










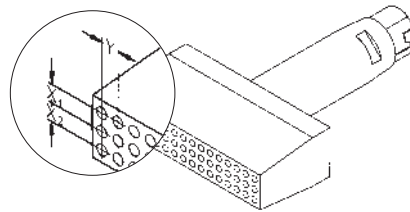










For use with: LR 82, FE 80

Model		Description	Width A	Thickness B	Order-No.
HT-1		Chisel tip	3,2 mm	1,0	5 44 260 99
HT-2 ¹		Chisel tip	5,2 mm	1,2	5 44 261 99
HT-3		Chisel tip	7,0 mm	1,2	5 44 262 99
HT-C		Chisel tip	3,2 mm	1,0	5 44 267 99
HT-D		Chisel tip	4,6 mm	1,0	5 44 268 99
HT-E		Chisel tip	5,6 mm	1,0	5 44 269 99
HT-BS		Round tip	2,4 mm	8,3	5 44 264 99
HT-CS		Round tip	3,2 mm	8,3	5 44 265 99
HT-DS		Round tip	5,0 mm	8,3	5 44 266 99
		Screw-in tip M8 thread	M 8		5 44 270 99
		Calibration tip			5 44 263 99

For use with: LR 82



Model + Description	X_1	X_1+X_2+X	Y	Order-No.
HT-Desoldering heads, 40-pins 	2,54	15,24	2,54	5 44 180 99
HT-Desoldering heads, 20-pins 	2,54	7,62	2,54	5 44 181 99
HT-Desoldering heads, 26-pins 	2,54	2,54	2,54	5 44 182 99
HT-Desoldering heads, 13-pins 	2,54		2,54	5 44 183 99
HT-Desoldering heads, 20-pins 	2,54	2,54	2,54	5 44 184 99
HT-Desoldering heads, 10-pins 	2,54		2,54	5 44 185 99
HT-Desoldering heads, 29-pins 	2,54		2,54	5 44 186 99
HT-Desoldering heads, 20-pins 	2,54		2,54	5 44 187 99
HT-Desoldering heads, 96-pins 	2,54	5,08	2,54	5 44 190 99
HT-Desoldering heads, 48-pins 	2,54	5,08	2,54	5 44 192 99
Desoldering heads for PGA, 121-pins 	2,54	2,54	2,54	5 44 195 99