



### Model

### Description

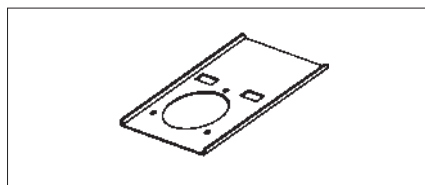

5 36 345 99

Clamp holder for extraction arm

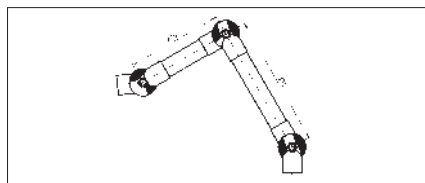


5 36 347 99

Extraction arm for bench assembly


5 36 348 99

Extraction arm for bench assembly  
antistatic

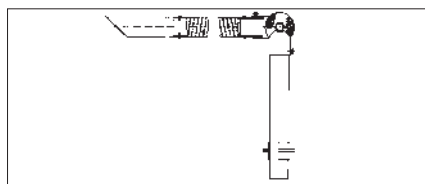


5 87 358 49

One joint-extraction arm, flexible, for bench assembly  
NW 50, includes clamp holder, air flow adjustable

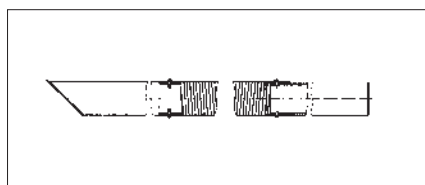


5 87 358 53

Flexible extraction arm, air flow adjustable, antistatic,  
for direct assembling to DN 40-system or  
via adapter DN 70/40 to WFE 4S

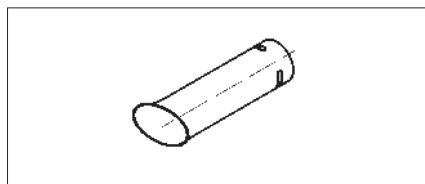


5 36 351 99

Extraction nozzle,  $\varnothing$  50 mm, length 230 mm

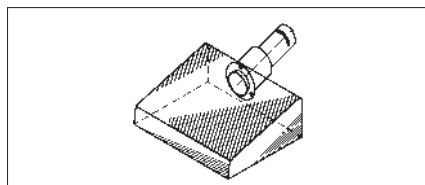


5 36 349 99

Hood, PE transparent 296x248 mm

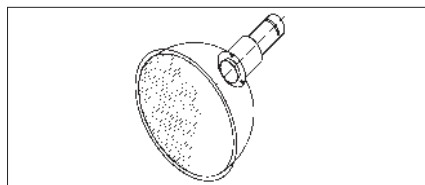


5 36 350 99

Hood, PE transparent  $\varnothing$  385 mm

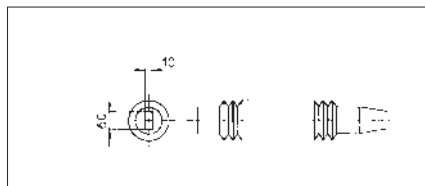

5 36 317 99

Stretch nozzle flat NW 63

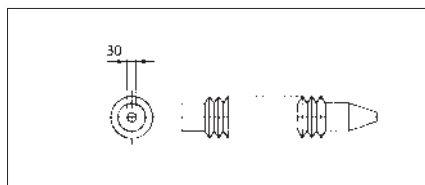

5 36 318 99

Stretch nozzle round NW 63

Siemens Nederland N.V.  
ESD Services  
Remmerden 5  
3911 TZ Rhenen  
P.O. Box 129  
3910 AC Rhenen  
The Netherlands  
Phone +31 31 7398 787  
Fax +31 31 7398 780


**We believe all the information in these pages including technical data to be reliable. However we make no warranties expressed or implied and assume no liability regarding any use of this information.**

### Description

### Model


Extraction table, active surface 600x350 mm connectable side wards or from below.  
For tube system DN 40, specially for the extraction of disagreeable solvent- or adhesive smells.

5 36 370 99

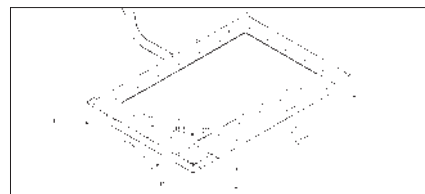


Metal table extraction hood connectable to the DN 40 tube system. Suitable for the extraction of solder fume in hot air applications or for works at small circuit boards.

5 87 358 45

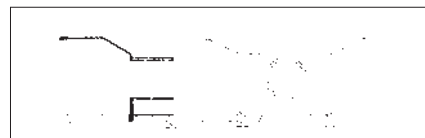


Extraction tube NW 44, 1 m

5 36 316 99

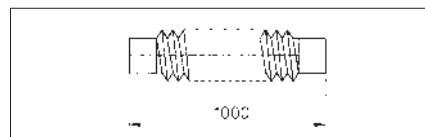


Hose connector

5 36 338 99

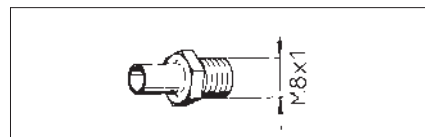

Hose connector for extension hose DN 17

5 36 343 99

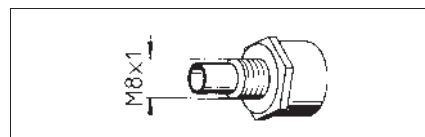

Extension hose DN 17 (5 m)

5 36 414 00

Flex tube NW 44, per meter

5 36 415 99

Flex tube NW 44, complete (1 m)

5 36 316 99

Connection cone for flex tube NW 44"

5 36 326 99

DN 17 Nipple with tread G 3/8"

5 87 351 42

Nut G 3/8" for nipple 005 87 351 42


5 36 352 44

Exhaust flange for DN 100 tube (only for use with WFE 10)

5 36 346 99


2 m Breather tube DN 100, without socket

5 36 315 99

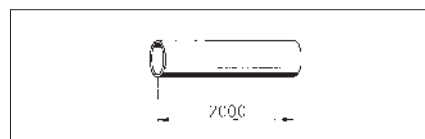

DN 100 Bow 90° with socket

54 36 353 99

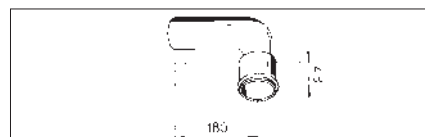

Siemens Nederland N.V.

ESD Services

Remmerden 5

3911 TZ Rhenen






P.O. Box 129

3910 AC Rhenen

The Netherlands

Phone +31 31 761 91 19

Fax +31 31 791 63 94

|                                                                                     | system DN 40<br>(WFE 10 + 35) | system DN 70<br>(WFE 4S) | Description                                      |
|-------------------------------------------------------------------------------------|-------------------------------|--------------------------|--------------------------------------------------|
|    | 5 87 358 47                   | 5 87 358 32              | Suction flange for WFE 4S                        |
|    | 5 87 358 48                   | 5 87 358 33              | Suction flange 90° for WFE 4S                    |
|    | 5 36 323 99                   | 5 87 353 20              | Tube 2 m with socket                             |
|    | 5 36 322 99                   | 5 87 353 21              | Bow 90° with socket                              |
|  | 5 36 319 99                   | 5 87 353 18              | Double socket                                    |
|  | 5 36 344 99                   | 5 87 353 22              | T-distributor 2 x 90° with socket                |
|  | 5 36 321 99                   | —                        | 2 x 45°-distributor with socket                  |
|  | 5 36 324 99                   | 5 87 358 55              | Tube end cap                                     |
|  | 5 36 329 99                   | 5 87 558 64              | Tube clamp                                       |
| Tube reductions                                                                     |                               | 5 87 353 19              | Reduction from DN 70 to<br>DN 40 with 2 sockets  |
|  |                               | 5 87 358 56              | Reduction from DN 70 to<br>DN 40 without sockets |