

SECURITY UNITS

Features:

- **Safe Storage:** Protects valuable materials and sensitive items from loss or pilferage.
- **Ready View of Contents:** Heavy-gauge open wire construction keeps the entire contents of the truck visible at all times, making it easy to check inventory.
- **Adjustable, Optional Intermediate Shelves:** Patented, easily adjustable shelf designs – Super Adjustable Super Erecta, MetroMax Q, and qwik SLOT – allow flexibility to meet changing needs. Can be positioned in 1" (25 mm) increments along the entire height of post.
- **Patented, Ergonomic, 1/4-Turn Door Handle:** Makes opening and closing the unit easier than conventional security unit designs.
- **Double Door:** Each door opens 270 degrees and can be secured along the sides of the unit.
- **Time Saving Assembly:** Metro security units assemble quickly – right out of the box.
- **Shipped Knocked-Down:** Saves on freight costs. Easily assembled.

Choose from Stationary or Mobile Standard and Heavy-Duty Configurations:

- **Safe Transportation:** Mobile, security trucks provide the advantage of quick, protective transportation.
- **Easy Cleaning of Storage Areas:** Mobile units move easily from walls to allow thorough cleaning of floors and walls.
- **Mobile Units:** Available in Standard and Heavy-Duty models. Heavy-Duty units offer increased rigidity and durability for applications such as crossing thresholds.
- **Stationary Units:** Posts have leveling feet to compensate for uneven surfaces.



Super Erecta Shelf
with optional Intermediate shelves



MetroMax Q
with optional Intermediate shelves



qwik SLOT
with optional Intermediate shelves



handle (open position)



handle (closed position)

SUPER ERECTA SHELF® SECURITY UNITS

- **Available in Chrome, Metroseal II, or Stainless Steel Finish:**
Choose from durable chrome for dry storage, Metroseal II for corrosion resistance in high-moisture environments, or stainless steel for corrosion-proof protection.
- **Polymer Caster Option Available on Metroseal II:**
Specifically designed for use in high-moisture environments.



Interior Super Adjustable Super Erecta shelves (pictured) are optional and must be ordered separately.

Specifications

Super Erecta Shelf Stationary Security

Cat. No. Chrome	Cat. No. Metroseal II	Cat. No. Stainless Steel	Width (in.) (mm)	Length (in.) (mm)	Height (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)
SEC53C	SEC53K2	SEC53S	66 ¹³ / ₁₆ 1695	38 ¹ / ₂ 980	66 ¹³ / ₁₆ 1695	131 59
SEC55C	SEC55K2	SEC55S	66 ¹³ / ₁₆ 1695	50 ¹ / ₂ 1295	66 ¹³ / ₁₆ 1695	154 70
SEC56C	SEC56K2	SEC56S	66 ¹³ / ₁₆ 1695	62 ¹ / ₂ 1587	66 ¹³ / ₁₆ 1695	177 79

Super Erecta Shelf Mobile Security

Cat. No. Chrome	Cat. No. Metroseal II*	Caster Type	Description	Width (in.) (mm)	Length (in.) (mm)	Height (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)
SEC53DC	SEC53DK2	Four 5MP	Standard	27 ¹ / ₄ 705	40 ³ / ₄ 1035	68 ¹ / ₂ 1740	142 64
SEC55DC	SEC55DK2	Four 5MP	Standard	27 ¹ / ₄ 705	52 ³ / ₄ 1340	68 ¹ / ₂ 1740	165 75
SEC56DC	SEC56DK2	Four 5MP	Standard	27 ¹ / ₄ 705	65 1651	68 ¹ / ₂ 1740	188 86
	SEC53VK2	Two 5PC/5PCB	Standard	27 ¹ / ₄ 705	40 ³ / ₄ 1035	68 ¹ / ₂ 1740	142 64
	SEC55VK2	Two 5PC/5PCB	Standard	27 ¹ / ₄ 705	52 ³ / ₄ 1340	68 ¹ / ₂ 1740	165 75
	SEC56VK2	Two 5PC/5PCB	Standard	27 ¹ / ₄ 705	65 1651	68 ¹ / ₂ 1740	188 86
SEC53LC	SEC53LK2	Two B5P/B5PB	Heavy Duty	28 ¹ / ₁₆ 710	38 ¹ / ₂ 980	67 ⁷ / ₈ 1730	171 78
SEC55LC	SEC55LK2	Two B5P/B5PB	Heavy Duty	28 ¹ / ₁₆ 710	50 ¹ / ₂ 1285	67 ⁷ / ₈ 1730	198 90
SEC56DC	SEC56LK2	Two B5P/B5PB	Heavy Duty	28 ¹ / ₁₆ 710	63 ¹ / ₈ 1600	67 ⁷ / ₈ 1730	225 102

*NOTE: Standard duty polymer caster models "VK2", which resist rusting, are recommended for high-moisture environments.

STAINLESS STEEL**

Casters must be ordered separately.

Cat. No.	Description	Width (in.) (mm)	Length (in.) (mm)	Height (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)
SEC53S-SD	Standard	27 ¹ / ₄ 705	40 ³ / ₄ 1035	62 1575	133 61
SEC55S-SD	Standard	27 ¹ / ₄ 705	52 ³ / ₄ 1340	62 1575	156 71
SEC56S-SD	Standard	27 ¹ / ₄ 705	65 1651	62 1575	179 80
SEC53S-HD	Heavy Duty	28 ¹ / ₁₆ 710	38 ¹ / ₂ 980	62 1575	146 64
SEC55S-HD	Heavy Duty	28 ¹ / ₁₆ 710	50 ¹ / ₂ 1285	62 1575	170 75
SEC56S-HD	Heavy Duty	28 ¹ / ₁₆ 710	63 ¹ / ₈ 1600	62 1575	194 91

**NOTE: Given height is for unit without dolly or casters (depending on model chosen). For approximate overall unit height add chosen caster diameter plus 1" (25mm).

Intermediate Shelves for Super Erecta Shelf Security Units

Cat. No. Chrome	Cat. No. Metroseal II	Cat. No. Stainless Steel	Width (in.) (mm)	Length (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)
A2436NC	A2436NK2	A2436NS	24 610	36 910	13 6
A2448NC	A2448NK2	A2448NS	24 610	48 1220	16 8
A2460NC	A2460NK2	A2460NS	24 610	60 1525	21 9.5

NOTE 1: Basic Unit does not include intermediate shelves. They must be ordered separately.

NOTE 2: Standard Super Erecta Shelves may also be ordered for intermediate shelves.


NOTE 3: Covers for Security Trucks are available on custom order.

SECURITY UNITS

MetroMax Q™

SECURITY UNITS

- **Microban® Product Protection:** Polymer mats on intermediate shelves feature built-in Microban antimicrobial product protection, which inhibits the growth of bacteria, mold, mildew, and fungi that cause odors, stains, and product degradation.
- **Cleanable:** Removable polymer mats can be placed in the dishwasher or sink to make cleaning easy.
- **Corrosion Resistant:** Gray epoxy finish is perfect for both dry and high-moisture environments.

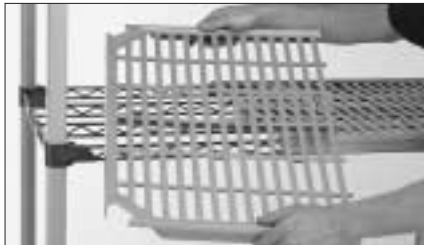

Interior shelves pictured are optional and must be ordered separately.

Specifications

MetroMax Q Stationary Units

66¹³/₁₆" (1696mm) high

Cat. No.	Width		Length		Approx. Pkd. Wt.	
	(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)
QSEC53E	24	610	36	910	168	76.4
QSEC55E	24	610	48	1220	171	77.8
QSEC56E	24	610	60	1525	178	79.2

MetroMax Q Stem Caster Mobile Units

68¹/₂" (1740mm) high

Standard with four 5" (127mm) diameter swivel casters	Corrosion Resistant with four polymer casters (2 with brakes)*	Width		Length		Approx. Pkd. Wt.	
		(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)
QSEC53DE	QSEC53VE	24	610	36	910	186	86.6
QSEC55DE	QSEC55VE	24	610	48	1220	200	91
QSEC56DE	QSEC56VE	24	610	60	1525	206	93.7

* "VE" models use two 5PCX and two 5PCBX casters.

MetroMax Q Heavy-Duty Mobile Units

67⁷/₈" (1724mm) high

Mounted on dolly with 5" (127mm) plate casters and wraparound bumpers.

Cat. No.	Width		Length		Approx. Pkd. Wt.	
	(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)
QSEC53LE	24	610	36	910	201	91.4
QSEC55LE	24	610	48	1220	217	98.7
QSEC56LE	24	610	60	1525	228	104


Intermediate Shelves for MetroMax Q

Cat. No.	For Use With	Width		Length		Approx. Pkd. Wt.	
		(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)
Q2436G2	QSEC53E, QSEC53DE, QSEC53VE, QSEC53LE	24	610	36	910	12	5.5
Q2448G2	QSEC55E, QSEC55DE, QSEC55VE, QSEC55LE	24	610	48	1220	16	7.3
Q2460G2	QSEC56E, QSEC56DE, QSEC56VE, QSEC56LE	24	610	60	1525	20	9.1

SECURITY UNITS

METRO®
qwikSLOT™ SECURITY UNITS

- **Add/Remove a Shelf Feature:** Allows the unit to be quickly adapted to fit your changing storage needs.
- **Shelves can easily be adjusted in seconds.**

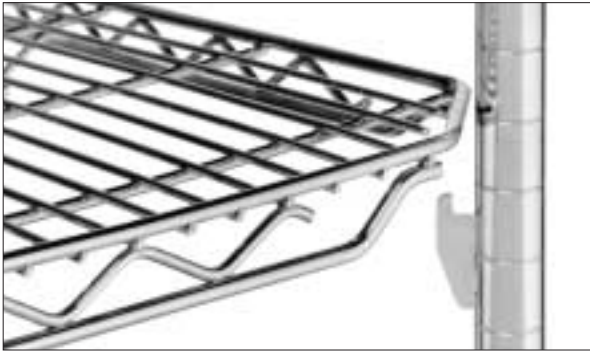

Interior shelves pictured are optional and must be ordered separately.

Specifications

qwikSLOT Stationary Security Units

Cat. No.	Description	Width/Length (in.) (mm)		Height (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)	
SEC53CQ	Stationary	27 ¹ / ₄	38 ¹ / ₂	66 ¹³ / ₁₆	1695	131	59
SEC55CQ	Stationary	27 ¹ / ₄	50 ¹ / ₂	66 ¹³ / ₁₆	1695	154	70
SEC56CQ	Stationary	27 ¹ / ₄	62 ¹ / ₂	66 ¹³ / ₁₆	1695	177	79

qwikSLOT Mobile

Cat. No.	Description	Width/Length (in.) (mm)		Height (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)	
SEC53DCQ	Mobile, Standard Duty*	27 ¹ / ₄	40 ³ / ₄	68 ¹ / ₂	1740	142	64
SEC55DCQ	Mobile, Standard Duty*	27 ¹ / ₄	52 ³ / ₄	68 ¹ / ₂	1740	165	75
SEC56DCQ	Mobile, Standard Duty*	27 ¹ / ₄	65	68 ¹ / ₂	1740	188	86
SEC53LCQ	Mobile, Heavy Duty**	28 ¹ / ₁₆	38 ¹ / ₂	67 ⁷ / ₈	1730	171	78
SEC55LCQ	Mobile, Heavy Duty**	28 ¹ / ₁₆	50 ¹ / ₂	67 ⁷ / ₈	1730	198	90
SEC56LCQ	Mobile, Heavy Duty**	28 ¹ / ₁₆	63 ¹ / ₈	67 ⁷ / ₈	1730	225	102

*Standard-duty mobile units use 4 - 5" (127mm) poly stem casters.

**Heavy-duty mobile units are mounted on an aluminum dolly with wraparound bumper and 2 - 5" (127mm) poly brake plate casters.

Intermediate Shelves for Security Units

Cat. No.	For Use With	Width (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)	
2436QBR*	Shelf for SEC53CQ, SEC53LCQ, SEC53DCQ	24x36	610x910	13	6
2448QBR*	Shelf for SEC55CQ, SEC55LCQ, SEC55DCQ	24x48	610x1220	16	7
2460QBR	Shelf for SEC56CQ, SEC56LCQ, SEC56DCQ	24x60	610x1525	21	9.5

*Chrome qwikSLOT shelves available in sizes 24x36, 24x48.

**Drop Mat qwikSLOT shelves with 1" ledge also available in sizes 24x36, 24x48.

Siemens Nederland N.V.

ESD Services

Remmerden 5

3911 TZ Rhenen

P.O. Box 129

3910 AC Rhenen

The Netherlands

Phone +31 31 7398 787

Fax +31 31 7398 780

L02-086

Printed in U.S.A. Rev. 3/02

Information and specifications are subject to change without notice. Please confirm at time of order.

Copyright © 2002 InterMetro Industries Corp.