
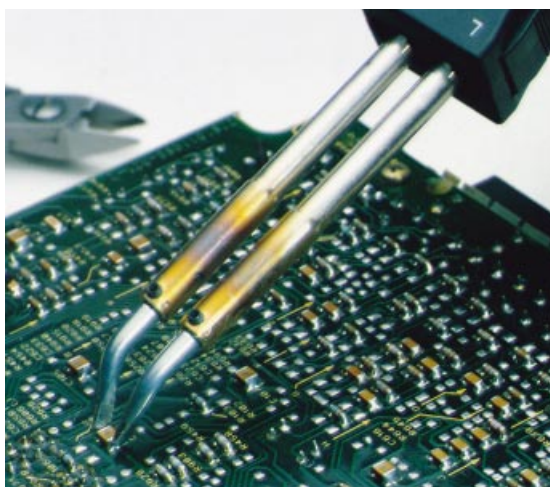









For use with: WT 50, WTA 50

Model		x	y	Component	Order-No.
WT 1		1,0	11	Chip 0405-1805, SOD80, MELF	5 44 141 99
WT 1S		0,5			5 44 145 99
WT 2		3,0	11	Chip 1808-1812, SOD87, SOT23, SOT143, SOD89	5 44 140 99
WT 3		6,0	11	SOT 192, SO4-SO8	5 44 142 99
WT 4		12,5	10	SO14, SO16, SOJ14, SOJ16	5 44 143 99
WT 5		18,5	12	SO20, SO20L, SOJ20	5 44 144 99
WT 11		1,0		vertical use	5 44 150 99
WT 12		3,0		vertical use	5 44 151 99

Siemens Nederland N.V.

ESD Services
Remmerden 5
3911 TZ Rhenen
P.O. Box 129
3910 AC Rhenen
The Netherlands

We believe all the information in these pages including technical data to be reliable. However we make no warranties expressed or implied and assume no liability regarding any use of this information.