
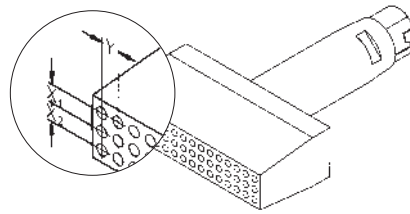










For use with: LR 82



Model + Description		X ₁	X ₁ +X ₂ +X	Y	Order-No.
HT-Desoldering heads, 40-pins		2,54	15,24	2,54	5 44 180 99
HT-Desoldering heads, 20-pins		2,54	7,62	2,54	5 44 181 99
HT-Desoldering heads, 26-pins		2,54	2,54	2,54	5 44 182 99
HT-Desoldering heads, 13-pins		2,54		2,54	5 44 183 99
HT-Desoldering heads, 20-pins		2,54	2,54	2,54	5 44 184 99
HT-Desoldering heads, 10-pins		2,54		2,54	5 44 185 99
HT-Desoldering heads, 29-pins		2,54		2,54	5 44 186 99
HT-Desoldering heads, 20-pins		2,54		2,54	5 44 187 99
HT-Desoldering heads, 96-pins		2,54	5,08	2,54	5 44 190 99
HT-Desoldering heads, 48-pins		2,54	5,08	2,54	5 44 192 99
Desoldering heads for PGA, 121-pins		2,54	2,54	2,54	5 44 195 99