

### Product Information

#### Weller WFE 2S Fume Extraction System

The Weller WFE 2S system for flat suction cleanses work place air in a big way. A powerful, maintenance free turbine provides a continuous fume extraction vacuum flow at a maximum rate of 230 m<sup>3</sup>/h.

A built-in micro processor controls the adjustable speed of the turbine. The three stage filter system is fitted as standard and is easy to replace, consisting of a fine particle filter and a combined suspended particle and broad band gas filter.


The WFE 2S comes with 1 pipe connector (2 optional). A wide range of pipe accessories like extraction nozzles and extraction hoods make it flexible for two work places.

#### Technical Data WFE 2S

Filter:	Prefilter F5 Combined submicron filter class H13 (99,5% against particle ca. 0.3µm) and broad band gas filter (50% AKF, 50%Puratex)
Dimensions :	320 mm x 320 mm x 395 mm (L x W x H)
Weight:	19 kg
Max. Vacuum:	2700 Pa
Max. Airflow:	230 m <sup>3</sup> /h

- For max. 2 workplaces
- Standard connector DN 40
- Potentiometer for speed control
- LED for filter control
- RS 232 interface for remote control

Order No. 005 36 266 99

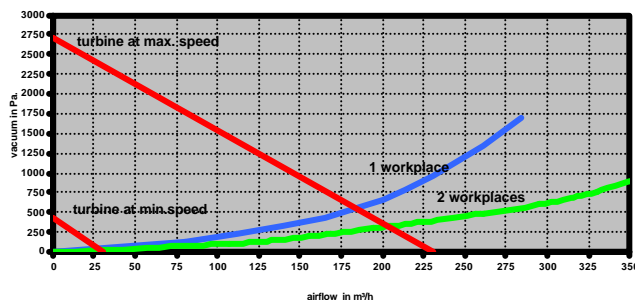

For more information please contact:

Siemens Nederland N.V.  
ESD Services  
Remmerden 5  
3911 TZ Rhenen  
P.O. Box 129  
3910 AC Rhenen  
The Netherlands  
Phone +31 31 7398 787  
Fax +31 31 7398 780