

Using an Adjoint Approach to Eliminate Mesh Sensitivities in Computational Design

Eric J. Nielsen* and Michael A. Park†

NASA Langley Research Center, Hampton, Virginia 23681

An adjoint algorithm for efficiently incorporating the effects of mesh sensitivities in a computational design framework is introduced. The method eliminates the need for explicit linearizations of the mesh movement scheme with respect to the geometric parameterization variables, an expense that has hindered large-scale design optimization for practical applications. The effects of the mesh sensitivities can be accounted for through the solution of an adjoint problem equivalent in cost to a single mesh movement computation, followed by an explicit matrix–vector product whose cost scales with the number of design variables and the resolution of the parameterized surface grid. The methodology augments the current practice of using adjoints solely for the flowfield and leads to a dramatic computational savings. The accuracy of the implementation is established, and several sample design optimizations are shown.

Nomenclature

D	=	vector of design variables
f	=	cost function
K	=	linear elasticity coefficient matrix
L	=	Lagrangian function
L/D	=	lift-to-drag ratio
Q	=	vector of dependent variables
R	=	discretized residual vector
u, v	=	nodal displacements
V	=	nodal displacement vector
X	=	computational mesh
Λ	=	vector of adjoint variables
ν	=	Poisson's ratio

I. Introduction

IN recent years a concerted effort has been made to bring higher fidelity, physics-based computational fluid dynamics (CFD) simulations into the aircraft design process. Such tools have typically been used to perform validations of designs derived through the use of lower fidelity methods, or in some cases, used in heuristic design methods that rely heavily on experience. These advanced CFD tools are now routinely targeted as primary components of automated optimization frameworks.

In the field of gradient-based design, one challenge in utilizing solvers based on the Euler or Reynolds-averaged Navier–Stokes equations has been an efficient and accurate method for computing the sensitivity derivatives required by many optimization algorithms. Approaches such as finite differencing,^{1–3} direct differentiation,^{4–11} and the complex variable method^{12–17} can be used for calculating these derivatives; however, their cost scales directly with the number of design variables. For typical aerodynamic design problems where this value may be on the order of tens to hundreds, this limitation precludes the use of such methods.

To alleviate the computational burden associated with problems containing many design variables, recent work has focused on the

use of adjoint methods.^{10,18–37} Adjoint methods may be implemented in either a continuous or discrete context, depending on the order in which the differentiation and discretization operations are performed. Both the continuous and discrete adjoint approaches introduce an auxiliary, or adjoint, variable that is determined through the solution of a linearized form of the governing equations. Using the same solution procedure as is used for the nonlinear system, asymptotic convergence rates of both equation sets are similar because the eigenvalues of the two systems are the same. Moreover, for the discrete adjoint variant used in this paper, if the solution algorithm itself is constructed in a manner that is discretely adjoint to the baseline scheme, the asymptotic convergence rates are guaranteed to be identical.^{21,22,33}

In practice, the discrete approach dictates that the effects of the mesh be accounted for in the subsequent sensitivity derivative computation. If these grid-related contributions are not included, it has been shown that the resulting sensitivities can be extremely inaccurate and even of the incorrect sign.^{31,32} Note that these grid-related contributions do not appear in the continuous approach. The continuous approach converges to the discrete result in the case of a sufficiently refined grid, but this condition is seldom, if ever, met in current practice for realistic three-dimensional complex geometry computations.

The grid-related terms that arise naturally in the discrete approach have traditionally been computed using direct differentiation. Unfortunately, this expense has hindered large-scale application of the methodology, despite an adjoint formulation for the flowfield. For a single design variable, the use of a direct mode of differentiation to obtain the derivative of a mesh movement scheme based on linear elasticity was shown in Ref. 32 to cost as much as 30% of a flow simulation. Clearly, the expense associated with performing this operation for several dozen design variables will dominate the overall computational cost.

In the current work, an adjoint formulation is introduced that eliminates the need for an explicit computation of the grid sensitivities that appear in the discrete form of the sensitivity analysis. The methodology augments the current practice of using adjoints solely for the flowfield and leads to a dramatic computational savings. Such an approach has previously been used in the automatic differentiation (AD) community³⁸; however, no explicit formulations for handcoding such a technique have been found in the literature. The scheme presented in the current work significantly reduces the expense associated with the mesh linearizations. Rather than scaling with the number of design variables, the cost of including these terms is equivalent to a single mesh movement computation. Demonstrations of the method show that a rigorous discrete sensitivity analysis for problems based on the Navier–Stokes equations and involving many design variables may ultimately be performed

Presented as Paper 2005-0491 at the AIAA 43rd Aerospace Sciences Meeting, Reno, NV, 10–13 January 2005; received 10 February 2005; revision received 12 September 2005; accepted for publication 19 October 2005. This material is declared a work of the U.S. Government and is not subject to copyright protection in the United States. Copies of this paper may be made for personal or internal use, on condition that the copier pay the \$10.00 per-copy fee to the Copyright Clearance Center, Inc., 222 Rosewood Drive, Danvers, MA 01923; include the code 0001-1452/06 \$10.00 in correspondence with the CCC.

*Research Scientist, Mail Stop 128, Computational Modeling and Simulation Branch. Senior Member AIAA.

†Research Scientist, Mail Stop 128, Computational Modeling and Simulation Branch. Member AIAA.

at a cost comparable to that of the analysis problem. The subsequent impact on the ability to efficiently perform optimizations of large-scale configurations is also shown.

II. Mesh Sensitivities via Forward Mode Differentiation

The discrete adjoint technique for sensitivity analysis can be derived in several ways. Here, the approach taken in Ref. 30 is used. Consider the vector of discretized residual equations \mathbf{R} for the Euler or Navier–Stokes equations as a function of the design variables \mathbf{D} , computational mesh \mathbf{X} , and flowfield variables \mathbf{Q} . Given a steady-state solution of the form $\mathbf{R}(\mathbf{D}, \mathbf{Q}, \mathbf{X}) = 0$, a Lagrangian function L can be defined as

$$L(\mathbf{D}, \mathbf{Q}, \mathbf{X}, \Lambda) = f(\mathbf{D}, \mathbf{Q}, \mathbf{X}) + \Lambda^T \mathbf{R}(\mathbf{D}, \mathbf{Q}, \mathbf{X}) \quad (1)$$

where $f(\mathbf{D}, \mathbf{Q}, \mathbf{X})$ represents a cost function to be minimized and Λ is a vector of Lagrange multipliers, or adjoint variables. Differentiating this expression with respect to \mathbf{D} yields the following:

$$\begin{aligned} \frac{dL}{d\mathbf{D}} = & \left[\frac{\partial f}{\partial \mathbf{D}} + \left(\frac{\partial \mathbf{X}}{\partial \mathbf{D}} \right)^T \frac{\partial f}{\partial \mathbf{X}} \right] + \left(\frac{\partial \mathbf{Q}}{\partial \mathbf{D}} \right)^T \left[\frac{\partial f}{\partial \mathbf{Q}} + \left(\frac{\partial \mathbf{R}}{\partial \mathbf{Q}} \right)^T \Lambda \right] \\ & + \left[\left(\frac{\partial \mathbf{R}}{\partial \mathbf{D}} \right)^T + \left(\frac{\partial \mathbf{X}}{\partial \mathbf{D}} \right)^T \left(\frac{\partial \mathbf{R}}{\partial \mathbf{X}} \right)^T \right] \Lambda \end{aligned} \quad (2)$$

Because the vector of adjoint variables is essentially arbitrary, the coefficient multiplying $(\partial \mathbf{Q} / \partial \mathbf{D})^T$ can be eliminated using the following equation:

$$\left(\frac{\partial \mathbf{R}}{\partial \mathbf{Q}} \right)^T \Lambda = - \frac{\partial f}{\partial \mathbf{Q}} \quad (3)$$

Equation (3) represents the discrete adjoint equation for the flow simulation. The solution of this linear system of equations for three-dimensional turbulent flows on unstructured grids has been demonstrated previously in Refs. 30–33. Once the solution for Λ has been formed, the remaining terms in Eq. (2) can be evaluated to give the desired sensitivity vector:

$$\frac{dL}{d\mathbf{D}} = \left[\frac{\partial f}{\partial \mathbf{D}} + \left(\frac{\partial \mathbf{X}}{\partial \mathbf{D}} \right)^T \frac{\partial f}{\partial \mathbf{X}} \right] + \left[\left(\frac{\partial \mathbf{R}}{\partial \mathbf{D}} \right)^T + \left(\frac{\partial \mathbf{X}}{\partial \mathbf{D}} \right)^T \left(\frac{\partial \mathbf{R}}{\partial \mathbf{X}} \right)^T \right] \Lambda \quad (4)$$

The $(\partial \mathbf{X} / \partial \mathbf{D})$ terms in Eq. (4) represent the mesh sensitivities. In Ref. 32, a mesh movement strategy based on the equations of linear elasticity is described, which take the following form in two dimensions:

$$\nabla^2 u + \frac{1}{1-2\nu} \frac{\partial}{\partial x} \nabla \cdot \mathbf{V} = 0 \quad (5)$$

$$\nabla^2 v + \frac{1}{1-2\nu} \frac{\partial}{\partial y} \nabla \cdot \mathbf{V} = 0 \quad (6)$$

where ν is Poisson's ratio and the nodal displacement vector is given by $\mathbf{V} = u\hat{i} + v\hat{j}$. Although generally not as expensive as a flowfield computation, the cost associated with solving these equations is not trivial. If this system is posed as

$$\mathbf{KX} = \mathbf{X}_{\text{surface}} \quad (7)$$

where \mathbf{K} is a constant coefficient matrix that is computed once and frozen, then the mesh sensitivities may be computed from the following:

$$\mathbf{K} \frac{\partial \mathbf{X}}{\partial \mathbf{D}} = \left(\frac{\partial \mathbf{X}}{\partial \mathbf{D}} \right)_{\text{surface}} \quad (8)$$

Note that the solution of this linear system is equivalent in cost to that of the mesh movement [Eq. (7)] and must be obtained once for each design variable in \mathbf{D} .

III. Adjoint Approach for Eliminating Mesh Sensitivities

Now reconsider Eq. (1), where a subscript f has been appended to Λ to indicate the adjoint variable associated with the flow equations and an additional adjoint variable Λ_g multiplying the residual of the grid movement problem has been introduced:

$$\begin{aligned} L(\mathbf{D}, \mathbf{Q}, \mathbf{X}, \Lambda_f, \Lambda_g) = & f(\mathbf{D}, \mathbf{Q}, \mathbf{X}) + \Lambda_f^T \mathbf{R}(\mathbf{D}, \mathbf{Q}, \mathbf{X}) \\ & + \Lambda_g^T (\mathbf{KX} - \mathbf{X}_{\text{surface}}) \end{aligned} \quad (9)$$

Linearizing with respect to \mathbf{D} as before yields

$$\begin{aligned} \frac{dL}{d\mathbf{D}} = & \frac{\partial f}{\partial \mathbf{D}} + \left(\frac{\partial \mathbf{R}}{\partial \mathbf{D}} \right)^T \Lambda_f + \left(\frac{\partial \mathbf{Q}}{\partial \mathbf{D}} \right)^T \left[\frac{\partial f}{\partial \mathbf{Q}} + \left(\frac{\partial \mathbf{R}}{\partial \mathbf{Q}} \right)^T \Lambda_f \right] \\ & + \left(\frac{\partial \mathbf{X}}{\partial \mathbf{D}} \right)^T \left[\frac{\partial f}{\partial \mathbf{X}} + \left(\frac{\partial \mathbf{R}}{\partial \mathbf{X}} \right)^T \Lambda_f + \Lambda_g^T \mathbf{K} \right] - \Lambda_g^T \left(\frac{\partial \mathbf{X}}{\partial \mathbf{D}} \right)_{\text{surface}} \end{aligned} \quad (10)$$

As before, the coefficient multiplying $(\partial \mathbf{Q} / \partial \mathbf{D})^T$ can be eliminated by satisfying the adjoint equation for the flow simulation [Eq. (3)]. In a similar fashion, the term multiplying $(\partial \mathbf{X} / \partial \mathbf{D})^T$ can also be eliminated by satisfying a second adjoint problem,

$$\mathbf{K}^T \Lambda_g = - \left[\frac{\partial f}{\partial \mathbf{X}} + \left(\frac{\partial \mathbf{R}}{\partial \mathbf{X}} \right)^T \Lambda_f \right] \quad (11)$$

With the solution of Eqs. (3) and (11), the final form of the sensitivity vector becomes

$$\frac{dL}{d\mathbf{D}} = \frac{\partial f}{\partial \mathbf{D}} + \Lambda_f^T \frac{\partial \mathbf{R}}{\partial \mathbf{D}} - \Lambda_g^T \left(\frac{\partial \mathbf{X}}{\partial \mathbf{D}} \right)_{\text{surface}} \quad (12)$$

With the formulation just outlined, a single solution of the linear system given by Eq. (11) is required for each function f . If f is some quantity composed of aerodynamic coefficients such as lift, drag, or moments, then several observations can also be made about Eq. (12). For design problems in which the shape is held constant and only global parameters such as the angle of attack or Mach number are allowed to vary, Eq. (11) need not be evaluated and the third term in Eq. (12) is identically zero. Conversely, for problems involving solely geometric parameterization variables, the first and second terms in Eq. (12) are identically zero because there is no explicit dependence of f or \mathbf{R} on \mathbf{D} . In addition, the term $\Lambda_g^T (\partial \mathbf{X} / \partial \mathbf{D})_{\text{surface}}$ is very cheap to compute and only requires an explicit inner product dimensioned by the size of the surface mesh for each design variable.

The software developed in Refs. 30–32 has been extended to include the formulation already outlined. In the previous implementation, the matrix–vector product $(\partial \mathbf{R} / \partial \mathbf{X})^T \Lambda_f$ has been stored to enable rapid computation of each inner product with $\partial \mathbf{X} / \partial \mathbf{D}$ because these residual linearizations are constant for all shape parameters in \mathbf{D} . These mechanics are now used to construct the right-hand side of Eq. (11) in the current work.

The parameterization schemes employed here are described in Refs. 39 and 40 and rely on a free-form deformation technique to provide a compact set of design variables for a wide range of configurations. Given the current vector of design variables \mathbf{D} , the methods are used to determine the current location of the surface grid points as well as their analytic derivatives with respect to \mathbf{D} , $(\partial \mathbf{X} / \partial \mathbf{D})_{\text{surface}}$. The schemes are very inexpensive and can be used to consistently parameterize families of computational meshes suitable for multiple disciplines.

The matrix \mathbf{K} is formed using the method in Ref. 32 and is merely transposed once all of the contributions have been included. The system given by Eq. (11) is then solved using the generalized minimal residual (GMRES) algorithm⁴¹ implemented in Ref. 32. Because the eigenvalues of \mathbf{K} remain unchanged by the transpose operation, the solution for Λ_g converges similarly to that of the mesh movement scheme. In the current implementation, adjoint solutions for multiple functions f may be computed simultaneously as outlined in Ref. 33 by storing multiple right-hand sides for Eq. (11). Once

the solution for Λ_g has been computed, an explicit inner product with the surface mesh sensitivities for each design variable yields the final sensitivity vector.

IV. Consistency of Linearization

To verify the accuracy of the implementation, derivatives of the lift and drag coefficient are computed for fully turbulent flow over the ONERA M6 wing geometry⁴² shown in Fig. 1. The grid for this case contains 16,391 nodes and 90,892 tetrahedra. The freestream Mach number is 0.84, the angle of attack is 3.06 deg, and the Reynolds number is 1×10^6 based on the mean aerodynamic chord. The computations have been performed in a domain-decomposed environment on 12 Pentium IV processors using three different approaches as outlined in Table 1. All equation sets have been converged to machine accuracy.

The first linearization method is a direct mode of differentiation using complex variables. This approach was originally suggested in Refs. 13 and 14 and was first applied to a Navier–Stokes solver in Ref. 12. The primary advantage of this approach is that true second-order accuracy may be obtained by selecting step sizes without concern for subtractive cancellation error typically present in real-valued divided differences. Through the use of an automated scripting procedure as outlined in Ref. 43, this capability can be immediately recovered at any time for the baseline code. For computations using this method, the complex step size has been chosen to be 1×10^{-50} . The second technique used to verify the linearizations relies on the hand-coded implementation^{31,33} of the discrete adjoint system given by Eq. (3) for the flow equations and the hand-

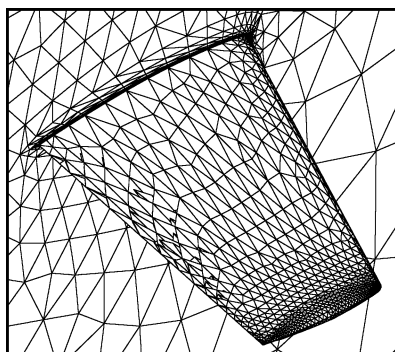


Fig. 1 ONERA M6 grid used for evaluating linearizations.

Table 1 Schemes used to obtain sensitivities

Method	Flowfield linearization	Mesh linearization
1	Direct differentiation with automated complex variables	Direct differentiation with automated complex variables
2	Handcoded discrete adjoint, Eq. (3)	Handcoded direct differentiation, Eqs. (4) and (8)
3	Handcoded discrete adjoint, Eq. (3)	Handcoded discrete adjoint, Eqs. (11) and (12)

coded direct differentiation of the mesh terms³² as formulated in Eqs. (4) and (8). The third approach is similar to that of method 2; however, the present adjoint formulation given by Eqs. (11) and (12) is used to evaluate the mesh terms.

Sensitivity derivatives for the lift and drag coefficients using several shape parameters located at the midspan of the wing are shown in Table 2. All three methods are in excellent agreement, with the only discrepancies apparent in the 12th decimal place or better; note that even at machine precision, the last several digits are often still fluctuating. A comparison of the convergence rates for the systems given by Eqs. (8) and (11) is shown in Fig. 2. The systems converge in a similar fashion.

V. Large-Scale Test Cases

Several large-scale test cases are used to evaluate the impact of the new scheme. For the cases shown, relative measures in performance are used to establish benefits of the current approach. The meshes used here are not necessarily optimal for resolving the flowfields; the intent is solely to demonstrate algorithmic performance on a given discrete model. Each of the grids shown has been obtained using the methods in Refs. 44 and 45. Note that, although the cases described here involve compressible flows, an incompressible implementation^{31,46} based on the method of artificial compressibility⁴⁷ is also maintained.

To show the impact of the current formulation, Table 3 lists timings for the major software components necessary for aerodynamic shape optimization. Operations associated with the surface grid evaluation and sensitivities are omitted; these costs are negligible in comparison with the other components. The computations for each configuration have been performed on different hardware with a range of compilers; timings for a given test case should only be compared relative to each other and not to other test cases. For each of the computations, the residuals for Eqs. (7) and (11) have been reduced by 10 orders of magnitude. All of the values shown in Table 3 use an objective function based on the drag coefficient. The data

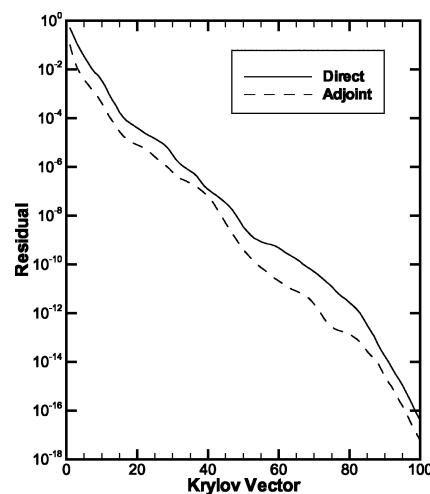


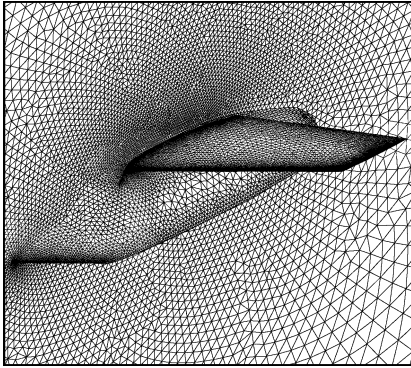
Fig. 2 Convergence rates for direct and adjoint modes.

Table 2 Comparison of sensitivity derivatives for lift and drag coefficients using various approaches

Method	Design variable			
	Thickness	Shear	Camber	Twist
<i>Objective function C_L</i>				
1	−0.584383430968430	−0.073891855284066	1.843734584180741	−0.022010251214990
2	−0.584383430967291	−0.073891855283698	1.843734584180810	−0.022010251215005
3	−0.584383430968115	−0.073891855283921	1.843734584180955	−0.022010251214989
<i>Objective function C_D</i>				
1	0.058894900355748	−0.006835640271421	0.064393773359690	−0.001817294278046
2	0.058894900355806	−0.006835640271405	0.064393773359692	−0.001817294278046
3	0.058894900355780	−0.006835640271392	0.064393773359720	−0.001817294278046

Table 3 Timings for analysis and sensitivity analysis components

Test case (number of design variables)	Wallclock time, min			
	Analysis		Sensitivity analysis	
	Mesh movement	Flowfield solution	Flowfield adjoint solution	Mesh adjoint solution and sensitivities
Inviscid stowed morphing vehicle (175)	4	18	42	4
Turbulent cruise morphing vehicle (150)	3	45	70	4
Turbulent wing-body (172)	8	228	184	10

**Fig. 3** Surface grid for morphing aircraft in dash configuration.

shown in Table 3 for each test case are discussed in more detail later.

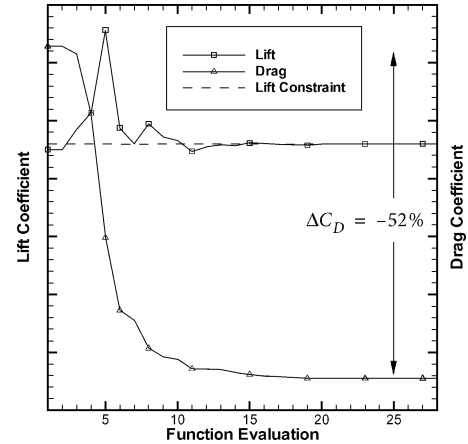
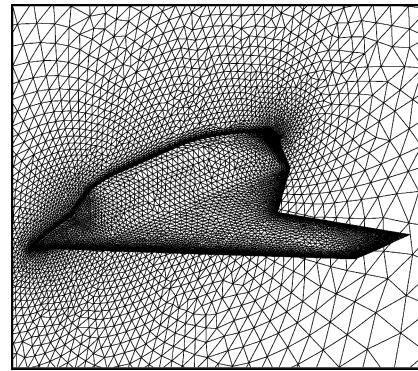
Morphing Aircraft Configuration

The first two test cases are based on an unmanned combat air vehicle being pursued by Lockheed–Martin and the Defense Advanced Research Projects Agency and is described in Ref. 48. The aircraft is designed to cruise in a conventional configuration and to fold its wings into a stowed position for the dash/attack portion of its mission.

The first test case is based on the stowed configuration and is computed using the Euler equations. The grid used for this case is shown in Fig. 3 and contains 430,732 nodes and 2,543,772 tetrahedra. The freestream Mach number is 0.80, and the angle of attack is 2 deg. For this test, the geometry has been parameterized using the package outlined in Ref. 40 to create a set of 175 design variables describing the wing and fuselage.

Timing results obtained on 16 Pentium IV processors for the various components needed for optimization are shown in Table 3. Here, the flow solver and its adjoint counterpart have been run 300 time steps. The analysis portion of the computation, consisting of a mesh movement and a flowfield solution, requires approximately 22 min of wallclock time. With a single solution of Eq. (11), the sensitivity analysis for all 175 design variables takes 46 min. Note that the previous method based on direct differentiation would require 175 solutions to Eq. (8), or nearly 12 h more wallclock time. This savings is the equivalent of 39 additional flowfield solutions.

To demonstrate an optimization for the current test case, an objective function based on drag has been used in conjunction with an explicit lift constraint. In this manner, separate adjoint solutions are required to evaluate the sensitivities of both the objective and the constraint. A subset of 63 of the 175 total shape variables are free to change, subject to side constraints that prohibit thinning of the geometry. The optimization package described in Ref. 49 is used to drive the design problem. The results of the optimization are shown in Fig. 4, where the drag coefficient has been reduced by 52% and the lift coefficient satisfies the requested constraint value. For this case, the optimizer requested 26 sensitivity analyses during the course of the optimization. Based on the earlier timings, the current adjoint formulation results in a savings of roughly 109 h of wallclock time,

**Fig. 4** Lift and drag coefficients during constrained optimization of dash configuration.**Fig. 5** Surface grid for morphing aircraft in cruise configuration.

or the equivalent of 364 flowfield solutions, in computing the mesh linearizations for the 63 variables.

The next case is a turbulent flow computation for the baseline cruise configuration, as shown in Fig. 5. The grid contains 534,525 nodes and 3,159,677 tetrahedra. Here, the freestream Mach number is 0.80, the angle of attack is 2 deg, and the Reynolds number is 5×10^6 based on the mean aerodynamic chord. This case has been run on 64 Opteron processors, and results for the component timings are again shown in Table 3. For these computations, the flow solver and associated adjoint solver have been run for 800 time steps. The mesh linearizations for all 150 design variables have been computed in approximately 4 min. With the direct approach, equivalent results would require 150 solutions to Eq. (8) at an expense of roughly 450 min or the equivalent of 10 flowfield solutions.

For this test case, the optimization goal is to perform an unconstrained maximization of the lift-to-drag ratio L/D . The optimization package used for this computation is described in Ref. 50. Results for the L/D maximization are shown in Fig. 6, where a subset of 54 of the 150 shape design variables are allowed to change, subject to side constraints that the geometry does not decrease in

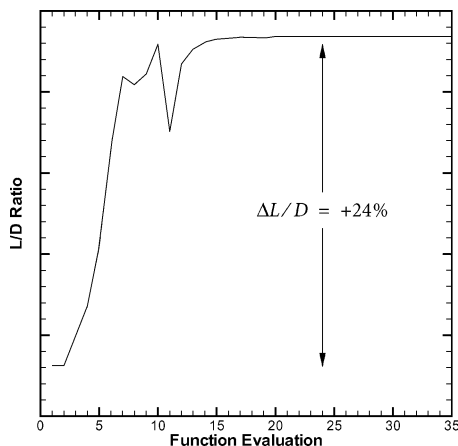


Fig. 6 Lift-to-drag ratio during unconstrained optimization of cruise configuration.

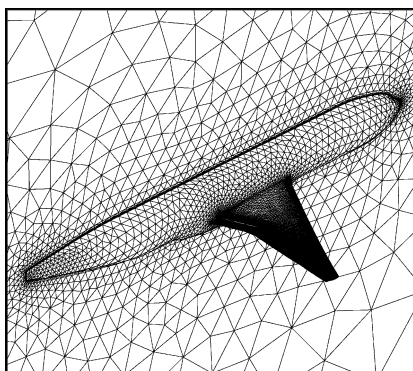


Fig. 7 Surface grid for slotted wing-body configuration.

thickness. The final value of L/D is approximately 24% higher than its initial value. Here, the optimizer required seven sensitivity analyses. The present adjoint implementation for the mesh-related terms has yielded an estimated savings of approximately 19 h of wallclock time, or the cost of 25 flowfield solutions, over the direct approach.

Slotted Wing-Body Configuration

The final example is fully turbulent flow over a transport wing-body configuration with a wing incorporating an advanced slotted airfoil concept. The mesh for this case is shown in Fig. 7 and contains 1,326,150 nodes and 7,744,304 tetrahedra. The freestream Mach number is 0.87, the angle of attack is 2.7 deg, and the Reynolds number is 3×10^6 based on the mean aerodynamic chord. The computations shown in Table 3 have been performed using 64 Opteron processors. Here, the flow solver and its adjoint counterpart have each been run 1000 time steps. The surface grids for this computation have been parameterized using the method in Ref. 37 to create a set of 172 design variables describing the main wing and flap geometries. For this case, the analysis problem takes 236 min of wallclock time vs 194 min for the sensitivity analysis. The present adjoint formulation for the mesh terms yields a savings of approximately 23 h in computing the sensitivities for all 172 variables. This is the equivalent of six additional flowfield solutions.

An unconstrained maximization of L/D is performed for the current configuration, using a subset of 41 of the shape parameters in addition to the angle of attack. As in the earlier examples, the geometry is constrained to maintain its original thickness. The net result of the optimization procedure is a 32% increase in L/D as shown in Fig. 8. For this case, the optimizer required 26 sensitivity analyses during the course of the computation. The previous formulation for the grid sensitivities would have required an estimated additional 142 h of wallclock time to perform the same optimization. This savings is the equivalent of 37 flowfield solutions.

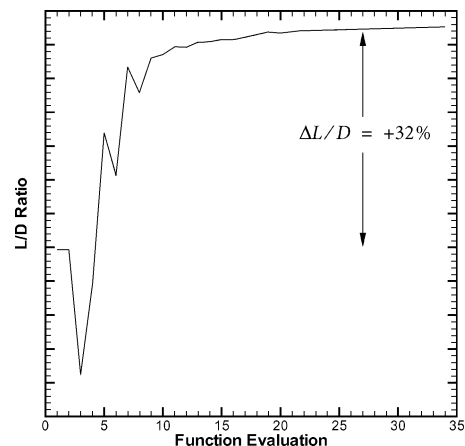


Fig. 8 Lift-to-drag ratio during unconstrained optimization of wing-body configuration.

VI. Summary

An adjoint formulation to efficiently account for mesh sensitivities has been developed and implemented. In combination with an adjoint procedure for the aerodynamic flowfield, the new approach effectively removes the dependence on the size of the design space for a rigorous discrete sensitivity analysis. Unlike previous methods that required explicit computation of grid sensitivity terms for each design variable, the current approach accounts for these terms through the solution of a single adjoint problem, equivalent in cost to the mesh movement scheme being used. The method has been implemented within a three-dimensional unstructured grid framework, and the resulting sensitivity derivatives have been shown to be in excellent agreement with a direct mode of differentiation using complex variables, as well as a previous implementation using handcoded direct differentiation for the mesh terms. Timings for the major components have been shown for several large-scale configurations, with dramatic savings obtained through the use of the adjoint formulation for the mesh linearizations. Demonstration optimizations yield improvements in vehicle performance for the discrete models used.

Acknowledgments

The authors thank William Jones for providing the meshes used in this work and Jamshid Samareh for his assistance in parameterizing the various configurations. Results from Clyde Gumbert for the stowed morphing configuration are also appreciated.

References

- Hicks, R. M., and Henne, P. A., "Wing Design by Numerical Optimization," *Journal of Aircraft*, Vol. 15, No. 7, 1978, pp. 407–412.
- Joh, C.-Y., Grossman, B., and Haftka, R. T., "Design Optimization of Transonic Airfoils," *Engineering Optimization*, Vol. 21, No. 1, 1993, pp. 1–20.
- Vanderplaats, G. N., Hicks, R. N., and Murman, E. M., "Application of Numerical Optimization Techniques to Airfoil Design," *NASA Conference on Aerodynamic Analysis Requiring Advanced Computers*, NASA SP-347, Pt. 2, March 1975.
- Baysal, O., and Eleshaky, M. E., "Aerodynamic Sensitivity Analysis Methods for the Compressible Euler Equations," *Journal of Fluids Engineering*, Vol. 113, No. 4, 1991, pp. 681–688.
- Borggaard, J. T., Burns, J., Cliff, E. M., and Gunzburger, M. D., "Sensitivity Calculations for a 2-D Inviscid Supersonic Forebody Problem," *Identification and Control Systems Governed by Partial Differential Equations*, Society for Industrial and Applied Mathematics, Philadelphia, 1993, pp. 14–24.
- Burgreen, G. W., and Baysal, O., "Aerodynamic Shape Optimization Using Preconditioned Conjugate Gradient Methods," *AIAA Journal*, Vol. 32, No. 11, 1994, pp. 2145–2152.
- Hou, G. J.-W., Maraju, V., Taylor, A. C., and Korivi, V. M., "Transonic Turbulent Airfoil Design Optimization with Automatic Differentiation in Incremental Iterative Forms," *AIAA Paper 95-1692*, June 1995.
- Newman, J. C., and Taylor, A. C., "Three-Dimensional Aerodynamic Shape Sensitivity Analysis and Design Optimization Using the Euler Equations on Unstructured Grids," *AIAA Paper 96-2464*, June 1996.

- ⁹Sherman, L. L., Taylor, A. C., Green, L. L., Newman, P. A., Hou, G. J.-W., and Korivi, V. M., "First- and Second-Order Aerodynamic Sensitivity Derivatives via Automatic Differentiation with Incremental Iterative Methods," *AIAA Paper* 94-4262, Sept. 1994.
- ¹⁰Taylor, A. C., Putko, M. M., Green, L. L., and Newman, P. A., "Some Advanced Concepts in Discrete Aerodynamic Sensitivity Analysis," *AIAA Journal*, Vol. 41, No. 7, 2003, pp. 1224-1229.
- ¹¹Young, D. P., Huffman, W. P., Melvin, R. G., Bieterman, M. B., Hilmes, C. L., and Johnson, F. T., "Inexactness and Global Convergence in Design Optimization," *AIAA Paper* 94-4386, Sept. 1994.
- ¹²Anderson, W. K., Newman, J. C., Whitfield, D. L., and Nielsen, E. J., "Sensitivity Analysis for the Navier-Stokes Equations on Unstructured Meshes Using Complex Variables," *AIAA Journal*, Vol. 39, No. 1, 2001, pp. 56-63.
- ¹³Lyness, J. N., "Numerical Algorithms Based on the Theory of Complex Variables," *Proceedings of the Association for Computing Machinery 22nd National Conference*, Thomas Book Co., Washington, DC, 1967, pp. 124-134.
- ¹⁴Lyness, J. N., and Moler, C. B., "Numerical Differentiation of Analytic Functions," *SIAM Journal on Numerical Analysis*, Vol. 4, No. 2, 1967, pp. 202-210.
- ¹⁵Martins, J. R. R. A., Kroo, I. M., and Alonso, J. J., "An Automated Method for Sensitivity Analysis Using Complex Variables," *AIAA Paper* 2000-0689, Jan. 2000.
- ¹⁶Newman, J. C., Anderson, W. K., and Whitfield, D. L., "Multidisciplinary Sensitivity Derivatives Using Complex Variables," Mississippi State Univ., Rept. MSSU-COE-ERC-98-08, Mississippi State, MS, July 1998.
- ¹⁷Squire, W., and Trapp, G., "Using Complex Variables to Estimate Derivatives of Real Functions," *SIAM Review*, Vol. 10, No. 1, 1968, pp. 110-112.
- ¹⁸Anderson, W. K., and Bonhaus, D. L., "Airfoil Design on Unstructured Grids for Turbulent Flows," *AIAA Journal*, Vol. 37, No. 2, 1999, pp. 185-191.
- ¹⁹Anderson, W. K., and Venkatakrishnan, V., "Aerodynamic Design Optimization on Unstructured Grids with a Continuous Adjoint Formulation," *Computers and Fluids*, Vol. 28, No. 4, 1999, pp. 443-480.
- ²⁰Carle, A., Fagan, M., and Green, L. L., "Preliminary Results from the Application of Automated Adjoint Code Generation to CFL3D," *AIAA Paper* 98-4807, Sept. 1998.
- ²¹Elliott, J., "Discrete Adjoint Analysis and Optimization with Overset Grid Modelling of the Compressible High-Re Navier-Stokes Equations," 6th Overset Grid and Solution Technology Symposium, Oct. 2002.
- ²²Giles, M. B., Duta, M. C., Muller, J.-D., and Pierce, N. A., "Algorithm Developments for Discrete Adjoint Methods," *AIAA Journal*, Vol. 41, No. 2, 2003, pp. 198-205.
- ²³Iollo, A., Salas, M. D., and Ta'asan, S., "Shape Optimization Governed by the Euler Equations Using an Adjoint Method," ICASE, Rept. 93-78, Hampton, VA, Nov. 1993.
- ²⁴Jameson, A., Pierce, N. A., and Martinelli, L., "Optimum Aerodynamic Design Using the Navier-Stokes Equations," *AIAA Paper* 97-0101, Jan. 1997.
- ²⁵Kim, C. S., Kim, C., and Rho, O. H., "Sensitivity Analysis for the Navier-Stokes Equations with Two-Equation Turbulence Models," *AIAA Journal*, Vol. 39, No. 5, 2001, pp. 838-845.
- ²⁶Kim, H.-J., Sasaki, D., Obayashi, S., and Nakahashi, K., "Aerodynamic Optimization of Supersonic Transport Wing Using Unstructured Adjoint Method," *AIAA Journal*, Vol. 39, No. 6, 2001, pp. 1011-1020.
- ²⁷Mohammadi, B., "Optimal Shape Design, Reverse Mode of Automatic Differentiation and Turbulence," *AIAA Paper* 97-0099, Jan. 1997.
- ²⁸Nemec, M., and Zingg, D. W., "Towards Efficient Aerodynamic Shape Optimization Based on the Navier-Stokes Equations," *AIAA Paper* 2001-2532, June 2001.
- ²⁹Newman, J. C., III, Taylor, A. C., III, and Burgreen, G. W., "An Unstructured Grid Approach to Sensitivity Analysis and Shape Optimization Using the Euler Equations," *AIAA Paper* 95-1646, June 1995.
- ³⁰Nielsen, E. J., "Aerodynamic Design Sensitivities on an Unstructured Mesh Using the Navier-Stokes Equations and a Discrete Adjoint Formulation," Ph.D. Dissertation, Dept. of Aerospace and Ocean Engineering, Virginia Polytechnic Inst. and State Univ., Blacksburg, VA, Dec. 1998.
- ³¹Nielsen, E. J., and Anderson, W. K., "Aerodynamic Design Optimization on Unstructured Meshes Using the Navier-Stokes Equations," *AIAA Journal*, Vol. 37, No. 11, 1999, pp. 1411-1419.
- ³²Nielsen, E. J., and Anderson, W. K., "Recent Improvements in Aerodynamic Design Optimization on Unstructured Meshes," *AIAA Journal*, Vol. 40, No. 6, 2002, pp. 1155-1163.
- ³³Nielsen, E. J., Lu, J., Park, M. A., and Darmofal, D. L., "An Implicit, Exact Dual Adjoint Solution Method for Turbulent Flows on Unstructured Grids," *Computers and Fluids*, Vol. 33, No. 9, 2004, pp. 1131-1155.
- ³⁴Reuther, J. J., Jameson, A., Alonso, J. J., Rimlinger, M. J., and Saunders, D., "Constrained Multipoint Aerodynamic Shape Optimization Using an Adjoint Formulation and Parallel Computers," *Journal of Aircraft*, Vol. 36, No. 1, 1999, pp. 51-60.
- ³⁵Soemarwoto, B., "Multipoint Aerodynamic Design by Optimization," Ph.D. Dissertation, Dept. of Theoretical Aerodynamics, Delft Univ. of Technology, Delft, The Netherlands, Dec. 1996.
- ³⁶Soto, O., and Lohner, R., "A Mixed Adjoint Formulation for Incompressible Turbulent Problems," *AIAA Paper* 2002-0451, Jan. 2002.
- ³⁷Sung, C., and Kwon, J. H., "Aerodynamic Design Optimization Using the Navier-Stokes and Adjoint Equations," *AIAA Paper* 2001-0266, Jan. 2001.
- ³⁸Sundaram, P., Agrawal, S., and Hager, J. O., "Aerospace Vehicle MDO Shape Optimization Using ADIFOR 3.0 Gradients," *AIAA Paper* 2000-4733, Sept. 2000.
- ³⁹Samareh, J. A., "A Novel Shape Parameterization Approach," NASA TM-1999-209116, May 1999.
- ⁴⁰Samareh, J. A., "Aerodynamic Shape Optimization Based on Free-Form Deformation," *AIAA Paper* 2004-4630, Aug. 2004.
- ⁴¹Saad, Y., and Schultz, M. H., "GMRES: A Generalized Minimal Residual Algorithm for Solving Nonsymmetric Linear Systems," *SIAM Journal on Scientific and Statistical Computing*, Vol. 7, No. 3, 1986, pp. 856-869.
- ⁴²Schmitt, V., and Charpin, F., "Pressure Distributions on the ONERA M6 Wing at Transonic Mach Numbers," *Experimental Database for Computer Program Assessment*, AGARD AR-138, 1979, pp. B1-1-B1-44.
- ⁴³Kleb, W. L., Nielsen, E. J., Gnoffo, P. A., Park, M. A., and Wood, W. A., "Collaborative Software Development in Support of Fast Adaptive Aerospace Tools (FAAST)," *AIAA Paper* 2003-3978, June 2003.
- ⁴⁴Jones, W. T., "GridEx—An Integrated Grid Generation Package for CFD," *AIAA Paper* 2003-4129, June 2003.
- ⁴⁵Marcum, D. L., and Weatherill, N. P., "Unstructured Grid Generation Using Iterative Point Insertion and Local Reconnection," *AIAA Journal*, Vol. 33, No. 9, 1995, pp. 1619-1625.
- ⁴⁶Anderson, W. K., Rausch, R. D., and Bonhaus, D. L., "Implicit/Multigrid Algorithms for Incompressible Turbulent Flows on Unstructured Grids," *Journal of Computational Physics*, Vol. 128, No. 2, 1996, pp. 391-408.
- ⁴⁷Chorin, A. J., "A Numerical Method for Solving Incompressible Viscous Flow Problems," *Journal of Computational Physics*, Vol. 2, No. 1, 1967, pp. 12-26.
- ⁴⁸Love, M. H., Zink, P. S., Stroud, R. L., Bye, D. R., and Chase, C., "Impact of Actuation Concepts on Morphing Aircraft Structures," *AIAA Paper* 2004-1724, April 2004.
- ⁴⁹Gill, P. E., Murray, W., Saunders, M. A., and Wright, M. H., "User's Guide for NPSOL 5.0: A FORTRAN Package for Nonlinear Programming," Dept. of Mathematics, Rept. NA 98-2, Univ. of California, San Diego, La Jolla, CA, 1995.
- ⁵⁰Kaufman, L., and Gay, D., "PORT Library: Optimization and Mathematical Programming—User's Manual," Bell Labs., Murray Hill, NJ, 1997.

M. Auweter-Kurtz
Associate Editor