

Development of a Flight Article for a Hypersonic Boundary-Layer Experiment

W. Lance Richards* and Richard C. Monaghan†
NASA Dryden Flight Research Center, Edwards, California 93523-0273

Preparations for a boundary-layer transition experiment to be conducted on a future flight mission of the air-launched Pegasus® rocket are underway. The experiment requires a flight-test article called a glove to be attached to the wing of the Mach-8 first-stage booster. A three-dimensional, nonlinear finite element analysis has been performed and significant small-scale laboratory testing has been accomplished to support the design and development of the flight-test glove. Reliance on analyses and laboratory tests has been instrumental in achieving the structural stability and strength requirements for the glove design. Results obtained from the structural analysis and laboratory testing show that all glove components are well within the allowable thermal stress and deformation requirements to satisfy experiment objectives.

Introduction

THE prediction of boundary-layer transition for three-dimensional flow is essential to the design and development of hypersonic vehicles. Accurate transition assumptions must be made in the vehicle design because of extreme differences in the aerodynamic heating between fully turbulent and fully laminar flow at hypersonic speeds. If the conservative (but unrealistic) assumption of fully turbulent flow is assumed throughout the mission, the resulting design will be extremely inefficient. Conversely, fully laminar flow cannot be assumed for the safe design of the vehicle. Therefore, accurate assumptions concerning boundary-layer transition must be made for the vehicle design to be both efficient and robust.

Preparations for a flight experiment are currently underway to improve boundary-layer transition prediction methods for actual hypersonic flight conditions. A transition experiment is proposed in flight because ground-based facilities are limited in their ability to concurrently reproduce the important parameters in a transient hypersonic flight trajectory, such as Mach and Reynolds numbers, enthalpy, and test duration.¹ Crucial to the success of the experiment is the ability to design, analyze, and fabricate a fully instrumented flight-test fixture that can provide a smooth, three-dimensional, structurally stable aerodynamic surface and to determine when and where boundary-layer transition occurs during the flight.

To achieve these objectives, a flight-test article called a glove has been designed, analyzed, manufactured, and installed on the wing of the air-launched Pegasus® (Orbital Sciences Corp., Fairfax, Virginia) space booster. A comprehensive structural test and analysis program has been successfully completed to validate the integrity of the complex glove design. Complexity of the design stemmed from the use of nontraditional engineering materials, geometrically complex components, time-varying boundary conditions, and nontrivial manufacturing processes. This paper presents the glove design and describes the test and analysis details that were essential in the glove verification process.

Design Requirements

The glove was designed to provide valuable boundary-layer transition data during a typical Mach-8 flight of the Pegasus space booster. This section describes the key requirements for the glove design.

Vehicle and Mission Requirements

The Pegasus is a multistaged, air-launched rocket designed to economically place small payloads into low Earth orbit. Figure 1 shows the physical dimensions of the rocket and the location of the glove. Figure 2 is a photograph of the Pegasus space booster mounted under the wing of a B-52 carrier aircraft.

The booster follows a fixed trajectory that is predetermined for a particular payload requirement. For a typical mission, the booster separates from the carrier aircraft at Mach 0.8 and an altitude of approximately 13,000 m and descends for 5 s. Then, the first stage ignites. After approximately 70 s, the vehicle has accelerated to Mach 8 and an altitude of approximately 61,000 m. After first-stage burnout occurs, the glove experiment concludes as the entire first stage is jettisoned and second-stage ignition occurs.

Aerothermal Loads Analysis

A vehicle trajectory, similar to those previously described,^{2,3} was used as input to an aerothermal analysis to determine aerodynamic heating loads applied to the glove during the flight. An engineering aerodynamic heating code was used to calculate heat-transfer coefficients, heating rates, skin friction, and surface-static pressures at discrete locations during the transient-heating profile. The program permitted the use of different theories for calculating heat transfer at various glove locations and flow conditions. Additional details of the aerothermal analyses performed in the glove design have previously been provided, e.g., Ref. 4. Several combinations of glove skin thickness and materials were used in the analysis to begin defining an appropriate glove configuration.

Structural Design Requirements

Structural design requirements included a surface waviness criterion not to exceed 0.008 cm over a 5-cm length throughout the flight envelope; a requirement to minimize any step discontinuities at the inboard edge of the test surface, especially near the leading edge; and a requirement to have a thermally conductive thin skin. Such a skin was needed so that thermocouples installed on the inside skin surface would sense heating-rate changes caused by boundary-layer transition. Weight was a secondary design consideration, and the structure was not optimized in this regard.

Preliminary studies showed that, if the glove was rigidly constrained during heating, the test skin would buckle, or the rigid attachments would yield, or both. Thermal expansion and contraction capability was, therefore, regarded as an important feature in the glove design.

Aerodynamic Design Requirements

The outer moldline shape of the glove was defined through analyses based on computational fluid dynamics.⁵ Results from studies

Received Sept. 24, 1996; revision received May 9, 1997; accepted for publication May 23, 1997. Copyright © 1997 by the American Institute of Aeronautics and Astronautics, Inc. No copyright is asserted in the United States under Title 17, U.S. Code. The U.S. Government has a royalty-free license to exercise all rights under the copyright claimed herein for Governmental purposes. All other rights are reserved by the copyright owner.

*Structural Test and Analysis Group Leader, Aerostructures Branch, P.O. Box 273, Member AIAA.

†Chief, Aerostructures Branch, P.O. Box 273.

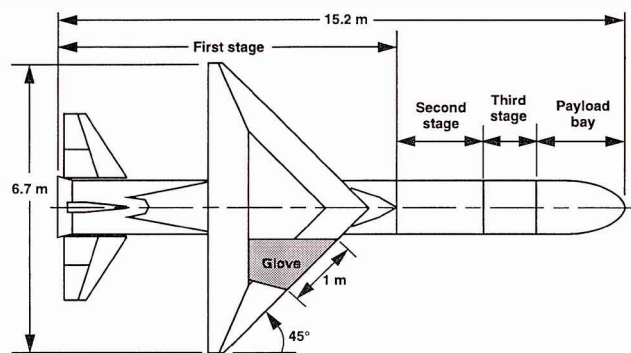


Fig. 1 Plan view of the Pegasus XL space booster with glove.

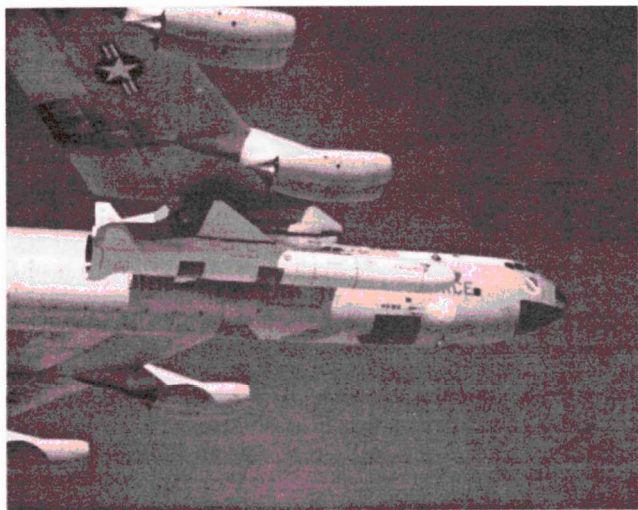


Fig. 2 Pegasus space booster mounted under the wing of the B-52 aircraft.

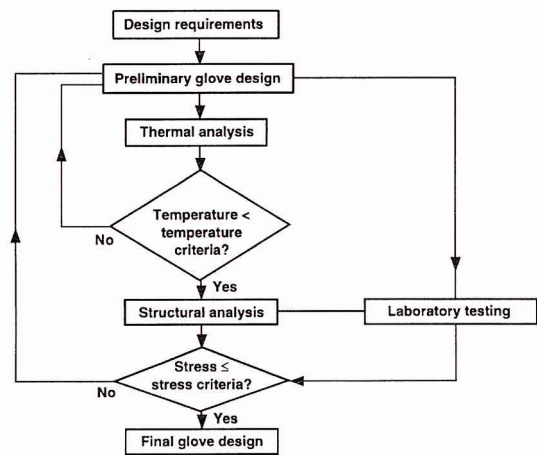


Fig. 3 Glove design process.

such as these were important requirements in the glove design but are beyond the scope of this paper.

Preliminary Design and Thermal Analysis

Figure 3 shows the design and verification process for the design of the hypersonic glove test article. After the design requirements were defined, a preliminary design of the glove was initiated. Such a design required the selection of materials, definition of boundary constraints, sizing of skin thicknesses and fasteners, and laying out of instrumentation and sensor wiring. The details of the initial glove design and preliminary results from the one- and two-dimensional thermal analyses that supported these tasks have previously been documented.⁴

Thermal analyses of the preliminary glove design were performed to predict the glove transient-temperature response during the mission. The applied heating rates from the aerodynamic heating analysis already described were coupled with the thermal response of the preliminary glove design. The transient-temperature distributions were then evaluated to determine whether any area of the glove exceeded maximum temperature limits. Those areas in the glove design that exceeded these criteria were modified and reanalyzed until all of the glove materials and structures were below maximum operating temperature criteria.

Glove Design

The iterative process between the preliminary design and thermal analyses resulted in a glove with a relatively thick, metallic outer skin and a large leading-edge heat sink to accommodate the extreme leading-edge heating during flight. The aerodynamic fairing that blends the metallic portion of the glove to the existing Pegasus composite wing has previously been described.⁴

As already mentioned, the ability to accommodate thermal growth and contraction during flight was an important requirement for the glove. To achieve this capability, the leading edge was rigidly fixed at a single point and the metallic skin was allowed to freely expand over a balsa wood support foundation during heating.

Figure 4a shows a top view of the glove. Figure 4b shows the inboard leading edge highlighted. The single rigid attachment at the inboard leading edge and the expansion joints in the outboard direction are also shown. The preliminary design constrained the movement of the glove leading edge in the direction normal to the Pegasus wing leading edge. However, a series of slotted attachments allowed movement in the direction parallel to the Pegasus wing leading edge. The rigid attachment of the glove leading edge forced all thermal growth of the glove aft and parallel to the leading edge. This approach ensured glove dimensional stability at the leading edge where boundary-layer transition is the most sensitive.

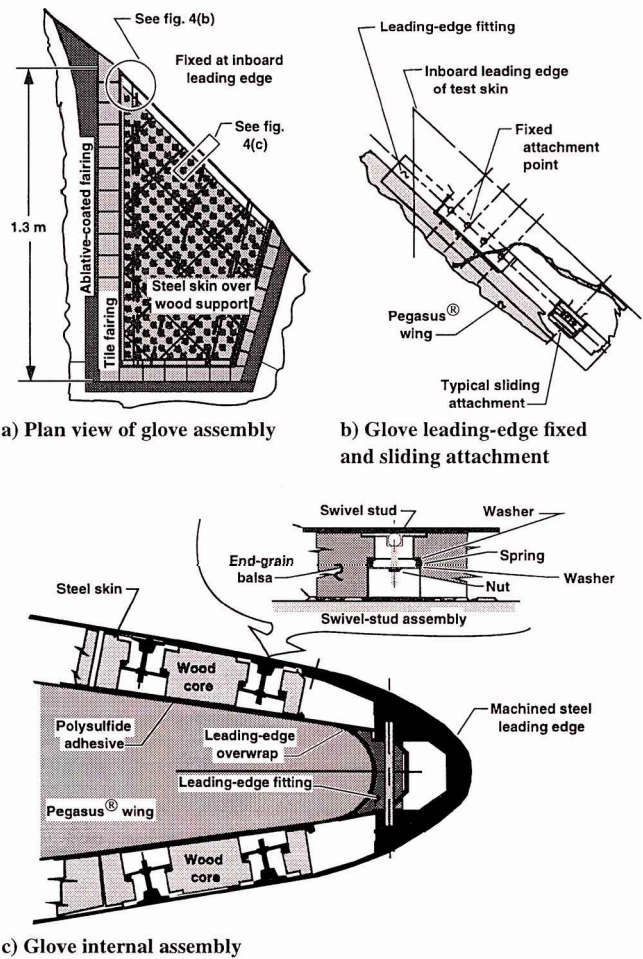


Fig. 4 Glove assembly.

The glove outer skin consists of a nickel-plated, low-carbon steel sheet that has a plan view area of approximately 1 m² (Fig. 4a). The upper and lower skins are 0.23 and 0.35 cm thick, respectively. These skins are attached to the wing at 270 independent locations by spring-loaded swivel studs designed specifically for this flight program. Figure 4c shows a cross-sectional view of the glove and an enlargement of a typical swivel-stud mechanism. The swivel studs, spaced 6.4 cm apart, are bonded to the steel skins with high-temperature epoxy. To react against aerodynamic forces, the studs are preloaded to 111 N through the spring attachments to the balsa substructure. The balsa glove structure is preshaped and bonded to the outer skin of the basic Pegasus wing. This attachment method holds the skin securely to the surface but also allows the skin to expand thermally with only a small resistance caused by sliding friction.

Small-Scale Laboratory Testing

The structural design of the glove incorporated unconventional construction methods and materials. Consequently, extensive small-scale laboratory testing was performed to verify those areas in the glove that possessed the greatest design uncertainty or areas that were impractical to model analytically. This section describes the two main areas on the glove that were evaluated: the joint between the upper skin and leading-edge mass (the upper joint) and the sliding attachment of the test skin to the wing. In all, more than 20 small-scale laboratory tests were performed.

Solder-Joint Strength and Performance Tests

The requirements for the upper joint included smoothness of the aerodynamic test surface, predictable heat transfer, and fail-safety design under potentially high thermal stresses. To satisfy these requirements, the upper joint was redundantly designed with two fastening mechanisms. Solder was used to provide predictable heat transfer and a means of smoothing the joint without causing thermal conduction discontinuities. Two rows of 3-mm screws spaced at 1.3 cm in each row were also added to the joint to provide redundancy and predictable strength values for analysis of the primary structural load path.

Figure 5 shows the test article used to develop the manufacturing technique and gain confidence in the integrity of the upper-joint design. This test article consisted of a 25-cm-long section of the full-scale, leading-edge mass attached by a representative joint to a 65-cm² section of the upperskin. This test article was used to develop the solder process, the joint smoothing technique, and the nickel-plating process. A pass-fail thermal stress test was also conducted on this test article.

Preliminary analysis had indicated that the thermal stress in the joint would be only slightly less severe on the 25-cm specimen than on the full-scale article. A representative thermal gradient was applied to this test article to demonstrate survivability of the joint. This test produced temperatures in the soldered and bolted joint similar to the predicted flight condition and produced a similar thermal gradient across the joint. The leading-edge mass was heated to 102°C, and the thin skin was heated to 193°C. Posttest inspection using visual and dye-penetrant techniques indicated no damage to the joint.

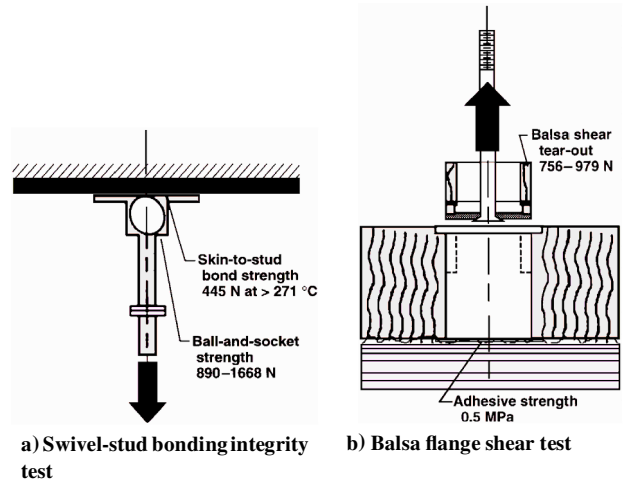


Fig. 6 Small-scale laboratory tests.

Bolt-Shear Tests in the Upper-Skin Joint

The upper-joint design called for bolts to be shear loaded in the threaded section, which is not standard engineering practice, and, therefore, no strength data were available from existing sources. Bolt-shear tests using the actual joint materials (low-carbon steel and 793-MPa tensile-strength bolts) were conducted to determine shear strength as well as to observe the yielding characteristics. The test results indicated large margins of safety (40%) and significant yielding in the skin material prior to bolt failure. Bolt failure occurred from a combination of shear and bending stresses. The bolt strength was adequate to satisfy thermal stress requirements. Actual bolt loads will be significantly lower than those analytically predicted because of local yielding in the area of the bolt that is not included in the analysis.

Swivel-Stud Strength Tests

Figure 6 summarizes four component tests that were done to demonstrate the strength of the various elements of an individual swivel-stud attachment point. The testing of the swivel-stud-to-skin bond (Fig. 6a) was used to select and qualify an adhesive that would maintain strength at high temperatures. A 445-N load was selected as the static-load criterion. The test results for the selected adhesive indicated a 95% probability of holding a 445-N tensile load to a temperature greater than 271°C using a normal statistical distribution.

The weak link in the balsa attachment was the shearing of the balsa flange that supports the swivel-stud preload springs. Figure 6b shows the configuration of the coupons used to test this area. The test results indicated good strength for the typical balsa flange. In some local areas, the flange depth was reduced significantly and basswood inserts were installed to increase the shear strength.

The balsa substructure of the glove is bonded to the Pegasus wing with a polysulfide adhesive. Testing done for this joint, which includes a real wing upper-surface skin, indicated strengths well in excess of the balsa and swivel-stud strength. The demonstrated high strength ratio of the Pegasus wing skin to foam core provides a fail-safe feature. In the unlikely event of a local overload from the glove outer skin, the studs and balsa would fail before the loads could be high enough to damage the basic wing structure.

Structural Analyses

In addition to the laboratory tests, analyses were required in the design verification process to understand those features that were nearly impossible to represent in the laboratory. The analyses were used to represent such design features as geometrically complex glove shapes, such as B-splines and three-dimensionally varying contours; nontrivial load conditions, such as nonuniform transient-temperature distributions; nonlinear boundary conditions, such as expansion joints and surfaces with contact and sliding friction; and nontraditional engineering materials, such as balsa wood, mechanical springs, and swivel-stud mechanisms. The analyses used a computationally intensive nonlinear solution process to determine

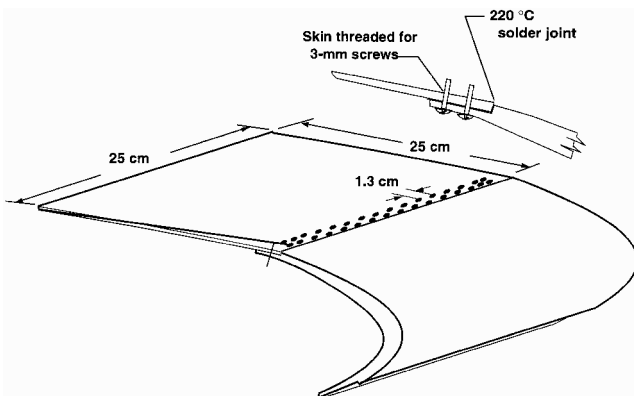


Fig. 5 Upper joint test article.

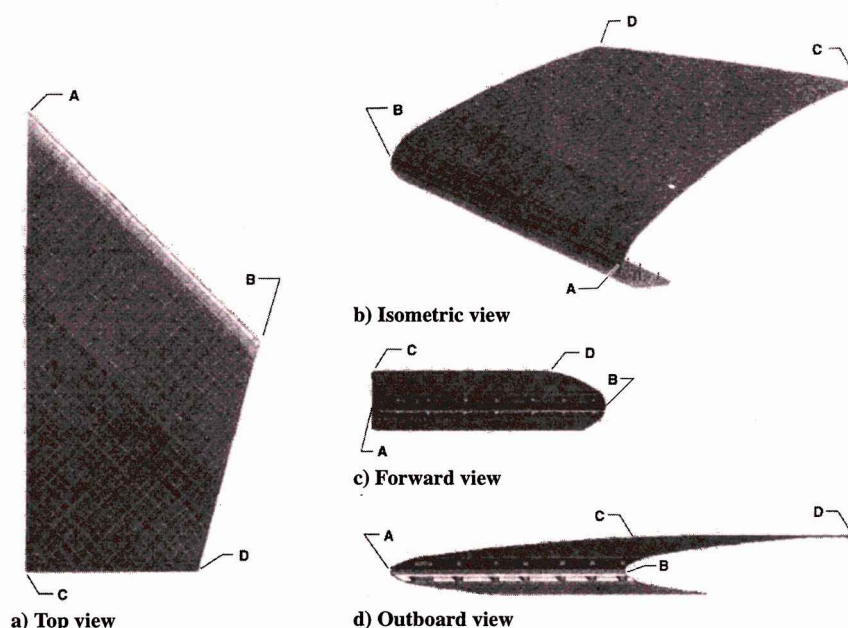


Fig. 7 Finite element model: A = inboard leading edge, B = outboard leading edge, C = inboard trailing edge, and D = outboard trailing edge.

transient stress and buckling characteristics of the glove during the experiment.

Finite Element Model

Figure 7 shows various views of the glove model generated with MSC/NASTRAN (version 68) (Ref. 6). A three-dimensional finite element model was constructed that consisted of 3777 hexahedron elements, 187 pentahedron elements, and 1194 nonlinear contact-friction elements. The model was meshed in such a way as to match the location of each swivel-stud assembly in the balsa support system. The leading-edge heat sink is modeled with solid elements to incorporate the large temperature drop through the thickness of the leading edge. The fixed restraint is located inboard (Fig. 7c).

Linear stress analysis assumes that displacements are linearly related to the forces applied to the structure. However, this relationship does not apply at the sliding attachment boundary between the thin skin and the balsa wood support. Nonlinear, contact-friction elements, formulated to represent the balsa wood stiffness; swivel-stud assemblies; wavy springs; and the wood/skin interface were used to model this complex behavior. These elements are inherently nonlinear because, at each load increment in the solution sequence, the code determines whether the contact surface is stationary and resisted by static friction, whether the contact surface has slipped and is resisted by kinetic friction, or whether the internal element forces have exceeded the preload and the surface has opened.

Temperature Distributions

Initially, the temperature distribution at a single time in the thermal analysis was input to a structures model to predict the stress field and buckling characteristics of the glove. The temperature distribution at 69 s (first-stage burnout time) was initially chosen because it corresponded to the end of the heating profile when thermal stresses are usually assumed to be the most extreme. A more rigorous analysis showed that multiple times in the temperature-time history were necessary because the temperature gradients varied considerably throughout the trajectory. Therefore, analyses were also performed for times at 45, 75, and 90 s (second-stage ignition) into the mission profile. Times of 45 and 75 s correspond to the points at which the thermal gradient between the thick leading edge and thin skin is the most extreme.

Boundary Conditions

The fixed boss located at the inboard area of the leading edge is the only place where the glove is rigidly attached to the wing. All

degrees of freedom at this location, therefore, were constrained in the analysis. Displacements of the leading-edge slotted attachments were initially prevented in the direction normal to the leading edge but were allowed in the parallel direction to accommodate the thermal expansion in this direction. However, after the stress analyses were performed at the three additional profile times, it was discovered that the original attachment scheme produced stresses greater than the acceptable yield stress criteria.

Various attachment schemes were analytically studied to help identify an acceptable attachment technique. Based on these studies, glove design modifications were made at the leading edge at the attachments and slotted joints. The displacement in the direction normal to the leading edge was allowed everywhere at the leading edge except the most inboard and most outboard leading-edge connections. Consequently, the constraints at the leading edge were similar to a simply supported beam that is able to rotate at both ends. These changes allowed greater thermal distortion at the leading edge but were necessary to ensure the thermal stresses were less than the allowable yield stress criteria.

Results and Discussion

Stresses and displacements were predicted at multiple points in the transient heating profile. This section highlights some of the significant results from the structural analysis.

Stress Results

Table 1 summarizes the transient stress results and factors of safety of the components most critical to the glove design. The maximum stresses induced during the trajectory are highlighted. These results were used to determine the component safety factor. As Table 1 shows, the maximum stress in each of the glove components occurs at different times during the mission. This result underscores the need for transient analyses; conventional analysis techniques that use steady-state, linear assumptions to simplify the problem could produce erroneous predictions and nonconservative design results.

Figure 8 shows one of the component stress results given in Table 1. The shear stress in the upper joint is mapped on the glove model. The area of highest shear occurs at the inboard end of the soldered and bolted joint. The analysis did not attempt to account for additional strength provided by the solder. Despite this, all critical glove components are well below the allowable stress, with a factor of safety of at least 1.5.

Deformation Results

Figure 9 shows top views of the leading-edge distortion at 45, 69, 75, and 90 s in the trajectory. Figure 9 also illustrates why a transient

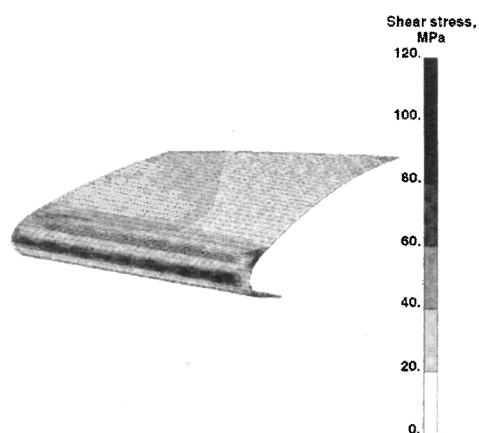


Fig. 8 Shear stress in upper joint.

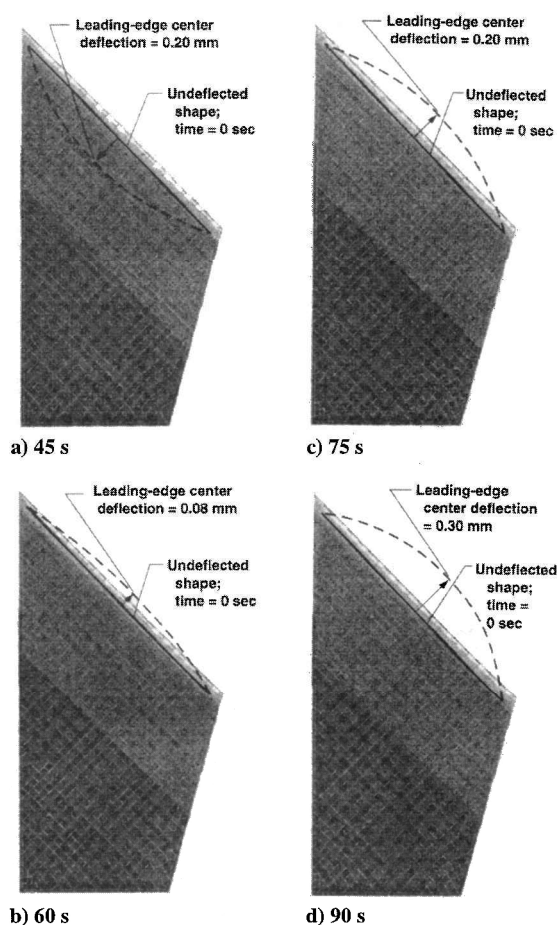


Fig. 9 Leading-edge deflections at several profile times.

structural analysis was required. The 69-s deflection, assumed as the worst-case condition for the preliminary design, appears to be the most benign of those at the four times evaluated. The center leading edge thermally distorts aft at 45 s in the profile. At 69 s, the stagnation heating at the leading edge forces the leading-edge deflection through its initial starting point. At 75 s, the gradient between the leading edge and thin skin has reached a displacement nearly equal in magnitude and opposite in sign to the displacement

Table 1 Stress results

Glove component	Stress results, MPa				Allowable stress	Factor of safety
	45 s	69 s	75 s	90 s		
Upper skin						
Maximum shear stress	82	80	84	55	241	2.9
Lower skin						
Maximum shear stress	113	121	117	89	241	2.0
Upper joint						
Maximum skin-shear stress	90	96	82	62	241	2.5
Lower joint						
Maximum skin-shear stress	136	134	129	97	241	1.8
Leading edge						
Maximum shear stress	120	104	112	118	241	2.0
Boss bearing stress	48	49	63	66	241	3.7

at 45 s. At 90 s, the displacement has bowed out to a maximum displacement of 0.03 cm. Although the maximum center deflections vary from 0.02 cm in the aft direction to 0.03 cm in the forward direction, these are well within the experiment deflection limits of 0.005 cm over a 5-cm, in-plane length.

Concluding Remarks

A comprehensive structural test and analysis program has been successfully completed to validate the design of a flight-test article for a Mach-8, boundary-layer experiment. The test article consisted of nontraditional engineering materials and geometrically complex components, had transient boundary conditions, and was constructed using unique manufacturing processes. Extensive small-scale laboratory testing was used to verify those areas in the glove that possessed the greatest design uncertainty or were impractical to model analytically. A three-dimensional nonlinear structural analysis was instrumental in accurately representing the complex glove characteristics during the transient flight profile reaching Mach 8. Test and analysis activities were worked in concert to help design and validate the glove test article required for the experiment. Results obtained from the structural analysis and laboratory testing were presented. These results show that all glove components are well within the allowable stress and deformation limits to satisfy experiment objectives.

References

- ¹Bertilrud, A., Kolodziej, P., Noffz, G. K., and Godil, A., "Plans for In-Flight Measurement of Hypersonic Crossflow Transition on the Pegasus[®] Launch Vehicle," AIAA Paper 92-4104, Aug. 1992.
- ²Noffz, G. K., Curry, R. E., Haering, E. A., Jr., and Kolodziej, P., "Aerothermal Test Results from the First Flight of the Pegasus Air-Launched Space Booster," NASA TM-4330, Oct. 1991.
- ³Noffz, G. K., Moes, T. R., Haering, E. A., Jr., and Kolodziej, P., "Aerothermal Test Results from the Second Flight of the Pegasus[®] Booster," NASA TM-4391, Oct. 1992.
- ⁴Gong, L., Richards, W. L., Monaghan, R. C., and Quinn, R. D., "Preliminary Analysis for a Mach 8 Crossflow Transition Experiment on the Pegasus[®] Space Booster," NASA TM-104272, Nov. 1993.
- ⁵Godil, A., and Bertilrud, A., "Design of a Wing Shape for Study of Hypersonic Crossflow Transition in Flight," *Computing Systems in Engineering*, Vol. 3, Nos. 1-4, 1992, pp. 115-130.
- ⁶Lahey, R. S., Miller, M. P., and Reymond, M. (eds.), "MSC/NASTRAN Reference Manual: Version 68, Volume 1," MacNeal-Schwendler Corp., Los Angeles, CA, 1994.

I. E. Vas
Associate Editor