

Effect of Bypass on Overall Performance of Pin-Fin Heat Sinks

W. A. Khan*

COMSATS Information Technology Center, Abbottabad 22060, NWFP, Pakistan
and

M. M. Yovanovich†

University of Waterloo, Waterloo, Ontario N2L 3G1, Canada

DOI: 10.2514/1.27544

One of the most important factors influencing the overall performance of cylindrical pin-fin heat sinks is the bypass phenomenon. Depending upon the total bypass area in comparison to the flow area between pin fins, a significant portion of the approaching airflow bypasses the heat sink. In this study, the effects of side and top bypass on the hydraulic and thermal performances of a cylindrical pin-fin heat sink will be investigated in laminar forced convection. Theoretical models, based on laws of conservation of mass, momentum, and energy, are developed to predict flow velocity, pressure drop, and heat transfer from the heat sink and the bypass regions. These models will help in determining hydraulic and thermal resistances in each region. Both in-line and staggered arrangements are analyzed in this study. Analytical and empirical correlations are used to determine friction factors and heat transfer coefficients in both arrangements. The effects of thermal spreading and joint resistances are neglected in this study.

Nomenclature

A_b	= area of the baseplate $\equiv L \times W_2$, m ²
A_f	= frontal face area of heat sink, m ²
a	= dimensionless longitudinal pitch $\equiv S_L/D$
b	= dimensionless transverse pitch $\equiv S_T/D$
CL_s	= side clearance ratio $\equiv 2W_1/W_2$
CL_t	= top clearance ratio $\equiv H_2/H_1$
C_1, C_2	= constants defined in Eq. (20)
c	= dimensionless diagonal pitch $\equiv S_D/D$
D	= pin diameter, m
D_h	= hydraulic diameter, m
f	= friction factor
H	= height, m
h	= average heat transfer coefficient, W/m ² · K
h_e	= uniform effective heat transfer coefficient, W/m ² · K
K	= correction factor defined in Eq. (10)
K_1, K_2, K_3	= constants defined in Eq. (21)
K_c, K_e	= contraction and expansion coefficients in heat sink region
k	= thermal conductivity, W/m · K
L	= length of heat sink in flow direction, m
m	= fin performance parameter, m ⁻¹
N	= total number of pins in heat sink $\equiv N_T N_L$
Nu_D	= Nusselt number based on pin diameter $\equiv Dh/k_f$
N_L	= number of pins in the longitudinal direction
N_T	= number of pins in the transverse direction
P	= pressure, Pa
Pr	= Prandtl number $\equiv \nu/\alpha$
Q	= total heat transfer rate, W
Re_D	= Reynolds number based on pin diameter $\equiv DU_{\max}/\nu$

Re_{D_h}	= Reynolds number based on hydraulic diameter $\equiv D_h U/\nu$
R_c	= contact resistance between fins and the baseplate, K/W
R_{film}	= thermal resistance of exposed (unfinned) surface of the baseplate, K/W
R_{fin}	= resistance of a fin, K/W
R_m	= material resistance of the baseplate, K/W
S_D	= diagonal pitch, m
S_L	= longitudinal distance between two consecutive pins, m
S_T	= transverse distance between two consecutive pins, m
T	= temperature, K
t_b	= thickness of baseplate, m
U	= velocity, m/s
U_{app}	= approach velocity, m/s
$U_{\max}$	= maximum velocity in minimum flow area, m/s
W	= width of duct, m
W_2	= width of heat sink, m
ΔP	= pressure drop, Pa
η_{fin}	= fin efficiency $\equiv \tanh(mH_{\text{fin}})/(mH_{\text{fin}})$
μ	= absolute viscosity of fluid, kg/m s
ν	= kinematic viscosity of fluid, m ² /s
ρ	= fluid density, kg/m ³

Subscripts

a	= ambient
b	= baseplate or unfinned surface of baseplate
d	= duct
f	= fluid
fin	= single fin
fins	= all fins with exposed baseplate area
hs	= heat sink
m	= bulk material
T	= thermal
w	= wall
1	= side bypass
2	= top bypass

Presented as Paper 3604 at the 9th AIAA/ASME Joint Thermophysics and Heat Transfer Conference, San Francisco, CA, 5–8 June 2006; received 28 August 2006; revision received 1 December 2006; accepted for publication 25 January 2007. Copyright © 2007 by the American Institute of Aeronautics and Astronautics, Inc. All rights reserved. Copies of this paper may be made for personal or internal use, on condition that the copier pay the \$10.00 per-copy fee to the Copyright Clearance Center, Inc., 222 Rosewood Drive, Danvers, MA 01923; include the code 0887-8722/07 \$10.00 in correspondence with the CCC.

*Associate Professor, Department of Mathematics; Current Address: Department of Mechanical Engineering, National University of Science and Technology, PNEC, Karachi, Pakistan.

†Distinguished Professor Emeritus, Department of Mechanical Engineering.

I. Introduction

THE continuing increase of power densities in microelectronics and the simultaneous drive to reduce the size and weight of electronic products have led to an increased importance of thermal

management issues in this industry. A common method for cooling packages is the use of pin-fin heat sinks. These heat sinks provide a large surface area for the dissipation of heat and effectively reduce the thermal resistance of the package. They often take less space and contribute less to the weight and cost of the product. For these reasons, they are widely used in applications where heat loads are substantial and/or space is limited. They are also found to be useful in situations where the direction of the approaching flow is unknown or may change. The majority of these pin-fin heat sinks are mounted on circuit boards where significant clearances are available on the sides and the top. Because of higher resistance for flow through the heat sink, the approaching cooling fluid takes a detour around the heat sink, which always results in a better hydraulic performance but poorer thermal performance. In this paper, the effects of side and top bypass on the overall performance of a pin-fin heat sink are investigated for in-line and staggered arrangements.

II. Literature Review

The effect of flow bypass on the overall performance of plate-fin heat sinks has been investigated experimentally [1–9], numerically [10,11], and analytically [12–14]. Ortega and his coworkers [15–18] conducted extensive experiments to study hydraulic and thermal performances of in-line square pin-fin heat sinks (SPFHS) with/without top and side bypass. They also developed a two-branch semi-inviscid bypass model to calculate the pressure drop across the heat sinks. They found that side bypass results in higher overall pressure drop compared to top bypass. They also found that the overall heat transfer is governed by the fin flow which is influenced by the top bypass as well as pin pitch. Later on, Shaukatullah et al. [19] performed experiments on in-line SPFHS for use in low velocity applications and optimized the thermal performance. They kept the design simpler and cheaper.

Rizzi et al. [20,21] and Jonsson and Moshfegh [22,23] investigated the effects of bypass on heat transfer and pressure drop in circular pin-fin heat sinks (CPFHS), SPFHS, and parallel plate-fin heat sinks (PPFHS) experimentally. Rizzi et al. [20,21] developed a number of data reduction parameters and procedures using scaling for heterogeneous media suggested by volume averaging theory. They developed a correlation relating heat transfer performance to Reynolds number and other important characteristic parameters. Jonsson and Moshfegh [22,23] also developed an empirical correlation for different fin designs. Their correlation predicts the Nusselt number and the dimensionless pressure drop and takes into account the influence of duct height, duct width, fin height, fin thickness, and fin-fin spacing. They also developed a physical bypass model for plate-fin heat sinks to describe the bypass effect.

Jonsson and Moshfegh [24,25] developed three-dimensional computational fluid dynamics (CFD) models of CPFHS in bypass flow. They used the Chen-Kim $k-\epsilon$ model in turbulent flow. They studied the influence of increasing fin height in the flow direction and uneven distribution of the fins in the lengthwise and the spanwise directions. They showed that an increase in the heat transfer coefficient can be achieved by an uneven distribution of the fins in the lengthwise direction, using smaller fin spacing at the trailing edge of the heat sink. They also performed a parametric study and found that the inlet velocity, the fin height, and the fin-to-fin distance have strong influences on the heat transfer coefficient and the pressure drop. Chapman et al. [26] investigated the effect of airflow bypass characteristics in open duct configuration. They found that the straight fin experiences the lowest amount of flow bypass over the heat sink. For this particular application, where the heat source is localized at the center of the heat sink baseplate, the overall thermal resistance of the straight fin was lower than the other two designs mainly due to the combined effect of enhanced lateral conduction along the fins and the lower flow bypass characteristics.

III. Analysis

The front, side, and top views of an in-line pin-fin heat sink are shown in Fig. 1. The dimensions of the baseplate are $W_2 \times L \times t_b$,

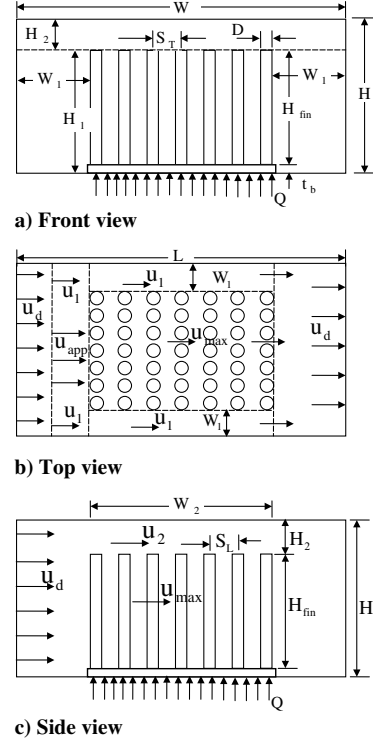


Fig. 1 Front, top, and side views of an in-line pin-fin heat sink in bypass flow.

where W_2 is the width of the entrance, L is the length measured in the downstream direction. The dimensions of the duct are $W \times H$. The dimensions of the side bypass are $W_1 \times H_1$, where as the dimensions of the top bypass are $W \times H_2$. The pin fins can be arranged in an in-line or staggered manner. Each pin fin has diameter D and height H . The dimensionless longitudinal and transverse pitches are $a = S_L/D$ and $b = S_T/D$. The source of heat is applied to the bottom of the heat sink. Heat is applied uniformly over the full area of the baseplate. The flow is assumed to be laminar, steady, and two dimensional. The duct velocity of the fluid is U_d and the ambient temperature is T_a . There is no leakage of fluid from the top or sides. The wall temperature of the pin is $T_w (> T_a)$ and the baseplate temperature is T_b . The side and top clearance ratios are defined as

$$CL_s = \frac{2W_1}{W_2} \quad (1)$$

$$CL_t = \frac{H_2}{H_1} \quad (2)$$

A. Hydraulic Resistance

When the heat sink is not fully shrouded, some air flows between pin fins and the remaining air bypasses the heat sink. Because of the bypass effect, the heat transfer and pressure drop across the heat sink decrease. The amount of flow in the heat sink and bypass regions depends on their hydraulic resistance or pressure drop. It affects the overall performance of the heat sink. Higher hydraulic resistance causes less airflow through the heat sink channel, attaining a lower convection heat transfer rate between the fins and the surrounding air and increasing fin thermal resistance. Ortega and his group [15–19] found from experiments that in most cases the flow begins to split 10 to 20 mm upstream of the heat sink. Keeping this fact in mind, it is assumed that the flow splits at position 2 and starts to mix at position 4. The pressure drop in the side bypass, top bypass, and heat sink regions between positions 2 and 4 (Fig. 2) can be written as



Fig. 2 Hydraulic resistances in side bypass, top bypass, and heat sink regions.

$$\left. \begin{aligned} \Delta P_1 &= \left(\frac{1}{2}\rho U_1^2\right) f_1 (L/D_{h1}) \\ \Delta P_2 &= \left(\frac{1}{2}\rho U_2^2\right) f_2 (L/D_{h2}) \\ \Delta P_{hs} &= \left(\frac{1}{2}\rho U_{\max}^2\right) [K_c + K_e + N_L f_3] \end{aligned} \right\} \quad (3)$$

where f_1 and f_2 are the friction factors in the side and top bypass regions and are given by

$$f_1 = \frac{24}{Re_{Dh1}} \quad \text{and} \quad f_2 = \frac{24}{Re_{Dh2}} \quad (4)$$

with

$$\left. \begin{aligned} Dh_1 &= \frac{4W_1H_1}{2W_1 + H_1} \quad \text{and} \quad Dh_2 = \frac{2WH_2}{W + H_2} \\ Re_{Dh1} &= \frac{U_1 Dh_1}{\nu} \quad \text{and} \quad Re_{Dh2} = \frac{U_2 Dh_2}{\nu} \end{aligned} \right\} \quad (5)$$

For a heat sink, K_c and K_e are the abrupt contraction and abrupt expansion coefficients, respectively, f_3 is the friction factor. The coefficients of abrupt contraction and expansion have been established graphically by Kays [27] for a number of geometries. The following correlations are derived from those graphs:

$$K_c = -0.0311\sigma^2 - 0.3722\sigma + 1.0676 \quad (6)$$

$$K_e = 0.9301\sigma^2 - 2.5746\sigma + 0.973 \quad (7)$$

with

$$\sigma = \frac{b-1}{b} \quad (8)$$

Žukauskas and Ulinskas [28] collected data, from a variety of sources, about friction factors for the flow in-line and staggered arrangements having many rows and plotted them in the form Eu/K versus Re_D , where K is a parameter accounting for geometry. They fitted these plots by inverse power series relationships and recommended several correlations depending on the value of a and on the Reynolds number range. They also fitted and recommended correlations for the correction factors for the pressure drop with a small number of rows. Khan et al. [29] digitized the graphical results for pressure drop and their correction factors presented by Žukauskas and Ulinskas [28] and fitted those results into single correlations for the friction factors and correction factors for each arrangement. These correlations can be used for any pitch ratio and Reynolds number in the laminar flow range. They are

$$f_3 = \begin{cases} K[0.233 + 45.78/(b-1)^{1.1} Re_D] & \text{in-line arrays} \\ K[378.6/b^{13.1/b}]/Re_D^{0.68/b^{1.29}} & \text{staggered arrays} \end{cases} \quad (9)$$

where K is a correction factor depending upon the flow geometry and arrangement of the pins. It is given by

$$K = \begin{cases} 1.009 \left(\frac{b-1}{a-1}\right)^{1.09/Re_D^{0.0553}} & \text{in-line arrays} \\ 1.175 \left(a/b Re_D^{0.3124}\right) + 0.5 Re_D^{0.0807} & \text{staggered arrays} \end{cases} \quad (10)$$

B. Average Velocities in Side Bypass, Top Bypass, and Heat Sink Regions

From the law of mass conservation between 1 and 2 (Fig. 1b),

$$U_d A_d = U_1 A_1 + U_2 A_2 + U_{app} A_f \quad (11)$$

where A_d , A_1 , A_2 , and A_f are the areas of the duct, side bypass, top bypass, and the frontal face area of the heat sink and can be written as

$$A_d = WH \quad (12)$$

$$A_1 = 2W_1 H_1 \quad (13)$$

$$A_2 = WH_2 \quad (14)$$

$$A_f = W_2 H_{fin} \quad (15)$$

The force balance between 1 and 4, in side bypass, top bypass, and heat sink regions (Fig. 1b), gives

$$\begin{aligned} P_1 + \frac{1}{2}\rho U_d^2 &= P_4 + \frac{1}{2}\rho U_1^2 + \Delta P_1 & \text{side bypass} \\ P_1 + \frac{1}{2}\rho U_d^2 &= P_4 + \frac{1}{2}\rho U_2^2 + \Delta P_2 & \text{top bypass} \\ P_1 + \frac{1}{2}\rho U_d^2 &= P_4 + \frac{1}{2}\rho U_{app}^2 + \Delta P_{hs} & \text{heat sink} \end{aligned} \quad (16)$$

where U_1 , U_2 , and U_{app} are the average velocities in the side, top, and frontal regions of the heat sink, respectively. The average maximum velocity in the heat sink region can be determined using continuity between 2 and 3.

$$U_{\max} = \sigma_3 U_{app} \quad \text{with} \quad \sigma_3 = \frac{S_T}{S_T - D} \quad (17)$$

Equation (16) yields

$$\frac{1}{2}\rho U_1^2 (1 + K_1) = \frac{1}{2}\rho U_2^2 (1 + K_2) = \frac{1}{2}\rho U_{app}^2 (1 + \sigma_3^2 K_3) \quad (18)$$

which gives

$$U_{app} = C_1 U_1 = C_2 U_2 \quad (19)$$

where

$$C_1 = \sqrt{\frac{1 + K_1}{1 + \sigma_3^2 K_3}} \quad \text{and} \quad C_2 = \sqrt{\frac{1 + K_2}{1 + \sigma_3^2 K_3}} \quad (20)$$

with

$$K_1 = f_1 \frac{L}{Dh_1} \quad K_2 = f_2 \frac{L}{Dh_2} \quad K_3 = f_3 (K_c + K_e + f_3 N_L) \quad (21)$$

From Eqs. (11) and (18), the average velocities in side bypass, top bypass, and frontal regions of the heat sink are

$$U_1 = \frac{C_2 U_d}{a_1 C_2 + a_2 C_1 + a_f C_1 C_2} \quad (22)$$

$$U_2 = \frac{C_1 U_d}{a_1 C_2 + a_2 C_1 + a_f C_1 C_2} \quad (23)$$

$$U_{app} = \frac{C_1 C_2 U_d}{a_1 C_2 + a_2 C_1 + a_f C_1 C_2} \quad (24)$$

where

$$a_1 = \frac{A_1}{A_d} \quad a_2 = \frac{A_2}{A_d} \quad a_f = \frac{A_f}{A_d} \quad (25)$$

C. Thermal Resistance

The thermal resistance of a heat sink is a combination of different resistances (Fig. 3). Neglecting thermal joint and spreading resistances, the total thermal resistance of the heat sink can be defined as

$$R_{th} = \frac{1}{[N/(R_c + R_{fin})] + (1/R_{film})} \quad (26)$$

where the thermal resistance of the fin R_{fin} is in series with R_c and parallel with R_{film} and can be written as

$$R_{fin} = \frac{1}{(hA\eta)_{fin}} \quad (27)$$

with

$$\eta_{fin} = \frac{\tanh(mH_{fin})}{mH_{fin}} \quad (28)$$

$$m = \sqrt{\frac{4h_{fin}}{kD}} \quad (29)$$

$$A_{fin} = \pi DH_{fin} + \frac{\pi}{4} D^2 \quad (30)$$

Khan [30] determined analytically the heat transfer coefficient for the fins and is given by

$$h_{fin} = C_3 \frac{k_f}{D} Re_D^{1/2} Pr^{1/3} \quad (31)$$

where Re_D is the Reynolds number based on the pin diameter D and the mean velocity in the minimum free cross section between two rows, U_{max} , for both types of arrangements and is defined as

$$Re_D = \frac{DU_{max}}{\nu} \quad (32)$$

with

$$U_{max} = \max \left\{ \frac{S_T}{S_T - 1} U_{app}, \frac{S_T}{S_D - 1} U_{app} \right\} \quad (33)$$

where S_L and S_T are the dimensionless longitudinal and transverse pitches, and $S_D = \sqrt{S_L^2 + (S_T/2)^2}$ is the dimensionless diagonal pitch in the case of a staggered arrangement. The constant C_3 in Eq. (31) depends on the geometry of the heat sink and is given by

$$C_3 = \begin{cases} [0.2 + \exp(-0.55S_L)] S_T^{0.285} S_L^{0.212} & \text{in-line arrangement} \\ \frac{0.61 S_T^{0.091} S_L^{0.053}}{[1 - 2 \exp(-1.09S_L)]} & \text{staggered arrangement} \end{cases} \quad (34)$$




Fig. 3 Thermal resistance of heat sink.

The film resistance R_{film} is the thermal resistance of the exposed surface of the baseplate and can be written as

$$R_{film} = \frac{1}{h_b(LW_2 - N \frac{\pi D^2}{4})} \quad (35)$$

where h_b is the heat transfer coefficient of the baseplate, determined analytically by Khan [30]

$$h_b = 0.75 \frac{k_f/D}{\sqrt{N_L S_L}} Re_D^{1/2} Pr^{1/3} \quad (36)$$

When the pin fins are machined as an integral part of the baseplate, there is no thermal contact resistance at their base. However, when pin fins are manufactured separately and are attached to the baseplate by a metallurgical or adhesive joint or are forced into slots machined on the baseplate, thermal contact resistance R_c can adversely influence the thermal performance of the heat sink. This resistance depends upon the attachment methods involving an adhesive or bonding agent as well as the contact area of the fins A_c with the baseplate, and is written as

$$R_c = \frac{1}{(hA)_c} \quad (37)$$

where $A_c = N(\pi D^2/4)$ is the total contact area of the fins and h_c is the thermal contact conductance that ranges typically from 10^4 (metallurgical joint) to 10^{10} (perfect joint).

IV. Case Studies and Discussion

The parameters given in Table 1 are used as the default case to determine the thermal and hydraulic resistances for both in-line and staggered pin-fin heat sinks. The air properties are evaluated at the ambient temperature.

The effect of top clearance ratio CL_t on the average velocity in the top bypass area U_2 , the approach velocity just in front of the heat sink U_{app} , and the maximum velocity in the heat sink region U_{max} are shown in Fig. 4 for an in-line arrangement. When there is no top clearance, the velocity in the top bypass area U_2 is zero, whereas U_{app} and U_{max} are maximum. As CL_t increases up to 10% of the total height of the heat sink, the average velocity in the top bypass region increases sharply and then decreases monotonically. The approach velocity and the maximum velocity in the heat sink decrease with the increase in CL_t . The same performance behavior was observed with side bypass only.

The maximum velocity in the heat sink is compared in Fig. 5 for both in-line and staggered arrangements in the absence of side bypass. It is observed that U_{max} is maximum in both arrangements when the top clearance ratio is zero and decreases with the increase in CL_t . An in-line arrangement shows higher U_{max} and the difference between the two arrangements increases with the increasing CL_t .

Table 1 Assumed parameter values used to determine performance of heat sinks

Quantity	Parameter values
Footprint, mm ²	50 × 50
Source dimensions, mm ²	50 × 50
Baseplate thickness, mm	2
Pin diameter, mm	1.5
Overall height of heat sink, mm	50
Duct flow rate, m ³ /s	0.01
Thermal conductivity of solid, W/m · K	210
Thermal conductivity of fluid, W/m · K	0.026
Thermal contact conductance, W/m ² · K	10 ⁴
Density of fluid, kg/m ³	1.1614
Specific heat of fluid, J/kg · K	1007
Kinematic viscosity, m ² /s	1.58 × 10 ⁻⁵
Prandtl number	0.71
Heat load, W	10
Ambient temperature, °C	27

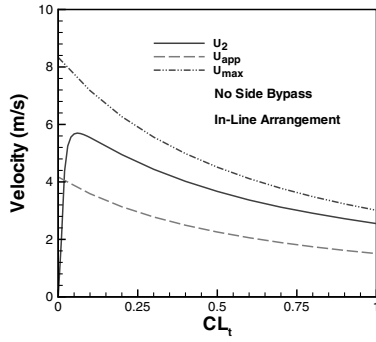


Fig. 4 Effect of top bypass on average velocities.

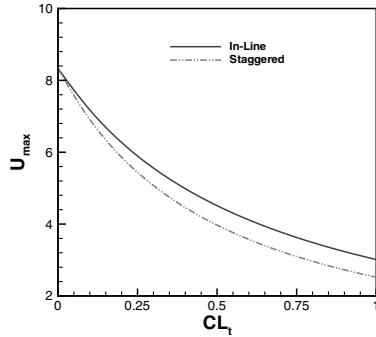


Fig. 5 Comparison of $U_{\max}$ for in-line and staggered arrangements.

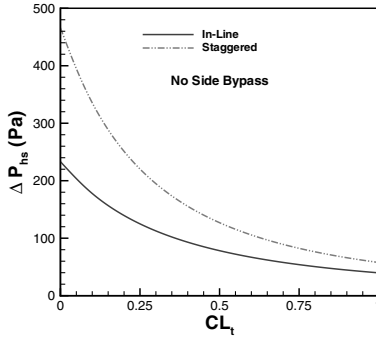


Fig. 6 Effect of CL_t on ΔP_{hs} for in-line and staggered arrangements.

Figure 6 shows the comparison of pressure drop in the heat sink for both in-line and staggered arrangements. For a fully shrouded heat sink (i.e., $CL_s = 0$ and $CL_t = 0$), the pressure drop is maximum. As expected, pressure drop in the heat sink decreases with an increase in the top clearance ratio because the effective resistance for the flow decreases. The same behavior was noticed with side bypass only ($CL_t = 0$). The staggered arrangement shows higher pressure drop in the heat sink for any CL_t and the difference between pressure drops in the two arrangements decreases with an increase in CL_t .

Figure 7 shows the variation of thermal resistance with the top clearance ratio for both in-line and staggered arrangements. In this case, the side clearance ratio is assumed to be zero. As expected, the thermal performance of in-line pin-fin heat sinks is lower than the staggered pin-fin heat sinks for the same material. Note that for $CL_s = 0$ and $CL_t = 0$, the entire flow goes through the heat sink and the total thermal resistance of the heat sink is minimum. Thus, the thermal resistance is a direct measure of the deterioration of the thermal performance due to the presence of side and top bypass regions around the heat sink. However, with both side and top clearance ratios, the thermal performance decreases further. This effect is shown in Fig. 8 for an in-line arrangement. The effect of side clearance ratio on the thermal performance is found to be much more pronounced than top clearance ratio only.

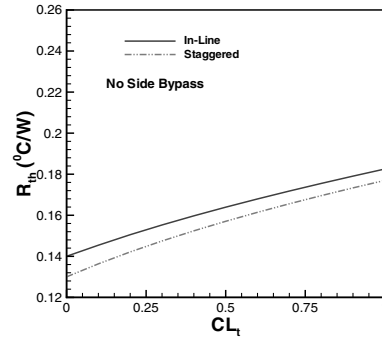


Fig. 7 Effect of top bypass on thermal resistance.

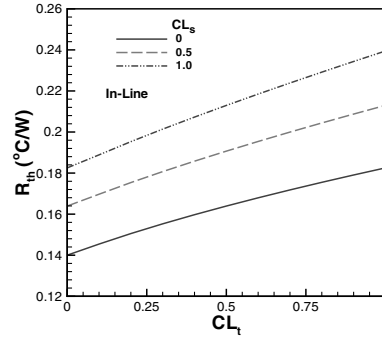


Fig. 8 Effect of side and top bypass on thermal resistance.

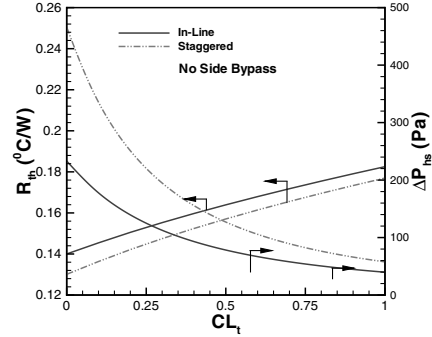


Fig. 9 Variation of R_{th} and ΔP as a function of CL_t for in-line and staggered arrangements.

The thermal resistance and the total pressure drop for the heat sink are plotted as a function of the top clearance ratio CL_t in Fig. 9 for both in-line and staggered arrangements. It is observed that R_{th} increases and ΔP decreases with an increase in CL_t in both arrangements. Simultaneously optimizing both thermal and hydraulic performance is not possible. If a higher thermal performance (minimum R_{th}) is required, then we have to pay the cost of higher pressure drop (in terms of pumping power) and if we are looking for minimum pressure drop, then we have to pay for higher R_{th} . In an optimal heat sink, there is a tradeoff between these two resistances. It can be seen easily, in Fig. 9, that the staggered arrangement has lower R_{th} but requires higher ΔP . However, the point of intersection of R_{th} and ΔP gives the lower top clearance ratio for an in-line arrangement. It shows that lower top clearance ratios give better overall performance in an in-line arrangement.

V. Conclusions

The effect of side and top bypass on the overall performance of cylindrical pin-fin heat sinks is investigated in this study. Theoretical models, based on the laws of conservation of mass, momentum, and energy, are developed to predict average flow velocity, pressure

drop, and heat transfer from the heat sink and the bypass regions. Both in-line and staggered arrangements are analyzed in this study. It is shown that an in-line arrangement gives higher thermal resistance but lower pressure drop across the heat sink. Results show that the side and top clearance ratios significantly reduce the pressure drop and heat transfer from heat sinks and as a result the overall performance of heat sinks decreases.

Acknowledgments

The authors gratefully acknowledge the financial support of the Natural Sciences and Engineering Research Council of Canada and the Center for Microelectronics Assembly and Packaging.

References

- [1] Sparrow, E. M., and Beckey, T. J., "Pressure Drop Characteristics for a Longitudinal Fin Array With Tip Clearance," *Journal of Heat Transfer*, Vol. 103, No. 2, 1981, pp. 393–395.
- [2] Sparrow, E. M., Baliga, B. R., and Patankar, S. V., "Forced Convection Heat Transfer from a Shrouded Fin Array with and Without Tip Clearance," *Journal of Heat Transfer*, Vol. 100, No. 4, 1978, pp. 572–579.
- [3] Sparrow, E. M., and Kadle, D. S., "Effect of Tip-to-Shroud Clearance on Turbulent Heat Transfer from a Shrouded, Longitudinal Fin Array," *Journal of Heat Transfer*, Vol. 108, No. 3, 1986, pp. 519–524.
- [4] Lau, K. S., and Mahajan, R. L., "Effects of Tip Clearance and Fin Density on the Performance of Heat Sinks for VLSI Packages," *IEEE Transactions on Components, Hybrids and Manufacturing Technology*, Vol. 12, No. 4, 1989, pp. 757–765.
- [5] Lee, R. S., Huang, H. C., and Chen, W. Y., "Thermal Characteristic Study of Extruded-Type Heat Sinks in Considering Air Flow Bypass Phenomenon," *Proceedings—IEEE Semiconductor Thermal and Temperature Measurement Symposium*, IEEE, Piscataway, NJ, 1990, pp. 95–102.
- [6] Wirtz, R. A., and Chen, W., "Longitudinal Fin Heat Sink Performance in Arrays of Low-Profile Electronic Packages," *Proceedings of the ASME International Electronics Packaging Conference*, American Society of Mechanical Engineers, Fairfield, NJ, 1993, pp. 809–817.
- [7] Butterbaugh, M. A., and Kang, S. S., "Effect of Airflow Bypass on the Performance of Heat Sinks in Electronic Cooling," *Proceedings of the International Intersociety Electronic Packaging Conference-INTER-pack'95*, 1995, pp. 843–848.
- [8] dos Reis, E., and Altamirani, Carlos, A. C., "Design of Heat Sinks and Planar Spreaders with Airflow Bypass," *Pacific RIM/ASME International Intersociety Electronics Photonic Packaging Conference "Advances in Electronic Packaging 1999"*, 1999, Vol. 26–1, pp. 477–484.
- [9] Leonard, W., Teertstra, P., Culham, J. R., and Zaghol, A., "Characterization of Heat Sink Flow Bypass in Plate Fin Heat Sinks," *ASME International Mechanical Engineering Congress and Exposition*, American Society of Mechanical Engineers, Fairfield, NJ, 2002, Vol. 372, No. 5, pp. 189–196.
- [10] Wang, M. P., Wu, T. Y., Horng, J. T., Lee, C. Y., and Hung, Y. H., "Fluid Flow Characteristics for Partially-Confined Compact Plain-Plate-Fin Heat Sinks," *ASME Summer Heat Transfer Conference*, American Society of Mechanical Engineers, Fairfield, NJ, 2005, Vol. 4, pp. 687–694.
- [11] Narasimhan, S., and Bar-Cohen, A., "Compact Modeling of Unshrouded Plate Fin Heat Sinks," *International Electronic Packaging Technical Conference and Exhibition*, 2003, Vol. 1, pp. 543–550.
- [12] Radmehr, A., Kelkar, K. M., Kelly, P., Patankar, S. V., and Kang, S. S., "Analysis of the Effect of Bypass on the Performance of Heat Sinks Using Flow Network Modeling (FNM)," *15th Annual IEEE Semiconductor Thermal Measurement and Management Symposium*, IEEE, Piscataway, NJ, 1999, pp. 42–47.
- [13] Barrett, A. V., and Obinelo, I. F., "Characterization of Longitudinal Fin Heat Sink Thermal Performance and Flow Bypass Effects Through CFD Methods," *IEEE 13th Annual Semiconductor Thermal Measurement & Management Symposium*, IEEE, Piscataway, NJ, 1997, pp. 158–164.
- [14] Sata, Y., Iwasaki, H., and Ishizuka, M., "Development of Prediction Technique for Cooling Performance of Finned Heat Sink in Uniform Flow," *IEEE Transactions on Components, Packaging, and Manufacturing Technology Part A*, Vol. 20, No. 2, 1997, pp. 160–166.
- [15] Lei, N., and Ortega, A., "Experimental Hydraulic Characterization of Pin Fin Heat Sinks with Top and Side Bypass," *Ninth Intersociety Conference on Thermal and Thermomechanical Phenomena in Electronic Systems*, 2004, Vol. 1, pp. 418–428.
- [16] Urdaneta, M., Ortega, A., and Westphal, R. V., "Experiments and Modeling of the Hydraulic Resistance of In-Line Square Pin Fin Heat Sinks with Top Bypass Flow," *Advances in Electronic Packaging, International Electronic Packaging Technical Conference and Exhibition*, 2003, Vol. 2, pp. 587–596.
- [17] Urdaneta, M., and Ortega, A., "Experiments and Modeling of the Thermal Resistance of In-Line Square Pin-Fin Heat Sinks with Top Bypass flow," *Advances in Electronic Packaging, International Electronic Packaging Technical Conference and Exhibition*, 2003, Vol. 2, pp. 597–604.
- [18] Dogruoz, M. B., Urdaneta, M., and Ortega, A., "Experiments and Modeling of the Heat Transfer of In-Line Square Pin-Fin heat Sinks with Top Bypass Flow," *American Society of Mechanical Engineers, Heat Transfer Division, ASME International Mechanical Engineering Congress and Exposition*, American Society of Mechanical Engineers, Fairfield, NJ, 2002, Vol. 372, No. 7, pp. 195–206.
- [19] Shaikatullah, H., Storr, W. R., Hansen, B. J., and Gaynes, M. A., "Design and Optimization of Pin Fin Heat Sinks for Low Velocity Applications," *IEEE Transactions on Components, Packaging, and Manufacturing Technology, Part A*, Vol. 19, No. 4, 1996, pp. 486–494.
- [20] Rizzi, M., and Catton, I., "An Experimental Study of Pin Fin Heat Sinks and Determination of End Wall Heat Transfer," *Proceedings of the ASME Summer Heat Transfer Conference*, American Society of Mechanical Engineers, Fairfield, NJ, 2003, Vol. 2003, pp. 445–452.
- [21] Rizzi, M., Canino, M., Hu, K., Jones, S., Travkin, V., and Catton, I., "Experimental Investigation of Pin Fin Heat Sink Effectiveness," *Proceedings of the National Heat Transfer Conference*, 2001, Vol. 2, pp. 1235–1243.
- [22] Jonsson, H., and Moshfegh, B., "Modeling of the Thermal and Hydraulic Performance of Plate Fin, Strip Fin, and Pin Fin Heat Sinks—Influence of Flow Bypass," *IEEE Transactions on Components and Packaging Technologies*, Vol. 24, No. 2, 2001, pp. 142–149.
- [23] Jonsson, H., and Moshfegh, B., "Modeling of the Thermal and Hydraulic Performance of Plate Fin, Strip Fin, and Pin Fin Heat Sinks—Influence of Flow Bypass," *7th Intersociety Conference on Thermal and Thermomechanical Phenomena in Electronic Systems-I Therm 2000*, 2000, Vol. 1, pp. 185–192.
- [24] Jonsson, H., and Moshfegh, B., "Enhancement of the Cooling Performance of Circular Pin Fin Heat Sinks Under Flow Bypass Conditions," *Thermomechanical Phenomena in Electronic Systems, 8th Intersociety Conference on Thermal and Thermomechanical Phenomena in Electronic Systems*, 2002, pp. 425–432.
- [25] Jonsson, H., and Moshfegh, B., "CFD Modeling of the Cooling Performance of Pin Fin Heat Sinks Under Bypass Flow Conditions," *Advances in Electronic Packaging, Pacific Rim/International, Intersociety Electronic Packaging Technical/Business Conference and Exhibition*, 2001, Vol. 1, pp. 393–403.
- [26] Chapman, C. L., Lee, S., and Schmidt, B. L., "Thermal Performance of an Elliptical Pin Fin Heat Sink," *Proceedings of the 10th IEEE Semiconductor Thermal Measurement and Management Symposium*, IEEE, Piscataway, NJ, 1994, pp. 24–31.
- [27] Kays, W. M., "Loss Coefficients for Abrupt Changes in Flow Cross Section with Low Reynolds Number Flow in Single and Multiple Tube Systems," *Transactions of ASME, Series G: Journal of Dynamic Systems, Measurement and Control*, Nov. 1950, pp. 1067–1074.
- [28] Žukauskas, A., and Ulinskas, R., "Single-Phase Fluid Flow: Banks of Plain and Finned Tubes," *HEDH, Heat Exchanger Design Handbook*, Washington Hemisphere Publishing, New York, 1983, Chap. 2.2.4.
- [29] Khan, W. A., Culham, J. R., and Yovanovich, M. M., "Modeling of Pin-Fin Heat Sinks for Electronic Packaging," *SEMI-THERM 21, Semiconductor Thermal Measurement and Management Symposium*, 2005; also *IEEE Transactions on Components and Packaging Technologies* (to be published).
- [30] Khan, W. A., "Modeling of Fluid Flow and Heat Transfer for Optimization of Pin-Fin Heat Sinks," Ph.D. Thesis, Department of Mechanical Engineering, University of Waterloo, Waterloo, Ontario, Canada, 2004.