

Rajagopal, S., K. M. Ng, and J. M. Douglas, "Design of Solids Processes: Production of Potash," *Ind. Eng. Chem. Res.*, **27**, 2071 (1988).
 Rajagopal, S., K. M. Ng, and J. M. Douglas, "A Hierarchical Decision Procedure for the Conceptual Design of Solids Processes," *Comp. Chem. Eng.*, **16**, 675 (1992).
 Rossiter, A. P., and J. M. Douglas, "Design and Optimization of Solids Processes, Part 2—Optimization of Crystalliser, Centrifuge and Dryer Systems," *Chem. Eng. Res. Des.*, **64**, 184 (1986).
 Stoesser, W. C., and W. R. Surine, U.S. Pat. 2,987,539 (June 6, 1961).
 Svarovsky, L., *Solid-Liquid Separation*, 2nd ed., Butterworths, London (1981).

Wakeman, R. J., "The Performance of Filtration Post-Treatment Processes 1. The Prediction and Calculation of Cake Dewatering Characteristics," *Filtration and Separation*, 655 (Nov./Dec., 1979).
 Wakeman, R. J., "The Performance of Filtration Post-Treatment Processes 2. The Estimation of Cake Washing Characteristics," *Filtration and Separation*, 67 (Jan./Feb., 1980).

Manuscript received Dec. 10, 1997, and revision received July 10, 1998.


Corrections

In the article titled "Screening Procedure for Synthesizing Isothermal Multiphase Reactors" by Kelkar and Ng (July 1998), the following corrections are made:

Equation 19 on p. 1570 is corrected to

$$\phi = \frac{d_p}{6} \sqrt{\frac{k \rho_p}{D_l}} \quad (19)$$

Correct Figure 7 on p. 1571 is

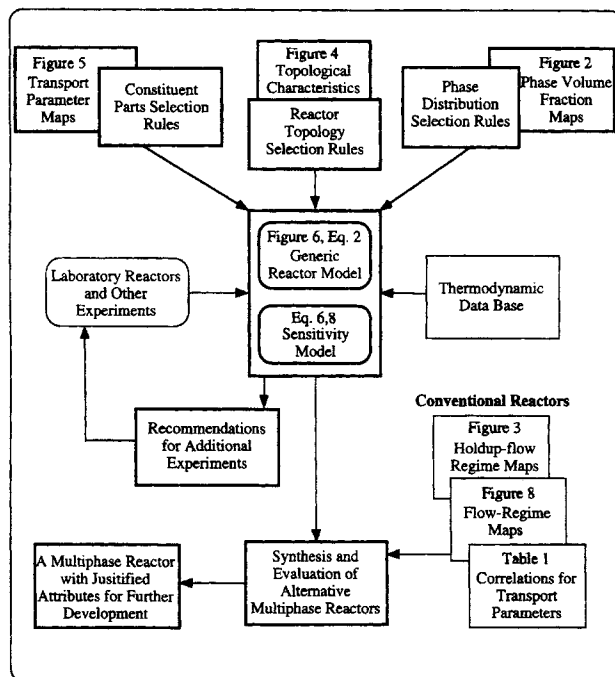

In Table 3 (p. 1574), the arrows (↓) were not included in the following six places: in iteration 1, between "0.086" and "3.76"; in iteration 2, between "1.53" and "0.168," between "0.14" and "0.71," and between "7.63" and "0.6"; in iteration 3, between "0.324" and "1.45"; and in iteration 4, between "0.19" and "30.3."

In Table 5 (p. 1577), the arrows (↓) were not shown in the following seven places; in iteration 1, between "0.003" and "0.0," between "1.57" and "4.995," and between "1.29" and "3.16"; in iteration 2, between "0.03" and "0.0," between "1.14" and "0.196," and between "4.42" and "0.122"; and in iteration 3, between "7.92" and "0.39."