

Energy Optimization for the Design of Corn-Based Ethanol Plants

Ramkumar Karuppiah, Andreas Peschel, and Ignacio E. Grossmann

Dept. of Chemical Engineering, Carnegie Mellon University, Pittsburgh, PA 15213

Mariano Martín

Departamento de Ingeniería Química, Universidad de Salamanca, Plz. de los Caídos 1-5, Salamanca 37008, Spain

Wade Martinson and Luca Zullo

Cargill Incorporated, Minneapolis, MN 55440

DOI 10.1002/aic.11480

Published online April 10, 2008 in Wiley InterScience (www.interscience.wiley.com).

In this work, we address the problem of optimizing corn-based bioethanol plants through the use of heat integration and mathematical programming techniques. The goal is to reduce the operating costs of the plant. Capital cost, energy usage, and yields—all contribute to production cost. Yield and energy usage also influence the viability of corn-based ethanol as a sustainable fuel. We first propose a limited superstructure of alternative designs including the various process units and utility streams involved in ethanol production. Our objective is to determine the connections in the network and the flow in each stream in the network such that we minimize the energy requirement of the overall plant. This is accomplished through the formulation of a mixed-integer nonlinear programming problem involving short-cut models for mass and energy balances for all the units in the system, where the model is solved through two nonlinear programming subproblems. We then perform a heat integration study on the resulting flowsheet; the modified flowsheet includes multieffect distillation columns that further reduces energy consumption. The results indicate that it is possible to reduce the current steam consumption required in the transformation of corn into fuel grade ethanol by more than 40% compared to initial basic design. © 2008 American Institute of Chemical Engineers AIChE J, 54: 1499–1525, 2008

Keywords: *bioethanol, sustainability, nonlinear programming, multieffect distillation columns, heat integration*

Introduction

The supply of energy for various operations such as transportation, power generation, and heating is of critical concern in the world today. Fossil fuels like crude oil have been the traditional source of energy but are nonrenewable. Prices of

fossil fuels like crude oil and natural gas have increased significantly in the past 5 years. This, along with increasing concerns about global warming, has led to a search for alternatives to fossil fuels. Hence, the use of new sources of energy like fuel cells, solar energy or bioethanol has become a priority. Bioethanol shares some of the storage and distribution advantages that traditional fuels hold over other energy sources like hydrogen. Its production has increased all over the world in the last few years through expansion of existing plants and construction of new facilities. In the

Correspondence concerning this article should be addressed to I. E. Grossmann at grossmann@cmu.edu.

United States, it is usually produced using a technology called the “Dry-grind process” that utilizes corn kernels as feedstock to produce ethanol. As a result of the effort to sustainably substitute ethanol for gasoline as transportation fuel, the production of ethanol in the United States has risen up to more than 4 billion gallons per year in 2005.¹

Historically, early internal combustion engines were built to run on a variety of fuels, including alcohols and alcohol-hydrocarbon blends (http://running_on_alcohol.tripod.com/id7.html, as of 12/09/2006). In 1907, the United States Department of Agriculture investigated the use of alcohol as a motor fuel. A subsequent study by the United States Bureau of Mines concluded that engines could provide up to 10% higher power on alcohol fuels than on gasoline. Mixtures of alcohol and gasoline were used on farms in the United States in the early 1900s. For transportation purposes, the first Ford Model T automobiles could be run on either gasoline or ethanol using a manually adjustable carburetor. However, the development of low cost gasoline displaced other automobile fuels and the diesel engine further solidified the hold of petroleum fuels on the transportation sector. Ethanol was occasionally used, particularly in rural regions, when gasoline supplies were short or when corn prices were low.

More recently Brazil has been producing bioethanol on a large scale and now runs most of its vehicles on ethanol-gasoline blends, thus proving the viability of ethanol as a fuel. It also provides proof that the market can accommodate a major shift in automotive fuel. In the United States, there are some Flexible Fuel Vehicles that run on a blend of ethanol and gasoline called E85 (85% ethanol and 15% gasoline).

Fuel ethanol also presents some challenges. It is corrosive, and materials that normally would not be affected by low percentage ethanol blends, have been found to dissolve in the presence of higher ethanol concentrations. Dedicated ethanol vehicles must use unplated steel, stainless steel, black iron, or bronze, which have all shown acceptable resistance to ethanol corrosion, or they have to use nonmetallic materials such as thermoset reinforced fiberglass or neoprene rubber.²

The issue of feasibility of ethanol as a fuel has been under considerable debate. Early research indicated that the net energy balance in the production of corn-based ethanol is negative,³ in the sense that more energy is required to produce a unit of ethanol than what it provides when burned. More recent studies based on newer process data that also include coproduct energy credits indicate a positive net energy balance.⁴

To improve the design and the energy efficiency of dry-grind ethanol plants, process synthesis and mathematical optimization techniques can be used.⁵ We propose a limited superstructure optimization approach, where we first construct a flowsheet embedding the various process units involved in ethanol production, and then consider alternatives for some of the processes. These units are interconnected to each other through network flows and other utility streams. The goal is to optimize the structure minimizing the energy input in the ethanol production process. The optimization of the system is formulated as a mixed-integer nonlinear programming (MINLP) problem, where the model involves a set of constraints representing mass and energy balances for all the units in the system. This problem is solved through two non-

linear programming (NLP) subproblems. We then perform a heat integration analysis of the resulting process. The heat recovery network, together with a modified distillation column design, further reduces the energy consumption in the plant and this decreases the unit production cost of ethanol. Finally, we present the results of a case study for the optimization of a network for producing fuel ethanol from corn.

Overall Process Description

A base case structure of a plant producing fuel ethanol from corn using the dry-grind process is shown in Figure 1. In this process, corn kernels are used as feed, and are first washed and then ground. The resulting ground corn undergoes cooking and liquefaction to produce corn slurry, which is then enzymatically saccharified to produce glucose. The mash is then fed to the fermentor, where ethanol is produced from glucose. After the fermentation, a stripping column known as “beer column” separates the solids and some water from the ethanol-water mixture. The beer column overhead stream contains 60–70% ethanol and is further rectified in a distillation tower to obtain an azeotropic mixture of ethanol and water. This azeotropic mixture then passes over a molecular sieve made of zeolite to produce anhydrous or fuel grade ethanol at the outlet. The wet solids from the bottom of the beer column go to a centrifuge, which separates the mixture into solids (relatively wet) and a liquid mixture. These wet solids from the bottom of the centrifuge are combined with the proteins obtained by evaporating the water from the centrifuge and are dried. This material (Distillers Dried Grains with Solubles, or, DDGS) is sold as cattle feed.

In the next section, alternatives are introduced for some of the processes in the standard flowsheet. This yields a superstructure of design alternatives that is optimized using nonlinear programs to minimize energy consumption in the plant.

Superstructure of Design Alternatives

We propose a superstructure of the operations involved in the transformation of corn to fuel ethanol by considering a number of different design alternatives. As can be seen from Figure 2, the superstructure has three specific substructures. These pertain to:

(i) Feed preparation and enzymatic hydrolysis—these are operations which are necessary for the production of ethanol, including corn washing and grinding, jet cooking, liquefaction, saccharification, and fermentation.

(ii) Ethanol purification—this involves operations required for the purification of ethanol as obtained from the fermentor to fuel grade ethanol. This part consists of the distillation columns, corn bed adsorbers, and molecular sieves.

(iii) Solids drying—these operations are for separating and drying the solids from the fermentor to be used as cattle feed. This part of the network includes the mechanical press, the flotation unit, and the dryer.

Corn kernels are used as feedstock in this fuel ethanol production process. An average composition of yellow-dent #2 corn kernels is given in Table A1. The corn kernels consist

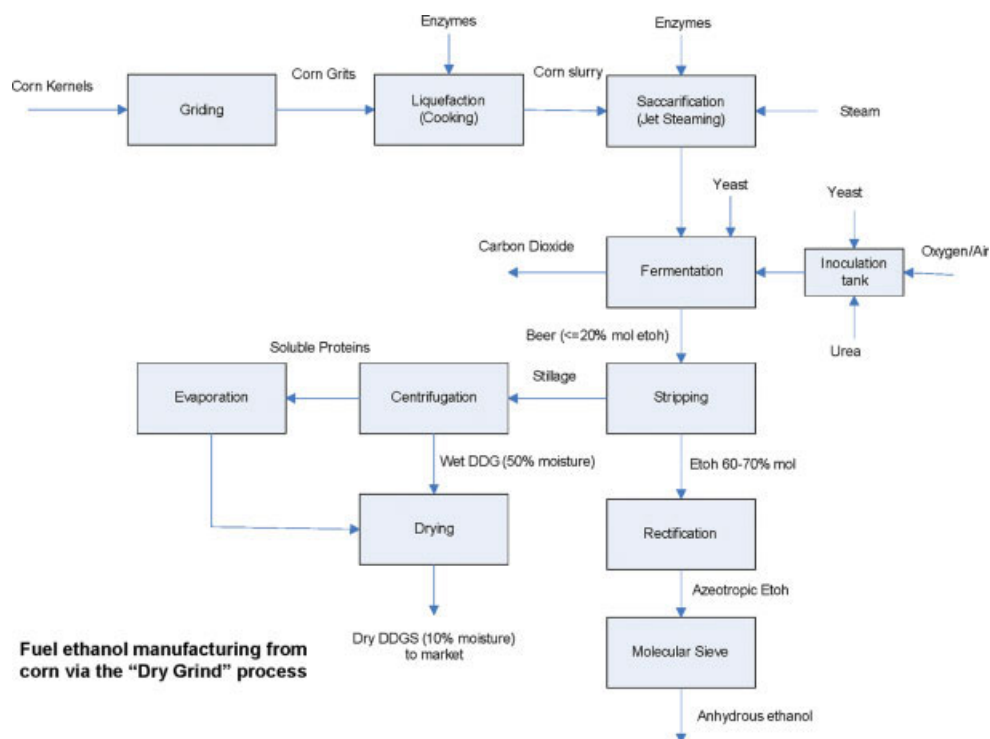


Figure 1. Base case process flowsheet for ethanol manufacture from corn kernels.

[Color figure can be viewed in the online issue, which is available at www.interscience.wiley.com.]

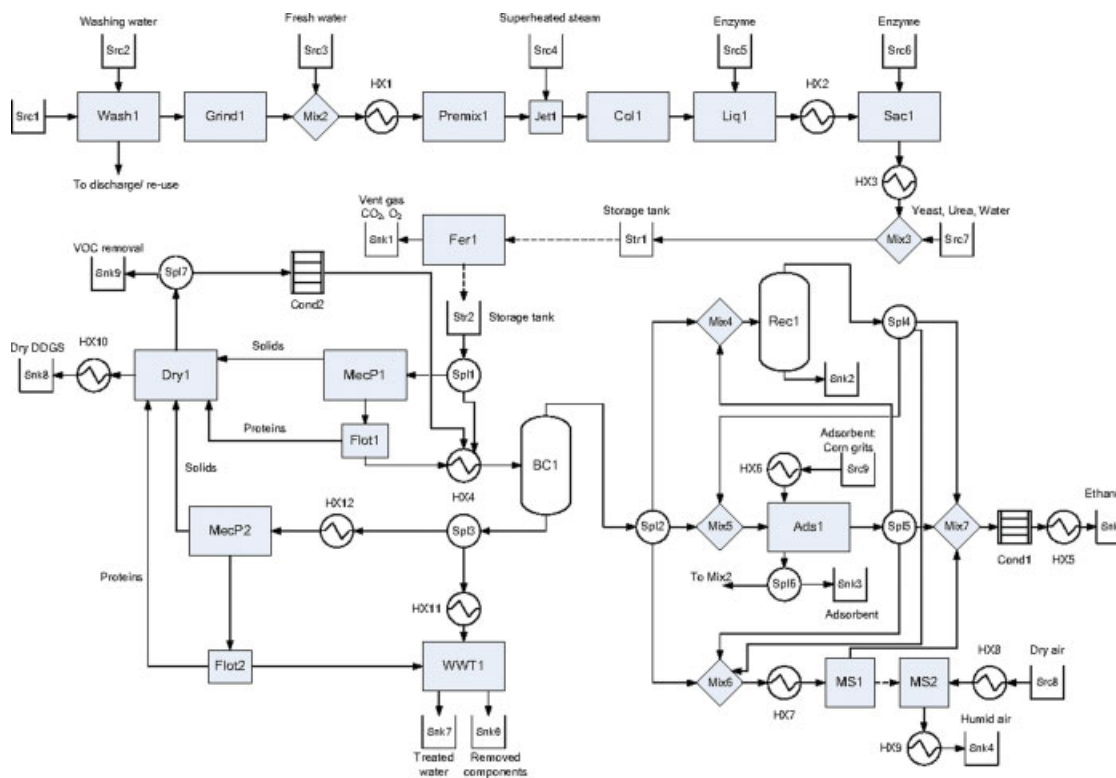


Figure 2. Superstructure of a corn-based ethanol plant.

[Color figure can be viewed in the online issue, which is available at www.interscience.wiley.com.]

primarily of starch. Other components include free sugars, proteins, hemicellulose, cellulose, oils, and ash. It is assumed that the sugars are only glucose. The cellulose and hemicellulose are mainly part of the fiber. The moisture content of the corn is taken to be 15%. The feedstock is converted into the required product, which is nearly anhydrous ethanol following a series of steps.

There are a number of different design alternatives in the superstructure. For instance, we have two different routes for separating the solids and liquids coming out of the fermentor as seen in Figure 2. We can have a mechanical press (separator) placed at the outlet of the fermentor so that the solid-liquid separation takes place before the beer column. Alternatively, the separator can be placed after the bottoms of the distillation column, in which case the distillation process provides the main solid-liquid separation. In the former separation route, the solid loading to the distillation column is negligible, while in the latter case the solid loading to the distillation column is higher.

For purifying the ethanol-water mixture coming out at the top of the beer column, we can use one or a combination of the following (see Figure 2):

- (a) Rectification column (distillation column that gives a azeotropic mixture of ethanol and water at the top).
- (b) Molecular sieves (zeolite beds to selectively adsorb water from an incoming vapor mixture of ethanol and water).
- (c) Corn grit adsorber (bed made of corn grits to selectively adsorb water from ethanol-water vapor mixture).⁶

We model the various operations in the plant including the different alternatives to obtain an MINLP model, which is optimized with respect to the energy consumption in the plant. Note that since we have just one discrete decision to be made (how to separate the solids from the liquid in the slurry coming out of the fermentor), we simply solve two separate NLP models, corresponding to each option, and choose the better solution. After the optimization, we perform heat integration but find that the scope is limited. Therefore, we analyze the distillation columns in the network, which are energy-intensive processes and replace them with multieffect distillation columns in order to reduce the energy consumption. Finally, we complete the design by performing heat integration.⁷ It should be noted that we have used a sequential optimization approach instead of a simultaneous one,⁸ because the emphasis of this article is to demonstrate the proof of concept and assess the potential of the optimization and energy recovery techniques in an ethanol plant. It will be shown that despite this sequential synthesis strategy, the combination of using optimization, multieffect distillation columns and heat integration in the plant can significantly reduce the energy consumption. Further improvements should be possible by considering a simultaneous approach.

Model

All the operations in the ethanol production process are modeled with short-cut equations. Models of the constituent units in the superstructure consist primarily of mass and energy balances. The data for the parameters used in the

model is mostly taken from Jacques et al.⁹ and few other cited sources; the numerical data for other operating parameters represents current typical practice as estimated by Cargill. The model is written in terms of the total mass flows, component mass flows, component mass fractions, and temperatures of the streams in the network. These are the main variables whose values have to be determined from the optimization. In the model, $F(\text{unit1}, \text{unit2})$ denotes the total mass flow from unit1 to unit2 in the system in kg/s. The variable $fc(j, \text{unit1}, \text{unit2})$ stands for the mass flow of component j from unit1 to unit2 in the system in kg/s. The term $x(j, \text{unit1}, \text{unit2})$ is the mass fraction of component j in the stream from unit1 to unit2 in the system, while $T(\text{unit1}, \text{unit2})$ represents the temperature (in °C) of the stream flowing from unit1 and unit2 in the network. The temperatures of certain streams in the network are fixed to specific values and are shown in Table A2. The components in the system include those present in the corn, plus those produced during the process of ethanol production, and belong to the set $J = \{\text{water, starch, glucose, maltose, proteins, ethanol, glycerol, succinic acid, acetic acid, lactic acid, urea, cell mass, carbon dioxide, oxygen, cellulose, hemicellulose, oil, ash}\}$. Starch, proteins, cellulose, hemicellulose, oil, ash, and water are present in the corn feed. Maltose and glucose are intermediate products of the cooking process. Glycerol, succinic acid, acetic acid, and lactic acid are the main by-products of the fermentation process that produces ethanol. Carbon dioxide and oxygen are also by-products of the fermentation process. The yeast required for fermentation is denoted by cell mass. Urea is required as a nitrogen source for the growth of yeast. Finally, all enzymes used in the process are commonly represented as proteins. Note that the components glucose, maltose, proteins, ethanol, glycerol, acetic acid, lactic acid, and urea are assumed to be completely soluble in water. Starch, cell mass, cellulose, hemicellulose, oil, and ash are assumed to be insoluble in water. Carbon dioxide and oxygen are supercritical gas products, and therefore assumed not to be found in the liquid streams.

The set of equations that relate the component flows, total flows, and component fractions in all the streams in the network are:

$$fc(j, \text{unit1}, \text{unit2}) = x(j, \text{unit1}, \text{unit2}) * F(\text{unit1}, \text{unit2}) \quad \forall j \in J \quad (1)$$

$$F(\text{unit1}, \text{unit2}) = \sum_j fc(j, \text{unit1}, \text{unit2}) \quad (2)$$

The different units in the superstructure are modeled as described below.

Mechanical preparation—corn washing and grinding (see Figure 3)

The incoming feed of corn kernels (from source Src1) is first washed with a stream of freshwater with no contaminants inside a washing unit (Wash1). This step removes dirt and dust from the corn kernels. The washing water (from source Src2) also slightly hydrates the corn. Therefore, a small amount (1%) of the wash water is assumed to stay with the corn. The spent washing water is treated and discharged or used in other processes in the plant, although this

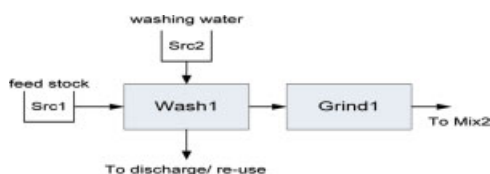


Figure 3. Washing and grinding of corn kernels.

[Color figure can be viewed in the online issue, which is available at www.interscience.wiley.com.]

option is not considered in the model. It is assumed that 0.5 kg of washing water is needed to wash 1 kg of corn kernels. The washing step does not consume any heat because it takes place at ambient temperature.

After this step, the corn is ground in a dry mill (denoted by Grind1). Grinding breaks up the corn kernels to obtain an optimal particle size for penetration of water during the corn cooking process. In most plants, hammer mills are used to break up the corn. The corn slurry should also not be too fine in order to avoid problems in the by-product recovery and to avoid balling in the slurry tanks.⁹ The milling step takes place at ambient temperatures, and therefore no heat is required in this process. The power consumption in the grinding process is taken into account in the cost analysis. It is to be noted that the corn composition remains unchanged during the grinding process. The mass and energy balances in these preliminary operations are given below.

$$fc(j, \text{Wash1}, \text{Grind1}) = fc(j, \text{Src1}, \text{Wash1}) \quad \forall j \in J, \quad j \neq \{\text{water}\} \quad (3)$$

$$fc(\text{water}, \text{Wash1}, \text{Grind1}) = fc(\text{water}, \text{Src1}, \text{Wash1}) + \text{frac}_{\text{wash}} \cdot fc(\text{water}, \text{Src2}, \text{Wash1}) \quad (4)$$

$$fc(j, \text{Src1}, \text{Wash1}) = x_0(j) \cdot F(\text{Src1}, \text{Wash1}) \quad \forall j \in J \quad (5)$$

$$F(\text{Src2}, \text{Wash1}) = \text{min}_{\text{wash}} \cdot F(\text{Src1}, \text{Wash1}) \quad (6)$$

$$fc(j, \text{Grind1}, \text{Mix2}) = fc(j, \text{Wash1}, \text{Grind1}) \quad \forall j \in J \quad (7)$$

In the above equations, min_{wash} stands for the minimum amount of washing water required per kg of corn, while $\text{frac}_{\text{wash}}$ is the fraction of washing water that stays with the corn. $x_0(j)$ is the composition of the corn kernels feedstock on a wet basis.

Corn cooking

On average, 90% of the starch present in corn is in the form of amylopectin and 10% is in the straight-chain amylose form.⁹ The granular structure of the starch must be broken down first to produce simple sugars, which can be fermented to produce ethanol. This is achieved by gelatinizing the slurry of ground corn kernels and water. When the slurry is cooked, the starch crystals adsorb water and swell. They lose their crystalline structure and the starch molecules become available for depolymerization. In this work, the cooking process is considered to be continuous. Figure 4 depicts the operations involved. The ground corn is mixed with water (from Src3) and heated up to 60°C using a heat

exchanger (HX1) and mixed thoroughly in a premixing tank (denoted by Premix1). After this, the temperature of the slurry is raised to 120°C by direct injection of superheated steam in a jet cooker (denoted by Jet1). This steam is assumed to come from a source Src4. Since steam is being added to the slurry in this cooker, it will have the effect of increasing the water fraction in the slurry at the outlet of the jet cooker. The corn mash is then fed to a vertical column (Col1), where its temperature is reduced to 85°C in about 20 min.⁹ In this column, the viscosity of the mash changes and the crystalline structure of the amylopectin is broken. The high temperature in the jet cooker and in the column also disinfects the mash and prevents microbial contamination in the fermentor, which could potentially reduce the ethanol yield.

The mass and energy balances for these processes are as follows:

$$fc(j, \text{Mix2}, \text{HX1}) = fc(j, \text{Grind1}, \text{Mix2}) + fc(j, \text{Src3}, \text{Mix2}) + fc(j, \text{Spl6}, \text{Mix2}) \quad \forall j \in J \quad (8)$$

$$\begin{aligned} & \sum_j (fc(j, \text{Grind1}, \text{Mix2}) \cdot Cp(j)) \cdot (T(\text{Mix2}, \text{HX1}) \\ & - T(\text{Grind1}, \text{Mix2})) + \sum_j (fc(j, \text{Src3}, \text{Mix2}) \cdot Cp(j)) \\ & \times (T(\text{Mix2}, \text{HX1}) - T(\text{Src3}, \text{Mix2})) \\ & + \sum_j (fc(j, \text{Spl6}, \text{Mix2}) \cdot Cp(j)) \cdot (T(\text{Mix2}, \text{HX1}) \\ & - T(\text{Spl6}, \text{Mix2})) = 0 \quad (9) \end{aligned}$$

$$fc(j, \text{Mix2}, \text{HX1}) = fc(j, \text{HX1}, \text{Premix1}) \quad \forall j \in J \quad (10)$$

$$\begin{aligned} Q(\text{HX1}) = & \sum_j (fc(j, \text{Mix2}, \text{HX1}) \cdot Cp(j)) \cdot (T(\text{HX1}, \text{Premix1}) \\ & - T(\text{Mix2}, \text{HX1})) \quad (11) \end{aligned}$$

$$fc(j, \text{Premix1}, \text{Jet1}) = fc(j, \text{HX1}, \text{Premix1}) \quad \forall j \in J \quad (12)$$

$$fc(j, \text{Jet1}, \text{Col1}) = fc(j, \text{Premix1}, \text{Jet1}) + fc(j, \text{Src4}, \text{Jet1}) \quad \forall j \in J \quad (13)$$

$$\begin{aligned} Q(\text{Jet1}) = & fc(\text{water}, \text{Src4}, \text{Jet1}) \\ & \times \left[Cp^{\text{vap}}(\text{water}) \cdot (T(\text{Src4}, \text{Jet1}) - T(\text{Jet1}, \text{Col1})) \right. \\ & \left. + \Delta H_v^0(\text{water}) \cdot \left(\frac{T_c(\text{water}) - T(\text{Jet1}, \text{Col1})}{T_c(\text{water}) - T_b(\text{water})} \right)^{n_{\text{watson}}} \right] \quad (14) \end{aligned}$$

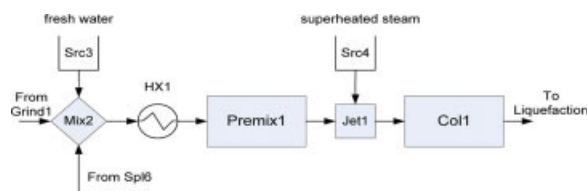


Figure 4. Continuous corn cooking process.

[Color figure can be viewed in the online issue, which is available at www.interscience.wiley.com.]


$$Q(\text{Jet1}) = \sum_j fc(j, \text{Premix1}, \text{Jet1}) \cdot Cp(j) \cdot (T(\text{Jet1}, \text{Col1}) - T(\text{Premix1}, \text{Jet1})) \quad (15)$$

$$Q(\text{Col1}) = \sum_j fc(j, \text{Jet1}, \text{Col1}) \cdot Cp(j) \cdot (T(\text{Col1}, \text{Liq1}) - T(\text{Jet1}, \text{Col1})) \quad (16)$$


Here, $Cp(j)$ is the specific heat capacity of a component j (in kJ/kg °C) and is assumed to be constant at a mean value over the given temperature ranges. $T_c(\text{water})$ is the critical temperature of water in °C, while $T_b(\text{water})$ is the normal boiling point of water in °C, $Cp^{\text{vap}}(\text{water})$ is the specific heat capacity of water vapor (in kJ/kg °C and assumed to be a constant at a mean value over the given temperature ranges), $\Delta H_v^0(\text{water})$ is the heat of vaporization of water at its normal boiling point (kJ/kg). Finally, $n_{\text{watson}} = 0.38$, in the Watson correlation (see Reid et al.¹⁰) to calculate enthalpy of vaporization of water at a given temperature.

Liquefaction and saccharification

Liquefaction and saccharification convert the starch to fermentable sugars. Most yeast strains cannot ferment sugars except glucose and fructose. In this model, glucose is considered to be the only fermentable sugar and the possible fermentation of other carbohydrates is neglected. The liquefaction and saccharification operations are shown in Figure 5. The corn mash coming from the vertical column (Col1) is fed to the liquefaction tank (Liq1), where the high temperature tolerant enzyme α -amylase is added. The pH range of liquefaction is 6–6.5 and the temperature is kept at 85°C (Jacques et al.⁹). The chemical reaction involved in this step is the hydrolysis of starch to maltose, which involves the use of the endoenzyme α -amylase.



This step is followed by the use of the exoenzyme glucoamylase to achieve the conversion of maltose to glucose in the saccharification process (Sac1).



Saccharification operates most efficiently around 75°C. A heat exchanger (HX2) cools the mash coming from the liquefaction tank from 85 to 75°C. The saccharification process is carried out in a pH range of 4.5–6. The mash is usually acidified by sulfuric acid before adding the glucoamylase into the saccharification vessel. The adjustment of the pH values is neglected in the process model. Finally, the heats of reaction for both the reactions of starch to maltose, and of maltose to glucose are insignificant and thus neglected in the heat balance. No temperature changes are assumed in the liquefaction and saccharification tanks.

For the reactions in the liquefaction and saccharification processes, we assume a conversion efficiency of 99% based on the amount of primary reactant. The reactions are modeled on a mass basis and stoichiometric factors are used in

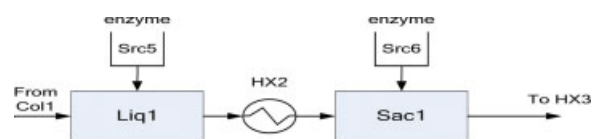


Figure 5. Liquefaction and saccharification of corn slurry.

[Color figure can be viewed in the online issue, which is available at www.interscience.wiley.com.]

the equations. On a mass basis, the reactions are defined as follows:



Regarding the enzymes needed in the reactions, the amount of α -amylase to be added is 0.05% w/w of the corn mash, while the required glucoamylase is 0.12% w/w of the incoming mash.⁹ In the process model, the enzymes are treated as proteins, and hence they are added to the protein mass of the stream. The effect of the enzymes on the energy balance for both the liquefaction and saccharification units is neglected. The mass and heat balances for this section are as follows:

$$fc(j, \text{Jet1}, \text{Col1}) = fc(j, \text{Col1}, \text{Liq1}) \quad \forall j \in J \quad (17)$$

$$fc(j, \text{Liq1}, \text{HX2}) = fc(j, \text{Col1}, \text{Liq1}) + fc(j, \text{Src5}, \text{Liq1}) \quad \forall j \in J, j \neq \{\text{water, starch, maltose}\} \quad (18)$$

$$fc(\text{protein}, \text{Src5}, \text{Liq1}) = \text{Enz}_{\text{Liq}} \cdot F(\text{Col1}, \text{Liq1}) \quad (19)$$

$$fc(\text{starch}, \text{Liq1}, \text{HX2}) = (fc(\text{starch}, \text{Col1}, \text{Liq1}) + fc(\text{starch}, \text{Src5}, \text{Liq1})) \cdot (1 - \text{conv}_{\text{star,malt}}) \quad (20)$$

$$fc(\text{maltose}, \text{Liq1}, \text{HX2}) = (1 + \text{Wa}_{\text{star,malt}}) \cdot \text{conv}_{\text{star,malt}} \cdot (fc(\text{starch}, \text{Col1}, \text{Liq1}) + fc(\text{starch}, \text{Src5}, \text{Liq1})) + fc(\text{maltose}, \text{Col1}, \text{Liq1}) + fc(\text{maltose}, \text{Src5}, \text{Liq1}) \quad (21)$$

$$fc(\text{water}, \text{Liq1}, \text{HX2}) = fc(\text{water}, \text{Col1}, \text{Liq1}) + fc(\text{water}, \text{Src5}, \text{Liq1}) - \text{Wa}_{\text{star,malt}} \cdot \text{conv}_{\text{star,malt}} \cdot (fc(\text{starch}, \text{Col1}, \text{Liq1})) + fc(\text{starch}, \text{Src5}, \text{Liq1})) \quad (22)$$

$$fc(j, \text{HX2}, \text{Sac1}) = fc(j, \text{Liq1}, \text{HX2}) \quad \forall j \in J \quad (23)$$

$$Q(\text{HX2}) = \sum_j fc(j, \text{Liq1}, \text{HX2}) \cdot Cp(j) \cdot (T(\text{HX2}, \text{Sac1}) - T(\text{Liq1}, \text{HX2})) \quad (24)$$

$$fc(j, \text{Sac1}, \text{HX3}) = fc(j, \text{HX2}, \text{Sac1}) + fc(j, \text{Src6}, \text{Sac1}) \quad \forall j \in J, j \neq \{\text{water, maltose, glucose}\} \quad (25)$$

$$fc(\text{protein}, \text{Src6}, \text{Sac1}) = \text{Enz}_{\text{Sac}} \cdot F(\text{HX2}, \text{Sac1}) \quad (26)$$

$$fc(\text{glucose}, \text{Sac1}, \text{HX3}) = fc(\text{glucose}, \text{HX2}, \text{Sac1}) + fc(\text{glucose}, \text{Src6}, \text{Sac1}) + (1 + \text{Wa}_{\text{malt,gluc}}) \cdot \text{conv}_{\text{malt,gluc}} \times (fc(\text{maltose}, \text{HX2}, \text{Sac1}) + fc(\text{maltose}, \text{Src6}, \text{Sac1})) \quad (27)$$

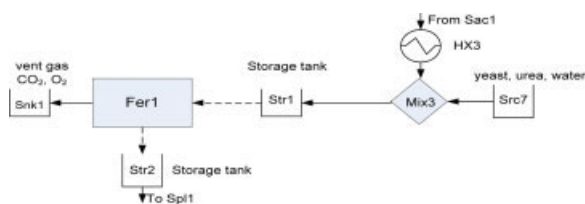


Figure 6. Fermentation process.

[Color figure can be viewed in the online issue, which is available at www.interscience.wiley.com.]

$$fc(\text{maltose}, \text{Sac1}, \text{HX3}) = (fc(\text{maltose}, \text{HX2}, \text{Sac1}) + fc(\text{maltose}, \text{Src6}, \text{Sac1})) \cdot (1 - \text{conv}_{\text{malt,gluc}}) \quad (28)$$

$$fc(\text{water}, \text{Sac1}, \text{HX3}) = fc(\text{water}, \text{HX2}, \text{Sac1}) + fc(\text{water}, \text{Src6}, \text{Sac1}) - \text{Wa}_{\text{malt,gluc}} \cdot \text{conv}_{\text{malt,gluc}} \times (fc(\text{maltose}, \text{HX2}, \text{Sac1}) + fc(\text{maltose}, \text{Src6}, \text{Sac1})) \quad (29)$$

$$fc(\text{water}, \text{Jet1}, \text{Col1}) \geq \text{Wa}_{\text{abun}} \cdot (\text{Wa}_{\text{star,malt}} \cdot \text{conv}_{\text{star,malt}} \times fc(\text{starch}, \text{Mix2}, \text{HX1}) + \text{Wa}_{\text{malt,gluc}} \cdot \text{conv}_{\text{malt,gluc}} \times (1 + \text{Wa}_{\text{star,malt}}) \cdot fc(\text{starch}, \text{Mix2}, \text{HX1})) + fc(\text{water}, \text{Src1}, \text{Wash1}) + fc(\text{water}, \text{Spl6}, \text{Mix2}) \quad (30)$$

In the above set of equations, $\text{Wa}_{\text{star,malt}} = 0.0555$ is the amount of water required for hydrolyzing 1 kg of starch to produce maltose, while $\text{Wa}_{\text{malt,gluc}} = 0.0526$ is the stoichiometric water requirement for converting 1 kg of maltose into glucose. The terms $\text{conv}_{\text{star,malt}}$ and $\text{conv}_{\text{malt,gluc}}$ stand for the conversion of starch to glucose and the conversion of glucose to maltose, respectively, and are both equal to 0.99. $\text{Enz}_{\text{Liq}} = 0.0005$ is the amount of enzymes (in kg) required per kg of corn mash liquefied, while $\text{Enz}_{\text{Sac}} = 0.0012$ is the amount of enzymes (in kg) required in the saccharification tank per kg of corn slurry saccharified. The amount of water needed for the reactions in liquefaction and saccharification is multiplied by a factor $\text{Wa}_{\text{abun}} = 1.5$ (see Eq. 30) to ensure that reactions go to completion, and are not limited by the amount of water present in the mash.

Fermentation

The next step in the production of bioethanol is fermentation of the slurry, which is the heart of the process. The corn mash passes from the saccharification tank into a heat exchanger (HX3) and then into a mixer (Mix3), where the mash is mixed with the yeast, urea, and water required for the fermentation. The mass and energy balances for these units are as follows:

$$fc(j, \text{HX3}, \text{Mix3}) = fc(j, \text{Sac1}, \text{HX3}) \quad \forall j \in J \quad (31)$$

$$Q(\text{HX3}) = \sum_j fc(j, \text{Sac1}, \text{HX3}) \cdot Cp(j) \cdot (T(\text{HX3}, \text{Mix3}) - T(\text{Sac1}, \text{HX3})) \quad (32)$$

$$fc(j, \text{Mix3}, \text{Str1}) = fc(j, \text{HX3}, \text{Mix3}) + fc(j, \text{Src7}, \text{Mix3}) \quad \forall j \in J \quad (33)$$

$$\sum_j (fc(j, \text{HX3}, \text{Mix3}) \cdot Cp(j)) \cdot (T(\text{Mix3}, \text{Str1}) - T(\text{HX3}, \text{Mix3})) + \sum_j (fc(j, \text{Src7}, \text{Mix3}) \cdot Cp(j)) \cdot (T(\text{Mix3}, \text{Str1}) - T(\text{Src7}, \text{Mix3})) = 0 \quad (34)$$

Storage tanks (Str1 and Str2) are present at the inlet and outlet of the fermentation tank (Fer1), since the fermentation is a batch process and the processes upstream and downstream of the fermentation are continuous processes. Finally, the temperature of the slurry entering the fermentor must be 32°C. In this work, we have assumed for simplicity a single fermentor, although in actual practice such a large fermentor may not be available, and so a train of parallel fermentors is used to carry out the fermentation. The operations in this part of the flowsheet appear in Figure 6. The transfer of the reactants into the fermentor, and the transfer of products out from the fermentor are assumed to be instantaneous in the model. The mass transferred into storage tank Str1 from mixer Mix3, and the mass transferred from the storage tank Str2 to the downstream processes are both assumed to take place over the cycle time (t_{cyc}) over which the fermentation takes place inside the fermentor. Furthermore, it is assumed that no reactions take place inside the storage tanks. We have used storage tanks for a quasi-steady state approximation, although in practice parallel fermentors are used. It is to be noted that we have used a train of parallel fermentors for the cost estimation of the equipment in the plant.

In the fermentor, yeast of the type *Saccharomyces cerevisiae* is used to convert glucose into ethanol. The most often used form is active dry yeast. The amount of yeast used in the fermentor is a function of the amount of corn feed (2.765×10^{-4} kg yeast per kg corn feed processed). The fermentation is assumed to be carried out for a maximum total time of 30 h. During this time, the first 4 h are what is known as a lag phase (t_{lag}), when the incubation of yeast takes place and hence there is no conversion of glucose to ethanol. In the remaining 26 h ($t_{\text{fer_max}}$), all the glucose gets converted into ethanol and a number of unavoidable by-products. The time dependence of the fermentation reaction will assume a linear conversion of glucose starting after the initial lag phase of 4 h. The total time (or the cycle time) in the fermentor is then given by:

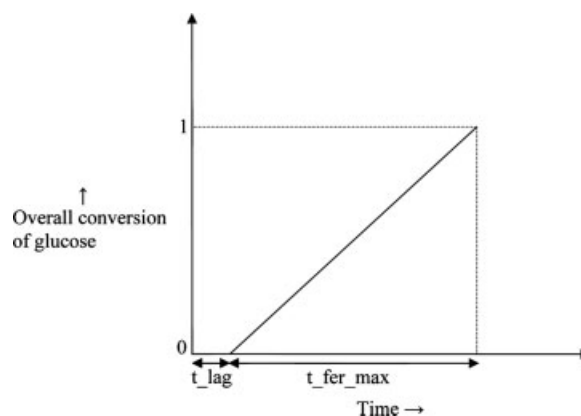


Figure 7. Conversion of glucose as a function of time.

Table 1. Fraction of Glucose Converted to Various Products During Fermentation

Product (<i>p</i>)	Fraction of Glucose that Gets Converted to Product <i>p</i> After <i>t</i> _{fer_max} <i>h</i> of Fermentation Time ($\zeta_{\text{glucose},p}$)
Ethanol	0.92
Glycerol	0.034
Succinic acid	0.01
Lactic acid	0.002
Acetic acid	0.0024
Cell mass	0.0316


$$t_{\text{cyc}} = t_{\text{lag}} + t_{\text{fer}} \quad (35)$$

where the actual fermentation time is *t*_{fer} h and is a decision variable. Figure 7 depicts glucose conversion as a function of time.


The various products of fermentation and the fraction of glucose that is converted into a particular product appear in Table 1.

All the reactions pertaining to the fermentation are as follows:


(1) Glucose to ethanol

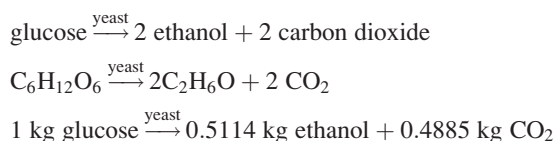


(2) Glucose to glycerol

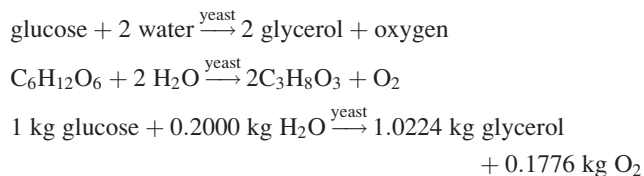


(3) Glucose to succinic acid

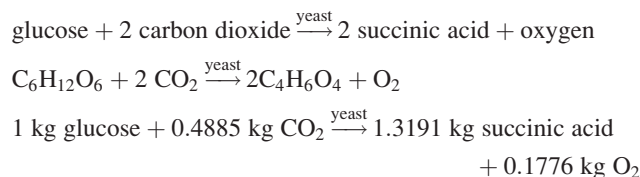


(4) Glucose to acetic acid

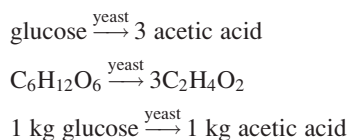


(5) Glucose to lactic acid

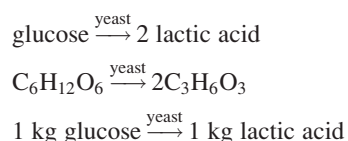

(6) Glucose to cell mass

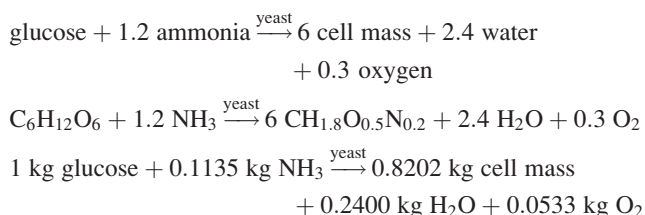

In the last reaction, ammonia is one of the reactants. This reaction is indicative of the anaerobic growth of the yeast, where the cell mass of the yeast is increased. The ammonia comes from the following reaction that is also assumed to take place inside the fermentor.

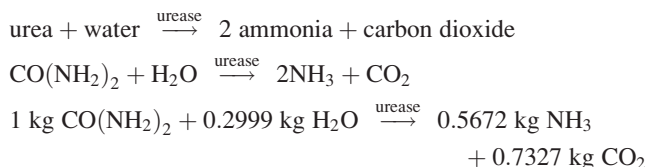

The urea that is required for the reaction is fed into the mixer Mix3, through the source Src7, from where it goes into the storage tank Str1 and finally to the fermentor Fer1. To avoid nitrogen limited growth, we assume that we can feed 10% more urea than what is stoichiometrically required in the fermentor. Besides sugar and nitrogen, other nutrients such as oxygen, and minerals and vitamins are also necessary for efficient fermentation of glucose to ethanol, although in the model the effect of these nutrients is neglected.

To model the conversion of glucose to various products $p \in P = \{\text{ethanol, glycerol, succinic acid, lactic acid, acetic acid, cell mass}\}$ on a mass basis, we make use of the parameter $\zeta_{\text{glucose},p}$ and the respective stoichiometric coefficients on a mass basis, and calculate a parameter $\text{conv}(p)$. An example calculation of $\text{conv}(p)$ for ethanol yields a value of $0.92 \cdot 0.5114 = 0.47$.

The variable $\text{conv}_t(p)$ is dependent on the actual time of fermentation and is defined for all the considered products of the fermentation as follows:

$$\text{conv}_t(p) = \text{conv}(p) \frac{t_{\text{fer}}}{t_{\text{fer_max}}} \quad (36)$$

For example, $\text{conv}_t(\text{ethanol})$ is defined as:

$$\begin{aligned} \text{conv}_t(\text{ethanol}) &= 0.92 \cdot 0.5114 \cdot \frac{t_{\text{fer}}}{t_{\text{fer_max}}} \\ &= 0.47 \cdot \frac{t_{\text{fer}}}{t_{\text{fer_max}}} \end{aligned}$$

The conversion factors for all fermentation products on a mass basis are summarized in Table 2.

The mass of a component *j* entering the fermentor (*m*_{in}(*j*)) is dependent on the cycle time (*t*_{cyc}) and also the flow of component *j* in the stream from mixer Mix3 to storage tank Str1, and is given by the following equation:

$$m_{\text{in}}(j) = f_c(j, \text{Mix3}, \text{Str1}) \cdot (t_{\text{cyc}}) \cdot 3600 \quad \forall j \in J \quad (37)$$

Table 2. Conversion Factors for Different Products on a Mass Basis

Product (<i>p</i>)	conv (<i>p</i>)
Ethanol	0.47
Glycerol	0.034
Succinic acid	0.013
Lactic acid	0.002
Acetic acid	0.0024
Cell mass	0.026

For the case of urea, the input mass is 1.1 times that required to produce sufficient amount of ammonia that will react with an unit mass of glucose and result in the growth of yeast. It is modeled with Eq. 38.

$$m_in(urea) = 0.006955 \cdot \frac{t_fer}{t_fer_max} \cdot m_in(glucose) \quad (38)$$

The masses of select products produced at the end of the fermentation cycle ($m_out(j)$) is a function of the conversion of glucose to these products and the amount of glucose that is input into the fermentor (Eq. 39).

$$m_out(j) = m_in(j) + conv_t(j) \cdot m_in(glucose) \\ j = \{\text{ethanol, glycerol, succinic acid, lactic acid, acetic acid, cell mass}\} \quad (39)$$

For other products and the reactants, the outlet mass is computed using the following set of equations (Eqs. 40–45).

$$m_out(p) = m_in(p)$$

$$p = \{\text{starch, maltose, protein, cellulose, hemicellulose, oil, ash}\} \quad (40)$$

$$m_out(glucose) = \left(1 - \frac{t_fer}{t_fer_max}\right) \cdot m_in(glucose) \quad (41)$$

$$m_out(urea) = \left(\frac{0.1}{1.1}\right) \cdot m_in(urea) \quad (42)$$

$$m_out(water) = m_in(water) - 0.00111 \\ \cdot \frac{t_fer}{t_fer_max} \cdot m_in(glucose) \quad (43)$$

$$m_out(carbon\ dioxide) = m_in(carbon\ dioxide) + 0.449 \\ \cdot \frac{t_fer}{t_fer_max} \cdot m_in(glucose) \quad (44)$$

$$m_out(oxygen) = m_in(oxygen) + 0.00949 \\ \cdot \frac{t_fer}{t_fer_max} \cdot m_in(glucose) \quad (45)$$

The carbon dioxide and oxygen that are produced are assumed to be constantly vented out to a sink (Snk1) from where they can be sequestered, and hence the flowrate of these gases from the fermentor is calculated using Eqs. 46 and 47.

$$m_out(carbon\ dioxide) = fc(carbon\ dioxide, Fer1, Snk1) \\ \cdot (t_cyc) \cdot 3600 \quad (46)$$

$$m_out(oxygen) = fc(oxygen, Fer1, Snk1) \cdot (t_cyc) \cdot 3600 \quad (47)$$

The slurry from the fermentor contains a number of new components and is sent to a storage tank (Str2). The flowrate of the components in the solid–liquid mixture is determined from Eq. 48.

$$m_out(j) = fc(j, Str2, Spl1) \cdot (t_cyc) \cdot 3600 \\ \forall j \in J, j \neq \{\text{carbon dioxide, oxygen}\} \quad (48)$$

Further, the fermentation of glucose to ethanol by yeast is an exothermic reaction. Therefore, heat ($Q(Fer1)$) must be removed in order to keep the temperature in the fermentor constant at the recommended value of 32°C. This heat has to be removed over the growth phase of the yeast. Since a linear conversion of glucose during the fermentation time is assumed, this heat must be removed continuously during the fermentation time. During the lag phase no heat has to be removed. The simplified heat balance for the fermentor gives rise to the following equation:

$$Q(Fer1)t_fer \cdot 3600 = -808.7(m_out(etho) - m_in(etho)) \quad (49)$$

For removing the heat produced in the fermentors, internal cooling coils, internal cooling panels, external cooling jacket, or heat exchangers with recirculation are commonly used.

Yeast stress factors, including bacterial infection, high temperatures, high alcohol levels, and high acid levels inhibit ethanol production. Bacterial infection will reduce the ethanol yield drastically as the bacteria compete with the yeast for the substrates. Bacteria under anaerobic conditions also produce relatively large amounts of acetic and lactic acid, which further stress the yeast.⁹ Ethanol in too high concentration is also toxic for the yeast. More recently, Alper et al.¹¹ have engineered a new yeast that is tolerant of higher levels of ethanol and can improve the speed and efficiency of ethanol production. The recommended temperature for fermentation for *S. cerevisiae* is between 30 and 35°C. If the temperature rises or falls too much, the yeast will produce less ethanol and more of other by-products. Furthermore, higher temperature favors bacterial growth.

Ethanol content over 23%-v/v, lactic acid content over 0.8%-w/v, acetic acid content over 0.05%-w/v, and an initial glucose content over 38%-w/v are the inhibitory levels of these components.⁹ These inhibitory levels are converted to mass fractions (see Table 3) in order to use them as bounds

Table 3. Inhibitory Levels (Mass Fractions) of Various Components Inside the Fermentor

Component	Critical Mass Fraction
Glucose	0.21
Ethanol	0.16
Lactic acid	0.0089
Acetic acid	0.00055
Succinic acid	0.0033
Solids	0.36

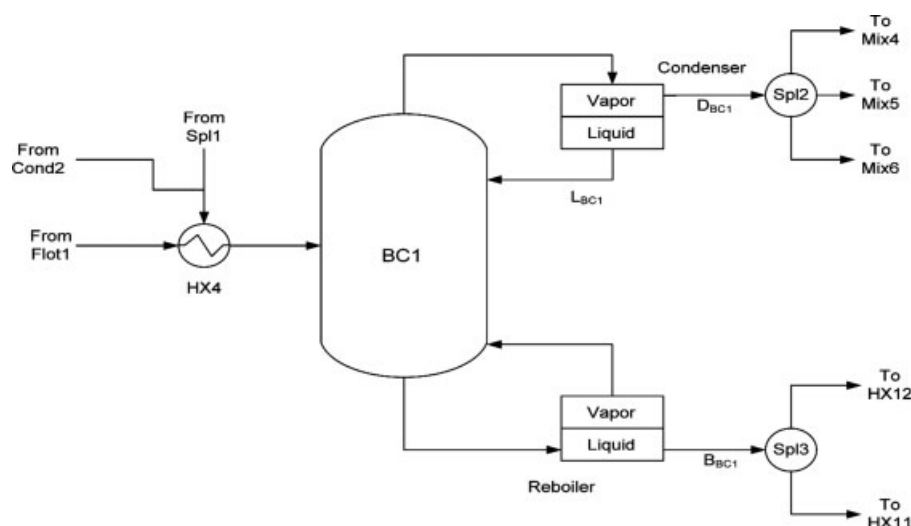


Figure 8. Beer column.

on the mass fraction of the above-mentioned inhibitors in the process model. Also, the amount of solids must be limited to about 36% in the fermentor. This is enforced by the following equations:

$$\sum_{j = \text{starch, cell mass, cellulose, hemicellulose, ash}} x(j, \text{Mix3, Str1}) \leq \text{solids}^{\max} \quad (50)$$

$$\sum_{j = \text{starch, cell mass, cellulose, hemicellulose, ash}} x(j, \text{Str2, Spl1}) \leq \text{solids}^{\max} \quad (51)$$

Solid Liquid Separation. The slurry coming out of the fermentor has to be separated into a liquid (ethanol + water mixture + solubles) and solid component. The solid-liquid separation can either be achieved by a centrifuge, or by a mechanical press, or by a distillation column known as a beer column. Since a centrifuge and a mechanical press do the same separation job, only one separation technology is investigated for this separation task. The maintenance cost and power requirements of a centrifuge are usually higher compared to a mechanical press, and hence a mechanical press is considered in the work. In case the solids are separated from the liquids prior to the beer column, the column can be designed as a regular distillation column. If no mechanical separation equipment is used in front of the column, the beer column must be designed for a heavy solid load. In this case the investment cost for the beer column is higher.

In terms of the flowsheet, if a mechanical press is used before the beer column, the flows “Spl1” → “HX4”, “Spl3” → “HX12” do not exist (see Figure 2). In case the mechanical separator is used after the beer column, the flows “Spl1” → “MecP1”, “Spl3” → “HX11” are eliminated. Mathematically, this can be represented as a disjunction, although this representation was not considered in this work and we solved two cases, one with the solid-liquid separation before the beer column, and one with the solid-liquid separation after the beer column, to determine the optimal design. Note that

a recycle stream must be included from the dryer (Dry1) to the beer column (BC1). Since the solid outlet of the mechanical press is assumed to have a moisture content of about 40%, some ethanol also remains in the solid phase, and thus it is necessary to have a recycle stream to recover this ethanol.

The slurry coming out of the fermentor is sent to storage tank Str2, from where it is sent to splitter Spl1 and the flow balance is modeled as follows:

$$fc(j, \text{Str2, Spl1}) = fc(j, \text{Spl1, HX4}) + fc(j, \text{Spl1, MecP1})$$

$$\forall j \in J, j \neq \{\text{carbon dioxide, oxygen}\} \quad (52)$$

Preliminary distillation

A distillation system separates the ethanol from water in the liquid mixture. The beer column separates most of the ethanol from water (and solids, if any) and produces a top stream rich in ethanol, and a bottom stream rich in water, as shown in Figure 8. The beer column serves to reduce the overall flowrate for the ethanol purification downstream. This column usually has a large diameter, but only few trays. The inlet stream to the beer column (BC1) is preheated in a heat exchanger (HX4) to its bubble point. This heat exchanger has three possible inlet streams (see Figure 2):

- (1) The fermentor outlet stream from splitter Spl1 to heat exchanger HX4.
- (2) The stream from splitter Spl7 to heat exchanger HX4.
- (3) The stream from flotation unit Flot1 to heat exchanger HX4.

The flow and energy balances for this heat exchanger are given below.

$$fc(j, \text{HX4, BC1}) = fc(j, \text{Spl1, HX4}) + fc(j, \text{Flot1, HX4})$$

$$+ fc(j, \text{Spl7, HX4}) \quad \forall j \in J, j \neq \{\text{carbon dioxide, oxygen}\}$$

(53)

$$\begin{aligned}
Q(\text{HX4}) = & \sum_{j \neq \{\text{carbon dioxide, oxygen}\}} fc(j, \text{Spl1}, \text{HX4}) \cdot Cp(j) \\
& \cdot (T(\text{HX4}, \text{BC1}) - T(\text{Spl1}, \text{HX4})) \\
+ & \sum_{j \neq \{\text{carbon dioxide, oxygen}\}} fc(j, \text{Flot1}, \text{HX4}) \cdot Cp(j) \\
& \cdot (T(\text{HX4}, \text{BC1}) - T(\text{Flot1}, \text{HX4})) \\
+ & \sum_{j \neq \{\text{carbon dioxide, oxygen}\}} fc(j, \text{Spl7}, \text{HX4}) \cdot Cp(j) \\
& \cdot (T(\text{HX4}, \text{BC1}) - T(\text{Spl7}, \text{HX4})) \quad (54)
\end{aligned}$$

The recovery of ethanol in the distillation columns in the plant is fixed to be 99.6% to reduce ethanol losses. To have operational flexibility in the beer column, the recovery of water at the top is treated as a variable. The flow balances are easily formulated in terms of these recoveries.

$$fc(j, \text{HX4}, \text{BC1}) = fc(j, \text{BC1}, \text{Spl2}) + fc(j, \text{BC1}, \text{Sp3}) \quad \forall j \in J, j \neq \{\text{carbon dioxide, oxygen}\} \quad (55)$$

$$fc(\text{Water}, \text{BC1}, \text{Spl2}) = \text{rec}_{\text{water}}(\text{BC1}) \cdot fc(\text{Water}, \text{HX4}, \text{BC1}) \quad (56)$$

$$fc(\text{Ethanol}, \text{BC1}, \text{Spl2}) = \text{rec}_{\text{ethanol}}(\text{BC1}) \cdot fc(\text{Ethanol}, \text{HX4}, \text{BC1}) \quad (57)$$

In the above equations, $\text{rec}_{\text{water}}(\text{BC1})$ is the recovery of water in the beer column BC1 while $\text{rec}_{\text{ethanol}}(\text{BC1})$ stands for the recovery of ethanol in the beer column BC1.

The relative volatility of ethanol with respect to water ($\alpha_{\text{ethanol/water}}$) is taken to be 2.2389 and is assumed to be constant over the temperature range of the column. The relative volatilities of the corn oil, glycerol, and the acids are negligibly small. Therefore, water is chosen to be the heavy key and ethanol the light key for the calculations in both the beer column as well as the rectification column. Since all components except ethanol are heavier than water, they are all assumed to go into the bottom outlet. Hence, the effect of all components except water and ethanol on the condenser temperature is neglected. Further, only ethanol and water are assumed to be present in the vapor distillate stream coming out from the condenser of the beer column, and so only these components are considered to be present in the ethanol purification section. A partial condenser is used in the beer column to obtain a vapor distillate, since the molecular sieves and the corn grit adsorption bed present in the ethanol purification section handle vapor mixtures of ethanol and water. In the feed to the beer column and in the reboiler, the effect of the components other than water on the bubble point is negligible, since their relative volatilities are extremely small and their mole fractions are also very small. The vapor pressures of water and ethanol are predicted by the Antoine equation. The beer column operates at atmospheric pressure ($P_{\text{BC1}} = 1$ atm). A pressure drop of 0.1 atm across the beer column (ΔP_{BC1}) is assumed. Therefore, the temperature of the inlet stream is calculated at 1 atm, the temperature of the reboiler is computed at 1.05 atm and the temperature in the condenser is calculated at 0.95 atm.

The dew point equation (DPE)⁸ is used to relate the temperature inside the condenser with the mass fractions of the vapor distillate and the refluxed liquid. A reflux ratio (R_{BC1}) of 2 is taken for the beer column.

$$p_n^0(T) = P_{\text{tot}} \sum_k \frac{y_k}{\alpha_{k/n}} \quad (\text{DPE})$$

In Eq. (DPE), n stands for the most abundant component (in the condenser of the beer column it is ethanol), k is the set of all components in the mixture (ethanol and water), $\alpha_{k/n}$ is the relative volatility of k with respect to n , y_k is the mole fraction of component k in the vapor, P_{tot} is the total pressure of the vapor, and $p_n^0(T)$ is the vapor pressure of component n at temperature T .

Written in terms of column pressure and pressure drop, the DPE for the beer column condenser becomes

$$p_{\text{ethanol}}^0(T) = \left(P_{\text{BC1}} - \frac{\Delta P_{\text{BC1}}}{2} \right) \cdot \left(y_{\text{ethanol}} + y_{\text{water}} \cdot \alpha_{\text{ethanol/water}} \right)$$

Combining this with the Antoine equation yields the following set of equations for the beer column condenser,

$$\begin{aligned}
mf(j, \text{BC1}, \text{Spl2}) \cdot \sum_{h \in \{\text{ethanol, water}\}} \frac{x(h, \text{BC1}, \text{Spl2})}{MW_h} \\
= \frac{x(j, \text{BC1}, \text{Spl2})}{MW_j} \quad j = \{\text{ethanol, water}\} \quad (58)
\end{aligned}$$

$$\begin{aligned}
& \exp \left(A_{\text{ethanol}} - \frac{B_{\text{ethanol}}}{T(\text{BC1}, \text{Spl2}) + C_{\text{ethanol}}} \right) \\
& = \left(P_{\text{BC1}} - \frac{\Delta P_{\text{BC1}}}{2} \right) \cdot (mf(\text{water}, \text{BC1}, \text{Spl2}) \cdot \alpha_{\text{ethanol/water}} \\
& \quad + mf(\text{ethanol}, \text{BC1}, \text{Spl2})) \quad (59)
\end{aligned}$$

Here $mf(j, \text{BC1}, \text{Spl2})$ is the mole fraction of component j in the distillate drawn from the top of the beer column and MW_j is the molecular weight of component j .

Since a partial condenser is used in the beer column, the composition of the condensed liquid is not the same as the top product, which is removed as saturated vapor. It is assumed that the extracted vapor is in equilibrium with the condensed phase. The composition of the refluxed stream can be calculated by using the vapor–liquid equilibrium relationship for water and ethanol at the temperature of the condenser. The vapor–liquid equilibrium for an assumed ideal liquid mixture is given by the following relationship:

$$m_k = \frac{y_k P_{\text{tot}}}{p_k^0(T)}$$

Here, m_k is the mole fraction of component k in the liquid mixture, while y_k is the mole fraction of component k in the vapor that is in equilibrium with the liquid. P_{tot} is the total pressure of the vapor, while $p_k^0(T)$ is the vapor pressure of component k at temperature T .

The equilibrium relation for the vapor and liquid in the beer column condenser, along with ideal solution assumptions in the condenser yield the following equations:

$$lf_{BC1}(\text{ethanol}) = \frac{mf(\text{ethanol}, BC1, Spl2) \cdot \left(P_{BC1} - \frac{\Delta P_{BC1}}{2}\right)}{\exp\left(A_{\text{ethanol}} - \frac{B_{\text{ethanol}}}{T(BC1, Spl2) + C_{\text{ethanol}}}\right)} \quad (60)$$

$$lf_{BC1}(\text{water}) = 1 - lf_{BC1}(\text{ethanol}) \quad (61)$$

$$xf_{BC1}(j) \cdot \sum_{h=\{\text{ethanol}, \text{water}\}} lf_{BC1}(h) \cdot MW_h = lf_{BC1}(j) \cdot MW_j \quad j = \{\text{ethanol}, \text{water}\} \quad (62)$$

Finally, the cooling heat load required for the condenser is given by Eq. 63.

$$Q_{\text{cond}}(BC1) = -F(BC1, Spl2) \cdot R_{BC1} \times \sum_{h=\{\text{ethanol}, \text{water}\}} xf_{BC1}(h) \cdot \Delta H_v^0(h) \cdot \left(\frac{T_c(h) - T(BC1, Spl2)}{T_c(h) - T_b(h)}\right)^{n_{\text{watson}}} \quad (63)$$

In the above equations, $lf_{BC1}(j)$ is the mole fraction and $xf_{BC1}(j)$ is the mass fraction of component j in the liquid refluxed from the condenser of the beer column BC1, and $\Delta H_v^0(h)$ is the heat of vaporization of component h at its normal boiling point. $T_c(h)$ and $T_b(h)$ are the critical temperature and the normal boiling temperature of component h , respectively.

The bubble point equation (BPE) is used to calculate the inlet temperature and the reboiler temperature for the beer column. The BPE⁸ is given by:

$$P_{\text{tot}} = \frac{\bar{\alpha}}{\alpha_{k/n}} P_k^0(T) \quad (\text{BPE})$$

where, $\bar{\alpha} = \sum_i \alpha_{i/n} \cdot m_i$.

In the above equation, k stands for the most abundant component (in the reboiler of the beer column it is water), n is water, $\alpha_{k/n}$ is the relative volatility of k with respect to n , m_i is the mole fraction of component i in the liquid, P_{tot} is the total pressure of the vapor, and $P_k^0(T)$ is the vapor pressure of component k at temperature T . This leads to the following equations:

$$mf(j, BC1, Spl3) \cdot \sum_{h=\{\text{ethanol}, \text{water}\}} \frac{x(h, BC1, Spl3)}{MW_h} = \frac{x(j, BC1, Spl3)}{MW_j} \quad j = \{\text{ethanol}, \text{water}\} \quad (64)$$

$$P_{BC1} + \frac{\Delta P_{BC1}}{2} = (mf(\text{water}, BC1, Spl3) + \alpha_{\text{ethanol}/\text{water}} \cdot mf(\text{ethanol}, BC1, Spl3)) \cdot \exp\left(A_{\text{water}} - \frac{B_{\text{water}}}{T(BC1, Spl3) + C_{\text{water}}}\right) \quad (65)$$

$$mf(j, HX4, BC1) \cdot \sum_{h=\{\text{ethanol}, \text{water}\}} \frac{x(h, HX4, BC1)}{MW_h} = \frac{x(j, HX4, BC1)}{MW_j} \quad j = \{\text{ethanol}, \text{water}\} \quad (66)$$

$$P_{BC1} = (mf(\text{water}, HX4, BC1) + \alpha_{\text{ethanol}/\text{water}} \cdot mf(\text{ethanol}, HX4, BC1)) \cdot \exp\left(A_{\text{water}} - \frac{B_{\text{water}}}{T(HX4, BC1) + C_{\text{water}}}\right) \quad (67)$$

Since the recovery of ethanol at the top is fixed at 99.6%, the bottom stream contains almost no ethanol. The relative volatilities of other species with respect to water are very small, so their contributions to the heat of vaporization in the reboiler may be neglected. Neglecting also the temperature change in the reboiler, the heat balance reduces to:

$$Q_{\text{reb}}(BC1) = F(BC1, Spl2) \cdot (1 + R_{BC1}) \cdot \Delta H_v^0(\text{Water}) \cdot \left(\frac{T_c(\text{Water}) - T(BC1, Spl3)}{T_c(\text{Water}) - T_b(\text{Water})}\right)^{n_{\text{watson}}} \quad (68)$$

Finally, to avoid a beer column with many separation trays, the mass fraction of ethanol in the vapor distillate from the condenser of the beer column is bounded to be less than 0.72. The top product from the beer column is assumed to consist of only ethanol and water and the vapor mixture of these components is sent to splitter Spl2 (see Figure 2), which is modeled as follows:

$$F(BC1, Spl2) = F(Spl2, Mix4) + F(Spl2, Mix5) + F(Spl2, Mix6) \quad (69)$$

$$\begin{aligned} x(j, Spl2, Mix4) &= x(j, BC1, Spl2) \quad j = \{\text{ethanol}, \text{water}\} \\ x(j, Spl2, Mix5) &= x(j, BC1, Spl2) \quad j = \{\text{ethanol}, \text{water}\} \\ x(j, Spl2, Mix6) &= x(j, BC1, Spl2) \quad j = \{\text{ethanol}, \text{water}\} \end{aligned} \quad (70)$$

$$\begin{aligned} T(Spl2, Mix4) &= T(BC1, Spl2) \\ T(Spl2, Mix5) &= T(BC1, Spl2) \\ T(Spl2, Mix6) &= T(BC1, Spl2) \end{aligned} \quad (71)$$

The liquid stream at the bottoms of the beer column is sent to splitter Spl3, from where it can be sent to different units. The following equations describe this splitter:

$$F(BC1, Spl3) = F(Spl3, HX11) + F(Spl3, HX12) \quad (72)$$

$$\begin{aligned} x(j, Spl3, HX11) &= x(j, BC1, Spl3) \\ \forall j \in J, \quad j &\neq \{\text{carbon dioxide}, \text{oxygen}\} \\ x(j, Spl3, HX12) &= x(j, BC1, Spl3) \\ \forall j \in J, \quad j &\neq \{\text{carbon dioxide}, \text{oxygen}\} \end{aligned} \quad (73)$$

$$\begin{aligned} T(Spl3, HX11) &= T(BC1, Spl3) \\ T(Spl3, HX12) &= T(BC1, Spl3) \end{aligned} \quad (74)$$

Purification of Ethanol to Fuel Grade. There are several technologies available to separate ethanol from water. A

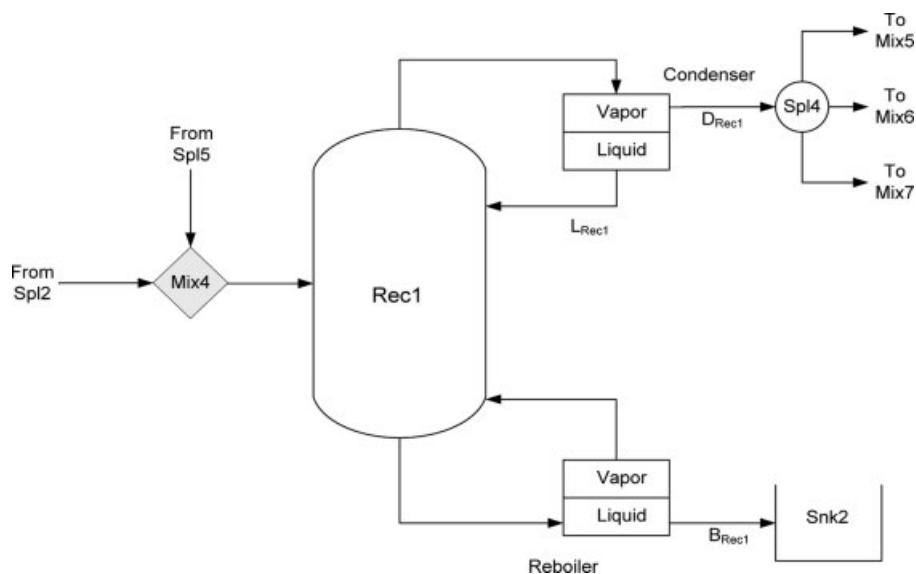


Figure 9. Rectification column.

common rectification tower working at atmospheric pressure, a bed of corn grits, and/or molecular sieves can be used. It should be noted that pervaporation is another alternative separation scheme,¹² but this is not considered here. The ethanol–water vapor mixture obtained at the top of the beer column can be sent to any of these purifying options. The separation technologies are interconnected to each other as can be seen from the superstructure in Figure 2. From the superstructure, it can be seen that a combination of these technologies can be used and so no discrete decisions are involved in the model. The purified ethanol vapor obtained from these processes is collected and condensed for storage.

Rectification

Rectification uses a distillation column to produce azeotropic ethanol. It is assumed that the feed to the rectification column (Rec1) consists of ethanol and water only. The feed for the rectification is in vapor form and comes from different streams mixed in the mixer unit Mix4. The rectification process is shown in Figure 9. Since the azeotropic composition of an ethanol–water mixture at atmospheric pressure is about 95 wt % of ethanol, this is the maximum achievable purity of ethanol in an atmospheric column. The required purity for fuel grade ethanol is higher, so the mixture must be purified further. The rectifier column is modeled in a similar fashion as the beer column. A partial condenser and reboiler are used in this unit, and are modeled in the same way they are for the beer column. The pressure drop in the column and the tray efficiencies are assumed to be the same as those for the beer column. Again, the ethanol recovery is fixed to 99.6% and the recovery of water at the top of the column is selected to be a variable. The composition of the condensate in the condenser of this column is calculated by assuming equilibrium between the vapor outlet and the liquid reflux stream. The condenser temperature is determined by the DPE for the top outlet composition. Furthermore, it is assumed that only water is vaporized in the reboiler and the tempera-

ture of the reboiler is calculated using the BPE for the bottom outlet composition. The following set of equations are used to model the rectifier.

$$fc(h, \text{Mix4}, \text{Rec1}) = fc(h, \text{Spl2}, \text{Mix4}) + fc(h, \text{Spl5}, \text{Mix4})$$

$$h = \{\text{ethanol}, \text{water}\} \quad (75)$$

$$\sum_{h=\{\text{ethanol}, \text{water}\}} (fc(h, \text{Spl2}, \text{Mix4}) \cdot Cp^{\text{vap}}(h)) \cdot (T(\text{Mix4}, \text{Rec1}) - T(\text{Spl2}, \text{Mix4})) + \sum_{h=\{\text{ethanol}, \text{water}\}} (fc(h, \text{Spl5}, \text{Mix4}) \cdot Cp^{\text{vap}}(h)) \cdot (T(\text{Mix4}, \text{Rec1}) - T(\text{Spl5}, \text{Mix4})) = 0 \quad (76)$$

$$fc(h, \text{Mix4}, \text{Rec1}) = fc(h, \text{Rec1}, \text{Spl4}) + fc(h, \text{Rec1}, \text{Snk2})$$

$$h = \{\text{ethanol}, \text{water}\} \quad (77)$$

$$fc(\text{water}, \text{Rec1}, \text{Spl4}) = \text{rec}_{\text{water}}(\text{Rec1}) \cdot fc(\text{water}, \text{Mix4}, \text{Rec1}) \quad (78)$$

$$fc(\text{ethanol}, \text{Rec1}, \text{Spl4}) = \text{rec}_{\text{ethanol}}(\text{Rec1}) \cdot fc(\text{ethanol}, \text{Mix4}, \text{Rec1}) \quad (79)$$

In the above equations, $\text{rec}_{\text{water}}(\text{Rec1})$ is the recovery of water in the rectification column Rec1, while $\text{rec}_{\text{ethanol}}(\text{Rec1})$ stands for the recovery of ethanol in the rectification column Rec1.

The rectification column is assumed to operate at atmospheric pressure ($P_{\text{Rec1}} = 1 \text{ atm}$). A pressure drop of 0.1 atm across the rectification column (ΔP_{Rec1}) is assumed. Therefore, the temperature of the inlet stream is calculated at 1 atm, and those of the reboiler and the condenser are computed at 1.05 and 0.95 atm, respectively. The DPE is again used to relate the temperature inside the condenser with the mass fractions of the components in the vapor distillate and the reflux liquid. A reflux ratio (R_{Rec1}) of 2 is taken for the rectifier column. Since water and ethanol are the only components in the condenser of the rectifier column, (DPE) reduces to the following:

$$mf(j, \text{Rec1}, \text{Spl4}) \cdot \sum_{h=\{\text{ethanol}, \text{water}\}} \frac{x(h, \text{Rec1}, \text{Spl4})}{MW_h} = \frac{x(j, \text{Rec1}, \text{Spl4})}{MW_j} \quad j = \{\text{ethanol}, \text{water}\} \quad (80)$$

$$\exp\left(A_{\text{ethanol}} - \frac{B_{\text{ethanol}}}{T(\text{Rec1}, \text{Spl4}) + C_{\text{ethanol}}}\right) = \left(P_{\text{Rec1}} - \frac{\Delta P_{\text{Rec1}}}{2}\right) \cdot (mf(\text{water}, \text{Rec1}, \text{Spl4}) \cdot \alpha_{\text{ethanol}/\text{water}} + mf(\text{ethanol}, \text{Rec1}, \text{Spl4})) \quad (81)$$

Vapor–liquid equilibrium in the rectification column condenser is modeled as follows:

$$lf_{\text{Rec1}}(\text{ethanol}) = \frac{mf(\text{ethanol}, \text{Rec1}, \text{Spl4}) \cdot (P_{\text{Rec1}} - \frac{\Delta P_{\text{Rec1}}}{2})}{\exp\left(A_{\text{ethanol}} - \frac{B_{\text{ethanol}}}{T(\text{Rec1}, \text{Spl4}) + C_{\text{ethanol}}}\right)} \quad (82)$$

$$lf_{\text{Rec1}}(\text{water}) = 1 - lf_{\text{Rec1}}(\text{ethanol}) \quad (83)$$

$$xf_{\text{Rec1}}(j) \cdot \sum_{h=\{\text{ethanol}, \text{water}\}} lf_{\text{Rec1}}(h) \cdot MW_h = lf_{\text{Rec1}}(j) \cdot MW_j \quad j = \{\text{ethanol}, \text{water}\} \quad (84)$$

The cooling heat load required for the condenser of the rectifier column is given by Eq. 85.

$$Q_{\text{-cond}}(\text{Rec1}) = -F(\text{Rec1}, \text{Spl4}) \cdot R_{\text{Rec1}} \cdot \sum_{h=\{\text{ethanol}, \text{water}\}} xf_{\text{Rec1}}(h) \cdot \Delta H_v^0(h) \cdot \left(\frac{T_c(h) - T(\text{Rec1}, \text{Spl4})}{T_c(h) - T_b(h)}\right)^{n_{\text{watson}}} \quad (85)$$

Equation (BPE) is again used to calculate the reboiler temperature for the rectification column.

$$mf(j, \text{Rec1}, \text{Snk2}) \cdot \sum_{h=\{\text{ethanol}, \text{water}\}} \frac{x(h, \text{Rec1}, \text{Snk2})}{MW_h} = \frac{x(j, \text{Rec1}, \text{Snk2})}{MW_j} \quad j = \{\text{ethanol}, \text{water}\} \quad (86)$$

$$P_{\text{Rec1}} + \frac{\Delta P_{\text{Rec1}}}{2} = (mf(\text{water}, \text{Rec1}, \text{Snk2}) + \alpha_{\text{ethanol}/\text{water}} \cdot mf(\text{ethanol}, \text{Rec1}, \text{Snk2})) \cdot \exp\left(A_{\text{water}} - \frac{B_{\text{water}}}{T(\text{Rec1}, \text{Snk2}) + C_{\text{water}}}\right) \quad (87)$$

The heat balance in the reboiler is given by:

$$Q_{\text{-reb}}(\text{Rec1}) = (F(\text{Rec1}, \text{Spl4}) \cdot R_{\text{Rec1}} - F(\text{Rec1}, \text{Snk2})) \cdot \Delta H_v^0(\text{water}) \cdot \left(\frac{T_c(\text{water}) - T(\text{Rec1}, \text{Snk2})}{T_c(\text{water}) - T_b(\text{water})}\right)^{n_{\text{watson}}} \quad (88)$$

Finally, the heat from the bottoms stream can also be recovered by placing a heat exchanger after Snk2. The total amount of heat recovered is given by:

$$Q_{\text{-bottom}}(\text{Rec1}) = \sum_{h=\{\text{ethanol}, \text{water}\}} fc(h, \text{Rec1}, \text{Snk2}) \cdot Cp(h) \cdot (T_{\text{cooldown}} - T(\text{Rec1}, \text{Snk2})) \quad (89)$$

In the above equation, T_{cooldown} is set to 25°C.

The outlet from the rectifier can be sent directly to the ethanol outlet, or to the adsorption bed made of corn grits, or to the molecular sieve (see Figure 2). This is modeled as follows:

$$F(\text{Rec1}, \text{Spl4}) = F(\text{Spl4}, \text{Mix5}) + F(\text{Spl4}, \text{Mix6}) + F(\text{Spl4}, \text{Mix7}) \quad (90)$$

$$\begin{aligned} x(j, \text{Spl4}, \text{Mix5}) &= x(j, \text{Rec1}, \text{Spl4}) \quad j = \{\text{ethanol}, \text{water}\} \\ x(j, \text{Spl4}, \text{Mix6}) &= x(j, \text{Rec1}, \text{Spl4}) \quad j = \{\text{ethanol}, \text{water}\} \\ x(j, \text{Spl4}, \text{Mix7}) &= x(j, \text{Rec1}, \text{Spl4}) \quad j = \{\text{ethanol}, \text{water}\} \end{aligned} \quad (91)$$

$$T(\text{Spl4}, \text{Mix5}) = T(\text{Rec1}, \text{Spl4})$$

$$T(\text{Spl4}, \text{Mix6}) = T(\text{Rec1}, \text{Spl4}) \quad (92)$$

$$T(\text{Spl4}, \text{Mix7}) = T(\text{Rec1}, \text{Spl4})$$

Adsorption of water on corn grits

The feed for the adsorption unit (Ads1) can come from the rectification column as well as from the beer column. Some researchers have investigated the use of biomaterials as adsorbents (Ladisch et al.⁶; Beery and Ladisch¹³). The results show great promise for reducing the energy consumption in the ethanol purification part of the plant. A bed made of corn grits (composition shown in Table 4 (see Beery and Ladisch¹³)) selectively adsorbs water from an ethanol–water vapor mixture coming from the mixer Mix5. The corn grits for this bed come from a source unit (Src9). Heat exchanger HX6 heats the corn grits to the adsorption temperature (T_{ads}). The bed adsorbs water from the ethanol–water vapor mixture and the ethanol passes on to the splitter Spl5. The ethanol–water mixture rises to the bed temperature as the water adsorbs into the bed. The maximum concentration of ethanol obtainable at the outlet of the bed is assumed to be 97.7% w/w (Ladisch and Dyck¹⁴). After the bed is saturated with water, the wet corn grits are sent to a splitter Spl6, and from there they can be sent to both the mixer Mix2, and/ or to sink Snk3, while fresh adsorbent enters the column and a new adsorber bed is formed. An alternative scheme is to use two corn grit beds working in parallel, one being saturated with water while the other is being dehydrated (or regenerated). For the costing analysis of the overall plant, we consider a dual-bed corn grit adsorber, although

Table 4. Composition of Corn Grit Bed

Component	Mass Fraction
Starch	0.8810
Protein	0.0847
Oil	0.0079
Ash	0.0034
Cellulose	0.0069
Hemicellulose	0.0161

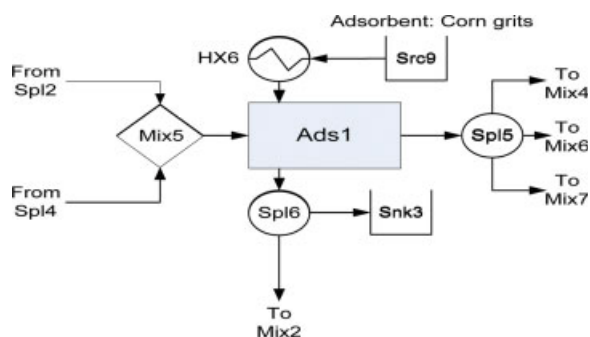


Figure 10. Corn bed adsorber.

[Color figure can be viewed in the online issue, which is available at www.interscience.wiley.com.]

the energy cost for the regeneration of the bed is not taken into account. Note that the corn grits saturated with water can be used as fermentation substrate, although that possibility is not considered in the model. The schematic of a corn bed adsorber appears in Figure 10.

The mixer Mix5 is modeled as follows:

$$f_c(j, \text{Mix5}, \text{Ads1}) = f_c(j, \text{Spl2}, \text{Mix5}) + f_c(j, \text{Spl4}, \text{Mix5})$$

$$j = \{\text{ethanol}, \text{water}\} \quad (93)$$

$$\sum_{h=\{\text{ethanol}, \text{water}\}} (f_c(h, \text{Spl2}, \text{Mix5}) \cdot C_p^{\text{vap}}(h)) \cdot (T(\text{Mix5}, \text{Ads1}) - T(\text{Spl2}, \text{Mix5})) + \sum_{h=\{\text{ethanol}, \text{water}\}} (f_c(h, \text{Spl4}, \text{Mix5}) \cdot C_p^{\text{vap}}(h)) \cdot (T(\text{Mix5}, \text{Ads1}) - T(\text{Spl4}, \text{Mix5})) = 0 \quad (94)$$

The flow balances for the corn grit bed are as follows:

$$f_c(\text{ethanol}, \text{Ads1}, \text{Spl5}) = f_c(\text{ethanol}, \text{Mix5}, \text{Ads1}) \quad (95)$$

$$f_c(j, \text{Src9}, \text{HX6}) = x_{\text{ads}}(j) \cdot F(\text{Src9}, \text{HX6})$$

$$\forall j \in J, j \neq \{\text{carbon dioxide}, \text{oxygen}\} \quad (96)$$

$$f_c(j, \text{HX6}, \text{Ads1}) = x_{\text{ads}}(j) \cdot F(\text{Src9}, \text{HX6})$$

$$\forall j \in J, j \neq \{\text{carbon dioxide}, \text{oxygen}\} \quad (97)$$

$$f_c(j, \text{Ads1}, \text{Spl6}) = x_{\text{ads}}(j) \cdot F(\text{Src9}, \text{HX6})$$

$$\forall j \in J, j \neq \{\text{ethanol}, \text{water}\} \quad (98)$$

$$f_c(\text{water}, \text{Ads1}, \text{Spl5}) = (1 - \text{rem}_{\text{ads}}) \cdot f_c(\text{water}, \text{Mix5}, \text{Ads1}) \quad (99)$$

$$f_c(\text{water}, \text{Ads1}, \text{Spl6}) = \text{rem}_{\text{ads}} \cdot f_c(\text{water}, \text{Mix5}, \text{Ads1}) + x_{\text{ads}}(\text{water}) \cdot F(\text{Src9}, \text{HX6}) \quad (100)$$

Here, $x_{\text{ads}}(j)$ is the fraction of component j in the corn grit bed (see Table 4), while rem_{ads} is the fraction of water removed from the incoming ethanol–water vapor mixture. There is a lower limit on the fraction of ethanol that can be present in the vapor stream entering the adsorber denoted by $x_{\text{in,ads}}^{\text{ethanol,min}}$, and there is an upper bound on the fraction of ethanol exiting the corn grit bed ($x_{\text{out,ads}}^{\text{ethanol,max}}$).

The heat balance in the heat exchanger HX6 is given by,

$$Q(\text{HX6}) = \sum_j f_c(j, \text{HX6}, \text{Ads1}) \cdot C_p(j) \cdot (T(\text{HX6}, \text{Ads1}) - T(\text{Src9}, \text{HX6})) \quad (101)$$

Data for adsorption on corn grits is summarized in Table 5 (Beery and Ladisch¹³; Ladisch and Dyck¹⁴). The amount of water being adsorbed by the corn grits divided by the adsorption potential gives the required bed size ($\text{size}_{\text{Ads1}}$) on a mass basis and this is modeled with the following two equations,

$$F(\text{Src9}, \text{HX6}) = (1/\text{ads_potential}_{\text{Ads1}}) \cdot \text{rem}_{\text{ads}} \cdot f_c(\text{water}, \text{Mix5}, \text{Ads1}) \quad (102)$$

$$\text{size}_{\text{Ads1}} = F(\text{Src9}, \text{HX6}) \cdot t_{\text{ads_saturation}} \quad (103)$$

where $\text{ads_potential}_{\text{Ads1}}$ is the mass of water adsorbed per unit mass of corn grit bed and $t_{\text{ads_saturation}} = 3600$ s is an assumption for the time required for the corn grit bed to reach saturation. The splitters Spl5 and Spl6, following the corn grit adsorber, are modeled using the following set of equations:

$$F(\text{Ads1}, \text{Spl5}) = F(\text{Spl5}, \text{Mix4}) + F(\text{Spl5}, \text{Mix6}) + F(\text{Spl5}, \text{Mix7}) \quad (104)$$

$$x(j, \text{Spl5}, \text{Mix4}) = x(j, \text{Ads1}, \text{Spl5}) \quad j = \{\text{ethanol}, \text{water}\}$$

$$x(j, \text{Spl5}, \text{Mix6}) = x(j, \text{Ads1}, \text{Spl5}) \quad j = \{\text{ethanol}, \text{water}\}$$

$$x(j, \text{Spl5}, \text{Mix7}) = x(j, \text{Ads1}, \text{Spl5}) \quad j = \{\text{ethanol}, \text{water}\} \quad (105)$$

$$T(\text{Spl5}, \text{Mix4}) = T(\text{Ads1}, \text{Spl5})$$

$$T(\text{Spl5}, \text{Mix6}) = T(\text{Ads1}, \text{Spl5}) \quad (106)$$

$$T(\text{Spl5}, \text{Mix7}) = T(\text{Ads1}, \text{Spl5})$$

$$F(\text{Ads1}, \text{Spl6}) = F(\text{Spl6}, \text{Mix2}) + F(\text{Spl6}, \text{Snk3}) \quad (107)$$

$$x(j, \text{Spl6}, \text{Mix2}) = x(j, \text{Ads1}, \text{Spl6})$$

$$\forall j \in J, j \neq \{\text{carbon dioxide}, \text{oxygen}\}$$

$$x(j, \text{Spl6}, \text{Snk3}) = x(j, \text{Ads1}, \text{Spl6})$$

$$\forall j \in J, j \neq \{\text{carbon dioxide}, \text{oxygen}\} \quad (108)$$

$$T(\text{Spl6}, \text{Mix2}) = T(\text{Ads1}, \text{Spl6}) \quad (109)$$

$$T(\text{Spl6}, \text{Snk3}) = T(\text{Ads1}, \text{Spl6})$$

For the optimization, the flow $F(\text{Spl6}, \text{Mix2})$ is set to zero, implying no recycle of the corn grits saturated with water.

Table 5. Data for Adsorption on Corn Grits

Parameter	Value
$x_{\text{in,ads}}^{\text{ethanol,min}}$	0.77
$x_{\text{out,ads}}^{\text{ethanol,max}}$	0.977
$\text{ads_potential}_{\text{Ads1}}$ (kg water adsorbed/kg adsorbent)	0.075

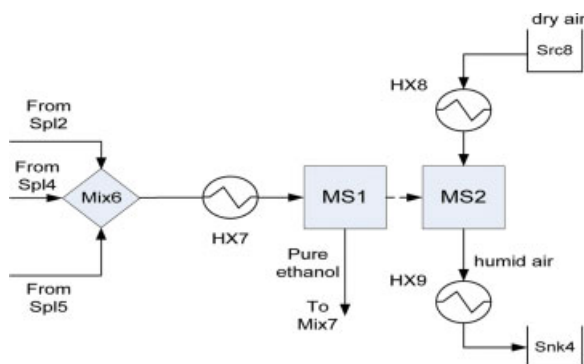


Figure 11. Molecular sieves operating in parallel.

[Color figure can be viewed in the online issue, which is available at www.interscience.wiley.com.]

Molecular sieves

Since a purity of 99.9% w/w of ethanol is required for fuel grade ethanol, molecular sieves are needed. Distillation at atmospheric pressure can only achieve the azeotropic concentration. A molecular sieve selectively adsorbs water from an ethanol–water mixture and 100% pure ethanol is obtained at the outlet. The molecular sieve is a bed of zeolite that operates in semicontinuous mode. The bed gets saturated with water after a period of time and is then regenerated. Hence, there are usually two sieves being operated in parallel—one being saturated with water (MS1), while the other (MS2) is being regenerated (or dehydrated). The molecular sieves switch every time the hydrating bed gets saturated with water.

For dehydrating the molecular sieve, we employ dry air because it is cheaper than alternatives such as steam. The schematic of the operation of the molecular sieves is shown in Figure 11. Adsorption takes place at 95°C and at atmospheric pressure. Heat exchanger HX7 brings the inlet stream from the mixer Mix6 up to 95°C. The heat of adsorption is assumed to be stored in the bed and provides the heat of desorption while regenerating.

The feed for the molecular sieves can come from the outlet of the corn grit bed adsorber or from the distillation columns, and these streams are mixed in mixer Mix6 to generate an inlet stream for the molecular sieve MS1. The energy and component mass balances for mixer Mix6 are as follows:

$$fc(j, \text{Mix6}, \text{HX7}) = fc(j, \text{Spl2}, \text{Mix6}) + fc(j, \text{Spl4}, \text{Mix6}) + fc(j, \text{Spl5}, \text{Mix6}) \quad j = \{\text{ethanol}, \text{water}\} \quad (110)$$

$$\begin{aligned} & \sum_{h=\{\text{ethanol}, \text{water}\}} (fc(h, \text{Spl2}, \text{Mix6}) \cdot Cp^{\text{vap}}(h)) \cdot (T(\text{Mix6}, \text{HX7}) - T(\text{Spl2}, \text{Mix6})) + \\ & \sum_{h=\{\text{ethanol}, \text{water}\}} (fc(h, \text{Spl4}, \text{Mix6}) \cdot Cp^{\text{vap}}(h)) \cdot (T(\text{Mix6}, \text{HX7}) - T(\text{Spl4}, \text{Mix6})) + \\ & \sum_{h=\{\text{ethanol}, \text{water}\}} (fc(h, \text{Spl5}, \text{Mix6}) \cdot Cp^{\text{vap}}(h)) \cdot (T(\text{Mix6}, \text{HX7}) - T(\text{Spl5}, \text{Mix6})) = 0 \quad (111) \end{aligned}$$

The water and ethanol balances for both the beds and the heat exchangers HX7 and HX8 are as follows:

$$fc(j, \text{HX7}, \text{MS1}) = fc(j, \text{Mix6}, \text{HX7}) \quad j = \{\text{ethanol}, \text{water}\} \quad (112)$$

$$fc(\text{water}, \text{MS1}, \text{Mix7}) = (1 - \text{rem}_{\text{MS}}) \cdot fc(\text{water}, \text{HX7}, \text{MS1}) \quad (113)$$

$$fc(\text{water}, \text{MS1}, \text{MS2}) = \text{rem}_{\text{MS}} \cdot fc(\text{water}, \text{HX7}, \text{MS1}) \quad (114)$$

$$fc(\text{ethanol}, \text{MS1}, \text{Mix7}) = fc(\text{ethanol}, \text{HX7}, \text{MS1}) \quad (115)$$

$$fc(\text{water}, \text{Src8}, \text{HX8}) = F^{\text{dryair}} \cdot sh_{\text{in}, \text{MS}} \quad (116)$$

$$fc(\text{water}, \text{HX8}, \text{MS2}) = F^{\text{dryair}} \cdot sh_{\text{in}, \text{MS}} \quad (117)$$

$$fc(\text{water}, \text{MS2}, \text{HX9}) = fc(\text{water}, \text{HX8}, \text{MS2}) + fc(\text{water}, \text{MS1}, \text{MS2}) \quad (118)$$

$$fc(\text{water}, \text{HX9}, \text{Snk4}) = fc(\text{water}, \text{MS2}, \text{HX9}) \quad (119)$$

Here, rem_{MS} is the fraction of water removed in the hydrating molecular sieve, F^{dryair} is the flow of dry air used to dehydrate the regenerating molecular sieve (kg/s), and $sh_{\text{in}, \text{MS}}$ is the specific humidity (kg water/kg dry air) in the inlet air stream to the regenerating molecular sieve. There is a lower bound on the fraction of ethanol entering the molecular sieve ($x_{\text{in}, \text{MS}}^{\text{ethanol}, \text{min}} = 0.8$). The heat input in the heat exchanger HX7 is given by:

$$Q(\text{HX7}) = \sum_{h=\{\text{ethanol}, \text{water}\}} fc(h, \text{Mix6}, \text{HX7}) \cdot Cp^{\text{vap}}(h) \cdot (T(\text{HX7}, \text{MS1}) - T(\text{Mix6}, \text{HX7})) \quad (120)$$

The size of the equipment is given by the quantity of water to be absorbed.

$$\text{size}_{\text{MS}} = \frac{\text{rem}_{\text{MS}} \cdot fc(\text{water}, \text{HX7}, \text{MS1})}{\text{ads_potential}_{\text{MS}}} \cdot t_{\text{MSsaturation}} \quad (121)$$

Here $\text{ads_potential}_{\text{MS}}$ is the mass of water adsorbed per unit mass of molecular sieve bed, size_{MS} is the mass of molecular sieve beds (in kg), $t_{\text{MSsaturation}}$ is the saturation time for a single molecular sieve bed (in s).

Air dehydrates the regenerating molecular sieve under vacuum. Heat exchanger HX8 heats air with an assumed relative humidity of 70% at 20°C to 95°C. The specific humidity of air can be calculated from the vapor pressure of the water in the air. The partial pressure of water is given by the relative humidity multiplied with the saturation pressure at the given temperature. The relative humidity (θ) of an air stream is defined as the partial pressure of water in that air stream (pp^{water}) divided by the saturation pressure of water at the temperature T of the air stream ($p_{\text{water}}^0(T)$).

$$\theta = \frac{pp^{\text{water}}}{p_{\text{water}}^0(T)}$$

The vapor pressure of water is calculated using the Antoine equation:

$$p_{\text{water}}^0(T) = \exp\left(A_{\text{water}} - \frac{B_{\text{water}}}{T + C_{\text{water}}}\right)$$

The specific humidity (sh) for an air stream is then defined as the mass of water per unit mass of dry air.

$$\text{sh} = \frac{\text{mass of condensable vapor}}{\text{mass of noncondensable gas}} = \frac{\text{mass of water}}{\text{mass of dry air}} = \text{specific humidity}$$

$$\text{sh} = \frac{MW_{\text{water}}}{MW_{\text{air}}} \cdot \frac{pp^{\text{water}}}{pp^{\text{air}}} = 0.622 \cdot \frac{pp^{\text{water}}}{P_{\text{tot}} - pp^{\text{water}}}$$

where MW_{water} and MW_{air} are the molecular weights of water and air, respectively, $pp^{\text{water}}/pp^{\text{air}}$ is the ratio of the partial pressure of water to the partial pressure of dry air in the given moisture laden air stream, and P_{tot} is the total pressure of the air stream.

The amount of water, which can be adsorbed by an air stream during the regeneration time, is the product of the flow of the dry air stream and the difference in the specific humidity of the air streams at the inlet and the outlet of the molecular sieve being regenerated. These are represented by the following equations:

$$p_{\text{water,in,MS}}^0 = \exp\left(A_{\text{water}} - \frac{B_{\text{water}}}{T(\text{Src8, HX8}) + C_{\text{water}}}\right) \quad (122)$$

$$p_{\text{water,out,MS}}^0 = \exp\left(A_{\text{water}} - \frac{B_{\text{water}}}{T(\text{MS2, HX9}) + C_{\text{water}}}\right) \quad (123)$$

$$p_{\text{water,rt}}^0 = \exp\left(A_{\text{water}} - \frac{B_{\text{water}}}{T(\text{HX9, Snk4}) + C_{\text{water}}}\right) \quad (124)$$

$$pp_{\text{in,MS}}^{\text{water}} = rh_{\text{in,MS}} \cdot p_{\text{water,in,MS}}^0 \quad (125)$$

$$pp_{\text{out,MS}}^{\text{water}} = rh_{\text{out,MS}} \cdot p_{\text{water,out,MS}}^0 \quad (126)$$

$$pp_{\text{rt}}^{\text{water}} = rh_{\text{rt}} \cdot p_{\text{water,rt}}^0 \quad (127)$$

$$\text{sh}_{\text{rt}} = \frac{(0.622) \cdot pp_{\text{rt}}^{\text{water}}}{P_{\text{MS}} - pp_{\text{rt}}^{\text{water}}} \quad (128)$$

$$\text{sh}_{\text{in,MS}} = \frac{(0.622) \cdot pp_{\text{in,MS}}^{\text{water}}}{P_{\text{MS}} - pp_{\text{in,MS}}^{\text{water}}} \quad (129)$$

$$\text{sh}_{\text{out,MS}} = \frac{(0.622) \cdot pp_{\text{out,MS}}^{\text{water}}}{P_{\text{MS}} - pp_{\text{out,MS}}^{\text{water}}} \quad (130)$$

$$F^{\text{dryair}} \cdot (\text{sh}_{\text{out,MS}} - \text{sh}_{\text{in,MS}}) = fc(\text{water, MS1, MS2}) \quad (131)$$

In the above, $p_{\text{water,in,MS}}^0$ and $p_{\text{water,out,MS}}^0$ are the vapor pressures of water in the cold inlet dry air to HX8 and the outlet air stream from the regenerating molecular sieve, respectively, while $p_{\text{water,rt}}^0$ is the vapor pressure of water at ambient temperature (25°C). $pp_{\text{in,MS}}^{\text{water}}$ and $pp_{\text{out,MS}}^{\text{water}}$ are the partial pressures of water in the inlet dry air to HX8, and the outlet air stream from the regenerating molecular sieve, respectively. $pp_{\text{rt}}^{\text{water}}$ stands for the partial pressure of water in an air stream at ambient temperature (25°C). The total pressure of the air stream entering the regenerating molecular sieve is given by P_{MS} . The terms $rh_{\text{in,MS}}$ and $rh_{\text{out,MS}}$ denote the relative humidity in the inlet air stream before HX8, and the outlet air

stream from the regenerating molecular sieve, respectively, while rh_{rt} is the relative humidity in an air stream at room temperature (25°C). sh_{rt} is the specific humidity in an air stream at ambient temperature (25°C), $\text{sh}_{\text{in,MS}}$ is the specific humidity in the inlet air stream to HX8, while $\text{sh}_{\text{out,MS}}$ is the specific humidity in the outlet air stream from the regenerating molecular sieve. The partial pressures are in mm Hg, while the relative humidities are in fractions.

The heat input in the heat exchanger HX8 is given by:

$$Q(\text{HX8}) = F^{\text{dryair}} \cdot (Cp^{\text{dryair}} + \text{sh}_{\text{in,MS}} \cdot Cp^{\text{vap}}(\text{water})) \cdot (T(\text{HX8, MS2}) - T(\text{Src8, HX8})) \quad (132)$$

where Cp^{dryair} is the specific heat capacity of dry air (in kJ/kg °C).

The hot moisture laden air at the outlet of the dehydrating molecular sieve is cooled to 25°C in heat exchanger HX9 and this stream leaves this unit saturated with water at 25°C. The heat loss in this case (including condensation of water) is given by:

$$Q(\text{HX9}) = F^{\text{dryair}} \cdot (Cp^{\text{dryair}} + \text{sh}_{\text{out,MS}} \cdot Cp^{\text{vap}}(\text{water})) \cdot (T(\text{HX9, Snk4}) - T(\text{MS2, HX9})) + F^{\text{dryair}} \cdot (\text{sh}_{\text{rt}} - \text{sh}_{\text{out,MS}}) \Delta H_v^0(\text{water}) \cdot \left(\frac{T_c(\text{water}) - T(\text{HX9, Snk4})}{T_c(\text{water}) - T_b(\text{water})} \right)^{n_{\text{watson}}} \quad (133)$$

The data used in the model for the molecular sieves is mostly assumed in the ranges taken from Jacques et al.⁹ and is summarized in Table 6.

Ethanol recovery

The purified ethanol vapor streams coming from the rectifier, the corn grit adsorber, and the molecular sieves mix in mixer Mix7, condense in condenser Cond1 at atmospheric pressure, and then cool to final product temperature. The condensation is assumed to take place at the boiling point of ethanol as the outlet stream is almost pure ethanol. This nearly pure ethanol stream is then cooled to room temperature in heat exchanger HX5 from where it goes to Snk5. The mass and energy balances in this part of the superstructure (see Figure 2) are as follows:

$$fc(j, \text{Mix7, Cond1}) = fc(j, \text{Spl4, Mix7}) + fc(j, \text{Spl5, Mix7}) + fc(j, \text{MS1, Mix7}) \quad j = \{\text{ethanol, water}\} \quad (134)$$

Table 6. Data for Molecular Sieves

Parameter	Value
$x_{\text{in,MS}}^{\text{ethanol,min}}$	0.8
$\text{ads_potential}_{\text{MS}}$ (kg water/kg adsorbent)	0.08
$t_{\text{MSsaturation}}$ (s)	360
$rh_{\text{in,MS}}$ (%)	70
$rh_{\text{out,MS}}$ (%)	70

$$\begin{aligned} & \sum_{h=\{\text{ethanol, water}\}} (fc(h, \text{spl4}, \text{Mix7}) \cdot Cp^{\text{vap}}(h)) \cdot (T(\text{Mix7}, \text{Cond1}) \\ & - T(\text{Spl4}, \text{Mix7})) + \sum_{h=\{\text{ethanol, water}\}} (fc(h, \text{spl5}, \text{Mix7}) \\ & \cdot Cp^{\text{vap}}(j)) \cdot (T(\text{Mix7}, \text{Cond1}) - T(\text{Spl5}, \text{Mix7})) \\ & + \sum_{h=\{\text{ethanol, water}\}} (fc(h, \text{MS1}, \text{Mix7}) \cdot Cp^{\text{vap}}(j)) \\ & \cdot (T(\text{Mix7}, \text{Cond1}) - T(\text{MS1}, \text{Mix7})) = 0 \quad (135) \end{aligned}$$

$$fc(j, \text{Cond1}, \text{HX5}) = fc(j, \text{Mix7}, \text{Cond1}) \quad j = \{\text{ethanol, water}\} \quad (136)$$

$$\begin{aligned} Q(\text{Cond1}) = & \sum_{h=\{\text{ethanol, water}\}} fc(h, \text{Mix7}, \text{Cond1}) \cdot \Delta H_v^0(h) \\ & \cdot \left(\frac{T_c(h) - T(\text{Mix7}, \text{Cond1})}{T_c(h) - T_b(h)} \right)^{n_{\text{watson}}} \quad (137) \end{aligned}$$

$$fc(j, \text{HX5}, \text{Snk5}) = fc(j, \text{Cond1}, \text{HX5}) \quad j = \{\text{ethanol, water}\} \quad (138)$$

$$\begin{aligned} Q(\text{HX5}) = & \sum_{h=\{\text{ethanol, water}\}} fc(h, \text{Cond1}, \text{HX5}) \cdot Cp(h) \\ & \cdot (T(\text{HX5}, \text{Snk5}) - T(\text{Cond1}, \text{HX5})) \quad (139) \end{aligned}$$

Solids Recovery from Fermentor As By-Product. Residual fermentation solids are recovered and processed for use in cattle feed. A mechanical press can be used for separating the solids from the liquid either before the beer column or after the beer column. We define two binary parameters that are set to values of 0 or 1, depending on the placement of the mechanical press and other process units for solids processing. The binary parameter $z_{\text{MecP-BC}}$ is set equal to 1 if solids separation takes place before the beer column, otherwise it is set to a value of 0. The section of the flowsheet corresponding to the solids separation before the beer column is shown in Figure 12a. The case when the solids separation takes place after the beer column is depicted in Figure 12b. If this is the case, the binary parameter $z_{\text{BC-MecP}}$ is set equal to a value of 1. Note that exactly one of the binary parameters $z_{\text{MecP-BC}}$ and $z_{\text{BC-MecP}}$ is set to a value of 1, while the other is set to 0.

In the solid-liquid separation section, we use a mechanical press and a protein recovery flotation unit. The components carbon dioxide and oxygen are not considered in the analysis for this section of the superstructure since they are assumed to have been vented out from the fermentor.

Mechanical press

There are two mechanical presses shown in the superstructure (Figure 2), MecP1 (placed before the beer column) and MecP2 (placed after the beer column). Only one of them exists in the actual flowsheet. To model the mechanical press, we assume a split fraction for water ($\text{split}_{\text{MecP1}}$ for MecP1, and $\text{split}_{\text{MecP2}}$ for MecP2) in the incoming feed that also decides how much of each component goes with the liquid and how much stays with the solids at the outlet of the mechanical press. The split fractions of the liquids and the solubles are coupled to the split fraction of water. It is

assumed that ethanol, glucose, maltose, urea, glycerol, the acids, and protein are completely soluble in water. Starch, cellulose, hemicellulose, ash, and cell mass are taken to be insoluble in water. For the oils, it is assumed that 60% of the oils stay with the solids and 40% are in the liquid phase. The solubility factors of all the relevant components in water $\text{sol}(j)$ are summarized in Table 7.

The percentage of liquid in the wet solids cake ($\text{moisture}_{\text{cake}}$) coming from the mechanical press is assumed to be at least 40%. The flow balances for the mechanical press are as follows:

$$\begin{aligned} & x(\text{ethanol}, \text{MecP1}, \text{Dry1}) \cdot z_{\text{MecP-BC}} + x(\text{water}, \text{MecP1}, \text{Dry1}) \\ & \cdot z_{\text{MecP-BC}} + x(\text{oil}, \text{MecP1}, \text{Dry1}) \cdot z_{\text{MecP-BC}} \\ & \geq \text{moisture}_{\text{cake}} \cdot z_{\text{MecP-BC}} \quad (140) \end{aligned}$$

$$\begin{aligned} & fc(j, \text{MecP1}, \text{Flot1}) = \text{split}_{\text{MecP1}} \cdot \text{sol}(j) \cdot fc(j, \text{Spl1}, \text{MecP1}) \\ & \quad \forall j \in J, \quad j \neq \{\text{carbon dioxide, oxygen}\} \quad (141) \end{aligned}$$

$$\begin{aligned} & fc(j, \text{MecP1}, \text{Dry1}) = (1 - \text{split}_{\text{MecP1}} \cdot \text{sol}(j)) \\ & \quad \cdot fc(j, \text{Spl1}, \text{MecP1}) \quad \forall j \in J, \\ & \quad j \neq \{\text{carbon dioxide, oxygen}\} \quad (142) \end{aligned}$$

$$\begin{aligned} & x(\text{ethanol}, \text{MecP2}, \text{Dry1}) \cdot z_{\text{BC-MecP}} + x(\text{water}, \text{MecP2}, \text{Dry1}) \\ & \cdot z_{\text{BC-MecP}} + x(\text{oil}, \text{MecP2}, \text{Dry1}) \cdot z_{\text{BC-MecP}} \\ & \geq \text{moisture}_{\text{cake}} \cdot z_{\text{BC-MecP}} \quad (143) \end{aligned}$$


$$\begin{aligned} & fc(j, \text{MecP2}, \text{Flot2}) = \text{split}_{\text{MecP2}} \cdot \text{sol}(j) \cdot fc(j, \text{Spl3}, \text{MecP2}) \\ & \quad \forall j \in J, \quad j \neq \{\text{carbon dioxide, oxygen}\} \quad (144) \end{aligned}$$

$$\begin{aligned} & fc(j, \text{MecP2}, \text{Dry1}) = (1 - \text{split}_{\text{MecP2}} \cdot \text{sol}(j)) \cdot fc(j, \text{Spl3}, \text{MecP2}) \\ & \quad \forall j \in J, \quad j \neq \{\text{carbon dioxide, oxygen}\} \quad (145) \end{aligned}$$


Flotation for Protein Recovery. The liquid outlet from the mechanical press is sent to a flotation unit to recover the proteins, which increase the cattle feed value on being mixed with it. One of the flotation units, Flot1 or Flot2, is chosen for the protein recovery depending on the placement of the mechanical press in the flowsheet. A fractional recovery of 0.95 (rec_{prot}) is assumed for the proteins in the flotation process. The proteins recovered from the flotation unit go to the dryer for further processing, while the liquid stream from this process goes to either the beer column or a wastewater treatment unit. It is assumed that a certain amount of water stays with the recovered protein on a unit mass basis ($\text{water}_{\text{prot}} = 0.1 \text{ kg/kg}$ of protein recovered). Only the proteins and a small amount of water are assumed to go from the flotation unit to the dryer, that is, we assume that the remaining components are not present in the stream between a flotation unit and the dryer. The following equations are used to model the flotation process:

$$\begin{aligned} & fc(\text{protein}, \text{Flot1}, \text{Dry1}) = \text{rec}_{\text{prot}} \cdot fc(\text{protein}, \text{MecP1}, \text{Flot1}) \\ & \quad \cdot z_{\text{MecP-BC}} \quad (146) \end{aligned}$$

$$\begin{aligned} & fc(\text{water}, \text{Flot1}, \text{Dry1}) = \text{water}_{\text{prot}} \cdot \text{rec}_{\text{prot}} \\ & \quad \cdot fc(\text{protein}, \text{MecP1}, \text{Flot1}) \cdot z_{\text{MecP-BC}} \quad (147) \end{aligned}$$

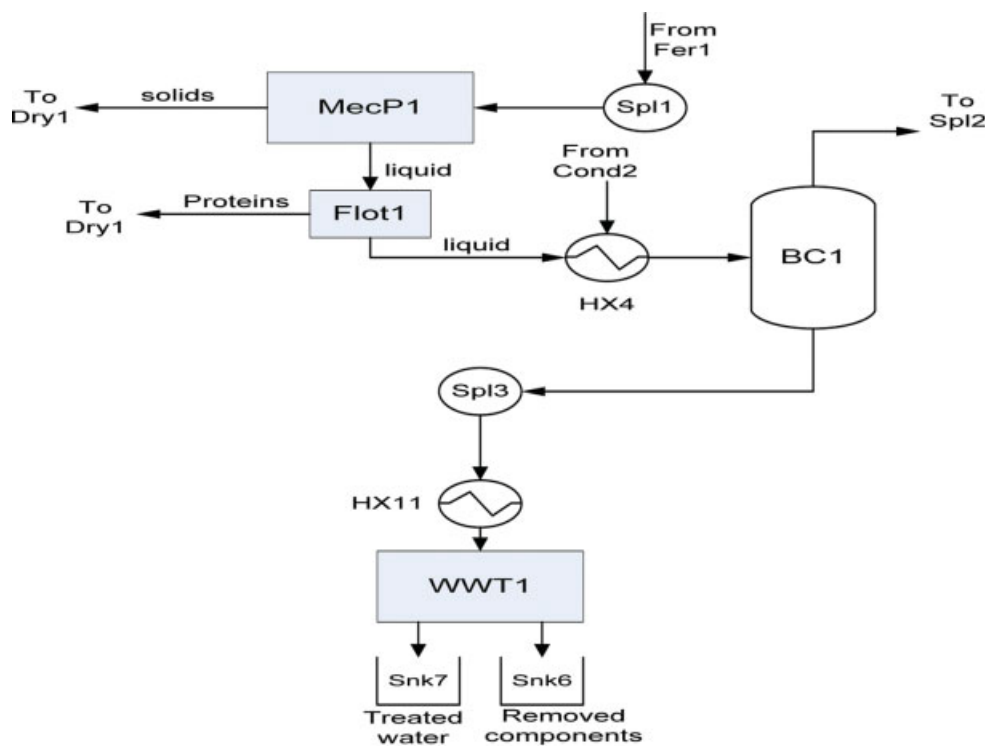

(a)

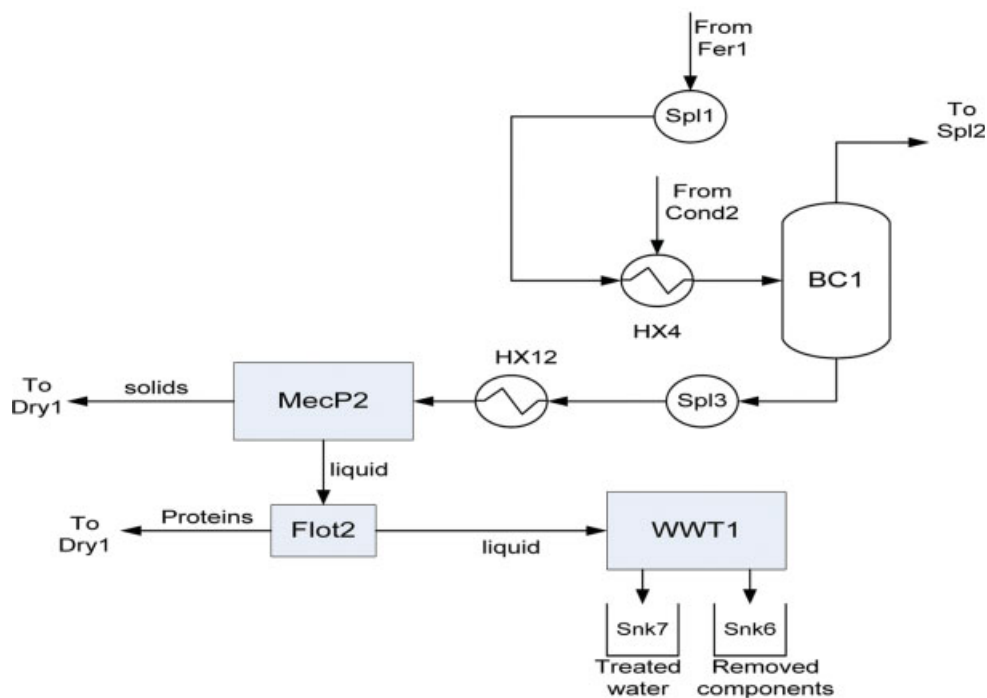

(b)

Figure 12. (a) Case when solids separation takes place before beer column. (b) Case when solids separation takes place after beer column.

[Color figure can be viewed in the online issue, which is available at www.interscience.wiley.com.]

Table 7. Solubility Factors for all Components Except Carbon Dioxide and Oxygen

Component	sol (<i>j</i>)
Starch	0
Glucose	1
Maltose	1
Protein	1
Ethanol	1
Glycerol	1
Succinic acid	1
Acetic acid	1
Lactic acid	1
Urea	1
Cell mass	0
Cellulose	0
Hemicellulose	0
Oil	0.4
Ash	0

$$fc(j, \text{Flot1}, \text{Dry1}) + fc(j, \text{Flot1}, \text{HX4}) = fc(j, \text{MecP1}, \text{Flot1}) \quad \forall j \in J, j \neq \{\text{carbon dioxide, oxygen}\} \quad (148)$$

$$fc(\text{protein}, \text{Flot2}, \text{Dry1}) = \text{rec_prot} \cdot fc(\text{protein}, \text{MecP2}, \text{Flot2}) \cdot z_{\text{BC-MecP}} \quad (149)$$

$$fc(\text{water}, \text{Flot2}, \text{Dry1}) = \text{water_prot} \cdot \text{rec_prot} \cdot fc(\text{protein}, \text{MecP2}, \text{Flot2}) \cdot z_{\text{BC-MecP}} \quad (150)$$

$$fc(j, \text{Flot2}, \text{Dry1}) + fc(j, \text{Flot2}, \text{WWT1}) = fc(j, \text{MecP2}, \text{Flot2}) \quad \forall j \in J, j \neq \{\text{carbon dioxide, oxygen}\} \quad (151)$$

Drying of solids

A dryer (Dry1) reduces the moisture level in the solids coming from the mechanical press and the flotation unit to less than 10% w/w for long term storage. These dried solids are known as Distillers Dried Grains with Solubles (DDGS). The model assumes a steam bundle dryer with a drying efficiency (η_{dryer}) of 0.85. The vapor from the dryer is assumed to consist of only ethanol and water and is sent to splitter Spl7, while the solids from the dryer continue on to heat exchanger HX10 for cooling to storage temperature. The schematic of the dryer is shown in Figure 13.

In the dryer model, the recovery of water (ξ_{water}) is defined as the fraction of water in the feed solids that goes to the vapor stream. The recovery of ethanol (ξ_{ethanol}) is related to the recovery of water by a simple flash calculation (see Biegler et al.⁸).

$$\xi_{\text{ethanol}} = \frac{\alpha_{\text{ethanol/water}} \cdot \xi_{\text{water}}}{1 + (\alpha_{\text{ethanol/water}} - 1) \cdot \xi_{\text{water}}} \quad (152)$$

The mass balances inside the dryer are as follows:

$$fc(j, \text{Dry1}, \text{HX10}) = fc(j, \text{MecP1}, \text{Dry1}) \cdot z_{\text{MecP-BC}} + fc(j, \text{MecP2}, \text{Dry1}) \cdot z_{\text{BC-MecP}} + fc(j, \text{Flot1}, \text{Dry1}) \cdot z_{\text{MecP-BC}} + fc(j, \text{Flot2}, \text{Dry1}) \cdot z_{\text{BC-MecP}} \quad \forall j \in J, j \neq \{\text{water, ethanol carbon dioxide, oxygen}\} \quad (153)$$

$$fc(\text{water}, \text{Dry1}, \text{Spl7}) = \xi_{\text{water}} \cdot (fc(\text{water}, \text{MecP1}, \text{Dry1}) \cdot z_{\text{MecP-BC}} + fc(\text{water}, \text{MecP2}, \text{Dry1}) \cdot z_{\text{BC-MecP}} + fc(\text{water}, \text{Flot1}, \text{Dry1}) \cdot z_{\text{MecP-BC}} + fc(\text{water}, \text{Flot2}, \text{Dry1}) \cdot z_{\text{BC-MecP}}) \quad (154)$$

$$fc(\text{ethanol}, \text{Dry1}, \text{Spl7}) = \xi_{\text{ethanol}} \cdot (fc(\text{ethanol}, \text{MecP1}, \text{Dry1}) \cdot z_{\text{MecP-BC}} + fc(\text{ethanol}, \text{MecP2}, \text{Dry1}) \cdot z_{\text{BC-MecP}} + fc(\text{ethanol}, \text{Flot1}, \text{Dry1}) \cdot z_{\text{MecP-BC}} + fc(\text{ethanol}, \text{Flot2}, \text{Dry1}) \cdot z_{\text{BC-MecP}}) \quad (155)$$

$$fc(\text{water}, \text{Dry1}, \text{HX10}) = (1 - \xi_{\text{water}}) \cdot (fc(\text{water}, \text{MecP1}, \text{Dry1}) \cdot z_{\text{MecP-BC}} + fc(\text{water}, \text{MecP2}, \text{Dry1}) \cdot z_{\text{BC-MecP}} + fc(\text{water}, \text{Flot1}, \text{Dry1}) \cdot z_{\text{MecP-BC}} + fc(\text{water}, \text{Flot2}, \text{Dry1}) \cdot z_{\text{BC-MecP}}) \quad (156)$$

$$fc(\text{ethanol}, \text{Dry1}, \text{HX10}) = (1 - \xi_{\text{ethanol}}) \cdot (fc(\text{ethanol}, \text{MecP1}, \text{Dry1}) \cdot z_{\text{MecP-BC}} + fc(\text{ethanol}, \text{MecP2}, \text{Dry1}) \cdot z_{\text{BC-MecP}} + fc(\text{ethanol}, \text{Flot1}, \text{Dry1}) \cdot z_{\text{MecP-BC}} + fc(\text{ethanol}, \text{Flot2}, \text{Dry1}) \cdot z_{\text{BC-MecP}}) \quad (157)$$

The heat balance considers the evaporation enthalpies of water and ethanol as well as the sensible heat required to bring the inlet streams to the drying temperature of 100°C. The following heat balance yields the dryer heat duty:

$$Q(\text{Dry1})\eta_{\text{dryer}} = \sum_{h=\{\text{ethanol, water}\}} fc(h, \text{Dry1}, \text{Spl7}) \Delta H_v^0(h) \cdot \left(\frac{T_c(h) - T(\text{Dry1}, \text{Spl7})}{T_c(h) - T_b(h)} \right)^{\eta_{\text{watson}}} + \sum_{j \neq \{\text{carbon dioxide, oxygen}\}} fc(j, \text{MecP1}, \text{Dry1}) \cdot z_{\text{MecP-BC}} \cdot Cp(j) \cdot (T(\text{Dry1}, \text{HX10}) - T(\text{MecP1}, \text{Dry1})) + \sum_{j \neq \{\text{carbon dioxide, oxygen}\}} fc(j, \text{MecP2}, \text{Dry1}) \cdot z_{\text{BC-MecP}} \cdot Cp(j) \cdot (T(\text{Dry1}, \text{HX10}) - T(\text{MecP2}, \text{Dry1})) + \sum_{j \neq \{\text{carbon dioxide, oxygen}\}} fc(j, \text{Flot1}, \text{Dry1}) \cdot z_{\text{MecP-BC}} \cdot Cp(j) \cdot (T(\text{Dry1}, \text{HX10}) - T(\text{Flot1}, \text{Dry1})) + \sum_{j \neq \{\text{carbon dioxide, oxygen}\}} fc(j, \text{Flot2}, \text{Dry1}) \cdot z_{\text{BC-MecP}} \cdot Cp(j) \cdot (T(\text{Dry1}, \text{HX10}) - T(\text{Flot2}, \text{Dry1})) \quad (158)$$

The vapor coming from the dryer is split in the splitter Spl7 and is sent to a sink Snk9 and to a condenser Cond2. The vapor going into sink Snk9 is sent to a thermal oxidizer for

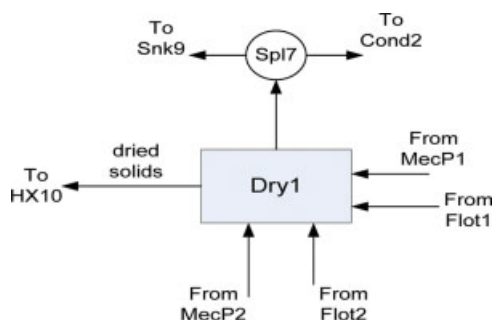


Figure 13. Schematic of dryer for drying solids.

[Color figure can be viewed in the online issue, which is available at www.interscience.wiley.com.]

volatile organic compounds removal. We specify bounds on the level of ethanol that can be present in the stream going into Snk9. The following equations describe splitter Spl7,

$$F(\text{Dry1}, \text{Spl7}) = F(\text{Spl7}, \text{Cond2}) + F(\text{Spl7}, \text{Snk9}) \quad (159)$$

$$\begin{aligned} x(j, \text{Spl7}, \text{Cond2}) &= x(j, \text{Dry1}, \text{Spl7}) \quad j = \{\text{ethanol}, \text{water}\} \\ x(j, \text{Spl7}, \text{Snk9}) &= x(j, \text{Dry1}, \text{Spl7}) \quad j = \{\text{ethanol}, \text{water}\} \end{aligned} \quad (160)$$

$$\begin{aligned} T(\text{Spl7}, \text{Cond2}) &= T(\text{Dry1}, \text{Spl7}) \\ T(\text{Spl7}, \text{Snk9}) &= T(\text{Dry1}, \text{Spl7}) \end{aligned} \quad (161)$$

Wastewater treatment

The wastewater stream coming from the bottom of the beer column contains many solubles and must be treated in a wastewater treatment unit (WWT1) before it can be discharged into the environment. The organic solubles are anaerobically digested and biogas can be obtained from this process. However, the production of biogas is not considered in the model. In the wastewater treatment process (see Figure 14), the feed to the unit comes either from heat exchanger (HX11) or from the flotation unit (Flot2). The treatment unit produces treated water that goes into sink Snk7 and the removed components that are collected in Snk6.

The treatment unit is modeled simply using component removal fractions ($\text{rem}_{\text{WWT1}}(j) \forall j$). The removal fraction for all the components except water is assumed to be 0.95. The parameter $\text{rem}_{\text{WWT1}}(\text{water})$ is assigned a numerical value of 0. The component mass balances depend on the removal fractions as shown below:

$$\begin{aligned} fc(j, \text{WWT1}, \text{Snk7}) &= (1 - \text{rem}_{\text{WWT1}}(j)) \\ &\cdot (fc(j, \text{HX11}, \text{WWT1}) \cdot y_{\text{MecP-BC}} + fc(j, \text{Flot2}, \text{WWT1}) \\ &\cdot y_{\text{BC-MecP}}) \quad \forall j \in J, \quad j \neq \{\text{carbon dioxide}, \text{oxygen}\} \end{aligned} \quad (162)$$

$$\begin{aligned} fc(j, \text{WWT1}, \text{Snk6}) &= \text{rem}_{\text{WWT1}}(j) \cdot (fc(j, \text{HX11}, \text{WWT1}) \\ &\cdot y_{\text{MecP-BC}} + fc(j, \text{Flot2}, \text{WWT1}) \cdot y_{\text{BC-MecP}}) \\ &\quad \forall j \in J, \quad j \neq \{\text{carbon dioxide}, \text{oxygen}\} \end{aligned} \quad (163)$$

Condenser for dryer vapors

The vapor coming from the dryer is assumed to be only ethanol and water. This stream is split in the splitter Spl7

and a part of it is sent to a total condenser Cond2 that condenses the incoming vapor feed into a saturated liquid. The liquid then passes through heat exchanger HX4. The pressure inside the condenser (P_{Cond2}) is taken to be 760 mm Hg (or 1 atm). The following equations describe condenser Cond2:

$$fc(j, \text{Cond2}, \text{HX4}) = fc(j, \text{Spl7}, \text{Cond2}) \quad j = \{\text{ethanol}, \text{water}\} \quad (164)$$

$$\begin{aligned} mf(j, \text{Cond2}, \text{HX4}) &\cdot \sum_{h=\{\text{ethanol}, \text{water}\}} \frac{x(h, \text{Cond2}, \text{HX4})}{\text{MW}_h} \\ &= \frac{x(j, \text{Cond2}, \text{HX4})}{\text{MW}_j} \quad j = \{\text{ethanol}, \text{water}\} \end{aligned} \quad (165)$$

$$\begin{aligned} P_{\text{Cond2}} &= (mf(\text{water}, \text{Cond2}, \text{HX4}) \\ &+ \alpha_{\text{ethanol/water}} \cdot mf(\text{ethanol}, \text{Cond2}, \text{HX4})) \\ &\cdot \exp\left(A_{\text{water}} - \frac{B_{\text{water}}}{T(\text{Cond2}, \text{HX4}) + C_{\text{water}}}\right) \end{aligned} \quad (166)$$

$$\begin{aligned} Q(\text{Cond2}) &= - \sum_{h=\{\text{ethanol}, \text{water}\}} fc(h, \text{Cond2}, \text{HX4}) \\ &\cdot \left[Cp^{\text{vap}}(h) \cdot (T(\text{Spl7}, \text{Cond2}) - T(\text{Cond2}, \text{HX4})) \right. \\ &\quad \left. + \Delta H_v^0(h) \left(\frac{T_c(h) - T(\text{Cond2}, \text{HX4})}{T_c(h) - T_b(h)} \right)^{n_{\text{watson}}} \right] \end{aligned} \quad (167)$$

In these equations, $mf(j, \text{Cond2}, \text{HX4})$ denotes the mole fraction of component j in the liquid stream leaving the condenser Cond2, which is the same as the mole fraction of the component in the vapor inside the condenser.

Heat exchangers in solids processing section

There are three heat exchangers present in the solids processing section. Heat exchangers HX11 and HX12 cool down the bottoms product from the beer column. Only one of them can exist in a given flowsheet. Heat exchanger HX10 cools the dried solids coming out of the dryer to storage temperature. The following equations describe the heat exchangers in this subsection of the superstructure (see Figure 2).

$$\begin{aligned} fc(j, \text{HX10}, \text{Snk8}) &= fc(j, \text{Dry1}, \text{HX10}) \\ \forall j \in J, \quad j &\neq \{\text{carbon dioxide}, \text{oxygen}\} \end{aligned} \quad (168)$$

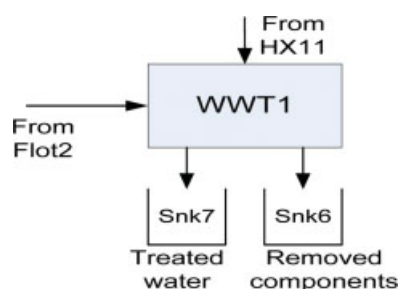


Figure 14. Wastewater treatment.

[Color figure can be viewed in the online issue, which is available at www.interscience.wiley.com.]

$$Q(\text{HX10}) = \sum_{j \neq \{\text{carbon dioxide, oxygen}\}} fc(j, \text{Dry1}, \text{HX10}) \cdot Cp(j) \cdot (T(\text{HX10}, \text{Snk8}) - T(\text{Dry1}, \text{HX10})) \quad (169)$$

$$fc(j, \text{HX12}, \text{MecP2}) = fc(j, \text{Spl3}, \text{HX12}) \quad \forall j \in J, j \neq \{\text{carbon dioxide, oxygen}\} \quad (170)$$

$$Q(\text{HX12}) = \sum_{j \neq \{\text{carbon dioxide, oxygen}\}} fc(j, \text{Spl3}, \text{MecP2}) \cdot Cp(j) \cdot (T(\text{HX12}, \text{MecP2}) - T(\text{Spl3}, \text{HX12})) \quad (171)$$

$$fc(j, \text{HX11}, \text{WWT1}) = fc(j, \text{Spl3}, \text{HX11}) \quad \forall j \in J, j \neq \{\text{carbon dioxide, oxygen}\} \quad (172)$$

$$Q(\text{HX11}) = \sum_{j \neq \{\text{carbon dioxide, oxygen}\}} fc(j \cdot \text{Spl3} \cdot \text{HX11}) \cdot Cp(j) \cdot (T(\text{HX11}, \text{WWT1}) - T(\text{Spl3}, \text{HX11})) \quad (173)$$

Objective Function. Once all the constraints have been formulated and the variables bounds are set, we seek a design that minimizes the sum of the positive energy input in the network:

$$\begin{aligned} \min f = & Q(\text{HX1}) + Q(\text{HX3}) + Q(\text{HX4}) + Q(\text{HX6}) \\ & + Q(\text{HX7}) + Q(\text{HX8}) + Q(\text{Jet1}) + Q(\text{Dry1}) \\ & + Q_{\text{-reb}}(\text{BC1}) + Q_{\text{-reb}}(\text{ReC1}) \end{aligned} \quad (174)$$

This objective is chosen since most of the utility cost in the plant is due to steam consumption that is used in order to provide heat to some of the units in the plant. We obtain two NLP models (P1) and (P2) that correspond to the mechanical press placement options. Model (P1) comprises constraints (1)–(174), where the binary parameter $z_{\text{MecP-BC}}$ is set to 1 and $z_{\text{BC-MecP}}$ is set to 0. Model (P2) includes Eqs. 1–174, where the binary parameter $z_{\text{BC-MecP}}$ is set to 1 and $z_{\text{MecP-BC}}$ is set to 0. We solve models (P1) and (P2) using GAMS/CONOPT 3.0 and choose the design with the lower objective value. The solution of this optimization is used for further reducing the energy input into the plant using energy reduction techniques as described in the following section.

Alternatives for Energy Reduction

Heat Integration

Heat integration among the hot and cold streams across the whole plant allows considerable savings in the utilities (steam, cooling water) and consequently in the operating costs (Linnhoff et al.¹⁵; Biegler et al.⁸). To carry out the heat integration, the software *SYNHEAT* (<http://newton.cheme.cmu.edu/interfaces>) was used. This software is based on the work by Yee and Grossmann,⁷ and uses an MINLP model that determines a minimum cost network, where the heat exchanger areas and the stream matches are optimized simultaneously, given the heat loads in different streams and the inlet and outlet temperatures of these streams.

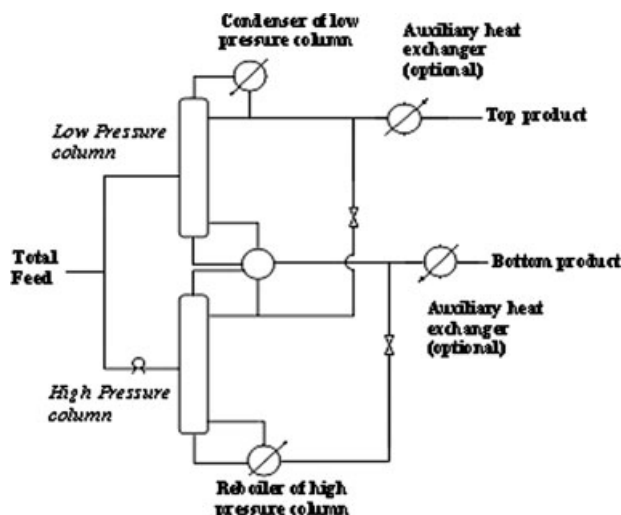


Figure 15. Multieffect distillation column with two columns.

Multieffect distillation columns

Distillation columns are some of the most energy intensive equipment in the chemical industry. Multieffect distillation column systems can reduce significantly steam and cooling water consumption (see Katzen et al.¹⁶; Biegler et al.⁸). In these systems, a distillation column is replaced by two or more columns. By operating the columns at different pressures, the condenser of a higher pressure column serves as the reboiler of a lower pressure column. The inlet feed is split between all the columns, and their top and bottoms products are mixed together to obtain the final products with the desired flowrates and compositions. A schematic of a double effect distillation column is shown in Figure 15.

In this work, we considered multieffect columns with only two or three columns. For determining the fraction of feed to be sent to each column and the operating pressures of the columns, we set up an optimization model using Microsoft[®] Excel. The objective is to minimize the total annualized cost for the multieffect columns

$$\begin{aligned} \text{cost} = & \text{annualized equipment cost} + \text{annual steam cost} \\ & + \text{annual cooling water cost} \end{aligned}$$

subject to the restriction that product composition at the top and bottom of each column must match that obtained for a single distillation column from the results of the previous optimization. This is due to the fact that the superstructure has already optimized the heat loads and this new configuration tries to improve the results. Hence, additional heat exchangers as well as pumps and compressor, may be required to meet the initial conditions, whose investment cost and utility cost would be included in the total cost objective. Also, isenthalpic expansion valves may be needed for some streams so as to match the pressure of the low pressure columns.

Results

The proposed energy optimization model does not consider feedstock planting, harvesting, handling, or any sort of trans-

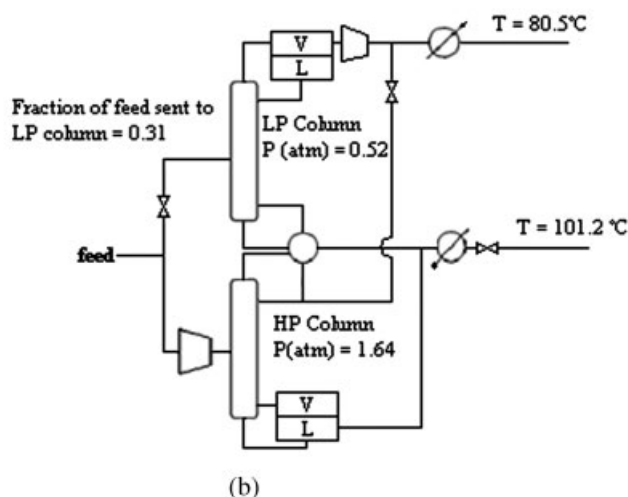
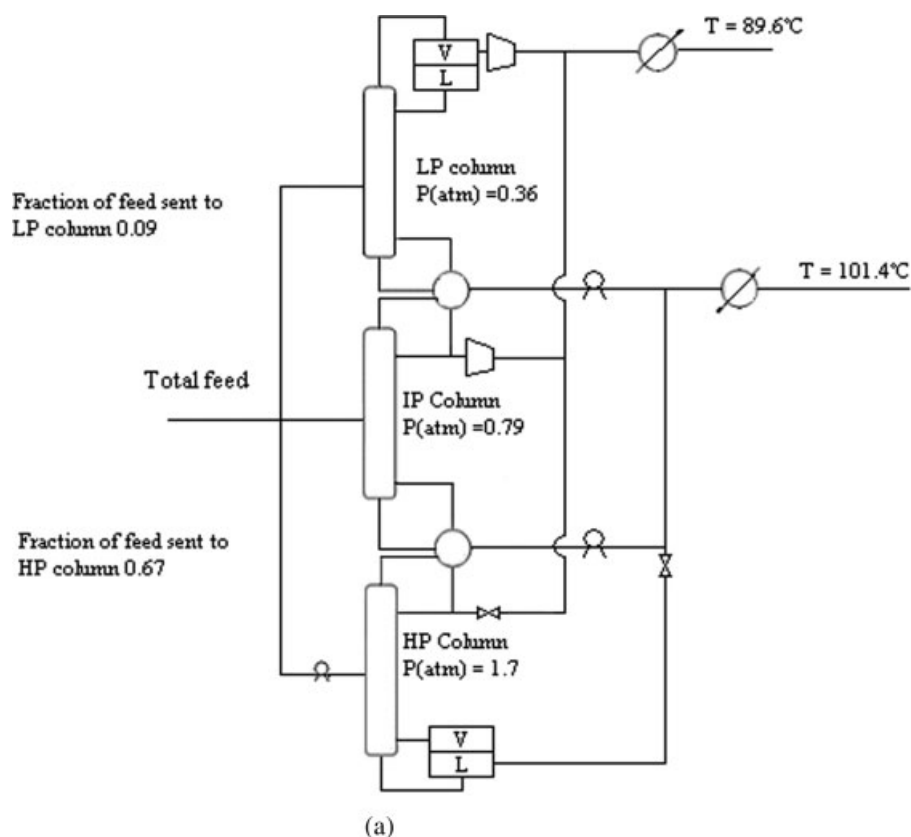


Figure 17. (a) Multieffect system for the beer column. (b) Multieffect system for the rectification column.

\$1.24/gal ethanol produced. Comparing the energy values with the energy values reported in literature (Wang et al.¹⁷; Shapouri et al.¹⁸), we can see that this represents a considerable reduction in the energy consumed per gallon of ethanol produced.

Conclusions

In this work, we have proposed a limited superstructure optimization approach for designing optimal corn-based ethanol plants. A mathematical programming model consisting of

mass and energy balances, thermodynamic equilibrium equations, and design constraints is developed to represent the various operations in a bioethanol plant. The optimization of this model leads to a basic optimized design of such a plant. The results from this optimization were then used to incorporate structural enhancements in the distillation columns and heat integration inside the plant to reduce the overall steam consumption in the plant. We have applied the proposed model optimization and heat integration procedure to a case study of a dry-grind corn to fuel ethanol plant producing about 60 M gal per year. As was shown by the results, sig-

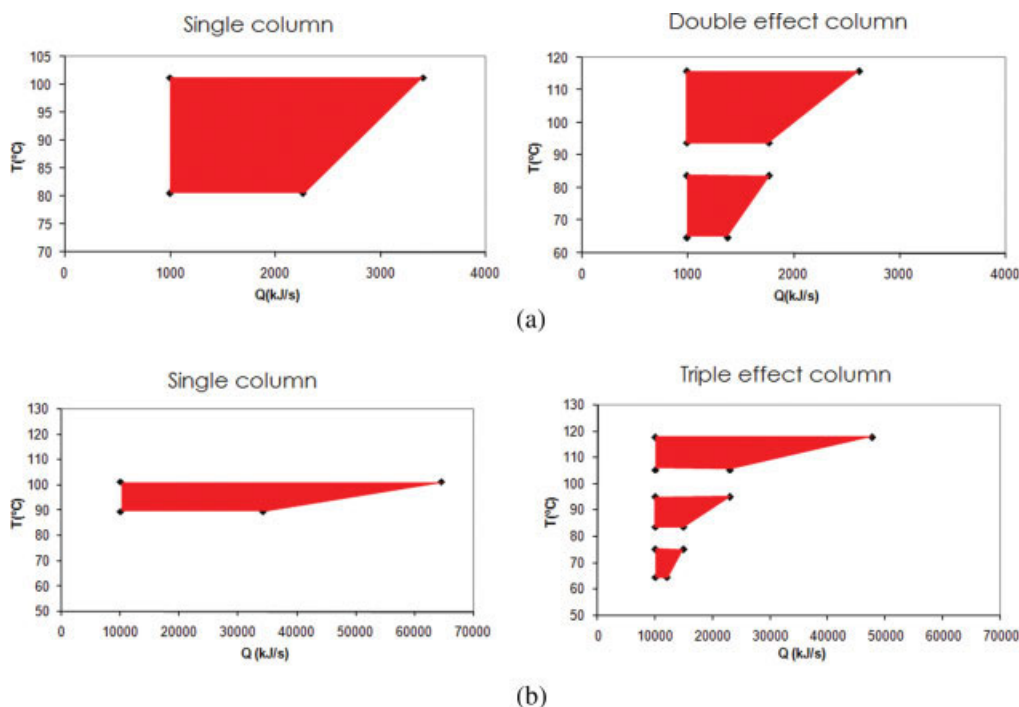


Figure 18. (a) T–Q diagrams for single column and multieffect beer column designs. (b) T–Q diagrams for single column and multieffect rectification column.

[Color figure can be viewed in the online issue, which is available at www.interscience.wiley.com.]

nificant reductions are possible in the energy input in the production of ethanol and in the manufacturing costs (from 79,003 to 35,880 kW, and from \$1.34/gal to \$1.24/gal). Further improvements should be possible by pursuing a simultaneous optimization strategy, where the use of multieffect columns and heat integration is combined with the main model that is then optimized. Also, other alternatives such as the use of pervaporation to separate water and ethanol should be examined. Finally, more detailed simulation studies must be performed in order to validate the results presented in this

article. Despite some of the limitations, the results indicate that the dry-grind ethanol production process can be made more energy efficient, thereby making it more attractive as a sustainable alternative for liquid fuels.

Acknowledgments

The authors gratefully acknowledge financial support from the National Science Foundation under Grant CTS-0521769, the industrial members of the Center for Advanced Process Decision-making at Carnegie Mellon University, and from the Ministry of Education and Science of Spain, F.P.U. fellowship.

Notation

Indices

- Ads = corn grit bed adsorber
- BC = beer column
- Col = column
- Cond = condenser
- d = distillation column
- Dry = dryer
- Fer = fermentor
- Flot = flotation unit
- Grind = grinding unit
- h = selected components {ethanol, water}
- HX = heat exchanger
- j = component
- Jet = jet cooker
- Liq = liquefaction unit
- MecP = mechanical press
- Mix = mixer
- MS = molecular sieve
- p = fermentation product
- Premix = premixing tank

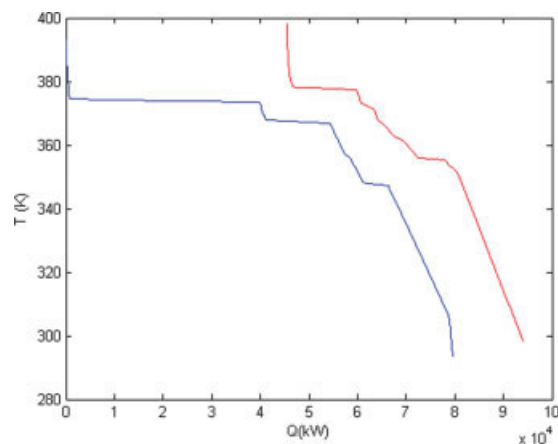


Figure 19. T–Q curve after incorporation of multieffect columns.

[Color figure can be viewed in the online issue, which is available at www.interscience.wiley.com.]

Rec = rectification column
 Sac = saccharification unit
 Snk = sink
 Spl = splitter
 Src = source
 unit1, unit2 = process units in the system
 Wash = washing unit
 WWT = wastewater treatment unit

Sets

J = set of components
 P = set of selected products from fermentation

Parameters

ads_potential_{Ads1} = mass of water adsorbed per unit mass of corn grit bed
 ads_potential_{MS} = mass of water adsorbed per unit mass of molecular sieve bed
 A_{ethanol} = Antoine coefficient for ethanol
 A_{water} = Antoine coefficient for water
 B_{ethanol} = Antoine coefficient for ethanol
 B_{water} = Antoine coefficient for water
 conv_{Star,Malt} = conversion factor for starch to maltose reaction
 conv_{Malt,Gluc} = conversion factor for maltose to glucose reaction
 conv(p) = conversion of glucose to product p on a mass basis after maximum time of fermentation
 C_{ethanol} = Antoine coefficient for ethanol
 C_{water} = Antoine coefficient for water
 $C_p(j)$ = specific heat capacity of component j
 $C_{p,\text{dryair}}$ = specific heat capacity of dry air
 $C_p^{\text{vap}}(j)$ = specific heat capacity of component j in vapor form
 Enz_{Liq} = amount of enzyme required per kg of corn mash liquefied
 Enz_{Sac} = amount of enzyme required per kg of corn mash saccharified
 frac_{wash} = fraction of washing water that stays with the corn
 min_{wash} = minimum amount of washing water required per kg of corn
 moisture_{cake} = minimum fraction of liquid present in wet cake
 MW _{j} = molecular weight of component j
 n_{watson} = exponent used in Watson correlation
 P_{Cond2} = pressure inside condenser Cond2
 P_d = pressure at inlet to distillation column d
 rec_prot = fractional recovery of proteins in the flotation units
 rem_{WWT1}(j) = fraction of component j removed in the wastewater treatment
 R_d = reflux ratio in distillation column d
 Solids_{max} = maximum mass fraction of solids allowed in the fermentor
 sol(j) = solubility factor for component j in water
 t_ads_{saturation} = time for corn grit bed to get saturated
 t_MS_{saturation} = time for molecular sieve bed to get saturated
 t_fer_max = maximum time for fermentation
 $T_b(j)$ = normal boiling temperature of component j
 $T_c(j)$ = critical temperature of component j
 T_{cooldown} = ambient temperature (25°C)
 water_prot = amount of water that stays with the proteins at the outlet of the flotation process
 Wa_{abun} = factor for considering excess water in corn slurry
 Wa_{Star,Malt} = amount of water required in liquefaction process for every kg of starch
 Wa_{Malt,Gluc} = amount of water required in saccharification process for every kg of maltose
 $x_0(j)$ = fraction of component j in the corn feed
 $x_{\text{ads}}(j)$ = fraction of component j in corn grit adsorber bed
 $x_{\text{in,ads}}^{\text{ethanol,min}}$ = minimum fraction of ethanol in the inlet to the corn grit adsorber
 $x_{\text{out,ads}}^{\text{ethanol,max}}$ = maximum fraction of ethanol in the outlet from the corn grit adsorber
 $x_{\text{in,MS}}^{\text{ethanol,min}}$ = minimum fraction of ethanol in the inlet to the adsorbing molecular sieve

$z_{\text{BC-MecP}}$ = equal to 1 if mechanical press is placed after the beer column otherwise 0
 $z_{\text{MecP-BC}}$ = equal to 1 if mechanical press is placed before the beer column otherwise 0
 $\alpha_{\text{ethanol/water}}$ = relative volatility of ethanol with respect to water
 $\Delta H_v^0(j)$ = standard heat of vaporization of component j at its normal boiling point
 ΔP_d = pressure drop in distillation column d
 $\zeta_{\text{glucose,p}}$ = fraction of glucose that gets converted to product p after t_fer_max h of fermentation time
 η_{dryer} = dryer efficiency

Continuous variables

conv_t(p) = conversion of glucose to product p on a mass basis after actual time of fermentation
 $fc(j, \text{unit1}, \text{unit2})$ = flow of component j in stream from unit1 to unit2 in the system
 $F(\text{unit1}, \text{unit2})$ = total flow in stream from unit1 to unit2 in the system
 F^{dryair} = flow of dry air used to dehydrate regenerating molecular sieve
 $lf_d(j)$ = mole fraction of component j in condensed liquid inside condenser of distillation column d
 $mf(j, \text{unit1}, \text{unit2})$ = mole fraction of component j in stream from unit1 to unit2 in the system
 $m_{\text{in}}(j)$ = mass of component j entering fermentor
 $m_{\text{out}}(j)$ = mass of component j exiting fermentor
 $p_{\text{water,in,MS}}^0$ = vapor pressure of water in the cold inlet dry air to HX8
 $p_{\text{water,out,MS}}^0$ = vapor pressure of water in the outlet air stream from the regenerating molecular sieve
 $p_{\text{water,rt}}^0$ = vapor pressure of water at room temperature (25°C)
 $pp_{\text{in,MS}}^{\text{water}}$ = partial pressure of water in the inlet dry air to HX8
 $pp_{\text{out,MS}}^{\text{water}}$ = partial pressure of water in the outlet air stream from the regenerating molecular sieve
 $pp_{\text{rt}}^{\text{water}}$ = partial pressure of water in air stream at room temperature (25°C)
 P_{MS} = total pressure in air stream entering and leaving regenerating molecular sieve
 $Q(\text{unit1})$ = heat produced or consumed in unit1
 $Q_{\text{cond}}(j)$ = heat load of condenser of distillation column d
 $Q_{\text{reb}}(d)$ = heat load of reboiler of distillation column d
 $\text{rec}_{\text{ethanol}}(d)$ = recovery of ethanol in distillation column d
 $\text{rec}_{\text{water}}(d)$ = recovery of water in distillation column d
 rem_{ads} = fraction of water from the incoming stream removed in the corn grit adsorber
 rem_{MS} = fraction of incoming water removed in the molecular sieve
 $\text{rh}_{\text{in,MS}}$ = relative humidity in the inlet air stream to HX8
 $\text{rh}_{\text{out,MS}}$ = relative humidity in the outlet air stream from the regenerating molecular sieve
 rh_{rt} = relative humidity in an air stream at room temperature (25°C)
 $\text{sh}_{\text{in,MS}}$ = specific humidity in the inlet air stream to HX8
 $\text{sh}_{\text{out,MS}}$ = specific humidity in the outlet air stream from the regenerating molecular sieve
 sh_{rt} = specific humidity in an air stream at room temperature (25°C)
 size_{Ads1} = mass of corn grit adsorption bed
 size_{MS} = mass of molecular sieve bed
 split_{MecP1} = fraction of water from the incoming stream that goes into the liquid stream outlet of mechanical press MecP1
 split_{MecP2} = fraction of water from the incoming stream that goes into the liquid stream outlet of mechanical press MecP2
 t_cyc = cycle time for fermentation
 t_fer = actual time of fermentation
 t_lag = lag phase time during fermentation
 $T(\text{unit1}, \text{unit2})$ = temperature of stream between unit1 and unit2 in the system
 $x(j, \text{unit1}, \text{unit2})$ = mass fraction of component j in stream between unit1 and unit2 in the system

$x_{f,d}(j)$ = mass fraction of component j in condensed liquid inside condenser of distillation column d
 ζ_{ethanol} = fraction of incoming ethanol being vaporized in the dryer
 ζ_{water} = fraction of incoming water being vaporized in the dryer

Literature Cited

- Singh V. Past, present and future of dry grind corn process. 2006 Bioenergy Symposium, Purdue University, West Lafayette, IN, 2006.
- IFQC. Setting quality standard for fuel ethanol. *DEH Ethanol Standard 18/2004 Report*. International Fuel Quality Center, Hart Downstream Energy Services, Houston, TX, 2004.
- Pimentel D. Ethanol fuels: energy security, economics, and the environment. *J Agric Environ Ethics*. 1991;4:1–13.
- Shapouri H, Duffield JA, Graboski MS. *Estimating the net energy balance of corn ethanol*. Agricultural Economic Report No. 721, U.S. Department of Agriculture, Economic Research Service, Office of Energy, Washington, DC, 1995.
- Grossmann IE, Caballero JA, Yeomans H. Mathematical programming approaches to the synthesis of chemical process systems. *Kor J Chem Eng*. 1999;16:407–426.
- Ladisch MR, Voloch M, Hong J, Blenkowski P, Tsao GT. Cornmeal adsorber for dehydrating ethanol vapors. *Ind Eng Chem Process Des Dev*. 1984;23:437–443.
- Yee TF, Grossmann IE. Simultaneous optimization models for heat integration. II. Heat exchanger network synthesis. *Comp Chem Eng*. 1990;14:1165–1184.
- Biegler LT, Grossmann IE, Westerberg AW. *Systematic Methods Of Chemical Process Design*. New Jersey: Prentice Hall, 1999.
- Jacques K, Lyons TP, Kelsall DR. *The Alcohol Textbook*, 3rd ed. Nottingham, United Kingdom: Nottingham University Press, 1999.
- Reid RC, Prausnitz JM, Poling BE. *The Properties of Gases and Liquids*. New York: McGraw-Hill, 1987.
- Alper H, Moxley J, Nevoigt E, Fink GR, Stephanopoulos G. Engineering yeast transcription machinery for improved ethanol tolerance and production. *Science*. 2006;314:1565–1568.
- Ikegami T, Kitamoto D, Negishi H, Haraya K, Hiroyuki M, Nitanai Y, Koura N, Sano T, Yanagishita H. Drastic improvement of bioethanol recovery using a pervaporation separation technique employing a silicone rubber-coated silicate membrane. *J Chem Tech Bio-technol*. 2003;78:1006–1010.
- Beery KE, Ladisch MR. Adsorption of water from liquid-phase ethanol-water mixtures at room temperature using starch-based adsorbents. *Ind Eng Chem Res*. 2001;40:2112–2115.
- Ladisch MR, Dyck K. Dehydration of ethanol: new approach gives positive energy balance. *Science*. 1979;205:898–900.
- Linhoff B, Townsend DW, Boland D, Hewitt GF, Thomas BEA, Guy AR, Marsland RH. *User Guide on Process Integration for the Efficient Use of Energy*. Rugby, England: Institution of Chemical Engineers, 1982.
- Katzen R, Ackley WR, Moon GD, Messick JR, Bruch BF, Kavpisch DF. Low energy distillation systems. 180th National Meeting of the American Chemical Society, Las Vegas, NV, 1980.
- Wang M, Saricks C, Santini D. Effects of fuel ethanol use on fuel-cycle energy and greenhouse gas emissions. U.S. Department of Energy, Argonne National Laboratory, Center for Transportation Research, Argonne, IL, 1999.
- Shapouri H, Duffield JA, Wang M. The energy balance of corn ethanol: an update. Agricultural Economic Report No. 813. U.S. Department of Agriculture, Office of the Chief Economist, Office of Energy Policy and New Uses, Washington, DC, 2002.

Appendix

Table A1. Corn Kernel Composition on a Wet Basis

Component (j)	Mass fraction $x_0(j)$
Starch	0.6185
Glucose	0.0162
Protein	0.076
Cellulose	0.0274
Hemicellulose	0.0638
Oil	0.0354
Ash	0.0127
Water	0.15

Table A2. Temperatures of Various Streams in Network

Stream in network (unit1, unit2)	Temperature T (unit1, unit2) (°C)
(Src1,Wash1)	20
(Src2,Wash1)	20
(Wash1,Grind1)	20
(Grind1,Mix2)	20
(Src3,Mix2)	20
(HX1,Premix1)	60
(Premix1,Jet1)	60
(Jet1,Cook1)	120
(Col1,Liq1)	85
(Src5,Liq1)	85
(Liq1,HX2)	85
(HX2,Sac1)	75
(Src6,Sac1)	75
(Sac1,HX3)	75
(Src7,Mix3)	20
(Mix3,Str1)	32
(Str2,Spl1)	32
(MecP1, Dry1)	32
(MecP1,Flot1)	32
(Flot1,HX4)	32
(Flot1,Dry1)	32
(Premix1,Jet1)	60
(Dry1,HX10)	100
(Dry1,Spl7)	100
(HX10,Snk8)	25
(HX11,WWT1)	25
(HX12,MecP2)	25
(MecP2, Dry1)	25
(MecP2,Flot2)	25
(Flot2,WWT1)	25
(Flot2,Dry1)	25
(Src8,HX8)	20
(HX8,MS2)	95
(MS2,HX9)	95
(HX7,MS1)	95
(MS1,MS2)	95
(MS1,Mix7)	95
(Src9,HX6)	20
(HX6,Ads1)	91
(Ads1,Spl6)	91
(Ads1,Spl5)	91
(HX9,Snk4)	25
(HX5,Snk5)	25

Manuscript received Oct. 5, 2007, and final revision received Feb. 16, 2008.