



A HOWARD W. SAMS PUBLICATION




TM

SEPTEMBER 1965/75 cents

# Broadcast Engineering

*the technical journal  
of the broadcast-  
communications industry*

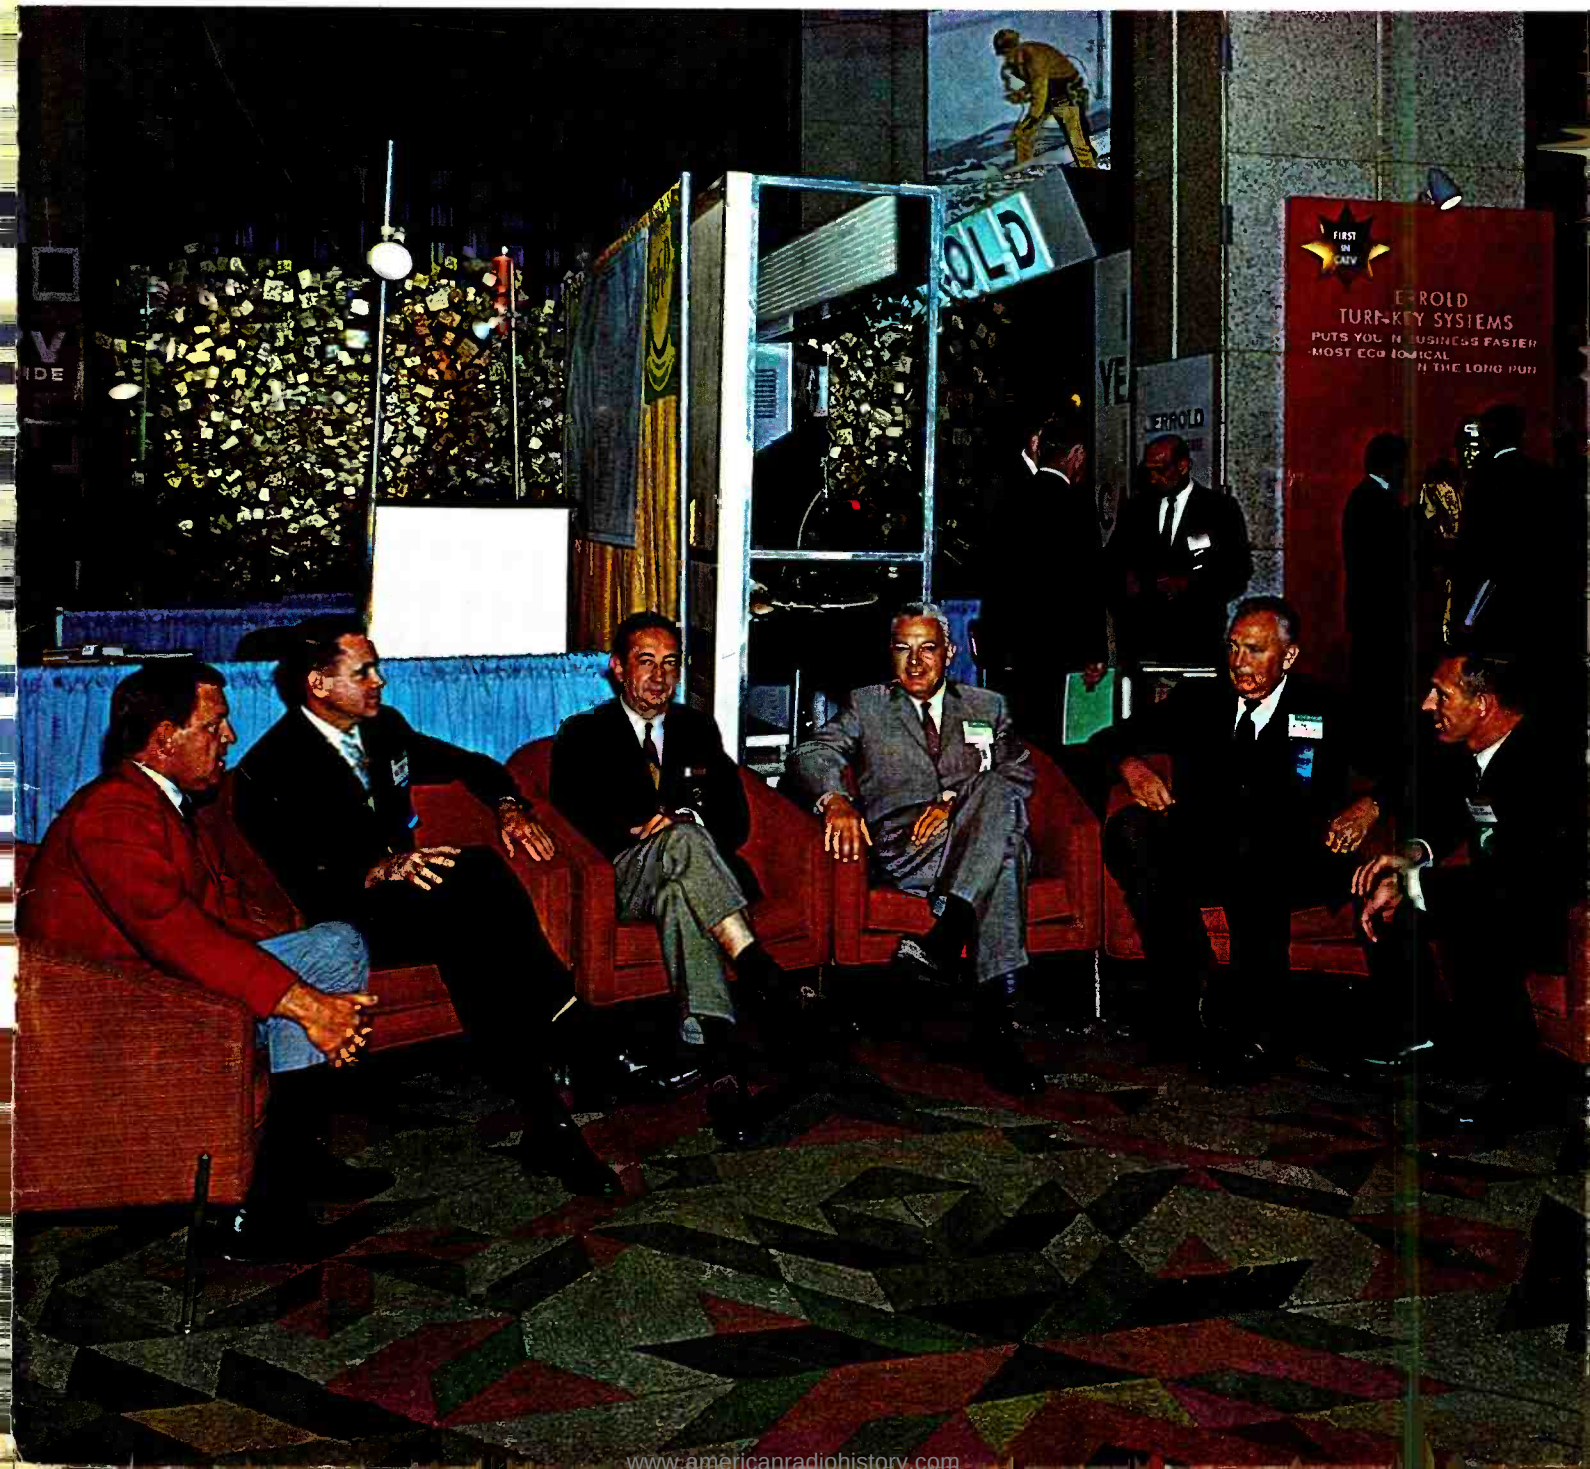



## DROPOUT COMPENSATOR

D R O P O U T   C O M P E N S A T O R   Mincom Division 3M

ONLY FROM

RIKER

### NOW ALSO FOR HELICAL SCAN VTRs

Forget about dropouts — use 3M's Mincom Video Tape Dropout Compensator, available only from Riker. People call the Dropout Compensator indispensable because of the fast, sure way it eliminates perceptible dropout effect in video tape playback. This compact module saves on production takes, especially on commercials, and is compatible, naturally, with all color and black-and-white VTR equipment. Prevents cumulative dropout effect on video-to-video dubbing. And, of course, the Dropout Compensator helps you put a superior picture on the air from any tape, old or new. All the major tape centers have one. Shouldn't you? Phone or write for details today.




**RIKER INDUSTRIES, INC.**

Norder Lane, Huntington Station, New York Phone 516 HA 1-3444

*...thinking always of tomorrow*  
Atlanta, Los Angeles, Detroit

Circle Item 1 on Tech Data Card

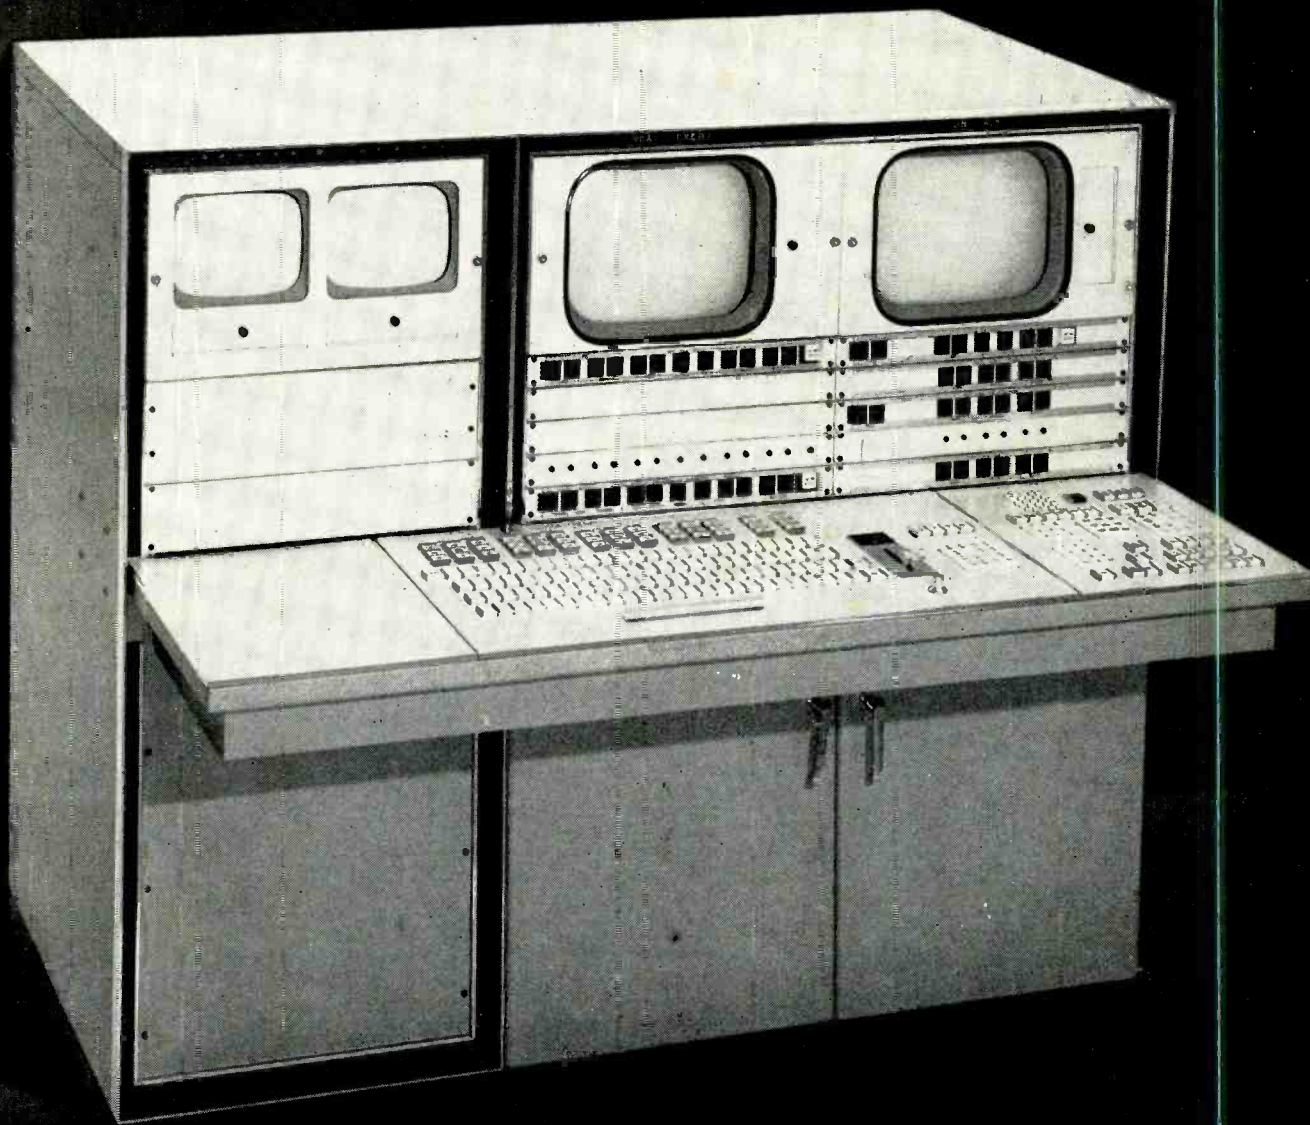

## DON'T WAIT FOR THE REVOLUTION IN TELEVISION PROGRAMMING—IT'S HERE

It started about a year ago, when Sarkes Tarzian introduced an automatic programmer for television. A few were skeptical. There were many questions, naturally, for nothing so sophisticated in television automation had ever before been attempted.

Now, experience confirms it.

Tarzian's APT-1000 is the most versatile television programming system in existence. In fact, performance of the APT has been so sensational, we invite you to try to stump it. We're confident

this solid state computer can handle any programming problem you have—better, faster, and smoother than you ever thought possible. Fact is, it has never been possible . . . before.

A special purpose computer, APT-1000 was designed solely for total and flawless television programming. It can't panic, prime time or any time. Easy operation develops an operator confidence that shows up in improved efficiency and quality of programming.

Television programming now enters a

new era . . . for even while the complexity of operations continues to increase, a greater competence and significant cost reduction become possible with APT.

If Automatic Programming for Television sounds phenomenal . . . you should see it in action. All it takes is a call or letter. And ask, too, for details on Tarzian's revolutionary new TASCOM, the digital computer which solves those costly and time-consuming traffic-availabilities-scheduling problems.

**S A R K E S**

BROADCAST EQUIPMENT DIVISION



**T A R Z I A N**

BLOOMINGTON, INDIANA

Circle Item 2 on Tech Data Card

**publisher**  
Howard W. Sams

**editor**  
Forest H. Belt

**managing editor**  
James M. Moore

**ass't to the editor**  
Norman D. Tanner

**associate editor**  
Allen B. Smith

**regional editors**  
George M. Frese, Northwest  
Thomas R. Haskett, Central  
Howard T. Head, Wash., D.C.  
Robert A. Jones, Midwest  
George C. Sitts, East

**research librarian**  
Bonnie B. Howland

**production**  
Esther M. Rainey, Manager  
Paul A. Cornelius, Jr., Photography

**circulation**  
Pat Tidd, Manager  
Katherine Krise, Ass't  
Cora La Von Willard, Ass't

**advertising and editorial assistants**  
Hazel Boyer  
Rebecca Clingerman

**advertising sales offices**  
Hugh Wallace, Sales Manager

**eastern**  
Gregory C. Masofield  
Howard W. Sams & Co., Inc.,  
3 West 57th Street  
New York, N. Y., MU8 6350

**midwestern**  
Paul N. Houston  
Howard W. Sams & Co., Inc.,  
4300 West 62nd Street,  
Indianapolis 6, Indiana, AX1 3100

**southwestern**  
C. H. Stockwell Co.,  
4916 West 64th Street,  
Mission, Kansas, RA2 4417

**western**  
The Maurice A. Kimball Co., Inc.,  
2008 West Carson Street,  
Suites 203-204, Torrance, California  
320-2204; and 580 Market St.,  
Room 400, San Francisco 4,  
California, EX 2-3365

**foreign**  
John Ashcraft, 9 Rue Lagrange,  
Paris 5, France, ODeon 20-87  
John Ashcraft, 12 Bear Street,  
Leicester Square, London W.C. 2,  
England, WHitehall 0525  
International Media Representatives,  
Ltd., Kisha Kurabu 14, 2-chrome  
Marunouchi, (502) 0656

Copyright 1965  
by Howard W. Sams & Co., Inc.

BROADCAST ENGINEERING is published monthly by Technical Publications, Inc., an affiliate of Howard W. Sams & Co., Inc. Editorial, Circulation, and Advertising headquarters: 4300 West 62nd Street, Indianapolis 6, Indiana. SUBSCRIPTION PRICES: U.S.A. \$6.00, one year; \$10.00, two years; \$13.00, three years. Outside the U.S.A., add \$1.00 per year for postage. Single copies are 75 cents, back issues are \$1.00.

the technical journal of the broadcast-communications industry



# **Broadcast Engineering**

**Volume 7, No. 9**

**September, 1965**

## **C O N T E N T S**

### **Features**

#### **Cooperation—Latent Theme of CATV Convention**

Forest H. Belt 10

An interpretive report of what happened at the Denver NCTA gathering.

#### **Introduction to Studio Acoustics**

J. Gordon Elder 14

How your station sounds depends on how the studios are built.

#### **NAB Reel-to-Reel Tape Standard**

James M. Moore 16

A summary of the technical provisions of the recently adopted NAB Standard.

#### **Line Services for Broadcasters**

Allen B. Smith 18

Make the most of the many available common-carrier facilities.

#### **A Portable Stereo Console** Lt. George M. Durenberger, Jr. 20

This construction feature describes a unit for auxiliary and portable use.

#### **The Montreux Television Symposium**

Elliott P. Fagerberg 23


Our European correspondent reports on an international TV meeting and equipment display.

### **Departments**

|                      |    |                      |    |
|----------------------|----|----------------------|----|
| Letters              | 6  | New Products         | 54 |
| Washington Bulletin  | 39 | Engineers' Tech Data | 56 |
| News of the Industry | 46 | Advertisers' Index   | 57 |
| Book Review          | 50 | Classified Ads       | 58 |
| Engineers' Exchange  | 51 |                      |    |

Shown discussing the 1965 NCTA convention at the Denver Hilton are (l. to r.) Bill Daniels, of Daniels & Associates; NCTA Chairman Ben Conroy; FCC Commissioner Robert E. Lee; NCTA President Frederick W. Ford; NCTA Past Chairman Bruce Merrill; and BE Editor Forest Belt.



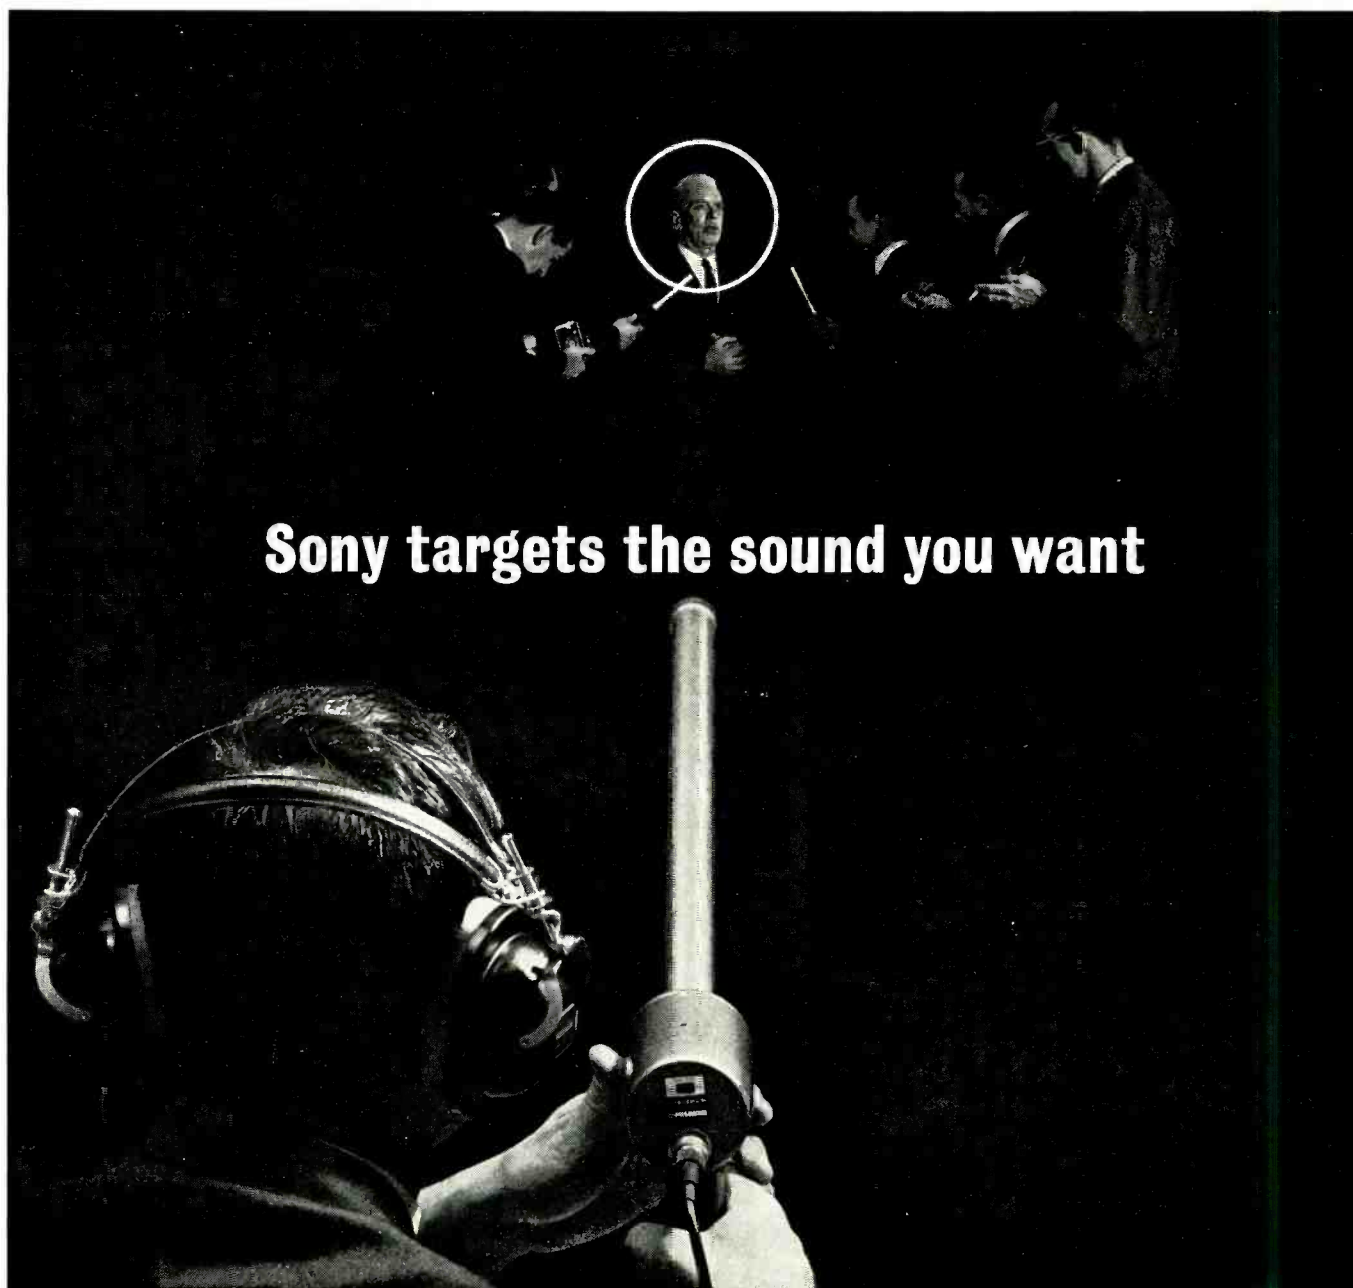

## Sony targets the sound you want


### Telemike Exclusive: Built-in Monitor Facility\*

Now, with *three* readily interchangeable sound tele-probes, similar in principle to changeable telephoto lenses, you can 'zoom' in from varying distances for the precise sound you're after. The 18-inch probe may be used for 'close-ups,' as far back as 75 feet from the sound source; the 34-inch probe from 150 feet. A 7-foot probe is optional for distances beyond 150 feet.

\*The most unique feature, a Sony exclusive, is the built-in, battery powered, solid state monitoring amplifier in the pistol grip handle, which assures the operator that he is transmitting the source with pin-point accuracy.

**OTHER FEATURES, OTHER USES:** The new Sony F-75 Dynamic Tele-Microphone is highly directional at the point of probe, with exceptional rejection of side and back noises (35 to 40 db sensitivity differential). Recessed switching allows quick selection of impedances (150, 250 and 10K). The uniform frequency response, controlled polar pattern, and unprecedented rejection of background noise eliminates feedback interference in P. A. systems.

The complete Sony F-75 Tele-Microphone includes two sound probes, 18 and 34 inch lengths, monitoring pistol grip handle and the Sony dynamic headset, all in a velvet-lined compartmentalized carrying case for less than \$395. For specifications and a catalog of the complete line of Sony microphones, visit your nearest Sony/Superscope franchised dealer, or write: Superscope, Inc. Dept. 52, Sun Valley, Calif. *The best sound is Sony.*

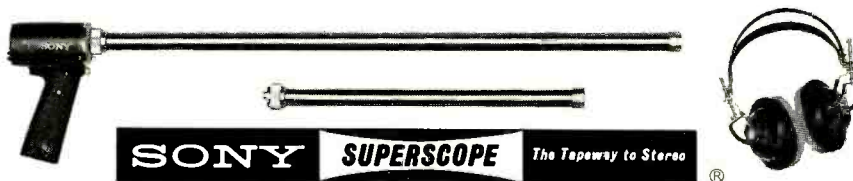

Circle Item 3 on Tech Data Card

# SOUNDS THAT SELL... START ON FAIRCHILD TURNTABLES!


For over 25 years FAIRCHILD RECORDING EQUIPMENT CORPORATION has been supplying to quality-oriented broadcast studios throughout the world, the ultimate in "engineered-in-depth" turntables. The continuing search for better quality has rewarded FAIRCHILD with a reputation for unsurpassed performance.

Realizing the vital fact that your station's turntables are the heart of your station's sound has prompted FAIRCHILD to introduce a series of unique belt drive turntables. These turntables provide truly inaudible rumble, wow and flutter coupled with a minimal moving parts design for low low maintenance and high reliability.

Now FAIRCHILD offers three distinctively designed quality turntables to serve the broadcast industry...three new FAIRCHILD turntables unsurpassed in quality, performance and durability to give your station the sound that sells!




**FAIRCHILD MODEL 750** — Three-speed 16" turntable handles LP's, 45's and 78's. Unique cueing pad for easy slip cueing, and torque characteristics of the drive system, allows startups from standstill in 1/2 turn (slip cue factor). The belt drive system allows turntable to be in a "ready" state at all times—no idlers to disengage or adjust. Noise-free to operate close to open DJ microphone. Available in black or new warm walnut.

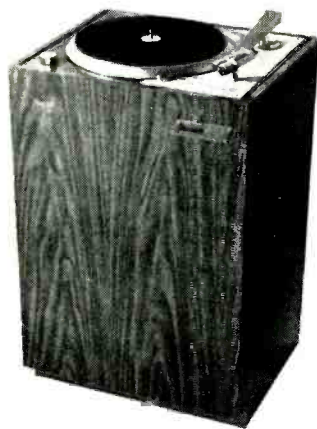

**FAIRCHILD MODEL 755** — A 12" turntable with 2 basic speeds—33 and 45. Unique 2-belt system provides high starting torque coupled with low low rumble and imperceptible wow and flutter. The FAIRCHILD 755 is an ideal quality answer for your turntable requirements—high performance design—compact and economical. High reliability and low maintenance performance have been part of the FAIRCHILD 755 design reputation for several years. Available in black or new warm walnut.



**FAIRCHILD MODEL 750-2** — Same outstanding performance as basic FAIRCHILD 750 with 2 speeds (33 and 45). Provides ideal 16" turntable where 78's will not be used. Available in black or new warm walnut.



**FAIRCHILD 676A TRANSISTORIZED PREAMP** — Complements turntable performance by providing optimum accurate equalized output from any moving magnet or moving coil cartridge. Contains NAB or flat equalization curves, with individual gain control easily accessible and operable during operation. Single or stereo (676A2) version.

## FAIRCHILD

RECORDING EQUIPMENT CORPORATION  
10-40 45th Ave., Long Island City 1, N. Y.

Circle Item 4 on Tech Data Card

## LETTERS to the editor

DEAR EDITOR:

There is a typographical error in my article "What to Do in Tower Emergencies" in the April 1965 issue of BROADCAST ENGINEERING. In the expression for  $X_1$  in Fig. 4 on page 80, the last term should be  $Z_s^2$  instead of  $Z_s$ . The correct expression should read:

$$X_1 = + \sqrt{\frac{Z_s}{R_A} (R_A^2 + X_A^2) - Z_s^2}$$

GEORGE M. SKLOM

Associate, Walter F. Kean  
Consulting Radio Engineers  
Riverside, Illinois



DEAR EDITOR:

In June 1964 you published an article describing a solid-state chopper for monitoring video modulation ("Solid-State Chopper for Modulation Checks," June 1964 BE, page 26). With the addition of a 1000-ohm, 1/2w carbon resistor connected between the collector of Q8 and -6 volts as a load, this unit becomes an excellent VIT keyer for a video-test signal generator requiring 4 to 5 volts to key. The generator output is bridged across the program line or used to source terminate, depending on the system in use at your station. R-15 in the chopper unit is made variable (a 50,000-ohm pot is suitable) to facilitate proper timing of the VIT signal.

ROBERT E. L'ROY

Transmitter Supervisor, KLRN-TV  
New Braunfels, Texas

We've been gratified by the reader acceptance of the solid-state chopper. Our thanks to Bob for suggesting this additional use for the unit. The partial schematics below show where the modifications are made.—Ed.

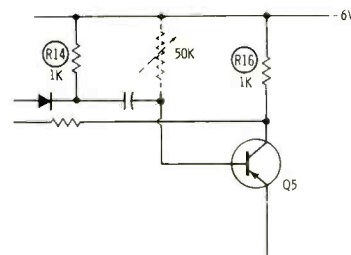

# We'll do a month's work for you free!

Just send this page to CBS Laboratories. We will send Audimax and Volumax to your station. If you want to send them home after 30 days, we will pay the freight. But if you want to make your station their permanent home, all you do is pay \$665 each.

At the end of that period, chances are you will be so sold on Audimax and Volumax you will want to buy them.

And you should. After all, they can increase your program power 8 times.


Solid state Audimax is an automatic level control years ahead of the ordinary AGC. By automatically controlling audio levels, it frees engineers, cuts costs and boosts your signal.

Volumax, also solid state, out-modes conventional peak limiters by controlling peaks automatically with-

out side effects. By expanding effective range and improving reception, it brings in extra advertising revenue.

We can afford to give Audimax and Volumax away free. Because we know they're so good, most people can't afford to give them back.

**CBS LABORATORIES**  
Stamford, Connecticut. A Division of  
Columbia Broadcasting System, Inc.

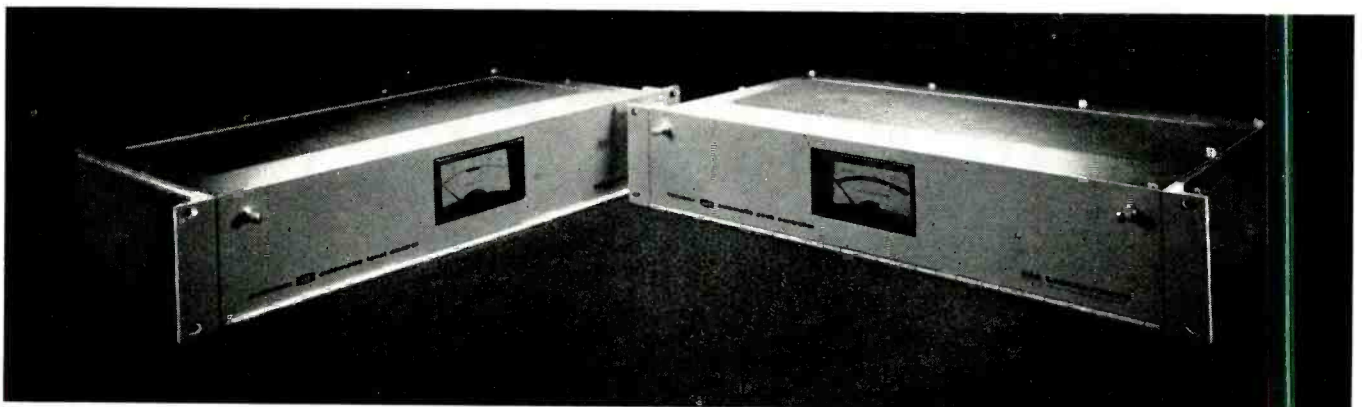

Circle Item 5 on Tech Data Card

# Voilà! this is it! . . . successor to the famous 351 series **100% SOLID STATE AG 350**

by **AMPEX**

**This is the one the industry has been waiting for! . . .**

Ampex, reknown far and wide for the work-horse 351 recorder/reproducer, has announced its thorobred AG 350 entry into the solid state race . . . and it looks like a sure winner at the starting gate!

Note these significant changes:

## **IN THE ELECTRONICS . . .**

- adjustments accessible from the front
- plug-in type equalizers throughout
- new low frequency reproduce equalization adjustments
- new compact panel measuring 5¼" x 19" x 8½"
- 100% solid state; transistors of plug-in type for easy serviceability

## **IN THE TRANSPORT . . .**


- automatic equalization switching when speed change is made
- head gate opens wider for easy editing and threading
- new function mode control panel and switches for additional operator convenience
- ferrite type erase heads

**PLUS . . .** Two brand new console cabinets to choose from . . . console with electronics overhead (doghouse type) freeing transport to be tilted to various operating angles . . . or . . . console with electronics below for greater compactness.



**Models start as low as \$1750.**

The new AG 350 is now available. Certain models in stock; 30-60 day delivery for models not in inventory. Write for full specifications and price information.  
Custom console work our specialty.

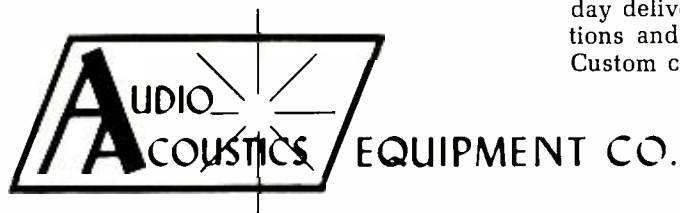

P. O. Box 444  
Arlington, Texas  
Area Code 214  
AN 4-2437

Distributor for: A.D.C. / A.P.I. / Atlas / Beyer / Cannon / Cinema / Electro-Voice / E.M.T. / Fairchild / Gotham / Langevin / Lowell / Metal Works / Miratel / McIntosh / Nagra / Neuman / Pultec / Rek-O-Kut / Universal Audio / Vega

Circle Item 6 on Tech Data Card


**The soundest sound in FM is the new sound of GATES**

**POWER UP...  
SPACE DOWN**

**with the Gates  
all-new 20,000-watt  
FM transmitter  
Model FM-20G**

Here's top power at lowest per hour operating cost in a compact space-saving cabinet arrangement. The new Gates FM-20G provides maximum installation flexibility. Power supply is 100% solid-state and only one 4CX-15,000D ceramic tetrode delivers 20,000 watts output. This brand-new Gates FM-20G Transmitter is another reason why the soundest sound in FM is the new sound of Gates.

*Send today for complete description and specifications.*

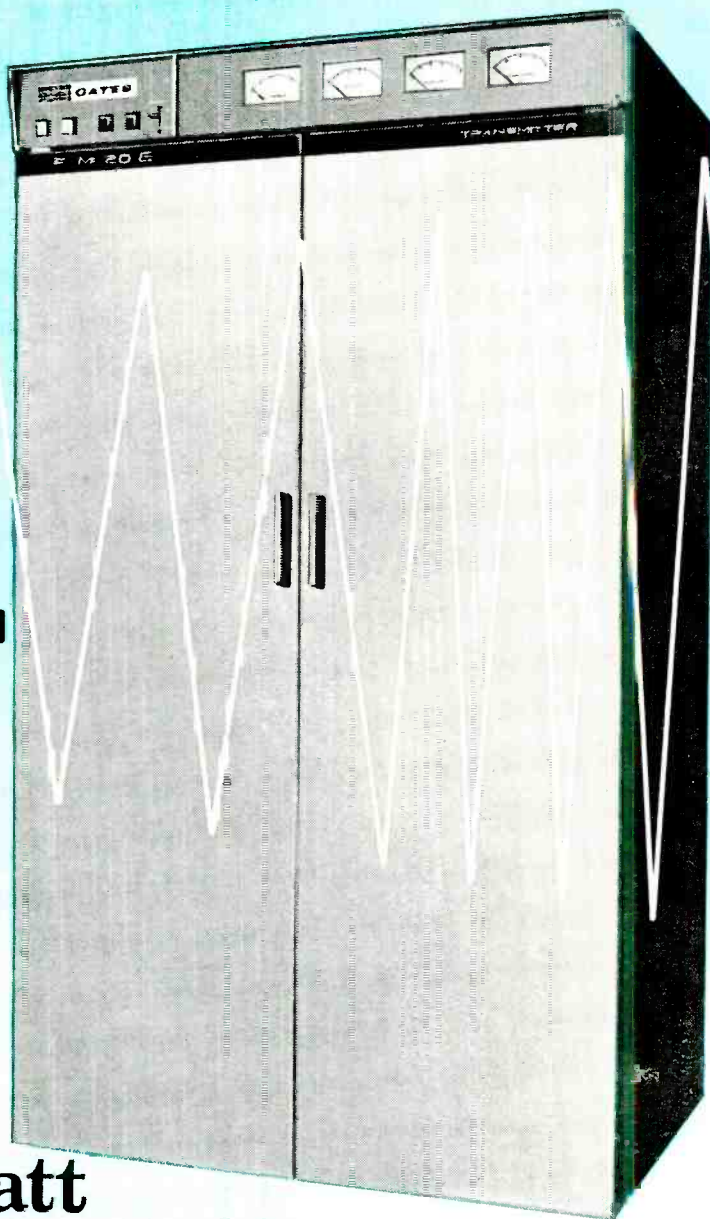

**HARRIS  
INTERTYPE  
CORPORATION**

**GATES**

GATES RADIO COMPANY  
A Subsidiary of  
Harris-Intertype Corporation  
QUINCY, ILLINOIS 62302

Offices: New York, Houston, Los Angeles, Washington, D. C.  
Export: Rocke International Corporation, New York City  
In Canada: Canadian Marconi Company, Montreal

# Cooperation—Latent theme of CATV Convention

by Forest H. Belt

Denver, Colorado, July 18-23, 1965—On the wide plateau along the upper reaches of the South Platte River, a long stone's throw from the Front Range of the Rocky Mountains and not many miles from the Continental Divide, this mile-high city witnessed this week a gathering of nearly 2000 under the banner "14th Annual Convention of Community Public Servants"—the 14th Annual National Community Television Association (NCTA) Convention took over the Denver Hilton Hotel.

If any one factor stood out, it was that this was a working convention. Systems owners, several broadcasters, equipment manufacturers, and representatives of FCC and certain telephone companies—all gathered and conferred to formulate exactly the problems facing the wildly growing CATV industry and to devise solutions.

Days of strenuous meeting, planning, and learning were followed, however, by nights of well planned entertainment—a welcoming cocktail party Sunday night by TV Digest publisher Al Warren; a Western ranch party by Jerrold, with entertainment by Rocky Starr's Western Band, girl fast-draw artist Willie Sessions, the Koshare Indian Dancers, psychologist and mind-reader Chan Canasta, and the Parrish Square Dancers; a Hawaiian luau by Ameco, with Hawaiian band, Tahitian dancer, plus food and drink from the Islands; a Discotheque au Go Go every night by Entron; several cocktail parties sponsored by various manufacturers; professional entertainment, such as Paul Ford and Mimi Hines sponsored by Entron, The King Family by Viking, Ray Bloch Orchestra

and The Taylors by Aberdeen Co. and Tape-Athon Corp.; plus various outings and tours sponsored by companies and local or state associations.

Hats are off to the committee who planned this affair. Organized—in cooperation with the NCTA Washington staff—by Bill Daniels (cover photo, in red coat), of Daniels & Associates, well known CATV broker, the planning combined convention seriousness with vacation liveliness for the families of attendees. Daily programs for the ladies and special arrangements for the children contributed the ingredients for a successful family outing.

Work for the NCTA executives began on Friday, July 16, with three days of meetings—Pole Line Committee, Budget & Audit Committee, ETV Committee, Membership Committee, Associate-Member Committee, Ladies' Convention Committee—plus Executive Committee meetings and two days of meetings by the NCTA Board of Directors.

By 3:00 PM Sunday afternoon, July 18, most of the ninety exhibitors had their booths ready for the official opening of the Convention. In the exhibit area just off the hotel lobby, registrants jostled each other for a look at the latest equipment and services offered by manufacturers. The photo groups show activity at several of the booths.

## Monday, July 19

Work began after a breakfast hosted by Wyoming CATV operators, when system operators heard the Annual Report of the Chairman of NCTA, Bruce Merrill.

## Chairman's Report

Mr. Merrill recapped the hiring of former FCC Commissioner Frederick W. Ford as NCTA President effective January 1, 1965. He further analyzed the posture of CATV today: There are presently 1600 systems operating in 48 states, representing an increase in the past year of 200 or more systems. Applications are pending in at least 800 more communities. The gates are down and the flood is ready to start. In the way of this flood, however, stand certain major adversaries—the FCC, the NAB, copyright syndicates, and on the sidelines the telephone companies.

Reviewing the year, Mr. Merrill mentioned six states in which Public Utility Commissions considered taking over CATV regulation—Nebraska, Nevada, North Dakota, Ohio, Oklahoma, and Pennsylvania; of these, Ohio decided, "no," while decisions in the others are still pending. State legislatures in 13 states also considered making public utilities of CATV systems: Connecticut, Idaho, Maine, Minnesota, Missouri, New Jersey, New York, Oregon, Pennsylvania, Rhode Island, Vermont, West Virginia, and Arizona. Only in Connecticut did the law pass; in that law it was further stipulated that Connecticut CATV systems must pay 6% of their gross profits to the state. Legal attacks will be instituted on both phases of the law. In New Jersey and Vermont, legislation is still waiting to be acted upon, so the result cannot be predicted accurately.

Next, Mr. Merrill discussed extensive and, to NCTA, futile negotiations with NAB, but iterated willingness to talk further at any time. He insisted "only that public interest be the criterion for



any restrictions, and that damage to the public interest be proved in evidentiary procedures."

The FCC's First Report and Order in the microwave dockets was described as "arbitrary, cumbersome, inequitable, unjustified, and ill-advised." The NCTA Chairman feels "as if (CATV operators) are being offered up as a peace offering by the FCC to the broadcasters."

The new copyright-law revision—which has drawn attention from all facets of publishing, writing, and broadcasting—came in for a share of attention in Chairman Merrill's address. Briefly, the right of CATV systems to rebroadcast programs without royalty payments is at stake. NCTA is actively presenting their case before Congress.

On telephone companies: "This was the year when the nation's giant telephone systems awoke, like one of the three bears, and said, 'Somebody's been building CATV systems on my poles.' We're here to tell them that somebody's going to go right on building CATV systems. We started this industry. We proved the need for our service and we have shown the public what we can do. We're not going to allow any ten-billion-dollar-a-year giant to stop us or slow us down."

#### On Ratings

In a workshop meeting well attended by system operators, discussions of rating services for CATV seemed to hover closely around the idea that broadcasters and CATV operators should work more closely together for their mutual benefit instead of fighting each other. George Blechta of A. C. Nielsen Company and George W. Dick of American Research Bureau indicated the kind of information their companies need if their audience research activities are to be dependable in the field of CATV.

Mr. Blechta pointed out the importance of program analysis and viewing-habit analysis among the 1,700,000 homes served by cable systems, and explained the problems Nielsen encounters in counting noses in these markets. Besides the difficulties inherent in developing accurate viewer statistics among CATV subscribers, the importance of ratings to both CATV operators and the stations their systems carry was made clear. The Nielsen executive enumerated the following facts the rating company needs from CATV operators if it is to evaluate accurately tabulations among CATV viewers: (1) What communities, large or small, are served by your system? (2) What stations, by call letter, does your system receive, and on what system channel does your subscriber view each? (3) If any one system channel is used to carry more than one station, exactly what days of the week and what hours is each station carried? (4) What type of protection, if any, do you provide any station against network duplication? Nielsen needs this information about every CATV system in operation.

George W. Dick, president of American Research Bureau, expressed the

viewpoint that "public interest," on which CATV operators and broadcasters base their arguments, is best uncovered by audience research that estimates not only which stations can be received but which are regularly watched. He described the method used by ARB for measuring TV audiences, which is similar to the Nielsen method—both companies use viewer diaries. Since CATV subscribers are considered somewhat heavier viewers than ordinary, special methods must be used to analyze their viewing habits.

ARB has been working with broadcasters for several years developing sampling-control techniques adequate for projecting CATV viewer statistics; special analysts at ARB handle the problems created by altered channel numbers and non duplication agreements. **Mr. Dick urges CATV operators to join this cooperative effort by supplying the stations they carry (and ARB, too, of course) with adequate information on the extent of their operations.**

Particularly pertinent to CATV operators (and broadcasters) are these comments by Mr. Dick: "Some of you . . . don't see yourselves as part of the broadcasting industry. On the other hand, I am sure the great majority of you recognize that you are part of the vital and dynamic broadcasting industry, an industry that couldn't have grown to such great proportions if it did not have one whale of a lot of cooperation from everyone concerned with it."

Some ways audience rating can help CATV operators: (1) It would help to know which stations and programs your subscribers value as reasons to remain subscribers. (2) If FCC does control CATV, expanding your services may depend on justifying the need of viewers for additional television in your area. (3) If copyright laws eventually include CATV payments, you should pay on the basis of what you actually do deliver, not merely what you could deliver. (4) The same holds true if Section 325 of the Communications Act is amended so you have to pay stations instead of copyright owners. (5) If you win your argument that you are contributing to a station's circulation, which is already included in determining copyright fees for the station, you'll need to know how much additional circulation you are contributing. (6) Suppose your services eventually include program origination, and you become sellers of broadcast time; you'll need audience research the same as present broadcasters do.

**Mr. Dick summed up by enjoining CATV operators and broadcasters, "I know some of you may not be palsy-walsy but, for auld lang syne, please cooperate. You CATV pioneers are meeting here in the West where the word 'pioneer' still is meaningful . . . those pioneers found that survival depended in large measure on cooperating with each other . . ."**

#### Congressman Oren Harris

At lunchtime, well over 1,000 NCTA-ers were found listening to a speech by

the Honorable Oren Harris, Arkansas member of the U. S. House of Representatives. Representative Harris reiterated his feeling of the justice of his controversial bill, H.R. 7715, particularly of the part which states: ". . . it shall be the purpose of this part (of the Communications Act) to give the people of the United States access to the greatest partible diversity of local, network, educational, and other television programs."

The Arkansas Congressman called to mind Dr. Martin H. Seiden's report (the controversial Seiden Report) which estimated that 16 million homes—about 28% of the population—do not have a viewing choice from among the three national networks, and then opined that much of the objection among broadcasters is motivated by fear of changing the status quo, of encroachment on what they consider their exclusive markets. Congressman Harris feels that Congress should determine the degree and extent of regulation to be exercised over CATV by the federal government, while the FCC should limit its activities in CATV to recommending to Congress specific legislation which would then become an integral part of the national communications policy.

On duplication: "I can see some reason for prohibiting the carrying by CATV of programs prior to the time when such programs are carried by local stations; I can see little, if any, reason at all in imposing on CATV limitations with regard to duplication following broadcasts by local stations."

**On cooperation: "I challenge all segments of the industry to work together toward this important objective (a national television policy) and to do their utmost to bring to an end the bickering and dissension which now prevail. One or the other segment may feel that their separate interests may be best served by holding on to the status quo. . . . Such attitude in my opinion is contrary to the best interests of the American people, and it is also contrary to the enlightened self-interest of the individual segments of the communications industry."**

#### Sales, Sales, Sales

After lunch, systems managers attended a forum on SALES. J. Fred Weber, vice-president for sales at American Cablevision Corp., delivered a paper on the use of direct (face-to-face) sales for selling CATV connections to prospective subscribers; he included figures and examples to drive home the profit point of this type of selling.

John F. Gault, vice-president of Television Communications Corp., to the theme of "You've Got to Believe It Yourself," expostulated two basic commandments of cable-TV success: (1) Get them on the cable, and (2) Keep them on the cable. To accomplish both, the system operator must provide for the CATV viewer (a) good pictures, (b) good service, and (c) variety of service. Furnishing these, the operator-owner and his salesmen must "believe it themselves" if they are to sell effectively.

Robert H. Berger, sales VP for National Trans-Video, told seminar attendees they had "Better Sell It Today." In a most informative address, Mr. Berger passed along idea after idea for promoting, advertising, and selling CATV connections. He divided systems into three categories for purposes of selling: mature systems, those which have reached the saturation point where the cost of further sales is high; middle-ground systems, where direct selling and promotion are necessary and profitable; and new systems, where with advance publicity many sales are to be had merely for the asking, and selling costs are at a minimum. Mature systems can't be abandoned, however, for selling is necessary to maintain the saturation level in the face of a normal attrition and turnover of subscribers.

## Tuesday, July 20

Following an "Arizona" breakfast, a brace of speakers taught system owners about the financial aspects of CATV business, particularly in the area of financing. Ralph Fratkan, CPA from Philadelphia, started the morning's bill by speaking on taxes and how to look for tax advantages when buying or selling CATV systems.

### Financing Systems

James F. Ackerman, finance-company executive from Indianapolis, dwelt on certain advantages of obtaining system-expansion and development dollars from a commercial finance company. One significant reason cited was that a finance company looks at the future cash flow of a system when gauging loan-worthiness, while other lending institutions are more inclined to consider the initial capital investment. Thus, Mr. Ackerman pointed out, the system owner can borrow needed funds without necessarily signing away his equity in system assets, nor restricting the management of his company unnecessarily.

Alvin H. Hartman, vice-president of a

small-business investment company, explained details of financing through his type of firm. SBIC's, of which there are more than 700, will provide capital for system development quite liberally, but they usually want part ownership in the system—they are interested primarily in loaning equity or "risk" funds. Mr. Hartman assured system owners, however, that an SBIC seldom is interested in controlling their companies, merely in protecting its usually sizeable investment.

Bank financing received attention in the address of William R. Putnam, banking executive from New York. Mr. Putnam enumerated reasons for the careful and cautious policies of banks when making loans to industries such as CATV. Because the money involved belongs to depositors, operations are closely regulated. As a result, bank lending has historically been limited to short-term notes against collateral such as inventory, crops, and so forth. Recently, however, some banks, especially smaller ones, are participating more aggressively in term loans. Bankers are also inclined to judge business health by the balance sheet, Mr. Putnam commented; with a business whose cash-flow turnover is as rapid as that of CATV operations, the balance sheet may mean little unless special bookkeeping procedures are followed. His banking firm, when analyzing a CATV loan application, considers: (1) How much have the owners already invested? (2) What potential does the bank's CATV consultant see for the service area? (3) What management ability and character does the applicant offer? (4) Can the loan be retired in six years or fewer?

### President Ford's Address

At luncheon, following a half-hour of jollity led by FCC Commissioner (and able comedian) Robert E. Lee, members of the press were introduced briefly. Frederick W. Ford, president of NCTA since January 1965, then addressed the membership. Mr. Ford posed some inter-

esting statistics: As of July 1, membership in NCTA comprised 565 operating CATV systems, serving 962,862 subscribers. With 77 systems under construction, members will soon operate 642 systems.

He then outlined three major policy problems facing CATV, as he views them: (1) federal jurisdiction, both legislative and administrative; (2) pole-attachment contracts and CATV activities of telephone companies; and (3) copyright legislation. He went on to describe steps NCTA has taken in each area to protect the interests of NCTA and the viewing public. Mr. Ford mentioned the nearness of agreement with NAB on the matters of regulation, and expressed regret at the failure of negotiations to date.

Particularly significant are these remarks by Mr. Ford: "We welcome the participation of our natural allies—the broadcasters—in the CATV industry and in NCTA. We hope that neither the FCC nor the broadcast industry will oppose the entry of CATV operators into the broadcast field. . . . I truly believe that both industries can and will grow and expand together, if the proper cooperative attitudes are adopted, and that out of the conflict that exists today and the fair competition which CATV fosters between stations will emerge a stronger nationwide television system, with better programs and clearer pictures and the increased confidence of the American people."

### CATV Viewpoints

The afternoon panel session had as its topic, inevitably—"CATV. Its Problems and Solutions." The three most recognized problems—telephone companies, FCC, and copyrights—were brought up and discussed at length, with some added attention given to the public image of CATV. In fact, E. Stratford Smith, of the law firm of Smith & Pepper in Washington, D. C., ventured that "if we could solve (the need for im-



proved public relations) adequately, the other (problems) would be relatively easy."

Marcus Bartlett, vice-president of Cox Broadcasting Co. which has interests in both broadcasting and CATV, digressed from the usual angle to point the finger at some of CATV's "self-made problems": (1) Failure to insist on standardization of cable equipment; (2) failure to establish good relations with broadcasters from the beginning; (3) failure to establish good public and political relations during CATV's growth; (4) mistakenly allowing the "Pay-TV" tag to be hung on CATV; (5) failure to quench the myth that CATV is a gold mine; and (6) failure to recognize the need for federal regulation before it was forced on the industry. He further insisted that another key problem is the lack of facts about the many questions raised in FCC's Notice of Inquiry. Mr. Bartlett noted that the true answers to this latter problem can best be derived by CATV and broadcasting interests working together.

Climaxing the panel session was a statesmanlike address by Max D. Paglin, of the law firm of Grove, Paglin, Jaskiewicz, Gilliam, and Putbress of Washington, D. C. Mr. Paglin suggested a course of action for both the CATV operator and the broadcaster, which should help resolve some of their differences. The CATV industry will be helping its subscribers, the broadcaster will be helping himself and his public, and both will be helping the government, said Mr. Paglin, if they make every effort to cooperate in gathering all available information and data.

Some of Mr. Paglin's key remarks: "... the CATV industry must convince itself and then convince the broadcasters and the FCC that it truly believes the only valid national policy is one which envisages an integrated system of wire and radio to serve the nation's needs for television programming efficiently and adequately. Secondly, it must persuade itself that the broadcast industry is not

an enemy, but a natural ally. Only by (CATV and broadcasters) joining forces and crossing over into each other's camps—where appropriate—will the people of this country be assured of the multiple-choice television they are demanding and to which they are entitled."

Mr. Paglin's theme was one of "Dual Development." The television broadcaster, by entering CATV, can add to his coverage area. . . . "The CATV operator . . . already has the nucleus of local support for a broadcast operation. . . ." "The broadcaster and the CATV operator . . . have a particularly sobering responsibility because of the unique potentialities and powerful impact of the medium (television) in which they work. For the same reason, they have also a rare opportunity for contribution to the overall advancement of our democratic way of life. It is up to (both) to go out and grasp this opportunity."

### Wednesday, July 21

This day opened with a series of addresses which undoubtedly made ears burn at the Federal Communications Commission. John P. Cole, Jr., in a peppy and documented commentary on the FCC's attitude toward CATV, charged that the FCC hasn't taken the trouble to obtain sufficient facts to justify the conclusions in their First Report and Order 38 FCC 683 (1965). Other speakers included W. H. Borghesani, Jr., who analyzed the multiple considerations facing FCC, CATV, and the microwave industry in the matter of frequency allocations in the microwave-relay spectrum; and Morton L. Berfield, who suggested that the Fairness Doctrine of the Commission gives CATV owners a right and a means to defend on the air any accusations brought justly or unjustly by television broadcasting stations.

Luncheon was topped by an address by David M. Snow, president of National Education Sciences Corp. He spoke on ETV as an affiliated service of CATV, and intimated how extensive

and vast are the possibilities for the imaginative CATV entrepreneur who includes educational and instructional television facilities in his system to serve schools as well as commercial and entertainment needs. Mr. Snow's talk was the subject of much conversation after the luncheon meeting was adjourned.

On Thursday, technical sessions covered topics such as: Measurement of Noise and Cross-Modulation, Amplifier Specifications and System Performance, Envelope Delay, AGC, and System Reliability. The afternoon sessions were divided into two sections—Transmission Lines, and Systems and Antennas. The former covered Sweep Testing of Coaxial Cable, Coaxial Cable Performance for CATV, Microwave by Wire (G-Line), Pressurized Cables, and Underground Cable Installation Techniques. The latter section included Color TV, Problems in Line-Powered CATV Systems, Coaxial Jumpers, and A Parabolic VHF Antenna for CATV.

### Recap

Just as CATV owners and operators were noticeably present at the National Association of Broadcasters Convention in late March, broadcasters were conspicuously represented in this National Community Television Association gathering. More of this intermingling—to see and understand problems that very often are mutual—is destined as time passes and members of both groups cease regarding one another as "the enemy." Many enlightened companies are now engaged in both methods of providing entertainment services to the viewing public. Why not? There is apparently money to be made either way, providing the public is willing to watch and support the media. The time shouldn't be far off when both factions will devote themselves to providing—together, by air and by wire—a nationwide system of high-quality television entertainment for every U. S. citizen. Progress in that direction was made in Denver this week.

▲



# INTRODUCTION TO STUDIO ACOUSTICS

by **J. Gordon Elder**, Consulting  
Engineer, King City, Ontario, Canada,  
and BE Consulting Author — Some of  
the important principles of acoustics  
as applied to studio design.

Perhaps your programs are accompanied occasionally by extraneous, interfering sounds — from trucks, typewriters, or talkers, for example. Or possibly you are planning new studios. In either case, it will help you to consider various design methods and criteria for ensuring adequate noise control and for optimizing the acoustical properties of the studios.

A well designed broadcast studio should be "sound proofed" so that the background noise level is very low. Quietness is especially important in an announcer's booth or in a small studio used for intimate talk or music productions. The control of reverberation time is equally important, to avoid programing that sounds either too lively or too dead. High-fidelity "live" programing — particularly for FM stereo—obviously requires an excellent design in which the acoustics are controlled from at least 50 to 15,000 cps.

Acoustical engineering has developed rapidly in recent years. Architectural building specifications and acoustical properties can now be planned together and the latter predicted with reasonable accuracy. Equipment is readily available for making detailed and accurate measurements. The final design is frequently compromised from the

acoustical standpoint, however, by economic, architectural, and aesthetic considerations.

A number of terms occur in acoustics that are unfamiliar and confusing to the newcomer. Some of these will be introduced as required, but the discussion that follows will be kept as uncomplicated and practical as possible. Though sound waves bend more readily due to wind, temperature, or obstructions, in many respects their propagation characteristics are similar to those of electromagnetic waves at radio frequencies.

## Acceptable Noise Levels

Reliable data have been obtained concerning the desirable maximum noise levels in different environments. Fig. 1 shows three conservative noise-rating curves recommended by Kosten and Van Os for broadcasting studios and for a private office. Other published families of noise curves have been constructed in various ways, but all of them generally agree with only a few decibels of difference, notably at the higher frequencies.

In Fig. 1, the sound-pressure level in decibels is plotted against the mid-frequencies of the recommended standard octave bands for convenience in comparing the curves with measurements made using an octave analyzer. (Measurement techniques will be discussed later.) The curves are identified and the noise rating designated as the corresponding pressure level in decibels at 1000 cps, a convenient reference frequency. Any sound levels that are quoted later relate to this frequency unless otherwise stated.

The simple equation shown in the box relates the acceptable noise level and the other two basic design factors. Levels typical of broadcast station studios in quiet and

noisy environments are shown under the equation. They are expressed in decibels referred to a zero level of .0002 dyne/cm<sup>2</sup>.

The required noise reduction governs the combined transmission loss and absorption of the walls and ceiling — and hence the selection of building materials, the location of the studio, and the architectural specifications. These will be considered later.

The actual noise level may be assessed from measurements made in an existing studio. Similarly, the background noise level may be measured in the vicinity of the studio. It may also be predicted based upon the levels expected from street or corridor traffic, typewriters, and other noise sources.

In most communities, noise levels vary cyclically and peak regularly at certain times. Protection should be provided against a noise level that is exceeded very rarely, if ever. If two equal noise levels are added, the increase is 3 db. If one is 6 db greater than the other, the combination is only 1 db more than the larger. Therefore, only the main sources of noise contribute significantly. Assume that the studios are or will be in a noisy location — near heavy traffic, factories, or low-flying aircraft, for example. In such a case the maximum background noise level should be verified by measurement if possible, because predictions are imprecise.

## Studio Location

Most of the noise discussed so

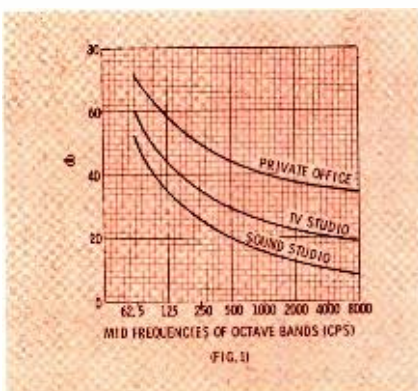


Fig. 1. Noise-rating curves (Kosten and Van Os) for three different environments.

| Required Noise Reduction | Existing or Predicted Maximum Background Noise Level in the Vicinity | Acceptable Noise Level in the Studio |
|--------------------------|----------------------------------------------------------------------|--------------------------------------|
| 40                       | 55                                                                   | 15                                   |
| 60                       | 75                                                                   | 15                                   |

far has been transmitted through the air. If new studios are involved, an obvious remedy would be to locate them as far as possible from the noise source. The peak sound level at the side of a busy highway or city street is about 75-80 db. One hundred feet away it has decreased by 20 db. If a noisy location is unavoidable, the studios themselves should be shielded from the source of noise as much as possible — by private offices or other similar areas.

The same reasoning applies to the studio location relative to sources of noise within the building. Preferably it should be some distance from: offices equipped with typewriters or calculating machines; washrooms; cafeteria; elevator; workshop and furnace room. The noise may be airborne from these places along air-conditioning ducts. It may also be structure-borne — caused by impact or vibration and transmitted through the walls, floors, and ceilings.

Expense and effort can often be saved by reducing the offending noise at its source rather than at the studios. For example, a typewriter may be set on a sponge-rubber mat. For larger or heavier machines, compression-spring mountings may be used provided the system does not resonate at audio frequencies. Severe cases may require a special box or enclosure. Worn bearings or imbalance can cause excessive noise in rotating machines. Impact noise from stiletto heels may be reduced by lining corridors with rubber or other resilient tiling.

### Soundproofing

The sound insulation of solid materials is approximately proportional to their density and thickness. However, many modern building materials are porous and must be plastered on both sides to obtain results comparable with predictions based upon this "mass law." Nine-inch brickwork so treated provides a loss of 50 db. A loss of 60 db may be obtained by using double-wall construction with an air gap. Gaining the maximum possible loss requires that the floor and inner wall be mounted floating on resilient material such

as cork, rubber, or glass wool. Though expensive, this procedure is very effective in attenuating both airborne and impact noise.

Doors and windows are much more difficult to insulate than walls. Double doors and windows are normally essential. Two panes of glass  $\frac{1}{4}$ " thick and spaced 6" apart can provide about 40 db of transmission loss. A narrower air gap reduces this loss (by up to 10 db for zero gap), due to excessive coupling and insufficient damping action.

It is of paramount importance that all doors, windows, pipes, and conduit be installed carefully to avoid any looseness, cracks, or holes around them. Otherwise noise inevitably will leak into the studio.

To illustrate this point, assume that there is a heavy 7' x 3' x 2" door which by itself would provide a sound loss of 35 db. A crack  $1/10$ " wide along its base would reduce the loss to 32 db.

For simplicity, the transmission loss specifications for building materials often include an average of the values measured at several frequencies throughout the band. These average values are used for the preliminary design. Later on, the composite loss at specific frequencies is calculated to ensure that the design satisfies the curve of Fig. 1.

In order to calculate the composite loss of the walls, doors, windows, etc., their surface areas and transmission coefficients must be known. The latter are obtained directly from the material's transmission loss by solving the formula:

$$\text{loss} = 10 \log_{10} \frac{1}{\text{coefficient}}$$

Thus:

$$\text{coefficient} = 10 \log_{10} \frac{1}{\text{loss}}$$

The transmission coefficient would be zero for a perfect insulator, or unity for a perfect conductor. Air approximates a perfect conductor of sound. (In it the sound pressure falls 6 db as the distance from the source is doubled—inverse-distance law.)

Each surface area is multiplied by its corresponding transmission coefficient. These products are then added and divided by the total sur-

face area to obtain the composite coefficient and hence the composite transmission loss for the room.

The studio sound insulation may be improved further by lining walls and other surfaces with absorbent material, such as carpeting, drapes, and acoustic tiling. A maximum improvement of 5 db is possible by this means. However, the principal effect is to alter the reverberation time and other sound characteristics of the studio, so these materials must be applied carefully. Their use and misuse will be discussed later.

Two important sources of studio noise are fans and air-conditioning systems. The air velocity should be lower than 20 ft/sec. Suitable fans have well designed blades operating at a low tip speed. Air ducts should be large in cross section. Covers and grilles should not obstruct the flow of air appreciably. The ducts should be lined with rock wool to muffle the sound waves by absorption. Sheet-metal separators may be installed in the duct, either laterally or lengthwise, and lined to provide additional high-frequency absorption and some reflection. For lining which occupies half the cross-sectional area of the duct and has a density of about 6 lb/ft<sup>3</sup>, the attenuation will be 5 to 10 db/ft. If necessary, a filter can be incorporated to attenuate noise in specific frequency bands to a greater degree.

### Studio Design

The design should not only adequately exclude undesired sounds, but should preserve the acoustic quality of the desired sounds that constitute the station's live or locally recorded programming. For many small radio stations this is limited almost entirely to the spoken word. However, even an announcer's booth must be acoustically designed if it is to produce pleasing results. The size of a studio is naturally dependent upon programming policies and market economics. Many studios and most booths are quite small. The discussion that follows will concern primarily these small rooms, though much of it also would apply to larger studios.

The reverberation time of a room is the transient time in seconds re-

• Please turn to page 26

# NAB REEL-TO-REEL TAPE STANDARD

by James M. Moore—A report on the contents of the technical standard for reel-type systems.

The use of recorded program material is universal throughout the broadcast industry. This very fact makes almost mandatory the adoption of some kind of industry-wide standard for each recording method if the advantages of system compatability are to be realized. Through the years, the NAB Recording and Reproducing Standards Committee has issued such standards. The most recent are the standards for tape-cartridge systems (see "Progress in Recording Standards," January 1965 BE) and the NAB Standard for Magnetic Tape Recording and Reproducing (Reel-to-Reel).

The reel-to-reel standard was adopted by the NAB Board of Directors January 29, 1965. It is the result of the cooperative efforts of broadcasters, manufac-

turers, recording companies, and other interested parties. The full cooperation of the NAB in supplying the information for the following summary is gratefully acknowledged.

## General Scope

Although a tape speed of  $7\frac{1}{2}$  ips is preferred for program-exchange purposes, standards are also given for 15 and  $3\frac{3}{4}$  ips tape speeds. Full-track, two-track, and four-track systems, both mono and stereo (for multitrack systems) are covered.

Two classes of systems are recognized: high-performance equipment and "Special-Purpose Limited-Performance Systems." The latter are systems in which "portability and weight are the

primary considerations and technical perfection is made secondary to accomplish this greater portability." Naturally, this distinction must be kept in mind when applying the Standard.

The Standard specifies physical properties and mechanical requirements for the tape and performance requirements for systems. Compliance with the Standard is determined in terms of standard tapes; annexes to the standard explain how these tapes are made and calibrated. Mechanical drawings of the standard reels, response curves, and a glossary of terms complete the Standard.

## Tape and Reel Requirements

Logically enough, the Standard begins by stating specifications for the tape

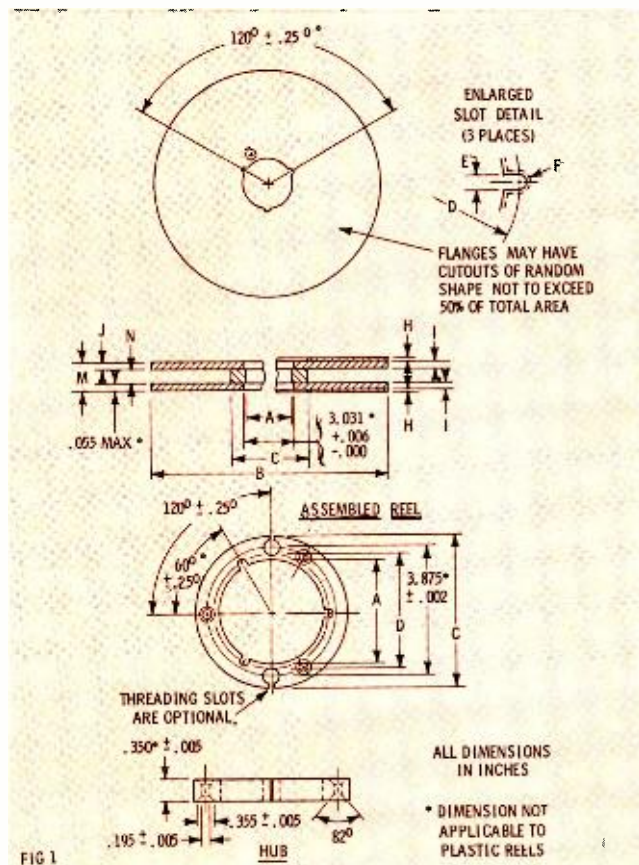


Fig. 1. Dimensions specified in Standard for NAB Type A reels.

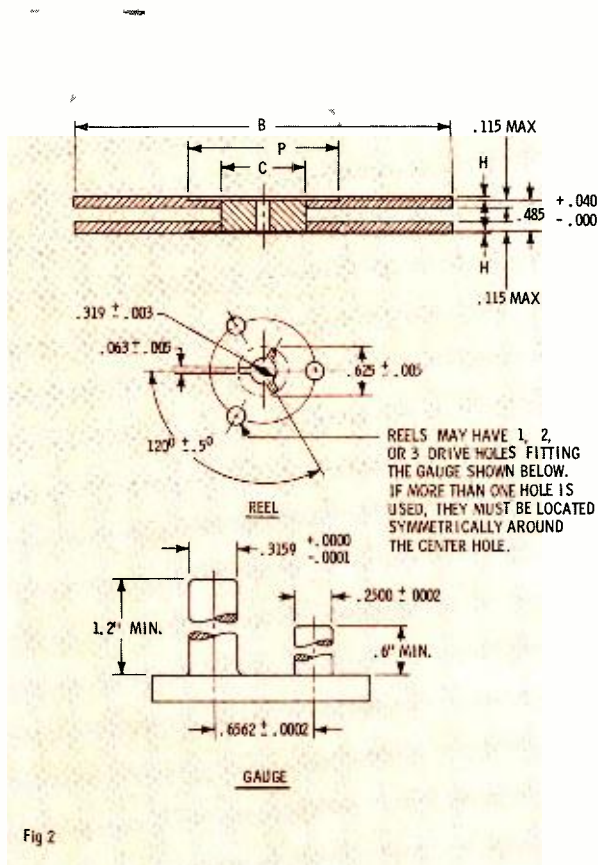


Fig. 2. Dimensions specified in Standard for NAB Type B reels.

**Table 1. Tape Length vs Reel Size**

| Nominal<br>(Reel) | Dia<br>(Hub) | 1.5 mil<br>base | 1 mil<br>base | .5 mil<br>base |
|-------------------|--------------|-----------------|---------------|----------------|
| 3"                | 1.75"        | 125'            | 200'          | 300'           |
| 5"                | 1.75"        | 600'            | 900'          | not            |
| 7"                | 2.25"        | 1200'           | 1800'         | rec-           |
| 10.5"             | NAB 4.5"     | 2500'           | 3600'         | om-            |
| 14"               | NAB 4.5"     | 5000'           | 7200'         | mended         |

itself. Nominal 1/4" sound-recording tape shall measure .246"  $\pm$  .002" in width and not more than .0022" in thickness. Standard minimum lengths for various reel sizes are listed in Table 1.

Standard dimensions are prescribed for the reels as well as for the tape. Two types of reel are recognized: NAB Type A reels are metal or filled plastic reels 10 1/2 or 14" in diameter and having a 3" center hole (Fig. 1). NAB Type B reels are filled or unfilled plastic reels having a 5/16" center hole (Fig. 2). Dimensions are listed in Tables 2 and 3, respectively.

Certain other specifications relate to the tape as used in record-reproduce systems. The tape shall be wound with the oxide coating facing the reel hub. Normally the start of the program should be at the outside of the reel, but if the tape is to be stored for an extended period of time it should be wound with the start of the program at the inside of the reel.

Full-track recordings are to be .238" + .010" - .004" in width. When more than one track is recorded on the same tape, the tracks are designated by number as shown in Fig. 3. The illustration also shows the important track dimensions.


For two-track stereophonic recordings, track 1 is to carry the left-channel signal, and track 2 is to carry the right-channel signal. The tracks are to be recorded "with the head gaps in line and phased for reproduction on equipment so connected that when a full-track tape is reproduced, it produces in-phase signals in the two channel outputs."

For four-track monophonic recordings, the standard sequence for recording the tracks is to be 1-4-3-2. Tracks 1 and 3 are to be used for recording in one direction as the tape is unwound from the supply reel. Tracks 4 and 2 are to be used for recording when the tape moves in the opposite direction. The Standard specifies that left-channel information shall be recorded on tracks 1 and 4 and right-channel information shall be recorded on tracks 2 and 3. A further specification is that "tracks 1 and 3 and tracks 2 and 4 shall be recorded with the head gaps in line and shall be phased for reproduction on equipment so connected that when a full-track tape is reproduced it produces in-phase signals at the two channel outputs."

Requirements for uniformity of tape output are as follows: The average output level at 400 cps and a tape speed of 7 1/2 ips must not vary more than  $\pm 5$  db throughout the reel; the output of any given type of magnetic tape must not vary more than  $\pm 1$  db from reel to reel. The level measurement "... is to be made at the NAB Standard Reference Level<sup>1</sup> and read on a Standard Volume Indicator (ASA Standard C16.5-1961) with bias adjusted for maximum output for the tape under test."

### NAB Standard Recorders

The requirements for recording and

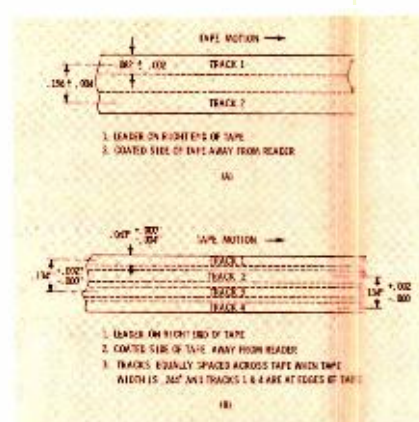

**Fig. 3. Standard tape-track designations.**

reproducing systems are divided broadly into two classes, those for high-performance systems (designated "NAB Standard Recorders") and those for "Special Purpose Limited Performance Systems" (designated "NAB Special Purpose Recorders"). The first class will be discussed now; the second class will be covered later.

### Speed

The preferred tape speed is 7 1/2 ips  $\pm$  .2%, but supplementary tape speeds of 15 and 3 3/4 ips  $\pm$  .2% are also recognized. Annex A of the standard describes in some detail a method for measuring tape speed. It consists of placing a pulley of precisely known diameter against the tape between the capstan and the head. The speed of rotation of the pulley is then measured using an AC-generator tachometer or a stroboscope disc illuminated by a neon lamp excited from the 60-cps motor supply. The measurement must be made using tape having a thickness of .0019"  $\pm$  .0002".

The annex suggests a pulley (having precision low-friction bearings) with a diameter of 1.4305" + .0002" - .0000". To this is attached a stroboscope disc having rows of 36 and 72 dots under 60-cps illumination (120 flashes per second) the dot rows indicate, when stationary, 15 and 7 1/2 ips, respectively. (To measure the 3 3/4-ips speed, a diode in series with the neon lamp causes it to flash at 60 pulses per second.) The tolerance limit of  $\pm 2\%$  corresponds to a

• Please turn to page 30

**Table 2. Dimensions for Type A Reels**

| Dim | Metal Reels                    | Plastic Reels           |
|-----|--------------------------------|-------------------------|
| A   | 3.002 + .006 - .000            | 3.010 + .015 - .000     |
| B   | 10.500 or 14.000 + .020 - .010 | 10.500 $\pm$ .020       |
| C   | 4.500 $\pm$ .010               | 4.500 $\pm$ .015        |
| D   | 3.250 + .008 - .002            | 3.250 $\pm$ .020 - .000 |
| E   | .219 + .010 - .000             | .219 + .013 - .000      |
| F   | .109 + .005 - .000             | .109 + .007 - .000      |
| H   | .025 max                       | .060 max                |
| I   | .080 max                       | .115 max                |
| M   | .462 $\pm$ .020                | .485 + .040 - .000      |
| N   | .350 $\pm$ .005*               | .285 $\pm$ .015         |

\*"... the distance between the flanges at the hub shall not vary more than  $\pm .050$ " when measured from the hub to the periphery of the flanges. Flange wobble shall not extend beyond the hatched areas ..."

"Reels shall be symmetrical in that they shall mount and be functional when mounted on either lateral mounting surface."

**Table 3. Dimensions for Type B Reels**

| DIMENSION | NOMINAL REEL SIZE |       |       |       |       |                   |                     |
|-----------|-------------------|-------|-------|-------|-------|-------------------|---------------------|
|           | 3"                | 5"    | 5"    | 7"    | 7"    | (Tolerance)       | 10 1/2" (Tolerance) |
| B         | 2.938             | 5.000 | 5.000 | 7.000 | 7.000 | $\pm .031 - .000$ | 10.500 $\pm .020$   |
| C         | 1.750             | 1.750 | 3.000 | 2.250 | 4.000 | $\pm .010$        | 4.500 $\pm .015$    |
| H         | .050              | .050  | .050  | .050  | .050  | max               | .060 max            |
| P         | 1.750             | 1.750 | 2.250 | 2.250 | 2.250 | min               | 4.500 min           |

# LINE SERVICES FOR BROADCASTERS

by **Allen B. Smith** — Every broadcaster should be familiar with available common-carrier services.

A well-established truism says we often fail to get a good look at things with which we are very familiar; we seem to suffer from severe nearsightedness that prevents us from seeing the whole picture. This is certainly true among many staff engineers—and not a few chiefs—when it comes to the broad range of services offered by the extensive communication system of the common-carrier telephone companies of the United States and Canada. Broadcasting as we know it today certainly could not exist without these services, yet we seem to take the entire range of facilities for granted most of the time. Only when something fails do we become aware—in this context, certainly, not in a complimentary sense.

By far the greatest network of communication paths is provided by two major corporations, but there are also many independently operated telephone companies serving relatively limited local areas. These smaller companies, of course, utilize the lines and other facilities of the major systems, and their capabilities generally follow those of the wider-based system. This standardization of equipment and operational procedures simplifies the task of securing a wide variety of line services from practically any point within the continental limits of the U. S. and Canada. Indeed,

the advent of the Early Bird communication satellite and other synchronous relay stations promises to extend the ready availability of international circuits to broadcasting groups or individual stations, in addition to the major networks, for programs originating overseas.

While the expense of using the new generation of relay satellites is prohibitive for most purposes, charges made for more familiar services enable broadcasters to employ remote-line links for sports, news, and public-service programs even in small communities where station revenues are limited. While the cost for these services will vary somewhat within the boundaries of individual states, interstate line charges are set by Federal regulation and are common to all areas within the United States. State Public Utilities Commissions or Departments of Commerce establish rates for paths wholly within each state. Despite the possibility for a confused pricing structure, however, there actually are only relatively small differences in line charges among the states.

## Services Available

To accommodate the demands of broadcasters for lines of varied quality, the telephone companies provide a selection of circuits which range from 10-mc video paths to

some, normally used for two-way telephone conversations, that have very narrow frequency-response characteristics and little or no equalization. Tables 1 and 2 list the audio and video services available and show the approximate bandwidth tolerances held in general practice, though for some independent companies these figures may vary. As in other kinds of service businesses, rates vary with the complexity of the specific service provided. Higher-grade scheduled lines require more expensive wide-band amplifiers, and levels must be equalized and monitored more frequently along extended paths. Video lines must be maintained by technicians familiar with the techniques involved in coaxial-cable and microwave-signal transmission, which contributes to increased costs to broadcasters.

## Audio Services

Over the years, broadcasters have more or less dictated the bandwidth requirements for the various schedules. The advent of FM broadcasting, for example, spurred the development of the AAA lines having nominally flat response to 15 kc for use in FM studio-to-transmitter loops. Schedule AA lines (8 kc), primarily used for AM studio-to-transmitter loops, and schedule A lines (5 kc) provide the majority of program needs for AM stations.

Table 1. Scheduled Audio Services Available

| Designation                                                               | Useable Bandwidth  |
|---------------------------------------------------------------------------|--------------------|
| Schedule AAA (Permanent)                                                  | 50 cps — 15 kc     |
| Schedule AA (Permanent)                                                   | 100 cps — 8000 cps |
| Schedule A (Permanent)                                                    | 100 cps — 5000 cps |
| Schedule B (Temporary)                                                    | 100 cps — 5000 cps |
| Schedule C (Permanent)                                                    | 150 cps — 3500 cps |
| Schedule D (Temporary)                                                    | 150 cps — 3500 cps |
| Schedule F Local channel (voice) equalized or unequalized (non-dedicated) |                    |

Table 2. Scheduled Video Services Available

| Designation | Description                                                             |
|-------------|-------------------------------------------------------------------------|
| A2A         | Local channel video pairs or cable (4.5-mc bandwidth)                   |
| TD-2        | Intercity 3700 mc to 4200 mc SHF microwave (45 cps to 4.5 mc bandwidth) |
| L-1         | Intercity coaxial cable (2.7-mc maximum useable bandwidth)              |
| L-3         | Intercity coaxial cable (4.2-mc maximum video-channel bandwidth)        |

**Table 3. Unloaded Losses**

|                                                                                                   |                |                                             |
|---------------------------------------------------------------------------------------------------|----------------|---------------------------------------------|
| Schedule                                                                                          | AAA $\pm$ 1 db | 50 cps to 1000 cps<br>and 1000 cps to 15 kc |
| Schedule                                                                                          | AA $\pm$ 1 db  | 100 cps to 1000 cps<br>and 1000 cps to 8 kc |
| Schedule                                                                                          | A $\pm$ 1 db   | 200 cps to 1000 cps<br>and 1000 cps to 5 kc |
| Transmission-path losses are held to no more than 10 db for 15-kc lines and 12 db for 5-kc lines. |                |                                             |

For short-term remote-broadcast locations, the temporary schedule B (5 kc) or, sometimes when quality is less important than immediacy, schedule C or D lines fulfill the rest of the requirements of AM broadcasters. For remote work, FM outlets often use the AA or even A lines when expediency requires rapid setup.

Responsibility for providing program services is divided among two separate operations: the Long Lines Department of American Telephone and Telegraph and the local operating company—in most cases one of the subsidiary Bell Telephone Systems. In cases where independent telephone companies are involved in program-contract services, the local company employs its facilities to whatever extent it can and then calls upon AT&T and/or the nearest Bell System company to complete the connection.

Equalization of the audio-network program lines is accomplished by using a series of line amplifiers and compensating networks spaced at frequent intervals. Table 3 lists the nonloaded losses for the three schedules in most frequent use. Using 22-gauge pairs, the 10-db and 12-db loss figures are reached within 6 miles and 7 miles, respectively; for 19-gauge pairs, the allowable losses occur at 8 and 10 miles. Line amplifiers incorporating compensating networks must there-


fore be used at no greater distances than these specified intervals.

### Video Services

The video-service lines shown in Table 2 are part of the extensive network of lines available to the three major television networks and to local stations equally. Generally speaking, there are two grades of video lines available, one capable of transmitting the maximum frequencies encountered in black-and-white television signals, and one capable of handling those required for color signals.

It is general practice in this country for the video and audio portions of the composite signal to be transmitted separately, with the video being carried over microwave paths and the audio being fed over wire lines. These separate modes of transmission focus attention on the effects of differential time delays which for a microwave path may be on the order of 25 msec and for a cable path more nearly 150 msec. The discrepancy in transit time is sufficient to be objectionable unless specific steps are taken to compensate for the effect. In general practice, the differential delay is minimized by using as few tandem-carrier terminals as possible and by careful layout engineering to provide very direct paths for the television audio. Delays within a maximum of 60 msec are attained over transcontinental paths, and extensive listening tests have demonstrated that most listeners are unaware of delays of as much as 100 msec.

Whatever method of transmission is used for television signals, and both cables and microwave would be used by most stations—cables for short intercity connections and microwave for longer hops—in nor-

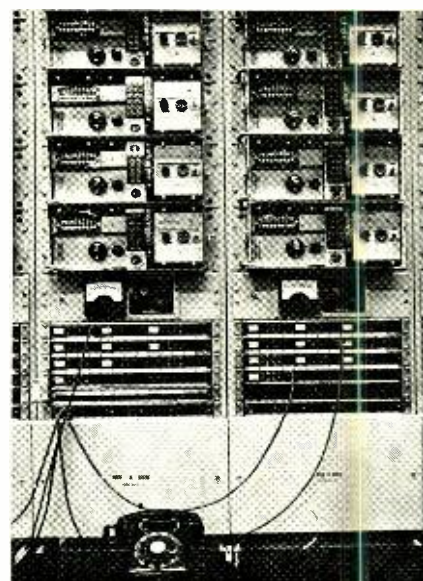

Line amplifiers located in modern POC.

mal operation, the heart of the signal-transmission operation is the Television Operating Center which is a part of the local Bell System installation. The TOC is the control point for all TV signals passing into, out of, or through a major population center. In the TOC are racks of test equipment, video and audio jack panels, video and audio monitors, and communication facilities which are used to correlate the entire operation. In most centers, there are two or more men on continuous duty to make whatever level adjustments or other changes must be made to assure uninterrupted service.

### Securing Services

When one applies for line services for typical remote broadcasts, initial contact is made with the supervisor of the Program Operating Center (POC) for radio links or with the TOC supervisor for television links. The station's requirements are entered as an order on a

● Please turn to page 36



Audio jack-panel and switching board.



Two men watch monitors, A-scope at TOC.



Video, other microwave transmitters.

# A PORTABLE STEREO CONSOLE

by Lt. George M. Durenberger, Jr.

— This inexpensive little unit fills the need for a remote or auxiliary console.

In production work and remote broadcasts, the need often arises for a compact and inexpensive control console as an auxiliary unit. Unfortunately it is often difficult to equate low cost with high quality. The stereo unit (Fig. 1) to be described meets FM specifications, is "packaged," and was constructed mostly from the spare-parts bin. It is hoped that this account will prove helpful to those interested in the construction of such a piece of equipment.

## Description

The console will accept a monophonic microphone, two magnetic stereo turntable heads, one high-level monophonic turntable output, the stereo outputs of two tape recorders, and the signal from an FM tuner. Inputs to all channels are switched through lever keys. There are two dual-channel outputs, one 600-ohm balanced and the other of the cathode-follower variety. The utility monitoring amplifiers deliver about ten watts of music power to 8-ohm speakers or to stereo headphones (which can be switched from monitor to audition/cue circuits or to an external source). Included is a 5-watt cue amplifier. The unit measures 12" x 17" x 14". All inputs and outputs

appear on the rear panel at jacks or barrier strips (Fig. 2), so the unit can be set up at a remote location with a minimum of effort.

## Design

The original planning envisioned an integrated stereo preamp/amplifier with the mixing system located in a high-level stage. Cost estimates ruled out the use of low-impedance faders and attendant transformers, so it was decided to go high-impedance throughout. To do this and still meet the hum and noise requirements of a high-quality unit, we designed an outboard power supply and used low-noise tubes. Leads from the turntables were kept to less than 3' in length, and shielded plugs were employed to reduce further possible hum pickup.

Since the microphone input was to be used for announce purposes only, it was designed to accept a monophonic signal, and a single microphone was used. The turntable preamplifiers follow a standard design and are RIAA equalized. They will accept any magnetic phono head having an output of 5 millivolts or more. All other inputs with the exception of channel 6 are connected through their respective keys to faders. The input to this channel is designed to accommo-

date a monophonic high-level output from an FM tuner or from the outboard preamplifier associated with an automatic turntable. This input is parallel-fed to both sides of fader 6 through resistors. This design was established simply because FM stereo is not available at our location. It is, of course, a simple matter to convert the channel to accept stereo.

## Input Stages

The schematic diagrams referred to in the text that follows show the circuits for one stereo channel only unless otherwise specified. In Fig. 3A, V1 is the low-distortion microphone preamplifier. Its output is fed to two halves of a 12AX7 (only one of which is shown in Fig. 3). The twin triode's outputs appear at key S1 of each channel to feed the No. 1 faders of the mixing system. Should the reader wish to design this stage to accept stereo microphones, it is an easy matter to replace the 12AX7 with another pentode as the second preamplifier. Fig. 3B shows the circuit of a standard phonograph preamplifier with RIAA equalization. Twin triodes were used here primarily because of the low distortion factor and also because of the simplicity of applying the required equalization.



Fig. 1. Front view of the consolette.

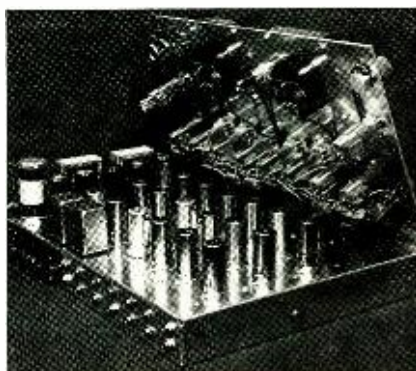


Fig. 2. Rear view shows parts locations.


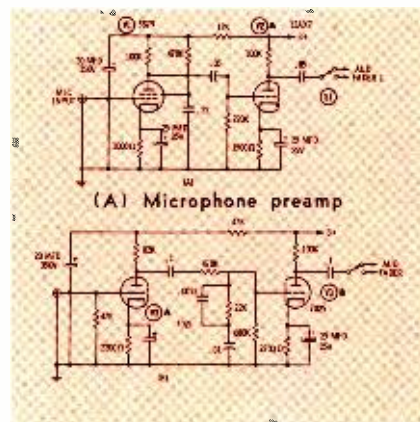


Fig. 3. Preamplifier schematic diagrams.

Note from Fig. 4 that all key switches are 4PDT. Two contacts (one is shown for each key) switch the stereo channels. Keys S1 through S6 also have the function of energizing relays for speaker muting and for remote starting of tape recorders and turntables; two contacts on each key are used in parallel for this purpose. All key wiring appears on terminal strips beneath the chassis, so it is a simple matter to alter the switching sequence. In order to keep the cost in line, we employed lever switches with only two positions; consequently the "off" and "audition/cue" positions were combined. When the switches are in this position, the audio is fed to monitor-input key S8 through the audition buses and is also fed to the cue amplifier. (Note that the input to the single cue amplifier is through two 180K resistors. This enables cuing of both stereo channels without loss of separation to the audition buses.)

The mixers are dual 50,000-ohm carbon controls connected in a voltage-divider arrangement. All six faders for each channel are connected in parallel through six 220K resistors to the grid of a section

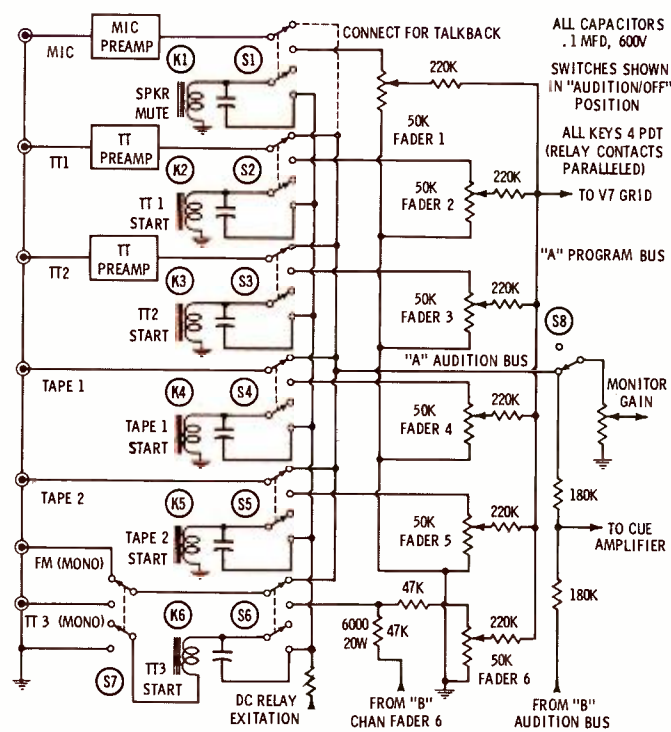

**Fig. 4. Switching section controls both audio, stop-start relays (one channel shown).**

of V7, a high-gain preamplifier, which sees an equivalent resistance of from 220K/6 (with all faders closed) to 270K/6 (with all faders open). The small change in overall resistance as an individual control is rotated through its range

results in a fairly linear frequency response and keeps the faders independent of each other.

## Amplifier Circuits

## Amplifier Circuits

The output of V7 is fed through fader 7, the master gain control,

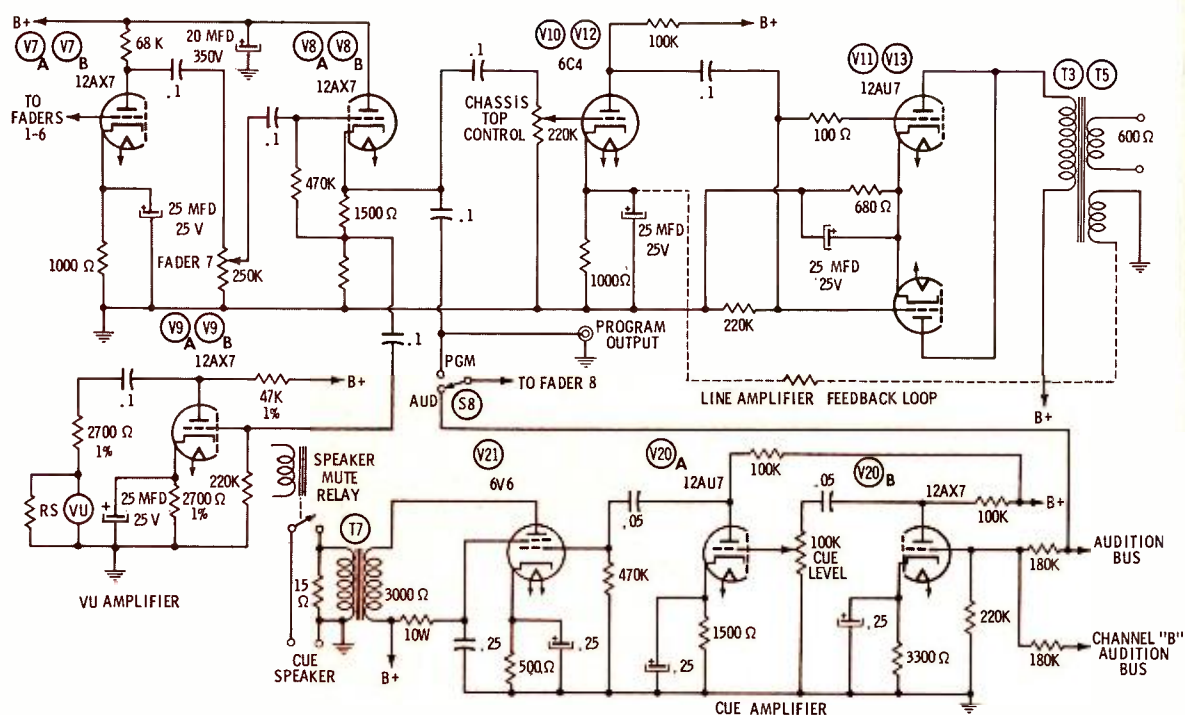


Fig. 5. Schematic diagram shows circuit arrangement and parts values of cue amplifier and one of the two-main channel amplifiers.

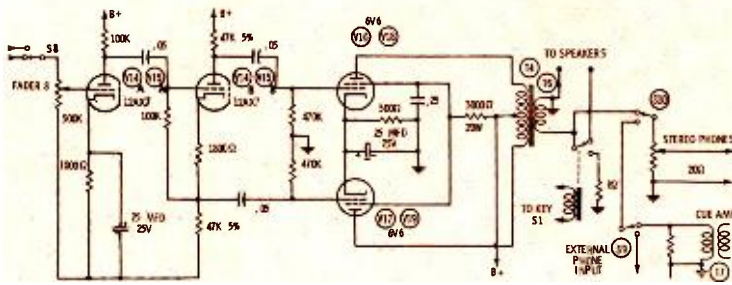


Fig. 6. One of the two identical monitor amplifiers for use in the stereo consolette.

to V8, a cathode-follower stage used as a distributing amplifier (See Fig. 5). V8 feeds the line, VU, and monitor amplifiers and is also tied to the output jacks to provide a cathode-follower output. This connection was deliberately designed so as not to isolate the output jacks from the monitor-amplifier input. Thus, by using the same jacks, a program can be fed **into** the monitor and line amplifiers without tying up the mixing system. This application is quite useful in our installation.

V9 is employed as a VU-meter amplifier. Precision resistors were used since they happened to be readily available. The reader can change the 220K grid-bias resistor to a variable control if variable meter multiplication and balancing are desired.

### Output Circuitry

Notice from Fig. 5 that the line amplifiers are fed through chassis-top controls. In use, the 600-ohm balanced outputs can be varied through a range from -20db to +10db with respect to the reference output level. Once a suitable output level has been established, there is no need for further adjustment of these controls. While transformer T3 (and T5 for the "B" channel) is shown as series-connected to the output tubes, the author's original installation used

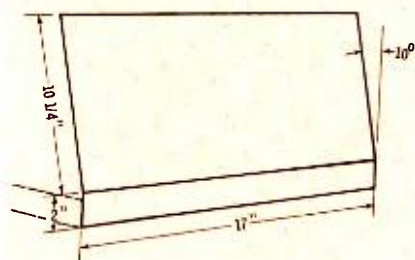


Fig. 8. Dimensions for bending the panel.

UTC O-1 "Ouncers" and .5-mfd blocking capacitors in a shunt-fed arrangement. Response was equally as good, but usable line level suffered. T3 and T5 can be obtained with dual output windings, and one winding might then be employed as a feedback loop to improve response (as shown in dash lines in Fig. 5).

Monitor amplifiers are fed through S8, the monitor input key, and fader 8, monitor gain control (See Fig. 6). V14 (and V15 for the "B" channel) is a voltage-amplifier/phase-splitter driving twin 6V6's in push-pull. The outputs are fed through speaker-muting relay contacts to enclosed 12" utility speakers, and the sound is quite clean. The output is also connected to key S10 for feed to the stereo headphones. Fader 12, "earphone volume," is connected as a voltage divider, and its output will match almost any type of headphone. Notice from Fig. 6 that key S10 can be engaged to provide cuing by earphones. A further connection is made through key S9 to enable monitoring of an outside source such as a tape-recorder output.

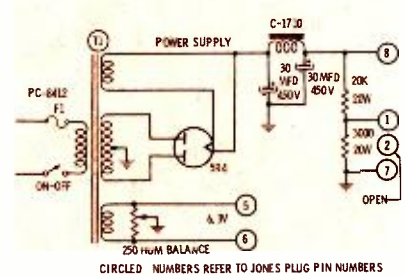


Fig. 7. Circuit of outboard power supply.

### Power Supply

The power supply (Fig. 7) employs the standard full-wave rectifier. The voltage-divider output serves the dual function of acting as a bleeder while providing the operating voltage for all relays in the system. (The only relays the parts bin provided were the high-resistance, low-current type.) Arcing is suppressed by .1-mfd capacitors across the relay-control contacts of all switches. Power to the consolette is furnished from the power supply by a twelve-conductor cable through Jones plugs.

### Construction

The front panel is constructed from a 12 1/4" x 17" sheet of 1/8" aluminum shaped as shown in Fig. 8. No detailed panel layout is given, because hole sizes and locations will depend on the specific components used. Care must be taken to provide enough clearance for the rear of the switches where they approach the first row of tubes (Fig. 2). We used the tube layout in Fig. 9. Of course, the builder may

• Please turn to page 38

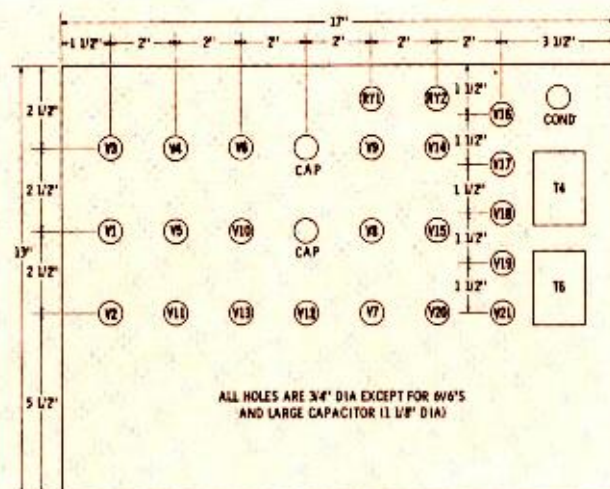


Fig. 9. Typical tube and transformer layout for the portable stereo consolette.

# THE MONTREUX TELEVISION SYMPOSIUM

by Elliott P. Fagerberg, BE Consulting  
Author, Geneva, Switzerland — A  
complete report on an international  
gathering of television experts.

Montreux, Switzerland, May 24-28—Space satellites for telecasting and color TV in Europe were highlighted at the Fourth International Television Symposium and Equipment Exhibition here this week. Considerable attention was also given to "Television in Emerging Countries" and to "Industrial, Biological, and Medical Applications of Television." Climaxing the biennial meeting was the presentation (Fig. 1) of Symposium Citations for outstanding contributions to TV.

In a survey of the most promising technical developments of the next decade, Dr. George H. Brown of RCA stressed the value of space satellites for relaying color TV programs.

Dr. Walter E. Gerber, discussing world standards, pointed out that nearly all of mankind could watch TV programs relayed by a single medium-level satellite, since 90% of the world's population inhabited a relatively compact contiguous area (Fig. 2). He also emphasized the increasing number of satellite TV transmissions (Fig. 3).

Speculating on the future of TV, Prof. Werner Nestel, Telefunken (Ulm, Germany), declared that "satellite use would sharply increase when an electronic standards converter becomes operational." According to Prof. Nestel, such a converter has been developed in Great

Britain. This equipment, which converts the 625-line standard to the 405-line standard, embodies a frame-storage converter that can also convert 525 lines, 60 frames per second into 625 lines, 50 frames per second, and vice versa.

Maurice Oudin, of the French radio and television organization, discussed the problems and advantages of using satellites for telecasting. Mr. Oudin explained that TV transmissions by satellite, although more rapid, were also more expensive than those by purely terrestrial techniques. He also pointed out that a time lag of several seconds, especially if the satellite was on an east-west orbit, might offset advantages such as (1) the facility of simultaneous worldwide transmissions, (2) possibilities for both indirect and direct spot news broadcasts, and (3) exchanges of national news programs on a daily basis. The French engineer called attention to the 45% increase in noise which results from slight atmospheric disturbances, as well as the high noise-to-signal ratio inherent in satellite telecasting.

From an economic viewpoint, Mr. Oudin added, the wide band required for telecasting is disadvantageous since it reduces the profitability of satellites for two-way telephone circuits. The economic disadvantage may be reduced, however, by using navigational satel-

lites for both monochrome and color TV programs.

Underscored by several as the basic requirements for satellite TV systems were (1) flexibility and (2) adaptability for liaison with earth stations and with other space stations.

Kevin Corrigan, manager of ABC's Worldvision Network, pre-

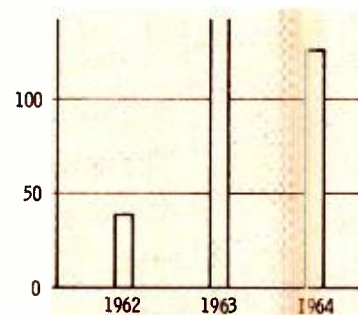


Fig. 2. Distribution of population as it might be viewed from the satellite.

sented a film report of the launching of Comsat's Early Bird, plus highlights of the Worldvision symposium held during the NAB Convention at Washington, D. C., in March 1965.

## Color TV for Europe

Not surprisingly, the "hottest" subject of discussion at the symposium was the problem of a color TV system for Europe.

Prof. Dr. Richard Theile, Direc-



Fig. 1. Honored were (l to r): Dr. Richard Theile (Germany), Dr. Vladimir Svoboda (Czechoslovakia), Dr. Johan Haantjes (Holland), and Dr. George H. Brown (United States).

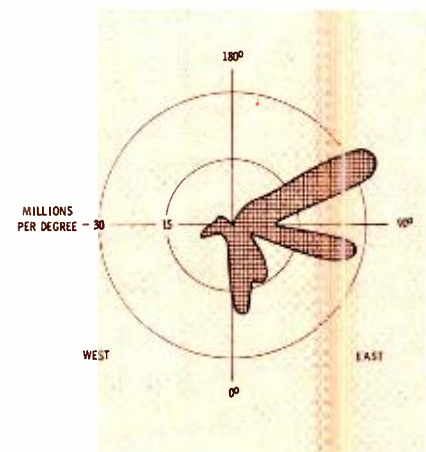


Fig. 3. Satellite transmissions on rise.

tor of the Institut Für Rundfunktechnik (Munich, Germany), in his lecture on "Compatible Color Systems, with Special Reference to Different Subcarrier Modulation Methods," compared the PAL (Phase-Alternation-Line) system with other techniques.

M. Chauvierre, Videon Laboratories (Paris, France), aroused considerable debate when he asserted that mask tubes for color TV should be replaced by a more efficient system. In his exposition of an experimental method of eliminating line lag in color TV using the SECAM process, the French engineer explained that, in tests with a four-tube decoder, trinescope receivers had proved more reliable than cathode tubes.

Dr. W. Bruch, Telefunken (Hanover, Germany), in his lecture on the PAL system, declared that the German technique was "doubly compatible." Telefunken's scientist explained that the PAL system, which uses a monochrome camera with a special tube, is only 35% more expensive for color than for black-and-white transmissions.

Responding to a question from a symposium participant, Dr. George H. Brown (RCA) said that, although the PAL system has many advantages, it unfortunately necessitates receivers that are expensive. Dr. Brown stated that his personal preference was for a system which embodied a subcarrier with FM phase modulation. He recommended that European equipment manufacturers undertake cooperative research which should enable them to agree on a common system possessing the virtues of all competing techniques and none of the flaws.

Pointing out that standards conversion is "undesirable from the producer's point of view," Dr. Walter E. Gerber, Swiss television expert, expressed the opinion that a uniform world-wide standard—of approximately 600 lines, 30 frames per second and 55 fields per second—could be achieved. Referring to the problem of "flicker," Dr. Gerber insisted it should not be solved by using unusually wide bands for TV transmissions.

### **The Future of Color**

There was general consensus among symposium attendees that the economic factor is the crucial

element in the future development of color television.

In the USA, where consumer purchasing power is high, color TV is expanding rapidly. It was envisaged that 2,000,000 new color receivers would be installed in American homes during 1965. Dr. Brown underscored that "... in the United States . . . , at present, nearly four million homes have color receivers, all major networks are broadcasting in color, and receiver production can scarcely meet demand. With increased production and growing industrial competition, set prices have decreased sharply." Dr. Brown also called attention to the fact that "... Japan and Canada are already evolving color-TV industries, and Europe and Russia have both determined to establish color service. Commercial transistorized small-screen color-television receivers are being introduced in Japan and the United States this year." Prof. Werner Nestel insisted, however, that in Japan, as in most other countries of the world, consumer buying power was not high enough to assure greatly expanded use of color-TV receivers. He said: "In my opinion, four conditions must be fulfilled before . . . color television has reached the breakthrough mark: (a) Transmitter and receiver design must mature, (b) there must exist a certain saturation of monochrome sets, (c) the income of the population must be in reasonable relation to the price of color TV sets, and (d) the entertainment value and length of color programs must provide an incentive.

Henry Benaroya, managing director of Telicolour Ltd., told the symposium that his firm, in collaboration with the Rank Electronic Tube Division, was developing a technique which will make possible the conversion of monochrome equipment at about 20% of the cost of other systems. He added that "... in broadcast studios, the existing black-and-white equipment can be converted rapidly . . . to the Telicolour system at an additional expense of about one-third the cost of existing equipment."

Genevan expert Georges Valensi, a TV pioneer who offered the principle of "double compatibility" in 1933, announced his current research on economical land-line

transmission in cables carrying hundreds of coaxial circuits. He said his system includes a chrominance-encoding technique he first demonstrated in 1956.

Dr. Brown declared: "One of the most significant recent advances in color broadcasting equipment is the four-tube camera which has a luminance channel on a par with the best black-and-white cameras. Work on camera tubes with electrostatic instead of magnetic focusing and deflection may lead to lighter-weight, more easily handled, and simpler color and black-and-white cameras." The RCA expert emphasized that more versatile magnetic tapes are being developed, with higher resolution and greater wear resistance. He likewise foresaw integrated circuitry for color TV receivers and broadcasting equipment, conversion of color television from analog to digital transmission, and flat-screen TV displays.

### **Exhibits and Papers**

Jean L. Delvaux, French Thomson-Houston (Paris), explained the operation of his firm's flying-spot scanning system. This scanning equipment, exhibited at Montreux, is used for both films and transparencies. Fully transistorized, the apparatus comprises a remotely controllable device for moving transparencies and slides.

Prof. Miroslaw Bano, Czechoslovakian Radio and Television Research Institute (Prague), reported on the "Optical System of an Experimental Color TV Camera." Jean Cayzac, Electronics and Applied Physics Laboratories (Paris), explained the "Operation of 4-Micrometer Infrared Television."

Walter E. Turk, English Electric Valve (London), surveying the range of existing image orthicons, traced their evolution from the 5820 through the 3" field-mesh types to the 4½" tube, with special reference to color adaptability. Mr. Turk indicated new techniques may replace camera tubes. His firm exhibited its new line of image orthicons and other tubes.

Prof. Werner Nestel, in predicting that "about 90% of TV programs will soon be transmitted from magnetic tape," underscored the high quality of taped color broadcasts. Similarly, Dr. Brown

• Please turn to page 42

# EIMAC

**four-cavity amplifier  
klystrons pass the 33,000 hour  
mark at WWLP-TV  
Springfield, Mass.**

The new generation of UHF klystrons is now time tested with two Eimac type 4KM100LA power klystrons. These two tubes have been in use for the past 2½ years at Station WWLP-TV in Springfield, Mass., with a total hours of operation now exceeding 33,000 hours! The two Eimac tubes installed in a 25 kilowatt TOWNSEND ASSOCIATES transmitter are operating without change in their original characteristics. Five other TOWNSEND ASSOCIATES transmitters are now in service using the same series of Eimac klystrons — with a history of no failures. Reliability, economy of operation, and ease of maintenance is now a reality. Experience tells the story. If you're in need of really dependable tubes for broad-

cast transmitters, contact Eimac's Microwave Division. We'll send you more data immediately.




## 4KM100 SERIES TYPICAL CHARACTERISTICS

4KM100LA (470-610 Mc)  
4KM100LF (590-720 Mc)  
4KM100LH (720-890 Mc)

|                |      |      |
|----------------|------|------|
| Output power   | 25   | kW   |
| Drive Power    | 20   | W    |
| Beam Voltage   | 16   | kVdc |
| Beam Current   | 3.82 | A dc |
| 1 db Bandwidth | 8    | Mc   |
| Heater Voltage | 26   | Vdc  |
| Heater Current | 11.5 | A dc |

EIMAC — a division of Varian Associates  
San Carlos, California

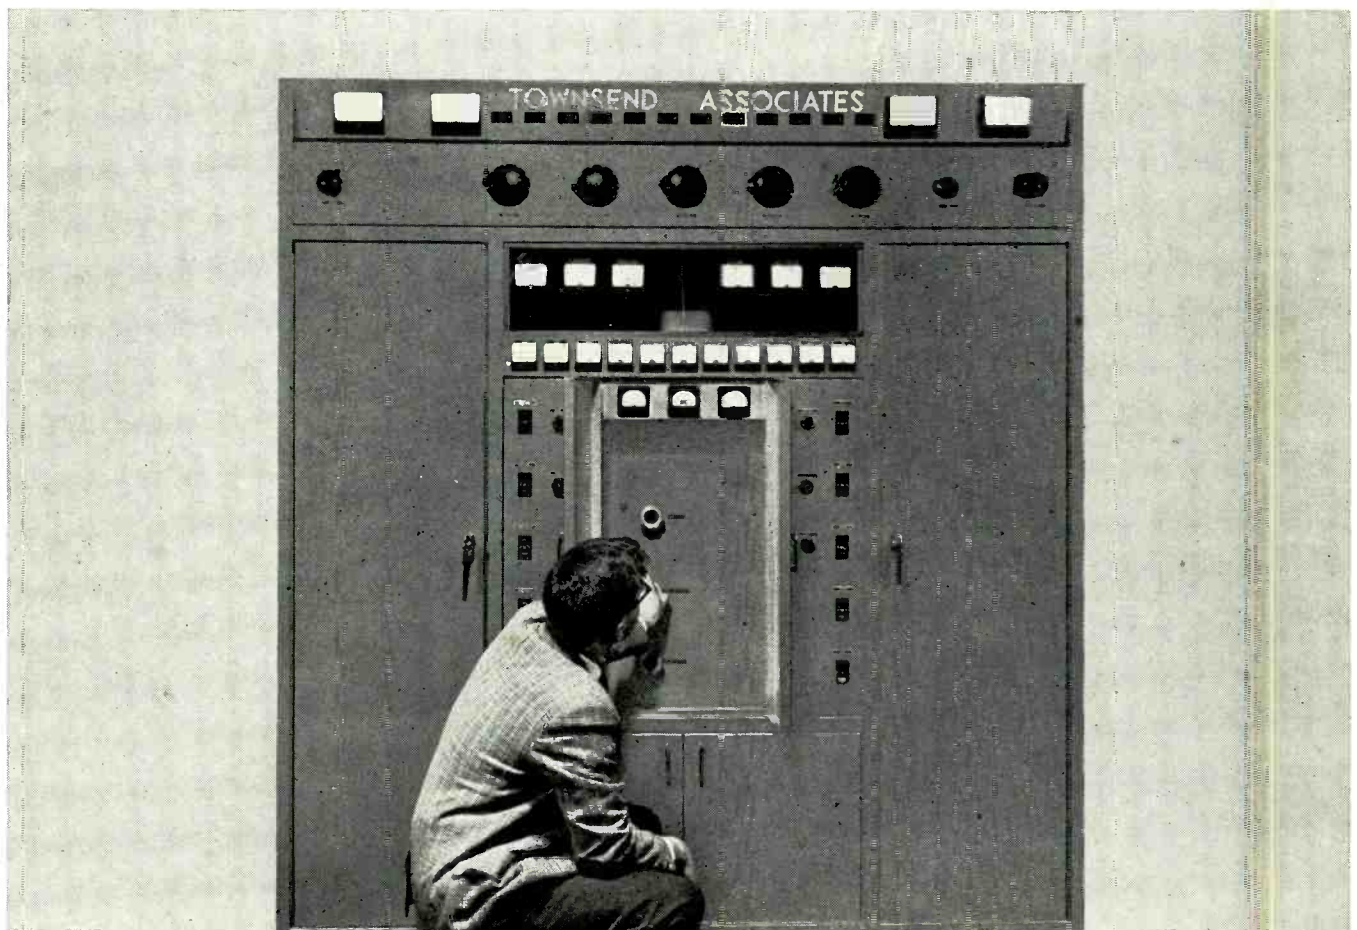

Circle Item 8 on Tech Data Card

CAN BE  
USED TO CONTROL  
CATV  
RECEIVERS

**New Instantaneous Function Selection**

**REMOTE CONTROL FOR ANY AM or FM STATION**

\$895 Complete  
With Four Meters

Maximum Reliability  
No Dials or Stepping Relays

Minimum  
Rack Space  
Requirement

from Bionic Instruments, Inc. - 221 Rock Hill Road Bala - Cynwyd, Pennsylvania

BIONIC INSTRUMENTS, INC. MODEL 6155

Circle Item 10 on Tech Data Card

## Studio Acoustics

(Continued from page 15)

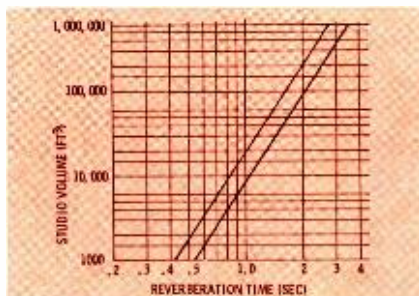


Fig. 2. Graph relating studio volume and recommended reverberation-time range.

quired for a sound to decay 60 db to threshold level. If it is much too long, a discernible echo will result. If it is much too short, one feels depressed by the resulting deadness of sound. Since Sabine's initial experiments 70 years ago, numerous investigators have carried out subjective tests and objective measurements to determine optimum values of reverberation time. The accepted range of values for use in broadcasting is shown plotted against studio volume in Fig. 2. These are intended for monaural systems; the optimum values for stereo may be somewhat longer. Reverberation time varies with frequency and with

room occupancy. The quality of studio acoustics is closely dependent on the frequency variation. Typical curves for good sound quality are shown in Fig. 3.

The approximate reverberation time can be calculated. The simplest formula to use is Sabine's:

$$R.T. = \frac{V}{20 KA}$$

Where,

R.T. is the reverberation time in seconds,

V is the room volume in cubic feet,

K is the average absorption coefficient, and

A is the surface area in square feet.

The initial step in the design is to establish the size and shape of the studio. In a small room it is very difficult to avoid objectionable reflections, which cause resonant modes or standing-wave patterns, dead spots, and poor sound diffusion. The effect is aggravated by incorrect room dimensions, the poorest being a cube shape. In such a case bass voices boom, and distortion occurs at higher frequencies also. In order to space the low-frequency modes as evenly as possible throughout the band, the optimum room proportions are usually near 1.6:1.25:1. At least one dimension should be 16' or more, and the volume should be at least 1500 ft<sup>3</sup>.

Reverberation time can be controlled most effectively by the correct choice and placement of sound-absorbing materials. A completely uncarpeted floor and a ceiling covered with acoustical tile produce

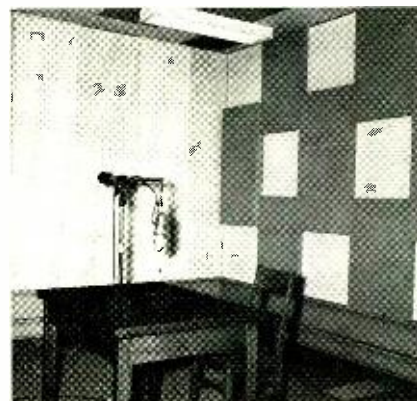


Fig. 4. Treatment of surfaces in small studio gives desired sound properties.

**Mike Reel**

115 Volt AC single phase motor driven microphone cable reel for raising and lowering multi-microphone installations. Available with 2 to 8 conductor slip rings. Remote operation.

**Port-O-Reel**

Port-O-Reel, hand wound for use with shielded microphone cable for public address systems, radio stations, etc. Also can be furnished with power cord for lighting.

All sizes and types of reels are available. Write for catalogue 61A

**INDUSTRIAL ELECTRIC REELS, INC.**  
1509 Chicago Street Omaha, Nebraska

Circle Item 9 on Tech Data Card

BROADCAST ENGINEERING

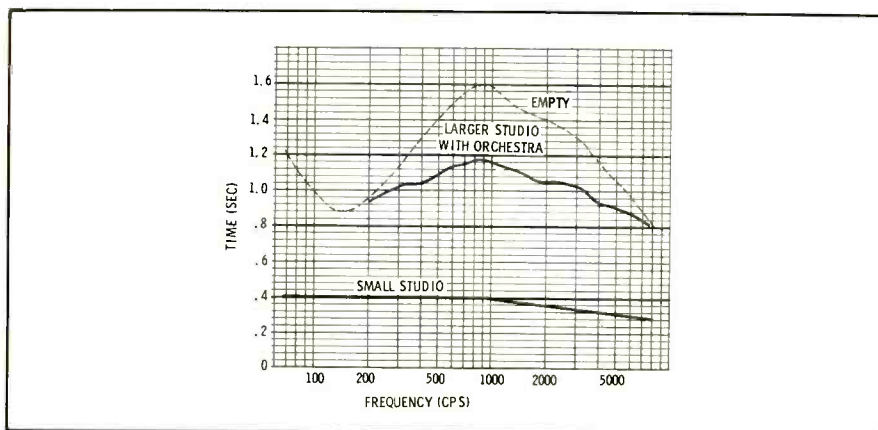


Fig. 3. Reverberation time depends on size and occupancy as well as frequency.

poor results. Instead, the materials should be broken up and applied to smaller areas. It is often necessary to change the locations, quantity, or types of materials used in order to optimize the acoustic performance.

A typical small studio is shown in Fig. 4. It is 13' x 19' x 9' 6" and is suitable for talks or a very small orchestra. One 19' wall has panels of 1/2" plywood projecting 2" and interspaced with two types of perforated panels. These have an asbestos-cement facing and glass-wool backing. The end walls em-

ploy a staggered arrangement of perforated and unperforated panels.

Irregular boundary walls may help a little in breaking up troublesome reflections. Concave surfaces cause focusing and therefore must be avoided. Considerable improvement is possible if the microphone is directional and is positioned so that its response to reflections is minimized. A very small studio or booth presents severe acoustic problems if it is to be used for stereophonic discussions or interviews. Some FM stations conduct these in two separate rooms to achieve op-

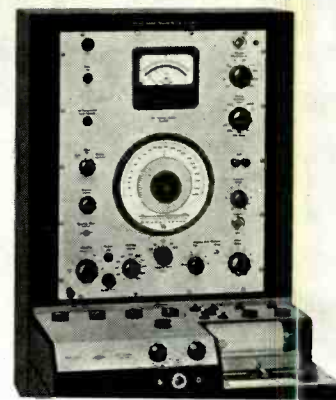


Fig. 5. Automatic frequency-response recorder can measure reverberation time.

timum microphone placement and to avoid echoes.

### Measurements

The severity of a noise problem can be assessed quickly using a palm-sized sound meter. The "A" weighting curve of the filter should be selected so that the meter's response approximates that of the human ear, especially when low sound levels are being measured. Readings of 15-20 db, 25-30 db, and 40-45 db would correspond with the curves of Fig. 1. For a more detailed study, a precision sound-

## separate FM programming?

### SCULLY'S AUTOMATION TWINS

- ✓ Solid state, with enviable record of reliability
- ✓ Heavy duty, professional quality
- ✓ Ideal for long periods of unattended operation
- ✓ Minimum maintenance assured



MODEL 280 (sp/14)


#### 14" TAPE RECORDER

The perfect solid state instrument for automation . . . background music . . . all long play requirements. Crafted in the traditional Scully manner for truly professional performance.

MODEL 270

#### 14" TAPE PLAYER

The extra-heavy duty transistorized unit designed for broadcasters . . . setting new endurance and performing records. Crafted to Scully's exacting standards for long, trouble-free life, professional operation.

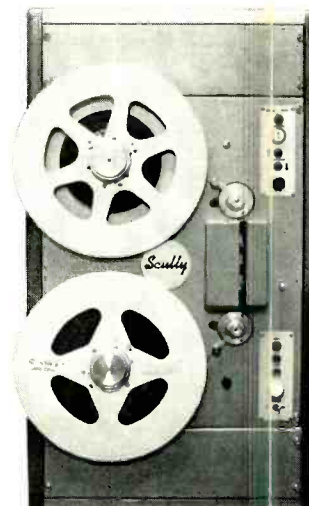

Makers of the renowned Scully Lathe . . . since 1919 the symbol of precision in the audio industry.

### SCULLY RECORDING INSTRUMENTS CORPORATION

480 BUNNELL STREET, BRIDGEPORT, CONN. 06607 TEL. (203) 335-5146

Circle Item 11 on Tech Data Card

An Important Announcement from the World Leader  
in Cartridge Tape Equipment:

# ADVANCED, NEW *Spotmaster* Super B Series

MEETS OR EXCEEDS ALL NAB SPECIFICATIONS AND REQUIREMENTS



## And Here's the New Economy King **COMPACT 400-A**



Don't let their low price fool you. New, solid state SPOTMASTER Compact 400's are second only to the Super B series in performance and features. Available in both playback and record-playback versions, these Compact models share the traditional SPOTMASTER emphasis on rugged dependability.

## Top Quality Tape Cartridges



Superior SPOTMASTER tape cartridges are available in standard timings from 20 seconds to 31 minutes, with special lengths loaded on request. In addition, Broadcast Electronics offers a complete selection of blank cartridges, cartridges for delayed programming and heavy duty lubricated bulk tape. Prices are modest, with no minimum order required.

Introducing the Super B, today's truly superior cartridge tape equipment.

New Super B series has models to match every programming need—record-playback and playback-only, compact and rack-mount. Completely solid state, handsome Super B equipment features functional new styling and ease of operation, modular design, choice of 1, 2 or 3 automatic electronic cueing tones, separate record and play heads. A-B monitoring, biased cue recording, triple zener controlled power supply, transformer output . . . all adding up to pushbutton broadcasting at its finest.

Super B specs and performance equal or exceed NAB standards. Our ironclad one-year guarantee shows you how much we think of these great new machines.

Write, wire or call for complete details on these and other cartridge tape units (stereo, too) and accessories . . . from industry's largest, most comprehensive line, already serving more than 1,500 stations on six continents.



**BROADCAST  
ELECTRONICS, INC.**

8800 Brookville Rd., Silver Spring, Md.  
Area Code 301 • JU 8-4983

Circle Item 12 on Tech Data Card

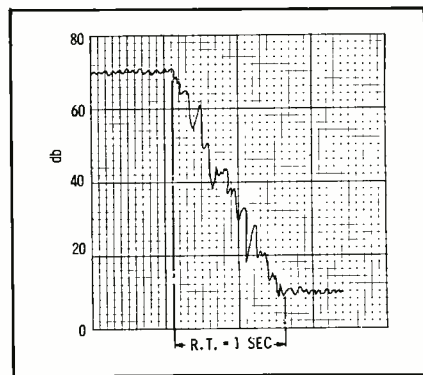


Fig. 6. Typical decay curve for a pure tone source shows reverberation time.

level meter and octave analyzer should be used.

Reverberation time may be measured using an automatic frequency-response recorder similar to the one shown in Fig. 5. The oscillator output is pulsed and fed to an external power amplifier and speaker system of high quality. The oscillator frequency may be varied or warbled at a low audio rate to smooth out the decay curve. A typical recording of a single pure tone is shown in Fig. 6.

Many other types of measurements are possible, but their cost usually is not justifiable in a commercial operation. The techniques mentioned above are normally adequate and eliminate much guesswork. Moreover, acoustics is not an exact science, and theoretical predictions do not always agree with measured results.

## Conclusion


The basic principles of studio sound conditioning have been outlined. The inclusion of complete design information was obviously not possible in this introductory article. On most projects it is advisable to obtain the advice of an acoustics consultant. ▲

Further practical information may be obtained from various textbooks and publications including:

**Handbook of Noise Control**—C. M. Harris (McGraw-Hill)

**Acoustics**—L. L. Beranek (Wiley)

**Journal of the Audio Engineering Society**

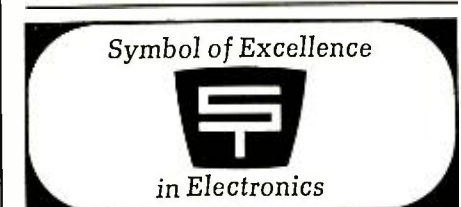

Circle Item 13 on Tech Data Card

**BROADCAST ENGINEERING**

Some plain talk from Kodak about tape:

## Noisemanship...modulation noise... and how to get extra dbs. of silence

Noisemanship is a very hip subject. The more noise your sound system has, the muddier your reproduced signal. Which brings up the subject of defining tape noises, how they occur, how they are measured, and what can be done to reduce them. Like at the start of Salome's dance, there's a lot to uncover.

### Starting at the beginning

Kodak tape is mighty quiet when it leaves the factory. Because of special milling techniques and our now-famous "R-type" binder, the gamma ferric oxide particles are more uniform in size and shape and more uniformly dispersed than was ever before possible. Result: a superior degree of magnetic randomness, and thus, built-in quietness. To make sure that the roll of Kodak tape you purchase is as "quiet" as possible, we also bulk erase each roll. By "randomizing" the particles' polarity in *all* dimensions, foreign signals picked up during manufacture are eliminated.

This fairly pristine state doesn't last long. Once the tape has been subjected to the erase field and record bias from your recorder, a certain degree of randomness is lost. So-called zero-signal noise results because a recorder's erase system is not as efficient as a bulk eraser. Whereas bulk erasers cause 3-dimensional decay of the remnant signal, an erase head causes decay in one dimension only—along the length of the tape. This explains why zero-signal noise is always higher than bulk-erase noise.

### Blue plate special—noisewise

Noise in the presence of a recorded signal—modulation noise—is the real


meat and potatoes of tape performance. Testing for modulation noise is a bit tricky, however, because both ac program and noise get mixed up in the amplifier. And if we are to determine the amount of noise in a system, it's imperative that we distinguish between one and the other. One way to do this is to use what our scientists refer to as a dc equivalent in r.m.s. milliamps of an ac signal.

Simply explained, we select the ac signal level that represents the practical limit for linear recording—2% third harmonic distortion. Then we apply a dc signal to the record head and increase the record current until it reaches the same level as that of the above ac signal. On the tape we have recorded a "zero frequency" program plus the modulation noise contributed by both equipment and tape. Since the reproduce amplifier filters out dc signals, only the modulation noise comes through, and this can be measured by an output meter.

### Strike up the band pass


Final proof-of-the-pudding is to examine the total noise spectrum through band pass filters. Fun! One could, for example, measure the noise that comes through a 1-cycle band pass filter—even get a signal-to-noise ratio of about 115 db. But this really tells nothing about the tape's practical performance. For as the graph shows, there is much more noise in the lower frequencies than in the higher. For more meaningful evaluation, we specify two signal-to-noise ratios . . . one for the average low frequencies (20-1000 cycles at 15 ips) and one for the high frequencies (1000-15,000 cycles at 15 ips). We are happy to report that Type 31A (Kodak's

general-purpose/low-print tape) rates as much as 6.5 dbs better in the low frequencies and 1.5 dbs better in the high frequencies. At Kodak "shhh" is the word.

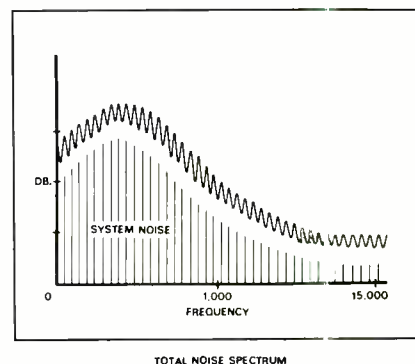

KODAK Sound Recording Tapes are available at most electronic, camera, and department stores.

FREE. New, 24-page, comprehensive "Plain Talk" booklet covers all the important aspects of tape performance, and is free on request. Write: Department 8, Eastman Kodak Company, Rochester, N. Y. 14650.

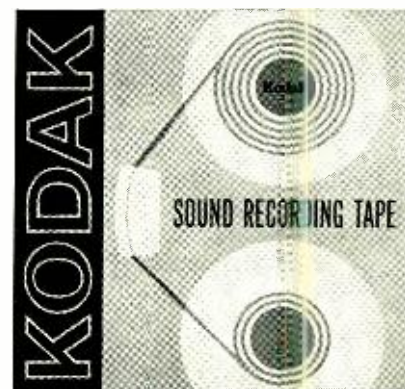

© Eastman Kodak Company, MCMLXI

**EASTMAN KODAK COMPANY, Rochester, N. Y.**

Circle Item 14 on Tech Data Card

# THIS IS DEPENDABLE.. THIS IS NOT...



Dependable solid-state, above all else, is the one reason why Ameco towers high over all other CATV equipment manufacturers. ■ For a cable system to be successful, it must provide dependable, uninterrupted service . . . and *nothing* can match Ameco solid-state when it comes to dependability. ■ Even with the best of vacuum tubes, the so-called "long-life" ones, you must measure their dependability in months. ■ The most conservative estimate on the average life of transistors is somewhere between ten and twenty years! ■ So combine solid-state with Ameco quality and know how . . . and it is easy to see why Ameco is the recognized leader in CATV. Three years ago while other manufacturers were *thinking* about solid-state . . . Ameco *went* solid-state. ■ If you are thinking CATV . . . think Ameco, the leader in CATV.

**ameco**

P. O. Box 11326  
PHOENIX, ARIZONA 85017  
TELE: 602-252-6041

**AMECO QUALITY...  
THE ENVY OF CATV**

Circle Item 15 on Tech Data Card

## Magnetic Tape

(Continued from page 17)

Table 4. Minimum Signal-to-Noise

| Tape Speed        | Full Track | Two Track | Four Track |
|-------------------|------------|-----------|------------|
| <b>Unweighted</b> |            |           |            |
| 15 ips            | 50 db      | 45 db     | not used   |
| 7½ ips            | 50 db      | 45 db     | 45 db      |
| 3¾ ips            | 46 db      | 46 db     | 45 db      |
| <b>Weighted</b>   |            |           |            |
| 15 ips            | 58 db      | 53 db     | not used   |
| 7½ ips            | 60 db      | 55 db     | 52 db      |
| 3¾ ips            | 57 db      | 54 db     | 52 db      |

drift in either direction of 14 dots per minute past a reference point for 7½ or 15 ips or 7 dots per minute on the 36-dot row for 3¾ ips.

### Level

The standard recorded program level is such " . . . that recorded program material shall produce the same reference deflection on a Standard Volume Indicator (ASA Standard C16.5-1961) as that produced by a 400-cps sine-wave signal recorded at the NAB Standard Reference Level."

### Frequency Response

Frequency-response limits for reproducing are shown in Fig. 4. The recorded-response limits are shown in Fig. 5. "The recorded response is defined as the difference between the overall record-reproduce response and the reproduce response from an NAB Standard Test Tape of the same speed." "The measurement of recorded response shall be made at the same level as that on the NAB Standard Test Tape. Normal operating bias shall be used."

### Signal-to-Noise Ratio

Minimum weighted and unweighted signal-to-noise ratios are given in Table 4. Unweighted noise is measured over the frequency range of 20 to 20,000 cps with a measuring system having response uniform within ±3 db from 30 to 15,000 cps. Response shall be 3 db below the 400-cps level at 20,000 cps and shall fall 12 db or more per octave above 20,000 cps. The measurement is made using a tape recorded with bias

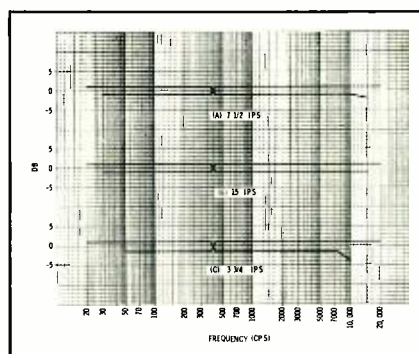


Fig. 5. Recording frequency response.

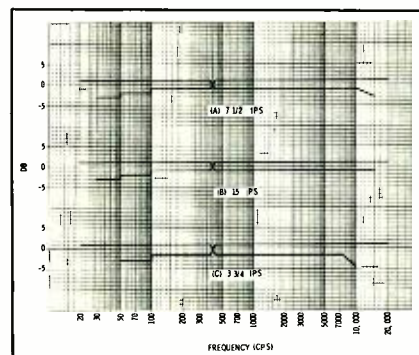


Fig. 4. Reproducing frequency response.

but without signal. The reference level at 400 cps is the NAB Standard Reference Level, the meter conforms to ASA Standard C16.5-1961, and the measuring system has a full-wave rectified average measurement law.

The weighted noise measurement is designed to give an indication of the "subjective signal-to-noise ratio." It makes use of a frequency response similar to that of the ear at low volume levels. It is measured using the weighting curve in Fig. 6. The measurement technique is similar to the one just described. "Calibration is made (with the weighting network inserted) at 1000 cps using the 1000-cps Standard Level which is included . . . on the NAB Standard Test Tape."

### Distortion

Total harmonic distortion for the record-reproduce system must be less than 3% rms when a 400-cps sine wave is recorded so that a reproduce level 6 db above the NAB Standard Reference Level is obtained.

### Flutter

Flutter, like noise, has limits specified on both a weighted and unweighted basis. The measurements are made while playing back a 3-kc recording that is essentially flutter free. The measurement is prescribed as follows:

"Unweighted flutter content shall be measured over the frequency range of .5 cps to 200 cps. The response of the measuring system shall be 3 db down at .5 cps and 200 cps, and falling at a rate of at least 6 db per octave below and above these frequencies, respectively. At low frequencies where the meter pointer follows the waveform, the maximum de-

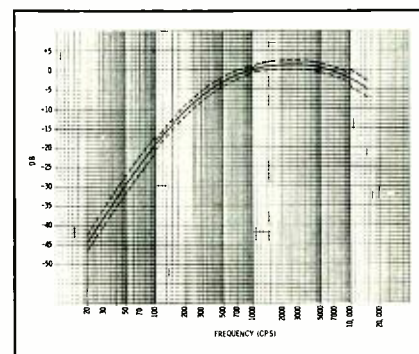


Fig. 6. Weighted noise measurement curve.

# 12

**You can get all  
these 12 features in  
only one 5/10 kw  
AM transmitter**

- 1.** Solid state r-f exciter ( $\pm 5$  cps guaranteed.)
- 2.** Solid state audio driver.
- 3.** Solid state rectifiers.
- 4.** Extended operating console for metering and control.
- 5.** Unequaled compactness — only 69" high, 67-7/16" wide, 32" deep.
- 6.** No external power components.
- 7.** Remote control circuits incorporated.
- 8.** Designed for automatic operation.
- 9.** Loading control of power output.
- 10.** Automatic tuning of PA.
- 11.** Variable vacuum capacitors in tuning and loading.
- 12.** All components accessible; easy maintenance.

It's Collins' new 820 E/F-1 5/10kw AM transmitter. Contact your Collins Sales Engineer or write Broadcast Communication Division, Collins Radio Company, Dallas, Texas for descriptive brochure.



COMMUNICATION / COMPUTATION / CONTROL • COLLINS RADIO COMPANY / WORLD HEADQUARTERS / DALLAS, TEXAS

Circle Item 16 on Tech Data Card

Table 5. Maximum Flutter

|              | rms Flutter<br>(Unweighted) | (Weighted) |
|--------------|-----------------------------|------------|
| 15 ips ..... | .15%                        | .05%       |
| 7½ ips ..... | .20%                        | .07%       |
| 3¾ ips ..... | .25%                        | .10%       |

flection shall indicate the rms value. The indicating meter shall have the dynamics of the Standard Volume Indicator (ASA C16.5-1961), a full-wave rectified average measurement law, and shall be calibrated to read the rms value of a sinusoidal frequency variation."

Readings are to be made at random intervals throughout the reel of tape. The average of the peak readings is

Table 6. Frequency Response Test Tones

| 15 ips<br>0 db | 7½ ips<br>-10 db | 3¾ ips<br>-15 db | 1½ ips<br>-15 db |
|----------------|------------------|------------------|------------------|
| 15 kc          | 15 kc            |                  |                  |
| 12 kc          | 12 kc            |                  |                  |
| 10 kc          | 10 kc            |                  |                  |
| 7.5 kc         | 7.5 kc           | 10 kc            |                  |
| 5 kc           | 5 kc             | 7.5 kc           |                  |
| 2.5 kc         | 2.5 kc           | 5 kc             | 5 kc             |
| 1 kc           | 1 kc             | 2.5 kc           | 2.5 kc           |
| 750 cps        | 750 cps          | 1 kc             | 1 kc             |
| 500 cps        | 500 cps          | 750 cps          | 750 cps          |
| 250 cps        | 250 cps          | 500 cps          | 500 cps          |
| 100 cps        | 100 cps          | 250 cps          | 250 cps          |
| 75 cps         | 75 cps           | 100 cps          | 100 cps          |
| 50 cps         | 50 cps           | 75 cps           | 75 cps           |
| 30 cps         | 30 cps           | 50 cps           | 50 cps           |
|                |                  | 30 cps           | 30 cps           |

observed, and peaks occurring less frequently than 3 times in a 10-second period are disregarded. Weighted flutter is measured with a measuring system having the response shown in Fig. 7. The maximum permissible values of flutter are given in Table 5.

### Crosstalk and Separation

For two- and four-track monophonic systems and four-track stereophonic sys-

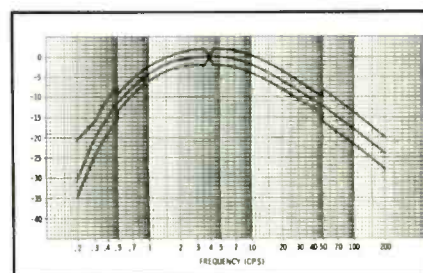


Fig. 7. Flutter measurement weighting.

tems, the minimum adjacent-track signal-to-crosstalk ratio between 200 and 10,000 cps is 60 db, measured without bias applied to the unrecorded tracks.

A minimum channel separation of 40 db in the range 100 to 10,000 cps is specified for stereo systems; this measurement is made with bias applied to both tracks.

### Limited-Performance Systems

A special section of the Standard recognizes the use of lightweight, portable recorders and sets minimum performance requirements for them. Standard tape speeds are 7½, 3¾, and 1½ ips, measured by the method previously described. Unweighted flutter must not exceed .5% rms, measured by the same method as for high-performance systems. The Standard Recorded Program Level for these systems is the same as previously stated.

The reproduce-system response when


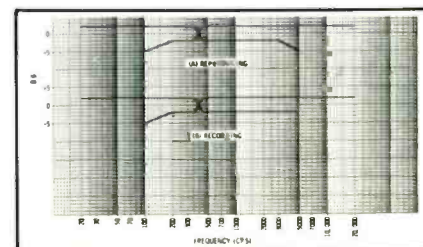


Fig. 8. Response for limited systems.



# INNOVATION

... ANOTHER KEY TO

# SPARTA SUCCESS



The NEW  
A-500  
MONAURAL

STUDIO CONTROL & REMOTE UNIT

Another outstanding example of Sparta's constant effort to incorporate the latest advances and technology into existing products.

The original SPARTA A-50B, and now the NEW A-500 meets the industry need for an integrated studio facility of professional quality and flexibility to serve as a permanent installation. It also has the versatile portability required for remote broadcasts and temporary set ups.

The attractive new cabinet design of the A-500, the new 3 speed custom turntable, the solid state removable audio console, plus many new operator conveniences make the A-500 Studio Control & Remote unit today's most incomparable value at only \$950. — AS-500 Stereo also available \$1350.

Contact your SPARTAMAN today for full information.

only \$950.00

# SPARTA

ELECTRONIC  
CORPORATION

6450 FREEPORT BLVD. - SACRAMENTO, CALIF. 95822

Circle Item 17 on Tech Data Card



TELEMET'S COMMERCIAL BROADCAST MODEL

## CAN YOU TELL THE DIFFERENCE?



TELEMET'S AEROSPACE MODEL

Well, there isn't any! They're exactly the same. In fact *all* Telemet Video Broadcast Equipment is identical in every respect to the units we deliver in quantity to the military.

Telemet's high reliability equipment is specially designed for those critical aerospace and communications applications where even the most minor failure can be very costly.

And our commercial video broadcast models are exactly the same—in performance characteristics—in the high standards of quality and reliability. That's why you'll get the best—from Telemet.



# TELEMET COMPANY

185 DIXON AVENUE, AMITYVILLE, N.Y. • PHONE (516) 541-3600

Circle Item 18 on Tech Data Card

# NOW! GIVE YOUR FM STATION 100% MODULATION CAPABILITY



## WITH THE FAIRCHILD CONAX!

■ Now! The FAIRCHILD CONAX enables FM radio stations to increase their signal strength and apparent loudness potential by the effective control of high frequencies which cause trouble when pre-emphasized. High frequencies add sparkle and "bite" to program material and pre-emphasis improves signal-to-noise ratios. When the two are combined, however, it often becomes necessary to decrease the station's power to eliminate over-modulation possibilities.

■ How can high frequencies, which normally contain less energy than mid or low frequencies, cause trouble when pre-emphasis is applied? Simple! High frequency information, such as the jingling of keys, the sharp "s", the muted trumpet, cymbals, or other high frequency sounds, often become high frequency "spikes" when pre-emphasized thereby exceeding the FCC 100% modulation limitation. By making high frequency information "spike-free" (through the use of inaudible super fast attack and release times) the FAIRCHILD CONAX now allows the use of the full high frequency pre-emphasis curve.

### HERE'S A STEP-BY-STEP GRAPHIC ANALYSIS OF THE FAIRCHILD CONAX IN ACTION...

FIG A — Normal program material with program information distributed in mid range—500 to 5000 cycles.

FIG B — Same program material pre-emphasized. Still trouble-free.

FIG C — Program material with a high percentage of high frequency material in its content—such as found on today's records.

FIG D — Same high frequency program material (hot) after pre-emphasis. Note high frequency "spikes" now exceed 100% of modulation.

FIG E — Same program material now controlled by the FAIRCHILD CONAX action.

\* Note even with pre-emphasis the lack of troublesome high frequency "spikes" that normally would cause over-modulation.

■ The FAIRCHILD CONAX has an exclusive patented pre-emphasis circuit which applies a standard pre-emphasis curve to any entering signal. The patented FAIRCHILD CONAX frequency dividing and controlling network allows accurate and inaudible control only of the troublesome high frequency "spikes". This means you can transmit a signal with high average modulation level up to 3 db higher, utilizing the full apparent loudness possibilities of your rated power. In FM stereo and SCA transmission, the FAIRCHILD CONAX prevents splatter between the SCA channel and the stereo channel, allowing you to use both of these dollar producing signals to their fullest. Now full modulation capabilities can be realized without the danger of FCC citation or any change in the transmitted sound of your signal. Now FAIRCHILD CONAX gives your station that brighter and louder sound... the sound that sells. **AVAILABLE IN MONO OR STEREO COMPACT SIZE!**

Write to FAIRCHILD — the pacemaker in professional audio products — for complete details.

# FAIRCHILD

RECORDING EQUIPMENT CORPORATION  
10-40 45th Ave., Long Island City 1, N. Y.

Circle Item 19 on Tech Data Card

playing "an appropriate NAB Test Tape" must fall within the limits shown in Fig. 8. The recorded response (defined previously) must also fall within these limits. This response is measured under the same conditions as for high-performance systems. The standard recommends that the response be attenuated 6 db per octave below 100 cps to improve speech intelligibility and above 5 kc to reduce the possibility of tape overload at high frequencies at lower tape speed.

The unweighted signal-to-noise ratio is measured by the method already described. Minimum ratios are 46 db for full-track recordings, 43 db for two-track recordings, and 40 db for four-track recordings.

### Standard Test Tapes

There are four NAB Standard Test Tapes, designated 15 NAB 65, 7½ NAB 65, 3¾ NAB 65, and 1½ NAB 65. The initial number of each tape designates its speed in ips. All of them are recorded across the full tape width, and each contains five parts, as follows:

(1) A 60-sec azimuth-adjustment tone of 15 kc for 15 and 7½ ips, 10 kc for 3¾ ips, and 5 kc for 1½ ips, recorded at the same level as the corresponding frequency in the frequency-response recording. The recorded azimuth is at 90° ± 1° to the tape edge,

(2) A 20-sec, 400-cps sine-wave tone recorded at the NAB Reference Level for 15 ips, 10 db below that level for 7½ ips, and 15 db below the reference level for 3¾ and 1½ ips,

(3) 12-sec frequency-response test tones as listed in Table 6. Each signal is preceded by a voice announcement. Tone levels would produce constant output when played on an Ideal Reproducing System; levels on the tape are measured during manufacture on a system of known response characteristics.

(4) A 20-sec 400-cps sine-wave tone recorded at NAB Standard Reference Level,

(5) A 1000-cps sine-wave tone recorded at NAB Standard Recorded Program Level.

### Conclusion

An attempt has been made to present the significant points of the NAB reel-to-reel tape recording and reproducing standard. Other portions of the standard further amplify or qualify the information given here. Annexes define an "Ideal Reproducing System" and a "Primary Calibrated Reproducing System."

Copies of the complete standard may be obtained by writing to the Engineering Department of the National Association of Broadcasters, 1771 N Street, N.W., Washington, D. C. ▲


### STANCIL-HOFFMAN CORP.

- MINITAPE PROFESSIONAL BATTERY Operated Portable Recorder, Mono Stereo, Synchronous.
- MAGNETIC FILM RECORDERS, Single and Multi-Channel, 16, 17½, 35 MM.
- BROADCAST LOGGING Recorders, Slow Speed Single Channel to 32 Channels.
- HIGH SPEED TAPE DUPLICATORS for Full, Half and Two Track Stereo Duplication.

921 N. Highland Ave., Hollywood 38, Calif.

Circle Item 47 on Tech Data Card

BROADCAST ENGINEERING

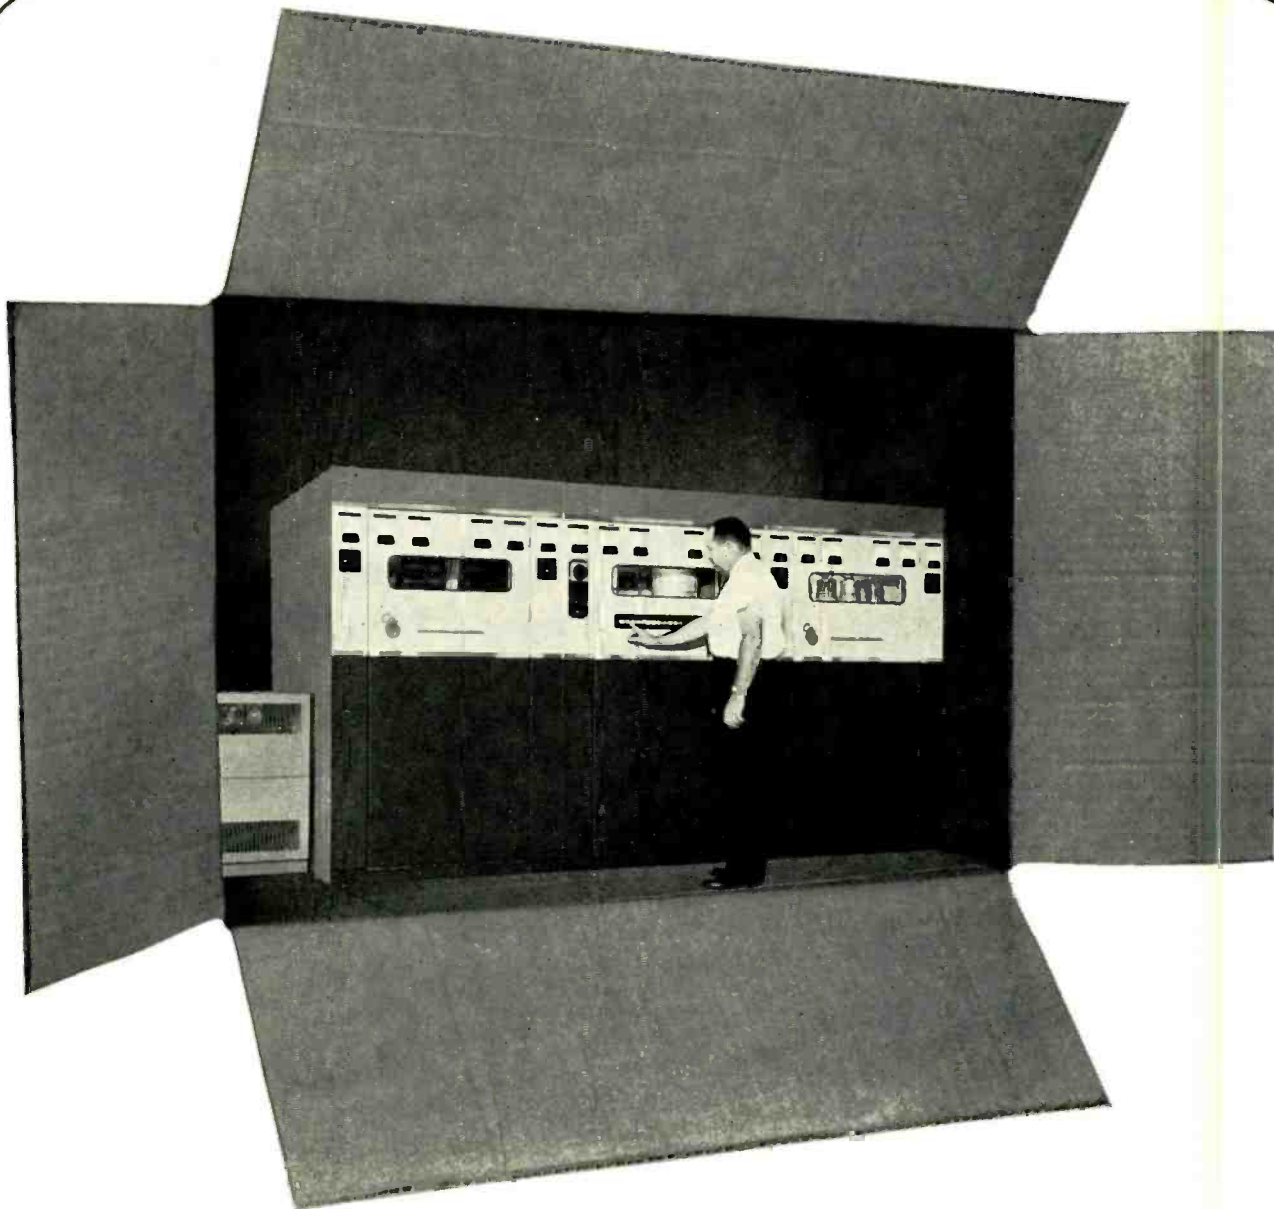

## ONE NEAT PACKAGE

gives you the most efficient 50 kw AM broadcast transmitter built anywhere!

□ overall efficiency: 62% or better □ plate efficiency: 80% or better □ power consumption: 120 kw @ 100% modulation, 92 kw @ 30% modulation, 82 kw @ 0 modulation □ completely self-contained, including blower: compact design assures minimum installation cost and uses only 62 sq. ft. of total floor space.

for a descriptive brochure on Continental's new Type 317C 50 kw AM broadcast transmitter, write: Commercial Sales, Continental Electronics Manufacturing Company, Box 17040, Dallas, Texas 75217

**LTV** *Continental Electronics*  
A DIVISION OF LING-TEMCO-VOUGHT, INC.

Circle Item 20 on Tech Data Card

# **CONVERT** **TO** **Cool Reliable** **Silicon Rectifiers** **from** **WILKINSON ELECTRONICS**



SR-14-12

Replaces 872-8008-575

## **FEATURES**

- Direct Replacement No Rewiring
- Nonencapsulated -- Easy to Repair
- GO-NO-GO Light Indicators Warn of Any Difficulty
- Safe for Operators Lights Warn of Hi Volts ON

## **Replacements available**

5U4 5R4 866A 872 8008  
6894 6895 673 869B 857B

Now you can modernize equipment easily and economically to reliable solid state power supplies.

WE units plug in to existing sockets and component removal is unnecessary.

Each replacement contains a number of hermetically sealed diodes shunted by indicator lights and RC Networks. All components are replaceable.

**REDUCE HEAT - CUT POWER**  
**AND TUBE COSTS**  
**END OFF-AIR PANIC**



**Wilkinson Electronics, Inc.**  
 1937 W. MacDade Blvd.  
 Woodlyn, Pa. 19094  
 Telephone: 215-874-5237

Circle Item 21 on Tech Data Card

## **Line Services**

(Continued from page 19)

form similar to that shown in Fig. 1. The entire path of the signal within the POC is shown directly on the order card, and the input and output jacks are identified by numbers corresponding to the loops from the program source and to the transmitter, respectively. In the event of failure of any circuit component within the POC, the path diagram provides a simple means of locating the offending part, which may then be bypassed by means of patch cords or by changing a few simple connections. For the higher-service lines, another form is used which also includes a chart on which the actual measured frequency response of the circuit is recorded for reference.

When planning for the line services required for a new radio or television station, contact is usually made through the sales and engineering departments, and, through a series of conferences, agreement is reached on solving the specific demands of the new broadcaster.

As an example of how the line-service companies will work to accommodate the demands of special events, Indiana Bell installed approximately 16,500 feet of cable to provide the basis for the closed-circuit telecast of the Indianapolis 500-Mile Race originated by a local television station. Each cable contains from 4 to 24 video pairs; the largest cable has 24 video pairs and 300 regular telephone wires. The installation provides the equivalent of 870 miles of new circuits, making possible the use of 12 separate camera locations around the track. Both picture and sound are fed from each of these camera positions to either the main remote TV studio



One camera position at 500-mile race.

located on top of grandstand B or to the control room in the paddock. Two portable microwave systems provide the link from the Speedway, located west of Indianapolis, to the TOC downtown. The extent to which Indiana Bell accommodated the principals involved in telecasting the event is not entirely divorced from the sizeable revenues which will be received over the ensuing years, but common-carrier people are almost universally concerned about doing a good job for any customer.

## **Summary**

In day-to-day operation, the station engineer often falls into a rather complacent attitude regarding the services that may help improve the sound or the versatility of his station. By examining the many services available, he can better utilize them in planning new installations and in updating old ones. Until he cares enough to examine fully how he may benefit from a common-carrier system, the chief of a local 250-watt AM or the technical director of a multi-station combined radio and TV operation may be depriving himself of many direct and indirect services utilizing a vast and versatile communication system. ▲


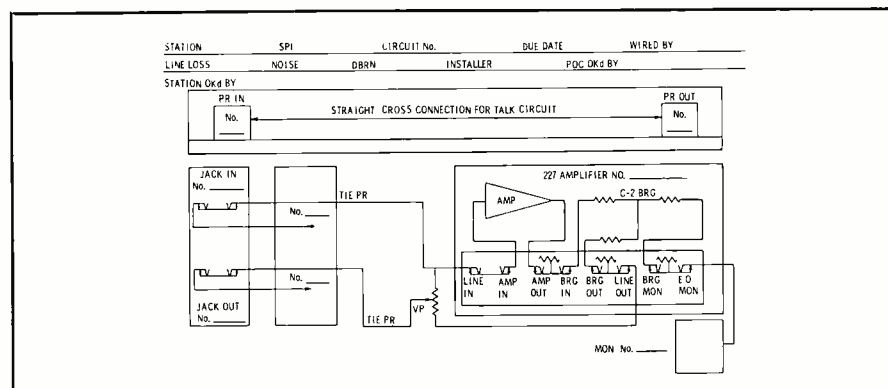


Fig. 1. Order card similar to this contains all essential circuit-routing information.

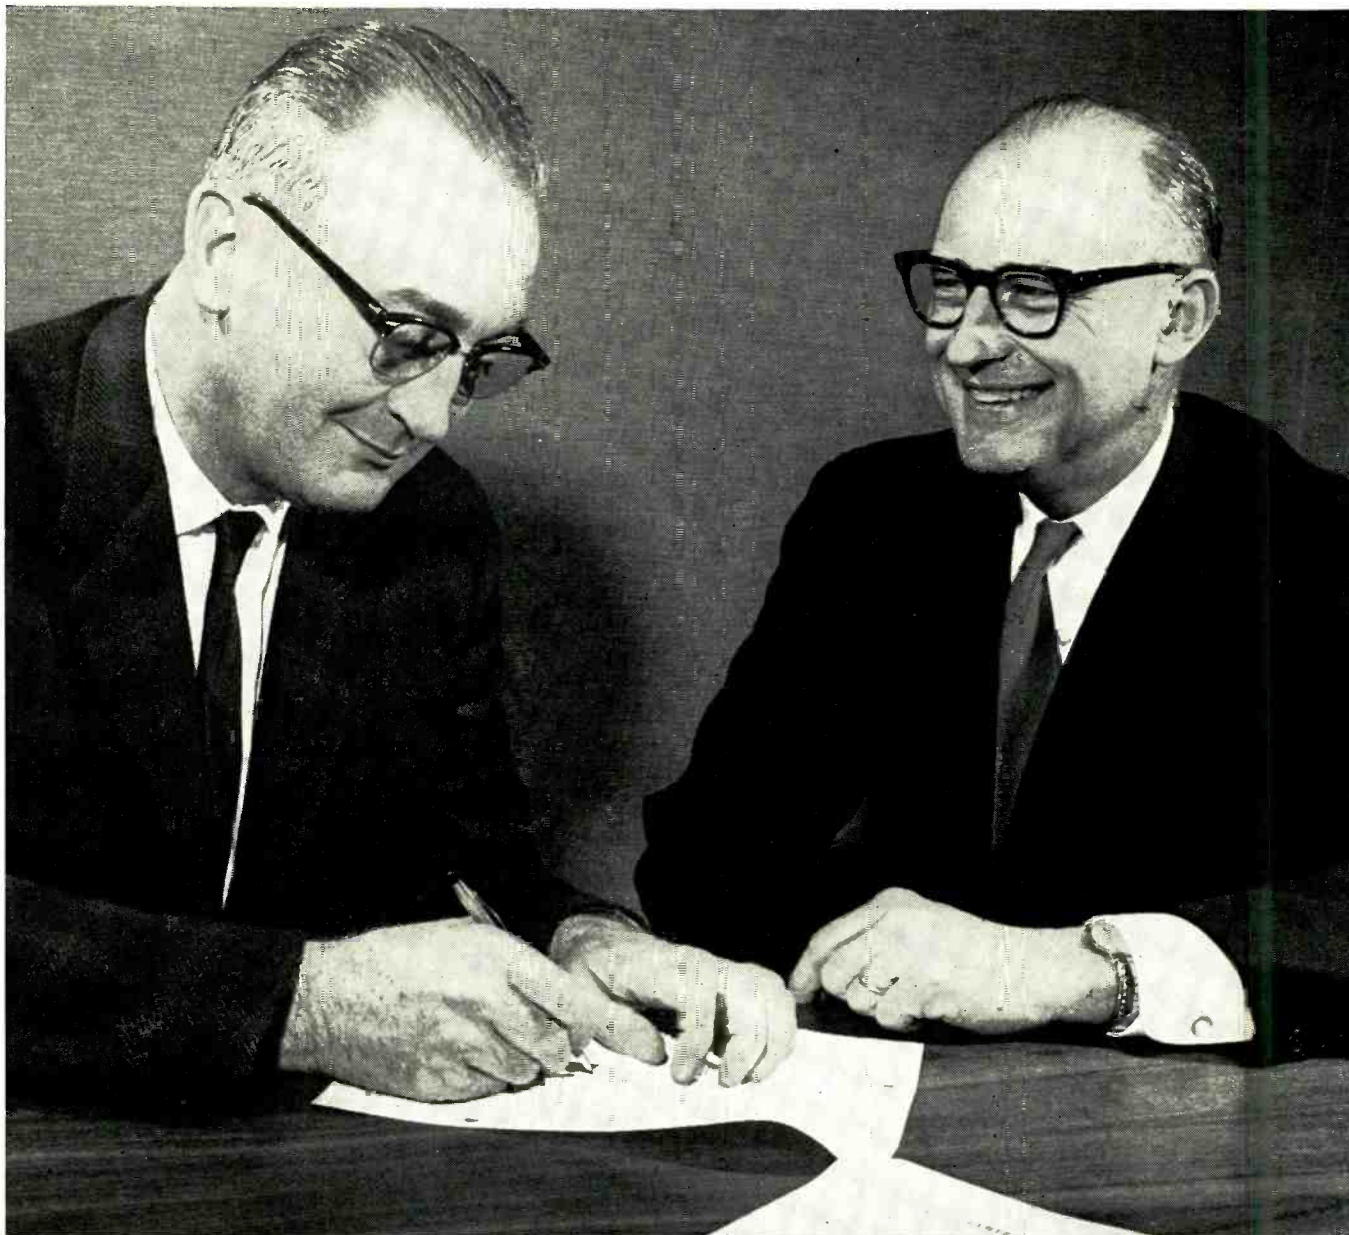

Left, W. S. Hansher; right, R. E. Christie, Manager, G-E Visual Communications Products.

## G-E UHF Klystron Transmitters Win-Again.

The event pictured above is noteworthy.

William S. Hansher (left), Vice President in Charge of Engineering, Taft Broadcasting Company, is signing a contract with the General Electric Company for a new 50 KW second-generation UHF Klystron Transmitter.

The transmitter will provide WNEP-TV, Scranton-Wilkes Barre, Pa., with an effective radiated power in excess of one megawatt.

Almost a decade ago, WNEP-TV went on the air with a first-generation G-E UHF Klystron Transmitter whose 45 KW output provided the country's first ERF of over one megawatt.

The noteworthy point in this contract signing is that WNEP-TV's success with the first-generation transmitter, and the advanced design of the new unit, won the Taft order for General Electric.

*This is the kind of customer acceptance which also won both first and second-generation G-E UHF Klystron Transmitter orders from WEEK-TV, Peoria, Ill., and WETA-TV, Washington, D.C. No other manufacturer can claim such a record of customer acceptance for high-power UHF klystron transmitters. For details on television's most-accepted UHF klystron transmitters, contact your G-E Broadcast Equipment Representative, or: General Electric Company, Visual Communications Products, #7-315 Electronics Park, Syracuse, N.Y., 13201.*

GE-19

Visual Communications Products

**GENERAL  ELECTRIC**

Electronics Park, Syracuse, New York

Circle Item 22 on Tech Data Card

## CRYSTALS are not all the same!



If your dealer is temporarily out of stock or does not carry Texas Crystals, send us his name along with your order. Minimum order, check or C.O.D. is \$5.00. Add 5¢ per crystal for postage, 10¢ for air mail.

Texas Crystals quality is outstanding as evidenced by use in numerous government space projects where there's no compromise with quality, reliability or accuracy. For commercial two way, ham operation or special frequency control crystals, Texas Crystals are your best buy.

Send for Free Catalog with Circuits



### TEXAS CRYSTALS

A Division of Whitehall Electronics Corp.

1000 Crystal Drive 4117 W. Jefferson Blvd.  
Fort Myers, Florida Los Angeles, California  
Phone 813 WE 6-2109 Phone 213 731-2258

Circle Item 24 on Tech Data Card

## Portable Stereo

(Continued from page 22)

have to modify this slightly to fit the components at hand.

Construction was aided by the use of turret sockets where possible and by the installation of numerous tie strips under the chassis. Shields are used on all miniature tubes. Belden 8450 cabling was employed because of its small outside diameter and its rigidity. Where possible in the under-chassis wiring, DC and filament-supply wiring were harnessed together away from all other components. Holes were drilled and grommets inserted beneath the faders to facilitate dressing of leads to keys and mixers.

Transformers T3, T5, and T7 are mounted beneath the chassis near their respective circuitry, as are several large decoupling capacitors. The plug-in speaker-muting relays are on the top of the chassis; space is left near them for the installation of small transformers to accommodate low-impedance microphones.

As mentioned earlier, all inputs and outputs appear on the rear apron. Microphone, turntable, FM,


and tape inputs and the cathode-follower and headphone outputs appear at phone jacks; the dual-channel monitor outputs, the output of the cue amplifier, the excitation for all relays, and the 600-ohm balanced outputs all appear on barrier strips.

## Operation

The first step after construction was completed was to age all tubes for several days and then begin to balance the unit for stereo. We were ready to insert a balancing control in the program preamplifier but found instead that switching tubes around did the trick. The sequence followed in balancing was as follows: First the VU stages were balanced, using a monophonic tone fed to the grids of both VU amplifiers. Once this stage was set, we worked back through the cathode-follower, the program preamplifier, and the turntable and microphone preamps, always tying the feed to both grids of the stage being balanced. This procedure seemed to work well, and, although the unit has been in operation for several months, it has needed no further adjustment.

The next step was to determine the desired output level. After arriving at an arbitrary figure of one volt for zero VU, we connected an audio VTVM at the cathode-follower jacks, and the VU meters were adjusted to read a corresponding zero VU. This was done by varying resistance RS (See Fig. 5). The line amplifier, as mentioned previously, is independent, needs no balancing, and can be varied from -20db to +10db with the chassis-top level controls.

The system of which this unit is the heart consists of three automatic turntables, three stereo tape recorders, an FM tuner, and one microphone. Turntables and tape decks have switches installed in parallel with the remote relays for local control and audition purposes. The equipment is capable of fast starts, and production capability compares favorably with more elaborate professional gear. The system is being used with excellent results in the production of recorded programs for playback on two Mid-western radio stations. ▲



OLD AMPEX HEAD REMOVED

INSTALL NORTRONICS REPLACEMENT HEAD

**NEW!**  
**NORTRONICS REPLACEMENT HEADS**  
**FOR AMPEX**  
**RECORDERS!**

**QK-76 ADAPTER PERMITS FAST REPLACEMENT**  
**... RAPID CHANGEOVER IN TRACK STYLES!**

Now — cut costs in replacing heads on Ampex 300, 350, 400, 3000 and 3200 series professional tape recorders... eliminate "down time"! New Nortronics heads and QK-76 adapter *equal* Ampex original equipment performance... easily mount within the shield cups of Ampex head nests.

- **VERSATILE** — You pick the head and track style! QK-76 adapts Ampex recorders to accept Nortronics full track, 2-track, 3 or 4 channel or 4-track styles... Record, Playback or Erase heads!
- **FAST** — No waiting... no units "out of service"! Head replacements made by simply loosening set screw and disconnecting plug! You make initial changeover... you schedule service or maintenance!
- **HIGHEST QUALITY** — Utilizes original equipment Ampex shield cups plus professional quality Nortronics replacements!

Nortronics offers the *largest* available variety of track and channel styles... *widest* selection of impedances and gap lengths... *greatest* versatility in mounting! Write today for detailed information.

**Nortronics** 

8143-G 10th Ave. No.  
Minneapolis, Minnesota 55427

Circle Item 23 on Tech Data Card

September 1965

We interrupt this magazine to bring you...

## Late Bulletin from Washington

by Howard T. Head

### NAB Seeks Relaxation of DA-Remote Requirements

The National Association of Broadcasters (NAB) is preparing a petition requesting that the Commission relax the present directional-antenna remote-control Rules, which require complete meter readings at the transmitter each day within two hours after switching to directional operation. This requirement has proved a burden, particularly for a station whose night pattern differs from its day pattern. The changing sunrise and sunset times throughout the year further complicate matters.

The request for relaxation will be based on successful experience at KQV, Pittsburgh, Pa., employing a new type of commercially available phase monitor which can be read by remote control; until the development of the new monitor, the only practical way of taking phase readings was to send a man to the transmitter. Since this instrument is now available, NAB will point out the technical feasibility of relaxing the requirement for daily visits to the transmitter.

### AM-FM Nonduplication Deadline Postponed for Some

The Commission has postponed the effective date of new Rules requiring FM stations in cities having population greater than 100,000 to program separately from their AM affiliates at least 50% of the time (May 1965 Bulletin). The October 15 deadline has been changed to December 31, 1965. The extension of this deadline, however, applies only to slightly more than 100 FM stations which have asked for permanent exemption from the proposed new Rule; stations which did not request an exemption will be expected to comply with the October 15 deadline.

The Commission has announced that it expects to reach a decision on the outstanding exemption requests during September, to afford sufficient time to comply with the new December 31 deadline.

### TV Receiving Antenna Improvement Program

Following recent studies by KIRO-TV, Seattle, and KSL-TV, Salt Lake City, which disclosed large numbers of television receiving installations not equipped with proper antennas, a campaign has been launched by the Association of Maximum Service Telecasters, Inc., (MST) and the American Institute for Better Television Reception, to acquaint both television dealers and the public with the need for adequate television receiving

antenna installations. The necessity for maintaining receiving antennas in proper condition is also stressed.

The studies at KIRO-TV and KSL-TV showed that an unexpectedly high percentage of television viewers did not realize the importance of installing and maintaining adequate receiving antennas, needed particularly for color reception. Perhaps even more serious, large numbers of television dealers were either likewise unaware of the problem or had not had the need made sufficiently clear to them. The present campaign is aimed at educating both the viewer and the dealer, and at encouraging development of receiving antennas that meet the requirements of individual installations.

#### FCC May Waive Filing Fees on Certain Applications

In recent instances involving floods and other natural disasters, the Commission has noted that reconstruction of broadcast facilities has required filing of formal applications normally subject to regular filing fees. In these instances, the Commission has announced favorable consideration to requests for waiver of filing fees. Applicants requesting a waiver must submit a statement to the Commission describing the circumstances and the damage which required the application to be filed.

#### Commission Concerned over CATV "Leapfrogging"


In a recent case in northern Alabama, the Commission has designated for hearing an application by a CATV operator for microwave facilities that would permit "leapfrogging" -- the bringing in of distant stations in preference to stations nearby (June 1965 Bulletin). In addition to the "leapfrogging" issue, the Commission also announced its intention to inquire into charges of economic injury to a local TV broadcast station, as well as conspiracy between the CATV operator and a broadcast competitor.

In a related action, the Commission has issued a policy statement which sanctions the acquisition of CATV systems by television broadcast licensees. The Commission stated that its inquiry had "not disclosed any substantial evidence of widespread abuses," but the right was reserved to take action in any specific case of abuse.

This latter policy action stemmed from an inquiry dealing with CATV system ownership only by television broadcast licensees; no such inquiries have been announced with respect to CATV ownership by AM or FM station licensees.

Howard T. Head...in Washington

# WHAT'S DIFFERENT ABOUT THIS **VERTICAL** **INTERVAL** **VIDEO SWITCHER...**

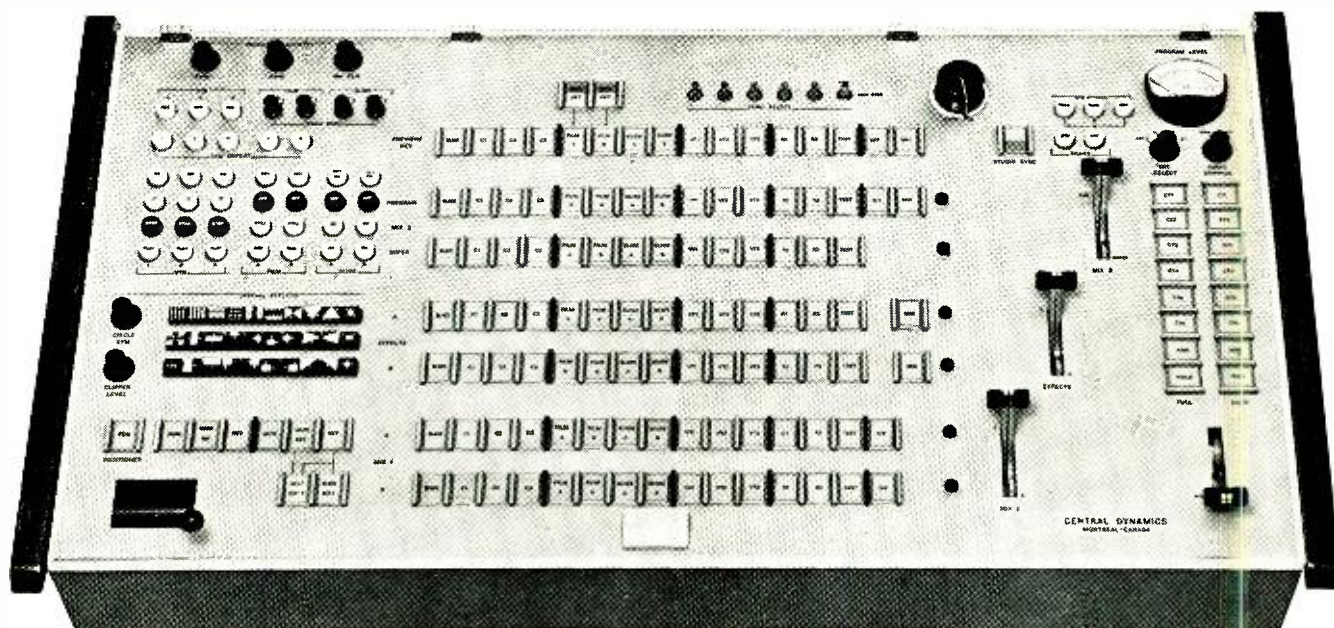

... that makes the CDL your best Video Switching investment? We've engineered this switcher to provide you with maximum program flexibility, and enable you at the same time to reduce your station operating expenses. Check the features below, and you'll understand why this switcher is truly different.

- All composite, fully color compensated, "double reentry" video switching system.
- Selection of additive or non-additive mixing facilities to super over on-air program.
- Simultaneous or independent "fade to black" of program audio and video.
- In "Automatic Mode", logic circuitry automatically selects unused film camera on island, flips appropriate mirror and activates video crosspoint. Also permits automatic

video switching by utilizing cues in video tape and film magnetic sound tracks.

- Remote video tape controls for Record, Rewind, Fast Forward, Stop and Play.
- Audio-Follow-Video switching on all sources, with additional selection of common audio source for all live cameras.
- Two banks of audio controls, "Full" and "Over" for cartridge and announce.
- Fast audio mix transition, not normal Make-Before-Break relay.
- Controls operating modes of CDL computer controlled Master Video Switching System.

Our experienced engineering department is prepared to help you plan your station modernization, and aid in solving special problems. For free consultation and engineering assistance, write or call:



## WARD ELECTRONIC INDUSTRIES

1414 EAST ST. GEORGE AVE., LINDEN, N. J. 07036 • (201) 925-4690

Circle Item 25 on Tech Data Card

# CAMERA TUBE BREAK- THROUGH 4½" ELCON now available



**Long-Life, High Performance Television Camera Tube.** An entirely new principle of operation, perfected by English Electric Valve, provides *improved performance and increases tube life 3 to 4 times that of previous image orthicons.*

## **LONG-LIFE** Achieved Without any Corresponding Disadvantages—

- No burn-in or "sticking" ■ Improved S/N ■ "Crisp" live pictures
- Sensitivity, resolution and gray scale remain constant over the life of tube ■ Reduced black compression.

This new ELCON tube can be used with existing image orthicon cameras, as well as in the newer transistorized zoom cameras built specifically to take maximum advantage of its performance.

For detailed information on this important technical breakthrough, write for Bulletin 410.

ELCON . . . stocked, tested and warranted only by VISUAL, the leader.



Sold Nationally By

**VISUAL ELECTRONICS CORPORATION**

356 west 40th street • new york, n. y. 10018 • (212) 736-5840

LOOK TO VISUAL FOR NEW CONCEPTS IN BROADCAST EQUIPMENT

## Television Symposium

(Continued from page 24)



**Fig. 4. Among exhibitors from the USA.**

stressed the trend toward solid-state recording equipment.

Visual Electronics' new solid-state equipment (Fig. 4) for recording color television on tape attracted interest, as did C. R. Webster's reading of the paper "A Simple Trouble-Free Quadruplex VTR System," which Steve Allen had presented at the NAB Convention.

Likewise of interest at the exhibition was the new Ampex color-TV tape recorder which had been unveiled at the NAB Show. Grant M. Smith discussed the equipment in a paper entitled "Design of an Optimized 625-line Color Television Tape Recorder."

### **Transistorized Gear**

New solid-state equipment was featured by many exhibitors and speakers at Montreux.


Much interest was aroused by a paper on Microwave Associates' solid-state 7000-mc equipment for remote broadcasts; C. R. Russel, G. A. P. Teasdale, and J. J. Tither presented the paper. One feature of this non-demodulation-equipped transmitter — employing klystrons, silicon transistors, and varactor diodes — is that it can be attached directly behind the antenna dish (Fig. 5).

At the exhibition's largest booth, Marconi Company, Limited




**Fig. 5. Remote-program microwave unit.**

**BROADCAST ENGINEERING**

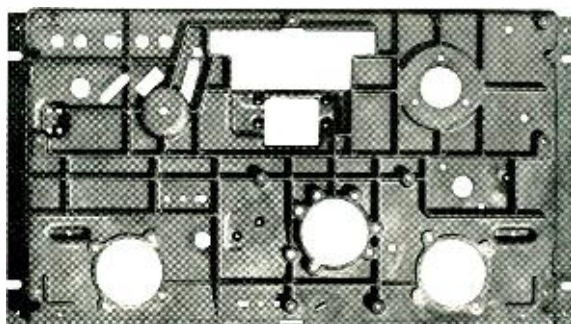

## DIE-CASTING

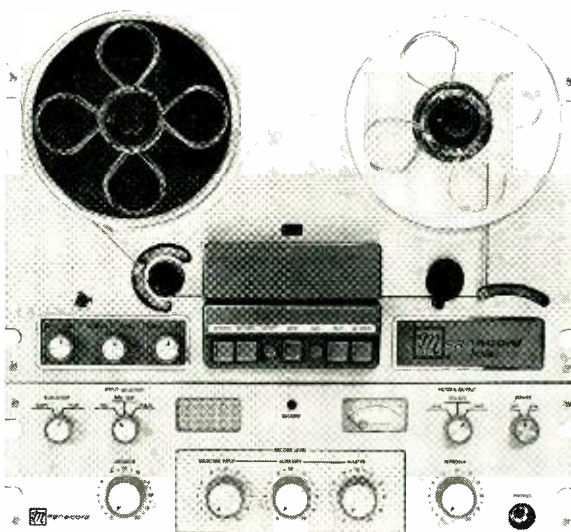

## [RHYMES WITH LASTING]

■ Quality in a professional tape recorder has got to last. That's why a sturdy, solid die-cast main plate backs up famous Magnecord durability.

Only a solid die-casting can provide rigid support and stable alignment of assembled parts. Mounting holes and bases are molded in for perfect uniformity between each instrument, insuring precise location and smooth operation. This extra strength in a Magnecord reduces wear to a minimum, cuts down-time and lowers maintenance cost.


Casting about for a professional tape instrument that is broadcast-ready and stays that way? Write for our new brochure featuring the complete line of Magnecord recorder/reproducers.



Model 1021 \$708



Model 1022 \$788



Model 1028 \$995



Model 1048 \$995



**magnecord** SALES DEPARTMENT  
MIDWESTERN INSTRUMENTS, INC.

Subsidiary of Telex Corporation / P. O. Box 1526 / Tulsa, Oklahoma 74105

(Chelmsford, England) introduced its fully transistorized Mark V 4½" lightweight image-orthicon zoom camera. Marconi's engineer, Hendryk Mirzowski, discussing "Automation of Master-Switching Systems," told the symposium that selection of a particular type of memory for such equipment depends upon the number of operations to be controlled. He explained that automated control may be introduced gradually; hence its installation is not necessarily expensive. Marconi exhibited their transistorized Type B-3720 semiautomatic master switching system, which affords video and audio shifts for up to twelve inputs, and switching—in sequence—of up to eight separate units from a memory device. It is suitable for either monochrome or color.

#### Other Products

The main exhibit of Thomson-Houston was the French firm's new TH T605 twin-use cine-television camera which allows shows to be filmed at the same time they are transmitted.

Another French manufacturer, Compagnie Generale de Telegraphie Sans Fil (CSF), showed a new 4-watt 800-mc portable UHF transmitter.

Sony displayed its PVC-101 CE-1A portable vidicon camera and its 120E VTR.

RCA, in a spacious booth, demonstrated its TR-4 and TR-5 tape recorders, as well as the latest cameras.

Videon, S. A. (Paris) had a full line of new transistorized components.

Tektronix International exhibited oscilloscopes, video monitors, and its new TV vector-scope.

Other products displayed include Erni Schwach Stromtechnik's new TV monitor receiver Mr 11-40, Wein Engineering Company's precision coaxial devices, Boonton Electronics Corporation's Model 95A sensitive DC meter and 91D sensitive RF voltmeters, Sperry Electronics Company's microwave test instruments, Hoffman Semiconductor Company's 1-watt solar energy converter, W. Vinter, Limited's

pan-and-tilt head Type 111, Wilcox Electric's completely compatible DME equipment, and Alto Scientific Company's 10-watt Altovue Pak transmitters.

J. C. Moll, Ediphor A. G. (Glarus, Switzerland) delivered a lecture on "Large Screen Projection and its Applications" in which he pointed out uses for background projection in TV studios. Mr. Moll discussed the comparative merits of projectors working with TV projection tubes mounted in an optical system (the Schmidt technique) and the Ediphor system which employs the dark-field control-layer principle.

A. Rother, Diemens and Halske (Munich, Germany), discussed his firm's experience with the YH 1020 traveling-wave tube in UHF TV translator service.

Roher Hibbard described Ampex's "new low-cost television system and recorder for CCTV applications."

#### Special Interest

Of particular interest to the numerous Asian, African, and Latin-American engineers attending the symposium was the paper of Saburo Oyama, Nippon Electric Co. (Tokyo), on "Receivers and Transmitters for Developing Areas."

Haruo Kondo, IAMCR (Tokyo), discussed "Television in Japan" after Prof. August Karolus presented "The History of Television."

Considerable discussion was provoked by Dr. George H. Brown's survey of "New Opportunities in biotechnology" as well as by Joseph Roizen's exposition of "Magnetic Video Recording in Radiology."


To round out the program, W. S. Sharps (London) and R. Pontillon of Thomson-Houston (Paris) presented papers on educational uses of television.

Ian S. Douglas (Melbourne, Australia) received the grand prize for the best paper offered at the Third Symposium in 1963.

#### End for This Year

This Fourth International Television Symposium, in which about 400 specialists participated, was concluded with awards for meritorious service. The Fifth International TV Symposium and Exposition is scheduled for May 1967 at Montreux. ▲

## NOW! Solve Electronics Problems fast with New Patented Slide Rule.



That's right! This amazing new Electronics Slide Rule will save you time the very first day you use it. It's a patented, all-metal 10" rule that features special scales for solving reactance, resonance, inductance and circuitry problems . . . an exclusive "fast-finder" decimal point locator . . . widely-used formulas and conversion factors for instant reference. And there's all the standard scales you need to do multiplication, division, square roots, logs, etc.

Best of all, the CIE Electronics Slide Rule comes complete with an Instruction Course

of four **AUTO-PROGRAMMED** lessons. You'll quickly learn how to whip through tough problems in a jiffy while others plod along the old-fashioned "pad and pencil" way.

Electronics Slide Rule, Instruction Course, and handsome, top-grain leather carrying case . . . a \$50 value for less than \$20. Send coupon for FREE illustrated booklet describing this Electronics Slide Rule and Instruction Course and FREE Pocket Electronics Data Guide. Cleveland Institute of Electronics, 1776 E. 17th St., Dept. BE103, Cleveland, Ohio 44114.

\*TRADEMARK

**GET BOTH FREE!**



**Send coupon today →**

### Cleveland Institute of Electronics

1776 E. 17th St., Dept. BE103, Cleveland, Ohio 44114

Send FREE Electronics Slide Rule Booklet. Special Bonus: Mail promptly and get FREE Pocket Electronics Data Guide too!

NAME \_\_\_\_\_ (Please Print)

ADDRESS \_\_\_\_\_ COUNTY \_\_\_\_\_

CITY \_\_\_\_\_ STATE \_\_\_\_\_ ZIP \_\_\_\_\_

A leader in Electronics Training...since 1934

Circle Item 27 on Tech Data Card



# NATION-WIDE SOURCE STOCKED IN DEPTH



**HARVEY RADIO CO., INC.**

**103 West 43rd Street / New York, N.Y. 10036 / (212) JUdson 2-1500**  
Federal Electronics, Inc. (Subsidiary) / Vestal Parkway, Vestal, N.Y. / (607) Ploneer 8-8211

Whatever you need, wherever you are, Harvey is **stocked in depth** with the top brands in the business. As America's oldest supplier of professional broadcast and studio recording equipment, Harvey can be counted on to have what you want on hand—and deliver it, anywhere. As your single source of supply—from studio tape decks, image orthicons and cables to the smallest replacement parts—Harvey can save you time, eliminate hunting around. We do it for the major networks right now. To order write or call collect today.

**ALWAYS ON HAND:** A.D.C. • AMPEX • AMPHENOL • A.P.I. • BELDIN • CANNON • CBS LABORATORIES • DAVEN  
DELCO • LANGEVIN • NEUMANN • R.C.A. • SENNHEISER • SHURE • SWITCHCRAFT • UNIVERSAL AUDIO

Circle Item 28 on Tech Data Card



## STUDIO TALK

by ALEXIS BADMAIEFF  
Chief Engineer  
Acoustics/Transducers  
Altec Lansing

### A BIG OR LITTLE CONDENSER MIKE?

We have heard that when using condenser microphones, some musicians insist on the large "impressive" looking models. Unfortunately, when it comes to microphones, large size is not the measure of quality. Quite the opposite! A large mike with a large diaphragm has inherent limitations when compared to the miniature "Lipstik" mikes which we manufacture. In fact, we'll make this unequivocal statement: *When using a condenser mike, you'll obtain better pickup along the entire audible spectrum, especially in the high frequency region, with a small diaphragm.*

### WHY SMALL SIZE OF DIAPHRAGM IS CRITICAL FOR QUALITY WORK

**Parallel Incidence** (sound arriving parallel to plane of diaphragm) is an extreme condition that can ruin the best planned session, because all wave lengths equal to the diameter of the diaphragm will strike from edge to edge, 180° out of phase. The larger the diameter, the lower the point at which phase cancellation occurs.

**Perpendicular Incidence** (sound arriving perpendicular to plane of diaphragm) is ideal, regardless of size of diaphragm. But unless you're dealing with a single, fixed sound source, the ideal incidence is pure theory. Add a multi-sound source like a widely dispersed orchestra, and you better look for the smallest mike available.

**Random Incidence** is any incidence between the fairly hypothetical parallel and perpendicular incidences. In practice, random incidence of varying angles is universal in microphone work. Therefore, you almost always work with staggered phase due to sound waves striking the diaphragm at different angles. The result is of course diminished hf response. What's important here is not the fact that hf drop-off will occur, but *where* it occurs. With a large diaphragm, it occurs lower in the spectrum; with a small one, it occurs virtually beyond the usable range. For example, in condenser mikes with diaphragms 1" in diameter or larger, frequency drop-off occurs at 10 kc. On the other hand, a mike with a 1/2" diaphragm (such as our M-20 or M-30), placed in an identical position, drops off at 20 kc!

### HF DROP-OFF IS INVERSELY PROPORTIONAL TO SIZE OF DIAPHRAGM

The smaller the diaphragm, the less subject it is to directivity of the sound source. That's why Altec manufactures two condenser microphone systems—the M20 Omnidirectional and M30 Cardioid—employing a tiny 1/2" diaphragm. Not only are these mikes considerably smaller than most European makes, they're better made to boot! We recently measured a popular European condenser mike against our M30. The foreign mike dropped-off badly after 10 kc; ours was flat to 18 kc! We also measured a 9 db advantage in signal-to-noise ratio in our mike (-61 dbv vs. -70 dbv). Altec condenser mikes are designed to meet the demand of American recording and broadcast engineers for superior performance throughout the audible range, quite naturally including a superior high frequency response.

ALTEC LANSING  
A Division of **UTV** Ling Altec, Inc.  
ANAHEIM, CALIFORNIA

© 1965 AL

Circle Item 30 on Tech Data Card

# NEWS OF THE INDUSTRY

## INTERNATIONAL

### TV for India

Consulting author P. U. Sukhadia reports from Bombay that plans are under way for the expansion of TV service in India. Present operations are limited to programming during the evening from stations in Delhi and New Delhi. Extended hours of service are to be inaugurated next year.

Planning is also in progress to establish new stations in such cities as Bombay, Calcutta, Madras, and Bangalore. These stations are envisioned for the 1966-67 period. Broadcasting in India is solely in the hands of the government, and negotiations are in progress between the government and some foreign firms concerning the procurement of equipment for the new stations.

Another problem is the manufacture of TV receivers. However, the Central Electronic Research Institute at Pilani (Rajasthan) has developed a low-cost receiver using Indian parts.

### Montreal SMPTE Conference

New concepts in television engineer-

ing techniques and a display of new TV equipment will bring TV engineers from all parts of the world to the 98th SMPTE Technical Conference and Equipment Exhibit at the Queen Elizabeth Hotel, Montreal, October 31 to November 5. International discussion of some of the critical problems confronting the TV industry will be a major feature.

In the transmission field, reports will be presented on color TV in Europe before and since the recent CCIR Conference in Vienna, new UHF-transmitter design, and cable distribution of UHF signals. A description of recent research work by the Institut fur Rundfunktechnik, Munich, on quadrature distortion correction will show how NTSC color transmission can be improved. A panel discussion on network problems is also planned.

A special session on the relatively new art of vertical-interval testing and monitoring will bring together contributors from Canada, Australia, and Germany. Engineers from the Canadian Broadcasting Corp. will discuss automatic video switching and some of CBC's quality-control procedures. Equipment papers from several countries will discuss new cameras, electron-beam recorders, monitors, color-slide scanners, complete mobile units, and new studio designs. Much of the new equipment described in the technical program will be included in the equipment exhibit.

## NATIONAL

### NCTA Opposes CATV for Telephone Companies


The Board of Directors of the National Community Television Association (NCTA), in a statement issued at the national convention, expressed deep concern with regard to the activity of telephone utilities in the field of community antenna television (CATV). The statement said:

"Many community antenna operators have expressed concern that the practices and policies of telephone companies may seriously impair, if not destroy, the future development of CATV as an independently owned industry.

"Special concern has been expressed over the offering by Bell and other telephone companies in tariffs filed in more than 20 states to provide virtually the entire physical plant for CATV systems at public utility charges.

"Many system owners and prospective system owners view this development as an outright entry into the CATV busi-

## SPOTMASTER

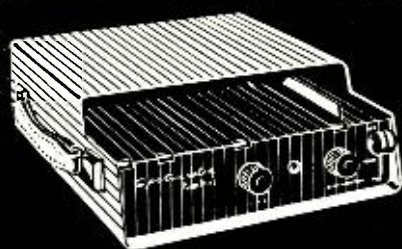

### PortaPak I Cartridge Playback Unit

Your time salesmen will wonder how they ever got along without it! Completely self-contained and self-powered, PortaPak I offers wide-range response, low distortion, plays all sized cartridges anywhere and anytime. It's solid state for rugged dependability and low battery drain, and recharges overnight from standard 115v ac line. Packaged in handsome stainless steel with a hinged lid for easy maintenance, PortaPak I weighs just 11 1/2 lbs. Vinyl carrying case optional.

Write or wire for full information.

**Spotmaster**  
**BROADCAST ELECTRONICS, INC.**

8800 Brookville Road  
Silver Spring, Maryland

Circle Item 29 on Tech Data Card

The background of the advertisement features a tall, dark antenna mast extending vertically. A person in a light-colored shirt is seen climbing the mast. Several horizontal cross-arms are attached to the mast. The sky is filled with soft, white clouds.

**JAMPRO**

**DUAL POLARIZED FM ANTENNA WILL**

# INCREASE YOUR SIGNAL!

Now you can achieve RF radiation the **EASY, PRACTICAL WAY!** The new JAMPRO dual polarized FM antenna will increase your signal many times to establish new listeners in hilly areas, give you more signal to home radios using built-in antennas and car FM sets. Contact JAMPRO today for a dual polarized system especially suited to your ERP requirements.

## CONVERT YOUR EXISTING ANTENNA


A new, low cost Dual Polarized Conversion Kit is now available from JAMPRO. Complete with power divider, vertical elements, and instructions for field installation, you can convert your present FM antenna into a dual polarized system. Contact JAMPRO for details.

Contact JAMPRO for newly developed technical information regarding Dual Polarized antenna measurements and performances.

# JAMPRO

**ANTENNA COMPANY**  
6939 POWER INN ROAD  
SACRAMENTO, CALIFORNIA

PHONE:  
AREA CODE 916  
**442-1177**

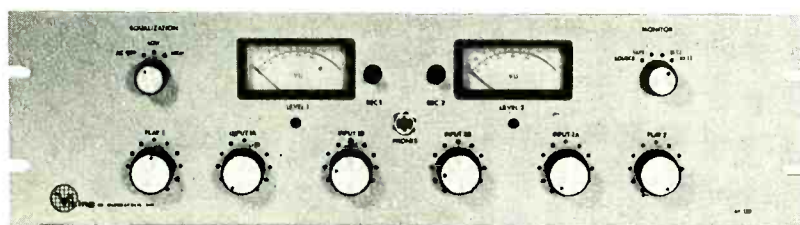

## Studio 96

QUALITY DESIGNED FOR BROADCASTERS AND SOUND STUDIOS

Two speed tape transport with automatic sequence braking, choice of hyperbolic head configurations, hysteresis capstan drive and heavy duty reel drive motors, remote control jacks and 10½" reel capacity. Superbly smooth tape handling — interlocked "fool-proof" switching — fit for every studio.

Rack mount ready from \$585.45

### MATCHING SOLID STATE ELECTRONICS

Record and playback amplifiers of modular design with interchangeable plug-in options, mixing controls, A-B monitoring, 600 OHM line output illuminated VU meters, exceed NAB standards.

Rack mount ready

Monaural RP110-R2 \$299.00  
Stereo RP120-R2 \$399.00



MADE BY SKILLED AMERICAN CRAFTSMEN AT

**Viking** OF MINNEAPOLIS®

9600 Aldrich Ave. S. Minneapolis, Minnesota, 55420

CANADA: Alex L. Clark, Ltd., 3751 Bloor St. W., Islington, Ontario  
Electro Tec Marketers, Ltd., 1624 W. Third Av., Vancouver, British Columbia  
CENTRAL & SOUTH AMERICA: ManRep Corp., P.O. Box 429 N. Miami Beach, Florida, U.S.A.  
OVERSEAS EXPORT: International Division Viking of Minneapolis, Inc., 9600 Aldrich Ave. S., Minneapolis, Minn., U.S.A.

Circle Item 31 on Tech Data Card

ness by the telephone industry and assert that this, together with the telephone companies' ability to restrict or prohibit use of utility poles for privately owned community antennas, could sound the death knell to future CATV development outside the control of the telephone companies.

"The NCTA Board of Directors has directed the Association's staff to develop immediately all available facts regarding the plans, policies and practices of the various segments of the telephone industry regarding the tariff offerings, the availability to independent companies of pole line attachment space contracts, the rate for such contracts when available, restrictive provisions therein impairing the opportunity of privately owned systems to compete, and all other matters pertinent to the problem including plans for direct entry into CATV.

"All appropriate measures will be taken to prevent the development of a telephone monopoly in the manufacture, installation and operation of new CATV systems and to protect the integrity of existing CATV systems as independent businesses.

"It is the intention of this Association to maintain close liaison with Bell System and other telephone companies in the interest of working out arrangements which will accommodate the legitimate interests of both groups and result in the best and most economical service to the public."

### Expands Color TV Production

Expansion of its Camden, N. J., production facilities to meet the anticipated demand for new color television cameras is planned by the RCA Broadcast and Communications Products Division. The new facilities include "clean rooms," where camera modules are assembled under dust-free conditions, and additional camera test positions.

### PROPERTY TRANSACTIONS

Radio station KOPY, 1 kw full time on 1070 kc., Alice, Texas, has been sold by Robert N. Aylin, principal owner. Tom E. Foster, his son, Tolbert Foster, and others comprise the buying group. The Fosters, owners and operators of KDET, Center, Texas, and other properties, are veteran Southwestern broadcasters. The consideration was \$200,000.

Subject to the approval of the FCC, the administrators of the estate of the late Dr. Roscoe R. Miller have sold Radio Station WDBF in Delray Beach, Florida to the Quality Broadcasting Corporation. Officers of the purchasing group are Frederick M. Ayres, president, John C. Appel, secretary-treasurer, and Victor M. Knight, executive vice-president. Consideration is in excess of \$250,000. ▲

BROADCAST ENGINEERING

ANDREW

*Lower attenuation...*  
**new HELIAX®**

**1/4", 3/8", 1/2" flexible  
coaxial cables for**

- Military
- Broadcast
- CATV
- Mobile Radio
- Data Processing and  
Instrumentation Systems

These new air and foam cables offer lower attenuation in small physical sizes. Type FH1, 1/4" Foam HELIAX has 30% lower attenuation, 60% smaller size and 50% less weight than RG8/U. The copper inner and outer conductors assure optimum electrical performance with long life reliability. Available in long splice free lengths with or without polyethylene jacket.


For additional information on HELIAX, contact your regional Andrew sales engineer or write P.O. Box 807, Chicago, Illinois 60642.

6-65

Circle Item 33 on Tech Data Card

**Andrew**  
CORPORATION  
28 YEARS OF ENGINEERING INTEGRITY

## UNLIMITED VARIETY

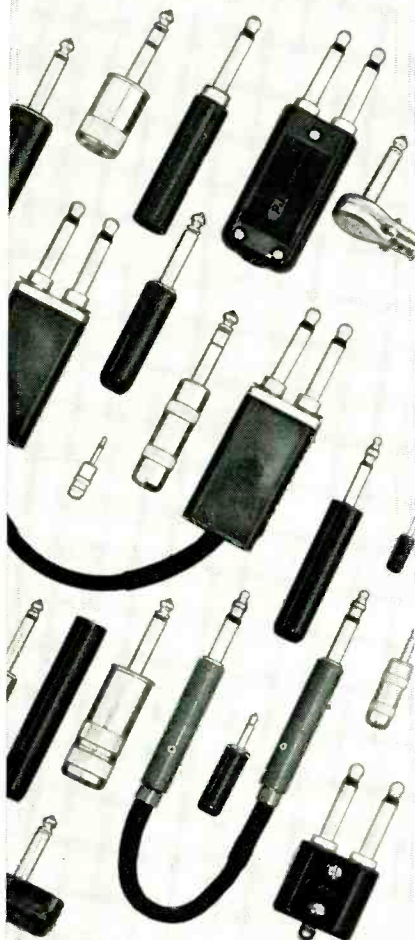

## INCOMPARABLE QUALITY

### SWITCHCRAFT PHONE PLUGS

Why waste time "shopping around" . . . whatever your plug requirement—regardless of size or type, Switchcraft makes it, and makes it better! The one piece tip rod, for instance, is staked into the terminal to assure tightness . . . the tip rod can't fall out! Switchcraft offers you the world's largest selection of phone plugs . . . with solder terminals, screw terminals, cable clamps; .250", .206", .140", .097" finger diameters; shielded handles, or tough plastic handles; single plugs, twin-plugs; 2-conductor or 3-conductor—you name it! Chances are it's a thoroughly proved, field-tested STOCK plug from the incomparable Switchcraft line of plugs.

SEND FOR NEW CATALOG P-202 or see your Switchcraft Authorized Industrial Distributor for immediate delivery at factory prices.

**SWITCHCRAFT®**

5535 North Elston Ave.  
Chicago, Illinois 60630  
Canada: Atlas Radio Corp., Ltd.  
50 Wingold Ave., Toronto, Ontario

Circle Item 34 on Tech Data Card

## BOOK REVIEW



**Collected Papers on Acoustics;** Wallace C. Sabine; Dover Publications, Inc., New York, N. Y., 1964; 279 pages, 5 $\frac{3}{8}$ " x 8 $\frac{1}{2}$ ", paperback; \$2.00.

This book is a collection of the writings of the late Professor Sabine. The paperback edition is a republication, without change, of the original edition published in 1922 by the Harvard University Press. In the introduction to the 1964 edition, Professor Frederick V. Hunt refers to Professor Sabine as the founder of the science of architectural acoustics, for during a period of 20 years beginning in 1895, Professor Sabine's original research exposed the fundamental concepts on which the science is based.


This collection of papers, which originally appeared in a number of scientific and industry journals, chronicles, in his own words, Sabine's experiments and the conclusions he drew from them. Although the basic conclusions were derived for the most part from experimental results, a number of cross checks were used to establish the validity of the results.

The first section of the book consists of a series of papers on reverberation. Later papers are "The Accuracy of Musical Taste in Regard to Architectural Acoustics," "The Variation in Reverberation with Variation in Pitching," "Melody and the Origin of the Musical Scale" (in which Sabine takes exception to some earlier statements by Helmholtz), "Effects of Air Currents and of Temperature," "Sense of Loudness," "The Correction of Acoustical Difficulties," "Theatre Acoustics," "Building Material and Musical Pitch," "Architectural Acoustics" (a summary and review of previous material), "The Insulation of Sound," and "Whispering Galleries" (explanations of the characteristics of some well-known whispering galleries and how they work). An appendix contains notes on a lecture on sound-intensity measurement.

The book is written in the style of the late 1800's and early 1900's, and some of the concepts involved are not obviously apparent. Even so, the author presents them in a manner that is rather easily understood. A number of line drawings and photographs illustrate points made in the text. In the section on "Theatre Acoustics" are a number of interesting photographs showing the movement and reflection of wavefronts in models of theaters.

This volume is interesting in that it relates some of the early history of the development of the science of architectural acoustics. At the same time, it serves the reader as an introduction to acoustical principles. ▲

Automatic  
Broadcasting  
tailormade to your  
needs through the  
building block  
concept from



Send for FREE 35-pg. booklet "Planning for Automated Broadcasting." Or call collect today 309-825-1228.

**AUTOMATIC ATC TAPE CONTROL**  
1107 E. Croxton Ave. Bloomington, Ill.  
Circle Item 35 on Tech Data Card

## RUSSCO BROADCAST Turntables



\$169.50

**Separate Tone Arm  
mounting plate for  
easy installation**

- Single lever controls 33, 45, 78 speeds
- Plays 45 RPM's without adapter
- Illuminated speed indicators
- Sold with or without arm (GREY or REK-O-KUT)
- Instant acceleration
- Heavy duty—professional quality
- Competitive low price
- Call or write for folder

**Unconditionally  
Guaranteed**

—against defects in material or workmanship when given normal maintenance

**SOLD DIRECT  
—OR TO  
DEALERS**

**RUSSCO Electronics Mfg.**  
6879 N. SUNNYSIDE, CLOVIS, CALIF.  
PH. 299-4692


# ENGINEERS' EXCHANGE

## Automatic Recorder Control

by Frederick N. Davis, Chief Engineer, WELW, Willoughby, Ohio

At WELW, we record a number of remote broadcasts that occur at unscheduled times. Frequently, one of these broadcasts would be missed, and a repeat was required. The circuit shown solved this problem.

A 12BY7 is used in conjunction with a 5000-ohm plate-circuit relay. The 12BY7, which is normally conducting, keeps the relay energized and the tape deck off. When the cue is sent, about 30 seconds before the

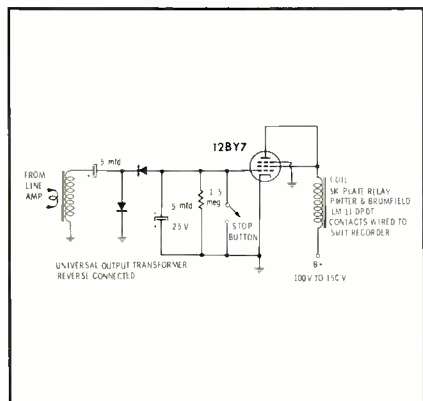

broadcast begins, a sample of the audio from the output of the line monitor amplifier is stepped up by the input transformer and rectified by a half-wave doubler, charging the 5-mfd filter capacitor and cutting off the 12BY7. This allows the relay to drop out and starts the tape deck.

With the grid resistor shown, it will take from 30 to 45 seconds for the capacitor to discharge sufficiently to allow the tube to conduct and turn the recorder off.

## Crystal Reference Oscillator


by James W. Thweatt, Staff Transmitter Technician, WPSD-TV, Paducah, Ky.

A 100-kc crystal-controlled frequency standard can be quite useful at the TV station. The circuit shown is of an oscillator that we constructed. The 200-kc and 1-mc tuned circuits were added simply because we had the crystals, but they give added utility to the unit. Each of the crystal circuits is cali-

brated by zero-beating a harmonic with WWV.

A 100-kc signal is required as part of the complete alignment procedure of the AFC unit in our microwave receiver. The value of R1, for this reason, was chosen so as to obtain a sinusoidal 100-kc output. The 1-mc output was used to check each frequency of the time-mark generator in our scope.

Of course either the 100-kc or 200-kc output could be used if no 1-mc crystal is available. ▲

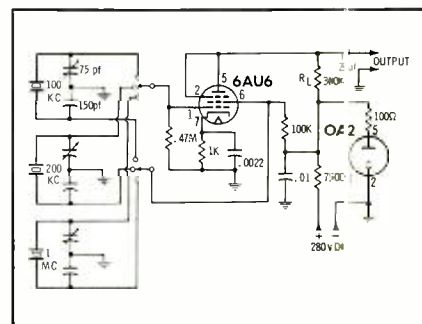

## How do you measure quality in film transfers?

You know it when you see it! Your eye is our judge. That's why we demand perfection in clarity, definition and true grey scale. We get perfection by complete control. All of our work is done under one roof...a unique way of operating in our industry. And we feel the results are worth it. So do our clients—companies like AMERICAN MOTORS, MGM-TELESTUDIOS, MCA-TV, HEATH DE ROCHEMONT, ever AMPEX. Their names tell you a lot about our standards. But there's a better way to find out. Try us. We offer "in by 9—out by 5" processing—with your transfer jetting back the same night. And optimum quality is guaranteed (backed by two decades of expert Hollywood technology). If you believe your eyes call Acme Film Laboratories, Inc., Hollywood, 1161 North Highland Avenue, HO 4-7471; New York, 400 Madison Avenue, HA 1-3400.

Acme Film Transfers **A**

# DIRECT REPLACEMENT SILICON RECTIFIERS

from

**WILKINSON ELECTRONICS**

**NEW**



SR-24-15

Replaces  
the 869B

- Plug-in No Rewiring
- Nonencapsulated  
Each Diode Replaceable
- Safe and Self Testing  
Each Diode Has a GO-NO-  
GO Light to Warn of Fail-  
ure and High Volts on.

## SPECIFICATIONS

|                  |       |
|------------------|-------|
| PRV Repetitive   | 24KV  |
| PRV Transient    | 29KV  |
| Max. Current     | 22A*  |
| Surge Current    | 200A  |
| Max. DC PS Volts | 16KV* |

\* In 3 phase full wave bridge



Wilkinson Electronics, Inc.  
1937 W. MacDade Blvd.  
Woodlyn, Pa. 19094  
Telephone: 215-874-5237

Circle Item 37 on Tech Data Card

## Audio Engineering Society Convention

The Audio Engineering Society will hold its annual Fall Convention and Exhibit of Professional Equipment October 11-15 at the Barbizon Plaza Hotel, 106 Central Park South, New York City. Registration will be from 9 AM to 8 PM Monday, October 11, through Friday, October 15, on the hotel mezzanine. Professional exhibits will be open from

Monday noon through Thursday. An awards banquet will be held Thursday evening.

More than 100 papers on all aspects of audio engineering will be read during the five-day technical sessions. Following is a partial program for the technical sessions, with emphasis on those papers of interest to broadcast engineers.

### MONDAY

- 9:00 AM Annual Business Meeting**
- 9:30 AM Microphones and Earphones**  
Two-Way Dynamic Cardioid Microphones
- 1:30 PM Audio Amplification**  
Recent Trends in Audio Amplifiers  
Design Considerations of A Solid State Amplifier for Use in High-Quality Professional Studio Recording and Broadcast Consoles
- 7:30 PM Music and Electronics**  
Report on A Seminar in Electronic Music Composition  
Duration and/or Frequency Alteration

### TUESDAY

- 9:30 AM Miniaturized Audio Applications**

Integrated Audio Voltage and Power Amplification—Problems and Solutions

- 1:30 PM Loudspeakers I**  
An Ultra-Compact Lightweight Speaker System
- 7:30 PM Loudspeakers II**  
The Effect of Commonly Used Baffles on the Sound Dispersion of Typical Direct Radiator Loudspeakers  
A Repeatable Technique for Listening Tests

### WEDNESDAY

- 9:30 AM Audio Instruments and Instrumentation**  
A Program Distortion Monitor
- 1:30 PM Electronic Control of Auditorium Acoustics**  
Demonstration of Electronic Room-Acoustic Concepts  
Passive and Active Acoustics in Architectural Enclosures  
Natural and Artificial Reverberation
- 7:30 PM Sound Reinforcement**  
Acousti-Architectural Considerations in the Harris County Domed Stadium  
Theoretical and Practical Considerations in the Equalization of Sound Systems  
"Behind the Actor's Back"

### THURSDAY

- 9:30 AM Studio and Control Systems**  
Audio Control Equipment for Use in Studio Sound Recording  
Design of Control Consoles with Theater Reinforcement Systems  
New Trends for Studio Console Design  
Balance Requirements of Equipment Connected to Telephone Lines
- 1:30 PM Disc Recording and Reproduction**  
Absolute Calibration of Pickups and Records  
Optimizing the Dynamic Characteristics of A Phonograph Cartridge  
Application of the Silicon Semiconductor Phonograph Cartridge  
Stylus Mass and Elliptical Points  
Instruments for Record Cleaning  
Performance Evaluation of Pickups With Elliptical Stylus

### FRIDAY

- 9:30 AM Magnetic Recording and Reproduction**  
Modulation Noise in Tape Recording  
Flutter Perceptibility and A New Flutter Analyzer  
A Flexible-Sheet Magnetic Recorder Dropouts at Low Tape Speeds  
Transient Response and Cross Modulation Distortion in Magnetic Recorders
- 1:30 PM Speech Analytics**  
Approaches to the Synthesis of Speech

**INTERNATIONAL**  
— First Choice of those  
who demand the Best!

**Model SS824** **From \$1295**  
1/4 Track Stereo

**Unsurpassed Performance**


| ips   | db | cps       | s/n   |
|-------|----|-----------|-------|
| 7-1/2 | ±2 | 30—30,000 | 55 db |
| 3-3/4 | ±2 | 30—20,000 | 52 db |
| 1-7/8 | ±3 | 50—13,000 | 45 db |

*Write to* **Crown International**  
Box 1000, Dept. BE-9  
Elkhart, Indiana 46517

**Put a Crown in Your Future!**

Circle Item 38 on Tech Data Card

**BROADCAST ENGINEERING**

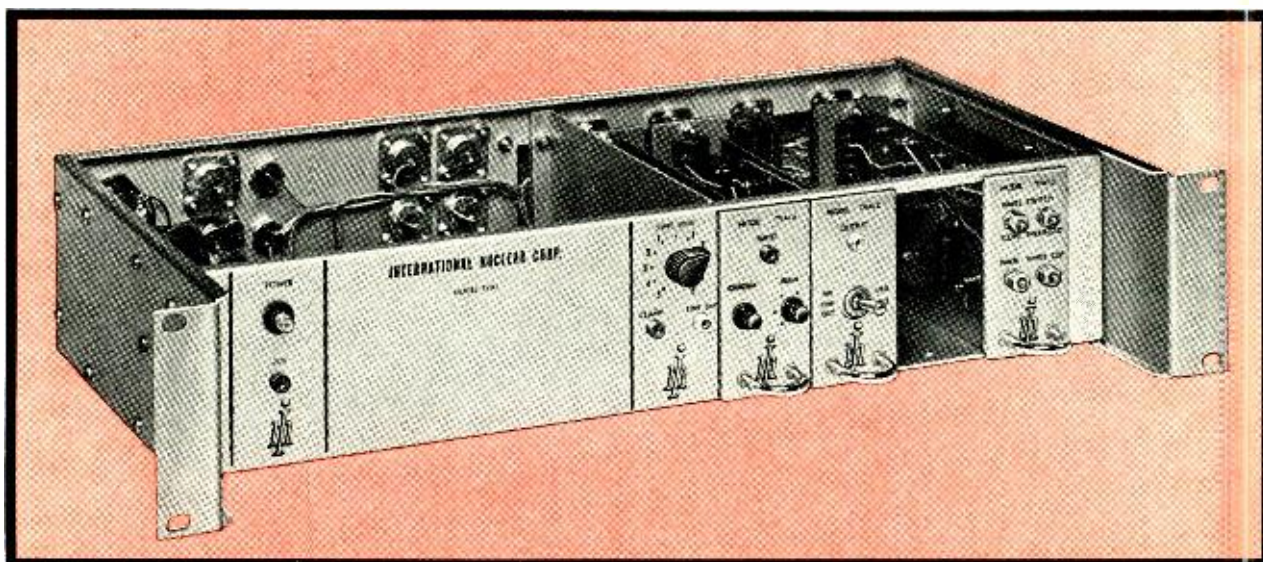

## TVA1 TRANSISTORIZED VIDEO STABILIZING AMPLIFIER AND ASSOCIATED PLUG-IN UNITS

International Nuclear's Model TVA1 Video Stabilizing Amplifier, with its associated series of plug-in units offers high level performance and versatility for studio or transmitter use. It removes all low frequency disturbances such as hum, bounce and tilt by sync-tip clamping. The back porch level is precisely stabilized without affecting color signals in any way. Sync is stretched after back porch stabilization and then clipped accurately to desired level. This level may be set by means of a front panel control which can be extended to a remote location. Stripped sync is provided at one 75 ohm internally terminated output connector, at a 4 volt level. The TVA1 chassis contains a plug-in compartment which accepts up to 4 plug-in units. Among these plug-in units is the TVA1-E, providing a stripped color video channel, and the TVA1-D which provides the means of adjusting peak-white clipping, white stretch and differential phase. Other plug-in units are listed below.

### PRICES F.O.B. NASHVILLE, TENNESSEE

|                                                                                         |            |
|-----------------------------------------------------------------------------------------|------------|
| Model TVA1 Stabilizing Amplifier (less plug-ins)                                        | \$1,380.00 |
| Model TVA1-A, Manually operated input amplifier unit                                    | \$ 310.00  |
| Model TVA1-B, input amplifier unit, with provision<br>for remote master gain and chroma | \$ 425.00  |
| Model TVA1-C Monitor Amplifier unit                                                     | \$ 265.00  |
| Model TVA1-D White stretch and clip unit                                                | \$ 240.00  |
| Model TVA1-E Stripped Video unit                                                        | \$ 450.00  |


for more complete information write Department VA

## INTERNATIONAL NUCLEAR CORPORATION

608 NORRIS AVENUE — NASHVILLE 4, TENN. — PHONE 615-254-3366



# NEW PRODUCTS

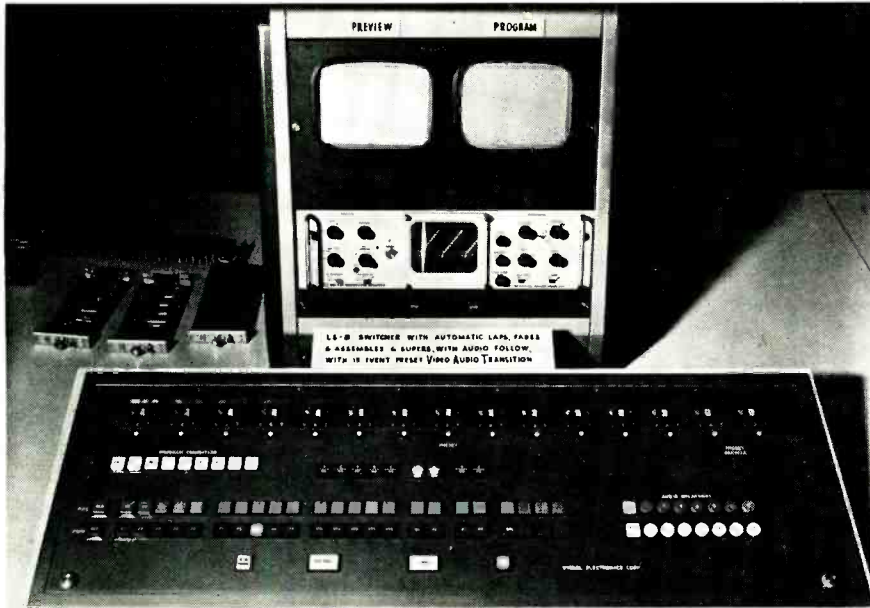

## Preselect Switcher

The preselect switcher for video, audio, and transitions (VAT) shown here provides for a "take" bar to run off a series of preset events with the inclusion of cuts, automatic laps, fades, or supers. The Visual Electronics VAT systems utilize thumbwheels for control, storage, and readout of preselect information. Audio may be preselected to follow video or may be from a separate source. Presetting of the video and audio switching transition (cut, lap, fade, or super) and speed is provided. The system permits previewing the signal immediately prior to airing, and last-minute push-button changes of all preset information can be made. A "Take" or "Preroll" button activates each succeeding event.

Circle Item 88 on Tech Data Card

## Image-Pickup Tube

The WL-23111 is a 3" image dissector tube having a resolution of 3000 television lines per inch and short rise and


decay time. This Westinghouse tube is designed for microfilm readout, television film scanning, and high-speed flying-spot scanning. The tube has no target, hot cathode, or beam-forming gun. Standard image orthicon components can be used when scan rates permit.



A zoom effect can be attained electronically by magnification through scan reduction. By decreasing the deflection amplitude and underscanning the image, a magnification of several hundred times is possible. In the operation of this image dissector, an electronic picture corresponding to the optical image focused on

the face-plate is emitted from the photocathode. The electronic picture is then scanned across an aperture, and at any instant in time only the electrons passing through the aperture enter the electron multiplier. The quantity varies with the light intensity on the portion of the image being scanned. Further amplification is accomplished by secondary emission in the 12-stage multiplier section.


Circle Item 89 on Tech Data Card

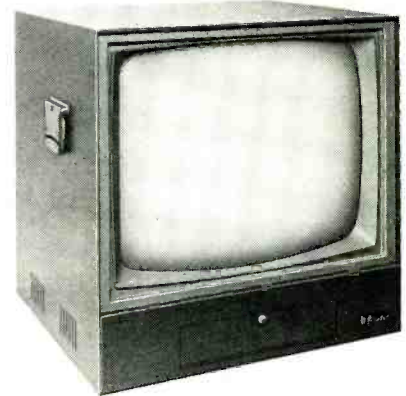

## Solid-State TV Monitors

A series of television monitors featuring transistorized circuitry and printed-circuit construction is being manufactured by Miratel Electronics. This equipment is designed to meet general-purpose TV viewing requirements and provide the advantages of solid-state design. All standard mounting configurations are available.

Circle Item 90 on Tech Data Card

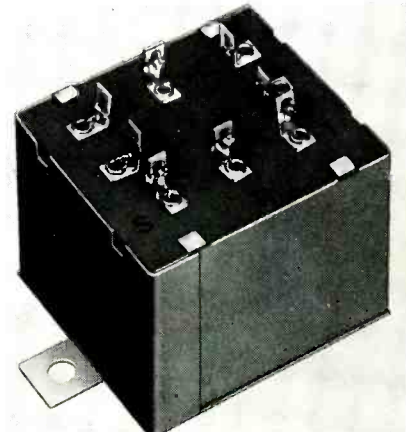

## Interphone Amplifier

The Model 90C solid-state interphone amplifier has been designed to meet the requirements of television-studio communication systems. This Daven amplifier, which eliminates the need for an induction coil, offers a gain of up to 25 db in received sound level. Up to 32 stations may be used on the same bus, compared to the usual number of 6 possible with an induction coil.

Received signal level can be independently fixed to any desired setting at each station in a system, and sidetone balance can be obtained with a fixed number of stations on the line. Where the number of stations is variable, a compromise setting is used.

Circle Item 91 on Tech Data Card

**all  
systems\*  
GO...**

You're A-OK with **Q R K**  
\*Monaural or Stereo




Whether it's stereo or monaural... when you launch a recording on a QRK Professional Turntable, you can depend on an instant "cue" and the superlative performance that has made QRK famous. QRK Professional Turntables have only 3 rotating parts in their patented design. The exclusive "platter-dapter" adapts to all discs without pop-up gadgets. Every QRK unit is backed by a full year warranty and prompt service.

See your dealer or write for complete illustrated literature.

**QRK ELECTRONIC PRODUCTS**  
2125 N. Barton • Fresno, California



Circle Item 41 on Tech Data Card

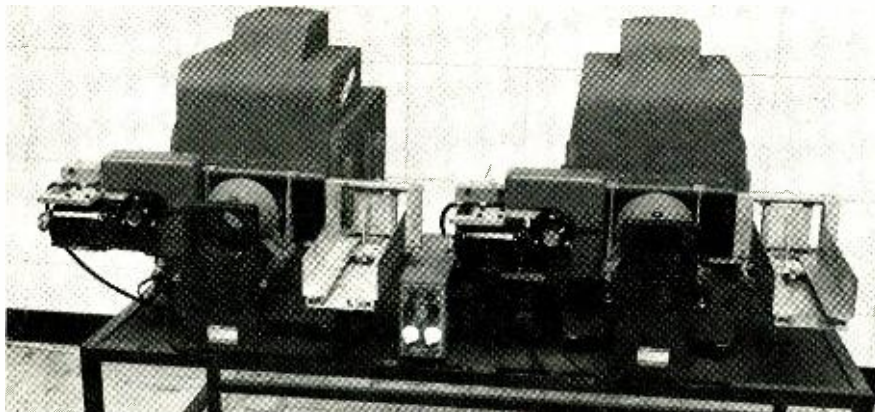

### Horizontal Wipe for Large-Screen Projectors

Designed to fit the "Mod 300" slide changer without shop work, this **TelePro** device consists of a joy-stick type of manual control arranged to operate two projectors for alternate projection of slide sequences. Each projector is fitted with a wipe shutter. When the control stick is operated in one direction, projector A port is opened smoothly by uncovering its slide aperture with a horizontal movement of its shutter. The shutter in projector B is locked to projector A through the control stick so that projector B's port is closed at a rate exactly synchronized to the opening of projector A.

On the screen, the picture from Projector A wipes onto the screen as the picture from Projector B wipes off. The Type 3000 wipe uses complementary shutters operating in the image planes. The gate temperature of the blanked projector is lowered, reducing bleaching effects and prolonging transparency life.


Circle Item 92 on Tech Data Card



### Transistorized 4 1/2" IO Camera

A compact, fully transistorized 4 1/2" image-orthicon studio camera is available from **Ampex Corp.** The Mark V camera, which is manufactured by **Marconi Co., Ltd.**, of England, and marketed in the United States by Ampex, weighs 98 lbs. Controls on the camera include only basic "on-off" and lighting adjustments, with all other camera electronics on separate equipment racks, leaving the operator free to concentrate on controlling the position and field of view of the camera. A tilting viewfinder permits the cameraman to obtain the most comfortable viewing position at any camera angle. The viewfinder is four times brighter than previous viewfinders and can display the picture from the camera, a picture from an outside source, or a mixture of the two. Other major features of the camera include a single integrated zoom lens.

Circle Item 93 on Tech Data Card

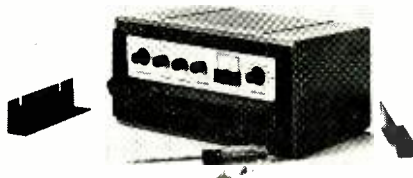

### Solid-State TV Relay

An all-solid-state relay for STL, intercity, multihop or portable pick-up, the **Microwave Associates MA-7** operates in the 6875 to 7125-mc TV relay auxiliary broadcast band. It is designed to meet or exceed FCC and CCIR standards for color and black-and-white visual and audio subcarrier. The equipment requires no warm-up and features low power consumption and reduced size and weight. The transmitter and receiver are housed in separate cases which include interchangeable power packs for 12 VDC, 24 VDC, 110 VAC, or 220 VAC sources. Transmitter RF power output is 3/4 watt with 35 watts input. The receiver is crystal controlled and has 25 watts continuous-duty power consumption. Noise figure is 12 db nominal and 7 db with RF preamplifier (optional). Rack-mount size is 19" x 8 1/2" for both units.


Circle Item 94 on Tech Data Card



### Solid-State Stereo Console

Selection and mixing of FM stereo program sources and complementary mono program sources are the functions of the **Melcor Model AF-37A** solid-state console. It features seven mixing inputs normalled through push-button selectors to seventeen program sources, six of which are dual stereo sources. The mixing inputs are push-button selectable to either of two programming channels, or to a third output channel which can be used for cue or echo send. The cabinet design provides forearm support at working height, with knee space below and space for script. A complete jackfield is exposed when the arm support is pivoted downward. The mixing console can be used for simultaneous SCA operation from a separate program source by assigning the third output channel for this purpose. ▲

Circle Item 95 on Tech Data Card

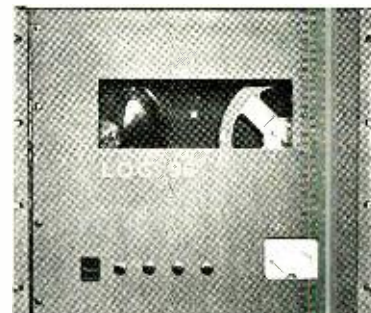

### AUTOMATIC PROGRAM LOGGER

**LOG 96** records 96 hours of program material on 1200 ft. of standard 1/4-inch tape. This tremendous capacity reduces tape costs to approximately 1¢ per hour.

**LOG 96** meets FCC requirements for automatic program logging. With **LOG 96** you are assured of accurate, exact program representations.

Even the largest stations with competent personnel, keeping fastidious logs, will want the added security and dependability of **LOG 96**. Basic model only \$595.

Autotronics of Oklahoma  
Price Tower Laboratories  
Bartlesville, Oklahoma



Circle Item 42 on Tech Data Card

## ENGINEERS' TECH DATA

### AUDIO & RECORDING EQUIPMENT

47. AMPEX—Bulletin 2273 and price sheet 2274 list data for AG-100 magnetic mat recorder/reproducer.
48. ATLAS SOUND—Illustrated catalog supplies specifications for new Series AP-30 public-address loudspeakers for indoor and outdoor systems.
49. BRITISH INDUSTRIES — Catalogs describing full line of Garrard turntables and Wharfedale speaker systems.
50. BROADCAST ELECTRONICS—Packet contains specifications and prices on Spotmaster tape-cartridge equipment including: Portapak I, 400A Series, Ten Spot, and Super "B" Series.
51. CBS LABS—Literature on the "Volumax" automatic peak controller and the "Audiomax III" solid-state automatic level control.
52. CINE SONIC—Data sheet describes rental service which supplies background music prerecorded on 7", 10½", and 14" reels of tape, or in cartridges.
53. CONCORD—Specification sheet describes Series "R" automatic stereo tape recorders.
54. CROWN—Six-page data sheet for new solid-state power amplifier.
55. QUAM—New general catalog No. 65 lists speakers for color-TV replacement, PA systems, high-fidelity, and general replacement.
56. SPARTA—Flyer and price sheet gives specifications for studio turntables, tape cartridge systems, audio consoles, and accessories.

### CATV EQUIPMENT

57. ENTRON—Facility brochure describes product line and manufacturing procedures as well as general history of company's participation in CATV.

### COMPONENTS & MATERIALS

58. CORNELL DUBILIER—Guide lists cross-reference data for vibrators.
59. MERIT—Form 850, 1965-66 general catalog, provides replacement guide for coils and transformers.
60. MICON—Catalog 103 supplies information on company line

of coaxial connectors and devices.

61. SOLITRON—Short form catalog for germanium and silicon power transistors.
62. SWITCHCRAFT—New product bulletin No. 152 describes series H-100, H-200 "HI-D" and series DA "DATA-SWITCH" momentary-contact switches.
63. TENSOLITE—Bulletin 103 shows design and specifications for high-voltage wire and cable.

### MICROWAVE DEVICES

64. MICRO-LINK—Planning guide for 2500-mc ITV systems, data on model 420A portable link and Model 600 fixed link.

### MOBILE RADIO & COMMUNICATIONS

65. MILES—Descriptive literature is available for subminiature FM transmitter and matching receiver.
66. MOSELEY ASSOCIATES—Four-page folder gives details and specifications for new Type II and Type III STL radio remote-control systems.
67. MOSLEY—Literature describes Citizens band antennas.
68. SPRAGUE—Circular M-853 describes SK1-, SK-10, SK-20, and SK-30 "Suppressikits" for vehicles with alternators or DC generators.

### POWER DEVICES

69. HEVI-DUTY—Bulletin 7-22 supplies data on line-voltage regulator using saturable-core reactor.

### RADIO & CONTROL ROOM EQUIPMENT

70. BAUER—Illustrated specification sheet gives information on Model 910 solid-state, eight-channel audio console which is available in factory-assembled or kit form.

### REFERENCE MATERIAL & SCHOOLS

71. CLEVELAND INSTITUTE—Booklet outlines courses in electronics, including those for broadcast engineering and FCC-license preparation.
72. HOWARD W. SAMS—Literature describing popular and informative technical publications; includes latest catalog of technical books.

PROGRAM DIRECTORS  
CHIEF ENGINEERS  
EXECUTIVES

# SAVE TIME

Identifying, Evaluating, Cataloging,  
Inspecting 16mm Motion Picture Film  
on the



# moviola LIBRARY READER

- View at up to five times sound speed.
- View at governed sound speed.
- Twelve sided prism, high quality, projection system.
- Rapid rewind without switching reels.
- Performs all functions forward and reverse.
- Available with or without sound.

**moviola**  
manufacturing co.  
*motion picture / tv equipment*

5539 Riverton Ave., North Hollywood, Calif.  
Telephone: 877-2173  
Cable Address: Moviola, North Hollywood, Calif.

Circle Item 44 on Tech Data Card

# SPOTMASTER

RS-25



Tape  
Cartridge  
Racks

RM-100



... from  
industry's  
most comprehensive  
line of cartridge tape equipment.

Enjoy finger-tip convenience with RM-100 wall-mount wood racks. Store 100 cartridges in minimum space (modular construction permits table-top mounting as well); \$40.00 per rack. SPOTMASTER Lazy Susan revolving cartridge wire rack holds 200 cartridges. Price \$145.50. Extra rack sections available at \$12.90.

Write or wire for complete details.

**Spotmaster**

**BROADCAST ELECTRONICS, INC.**  
8800 Brookville Road  
Silver Spring, Maryland

Circle Item 43 on Tech Data Card

**BROADCAST ENGINEERING**

## STUDIO & CAMERA EQUIPMENT

73. BENDIX—Specification sheet gives information on BX-8A broadcast-type image-orthicon camera.
74. TV ZOOMAR—Data on Angenieux-Zoomar Model 10-2-1B, and AUTOCAM servo control.
75. VISUAL ELECTRONICS—Technical information covers new accessories for Mark 10 camera line and VAT preselect switcher.

## TELEVISION EQUIPMENT

76. COLORADO VIDEO—Eight-channel solid-state "Bar/Graph" generator is described in illustrated specification sheet.
77. DAGE-BELL—Specification sheets on portable video tape recorder, 520 Broadcast Camera, and FC-11 film chain.
78. DYNAIR—Flyers give particulars on RX-4A solid-state professional TV tuner.
79. TELEMET—Sheet supplies description for Model 315-A1 color monitor.
80. VITAL—Data sheets give specifications of Model VI-500 stabilizing amplifier, Model VI-10A video distribution amplifier, and Model VI-20 pulse distribution amplifier.

## TEST EQUIPMENT & INSTRUMENTS

81. BLONDER-TONGUE—"Standards for Industry" folder features Model FSM-2 UHF/VHF field strength meter, Model 4122 solid-state UHF/VHF sweep generator, and 75-ohm accessories.
82. ELECTROTECH—Data sheets provide technical information on Model V-6 color bar generator, Model V-7 color-bar generator and vectorscope, Metergard meter protection device, and Lectrocell battery replacement for VTVM.
83. MARCONI—Data on Model 1099 video-sweep generator for color video-tape testing and head alignment.
84. SENNHEISER—Literature lists uses and specifications for Model ZP-2 transistorized impedance tester.

## TRANSMITTER & ANTENNA DEVICES

85. CCA—Catalog sheets describe type SC-1D FM transmitter subsidiary generator.
86. COLLINS—Two four-page brochures describe Model 212S-1 speech-input console and Model 820E/F-1 5- and 10-kw AM transmitters. "Microwave — Applied to CATV/CCTV/ETV Operations" booklet supplies basic information on economics and advantages of microwave use.
87. GATES—Specifications available for new FM-3G, 3-kw FM transmitter.

# TV SYSTEMS ENGINEERS

The continuing growth of RCA's Broadcast and Communications Products Division has created several excellent openings for experienced TV Systems Engineers.

Your work will include systems planning for TV studios, closed circuit systems, ETV, radio broadcast systems, mobile unit planning, as well as actual supervision of installation and construction of necessary components to complete the system. Some customer contact is involved.

Qualifications include a BSEE degree, or equivalent, and two or more years experience in planning, installation and maintenance of TV facilities (both audio and video).

Salary is commensurate with your education and experience. Relocation assistance is provided.

Send your resume to: Mr. C. F. Zangardi, Employment Manager, RCA Broadcast and Communications Products Division, Building 3-2, Camden 2, New Jersey.

AN EQUAL OPPORTUNITY EMPLOYER



**THE MOST TRUSTED NAME  
IN ELECTRONICS**

## Advertisers' Index



|                                          |         |                                                |         |
|------------------------------------------|---------|------------------------------------------------|---------|
| Acme Film Labs.....                      | 51      | International Nuclear Corp. ....               | 53      |
| Altec Lansing Corp. ....                 | 46      | Jampro Antenna Co. ....                        | 47      |
| AMECO .....                              | 30      | Magnecord, Midwestern Instruments. ....        | 43      |
| Andrew Corp. ....                        | 49      | Moviola Mfg. Co. ....                          | 56      |
| Audio Acoustics Equipment Co. ....       | 8       | Nortronics .....                               | 38      |
| Automatic Tape Control, Inc. ....        | 50      | QRK Electronics .....                          | 54      |
| Autotronics of Oklahoma.....             | 55      | RCA Electronic Components<br>and Devices ..... | Cover 4 |
| Bionic Instruments, Inc. ....            | 26      | RCA Employment .....                           | 57      |
| Broadcast Electronics .....              | 28, 56  | Riker Industries .....                         | Cover 2 |
| CBS Labs, Inc. ....                      | 7       | Russco Electronics Mfg. ....                   | 50      |
| Cleveland Institute of Electronics... .. | 44      | Sarkes Tarzian, Inc. ....                      | 3, 28   |
| Collins Radio .....                      | 31      | Scully Recording Instruments Corp. .           | 27      |
| Continental Electronics .....            | 35      | Sony Superscope .....                          | 5       |
| Crown International .....                | 52      | Sparta Electronics Corp. ....                  | 32      |
| Dage TV Co. ....                         | Cover 3 | Stancil-Hoffman Corp. ....                     | 34      |
| Eastman Kodak Co. ....                   | 29      | Switchcraft, Inc. ....                         | 50      |
| Eitel-McCullough, Inc. ....              | 25      | Telemet Co. ....                               | 33      |
| Fairchild Recording Co. ....             | 6, 34   | Texas Crystals .....                           | 38      |
| Gates Radio Co. ....                     | 9       | Viking of Minneapolis.....                     | 48      |
| General Electric Co. ....                | 37      | Visual Electronics Corp. ....                  | 42      |
| Harvey Radio .....                       | 45      | Ward Electronic Industries, Inc. ....          | 41      |
| Industrial Electronic Reels.....         | 26      | Wilkinson Electronics .....                    | 36, 52  |

## Next Month:

**Pioneer Remote-Controlled UHF Helical  
Antennas for Television Maintenance  
of Film Chains**

Engineers' Exchange  
Washington Bulletin  
News of the Industry  
New Products

**Other Features and Departments**

**Reserve your copy  
of the October**

## Broadcast Engineering

now! Just fill out and send us the convenient subscription form bound in this issue — you'll receive the Broadcast Engineer's Maintenance Guide free of charge.

## Professional Services

### VIR JAMES

CONSULTING RADIO ENGINEERS  
Applications and Field Engineering  
345 Colorado Blvd.  
Phone: (Area Code 303) 333-5582  
DENVER, COLORADO 80206  
Member AFCCE

### JAMES C. McNARY

Consulting Engineer  
National Press Bldg.  
Washington 4, D. C.  
Telephone District 7-1205  
Member AFCCE

### LAWRENCE BEHR ASSOCIATES, Inc.

RADIO ENGINEERING CONSULTANTS  
AM - FM - TV - CATV  
LAWRENCE BEHR, PRESIDENT  
2501 East Fourth Street  
Greenville, North Carolina  
919-PL 8-3966  
NCAB SBE IEEE

### OSCAR LEON CUELLAR

Consulting Radio Engineer  
AM-FM-TV  
411 Phoenix Title Building 623-1121  
Directional Antennas Design  
Applications and Field Engineering  
Tucson, Arizona 85701  
Member IEEE

### CARL E. SMITH

CONSULTING RADIO ENGINEERS  
AM, FM, TV and CATV  
8200 Snowville Road  
Cleveland, Ohio 44141  
Phone: 216-526-4386  
Member AFCCE

### CAMBRIDGE CRYSTALS PRECISION FREQUENCY MEASURING SERVICE

SPECIALISTS FOR AM-FM-TV  
445 Concord Ave. Phone 876-2810  
Cambridge, Mass. 02138

AMPEX HEAD ASSEMBLY RECON-  
DITIONING SERVICE for all Ampex  
professional model recorders. This  
professional service features precision  
relapping of all heads for maximum  
head life. Your assembly is thoroughly  
cleaned and guides are replaced as re-  
quired. Price includes optical and  
electrical inspection and complete  
testing on Ampex equipment in our  
plant. Full track or half track assem-  
blies... \$35.00. One to two day ser-  
vice. "Loaner" assemblies available,  
if necessary. Audio assemblies from Am-  
pex and RCA Video Tape Recorders  
also serviced. LIPPS, INC., 1630 Eu-  
clid St., Santa Monica, California  
90404. (213) EX 3-0449. tf

### Barnett F. Goldberg, P.E.

CONSULTING ELECTRONICS ENGINEER  
AM, FM & TV  
APPLICATIONS AND FIELD ENGINEERING  
ACOUSTICS AND VALUATION-APPRAISAL  
WORK  
803-253-8347  
1138 BULL STREET, COLUMBIA, S.C. 29201

## Classified

Advertising rates in the Classified Sec-  
tion are ten cents per word. Minimum  
charge is \$2.00. Blind box number is 50  
cents extra. Check or money order must  
be enclosed with ad.

The classified columns are not open to  
the advertising of any broadcast equip-  
ment or supplies regularly produced by  
manufacturers unless the equipment is  
used and no longer owned by the manu-  
facturer. Display advertising must be  
purchased in such cases.

## EQUIPMENT FOR SALE

Will buy or trade used tape and disc re-  
cording equipment—Ampex, Concertone,  
Magnecord, Presto, etc. Audio equipment  
for sale. Boynton Studio, 295 Main St.,  
Tuckahoe, N. Y. 1-64 tf

Ampex Head Assemblies for 300 and 400  
series recorders reconditioned. Service  
includes lapping and polishing all three  
head stacks, cleaning entire assembly,  
readjusting and replacement of guides,  
and realignment of stacks as to azimuth  
and zenith. Full track assemblies—\$60.00.  
Taber Manufacturing & Engineering Co.,  
2619 Lincoln Ave., Alameda, California.  
5-64 tf

Audio Equipment bought, sold, traded.  
Ampex, Fairchild, Crown, McIntosh, Vik-  
ing, F. T. C. Brewer Company, 2400  
West Hayes Street, Pensacola, Florida.  
3-64 tf

Television/Radio/communications gear of  
any type available. From a tower to a  
tube. Microwave, transmitters, cameras,  
studio equipment, mikes, etc. Advise  
your needs—offers. Electrofind Co., 440  
Columbus Ave., NYC. 212-EN-25680.  
8-64 tf

COMMERCIAL CRYSTALS and new or  
replacement crystals for RCA, Gates, W.  
E., Bliley, and J-K holders; regrounding,  
repair, etc. BC-604 crystals; also service  
on AM monitors and H-P 335B FM mon-  
itors. Nationwide unsolicited testimonials  
praise our products and fast service. Eid-  
son Electronic Company, Box 96, Temple,  
Texas. 5-64 tf

AMPEX 350 SERIES reconditioned cap-  
stan idlers for \$7.50 exchange. Send us  
your old ones, or order them for \$10.00  
and get \$2.50 back after sending the old  
ones in. Ours have new bearings, the  
rubber softened and surface precision  
ground. TABER MANUFACTURING &  
ENGINEERING CO., 2619 Lincoln Ave.,  
Alameda, California. 1-65 12t

AMPEX 350 SERIES reconditioned cap-  
stan drive motors (BODINE NCH-33 only)  
\$85.00 exchange. Send us your old one,  
or order for \$100.00 and get \$15.00 back  
after sending old one in. Ours have new  
bearings and rewound stator. Package  
motor well. TABER MANUFACTURING  
& ENGINEERING CO., 2619 Lincoln Ave.,  
Alameda, California. 1-65 12t

CO-AXIAL CABLE Helix, Styroflex,  
Spiroline, etc. Also rigid and RG types in  
stock. New material at surplus prices.  
Write for list. Sierra-Western Electric Co.,  
Willow and 24th St., Oakland, Calif.  
Phone 415 832-3527. 5-65 tf

Conrac TV Monitors for sale. 3—27", 2—  
21", 1—17", 3—8". All encased and in  
good condition. GPL PD-150 camera and  
control unit. Best offer on any or all.  
F & B/CECO, Inc., 315 West 43rd Street,  
New York City, Mr. Zuch. Phone: JU  
6-1420. 8-65 tf

Hobart gasoline generator 35 KVA, 230  
Volts, 3 phase—\$1,000. Federal 101-C  
field intensity meter—\$275. Johnson RF  
contactor 25 Amps, SPDT—\$75. KSJB,  
Jamestown, N. D. 9-65 1t

Three complete Speedy-Q Sound Effects  
Libraries, mostly new, worth \$384.00 now  
\$175.00 FOB, Hollywood. Write Gold Star,  
6252 Santa Monica Blvd., Hollywood,  
California. 9-65 3t

REK-O-KUT Imperial 11 disc recorder,  
M12 lathe. TR12H turntable. S120 12"  
playback arm. R8B transistorized ampli-  
fier. Very slightly used. Excellent condi-  
tion. Bargain at \$350. Sales Development  
Institute, 3338 Chippendale Ave., Phila-  
delphia, Pa. 9-65 1t

Everything in used broadcast equip-  
ment. Write for complete listings. Broad-  
cast Equipment and Supply Co., Box 3141,  
Bristol, Tennessee. 11-64 tf

New and Reconditioned Remote Pickup  
and 2-way radio equip., Fire and Police  
Receivers. All brands and models. Sales  
Manager, Box 238, Phone 817-594-5171,  
Weatherford, Texas. 5-65 12t

Audio Equipment—Ampex, Altec, Fair-  
child, Langevin, Neumann, etc. Trades.  
New and used. Get our list. Audio Dis-  
tributors, Inc., 2342 S. Division, Grand  
Rapids, Michigan. 7-65 6t

## PERSONNEL

ENGINEERING SALES OPENING? Sales  
background plus nine years in broadcast-  
ing, from engineer to management level,  
adds up to good representative for manu-  
facturer dealing with broadcasting field.  
Box 133, Broadcast Engineering. 8-65 2t

Announcer with 2½ years experience in  
general station operation, seeks position  
in small AM variety format operation on  
east coast. Age 28, single. Box 137,  
Broadcast Engineering. 9-65 1t

1st PHONE ENGINEER—Experienced in  
transmitter and studio operation and  
maintenance, directional AM. Desire per-  
manent position. Prefer midwest area.  
Write Box 136, Broadcast Engineering.  
9-65 1t

## Employment

Leading business publication has imme-  
diate opening for technical writer/editor.  
Background in electronics, good knowl-  
edge of grammar, experience in broad-  
casting are essential. Send resume to Box  
138, BROADCAST ENGINEERING. tf

TV Broadcast Technicians Wanted—Major  
Network-owned Television Station in  
Midwest needs several Technicians. Must  
be young, energetic, well educated and  
technically oriented. Experience welcome  
but not essential. These are top quality  
jobs for superior Technicians only. Sub-  
mit complete resume to Box 135. 9-65 1t

## Business Opportunities

### EXCLUSIVE FRANCHISE

Amazing new liquid plastic coating used  
on all types of surfaces interior or ex-  
terior. Eliminates waxing when applied  
on Asphalt Tile, Vinyl, Linoleum, Vinyl  
Asbestos, Hard Wood, and Furniture.  
Completely eliminates painting when ap-  
plied to Wood, Metal, or Concrete sur-  
faces. This finish is also recommended for  
boats and automobiles.

### NO COMPETITION

As these are exclusive formulas in de-  
mand by all businesses, industry and  
homes. No franchise fee. Minimum in-  
vestment—\$300. Maximum investment—  
\$7,000. Investment is secured by inven-  
tory. Factory trained personnel will help  
set up your business.

For complete details and descriptive lit-  
erature write:

CHEM-PLASTICS & PAINT CORP.

1828 Locust, St. Louis 3, Mo.

6-65 14t

## BROADCAST ENGINEERING

# SEPTEMBER, 1965

Please allow 60 to 90 days for delivery.

## Engineer's Tech Data Service Request Card

Name \_\_\_\_\_

Firm \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip Code \_\_\_\_\_

Please send me the literature circled below:

|    |    |    |    |    |    |    |    |    |
|----|----|----|----|----|----|----|----|----|
| 1  | 12 | 23 | 34 | 45 | 56 | 67 | 78 | 89 |
| 2  | 13 | 24 | 35 | 46 | 57 | 68 | 79 | 90 |
| 3  | 14 | 25 | 36 | 47 | 58 | 69 | 80 | 91 |
| 4  | 15 | 26 | 37 | 48 | 59 | 70 | 81 | 92 |
| 5  | 16 | 27 | 38 | 49 | 60 | 71 | 82 | 93 |
| 6  | 17 | 28 | 39 | 50 | 61 | 72 | 83 | 94 |
| 7  | 18 | 29 | 40 | 51 | 62 | 73 | 84 | 95 |
| 8  | 19 | 30 | 41 | 52 | 63 | 74 | 85 | 96 |
| 9  | 20 | 31 | 42 | 53 | 64 | 75 | 86 | 97 |
| 10 | 21 | 32 | 43 | 54 | 65 | 76 | 87 | 98 |
| 11 | 22 | 33 | 44 | 55 | 66 | 77 | 88 | 99 |

Please check BOTH Year business and occupation

- ☐ AM Radio Station      ☐ Recording Studio  
☐ FM Radio Station      ☐ Government Agency,  
☐ Television Station      Library, School  
☐ Network      ☐ Owner, Manager,  
☐ Consulting Engineer      Officer  
☐ Manufacturer or      ☐ Engineer, Technician  
Distributor      ☐ Other

Please indicate number of items you have circled →

|     |     |     |
|-----|-----|-----|
| 100 | 111 | 122 |
| 101 | 112 | 123 |
| 102 | 113 | 124 |
| 103 | 114 | 125 |
| 104 | 115 | 126 |
| 105 | 116 | 127 |
| 106 | 117 | 128 |
| 107 | 118 | 129 |
| 108 | 119 | 130 |
| 109 | 120 | 131 |
| 110 | 121 | 132 |
| 133 | 139 |     |
| 134 | 140 |     |
| 135 | 141 |     |
| 136 | 142 |     |
| 137 | 143 |     |
| 138 | 144 |     |

**USE  
BEFORE  
Nov. 1  
1965**

**FIRST CLASS**

**PERMIT No. 1076**

**Indianapolis, Ind.**

**BUSINESS REPLY MAIL**

**No Postage Stamp Necessary if Mailed in the United States**

**POSTAGE WILL BE PAID BY—**

***Engineers' Tech Data Dept.***

**BROADCAST ENGINEERING**


**4300 WEST 62ND STREET**

**INDIANAPOLIS 6, IND.**

**YOU  
CHOOSE  
with**

# DAGE

**FEATURES  
PERFORMANCE  
AND RELIABILITY**

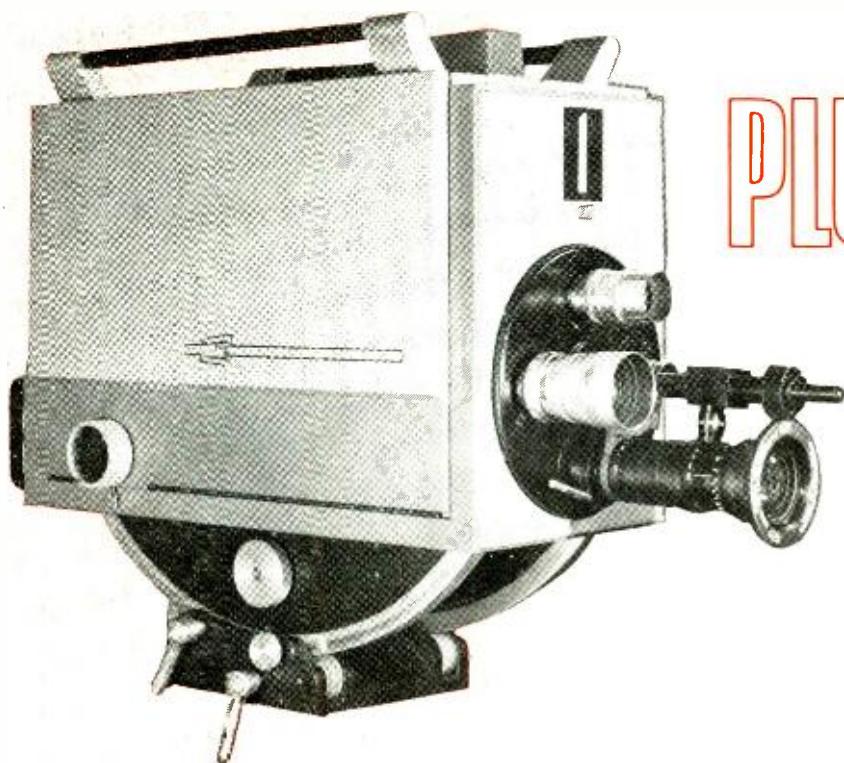

**PLUMBICON**

**VIDICON**

**SEPARATE  
FIELD MESH**

Dage engineering has developed the 520 solid state camera chain which outperforms any other vidicon equipment presently available for commercial or educational broadcasting and video taping. Check feature for feature and see why this is the system for your studio

**RELIABLE SOLID STATE CIRCUITRY • HIGH SIGNAL TO NOISE RATIO • MORE AVAILABLE OPERATOR FEATURES • TREMENDOUS DETAIL RESPONSE AND SENSITIVITY • HIGH RESOLUTION CAPABILITIES WITH NO DISTORTION • PLUMBICON PROVIDES PICTURE WITHOUT LAG**




*No matter what your equipment needs are, Dage has the **BIG** answer for you with the new 520 Broadcast Camera Chain for use with **PLUMBICON**, **VIDICON**, or **SEPARATE FIELD MESH***

**Dage-Bell Corporation**

**A SUBSIDIARY OF RAYTHEON COMPANY**

**445 Sheridan Avenue, Michigan City, Indiana, Dept. 30-8**

**Circle Item 46 on Tech Data Card**

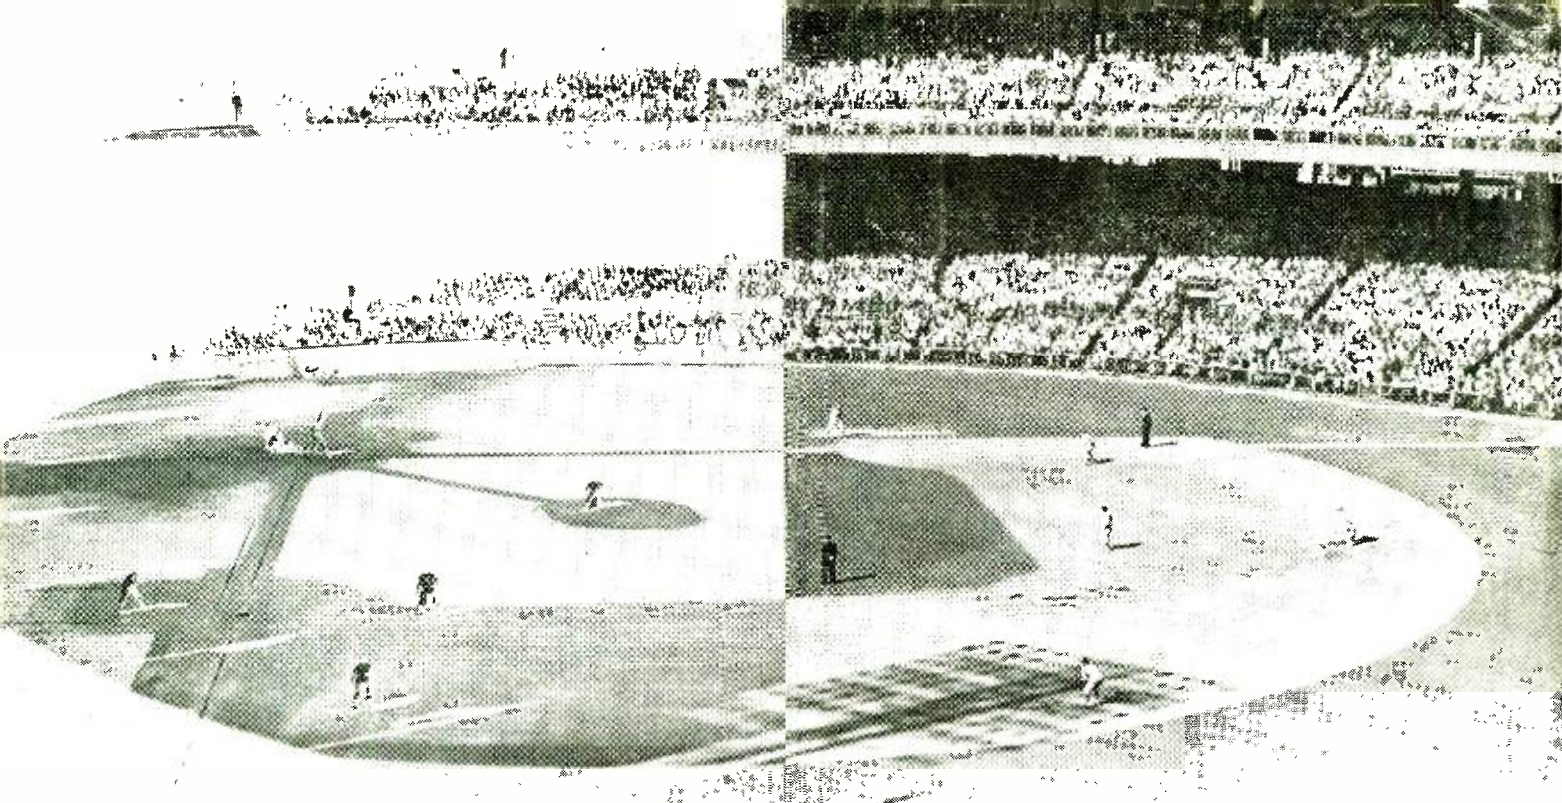

**NIGHT...**

**DAY...**

## A BROADCASTER'S DILEMMA... SOLVED BY RCA 8092A IMAGE ORTHICONS


One of our broadcast customers got a hooker thrown at him when he found he had to do a daytime ballgame after a long night stand at a ball park. He did not have time to change his Image Orthicons to tubes that would produce the best picture under bright daylight conditions.

He had been using our RCA-8092A Image Orthicons in his color camera for nighttime baseball pickup since they produced the best possible sensitivity. We introduced the 8092A several years ago after we were able to provide the increased sensitivity, improved signal-to-noise, and eliminated some of the graininess in the picture...problems which had plagued some of the earlier attempts to use these Image Orthicons in quality television pickup.

This broadcaster was very happy with the nighttime operation because he could put a zoom lens on the camera and still obtain good picture quality with infield illumination from about 150 foot candles. When he had to run the outdoor game the next day in broad daylight he certainly didn't need the high sensitivity.

We told him to go ahead and try them out in daylight, feeling that the tube should produce a good picture if he could "stop" the camera lens down far enough to keep from overloading the tubes. We felt that the contrast should be pretty well handled by these RCA 8092A's.

Well, he tried it, and, surprisingly without stopping the lens down all the way, he found that the 8092A's were

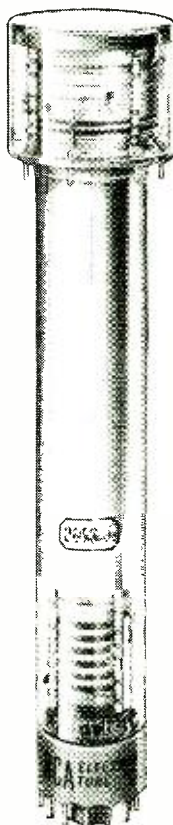

able to pull a lot of the low-light signal out of the mud and beat down the highlight signal without washing out the highlights.

He could pan the camera from the brightly-lighted infield to the shadows of the stadium and look into the dugout without seriously upsetting the color balance, or he could watch the runner on first base without having the brightly-lighted outfield overload the picture.

He has been using his 8092A's for both outdoor daylight and nighttime broadcasts ever since.

Of course, he can not get the color fidelity and the signal-to-noise ratio that might be expected from some of our studio tubes. But the operational flexibility and the fact he has all the sensitivity he needs for nighttime pickup are the things that put him into business day after day with no changes of tubes between games.

These tubes do require a little consideration in handling since they have a gossamer thin target which can be damaged by the wrong kind of jolts or camera handling but if you treat them right, they will give you good service and a wide range of operation.

For further information on the RCA-8092A, ask your RCA Broadcast Tube Distributor for a copy of the RCA-8092A bulletin.

This is one of a series of interesting field situations faced and solved by broadcasters through the coordination of RCA Broadcast Tube Distributors and RCA sales and factory engineers.

RCA ELECTRONIC COMPONENTS AND DEVICES, HARRISON, N. J.



**The Most Trusted Name in Electronics**