





A HOWARD W. SAMS PUBLICATION



DECEMBER 1965/75 cents

Broadcast Engineering

*the technical journal
of the broadcast-
communications industry*

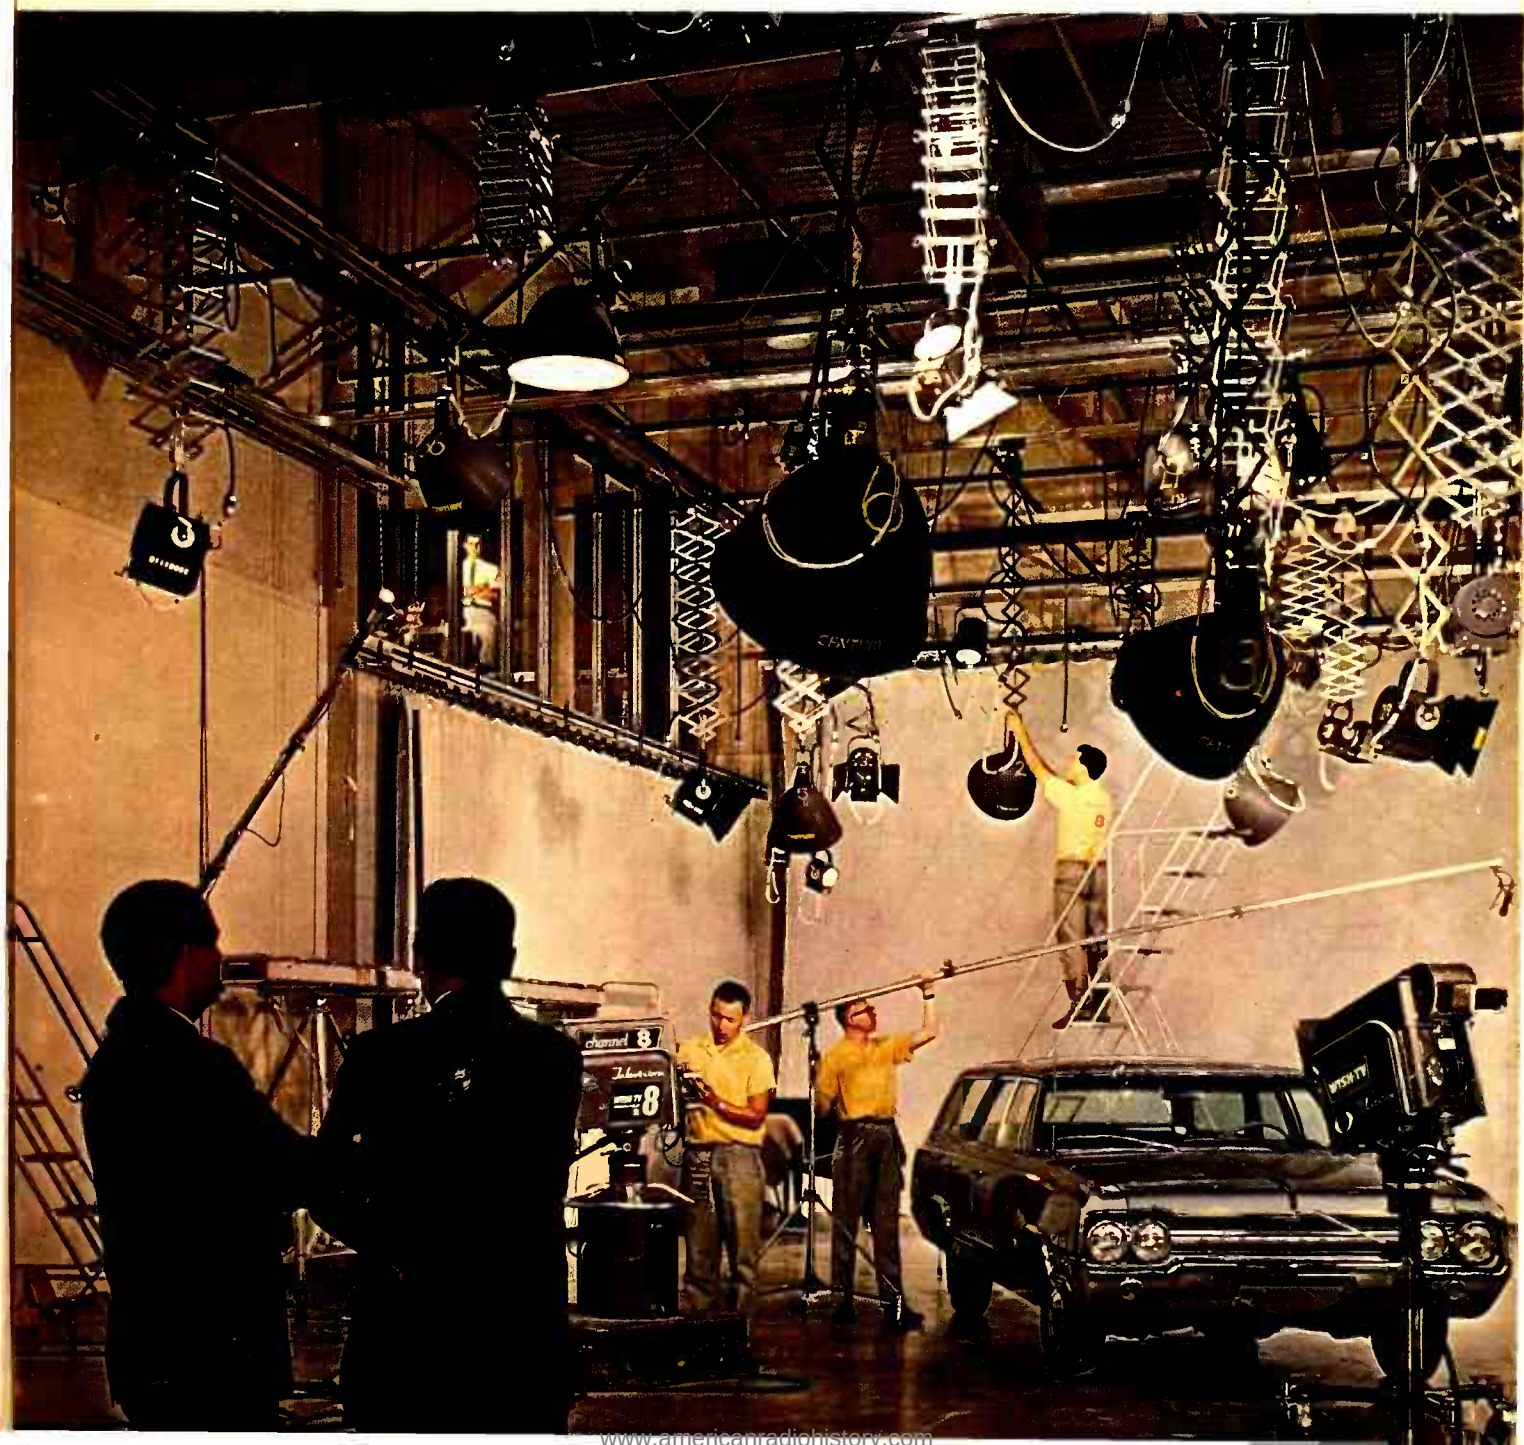

RECOLOR RECOLOR RECOLOR RECOLOR

NOW

COLOR
WITHOUT
A COLOR
CAMERA
OR
ENCODER



INTRODUCING THE RIKER COLORIZER

The RIKER COLORIZER allows even the smallest station to swing to color. Now for the first time, broadcasters can produce color station breaks, color commercials and network color inserts using existing monochrome cameras.

A RIKER COLORIZER consists of two all-transistor modules. A 6 position switch selects the following modes of operation:

- ... Any 3 pre-selected colors
- ... Manual selection of color
- ... Automatic cycling through the color spectrum at a selectable rate
- ... Color added to a monochrome camera output

This unique production tool is designed for economy, speed and simplicity of operation. For example: black and

white film may be developed normally to generate color. Color inserts may be varied without changing luminance.

So many color effects are possible. Here are a few:

- ... Fade to any color
- ... Insert any color
- ... Color monochrome slides (even the U.S. flag in color)
- ... Color ID's and titles

FOR THE COLOR STATION—another color video source.
FOR THE MONOCHROME FACILITY—color station breaks, color commercials and color inserts—all possible with the RIKER COLORIZER.

Partial Listing of Additional Color Equipment from Riker:

- Encoded Color Bar Generator
- Color Bar Generator
- Color Sync Generator
- Subcarrier Regenerator
- Bar & Dot Generator
- Color Video Switching Systems
- Additive/Non Additive Mixer
- Black Burst Generator
- Burst Flag Generator
- Color Special Effects Generator
- Test Signal Generators
- Color Processing Amplifier
- 3.58 MC Phase Shifter
- Plus Many Others




Call or write today for complete details.

RIKER INDUSTRIES, INC.

...thinking always of tomorrow

Norden Lane, Huntington Station, New York Phone 516 HA 1 3444 Atlanta Los Angeles, Detroit, Washington, D.C.

Circle Item 1 on Tech Data Card

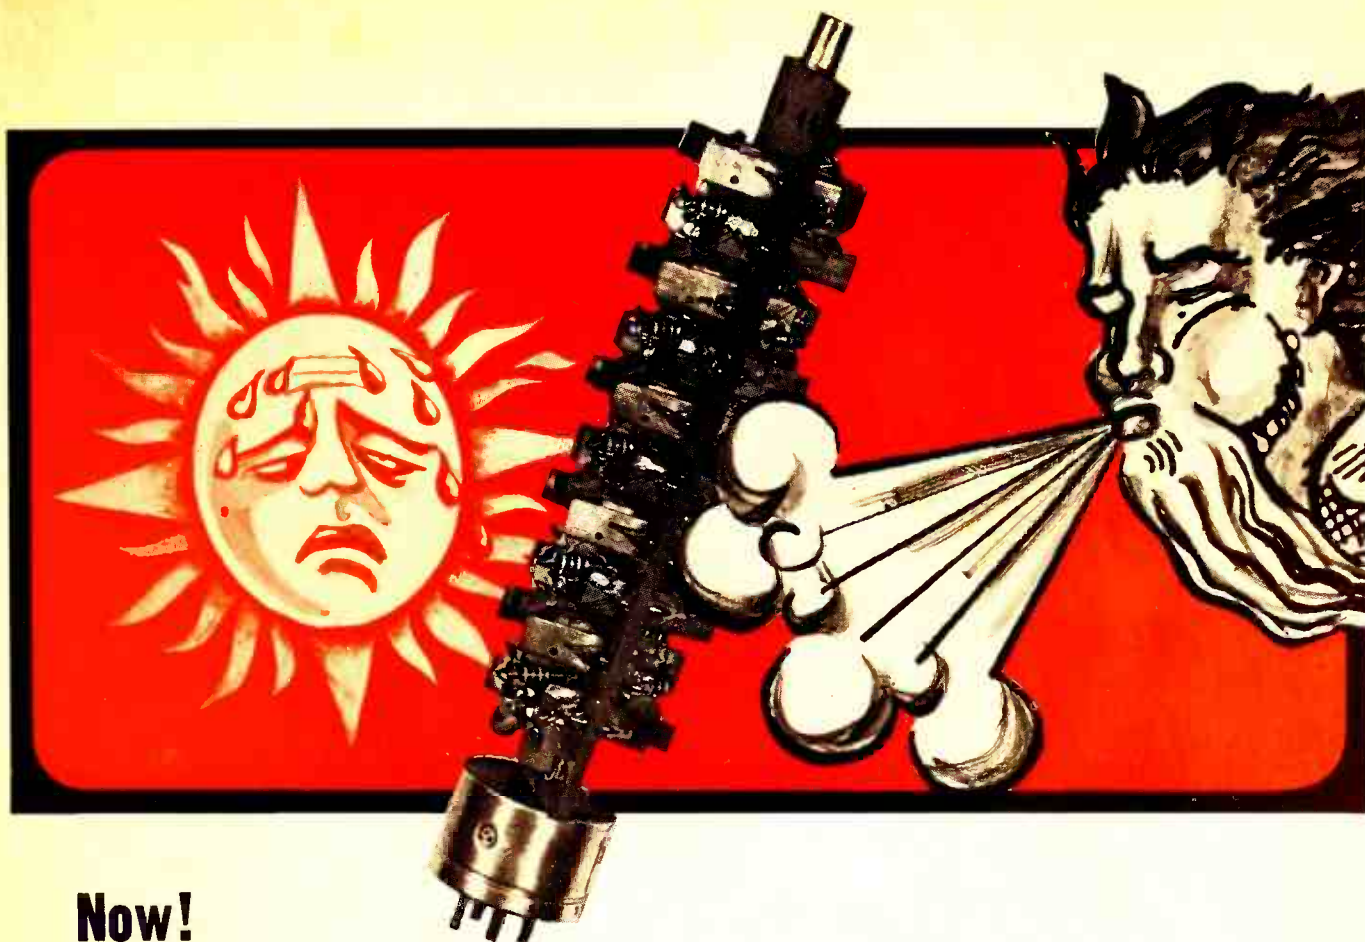

Now!
End "Off-Air" Panic and Eliminate
Temperature Worries Forever, with... WILKINSON
SILICON RECTIFIERS

No more finicky temperature sensitive mercury vapor rectifiers... Go on cold mornings! Forget heating and air conditioning!... Wilkinson Silicon Replacement Rectifiers produce no filament heat and function below -60°C .

No longer high priced! Wilkinson Silicon Rectifiers cost less than others and can be repaired in seconds with low-cost replacement diodes. No encapsulation used! No more guesswork or costly test time! You know at a glance the exact status of your complete power supply because a "GO, NO GO" indicator warns when the reverse leakage of any diode is in excess of 50 microamps. Wilkinson Rectifiers virtually last forever!

Now it's easy and economical to solid state the power supplies in high power equipment. With Wilkinson Rectifiers no rewiring is necessary. Just plug them into your present mercury vapor tube socket. Filament transformers as well as other components are left in place.

Modernize your equipment today! Consult the Tube Replacement Chart shown here and order now!

FEATURES: Light indicator on each diode warns of any difficulty or high voltage ON. • Easily replaceable low-cost diodes. • Reduces heat — power cost — hash. • Operates from -65°C to $+70^{\circ}\text{C}$ Free Convection. • Eliminates warm-up time.

FOR COMPLETE DETAILS WRITE:

TUBE REPLACEMENT CHART					
WE TYPE	REPLACES TUBE TYPE		P.R.V.	AMPS	UNIT PRICE
SR-3-1	866A	816	3KV	1	10.95
SR-10-6	872	8008	10KV	6	50.00
SR-10-12	872	8008 575	10KV	12	60.00
SR-14-6	872	8008 575	14KV	6	72.00
SR-14-12	872	8008 575	14KV	12	84.00
SR-20-6	6894	6895 673	20KV	6	100.00
SR-20-12	6894	6895 673	20KV	12	120.00
SR-24-15	869B		24KV	15	225.00
SR-32-25	857B		32KV	25	475.00

WILKINSON ELECTRONICS, INC.

1937 MACDADE BLVD. • WOODLYN, PA. 19094
 TELEPHONE (AREA CODE 215) 874-5236 874-5237

Circle Item 2 on Tech Data Card

publisher
Howard W. Sams

editor
Forest H. Belt

managing editor
James M. Moore

ass't to the editor
Norman D. Tanner

associate editor
David I. King

regional editors
George M. Frese, Northwest
Thomas R. Haskett, Central
Howard T. Head, Wash., D.C.
Robert A. Jones, Midwest
George C. Sitts, East

research librarian
Bonny Howland

production
Esther M. Rainey, Manager
Paul A. Cornelius, Jr., Photography

circulation
Pat Tidd, Manager
Katherine Krise, Ass't
Cora La Von Willard, Ass't

advertising and editorial assistants
Hazel Boyer
Rebecca Clingerman

advertising sales offices
Hugh Wallace, Sales Manager

eastern
Gregory C. Masefield
Howard W. Sams & Co., Inc.,
3 West 57th Street
New York, N. Y., MU8 6350

midwestern
Paul N. Houston
Howard W. Sams & Co., Inc.,
4300 West 62nd Street,
Indianapolis, Indiana 46206, 291 3100

southwestern
C. H. Stockwell Co.,
4916 West 64th Street,
Mission, Kansas, RA2 4417

western
The Maurice A. Kimball Co., Inc.,
2008 West Carson Street,
Suites 203-204, Torrance, California
320-2204; and 580 Market St.,
Room 400, San Francisco 4,
California, EX 2-3365

foreign
John Ashcraft, 9 Rue Lagrange,
Paris 5, France, ODeon 20-87
John Ashcraft, 12 Bear Street,
Leicester Square, London W.C. 2,
England, WHitehall 0525
International Media Representatives,
Ltd., Kisha Kurabu 14, 2-chrome
Marunouchi, (502) 0656

Copyright © 1965
by Howard W. Sams & Co., Inc.

BROADCAST ENGINEERING is published monthly by Technical Publications, Inc., an affiliate of Howard W. Sams & Co., Inc. Editorial, Circulation, and Advertising headquarters: 4300 West 62nd Street, Indianapolis, Indiana 46206. SUBSCRIPTION PRICES: U.S.A. \$6.00, one year; \$10.00, two years; \$13.00, three years. Outside the U.S.A., add \$1.00 per year for postage. Single copies are 75 cents; back issues are \$1.00.

the technical journal of the broadcast-communications industry



Broadcast Engineering

Volume 7, No. 12

December, 1965

CONTENTS

Features

Trends in TV Studios

Highlights of WISH-TV's new studio building.

David I. King 13

Emergency Broadcast System

An examination of what the EBS is and how it works.

Patrick S. Finnegan 15

A Primer On Directional Antennas

A summary of basic principles for the operator who may be encountering directional arrays for the first time.

J. G. Rountree 18

Radio Pierces the Great Blackout

A special report on the role played by radio broadcasters during the Eastern power failure.

George C. Sitts 20A

Care of Magnetic Tape Heads

No station can afford not to maintain its tape heads in top condition.

Larry J. Gardner 21

Understanding and Using the Field-Intensity Meter

Part 2.—Technique is as important as the instrument in obtaining useful readings.

Thomas R. Haskett 23

1965 Subject-Reference Index


A complete listing, by month and page number, of all subjects in 1965 issues.

26

Departments

Letters	6	New Products	54
Book Review	30	Engineers' Tech Data	57
Washington Bulletin	31	Advertisers' Index	59
News of the Industry	50	Classified Ads	60

SCR-controlled lighting and the large conference-room window are two features of studio A at WISH-TV, Indianapolis. For more details, turn to page 13.



We'll do a month's work for you free!

Just send this page to CBS Laboratories. We will send Audimax and Volumax to your station. If you want to send them home after 30 days, we will pay the freight. But if you want to make your station their permanent home, all you do is pay \$665 each.

At the end of that period, chances are you will be so sold on Audimax and Volumax you will want to buy them.

And you should. After all, they can increase your program power 8 times.

Solid state Audimax is an automatic level control years ahead of the ordinary AGC. By automatically controlling audio levels, it frees engineers, cuts costs and boosts your signal.

Volumax, also solid state, out-modes conventional peak limiters by controlling peaks automatically with-


out side effects. By expanding effective range and improving reception, it brings in extra advertising revenue.

We can afford to give Audimax and Volumax away free. Because we know they're so good, most people can't afford to give them back.



CBS LABORATORIES

Stamford, Connecticut. A Division of
Columbia Broadcasting System, Inc.

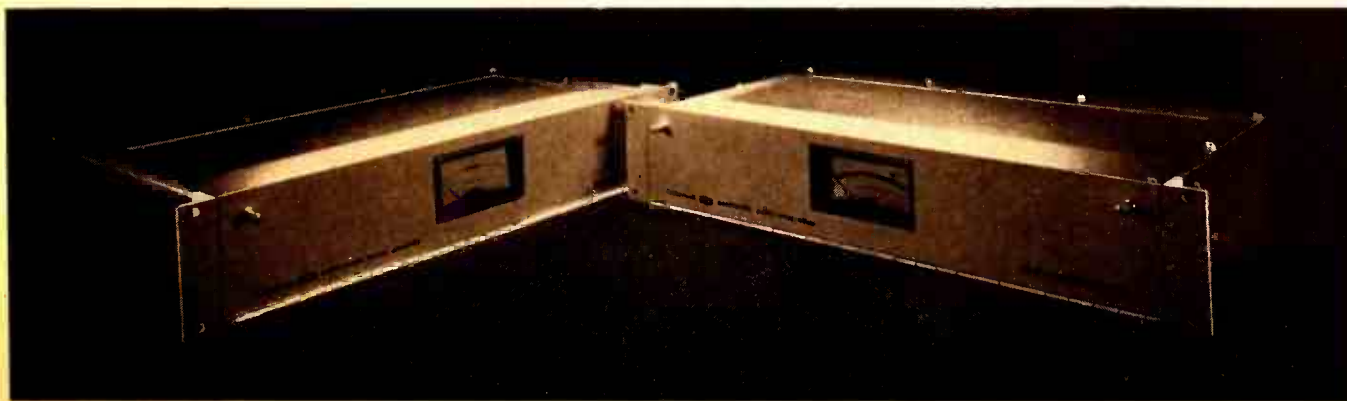

Circle Item 3 on Tech Data Card

SOUNDMEN GET SOUND ANSWERS FROM FAIRCHILD!



FAIRCHILD DYNALIZER MODEL 673

The newest approach for the creation of "apparent loudness"—the Dynalizer is an automatic dynamic audio spectrum equalizer which redistributes frequency response of the channel to compensate for listening response curves as developed by Fletcher-Munson. Adds fullness and body to program material.

NEW! FAIRCHILD BASS-X

A dynamic low frequency roll-off filter—that can roll off high level low frequency information, starting at 500 cycles, with a maximum obtainable attenuation of 12 db at 30 cycles. Device is automatic, is in use only when needed—therefore it does not alter overall apparent low end response to the ear. THE FAIRCHILD BASS-X allows higher levels to be maintained in disc recording, and particularly assists AM stations in increasing their effective signal by automatically controlling the often troublesome low end response.




FAIRCHILD CONAX

The world-accepted way to control high frequency spillovers in FM due to pre-emphasis. Lets your station maintain real high levels even with brass and crashing cymbals and still avoid FCC citations.

FAIRCHILD LIMITER MODEL 670

Fast attack stereo limiter (50 microseconds) with low distortion and absence of thumps. Sum and difference limiting position eliminates floating stereo image. Includes regular channel A and B limiting. Dual controls, dual meters provided. Used throughout the world. (Mono model available).



Write to FAIRCHILD — the pacemaker in professional audio products — for complete details.

FAIRCHILD

RECORDING EQUIPMENT CORPORATION
10-40 45th Ave., Long Island City 1, N. Y.

Circle Item 4 on Tech Data Card

LETTERS to the editor

DEAR EDITOR:

Your article on line services in the September issue of BE was most interesting. As a user of several schedule AAA and AA lines, I hope that you will be able to pursue the subject in greater detail in the near future.

Having been in the broadcasting field for nearly twenty years, I find that the amount of misunderstanding between the broadcaster and local telephone personnel, especially in smaller communities, is sometimes astonishing. Most of these men certainly mean well, but they do only a limited amount of program-line installation and have little opportunity to learn about many of the problems involved.

On occasion it has been necessary for us to wait as long as four months for schedule AAA lines, only to be presented with facilities which are unable to meet noise requirements. When frequency and noise measurements are within limits, we often find that the lines are 20 or 30 db down and are told that this is to be expected when equalization requirements are so exacting. It is often difficult to duplicate the telephone company's measurement figures.

It seems that our industry is badly in need of a set of procedures that will be compatible with those of the telephone industry and will provide us with figures closer to those they give us.

GEORGE S. WOODS

WRUN AM-FM
Utica, New York

Thanks for your comments, George; we'll be looking at the subject of remote lines again before too many moons have passed. We try to give our readers the information they want and need, and letters such as yours help us to know what those wants and needs are.—Ed.

DEAR EDITOR:

Especially in view of the much-appreciated courtesy accorded me by Microwave Associates' representatives during the Fourth International Exposition at Montreux, Switzerland, please permit me to apologize for an error in my report on the company's new microwave link for outside broadcasts (September 1965 BE, page 42). The equipment does not use klystrons as was stated; it is completely solid-state. I also noticed two errors in the printing of the article: On page 23, figures 2 and 3 are interchanged; on page 44, the name "Diemens and Halske" should read "Siemens and Halske."

ELLIOTT P. FAGERBERG

Geneva, Switzerland

Circle Item 5 on Tech Data Card →

FOR THE ONE SOUND ENGINEER IN THREE WHO IS VERY PARTICULAR



AUDIO MIXER



Unique plug-in preamp modules gives you 6-channel mixing with choice of input levels or impedances in any combination at no extra cost. Additional low-cost plug-in units can be supplied for maximum flexibility in use. One input can be used as a 1000 cycle tone for system balancing. Separate and master gain controls, separate bass and treble controls, large illuminated VU meter with range switch. Main output 600Ω, transformer coupled, balanced or unbalanced. Additional output from emitter follower for feeding tape recorder or amplifier. Solid state throughout.

DIODE SWITCH



For simplified operation of remote video monitor, without cumbersome trunk lines. Gives remote selection of 3 high impedance inputs, couples to low impedance output through transistor isolating circuit. Solid state throughout. Self-contained power supply, AC isolated.

Write for complete specifications. See how well-designed quality equipment doesn't have to cost more.

Specialists in versatile equipment for broadcast, closed circuit TV and recording studios. For the engineer who insists on quality.

BRADFORD INFORMATION SYSTEMS, INC.

7312 N. Ridgeway Ave., Skokie, Ill. 60076

New, from Electro-Voice! Sentry Series Professional Monitor Loudspeakers . . . guaranteed flat ± 3 db from 40 to 20,000 cps!

No longer must you improvise with theatre or home-type hi-fi speakers designed for some other purpose. Gone is the guesswork when equalizing . . . you know you'll get *exactly* what you hear through an E-V Sentry Monitor. That's because each Sentry is simple, reliable and as flat in response as modern science can make it!

Gone are "balance" switches or knobs that vary response . . . each Sentry is adjusted flat at the E-V laboratories before you ever see or hear it! And because of this simplicity, the E-V Sentry Series speakers are modest in size and price.

NEW VOICE OF AUTHORITY!

The natural-finish hardwood cabinets are available in a sloping-front style for wall or ceiling mounting . . . or in an upright floor model for fixed or portable applications. They are all identical in sound. Built-in transformer matches studio output impedance of 8, 16 and 600 ohms.

If you want to end equalization guesswork . . . if you want to know that the sound you hear is an exact duplication of the original . . . the E-V Sentry Series Professional Monitors were designed for you. Write for complete specifications, or see your E-V Professional Products Distributor, today!

Sentry II Floor Model, 32" H, 20" W, 13" D. List Price \$248.33. Sentry I Wall or Ceiling Model, 17" H, 37" W, 2 1/4" D. List Price \$265.00. (Normal trade discounts apply.)



SENTRY II




SENTRY I

Electro-Voice®

A FEW REASONS WHY YOU CAN'T BUY A FINER TELEVISION CAMERA ...AT ANY PRICE




Impressive, designer-styled exterior. Clean lines, ultra-compact package houses field-proven Tarzian 3" Image Orthicon camera system. Highly portable. Easy to handle. Uses conventional camera cable.

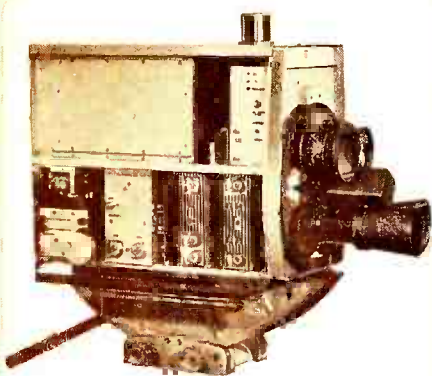


100% transistorized plug-in electronics for reliability and fast, convenient troubleshooting. Hinge out yoke assembly allows rapid change of 10 tube.



Built-in remote iris control. Quick-change lens insert system accepts variety of lenses, fixed focus and zoom.

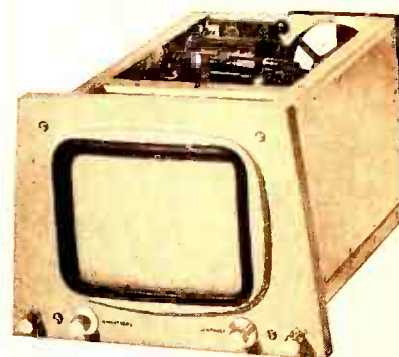

Plug-in, self-contained 8-inch viewfinder assembly, interchangeable with other Tarzian live cameras. All circuits accessible without removing viewfinder.

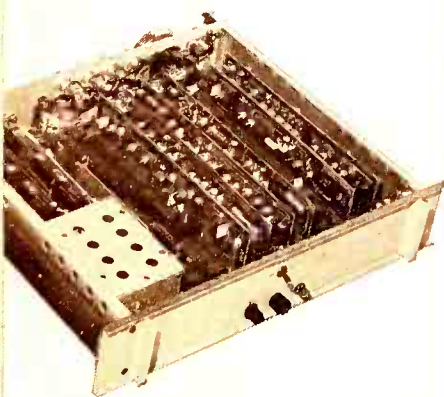

Modular proc amp completes camera system. (Also interchangeable between cameras.) Totally transistorized electronics on plug-in circuit cards. Compact, highly portable.

SPECIFICATIONS

Scanning rate	525 lines, 30 frames, 60 fields, 2:1 interlaced
Line repetition rate	15,750 cycles per second
Resolution (horizontal) . .	600 lines picture center 500 lines picture corners
Signal-noise ratio	Limited only by image orthicon
Remote iris control	Time for full range, 3 seconds accuracy of setting ± 0.25 lens stop
Output signals	Horizontal drive, 4 volts ± 0.5 volts; Vertical drive, 4 volts ± 0.5 volts; Sync, 4 volts ± 0.5 volts; Blanking, 4 volts ± 0.5 volts. Viewfinder video (external) 0.7 volts intercom audio.
Viewfinder size	8" tube
Intercom	Dual transistorized

These are but a few reasons. For all the rest, call, or write, for 8-page brochure, "3000L 3" Image Orthicon Camera System."

S A R K E S
BROADCAST EQUIPMENT DIVISION



T A R Z I A N
BLOOMINGTON, INDIANA

Circle Item 7 on Tech Data Card
www.americanradiohistory.com



YOUR SYLVANIA DISTRIBUTOR GIVES

FAST DELIVERY

Prompt, helpful service is the rule with your Sylvania Distributor. Same-day service wherever possible from his complete inventory of rugged, dependable industrial and commercial tubes in any quantity.

Next time you need electronic tubes in a hurry, try him first. You'll be glad you did.

Electronic Tube Division, Sylvania Electronic Components Group.


SYLVANIA
SUBSIDIARY OF
GENERAL TELEPHONE & ELECTRONICS GTE

NEW CAPABILITIES IN: ELECTRONIC TUBES • SEMICONDUCTORS • MICROWAVE DEVICES • SPECIAL COMPONENTS • DISPLAY DEVICES

Circle Item 8 on Tech Data Card

December, 1965

To audio engineers happiness is:

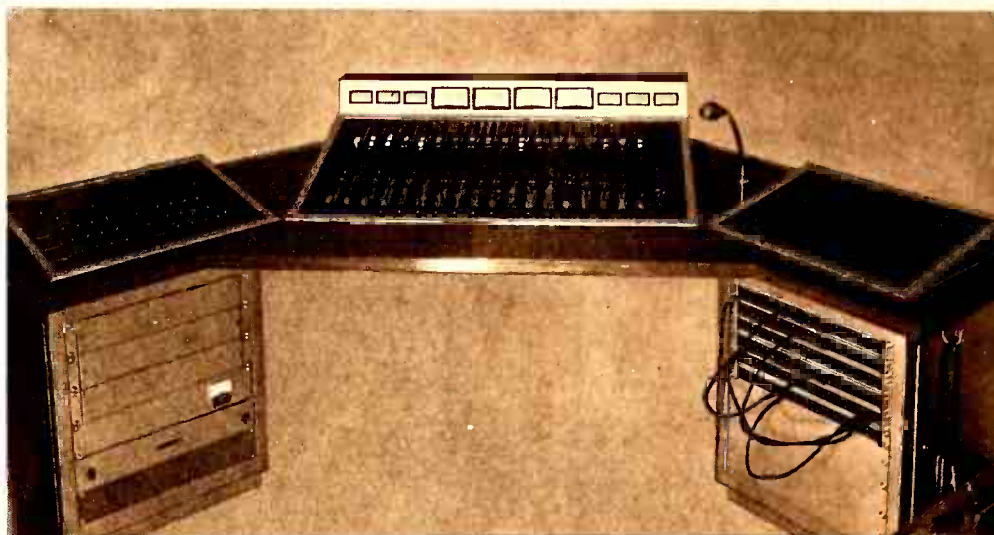

This console designed and engineered for International Recording, Inc., Dallas, Tex.

a custom console built by Audio Acoustics.

Happiness is: a four channel recording console built in module form.

It's 16 microphone channels, two echo channels and one master control module.

It's 16 Langevin MX113 slide faders, plus four color coded channel selector push buttons for instant switching, and a fifth button for reset which disengages the microphone from the system.




Close-up of modular strip design.

Happiness is more: it's a level control and selector switch on each microphone that allows the echo to be fed either before or after the mixer.

It's 16 Universal Audio equalizers that give individual microphone equalization—a necessity in modern recording techniques.

And it's four A.P.I. illuminated VU meters and six Weston VU's that show gain/reduction, echo send level, and composite output.

We can build a console for you . . . to meet your requirements. Call or write today. (It would make us both happy.)

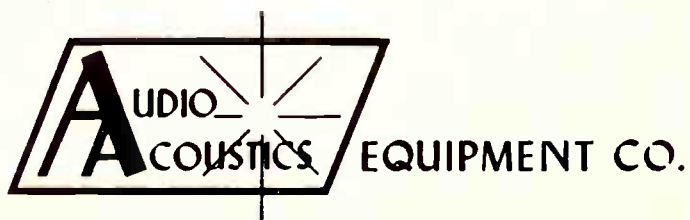


P. O. Box 444
Arlington, Texas
Area Code 214
AN 4-2437

Distributor for: A.D.C. / A.P.I. / A.T.C. / Ampex / Atlas / Beyer / Cannon / Cinema / Dyna / Electro-Voice / E.M.T. / Fairchild / Gotham / Langevin / Marantz / Metal Works / Miratel / Nagra / Neuman / Pultec / Rek-O-Kut / Sony / Universal Audio / Vega / Weston

Circle Item 9 on Tech Data Card



REVOLUTION...IN THE TV CONTROL ROOM!
→

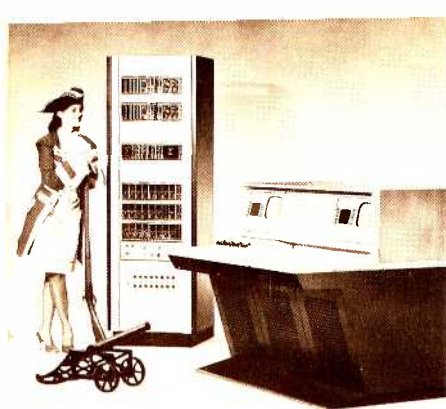

*New Studio
Console and
Rack Equipment*

Revolution in the control room affords savings and opens new operating possibilities

... to improve television program quality

SPACE SAVINGS

Use of RCA "New Look" equipments, such as transistorized sync generators, power supplies, and distribution amplifiers greatly reduces the amount of rack space required by a television station. It is possible to install the few racks required in the control area, eliminating need for a separate equipment room. Moreover, use of transistorized monitors and simplified camera controls can greatly reduce space required for control consoles.

OPERATION LESS COMPLEX


In many cases only one control position is required using the "New Look" system. Since cameras are stabilized and self-adjusting, the second position normally used for the "shading" operation can be eliminated. Using this new method, there are fewer demands for human hands to "ride controls" and, more importantly there is better control of program quality.

NEW OPERATING POSSIBILITIES


"New Look" tape recorders and film projectors are as stable and self-sufficient in operation as the "New Look" self-adjusting cameras. No longer is it necessary to isolate these machines in separate tape and film areas. They may be installed in one large master control area. And, since they are designed for remote operation, they may be started and stopped from the control console. Other new possibilities include preset station-break switching, preset program switching, and full time automation.

DOLLAR ADVANTAGES


"New Look" equipments cost less to install and less to operate. Long life of transistors and speed of module change lead to a new high in reliability, and a cut in maintenance costs. Reduction of controls reduces possibility for errors; hence fewer rebates. Overall the revolutionary "New Look" approach to equipment operation makes picture quality more uniform (more pleasing) through use of stabilized self-adjusting circuitry, focusing human attention on control of creative facilities for improving production of programs and commercials.

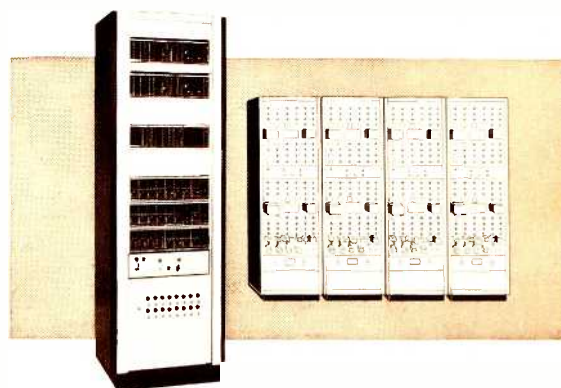

The sync and distribution equipment mounted in this one rack formerly took as many as four.

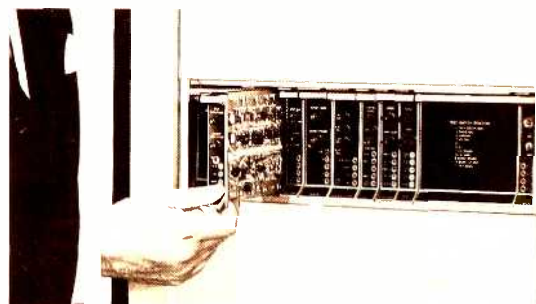

Standard transistorized modules improve performance, cut maintenance costs.

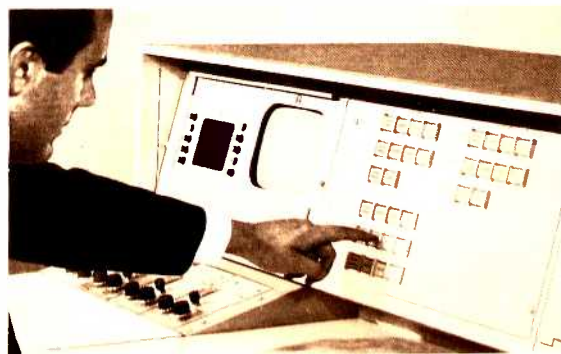

Revolutionary "New Look" compact design console showing machine control from one position.

For further information about using RCA "New Look" equipments in a system, write RCA Broadcast and Television Equipment, Building 15-5, Camden, N.J. Or call your RCA Broadcast Representative.



The Most Trusted Name in Television

TRENDS IN TV STUDIOS

by David I. King — Solid-state dominates the equipment picture at this modern studio facility.

In the ten years since its first broadcast in July 1954, WISH-TV had outgrown its original home on Indianapolis' North Meridian Street. As a result, management decided to move to a new home, built especially for the station, five blocks north of the original location. Contractors began the construction in April 1964, and in June 1965, WISH-TV, a Corinthian Broadcasting Corporation station, originated the first live telecast from its new studio facilities.

The Building

Maximum use of glass and contemporary decor characterize the entire building. White, sculptured columns surround the glass-enclosed two-story structure. Total area exceeds 30,000 square feet.

On the lower floor, spaces for the program, production, news, and film departments wrap around the engineering and studio spaces. Managerial offices, accounting offices, conference rooms, and an employees' lounge make up the top floor.

The south wall of conference room Number 1 is a large window which overlooks studio A; clients are thus given an impressive view of studio operation. The cover photo, which was taken inside studio A, shows the conference-room window—it's above and left of center. Rear-view film projectors and CCTV sets in the conference rooms and offices are installed be-

hind sliding wood panels. Off-the-air TV, CCTV, and film-viewing facilities provide a most impressive internal communications system.

A large carpentry shop for prop construction is included in the basement. Storage rooms, the heating plant, and a 105-ton air conditioner take up the rest of the basement.

The Studios


At present, two image-orthicon cameras are used in each of the two studios. These cameras soon will be supplemented by color units. Light-

ing in both studios is quite flexible. Pantograph mounting devices (lazy-boys) allow the height and direction of each light to be easily adjusted.

Studio A

The large studio, studio A (Fig. 1), measures 47' x 60'; its ceiling is 28' high. The door between the prop room and this studio is large enough to allow an automobile to enter—the overhead door, which opens to the outside, and the ramp in the prop room are designed for this purpose.

Maximum viewing area of the

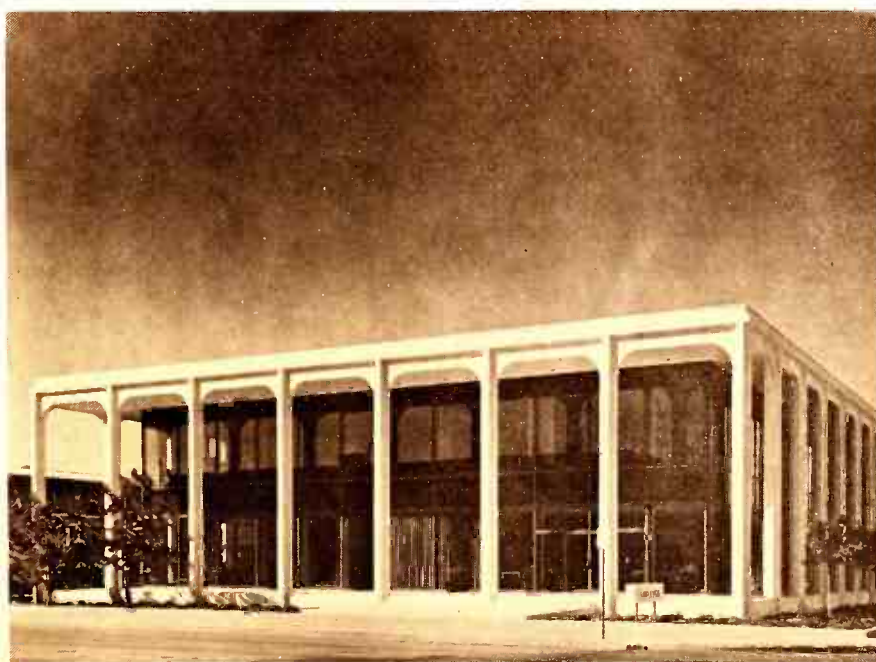


This modern building houses program-origination and business functions of WISH-TV.

on a voluntary basis. Standard broadcast stations in the system provide the direct outlet to the public. Network interconnection is provided by local telephone companies, A. T. & T. land lines, commercial networks, and newswire teletype services. The EBS is a network of great depth, with many echelons of backup facilities provided by common-carrier and private microwave systems, state FM defense networks, and numerous similar communications facilities which will automatically complete any link of the connecting system that may be destroyed in an attack.

Besides the national network, there are various networks at regional, state, and local levels working within the overall structure to provide service both to their own areas and to the national network when needed. These are made up of a variety of facilities, such as FM stations, TV aural channels, STL's, private microwave links, remote-pickup stations, and local telephone companies.

The EBS Plan

Operation of the network follows the procedures outlined in a document called the EBS Plan. All participating stations must adhere to the procedures of the Plan. The

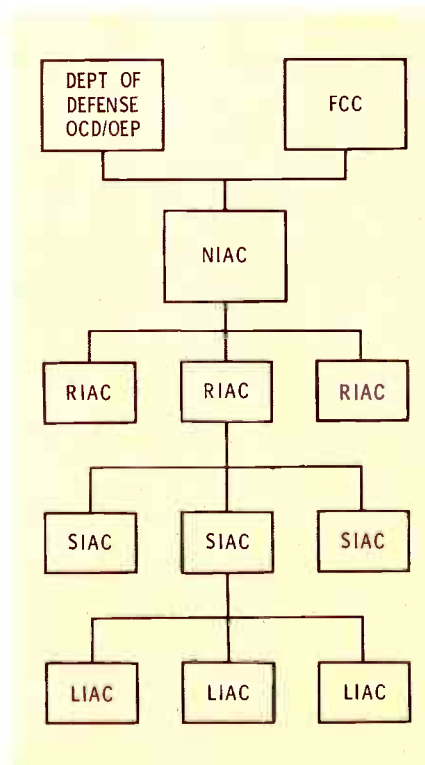

EBS organization includes industry committees at all levels from national to local.

Plan is revised continually as methods, routings, authenticating procedures, and techniques are added or improved. Although complete coverage of the Plan is impossible in one article, a few points will be brought out to indicate its scope.

Priority of messages—what may be recorded for later playback and what must be broadcast live—is spelled out. Specific alerting and operating procedures for use during and after an attack, along with the correct authentication procedures, are given. Also included are network routings from various seats of government (national and local) with alternate routings from alternate sites. Key stations, regional areas, current FCC field supervisors and their addresses, and current members of the various industry advisory groups are listed.

Each participating station is provided with a copy of the EBS Plan. Additional copies may be obtained from the FCC field supervisor or the Defense Commissioner at the FCC in Washington.

Participation

As was mentioned earlier, participation is strictly on a voluntary basis. Even though a licensee desires to have his facility participate in the system, certain technical and other criteria must be met, and the facility must be accepted into the EBS. As with any well organized system, each facility must be capable of effectively meeting a need and of being integrated into the system. Operation in the EBS and any modification of the facilities which may be required are at the expense of the individual licensee.

A participating station may withdraw from the system if it desires. There are some requirements to be met, however. The licensee must inform the FCC field supervisor **in writing** 30 days prior to withdrawal and must submit his National Defense Emergency Authorization for cancellation. This is required because the function his facility fulfilled in the system will have to be replaced by another means.

For those stations not belonging to the EBS, a few requirements of the regular FCC Rules must still be met. Whenever the Emergency Action Notification is sounded, the

EBS goes into operation, and **all** stations are required to transmit the alert **immediately**—without apology to their listeners and without delay. (Transmission of the alert on every station reaches the greatest number of people.) After transmitting the prescribed alert message, non-EBS stations must immediately remove their carriers from the air and remain silent until the Emergency Action Termination signal (all clear) is given. The only stations permitted on the air during an Emergency Action Condition (the period between the alert and the all clear) are regular government communication channels and those stations participating in the EBS.

Organization

Security of our nation is the responsibility of the Department of Defense. Through its office of Civil Defense (CD) and Office of Emergency Planning (OEP), in cooperation with the FCC, the EBS is controlled and directed.

All the participating facilities of the EBS are nongovernment, so industry groups are represented at various levels in the organization by the National (NIAC), Regional (RIAC), State (SIAC), and Local (LIAC) Industry Advisory Committees. Each of these committees is composed of members of industry groups in the area involved. It is the responsibility of these groups to work toward a continually more effective system.

These industry groups are familiar with their own areas and the capabilities of their facilities; they can develop many possible local routings, intercity connections, and operating procedures. The state FM defense networks and the remote-pickup communications networks are two of the developments of these committees. Any plan developed by a committee must be offered as a proposal to the next higher committee so that local, state, or regional plans can be integrated into the system. All such proposals must get approval from the FCC before final inclusion in the EBS Plan.

The Rules

There are not many EBS rules. They are found in Part 73, subpart G of the FCC Rules and Regulations. Some of them pertain to all

stations, and others pertain to EBS stations only. Implementation and elaborations of the EBS rules are sent out as Annexes to the Plan.

Every standard, FM, or TV station, commercial and noncommercial, must interrupt its programming and broadcast the alert in the manner prescribed. This requirement applies also to those stations operating with program or equipment test authority.

To insure receiving the alert, every station is required to have in operation at its control point a receiver tuned to a key EBS station. This is required even though the station is connected to one of the news-wire teletype services.

EBS tests are conducted so that, when an alert is sent out, station personnel will be able to perform the required functions without delay. Key EBS stations send out a test once each week, at a different time and day each week. The news-wire services send out a test on weekends. Every broadcast station is required to transmit a test once a week. Times and days are varied so that the test does not become a routine event and so that all personnel have an opportunity to perform the required functions. Over-the-air tests are to be made between 8:30 AM and local sunset. The time and source (key station, news wire, or the station itself) of each test, whether received or transmitted, must be entered in the log.

The over-the-air tests are the well known carrier interruptions, 1-kc tone, and appropriate message (prescribed in the EBS Rules).

Any licensee may apply to the FCC field supervisor, in writing, if he desires his facility to participate in the EBS. To determine whether a station meets certain technical and other criteria for acceptance into the system, an application must be filled out. The application is not elaborate or complicated, but it does cover points such as station day and night coverage, hours of operation, adequacy of staff, and similar points.

When a station is approved for participation in the EBS, it is sent a National Defense Emergency Authorization (NDEA). This is a certificate similar in size and appearance to the regular station

license; it is to be posted along with the station license.

It is not the intent of this article to imply that only a select group of stations is desired in the EBS. On the contrary, the FCC and Department of Defense would like to have as many facilities participate as possible. At the same time, however, simple numbers do not make an effective network. A station joining the EBS must be willing to accept some obligations and possibly some expenses along with whatever prestige may be gained from being a member. Such obligations include participation in the local, state, or national committees if called upon; promotion of the EBS; education of listeners; and a willingness to make whatever modifications may be required to technical equipment or facilities.

FM stations and some television aural transmitters are used to form state or regional FM defense networks. These networks are backup facilities and not intended for direct broadcast to the public. (Of course, the public can listen if they tune in the FM station. All stations, whether AM, FM, TV, remote pick-up, etc. operate in the EBS

with their normal frequencies and powers.) FM licensees wishing to participate must apply to the chairman of the SIAC in their state. When such a station is approved for operation in the FM defense network, the FCC issues an NDEA for this purpose.

There are some cases, depending on location and circumstances, in which an FM station not part of the state FM defense network may be permitted to broadcast directly to the public just as an AM EBS station would do. Application must be made to the chairman of the state IAC so that it can be determined whether such use of the FM station would cause interference to the FM defense network. If such transmissions are approved, the station will receive an NDEA for this operation. Such situations, however, are not common.

Stations operating in the FM defense networks are still obligated by the regular FCC Rules to obtain permission and give permission for programs rebroadcast from another station. There is a simple, acceptable solution to this problem. The SIAC chairman will provide the FM

• Please turn to page 44

Date _____

Federal Communications Commission
Washington, D.C. 20554

Secretary:

The undersigned licensee grants to any standard, FM, or television broadcast station authority to rebroadcast the Defense Network (DN) programs transmitted by this station.

Name of Licensee

Call Letters of Station

Station Location

Signed by Licensee

Sample of a letter for use by a station participating in a state FM network.

A PRIMER ON DIRECTIONAL ANTENNAS

by J. G. Rountree, Consulting
Engineer, Austin, Texas—An introduction
to and review of the basic principles
and terminology of directional antennas.

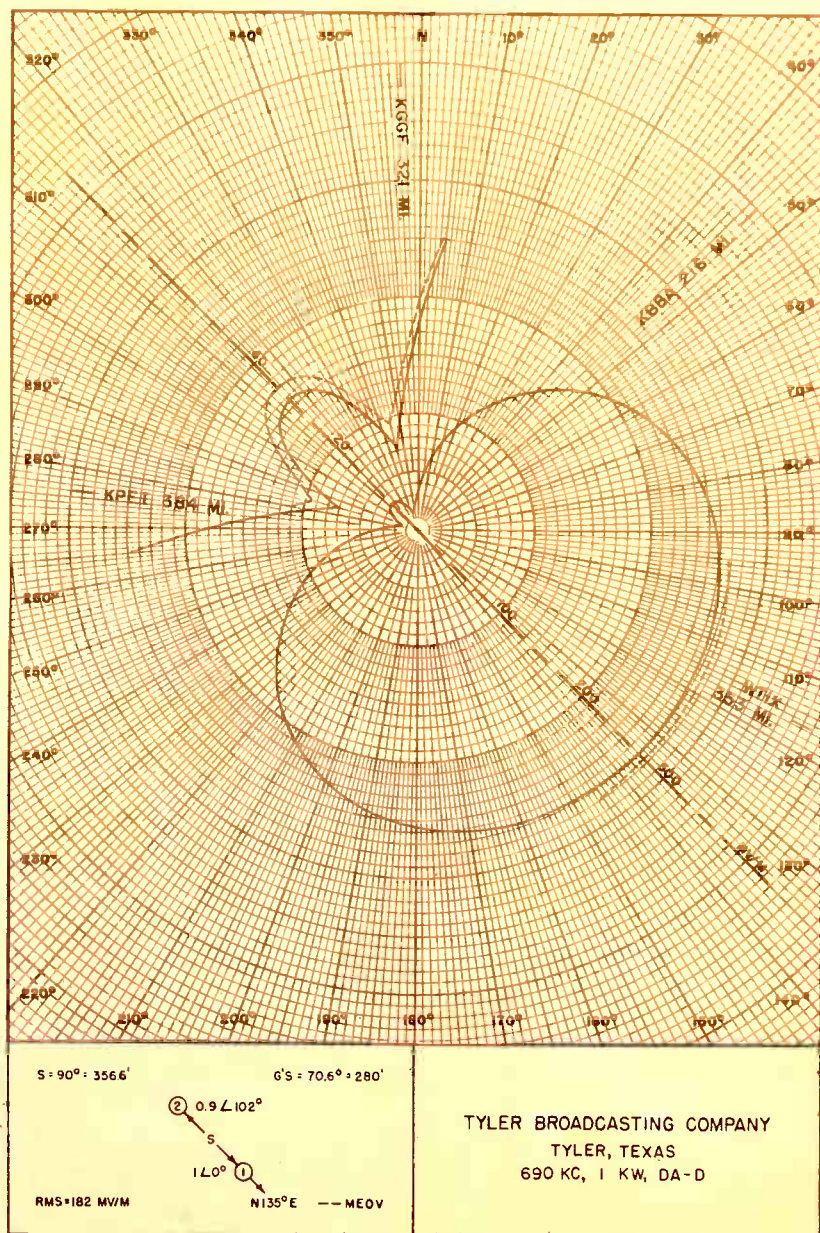


Fig. 1. Pattern is polar graph of unattenuated field at one mile, not a coverage map.

The operator accustomed to single-tower operation enters an often-confusing field when faced with the care and feeding of a multielement directional antenna. This article will discuss directional antennas for standard broadcast stations, with the hope of eliminating some sources of confusion.

The Why of Directional Antennas

Basically, the purpose of a directional antenna is to shape the radiation pattern of the antenna system in a desired manner. In almost every instance, the desire is to reduce radiation toward other stations and thereby minimize interference to these stations. In a few instances, a directional antenna at a coastal location is used to restrict the signal over the sea while increasing it over land.

A directional-antenna pattern is a polar graph showing the amount of radiation in each direction in terms of the unattenuated field intensity in millivolts per meter at one mile (Fig. 1). (In countries using the metric system entirely, this is sometimes given in terms of the unattenuated field intensity at one kilometer.) Unattenuated field intensity at one mile is the field intensity which would exist at that distance if the signal were not attenuated in passing over the ground.

It is usually found that a station using a directional antenna system is so located that the major lobe of the pattern extends in the direction of the city with which the station is associated (Fig. 2). From this fact it is often incorrectly assumed that the antenna pattern was designed to place the major lobe over the city when operating from the station site. The fact is that first the an-

tenna pattern was designed to provide the required protection, and then the site was selected so that the required coverage contours include the city. It must be emphasized that the directional antenna pattern itself is not a coverage map. This is a frequent misunderstanding among nontechnical persons.

Directional Antenna Data

When a directional antenna is being designed, the value of unattenuated field intensity which will be radiated in a given direction is determined from the design formulas. Such formulas can be quite complex, and computers are frequently used for their solution. After the antenna is built, the actual unattenuated field intensity radiated in a given direction must be measured. For this purpose, field-intensity measurements are made in a manner prescribed by FCC Rules. The measurements, made along a radial extending in the specified direction¹, are plotted on a log-log graph paper (Fig. 3) and analyzed by comparison with the appropriate graph of field intensity versus distance appearing in the FCC Technical Standards².

A complete report on the adjustment of the directional antenna system is filed with the Federal Communications Commission in connection with the application for station license. This proof-of-performance report normally includes data on field-intensity measurements, including graphs of measurements along each radial, maps of the points at which measurements are made, values of field intensity measured, and distance from the center of the antenna system to each point of measurement. Also included are all pertinent meter readings; the measured directional pattern; data on antenna or common-point impedance measurements; description, map, and photographs

of the monitoring points; and any additional information deemed pertinent. A copy of this report must be retained at the station and made available on request to authorized FCC personnel.

The Directional Antenna System

The directional antenna itself consists of two or more towers with the currents in each tower carefully controlled as to relative amplitude and phase. Power from the transmitter is fed into a phasor, which divides the power and introduces the desired phase shifts in the resulting currents fed to the towers. Usually, the phasor is a single unit located near the transmitter, although occasionally its elements are distributed among the towers. In the usual installation, each output from the phasor is fed through a transmission line to one tower base, where a line-termination unit matches the line impedance to the operating base impedance of the tower. Each line-termination unit has an RF ammeter which indicates the current at the antenna base. Frequently, another meter or a jack is provided so that the transmission-line current into the unit can be measured.

A large single-turn loop of wire or tubing is suspended from the tower to sample the field radiated by the tower. This sampling loop may be either a shielded loop insulated from the tower or an unshielded loop in which a leg of the tower forms one side. In either case, a small-diameter transmission line, called a sampling line, carries the sample of RF energy to the phase monitor. In the case of the unshielded loop, a portion of the sampling line is coiled to make an inductor, called an isolation coil, which is placed at the tower base to prevent the sampling line from acting as an RF short across the base insulator. The isolation coil is adjusted by means of tapped turns or a variable capacitor.

On a tower which is a quarter-wavelength or less in electrical height, the sampling loop is placed near the bottom of the tower, far enough above ground (20' or so) to minimize ground effects. On a tower more than a quarter-wavelength in electrical height, the sampling loop is usually placed at the point of maximum current (Fig. 4).

In some installations, the sample current is taken from an RF trans-



Fig. 2. Map shows 1000-, 25-mv/m contours for station whose pattern is shown in Fig. 1.

¹"Running the Radial," by Elton B. Chick, June 1965 BROADCAST ENGINEERING, page 21; and "Understanding and Using the Field Intensity Meter," by Thomas R. Haskett, November 1965 BROADCAST ENGINEERING, page 10, and December 1965 BROADCAST ENGINEERING, page 23.

²"Checking the Pattern," by Elton B. Chick, July 1965 BROADCAST ENGINEERING, page 20.

former located in series with the base ammeter. However, such transformers usually use a tuned secondary, and this introduces an element of possible instability in the monitoring system.

Regardless of how the sample current is obtained, it is fed to a phase monitor which provides an indication of relative phase and current amplitudes. The indications of the phase monitor are of primary importance in maintaining proper operation of the directional antenna.

In designing a directional antenna system, the engineer has chosen current ratios and phase relationships which will produce the desired radiation pattern. These are the theoretical specifications shown in the station license. In the actual tune-up, the parameters usually depart somewhat from the theoretical specifications. The actual values are listed as the operating specifications in the station license. It is these values which should be observed in order to maintain the directional-antenna pattern. FCC Rules require that the ratios of base currents and of sampling-loop currents be maintained within 5% of the values specified in the license. No tolerance for phase relationship is specified in the Rules, although it has been held that deviation beyond 4° is considered to be excessive. It should be noted that some critical antenna systems require operation within closer tolerances than these in order to provide required protection. In such instances, the

closer tolerances are spelled out in the station license.

Common Point of Input

In a single-tower antenna, the actual value of antenna base current is used to determine radiated power. In maintaining a directional antenna system, however, the actual values of base currents are less important than the ratios between tower currents. Power is determined at the point of common input to the phasor, and the current read at that point is called the common-point current. After the antenna system has been finally adjusted for the required pattern, the resistance at the common point is adjusted to the desired value, and the common-point reactance is made as close to zero as possible.

Because power is lost in the tuning equipment of a directional antenna, the transmitter actually supplies more than the rated power to the common point. For a station of 5000 watts or less which uses a directional antenna, FCC rules provide that the license will specify the common-point resistance as 92.5% of that actually measured. Thus, a 1000-watt station will actually deliver 1081 watts to the common point, and a 5000-watt station will deliver 5405 watts.

For stations of over 5 kw, the license value of common-point resistance is specified at 95% of that actually measured, since such stations usually use lower-loss tuning equipment. Thus, a 10,000-watt

station will actually deliver 10,526 watts to the common point, and a 50,000-watt station will deliver 52,632 watts.

Monitoring Points

The license for a station which uses a directional antenna describes certain monitoring points and specifies values of field intensity which must not be exceeded at these points. Monitoring points are designated by the engineer carrying out the directional-antenna proof of performance and are chosen to comply with terms of the construction permit. Those terms require that a monitoring point be selected in each of certain directions from the antenna and that the points be in the clear and located not less than one nor more than four miles from the antenna. The engineer tries to locate monitoring points that are readily accessible, available over all-weather roads, and located in areas where new construction is not likely. Thus, cemeteries, public parks, golf courses, and school playgrounds are highly regarded as monitoring-point locations. Occasionally, a suitable point cannot be found within the one- to four-mile section of a radial; then a point elsewhere along the radial is used.

The directional-antenna proof-of-performance report must include the value of field intensity measured at each monitoring point after final adjustment of the antenna system. In issuing a station license, the FCC applies a multiplying factor to

• Please turn to page 34

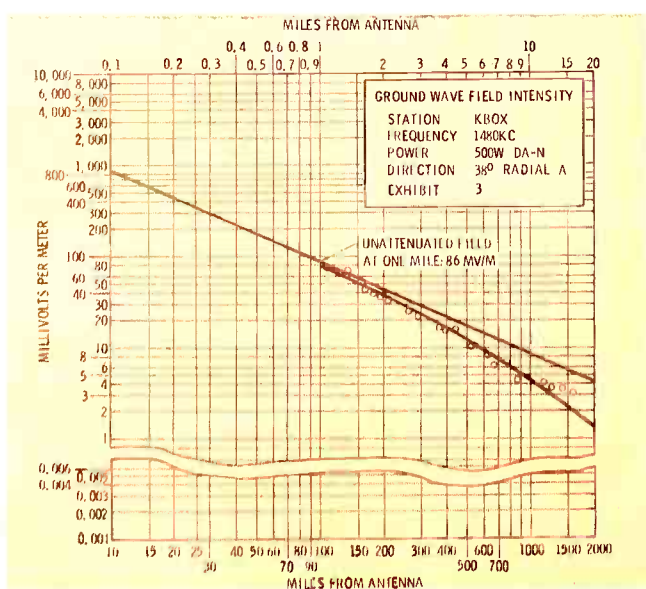


Fig. 3. Unattenuated field is determined from measured values.

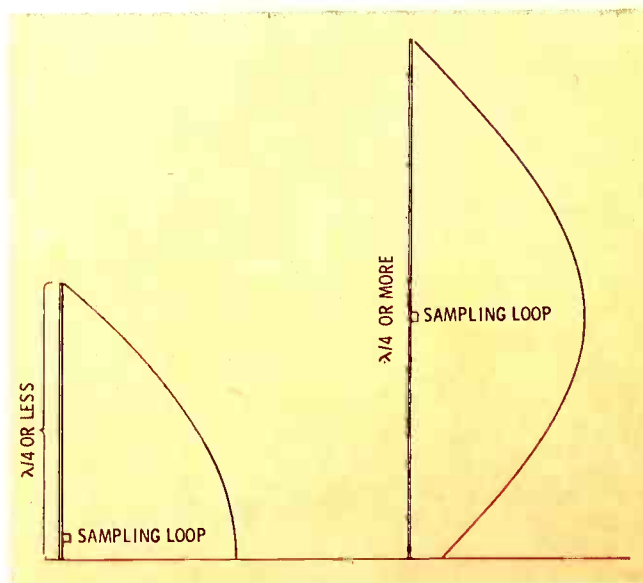


Fig. 4. Loop placement depends on electrical height of tower.

RADIO PIERCES THE GREAT BLACKOUT

by George C. Sitts, Eastern Regional Editor

When the power died in the Northeast the evening of November 9, 1965, radio stations in the affected area either made or lost their reputations as reliable news sources in a crisis. It was a difficult test, and those stations that passed did so because their engineers were prepared.

We chose the New York City area for a closer look at the engineer's role in that crisis principally because more people and stations there were affected for more hours than in any other area.

As the power dip occurred, stations found themselves in a variety of situations—power at the transmitter but none at the studio, no power at either transmitter or studio, loss of STL lines, loss of remote control, a multitude of engineers, or no engineer around. All affected stations were off the air briefly, leaving the broadcast band rather quiet; then they gradually came to life again. Within one minute, carriers that were off began to return, and those stations equipped with automatic switchover began to program. Within five minutes, other stations popped on, and within the hour most of the stations that were going to make it at all were in operation.

WCBS was a prime example of preparedness. With studios on the 16th floor of a new building and a remotely controlled transmitter, the station had auxiliary diesel generators with automatic switchover to produce operating power for two studios, control rooms, input equipment, newsroom, and some lights. In addition, there was a second generator to power elevators. The transmitter was equipped with a diesel generator to switch over automatically and operate the auxiliary 10-kw transmitter; besides this, WCBS had recently installed a 175-kw generator capable of operating the 50-kw main transmitter, but without automatic operation. As power lines died, the auxiliary generators kicked on at the studio, and the 10-kw rig came on at the transmitter site. The engineers checked the STL phone line, found it okay (they had a standby STL ready), and turned the operation over to the programming people.

A transmitter engineer on his way home saw the lights go out, realized the problem, and immediately returned to the transmitter. By 10 PM, the 50-kw rig was operating on the new generator. Chief Engineer Robert Mayberry told *BROADCAST ENGINEERING* the station remained on auxiliary power until 6:15 the following evening, long after power had been restored, to ease the starting load on the Consolidated Edison system.

Chief embarrassment of WCBS was that the station's two mobile cruisers were stranded on the upper level of

a storage garage with electrically operated elevators; they were useless during the blackout.

WABC, according to chief engineer Julius Barnathan, was off the air for 15 minutes, the time it took to get the emergency generator going at the transmitter site. This station utilized another gasoline generator to power the radio studio. The STL phone line was dead, but engineers discovered the business phone to the transmitter worked. A call was made from studio to transmitter to open the line; then the console and transmitter input equipment were connected to the phone terminals, putting the station back in operation.

WINS, the city's all-news outlet, lost studio facilities for two minutes as lights went out. An engineer at the transmitter in New Jersey, where power held, played prerecorded fill tape until contact was reestablished. At the studios, engineers connected a battery-operated remote amplifier to the STL phone line, only to discover the line was out of service. However, before an alternate line could be established, the original line returned and held through the evening.

WINS, being an all-news operation, had more reporters on the street when the problem occurred than other stations. As soon as programming began, chief engineer Hal Brokaw reports, his engineers turned to the problem of coupling battery-operated tape recorders to incoming phone lines for beeper reports. This alleviated the necessity for reporters to return to the studio and climb 19 floors to air their reports.

WOR Radio was typical of the nonnetwork metro-



Control room B at WCBS shows operations during emergency.



WCBS newsmen report on the blackout as engineers look on.

politan stations partially affected by the power drop. With a transmitter in Carteret, New Jersey (an unaffected area), a studio in Manhattan, and a remote-control point in the Empire State Building manned by WOR-TV engineers, the station was off for a quarter-hour. According to WOR director of engineering Orville J. Sather, as soon as the power went off, engineers at the remote-control point hooked two batteries to a small inverter to power the remote-control unit.

At the studio, a gasoline generator failed to start. A battery-operated remote-broadcast amplifier was put into service, but the STL phone line to the transmitter was out of service (a telephone-company booster amplifier had lost power). After some hurried patching and connecting, engineers managed to get a line to the transmitter via DC intercom lines to the Empire State control point and then to the transmitter via a spare set of lines in the remote-control circuitry.

Broadcasting began with the announcing staff using candles and flashlights in the studio. WOR was blessed with a traffic-report helicopter in the air and a mobile unit on the street at the time. The receivers for these remote units were located at the Empire State Building, and because the shortage of power at that site prevented use of the cue transmitter, it was necessary to give on-the-air cues to the units, at which times the Empire State engineers would patch them directly to the transmitter.

Shortly, the gasoline generator at the studio was repaired and activated, restoring lights and limited studio power. This luxury lasted until about midnight when it became apparent the unit would soon be out of gas. With gas-pump and elevator service out (WOR studios are on 24th floor), the problem could have been serious; but a businessman in New Jersey, hearing of their plight on the air, drove in with seven gallons of gas and carried the fuel up all 24 flights.

WNEW was more fortunate. Chief engineer Max Weiner reports two of his maintenance men were about to leave the transmitter when the failure occurred. Again the transmitter was in a safe area, but the fail-safe feature of the remote-control unit kicked the carrier off

the air. The men immediately restored the carrier locally and programed music from a turntable at the transmitter. The station was again fortunate because the STL phone line held up. Thus, getting back in business for the night was only a matter of getting one of their battery-operated remote-broadcast amplifiers connected to the line, and gathering candles and flashlights.

Personnel of WMCA, seeing the lights begin to dim and hearing the turntables change speed, threw the remote-control equipment to an emergency supply, preventing any carrier break. Engineers then switched their operation to a standby studio equipped with a battery-operated console and two turntables powered by an inverter. The staff began operation with three 75-watt lamps, but reduced illumination to one lamp to save battery power when it became apparent the power outage would continue.

The station remained on emergency power for 12 hours. Teletype service was out—as it was in all stations—but news was brought in by telephone reports and by roving reporters with portable tape recorders. Many of the staff members stayed through the night, subsisting on sandwiches, coffee, soft drinks, and cakes brought up to the 13th-floor studio by faithful listeners.

Among the city's other stations:

WLIB and other daytimers were approaching scheduled sign-off time and thus remained dark for the duration of the failure.

WHOM, a principally Spanish-language operation, used battery equipment to operate studio facilities until their 2 AM sign-off.

WQXR, with no emergency power provisions, spent the night silent—the station's first power failure in 25 years.

The morning after the blackout was a time for station managers and engineers to analyze the night's operations. As a result, some studios and transmitters are now being equipped with improved power-generating equipment and backup STL relays. But in most cases, relatively smooth emergency measures illustrated the careful planning by a handful of engineers for just such a night. ▲



Emergency news broadcast originates from the WMCA studios.

CARE OF MAGNETIC TAPE HEADS

by **Larry J. Gardner**, BE Consulting
Author, Chief Engineer, WKIX,
Raleigh, North Carolina—Broadcast-
quality tapes require properly adjusted
machines.

A magnetic tape head is simply a ring of magnetic material having one or more air gaps and upon which is wound a coil of wire—a simple device, but one which must be designed to very close tolerances. Before looking at the things which can go wrong with a tape head, let's investigate its construction and how it varies with different applications.

Head Construction

First, a head core may be either a solid piece of magnetic material or a stack of laminations separated by a varnish coating to reduce eddy-current losses. It may have a single air gap, or it may be of symmetrical construction with two air gaps (Fig. 1). The symmetrical configuration reduces hum pickup, but also reduces output level. In every

case, the tape contacts the head at the air gap and serves to complete the magnetic circuit of the core.

For the most part, the windings determine the electrical characteristics of the head. For vacuum-tube circuits, high-impedance heads are used, and the windings consist of a great many turns of very fine enameled wire. Generally, high-impedance heads have an inductance of about 500 mh and are used for playback. Record-only heads and playback heads for transistor circuits usually have an inductance of from 50 to 100 mh, whereas the inductance of erase heads is in the neighborhood of from 10 to 50 mh.

Physically, playback heads must have the shortest possible gap width consistent with sufficient output level—usually in the area of .0002". The record-head gap is longer,

about .001" to .002", and the erase-head gap is about .002" to .01". The three basic gap configurations are shown in Fig. 2. The triangular gap produces the greatest output level but has a very short life. It can be seen easily that a small amount of wear on a head of this type will begin to affect the gap width. The straight-line gap has the longest life, but, unfortunately, it has a very low output level and is seldom used in practice. A good compromise is the trapezoidal gap geometry, which is used in most heads and provides good life and moderate output level.

The same basic construction is used on record, playback, and erase heads, the only differences being in inductance and gap length. The playback head, however, requires more shielding to prevent undesired hum pickup. Of course the con-

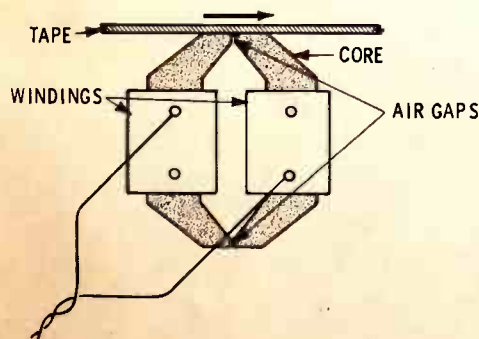


Fig. 1. A magnetic tape head is usually constructed in one of two basic arrangements.

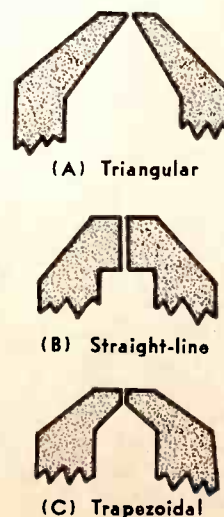



Fig. 2. Basic head-gap configurations.

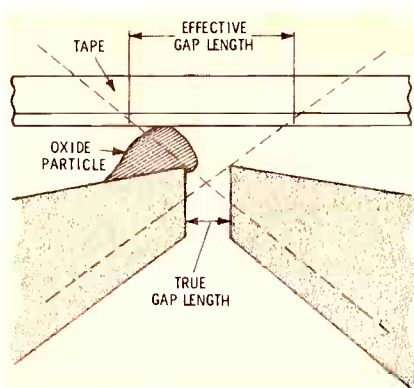


Fig. 4. Oxide accumulation on head lifts tape and increases effective gap width.

struction varies in size depending on whether the head is intended for full-track, two-track, or four-track operation. Fig. 3 shows the head dimensions which conform to the NAB standards.¹

Head Wear

The most important cause of head failure is wear. The performance of the head becomes unacceptable as soon as the width of the gap begins to increase. Of course, the oxide coating on the tape is abrasive, and eventually any head can wear out. In addition, because of variations in the stacking of the head laminations, the gap tends to drift back and forth relative to the tape as the head wears. This means that occasional touching-up of head alignment is necessary to maintain best performance. Because of its shorter gap width and depth, the playback head is most subject to

wear and generally becomes excessively worn somewhat before its companion record head and long before the erase head.

The usual symptom of wear in a playback head is a gradual deterioration of high-frequency response. The reason for this is that the output level is zero when the gap length is equal to the recorded wavelength. For example, if a worn head has a gap width of .001" and the tape speed is 7½ ips, it can be seen that the response will be zero at 7500 cps:

$$\text{frequency} = \frac{\text{velocity}}{\text{wavelength}}$$

$$7500 = \frac{7.5}{.001}$$

There is no practical way to reduce head wear other than taking the precaution not to rewind or fast-forward the tape over the heads. Generally, the condition of the head gap may be determined by inspection of the head surface with a magnifying glass. In a good playback head, the gap should be barely visible through the glass. The record-head gap should be easily visible and in a good head will be uniform in width across the entire head surface. The same holds true for an erase head. Since head wear is almost never completely uniform across the entire head surface, a good check on the condition of a full-track record head is playing a tape made with it on a stereo machine. If the record head is exces-

sively worn, there will usually be a large difference in the levels of the two channels of the stereo playback, due to the difference in level recorded by the long and short portions of the recording-head gap.

For good performance, it is absolutely necessary that the heads be kept clean. Dirty heads show exactly the same symptoms as worn heads: loss of high-frequency response, poor recorded level, or poor erasure. Oxide build-up on the head surface tends to lift the tape off the head, increasing the gap width by an amount equal to more than twice the distance between the pole pieces and the tape, as shown in Fig. 4. For example, a head with a .0005" gap and .001" of oxide on its surface will have an effective gap greater than .0025", and at 7½ ips its output will drop to zero at 3000 cps. Also, since the oxide from the tape is a magnetic material, it can tend to cause a magnetic short-circuit across the head gap, bypassing the surface induction of the tape and causing a still greater loss in output level. And if this isn't enough, since the oxide build-up is always uneven and tends to shift the angle at which the tape contacts the head, still more high-frequency loss will occur.

Heads should be cleaned with ethyl alcohol, commercial head cleaner, or common rubbing alcohol. Many manufacturers do not recommend carbon tetrachloride be-

• Please turn to page 36

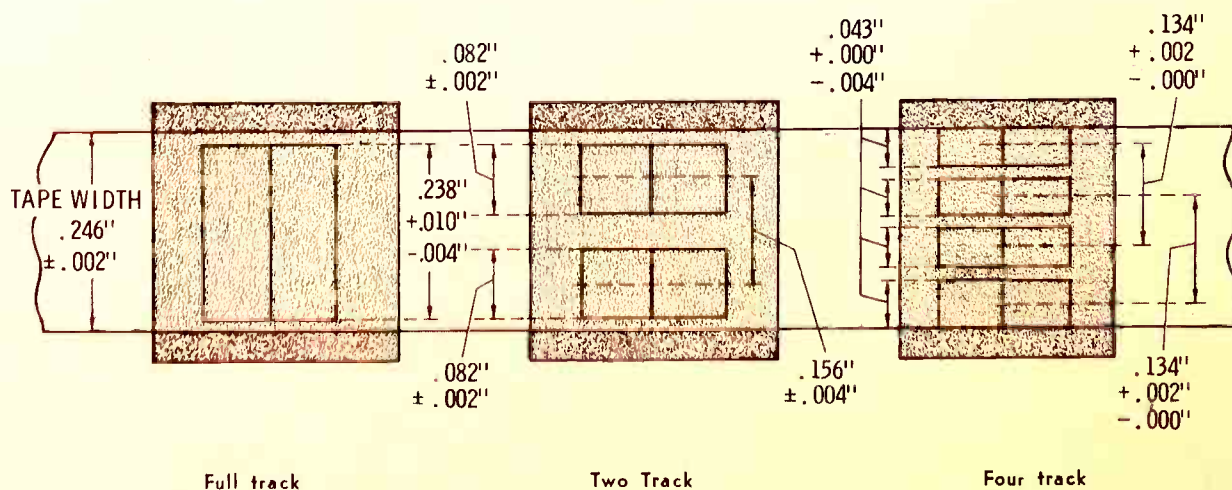


Fig. 3. For proper tracking and interchangeability of tapes, heads should be adjusted to conform to these NAB standard dimensions.

UNDERSTANDING AND USING THE FIELD-INTENSITY METER

by **Thomas R. Haskett**, Central
Regional Editor, Cincinnati, Ohio—Part 2.
The value of the measurements obtained
with this instrument depends on
how it is used.

The first part of this series described the operation of the field-intensity meter and the way it is calibrated and read. This, the concluding part of the series, outlines the methods to use to insure validity of the results of the measurements.

Validity of Readings

A properly calibrated FIM can accurately indicate the intensity of the field in which it is placed. However, the technique of putting the meter in the field properly must be learned through experience. You must take a series of measurements, log them, plot them on ground-wave paper, and see if they look right. A single reading by itself is practically useless.

To begin with, it's best to use headphones to be sure you are tuned to the desired station. If you are operating out of a car, tune the car radio to the station when beginning the trip. Listen for a station ID to verify the call. When you stop at the first measuring point, turn up the volume on the car radio, put headphones in the FIM, and

take it outside. Tune the field meter to the same station you hear on the car radio. If you forget the headphones, put the field meter near the car antenna and turn on the calibration oscillator. If you are tuned to the proper station, you'll hear a heterodyne on the car radio. You should also look for a reasonable reading on the meter. Working within a couple of miles of a 1000-watt station, you would normally expect a reading in the vicinity of 10 to 100 millivolts, depending on whether the station is directional or nondirectional, and in the case of a DA whether you are in a lobe or a null. However, if you find a reading of 1.5 mv/m, something is probably wrong. If you find several readings that don't seem proper, it might be worthwhile to stop and call the transmitter. Perhaps the station is operating at low power or has switched patterns. It's important that the mode of operation be the same during all field measurements, and to verify this it's wise to talk with the operator on duty and have him check his operating logs for the times and days that you took the measurements.

One of the most common mistakes made by a newcomer is taking a reading at a poor point—usually one where there's an obstruction. Some of the common ones are overhead wires (Fig. 1), trees (Fig. 2), buildings (Fig. 3), hills and creek beds (Fig. 4), and buried pipes. Such obstructions cause reradiation and shielding; they make readings useless or misleading. It's best to stay away from an obstruction by at least three times its height. Avoid high-voltage transmission lines and radio/TV transmitting or receiving towers by at least a tenth of a mile. Fig. 5 illustrates a pitfall for the inexperienced or careless field man. While a construction site is invitingly clear and

may offer a choice spot in an otherwise heavily urbanized area, it lacks one important criterion for a measuring point—permanence. You can take the reading easily now, but when you come back in six months to recheck the array, you find a six-story apartment building on the spot, and you can't use that point anymore!

There are several techniques which can indicate reradiation and a poor point. Note the direction of the approaching wavefront—it should be in the general direction of the transmitter location. If you aren't sure what that direction is, use a compass to check. Note also the depth of the null when rotating the FIM—it should be deep enough for you to switch downrange a couple of steps before coming to the bottom. If you can't you probably have a bad point. Except when working extremely close to the antenna, say within a couple of miles, you can also check for reradiation by pacing off a small square, 10 or 20 paces on a side, while observing field intensity on the meter. There should be little or no variation in



Fig. 1. Overhead wires are almost sure to result in false intensity readings.



Fig. 2. A tree is another obstruction to be avoided when selecting a point.

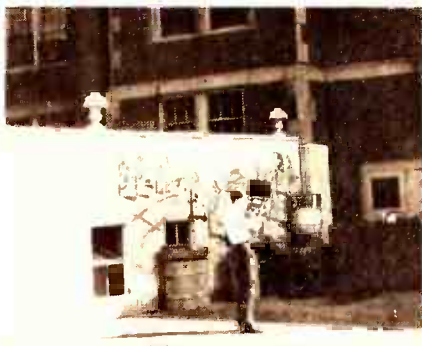


Fig. 3. To be valid, a reading must not be taken at a point too near a building.

the reading, and if there is you've probably got a bad point.

Choosing and Plotting Points

Points are usually tentatively chosen from a topographic map published by the Coast and Geodetic Survey. Radial lines will have been drawn from the transmitter site, and line-of-sight distances along each radial marked. Once you have chosen a point, you will drive there and inspect it. If the point is clear and accessible, the reading is then taken and an arbitrary point number assigned. It's important to mark the map and describe the point carefully so it can be located again. A typical log description might read: ".3 mi. S of Beavertown on US ± 25 , 20 pcs W of road, in cornfield." Beware of tying points down solely on seasonal plant growth. It's okay to give the distance from a permanent landmark and note that the point is in an apple orchard or by a walnut tree, but the orchard or the tree itself might be gone next year.

Cemeteries are probably the most desirable places for choosing field points. They don't have obstructions or wires, they are easily accessible during the day, they are almost eternally permanent and reliable, and they permit precise location,



Fig. 4. Hills and creek beds can act as obstructions, result in false readings.

i.e., "10 pcs in front of headstone John R. Smith." Public parks are also desirable for measurement points, as are pasture land, cultivated fields, and interstate expressways. While most roads have overhead wires, and you have to walk out into the adjacent field to take the reading, expressways usually don't have wires, and the median strip is easily accessible.

Measurement points are plotted on log-log graph paper (Fig. 7). The distance between points varies with the distance from the antenna. Two points a tenth of a mile apart at the .2-mile distance will be well spaced on the graph; to get an equal spacing at the 2-mile distance requires that the points be a mile apart. FCC rule 73.186 requires that you take points every tenth of a mile out of 2 miles, every half mile from 2 to 6 miles, and every two miles out to 15 or 20 miles. Beyond this, the usual practice is every 5 or 10 miles out to 100 miles, and 10 to 15 miles apart beyond 100 miles.

Close-in work (out to 2 miles) has its own requirements. It's essential to get these points exactly on the radial and as close as possible to the tenth-of-a-mile distance. Since roads cannot be depended on to furnish precise points at the desired distances, close-in work usually involves what are known as walk-in points. Simple pacing is usually inaccurate and should not be used for determining tenth-of-a-mile distances. One fairly accurate method involves two men and a length of rope that is some submultiple of one-tenth of a mile—say 132'. The men stretch the rope between them until they have measured off a tenth of a mile. Another method is to use a steel tape in the same manner. To make sure you're still on the radial, use a magnetic compass to measure the angle between the antenna and North. Remember to use the correction factor for magnetic error, for topographic maps are oriented to True North.

If you have to work alone on walk-in points where there are almost no landmarks on the radial, you can use a magnetic compass and the FIM itself to locate the tenth-of-a-mile points. On the map, measure off the required points and locate large landmarks (farmhouses,



Fig. 5. Construction site may seem like a good point, but it lacks permanence.

road intersections, etc.). Then measure the directions from the points to the landmarks. To locate the actual points on the ground, take bearings on the landmarks. Also, you can use the FIM as a direction finder by nulling out the station signal and sighting across the loop antenna. (There is a small slit on top of the loop for this purpose.) Using the compass, the FIM, the map, and a protractor, you can find the walk-in points by triangulation.

Calibrating the meter at a close-in point can be confusing, because the station signal may be greater than 500 mv/m (one-half volt per meter), and you may not be able to null it down far enough to avoid a heterodyne with the calibrating oscillator. In this case, a fairly reliable method is as follows. Null the station signal in the usual fashion by rotating the loop; then detune the RECEIVER control **up-band**, while switching the FULL SCALE RANGE switch down-range, until the signal is near the bottom of the 100 uv/m range. Then calibrate the meter as usual. Note that you are calibrating the meter **off** the station frequency. When you have calibrated, readjust the RECEIVER control to the station signal, orient the FIM for maximum signal, and take the reading. Then repeat the procedure, except detune the RECEIVER control **down-band**. You will then have measurements calibrated on either side of the station frequency. Record the average of these readings as a close approximation of the actual value.

Some engineers prefer not to take measurements closer to the antenna than 1 wavelength or 10 times the spacing of a directional array, while others read the meter as close in as possible without exceeding the

measuring range of the instrument. If you want to take very close readings, you must contend with the induction field and the fact that a DA is not a point source. These effects are known as proximity effects, and correction factors have been determined for application to close-in measurements. The factors are found on pages 9-22 and 9-23 of the 1960 edition of the **NAB Engineering Handbook**. The advantage of these close-in measurements is that soil conductivity has almost no effect on the readings, and a true indication of the array's inverse field is obtained.

It is always important to take more measurements than will be necessary for the final plot. No matter how careful you are in choosing clear points, there are always a few readings that don't plot out nicely, and these you usually throw away. Beyond two or three miles, it's not of prime importance to get points at exact distances. It's much more important to stay on the radial, especially when the station is operating DA. Even so, points that lie within one degree of the radial are usually acceptable. Such off-radial points should be marked as such, of course. Occasionally you will find a lake or a trackless wilderness inside which it's almost impossible to get points. If this forbidden area isn't too big, you simply skip it and take a few extra points on either side of it to compensate for the hole. However, if a lake exists for five miles close-in on an important null radial in a DA, you will have to hire a boat or an airplane and make the readings. Techniques of nautical and aeronautical measurements are beyond the scope of this article. (See Bibliography)

Extra Hints

With almost no exceptions, field measurements **must** be made during daylight, because skywave signals render nighttime measurements useless. This means that you can work only during certain hours that depend on local sunrise and sunset. These items can be found on the license of a daytime station or a station with different day and night patterns and/or powers. If necessary, you can call another station in the area for this information, which is standardized by the FCC for each community. If you are



Fig. 6. Satisfactory measuring points, accessible and free from obstructions.

measuring fields of 50 mv/m or stronger, it's usually safe to work within 1 hour of local sunrise or sunset. For fields between about 5 and 50 mv/m, the general limitation is 2 hours away from sunrise and sunset. With fields of less than 5 mv/m, you may not be able to work within 3 hours of sunrise and sunset. These limitations apply in general from late spring, through summer, to early fall. During winter, skywave activity is stronger during daylight, and, to cite an extreme, sometimes in January you can only work a couple of hours each day when measuring very low field intensities. Actually, none of these are hard-and-fast rules, and your own judgment as you take

readings is the final criterion. If the reading is not steady over a period of a minute or more, skywave interference may be present, and you may not be able to use the reading.

The type of log you keep as you take readings will depend on your chief engineer, consulting engineer, or other authority. Typical entries include the station measured, operating frequency, power, mode (DA-D, DA-1, ND, etc.), weather conditions, meter type and serial number, engineer's name, date, time, point number, distance to antenna, description of point, and the reading of field intensity. This last column will usually be headed "E mv/m," and readings should always

• Please turn to page 48

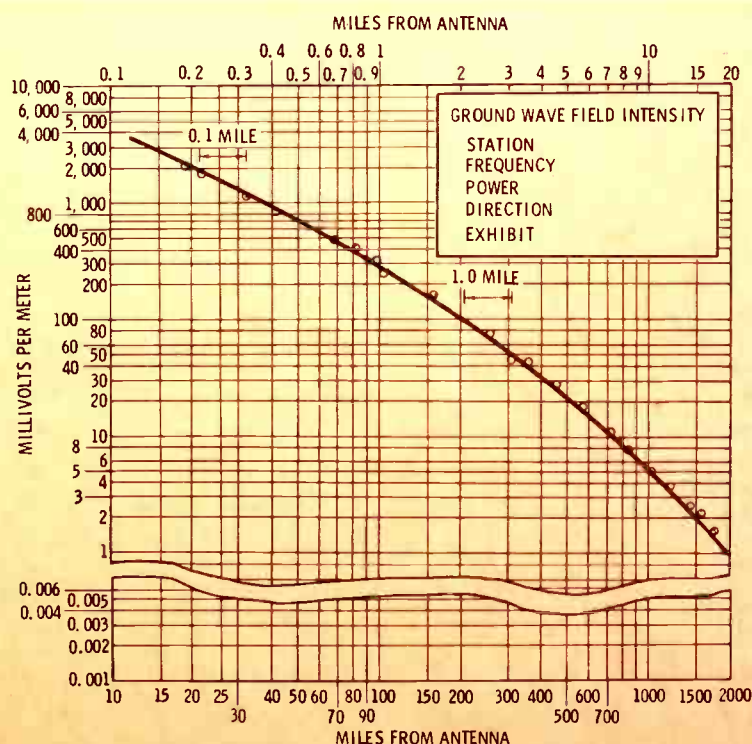


Fig. 7. Field-intensity curve is plotted in this manner; distance affects spacing.

1965 SUBJECT-REFERENCE INDEX

ACOUSTICS

- AES Convention Sep 52
- Studio
 - design Sep 15
 - reverberation Sep 26
 - soundproofing Sep 15

AIRCRAFT APPLICATIONS

- Field-intensity measurements,
 - vertical plane Mar 16
- Helicopters, TV use Jan 24

AM

- Allocation rules clarified WB May 28
- Call-letter policy modified WB Jun 34
- Central America, survey Aug 13
- East Germany, broadcasting Feb 56
- Measurements, RF power Apr 20
- Modulation power, increasing Jul 10
- Remote control, basics Oct 35
- Tower emergency Apr 13
- Transmitters, 4-400A uses Mar 18

ANTENNAS

- Base-current meter,
 - constant-impedance switch CE Jun 58
 - remote-indicating Aug 14
- Emergency, AM station
 - component defect Apr 15
 - correction LE Jun 6
 - matching Apr 15
 - tower collapse Apr 14
 - Rules compliance Apr 13
- Ground system CE Apr 88
- Helical, TV Oct 20
- Measurement, running radials Jun 21
- Measurements, RF power Apr 20
- Resistance measurement, RF
 - bridge Jun 23
- Site test Nov 16
- Stability, directional Apr 48
- Temporary, FCC permission CE Jan 49
- Tower-height limit,
 - congressional proposal WB Apr 33
- TV, measurements Jun 24
- TV receiving, MST program WB Sep 39

ANTENNAS, DIRECTIONAL

(See also RADIATION AND PROPAGATION)

- Emergency, tower collapse Apr 14
- FCC
 - base-current readings CE Mar 64
 - phase monitor Apr 25
 - requirements WB Jan 22
 - studies WB Oct 67
- Field-intensity measurements,
 - vertical plane Mar 16
- Measurements, RF power Apr 21
- Pattern, radiation, checking Jul 20
- Phase monitors, improving
 - sensitivity May 24
- Phase variations, tolerance CE Apr 88
- Remote requirements, NAB
 - petition WB Sep 39
- Sampling line, phase shift EE Jun 48
- Stability
 - array design Apr 48
 - base impedance Apr 50
 - construction considerations Apr 52
 - monitoring considerations Apr 52
 - resistance variations Apr 48
- Theory, primer Dec 18

ANTENNAS, TV

- CATV, installation Feb 28
- Helical theory Oct 20
- Pattern measured using helicopter Jan 28

ASSOCIATIONS AND CONFERENCES

- AES Convention Sep 52
- MST, TV receiving antenna
 - improvement program WB Sep 39
- NAB
 - conference series NI Oct 70
 - Convention and Engineering Conference, 1965, preview supplement Mar 39

- frequency-sharing plan Mar 90
- salary survey, results NI Apr 85
- vice-president for engineering Oct 60
- NCTA convention
 - chairman's report Sep 10
 - financing systems Sep 12
 - president's address Sep 12
- SMPTÉ
 - awards NI Nov 51
 - Montreal conference Sep 46

AUDIO EQUIPMENT

- "Cut" button for editing live
 - program EE Feb 60
- Echo devices, tape recording Mar 67
- Limiter amplifier, solid-state Feb 64
- Microphones, wireless Apr 16
- Monitor, solid-state Feb 64
- Recorders, portable tape Jan 14
- Switching system, solid-state Mar 34
- Tape systems, automated Feb 18
- Transmission set Feb 12
- UHF-TV station, low budget Mar 13

AUDIO MEASUREMENTS

- Stereo FM, proof of
 - performance CE Feb 36
- Transmission set
 - FCC requirements Feb 12
 - frequency response Feb 12

AUTOMATION

- Basic principles Feb 18
- Make, not save, money May 16
- Systems
 - clock Feb 19
 - cross-fader Feb 20
 - logging recorders Feb 21
 - programmer Feb 19
 - programmer, network Feb 20
 - reproducers Feb 20
 - restart Feb 19
 - services Feb 20
 - spot selector Feb 20
 - time-delay, recorder Feb 21
 - time fader Feb 19
- Tone generator, 20-cps, construction Aug 22
- Transmitter site Jun 10

BOOK REVIEWS

- Acoustical Tests and
 - Measurements Aug 50
- Audio and Acoustics Feb 65
- Basic Electronics Mar 92
- Basic Theory and Application
 - of Transistors May 50
- Collected Papers on Acoustics Sep 50
- Handbook for Electronic
 - Engineers and Technicians Dec 30
- Microwave Test and
 - Measurement Techniques Nov 49
- Planning the Local UHF-TV
 - Station Jun 36
- Radio Operators License
 - Handbook Oct 64
- Two-Way Mobile Radio
 - Handbook Jan 46
- Understanding Lasers and
 - Masers Apr 58
- CAMERAS
 - Color, solid-state Feb 16
 - Lunar, TV NI Feb 66
 - Remote-pickup, solid-state unit Feb 16
 - Waveform, economical EE May 40

CARTRIDGE TAPE EQUIPMENT AND OPERATION

(See also RECORDING, AUDIO)

- Adjustment, cartridges for Nov 31
- Editing, live programs, use Feb 21
- Equipment
 - announcement Jan 16
 - cues Jan 16
 - multiple-cartridge units Jan 20
 - music use Jan 16
- Recorder, playback construction Jul 22
- Standards, NAB Jan 9

CATV

- Cable, choosing Jul 18
- FCC
 - "Leapfrogging" WB Sep 40
 - microwave service, new WB Dec 31
 - operating data questionnaire Aug 42
 - proposal, filings WB Nov 33
 - regulation WB Mar 23
- Financing systems, NCTA
 - convention report Sep 12
- FM, adding Aug 10
- Installation Feb 28
- Interference, fence-charger CE Mar 64
- Maintenance Feb 30
- Microwave relay,
 - authorization WB Feb 33
- NCTA convention Sep 10
- Reception problems Jan 50
- Regulation, FCC WB Jun 33
- Telephone company activities Oct 67
- Typical installation Jan 12

CCTV

- School system Nov 14

COAXIAL TRANSMISSION LINE

- CATV, choosing Jul 18
- Helix dielectric, handling, hints Mar 14
- Installation, CATV Feb 30
- Maintenance techniques
 - components Jan 10
 - pressurizing methods Jan 10
- Rigid
 - cutting Feb 44
 - protection Feb 48
- Transmitting
 - installation Feb 44
 - losses Feb 40
 - maintenance Feb 48
 - peak power, AM Feb 40
 - TV, power rating Feb 40
 - VSWR Feb 40
- TV, measurements Jul 24
- TV, patch system Apr 60

COLOR TV

- Camera, solid-state Feb 16
- Europe, Montreux symposium Sep 23
- NAB convention, highlights May 18
- U.S. color TV shown in
 - Europe NI Jan 52

CONSOLES

- Audio, solid-state Dec 40
- Modifications, FCC Rules LE Jul 6
- Modifications, precautions LE Apr 6
- Stereo, construction Sep 20

CONSTRUCTION AND MODIFICATION

- Antenna, directional,
 - considerations Apr 52
- Cartridge recorder, control
 - system Jul 22
- Chassis Jun 25
- Compressor, dual recovery time Jul 40
- Console, adding channel EE Jul 40
- Console, stereo, portable Sep 20
- Monitor amplifier Aug 12
- Multimeter, built-in Jun 18
- Oscilloscope, RF monitor Oct 15
- Recorder, automatic control EE Sep 51
- Relay supply, low-current,
 - low-cost EE Jun 48
- Remote-control, eight-function,
 - single telephone pair Apr 18
- Silence sensor, SCA muting Oct 19
- Switch contacts, adding EE Jun 46
- Synchronizing generator,
 - transistorized Apr 36
 - May 10
- Tape delay, one transport EE Jun 48
- Tone generator, 20-cps,
 - automation Aug 22
- Transmission line,
 - counterweight for Mar 74
- TV station, UHF, low-budget Mar 12
- Van, video-tape recording Jun 12

Vidicon automatic sensitivity control EE Aug 45

CONTROL ROOM

Construction, TV station, UHF. Feb 65

DESIGN

Antenna, directional Apr 48

Cathode follower Jun 14

Microwave, video system specifications LE Mar 6

Studio, acoustic Sep 15

Switching devices, solid-state Jun 16

EMERGENCY OPERATIONS AND EQUIPMENT

EANS and EBS, FCC Rules, Part 73 Apr 25

EBS

—alerting device, NIAC WB Aug 41

—participation Dec 16

—Plan Dec 16

—rules Dec 16

—tests Dec 17

Power failure, indicator, remote EE Feb 60

Tower

—beacon defective, FFA report procedure Apr 26

—collapse Apr 28

ENGINEERING THEORY

Amplitude modulation Jul 10

Antenna, helical Oct 20

Antennas, directional Dec 18

Cathode follower Jun 14

Class-C amplifier Aug 18

Emitter follower Jun 14

Microwave, video system design specifications LE Mar 6

Negative resistance Jul 16

Remote-control systems Oct 36

Switching devices, solid-state Jun 17

Vector computation, review Feb 22

ENGINEERS' EXCHANGE

Adding Switch Contacts Jun 46

Economical Waveform Camera May 40

Foolproof Cut Button EE Feb 60

Improving the GE BT-1B Low-Voltage Supply May 42

Low-cost Low-Current Relay Supply Jun 48

Method for Diminishing Ghosts, A May 40

Phase Change Without Pattern Change Jun 48

Speeding Routine Line Checks Apr 77

Starting Switcher for Cartridge Decks EE Jan 44

Tape Delay Using One Transport Jun 44

EQUIPMENT AND DEVICES (STATION-BUILT AIDS)

Audio switching system, solid-state Mar 34

Burnishing tool, phone-jacks. EE Oct 70

Carrier-failure alarm

—description Jul 42

—schematic LE Oct 7

Cartridge-tape tests Nov 31

Cue amplifier, video-tape EE Apr 77

Headsets, level control Jul 42

Line checker, portable radio. EE Oct 70

Monitor switcher, uses coax relay Apr 32

Multimeter, built-in Jun 18

Oscillator, reference EE Sep 51

Remote amplifier, turntable inputs EE Apr 78

Synchronizing generator, solid-state Apr 36

Teletype alerting device EE Aug 44

Time delay, substitute EE Apr 77

Tower-light indicator EE Oct 70

Transmitter, control, automatic EE Mar 78

ETV

CCTV system Nov 14

FM station, low power

—antenna and transmitter Mar 14

—control room Mar 15

—engineering report Mar 86

—FCC Rules compliance Mar 86

—frequency checks Mar 15

—installation Mar 14

—planning Mar 14

—transmission line Mar 14

Milwaukee, WMVS Aug 32

MPATI request denied WB Aug 42

Samoa, system Apr 42

FCC

(See also SPECIFICATIONS AND STANDARDS)

Allocation, AM, Rules clarified WB May 28

Antenna

—base-current readings CE Mar 64

—checking pattern Jul 20

—current meters, remote Aug 14

—emergency notification Apr 13

—farms, proposals WB Feb 34

—ground system, changes CE Apr 88

—running radials Jun 21

—signs attached CE Jan 49

—temporary CE Jan 49

Applications

—AM and FM, new program form WB Oct 66

—filing fees, change WB May 28

—filing-fee waiver WB Sep 40

—public inspection WB Jun 34

Authorization, translator and CATV WB Feb 33

Auxiliaries, station identification WB Dec 32

Call letters

—notice WB Jan 21

—policy modified WB Jun 34

CATV

—“leapfrogging” WB Sep 40

—microwave service WB Dec 31

—operating data questionnaire WB Aug 41

—proposal, filings WB Nov 33

—regulation WB Jan 34

WB Mar 23

WB Jun 33

Directional antennas

—phase variations CE Apr 88

—rules unchanged WB Jan 22

—studies WB Oct 67

“Double billing” outlawed WB Dec 32

EBS plan Dec 15

Engineer, serves as commissioner WB Apr 33

Field-strength-vs-distance curves proposed WB Mar 24

WB Jul 35

FM

—engineering report Mar 86

—interference problems WB May 27

WB Aug 42

—modulation monitoring, studies WB Apr 34

—nonduplication, AM-FM WB May 27

WB Sep 39

—stereo CE Feb 36

Loudness, commercial

—action WB Feb 33

—average level changes WB Aug 41

—modulation level WB Aug 41

—volume-compression WB Aug 41

Maintenance log Jul 13

Measurements

—audio, transmission set Feb 12

—RF power Apr 20

Multiple-ownership rules

affirmed WB Jul 36

Part 73

—directional monitor Apr 25

—EBS and EANS Apr 25

—licenses, posting Apr 25

—maintenance log Apr 25

—tower inspection Apr 26

Public inspection Rules, changes WB Dec 31

Radiation, monitor-point changes CE Feb 36

Remote pickup, aural, multihop WB Jan 21

Satellite proposal, ABC WB Nov 33

Site test, authorization Nov 16

Spurious emission, broadcast Apr 74

STL operation CE Apr 88

Translators

—interim policy WB Jul 36

—proposed regulations WB Apr 33

—Rules relaxed Aug 41

Transmitter automation, FCC Rules Jun 11

TV

—aural-visual power WB May 27

—frequency-monitor requirement WB Jan 21

WB Feb 33

—proof of performance Nov 12

—propagation curves WB Oct 66

WB Nov 33

—remote-control petition, NAB WB Feb 34

—stereo sound inquiry WB Jan 22

WB Mar 24

UHF TV

—allocation table WB Mar 24

WB Jul 35

WB Nov 34

—low-power stations WB Apr 34

—permits WB Jan 21

WB May 28

FILMS, TV

Chains, maintenance Oct 12

Projectors, UHF, low-budget Mar 13

Sound, synchronized tape system Apr 64

Test films, SMPTE Oct 14

FM

Broadcast multiplexing with land mobile radio services WB Mar 23

Carrier current repeaters EE Aug 46

CATV, adding Aug 10

ETV station installation Mar 14

Interference problems, FCC Rules WB May 27

WB Aug 42

Line services Sep 18

Measurements, RF power Apr 21

Monitors, modulation, FCC, NAB studies WB Apr 34

Relay, off-the-air, heterodyne May 34

Remote control, basics Oct 35

SCA, muting device, construction Oct 19

Tower, concrete, South Africa Feb 50

Transmitter, solid-state Feb 16

FREQUENCY MONITORS

Reference signal Mar 15

TV requirement

—FCC eliminates WB Jan 21

—FCC postpones WB Feb 33

INTERNATIONAL BROADCASTING

CCIR study, U.S. fares well Jun 34

Central American radio and TV Aug 26

“Early Bird” operation begins WB Jun 33

East Germany, radio broadcasting Feb 56

European CCIR vote NI Aug 52

FM stereo via satellite WB Feb 34

Radio broadcasting, worldwide Mar 42

South Africa

—concrete tower Feb 50

—national FM system Feb 52

TV

—color, U.S., shown in Europe NI Jan 52

—helicopter use Jan 24

—Montreux symposium Sep 23

—world coverage Mar 45

LEVEL DEVICES, AUDIO

Characteristics Jul 11

FCC policy Aug 41

Limiter amplifier, solid-state Feb 64

Recovery time, dual, modification	Jul 40
TV station, UHF, low-budget	Mar 12
LOGS AND LOGGING	
Automated recorders	Feb 21
FCC Rules	
—maintenance	Apr 25
—operating	Apr 23
MAGNETIC RECORDING	
(See also specific subject)	
Automated audio tape equipment	Feb 18
Editing, live programs, cartridge tape use	Feb 21
Portable recorders, audio	Jan 14
Sound/film system, tape, synchronous	Apr 64
Tape	
—audio, mastering	Mar 66
—cartridge, NAB standards	Jan 8
—deck, cartridge, starting switcher	EE Jan 44
MAINTENANCE	
CATV	Feb 30
Film chains	Oct 12
Log	
—FCC requirements	Apr 25
—FCC Rules	Jul 13
Tape transports, reel-to-reel	Oct 23
Transmission line, coaxial	Jan 10
Transmitter, UHF	Nov 18
MEASUREMENTS	
Acoustic, studio	Sep 27
Antenna resistance, RF bridge	Jun 23
Audio, transmission set use	Feb 12
Field intensity	
—checking pattern	Jul 20
—meter, use	Dec 23
—monitor point, change	CE Feb 36
—running radials	Jun 21
—vertical-plane	Mar 16
Power, RF	
—AM stations	Apr 20
—FM stations	Apr 21
—TV stations	Apr 22
Spurious emission, broadcast station	Apr 75
Stereo FM, proof of performance	CE Feb 36
Transmission-line length	Jun 24
TV, antenna and transmission line	Jul 24
METERS	
Antenna current	Aug 14
Field-intensity	
—accuracy and calibration	Nov 11
—operation	Nov 11
—readings, validity	Dec 23
MICROPHONES	
Equalization, tape recording	Mar 66
Pickup, musical-instrument	Mar 70
Recording facilities, choosing	May 48
Repair	May 15
Wireless	Apr 16
MICROWAVE	
Design, video system specifications	LE Mar 6
Television system, solid-state	May 30
MISCELLANEOUS	
BROADCAST ENGINEERING'S	
Consulting Authors	Jan 38
Broadcasting, 45 years	Nov 20
Client relations, recording studio	Mar 72
Interference, fence-charger	CE Mar 64
Staff requirements, low-budget UHF-TV station	Mar 84
MOBILE	
Multiplexing with FM broadcast	WB Mar 23
Sharing TV channels	WB Mar 23
Van, video-tape	Jun 12
MODULATION	
AM, increasing power	Jul 12
Patterns	LE Jan 6
Video, solid-state chopper	
—parts list	LE Aug 6
—VIT modification	LE Sep 6

MONITORS

Antennas, directional, consideration	Apr 52
Audio	
—power amp, construction	Aug 12
—solid-state	Feb 64
Maintenance, film chain	Oct 28
Phase	
—improving sensitivity	May 24
—sampling line shift	EE Jun 48
RF, oscilloscope use	Oct 15
Switcher, coax-relay	Apr 32
TV station, UHF, low-budget	Mar 12

OFF-AIR PICKUPS

FM relay, heterodyne	May 34
Stereo FM, phase distortion	Oct 70

POWER SUPPLIES

Audio console, updating	May 14
GE BT-1B, improving	EE May 42
Maintenance, film-chain	Oct 26
Relay, low-current, low-cost	EE Jun 48

PROOF OF PERFORMANCE

Antenna system, running radials	Jun 21
Audio-console preamp, modifications	LE Apr 6
	LE Jul 6
Stereo FM, FCC Rules	CE Feb 36
Transmission set, use	Feb 12
TV	Nov 12

RADIATION AND PROPAGATION

Field-intensity meter, use	Nov 10
	Dec 23
Field-strength-vs-distance, FCC, new curves	WB Mar 24
	WB Jul 35
	WB Oct 66

Measurement, checking pattern

—airplane use	Mar 16
—analyzing	Jul 20
—helicopter use	Jan 28
—maps	Jun 21
—pattern, plotting	Jul 20
—points, selecting	Jun 22
—radials, layout	Jun 21
—ratio points	Jul 28
—rms value	Jul 20
—vertical-plane	Mar 16
Monitor point, change	CE Feb 36
Site test, procedure	Nov 16

RECORDING, AUDIO

Facilities, updating	May 14
Film system, tape, synchronous	Apr 64
Remote pickup, automatic control	EE Sep 51
Tape	
—automated	Feb 18
—control mechanism	May 14
—crosstalk	Sep 32
—delay, one transport	EE Jun 44
—distortion	Sep 30
—echo devices	Mar 67
—flutter	Sep 30
—frequency response	Sep 30
—heads, care of	May 15
	Dec 21
—level	Sep 30
—mastering techniques	Mar 66
—microphone equalization	Mar 66
—music instrument pickups	Mar 70
—NAB standards	Sep 16
—portable	Jan 14
—reverberation	Feb 21
—signal-to-noise ratio	Sep 30
—speed	Mar 66
	Sep 16
—splicing	Mar 66
—test, NAB standard	Sep 34
—time-delay	Feb 21
—transport mechanism	May 14
	Oct 23

Tape, cartridge	
—control system, construction	Jul 22
—cue	Jan 16
—deck, starting switcher	EE Jan 44
—editing, live programs	Feb 21
—features	Jan 16
—portable	Jan 20

—standards, NAB	Jan 8
	Jan 16
—test	Nov 31

RECORDING, VIDEO

Cue amplifier	EE Apr 77
Tape preview, simplified	Aug 58
Van, construction of	Jun 12

RELAYS, APPLICATIONS OF

Remote-control	Apr 18
Time-delay, substitute	EE Apr 77

REMOTE CONTROL

Basic systems	
—carrier-break dialing	Oct 40
—functions	Oct 36
—manufacturers, list	Oct 50
—metering	Oct 47
—metering, subcarrier	Oct 38
—microwave link	Oct 38
—solid-state	Oct 48
—wire-line	Oct 36
—26-mc link	Oct 42
Eight-function, single pair	Apr 18
High-power broadcast station, study	Apr 16
Power-failure indicator	EE Feb 60
Transmitter	
—control, automatic	EE Mar 78
—TV, NAB petition	WB Feb 34

REMOTE PICKUP

Aural multihop operation, FCC permits	WB Jan 22
Camera, solid-state	Feb 16
Microphones, wireless	Apr 16
Receiver, TV, solid-state	Feb 16
Recorder, automatic control	EE Sep 51
Station identification, FCC	WB Dec 32
Transistor use	Feb 16
Transmitter, TV, solid-state	Feb 16

SEMICONDUCTOR APPLICATIONS

Audio switching system	Mar 34
Broadcasting	Feb 16
Dimmers, studio	Dec 13
Emitter follower, theory	Jun 15
Microphones, wireless	Apr 16
Modules, microelectronic	Mar 26
Monitor, audio	Feb 64
Negative-resistance devices	Jul 17
	Aug 20
Remote-control	Apr 18
Switching devices	Jun 16
Synchronizing generator, building	Apr 36

SPECIFICATIONS AND STANDARDS

Audio console preamp, modifications	LE Apr 6
Measurements, RF power	Apr 20
Microwave, video system design	LE Mar 6
Spurious emission, broadcast	Apr 74
Tape	
—cartridge, NAB standards	Jan 8
—reel-to-reel, NAB	Sep 16
TV proof of performance	Nov 12

STEREO

Cartridge, mono playback	EE Oct 70
Console, portable, construction	Sep 20

FM

—CCIR recommendations	WB Jun 34
—phase distortion	Oct 70
—proof of performance	CE Feb 36
—satellite, via	WB Feb 34
Tape, NAB standards	Sep 16
TV sound, FCC	WB Jan 22
	Mar 24

STL

FCC Rules	
—operation	CE Apr 88
—station identification	Dec 32

STUDIO

Acoustics	Sep 14
ETV, American Samoa	Apr 42
TV, trends	Dec 13

TAPE RECORDING

(See also RECORDING AUDIO, CARTRIDGE AND TAPE)

Audio, automated equipment	Feb 18
----------------------------	--------

Audio mastering Mar 66
 Deck, cartridge, starting
 switcher for EE Jan 44
 Editing live programs,
 cartridge use in Feb 21
 Electronics, servicing Jun 19
 Heads, care May 15
 Dec 21
 Portable recorders, audio Jan 14
 Reel-to-reel maintenance Oct 23
 Reverberation Feb 21
 Standards, cartridge, NAB Jan 8
 Standards, reel-to-reel, NAB Sep 16
 Sound/film system, synchronous Apr 64
 Time-delay, use Feb 21

TELEPHONE LINES
 Beep requirement eliminated WB Jul 35
 Checks, portable radio EE Oct 70
 Services for broadcasters Sep 18

TELEVISION
 Antenna, helical, theory Oct 20
 Call-letter policy modified WB Jun 34
 Central America, survey Aug 13
 Channel two, new station Oct 17
 Coax
 —power rating Feb 42
 —VSWR Feb 42
 Equipment cost, low-budget
 UHF-TV station Mar 84
 ETV, American Samoa Apr 42
 Frequency monitor, FCC
 requirement WB Jan 21
 Feb 33
 Ghosts, diminishing EE May 40
 Helicopter use, international Jan 24
 Line services Sep 18
 Lunar camera NI Feb 66
 Measurements
 —antenna Jul 24
 —RF power Apr 22
 —transmission line Jul 24
 Microwave system, solid-state May 30
 Modulation checks, solid-state
 chopper, parts list LE Aug 6
 Monitor switcher Apr 32
 Montreux symposium Sep 23
 Patch system, RF Apr 60
 Power, aural-visual,
 FCC rules WB May 27
 Proof of performance, aural Nov 12
 Proof of performance, visual Nov 13
 Propagation curves, FCC
 conference WB Oct 66
 Receiving-antenna improvement
 program, MST WB Sep 39
 Remote control, UHF Oct 52
 RF monitor, oscilloscope Oct 15
 Sharing channels WB Mar 23
 Stereo sound, FCC inquiry WB Jan 22
 Mar 24
 Studios, trends Dec 13
 Translators, proposed relaxation
 of regulations WB Apr 33
 Transmission, NAB conven-
 tion highlights May 20
 Transmitters, remote-control
 petition, NAB WB Feb 34

UHF
 —low-power stations WB Apr 34
 —channel-allocation
 table, FCC WB Mar 24
 WB Jul 35
 —station, planning Feb 14
 Mar 12

U. S. color TV shown
 in Europe NI Jan 52

TEST EQUIPMENT AND INSTRUMENTS
 Multimeter, built-in Jun 18
 Tape cartridge, test tape Jan 9

TOOLS
 Burnishing, phone jacks EE Oct 70

TOWERS
 Antenna farms, FCC
 proposals WB Feb 34
 Mar 24
 Concrete, construction,
 South Africa Feb 50

Emergencies
 —AM station Apr 13
 —collapse Apr 28
 —formula correction LE Sep 6
 Height limit, congressional
 proposal WB Apr 33
 Inspection, quarterly Apr 26
 Installation, CATV Feb 28
 Lights
 —beacon failure, FAA report Apr 26
 —indicator EE Oct 70
 —inspection, daily Apr 25
 —line regulation, poor CE Jun 58
 —wiring economizing EE Jul 44

Signs
 —attachment CE Jan 49
 —dangers LE Apr 12
 Site test Nov 16

TRANSLATORS
 FCC authorization WB Feb 33
 License, interim policy Jul 36
 Rules relaxed WB Apr 33
 WB Aug 41

TRANSMISSION LINE
 Coax
 —pressurizing Jan 10
 —transmitting Feb 40
 Electrical length, measure-
 ment, RF bridge Jun 24
 Open line, counterweight for Mar 74
 Television, patch system Apr 60

TRANSMITTERS
 AM, uses of 4-400A Mar 18
 Automation, at site Jun 10
 Control, automatic EE Mar 78
 Inspection, daily Apr 25
 Maintenance, UHF Nov 18
 Modulation patterns LE Jan 6
 Power failure, indicator,
 remote EE Feb 60
 Remote control, basics Oct 35
 Semiconductor uses Feb 16
 Spurious emission, broadcast Apr 74
 Time delay, substitute EE Apr 77

UHF
 FCC
 —channel-allocation table WB Mar 24
 WB Jul 35
 —low-power stations WB Apr 34
 —permits WB Jan 21
 WB May 28

Planning station
 —antenna selection Feb 14
 —audio system Mar 12
 —building considerations Feb 14
 —film system Mar 13
 —market area Feb 14
 —transmitter site Feb 14
 —video system Mar 13
 Remote-control Oct 52
 Transmitter maintenance Nov 18

VIDEO EQUIPMENT
 NAB convention, display May 19
 Solid-state Dec 42

WASHINGTON BULLETIN
 Airborne ETV Request
 turned down Aug 42
 AM allocation rules clarified May 28
 AM-FM nonduplication deadline
 postponed for some Sep 39
 Antenna-farm proposals
 under fire Feb 34
 Antenna farms and new TV
 propagation curves Mar 24
 Applications must be avail-
 able to public Jun 34
 Assignments, new table
 of UHF TV Jul 35
 Aural-visual power rules
 made final May 27
 Beep requirement, AT&T
 to delete Jul 35
 Call-letter policy modified Jun 34
 Call letters, notice now
 required on Jan 21
 CATV, commission acts to
 regulate Jun 33

CATV, equal treatment for
 translators and Feb 33
 CATV, federal regulation of Mar 23
 CATV, microwave service
 exclusively for Dec 31
 CATV operating data,
 commission requests Aug 42
 CATV proposal, filings
 heavy in Nov 33
 CATV, telephone companies
 active in Oct 67
 CCIR, U. S. fares well at Jun 34
 Commercial loudness, action
 expected on Feb 33
 Commercial loudness policy
 statement issued Aug 41
 DA-remote requirements, NAB
 seeks relaxation of Sep 39
 DA's, operator requirements
 for unchanged Jan 22
 Directional-antenna licensees
 may get relief Oct 67
 "Double billing" officially
 outlawed Dec 32
 Duplication limit postponed May 27
 "Early Bird" satellite begins
 operation Jun 33
 EBS alerting device proposed Aug 41
 Engineer as new commissioner? Apr 33
 Field strength/distance curves:
 antenna farms Jul 35
 Filing fees, changes in
 broadcast May 28
 Filing fees on certain applica-
 tions, FCC may waive Sep 40
 FM interference problems May 27
 FM modulation monitoring,
 studies of Apr 34
 IF interference, new rules
 protect FM from Aug 42
 "Leapfrogging," commission con-
 cerned over CATV Sep 40
 Monitor Rule, change of TV,
 postponed Feb 33
 Multiple-ownership rules,
 new, affirmed Jul 36
 Program form, new, adopted for
 AM and FM applications Oct 66
 Propagation curves, conference
 on TV Oct 66
 Propagation curves, further
 revision for Nov 33
 Public inspection rules,
 changes in Dec 31
 Remote control of TV
 transmitters Feb 34
 Remote pickups, multihop
 relaying for aural Jan 22
 Satellite, ABC proposes
 private relay Nov 33
 Satellite, stereo via relay Feb 34
 Sharing TV channels with
 other users Mar 23
 Station identification, relaxed,
 for auxiliaries proposed Dec 32
 Stereo sound for television Jan 22
 Stereo, sound for television Mar 24
 Tower-height limit, Congress
 proposes Apr 33
 Translator grants, interim
 policy on Jul 36
 Translator Regulations, relaxed Apr 33
 Translator Rules relaxed Aug 41
 TV frequency-monitor require-
 ment eliminated Jan 21
 TV receiving antenna improve-
 ment program Sep 39
 UHF allocations to be
 corrected Nov 34
 UHF permits,
 FCC tightening on Jan 21
 UHF permits, unused,
 to be reviewed May 28
 UHF stations, low-power,
 considered Apr 34
 UHF table, early release
 of new Mar 24

An Important Announcement from the World Leader
in Cartridge Tape Equipment:

ADVANCED, NEW *Spotmaster* Super B Series

MEETS OR EXCEEDS ALL NAB SPECIFICATIONS AND REQUIREMENTS



And Here's the New
Economy King
COMPACT 400-A



Don't let their low price fool you. New, solid state SPOTMASTER Compact 400's are second only to the Super B series in performance and features. Available in both playback and record-playback versions, these Compact models share the traditional SPOTMASTER emphasis on rugged dependability.

Top Quality
Tape Cartridges




Superior SPOTMASTER tape cartridges are available in standard linings from 20 seconds to 31 minutes, with special lengths loaded on request. In addition, Broadcast Electronics offers a complete selection of blank cartridges, cartridges for delayed programming and heavy duty lubricated bulk tape. Prices are modest, with no minimum order required.

Introducing the Super B, today's truly superior cartridge tape equipment.

New Super B series has models to match every programming need—record-playback and playback-only, compact and rack-mount. Completely solid state, handsome Super B equipment features functional new styling and ease of operation, modular design, choice of 1, 2 or 3 automatic electronic cueing tones, separate record and play heads. A-B monitoring, biased cue recording, triple zener controlled power supply, transformer output . . . all adding up to pushbutton broadcasting at its finest.

Super B specs and performance equal or exceed NAB standards. Our ironclad one-year guarantee shows you how much we think of these great new machines.

Write, wire or call for complete details on these and other cartridge tape units (stereo, too) and accessories . . . from industry's largest, most comprehensive line, already serving more than 1,500 stations on six continents.



**BROADCAST
ELECTRONICS, INC.**

8800 Brookville Rd., Silver Spring, Md.
Area Code 301 • JU 8-4983

Circle Item 11 on Tech Data Card

BOOK REVIEW



Handbook for Electronic Engineers and Technicians: Harry E. Thomas; Prentice-Hall, Inc., Englewood Cliffs, N. J., 1965; 427 pages, 7" x 9 3/4", hard cover, \$15.

Although much of the information given in this reference handbook is slanted toward military hardware and its applications, it should still be of value for use in nonmilitary applications. EIA, U.L., and NEMA standards are included; for example, the component-parts section and many of the circuits and measurement techniques given are useful for both civilian and military applications.

Mechanical-construction considerations are covered in the first six chapters. Chapters one and two describe tools and techniques used for drafting; chapters three and four list methods and tools used for chassis construction. These first four chapters should be a particularly useful reference for those who, although they have little contact with construction processes, must be familiar with all mechanical requirements and standards. The fifth chapter describes electronic components and their characteristics. Photos, tables, graphs, and drawings provide handy reference data on markings, tolerances, temperature characteristics, and applications. Chassis assembly and wiring procedure is covered in the sixth chapter.

A brief summary of math is given in the seventh chapter; slide-rule use, algebra, standard scientific notation, trigonometry, vectors, and binary numbers are all discussed. The eighth chapter introduces methods of laboratory organization.

Chapters nine through nineteen describe various techniques for measuring individual component characteristics, frequency, waveforms, vacuum-tube and semiconductor characteristics, microwave-equipment parameters, transmitter and receiver characteristics, and radar-system characteristics. The twentieth chapter concerns synchro- and servo-system applications and testing. The last chapter describes power-supply design methods and applications.

There are six appendices at the back of the book which supplement data contained in the text. Included are schematic symbols, a glossary of electronic terms and abbreviations, receiving-tube characteristics and basing diagrams, a list of JEDEC registered semiconductor characteristics, fuse data, and much other reference information. ▲

We interrupt this magazine to bring you...

Late Bulletin from Washington

by Howard T. Head

Changes in Public Inspection Rules

The Commission has made minor modifications in the Rules that require all broadcast stations to have reference copies of all major applications available for local public inspection (June 1965 Bulletin). Under the changed Rules, television translator station applications are exempt from the public inspection requirement. The Commission has also made it plain that network-affiliation contracts or financial records not otherwise made public are not covered under the public inspection Rule. Further, in the case of petitions to deny applications, only a statement identifying the name and address of the petitioner need be made publicly available, instead of a copy of the entire petition as originally required.

In their first approach to modifying the public-inspection Rules, the Commission decided which engineering information must be made available. Only maps showing service contours and information concerning transmitter and studio location would be necessary. This meant, however, that all stations must have coverage maps available. It soon became apparent that not all stations had such maps except with their applications at the Commission, and preparation of them would involve considerable expense. As a result, the Commission hastily rescinded this part of the changes.

Coverage maps are now required to be made available for public inspection only when they are part of new applications.

Microwave Service Exclusively for CATV

The Commission has created a new class of microwave service to be known as the Community Antenna Relay (CAR) Service, to provide relay facilities servicing Community Antenna Television (CATV) systems. The new service is in the lower 250 mc of the 12.7 gc to 13.2 gc band. On an interim basis, the CAR service will employ the same technical standards as those for television remote pickup and intercity microwave stations. All applications filed after November 22, 1965, must be in compliance with the new Rules, and no renewal authorizations for existing facilities will be granted to extend beyond February 1, 1971.

Under the new Rules, CATV systems are permitted to own their own CAR systems, and are encouraged to conserve spectrum space by using these microwave facilities jointly with other CATV systems. The Commission has also asked for comments on the question of the desirability of CAR licensees and television broadcast licensees sharing common relay facilities.

"Double Billing" Officially Outlawed

The Commission has adopted new Rules for AM, FM, and television stations to prohibit "double billing" practices by broadcast stations. The new Rules were adopted, with some modifications, in response to a proposal issued in March 1964.

Under the new Rules, the practices which are outlawed include not only the actual submission of separate bills in two amounts but also the providing of assistance to advertising agencies which might mislead the agencies' clients as to the amounts charged by the station for advertising. The Commission has issued a Notice giving its interpretation of several questions which might be likely to arise under the new Rules. A copy of this Notice may be obtained from the Commission (Mimeo No. 74223), or we'll be glad to obtain a copy for you.

Relaxed Station Identification for Auxiliaries Proposed

The Commission proposes to relax its Rules requiring station identification for television remote pickup and studio-transmitter link stations. The proposal would require only the call sign of the television broadcast station as a means of identifying the remote pickup or STL. Under present regulations, the call sign of the auxiliary station must be transmitted at the beginning and end of each period of operation. Also being considered is a relaxation of identification requirements on inter-city relay stations, which would be exempted from any identification.

The Electronic Industries Association (EIA) has also petitioned the Commission to permit unattended operation of stations in the auxiliary services. Under the present requirements, these stations must be under the control of a licensed first-class operator, although remote-control operation is permitted and usually undertaken.


Short Circuits

Applications for 7 VHF translators at Cumberland, Maryland, have been set for hearing to determine whether they might retard UHF development in the area . . . A CATV system in the eastern part of Pennsylvania has been cited for excessive radiation from its cables; the radiation was almost ten times that permitted by the Commission's Rules . . . The Commission has proposed to modify its Rules governing calculations of interference from AM directional antennas to specify the use of calculated rather than measured values; predetermined tolerance is to be applied so as to permit the use of high-speed electronic calculators . . . Two FM stations in the Philadelphia area have been authorized to carry 4 SCA channels for "educasting" to be used for home instruction . . . 32 additional FM stations have been exempted from the AM-FM non-duplication requirements (September 1965 Bulletin) until December 31, 1965 . . . Emergency Broadcasting Service (EBS) operational plans have been approved for 49 states (all except New Hampshire) and the territories and possessions except for Guam, the Virgin Islands, and the District of Columbia; more than half of the country's broadcast stations are participating.

Howard T. Head... in Washington



THE MARK VI-A SPECIAL EFFECTS GENERATOR

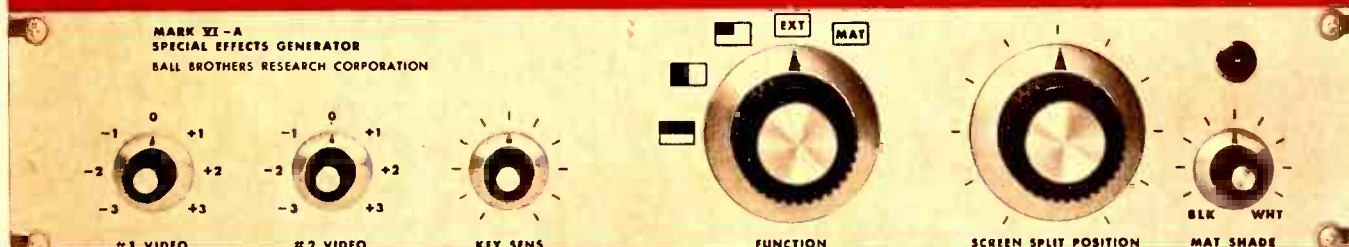

ADD NETWORK-TYPE CAPABILITIES TO YOUR STUDIO OPERATION AT MODERATE COST WITH THE MARK VI MONOCHROME SPECIAL EFFECTS GENERATOR

Two models of the BBRC Mark VI are now available: the Mark VI-A self-contained unit (above) and the Mark VI-AR remote control unit (at right). Both units are capable of the following special effects: Horizontal, vertical and corner wipes. External video key for keyed inserts. Independent, selective matting* (or lettering) in the range of grey from black to white.



Studio Applications: Local stations can offer advertisers a variety of special effects. Educational TV stations, university TV workshops, or closed circuit TV systems can greatly expand studio capabilities. The Mark VI is an ideal standby generator, an auxiliary unit for a second studio, or can be used in mobile van operation.

Compact, reliable construction: All solid state circuitry. Price: From \$1375.00

Optional console panels are available for remote unit installation with the...

MARK VI-AR (REMOTE CONTROL) UNIT

FOR IMMEDIATE INFORMATION: CALL YOUR LOCAL DISTRIBUTOR, OR WRITE BBRC VIDEO MARKETING

BALL BROTHERS RESEARCH CORPORATION • BOULDER, COLORADO 80301 • TEL 303/442-2965 • TWX 303/443 6290




Circle Item 12 on Tech Data Card

BUILDING A BETTER CONSOLE? HERE ARE YOUR ALTEC AUDIO CONTROLS!



ALTEC ATTENUATORS, MIXERS, VU EXTENDERS AND STEREO PAN POTENTIOMETERS provide less than 1-milliohm contact resistance, lower noise, easier upkeep, and longer life. Choose from more than 300 types, either rotary or straight-line. New rotaries use pure silver dual brushes, independently sprung to eliminate "stumble."



ALTEC 9060A MICROPHONE EQUALIZER provides up to 12-db equalization, and 16-db attenuation at 100 cycles and 10 kc. Straight-line controls are precisely calibrated in 2-db steps. Passive L/C/R bridged "T" network circuit. Compact plug-in design. $3\frac{1}{2}$ "H x $1\frac{1}{2}$ "W x $5\frac{1}{2}$ "D.



ALTEC 9061A & 9063A PROGRAM EQUALIZERS provide continuously variable equalization at selectable frequencies: up to 12-db boost at 40 or 100 cycles, and 3, 5, 10 or 15 kc; 16-db attenuation at 100 cycles and 10 kc. Passive circuitry. 9061A, for plug-in mounting, features straight-line controls. $3\frac{1}{2}$ "H x $1\frac{1}{2}$ "W x $5\frac{1}{2}$ "D. 9063A, for standard rack mounting, has rear-mounted input and output terminals normaled through front-panel jacks and rotary control switches. $3\frac{1}{2}$ "H x $19\frac{1}{2}$ "W x $5\frac{1}{4}$ "D.



ALTEC 9062A & 9073A GRAPHIC EQUALIZERS have completely passive circuitry which induces no hum or distortion at levels from -70 to +24 dbm. The 9062A provides quiet, positive variable boost or attenuation in 1 db steps at seven critical frequencies. The 9073A boosts or attenuates six different frequencies of +8 or -8 db in 1 db steps. Precise slider controls have an accuracy of ± 0.5 db per step, enabling a frequency overlap for an essentially flat response. Escutcheon plates available for rack mounting. 9062A, $3\frac{1}{2}$ "H x $10\frac{1}{2}$ "W x $5\frac{1}{4}$ "D. 9073A, $3\frac{1}{2}$ "H x $8\frac{3}{4}$ "W x $5\frac{1}{4}$ "D.




ALTEC 9064A NOTCH FILTER eliminates unwanted narrow-band frequencies with negligible effect on program material. The 9064A is made to your specification with notch frequencies from 50 to 20,000 cps; Available as single or dual notch filter. $2\frac{1}{2}$ "H x $3\frac{1}{2}$ "W x $2\frac{1}{2}$ "D.



9065A FIXED LOW-PASS and 9066A FIXED HIGH-PASS FILTERS provide 18 db per octave attenuation from selected cut-off point. (30-db per octave units also available.) No insertion loss. The 9065A may be ordered to any cut-off point from 50 to 20,000 cps; the 9066A from 40 to 20,000 cps. $1\frac{1}{2}$ "H x $1\frac{1}{2}$ "W x $2\frac{1}{2}$ "D.



ALTEC 9068A VARIABLE LOW-PASS FILTER and 9069A VARIABLE HIGH-PASS FILTER provide 18 db per octave attenuation with 10 positions of LF and HF cut-off. With toroidally wound inductances, units may be used in extremely low-level circuitry without noise or hum pick-up. Zero insertion loss. 9068A LOW-PASS FILTER is $3\frac{1}{2}$ "H x $2\frac{1}{4}$ "W x $5\frac{1}{2}$ "D. 9069A HIGH-PASS FILTER is same size.



ALTEC 9067A VARIABLE LOW- AND HIGH-PASS COMBINATION FILTER combines the 9068A and 9069A for rack mounting. Rear-mounting input and output terminals normaled thru front panel jacks. $3\frac{1}{2}$ "H x $19\frac{1}{2}$ "W x $5\frac{1}{4}$ "D.



ALTEC PRECISION NETWORKS introduce no frequency discrimination or distortion from 0 to 150 kc. Units include mixers, matching pads, fixed-loss pads, bridging pads, and VU meter extenders in unbalanced "T" and balanced "H" configurations. Networks come in four sizes, are enclosed against dust and dirt, and are available in a wide range of impedances.

Send today on your letterhead for special professional discounts (available to bona fide recording and broadcast studios only). We'll send you name of nearest Professional Altec Distributor and complete Altec catalog covering speech input and playback equipment. Write Dept. BE-12.

© 1965 AL



ALTEC LANSING
A Division of *ITT* Ling Altec, Inc.
ANAHEIM, CALIFORNIA

Circle Item 13 on Tech Data Card

Directional Antennas

(Continued from page 20)
each such value and specifies for each monitoring point a maximum value of field intensity which should not be exceeded. This is the maximum permissible value of field intensity—no further multiplying factor is to be applied.

Not infrequently, a monitoring point "goes sour" because of new construction in the vicinity and no longer gives a true indication of the state of adjustment of the antenna system. In such a case, a new monitoring point must be selected, preferably one of the points at which measurements were made in the original proof of performance. Complete data must be furnished to the FCC on the substitute monitoring point, including a description of the point, directions for getting there, a photograph of the point showing the field-intensity meter in place and as many landmarks as possible, and the value of field intensity measured at the point in the original proof of performance.

Conclusion

It is beyond the scope of this article to develop directional-antenna theory. For those who wish to study the subject further, a number of books and articles are available, such as "Standard Broadcast Antenna Systems" by Carl E. Smith and Daniel B. Hutton in the fifth edition of the **NAB Engineering Handbook**. It is hoped that the basic information presented here will serve as a foundation for such study. ▲

MOVING?

Receive BE as usual at your new address

Don't Lose Touch . . .

Write: **BROADCAST ENGINEERING**

Circulation Department

4300 West 62nd St., Indianapolis 6, Ind.

you lost your turn by missing our ad in the September issue. Go back and look at page 26 for **NEW REMOTE CONTROL** from **BIONIC INSTRUMENTS, INC.**

Circle Item 35 on Tech Data Card

BROADCAST ENGINEERING

IS YOUR VIDEO ON THE LEVEL?

Solid State Color STABIlizing AMPlifier with A.G.C. model VI-500



Ultra Stable Circuitry
through complete and accurate
temperature compensation

AUTOMATIC VIDEO LEVEL CONTROL

Maintains video peaks constant to a preset level, with reference to blanking.

CLAMPING

Sync tip clamps remove hum, tilt and other low frequency disturbances.

SYNC LEVEL

Sync level is maintained at a constant amplitude despite large variations in input.

EQUALIZATION

Accurately compensates for losses in up to 1000 feet of coaxial cable.

REMOTE CONTROLS

Automatic/Manual video gain
Sync Level
White Clip
Black Clip
By-pass switch

WHITE CLIP

Adjustable sharp white clip remains fixed with respect to blanking.

BLACK CLIP

Adjustable sharp black clip for monochrome operation.

WHITE STRETCH

Stretch adjustments provide a high degree of flexibility to compensate for transmitter characteristics.

NON-COMPOSITE COLOR OUTPUT

Mono. or **Color** non composite output board in lieu of white stretch is available at additional cost.

APPLICATION

Wherever there is video and you want to assure:

- Constant levels • Constant clean sync • Elimination of tilt, hum and low frequency disturbances.

Price for the VI-500 \$1,750.00 Remote controls \$150.00 . . . Have you placed your order yet?

GOOD ENGINEERING IS VITAL



Write for complete information and specifications.

VITAL INDUSTRIES

Circle Item 14 on Tech Data Card

3614 SOUTHWEST ARCHER ROAD
GAINESVILLE, FLORIDA—PHONE 372-7254




BROADCAST EQUIPMENT

"reliable
profit makers"




REMOTE PICK-UP SYSTEM

Unequaled 160 mc/s performance
for quality broadcasting
● ± 1.5 db 50-10,000 cps.
● 1.6% max. distortion

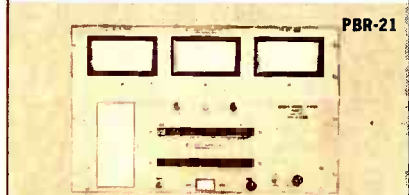

REMOTE CONTROL SYSTEMS

For AM-TV-FM via single AC phone line or STL
● Push-Button ● 21 Channels
● Silicon Solid-State

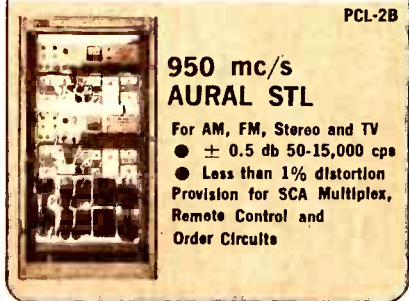

950 mc/s AURAL STL

For AM, FM, Stereo and TV
● ± 0.5 db 50-15,000 cps
● Less than 1% distortion
Provision for SCA Multiplex,
Remote Control and
Order Circuits

MOSELEY
ASSOCIATES, INC.

135 NOGAL DRIVE
SANTA BARBARA, CALIFORNIA
(805) 967-0424

Circle Item 15 on Tech Data Card

Tape Heads

(Continued from page 22)

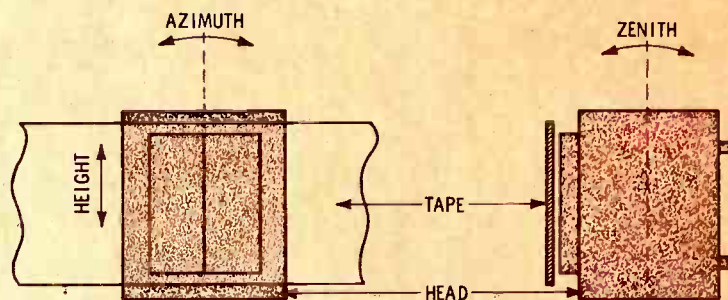


Fig. 5. For best performance, each tape head must be aligned in three directions.

cause it may dissolve the varnish which separates the laminations; it can be dangerous to the operator as well. The best cleaning tool is a small cotton swab. Also, cloth cleaning tapes may be used, but they should not be run across the heads at high speed because of the heat of friction.

Demagnetization

Although the head cores are made of a "soft" magnetic material, they can pick up a degree of residual magnetism from surges through the windings, exposure to strong fields, or contact with magnetized objects. If a head is magnetized, it can raise the noise level of a recording, whether the machine is in the record mode or not. It can also partially erase the high recorded frequencies and damage valuable tapes. To avoid magnetizing the heads, the following precautions should be taken:


1. Do not allow the heads to come in contact with magnetized objects, such as scissors or screwdrivers.
2. Do not record at excessively high levels, or even apply excessive signal levels to the record amplifier.
3. Do not remove tubes in either the record or playback amplifier while the machine is on.
4. Do not operate a bulk tape eraser near the heads.

5. Do not subject the heads to mechanical shock, such as allowing the gate to slam shut.
6. Do not turn the power off while the machine is recording.

The heads should be demagnetized at regular intervals. How often this is done depends on how much the machine is used and the quality standards which must be maintained. Many major recording studios demagnetize the heads each time the machine is used. Other users demagnetize them only when the machine gets its regular routine maintenance. For most conditions, the latter should be sufficient.

Alignment

In addition to being kept clean and demagnetized, the heads must be properly positioned, or aligned. As can be seen from Fig. 5, there are three position adjustments: height, azimuth, and zenith. On some machines, only one or two of these adjustments can be made; the others are fixed during manufacture. Head height positions the tape so that it is properly scanned. This adjustment is especially important on two-track and four-track machines to be sure the head is properly centered on the correct track and only the correct track. The best way to set the height is to use a piece of tape from which the oxide coating has been removed with acetone. A full-track head should be centered on the tape; a two-track or four-track head should be set so that the edge of the pole pieces coincides with the edge of the tape. A check on positioning of the tracks can be made using one of the colloidal suspensions of magnetic particles which are available

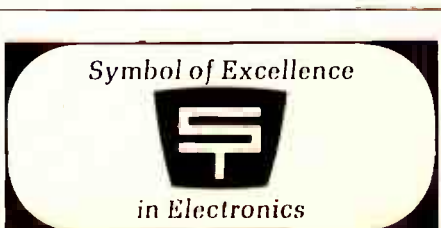

Circle Item 16 on Tech Data Card

JAMPRO

DUAL POLARIZED FM ANTENNA WILL

INCREASE YOUR SIGNAL!

Now you can achieve RF radiation the **EASY, PRACTICAL WAY!** The new JAMPRO dual polarized FM antenna will increase your signal many times to establish new listeners in hilly areas, give you more signal to home radios using built-in antennas and car FM sets. Contact JAMPRO today for a dual polarized system especially suited to your ERP requirements.

CONVERT YOUR EXISTING ANTENNA

A new, low cost Dual Polarized Conversion Kit is now available from JAMPRO. Complete with power divider, vertical elements, and instructions for field installation, you can convert your present FM antenna into a dual polarized system. Contact JAMPRO for details.

Contact JAMPRO for newly developed technical information regarding Dual Polarized antenna measurements and performances.

JAMPRO

ANTENNA

6939 POWER INN ROAD

COMPANY


SACRAMENTO, CALIFORNIA

PHONE:
AREA CODE 916
442-1177

Circle Item 17 on Tech Data Card

NOW 16 HOURS
of background music

REEL-TO-REEL REEL-TO-REEL REEL-TO-REEL REEL-TO-REEL

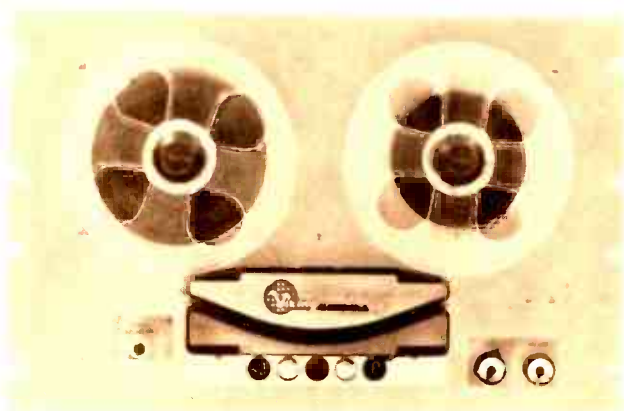

MODEL 225

Automatic, two-directional playback of quarter track monaural tapes provides 16 hours of background music on each 7" reel with pushbutton choice of program track.

Electrically controlled, three motor tape transport with hysteresis synchronous capstan drive.

With its built-in playback pre-amplifier model 225 connects readily to existing sound systems in - AIRPORTS, AMUSEMENT PARKS, ARENAS, BOWLING ALLEYS, CLUBS, DISPLAY ROOMS, DEPARTMENT STORES, DEPOS, HOTELS, INDUSTRIAL PLANTS, MOTELS, OFFICE BUILDINGS, RESORTS, SHOPPING CENTERS, STADIUMS

for only \$500.00



Background music tapes available from Viking. Lets you develop your own sales or leasing plan.

For detailed information write to Sales Manager.



OF MINNEAPOLIS®

9600 Aldrich Ave. S. Minneapolis, Minnesota, 55420

Circle Item 19 on Tech Data Card

for the purpose. These suspensions, when applied to the tape and allowed to dry, permit the recorded tracks to be seen readily. Any variations in track spacing or positioning can then be corrected easily. This procedure applies only to record heads, but playback heads may be adjusted easily by changing the height to secure maximum output from a recording of a low-frequency tone (around 100 cps) made with a head that is known to be properly positioned.

The zenith adjustment merely positions the head face so that the tape has no tendency to slide off the head, or skew. It is often fixed in manufacture and usually is correct when the head surface is perpendicular to the deck surface.

The most important mechanical adjustment of the heads is the azimuth adjustment. This is set so that the head gap is precisely at a 90° angle to the edge of the tape. It may be checked very quickly by recording a 10,000-cps tone on a tape, playing it back, and observing the output level. Then the reels are interchanged, the tape is run through the machine in the opposite direction, and the level is checked again. If the difference in level for the two directions is less than one decibel, the azimuth alignment is satisfactory. To adjust the azimuth, a standard alignment tape should be used. Adjust the playback-head azimuth for a maximum reading while playing the standard tape. Then adjust the record-head azimuth for maximum playback level of a recorded 10,000- or 15,000-cps tone.

Conclusion

A good head should give many thousands of hours of service if it is kept clean, demagnetized, and properly aligned. Most head troubles may be cleared up by the procedures outlined above. Just remember, heads always wear out, but seldom burn out. ▲



you lost your turn by missing our ad in the September issue. Go back and look at page 26 for NEW REMOTE CONTROL from BIONIC INSTRUMENTS, INC.

Circle Item 18 on Tech Data Card

BROADCAST ENGINEERING

v.i.t. displays with video-waveform monitor

with capability for sine-squared testing



Type RM529

frequency responses—Four response characteristics necessary to monitor Video Test Signals are provided:

1. FLAT to 5 MHz $\pm 1\%$, to 8 MHz $\pm 3\%$. This flat response position to 8 MHz assures waveform fidelity and makes the video-waveform monitor ideally suited for sine-squared testing.
2. HIGH PASS 3.58 MHz center frequency, 30% down at ± 400 kHz.
3. LOW PASS -18 dB at 500 kHz.
4. IEEE 1958 STD 23-S-1. Color subcarrier -20 dB.

YRBG or RGB display capability—For monitoring output of color processing amplifiers.

line selector—Provides stable displays of the Vertical Interval Test signals. Adequate brightness is provided even at the fastest sweep speed. Can display any line desired. Brightening pulse automatically intensifies the displayed line as viewed on the associated picture monitor. No modification to the picture monitor is required.


field selection—Positive acting circuit allows selection of field one or two for display. Noise will not cause random field changing.

dc restorer—A feedback-type restorer acts during the backporch time. Not affected by presence of color burst. Does not distort the burst. Front-panel switch can disable the restorer—when other than video waveforms are viewed.

Cabinet Model also available. Same features as RM Model and designed for side-by-side mounting with a picture monitor in standard racks. Takes only $8\frac{3}{4}$ " of rack space. Field case offered as an optional accessory for Type 529.

Type RM529 Video-Waveform Monitor \$1100
Type 529 Video-Waveform Monitor 1050

U.S. Sales Prices, f.o.b. Beaverton, Oregon

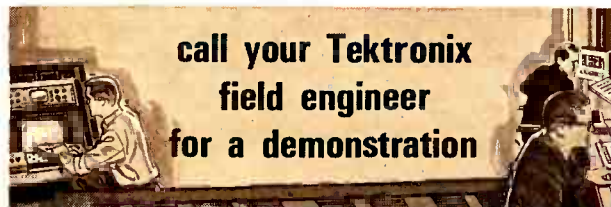

Available throughout the world

Tektronix, Inc.

Circle Item 20 on Tech Data Card

Trends in TV

(Continued from page 14)

white film island with one slide and one film projector.

At present, there are two video-tape record-playback units (one is a solid-state type) and one video-



Fig. 2. Custom solid-state audio-control console was built by station personnel.

tape playback unit. Each unit can be remotely controlled from the video-control room.

The station has ample film- and tape-editing facilities, which it uses in conjunction with its mobile unit. Addition of a color video-tape record-playback unit and color

cameras will allow local programs to be taped in color.

Audio Equipment

Fig. 2 shows the audio console: 30 inputs can be handled by this solid-state unit. Since a commercially built console meeting the station's requirements was not available and a custom-built unit would involve high cost and a long delay, WISH-TV elected to build its own.

The console is built around plug-in cards with solid-state components. All faders use solid-state photo-sensitive relays. The lamps in these units are run slightly under rated voltage for long life, and the lamp current is controlled by transistor amplifiers to minimize the required power rating of the control potentiometers.

Originally, printed-circuit boards were considered for the design, but the perforated phenolic boards shown in Fig. 3 were easier to use. Also, this design permits modifications, which would be difficult to make on a printed-circuit board.

Components mounted on top of the boards are connected to the underside wiring by means of terminals pushed through the perforations. Parts cost for the entire audio-control console was about \$4400.



Fig. 3. Front and back views of plug-in circuit boards built at WISH-TV.

total cost, including labor, was about \$6500.

Terminal boards in the audio racks have solderless connectors similar to those used by the local telephone company. Each connector consists of two knife-edged bars between which the insulated hookup wire is forced with a special tool. Any wire can be rapidly

The soundest sound in broadcasting is the new sound of GATES

GATES NEW CARTRITAPE II

Here is the ultimate in truly professional all-transistor cartridge tape systems. Cartritape II provides uncompromising audio quality and outstanding reliability. Available in monaural or stereo-phonics versions, with 1, 2 or 3 cue tone functions for automatic control of external equipment.

Construction is modular with easy expansion of facilities as desired. Other features: in-line cueing, separate record and playback heads, positive cartridge indexing. Meets new NAB recording standards. For detailed information, write for brochure 113.



GATES

GATES RADIO COMPANY
A Subsidiary of
Harris-Intertype Corporation
QUINCY, ILLINOIS 62302


Offices: New York, Houston, Los Angeles, Washington, D.C.
Export: Rocke International Corporation, New York City



Monaural Record/Playback unit only 5 1/4" high. Available for rack or desk-top installation. System can be expanded quickly with the addition of inexpensive plug-in amplifiers.

Circle Item 21 on Tech Data Card

We can custom make your switcher. If you have special switcher requirements that demand custom manufacture, then International Nuclear can be of service to you. An International Nuclear audio and video crossbar

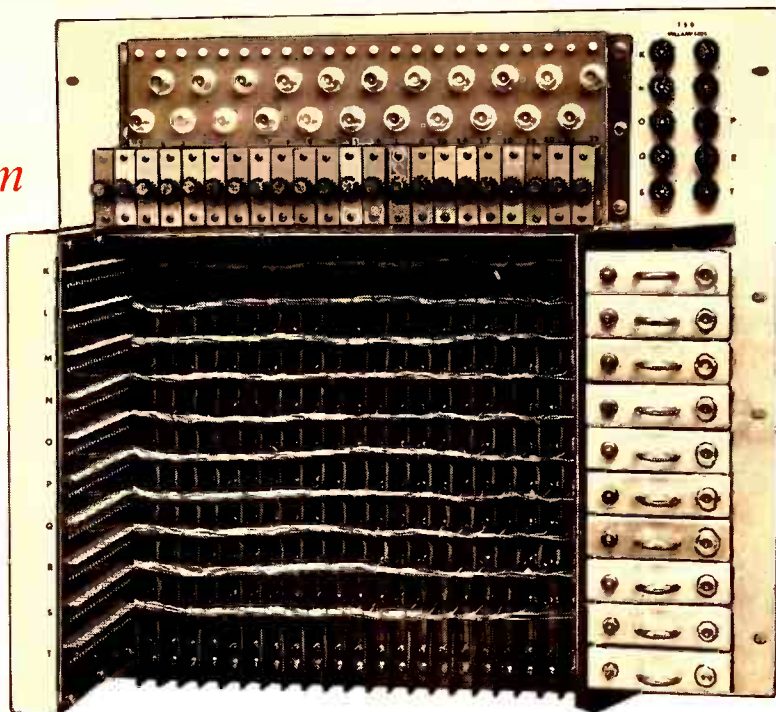

switcher can be assembled to house any number of inputs or outputs. Each input line is a printed circuit. All amplifiers and power supplies are completely solid state. A single standard type transistor is used throughout the circuitry.

All components are readily accessible and operate well within their rating. Custom switchers handle double re-entry switching as well as composite or noncomposite switching.

We can custom make your switcher. The new reed-type relays which we use are metal contacts operating in a glass sealed atmosphere. Control of these relays is accomplished by an external push-button and tally light console. Telephone companies and space programs have proven that this type of relay is the only reliable method of switching video.

Yes sir, we can custom make your switcher.



Custom portable switcher designed especially for ABC

We invite your inquiry, write or phone collect, today

INTERNATIONAL NUCLEAR CORPORATION

608 NORRIS AVENUE • NASHVILLE, TENNESSEE • PHONE 254-3366

Circle Item 22 on Tech Data Card



BOYNTON HAS IT!



THE NEW SYNCRON AU-7a CONDENSER MICROPHONE

FOR PREMIUM SOUND PICKUP
AT A FRACTION OF USUAL COST!

At last! An American made quality condenser microphone in a self-contained 9 3/4" unit that is reshaping the recording industry.

Now . . . P. A. engineers, broadcasters, studios and audiophiles can utilize the full potentials of "condenser" sound without the bulk and expense of conventional condenser mikes.

Connect the cable and it's ready to go. Over 2500 hours transistor battery life with low cost mercury cells.

Frequency range: ± 3 db 40-20,000. Directional characteristics: cardioid, with front to back ratio of better than 20 db.

Output level: -50 db. Distortion: less than 0.5%. Rugged diaphragm provides broad, smooth frequency response with total absence of annoying peaks. Maximum sensitivity, outstanding clarity of sound. **PRICE \$169.50**

ONLY SYNCRON MAKES IT. ONLY BOYNTON SELLS IT.



BOYNTON STUDIO

DEPT.
BE10

295 Main St., Tuckahoe, N.Y. 10707 Tel. (914) SP 9-5278

SOLE DISTRIBUTOR FOR

SYNCRON AU-7a CONDENSER MICROPHONE

Dealerships available

Circle Item 23 on Tech Data Card

pulled and placed at another terminal—good electrical contact is always assured by the terminal design. These terminal boards have already saved much installation time and will make future modifications much easier.

Video Equipment

Video-equipment racks separate the video-control room from the space containing the film chains and tape units. In the video-control console, the special-effects equipment and picture monitors are of solid-state design. The microwave-control unit, vertical-interval switching units, video patch panel, pulse-distribution amplifiers, and the camera control units are in the rack bay behind the video-control console.

Both the pulse-distribution amplifiers and the camera-control unit were built by staff personnel. Pulse-distribution amplifier plug-in boards are similar in construction to the boards used in the audio control unit; the video units have 4 inputs and 16 outputs. Rack mounted beside the pulse-distribution amplifiers are their two power supplies.

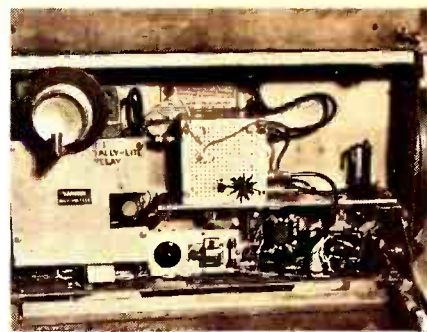


Fig. 4. Solid-state camera preamp was built to replace original tube unit.

one in use, the other a spare. A toggle switch on the panel is used for switchover if the unit in use should fail.

The camera-control units also use plug-in boards built by station personnel; a processor board, a shader board, and a pulse-amplifier board are used. Power-supply units are mounted on the main chassis.


Other solid-state additions are the camera preamplifiers (Fig. 4). These three-transistor units replace the original six-tube preamplifiers. Again, these boards were built by the staff, and construction is similar to that of the boards used in the audio-control console and pulse-distribution units. Here, however, cable connectors are used instead of plug-in connectors. Major advantage of the solid-state preamplifier is reduced maintenance; also, the reduction in heat lowers the failure rate of other camera components.

Conclusion

WISH-TV is an example of a station which is expanding its studio, engineering, management, and public-relations facilities to meet the trends in modern communications. Improved studio lighting techniques are one facet of these trends; increased reliance on solid-state equipment—even if it must be built by station personnel—is another.

Our sincere thanks go to Ray Reisinger, William Gruenert, Chief Engineer C. E. Wallace, Jr., and Hal Szalay of the WISH-TV staff for their help in making this article possible. ▲

SPOTMASTER

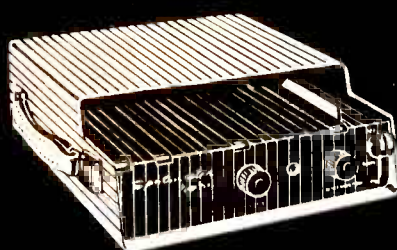

PortaPak I Cartridge Playback Unit

Your time salesmen will wonder how they ever got along without it! Completely self-contained and self-powered, PortaPak I offers wide-range response, low distortion, plays all sized cartridges anywhere and anytime. It's solid state for rugged dependability and low battery drain, and recharges overnight from standard 115v ac line. Packaged in handsome stainless steel with a hinged lid for easy maintenance, PortaPak I weighs just 11 1/2 lbs. Vinyl carrying case optional.

Write or wire for full information.

Spotmaster
BROADCAST ELECTRONICS, INC.


8800 Brookville Road
Silver Spring, Maryland

Circle Item 24 on Tech Data Card

you lost your turn by missing our ad in the September issue. Go back and look at page 26 for NEW REMOTE CONTROL from BIONIC INSTRUMENTS, INC.

Circle Item 25 on Tech Data Card

BROADCAST ENGINEERING

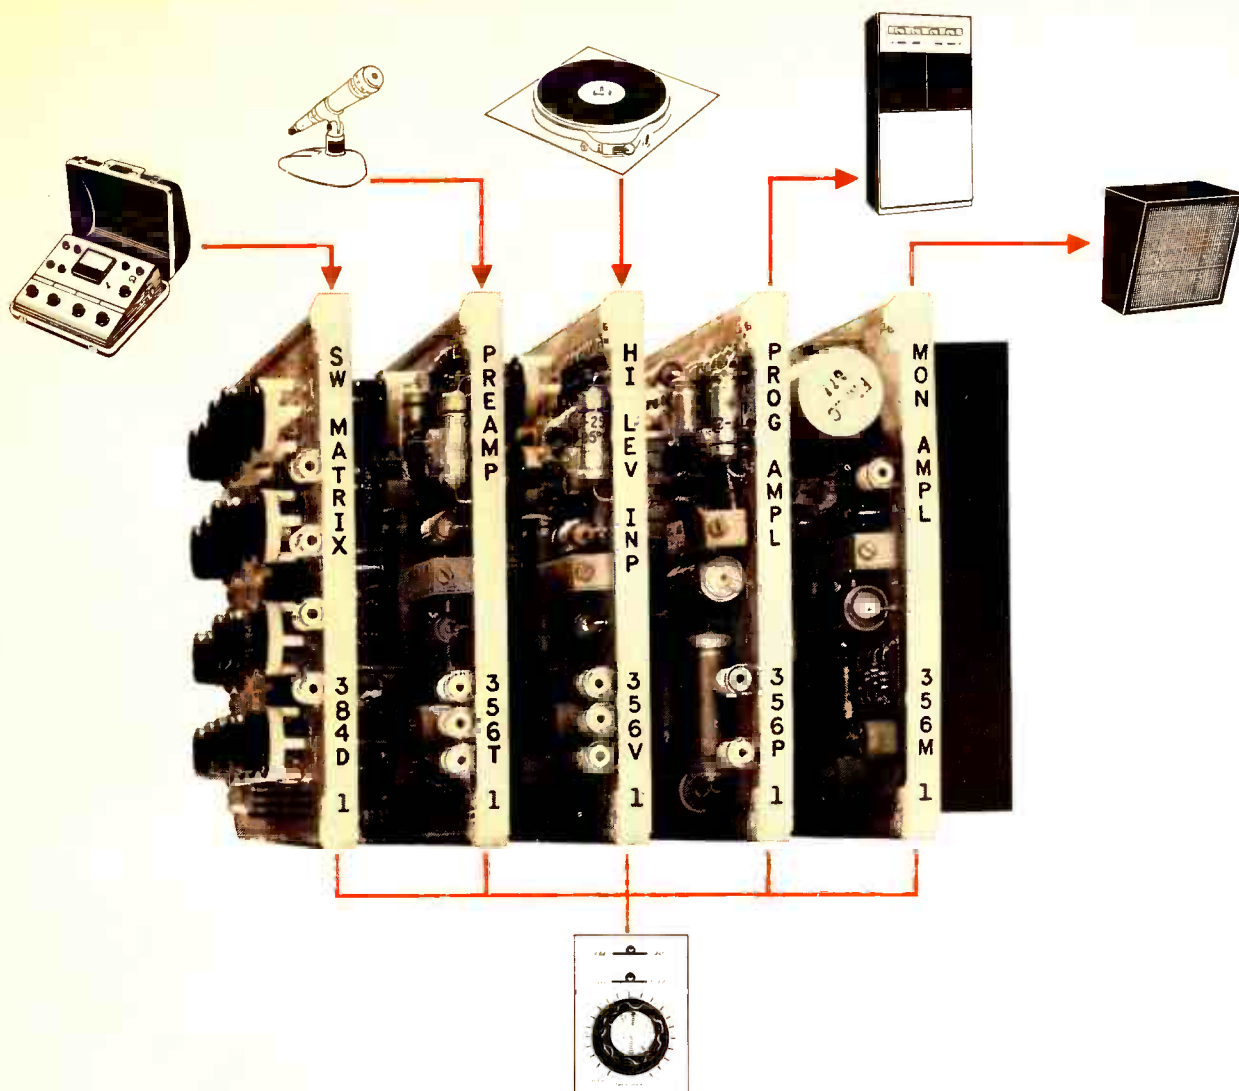

Actual size of card $6\frac{3}{8}'' \times 4\frac{1}{2}''$

Now, Collins photoconductive controls can be custom designed for your studio !

Eliminate pops, clicks and hums by replacing mechanical contacts with Collins' new photoconductive modules.

Arrange cards (solid state modules with integral switching) in any configuration you want.

Concentrate all your sensitive wiring within card cage, away from all interference.

Remote your amplifiers with a simple 4-volt, dc wire (instead of shielded cable).

Eliminate your biggest maintenance problem: worn or dirty mechanical contacts. With photoconductive cells

instead of relays and switches, you won't have a mechanical contact in your program circuits.

Simplify troubleshooting. Replace attenuator, input switches, and amplifier output switches with one quick shuffle of cards.

For the finest audio available, let Collins' specialists custom design your studio. Contact your Collins Sales Representative, or send a block diagram of your requirements to Collins Radio Company, Broadcast Communication Division, Dallas, Texas 75207.



COMMUNICATION / COMPUTATION / CONTROL • COLLINS RADIO COMPANY / WORLD HEADQUARTERS / DALLAS, TEXAS

Circle Item 26 on Tech Data Card

SEPARATE FM PROGRAMMING

?


Specify SCULLY'S AUTOMATION TWINS . . .

whether you're buying a pre-packaged automation system or designing one to fit your special requirements.

- Solid state, with enviable record of reliability
- Heavy duty, professional quality
- Ideal for long periods of unattended operation
- Minimum maintenance assured
- 14" reel size



Model 280 (sp/14)
14" TAPE RECORDER

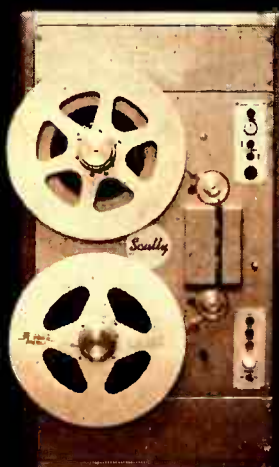

Model 270
14" TAPE PLAYER

The perfect solid state instrument for automation . . . background music . . . all long play requirements. Crafted in the traditional Scully manner for truly professional performance.

The extra-heavy duty transistorized unit designed for broadcasters . . . setting new endurance and performing records. Custom-engineered to Scully's exacting standards for long, trouble-free life, professional operation.

LEADING BROADCASTERS SPECIFY SCULLY:

WNEW	KGBS	WMC	WICC	CJAD
WNCN	KPOL	WKRC	WELI	VOICE OF
WMAL	WMIL	WBNS	KFBK	AMERICA
WIP	WDSU	KDKA	KMV	And over
KLAC	WSB	KGBS	CHUM	100 more!

SCULLY RECORDING INSTRUMENTS CORPORATION

480 BUNNELL STREET, BRIDGEPORT, CONN. 06607, TEL. (203) 335-5146
Makers of the renowned SCULLY LATHE, since 1919 symbol of precision in the audio field

Scully

Emergency Broadcast

(Continued from page 17)

station with a letter which gives blanket permission to all EBS stations to rebroadcast FM defense network programs carried on the particular station. Only two copies of this need be filed with the FCC in Washington.

Auxiliary facilities can also be used as local communication links, intercity links, or even state communications networks. Such facilities as remote-broadcast pickup transmitters, private microwaves, and STL's are used in this manner. They must be approved for use in the system, and when so approved each receives an NDEA for this operation.

All NDEA's are in effect, unless cancelled, as long as the current station license is valid. When the major station license is renewed, the NDEA must be renewed at the same time. This holds for each NDEA held by the licensee, whether for the main station, remote pickup, or microwave. If one fails to renew his NDEA, his facility will be dropped from the system. Only stations holding a valid NDEA may operate during an emergency action period.

On the Local Scene

In each area, stations holding NDEA's are required to form an LIAC. This is made up of representatives of the EBS stations, Civil Defense, and local government. It is the responsibility of the local people to develop plans for the defense and safety of the public in their designated area. It is the obligation of the EBS station to provide the means of communication between these officials and the public. Most if not all local CD directors have worked out plans for evacuation of the population, designated fallout shelters, etc. The EBS station can assist in the education of the public concerning such parts of these plans as are desired by the local officials.

Whenever the network goes into an Emergency Action Condition, no

SPENCER-KENNEDY LABORATORIES, INC.

Complete CATV Service
EQUIPMENT . . . ENGINEERING . . . FINANCING
1320 Soldiers Field Road
Boston, Mass. 02135 Tel. 617/254-5400

Circle Item 27 on Tech Data Card

Circle Item 28 on Tech Data Card

BROADCAST ENGINEERING

FOR *EASIER, FASTER* INSTALLATION

SUPERIOR COAXIAL TRUNK CABLE

SEQUENTIALLY FOOT-MARKED

Guaranteed accurate to the
critical tolerance of $\pm 1\%$

- **SUPERIOR CELL-O-AIR®** for AERIAL USE
- **SUPERIOR "SOLID-D"** for DIRECT BURIAL

Know the lengths of cable between amplifiers... *to the foot*... and assure positive checks of cable attenuation measurements and amplifier performance.

Know the *exact cable footage* installed... without time-consuming physical measurement.

Know the cable footage received... and easily verify the footage in stock.

The numerical markings are per-

manently printed in white at two-foot intervals on the cable jacket... and one-foot increments are designated by a white horizontal line midway between each numerical marking.

To simplify installation, handling and inventory procedures, order SUPERIOR Sequentially Foot-Marked Coaxial Trunk Cable... at no extra cost! Every reel is 100% sweep-tested.

For detailed information and prices, write

SUPERIOR CABLE


SUPERIOR CABLE CORPORATION • HICKORY, NORTH CAROLINA
Circle Item 29 on Tech Data Card



9665

NEW McCURDY SS4400 AUDIO CONSOLE

Offers superior performance with
modern styling and customized design

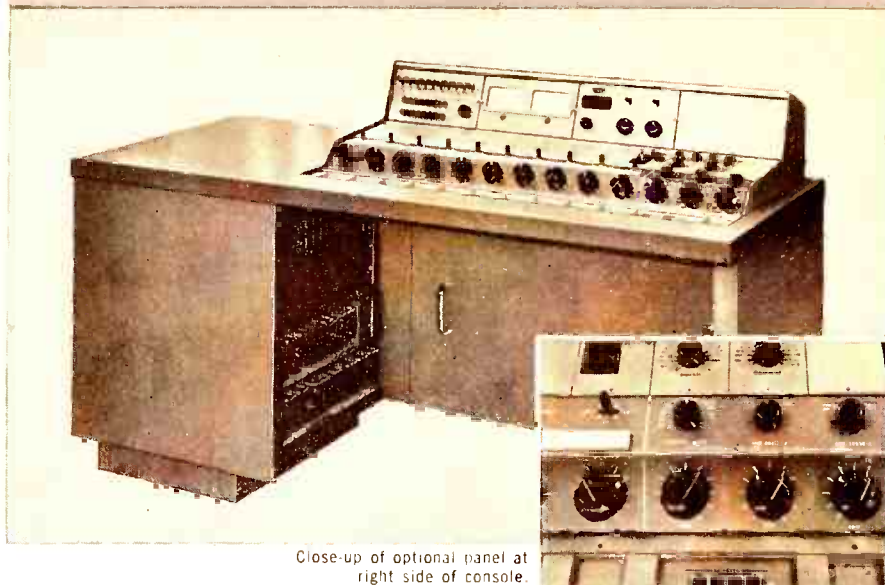

Close-up of optional panel at
right side of console.



SOLID-STATE DUAL CHANNEL CONSOLE

The new McCurdy SS4400 is assembled to your requirements and delivered to you pre-tested and ready for use with minimum installation.

FEATURES include: ■ Thirty inputs selectable to ten mixer channels; two sets of seven input line selectors; announce and auxiliary inputs ■ Two program channels, each providing fixed and switchable outputs ■ Complete cue and monitoring facilities; interlocked talkback. **OPTIONS:** ■ High or low level inputs on any channel ■ Up to four monitor amplifiers ■ Equalizer for each channel or one switchable equalizer ■ Reverberation insertion module ■ Auxiliary module — Basic console is prewired for all options. **RESPONSE:** within 1 db 20 - 20,000 cps. **DISTORTION:** less than 0.5% at max. levels. **INPUT NOISE:** — 124 dbm unweighted. (Write for detailed Specifications). Available soon: SS4450 stereo version.

If quality is your aim, can you afford less?

McCurdy supplies a complete line of audio broadcast equipment — Turntables, Amplifiers, Power Supplies, Accessories, Consoles, etc. — Contact Visual for full information.



Sold Nationally by:

VISUAL ELECTRONICS CORPORATION

356 west 40th street • new york, n. y. 10018 • (212) 736-5840

LOOK TO VISUAL FOR NEW CONCEPTS IN BROADCAST EQUIPMENT

Circle Item 30 on Tech Data Card

EBS station is permitted to identify itself by call letters; it must use only the designation of the area to which it is providing service. This requirement is not a security measure. It was established so that an EBS station operating during an alert will not gain any competitive advantage over the non-EBS stations in the area.

Most stations require periodic maintenance during the test period after midnight. The engineer should first check the EBS monitor to make certain that an Emergency Action Condition does not exist before putting the carrier on the air.

Stations will regularly receive updated instructions, materials, and information on the workings and plan of EBS. To avoid confusion, the old material that is replaced by the new should be discarded and the files kept up to date.

To insure that the operator on duty at a station knows what to do during an alert, a simple set of operating procedures should be available near the operating position. This should tell the operator what to do and when, what staff members to call, and similar **simple** information. Remember—if an enemy attack is launched, it will reach us within a matter of minutes, and speed in preparing to meet the attack is vital. Because of this urgency, the instructions should be very, very simple. Practice will help, but even so, the operator may panic and become confused. If he must search through the whole EBS file to find out what to do, the system will fail at that station when it is needed most!

We all hope that an attack will never come, but we must be on the alert and prepared. Our present EBS system is a good mass-communications medium. Even so, by constant effort of those now in the system and the ever-increasing number of those participating, the system can become even more efficient and effective. ▲




you lost your turn by missing our ad in the September issue. Go back and look at page 26 for **NEW REMOTE CONTROL** from **BIONIC INSTRUMENTS, INC.**

Circle Item 31 on Tech Data Card

BROADCAST ENGINEERING

JOIN THE CLUB

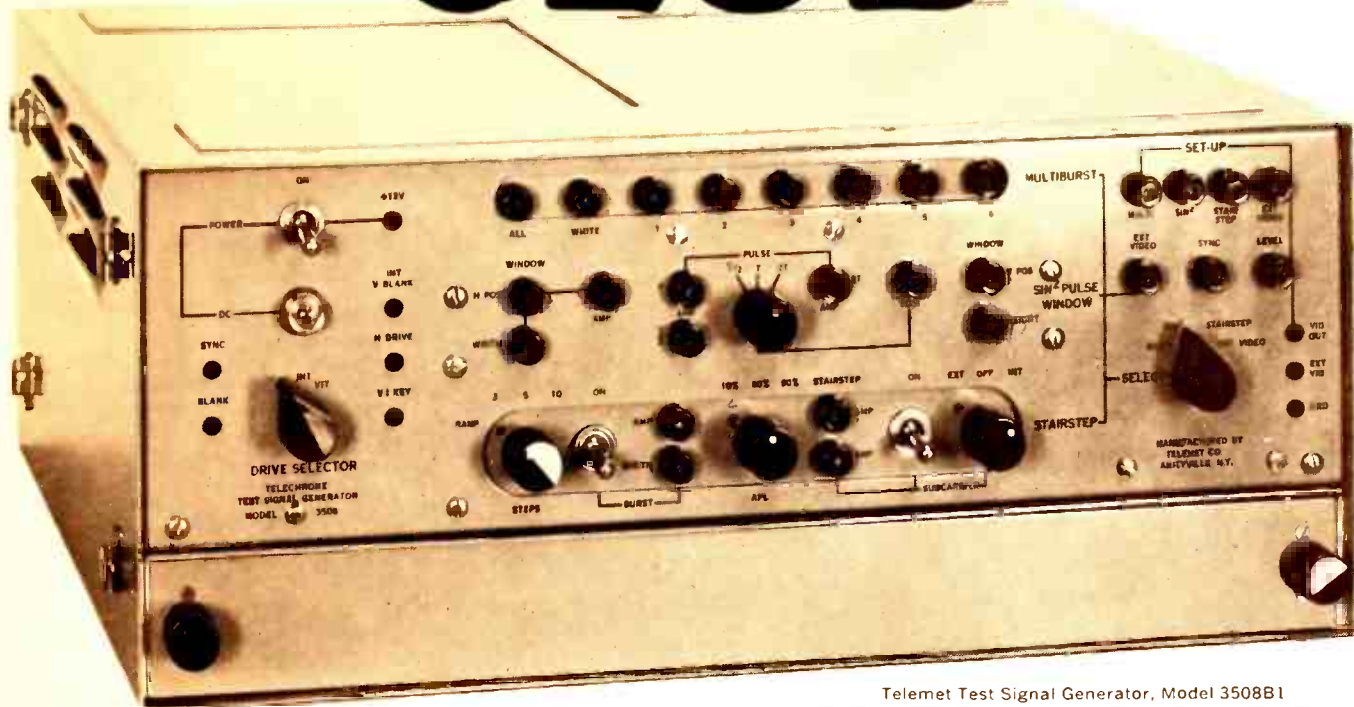

Telemet Test Signal Generator, Model 3508B1
Multiburst/Stairstep/Ramp/Sine Sq. Pulse/Sine Sq. Window

OVER 300 of these units are in daily use throughout the television industry — and this doesn't include the individual test signal generator modules (3501, 3502, 3503, etc.), of which hundreds have been sold.

This kind of popularity doesn't just happen... it's the combined result of awareness of customer requirements, capable engineering, quality production and continuing service.

If you're not already a member of the Model 3508 club, why not join now? It costs no more to go first class.



TELEMET COMPANY

185 DIXON AVENUE, AMITYVILLE, N.Y. • PHONE (516) 541-3600

Circle Item 32 on Tech Data Card



SOUNDS THAT SELL START WITH...

The New Fairchild F-22 Condenser Microphone

By breaking away from traditional condenser microphone design and using the latest in solid state field effect transistor technology and micro-circuitry, FAIRCHILD is able to produce this quality condenser microphone at an astonishingly low and sensible price, thereby putting the ultimate microphone quality within the reach of every sound engineer. price **\$160**



THE FAIRCHILD REVERBERTRON

Used by major studios throughout the world for its natural reverberation effects, the FAIRCHILD REVERBERTRON'S reasonable price now makes it possible for every studio to have the production plus of controlled, flexible and natural sounding reverberation.

Unique Features:

Variable reverb • Electronic time control • Solid state components • Rack mountable • Portable • Three time periods instantly and noiselessly selectable • Remote control without expensive servo mechanisms • Mixing network provided.

Priced at only \$985

Write to FAIRCHILD — the pacemaker in professional audio products — for complete details.

FAIRCHILD
RECORDING EQUIPMENT CORPORATION
10-40 45th Ave., Long Island City 1, N.Y.

Circle Item 33 on Tech Data Card

Field-Intensity

(Continued from page 25)

be logged in the same unit of measure—millivolts per meter. Never convert to microvolts or volts—it's too confusing.

While it's possible to get a reasonable amount of work done alone, there are delays if you must drive, read maps, choose and plot points, take readings, and make entries yourself. It's much more convenient to have a driver. If he isn't an engineer, then you must navigate, make entries, and take readings. The untrained driver must be taught to do exactly as told, to drive safely but not waste time, to be observant, and not talk too much. He must be able to read the odometer with one eye while watching the road with the other.

The best way to break in a field man is to teach him how to manipulate the FIM, then send him out as driver/engineer, accompanied by an experienced field man as passenger/navigator/recorder. The navigator is in charge, ordering the driver to the proper points. When they arrive, the driver hops out and takes the reading, which the navi-

gator then records in the log. This is the most efficient system, for it divides work fairly evenly. Also, the men can switch duties to avoid monotony, although it's best not to switch more than once per day. Under such conditions, the navigator can plot graph points as he goes along, to make sure there are no holes in the curve.

One more point should be kept in mind. The field-intensity meter costs a cool thousand dollars, and you should treat it like a newborn baby—gently. **Never** get it wet; if you must take a fast point in a light drizzle, dry it off when you get back in the car. **Never** drop it, for then it must be sent back to the factory for recalibration. **Never** carry it on the seat of a car, where a sudden stop could cause it to fall off; always put it on the floor, usually between your legs and the seat. And when you stop for a meal or stay at a motel and leave the car, put the meter in the trunk or take it with you. If you have to take the meter with you on an airline flight, **don't** check it at the baggage counter. Put it on the floor between your feet. Finally, before you start out on a field trip, get a full set of spare batteries, a spare 1R5, and a spare 1T4.

Conclusion

In the two parts of this series, we have described the standard-broadcast-band field-intensity meter and how it is used. Additional information of the use of this instrument can be obtained from the sources listed below. ▲

BIBLIOGRAPHY

BROADCAST ENGINEERING Articles

- "Checking the Pattern," Elton B. Chick, July 1965
- "Running the Radial," Elton B. Chick, June 1965
- "Aeronautical Field-Intensity Measurements," Robert A. Jones, March 1965
- "Winter-to-Summer Conductivity Effects," Robert A. Jones, June 1964
- "Accurate Intensity Measurements in Ambient Fields," Robert A. Jones, February 1963
- "More Notes on Field Measurements," Elton B. Chick, August 1961
- "Notes on Standard-Broadcast Field-Intensity Measurements," Elton B. Chick, January 1961

Other Sources

- NAB Engineering Handbook, Part 9, "Field Strength Measurements (540-1600 kc)," McGraw-Hill, 1960
- FCC Rules and Regulations, Volume III, Sections 73.183 through 73.186.

SPOTMASTER

RS-25



Tape Cartridge Racks

RM-100



... from industry's most comprehensive line of cartridge tape equipment.

Enjoy finger-tip convenience with RM-100 wall-mount wood racks. Store 100 cartridges in minimum space (modular construction permits table-top mounting as well); \$40.00 per rack. SPOTMASTER Lazy Susan revolving cartridge wire rack holds 200 cartridges. Price \$145.50. Extra rack sections available at \$12.90.

Write or wire for complete details.


Spotmaster

BROADCAST ELECTRONICS, INC.

8800 Brookville Road
Silver Spring, Maryland

Circle Item 34 on Tech Data Card

They don't make a smaller 30-KW VHF-TV transmitter

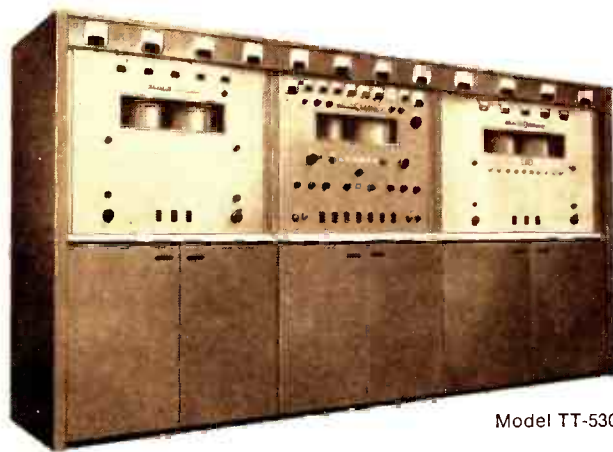

Model TT-530

They don't even make it this small...or as economical.

Only General Electric does...in three, accessible, self-contained modular cubicles...air-cooled. 5 KW more with less over-all floor space than competitive transmitters. Easy to install, more economical to operate and maintain. Designed to FCC and EIA specifications for color and monochrome operation...with remote control capability via external landline and/or microwave terminal equipment. The uncompromising quality of the Model TT-530 VHF transmitter assures optimum performance and makes it possible to attain maximum E.R.P. at 5 to 1 power ratio. General Electric also has VHF transmitter cubicle combinations for 1, 5, 10 and 60-KW with visual to aural power ratios from 5 to 1 to 10 to 1. For further information, contact your G-E Broadcast Equipment Representative or: General Electric Company, Visual Communications Products, #7-315, Electronics Park, Syracuse, N.Y. 13201.

GE-25

Visual Communications Products

GENERAL  ELECTRIC

Electronics Park, Syracuse, N.Y.

Circle Item 36 on Tech Data Card

The Commentator:

"I needed a headset that eliminates noise, provides a noise-canceling broadcast quality microphone, leaves both hands free, is comfortable over long stretches, and really takes punishment. My Roanwell does the whole job! Do you read me, Cameraman?"



11 Roanwell TV Specials to choose from — a model for every studio/field use. Users include ABC, CBS, NBC (all nationwide). Write for free brochure.

ROANWELL CORPORATION Roanwell Building
180 Vorick Street, New York, N. Y. 10014 (212) YUkon 9-1090 • TWX: (212) 640-4791
Circle Item 37 on Tech Data Card

NEWS OF THE INDUSTRY

INTERNATIONAL

New TV Stations in Portugal

Two new television stations are to be opened at Muro in the north and Mendro in the south of Portugal by **Radio Televisao Portuguesa**. The Mendro station will broadcast in Band III and will use a 5-kw visual transmitter and a 1-kw aural transmitter. The station at Muro will broadcast in Band I with a 10-kw visual transmitter and a 2-kw aural transmitter. **Marconi** transmitters are being installed at both stations; this is believed to be the first time that British television transmitters have ever been sold in Portugal.

Radio Televisao Portuguesa (RTP) is now in its eighth year of broadcasting and already reaches 160,000 receivers. The opening of these two stations will bring RTP to over 95% of the area and 97% of the population of Portugal.

Two-Way Intercontinental Television Program

The first two-way commercial televi-

sion program using the Early Bird satellite was transmitted October 26 by **RCA Communications, Inc.** for the **Columbia Broadcasting System's** "Town Meeting of the World." The two-way arrangement permitted students in Belgrade, London, Paris, and Mexico City to direct questions on world affairs to a panel in the Washington, D. C. studios of CBS. The program also marked the first time that multiple points on both sides of the Atlantic were linked via satellite. The program was transmitted live between 4:30 and 5:45 PM (EDT) and taped for re-broadcast over the network from 10 to 11 PM (EDT).

Panel members included Gen. Dwight D. Eisenhower, former President of the United States; Arthur J. Goldberg, U. S. Ambassador to the United Nations, and Thurgood Marshall, Solicitor General of the United States. They answered questions posed by students attending the London School of Economics, Belgrade University, University of Paris, and the University of Mexico City.

NATIONAL

RF TV Channel Superimposed on Millimeter-Wave Signal

The entire radio-frequency channel of a television station has been superimposed on a millimeter-wave signal by means of a semiconductor device called an injection modulator. The experiment was conducted by **General Telephone & Electronics Laboratories, Inc.** Development of the new semiconductor device was carried out by GT&E Laboratories under a series of contracts from the U. S. Army Electronics Command, Fort Monmouth, N. J. The injection-modulator concept originated at Fort Monmouth, and early development work also was carried out there.



In the GT&E demonstration, an 83-mc signal containing video and synchronizing pulses was applied to the device to modulate a 70-gc carrier. The resulting amplitude-modulated millimeter-wavelength signal was transmitted, detected, and displayed on a conventional television receiver (left in photo) used as a monitor. The signal prior to transmission is shown at the right in the photo.

Urges No Stereo for TV

A request for the FCC to drop or defer for an indefinite period its inquiry into the feasibility of adopting standards for stereophonic sound in television broadcasting has been submitted by the **Electronic Industries Association**. The association said there is not enough interest in the industry to warrant a further study of the question at this time. A report by the association's Broadcast Television Systems (BTS) Committee concluded that, based on past experience, a study to develop EIA recommendations would require that an estimated 100 industry engineers spend about 25% of their time on the project over a period of 18 months.

Since the FCC issued its notice of inquiry last November 12, an ad hoc subcommittee of the BTS Committee has

examined these problems: (1) compatibility of sound and picture with the potentialities of TV receivers now in the homes of viewers, (2) stereophonic reception characteristics, and (3) systems considerations. The ad hoc group's study indicated that a project to develop stereophonic sound standards for television would be greater than that assigned to the National Stereophonic Radio Committee, an industry committee established by EIA in 1958 under FCC sanctions to develop stereophonic sound standards for FM broadcasting. The difficulty is greater, the BTS Committee report said, because current television standards do not provide as much freedom in developing a stereophonic signal that is compatible with existing TV receivers for both sound and picture as was the case for FM broadcasting.

Call for Papers

The call has been sent out for technical papers for SWIEEEO, the 18th annual Southwestern IEEE Conference & Show to be held in Dallas April 20, 21, and 22, 1966. Authors of papers who would like to appear before this forum of engineers and technicians have been invited to submit 200-word abstracts to Technical Program Chairman Dr. Robert Carrel. Subjects which may be covered include research, component design, network design, and systems engineering in the fields of power generation, communication, computation, control, and the geosciences. The abstracts must be written exactly as they may appear in the SWIEEEO program, with title, author's company affiliation, city, and state. The 200-word abstract must clearly state the paper's purpose, content, and technical contribution. All abstracts and any additional information from the authors should be addressed as follows:

Dr. Robert Carrel
Collins Radio Company
Dallas, Texas 75207

The technical program, as well as the trade show and exposition, will be held in Dallas Memorial Auditorium. The Baker Hotel will serve as headquarters for the Conference & Show.

NAB Files CATV Comments, Plans and Holds Conferences

The Federal Communications Commission has been urged by the **National Association of Broadcasters** to prohibit Community Antenna Television systems from originating any kind of programming and from extending their signals by artificial means. It said that CATV systems, which charge a fee for their service, should be limited to the reception and retransmission of broadcast signals without any "insertions or deletions" of any kind. Such a policy, it said, would be consistent with CATV claims that the system is merely a "master antenna service" and with NAB's position that CATV systems should be a supplement to and not a substitute for free broadcasting service.

NAB also proposed that CATV's be permitted to retransmit distant signals into areas having three or more stations only if the distant signals were of sufficient strength to meet specified engineering standards.

On the FCC's request for comment on the possible impact of CATV on UHF television stations, NAB said the importation of a number of signals into single- or multiple-station markets will lead inevitably to a fractionalization of audiences. "The net result," it said, "must be a serious, if not fatal, deterrent to the development of independent VHF and UHF stations."

In NAB activity relating to conferences and conventions, the Convention Committee has approved a new format for the 44th annual convention and agreed to incorporate the annual Broadcast Pioneers Banquet into the formal agenda of the convention. The new convention format ends concurrent radio and television sessions on Tuesday and Wednesday mornings. Instead, a radio session will be held Tuesday morning and a television session Wednesday morning. The revision will enable television members on Tuesday morning, and radio members on Wednesday morning, to attend each other's sessions, to visit the exhibits, or to attend to other convention matters.

Registration for the 1966 convention will begin on Saturday, March 26. Exhibits will open at 10 AM Sunday,

March 27, and Sunday afternoon will be devoted to FM radio.

The committee meeting was held at the Conrad Hilton Hotel in Chicago, which will be the site of the convention.

A group of 49 radio and television engineering executives attended the Association's first Engineering-Management Development Seminar held at Purdue University, Lafayette, Ind., from November 29 through December 3. The registrants included broadcasters from 23 states and from one foreign country—Venezuela.

The course was designed "to encourage and aid the individual engineer further to develop and refine his working philosophy of management so the objectives of his organization can be met with greater efficiency and effectiveness."

The instructions were under the overall supervision of Dr. Charles Lawshe, Dean of the College of Technology, and Dr. Gregory Barnes, Professor of Industrial Education. Special research material provided by the broadcasters themselves and specially tailored for the Seminar was also used in the instructions.

PERSONALITIES

Logan Z. (Mike) Edwards has been appointed chief engineer of **KPAT AM-FM**, San Francisco. Mr. Edwards, in the broadcasting field since 1949, has spent

The Cameraman:

"I've got the whole picture. I needed a headset that's just as comfortable and noise-eliminating as yours but also monitors both program and the director. The **Roanwell** I've got has a noise-canceling mike to boot."




11 Roanwell TV Specials to choose from — a model for every studio/field use. Users include ABC, CBS, NBC (all nationwide). Write for free brochure.

ROANWELL CORPORATION Roanwell Building
180 Varick Street, New York, N. Y. 10014 (212) YUkon 9-1090 • TWX: (212) 640-4791

Circle Item 38 on Tech Data Card

Automatic Broadcasting tailormade to your needs through the building block concept from



Send for FREE 35-pg. booklet "Planning for Automated Broadcasting." Or call collect today 309-829-1228.

AUTOMATIC  **TAPE CONTROL**
1107 E. Croxton Ave. Bloomington, Ill.
Circle Item 40 on Tech Data Card

the major portion of his career with various California stations, holding the title of chief engineer since 1954. Most recently, he has been associated with the McLendon Corporation as chief engineer at WYSL, Buffalo, New York, and at KLIF, Dallas, Texas.

Richard F. Yearick and **Duane W. Crist** have been appointed vice-presidents of **Ameco, Inc.**

Mr. Yearick was promoted from sales director of the CATV equipment division. As vice-president in charge of product sales, he will be responsible for the distribution and sale of CATV equipment to existing systems through a network of 6 warehouses and 22 field sales engineers.


Duane Crist joined the company as credit manager and later became assistant treasurer. In his new position, he will be responsible nationally for new community antenna television system sales, and for seven district sales managers and a group of Phoenix based specialists providing engineering services, financing, equipment, turnkey construction, and training of customer personnel.

Albert W. Malang has been appointed manager-broadcast product planning for **General Electric Visual Communications Products**. He will be responsible for establishment of all requirements, specifications, scheduling, and other phases



of new product introductions for G-E television broadcast equipment. Mr. Malang comes to G-E from the Gencom Division of the Whittaker Corp., where he was chief engineer for the past year. Prior to that position, he was associated with the American Broadcasting Company for ten years, serving successively as TV maintenance engineer, video facilities engineer, and, from 1960 to 1964, as chief video facilities engineer.


Also at G-E, a newly created position of district sales representative for the greater New York metropolitan area has been filled by **Vincent P. Marlin**. He will work with Lewis F. Page, district

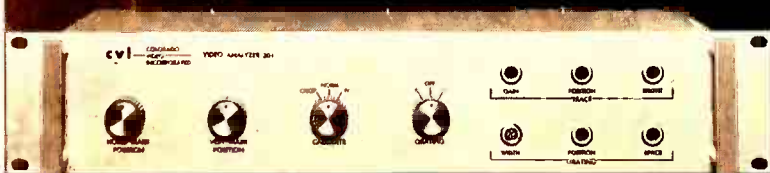

1. "LINE SELECTION" AT TV FIELD RATES
2. OSCILLOSCOPE TRACES DIRECTLY ON THE SCREEN OF NORMAL TV PICTURE MONITORS

The CVI model 301 Video Analyser uses modern digital television techniques to generate a clear, single trace, easy-to-interpret, video waveform which for the first time allows vertical analysis of TV image. No sync problems or faint traces due to low duty cycles either.

2 breakthroughs in video waveform display

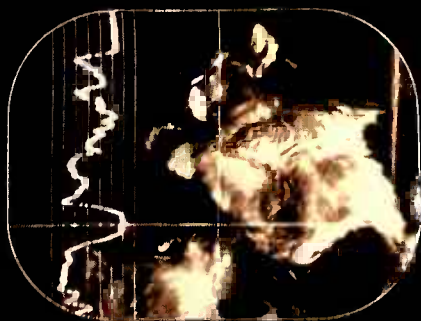

Tired of squinting at the "grass" on tiny 'scope screens? Lean back and enjoy a bright, easy-to-look-at, waveform super-imposed on the picture of your favorite 14 to 27 inch monitor. Direct correlation between picture and trace, too, plus remote control of the "line selector" positioning and a second marker providing "cross-hair" identification of picture elements.

Clamped waveform, internal calibration, a reference grating generator, and silicon design are among the other features. Rack space only 3½ inches. Write or call for full information.

CVI MODEL 301 VIDEO ANALYSER . . . \$875

cv**i**

COLORADO VIDEO, INCORPORATED • 2991 PEAK AVENUE • BOULDER, COLORADO • PHONE (303) 444-3972

Circle Item 39 on Tech Data Card

sales manager, to increase customer contacts and market penetration for General Electric Visual Communications Products television and radio broadcast equipment and closed-circuit TV equipment. Mr. Marlin joined the company in early 1964, serving as a headquarters sales engineer for broadcast products. For the previous six years he was chief engineer at WFBL (radio), Syracuse.

PROPERTY TRANSACTIONS

Metromedia, Inc. has sold its Decatur, Ill. TV outlet, **WTVP**, to **LIN Broadcasting Corp.** subject to FCC approval. The sale price was \$2 million.

The sale was made so that Metromedia could negotiate an option to purchase **KSAN-TV**, a San Francisco UHF station, and associated assets from S. H. Patterson. Total consideration involved in the KSAN-TV purchase was reported to be \$1,000,000. Upon exercise of the option, the transaction will be subject to the approval of the FCC. Metromedia intends to exercise its option following resolution of the controversy that has existed in the past several years over the location of a joint-use tall television tower to serve all of the San Francisco television stations. During the interim, Metromedia's facilities and program planning will go forward.

The sale of Radio Station **KJAY**, Sacramento, California, by **Bobelrick, Inc.** to **Jack L. Powell** has been negotiated for \$157,500. Bobelrick, Inc. is owned by Robert W. Dumm and his son, Rick Dumm. Robert W. Dumm formerly owned **KROY**, Sacramento. Mr. Powell formerly owned and operated **KMSL**, Ukiah, and **KVON**, Napa, both California. **KJAY** operates with 500 watts, daytime only, on 1430 kc.

Panax Corp., John P. McGoff, president, has sold three Michigan FM stations. **WABX-FM**, Detroit, was purchased for \$100,000 by **Century Broadcasting Corp.**, Howard Grafman, president. Century owns Radio Stations **KSHE-FM**, St. Louis, Missouri and **KMAP-FM**, Dallas, Texas. **WGMZ-FM**, Flint, was purchased for \$60,000 by Philip Munson, a vice-president of Panax Corporation. Mr. Munson will remain with Panax. **WQDC-FM**, Midland, was sold to **Habco, Inc.**, Ned S. Arbury, president. The total consideration for **WQDC** was \$55,000.

Wheeling, West Virginia radio station **WHLL** has been sold, subject to FCC approval, by **Wheeling Broadcasting Company**, owned by Glenn A. and Kenneth H. Forney, who established the station in 1949. The purchaser is **Wheeling Radio, Inc.**, owned by William A. Kendrick, a Clarion, Pennsylvania merchant, and Walter G. Broadhurst, former manager of **WWCH** in Clarion. Sale price was \$195,000. **WHLL** is a 5-kilowatt daytimer on 1600 kilocycles. ▲

IMMEDIATE OPENING FOR TECHNICAL WRITER-EDITOR

This position requires technical broadcast experience, first-class radiotelephone operator's license, and a good knowledge of English grammar. If you qualify and are interested, send your resume including salary requirements to:

Box 138

BROADCAST ENGINEERING
4300 West 62nd Street
Indianapolis, Indiana 46206



317C 50 kw AM NEW EFFICIENCY

- Lower operating costs
- All RF stages class "C"
- All power supplies solid state
- Power input:

82 kw	0 modulation
92 kw	av. modulation
120 kw	100% modulation

write for brochure


Continental
Electronics
SUBSIDIARY OF LTV ELECTROSYSTEMS, INC.
BOX 17040 / DALLAS, TEXAS 75217

Circle Item 43 on Tech Data Card

PROGRAM DIRECTORS
CHIEF ENGINEERS
EXECUTIVES

SAVE TIME

Identifying, Evaluating, Cataloging,
Inspecting 16mm Motion Picture Film
on the

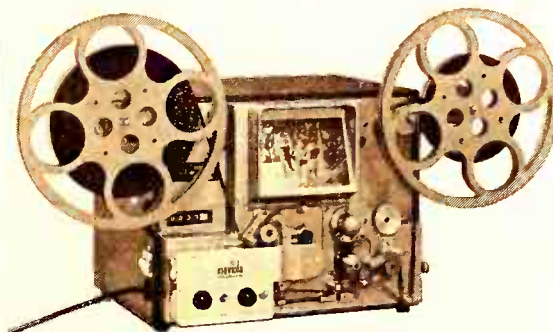

moviola LIBRARY READER

- View at up to five times sound speed.
- View at governed sound speed.
- Twelve sided prism, high quality, projection system.
- Rapid rewind without switching reels.
- Performs all functions forward and reverse.
- Available with or without sound.

moviola
manufacturing co.
motion picture / tv equipment

5539 Riverton Ave., North Hollywood, Calif.
Telephone: 877-2173
Cable Address: **Moviola**, North Hollywood, Calif.

Circle Item 42 on Tech Data Card


RUSSCO BROADCAST Turntables



\$169.50

Separate Tone Arm mounting plate for easy installation

- Single lever controls 33, 45, 78 speeds
- Plays 45 RPM's without adapter
- Illuminated speed indicators
- Sold with or without arm (GREY or REK-O-KUT)
- Instant acceleration
- Heavy duty — professional quality
- Competitive low price
- Call or write for folder



Unconditionally Guaranteed

— against defects in material or workmanship when given normal maintenance

**SOLD DIRECT
— OR TO
DEALERS**

RUSSCO Electronics Mfg.
6879 N. SUNNYSIDE, CLOVIS, CALIF.
PH. 299-4692

Circle Item 44 on Tech Data Card

NOW...THE IDEAL COAXIAL PATCH FIELD for TV STATIONS consists of:

COTERM



- Normal thru coaxial circuits without use of patchcords.
- Source automatically terminated in proper impedance when load side is patched.
- Permits testing of active circuit without interruption of signal.
- Extremely high density (22 jacks on 19" x 13 1/4" panel).
- COJAX has all features of COTERM except self-termination of source when load side is patched. Accepts same patchcord as COTERM.

QUICK DISCONNECT CONNECTOR



- Unique snap locking feature permits easy insertion and removal even in extremely high density patch fields.
- Easy to install using standard tools and available for wide range of coaxial cables.

We stock a complete line of panels and related accessories.

COOKE Engineering Company

735 N. Saint Asaph Street, Alexandria, Va.
TWX 703-931-4200 Telephone: 703-548-3889

Circle Item 45 on Tech Data Card

NEW PRODUCTS




Tape Duplicator

The 235 tape duplicator is available as a basic system of one master and one slave, and can be expanded to a total of ten slaves without additional electronics. The system is intended for use by schools, studios producing broadcasting jingles, producers of cartridge tapes for automotive tape players, and others who need to duplicate audio tapes. The units are of solid-state, modular plug-in construction.

Viking of Minneapolis prices the basic 235 tape-duplicating system at \$1850 for full-track; \$1800 for half-track, one-channel; \$1995 for half-track, two-channel; \$1995 for quarter-track, two-channel; and \$2600 for quarter-track, four-channel. The complete ten-slave system in half-track, two-channel is \$5600, and in quarter-track, four-channel the price is \$6730.

Circle Item 59 on Tech Data Card

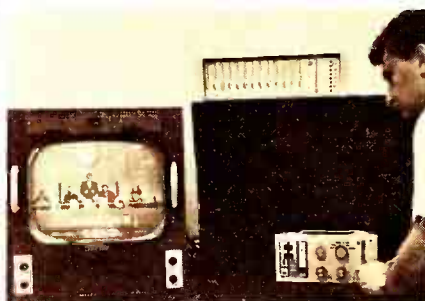

Color Special Effects

Special effects for stations broadcasting color are produced by the Mark VII color special effects generator manu-

factured by Ball Brothers Research Corp. This transistorized video system creates: artificially colored keyed inserts (any color in the range of the NTSC spectrum can be obtained by variations in the selection of control settings at the remote control panel, using a monochrome camera and the normal white-on-black background visuals); nonadditive lap dissolves (combinations are not dependent on video brightness information. Combining two video signals with color information on a variable time-sharing basis provides pattern effects when dissolving between video scenes); split-screen transition (as few as three or as many as fourteen wipe patterns may be obtained).

The system provides basic video switching circuitry to produce both internal and external keying effects with sync addition to one or two video output signals. The basic unit can handle a variety of monochrome or color signals of either composite or noncomposite format at the inputs.

The Mark VII consists entirely of plug-in modules (12 in all) which mount in a standard 5 1/4" x 19" relay-rack card housing. The remote-control unit dimensions are 5 1/4" x 11 1/8" x 3". Systems are expandable on a building-block concept; prices start at \$1810.

Circle Item 60 on Tech Data Card



All-Band CATV Amplifier

The Model B-2 solid-state amplifier is directly powered and covers channels 2 through 13 and the entire FM band.

Scala Precision Antennas

- ★ OFF-THE-AIR PICKUP — FM or TV
- ★ LOW POWER UHF, VHF TV TRANSMITTING
- ★ STL AND TELEMETERING ANTENNAS

Engineered to meet rigid FM and TV station specifications, and to endure the tests of weather and time.

Built to your specifications by

SCALA RADIO CORP.

1970 Republic Ave.
San Leandro 1, Calif.
94577
Area 415-351-3792

Circle Item 46 on Tech Data Card

BROADCAST ENGINEERING

It features 30-db gain and has four fused distribution-line outputs. Insertion or omission of one of these fuses determines whether or not power is fed down a particular distribution line. The **Entron, Inc.** amplifier is designed for mounting in a pole equipment housing adjacent to a trunk-line amplifier; the amplifier section may be removed without disturbing the trunk-line signals. The Model B-2 includes seven transistors and a built-in 28-volt or 60-volt transformer for feeding power down the distribution cables. Circuitry also includes changeable pads and manual gain and tilt controls.

Circle Item 61 on Tech Data Card




Video Distribution Amplifiers

The Model 4454 video distribution amplifier features high output capability and total harmonic distortion less than 2%. The basic module has a self-con-

tained power supply and is usable as an individual amplifier. In addition, up to four of the modules can be rack mounted in the **C-COR Electronics** Model VDR-1 rack adapter. Covering the frequency band of 5 cps to 3 mc, the Model 4454 has a single input and four isolated outputs, each capable of delivering 10 volts peak-to-peak into 75 ohms. Each channel has gain adjustable from 0 to 6 db. The basic module is priced at \$450; the VDR-1 rack adapter is \$150.

Circle Item 62 on Tech Data Card

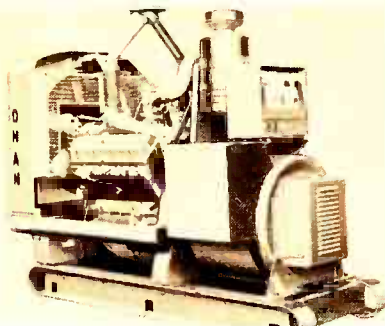


Standby Power

Both the 140- and 160-kw models of the "WE Series" electric generating plants are designed for installation in confined areas. The radiator-cooled "WE Series" is 1½' shorter than previous **Onan** models in this capacity range. Both models, whether used for intermittent standby duty or continuous operation, are powered by the 8-cylinder Roiline

H884 engine which was specially designed and built for such applications. The two units carry certified ratings of 140 and 160 kw for emergency standby duty and 125 and 150 kw, respectively, for continuous operation. Factory-installed carburetion for gasoline or gaseous fuels may be ordered.

The plants are available in standard 60-cps 3-phase voltages up to 600 volts. The unit includes a static exciter and voltage regulator. Standard features include mounted control panel, voltage-adjusting rheostat, complete engine-starting controls, all necessary safety devices, run-stop remote switch, automatic over-speed shutdown, running-time meter, and high-water-temperature and low-oil-pressure cut-outs. The generators may be equipped with a load-transfer control for completely automatic power takeover when high-line power fails, and automatic return to commercial power when the emergency has been corrected.

Circle Item 63 on Tech Data Card

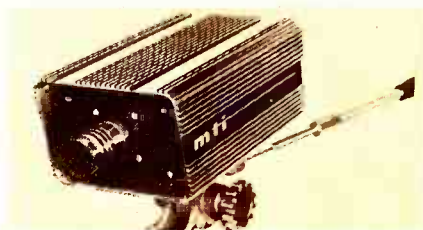

Vidicon Camera

The VC-1D Vidicon camera is designed to offer high resolution and sen-

INTRODUCING THE 600 SERIES STEREO TAPE CARTRIDGE SYSTEM

SPARTA-MATIC® engineered for quality minded FM broadcasters. Proven performance. Completely transistorized. NAB 3 track stereo configuration. Sound with sound recording. See your Spartaman now or call Area Code (916) 421-2070 write or wire...




600 R/P
\$950

SPARTA

ELECTRONIC CORPORATION

6450 FREEPORT BLVD. • SACRAMENTO, CALIF. 95822

Circle Item 47 on Tech Data Card

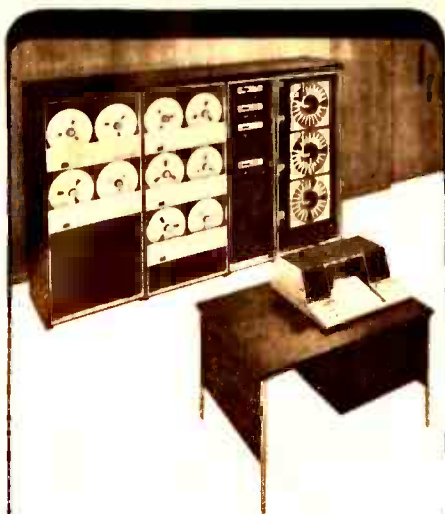

PROLOG® IS RELIABLE

- continuous unattended or live operation as desired
 - individualized format
 - program material from any source at any time
 - saves money
- write for brochure

Continental Electronics

SUBSIDIARY OF LTV ELECTROSYSTEMS, INC.
BOX 17040 / DALLAS, TEXAS 75217

Circle Item 48 on Tech Data Card

sitivity. Produced by Maryland Telecommunications, Inc., this self-contained single unit of modular construction weighs less than 18 lb.

Resolution of the VC-1D is specified as in excess of 800 horizontal TV lines at 3×10^{-1} footcandles and over 500 horizontal TV lines at 2×10^{-2} footcandles. The camera has plug-in solid-state circuitry and automatically regulated electrical focus and target adjustment for light-level changes. The unit features a cascode input, nuvistorized video preamplifier, nonmicrophonic solid-state sweep protection, linearity of both horizontal and vertical axis within 2%, and regulated solid-state power supply. The target potential is current-regulated and automatically adjusts to variations in light level. A minimum number of operating controls is incorporated for simplicity of operation. Off-the-shelf delivery is available at \$2495.

Circle Item 64 on Tech Data Card



CATV Bridging Amplifier

This main-line all-band bridging amplifier, Model KBR-4, provides four 75-ohm high-level outputs with low trunk-

line insertion loss. The Kaiser CATV amplifier is enclosed in a messenger-mounted, weather-proof, aluminum case designed with end-mounted fittings for all popular sizes of aluminum or corrugated copper cable. Specifications include 20 db maximum gain (at channel 13) and a line insertion loss of 1 db maximum.

Circle Item 65 on Tech Data Card



High-Power RF Diplexer

High-power hybrid bridge diplexers rated at 100 kw peak power for use on channels 2 through 13 are being manufactured by Jampro Antenna Co. The Type PK-100 diplexer is used with batwing turnstile antennas to provide 90° phase-quadrature feed. The unit shown, for operation on channel 6, is made of 6 1/8" transmission line and weighs 195 lbs; isolation between visual and aural inputs is over 34 db for channel 6. Power division is within .02 db, and input VSWR values better than 1.04:1. ▲

Circle Item 66 on Tech Data Card

New SPECTRA® Studio Color Temperature and Footcandle Meter

Only meter designed for precise quality control of TV COLOR

New SPECTRA — portable, direct-reading color temperature and footcandle meter specifically designed for live action color television! Intended primarily for precision control of TV studio light sources (and equally good for other indoor applications).

SPECIFICATIONS:

- INDICATING MICROAMMETER — high quality, taut band type with finely graduated 5" mirror scale
- KELVIN SCALE: 2000° to 6000°K, $\pm 50^\circ$ K (with 125 fc minimum)
- ILLUMINANCE SCALE: 0 to 1000 footcandles, $\pm 5\%$
- CONTROLS — diaphragm ring and operating trigger
- SELF-CONTAINED — no batteries required... Portable, mounts on tripod
- PRICE: Complete with foam-fitted carrying case, only \$369.50



PHOTO RESEARCH corp.

Karl Freund, president

"Photometric Instruments for Science and Industry"

837 No. Cahuenga Blvd. • Hollywood, California 90038 • (213) 462-6673 • Cable: Spectra

Circle Item 49 on Tech Data Card

NOW you can get CARTRIDGE REBUILDING CONVENIENCE - ECONOMY



PLUS Quality Workmanship
Reliable Service
48-hour processing

PLUS ALL cartridges PRETESTED under actual broadcast conditions.

IF you are particular about how you spend a dollar, it's simple, economical and convenient to have your old cartridges reconditioned and reloaded.

JOA will inspect, recondition and reload your cartridges with **ANY LENGTH TAPE** you specify.

NO minimum.

NO extra charge for replacement of minor parts.

New Fidelipac cartridges in any size are also available for immediate shipment from stock.

JOA incorporates all of these as a part of their service to the broadcaster.

Phone or write:



Cartridge Service
P. O. Box 3087,
Philadelphia, Pa. 19150
Area Code 215, TUrnER 6-7993

Circle Item 50 on Tech Data Card

BROADCAST ENGINEERING

ENGINEERS' TECH DATA

AUDIO & RECORDING EQUIPMENT

75. AMERICAN GELOSO—Literature details complete line of sound, public-address, and portable sound equipment.
76. CBS LABS—Literature on the "Volumax" automatic peak controller and the "Audimax III" solid-state automatic level control.
77. EUPHONICS—Eight-page bulletin No. 201 includes both installation instructions and a section titled "How to Design Your Own Circuit" for the Miniconic semiconductor cartridge.
78. LA CROSSE—Circular describes Model 200B portable solid-state tape-cartridge playback unit.
79. MARTEL—Flier sheets list features and specifications for line of imported and domestic tape recorders.
80. MINNEAPOLIS MAGNETICS—Literature covers replacement parts for rebuilding tape heads.
81. QRK—Brochure depicts professional turntables for mono and stereo reproduction.
82. SHURE—Data sheet supplies specifications and descriptions for Models SM5A and SM5B cardioid microphones.
83. SONY—Full-color catalog describes 1966 line of tape recorders and recording accessories.
84. SPARTA—Catalog sheet details new tape-cartridge system; new-product brochure is also available.

CATV EQUIPMENT

85. JERROLD—Eight-page brochure features "Starline" solid-state unitized CATV systems.
86. SKL—Folder lists and provides specifications for head-end, trunk, and distribution equipment; accessories; and special products for CATV use.

COMPONENTS & MATERIALS

87. HARVEY—500-page catalog lists line of broadcast and recording equipment and electronic components.
88. JENNINGS—12-page catalog No. 103 gives specifications and applications for vacuum coaxial relays.
89. QUICK-SET—Price schedule and 12-page brochure supply photos and mechanical specifications for Gibraltar tripods and pan heads.
90. TEXWIPE—Sheet details solvent cleaner for use on video and sound tape heads and film.

MICROWAVE DEVICES

91. MICRO-LINK—Planning guide covers 2500-mc ITV systems. Brochures and specification sheets provide data on Model 420A portable link and Model 600 fixed link.
92. MICROWAVE ASSOCIATES—Sixteen-page brochure, bulletins, and technical report detail applications and specifications for TV-broadcast solid-state microwave-relay equipment.

MOBILE RADIO & COMMUNICATIONS

93. MOSLEY ELECTRONICS—Catalog lists complete line of 1966 Citizens-band equipment.
94. SPRAGUE—Circular M-853 describes SK-1, SK-10, SK-20, and SK-30 "Suppressikits" for vehicles with alternators or DC generators.

POWER DEVICES

95. HEVI-DUTY—Bulletin 7-22 supplies data on line-voltage regulator using saturable-core reactor.
96. ONAN—"Gas Power for Standby Generators," an eight-page brochure, cites advantages of natural gas fuel for standby electric plants.

"Want a Good Job in Broadcasting?"



You'll Need a First Class FCC License."

Matt Stuczynski knows. He's the Senior Transmitter Operator of Radio Station WBOE. His story is typical of hundreds of men who have used Cleveland Institute Training as a springboard to success in Broadcasting. Here's what Matt says about Cleveland Institute:

"I give Cleveland Institute credit for my First Class FCC License. Even though I had only 6 weeks of high school algebra, CIE's Auto-Programmed lessons really made electronics theory and fundamentals easy. After completing the CIE course, I took and passed the First Class Exam. I now have a good job in studio operation, transmitting, proof of performance, equipment servicing. Believe me, a Commercial FCC License is a 'must' for a career in Broadcasting."

If you want rapid advancement in broadcasting, the first step is a First Class FCC ticket with *your* name on it. And Cleveland Institute Home Study is a fast, economical way to get one. What's more, CIE backs their licensing programs with this money-back warranty:

"A CIE License Course will quickly prepare you for a First Class FCC License. If you complete the course but fail to pass the exam on your first attempt, CIE will refund all tuition."

With Cleveland Institute you get your First Class FCC License or your money back! Send coupon today for FREE booklet "How to Get a Commercial FCC License." Cleveland Institute of Electronics.

SEND COUPON TODAY FOR FREE BOOKLET

Cleveland Institute of Electronics

1776 E. 17th St., Dept. BE-22
Cleveland, Ohio 44114

Please send FREE Booklet "HOW TO GET A COMMERCIAL FCC LICENSE," without obligation.



Your occupation _____
Name _____ Age _____
(PLEASE PRINT)
Address _____ County _____
City _____ State _____ Zip _____

A leader in electronics training... since 1934

RADIO & CONTROL ROOM EQUIPMENT

97. **BURDEN ASSOCIATES**—Flier provides specifications and functional diagram for Model AC-8 stereo audio console.
98. **IGM**—Full-color eight-page illustrated brochure shows monitor unit, timer module, punch-card reader, automatic network switcher, and other control-system units.

REFERENCE MATERIAL & SCHOOLS

99. **CLEVELAND INSTITUTE**—Booklet outlines courses in electronics, including those for broadcast engineering and FCC-license preparation.
100. **HOWARD W. SAMS**—Literature describing popular and informative technical publications; includes latest catalog of technical books.

STUDIO & CAMERA EQUIPMENT

101. **ACME FILM**—Film transfers, tape duplicates, 16 mm developing and printing are catalogued and priced in a 10-page booklet. A footage-conversion chart and a detailed system for eliminating splice lines are also included.
102. **CLEVELAND ELECTRONICS**—Data concerns modifications using new yoke assembly to update 3" image-orthicon camera.
103. **HARWALD**—Film inspection, cleaning, and editing equipment is described by fliers.
104. **LIGHTING & ELECTRONICS**—"Studio Lighting for Monochrome and Color Television," a 32-page booklet, supplies detailed information on basic lighting principles.
105. **NATIONAL CINE**—Prices and services for 8 mm and 16 mm film are described in pamphlet.
106. **TV ZOOMAR**—New literature features Autocam programed remote control pan and tilt equipment; literature describes lenses for IO and vidicon use.

TELEVISION EQUIPMENT

107. **COLORADO VIDEO**—Sheet gives data for the Model 301

video analyzer which displays TV waveforms directly on picture monitors.

108. **GENERAL TELEVISION**—Circulars list specifications and applications for television projector, television stands, and scope carts.
109. **VITAL**—Data sheets give specifications of Model VI-500 stabilizing amplifier, Model VI-10A video distribution amplifier, and Model VI-20 pulse-distribution amplifier.

TEST EQUIPMENT & INSTRUMENTS

110. **TEKTRONIX**—Four-page circulars give complete specifications for dual-trace oscilloscopes: Type 442, AC or battery-powered, and Type 453, with calibrated sweep delay.


TOOLS

111. **ENTERPRISE DEVELOPMENT**—Bulletins feature Models 300 and 100A desoldering-resoldering iron for PC-board use.

TRANSMITTER & ANTENNA DEVICES

112. **BARKER & WILLIAMSON**—Proprietary equipment catalog contains design and application data, illustrations and specifications for transmitters, receivers, test equipment, antenna couplers, dummy loads, and coils.
113. **GATES**—Brochure depicts transcription turntables and accessories. Flier sheets give specifications for solid-state monitor amplifier and Model FM-1G 1,000-watt FM transmitter.
114. **MARTI**—Specification sheets, flier sheets, and brochures give full particulars on line of remote-pickup and STL equipment.
115. **MOSELEY ASSOCIATES**—Condensed catalog illustrates complete line of broadcast equipment. Both wire and STL remote-control systems are featured.
116. **RUST**—Data sheet describes transmitter automatic-logging equipment. ▲

**CUT HOLES
FAST**

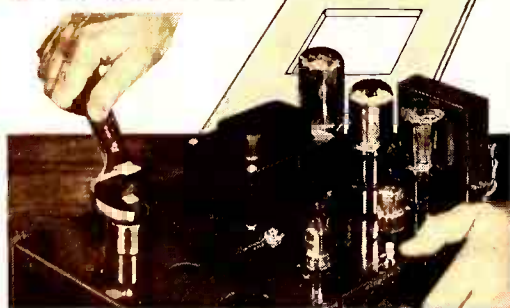

GREENLEE CHASSIS PUNCHES

Make accurate, finished holes in 1½ minutes or less in metal, hard rubber and plastics. No tedious sawing or filing—a few turns of the wrench does the job. All standard sizes . . . round, square, key, or "D" shapes for sockets, switches, meters, etc. At your electronic parts dealer. Literature on request.

GREENLEE TOOL CO. 
2028 Columbia Ave., Rockford, Illinois

POSITIONS IN COLOR TV ENGINEERING

The sudden industry wide acceptance of PLUMBICON Color Cameras has created many entirely new engineering positions in the areas of systems planning, field engineering, equipment packaging, circuit design. Engineers with live camera TV station experience and who are looking for personal advancement will receive training in this new equipment which is already playing a major role in the present shift to color.

Salary is commensurate with experience and ability. Locale: New York and Los Angeles. Relocation assistance provided. Interviews possible in major cities or interview travel expenses paid.

Send complete resume or call Mr. C. E. Spicer or Mr. G. H. Wagner, Visual Electronics Corporation, 356 West 40th Street, New York, N. Y. 10018, telephone (212) 736-5840.



VISUAL ELECTRONICS CORPORATION
NEW CONCEPTS
IN BROADCAST EQUIPMENT

Circle Item 52 on Tech Data Card

Circle Item 53 on Tech Data Card

Advertisers' Index

Aerovox Corp.	59	Moseley Associates.	36
Altec Lansing Corp.	34	Moviola Mfg. Co.	53
Audio Acoustics Equipment Co.	10	Nortronics.	59
Automatic Tape Control, Inc.	52	Photo Research Corp.	56
Ball Brothers Research Corp.	33	RCA Broadcast and Communi- cations.	11, 12
Bionic Instruments, Inc.	34, 38, 42, 46	RCA Electronic Components and Devices.	Cover 4
Boynton Studio.	42	Riker Industries.	Cover 2
Bradford Information Systems.	6	Roanwell Corp.	50, 51
Broadcast Electronics.	30, 42, 48	Russco Electronics Mfg.	54
CBS Labs, Inc.	5	Sarkes Tarzian, Inc.	8, 36
Cleveland Institute of Electronics.	57	Scala Radio Co.	54
Collins Radio.	43	Scully Recording Instruments Corp.	44
Colorado Video, Inc.	52	Sparta Electronics Corp.	55
Continental Electronics.	53, 56	Spencer-Kennedy Labs, Inc.	44
Cooke Engineering Co.	54	Superior Cable Corp.	45
Dage TV Co.	Cover 3	Sylvania Electric Products.	9
Electro-Voice, Inc.	7	Tektronix, Inc.	39
Fairchild Recording Co.	6, 48	Telemet Co.	47
Gates Radio Co.	40	Viking of Minneapolis.	38
General Electric Co.	49	Visual Electronics Corp.	46, 58
Greenlee Tools.	58	Vital Industries.	35
International Nuclear Corp.	41	Wilkinson Electronics.	3
JOA Cartridge Service.	56		
Jampro Antenna Co.	37		

Available locally from
your distributor ... NOW!

NORTRONICS 8000 SERIES PROFESSIONAL REPLACEMENT HEADS!



Full Track, 2 Track or 4 Track in Record, Playback or Erase
Heads as well as 3 or 4 Channel Heads in Record or Playback
Types for . . .

AMPEX, MAGNECORD, CONCERTONE, RCA, CROWN

Now you can reduce "downtime" by using Nortronics replacement heads—available locally and immediately from your distributor! Pick the head and track style YOU want from Nortronics' full professional line. After initial changeover, replace heads or convert track styles in minutes! Precision engineered adapters and mounting brackets let YOU make the initial changeover . . . let YOU service your recorders according to your needs.



Nortronics®

8143-J Tenth Ave. North
Minneapolis, Minn. 55427

See your distributor today. Write for full details! Or call 612-545-0401.

Circle Item 54 on Tech Data Card

CINEMA PRECISION AUDIO EQUIPMENT



AUDIO ATTENUATORS

Cinema's new compact rotary slide-wire attenuator is now available for your mixing consoles as single or ganged units. A must where smooth control is desired. Other standard types are also available for applications demanding precision noiseless attenuation, reliability and long term stability.


GRAPHIC EQUALIZER

The Cinema Graphic Equalizer offers a compact system of extreme flexibility. Each of the six controls permit the operator to equalize or attenuate that portion of the spectrum 8 db. This is an active unit having zero insertion loss and up to 35 db additional gain.



DIP FILTER

Features a notch depth of 50 db minimum and which is continuously variable from 30 to 9,000 cps. Extremely useful for removing single frequency noise and for harmonic distortion measurements.



PROGRAM EQUALIZER

Provides for accurate frequency response corrections in audio equipment. Easy operation of the two control knobs allow over 395 curve combinations. Detented action of the controls permits reference dial settings for future duplication of desired characteristics.

DEGAUSSERS

Cinema bulk degaussers are a favorite with sound men throughout the world. Provides erasure of program material and residual noise from magnetic tapes on reels up to 17 inches in diameter and 2 inches wide. Also, "Pencil" type degaussers are available for erasing small areas thus avoiding splicing.



Hi-Q's Cinema precision audio equipment is backed by an enviable reputation generated by over 25 years of outstanding service in critical sound recording, broadcast and laboratory applications. Many other custom audio products are available. Put the benefit of our experience to work for you. Write for Hi-Q's Cinema precision audio equipment literature today.

HI-Q® AEROVOX
DIVISION CORPORATION
CINEMA PLANT

1100 CHESTNUT STREET, BURBANK, CALIFORNIA 91503

PHONE: 213-849-5511 • TWX: 213-846-3578

Circle Item 55 on Tech Data Card

Professional Services

VIR JAMES

CONSULTING RADIO ENGINEERS

Applications and Field Engineering
345 Colorado Blvd.

Phone: (Area Code 303) 333-5562

DENVER, COLORADO 80206

Member AFCCE

JAMES C. McNARY

Consulting Engineer

National Press Bldg.
Washington 4, D. C.

Telephone District 7-1205

Member AFCCE

CARL E. SMITH

CONSULTING RADIO ENGINEERS

AM, FM, TV and CATV

8200 Snowville Road
Cleveland, Ohio 44141

Phone: 216-526-4386

Member AFCCE

CAMBRIDGE CRYSTALS

PRECISION FREQUENCY

MEASURING SERVICE

SPECIALISTS FOR AM-FM-TV

445 Concord Ave. Phone 876-2810

Cambridge, Mass. 02138

AMPEX HEAD ASSEMBLY RECONDITIONING SERVICE for all Ampex professional model recorders. This professional service features precision relapping of all heads for maximum head life. Your assembly is thoroughly cleaned and guides are replaced as required. Price includes optical and electrical inspection and complete testing on Ampex equipment in our plant. Full track or half track assemblies . . . \$35.00. One to two day service. "Loaner" assemblies available, if necessary. LIPPS, INC., 1630 Euclid St., Santa Monica, California 90404. (213) EX 3-0449. tf

Barnett F. Goldberg, P.E.

CONSULTING ELECTRONICS ENGINEER

AM, FM & TV

APPLICATIONS AND FIELD ENGINEERING
ACOUSTICS AND VALUATION-APPRAISAL
WORK

803-253-8347

1138 BULL STREET, COLUMBIA, S.C. 29201

VIDEO TAPE RECORDER

AUDIO HEAD ASSEMBLY SERVICE

Precision relapping of all heads and supporting posts, including cleaning and testing. Ampex head assembly with "cue" tracks, \$75.00 complete. RCA units also relapped. One to two day service. LIPPS, INC., 1630 Euclid St., Santa Monica, Calif. 90404. (213) EX 3-0449. tf

Classified

Advertising rates in the Classified Section are ten cents per word. Minimum charge is \$2.00. Blind box number is 50 cents extra. Check or money order must be enclosed with ad.

The classified columns are not open to the advertising of any broadcast equipment or supplies regularly produced by manufacturers unless the equipment is used and no longer owned by the manufacturer. Display advertising must be purchased in such cases.

EQUIPMENT FOR SALE

Will buy or trade used tape and disc recording equipment—Ampex, Concertone, Magnecord, Presto, etc. Audio equipment for sale. Boynton Studio, 295 Main St., Tuckahoe, N. Y. 1-64 tf

Audio Equipment bought, sold, traded. Ampex, Fairchild, Crown, McIntosh, Viking, F. T. C. Brewer Company, 2400 West Hayes Street, Pensacola, Florida. 3-64 tf

Television/Radio/communications gear of any type available. From a tower to a tube. Microwave, transmitters, cameras, studio equipment, mikes, etc. Advise your needs—offers. Electrofind Co., 440 Columbus Ave., NYC. 212-EN-25680. 8-64 tf

COMMERCIAL CRYSTALS and new or replacement crystals for RCA, Gates, W. E., Bliley, and J-K holders; regrinding, repair, etc. BC-604 crystals; also service on AM monitors and H-P 335B FM monitors. Nationwide unsolicited testimonials praise our products and fast service. Eidson Electronic Company, Box 96, Temple, Texas. 5-64 tf

AMPEX 350 SERIES reconditioned capstan drive motors (BODINE NCH-33 only) \$85.00 exchange. Send us your old one, or order for \$100.00 and get \$15.00 back after sending old one in. Ours have new bearings and rewound stator. Package motor well. **TABER MANUFACTURING & ENGINEERING CO.**, 2619 Lincoln Ave., Alameda California. 1-65 12t

Everything in used broadcast equipment. Write for complete listings. Broadcast Equipment and Supply Co., Box 3141, Bristol, Tennessee. 11-64 tf

New and Reconditioned Remote Pickup and 2-way radio equip., Fire and Police Receivers. All brands and models. Sales Manager, Box 238, Phone 817-594-5171, Weatherford, Texas. 5-65 12t

Audio Equipment—Ampex, Altec, Fairchild, Langevin, Neumann, etc. Trades. New and used. Get our list. Audio Distributors, Inc., 2342 S. Division, Grand Rapids, Michigan. 7-65 6t

Signs, Nameplates, Labels, Badges, Trophies and Plaques. Seton Corp., Dept. BREN, New Haven, Conn. 06505. 10-65 1t

Parabolic Antennas, 6' aluminum solid surface complete with dipole and mounting bracket. Now tuned for 1750 MC for \$125 set. Tuned to 950 MC for \$175 set. Sierra Western Electric Cable Co., 24th and Willow Streets, Oakland, California. Phone 415 832-3527. 12-65 tf

FOR SALE: Unsued Trompeter JS 48 RF and vidio patch panel, 48 jacks on 3 1/2 inch panel. BNC fitting, WE spacing, \$200. Delta Broadcasting System, 1004 N. Golden Dr., Santa Maria, Calif. 93454. 12-65 1t

EQUIPMENT WANTED

Wanted: Field Strength Meter, Nems-Clarke AM broadcast band only. **LOW POWER BROADCAST EQUIPMENT CO.**, 248 Swedesford Road, Malvern, Penn. 19-155. 12-65 1t

Employment

BROADCAST SALES FM TRANSMITTERS

A leading Midwest broadcast and communications equipment manufacturer has an outstanding opportunity for a man familiar with FM broadcast transmitters and associated equipment. Currently employed in the FM field, either in broadcasting or manufacturing. Age 28 to 40, B.E. degree or comparable experience required. Opportunity for advancement in a growing company. Complete employee benefits. An equal opportunity employer. Send complete details and picture to Box 146. 12-65 1t

BROADCAST EQUIPMENT SALES SPECIALIST

Live in Southeastern United States and sell technical equipment to AM, FM and TV stations. Must know broadcasters and have broadcasting experience. An equal opportunity employer. Send resume including education and experience to Box 144. 12-65 1t

BROADCAST EQUIPMENT SALES SPECIALIST

Live in the San Francisco area and sell technical equipment to AM, FM and TV stations. Must know broadcasters and have broadcasting experience. An equal opportunity employer. Send resume including education and experience to Box 145. 12-65 1t

Business Opportunities

EXCLUSIVE FRANCHISE

Amazing new liquid plastic coating used on all types of surfaces interior or exterior. Eliminates waxing when applied on Asphalt Tile, Vinyl, Linoleum, Vinyl Asbestos, Hard Wood, and Furniture. Completely eliminates painting when applied to Wood, Metal, or Concrete surfaces. This finish is also recommended for boats and automobiles.

NO COMPETITION

As these are exclusive formulas in demand by all businesses, industry and homes. No franchise fee. Minimum investment—\$300. Maximum investment—\$7,000. Investment is secured by inventory. Factory trained personnel will help set up your business. For complete details and descriptive literature write:

CHEM-PLASTICS & PAINT CORP.
1828 Locust, St. Louis 3, Mo.

6-65 14t

DISTRIBUTOR WANTED

No competition. To service and set up new accounts in exclusive territory. Investment secured by fast moving inventory of amazing plastic coating used on all types of surfaces interior or exterior. Eliminates waxing when applied to any type of floor. Eliminates all painting when applied to wood, metal or concrete surfaces.

Minimum Investment — \$ 500
Maximum Investment — \$12,000

For details write or call:

Phone: 314 AX-1-1500

Merchandising Division

P. O. Box 66

St. Ann, Missouri 63074

MOVING?

Don't Lose Touch . . .

Receive BE as usual at your new address

Write: **BROADCAST ENGINEERING**

Circulation Department

4300 West 62nd St., Indianapolis 6, Ind.

DAGE

FEATURES
PERFORMANCE
AND RELIABILITY

PLUMBICON

VIDICON

SEPARATE
FIELD MESH



Dage engineering has developed the 520 solid state camera chain which outperforms any other vidicon equipment presently available for commercial or educational broadcasting and video taping. Check feature for feature and see why this is the system for your studio.

RELIABLE SOLID STATE CIRCUITRY • HIGH SIGNAL TO NOISE RATIO • MORE AVAILABLE OPERATOR FEATURES • TREMENDOUS DETAIL RESPONSE AND SENSITIVITY • HIGH RESOLUTION CAPABILITIES WITH NO DISTORTION • PLUMBICON PROVIDES PICTURE WITHOUT LAG

RAYTHEON

No matter what your equipment needs are, Dage has the **BIG** answer for you with the new 520 Broadcast Camera Chain for use with **PLUMBICON, VIDICON, or SEPARATE FIELD MESH**

Dage-Bell Corporation

A SUBSIDIARY OF RAYTHEON COMPANY

455 Sheridan Avenue, Michigan City, Indiana, Dept. 30-8

Circle Item 56 on Tech Data Card

DECEMBER, 1965

Engineer's Tech Data Service Request Card

Please allow 60 to 90 days for delivery.

Name _____

Firm _____

Address _____

City _____

State _____

Zip Code _____

Please send me the literature circled below:

Please indicate number of items you have circled →

1 12 23 34 45 56 67 78 89 100 111 122 133 139

2 13 24 35 46 57 68 79 90 101 112 123 134 140

3 14 25 36 47 58 69 80 91 102 113 124 135 141

4 15 26 37 48 59 70 81 92 103 114 125 136 142

5 16 27 38 49 60 71 82 93 104 115 126 137 143

6 17 28 39 50 61 72 83 94 105 116 127 138 144

7 18 29 40 51 62 73 84 95 106 117 128 139

8 19 30 41 52 63 74 85 96 107 118 129 140

9 20 31 42 53 64 75 86 97 108 119 130 141

10 21 32 43 54 65 76 87 98 109 120 131 142

11 22 33 44 55 66 77 88 99 110 121 132 138 143

USE
BEFORE
Feb. 1
1966

- Please check BOTH Your business and occupation
- ☐ AM Radio Station
 - ☐ FM Radio Station
 - ☐ Television Station
 - ☐ Network
 - ☐ Consulting Engineer
 - ☐ Manufacturer or Distributor
 - ☐ Recording Studio
 - ☐ Government Agency, Library, School
 - ☐ Owner, Manager, Officer
 - ☐ Engineer, Technician
 - ☐ Other

Professional Services

VIR JAMES

CONSULTING RADIO ENGINEERS

Applications and Field Engineering
345 Colorado Blvd.

Phone: (Area Code 303) 333-5562

DENVER, COLORADO 80206

Member AFCCE

JAMES C. McNARY

Consulting Engineer

National Press Bldg.
Washington 4, D. C.

Telephone District 7-1205

Member AFCCE

CARL E. SMITH

CONSULTING RADIO ENGINEERS

AM, FM, TV and CATV

8200 Snowville Road
Cleveland, Ohio 44141

Phone: 216-526-4386

Member AFCCE

CAMBRIDGE CRYSTALS

PRECISION FREQUENCY

MEASURING SERVICE

SPECIALISTS FOR AM-FM-TV

445 Concord Ave. Phone 876-2810

Cambridge, Mass. 02138

AMPEX HEAD ASSEMBLY RECONDITIONING SERVICE for all Ampex professional model recorders. This professional service features precision relapping of all heads for maximum head life. Your assembly is thoroughly cleaned and guides are replaced as required. Price includes optical and electrical inspection and complete testing on Ampex equipment in our plant. Full track or half track assemblies . . . \$35.00. One to two day service. "Loaner" assemblies available, if necessary. LIPPS, INC., 1630 Euclid St., Santa Monica, California 90404. (213) EX 3-0449. tf

Barnett F. Goldberg, P.E.

CONSULTING ELECTRONICS ENGINEER

AM, FM & TV

APPLICATIONS AND FIELD ENGINEERING
ACOUSTICS AND VALUATION-APPRAISAL
WORK

803-253-8347

1138 BULL STREET, COLUMBIA, S.C. 29201

VIDEO TAPE RECORDER

AUDIO HEAD ASSEMBLY SERVICE

Precision relapping of all heads and supporting posts, including cleaning and testing. Ampex head assembly with "cue" tracks, \$75.00 complete. RCA units also relapped. One to two day service. LIPPS, INC., 1630 Euclid St., Santa Monica, Calif. 90404. (213) EX 3-0449. tf

Class

Advertising rates in this section are ten cents per line per word. Charge is \$2.00. Blank space is \$1.00. Extra. Check or money order enclosed with ad.

The classified column is for the advertising of equipment or supplies required by manufacturers unless otherwise stated. Display advertising is purchased in such cases.

FIRST CLASS
PERMIT No. 1076
Indianapolis, Ind.

EQUIPMENT

Will buy or trade used recording equipment—Magnecord, Presto, etc. for sale. Boynton St. Tuckahoe, N. Y.

Audio Equipment by Ampex, Fairchild, Cring, F. T. C. Brew. West Hayes Street, P.

Television/Radio/computer any type available. tube. Microwave, trans studio equipment. to your needs—offers. Columbus Ave. NYC.

COMMERCIAL CRYSTALS replacement crystals E. Bliley, and J-K repair, etc. BC-604 c on AM monitors and itors. Nationwide uns praise our products a son Electronic Compa Texas.

AMPEX 350 SERIES stan drive motors (BC \$85.00 exchange. Sen or order for \$100.00 after sending old one bearings and rewoun motor well. TABER & ENGINEERING CO Alameda California.

Everything in used broadcast equipment. Write for complete listings. Broadcast Equipment and Supply Co., Box 3141, Bristol, Tennessee. 11-64 tf

New and Reconditioned Remote Pickup and 2-way radio equip., Fire and Police Receivers. All brands and models. Sales Manager, Box 238, Phone 817-594-5171, Weatherford, Texas. 5-65 12t

Audio Equipment—Ampex, Altec, Fairchild, Langevin, Neumann, etc. Trades. New and used. Get our list, Audio Distributors, Inc., 2342 S. Division, Grand Rapids, Michigan. 7-65 6t


Signs, Nameplates, Labels, Badges, Trophies and Plaques. Seton Corp., Dept. BREN, New Haven, Conn. 06505. 10-65 1t

Parabolic Antennas, 6' aluminum solid surface complete with dipole and mounting bracket. Now tuned for 1750 MC for \$125 set. Tuned to 950 MC for \$175 set. Sierra Western Electric Cable Co., 24th and Willow Streets, Oakland, California. Phone 415 832-3527. 12-65 tf

FOR SALE: Unsold Trompeter JS 48 RF and video patch panel, 48 jacks on 3 1/2 inch panel, BNC fitting, WE spacing, \$200. Delta Broadcasting System, 1004 N. Golden Dr., Santa Maria, Calif. 93454. 12-65 1t

EQUIPMENT WANTED

Wanted: Field Strength Meter, Nems-Clarke AM broadcast band only. LOW POWER BROADCAST EQUIPMENT CO., 248 Swedesford Road, Malvern, Penn. 19-155. 12-65 1t



BUSINESS REPLY MAIL

No Postage Stamp Necessary If Mailed in the United States

POSTAGE WILL BE PAID BY—

Engineers' Tech Data Dept.

BROADCAST ENGINEERING

4300 WEST 62ND STREET

INDIANAPOLIS 6, IND.

needed by all businesses, industry and homes. No franchise fee. Minimum investment—\$300. Maximum investment—\$7,000. Investment is secured by inventory. Factory trained personnel will help set up your business. For complete details and descriptive literature write:

CHEM-PLASTICS & PAINT CORP.
1828 Locust, St. Louis 3, Mo.

6-65 14t

DISTRIBUTOR WANTED

No competition. To service and set up new accounts in exclusive territory. Investment secured by fast moving inventory of amazing plastic coating used on all types of surfaces interior or exterior. Eliminates waxing when applied to any type of floor. Eliminates all painting when applied to wood, metal or concrete surfaces.

Minimum Investment — \$ 500
Maximum Investment — \$12,000

For details write or call:

Phone: 314 AX-1-1500

Merchandising Division

P. O. Box 66

St. Ann, Missouri 63074

MOVING?

Don't Lose Touch . . .

Receive BE as usual at your new address

Write: BROADCAST ENGINEERING


Circulation Department

4300 West 62nd St., Indianapolis 6, Ind.

**YOU
CHOOSE
with**

DAGE

**FEATURES
PERFORMANCE
AND RELIABILITY**

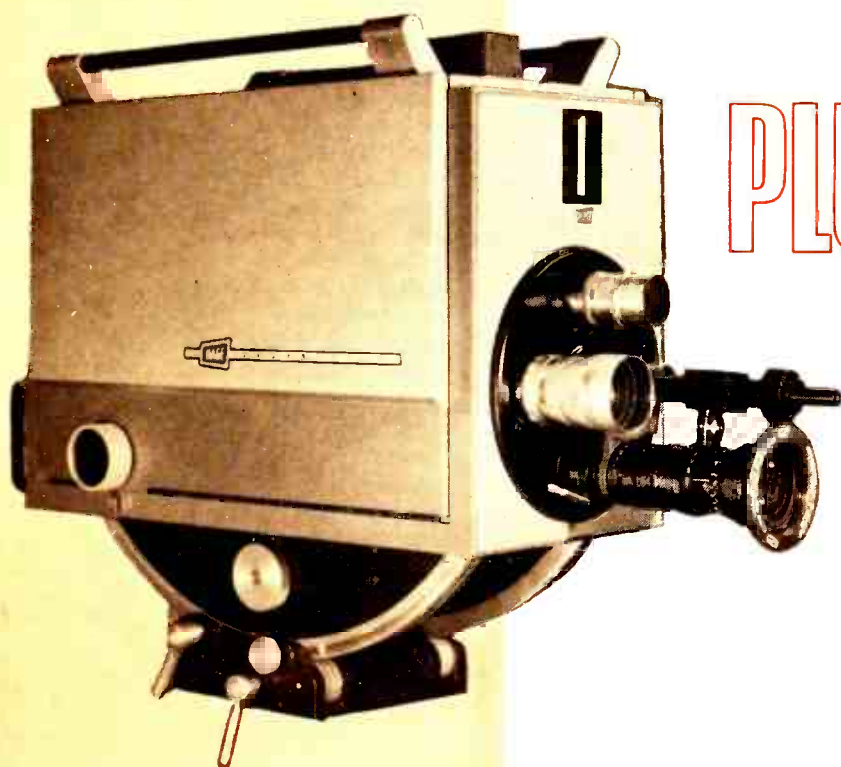

PLUMBICON

VIDICON

SEPARATE

FIELD MESH

Dage engineering has developed the 520 solid state camera chain which outperforms any other vidicon equipment presently available for commercial or educational broadcasting and video taping. Check feature for feature and see why this is the system for your studio.

RELIABLE SOLID STATE CIRCUITRY • HIGH SIGNAL TO NOISE RATIO • MORE AVAILABLE OPERATOR FEATURES • TREMENDOUS DETAIL RESPONSE AND SENSITIVITY • HIGH RESOLUTION CAPABILITIES WITH NO DISTORTION • PLUMBICON PROVIDES PICTURE WITHOUT LAG

RAYTHEON

*No matter what your equipment needs are, Dage has the **BIG** answer for you with the new 520 Broadcast Camera Chain for use with **PLUMBICON, VIDICON, or SEPARATE FIELD MESH***

Dage-Bell Corporation

A SUBSIDIARY OF RAYTHEON COMPANY

455 Sheridan Avenue, Michigan City, Indiana, Dept. 30-8

Circle Item 56 on Tech Data Card

when you plug in
solid-state silicon rectifiers...

it pays
to use
the best

Before RCA's new solid-state silicon rectifiers became commercially available as direct plug-in replacements for mercury vapor and gas rectifiers, they had to be the best. At stake was RCA's reputation with the broadcasters.

Now, after 1,000,000 hours of cumulative life tests on prototypes and same-socket plug-ins, RCA types CR273/8008, CR274/872A, CR275/866A/3B28 are available for high-reliability performance in your broadcast equipment.

Here are benefits you can count on when you use RCA Silicon Rectifiers:



1. NEW SOLID-STATE RUGGEDNESS—nothing to vibrate or deteriorate.
 2. INSTANT-ON—No warm-up time, no cool-down necessity.
 3. INTERFERENCE-FREE—No arc-backs, no rectifier "hash."
 4. LESS TO MAINTAIN—Long life—replacements minimized.
 5. LESS EQUIPMENT—No filament transformer required.
 6. SAME-SOCKET REPLACEMENTS—Type numbers identical to those of your present mercury vapor and xenon rectifier types.
- RCA Silicon Rectifier plug-ins are available only through your RCA Industrial Distributor. Call him for price and delivery information.



RCA Electronic Components and Devices, Harrison, N. J.

The Most Trusted Name in Electronics

Circle Item 67 on Tech Data Card