

BROADCAST engineering

Volume 19/5/\$2.00

474010
127 078
LIBRARY SERIALS SEPT

015 770 0006 27
AGUT
#2

Indiana University

FEB 17 1978

Library

Studios for AM stereo

Logic device update

**Making
RENG
work
for you**



At Home. Or Away.

At home in the studio, or away on location, Ward-Beck's flawless performance comes through for you.

The same engineering expertise, imaginative design concepts, and unparalleled craftsmanship, provide a depth of quality that is inherent in every Ward-Beck console, whatever its application.

For those who want a consistent winner, there is really only one choice.



Mobile multitrack recording console WBS Model 76042



Tomorrow's Technology Today.

Ward-Beck Systems Ltd., 841 Progress Avenue, Scarborough, Ontario, Canada M1H 2X4
Telephone (416) 438-6550. Telex 065-25399

Ward-Beck Systems Inc., 290 Larkin Street, Buffalo, N.Y. 14210

New! For heterodyne VTRs



a broadcast quality, digital TBC

It's the CVS 516, first digital TBC made and priced to give users of non-segmented, heterodyne VTRs all the proven advantages of modern digital video processing.

The CVS 516 is ideal for ENG, teleproduction, studio VTR backup and much more because it comes with features that, before, you'd find only in TBCs costing up to twice as much.

For example, correction of chroma/luminance delay problems, a 3dB chroma noise reduction, velocity compensation and color dropout compensation are standard.

So is "Gyrocomp," an exclusive, use-proven CVS memory design that easily handles severe gyroscopic distortions—without breakup.

There's also a broadcast stable, gen-lock sync generator, automatic VTR advanced sync and a built-in completely adjustable processing amplifier.

If all that's not enough, add our optional, moderately priced Image Enhancer/Noise Reducer. This plug-in card

substantially reduces luminance and chroma noise and significantly improves subjective resolution. And, to tame even the wildest instability, you can add our optional 16 line window.

Simple operation is another plus for the CVS 516. Front panel controls give you total mastery of your video signal. Each control also has a preset unity position to give you a consistent starting point for all your tapes.

All this, and more, is contained in a package that weighs only 25 pounds, is only 3½ inches high and uses only 175 watts—major advantages with today's increasing emphasis on ENG and field production.

So, to give your heterodyne productions the quality they deserve, get the one digital TBC made and priced to do the job—the CVS 516. For full details and/or a demonstration, contact your authorized CVS Distributor or CVS. And ask for our new booklet about the basics of digital time base correction. It's free.



**Consolidated
Video
Systems, inc.**

1255 E. Arques Avenue, Sunnyvale, California 94086 (408) 737-2100 Telex: 35-2028

For Literature Only Circle (4) On Reader Service Card

For Demonstration Only Circle (5) On Reader Service Card

BROADCAST engineering

The journal of the broadcast-communications industry



Page 64

Contents

- 30 1-Inch VTRs Clear Their Biggest Hurdle. *Joe Roizen.*
- 38 Making RENG Work For You, Part 2. *Peter Burk.*
- 44 Stereo Studios For AM, Part 1. *Dennis Ciapura.*
- 52 Logic Devices: An Update On Functions And Applications. *E. S. Busby, Jr.*
- 59 Directional Antenna Basics, Part 4. *Robert A. Jones.*
- 64 RCA Demolishes Last Antenna Tower At Historic Radio Central. *Cindy Nelson.*

About the cover

WKBW News Director Jim McLaughlin communicates with air personality Beverly Burke. For more on RENG, see article on page 38. (Photo by Peter Burk.)

Departments

- Direct Current
- Industry News
- News Briefs
- People In the News
- Radio Workshop
- Zoom In
- Station-to-Station
- New Products
- Ad Index
- Classified Ads

Editorial, advertising and circulation correspondence should be addressed to: 9221 Quivira Road, P.O. Box 12901, Overland Park, KS 66212 (a suburb of Kansas City, Missouri); (913) 888-4664

EDITORIAL

Ronald N. Merrell, *Editorial Director*
Michael Scheibach, *Managing Editor*
Ron Whittaker, *Production Spotlight*
Howard T. Head, *FCC Rules*
Joe Roizen, *Video*
Peter Burk, *Radio Workshop*
Dennis Ciapura, *Audio*
Robert A. Jones, *Facilities*
Carl Babcoke, *Technical*
Cindy Nelson, *Editorial Assistant*
Dudley Rose, *Graphic Designer*

CIRCULATION

Evelyn Rogers, *Manager*



Member, American Business Press



Member, Business Publications Audit
of Circulation

ADMINISTRATION

George H. Seferovich, *President*
Mike Kreiter, *Publisher*

ADVERTISING SALES

Jan Winters, *Production*
P.O. Box 12901
Overland Park, KS 66212
(913) 888-4664
Regional advertising sales offices
listed on ad index page.

BROADCAST ENGINEERING is published monthly by Intertec Publishing Corp., 9221 Quivira Road, Overland Park, KS 66212.

BROADCAST ENGINEERING is edited for corporate management, technicians/engineers, other station management personnel at commercial and educational radio and TV, static teleproduction studios, recording studios, C and CCTV facilities, and government agencies. Qualified persons also include consulting engineers, dealer/distributors of broadcast equipment.

SUBSCRIPTIONS: BROADCAST ENGINEERING is mailed free to qualified persons in occupation described above.

Non-qualified subscriptions in the U.S. \$20.00 one year. Outside the USA \$26.00 year. Back issues rate \$3.00. Adjustment necessitated by subscription termination at single copy rate.

Allow 6-8 weeks for new subscriptions.

Allow 6-8 weeks delivery for change of address.

Controlled circulation postage paid at Kansas City, Missouri.



INTERTEC PUBLISHING CORP.

BROADCAST ENGINEERING



FS-15 Frame Synchronizer by

NEC

An Emmy Award went to NEC's famous FS-12. . .and now this award-winning expertise has produced the FS-15!

And only the FS-15 combined with a Grass Valley Group 1600-Series switcher gives you the basis for a complete NTSC Digital Video Effects (DVE) system. One you can build a piece at a time with exactly matched components.

Exciting stop motion effects with the Freeze frame option for the FS-15 are a first modular step. . .at modest cost. Then add the NEC TBC and Velocity Corrector/Dropout Compensator to synchronize signals from your ENG cameras or helical scan video recorders. And later an NEC DVP-15 interfaced with your GVG Series-1600 switcher completes your DVE system. . .whenever you're ready for it. Production effects the equal of many expensive optical/film techniques are then at your fingertips in your own production or control room.

Your nearest Grass Valley Group field office can detail how our 1600-Series switchers, with the NEC FS-15 and its options, can enhance your productions.

Distributed exclusively in the US by

THE GRASS VALLEY GROUP, INC.

A Tektronix Company

1644 Tullie Cir, NE
ATLANTA, GA 30329
(404) 321-4318

810 W Bristol Street
ELKHART, IN 46514
(219) 264-0931

P.O. Box 482
MABANK, TX 75147
(214) 887-1181

4419 Van Nuys Blvd, Ste 307
SHERMAN OAKS, CA 91403
(213) 990-6172

ation Plaza East
T NECK, NY 11021
(516) 487-1311

DIRECT CURRENT FROM D.C.



February, 1977/By Howard T. Head and Harold L. Kassens

Canadian UHF-TV Allocation

The Canadian Department of Communications has been taking a new look at its allocation of UHF spectrum space in anticipation of the 1979 World Administrative Radio Conference. In a report released in December 1977, the department proposed to retain the band 470-806 MHz (UHF channels 14-69) exclusively for TV broadcasting (except for channel 37 reserved for radio astronomy). The band from 806 to 890 MHz would be held in reserve for the next few years awaiting improvements in the allocation of mobile services. In the interim, no TV assignment will be made in the band 806 to 890 MHz unless the assignment cannot be accommodated lower in the spectrum. The report indicates that the Department of Communications is opposed to sharing with land mobile in channels 14 through 20 such as is done in the United States.

The report indicates that the UHF-TV spectrum in Canada is being reduced in the hope that the new Texas Instruments receiver developed for the FCC will permit the elimination of most UHF taboos so that all Canadian TV channel requirements can be provided in the smaller spectrum space. It should be recognized, however, that most taboos merely restrict the area within which the transmitter may be located and elimination of most taboos will not provide additional channels.

Meanwhile, in the U. S., the commission returned "the receiver of the future" to Texas Instruments because it could not duplicate the measurements made by the firm.


Nine Kilohertz Tests To Continue

The cooperative tests between New Zealand and the U. S. (whereby KFI, Los Angeles, operated temporarily on 641 kHz in lieu of 640 to provide a 1 kHz beat with a New Zealand station and likewise a New Zealand station operated on 1071 kHz to produce a 1 kHz beat with KNX in Los Angeles on 1070 kHz) were conducted in the early

continued on page

BROADCAST ENGINEER

INSTANTANEOUS Digital Command

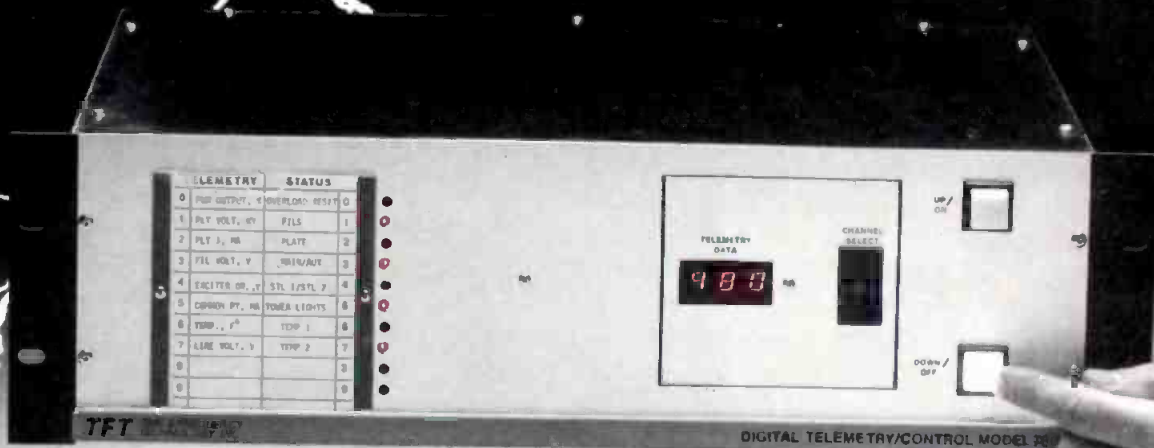

30 Functions for only \$1995

TFT Model 7601 represents a major breakthrough in remote control systems. Now, you can get 20 channels of digital command functions plus 10 channels of digital telemetry functions for less than \$2000! And it's the same high quality, reliable design that has made TFT equipment a standard in the broadcast industry. Just check this line-up of features:

DATA SECURITY ASSURED

Full command-code redundancy, *plus* odd/even parity check, makes digital data errors virtually impossible. A TFT proprietary feature. Even lightning induced noise has no effect on integrity of command functions.

INSTANTANEOUS COMMAND

Less than 0.2 second marks the time for a complete command/execute function with the new TFT high speed data modem.

ONE MAN CALIBRATION

The front panel of the Model 7601R (Remote terminal) has a DVM and scaling potentiometers so that just one man, on-site, can perform the FCC required weekly calibration. A studio lock-out switch provides complete operator safety for on-site work.

CHOICE OF TRANSMISSION METHODS

Model 7601 interconnection can be either telephone lines or radio links which include STL, TLS or SCA.

MINIMAL SERVICE DOWNTIME

Quick-disconnect rear barrier strips allow fast removal of the 7601 from the rack without disconnecting any of the interface wiring between the remote terminal and the transmitter or alarm sampling points.

TEN OPTIONAL STATUS CHANNELS

In addition, 10 status indicator functions may be factory or field installed to provide instant status display and alarm.

The Model 7601 is just one of a full line of field-proven, reliable, fail-safe remote control systems offered by TFT. Other remote control systems designed for AM, FM and TV include the Model 7610, 120-channel digital telemetry/status/control system, the TELESCAN* auto-logging multi-channel CRT display and tolerance alarm system, and a complete line of remote control accessories. They're all available now from TFT. Call or write:

*Trademark pending

TFT TIME & FREQUENCY TECHNOLOGY INC.

3000 OLCOTT STREET, SANTA CLARA, CA 95051 (408) 246-6365 TWX No. 910-338-0584

For More Details Circle (6) on Reply Card

www.americanradiohistory.com

DIRECT CURRENT FROM D. C.

continued from page 4

morning hours of December 13th and 14th. The reports from the various monitoring locations are not yet in but CBS reports that a noticeable 1 kHz beat between KNX, Los Angeles and 1ZB, New Zealand, was observed along the coast of California north of Los Angeles. Discussions are now under way to repeat the tests in March 1978. Meanwhile, reports have been received of interference to a Class IV station on 1400 kHz in Savannah due to a station on 1403 kHz in Africa. The commission is interested in receiving additional reports of off-frequency interference from stations in Asia, Africa or Europe. (They already know of the interference from Central and South America).

Commission FM Decisions


The FCC granted an application permitting an FM station to move its transmitter site from 3.3 miles to 38 miles from town and to reduce the city grade signal to 2.8 mV/m (the required is 3.16 mV/m). The reason given for the waiver of the rules is that 51,000 persons in an area of 6000 square miles will receive the new service. In another case, an administrative law judge denied an application of a Class A FM station to change transmitter location where the new site would be 23 miles from an adjacent-channel station. The rules require a 40 mile separation. Also involved was a violation of the IF spacing. The rules require that stations separated in frequency by 10.6 or 10.8 MHz be at least ten miles apart. Here the separation would be 7.2 miles. However, the commission's engineer made observations at 10 locations in the affected area during a temporary operation and could observe no interference.

Short Circuits

The commission's computer in Gettysburg, Pennsylvania, which processes most applications for non-broadcast licenses, appears to be complaining of overwork. It recently issued approximately 100,000 CB call signs which had previously been assigned to others. The computer was ordered to correct its error and issue corrected call signs...A new numbering system for FCC dockets was started January 1st. For the Broadcast Services, the first docket in 1978 was BC-78-1...The rules are changed to permit TV translators to receive and rebroadcast "any suitable source of signals, including use of TV auxiliary microwave stations, common carrier microwave stations, and Cable TV Relay Stations on an incidental-use basis." ...The FCC has been upheld by the courts in its order to prohibit the sale of 23 channel CB sets after January 1, 1978.

Something for everyone!

2104-16

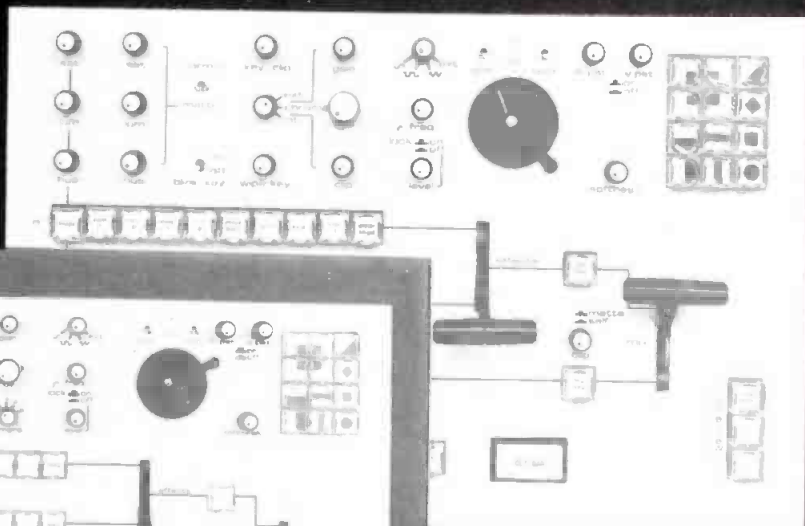

2104-10

No matter what your company's production specialty, news, commercial programming, or instructional television, the *American Data Model 2104 Production Switcher* has the features you'll need to do the job. Human engineering and uncompromising quality make the 2104 ideally suited for use in either studio or ENG/EFP remote applications. Plug-in solid state componentry enables the engineer to service and maintain the 2104 easily and quickly.

features:

- 3 input linear effects keyer
- Downstream linear mix/keyer
- Color background and black burst generator
- Color matte generator
- Blink and wipe key functions
- Multiple drive pattern modulator
- Pattern preset controls
- Joystick pattern positioner
- 12 wipe patterns
- Programmable diode pattern matrix
- Full-range softness control
- 3 x 1 preview selector
- Cutbar

For more information about the complete line of field proven *ADC Professional Video Products*, simply call or write the regional sales office nearest you:

 **American Data**

Research Park • P.O. Box 5228 • Huntsville, Alabama 35805 • Telephone 205 837-5180 • TWX 810 726-2125

ADC NORTHEAST
P.O. Box 452
New Hartford, CT 06057
(203) 379-7840

ADC MID-ATLANTIC
5504 Waterway
Rockville, MD 20853
(301) 460-1454

ADC SOUTHEAST
2219 Oakwana Rd., N.E.
Atlanta, GA 30345
(404) 633-2100

ADC MIDWEST
P.O. Box 27324
Indianapolis, IN 46227
(317) 784-3000

ADC WEST
3760 Cahuenga Blvd.
North Hollywood, CA 91604
(213) 760-3221

A North American Philips Company

For More Details Circle (7) on Reply Card

www.americanradiohistory.com

**How to get TV station quality
even if you're not a TV station.**



Introducing the Panasonic AK-920.

There are many ways of getting TV station quality from a Plumbicon® color camera. You can either own a TV station. Own a lot of money. Or better yet, own Panasonic's new Plumbicon color camera, the AK-920.

Not only does it give you TV station quality in the studio, it gives you TV station quality almost everywhere else. That's because it's fully self-contained, with the YI/Q encoder and the RS-170 sync generator built into the camera head.

But perhaps the best part about the AK-920 is the technology that has been put into it. Like a new color-trap circuit in the encoder and level-dependent circuit for reduced color noise, which is particularly important under low-light conditions. And for excellent edge detail and high frequency

response, there's an adjustable horizontal aperture circuit built into the camera head.

And since the AK-920 is a Plumbicon camera, you get performance that's hard to beat. Like low noise, low dark current and lag, high sensitivity, as well as the capability to reproduce high brightness details without burn-in or blooming.

The result of all this very impressive technology is equally impressive performance. Like horizontal resolution of more than 500 lines at center. A S/N ratio of 48 dB with recommended illumination of 150 footcandles at F/4. And a +6 dB gain switch for minimum illumination of just 15 footcandles at F/1.8.

You also get precise stability of alignment as well as the reliability that you expect from Panasonic. Because the prismatic optical system, the three one-inch pickup tubes, and the deflection coils are mounted on an aluminum die-cast chassis.

Also included are removable camera head side panels for easy maintenance. A self-contained, multi-function viewfinder. Color bar generator. And focus-wobble and sawtooth-generator test circuits. Plus some rather impressive options. Starting with the AK-9220 remote control unit. To a 10:1 zoom lens with built-in 1.67X and 2.5X lens extenders for versatility in location shooting. To a vertical aperture corrector, AK-9620. To the AK-9720 cable equalizer for the RGB signals.

There are also three different versions to choose from. The AK-920ST with studio-grade Plumbicon tubes. The AK-920IT with industrial grade Plumbicon tubes. And the AK-920 without tubes.

So before you buy any color camera, audition the AK-920. It's Panasonic's way of giving you TV station quality, even if you're not a TV station.

For more information, write: Panasonic Company, Video Systems Division, One Panasonic Way, Secaucus, N.J. 07094.

In Canada, contact Panasonic Video Systems Department, 40 Ronsón Drive, Rexdale, Ontario M9W 1B5.

Plumbicon is a registered trademark of N.V. Philips of Holland for TV camera tubes.

Panasonic

just slightly ahead of our time

For More Details Circle (8) on Reply Card

Women and minorities subject of FCC proposal

Now under consideration by the FCC is a proposal to amend the Annual Employment Report (Form 395) particularly as it pertains to the status of women and minorities in broadcasting.

The FCC would modify the form's job categories and definitions to reflect more accurately job positions in the broadcast industry. In addition, the FCC proposed changing the designation of racial and ethnic categories to conform with an executive directive issued by the Office of Management and Budget.

This action was in response to a rulemaking petition by Dr. John Abel and Judith Saxon of Michigan State University, and comments from the National Organization for Women (NOW), the American Women in Radio and Television (AWRT), the American Federation of Television and Radio Artists, AFL-CIO (AFTRA), and numerous other parties.

The FCC said a recent study which compared Broadcasting Yearbook employment statistics with those received in Form 395 sub-

missions found several contradictions.

For example, of the 1,717 executive positions listed in the Yearbook for all television stations in top-50 markets, only 90 (5.2%) were held by women. Moreover, although television stations in the top-10 markets reported 267 women as Officials and Managers on Form 395, they listed only 26 of those women as executives in the Yearbook.

In a more recent study, the U.S. Commission on Civil Rights (CCR) found that employment categories on the Form 395's were interpreted so that almost three-fourths of all employees at the stations were classified in upper-four categories (Officials and Managers, Professionals, Sales Persons, and Technicians), while many of these so-called upper positions, in practice, were little more than clerical in nature, particularly those occupied by minorities and women.

Therefore, the FCC said, the CCR study apparently underscored and confirmed the confusion surrounding employee classification.

Based on the petitions and studies discussed, the FCC said the public interest would be served by inviting comments in a rulemaking proceeding on possible revisions to Form 395, the possible inclusion of additional information which could be relevant to its industry equal employment opportunity program, and the means by which such information could be solicited.

While the FCC was reluctant to recommend a requirement that broadcasters file a statement of reasons for termination of minority and women employees or the listing of individual salaries, it said it did not wish to foreclose comment on any of the various recommendations before it.

The commission said that if any of the changes were adopted, a new Broadcast Annual Employment Report Form would replace the common Form 395 now used by broadcast, common carrier, and cable entities. It said common carrier and cable entities would continue to use the existing form.

FCC amends broadcast power maintenance rules

The Federal Communications Commission has amended its rules dealing with power maintenance for AM, FM and television stations, to specify the use of indicated values for determining power and antenna current ratios.

Prior to this action, it had been FCC and industry practice to accept indicated or calculated power as the actual transmitter output or operating power as long as the determinations of power were made according to established commission procedures with indicating instruments meeting minimum specifications.

However, the FCC said because current language in the rules specifies that the "actual" antenna input power of each station must be maintained as near as practicable to the authorized antenna input power,

this accepted practice was challenged in the U.S. District Court of the Eastern District of Virginia by Rust Communications Group, Inc., licensee of WRNL, Richmond, Virginia.

That challenge followed an FCC action to recover a forfeiture assessed against the station for repeated operation with excessive power in violation of Section 73.52(a) of the rules.

Subsequently, the court ruled against the commission and noted an inconsistency in the rules pertaining to maintenance of "actual" power and those allowing for instrument error in determining power.

The licensee used this margin of error to operate with values above those permitted, but successfully argued to the court that in using this margin of error, its operation

was within the rule's tolerance. The FCC said its intent in the rule was not to permit this mode of operation.

As a result of the court's decision, the FCC said it was rewriting the power maintenance rules with greater specificity to recognize the long-accepted intent and practice of maintaining power and antenna current ratios as near as practicable to authorized values, within specified limits, as determined by designated procedures utilizing instruments of specified minimum accuracies.

The commission said it was transferring licensee's responsibility to ensure that the accuracies of these instruments comply with minimum standards so the power and antenna current ratios determined would

continued on page

SPEED

transceiver, audio or broadcast testing...



With HP's new 339A Distortion Measurement Set.

Automatic frequency nulling and auto set level features the 339A speed your total harmonic distortion measurements (THD). And true-rms detection means accurate measurements as low as 0.0018% (-95 dB) from 10 Hz to 110 kHz. Just select the frequency of the built-in oscillator and the 339A's "tune signal" indicators show you how to make the proper range settings. Whether you're testing transceivers, sophisticated audio equipment or broadcast performance, here's how the 339A, priced \$1900*, can help you make quick and accurate measurements.

Transceiver testing. Automatic setting of the 100% reference level over a 10 dB input range means fewer manual adjustments, saving you a considerable amount of time. And true-rms detection lets you accurately determine thermal noise and harmonic components in making VAD measurements.

Audio testing. In addition to the time-saving convenience of auto set level and auto null, you have the benefits

of a built-in tracking oscillator. This means you have a low-distortion source for testing high-quality audio equipment and you tune one instrument instead of two.

Broadcast compliance testing. An AM detector, 30 kHz low-pass filter, switchable VU meter ballistics, and a +2 to -12 dBm (600Ω) meter scale let you quickly isolate the cause of out-of-limit readings. And they reduce your set-up time when checking your equipment for compliance with operating regulations.

Contact your local HP field engineer for further details.

* Domestic U.S.A. price only

087/43




1507 Page Mill Road, Palo Alto, California 94304

For assistance call: Washington (301) 948-6370, Chicago (312) 255-9800, Atlanta (404) 955-1500, Los Angeles (213) 877-1282

For More Details Circle (9) on Reply Card

The Only Solution for Sony Cameras



373 DX

Chromatic Production Switcher

Just Plug Them in and You Have the Most Advanced Studio

- Sony Camera Compatibility.
- Color Bar, Automatic Color Black and Color Background.
- 10 Wipes, Soft Wipe, Border Wipe, and Key.
- SYNC Generator.
- Front Panel Subcarrier Phase Shifter.
- Digital Tally Indicator, and Intercom.

SHINTRON
World Wide

Cambridge, Ma.
02142 U.S.A. 617-491-8700 Telex 921497

news

.....
continued from page 10

as close to the actual values as practicable.

Whenever the accuracy or reliability of any indicating instrument was suspected, it said, the licensee must have that instrument promptly calibrated, repaired or replaced. And, during the interim, it must use prescribed alternative procedures for determining and maintaining operating power.

BBC sends color TV over STC optical fiber link

The BBC, in collaboration with Standard Telephones and Cables (STC), recently completed a series of color television test transmissions over a 12-mile optical fiber loop.

The optical system was manufactured and installed by STC in normal post office cable ducts

between the towns of Hitchin and Stevenage, 20 miles north of London. The optical link has a capacity of almost 2,000 simultaneous telephone conversations. Although it was officially inaugurated June 1977, it has undergone extensive testing with the TV trials since November.

The objective of the tests has been to explore fundamental aspects of transmitting highly structured signals (a characteristic of television) over the new medium of fiber optics. After analysis, the test results will provide useful guidance for the specification and design of production equipment.

No basic problems have been identified in the use of fiber optics as a medium for transmitting digital TV. Its real potential inevitably will be realized in trunk transmission of television, since microwave channels will not meet all future growth requirements. Other TV transmission applications of a short-haul and/or a temporary nature will be able to utilize the extreme flexibility of optical fiber systems.

Log Entries

February

22-24—Synergetic Audio Concepts, San Francisco area sound engineering seminar. Holiday Inn, Belmont, California.

27-28—Worcester Polytechnic Institute, Project Management seminar. WPI campus, Worcester, Massachusetts.

March

4-8—National Association of Television Program Executives, annual conference. Bonaventure hotel, Los Angeles.

6-9—Interlace (data communications) annual conference. Las Vegas Convention Center, Las Vegas.

13-16—Electronics Industries Association, annual spring conference. Washington, D.C.

13-17—IEA/Electrex; International Electrical, Electronic and Instrument Exhibition. National Exhibition Centre, Birmingham, England.

17-19—Intercollegiate Broadcasting System, national convention. Biltmore hotel, New York.

27-28—Worcester Polytechnic Institute, Project Management seminar. Hotel Sonesta, Cambridge, Massachusetts.

April

4-7—Communication Equipment and Systems Exhibition. National Exhibition Centre, Birmingham, England.

5-8—National Honorary Broadcasting Society, Alpha Epsilon Rho, annual convention. Alladin hotel, Las Vegas.

9-12—National Association of Broadcasters, annual convention. Las Vegas.


12-26—MIP-TV, 14th annual international marketplace for producers and distributors of TV programming. Palais des Festivals, Cannes, France.

May

2-6—High Fidelity '78 Spring Exhibition. Cunard International Hotel, London.

continued on page

BROADCAST ENGINEERING

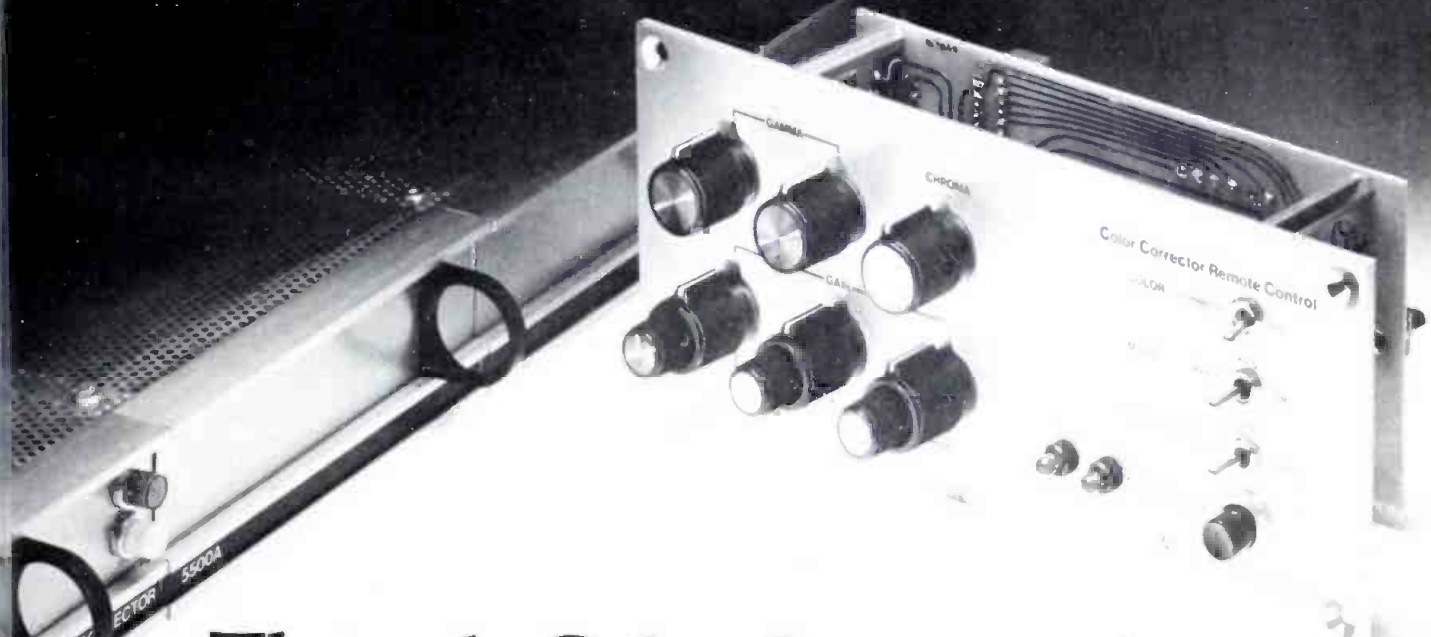

The only Color Corrector for Electronic News Gathering.

Electronic News Gathering makes tough demands upon the broadcaster. Color imbalance and colorimetry problems are frequently encountered. Matching remote camera shots to indoor studio programs or assembling tapes from different locations or cameras is "chancy" at best. Often that fast-breaking story doesn't allow for camera rebalancing!

Thomson-CSF Laboratories provides a solution to such difficult encoded signal color problems. With the Model 5500A Color Corrector, you'll be able to rebalance and match video signals *after* encoding. It can be used either after the play-back tape machine or following the microwave receiver during live coverage. In most cases, a noticeably improved color picture will result. For ease of operation, a Remote Control unit is included as standard equipment.

As an added feature, an optional automatic Sensor unit is also available to control the Color Corrector for telecine use.

Whether for Electronic News Gathering, tape production or telecine use, the Thomson-CSF Laboratories Color Corrector System should be working for you. Interested? Give us a call.




THOMSON-CSF LABORATORIES, INC.

37 Brownhouse Road, Stamford, Connecticut 06902

(203) 327-7700 / TWX (710) 474-3346

For More Details Circle (11) on Reply Card

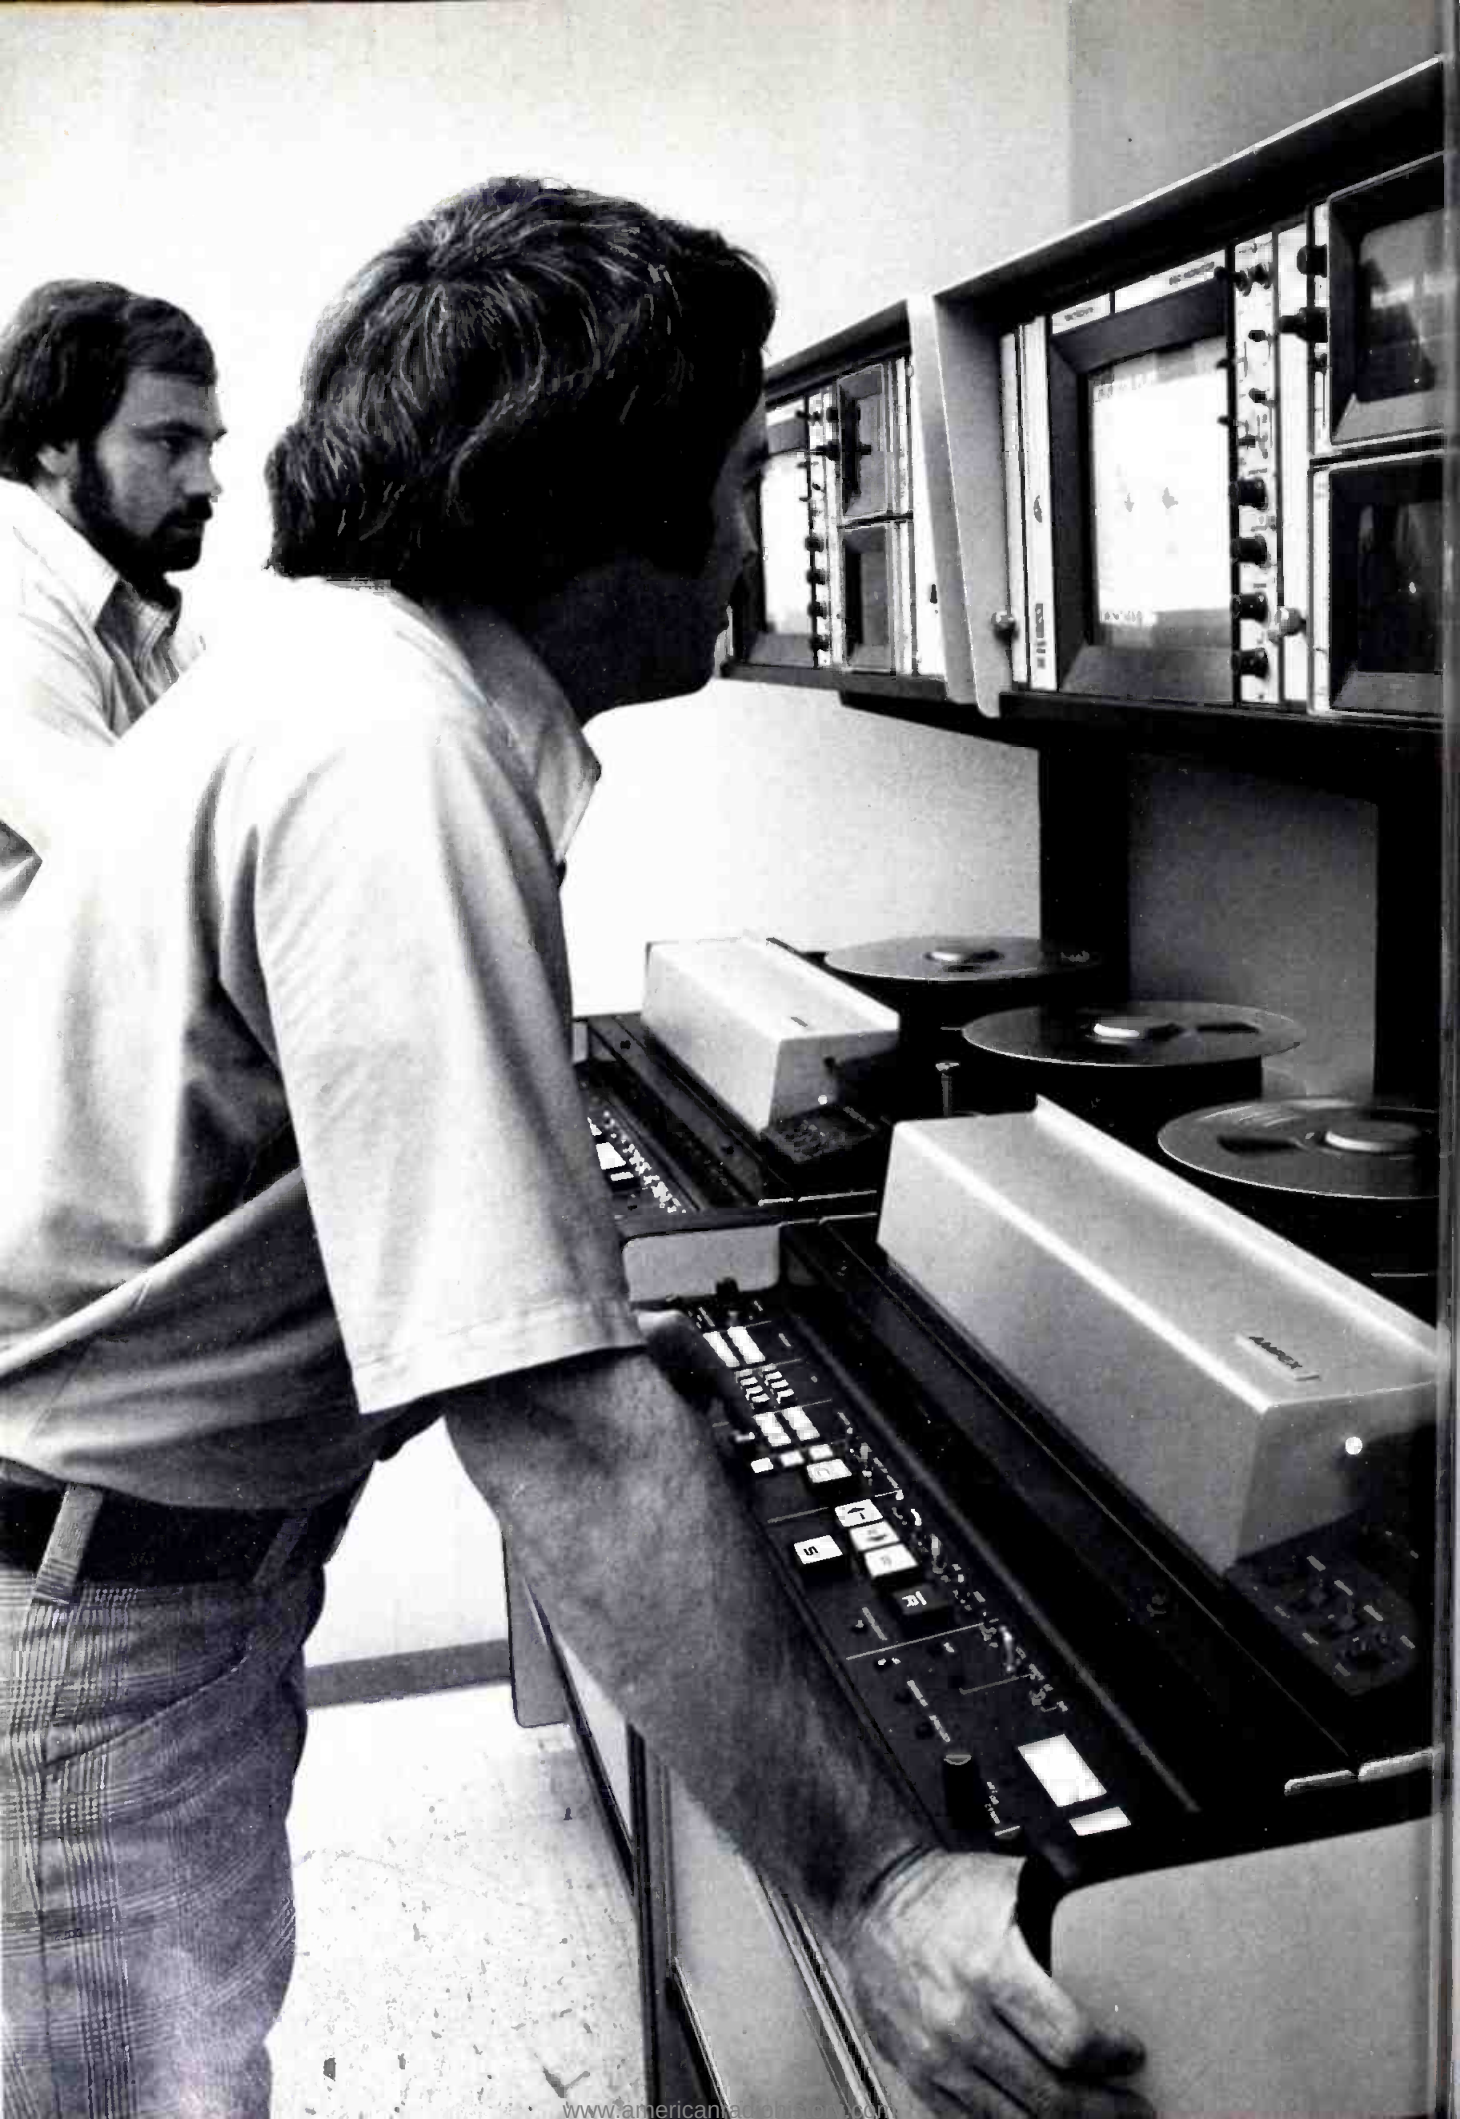

The small machine for big stations. The big machine for small stations. AVR-2.

Tell us what it has to do. There's an Ampex AVR-2 for every videotape assignment in your station.

If you already have a complete production/editing setup, you probably don't need a lot of accessories for your AVR-2. Order it with basic manual controls, and it's ready to go to work.

You might want Super High Band Pilot. It comes with optional switch selection to augment the standard High Band Color circuits, and it adds valuable depth to your multi-generation production work.

If you're just now growing into more advanced production work, then you're going to want the EC-2 Edit Controller.

This complete, sophisticated stand-up time code editing accessory can put you in command of as many as seven additional (similarly equipped) machines working in any combination of master/slave for production or multiple dubbing service.

Modular construction means an easy fit for your AVR-2, no matter where you want to use it—at a remote location, in your tape room, or out in the mobile van.

AVR-2 is the quad recorder that grows. Every accessory for this machine is available upon initial purchase or at any time in the future when you're ready. Tell us what it has to do, and we'll recommend the model that suits your needs.



AMPEX

Ampex Corporation, AudioVideo Systems Division, 401 Broadway, Redwood City, California 94063, 415 367-2011.

For More Details Circle (12) on Reply Card

www.americanradiohistory.com

Great market potential in optical communications

The optical communications market will exceed \$600 million by 1987, according to a new study by Frost & Sullivan, Inc.

The study divides the market into two distinct categories: 1) free-

space, or atmospheric communications, in which a laser beam propagates a message through the atmosphere directly between a transmitter and receiver; and 2) bounded, or guided, systems that transmit modulated laser signals within optical fibers or light pipes.

Many new companies, trying to gain a share of this market, are entering the field to offer optical communications systems and components. These companies are particularly interested in commercial telecommunications, a market ex-

pected to be \$350 million by 1987 compared to \$11 million currently. However, the study warns that the giant industrial companies will supply much of their own needs.

Computer applications, in which optical fibers are used to interconnect mainframes and peripherals, will grow from \$500,000 in 1977 to \$75 million in 1987, the study reports.

The move to optical computer links has already begun, in fact. Several companies offer such links in computer interconnects, and at least two major computer companies shortly will offer such links to be compatible with existing machines and peripherals.

Despite the expected growth potential in optical communications the study says these projections are based on engineers resolving certain problems. These include the adverse effects of moisture and temperature on some optical glasses over the long term, and the limited lifetime of injection lasers and other critical components.

April conference to discuss new satellites

More than 100 technical papers on new telecommunications satellite systems will be presented at the Seventh Annual Communication Satellite Systems Conference, scheduled for April 23-27 in San Diego. The conference is being sponsored by the American Institute of Aeronautics and Astronautics (AIAA).

Papers will be presented by scientists and engineers from 11 countries. Attendees will include representatives of suppliers, regulators, and telecommunications satellite users from many nations.

Highlights of the conference are to include:

- Detailed description of the new satellites, such as Intelsat V, LES-8 and 9, Anik C, 5B5, TDRSS, Syncom IV and DSCS III.
- Technology sessions featuring new large antenna designs, microwave and millimeter wave component advances, and development of digital processes for a wide variety of on-board spacecraft functions.
- Three panel sessions debating key issues facing the industry in the 1980s, including the crowding of parking space in the best orbital locations caused by successful launch of more than 60 satellites in geosynchronous orbit.

For further information, contact Dr. S. J. Dudzinsky, Jr., The Radio Corporation, 1700 Main Street, Santa Monica, CA 90406.

NEW From **WILKINSON
ELECTRONICS**

NOW From **WILKINSON
ELECTRONICS**

the
**All Solid State
2 KW**

FM Transmitter

Our 14th Year of Progress with
248 Transmitters In Service and
6436 Clients from
Abu Dhabi to Zambia

**WILKINSON
ELECTRONICS, INC.**

P.O. BOX 738 · CHESTER, PA. 19013 (215) 497-5100 · TWX 510 669 3188

New as Tomorrow... Reliable as Today

PROBLEM SOLVERS



There are two kinds of suppliers in this world: (1) those who don't want any part of your problems and (2) those who want to help you solve them. All the first group is interested in is getting your order. Get in and get out is their motto.

We belong to the group that wants to help you solve your problems. If one of our standard consoles or audio systems won't solve your problem, we'll custom-engineer one that will and we'll stick with you until we've got the answer. We've been doing it this way for more than ten years.

Get in and get involved is our way of doing business.

AUDIO DESIGNS AND MANUFACTURING, INC.
16005 Sturgeon, Roseville, Michigan 48066
Phone: (313) 778-8400, Cable: AUDEX TLX-23-1114

AMPEX

DISTRIBUTED OUTSIDE U.S.A.
BY AMPEX INTERNATIONAL OPERATIONS, INC.



news briefs

Television seminar/workshop

Imero Fiorentino Associates will conduct its eighth regional television lighting and staging seminar/workshop March 27 and 28 at WGBH studio facilities, Boston. The company's staff will provide instruction covering the spectrum of current techniques to improve video picture

quality. Lectures and demonstrations will be of value to those engaged in both broadcast and non-broadcast television production operations. The firm is currently accepting reservations. For information, write: Education Division, Imero Fiorentino Associates, 10 West 66th Street, New York, NY 10023; (212) 787-3050.

Communications transmission seminar

A communications transmission seminar is scheduled for March 20 at Princeton University's Woodrow

Wilson Auditorium. The one-day seminar, sponsored by IEEE and Princeton, will review the latest techniques in some important areas of digital transmission and switching technology. For more information write: M. A. Carrio, USACENCOMS DRDCO-COM-RX-5, Fort Monmouth NJ 07703.

FCC issues technical memo

Technical Memorandum #6, "Conversion of the TV and FM Broadcasting Field Strength Curves to the Metric System," offers a means of adapting the field strength curves found in Part 73 of the FCC Rules to metric distances and antenna heights. The FCC invites comment on the increments chosen, axis and curve annotation, the waviness of some of the curves and any inaccuracies in the memo. For copy, send a self-addressed label (not envelope) to: Research and Standards Division, Room 7202, Federal Communications Commission, Washington, DC 20554, attn: Technical Memo #6.

Laser recorder developed

A pulse code modulation recording system using laser beams to record and later reproduce sound of high-fidelity purity has been developed jointly by Mitsubishi Electric Corp., TEAC Corp., and Tokyo Denka Company. The new system, called the PCM laser recorder, projects an extremely small laser beam onto a disc, converts the 1/40,000th of a second segments of sound, and then records them. The reproduced sound is not a function of amplitude or groove depth in the record.

Bonneville International sells KSL-FM

Bonneville International Corp. has sold radio station KSL-FM, Salt Lake City, to Simmons Family, Inc. This move, recently approved by FCC, stemmed from the acquisition by Bonneville of KAFM(FM), Dallas, formerly owned by KRLD, Corp. In related action, the FCC granted transfer of control of KRLD, Corp. from Philip R. Jonsson, Marge Charlton and Kenneth Jonsson Metromedia, Inc., and granted assignment of the license of KRLD (AM), Dallas, from KRLD, Corp. Metromedia.

NPR endorses proposed legislation

National Public Radio's board of directors has endorsed the public broadcasting legislation proposed


continued on page

Built for Professionals



ITC's 750 Series Reproducer

1/2 Track Stereo \$1260

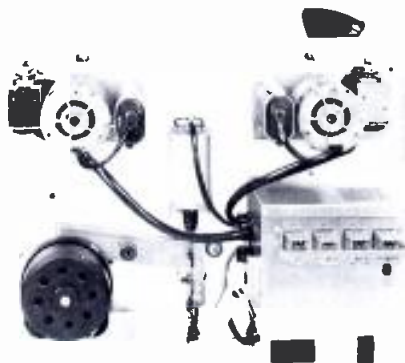

Check with any leading automation company for more information or call ITC collect (309-828-1381).



INTERNATIONAL TAPETRONICS CORPORATION

2425 SOUTH MAIN STREET • BLOOMINGTON, ILLINOIS 61701

Marketed in Canada exclusively by McCurdy Radio Industries Ltd • Toronto

© 1975 by ITC

For More Details Circle (14) on Reply Card

The finest multi-core studio and field camera system ever produced by Philips.

Which means the finest multi-core studio and field camera system ever produced.

In the decade since Philips re-invented color with the Plumbicon® tube, its PC-60 and PC-70 have successively stood as the reference standard for broadcast performance. Behind Philips leadership, that standard has steadily improved to today's ultimate—the LDK-25.

That Philips has again leapfrogged the competition can surprise no one who knows broadcast cameras...since we created Plumbicon® technology. After a decade of refinement and improvement Philips is still the *only* company that manufactures all of the critical picture determining components—computer-matched yokes, beam splitting prism, deflection circuitry and Plumbicon® tubes. The *only* company that can design each component for optimum performance of the entire camera system. These advantages, of superior Philips design and in-house component availability, offer you unsurpassed stability, picture quality and value.

Further, at Philips, we offer you options that *are* options. The LDK-25 you buy is a custom unit, equipped

with the automatic features you select...not a 'loaded' factory package.

But you can't just read about the LDK-25...you've got to experience it.

Only a demonstration can show you how our anti-comet-tail Plumbicon® tubes handle highlights up to 32x normal peak-white level without blooming or streaking—and without loss of our famous color rendition and resolution. 'Live' is the only way to learn what our Color Line-Up Equipment (CLUE) can do for ease of balance... what electronic color temperature control, auto white balance, flexible auto iris and contrast compression mean in use.

Only after you've seen it all—after you've actually handled this remarkable camera—will you understand why the Philips name is a guarantee of incomparable stability...why no one else can match our 1000-hour performance.

To get your hands on an LDK-25 or to get more information, call us today at (201) 529-3800, or write: Philips Broadcast Equipment Corp., 91 McKee Drive, Mahwah, N.J. 07430.

the
INNOVISION
company*



*Innovative Leader in World Television

PHILIPS®

TM/N.V. Philips

For Literature Only Circle (15) On Reply Card

news briefs

.....
continued from page 18

President Carter and pending in Congress. The President suggested that Congress increase spending on public broadcasting to \$200 million annually by the fiscal year beginning October 1, 1980. Of this total, he asked that \$100 million go to the creation of "high-quality domestic productions," including

complete congressional hearings that commercial radio and television rarely offer.

Fiber optics and communications

Papers have been invited for FOC 78, the United State's first fiber optic and communication exposition to be held September 6-8 in Chicago. Objectives of the program include: providing a forum solely devoted to fiber optics, digital and satellite communications; a yearly review of FOC technology and applications; an exploration of regulatory and policy implications of FOC develop-

ments; and market potential. Two hundred-word abstracts of papers relating to the field are due March 15, and should be mailed to: Dr. Paul Polishuk, Information Gatekeepers, Inc., president, 167 Corey Road, Brookline, MA 02146.

Marconi to distribute Orrox editing systems

Marconi Communication Systems Limited and Orrox Corp. have reached an agreement giving Marconi worldwide distribution rights for Orrox's CMX series of videotape editing systems. Marconi, a GEC Marconi Electronics company, also obtained exclusive U.K. distribution rights for the Orrox modular CMX340X system. This follows the agreement announced early last year for Marconi to manufacture and market Ampex 1-inch videotape recorders.

New electronics organization formed

Manufacturers of sound and audio equipment, meeting recently in Chicago, formed the Creative Audio and Music Electronics Organization (CAMEO). The new association will develop active program for its members, dealers and consumers. In addition, CAMEO will work cooperatively with other trade groups, gather recommendations for standardization, market research and product safety, and amass statistical data.

3M Company acquires COMTEC

3M Company has acquired Communications Technology Incorporated (COMTEC) of Huntsville, Alabama. COMTEC manufactures and markets audio and video routing switchers and video production switchers for the broadcast and industrial/educational markets.

Call for papers announced

A call for papers has been issued for the International Microcomputers, Minicomputers, Microprocessors '78 Conference, to be held June 20-22 at the Palais des Expositions, Geneva, Switzerland. The conference will cover microcomputer technology; software technology; industrial control and automation applications; small business system communications applications of microcomputers and LSI devices; and more. Abstracts are due February 15, 1978. Announcements of selected papers will be made March 1. For more information, write: Industrial & Scientific Conference Management, 222 West Adams Street, Chicago, Illinois 60606; (312) 248666.

BETTER SOUND THE AMPRO WAY.



You can deliver better sound to your monaural audience in the car, at home and on portable sets by utilizing Ampro's new Monomax Phase Protector—the amazing new matrixing system that eliminates phasing problems—mono response "holes" and dull, lifeless sound.

Ampro Cartridge Tape Equipment is designed to meet the needs of the professional broadcaster. It's built to sound better and last longer. Our superior system design makes use of the latest advances in linear and digital integrated circuit design to give you superior system performance and reliability.

Call us today and find out how to get better sound the Ampro way.





AMPRO BROADCASTING INC.

850 PENNSYLVANIA BLVD., FEASTERVILLE, PA 19047 • (215) 322-5100
Professional Equipment for Broadcasting Professionals

For More Details Circle (16) on Reply Card

VIDEOCASSETTE EDITING. MADE FOR SPEED. MADE FOR ACCURACY. MADE FOR QUALITY. MADE by JVC.

MODEL VCR-60000 | Recorder

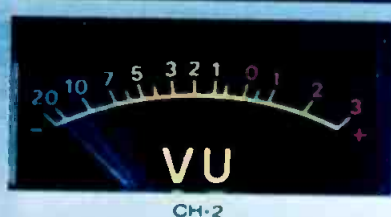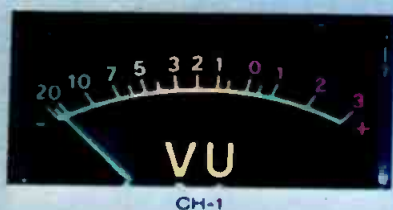

AUDIO REC LEVEL
LIMITER  ON OFF



JVC INTRODUCES THE CR-8300U FULL EDITING VIDEOCASSETTE RECORDER...

FOR FASTER EDITS

Now you can significantly cut the time you spend editing 3/4U-format tapes, thanks to JVC.

The unique bi-directional search control of the CR-8300U Electronic Editing Recorder lets you fast-forward at 7 times normal speed. Reverse at 10 times normal.

And you can do it while the tape is threaded on the head. You don't have to stop to rethread.

The unique preview feature lets you pass the signal from a second source through the CR-8300U while it's playing, without erasing the tape. You'll cut down on false starts by knowing what your edit will be like.

FOR MORE ACCURATE EDITS

Accuracy is what the JVC CR-8300U is designed for.

The unique built-in Pre-Roll rewinds tape for about 4 seconds from the actual editing point, and puts the recorder in stand-by mode. When you push "Edit Start" the CR-8300U first plays back about 4 seconds of rewind program, then goes automatically into the recording mode at the edit point. You're assured of the highest accuracy.

When you assemble edit, video and audio signals are edited simultaneously. When you insert, you can edit video and either audio channel independently or in any combination. Either way, accuracy is ± 5 frames.

You want still frame and slow motion? You've got them. The forward speed can be adjusted from 0 to 1/15th normal speed. You'll always find the exact frame you want.

And the tape counter doesn't just count. It has a memory. When you know you'll want to find a particular point again you reset the counter to "000". Then when you rewind, it will automatically stop the CR-8300U right there.

No other moderately priced videocassette editor has this combination of features to give you the accuracy you're looking for.

FOR THE HIGHEST QUALITY PICTURE

But speed and accuracy are nothing without quality. And quality is what the JVC CR-8300U has most of. It has everything you need for NTSC-type color video *built-in*.

Automatic Phase Control and patented Color Dubbing assure generation after generation of duplicates with stable color lock and highest quality.

There's a built-in Dropout Compensator. There's a video S/N ratio

of better than 45dB (unweighted) on the Rohde & Schwarz noise meter. An audio S/N ratio of better than 45dB. Independent Audio VU Meters and Controls for both channels (which can be operated either automatically or manually) help you upgrade the quality of low-level audio recordings.

Black & white resolution is better than 320 lines; color, better than 240.

And if "flag-waving" turns you off, all you have to do is turn on the CR-8300U. The frame servo locks on the odd field, so every edit is smooth and clean.

JVC WORKS WITH YOU

JVC has worked with broadcasters and producers to give you what you want, what you say you really need. Speed, accuracy, quality. And the features you need to get them.

Features like an external sync input for V-locking other sources. A built-in capstan servo mechanism for jitter-free, stable tape speed. An internal time-lapse meter to make

regular maintenance easier. And a new remote-control system you can learn about by reading the next page.





AND...TO TIE IT ALL TOGETHER... THE JVC RM-83U REMOTE AUTOMATIC EDITING CONTROL UNIT.


The RM-83U completely controls two JVC CR-8300U recorders for fast and accurate insert and assemble editing.

Its two independent LED timers (indicating minutes, seconds, and tenths of seconds) can be put on "Hold," so you can precisely identify the edit point. They then return to real time. "Hold" again at the end of the edit, and you've timed the length of your insert. Both clocks memorize the edit point—for fast and accurate review, you quickly return to it by touching "Search".

Not only can you *review*, you can *preview*. A unique rehearsal editing feature lets you see your edit without putting a signal on the tape. You can be sure you've got exactly what you want, exactly where you want it. After you've previewed, both machines go back to the edit point automatically. If you like what you saw, just push "Start" and you have it.

There are many more great features, such as the automatic safety device that shuts off both recorders if a tape is left in still-frame for 10 minutes. Get all the details on both the RM-83U and the CR-8300U by writing today to the address listed on the back page.

SPECIFICATIONS OF THE CR-8300U EDITING COLOR VIDEOCASSETTE RECORDER

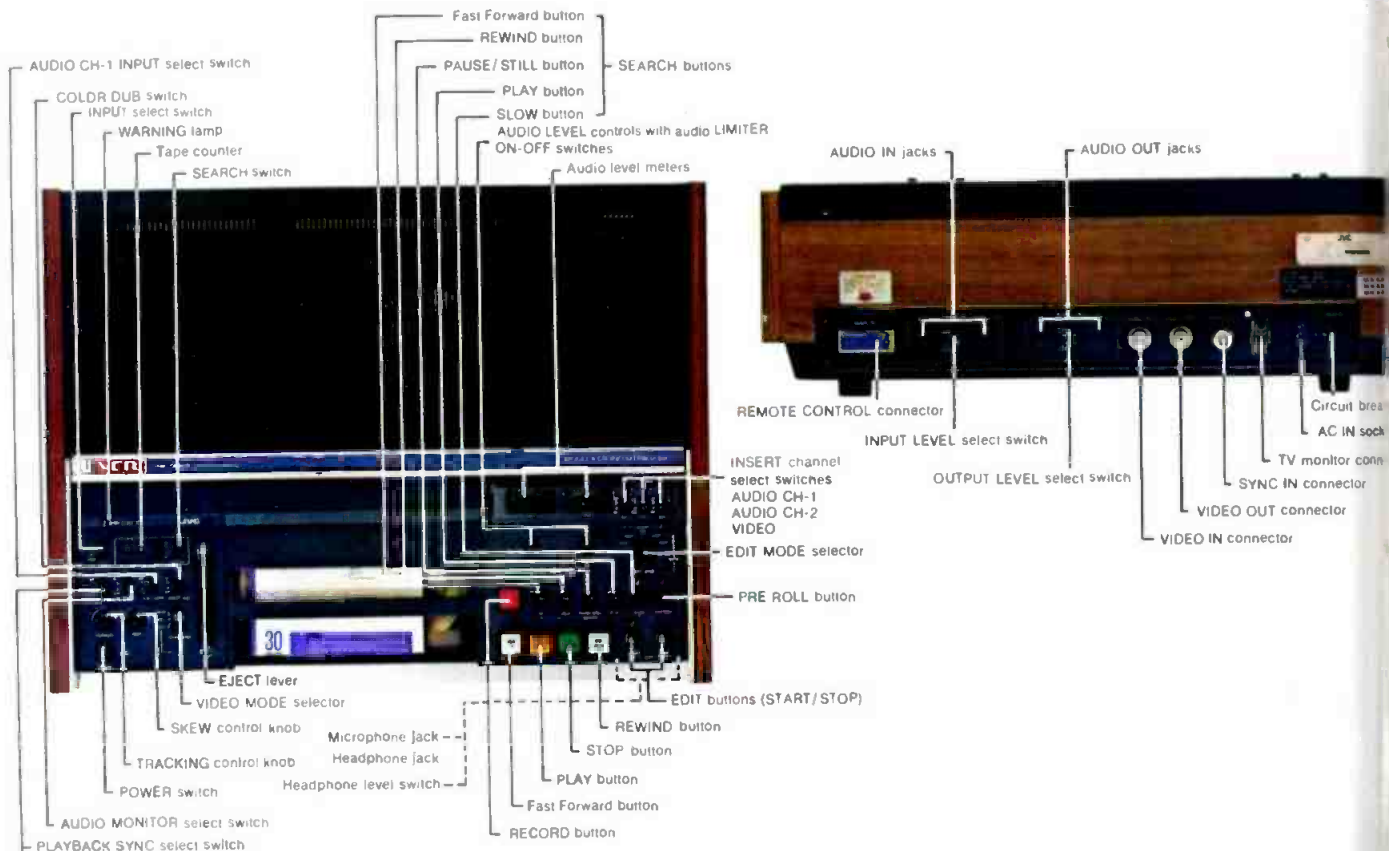

GENERAL

Video Recording System	: Rotary two-head, helical scan system
Luminance	: FM recording
Color Signal	: Converted subcarrier direct recording
Video Signal System	: NTSC-type color signal
Power Requirement	: 120 V AC, 60 Hz, 120 watts
Temperature Operating	: 41°F to 104°F (5°C to 40°C)
Storage	: -4°F to 140°F (-20°C to 60°C)
Operating Position	: Horizontal only
Weight	: 67.5 lbs. (30.6 kg)
Dimensions	: 24-1/16" (W) x 7-11/16" (H) x 17-3/4" (D) (610 mm x 195 mm x 450 mm)

Tape Transport

Tape Speed	: 3-3/4 ips (95.3 mm/s)
Fast Forward Time	: Less than 6 min. for 60 min. tape
Rewind Time	: Less than 5 min. for 60 min. tape
Wow & Flutter	: Less than 0.2% RMS

Video Signals

Input	: 0.5 V to 2.0 Vp-p, 75 ohms unbalanced
Output	: 1 V p-p, 75 ohms unbalanced
Signal-to-Noise Ratio	: More than 45 dBs (Rohde & Schwarz noise meter)
Horizontal Resolution	: Color 240 lines, Monochrome 320 lines

Audio Signals

Input	: Mic -70 dBs (600 ohms unbalanced)
	: Line -20/0 dBs (10k ohms unbalanced)
Line Output Level	: -20/0 dBs (600 ohms unbalanced)
Headphone Output	: -28 dBs/-37 dBs (8 ohms unbalanced)
Signal-to-Noise Ratio	: More than 45 dBs (@ 3% distortion level)
Frequency Response	: 80 Hz to 15 kHz

Be sure to write today to JVC for more information on the CR-8300U Electronic Editing Color Videocassette Recorder and also for a copy of JVC's new Glossary of Video Terms.

JVC

JVC INDUSTRIES COMPANY, BT-28, a division of US JVC CORP., 58-75 QUEENS MIDTOWN EXPRESSWAY, MASPETH, N.Y. 11378, (212) 491-2100

For Literature Only Circle (17) On Reader Service Card
For Demonstration Only Circle (18) On Reader Service Card

BROADCAST ENGINEER

FCC

William J. Tricarico was named secretary of the Federal Communications Commission. Tricarico, 34, has been a management analyst with the FCC's Management Systems Division, Office of the Executive Director, since joining the commission in January 1972.

Three additional regional directors recently were approved under the Field Operations Bureau reorganization plan. They are: Carl E. Pyron, Atlanta; Robert T. Crawford, Chicago; and William E. Johnson, Seattle.

Harry Fine, FCC deputy chief engineer, died December 5 at George Washington University Hospital. He was 65. Fine, who was with the FCC for 37 years, played a leading role in the development of domestic and international communication systems, including radio, TV, telephone and satellites, and in solving difficult communication problems. He was appointed deputy chief engineer in 1974, a position he held at the time of his death.

Radio/Television

Anna Kern, Bill Rodgers and Loren Kayfetz have joined the staff of public radio station KWIT, Sioux City, Iowa, as announcer/producers. Kern comes to KWIT from WMMM/WDJF, Westport, Connecticut. Rodgers has worked with various Sioux City media, most recently for KBCM-FM. And, Kayfetz has done radio work in Michigan, Tennessee, and Maine.



MILLER PLUMMER HOFFMAN

W. "Fran" Miller, assistant to the director of engineering, Fisher's Blend Station, Inc., owner and operator of KOMO Radio/TV, Seattle and KATU-TV, Portland, Oregon, has retired after 31 years with the broadcast corporation. Robert H. Plummer, electronic maintenance engineer for KOMO-TV since 1972, is the new chief engineer for KOMO Radio/TV, assuming Miller's responsibilities for the two Seattle ABC affiliate stations.

Bob Connelly, vice president and general manager of WNH in Rochester, was elected president of the New Hampshire Association of Broadcasters at their annual convention. C. Palmer Dante, owner of WBCM-FM and WTSV-AM in Claremont, and Stuart

continued on page 26

Perfect Timing

MASTER
CLOCK SYSTEMS



CHOOSE THE RIGHT ONE FOR YOU!

If seeing the same time on all your clocks is important, select ES 192 - Line Frequency timebase, for only \$275.

If a guaranteed accuracy of three seconds per month is what you want, choose ES 160 - \$750.

How about one second per month? ES 160/1 - \$900.

Or National Bureau of Standards accuracy! ES 190 is synchronized to Radio Station WWV to provide a Master with unquestioned accuracy. \$900 with receiver and antenna.

For a Time / Temperature Master, ask for ES 196 - \$650.

ESE Master Clock Systems are simple to install. All Masters have a Serial Time Code output, able to drive twenty slave displays without buffering. Slaves range in size from .3" LED to 4" Electromagnetic displays, priced from \$134 to \$475.


IF YOU ALREADY HAVE A SYSTEM AND WANT TO EXPAND IT, get the ES 167 Serial Time Code Generator (\$125), then add any number of our low cost slaves.

Many, many options and accessories are available. Ask us about them. Our brochure tells the whole story, but not for long. We keep adding new products.



Write, Wire or Call: (213) 674-3021
505½ CENTINELA AVENUE • INGLEWOOD, CALIFORNIA 90302

WEIGH ALL THE OPTIONS BEFORE YOU MAKE YOUR DECISION!

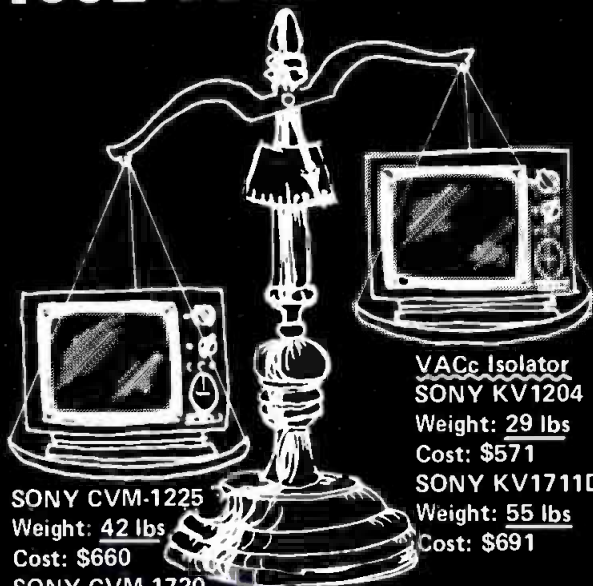

SONY CVM-1225
Weight: 42 lbs
Cost: \$660
SONY CVM-1720
Weight: 69 lbs
Cost: \$950

VACc Isolator
SONY KV1204
Weight: 29 lbs
Cost: \$571
SONY KV1711D
Weight: 55 lbs
Cost: \$691

Electro-optical isolators available for
most Sony receivers

EEF/ENG APPLICATIONS

Weigh all the options before you send your crew out for that ENG assignment. Will that lower-priced monitor/receiver your technical crew is using have that SONY performance and reliability? Too heavy you say... or maybe too expensive. Do yourself a favor... install a Video Aids electro optical isolator in a Sony receiver. In less than 30 minutes you have a high quality color monitor while still retaining the receiver function. You only add 8 ounces to the receiver's total weight instead of the typical 12 to 18 pounds most monitor/receivers add. Try it... not only will you like that solid reliability and performance... you'll save money... and your crews will love you for not having to carry those heavy monitor/receivers. Yes, weigh all the options before you make your decision...

Manufacturer's of:

Editor-Programmers	Cross Pulse Generators
Party Lines	Burst Phase Meters
Gen-Lock Color Sync Gen's	H-Phase Meters
Video Line Isolators	Black Burst Generators



VIDEO AIDS corporation
of colorado

phone USA (303)-667-3301
Toll free Canada (800)-261-4088

325 East 7th Street, Loveland, Colorado 80537

people in the news

.....
continued from page 25

Flanders, general manager of WFEA in Manchester, were elected vice presidents. **Richard Morse, Jr.**, president and general manager of WPNH in Plymouth, was re-elected director of the association.

Tim Rand has been elected president of the Arkansas Associated Press Broadcasters Association. Rand, VP and general manager of KDRS, Paragould, succeeds **Dixie Lewis**.

Al MacMillian has resigned as radio vice president for the Georgia Association of Broadcasters to become general manager of WAAX, Gadsden, Alabama. **Tom Lloyd**, vice president and treasurer of Clarke Broadcasting and general manager of WLAQ, Rome, Georgia, has been named to succeed MacMillian.

Barbara Benkowski has joined the sales staff of radio station WEAU 1330-AM, Evanston, Illinois. Benkowski has produced and hosted several radio talk shows and has served as continuity director for WUIC-AM.

Manufacturers/Distributors

R. Terry Hoffman was elected to the board of directors of TeleMation, Inc. Hoffman joined TeleMation in 1969, and has been a vice president since 1973. He is president of TeleMation Productions, Inc., a subsidiary of TeleMation, Inc. which operates a video production facility in the Chicago area.



SUTHERLAND



GOGA




DURNWIRTH

William Sutherland moves from Electro Voice, Inc. to GC Electronics, where he becomes advertising and sales promotion manager. Sutherland has held similar communications positions with other manufacturers of audio products, musical instruments and electronic components.

Ron Goga is the new general marketing manager of Amperex's Slatersville Division. Prior to this appointment, Goga had been marketing manager for Discrete Semiconductors.

It was announced recently that **Roy K. Durnwirth** is the new general marketing manager of Amperex's Hicksville division. Durnwirth joined Amperex in 1975 as marketing manager, microwave and scientific products.

John E. Leonard, Jr., becomes vice president and general manager of Moseley Associates. Leonard has been with Moseley for nine years, the last three of which he has served as vice president, marketing.

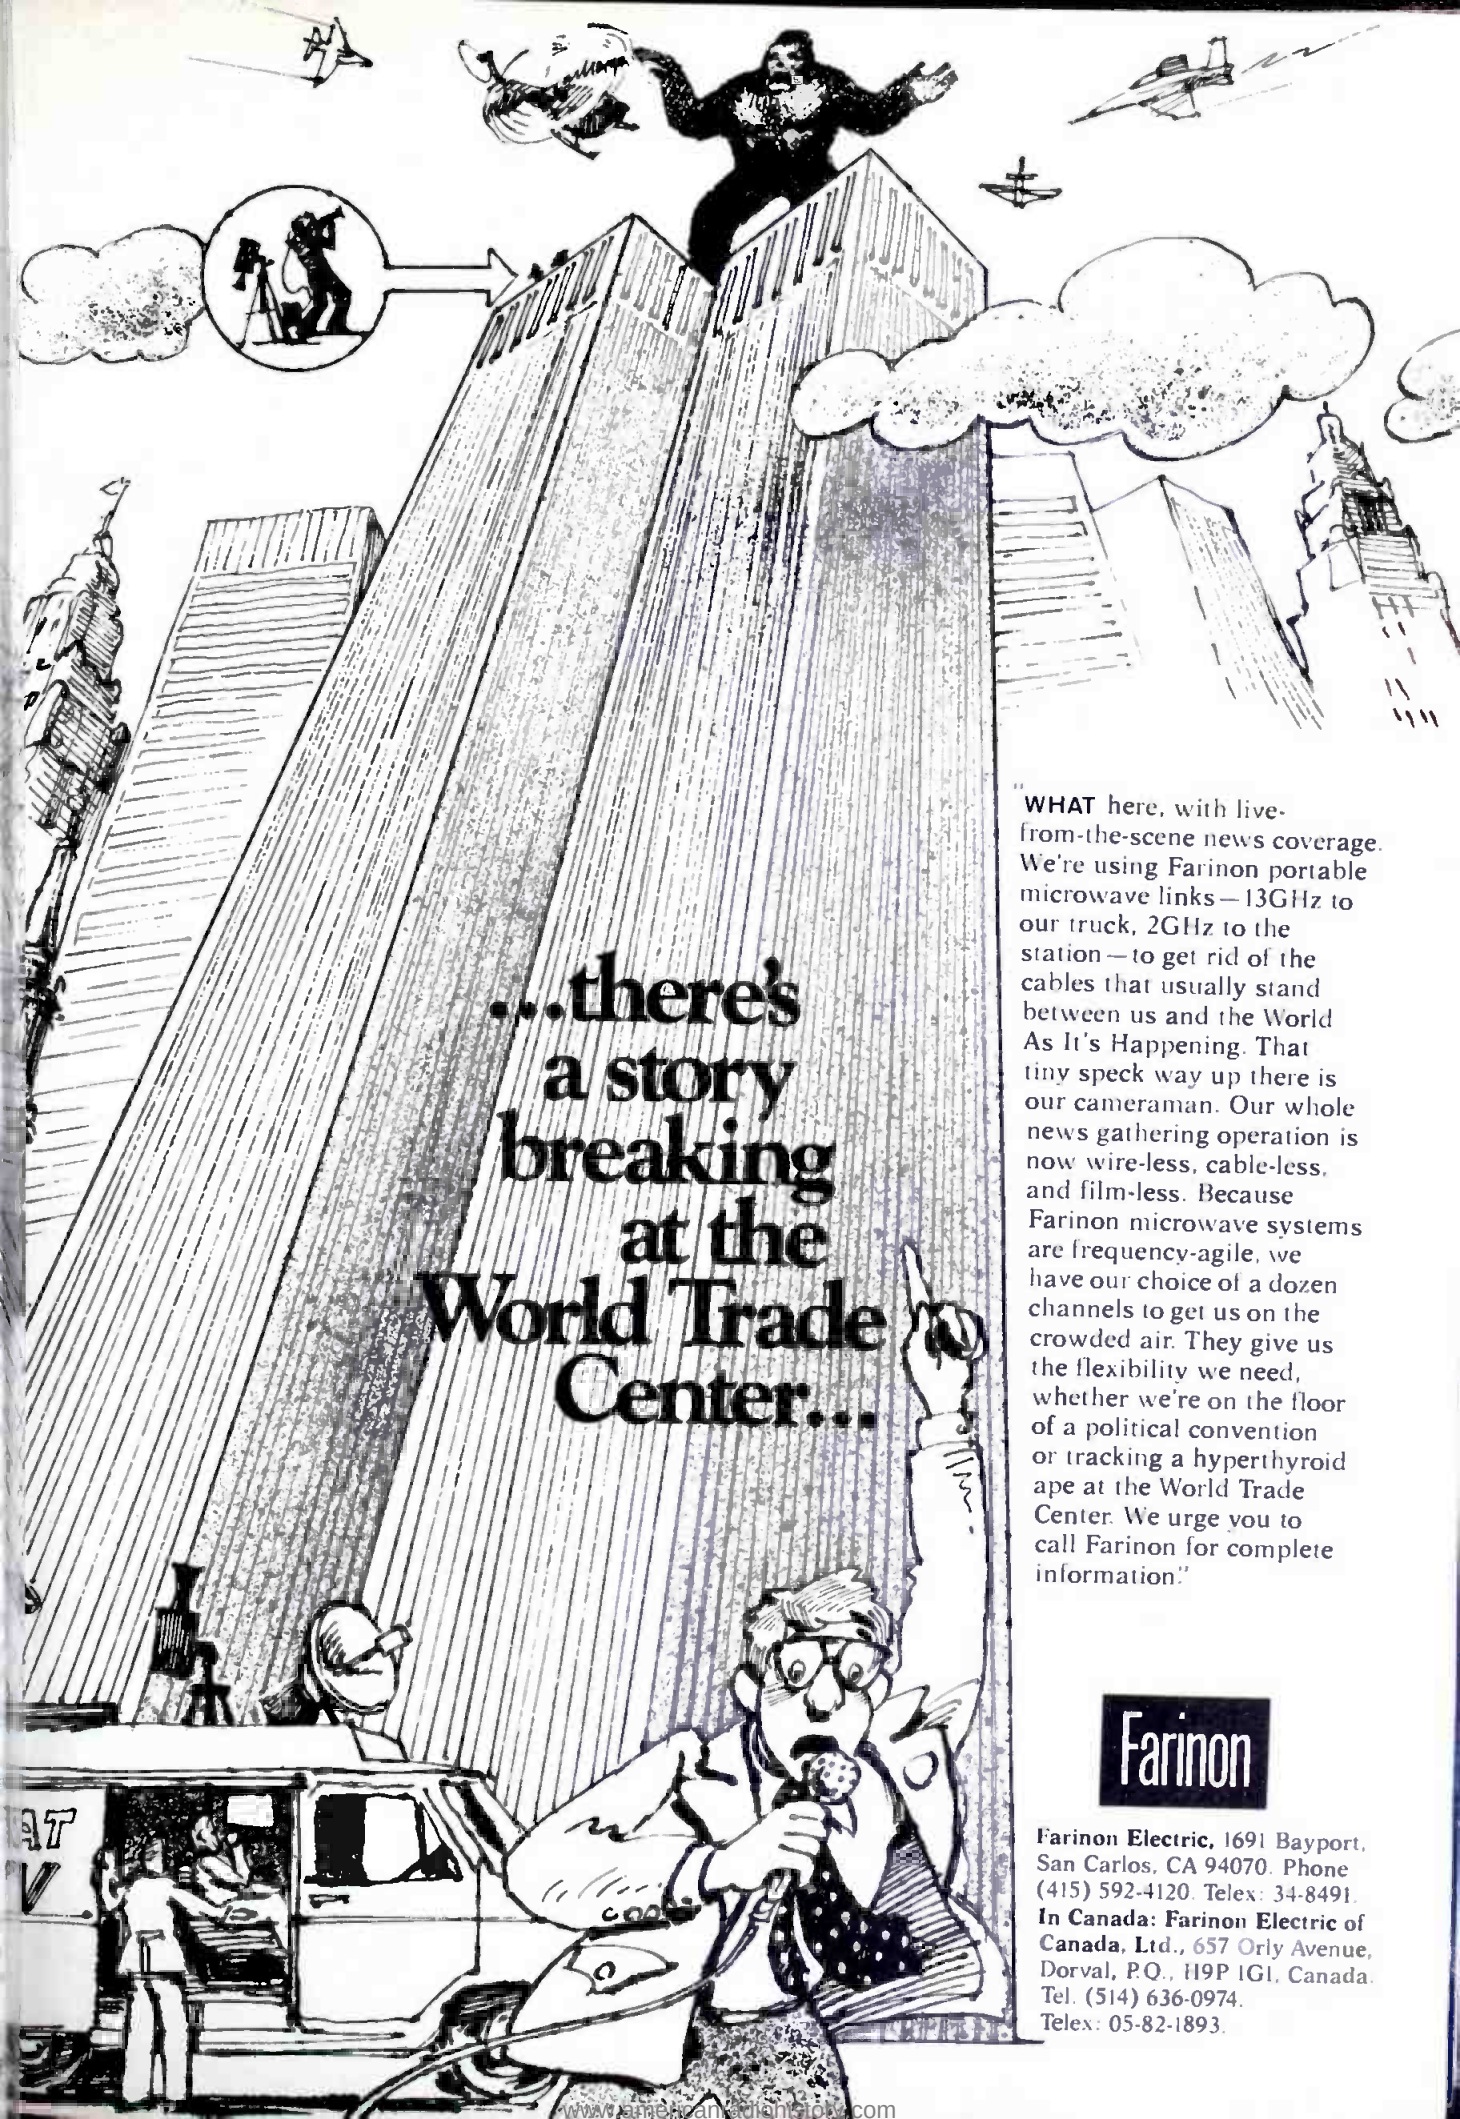

...there's
a story
breaking
at the
World Trade
Center...

"WHAT here, with live-from-the-scene news coverage. We're using Farinon portable microwave links — 13GHz to our truck, 2GHz to the station — to get rid of the cables that usually stand between us and the World As It's Happening. That tiny speck way up there is our cameraman. Our whole news gathering operation is now wire-less, cable-less, and film-less. Because Farinon microwave systems are frequency-agile, we have our choice of a dozen channels to get us on the crowded air. They give us the flexibility we need, whether we're on the floor of a political convention or tracking a hyperthyroid ape at the World Trade Center. We urge you to call Farinon for complete information."

Farinon

Farinon Electric, 1691 Bayport,
San Carlos, CA 94070. Phone
(415) 592-4120. Telex: 34-8491.
In Canada: Farinon Electric of
Canada, Ltd., 657 Orly Avenue,
Dorval, P.Q., H9P 1G1, Canada.
Tel. (514) 636-0974.
Telex: 05-82-1893.



The Sony BVT-1000. Consider the logic.

A time base corrector is part of a system. A system that includes a video tape recorder.

Isn't it logical that a company which manufactures video tape recorders would have an inside track on what it takes to correct time base error in a VTR signal?

We're talking, of course, about Sony Broadcast.

The company that pioneered professional U-matic video recorders. And introduced the BVH-1000 1" High Band Video Recorder, that has the whole broadcast industry moving in a new direction.

Sony Broadcast has matched these impressive video recorders with an equally impressive digital time base corrector. The BVT-1000.

And before you face up to the difficult decision of which TBC is best for you, consider the logic of the BVT-1000.

1. The economy of a complete package. Sony Broadcast knows that line-by-line velocity compensation, complete video processing with advance sync, drop-out compensation, and the ability to handle both direct and heterodyne color are not just "options."

They're requirements. Requirements that broadcasters need and use in day-to-day operations.

So we make all these so-called options standard built-in features of the BVT-1000. And you save dollars in our greater production efficiency.

2. The advantage of superior technology. The economy of the BVT-1000 doesn't mean you sacrifice quality.

Far from it.

The BVT-1000 incorporates unparalleled

technological excellence. Excellence demonstrated by a unique A/D converter that expands the effective number of bits per word, resulting in a higher signal-to-noise ratio than theoretically expected in an 8-bit system. Which leads to transparent picture quality.

With the Sony Broadcast BVH-1000 1" recorder, the BVT-1000 provides locked recognizable color pictures from still-frame to seven times normal speed. And to greater than thirty times normal speed in monochrome. So your editing techniques are faster and more critically accurate than ever before possible.

And for use with U-matic format recorders, the BVT-1000 offers special advantages. A wide 4H window and special anti-gyro circuitry compensate for wide errors and maintain both color and luminance stability.

Advance sync control allows phase correction using LED indicators at the TBC, for system integration. And the video level can be monitored by LEDs that show at a glance high or low level relative to one volt peak-to-peak.

3. The logic of a systems approach. If you are into electronic news gathering, or if you're part of the new revolution in 1" high band machines, the chances are very good that you're already using Sony recorders.

The BVT-1000 gives you an opportunity to add new logic to your broadcast equipment. The logic of an all-Sony system.

For full information about the BVT-1000 or any of the other professional video products in the Sony Broadcast family, call your nearest Sony Broadcast office.

Sony Broadcast

Sony Corporation of America, 9 West 57 Street, New York, New York 10019
New York: (212) 371-5800 Chicago: (312) 792-3600 Los Angeles: (213) 537-4300 Canada: (416) 252-3581

Sony® is a registered trademark of Sony Corporation of America

For Literature Only Circle (21) On Reader Service Card
For Demonstration Only Circle (22) On Reader Service Card

www.americanradiohistory.com

1-inch VTRs clear their biggest hurdle

Part 1/By Joe Roizen, Video Editor, Broadcast Engineering, and President, Telegen

For more than a decade the 1-inch VTRs available to the television industry could be compared to the perennial bridesmaid who never made it to the broadcast altar.

Somehow, regardless of the claims on the glossy brochures and the 50,000 such machines sold for closed-circuit applications, few of these 1-inch recorders went into TV studios for on-air use. It certainly wasn't for lack of variety that the one-inchers didn't catch on with broadcasters.

By the mid-1970s the chief engineer of every house or studio had available a gamut of Ampex, IVC, NEC, Panasonic, Recortec, Sony, (and other) 1-inch VTRs whose model numbers and configurations spanned a wide range. Why then all the current fuss about the new 1-inch helicals and their potential role in becoming the TV broadcasters replacement for the well-entrenched quadruplex VTR that is now the industry standard?

There were, of course, some valid reasons for the low penetration that the previous 1-inch VTRs made on the major TV operations. They might be categorized this way:

- **Performance.** Until a few years ago, the 1-inch VTRs which had been designed primarily for the CCTV user and upgraded to attract the broadcaster, never quite gave the technical performance that was possible with a properly operating quad. In particular, multiple generation on 1-inch machines didn't meet acceptable studio levels.

- **Formats.** Few manufacturers made machines which would interchange tapes with the others. Consequently, any user adopting a specific 1-inch format might have problems in exchanging tapes with another studio that had adopted a different one. There was no such limitation on quad tapes that were circulating freely between all broadcasters.

- **Quad Improvement.** Over the past 20 years the versatility and technical performance of the quad recorders was constantly augmented both by the major manufacturers and by upgrading kit

suppliers, to where picture quality, multiple dubbing, editing, and automated operations became common. The addition of quad cart machines for commercials gave a further validation for the quad format.

Nevertheless, the situation could not remain static. New technical advances in tape, heads, servo systems, and other areas of video recording made possible the development of 1-inch recorders which now rivaled or surpassed the performance and versatility of the quads. These new 1-inch formats also promised lower initial cost and lower operating expense.

The only dilemma remaining was that the new 1-inch machines still had no common format, and the confusion of choice still made the broadcaster reluctant to pick one or the other. The result was that 1976 was a peak year in quad sales, even though high-performance 1-inch VTRs were available.

Broadcast Engineering has reported the recent developments in standardization work by the SMPTE committees which have resulted in two major 1-inch formats being established for broadcast use. Currently three such formats have achieved SMPTE ratification for television video recording purposes.

1. **Type A.** A 1-inch single-head system with a signal dropout gap in the vertical interval which occurs when the head is crossing from one edge of the tape to the other. This format is recommended primarily for non-broadcast applications.

2. **Type B.** A 1-inch two-head system which segments the image into groups of horizontal lines (like the quad) and provides high-quality video performance and three audio channels for program sound, stereo audio, cueing or time code use. This format is generally referred to as "segmented."

3. **Type C.** A 1-inch, 1½-head system which records the full video and sync information by using a separate auxiliary video head. This system records and replays the vertical interval during the period that the main video head is crossing over from one edge of the tape to the other. It was generally referred

to as "non segmented," but recently has been officially called "continuous field" recording by the SMPTE.

Of the three formats, the first (Type A) is only of academic interest to the broadcast industry as it represents a 1-inch helical VTR that has been available for many years from at least two suppliers, Ampex and Recortec.

Type B and Type C are the formats now receiving attention from TV studios and production houses because they represent the wave of the future in videotape recording.

Type A Format

The Type A Format describes a 1-inch helical VTR introduced by Ampex in the early 1970s with a sequence of models ranging through the 5000, 7000, 7800 and 7900 series. A second supplier of the same format was Video Memory, now part of the Recortec product line.

The SMPTE's Type A Working Group has been deliberating on this format since mid-1975. The more recent introduction of the Type B and C formats has led to an acceleration of the specification and ratification of Type A. (BE is including a detailed review of the Type A Format for purely informational purposes.)


The Type A Format provides one video track with a dropout period located in the vertical interval. Video processing circuitry regenerates the missing vertical sync and blanking information and re-inserts it at the output of the VTR to form a complete composite video signal.

There are two audio channels for program sound at the bottom edge of the tape and a control track at the top edge. An additional track at the top edge can be used for cueing signals or as a frame address track for editing purposes.


Electrical characteristics for this format permit three modes of operation called Low Band Monochrome (3.5 to 5.5 MHz), Low Band Color (5.5 to 6.6 MHz), and High Band (NTSC) where the reference white carrier frequency is at 10 MHz.

continued on page 3


TYPE A FORMAT

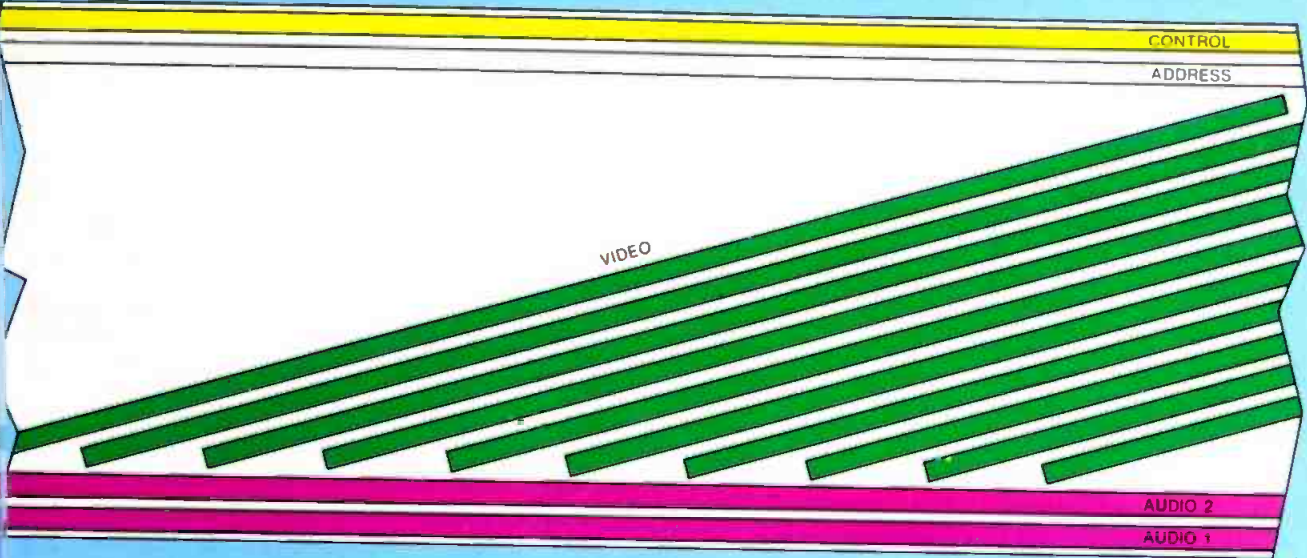

TYPE B FORMAT

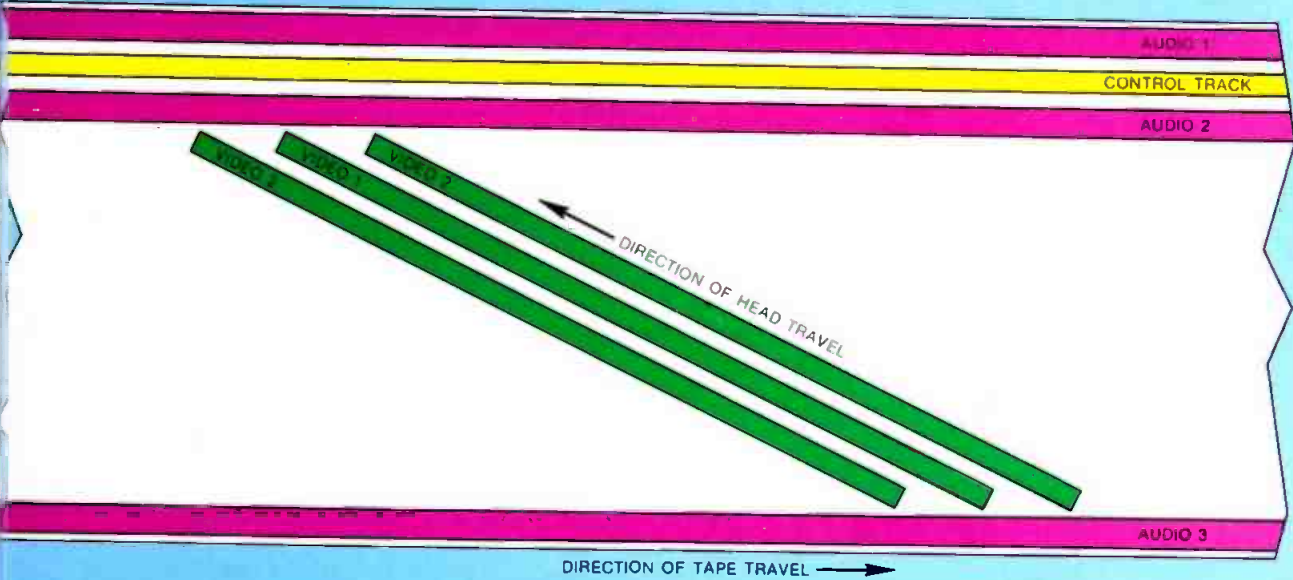

TYPE C FORMAT

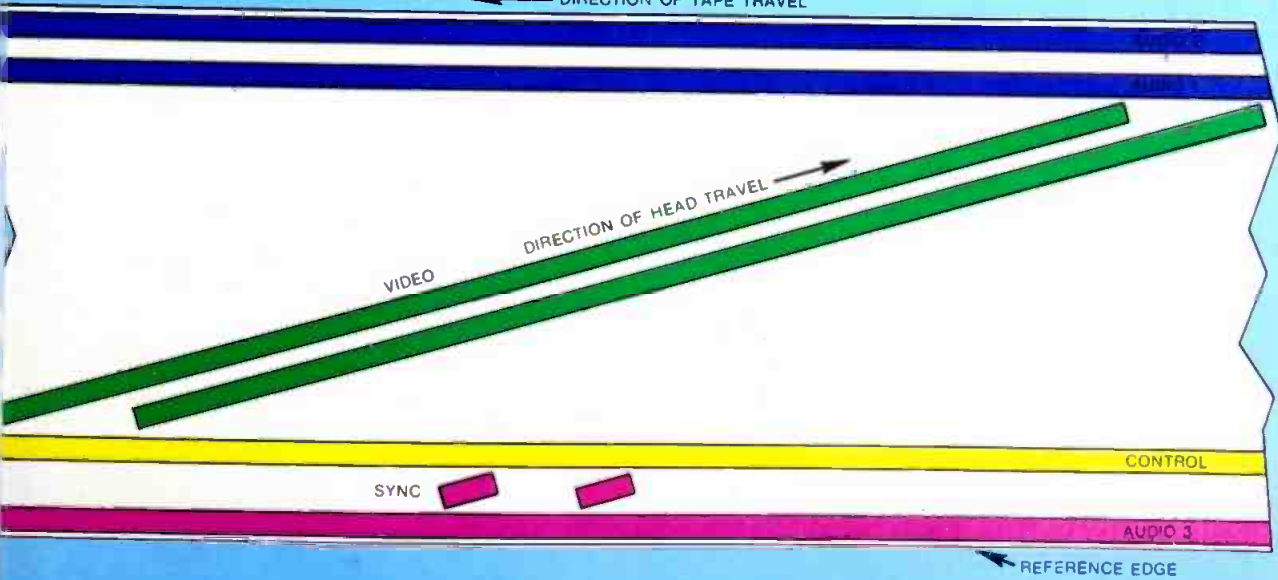

Spotmaster® 3000 Series



Model 3100 Slim Line — the space saver for A size cartridges. Available in mono and stereo playback.



Model 3200 Compact — for A and B cartridges. Available in mono and stereo, record/playback and playback only.



Model 3300 Standard — for A, B and C cartridges. Available in mono and stereo, record/playback and playback only.

A new family of professional cart machines with a large air-damped solenoid, direct drive synchronous motor, and a rugged machined deck.

And these Spotmaster exclusives: Phase Lok III head bracket for optimum stereo phasing; a superior, up-to-date, modular electronic package; a unique cartridge guidance system; and a full range of options including manual/automatic fast forward, additional cue tones, microphone input and desk top or rack mounting.

**NEW
LOCATION**

BROADCAST ELECTRONICS, INC.
4100 North 24th St., Quincy, Illinois 62301
Telephone (217) 224-9600

PRODUCERS OF
Spotmaster®
TAPE CARTRIDGE EQUIPMENT

A FILMWAYS COMPANY



For More Details Circle (23) on Reply Card

1-inch VTRs

continued from page 30

These VTRs are currently used in the High Band mode.

Type B Format

The Type B Format was introduced several years ago by the Bosch-Fernseh Company under the trade name of BCN. It is a 1-inch segmented helical recorder using two video heads, and its operating principles are similar to the Echo Science Pilot series and the IVC 9000 2-inch helical VTR. Fernseh has licensed other manufacturers to build and sell the BCN; various configurations are currently available from Philips, IVC and RCA.

The Type B Format uses two heads that each scan a 52-line segment. The wrap angle is only 190° and the scanner diameter is kept small. This reduces the amount of tape surface on the scanner and minimizes friction, differential stretch, and other factors that adversely affect interchangeability.

Since a single head scan cannot produce a full image, there is no easy way to do slow or stop motion. This condition has been overcome by the use of new digital field store devices which provide slow- or stop-motion images even though the tape keeps moving at normal speeds. Digital field stores are still relatively expensive devices and make this feature on the BCN a costly addition.

The Type B Format does provide the broadcaster high-quality video signals capable of multi-generation dubbing and three audio tracks which can be used for program sound or cueing and address code operation. The two main audio tracks at the top edge of the tape have a Dolby A Noise Reduction System for further enhancement of the sound capabilities of the BCN. Electrical characteristics include high-band FM recording frequencies of 7.03 to 10.00 MHz for NTSC. The signal specifications are commensurate or superior to quad VTRs operating in the High-Band mode.

The Type B Format recently received the SMPTE VTR Committee's approval and five drafts for American National Standards have been published.

Type C Format

This format of a 1-inch helical VTR, using a "1.5 head" system, was the subject of the greatest controversy among the members of the Working Group set up to study it. Fortunately, it was possible for

the Working Group to arrive at a workable compromise that resulted in a single Type C Format rather than remaining with the variety of non-interchangeable 1-inch continuous field recorders offered a few years ago.

Type C, as defined by the committee, has the following mechanical and electrical characteristics:

- a full-field video record and reproduce head on a single track;
- a second short video track near the bottom edge of the tape which contains the vertical interval information not covered by the main video head; and
- three audio tracks which can be used for program sound or cueing and address code for editing.

Ampex and Sony now are producing 1-inch helical machines (VPR and BVH series) that can be modified (for a reasonable price) to meet the Type C Format. Both companies expect to be making fully interchangeable Type C models before the end of 1978. In addition, Sony has licensed RCA to produce and sell the BVH series. It also is expected that other VTR manufacturers with experience in constructing 1-inch helical machines (such as Recortec and NEC) will join the parade of suppliers in this growing market.


The Type C Format offers broadcasters a number of advantages unique to that configuration. Continuous-field scanning by a single head means that stop-, slow- or fast-motion playback is possible for search and cue purposes. This is a very useful feature for editing and general operation of the recorder.

In the case of the Ampex VPR machine, an additional option called AST (Automatic Scan Tracking) actually produces broadcastable images in slow or stop motion without the familiar noise bar going through the picture. This is done by a servo system and video-head deflection mechanism which causes the reading head to follow the recorded tracks with great accuracy, from one end of the track to the other. Sony has indicated they will provide a similar feature on future BVH machines now called "Dynamic Tracking."

The Type C Format was approved by the SMPTE VTR Committee and submitted for ANSI ratification in five documents. These documents will be issued as recommended practices for the industry as soon as they have gone through the normal procedures associated with such standardization.

continued on page 3

The CD-480 "Smart Switcher" is here.

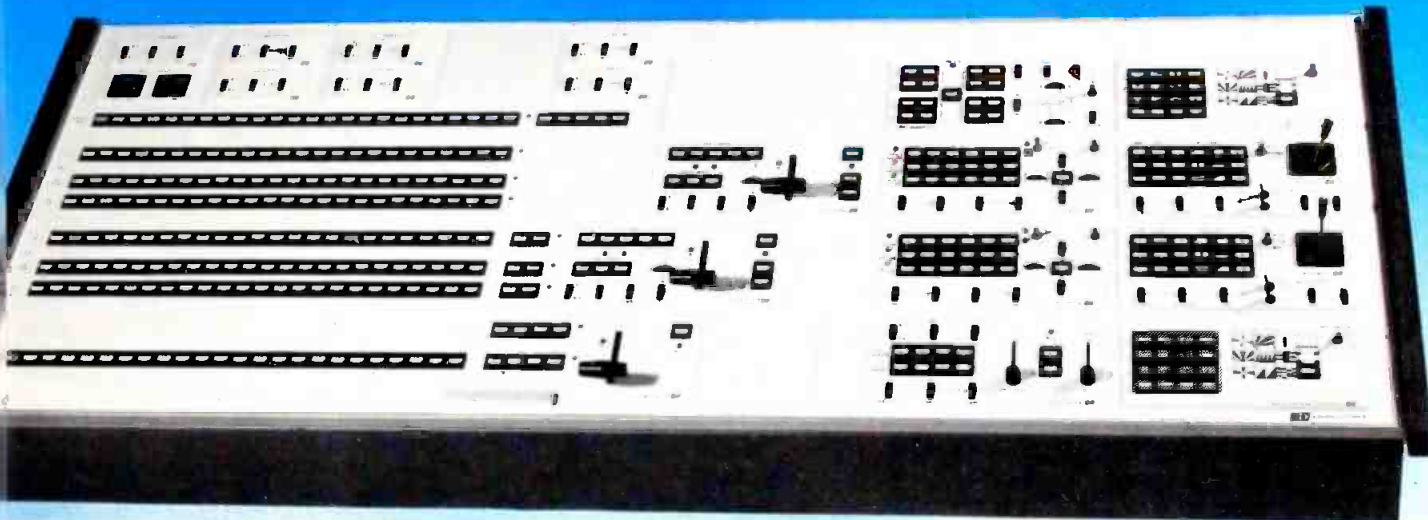

Why settle for anything less!

If you're interested in an outstanding video production switcher, compare the following—against any other switcher.

Operation: Simple. At last the operator will have an efficient and easy-to-use control panel. Spend more time being creative with the many outstanding special effects available on the CD-480 and spend less time fighting a maze of buttons, knobs and switches.

Features: Everything you would expect to find on a first-rate production switcher. Most standard, with an assortment of options such as rotary wipes, quadplexer, and many more. Even the smallest CD-480 will surprise you.

Technology: The latest. Providing unprecedented and outstanding operation, while ensuring the highest reliability available.

Your Requirements: No problem, various models are available. The CD-480 is modular and can be configured to meet your individual needs.

Expansion: A snap. The modular construction allows features to be added at any time, usually on a plug-in basis. Even on the control panel.

Price: A real bargain. Likely no more than you would expect to pay for a run-of-the-mill outdated switcher.

We Deliver: Switchers are presently in use in many areas of the world including 8 of the top 12 U.S. markets.

Why wait? Call us now.

CENTRAL DYNAMICS LTD

U.S.A.
Chicago
331 West Northwest Highway,
Palatine Ill 60067
Tel 312-991-4720
TWX 910 693 4805

New York City
Tel 201-767-1300
TWX - 710 991 9753
Atlanta
Tel 404-491-9037

Los Angeles
Tel 213-789-0574
TWX - 910 495 1713
Dallas
Tel 214-741-3332

CANADA - Montreal
Tel 514-697-0811
TWX - 610 422 3906
Denver
Tel 303-623-7603

For More Details Circle (24) on Reply Card

www.americanradiohistory.com



1-inch VTRs

continued from page 32

General considerations

The introduction of the Type B and Type C 1-inch Helical VTRs to the broadcast industry will result in a significant change in video recording operations. The impact was already evident in 1977 when more than 200 of these machines went into service in North America and at least an equal number (mostly Type B) began appearing in European broadcast applications.

The major TV networks have already had satisfactory experiences with the latest 1-inch helicals. In fact, they have declared themselves out of the market for further acquisitions of new quad recorders. It is easy to see why this is so even with a cursory comparison of what the Type B and C machines offer over their quad counterpart. These advantages are:

- The initial purchase price for a 1-inch helical, even when comparably equipped (to a quad) with a monitoring console, is still well below the cost of a transverse VTR.
- The operating cost for the 1-inch helicals is significantly lower,

especially in the areas of tape consumption, head refurbishing, and routine maintenance.

- Size, weight and power consumption are all adequately scaled down on the Type B and C, and these factors figure more and more in an era when space and energy are at a premium.
- More and better audio is something all quad users have consistently asked for, but it was inherently difficult to achieve because of the magnetic particle orientation on the tape which favored the video. The new helicals use longitudinally oriented tape with wide audio tracks which provide more than adequate audio quality, on more tracks than ever before.
- Flexibility of operation is a big factor in the new 1-inch helicals, especially in relation to editing. High-speed search of up to 30 times normal tape speeds or frame-by-frame fogging down to stop frame, all with a recognizable image, is an advantage that production and post-production houses recognize as the only way to go on future program generation.
- The configurations of the 1-inch helicals are growing rapidly. Studio-version consoles, mobile-use com-


pacts, and lightweight portables are already being offered in Type B and C formats. Cassette systems in Type B are on the market, no doubt to be followed by equivalent Type C devices as the demand grows.

- New production methods also will be encouraged by the 1-inch helicals. With less expensive, more portable, recording gear, the assembly of programs will move further away from traditional TV studio environments. This syndrome has begun with growing EFP activities and the electronic "film style" production now being employed by CBS (December, 1977 **Broadcast Engineering**).

- Distribution and storage of program material is another beneficial fallout of 1-inch helicals in broadcasting. The volume and weight of a program recorded on 1-inch tape is less than 40% of its quad predecessor. Duplication and shipping costs will be lower and the archival storage of master tapes will also take up a lot less space. None of these facts will long escape the administrative and accounting departments of television studios embarked on re-equipping or modernizing their facilities.

continued on page 36

3/4" EVALUATOR

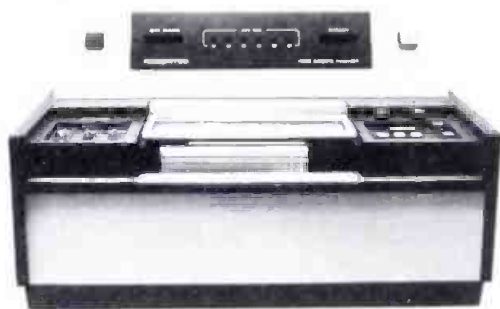

- Rapidly grades all recycled cassettes
- Tests one-hour cassette in 8 minutes
- Detects surface defects and edge damage
- Operates on new Sony VP-2000 player
- Cleans all program tapes while playing
- Available now for immediate delivery

The Recortec Video Cassette Evaluator (VCE) cleans and evaluates 3/4-inch video cassettes. The VCE identifies all recycled cassettes that cannot be reused. Bright LED displays are used to indicate totals for edge damage, surface defects and tape length. An optional printer

provides test records to give the location of each defect. The VP-2000, when not used for tape evaluation, will still playback video tapes and clean them at the same time. The VCE uses the field-proven evaluation technique employed for years in other Recortec Video Tape Evaluators.

RECORTEC, INC. 777 PALOMAR AVE., SUNNYVALE, CA 94086 TEL: (408) 735-8821 TELEX: 910 339 9367

For More Details Circle (25) on Reply Card

BROADCAST ENGINEERING

First Hitachi developed the revolutionary Saticon tube. Then Hitachi designed the perfect camera for it...



The new portable HITACHI SK-80

The remarkable new SK-80 has three superior $\frac{2}{3}$ " Saticons at its heart, for unexcelled image and color fidelity. Hitachi's sophisticated electronics coupled with the high resolution capability of the Saticon set a new high level of performance for a portable EFP camera under the most demanding conditions.

Moreover, the SK-80 feels and handles like a true portable should. And its 2-hour battery belt with 1-hour charge time assures you of adequate power for continuous long-term shooting when you're on location. The standard C-mount and optional Arri adapters give you the added versatility of selecting the exact lens that fits your shooting requirements.

But performance is only half the SK-80 story. A special training tape on videocassette is available with complete camera set-up and maintenance instructions, to help you keep your SK-80 making its excellent pictures. Beyond this, our six Hitachi regional offices are all staffed with qualified engineers and fully stocked with parts. They stand ready to back up our vast national network of servicing dealers.

We urge you to check out the performance features of the SK-80, as well as its low price, before specifying any other camera. Arrange a demonstration with your local Hitachi dealer or call the Hitachi regional office nearest you.



HITACHI
Hitachi Denshi America, Ltd.
FORMERLY HITACHI SHIBADEN CORP OF AMERICA

Executive Office: 58-25 Brooklyn-Queens Expressway, Woodside, N.Y. 11377 (212) 898-1261 Offices in: Chicago (312) 344-4020; Los Angeles (213) 328-2110, Dallas (214) 233-7623; Atlanta (404) 451-9453, Denver (303) 344-3156.

SPECTRA-VISION CORPORATION VIDEO EDITORS

Integrated Systems
For EJ and Post-Production

- JBT-104-BA Editor-Programmer
- Time Code • Random Access
- Special Effects • Search MOD-1

DEALERS

- AUDIO-VIDEO SYSTEMS, INC.**
Aurora, CO
(303) 341-9994
- CTL COMMUNICATIONS TELEVIDEO, LTD.**
Silver Spring, MD
(301) 585-6311
- ELECTRONIC SYSTEMS, INC.**
Honolulu, HI
(808) 533-3848
- GC VIDEO**
Albuquerque, NM
(505) 296-5653
- GULF COAST ELECTRONICS, INC.**
Mobile, AL
(205) 476-7690
- HAUENSTEIN & BURMEISTER, INC.**
Minneapolis, MN
(612) 721-5031
- R. P. HERMES CO., INC.**
Detroit, MI
(313) 886-4566
- KVC, INC.**
New York, NY
(212) 752-3690
- LEBOW LABS, INC.**
Allston, MA (Boston)
(617) 782-0600
- LERRO ELECTRICAL CORPORATION**
Philadelphia, PA
(215) 223-8200
- PROFESSIONAL ELECTRONICS, INC.**
Schenectady, NY
(518) 355-3120
- ROBERT SLYE ELECTRONICS, INC.**
Arlington, VA
(703) 525-7272
- TEXAS VIDEO SYSTEMS, INC.**
Dallas, TX — (214) 341-1771
San Antonio, TX — (512) 341-1317
- TRI-TRONICS, INC.**
North Hollywood, CA
(213) 985-6616
- VIDEOMON, INC.**
Albuquerque, NM
(505) 265-8335
- VIDEOSONICS, INC.**
Portland, OR
(503) 232-4632
- VIDEO SOUND OF ITHACA**
Ithaca, NY
(607) 272-2060
- VIDEO IMAGES**
Milwaukee, WI
(414) 475-0111
- ESI VIDEO**
Columbus, OH
(614) 436-1381
- COMMUNITRONICS CORPORATION**
St. Louis, MO
(314) 771-7160
- TELEVISION ENGINEERING CORP.**
Fenton, MO
(314) 343-5605
- TURNELLE ASSOCIATES, LTD.**
Ottawa, Ontario
(613) 829-8790
- ON AIR ELECTRONICS**
Cleveland, OH
(216) 476-1272

SUPERIOR TAPE HANDLING LEAST WEAR

See us at ITVA Booth #18
and NAB Booth #1315

Spectra-Vision Corporation
Philadelphia, PA

Score one more for SMPTE

While the subject of 1-inch tape interchangeability was a problem obvious to everyone, it was the prompting of letters from Joe Flaherty of CBS and Julie Barnathan of ABC that got the SMPTE involved and gave the industry hope for a practical standard.

There was a diversity of video track parameters, and virtually none of the audio, control or cue track locations would match up. About the only thing compatible was the transverse dimension of the tape.

When the echos of non-compatibility complaints were ringing throughout the industry, the SMPTE set up the Type B and C Format Working Groups. There was hope that at last a compromise standard would be worked out. Fred Remley, Jr., director of engineering for the TV department at the University of Michigan (Ann Arbor), was named chairman of the Type C Working Group. And it's of some consequence that the chairman was a user.

In fact, if there is applause due for the accomplishments of the Type C Working Group, the first round should go to those who conceived its makeup. The chairman was a user, and the group itself included manufacturers and representatives from the major networks, including PBS, the BBC, CBC, as well as members of the CCTV fraternity. This was vitally important, because any agreement would need to be acceptable to all sides.

After reviewing the 1-inch needs—as the broadcasters saw it—the priorities became: (1) a recorder with two studio-quality audio tracks; (2) one studio-quality cue track; (3) one field per video track; (4) a separate control track; and (5) recording of entire vertical interval.

Several other requests were made, and among them, it turned out that broadcastable slow- and stop-motion images were of prime interest.

Through the workings of this group, a compatible standard has been agreed to. The recorder Type C should now be referred to as "continuous field" (to tell what it is instead of what it is not).

When the dust settles, 1-inch will have 2-inch surrounded on several fronts. And we will all have seen the hard evidence of how a professional association can help the industry it serves.

Ron Merrell
Editorial Director

1-inch VTRs

continued from page 34

Summary

Twenty-two years ago, when the first Ampex VR 1000-X machines began their program-delay functions in network centers, it would have been ludicrous to predict the rapid growth and all-encompassing effect that magnetic video recording had on the broadcast industry. In fact, at that time market projections for world sales of these gray monsters was less than 100 machines.

The latest count puts the global population of quad recorders at over 10,000. A large proportion of these are more than 10 years old and still aging. Television production continues to grow to meet the expanding needs of broadcasting and non-broadcasting applications.

To cope with these current and future needs the 1-inch helical have begun, and will continue, to replace quad recorders. At the same time, new areas of TV program production now emerging in the industrial, educational and consumer fields also will benefit from the capabilities of the Type B and C machines.

NOTE:

Next month **BE** will cover the technical details of these two formats and compare their similarities and differences.

ATTENTION AMPEX & RCA QUAD USERS

We're wondering, how do you decide where to send your heads for refurbishing???

**IS IT . . .
COST???**

VMI already offers the lowest prices in the industry. Second time refurbishing of a VMI head now costs you \$825 which is 17% less than our nearest competitor . . . 34% less than the original manufacturer.

If the first head ran 413 hours, this equals an average cost of less than \$2 per hour . . . why pay a large sum of money before you use the head just to get guaranteed head cost? You can determine what your cost would be by evaluating your own past head hour experience.

**COULD IT BE . . .
RELIABILITY/
REPEATABILITY???**

VMI is working with the most modern tooling in the industry. This combined with the experience of our staff coupled with the improvements that VMI incorporates provides you with the highest quality refurbishing available which gives you the repeatability you are looking for!!

**OR MAYBE . . .
TURNAROUND
TIME???**

VMI is now offering you turnaround time of 10 working days on most heads. Some conversions and special requests require slightly longer.

After considering all of these factors, you owe it to yourself to try VMI just once . . . we offer more **VALUE** for your refurbish dollar . . .

Call collect for further information.



155 SAN LAZARO AVENUE • SUNNYVALE, CALIFORNIA 94086 • TEL: (408) 737-8300 • TWX: 910-389-9362

For More Details Circle (28) on Reply Card



Part 2/By Peter Burk

Last month, we looked at one station's way of implementing radio electronic news gathering (RENG), and passed on some suggestions for

a smooth operation. This month, we'll look at another successful RENG operation, using a different approach. The beauty of RENG is

that you can pick and choose as you like, molding a system that matches your needs.

RENG in Boston

WBZ in Boston has been using RENG for more than two years, and reports good results. Their objective was to integrate hand-held portable units with an existing two-way system to provide good-quality news pickup from anywhere in the metropolitan area. Norm Graham, WBZ chief engineer, worked closely with Comrex to develop a system that best fit their needs.

How it works

Each newsman wears a Sam Browne belt that has a low-power 161 MHz transmitter on one side and a three-way receiver package on the other side. The receiver monitors the station's AM signal and two 450 MHz channels used by the mobile units. Audio from the three receivers is fed to split headphones, and can be mixed to suit the taste of the newsman.

The portable transmitter is a high-quality wideband unit supplied by Comrex which accepts a conventional microphone input and a tape input. In addition, several tones can be transmitted by pushing the appropriate button. These tones are used to put a mobile repeater on one of two frequencies, and turn the mobile transmitter on and off.

In each mobile unit, a 161 MHz receiver is interfaced with the existing 450 MHz dual frequency two-way unit. The necessary decode logic is provided to control the frequency select and push-to-talk buttons from the portable transmitter.

The newsman hears everything including his re-transmitted signal so he knows instantly that his transmission is clean. Even as he's transmitting, he can receive additional cues from the station on the unused channel. Another mobile unit can, in fact, talk to the station or even talk to the on-air field reporter on the second channel.

The portable transmitter will operate for three to five hours continuously, and allows the reporter to move three-quarters of a mile or more from the car. Two power levels are available, so that battery life can be extended when the

continued on page 4

Only the finest ingredients go into our pancakes.

It goes practically without saying that the company responsible for the leading reference in cassette tapes should offer the finest available pancake product for cassette dupes. And with TDK 1/8" bulk tape for high speed duplication and industrial A/V use, you get the same high performance tape found in our Dynamic cassette, with its low noise and high output characteristics, plus broad dynamic range and low distortion.

You can also have it ready-loaded into our "Y" series bulk duplicator cassettes, for lifetime warranted jam-proof, dropout-free performance. We're equally particular about our audio/visual, data, endless and leaderless dictation cassettes, as well.

Along with superior performance, TDK 4" pancakes offer the added advantage of two separate series: "L," similar to our superb Audia open reel product, and "S," for general purpose applications. Both are supplied on 3600-foot 10 1/2"

NAB bulk hubs. Or, you can buy them on 1200, 1800 and 3600-foot reels.

All TDK products are made with only the finest ingredients, so you can taste their good performance in any industrial and professional application.

So, if you want high quality and reliability in *all* your professional applications, go TDK all the way. Let us show you how TDK professional products can upgrade the quality of your products—and save you time, too. For further information, write us or call (516) 746-0880.



World leader in recording tape technology.



TDK Electronics Corp., 755 Eastgate Boulevard, Garden City, New York 11530. In Canada, contact Superior Electronics Industries, Ltd

For More Details Circle (29) on Reply Card

RENG

continued from page 38

newsman is fairly close to the car. Graham reports that the newsmen are conscientious about using the low power mode where possible, primarily because they can hear the re-transmitted signal and can tell instantly if it's necessary to increase power.

WBZ uses one base-station location to cover the entire area. A new site has been chosen to provide better coverage of the metropolitan area, and will provide about 20

miles range with the 70-watt mobile units.

Quality vs. Range

Obviously, the communications type mobile units don't provide the same quality that a wideband RPU transmitter would, but several trade-offs led WBZ to the decision to use this concept.

Since the mobile equipment was already installed and operating, the cost of all new units was saved. In addition, the performance of the units was already established.

On the debit side of the ledger,

communications quality is not really satisfactory for broadcast. Comrex and WBZ partially offset this liability by making several system modifications. The most significant is the elimination of the typical communications type microphone. The Comrex portable system with its inherent fidelity, fed into the two-way unit, makes a considerable improvement in quality.

The communications type units offer several advantages over RPU equipment, which also must be considered. Generally, higher power levels are available in narrowband units. A 70-watt mobile unit with a 5/8-wave whip antenna provides 140 watts ERP. This combined with much better noise immunity in a narrowband receiver means a considerable increase in range.

It should be noted that the WBZ system is used strictly for news. Graham says the quality is comparable to a schedule D telco loop. For sports broadcasts and music pickups, WBZ uses wideband RPU equipment.

What's right for you?

The choices are many. As we've said before, no one method is right for every station. Some of the factors to consider are format, market size, terrain, available equipment, frequency congestion, and, of course, budget.


If you intend to use the system strictly for news, as WBZ did, communications equipment might be the right choice, especially if the equipment is already on hand. If you plan to do program remotes especially if music is involved, by all means use a broadcast-quality RPU system.

The size of your market and the terrain will play an important part in selecting appropriate equipment. The range of a wideband system will be less than that of a narrowband system with similar power and antenna locations. If you presently have a narrowband system that is marginal in coverage area, you'll have to do some fancy footwork to make a wideband system do the job.

Budget considerations may affect the amount of equipment originally purchased, but shouldn't affect the total systems concept to any great extent. This may sound a bit idealistic, but the point is that the system should be expandable if the operation calls for more equipment and the budget allows for it later on. One high-quality mobile unit probably a better choice than two or three cheapies that don't really do the job.

continued on page 40

STEREO CONVERSION KIT FOR THE SYSTEM ONE BROADCAST CONSOLE

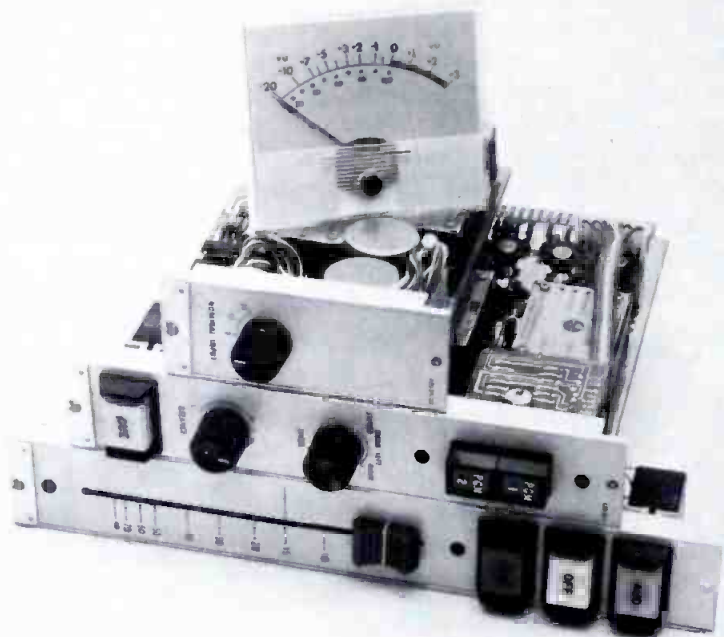

Universal input flexibility allows the System One to meet any broadcast application using the standard main frame and the desired number of universal input modules...and that includes the "down the road" switch from mono to stereo.

System One is the Broadcast Console of today and the future. Flexibility is what the modern Broadcaster requires, and the System One employs a digital control logic concept that provides it. Call or write for more information today.


exclusive export agent:
Sierra Audio
Burbank, Calif.



PACIFIC RECORDERS AND ENGINEERING CORPORATION
11100 ROSELLE ST., SAN DIEGO, CALIFORNIA 92121
TELEPHONE (714) 453-3255 TELEX 695008

For More Details Circle (59) on Reply Card

Their Pulse Distribution System.

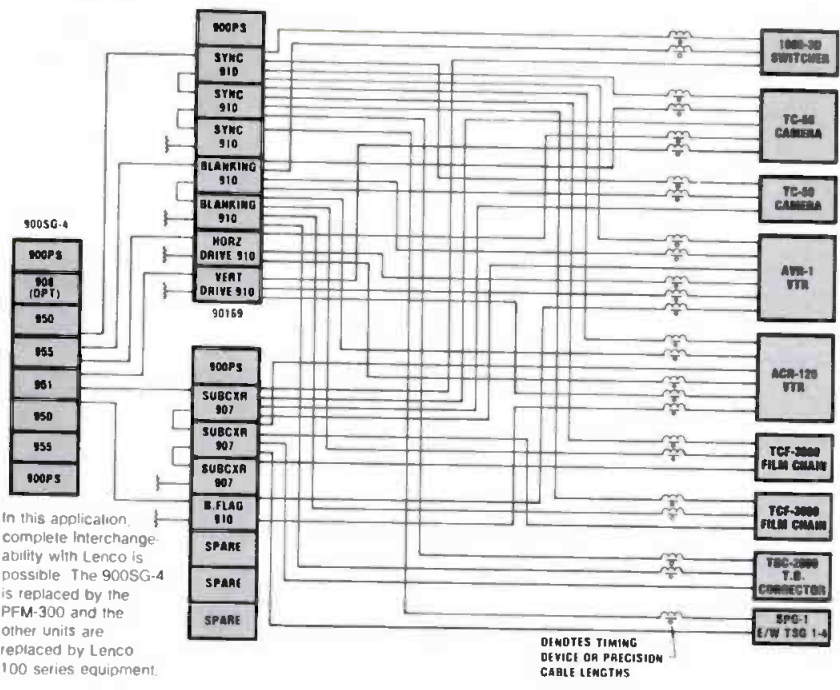


In this application, complete interchangeability with Lenco is possible. The 900SG-4 is replaced by the PFM-300 and the other units are replaced by Lenco 100 series equipment.

OUR 300 SYSTEM.

The Lenco 300 System is the most versatile pulse distribution system ever offered the professional broadcaster. It affords you virtually millions of combinations at a price far below that of "their" old-fashioned, obsolete systems.

The 300 System's unique PSD-340 System Delay Module completely eliminates pulse and subcarrier delays, and costly and cumbersome delay lines or devices. It allows you to delay all pulses up to 1.5 microseconds with the use of only one knob.

More than 300 professional users are getting their message across with the Lenco 300 System. Call or write us today and we'll get the 300 system message across to you. No obligation, of course.

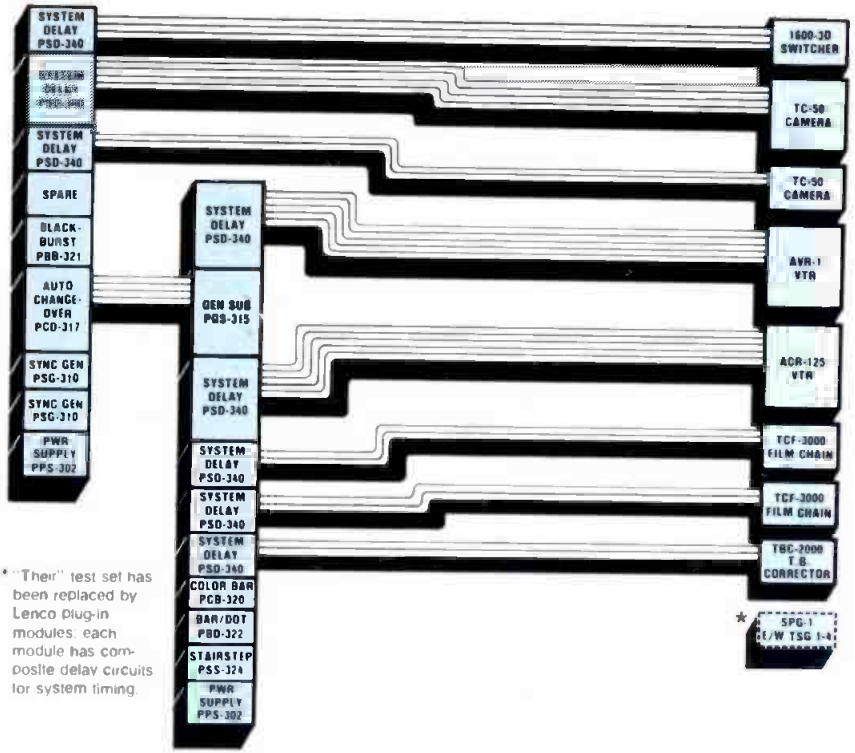

SYSTEM PRICE COMPARISON		
SYSTEM EQUIPMENT	"THEIR" SYSTEM	LENCO 300 SYSTEM
Terminal Equipment	\$ 9,980	\$ 9,615
External Video Test Set	3,940	not required
20 Pulse Delay Devices at approx. \$143 each	2,860	not required
TOTAL LIST PRICES	\$16,780	\$ 9,615

YOUR SAVINGS: \$7,165!



LENCO, INC.
ELECTRONICS DIVISION

300 N. Maryland St., Jackson, MO. 63755, (314) 243-3147
13670 Littlecrest Dr., Dallas, TX. 75234, (214) 241-0976
P.O. Box 301, Atchison, KS. 66002, (913) 367-1146

For More Details Circle (30) on Reply Card

Improving two-way quality

If you choose to use communications two-way equipment, there are a number of improvements that can be made in the audio quality. The first step is to throw away the original microphone. They are designed for limited-bandwidth communications and maximum intelligibility in the presence of noise. That's great for a fire chief ordering hose runs at a three-alarm fire, but

not really terrific for an interview with the mayor. If you don't plan to include a portable unit at this time, you might want to feed the two-way with a small portable mixer so that you can feed tape reports with live wrap-arounds.

Another typical quality bottleneck is the phone line linking the two-way base station with the studio. If you're using a remote on the two-way base station, split the audio out of the receiver and feed it into an equalized loop back to the station. You'll be amazed at the difference. If that's not feasible,

consider a second receiver at the studio. The range won't be as good, but when the signal is adequate, you can use it instead of the base-station receiver and get much better quality.

The bandwidth limitation of the communications unit is only part of the struggle. Of perhaps even greater significance is the distortion produced by the deviation control circuit in the transmitter. Maybe someday someone will market a type-approved modification for some of the popular two-way units. In the meantime, some reduction in distortion can be realized by reducing the level of the audio going in.

On the subject of levels, many operations suffer needlessly by not having some means of monitoring the level at the transmitter. A typical conversation between the reporter and the newsroom goes something like, "One, Two, Three... how's that?" "Turn it down a bit, it's too loud." All that monkey business can be solved by putting a VU meter on the audio at the transmitter.

Two-way limitations

If you have chosen to use communications equipment for RENG, be aware of several less obvious limitations. One item that gets some newsmen in trouble is duty cycle. Typically, communications gear is designed for short tidbits of information. Some popular units only allow for a maximum of two minutes of key-down, and require a five-minute wait to cool off. A long-winded newsmen can burn up a transmitter pretty quickly. RPU equipment designed for 100% duty cycle, which more closely approximates the talk vs. listen ratio of many news types.

Another new consideration is type acceptance. Any new equipment purchased will have to show up on the commission's list. This rules out some of the inexpensive alternatives that were available in the past.

Keep it flexible

Whatever method you choose for RENG, make sure it can be adapted for different requirements. Form change...sometimes quite sudden. If your system is only capable of short speech reports, it won't be much use if your station suddenly wants to do a three-hour sports remote or live music broadcast.

Plan carefully to allow for the future. If RENG is implemented intelligently, it can increase the prestige of your station, as well as provide additional revenue. Is that the object of the exercise?


Zeroing in on you.



Tip of the iceberg or flash in the pan? Our competitors thought we were just dabbling in the broadcast equipment market, but as we added Beaucart® Splice Finders and Cart Machines to our Beau Motors and Heads, it became obvious that we were here to stay. And now we've coordinated all these activities into our new Broadcast Products Division to make us more productive and efficient. And there's more to come. A whole lot more. For a look at your future, write today or call (203) 288-7731. We're the Broadcast Products Division, UMC Electronics Co., 460 Sackett Point Road, North Haven, Connecticut 06473.

UMC®

More performance per pound for ENG from NEC.

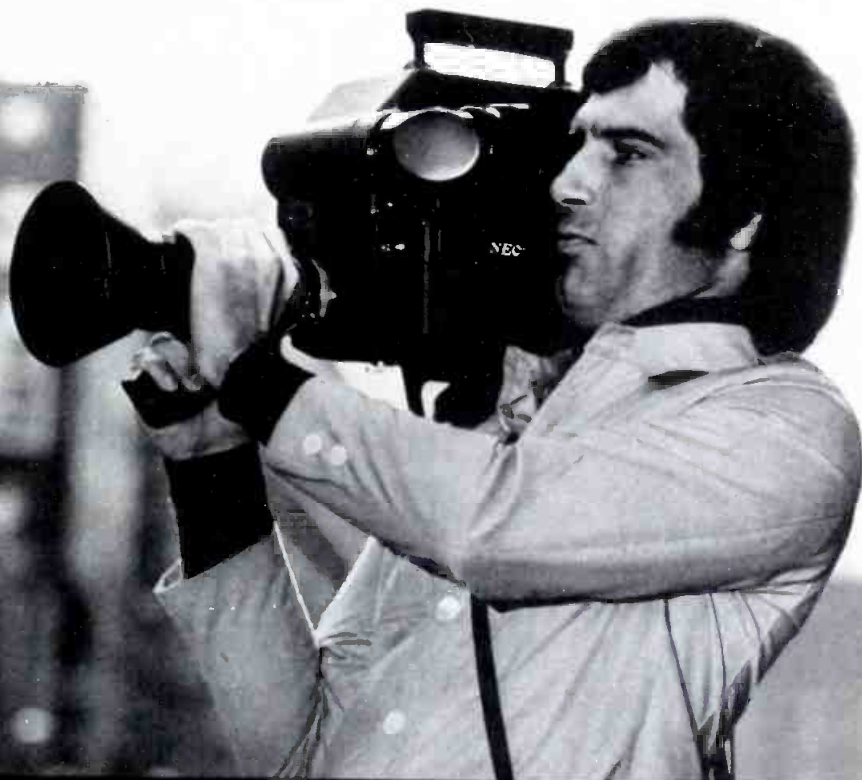

In a pinch you could use NEC's portable MNC-61A color camera in your studios. It delivers that kind of quality. Yet this field-ready, backpackless camera weighs less than 20 lbs. And the weight is evenly balanced for easy shooting from the shoulder.

Use of large-scale integration keeps power consumption at only 25 watts, so you can shoot extra hours if necessary. And you have a choice of Plumbicon* or Saticon** tubes.

To give you more flexibility, the MNC-61A is designed to take C-mount or Arri-mount lenses. Everything's been thought through to give you peak performance for every pound your cameraman carries, every dollar you spend.

It could only come from one of the world's largest and most experienced makers of broadcast equipment. And it does. That's NEC. Write or call us for details.

NEC

NEC America, Inc.

Broadcast Equipment Division
130 Martin Lane
Elk Grove Village, Illinois 60007

(312) 640-3792

*N. V. Philips. **Hitachi

For More Details Circle (31) on Reply Card

Stereo studios for AM, Part 1

By Dennis Ciapura

The advent of FM stereo in the early 1960s heralded a whole new type of broadcast studio design to accommodate dual-channel audio transmission. By now most FM stations are transmitting stereo, and those with AM affiliates will easily accomplish AM stereo conversions based on their FM experience.

But what about the multitude of AM stations around the country with no stereo background at all? An equally interesting question is whether AM stereo facilities should be designed just like their FM counterparts or should AM stereo conversion benefit from a different approach tailored to suit the medium more exactly?

Beginning this month and con-

cluding in the next issue, **Broadcast Engineering** will present a special two-part series covering everything from microphone selection to signal processing. We think that stereo audio systems for AM deserve to be born of fresh thinking on the subject and not simple transplants from FM stereo designs.

First of all, let's look at how typical AM stereo audio parameters will differ from FM audio and also where there may be some similarities. After all, to attain the best possible marriage between the stereo studio facilities and the AM stereo transmission system, we must know where the system's relative strengths and weaknesses lie.

Since the FCC has yet to decide

which of the proposed AM stereo schemes will become the national standard, we must estimate what the key audio parameters are likely to be based on a composite analysis of all of the proposed systems. Fortunately, all the proposed systems will yield roughly the same audio performance and differ mainly in how the dual-channel transmission is achieved. Actually, the AM stereo broadcaster will be more at the mercy of AM stereo receiver manufacturers than system limitations.

Once again, we are forced to estimate what the receivers will be capable of, because they are yet to be produced and sold. However, it is the nature of the broadcast game

continued on page 4

Figure 1 Audio response estimate of lower cost category of stereo receivers with bandwidth extending to just below 10 kHz. Dashed lower curve is typical of contemporary mono radios.


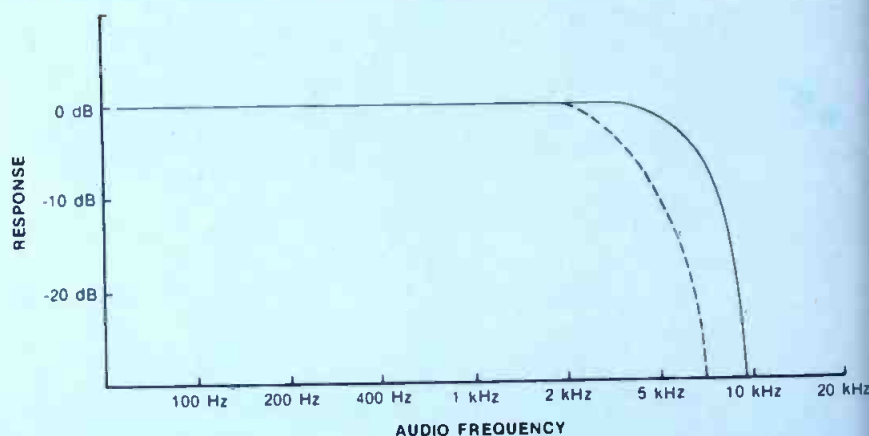


Figure 2 Audio response estimate of high-quality AM stereo receiver with 10 kHz notch filter switched in. These are usually defeatable so that smooth high end response can be restored when beats are not present. Sharper notches than the one shown also can be achieved.



TEKTRONIX DELIVERS PERFORMANCE...

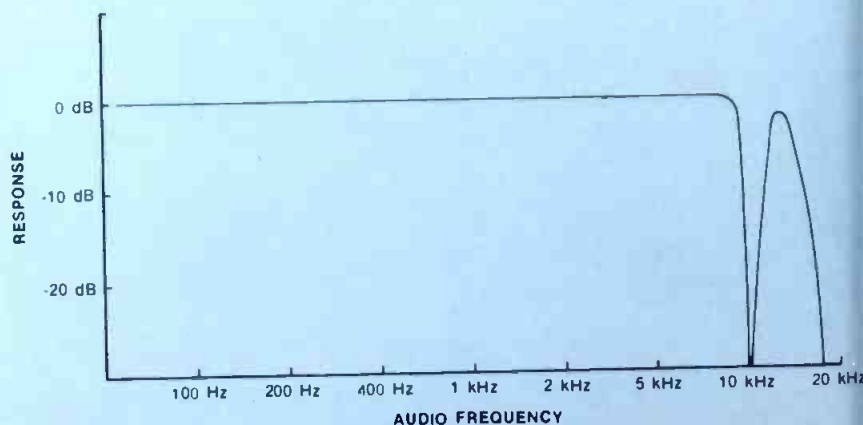


in a Sync Generator

Get Tektronix quality and dependability in a sync generator. **TEKTRONIX 1410.**

Check these key benefits:

- Add on picture sources easily. The 1410 Sync Generator is ideal for single-line sync distribution system application.
- Genlock provides fast or slow lock
- Programmable horizontal and vertical sync phasing supplies advance/delay range of $+10$ to $-4 \mu\text{sec}$ with respect to incoming reference signal
- Includes 360° subcarrier phase control
- Black burst output
- Minimize possibility of illegal horizontal and vertical blanking widths
- Variable horizontal and vertical blanking widths
- Minimize non-phased edits on video tapes
- Precise subcarrier to horizontal sync phasing is maintained at all times, including when genlocked. Color field identification is provided by a field identification pulse output.
- Greater sync system stability
- Optional ± 1 Hz color subcarrier stability performance (± 10 Hz is standard)
- Sync system status easily determined
- LEDs indicate internal or external reference source, monochrome signal incoming, loss of sync or external subcarrier lock
- 1410 Mainframe easily accommodates additional test signal generators.

- ☐ Put your total sync system together with TEKTRONIX
 - Automatic Changeover Unit provides switching to back up sync generator
 - Systems available for NTSC, PAL and PAL-M

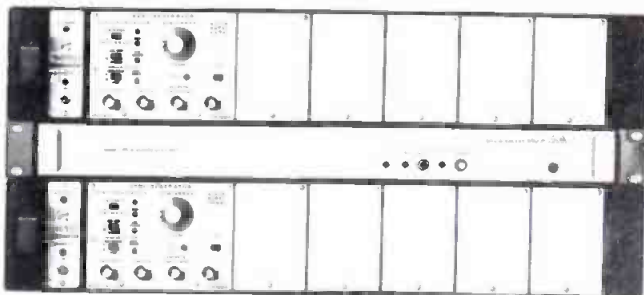

Typical NTSC sync generator system comprised of two 1410R Option 01 mainframes with SPG2 sync generator modules, and one GVG 3257A Automatic Changeover Unit.

Tektronix quality, performance and reliability in a sync generator. Get the whole story from your nearest Tektronix Products Field Engineer. Or circle the reader service number below for more information.

Tektronix
COMMITTED TO EXCELLENCE

For Demonstration Only Circle (32) On Reader Service Card
For Technical Data Only Circle (33) On Reader Service Card




Figure 3 Check the microphone polar response chart for indications of high back and side rejection as shown in the example above. Several curves for various audio frequencies are sometimes shown on the same graph and it is normal for the directivity of these microphones to deteriorate somewhat at the higher frequencies.

that we must design the egg before the chicken lays it! As a matter of fact, many stations have already completed their stereo studios and, at least in the more competitive markets, the first stereo AMs will definitely enjoy some degree of increased audience. It is necessary, therefore, to base our efforts on an educated guess if we are to have a stereo program chain ready on the day AM stereo generators become available.

Flat to 10 kHz

Ideally, audio facilities for AM stereo transmission should be absolutely flat up to at least 10 kHz. However, most of the less expensive stereo receivers probably won't be capable of 10 kHz audio bandwidth due to the relative complexity of a flat-topped IF bandpass and the need for a 10 kHz whistle filter. Anyone who has listened to AM on broadband equipment, particularly in the evening, can attest to the need for a 10 kHz notch filter. The very best AM receiving equipment will provide reasonably flat response to 15 kHz with only the 10

kHz notch and skirts a few hundred cycles wide missing.

Stations operating in areas where a pretty good audiophile audience is expected will probably want to maintain all parts of the system flat to 15 kHz. It is not likely that many receivers, as a percentage, will be capable of 10 kHz or greater response; it just gets to be a very expensive proposition. After all, most AM receivers in use today begin to roll off at 2 kHz and are already several dB down at 5 or 6 kHz. So, a stereo receiver with reasonably flat response to 10 kHz is yielding a whole additional octave and would be subjectively judged as excellent by contemporary standards.

For these reasons, the most cost-effective design criteria for simple stereo receivers would be an IF bandpass falling off sharply just before 10 kHz, thus eliminating the need for a notch filter; this is the type of response characteristic that we most generally expect to find in use. At this point, you may wonder why anyone would even question

continued on page 46

Figure 4 Avoid microphone with severe peaks in the response characteristic as shown here. On a high-quality receiver an "essy" or nasal quality may come through.


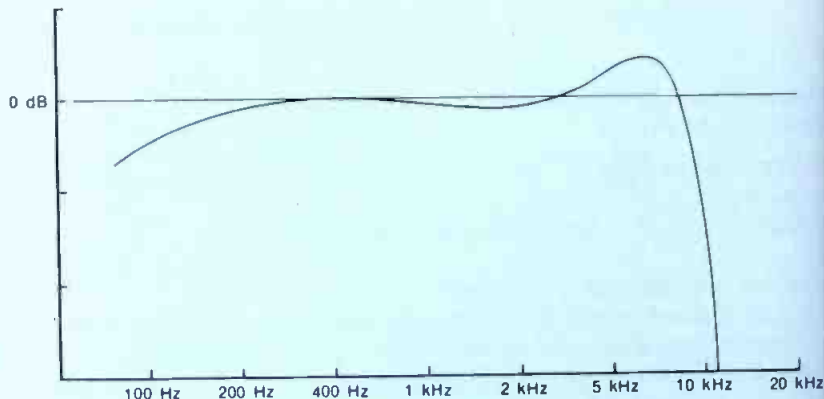


Figure 5 A smooth response like the one shown here will sound more natural and warm on the air.



KIRO KNOWS EXACTLY WHAT THEY WANT IN A 50 KW AM TRANSMITTER.

SO DOES CONTINENTAL ELECTRONICS!

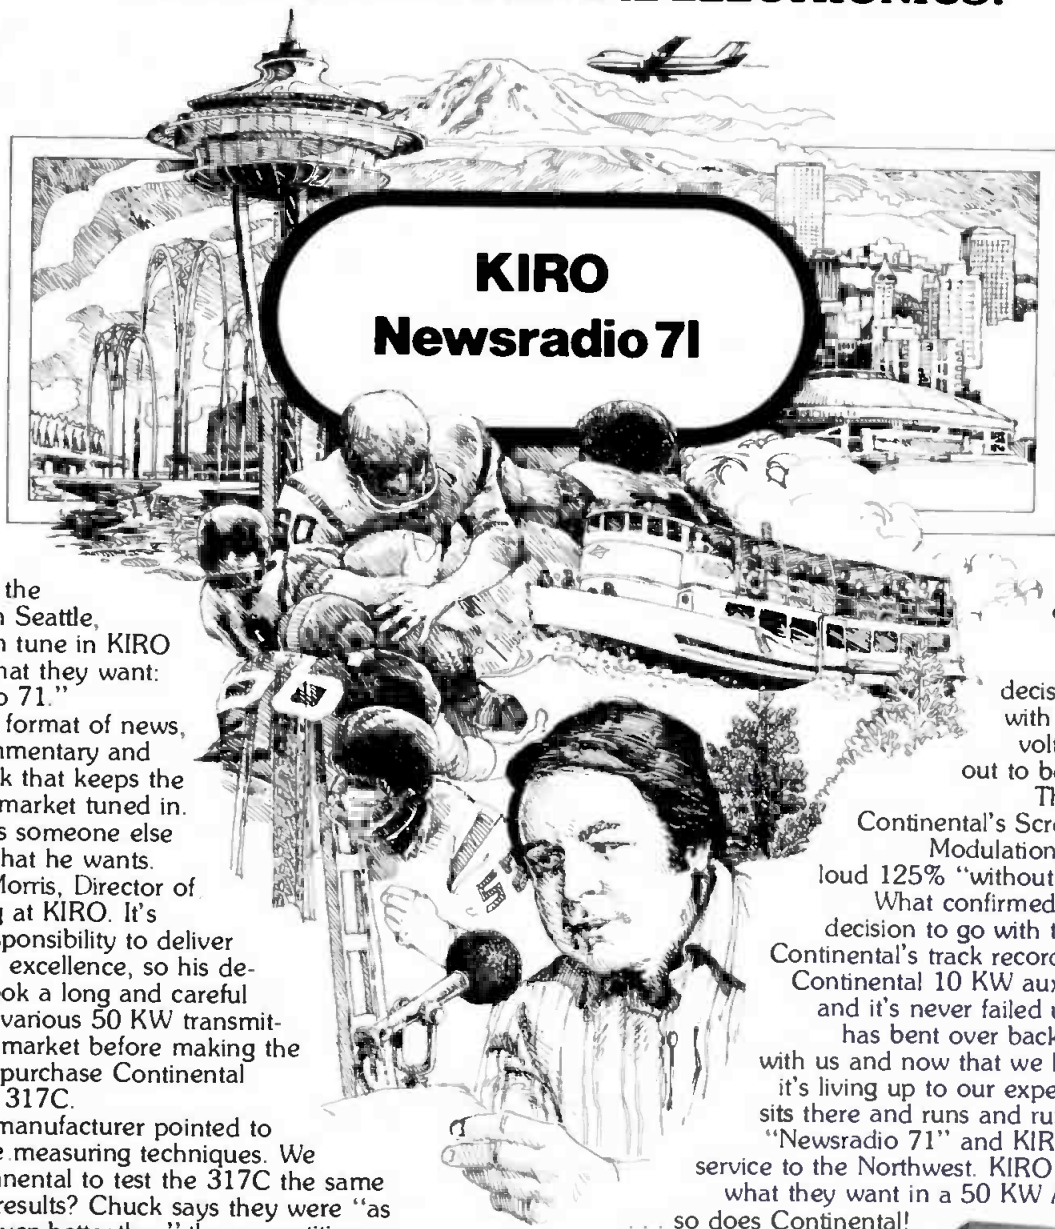

When the folks in Seattle, Washington tune in KIRO they get what they want: Newsradio 71."

A dynamic format of news, sports, commentary and a night talk that keeps the Northwest market tuned in.

There's someone else who gets what he wants. V. C. R. Morris, Director of Engineering at KIRO. It's Chuck's responsibility to deliver engineering excellence, so his department took a long and careful look at the various 50 KW transmitters on the market before making the decision to purchase Continental Electronics' 317C.

"One manufacturer pointed to their unique measuring techniques. We used Continental to test the 317C the same way." The results? Chuck says they were "as good as or even better than" the competition.

As a leader in high-power broadcasting Continental builds-in state-of-the-art performance from the start. Like high efficiency in a small space. And I'm really impressed with how easy it is to get the 317C for maintenance.

"With some of the problems other stations are having our decision to go along with the lower plate voltage has turned out to be a good one."

This is a result of Continental's Screen/Impedance Modulation which yields a loud 125% "without special effort."

What confirmed Chuck Morris' decision to go with the 317C? "It's Continental's track record. We've had a Continental 10 KW auxiliary for years and it's never failed us. Continental has bent over backwards to work with us and now that we have the 317C it's living up to our expectations. It just sits there and runs and runs." We salute "Newsradio 71" and KIRO's continuing service to the Northwest. KIRO knows exactly what they want in a 50 KW AM transmitter

... so does Continental!

For information on the 317C, write Continental Electronics Mfg. Co., Box 270879, Dallas, Texas 75227.



Continental Electronics



For More Details Circle (34) on Reply Card

Stereo Studios

continued from page 46

the advisability of extending system response to 15 kHz when virtually all consoles, tape decks, and phono equipment have response extending at least that far. The answer will become obvious when we talk about microphone selection and later in the series when we cover telco loops.

Low distortion required

In anticipation of cleaner demodulation circuits like product detectors, rather than the more conventional envelope detectors now in general use, the AM broadcaster should be prepared to offer a low-distortion stereo signal. As we go through the program chain, we will reflect on some of the routine sources of AM audio distortion.

It may be necessary to alter your thinking in some areas because better frequency response and lower distortion at the receiver also mean that your station's distortion will be much more obvious. Remember, those odd and even order audio harmonics won't be rolled off anymore, and there is always the

guy next door who will sound cleaner if he can.

AM signal-to-noise ratio will also become more important as better receivers arrive. All the accumulated hum- and noise-producing additions to the program chain which were patched out at proof time will make their presence obvious. FM broadcast engineers have had to learn to live with a 60 dB signal-to-noise requirement and so there is no reason why AM audio systems cannot be quiet, too. Actually, it is more a question of keeping the system noise-free than any special design effort, since all modern broadcast audio gear easily exceeds even the FM requirement.

Be as stereo as possible

Now that we have reviewed some of the areas that describe the performance goals that we would like to achieve, let's start going through the system, beginning right at the microphone, and see what factors need to be considered as we select equipment and plan for its installation.

Stereo immediately offers the programming department one gimmick

new to AM: stereo microphones. Some FM stations install two microphones, usually on separate booms which, due to random phasing effects, give an illusion of spaciousness to the mike sound as well as some stereo effect when the announcer moves his head or moves about.


Depending upon the format in use, your programming department may find that this effect is desirable, as it will definitely make the voice parts of your programming different than the mono AM stations. At least until the novelty wears off, everyone doing AM stereo will want to be "as stereo as possible."

Choosing microphones

In choosing microphones, you probably will want to select units with as much back and side rejection as possible to keep ambient noise to a minimum, particularly the stereo mike scheme is used. Bear in mind that the better fidelity receivers will also reproduce a noise and room rumbles, too. Looking at the frequency response chart for the mikes you are con-

continued on page 48

"THE STL"

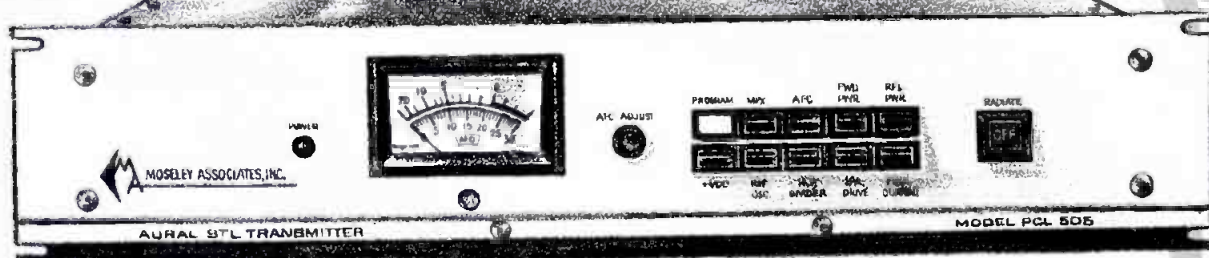

FROM MOSELEY ASSOCIATES

Pioneers of:

- ★ DUAL STL FOR STEREO
- ★ COMPOSITE STL (SINGLE LINK) FOR STEREO
- ★ SOLID-STATE STL

"THE STL" is available in two series providing monaural AM or FM, stereo AM or FM, and quadraphonic service. For full details on "THE STL," including the addition of wireless remote control, please contact our Marketing Department.



MOSELEY ASSOCIATES, INC.
SANTA BARBARA RESEARCH PARK

SANTA BARBARA RESEARCH PARK, 111 CASTILIAN DRIVE, GOLETA, CA 93017
(805) 968-9621 • TELEX: 658448 • CABLE: MOSELEY

SEE US IN BOOTH 310 AT NAB

BROADCAST ENGINEER

Used in 30 countries . . .

DYNAIR's RX-4B


All Channel Demodulator

VT-4BU Plug-in
UHF Tuner



Model RX-4B Solid-State Off-Air Professional TV Demodulator
with Plug-in Tuner Front-Ends

VT-4B-1 Plug-in
Variable VHF/UHF Tuner



FT-4B Plug-in
Fixed VHF Tuner



DYNAIR's Models RX-4B and RX-4BE, equipped with plug-in tuners, are now in use in over 30 countries around the world. In fact, they are compatible in 63 of the 136 countries with on-air broadcast television.

Designed for professional use, the demodulators have demonstrated excellent reliability and outstanding performance with over seven years of field use throughout the world.

The RX-4B is compatible with NTSC and PAL M color standards (system M and N) and the RX-4BE provides operation on PAL B color standards (system B). Both operate on 115/230V, 50/60 Hz and require only 40 watts.

For monitoring video modulation levels and for use in closed-loop operation, the optional solid-state video output may be added.

For off-air broadcast monitoring, CATV, or relay service, select a DYNAIR demodulator.


Write or call us for complete details including a free copy of our VIR applications bulletin.

DYNAIR ELECTRONICS, INC.

75 MARKET ST., SAN DIEGO, CA. 92114
PHONE: (714) 263-7711; TWX: (910) 335-2040

More Details Circle (35) on Reply Card



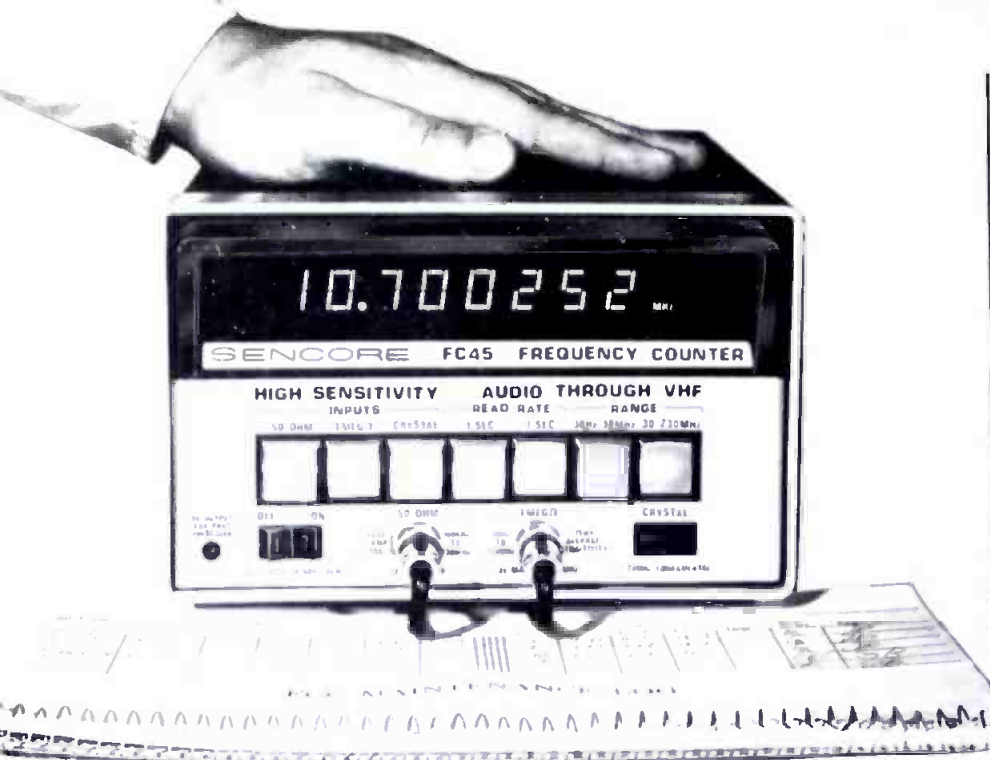

YOUR FCC DOCUMENTOR

Here's your number one standard source for documenting your FCC broadcast frequency at more than five times better than the FCC tolerance for your station. One part per million (.0001%) accuracy means there will be no doubt about your documentation when you use Sencore's new FC45 Frequency Counter. It's a counter you can really count on, yet saves you hundreds of dollars compared to other frequency meters and counters on the market.

You can make the FC45 your single source for every AM, FM, VHF, or UHF frequency check with a full, continuous spectrum range from 30 Hz audio through 230 MHz VHF. Use it with the plug-in PR47 600 MHz UHF Prescaler, too, for extended UHF range testing.

It's also super-handly around the studio for maintaining recorders and cart machines, VTRs, sync generators, and cameras. Extremely high 25 millivolt average sensitivity across the entire frequency range allows you to troubleshoot by "sniffing" frequencies with the exclusive PL207 "Snoop Loop", all without direct circuit connections that may cause frequency change and loading.

Plus every reading is pushbutton-easy to get on the big eight-digit direct-reading display that provides 10 Hz resolution at the highest VHF frequencies. You can get .01 Hz resolution at audio frequencies with the PR50 Audio Prescaler accessory.

So why pay more than \$448 for your FCC documentation? Order the new Sencore FC45 from your local Sencore Full Line Distributor, or use the order coupon below.

New FC45 230MHZ FREQUENCY COUNTER

SENCORE

3200 Sencore Drive, Sioux Falls,
So. Dak. 57105 (605) 339-0100
In Canada: Superior Electronics

- ☐ I WANT TO BUY IT. Send _____ FC45s to me at \$448 each.
- ☐ Check/MO enclosed. ☐ Send C.O.D.
- Also send:
- ____ PR47 600 MHz Prescaler \$125.
- ____ PR50 Audio Prescaler \$125
- ____ PA208 Power Adapter for PR47.. \$9.95.
- ____ PL207 "Snoop Loop"..... \$9.95.
- ☐ I WANT TO TRY IT. Have my nearest Sencore distributor bring the FC45 to me.
- ☐ SEND FULL SPECIFICATIONS.

NAME: _____

COMPANY: _____

STREET: _____

CITY: _____

STATE: _____ ZIP: _____

PHONE: _____

Stereo Studios

continued from page 48

sidering, be sure to check for any high mid-range peaks. Although this may have added a little presence to your signal as reproduced on a mono receiver with lousy response, it may make your mike sound too "essy" on better bandwidth sets. It is unlikely that any extra dollars spent to buy microphone response beyond 10 kHz for AM stereo is justified, unless you expect a healthy AM audiophile population in your area.

In general, omni-directional microphones are not desirable because they tend to pick up all the little solenoid operations in nearby cart machines, as well as paper noises; and, they require a very sound proof studio environment.

How about cart machines?

Selecting cart machines for the new AM stereo studio is a project requiring some serious advance thinking. The big question is whether all the carts, some of the carts, or none of the carts should be stereo. Few commercial masters are supplied in stereo from the advertising agencies, so unless an appreciable percentage of your production is done in-house, you may lack sufficient raw material to warrant the purchase of stereo cart decks.

You also must bear in mind the fact that stereo tape systems must be carefully and frequently serviced to be sure that phase-shift errors do not mar the mono sound of the station. This is a very important point because most of your audience for quite some time is going to be listening in mono. In general, the best approach is to do whatever you can to entertain the growing stereo audience while never doing anything to turn off your mono people. So, you decide to get into stereo production, you must be prepared to handle an increased maintenance work load.

Most stations will probably retain their mono cart machines for playing the bulk of mono spots that come from outside production sources; while adding a stereo machine or two so that stereo promos, IDs, etc. and occasional stereo spots can be aired. This scheme keeps cart machine maintenance to a minimum and gives you stereo capability when you need it. It would be shame to have to maintain six stereo cart machines day in and day out, keep everything in phase if on 20% of all the carts played contained stereo material.

BROADCAST ENGINEERING

If you are adding stereo carts to our system, you will probably also want to invest in some premium type cartridges. The final air product will, of course, be as good as the cartridge and cart machine combined.

If your music comes from reel-to-reel tape, the same attention to stereo phasing is required. Since all your music is likely to be stereo, you will probably be working with all stereo decks and these will have to be tested (at least) weekly to be sure the mono audio is not degraded. A complete treatise on stereo tape phasing is beyond the scope of this article, but a review of past issues of BE will provide several articles on the subject for reference.

Some FM stations with all stereo gear have installed switching systems so that when a mono cart on tape is played on a stereo machine, only the left channel of the tape is used, that being split to feed the left and right channel console outputs. This eliminates unnecessary phasing problems when playing mono tapes on stereo decks, but proper stereo performance still depends upon frequent tests and maintenance.

Pickups and preamps

Many AM stations already employ stereo phono pickups wired for mono reproduction because the vast majority of disc product is in stereo these days. The addition of a stereo phono preamp and some minor rewiring will put you in the stereo phono business, but we recommend that you take things a step further. If you aren't already doing so, it would probably be a good idea to convert to a phono pickup with an optical stylus, which will result in significantly less second-harmonic distortion at the higher audio frequencies compared to the common mil conical stylus.

Also, if you are considering buying a mate for your existing mono preamp to convert to stereo, try to fit one of the newer high-overload stereo preamps into your budget instead. The better stereo AM receivers will make these distortion reducing decisions worthwhile.

Now that we have discussed the selection of signal source equipment for the new AM stereo system, we'll take a break to review the manufacturer's ads and brochures until next month's issue of BE and Part 2 Stereo Studios For AM. We'll be taking a look at consoles, signal processing and STLs. □

If you think our Stereo Synthesizer is just for old mono records...

**... you don't know what you're missing!
Applications of the 245E Stereo Synthesizer
are limited only by your imagination:**

In the recording studio, you can

- save tracks by recording strings, horns, or drums on a single track and spreading them in the mix
- create stereo depth from synthesizers, electronic string ensembles, and electric organ
- create a stereo echo return from a mono echo chamber or artificial reverb generator
- use one channel to create phasing effects

In broadcasting, you can

- use it on announce mikes to create stereo depth without an image that shifts every time the announcer moves his head
- synthesize mono material before recording it on stereo cart: you'll minimize mono phase cancellation
- use mono cart machines and synthesize the output: you'll eliminate mono phase cancellation entirely
- create an audience-pleasing stereo effect from mono agency spots and network feeds

The 245E is a fundamentally different, patented way of creating stereo space. Its sound is distinct from panned point sources or stereo effects synthesized with digital delay lines. It's a dramatic, highly listenable sound that's fully mono-compatible—just add the channels to get the original mono back. At \$327, it belongs in everyone's bag of tricks. (If you get bored, you can always process old mono records into pseudo-stereo).

For further information, see your local Orban/Parasound dealer or write us direct.

orban/parasound

680 Beach Street, San Francisco, Ca. 94109 (415) 673-4544



The Orban/Parasound 245E Stereo Synthesizer

Orban/Parasound products are manufactured by Orban Associates Inc., San Francisco, CA.

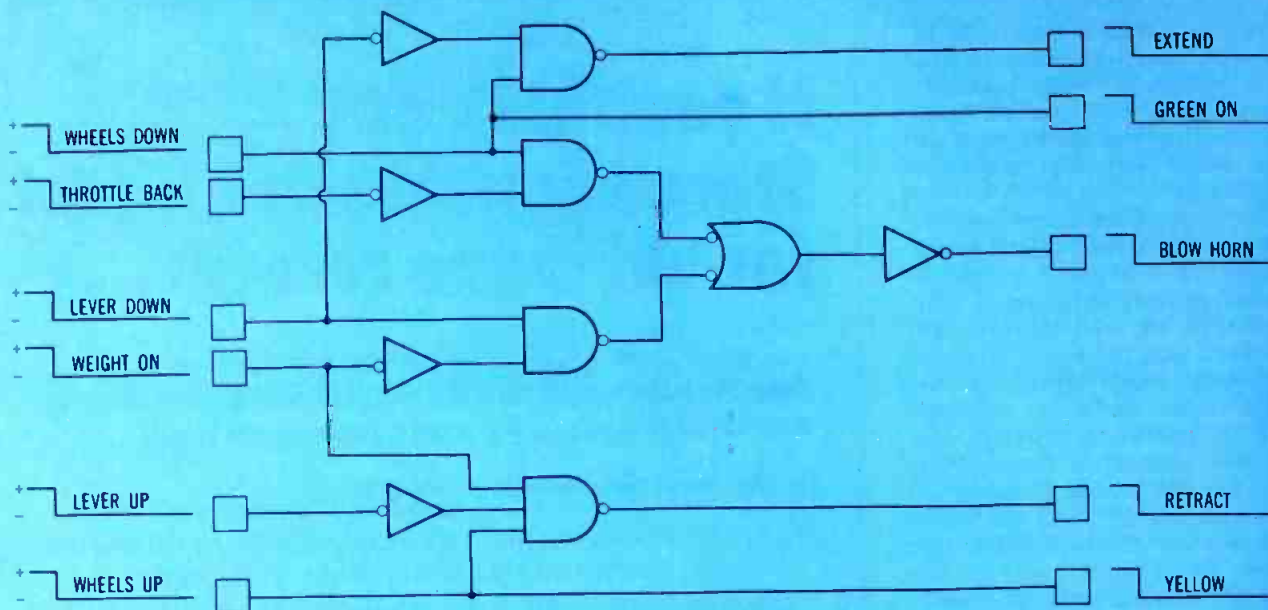


Figure 1 Combinational logic for landing gear problem.

LOGIC DEVICES: An update on functions and applications

By E. S. Busby, Jr., Engineer, Ampex Corp., Redwood City, California

Figure 2 Logic sequence for landing gear problem.

Step	Test	What to do	Next step if yes	Next step if no
0	Gear lever down?	-----	2	1
1	Weight on wheels?	-----	4	2
2	Wheels down?	-----	5	3
3	Throttle back?	-----	4	5
4	-----	Turn on horn	6	6
5	-----	Turn off horn	6	6
6	Wheels down?	-----	7	8
7	-----	Green on and stop extend	10	10
8	Gear lever down?	Green off	9	10
9	-----	Start extend	10	10
10	Wheels up?	-----	11	12
11	-----	Yellow on and stop retract	0	0
12	Gear level up?	Yellow off	13	0
13	Weight on wheels?	-----	0	14
14	-----	Start retract	0	0
15	Spare	Spare	0	0

This article is intended to update and extend past logic articles appearing in **Broadcast Engineering**, as well as pave the way for some future ones. These will not deal with logic devices, but with whole organizations of devices arranged to perform some well-defined, popular and complex tasks.

Despite the fact that microprocessors are invading the broadcast equipment business, neither this article nor its successors will do more than just mention them. If you are into microprocessors now, you already are aware that enough has been written and is being written about them. And, if you aren't, and want to be, you should start with Volume 1 of Osborne's *An Introduction to Microcomputers*, and/or the excellent series by Carol A. Ogdin in *EDN Magazine* published during the last year or so.

continued on page 3

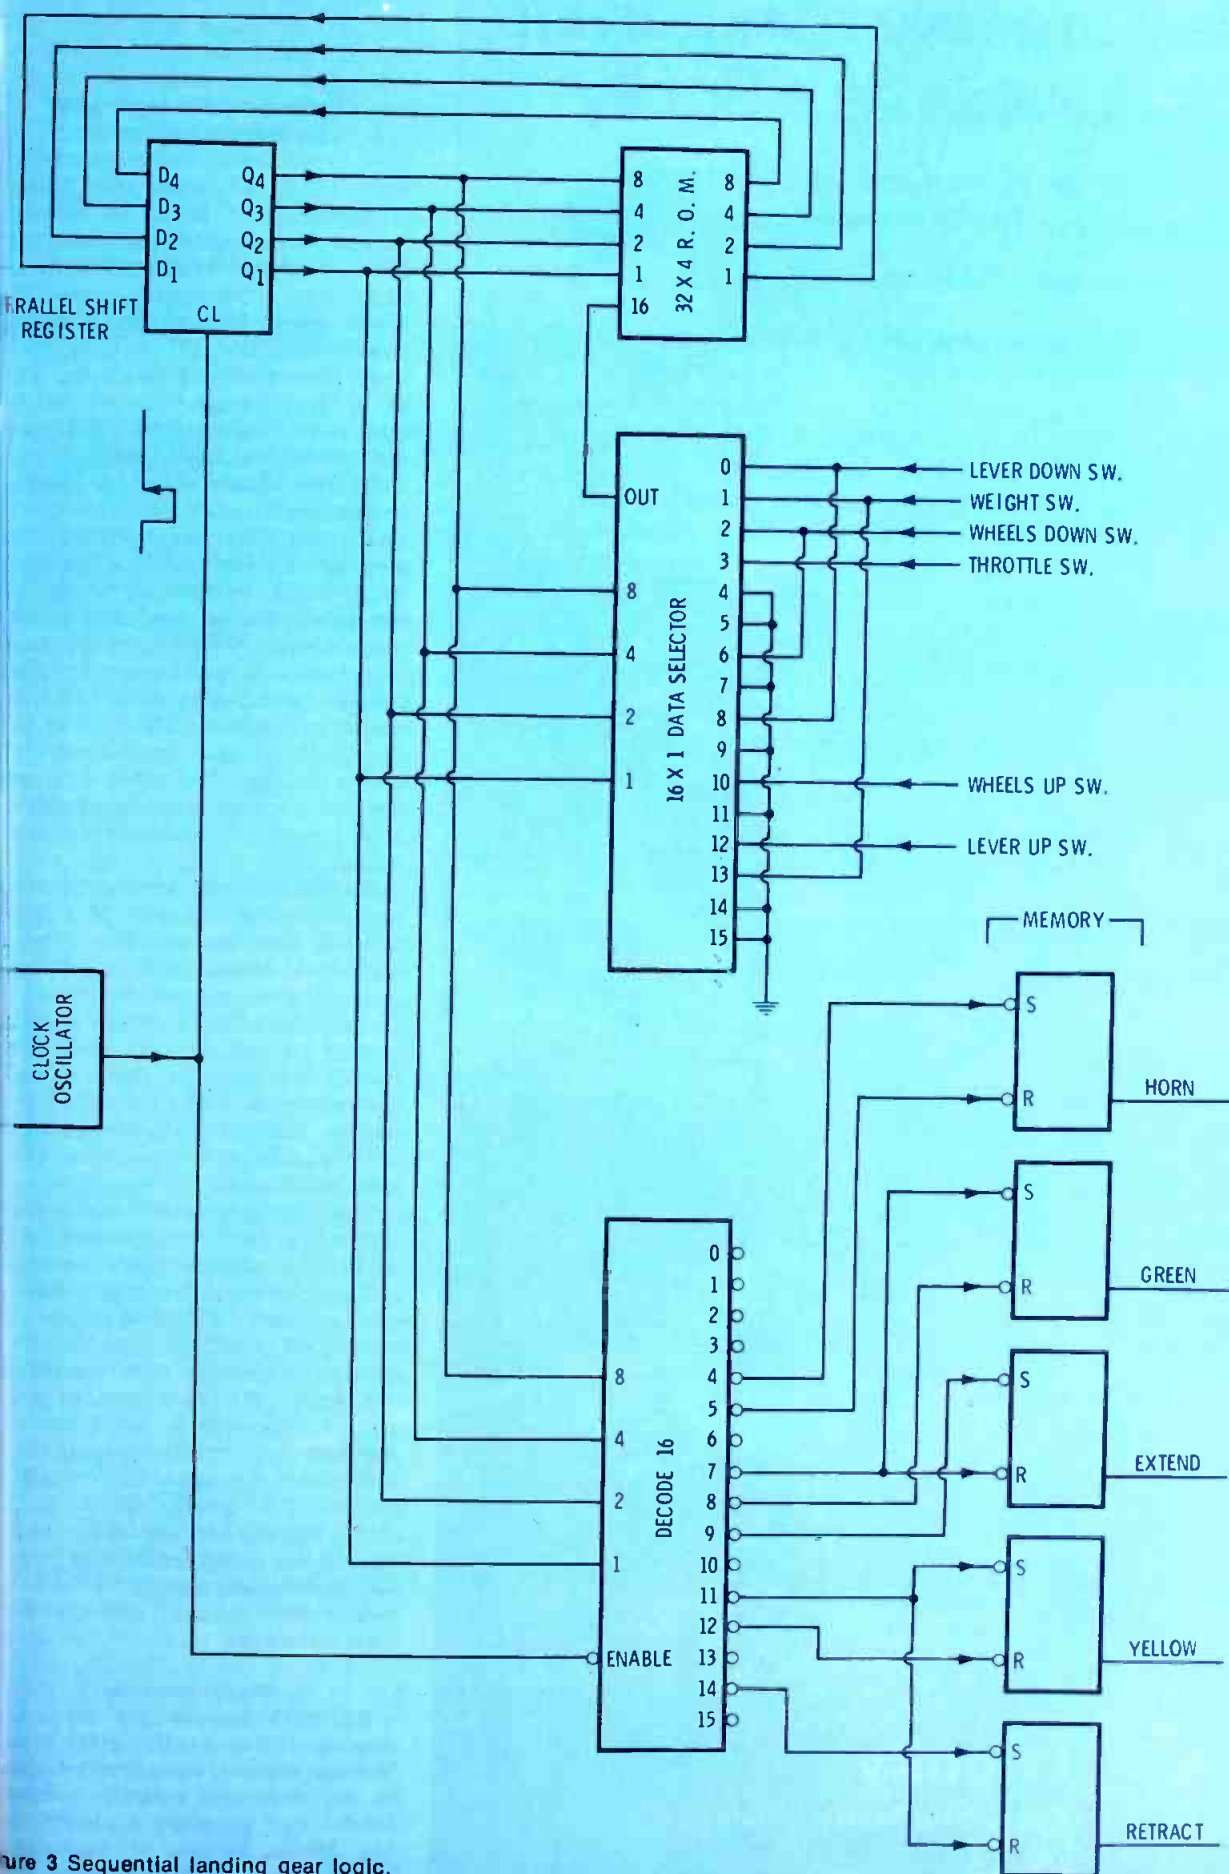


Figure 3 Sequential landing gear logic.

There are few things in life as durable as a Scully

Take our new, rugged 250 Recorder/Reproducer for instance.

The die-cast Scully 250 will take on all assignments. For portable needs, just plug in the mic preamps for news, sports, or whatever. Solve your studio needs and use only 19¼" of rack space. Configurations include full or half track mono, two or quarter track stereo. The 250 is loaded with lots of other Scully professional features, including full front access for easy alignment.

For Reproducer needs only we've designed the compact Scully 255... same Scully dependability, engineering, and durability... perfect for your automated system.

Prices? Much less than you'd expect.

The 250/255... another classic performance by Scully.

For complete details, write or call Scully Recording Instruments, Division of Dictaphone Corp., 475 Ellis Street, Mountain View, California 94043, (415) 968-8389 TLX 34-5524.



► Scully
Recording Instruments

For classic performance.

LOGIC DEVICES

continued from page 52

By the time you learn one, there's another

In new designs, resistor-transistor logic (RTL) is dead, and diode transistor logic (DTL) is certainly passé. Transistor-transistor logic (TTL) is approaching senility and is being supplanted by low-power TTL where speed isn't needed and low-power Schottky TTL where it is. Very high-speed applications, such as in digital time base correctors, still use high-speed TTL and emitter-coupled logic (ECL).

All the above share a common characteristic: current is always flowing in the device through one path or another, even when there isn't much going on. They are current-controlled devices. Another logic family which has risen to popularity is voltage controlled CMOS...complementary MOS. Its output is similar to TTL in that both the "pull-up" and "pull-down" are active devices. The input, however, has such a high impedance that at DC it can be considered open circuit.

A CMOS circuit, in a static state, uses almost zero power. If it jiggles around, the outputs must charge and discharge wiring and input capacitances, and power is then consumed. If the CMOS circuit thrashes around as fast and as often as can, it can dissipate about as much power as a TTL circuit. CMOS devices can use a wide range of supply voltages...typically three volts to 15 volts.

The "decision level," the voltage separating highs from lows, automatically adjusts itself to about halfway between the supply voltage and ground. CMOS devices are often used in battery portable equipment, and are also easy to apply "tack-on" modifications to older equipments which don't have separate logic power supply. If it does share the same supply voltage as the TTL family, it is (with limits) compatible with TTL. CMOS logic is not noted for blazing speed; the lower the supply voltage the slower they go, so read specific instructions carefully.

Static warning

All MOS devices are subject to damage from static discharge. Moving around on carpeted floors on dry days and wearing synthetic fabrics can generate a charge that can jolt a human or vaporize a board full of semi-conductor junks.

ions. Ground yourself before handling.

MOS chips often come packed with their pins stuck into a conductive foam or wrapped in conducting foil. Keep them there until the last minute. CMOS circuits have current-limited connections. Anything over about 10 mA is dangerous. An unpowered CMOS circuit can be damaged by applying an input to it from a low-impedance circuit. This can happen if you persist in plugging and unplugging circuit boards with the power on.

Somebody will make it if everybody wants it

Virtually all common logic functions (gates, counters, registers, adders, etc.) are available in TTL, low-power TTL, low-power Schottky TTL, CMOS and ECL, and new functions continue to be announced. Many of the new functions reflect the influence of the popular microprocessor. Some of the new devices are the same as old ones, with memory latches added to the inputs and/or outputs. These are useful because the microprocessor is by nature a sequential device, whose moving finger writes and moves on to tickle some other memory. Any device which needs a steady drive, such as a lamp, solenoid or motor, and which is controlled by sequential logic, must have its own private one-bit memory. Sometimes it is convenient to combine this memory with a logic function in the same chip.

Busing without controversy

Microprocessors speak to and listen to the outside world on a set of two-way wires called a data bus. Each wire is like a party-line conversation with the rule that only one party speaks at a time. Ordinary logic outputs are either pulling up hard or pulling down hard and are, in effect, talking all the time. They are not suitable to ride the bus.

Many logic functions are now available with three-state outputs. A separate control pin "enables" the chip, and its outputs pull up or down according to the rules of its logic. At other times, when disabled, the outputs are open circuit so they won't disturb other outputs which are enabled.

The concept of many devices sharing a single wire is not limited to microprocessor designs. Many logic designs use it, but it was computer technology which made it, and the devices suitable for it, popular.

continued on page 56

TWO WAYS TO MIX 30 inputs 10 WAYS...



S-21 Ten Mixer Dual Mono Console

One way is the new LPB S-21 Signature II dual mono audio console. Its stereo companion, the S-20, is the other. Either way, you get 30 inputs for 10 mixers.

The S-21, with plug-in capability for up to 30 mics, is ideal for mono broadcast and other professional sound uses, while the S-20, with standard features others offer as options, boasts dual stereo program channels *plus* mono mixdown. Engineered to satisfy the most exacting broadcaster, both are perfect as the centerpiece for the custom designed, wood-grained Dj® 10 studio furniture.

There are two ways of finding out about these and all the other LPB products available ...


One: write
Two: phone



S-20 Ten Mixer Dual Stereo Console

LPB®

LPB Inc.
520 Lincoln Highway, Frazer, PA 19355 (215) 644-1123
See us in Las Vegas, Booth #508

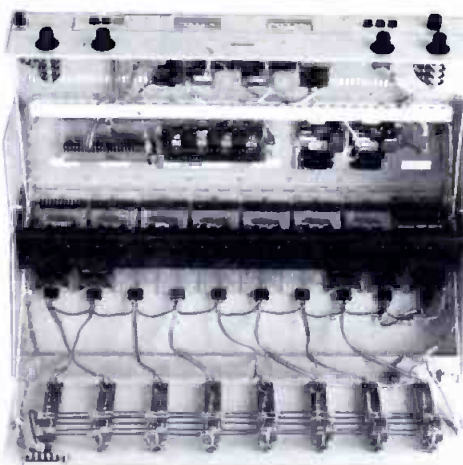

Interior of B-1082V

McMARTIN PERFORMANCE in a WORD...

CLEAN!

DJs say it about our outside. Engineers say it about our insides. Listeners and advertisers say it about our sound.

McMartin 1000 Series consoles are part of McMartin's "New Breed" of broadcast equipment. High performing. Reliable. Easy to work with.

■ Vertical or rotary attenuators ■ Five or eight channels ■ Mono or stereo ■ Gold plated contacts used where it counts ■ Tantalum capacitors ■ State-of-the-art ICs ■ Newest design on the market

See the 1000 Series consoles in booth 302 at the NAB.

MCMARTIN

4500 South 76th St • Omaha, Nebraska 68127 • (402) 331-2000 Telex 484485

For More Details Circle (39) on Reply Card

LOGIC DEVICES

continued from page 55

The most popular microprocessors today use an eight-bit data bus. So now on the market are logic packages containing eight inverters, eight latches, eight buffers, etc., even though it takes an 18 or 20 pin long, skinny package to contain them. These help in the ceaseless struggle to cram as much logic into as little space as possible.

Memories

Microprocessors require memory in which are stored instructions and data. They want *addressable* memory. They want to send out a bit pattern representing a location where some data lives and get the data sent back right away. A huge number of memory chips have been designed for use with microprocessors and some of these find uses in ordinary logic designs. Here are some of the memory family you might meet:

RAM [Random Access Memory]

The word "random" differentiates this memory from the shift register or sequential type. Given n address pins, there are 2^n different com-

binations of ones and zeros that can be applied to them. Each combination is a unique "address" of a "location." At each location you may store a word or read some data that was stored there before, usually using the same input/output pins. The direction of flow is decided by a read/write pin.

A memory described as 1024x1 means 1024 one-bit words. A 256x4 means 256 four-bit words, having eight address pins ($2^8=256$) and four input/output pins.

There are two basic kinds of RAMS: static and dynamic. The static ones store each bit in a flip-flop. Dynamic ones store data as capacitive charges. In these it is necessary to periodically address (access) groups of words to refresh the charges lest they dribble away. The dynamic kind can pack more storage into a given space. The static kind is more likely to be found in non-microprocessor designs.

ROM [Read Only Memory]

Like a RAM, access to each location is gained by supplying an address. Unlike a RAM, you can only read from it, and also, data is not lost when the power goes off. Like RAMS, they are offered in

various arrangements of N words of M bits each.

At some point in life a ROM must have data put into it. It is the way this is done that defines these three kinds of ROMS:

Ordinary ROMS have their contents defined in the last stages of manufacture, when the last layer of metal is deposited through a mask to define which connections are made and which are left open. If there are thousands of identical chips to be made, this is the way to do it. A typical application of a popular ROM is in video character generators having a fixed font.

Programmable ROMS (PROMS) come with all locations connected. The circuit designer decides what data he wants where, plugs the virgin PROM into a special PROM programming box, and one location at a time, irreversibly overloads each connection he doesn't want until it melts open. For small production runs, or when infrequent changes are expected, they are ideal. If you want to use one, you will find that most large supply houses have "PROM burners" on site.

Eraseable PROMS (EPROMS) can be written into non-destructively

Coming through...

with cleaner pictures,
words and songs

Belden wire and cable is built to move pictures, words and songs reliably, year in, year out. High quality audio cables, camera cables, coax, triax control cables and power cords... It's all available through your local Belden distributor. Much of it's available in UNREEL,[®] the wire package that dramatically slashes installation time. Let Belden come through for you. Contact Belden Corporation, Electronic Division, P.O. Box 1327, Richmond, IN 47374; 317-966-6661.

BELDEN

Coming through...

with new ideas for moving electrical energy

B-12-7

©1977 Belden Corporation

TV and Radio courtesy Zenith Radio Corp.

For More Details Circle (40) on Reply Card

BROADCAST ENGINEERING

but slowly. The contents (all the contents) can be erased by shining ultra-violet through a window on top of the chip. They are more expensive and are used mostly during the debugging phase of circuit development.

FPLA [Field Programmable Logic Array]

A designer is sometimes tempted into using a PROM to solve a complex gating function. A 256x4 PROM can be used in place of four eight-input gates and save three pieces of real estate. There is a better way. An FPLA is an array of "and" gates which are fed by all the inputs and inversions of all the inputs. The outputs of all the "and" gates connect to the inputs of a number of "or" gates, each of which drives an output pin. If there are 10 "and" gates, then each output can be taught to respond to as many as 10 of the possible combinations at the input pins. This is done in the same way that ROMs are programmed: by zapping open all the connections that don't make sense for the logic you're trying to accomplish.

IFO [First In First Out] MEMORY

This is an N bit wide memory

arranged like a water bucket with a spigot at the bottom. Data pours in the top whenever it comes and can be taken out at the bottom whenever you want some. To help you control the pouring in and the trickling out, it comes with dipstick pins which tell the world whether the bucket is empty, half full or full. It is very useful in applications where data arrives at random and must be removed synchronously, (or vice versa) and the order of arrival is important. (It usually is.)

FILO [First In Last Out] MEMORY

FILO is similar to a FIFO except that it is organized like an "in" basket on a desk: the last thing put in lies on top, where it will be removed first. It is useful chiefly in computer systems to store the present state of affairs when the computer is interrupted to perform some high-priority task.

SEQUENTIAL LOGIC

Sequential control is nothing new. Traffic lights and car washes do it all the time, using a fixed sequence: green, yellow, red over and over.

Logic problems can be solved sequentially if the sequence includes a test of some external event, and

the sequence can be altered depending on the outcome of the test.

Here is a trivial logic problem. The whole thing could be done with switches and wire, and is simple enough to serve as a non-befuddling example.

Assume that an airplane has landing gear that can be extended by running a motor one way and retracted by running it the other way. There are three switches on the landing gear:

- A. Wheels are fully down.
- B. Wheels are fully up.
- C. Wheels are bearing weight.

In the cockpit there is a landing gear lever and an engine throttle. These have switches:

- A. Lever is fully down. (extend the wheels)
- B. Lever is fully up. (retract the wheels)
- C. Throttle is retarded. (let's go down and land)

Also in the cockpit is a green light to indicate that wheels are full down, a yellow light to indicate wheels are full up, and a warning horn to warn of two circumstances:

- A. The throttle is back and the wheels aren't down. (This can

continued on page 58

OTARI PROFESSIONAL PERFORMANCE AND FEATURES IN A COMPACT PACKAGE

OTARI MX-5050

Does a professional recording or broadcast engineer need a tape recorder? Above all, he wants consistently high performance, production and editing features, ease of operation set up, and a reliable mechanism that won't let him down when the schedule gets tight.

If that's what you want too, then take a close look at Otari MX-5050. It's a full capability professional machine in a compact package. This new recorder is the end result of Otari's years of leadership in producing Japan's finest professional recorders and high speed duplicators.

Check these features: gentle, positive tape handling; panel edit and cue; built-in precision-aligned splicing; front adjustable bias and equalization; synchronous source for overdubbing; professional connectors, levels, impedances; 65 dB S/N, 19 dB headroom, 55 dB cross-sectional variable speed dc capstan servo; motion sensing; and many others. And if you need more than two channels, MX-5050 is also available in four channel (1/4 inch) and eight channel (1/2 inch), the eight channel with dc capstan as standard.

OTARI

Corporation
Industrial Road, San Carlos, Calif. 94070
933-1648 TWX; 910-376-4890
Canada: Noresco Mfg., Toronto (416) 249-7316



The Mod One Is The Flexible One

Start With The Console Format You Need Now, Expand Later.

Modular design lets you select a wide range of input modules and plug-in amplifier cards as you grow. 10 mixing positions with up to 30 inputs. Modern vertical faders, silent operating switches; state-of-the-art circuitry.

Custom features and options with off-the-shelf availability. Monaural, stereo, or quad. Meets all FCC - AM and FM standards. UREI quality, of course.

Available through your UREI dealer.



UREI "Instrumental in Audio"

11922 Valerio Street, No. Hollywood, California 91605 (213) 764-1500
Exclusive export agent Gotham Export Corporation, New York

LOGIC DEVICES

continued from page 57

lead to runway damage.)

B. An attempt is made to retract the wheels before becoming airborne.

(Very embarrassing.)

Don't laugh...both of these foul-ups have happened more than once.

Figure 1 shows (for reference) a straightforward combinational logic solution. Figure 3 shows a sequential approach. The output state of the shift register at Q1-4 drives three things:

1. A decoder whose 16 outputs can make something happen at each step.
2. A data selector which selects one of the 16 inputs to be "tested."
3. A ROM or PROM—whose output depends on the current step number and the test input. This output will determine the next state to be assumed by Q1-4 after the trailing edge of the clock.

Figure 2 shows the sequence in tabulated English. Steps zero and one jump to step four and sound the horn if there is danger or to step two if not. Two and three also have a chance to sound the horn or to turn off the horn if all is well. Six through nine handle extension and 10 through 14 retraction.

At each step there is an opportunity to do and/or test something. Extreme care must be taken if you are doing something to the very thing you are testing. An ugly timing program can develop. That is not the case at steps eight and 12. Step 15, although not used, causes a jump back to zero in case the shift register wakes up at step 15.

Now figure out at which step the logic absolutely prevents the wheels from coming up while they are on the ground.

This sequential solution was not intended to be efficient or elegant. The most complex sequential logic device with which the author is familiar is the electronic editor in the Ampex AVR-3 video recorder. It has 256 steps and seven 256x PROMS.

Unlike the example, its centre element is a presettable counter which can, at clock time, do nothing, advance one, or be preset to a new number dictated by ROM.

Sequential logic solutions, like computer programs, can range from the obvious and straightforward to the sly and devious. Sometimes the approach taken by the designer is for a good reason.

DIRECTIONAL ANTENNA BASICS

Part 4/By Robert Jones, Consulting Engineer, La Grange, Illinois and Facilities Editor for BE

This is the fourth in our series of the design of directional antenna systems. In this chapter I'll bring the reader through the basic formula used in the development of three-tower and four-tower patterns.

Three towers

Three-tower arrays are usually required when a two-tower design will not provide enough nulls, or where the protection required must be over a wider arc than can be achieved with a single null. There are two common methods of computing typical three-tower patterns. These are, like the two-tower patterns, the addition method and the multiplication method. There are several variations of these.

Addition formula

Like the two-tower formulas, the addition form for three towers consists of mathematically adding up the respective tower vectors, and employing basic trigonometry steps. In fact, what we have done is to add a third tower into our two-tower pattern at the end-point or reference spot. This can be represented as follows:

$$E = K f(\theta) (E_1 + E_2 \angle \psi + S \cos \theta \cos \theta + E_3 \angle \psi - S \cos \theta \cos \theta)$$

In this formula E_1 is assumed to be the center tower of a three-tower in-line array. The most common approach says that each end tower is equally spaced from the center (reference) tower, (this is more by custom than necessity); and that each has the same phase angle, but opposite signs. Typical three-tower patterns will produce at least two nulls on each side of the tower line. If these two nulls are to be of equal depth, then the magnitude of each end tower (E_2 and E_3) must be equal. When this occurs you have a special case that can be computed by the following formula:

$$E = K f(\theta) [E_1 + 2E_2 \angle S \cos \theta + \psi]$$

There are similarities between this formula and the one in Part 3 for the "half angle formula" except that the spacing is S instead of $\frac{S}{2}$, and the phasing is ψ instead of $\frac{\psi}{2}$. One special advantage to this formula is that the nulls can be filled equally by changing the phase of the center (reference) tower. The greater the number of degrees introduced, the greater will be the amount of null fill. There are no sine terms because

they cancel, being equal and of opposite signs.

The example of Table 1 shows the step-by-step calculation of a typical three-tower pattern by this method. Figure 3 is a graphic representation of the vectors of the three towers in Table 1 and Figure 2. At Bearings A and B the reader can see that all three vectors add up to zero, hence there are the two null bearings.

The size of the minor lobe is represented by the amount of overlap of the three vectors at C. By use of this vector plot it is easy to see that the angle or arc between the two nulls can be changed by increasing or decreasing the magnitude of the end vectors. It must be recognized that the size of the minor lobe will be affected by the arc between these nulls. The wider this arc, the larger the size of this lobe. It should be pointed out that the nulls can be moved forward or backward along the tower line by rotating the

continued on page 60

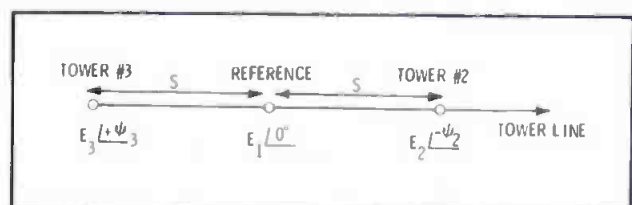


Figure 1

THREE TOWER ADDITION METHOD

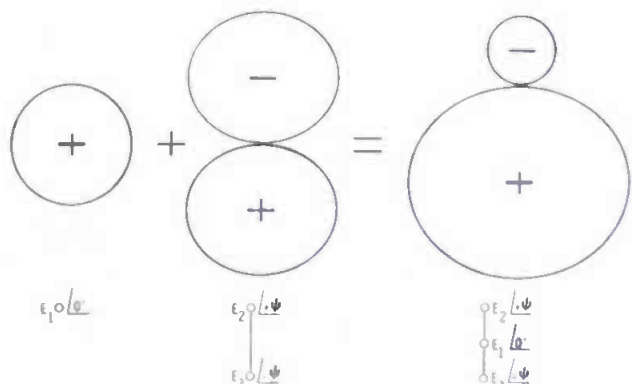


Figure 1A

**PROTECTION
ASSURED
AGAINST
LIGHTNING**
1259 Stations Use
The Wilkinson
Line Surge
Protector
IT REALLY WORKS!

WILKINSON P.O. Box 738
ELECTRONICS, INC. Trainer, Pa. 19013
(215)497-5100

For More Details Circle (43) on Reply Card

Wilkinson Electronics Canada Ltd.
15 McCulloch Ave., Rexdale, Ontario
Canada M9W 4M5 (416) 247-9741

**Wilkinson
Self Testing
Silicon Rectifiers
Replace Directly
Mercury Vapor
Tubes**

- * Self Testing — A neon indicator for each diode warns of failure.
- * Direct replacements available for all diode rectifiers — no rewiring necessary.
- * Repairable — any component can be replaced easily.
- * 200% Safety Margin on Voltage — 300% on Current.
- * Fully Guaranteed.

WILKINSON P.O. Box 738
ELECTRONICS, INC. Trainer, Pa. 19013
(215)497-5100

For More Details Circle (74) on Reply Card

Antenna basics

continued from page 59

beginning point of the end vectors.

Seldom used method

In addition to the general method outlined above there is a way of considering a three-tower design as being the sum of a non-directional tower added to a two-tower pattern. Figure 1-A shows the relationship of how this is accomplished. As with the four-tower addition methods, signs of (+) and (-) are assigned to each lobe. This method works only for a case of three towers being on the same plane (straight line).

Three-tower multiplication formulas

This is a very interesting way of designing a three-tower pattern. It consists of literally taking two separate two-tower patterns and multiplying them so that the result is an equivalent three-tower pattern. In using this method you must make certain assumptions.

One assumption is that the spacing between the towers of each individual two-tower pattern is equal to that between adjacent towers on the final three-tower array. Another assumption is that the

**TABLE I
THREE TOWER SPECIAL CASE**

$$E = K f(\theta) (F_1 + 2F_2 \cos / S \cos \theta \cos \theta + \Psi)$$

Where

$$F_1 = 1.7, F_2 = 1.0, S = 90^\circ, \theta = 0^\circ, \text{ and } \Psi = 167.6^\circ$$

$$E = K[1.7 + 2.0 \cos / 90 \cos \theta \cdot 1 + 167.6^\circ]$$

A	B	C	D	E	F	G
θ	$90 \cos A$	$B + 167.6$	$2.0 \cos C$	$1.7 + D$	E^2	mv/m
0	90.0	257.6	-.429	1.270	1.613	149.3
10	88.6	256.2	-.477	1.222	1.495	143.6
20	84.5	252.1	-.615	1.085	1.178	127.5
30	77.9	245.5	-.829	.870	.758	102.2
40	68.9	236.5	-1.104	.596	.355	70.0
50	57.8	225.4	-1.404	.295	.087	34.6
60	45.0	212.6	-1.684	.015	—	1.7
70	30.8	198.4	-1.897	-.198	.039	23.3
80	15.6	183.2	-1.997	-.297	.088	34.9
90	0	167.6	-1.953	-.253	.064	29.7
100	-15.6	152.0	-1.765	-.065	.004	7.6
110	-30.8	136.8	-1.458	.242	.058	28.4
120	-45.0	122.6	-1.077	.622	.387	73.0
130	-57.8	109.8	-.677	1.022	1.045	120.0
140	-68.9	98.7	-.302	1.397	1.953	164.1
150	-77.9	89.7	.010	1.710	2.926	200.9
160	-84.5	83.1	.240	1.940	3.765	227.9
170	-88.6	79.0	.382	2.081	4.333	244.5
180	-90.0	76.6	.463	2.163	4.680	254.1

$$K = \frac{129}{\sqrt{\frac{43.36}{36}}} = 117.5$$

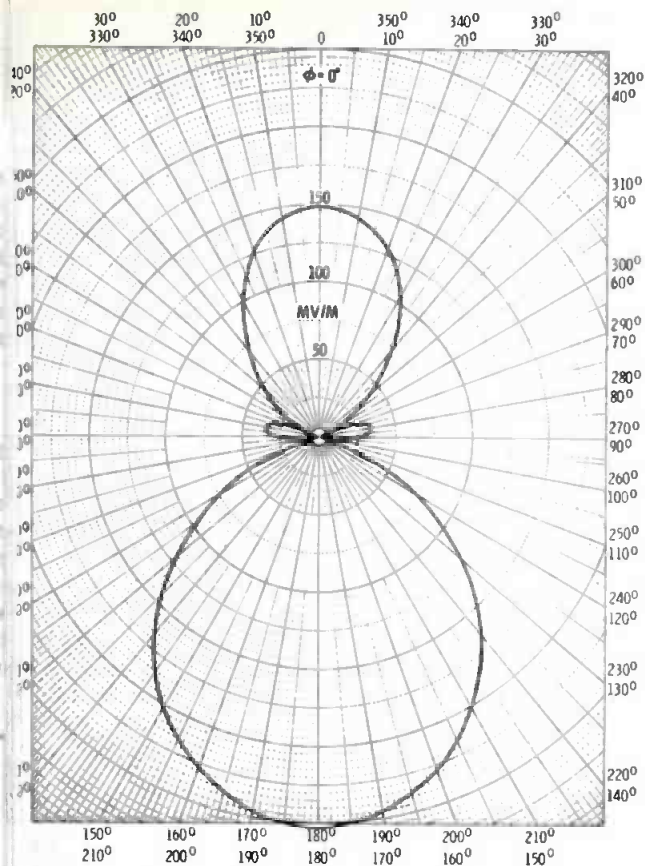


Figure 2

reference tower line for each two-tower pattern is the same as the reference for the final pattern. Also, all towers are assumed to be of equal height.

If Formula 3, of Part 3 of this series is used to represent a typical two-tower pattern, and the radical terms are multiplied together, you have:

$$E = K^1 f(\Theta) \sqrt{1 + \frac{M_1^2}{2M_1} \cos(\Psi_1 + S \cos \Theta \cos \Phi)} \\ \times \sqrt{\frac{1 + M_2^2}{2M_2} \cos(\Psi_2 + S \cos \Phi \cos \Theta)}$$

Actually there was an extra $K f(\Theta)$ term from the second pattern, but since $f(\Theta)$ was the same for each, the $f(\Theta)$ will suffice. Also, the K term from the second equation combines into a new K^1 term.

In Figure 4 I have shown how two two-tower patterns can be used to produce a three-tower array. The next step is to show how one moves from the basic design values of each individual pattern to arrive at the final three-tower value. In Figure 4 I've written the design values below each of the two-tower patterns. The end tower is assumed to be the reference tower, hence it is taken as having a value of $0/0^\circ$.

The center tower is calculated as follows:

$$\text{No. 2} = F_1 / \Psi_1 + F_2 / \Psi_2$$

and for the other end tower we use this formula:

$$\text{No. 3} = F_1 \times F_2 / \Psi_1 + \Psi_2$$

The terms are those shown in Figure 4. These two-tower design values are combined by the usual vector mathematics to achieve the final values. For an

continued on page 62

I GUESS RUSSCO IS THE ONLY ONE YOU CAN DEPEND ON!



RUSSCO engineers design the broadcast equipment that works for you—Solid state stereo and mono 5-channel audio mixers, amplifiers and preamps, the finest turntables and precision tone arms. Using modern, trouble-free technology and RUSSCO-RUGGED construction, we bring you products you can really depend on. There's just no other name to consider for Top Quality and Economy!



• Write us for our brochures

RUSSCO

ELECTRONICS INCORPORATED

1070 BROOKHAVEN, CLOVIS, CALIF. 93612 Ph. (209) 299-2167

DEPEND ON IT!

For More Details Circle (44) on Reply Card

SUPER REELS

Hannay makes super reels to handle broadcast and power cable for the bowl games, the Olympics and all of your special remote broadcast events. Choose standard designs or we'll custom build the reels you need.

Write for descriptive literature.



SEND FOR
YOUR FREE
CATALOG



**HANNAY
REELS**

CLIFFORD B. HANNAY & SON, INC., WESTERLO, NEW YORK 12193

For More Details Circle (45) on Reply Card

Tapes wiped clean in only 4 sec.

GARNER TAPE ERASERS

provide clean erasures in only four seconds—with no noise residue. Tapes are wiped cleaner than new. Our simple, safe, continuous belt operation handles all sizes of reels, cartridges and cassettes. Several models: Up to 16". Also Video Erasers.

Garner Erasers are now fulfilling the exacting requirements of many major organizations around the world...yet are so low priced that the smallest studio or station can afford one.

User reports... "It is a big improvement over what we used to use, or anything else on the market today."

—Ric Hammond, KNX Radio (CBS), Hollywood, Calif.



Call today or write for brochure.

GARNER INDUSTRIES

4200 N. 48th St., Lincoln, NE 68504, Phone: 402-464-5911

For More Details Circle (46) on Reply Card

Antenna basics

continued from page 61

example I've chosen a two-tower pattern with nulls at 90° and a second with nulls at 135° off the tower line. The calculation results in the pattern plotted in Figure 5.

One advantage of using this multiplication method is that each null can be placed separately, and the depth of each null is independent of the other nulls. In the foregoing three-tower addition formula, there is no such design flexibility. For this reason almost all design engineers use the multiplication method.

A special case of the three-tower multiplication formula occurs when the magnitudes of tower F_1 and F_2 are equal to the reference tower. In such a case Formula 3 can be rewritten as follows:


$$E = K f(\Theta) \sqrt{[1 + \cos(\Psi_1 + S \cos \Theta \cos \Phi)] \times [1 + \cos(\Psi_2 + S \cos \Theta \cos \Phi)]}$$

For this condition zero nulls are produced in the final three-tower array. It will be customary to change the reference tower, of the final pattern, from the end to the center tower. The phase angle of the center tower is then changed to 10° by subtracting out a $\frac{\Psi_1 + \Psi_2}{2}$

from each term in formula four and five. The end results is as shown on Figure 6.

This special case can be refined even one more step, if the center tower of our new pattern is made equal to unity. Equation 6 then can be written as follows:

$$E = K f(\Theta) \left[\frac{1 + \cos(\Psi + \cos \Theta \cos \Phi)}{2E} \right]$$

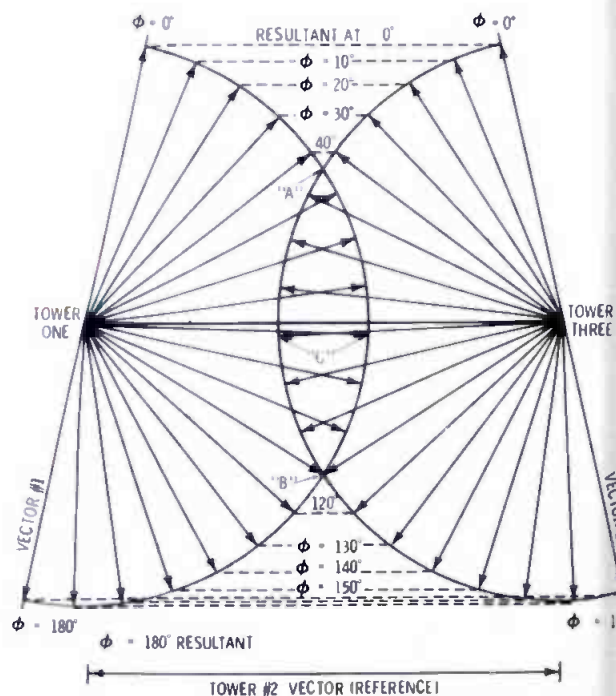

VECTOR PLOT OF TABLE 1
NULLS OCCUR AT POINT
OF OVERLAP

Figure 3

FINAL PATTERN

$$\begin{array}{c} \textcircled{} \\ | \\ F_2 \quad \angle \psi' \\ | \\ S \\ | \\ F_1 \quad \angle 0'' \end{array} \times \begin{array}{c} \textcircled{} \\ | \\ F_3 \quad \angle \psi' \\ | \\ S \\ | \\ F_1 \quad \angle 0'' \end{array} = \begin{array}{c} \textcircled{} \\ | \\ E_3 \quad \angle \psi_3 \\ | \\ S \\ | \\ E_2 \quad \angle \psi_2 \\ | \\ S \\ | \\ E_1 \quad \angle 0' \end{array}$$

$$\begin{aligned} E_1 &= F_1 = 1.0 \text{ } \angle 0^\circ \\ E_2 &= F_2 \angle U_2' + F_3 \angle U_3' \\ E_3 &= F_2 F_3 \angle U_2' + U_3' \end{aligned}$$

In this formula E represents the field ratio of each of the end towers, as compared to unity for the center tower. All the other terms are as previously explained. □

If you do OFF-AIR taping, or if you want to start your recorder when you'd rather be elsewhere, ES 1296 is for you! Presettable up to 96 hours in advance, starts any machine you want, turns it off after an hour, and for only \$150. For \$25 more, you get an option to turn off your equipment in 16, 33, 66 or 138 minutes, or 33, 66, 138 or 250 minutes.



For More Details Circle (47) on Reply Card


CUSTOM DESIGNED PROJECTIONS-
EASY TO USE IN ANY ELLIPSOIDAL SPOT.
TOP QUALITY STAINLESS STEEL. LARGE
SELECTION OF TREES, CLOUDS, DECO
DESIGNS. ARCHITECTURAL DETAILS.
SUPER FAST DELIVERY. ONLY \$7.50 EACH.

THE GREAT AMERICAN PATTERN

63

RCA demolishes last antenna tower at historic Radio Central

By Cindy Nelson, Editorial Assistant

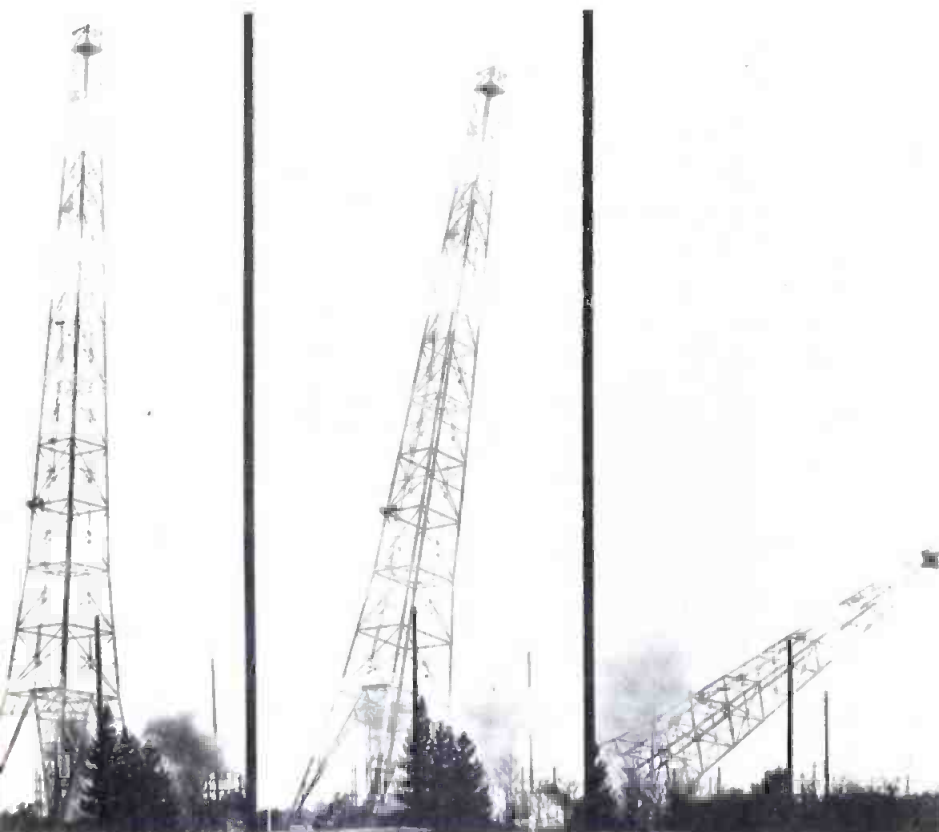

Dynamite charges toppled the 410-foot radio transmitting tower at Rocky Point, New York, on December 13, ending a colorful era in communications history. The tower was the only remaining structure of "Radio Central." (Courtesy of RCA Corp.)



Rocky Point transmitting station opened in 1921. Photo shows 410-foot long-wave towers and the "swimming pool" which was used as a cooling system for vacuum tubes and transmitters. (Courtesy of RCA Corp.)

The 410-foot antenna tower at Rocky Point, New York, which was heralded at birth by a United States president, has been relegated to the scrap heap.

Although it was once part of RCA's "Radio Central," the most powerful radio station in the world, during the past few years it served only as a microwave antenna and beacon light support for Kennedy airport.

But, as James C. Hepburn, vice president and technical director of RCA Global Communications, explained, "We are using satellites, and aeronautic technology has come so far that the tower is no longer necessary."

So, the tower that took two months to build and stood for 56 years, was demolished in a few seconds.

The official opening of Radio Central on November 5, 1921 was hailed by President Harding as a milestone in wireless progress. The President put the station into operation by throwing a switch which had been rigged-up in the White House. Stations around the globe had been alerted to tune in for a congratulatory statement by the President.

The message from the White House was personally telegraphed by the late David Sarnoff, then general manager of RCA. It was acknowledged by 19 countries, four of which replied within 15 seconds.

"For about a decade, Radio Central was the only means of direct communication with Europe," Hepburn said. It was also the "hopping off" point for messages transmitted by RCA to Central and South America.

The Rocky Point site was not only famous for its role in communications, but also for the pioneers of the radio age who regularly visited there. The guest book at the location lists such men as Guglielmo Marconi, Lee DeForest, Charles P. Steinmetz, Nikola Tesla, David Sarnoff, and many others.

"At that time," Hepburn said "the international telegraph service was quite young and Radio Central

as a major development in transatlantic communications. RCA was quite new at that time also, having been founded in 1919."

The Rocky Point station was built shortly after RCA, then known as the Radio Corporation of America, was organized at the end of World War I. The radio facilities of RCA's predecessor, The American Marconi Company, were being returned to private control by the U.S. government following wartime operations. RCA was formed to handle the nation's international communications.

"Long-waves" were necessary for long-distance communications in those days, and the state-of-the-art dictated the use of high steel towers to support massive antenna structures. There were originally two antenna units, each with six towers 200-feet high and weighing 150 tons. These towers stretched over a three-mile area on the eastern end of Long Island.

"For a period of time one of the large antennas was leased to AT&T for the first overseas telephone communications. Of course, with the use of satellites, the tower is no longer necessary," Hepburn said.

As communications technology developed, the long-wave system also became obsolete. The vacuum tube, which made shortwave transmissions possible, made the two giant Alexanderson alternators and antenna "farms" a thing of the past.

"Now, in the 1970s, shortwaves are all but discontinued," Hepburn said. "I am quite certain that by the end of this decade, the Rocky Point facility (still utilized for shortwave communications to South America) will no longer be necessary."

RCA demolished a group of six towers in the 1950s; five more were destroyed in the early 1960s. One of the 200-kilowatt alternators is now at the Smithsonian.

The last steel tower was inspected for structural integrity on a scheduled basis and was repainted every six years. This required a crew of four riggers in bosun chairs. A complete paint job required 225 gallons of paint and labor.

But the tower outlived its usefulness. December 13 signalled the end of a colorful era in communications history. □

NEW 19 ALL NEW Technics professional audio products in stock at RAMKO RESEARCH!



Just introduced! Turntables, reel to reel recorders, portable and fixed cassette R/P units, power amps, parametric equalizers, tuners and speakers.

The RS1500 reel to reel recorder that outperforms anything in its class. A new turntable, SL-1500 MK2, designed specifically for the broadcaster. A new portable cassette unit that gives the best portable reel to reel

units a run for their money. Power amplifiers, parametric equalizers and a series of studio monitor speakers that will astound you with their amazingly faithful reproduction.

Panasonic pulled out all stops on their research and development program for this series. Undoubtedly, with the performance, quality, and reasonable prices exhibited by this audio gear the "Technics" name will be a major consideration in your future purchasing decisions.

Whatever your needs, RAMKO RESEARCH offers a full line of the highest quality audio equipment available. Turntables, Tape Cartridge machines, a wide variety of distribution, mic, line, power and turntable preamps. Cassette record/play units & reel to reel recorders. And of course the most advanced broadcast consoles in the industry.

If it's for the studio we have it. Write or call collect today for our newest catalog and further information on the all new Technics "Professional series" audio equipment. You'll be dollars and performance ahead.

RAMKO RESEARCH

11355 "A" Folsom Blvd.
Rancho Cordova, Calif. 95670
(916) 635-3600

For More Details Circle (49) on Reply Card

Get Aligned Stay Aligned with STL precision magnetic test tapes

These dependable tapes are used by broadcasters, recording studios, equipment manufacturers, governments and educators throughout the world. They are available in two basic types . . . (azimuth, level set and frequency alignment) and (flutter and speed). Three basic formats are offered . . . reel to reel, cartridge and cassette.

Most catalog items can be shipped from our inventory the same day we receive your order. Write or phone for fast delivery. Write for free catalog.



STANDARD TAPE LABORATORY, Inc.
26120 Eden Landing Road / #5 / Hayward, CA 94545
(415) 786-3546

For More Details Circle (50) on Reply Card

IT'S A PLEASURE TO PROGRAM BASIC A

Just tell BASIC A what you want to do, in standard broadcast English...and it does it. No need for complex codes, no translation into computerese.


And, anytime you want to add, insert or delete program entries or alter your programming in any way, just ask BASIC A, in English, and the system will respond.

BASIC A performs all the functions all IGM systems ever did...and more. It stores 4000 events via RAM (Random Access Memory). It's expandable in 2000-event increments. And for right now, BASIC A operates with existing peripheral equipment. As your needs grow, BASIC A grows with you.

Best of all, the price of BASIC A is lower than that of many existing systems with fewer capabilities.

IGM

A Division of NTI
4041 Home Road
Bellingham, WA 98225
206-733-4567

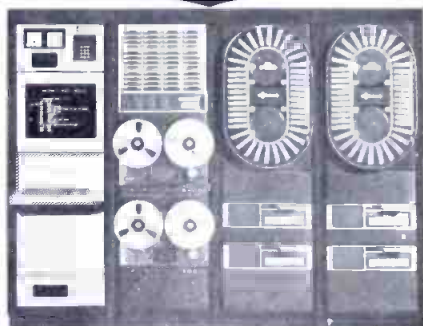

zoom in!

This is the official column of the American Society of TV Cameramen (ASTVC). The ASTVC

can be contacted by writing to: P.O. Box 2 Sparkill, NY 10976. (914) 359-5985.

We really need to promote the ASTVC at all levels

(Ed. note: From time to time, this column presents articles submitted by members of the ASTVC. The following was written by Bob Brooks who is our Southeast regional director, working out of WPEC-TV, West Palm Beach, Florida. Correspondence regarding this column may be sent directly to him at: Fairfield Dr., West Palm Beach, FL 33407.)

On November 2-5, it was my pleasure to attend the Theatre, TV, and Film Lighting Symposium sponsored by the Illuminating Engineering Society. The symposium, held in Miami, consisted of three and a half days of lectures and product demonstrations. Discussed were subjects such as architectural lighting, with substantial emphasis on proper use and energy conservation; the concept of "dimmer-at-the-lamp," which, its proponents claim, results in an overall cost reduction of 21%; and, lighting for major rock concerts.

The third day consisted of a field trip to the Dade County Auditorium and the studios of WPBT, the local PBS outlet, and various committee and organizational meetings. The fourth day consisted of a joint meeting with the Florida-Caribbean Theatre Design Conference, with two very interesting lectures by Peter Edwards, supervising lighting director, CFTO, Toronto and Stan Miller of Rosco Labs.

One of the most interesting things shown at the symposium was the Parellipsphere framing spotlight. This one unit can replace a six-inch ellipsoidal with a pair of nine-inch focal length plano convex lenses, or a pair of 16-inch focal length plano convex lenses, without changing lens or lens tube.

Some of the other advantages are: by using a combination of parabolic, elliptic, and spheric reflector sections, this unit collects and reflects a higher percentage of light and reduces hot-spots; the framing shutters are designed to prevent warping, burning, discoloration, burning

of hands, etc.; color media life extended 500% through the use of dielectric "hot mirror" which reflects the unusable, infrared (heat) energy downward, through special ducts, thus preventing the majority of the heat energy from reaching the color media, or, incidentally, the talent. Without trying to sound like a salesman, I have to say that the Parellipsphere is one of the best lighting instruments to use in the field in some time.

Also shown were a myriad lighting control packages ranging from equipment suitable for a small rock group, to disco lighting systems, film and tape location packages, and, finally, to major, 100,000 seat rock concert set-ups. Dimmer boards looking like something out of Star Wars were displayed. Many of these consoles utilized internal and/or external memory systems providing greater versatility and increased capability. Wherever computer-assisted lighting boards were demonstrated, there was always a group of onlookers.

Another item that had people standing in line was the Gre American Scene Machine. This is probably the most versatile special effects instrument that I've seen in the lighting industry. Interchangeable lenses; interchangeable pattern holders; and interchangeable, reversible, motor drives result in projection of moving cloud patterns, flames, and an almost endless variety of special lighting effects.

Lighting is something that affects every cameraman. At the very least it is going to affect the quality of your shot, and many markets require lighting experience as a prerequisite for the job. Our creativity often is not increased, because in television walk down our "TV Alley," never looking to the right or left to see what our associates in film and theatre are doing.

continued on page

Filament circuit modification

By Walter C. Jamison, P.E.

The need for well-regulated filament voltage supply for transmitter power tubes is well known. Many transmitters in use today have provision only for manual adjustment of filament voltage. Most of these transmitters are operated by "combination" operators or are located at remote sites, making careful monitoring of filament voltages impractical. Many remote sites have particularly bad voltage regulation. In some cases the solution is to regulate the power to the whole transmitter.

I have installed automatic voltage regulators in several transmitters, to regulate the voltage on the filament primary bus. A further refinement is to install a powerstat-type variable transformer

in the primary of each of the filament transformers for the larger tubes. Each tube can then be set for optimum life and performance.

In many transmitters this can be done by connecting the regulator in series with the filament contactor, as indicated in the diagram. Each transmitter will have to be analyzed and the best solution selected.

In one transmitter it was necessary to connect all the filaments to the same phase because a suitable three-phase regulator was not available. This actually improved the noise performance of this transmitter, and the power amplifier tube life was doubled as a result of careful filament voltage management.

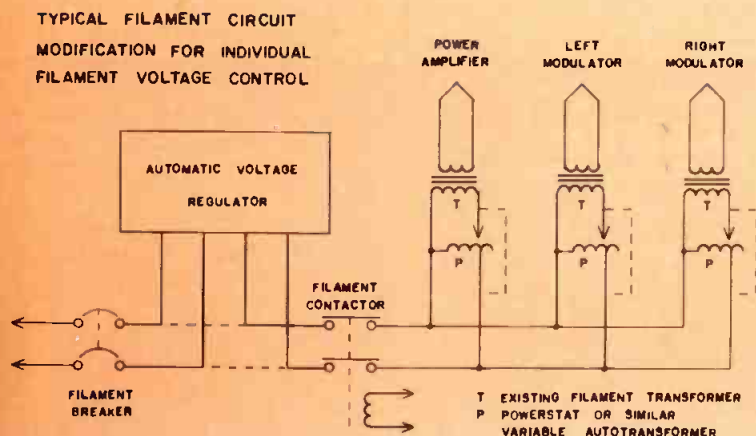


Figure 1

Modification for noiseless editing

By Mike Langner, KHFM, Albuquerque, New Mexico

News editing is a process where fast-paced contemporary radio operation demands comprehensive coverage of the day's events and immediate airing of taped "activities."

A simple modification to the solenoid of nearly any tape cartridge machine will permit noiseless, quick editing as actuality material is recorded onto the cartridge.

If the solenoid circuit is broken with the SPST switch's NC contacts,

the solenoid will drop out, stopping tape motion while leaving the machine in "Record" mode. The ability to start and stop tape motion independently from the generation of cue tones (and from starting and stopping the bias oscillator) permits split-syllable editing directly on the cartridge machine while recording. No tape splicing, no wax marker, no mess.

I have installed this switch (with

continued on page 68

SAVE 20%

ON SAMS 4-VOLUME
TELEVISION BROADCASTING LIBRARY
Save 20% with purchase of four-book library.
(Single volumes available at regular price.)



TELEVISION BROADCASTING: CAMERA CHAINS #20833

Helps you make circuitry adjustments in TV cameras. Explains theory, operations, and maintenance. Covers studio lighting, camera mounting, power supplies, video preamplifiers, camera control. 464 pages. \$14.75

TELEVISION BROADCASTING: EQUIPMENT, SYSTEMS, AND OPERATING FUNDAMENTALS #20786

Great for learning or reviewing broadcast system fundamentals. Clearly explains NTSC color system, sync generators, TV recording systems, transmitters. 656 pages. \$16.95

TELEVISION BROADCASTING: SYSTEMS MAINTENANCE #20898

Complete word-and-picture guide to troubleshooting everything from switcher inputs to transmitter output. Describes theory, operations, tests, measurements. 608 pages. \$16.95

TELEVISION BROADCASTING: TAPE AND DISC RECORDING SYSTEMS #20933

Takes you from basic theory to testing to maintenance of complete video-tape systems. Offers valuable information about various kinds of equipment. 576 pages. \$16.95



AM-FM

BROADCASTING: EQUIPMENT, OPERATIONS & MAINTENANCE #21012

Packed with on-the-job information for chief engineers or maintenance technicians of AM and/or FM stations. Covers transmitter and antenna systems, modern station operation, and much more. 800 pages. \$18.95

Clip Out—Mail Today

FREE TRIAL COUPON

YES—send the book(s) checked below for my free 15-day examination. Afterwards, I will either return them and owe nothing—or keep them and pay the modest prices shown, plus shipping and handling.

☐ 4-book TV Broadcasting Library (#21418) Reg. Price \$66.60 Special Savings Price \$62.50

☐ #20833 \$14.75

☐ #20786 \$16.95

☐ #20898 \$16.95

☐ #20933 \$16.95

☐ AM-FM Broadcasting Book (#21012) \$18.95
Save shipping and handling.

Send check with order and we'll pay shipping and handling. 15-day refund privilege still applies.

NAME _____

COMPANY _____

ADDRESS _____

CITY _____

STATE _____

ZIP _____

Mail to:

209

TA38



HOWARD W. SAMS & CO., INC.
4300 West 62nd Street
Indianapolis, Indiana 46206

Change Sound to Silence with a **TABERASER**



This rugged, heavy duty bulk tape eraser wipes sound from all magnetic tapes, cartridges, cassettes and magnetic film stock; handling up to 2".

It erases with minimum residual noise because the field automatically diminishes at the end of each 30-second cycle. A thermal control and blower keeps the unit below 71° C.

Available for 60Hz or 50Hz operation.

For the distributor in your area—Call or write:

TABER Manufacturing & Engineering Company
2081 Edison Ave. • San Leandro, Ca. 94577 • (415) 635-3831

For More Details Circle (51) on Reply Card

Station-to-Station

continued from page 67

a .02 uf capacitor across its contacts for arc suppression) in several models of ITC, ATC gates, and RCA audio tape cartridge machines with excellent success. Normal operation of the deck is completely unchanged. The switch positions are labeled "Edit" and "Normal." This simple modification will save 50% to 75% of the time normally spent editing tape in a radio station newsroom...to say nothing of saving the tape itself.

Building a cable tester

By Bruce V. Bradfield, KIMM,
Rapid City, South Dakota

The cable tester shown in Figure 1 is a small, self-contained, simple unit that is very effective. It will test for opens and shorts between any of the conductors of a shielded balanced-type cable. Almost any type cable can be accommodated by providing the correct connectors for your use.

On the one I built, I used standard Amphenol mike connectors because of their wide usage, and also provided four 1/4-inch phone jacks in groups of two, spaced 5/16 inches apart for testing audio patch cords.

If J1 and P1 are both mounted on the chassis, they should be mounted on phenolic or some similar insulat-

Electric Rain Gauge

Now you can report minute-by-minute rainfall amounts and not get wet! This new, low cost, remote-reading gauge shows announcer rainfall accumulations in 1/100-inch increments. Transmitter can be located several hundred feet away and is completely automatic — needs no service or attention. Ask for free Spec. Sheet, Model 525 Rain Gauge.



Also, a complete line of
Weather Instruments



(214)
631-2490

Department B
Texas
Electronics, Inc.
P. O. Box 7225
Dallas, TX 75209

For More Details Circle (52) on Reply Card

When accuracy Counts...Count on Belar for AM/FM/TV MONITORS



BELAR
AM MODULATION MONITOR



BELAR CALL ARNO MEYER (215) 687-5550
ELECTRONICS LABORATORY, INC.
LANCASTER AVENUE AT OORSET, OEVON, PA. 19333 • BOX 826 • (215) 687-5550

For More Details Circle (53) on Reply Card

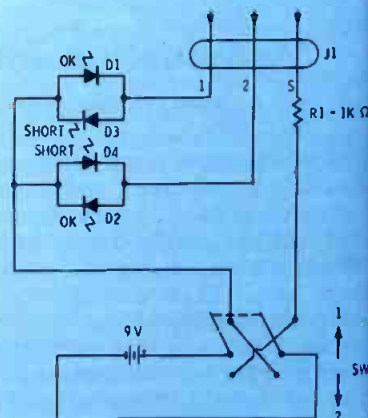



Figure 1

Table 1. TRUTH TABLE FOR LED CABLE TESTER

CABLE CONDITION	SWITCH POSITION	D1	D2	D3	D4
NORMAL	1	ON	OFF	OFF	OFF
	2	OFF	ON	OFF	OFF
1-2 SHORT	1	ON	OFF	OFF	ON
	2	OFF	ON	ON	OFF
1-S SHORT	1	ON	OFF	OFF	OFF
	2	OFF	OFF	ON	OFF
2-S SHORT	1	OFF	OFF	OFF	ON
	2	OFF	ON	OFF	OFF
1-2-S SHORT	1	ON	OFF	OFF	ON
	2	OFF	ON	ON	OFF
1 OPEN	1	OFF	OFF	OFF	OFF
	2	OFF	ON	OFF	OFF
2 OPEN	1	ON	OFF	OFF	OFF
	2	OFF	OFF	OFF	OFF
S OPEN	1	OFF	OFF	OFF	OFF
	2	OFF	OFF	OFF	OFF

ends together, the cable can be plugged into the tester on one end and the diode-equipped cable plug into the other end. You can use whatever scheme you find useful in your operation. If the cable is ok, only the two "OK" LEDs should light, one in each position of the switch. If either "SHORT" LED lights, the accompanying chart can be consulted to discover the nature of the short.

If you are interested primarily in a bench tester, the 9-volt battery and switch can be replaced with a 12 VAC filament transformer. This scheme would test both inner conductors of the cable at the same time. Battery life in the battery model should be quite long unless you consistently leave cables plugged in for periods of time.

If you want a bit more brightness from the LEDs, decrease the size of R1, keeping the current drain below the maximum rating of the LED in use. Most types of LED should work. You may wish to use one color LED for D1 and D2, and another for D3 and D4. D5 and D6 can be almost any general purpose diodes which will handle the current drawn by the LEDs.

continued on page 70

ing panel. Otherwise, an open field will not be detected. I mounted J1 on the chassis and used a Amphenol cable connector with 5 and D6 wired inside for P1. I

found this to be a handy arrangement for instances where a long mike cable is stretched out into position and then found to be bad.

To save having to drag the two

Split Second Time Machine

The Telex/Magnecord 1400 recorder. Split second timing with a grid of 524 lines passing a quartz crystal control reference each capstan revolution. This senses, and corrects the speed of the DC servo-drive some 4000 times per second*. Speed stability is so accurate the National Weather and the Environmental Satellite Services selected Telex/Magnecord 1400's over all others to record meteorological display data.

Of course, broadcasters also favor the 1400 for the rugged stability of the die cast main frame, DTL logic and exceptionally clean electronics. Compare our speed, specs, and price. We invite you to make a split second decision.

*At 7½ ips, adjustable ± 1% to compensate for tape thicknesses and mechanical wear.

PRODUCTS OF SOUND RESEARCH
TELEX
COMMUNICATIONS, INC.


9600 ALDRICH AVE. SO. • MINNEAPOLIS, MINN. 55420 U.S.A.
Europe: 22 rue de la Legion d'honneur, 93200 St. Denis, France
Canada: Telak Electronics, Ltd., Scarborough, Ontario

For More Details Circle (54) on Reply Card

Send us your

station-to-station

ideas. We'll pay you cash or send you the NAB Engineering Handbook.



If your equipment tips or other operating ideas are selected by Broadcast Engineering to appear in Station-to-Station, you will receive a \$30 minimum payment or a free copy of the prestigious NAB Engineering Handbook.

The latest Handbook contains over 1,000 pages and 1,000 illustrations covering every aspect of AM, FM and TV operation and maintenance; recommended procedures, fundamentals, standards, rules and how-to instructions.

Station-to-Station affords you an opportunity to share your expertise with readers throughout the industry: how you solved a nagging technical or production problem, modified a circuit for more flexibility, redesigned a studio or facility, developed new test procedures or employed an operating idea to save time and money. By sharing your knowledge, you'll share in the wealth of information contained in the Handbook.

Send your items to: Station-to-Station editor, Broadcast Engineering, P.O. Box 12901, Overland Park, KS 66212. Please indicate if you want to receive the Handbook or prefer to receive a check.

The Handbook can also be purchased directly from the NAB at \$30 a copy for NAB members and \$45 a copy for non-members. Write to: Station Services Dept., NAB 1771 N Street, N.W., Washington, D.C. 20036.

Station-to-Station

continued from page 69

Building a basic remote amplifier

By John Gaboury, KVOY, Yuma, Arizona

I wanted to upgrade our Telco remote (October 1971 BE) and find a better amplifier for all remote broadcasts. My goal was to find an inexpensive unit with excellent frequency response, low distortion, and simplicity.

After experimenting with some intractable ICs and silicon circuits, I arrived at a discrete circuit which is really inexpensive—about \$11 plus output transformer. It has excellent frequency response (30 Hz - 100 kHz ± 2 dB) and low distortion (under 1% at 60 dB gain). And, it uses small 9V batteries with a 12 MA quiescent drain and a full on 35 MA drain. It has excellent battery life in use, and can be improved by bypassing the battery with a 500 ufd capacitor. Headroom (and gain) is sufficient when used with an EV-635A or 654A mike; input impedance is just right for any 150-ohm broadcast mike with a near -55 dB output.

With 60 dB gain and a 4 dB output pad, it can be used on most Telco lines without a volume control. Where one is necessary, a 10K pot can be added from pin 2 of the XLR jack to ground, wiper to C1. Upper frequency response is governed by C3; if 100 kHz is too much, make C3 an .03 or larger capacitor. In applications where the 30 Hz low end allows too much room rumble (as in a gym), C1 can be decreased.

It is not RFI prone, and has excellent temperature compensation. One of our units worked seven hours directly in the Yuma sun—in an ambient temperature of 117°F. It

also has been used (rarely) in 30° temperature.

It can be miniaturized; with "ends up" construction it can be put on a 2½-inch square board. With a phone jack mike input, and a miniature transformer, I have built one into a 2¼"x2¼"x4" Bud box (with VU meter and volume control). Thus, it makes an excellent main, or redundant remote amplifier.

Gain, distortion, frequency response, and battery drain are all dependent on the output transformer used. With an A67J the parameters will be close to those stated, but because of the feedback and bias configuration they may vary with the other transformers. However, the choice is not too critical. Any transformer with a 50-ohm to 150-ohm primary and a 600-ohm secondary usually will work. Or, hook up a 30-45 ohm speaker to C4, and you have a low-power utility or cue amp.

Again, although not too critical, R9 and R10 should be a close match, and Q3 and Q4 also should be a matched complementary pair (germanium!) for best results.

We've been using the units for more than five years without any problems. (Well, that's not really true. The amp that our sportscaster took into the showers, during a victory celebration, did develop a nasty hum).

I will be glad to answer any questions, but remember the builders motto, "Try it and see."

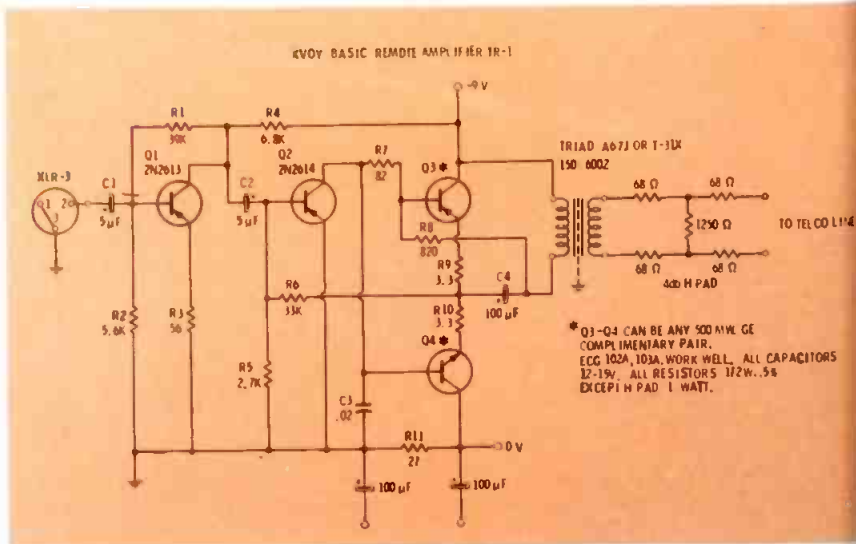


Figure 1

new products

Reproducer

A new feature of Otari's ARS-1000 automated radio station reproducer is a 25 Hz cue tone sensor and variable time delay. The model is a rack-mounted reproduce machine designed to meet the needs of the automated radio broadcaster for long term reliability under continuous operation. Features include two speeds—7½ and 3¼ ips, two channel stereo (half track) head tracks, recessed front adjustable output level and head azimuth, plug-in professional grade PC boards and relays, IC preamp in head assembly for improved S/N, simple operation plus remotable play and stop, ready light to indicate proper tape threading, special long-life polypropylene pinch roller and ball bearings.

For More Details Circle (75) on Reply Card

Automatic information system

System Concepts' new Merchandiser I™ is an automated information system based on microcomputer management. It features a high-resolution character generator, digital cassette mass memory, and a machine controller.

Video sources such as VCRs, 16mm slide projectors, 16mm film projectors, messagewheels, and data channels may be automatically controlled and selected to the cable operator's desired program schedule.

The Merchandiser I uses a macro-machine-management approach to simplify program source access and control, taking into account each unique machine personality.

For More Details Circle (76) on Reply Card

Cassette cleaner/evaluator

The Chyron cassette cleaner and evaluator, CCE model U-1, a self-contained unit, is said to clean and evaluate ¾-inch videocassette tape 10 times faster than real time without altering the pre-recorded signal.

The unit removes dirt and embedded particles from tape surfaces, detects surface and edge damage which may cause VTR head clog and video dropout. A 30-minute cassette can be processed in less than three minutes.

The unit can be made to automatically stop on major tape damage or stop on minor tape damage

only, or continue until the entire playing surface of the tape has been cleaned until evaluated. Two LED numeric counters on the front panel indicate the actual tape length in minutes and tenths to 99.9 minutes, and provide a count of accumulated major and minor tape damage. Eight message lamps reflect the tape and system status at each stage of the operation.

For More Details Circle (77) on Reply Card

Flexible counter

Most counters available today are either frequency or events counters. The new lineup of Heath 4100 counters will do both. To see how accurate and functional these units are, we tested the IM-4110 on our bench.

The IM-4110 comes in a kit or wired version, and on the frequency side, it will cover anything from 5 Hz to 110 MHz. Two interesting features are the function hold and attenuation controls. The function hold control is adjustable, and will hold the eight-segment display on the number measured after the signal is withdrawn. The attenuation control divides the incoming signal by 1, 10, or 100.

Strictly state of the art and designed for easy kit construction, the 4110 uses TTL, MOS, and ECL logic circuits.

Additional functions include events, period, and period averaging. Aside from counting events, the unit can read the period of a signal. In the period averaging mode, the counter displays the time of a single period based on a 1000-period average.

On our bench, the 4110 proved flexible, accurate, and a good buy for the money. Other 4100 series models cover 5 Hz to 250 MHz, and 5 Hz to 1 GHz.

For More Details Circle (78) on Reply Card

Portable video backpack/cart

K and H Products' Porta-Brace™ "Series B" video backpack and cart system is designed for use with the Sony DXC-1610 camera, and any of the new portable VCRs, including the Sony SLO-340.

Features include a camera support which redistributes the weight of the camera from the right shoulder to the back and hips,

continued on page 72

SCHNEIDER




for colour cameras

30X FIELD
1¼" f/2.1
33-1000
1" f/1.7
26-800



30X UNIV.
1¼" f/2.1
20-600
1" f/1.7
16-480



30X WIDE
1¼" f/2.1
16-480
1" f/1.7
12.5-375



15X WIDE
1¼" f/2.1
16-240
1" f/1.7
12.5-190



11X UNIV.
1¼" f/2.1
18-200
1" f/1.7
14-150



20X
1" f/2
17-340



10X
1" f/2
17-170



ENG
10x f/1.8
10-100



SALES — SERVICE — RENTALS

TELE-CINE INC.

5434 Merrick Road
Massapequa, New York 11758
(516) 798-2828

For More Details Circle (55) on Reply Card

CONVERT SLIDES TO COLOR TV PICTURES AT LOW COST.

Now you can assure yourself of professional TV color programming without tying up an expensive color camera or a highly-paid technician. The Tele-Measurements Model CSS-1 Color Slide Scanner converts color slides into sharp, clear video pictures to enhance your commercials, newscasts or special announcements.

Simply program your color slides in a Kodak carousel slide tray, and convert them directly into video signals. The program director can do this manually with a switch or tone signal, or he can set the unit to operate at pre-determined intervals by means of an automatic timer.

This highly reliable color slide scanner is ideal for spot commercials on local TV stations, for educational and public service broadcasters, for closed circuit TV or for cable operation. Now available at a special price of \$2500, which includes the carrying case and carousel, the scanner will pay for itself many times over in improved color programming and lower production costs.

For complete information call or write:



TELE-MEASUREMENTS INC.

145 Main Avenue, Clifton, New Jersey 07014
201-473-8822 212-581-9020

For More Details Circle (56) on Reply Card

BUILD A BETTER STATION

Call Aderhold Construction Company. A complete construction management team of architects, builders, engineers and designers. No problem too large or too small. 404/233-5413.



Aderhold Construction Company

3384 Peachtree Rd. NE/Atlanta, Georgia 30326

For More Details Circle (65) on Reply Card

50% OFF G.E., Sylvania & Norelco STAGE, STUDIO & PROJECTOR LAMPS


At Sittler's you pay
LIST PRICE LESS 50%

All transportation prepaid on \$100,000 or more net orders. Your satisfaction guaranteed. Order today, or write for Sittler's complete price sheet!

Sittler's SUPPLIES, INC.

702 E. Washington St., P.O. Box 10-A
Washington, Iowa 52353 Ph. 319-653-2123

For More Details Circle (64) on Reply Card

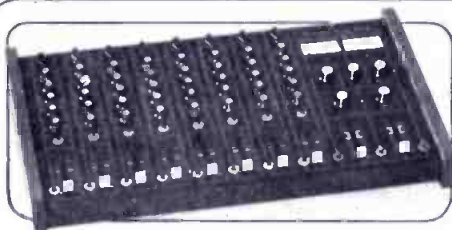

Richmond Sound Design Portable Broadcast Console



Listec
Television
Equipment Corp.

LISTEC
39 CAIN DRIVE, PLAINVIEW, NEW YORK 11803
(516) 694-8963 TELEX 640470
(WEST COAST)
4527 SAN FERNANDO ROAD, UNIT 1, GLENDALE,
CALIFORNIA 91204 (213) 244-0838

For More Details Circle (58) on Reply Card

"SOUND CHOICE"

- 8 input channels, expandable to 24
- 2 independent program channels
- complete equalization, monitoring and cueing throughout
- individual and master foldback and echo send controls
- switchable line inputs/microphone attenuation
- rugged, compact, lightweight
- \$2,465.00 • options available

NAB Booth #700

new products

continued from page 71

independently positions the camera at eye-level, and allows it to be swung away from the eye for walking convenience.

Another feature is the foam padded canvas nylon video recorder case, with shoulder strap and accessories case. Both cases attach to the Porta-Brace backpack/wheel base system, the modular design which provides the user with a backpack and a cart.

For More Details Circle (79) on Reply Card

Three-signal generator

Shintron's model 383 (CB)³ is said to be a precision, broadcast-grade three-signal generator in one rack mount package. The unit requires standard NTSC sync, blanking, and subcarrier signals.

It generates color bars, color background, and color black simultaneously. These output signals can be delayed from 200 nS to 1.0 uS to match the delay in color cameras.

The color background generator can be used as an additional color source for keying, matte, etc., in production applications. For switchers not equipped with color black, the unit adds fade-to-black capability. Some cameras also can lock on to color black to simplify distribution.

For More Details Circle (80) on Reply Card

Audio products catalog

Whirlwind Music's new "Audio Products Catalog" features its cables and connectors. Included are plug jacks; cordsets for amplifier speakers and microphones; impedance matching supplies and bus accessories.

Also featured are Medusas, simplifying the multiple wiring of systems and recording set-ups. Medusas feature cast aluminum stage boxes, riveted chassis-mounted jacks, and wire mesh stress reliefs. Medusa is available in five basic configurations, or with several connector options.

For More Details Circle (81) on Reply Card

Digital antenna monitor

Gorman-Redlich Mfg. Co. has new FCC type-approved (#3-24) digital AM antenna monitor, model CMR, which is fully remotable. Priced at \$1990 for two towers, the monitor features true ratio readout stability with unsymmetric modulation.

BROADCAST ENGINEER

The AUTOMATIC Audio Test System

That Measures. . .



MODEL AT-51
AUDIO TEST SYSTEM

- Harmonic Distortion
- Intermodulation Distortion
- Volts
- dB
- Signal + Noise / Noise Ratio
- Wow and Flutter
- Stereo Phasing
- Differential Gain in Stereo Channels

Contact Us Now For Complete
Details And Descriptive Literature.

employs screw-type terminal blocks for all inputs and outputs. Switching is solid-state integrated circuitry. Minimum crosstalk is -65 dB and maximum output level is +18 dBm.

For More Details Circle (83) on Reply Card

Mixing system

Rupert Neve's computer-aided mixing system (NECAM) is an integrated system that has removed the real time barrier by an independent storage medium keyed to a time code recorded on one track of the master tape. An engineer can interrupt, recycle over short segments, and operate at half-tape speed while the computer looks after the "joins."

Many "mix" attempts may be stored and recalled at will. "Update" is the instinctive improvement of a recalled mix which requires no action by the operator other than correcting fader movements. The faders are servo-driven and touch-sensitive, preserving the combination of control and indication.

A mixdown undertaken in segments may be assembled into one mix without moving the tape. Mixes may be subdivided into tracks by instructing the keyboard. This key-

continued on page 74

POTOMAC INSTRUMENTS

932 PHILADELPHIA AVE.
SILVER SPRING, MD. 20910
(301) 589-2662

For More Details Circle (61) on Reply Card

1, and compact size. The monitor has DC outputs for note phase and ratio readings. LED displays with continuous phase sign, and BCD outputs. It has 19-inch rack mounting panel 5 3/4 inches high, and 6 inches deep. Power consumption is 6 watts.

For More Details Circle (82) on Reply Card

Routing switchers

The Di-Tech series 5500, 5501 and 5502 routing switchers provide a means of routing any input signal to any output buss without disturbing other inputs.

The standard control panels which house the momentary illuminated pushbuttons are located separately from the electronics. Should other means of addressing the switcher be required, thumbwheel switches with readouts or Touch Control can be utilized.

The video inputs to the switchers are in groups of four and BNC type connectors are used for all inputs and outputs. Inputs are hi-impedance, with loop-thru bridging and output expansion. The switching for video is vertical interval, standard with models 5500 and 5501.

The audio switcher model 5502

NEW FM AND TV FIELD STRENGTH METER FIM-71

- Accurate — Direct Reading — Volts or dB ■ 45 MHz to 225 MHz — Continuous Tuning ■ Peak or Averaging Detector (switch selectable) ■ Wide or Narrow IF Bandwidth (switch selectable) ■ 20 dB or 60 dB Meter Range (switch selectable) ■ AM or FM Demodulator (switch selectable) ■ Calibrated Dipole Antenna, Mounted on Case for Near-Ground Measurements or Removable for TASO Measurements ■ 140 dB Measurement Range (1 μ V to 10 V) ■ 4 1/2-Inch, Mirrored Scale, Taut-Band Meter
- Front Panel Speaker
- Recorder Output
- Rugged, Portable Package ■ Calibrated Signal Generator, 45 MHz to 225 MHz
- Battery or External Power ■ Use as Signal Source/Selective Voltmeter for Insertion Loss Measurements of Filters, etc. ■ Measures FM Harmonics to -80 dB
- Price — \$2,500 complete with dipole antenna.



CONTACT US FOR DETAILS.

POTOMAC INSTRUMENTS

932 PHILADELPHIA AVE.
SILVER SPRING, MD. 20910
(301) 589-2662

For More Details Circle (62) on Reply Card



Color, Action, Hands-free Mobility

Combine the finest omnidirectional dynamic boom mike with an equally high performance binaural headphone and you have the superior Sportscaster headset...the Telex CS-90. For live broadcasts, from the station or on remotes, with cue and program monitoring and hands-free convenience. The audience hears every word, clearly, crisply, with crowd noise for background color and atmosphere. Circumaural ear cushions screen out noise in the immediate area so that special acoustic facilities are unnecessary. Supplied with convenient in-line, mike-muting "push-to-cough" switch. The Sportscaster headset. Color, action and hands-free mobility. For complete information please write:

PRODUCTS OF SOUND RESEARCH

TELEX
COMMUNICATIONS, INC.

9600 ALDRICH AVENUE SOUTH
MINNEAPOLIS, MINN. 55420 U.S.A.
Europe: 22, rue de la Legion-d'Honneur,
93200 St. Denis, France
Canada: Telak Electronics, Ltd., Scarborough, Ontario

For More Details Circle (63) on Reply Card

new products

continued from page 73

board controls all functions and is backed up by a line alphanumeric display which tells the operator what is going on. Incorrect or impossible commands are politely refused, and when an operation is carried out in stages, the next step is announced.

For More Details Circle (84) on Reply Card

Bandpass filters

A family of active bandpass filters featuring third, half and full-octave responses is available from Frequency Devices, Inc. Requiring no external compensation or offset trims, the 765 Series consists of finished filters specifically designed for ANSI Standard signal analysis. All models meet the ANSI Specification over the 0°C to 70°C operating temperature range.

For More Details Circle (85) on Reply Card

Compressor/limiter

Broadcast Electronics has designed the model AM-400 AM compressor/limiter for smooth, noise-free control of transmitter input levels. The model protects against overmodulation while automatically maintaining average modulation at optimum levels.

The unit features an adjustable compression release time of 5 to 40 seconds for 20 dB release, symmetrical or asymmetrical processing, one microsecond attack time, and a ± 20 dBm output capability.

For More Details Circle (88) on Reply Card

Timer

DT-3 by Pacific Recorders and Engineering Corporation is a functional, compact timer. It is designed to be built into a console meter panel but can be purchased as a table top unit. The DT-3 has complete remote control capability. Start, stop, reset, display hold and display blanking may be programmed by normally open switch contact to ground, or digital interface by open collector gates.

For More Details Circle (86) on Reply Card

Color balancer

TeleMation's CA-3000, an accessory to the TCF-3000 broadcast color film camera, automatically improves the color balance of poor-quality film and slides by continuously sampling and correcting selected portions of the signal.

For More Details Circle (87) on Reply Card

sound dynamics

SD-100 Transport



SHOWN
with
Inovonics
Electronics

The Sound Dynamics Model SD-100 is an updated version of an old reliable tape transport. Features include sealed motor capacitors, automatic equalization switching and edit features (Optional). The SD-100 is compatible with Inovonics, MCI or Ampex 350-440 electronics. In addition, parts are interchangeable with most Ampex 350/351 in use today. Thirty days is normal delivery time.

Sound Dynamics specializes in professional broadcast equipment featuring such items as: digital clocks/timers, recorder electronics, tape heads, microwave equipment, RF monitors, microphones, limiters plus several other broadcast products!

FOR ALL YOUR BROADCAST
NEEDS CONTACT —



(408) 926-3588

sound dynamics, inc.

P.O. Box 32055 • San Jose, CA 95152

For More Details Circle (57) on Reply Card

Help!

Anytime you have a question about your subscription to **Broadcast Engineering**, please include a mailing label to insure prompt service on your inquiry.

**AFFIX
LABEL
HERE**

Change of Address

If you're about to move, please let us know approximately four weeks before the move comes about. Simply affix your present label here, and carefully print the updated information below.

Please Help Us to Serve You Better

Broadcast Engineering
P.O. Box 12901
Overland Park, KS 66212

Name _____ (Please Print)

Employer _____

Address _____

City _____ State _____ Zip _____

BROADCAST ENGINEER

Microphone mixer

A newly designed 4-channel mic mixer, M41, and a companion expander, M41X, are available from Eddcor. A stereo jack and cord allows expansion to 10 channels when wanted.

The units feature solid-state design allowing a variety of input and output impedances without switches or extra transformers.

For More Details Circle (89) on Reply Card

Monitor speaker

A new stage monitor speaker has been designed by Shure Brothers Inc. to accommodate entertainers eager to hear themselves clearly and cleanly while performing on stage.

In the model 702, wide-angle high frequency dispersion is provided by a new tweeter configuration that disperses the sound in a broad pattern, allowing free stage movement without sound loss or distortion.

Features include: shaped frequency response, with boosted midrange and controlled bass roll off; and sensitivity of 97 dB SPL at 4 ft with one watt input.

For More Details Circle (90) on Reply Card

Automatic dialogue replacement module

Convergence Corporation has introduced the ADR-8 automatic dialogue replacement module. When added to the ECS-1B joystick video-cassette editor and PC-3 program computer the unit allows the operator to automatically replace pre-recorded audio segments on 3/4-inch videocassettes with a live microphone. Typical applications include foreign language sound track dubbing and lip-sync dialogue replacement formerly possible only in film sound dubbing studios.

For More Details Circle (91) on Reply Card

Color sync generator

A new color sync generator, model SY-5990A, and a companion unlock, model SY-5995A, add NTSC capability to Dynair's 5900 Series distribution equipment.

The sync generator has an oven stabilized crystal oscillator and meets all FCC part 97 requirements

ingénieux service corporation of california
381 BEACH AVE. VENICE, CALIF. 90291 • (213) 821 5080

FACTORY SERVICE CENTERS
REPAIRS • PARTS • ACCESSORIES

ingénieux service corporation of new york
600 OCEAN AVE. BROOKLYN, N.Y. 11216 • (516) 567 2424



For More Details Circle (64) on Reply Card

over the temperature range of 0-50°C.

For More Details Circle (92) on Reply Card

Remote mixer

Ramko Research has introduced a portable (2 pounds) remote broadcast mixer with built-in limiting/compression. The DML Series mixers feature low distortion amplification, mixing, limiting/compression, tone generator for level set, internal battery and optional AC operation, phone monitor/talk-back function, and XLR type input/output connectors.

The "set and forget" controls give the operator freedom from meter watching and knob twisting. The DML mixers are available in a stereo mike version, a two mono mike version, and a two mono mike with one high-level input unit.

For More Details Circle (93) on Reply Card

Stereo headphones

Burwen Research has introduced a new family of five stereo headphones. Two models, PMB 8 and PMB 6, are orthodynamic; and the PMB 4, PMB 40 and PMB 20 utilize a dynamic driver.

PMB 6 specifications include: 16-23,000 Hz frequency response, less than 0.3% total harmonic distortion, 121 dB maximum sound pressure level at 1 kHz, and 140 ohm impedance.

The PMB 4 is the highest performance dynamic unit, with 20-20,000 Hz frequency response, less than 0.3% total harmonic distortion, 114 dB maximum sound pressure level at 1 kHz, and 400 ohm impedance.

For More Details Circle (94) on Reply Card

Hi-fi generators

A high-fidelity signal generator for the radio industry and a companion stereo generator modulator are available from Radiometer Electronics through their U.S. representative, The London Company. Both generators feature a wide range of capabilities necessary for AM, FM and FM stereo receiver testing and design in R&D, production, Q.C. and service activities.


The RE101 RF generator features a digital display of FM and AM carrier frequencies from 150 kHz to 30 MHz and 86 MHz to 130 MHz in six ranges, plus a special 10.7 MHz range. Sweep capabilities are provided on all frequencies together with two sweep widths and center frequency marker. FM and AM modulation may be supplied from internal or external source.

For More Details Circle (95) on Reply Card

Broadcasters

GET UN-HOOKED FROM THE TELEPHONE COMPANY — PROVIDE YOUR OWN "PROGRAM LINES" WITH

MARTI STL

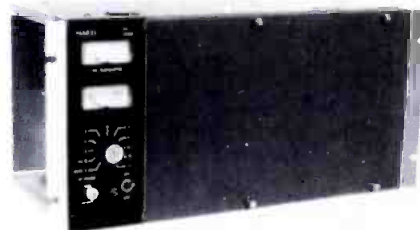

STL-8 TRANSMITTER • All Solid State • Direct FM Modulator • Modular Construction • Test Meter Built In • Proven Reliability in hundreds of installations • Unsurpassed for Dual Channel Stereo STL, Single Channel AM STL or Inter City Relay.


SPECIFICATIONS - STEREO

Stereo Cross Talk	—65 DB
Noise	—65 DB or less
Response	±0.5 DB 30-15000 Hz.
Distortion	Less than 0.5%

MARTI Electronics, Inc.
Box 601 • 1501 N. Main • Cleburne, TX 76031 • 817/645-9163

For More Details Circle (68) on Reply Card

Audio Tape for professionals

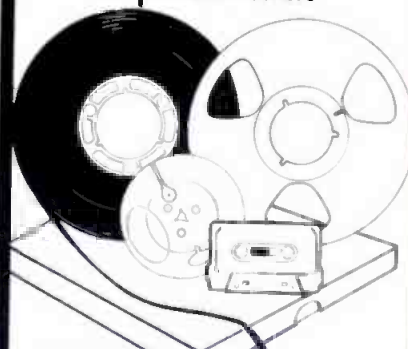

REEL TO REEL TAPE

Ampex, 3M. All grades.
On reels or hubs.

CASSETTES, C-10—C-90.

With Agfa, Ampex, 3M tape.

LEADER & SPLICING TAPE

EMPTY REELS & BOXES

All widths, sizes.

— COMPETITIVE • FROM STOCK —

For your catalog, call or write: **Tom Franke**

312/297-0955



Recording Supply Co.

Div. of Polyline Corp. 1233 Rand Road
Des Plaines, IL 60016

For More Details Circle (67) on Reply Card 75

A Rare Sight



YOU MAY NOT SEE IT FOR ANOTHER 10 MONTHS

When an installation such as this microwave station in Greenland is accessible for only a few months a year you need a dependable, remote power source. Inside the protective shelter TELAN thermoelectric generators are the sole source of power. For more information about TELAN please write us today.

TELEDYNE ENERGY SYSTEMS

110 W. Timonium Rd., Timonium, Md., 21093
Phone: 301-252-8220 Telex: 8-7780 Cable: TELISES

For More Details Circle (69) on Reply Card

have you
checked the competition?
NOW CHECK OURS!
Remote Control



The Best Of Two Worlds
digital for command accuracy
analog for telemetry speed

- Modern "Touch-Tone" Channel Address
- Compatible ATS Available
- Expandable to 19, 29, or 39 Channels
- Unique Expanded or Non-Expanded Scale Readout
- Continuous Verification of Channel Addressed

This all new Remote Control system achieves the ultimate in accuracy, stability, simplicity and speed, combining a unique blend of present day digital and analog technology. The MCI Automatic Transmitter System (ATS) is available as a "plug-in, add-on" unit to the Remote Control system for positive transmitter surveillance, alarm, correction or automatic shutdown if necessary.

MICRO CONTROL
ASSOCIATES

P.O. Box 13250 Arlington, Texas 76013
817/265-2912

For More Details Circle (70) on Reply Card

We Wrote The Book



on **ATS**

Send for your
free copy today

THE **Widget Works** INC

Widget Works Inc.
P.O. Box 79
Medina, Ohio 44256
(216) 336-7500

Gordy DuVall
Vice President, Sales
6838 North Ottawa Ave.
Chicago, Illinois 60631
(312) 774-5115

For More Details Circle (71) on Reply Card

Zoom In!

continued from page 66

Our job would be easier and our product better if we would only remember that many techniques will carry over into television with only minor variations. Let me encourage you to make yourself aware of practices in use in these other two fields.

After sitting in on various staff and committee meetings, it is obvious that a professional organization can, and should, be a powerful lobbying force in the area of the industry which affects that organization. In other words, the ASTVC could have a great deal of influence in the area of design and manufacture.

Our opinions, suggestions, and recommendations could affect the design of the next camera your station purchases. Therefore, we strive to be recognized by the industry as an organization that is composed of professionals: people concerned with furthering professional standards in the interest of producing the best possible product.

As regional director for the Southeast states, let me address myself now to those members. I realize that, in areas such as this, where membership is comparatively low attendance at ASTVC-sponsored activities might be less than we would hope for. But that makes your efforts that much more important. The ASTVC requires your help if it is to expand its activities in the Southeast. If I can help you in any way in organizing a chapter in your city, please contact me directly.

The one question that I was asked the most in Miami was: "Who (or what) is the American Society of TV Cameramen?" You can provide a lot of needed publicity within your own station. Further, we need publicity on ASTVC-sponsored technique product presentations, seminars, product information sheets, and other activities/services made possible through the cooperation of our various industry corporate sponsors.

The success of the ASTVC going to be proportional to the amount of effort expended by its members. So, let me encourage you to take full advantage of opportunities to participate in activities sponsored by the ASTVC; not only for the sake of the ASTVC, but for your own benefit as a professional with a stake in this industry and its future.

BROADCAST ENGINEERING

professional services

VIR JAMES

CONSULTING RADIO ENGINEERS
Applications and Field Engineering
Computerized Frequency Surveys
345 Colorado Blvd.
Phone: (Area Code 303) 333-5562
DENVER, COLORADO 80206
Member AFCEC

MIDWEST ENGINEERING ASSOCIATES

Consulting Engineers

6934 A N. UNIVERSITY
PEORIA, ILLINOIS 61614
(309) 692-4233
Member AFCEC

BRADLEY ENGINEERING, INC. Consulting Radio Engineers

APPLICATIONS &
FIELD ENGINEERING
Phone 918-245-5444
300 West 41st Street
Sand Springs, Okla. 74063

RALPH E. EVANS ASSOCIATES CONSULTING COMMUNICATIONS ENGINEERS

216 N. Green Bay Road
Suite 208
Thiensville, WI 53082
Phone: (414) 242-6000 Member AFCEC

McCLANATHAN & ASSOCIATES Consulting Engineers

APPLICATIONS & FIELD ENGINEERING
TURNKEY INSTALLATIONS—RADIO & TV
DIRECTIONAL ANTENNA DESIGN
P.O. Box 750
PORTLAND, OREGON 97207
Phone: 503/246-8080
TWX 910-464-6112/Frontier

Applied Video Electronics, Inc.

STUDIO SYSTEMS DESIGN AND INSTAL-
LATION ENGINEERING. REFURBISHING/
MODIFYING COLOR CAMERAS AND
QUADRUPLIX VIDEO TAPE RECORDERS.
Post Office Box 25
Brunswick, Ohio 44212
Phone (216) 225-4443

SMITH and POWSTENKO

Broadcasting and Telecommunications
Consultants

2000 N. Street, N.W.
Washington, D. C. 20036
(202) 293-7742

James Tiner, President

TINER COMMUNICATIONS SERVICE, INC.

"We Specialize in Towers"
Complete Tower and Antenna
Installation and Service

O. Box 3827, 15201 Hickman Road
Des Moines, Iowa 50322 (515) 278-5501

Joseph & Donna Roizen VIDEO CONSULTANTS

International TV Systems
Marketing/Technical Writing
800 Welch Rd., Suite 354
Palo Alto, Ca. 94304
Tel: (415)326-6103

advertisers' classified index

Aderhold Construction Co.	72
American Data Corp.	7
Amepx Corp.	14, 15
Ampro Broadcasting, Inc.	20
Angenieux Corp. of America	75
Audio Designs & Manufacturing	17
Belar Electronics	68
Belden Corp.	56
Broadcast Electronics	32
Broadcast Products Div.	
UMC Electronics Co.	42
Central Dynamics Ltd.	33
Consolidated Video Systems	1
Continental Electronics Mfg.	
Co.	47
Digital Video Systems	Cover 3
Dynair Electronics, Inc.	49
ES Enterprises	25, 63
Farinon Electric	27
Garner Industries	62
The Grass American Market	63
Clifford B. Hannay & Son	62
Hewlett-Packard Co.	11
Hitachi-Denshi America Ltd.	35
IGM	66
International Tapetronics	18
JVC Industries Co.	21, 22, 23, 24
LPB, Inc.	55
LenCo, Inc.	41
Listec Television Equip. Corp.	72
Marti Electronics	75
McMartin Industries, Inc.	55
Micro Control Associates	76
Moseley Associates, Inc.	48
NEC Broadcast Div.	43
Otari Corp.	57
Pacific Recorders & Engineering	
Co.	40
Panasonic Video Systems	8, 9
Parasound	54
Philips Broadcast Equip. Corp.	19
Potomac Instruments	73
Ramko Research	65
Recording Supply Co.	75
Recortec, Inc.	34
Russco Electronics	61
Howard W. Sams & Co., Inc.	67
Scully Recording Instruments	54
Sencore, Inc.	50
Shintron Company, Inc.	12
Shure Bros.	Cover 4
Sitler's Supplies, Inc.	72
Sony Corp. of America	28, 29
Sound Dynamics	74
Spectra Vision, Inc.	36
Standard Tape Laboratory	65
TDK Electronics	39
Taber Mfg. & Engineering	68
Tektronix, Inc.	45
Tele-Cine, Inc.	71
Teledyne Energy Systems	76
Tele. Measurements, Inc.	72
Telex Communications, Inc.	69, 74
Texas Electronics, Inc.	68
Thomsom-CSF Labs, Inc.	13
Time & Frequency Technology	5
UMC Electronics Co.	
Broadcast Products Div.	42
United Recording Electronics,	
INC. (UREI)	58
Video Aids Corp. of Colorado	26
Videomagnetics	37
Ward-Beck Systems Ltd.	Cover 2
The Widget Works	76
Wilkinson Electronics, Inc.	16, 60

Advertising rates in Classified Section are 50 cents per word, each insertion, and must be accompanied by cash to insure publication.

Each initial or abbreviation counts a full word. Minimum classified charge, \$4.00.

For ads on which replies are sent to us for forwarding (blind ads), there is an additional charge of \$5.00 per insertion, to cover department number, processing of replies, and mailing costs.

Classified columns are not open to advertising of any products regularly produced by manufacturers unless used and no longer owned by the manufacturer or a distributor.

TRAINING

FIRST PHONE in six to twelve weeks through tape recorded lessons at home plus one week personal instruction in Boston, Philadelphia, Detroit, Atlanta, St. Louis, Seattle or Los Angeles. Our twentieth year teaching FCC license courses. Bob Johnson Radio License Preparation, 1201 Ninth, Manhattan Beach, Calif. 90266, Telephone 213-379-4461. 8-75-tf

PASS FCC first and second class exams with new 21-lesson, 450-page course. Starts with basic electricity. Over 600 FCC-type, multiple-choice questions and sample exams included. No previous technical knowledge required. Commercial Radio Operator Theory Course, #15-01. Only \$5.95. Ameco Publishing, 275G Hillside Ave., Williston Park, N.Y. 11596. 8-72-tf

PASS FCC EXAMS with Ameco books. Each book contains FCC questions plus simplified answers plus FCC-type exams and answers. 3rd class includes broadcast endorsement \$1.25. 2nd class \$2.50, 1st class \$1.60. Free catalog. Ameco Publishing, 275G Hillside Ave., Williston Park, N.Y. 11596. 8-72-tf

REI offers intensive but quality instruction for 1st and 2nd class FCC license preparation. State approved for Veterans training. Student housing. Free brochure. 2402 Tidewater Trail, Fredericksburg, Va. 22401 or Phone 703-373-1441. 7-77-Bt

GRANTHAM'S FCC LICENSE STUDY GUIDE—377 pages, 16 FCC-type practice tests, 1465 questions with answers and discussions—covering third, second, and first class license exams. \$13.55 postpaid. GSE Publications, 2000 Stoner Ave., Los Angeles, CA 90025. 10-77-tf

ELECTRONICS DEGREE by correspondence. No commuting to class. Study at your own pace. Begin with basics and continue, first for A.S.E.T. and then for B.S.E.E. For free brochure, write: Information Desk, Grantham College of Engineering, 2000 Stoner Avenue, Los Angeles CA 90025. 10-77-tf

SERVICES

FREQUENCY MEASURING SERVICE—WE'RE #2—MONITOR REPAIRS—MOBILE UNIT—covers Northern 3/4 Ill., Eastern Iowa, Eastern Minn., Southern 3/4 Wis., Western Mich., and Western Ind., monthly. Radio Aids, 528 Ravine Ave., Lake Bluff, Illinois 60044, (312) 234-0953. 2-74-tf

COMMERCIAL RADIO MONITORING CO. Precision frequency measurements since 1932. Local and mobile service covering entire midwest plus. Test instruments, counters, monitors repaired and certified. Lee's Summit, Mo. 64063. (816) 524-3777. 9-74-tf

ONE STOP FOR ALL YOUR PROFESSIONAL AUDIO REQUIREMENTS. Bottom line oriented. F.T.C. Brewer Company, P.O. Box 8057, Pensacola, Florida 32505. 7-71-tf

SERVICES (Cont.)

BUILD YOUR OWN TV AND RADIO PRODUCTION EQUIPMENT. Easy, inexpensive, (mostly IC). Plans or kits: Special Effects Generator, Automatic Logger, Vertical Interval Video Switcher, Solid State Lighting Board, Preset Audio-Video Board, Preset Lighting Board, Crystal Controlled Wireless Mikes with Matching receivers, Subsonic Tone Control for audio tapes, 8MM SOF Cameras and Projectors, Distribution Amplifiers (Sync. Video, Audio), Audio Control Boards (Studio & Remote) Proc-Amp with compensation and regeneration for adapting Helical Scan VTR's to broadcast standards. PLUS specialized correspondence courses in TELEPHONE Engineering (\$39.50), and Integrated Circuit Engineering (\$49.50). Plans from \$5.95 to \$15. SUPER CATALOG plus years updating of new devices Air Mailed \$1.00. Don Britton Enterprises, P.O. Drawer G, Waikiki, Ha. 96815. 5-77-32t

CARTRIDGE RECONDITIONING SERVICE: CLEANING—NEW PARTS—NEW TAPE. 12 Years Experienced Personnel. Write for additional information & price sheet. MASTERTONE COMPANY, 1105 Maple, West Des Moines, Iowa 50265, 515-225-6122. 8-77-1t

SAVE HUNDREDS OF DOLLARS on high quality, dependable. American Made, MATV Head-Ends, V/V, U/V Converters, Camera Modulators, at factory-direct prices. Send \$5.00 (for your MATV Installers Letterhead). "Information," Box 809, Boynton Beach, Fla. 33435. 1-78 e.o.3

TOWER PAINTING AND LIGHTING: Service and maintenance contracts offered Pioneer Tower Service, P.O. Box 253, Carrollton, Missouri 64633, (816) 542-0840. 9-77-1t

AUDIO JACK FIELD WIRING. Standard or custom configurations. 26-jack panel wired to terminal block including materials \$180. Phone or mail us your requirements for prompt quote. Centennial Manufacturing Company, P.O. Box 1056, Hurst, Texas 76053, 817-589-2512. 2-78-1t

HELIAX-STYROFLEX. Large stock—bargain prices—tested and certified. Write for price and stock lists. Sierra Western Electric, Box 23872, Oakland, Calif. 94623. Telephone (415) 832-3527. 1-73-1t

FREQUENCY MEASURING AND MONITOR SERVICE. Precision measurements at reasonable rates. Box 20098, Birmingham, Alabama 35216 205-882-2184. 2-78-4t

EQUIPMENT FOR SALE

BROADCAST CRYSTALS for AM, FM or TV transmitters, frequency change, repair or replacement of oven types. Also vacuum types for RCA, Gates, Collins, etc. transmitters. Quality products, reasonable prices and better delivery! Don't be without a spare crystal. Frequency change and service for AM and FM monitors. Over 30 years in the business Eldson Electronic Co., Box 96, Temple, Texas 76501. Phone (817) 773-3901. 12-74-1t

BROADCAST AND STUDIO EQUIPMENT. New and used. Cart and reel recorders, consoles, limiters, monitors, mic's, turntables, preamps, speakers, racks, furniture, reconditioning services, parts (including PT6). Authorized Spotmaster distributors. Contact us for best prices and trade-in deals. AUTOOYNE, P.O. Box 13036, Orlando, Fla. 32809, (305) 855-6868. 9-77-1t

ONE-THIRD OCTAVE FILTER SET, General Radio #1925. Thirty filters, 20Hz-20kHz, each with 50dB attenuator (1dB/step), graphic display. Thirty Parallel outputs; and summed, weighted, or serial remote-controlled scan outputs. \$5500 new. Like new, \$4000 or best offer. Contact: R. Kozlowski, GAF Broadcasting, 1180 Avenue of Americas, NY 10036. 212-626-1043. 2-78-2t

FOR SALE: Large variety of used equipment. Camera, Sound, Editing, Projection, Staging. Send for list. Telecine Film Studios, 654 Busse Highway, Park Ridge, IL 60068. 2-78-11

TK-27 WITH ALL MODIFICATIONS. Three PC-70 Cameras, COL Model VSA-102 audio video switcher. Bill Orr WBNS Stations 614-460-3912. 2-78-2t

EQUIPMENT FOR SALE (CONT.)

EXCEPTIONAL OFFERING, like new: (24) Ampex 351 Electronics, both masters and slaves, operational, last alignment was for Ampex 406 tape. (12) Scully 280 B's. EMT 930 turntable with extras. Revco A-77 2-track deck. (13) Dynaco Mark III power amps. (4) Dynaco model 70A stereo amps. (2) Dynaco Mark IV amps. Cinema Eng. type 9205-A degausser, ten inch reel size. Sony 1 inch color video recorder model EV-320 plus CLP-1B video color pack. (1) JBL 5306 Pro-mixer. The original NORDEN BOMBSIGHT. (1) Philips Sound Delay Machine model EL 6911/02. (5) Technics turntables SL 110 A. Contact: CINEMA/SOUND LTD. 212-799-6940. 2-78-11

MICA AND VACUUM transmitting capacitors. Vacuum relays. Large stock; immediate delivery. Price lists on request. SURCOM ASSOCIATES, 305 Wisconsin Ave., Oceanside, Ca 92054, (714) 722-6162. 3-76-1t

RAZOR BLADES—Single Edge, Tape Editing, Raltec, 25884B Highland, Cleveland, Ohio 44143. 4-77-12t

CARTRIDGE LABELS: New, non-smear pressure sensitive labels. Fits all cartridges. Comes white & 4 colors. Write for FREE sample—MASTERTONE COMPANY, 1105 Maple, West Des Moines, Iowa 50265, (515) 225-6122. 8-77-1t

VPR7900, excellent condition Best Offer 305/624-4252. 2-78-11

REPLACEMENT PREAMPLIFIER for OTARI ARS-1000 tape deck. Highest quality, multiturn level adjustment, American I.C. in socket, glass P.C. board, \$80.00. Iowa Development Labs, Box 1913, Iowa City, Iowa 52240. 1-78-2t

TWO SONY 2850A's and TRI EA-4 and EA-5 EDITING CONSOLE—One year old. VTR's are broadcast modified, XLR audio, rf, and sc jacks. Service manuals. Sony training tapes. Spare parts. \$9,500. Montana Media, Box 7093, Missoula, Montana 59807, (406)-543-6441. 2-78-2t

WANTED

WANTED: All surplus broadcast equipment especially clean A.M. & F.M. transmitters, capacitors, 112 Clark & Potomac Phase monitors, Field Strength Meters, etc. High prices. All custom duties paid. Surplus Equipment Sales at 2 Thorncliffe Pk. Dr., Unit 28, Toronto 17, Ont., Canada (416) 421-5631. 1-76-1t

WANTED: 4W20,000A tubes. Lloyd Erickson, Phone 701/282-0444. 1-78-11

WANTED: 250-500 watts FM stereo transmitter. WTAO-FM, Rt. 5, Box 286, Murphysboro, Ill. 62966. 1-78-11

WANTED: Pre-1926 radio equipment and tubes. August J. Link, Surcom Associates, 305 Wisconsin Ave., Oceanside, Ca. 92054, (714) 722-6162. 3-76-1t

WANTED 300' tower, 3KW FM Transmitter, Studio used. Joy Broadcasters, 608-723-7628, Lancaster, Wisconsin. 2-78-11

AMPEX 1200, prefer OH with EOITEC. Call O. Zull 213-466-5441. 2-78-2t

WILL PURCHASE FOR CASH ANY OF YOUR EXCESS TUBES—transmitting, camera types; anything in good condition, including lamps and electronic parts. Write to: S & M Associates, 1231 Waterview Street, Far Rockaway, N.Y. 11691. 4-77-eot-6t

HELP WANTED

CHIEF ENGINEER—quality oriented—for AM Directional and High Power FM station. Formal electronics training required. Send detailed resume and salary requirements to: Director Engineering, Box 6002, Roanoke, Virginia 24017. 1-78-2t

HELP WANTED (CONT.)

ENGINEERING POSITIONS (\$15,000-\$40,000)—Openings at all locations coast to coast—all levels and disciplines. Over 1,000 firms represented. To cover ALL your immediate job possibilities in the "unpublished" market, send your resume with salary requirements now. No fee, confidential, professional. KEY PERSONNEL NATIONAL HEADQUARTERS, South Mall Towers, Wilkes-Barre, Pa. 18701, (717) 822-2196 1-78-1t

WE ARE LOOKING FOR A FIRST RATE EXPERIENCED TECHNICIAN capable of caring for a wide range of modern equipment in a large network affiliate. Must have a solid technical background and be heavy on EXPERIENCE in most of the following: cameras, switchers and production facilities; transmission equipment and microwave; quad and helical VTR; audio mixing and recording equipment; digital devices; E.N.G. etc. First Phone required. Swing and some night shifts. Send full resume to Bob Plummer KOMO-TV, 100-4th Ave. No., Seattle, Wa. 98109. (206) 223-4027. Equal Employment Opportunity Employer. 12-77-3

TV STAFF ENGINEER with production and high maintenance experience. Should have critical eye for quality. Broad advancement possibilities. Good pay, good area, good working conditions. An Equal Opportunity Employer. Call Don Vest Director of Engineering, Herrrich Broadcasting Stations, (501) 783-4105. 2-78-1

MAINTENANCE SUPERVISOR for established AM/FM installing new, modern state-of-the-art studios. Must be quality conscious. Good benefits and environment. Moderately low cost of living. An Equal Opportunity Employer. Call Don Vest, Director of Engineering, Herrrich Broadcasting Stations, (510) 783-4105. 2-78-1

CHIEF ENGINEER for University telecommunications center. Will have technical responsibilities for modern broadcast TV, FM and CCTV facility. Qualifications include: BS in related field demonstrated state of the art technical knowledge, leadership ability, and FCC first. Equal Opportunity Employer. Send resume, references and salary requirements to: Dept. 407, Broadcast Engineering, P.O. Box 12901, Overland Park Kansas 66212. 1-78-2

ENGINEER—Indiana Higher Education Telecommunication System has immediate opening for experienced engineer to plan and execute preventive maintenance program or its television and special electronic systems (ITFS, VTFs, RF digital). Requires First Phone. Work with university personnel. Digital experience helpful, degree desirable. Send resume, references, and salary requirements to: Jim Potter, IHETS, 1100 V Michigan, Indianapolis, IN 46202. EEO/A Employer. 2-78-

"CHIEF ENGINEER WANTED for 5,000 day, 1,000 night directional, Pueblo, Colorado, KIDN, Box 293, 81002 (303) 542-5570." 2-78-

NEEDED—CHIEF ENGINEER strong on precasting and construction to join West Virginia winning radio team. Good money for the right man. A truly great place to work and live. Send full resume and requirements at once if you can make the best sound better. Garry Bowen WCLG FM/AM, Morgantown, WV 26505. 2-78-

WANTED: Combo-man with engineering ability FCC First Class, able to maintain automatic system and stereo FM operation. Contact Manager, WDBI-FM, Tawas City, Michigan. 1-78-

CHIEF ENGINEER—Experienced with directional and remote control. Spanish speaking California operation. Good working conditions and fringe benefits. Must have good technical background. Send resume and salary required to Dept. 40 Broadcast Engineering, P.O. Box 12902, Overland Park, Kansas 66212 2-78-

TELEVISION—CCTV Video Maintenance Technicians. Full Benefits. Greater New York, Suffolk County or New Jersey Area. Send resume to VPC, P.O. Box 268, New Hyde Park, N.Y. 11067. 6-77-

HELP WANTED (CONT.)

VIDEO PRODUCTION ENGINEER Offers travel, interesting work with Midwest based tele-production company. Requires First Phone, experience in operation and maintenance of cameras and VTR's. Good salary and benefits. Send resume to: Bob Blinderup, Black Hawk Companies, KWWL Building, Waterloo, Iowa 50703. 2-78-11

ENGINEER-TV MAINTENANCE: RCA 2-inch VTR, R Cart Studio Cameras, TK 27 film. Solid state video shooting. FCC first phone required. Top salary sunny Southwest. Salary \$248-\$300 commensurate with experience. Submit detailed resume to: Dept. 408, Broadcast Engineering, P.O. Box 21, Overland Park, Kansas 66212. An Equal Opportunity Employer. 2-78-11

MAINTENANCE ENGINEER THREE TO FIVE YEARS' PRIOR MAINTENANCE EXPERIENCE WILL PUT YOU ON THIS UP-TO-DATE facility's team. Excellent benefits future with a #1 in market, CBS southeast affiliate. Equal Opportunity Employer. Contact Jack Becknell, V.P., Engineering, WCSC-TV, P.O. Box 186, Charleston, SC 29402 (803) 723-8371. 2-78-21

ENSENSED TV TECHNICIAN experienced in operation and maintenance of studio and transfer equipment for commercial midwest market. Latest equipment, pleasant environment, full benefits. NBC network/heavy local production. Contact Jerry Merritt, WICS-TV, 2680 E. Cook, Springfield, Ill., 62703 or call (217) 753-5665. 2-78-21

TELEVISION OPERATIONS ENGINEER needed for new corporate television production studio. Operate and maintain the latest ENG/EFP video systems. 30% travel throughout U.S. Salary commensurate with experience. Excellent benefits. Send resume with salary history to R.J. De, Air Products & Chemicals, Inc., P.O. Box 11, Allentown, PA 18105. 2-78-11

HELP WANTED (CONT.)

REMOTE TV ENGINEER. For studio and remote operations. FCC license required. Must have technical and operating background. Send resume and salary requirements to: Chief Engineer, WTCG-TV, 1018 West Peachtree St., Atlanta, Georgia 30309. 1-78-21

TELEVISION ENGINEER TRAINEE candidate for partially funded Minority Training Grant for television broadcast engineer. BSEE or Associates in Electronics desired. Equivalency in education with strong experience background in digital technology also considered. Contact: Roland Desjardins, WCBF, Lewiston, Maine 04240. 2-78-21

TELEVISION Help Wanted. Technical Experienced video/audio technician to supervise technical operation of large multi-studio production facility in southeast. Must be experienced in set-up and operation of color cameras, film chains, VTR, multi-track audio equipment. Supervisory ability important. Many benefits including 3 weeks vacation, 10 holidays, free hospitalization plan. Send detailed resume to Dept. 409, Broadcast Engineering, P.O. Box 12901, Overland Park, Kansas 66212. AN EQUAL OPPORTUNITY EMPLOYER 2-78-11

INSTRUCTIONAL TELEVISION ENGINEER Assume responsibility for completing conversion of monochrome system to color, including design and modifications, etc. Well-versed in maintenance of quad, helical and small format VTR, S and familiar with Norelco color camera system. EE Associate Degree or equivalent. Three years related experience necessary. First class FCC license preferred. Norelco schooling opportunity, 22 days vacation, excellent benefits, competitive salary. Send resume to Personnel Department, St. Louis Community College, 5801 Wilson, St. Louis, MO 63110. An Equal Opportunity/Affirmative Action Employer. 2-78-11

HELP WANTED (CONT.)

VIDEO ELECTRONIC ENGINEERS

Come work on the San Francisco Peninsula for CVS, recognized leader in broadcast video electronics. Our outstanding success in both U.S. and International markets has led us into exciting new areas and generated these new career opportunities.

VIDEO SYSTEMS ENGINEER

- BS/MS EE
- 7-10 years video electronics experience
- Microprocessor based systems
- DIGITAL DESIGN ENGINEER**
- BS/MS/Ph.D EE
- 5-7 years experience
- Digital video signal processing
- Microprocessor data analysis systems

ANALOG DESIGN ENGINEER

- BSEE desired
- 2-5 years video electronics design
- High speed A/D conversion

Please send complete resume including salary history to:

Vice President, Engineering



Consolidated Video Systems, Inc.
1255 East Arques Avenue
Sunnyvale, CA 94086
An equal opportunity employer

SALES- ENGINEERS

Due to increased demand, one of the world's leading manufacturers/distributors of highly advanced TV equipment including KCK cameras and BCN videotape equipment has immediate openings in the following areas: Sales Engineer in Houston, Service Engineer in Los Angeles, and in our national headquarters in Saddlebrook, N.J., a Service Engineer and Sales Engineer. The above additions are due to our increased sales and marketing activities involving our BCN videotape recording systems. To qualify for these challenging growth opportunities in our FERNSEH division, you must have a minimum of 3 years successful experience in the broadcasting industry. A BS degree or equivalent, camera and VTR experience are pluses. In return, we offer an excellent fringe benefit package. Send your resume with earnings history in confidence to:

MR. FRED BUNDESMANN
NATIONAL SALES MANAGER

An Equal Opportunity Employer M/F

Robert Bosch Corporation

279 MIDLAND AVENUE • SADDLEBROOK, N.J. 07662

BROADCAST engineering

**Regional
Advertising Sales Offices**

Indianapolis, Indiana—Roy Henry, 2469 E. 98th St., Indianapolis, IN 46280, (317) 846-7026.

New York, New York—Stan Osborn, 60 E. 42nd St., Room 1227, New York, NY 10017, (212) 687-7240.

Mountain View, California—Dennis Triola, 2680 Bayshore Frontage Rd., Room 102, Mountain View, CA 94043, (415) 961-0378.

London W.C. 2, England—John Ashcraft & Co., 12 Bear St., Leicester Square, 930-0525.

1171 VC-Badhoevedorp, Holland—John Ashcraft & Co., John J. Lucassen, Mgr., Slotenweg 303, 2968-6226.

Tokyo 105, Japan—International Media Representatives, Ltd., 2-29, Toranomon 1-chome, Minato-ku, 502-0656.

Here's everything you need to pull an FM Proof!

The first COMPLETE FM Proof Manual ever offered


Here's everything you need to comply with the FCC's annual proof-of-performance test. Every procedure, every detail is spelled out *step-by-step* in simple, concise language—all reviewed by the FCC. You save time, money, headaches—and you're sure of doing it right the first time.

Broadcast Engineering's FM Proof-of-Performance Manual includes *all* required logging forms for pulling *both* mono and stereo proofs. A complete chapter on FCC Rules. Dozens of helpful troubleshooting tips and time-saving measurement and logging techniques. Detailed procedures on how to *pre-test* your station before pulling the Proof. And more.

Your FM Proof Manual shows you

- how to prepare the test equipment
 - how to connect the test equipment
 - an efficient method of measurement and a look at the performance requirements
 - how to use the data summary sheet and evolve the graphs
 - how to comply fully with FCC rules and standards
- PLUS...you get individual *replaceable* forms for completing the equipment performance tests.

All this in one package. And all for \$7.95

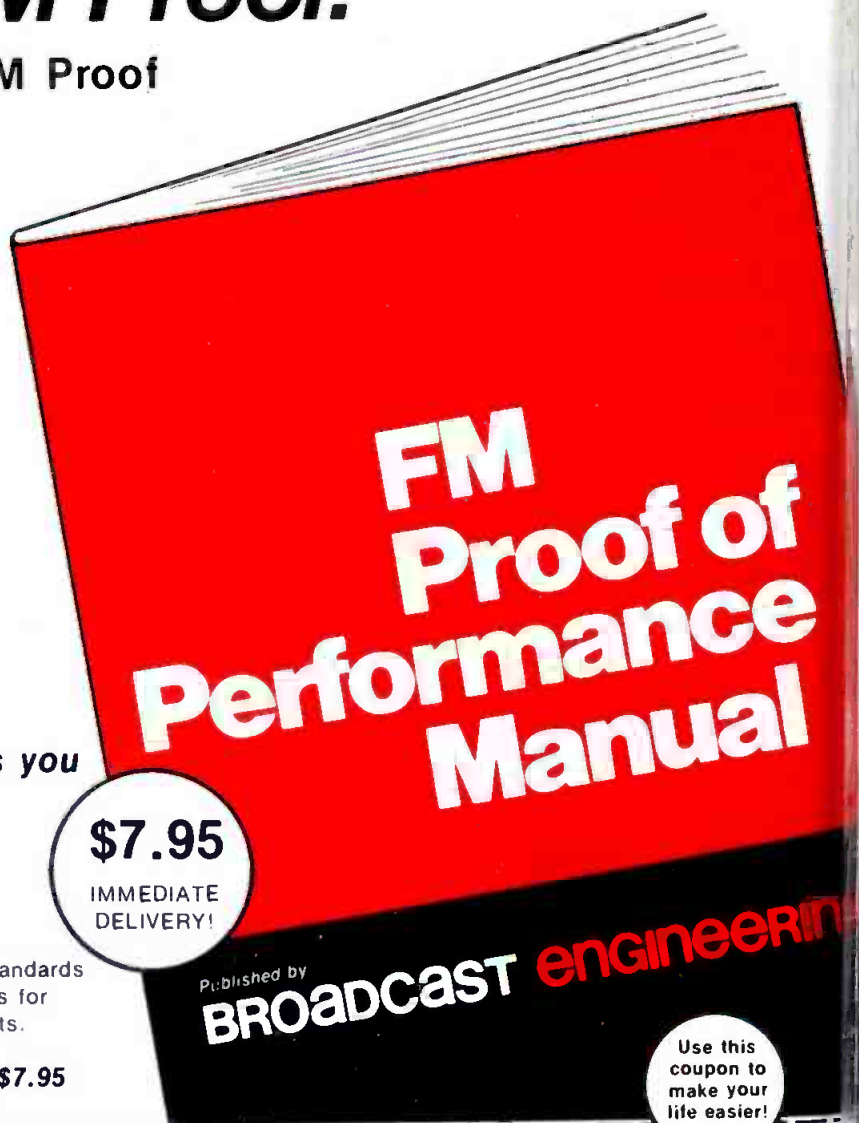

Use this coupon to make your life easier!

SPECIAL OFFER!

Order Both Manuals AND SAVE!



ONLY \$14 for both!
Over 2,500 AM manuals
now in use
and 1,500 FM manuals
Volume discounts available
on request.

BROADCAST engineering®

P.O. Box 12901, Overland Park, Ks. 66212

- ☐ Please send me _____ copies of the FM Proof-of-Performance Manual © \$7.95 each
- ☐ Please send me _____ copies of the AM Proof-of-Performance Manual © \$7.95 each
- ☐ Please send me _____ sets of the FM and AM Proof-of-Performance Manuals © \$14 for BOTH.

☐ My check or money order is enclosed

Name _____

Address _____

City _____

State _____ ZIP _____

NOTE: Broadcast Engineering pays the postage on all orders!

BROADCAST engineering.

For issue of February 1978—Use until May 1, 1978

After that date please contact manufacturer direct.

Use this handy card for more information on the products described.

Name _____ Title _____

Station or Company _____

Address/City _____

State _____ Zip _____ Phone () _____

Please check every section which applies to you.

BUSINESS OR OCCUPATION

- ☐ A. AM Radio Station
- ☐ B. FM Radio Station
- ☐ C. TV Station
- ☐ D. ETV Station
- ☐ E. CATV Facility
- ☐ F. CCTV Facility
- ☐ G. Consulting Engineer
- ☐ H. Educational Radio
- ☐ I. Recording Studio
- ☐ J. Distributor
- ☐ K. Government Agency
- ☐ L. Corporate Officer
- ☐ M. Technical Management/Engineering
- ☐ N. Other Management
- ☐ O. Other (specify) _____

1	13	25	37	49	61	73	85	97	109	121	133	145	157	169	181	193	205	217	229	241	253	265	277	289	301	313
2	14	26	38	50	62	74	86	98	110	122	134	146	158	170	182	194	206	218	230	242	254	266	278	290	302	314
3	15	27	39	51	63	75	87	99	111	123	135	147	159	171	183	195	207	219	231	243	255	267	279	291	303	315
4	16	28	40	52	64	76	88	100	112	124	136	148	160	172	184	196	208	220	232	244	256	268	280	292	304	316
5	17	29	41	53	65	77	89	101	113	125	137	149	161	173	185	197	209	221	233	245	257	269	281	293	305	317
6	18	30	42	54	66	78	90	102	114	126	138	150	162	174	186	198	210	222	234	246	258	270	282	294	306	318
7	19	31	43	55	67	79	91	103	115	127	139	151	163	175	187	199	211	223	235	247	259	271	283	295	307	319
8	20	32	44	56	68	80	92	104	116	128	140	152	164	176	188	200	212	224	236	248	260	272	284	296	308	320
9	21	33	45	57	69	81	93	105	117	129	141	153	165	177	189	201	213	225	237	249	261	273	285	297	309	321
10	22	34	46	58	70	82	94	106	118	130	142	154	166	178	190	202	214	226	238	250	262	274	286	298	310	322
11	23	35	47	59	71	83	95	107	119	131	143	155	167	179	191	203	215	227	239	251	263	275	287	299	311	323
12	24	36	48	60	72	84	96	108	120	132	144	156	168	180	192	204	216	228	240	252	264	276	288	300	312	324

READER SERVICE CARD

BROADCAST engineering.

For issue of February 1978—Use until May 1, 1978

After that date please contact manufacturer direct.

Use this handy card for more information on the products described.

Name _____ Title _____

Station or Company _____

Address/City _____

State _____ Zip _____ Phone () _____

Please check every section which applies to you.

BUSINESS OR OCCUPATION

- ☐ A. AM Radio Station
- ☐ B. FM Radio Station
- ☐ C. TV Station
- ☐ D. ETV Station
- ☐ E. CATV Facility
- ☐ F. CCTV Facility
- ☐ G. Consulting Engineer
- ☐ H. Educational Radio
- ☐ I. Recording Studio
- ☐ J. Distributor
- ☐ K. Government Agency
- ☐ L. Corporate Officer
- ☐ M. Technical Management/Engineering
- ☐ N. Other Management
- ☐ O. Other (specify) _____

13	25	37	49	61	73	85	97	109	121	133	145	157	169	181	193	205	217	229	241	253	265	277	289	301	313
14	26	38	50	62	74	86	98	110	122	134	146	158	170	182	194	206	218	230	242	254	266	278	290	302	314
15	27	39	51	63	75	87	99	111	123	135	147	159	171	183	195	207	219	231	243	255	267	279	291	303	315
16	28	40	52	64	76	88	100	112	124	136	148	160	172	184	196	208	220	232	244	256	268	280	292	304	316
17	29	41	53	65	77	89	101	113	125	137	149	161	173	185	197	209	221	233	245	257	269	281	293	305	317
18	30	42	54	66	78	90	102	114	126	138	150	162	174	186	198	210	222	234	246	258	270	282	294	306	318
19	31	43	55	67	79	91	103	115	127	139	151	163	175	187	199	211	223	235	247	259	271	283	295	307	319
20	32	44	56	68	80	92	104	116	128	140	152	164	176	188	200	212	224	236	248	260	272	284	296	308	320
21	33	45	57	69	81	93	105	117	129	141	153	165	177	189	201	213	225	237	249	261	273	285	297	309	321
22	34	46	58	70	82	94	106	118	130	142	154	166	178	190	202	214	226	238	250	262	274	286	298	310	322
23	35	47	59	71	83	95	107	119	131	143	155	167	179	191	203	215	227	239	251	263	275	287	299	311	323
24	36	48	60	72	84	96	108	120	132	144	156	168	180	192	204	216	228	240	252	264	276	288	300	312	324

READER SERVICE CARD

BROADCAST engineering.

For issue of February 1978—Use until May 1, 1978

After that date please contact manufacturer direct.

use this handy card for more information on the products described.

Name _____ Title _____

Station or Company _____

Address/City _____

State _____ Zip _____ Phone () _____

Please check every section which applies to you.

BUSINESS OR OCCUPATION

- ☐ A. AM Radio Station
- ☐ B. FM Radio Station
- ☐ C. TV Station
- ☐ D. ETV Station
- ☐ E. CATV Facility
- ☐ F. CCTV Facility
- ☐ G. Consulting Engineer
- ☐ H. Educational Radio
- ☐ I. Recording Studio
- ☐ J. Distributor
- ☐ K. Government Agency
- ☐ L. Corporate Officer
- ☐ M. Technical Management/Engineering
- ☐ N. Other Management
- ☐ O. Other (specify) _____

13	25	37	49	61	73	85	97	109	121	133	145	157	169	181	193	205	217	229	241	253	265	277	289	301	313
14	26	38	50	62	74	86	98	110	122	134	146	158	170	182	194	206	218	230	242	254	266	278	290	302	314
15	27	39	51	63	75	87	99	111	123	135	147	159	171	183	195	207	219	231	243	255	267	279	291	303	315
16	28	40	52	64	76	88	100	112	124	136	148	160	172	184	196	208	220	232	244	256	268	280	292	304	316
17	29	41	53	65	77	89	101	113	125	137	149	161	173	185	197	209	221	233	245	257	269	281	293	305	317
18	30	42	54	66	78	90	102	114	126	138	150	162	174	186	198	210	222	234	246	258	270	282	294	306	318
19	31	43	55	67	79	91	103	115	127	139	151	163	175	187	199	211	223	235	247	259	271	283	295	307	319
20	32	44	56	68	80	92	104	116	128	140	152	164	176	188	200	212	224	236	248	260	272	284	296	308	320
21	33	45	57	69	81	93	105	117	129	141	153	165	177	189	201	213	225	237	249	261	273	285	297	309	321
22	34	46	58	70	82	94	106	118	130	142	154	166	178	190	202	214	226	238	250	262	274	286	298	310	322
23	35	47	59	71	83	95	107	119	131	143	155	167	179	191	203	215	227	239	251	263	275	287	299	311	323
24	36	48	60	72	84	96	108	120	132	144	156	168	180	192	204	216	228	240	252	264	276	288	300	312	324

PLACE
FIRST CLASS
POSTAGE
HERE

BROADCASTengineering

P.O. BOX 12901

OVERLAND PARK, KANSAS 66212

Attn: Evelyn Rogers

Just fold, seal with tape and mail - please do not staple...Post Office will not deliver.


BROADCASTengineering

BROADCAST ENGINEERING is directed to key persons actively involved in planning, managing, and operating broadcast facilities, recording studios, studio originating cable TV and non-commercial systems.

You are required to renew your free subscription periodically and this subscription verification form is provided for your convenience in doing so. You must fill in all appropriate spaces, date and sign this card in order to start or renew your subscription.

First in a new advanced class of digital processors!

The DPS-1
by Digital Video Systems.

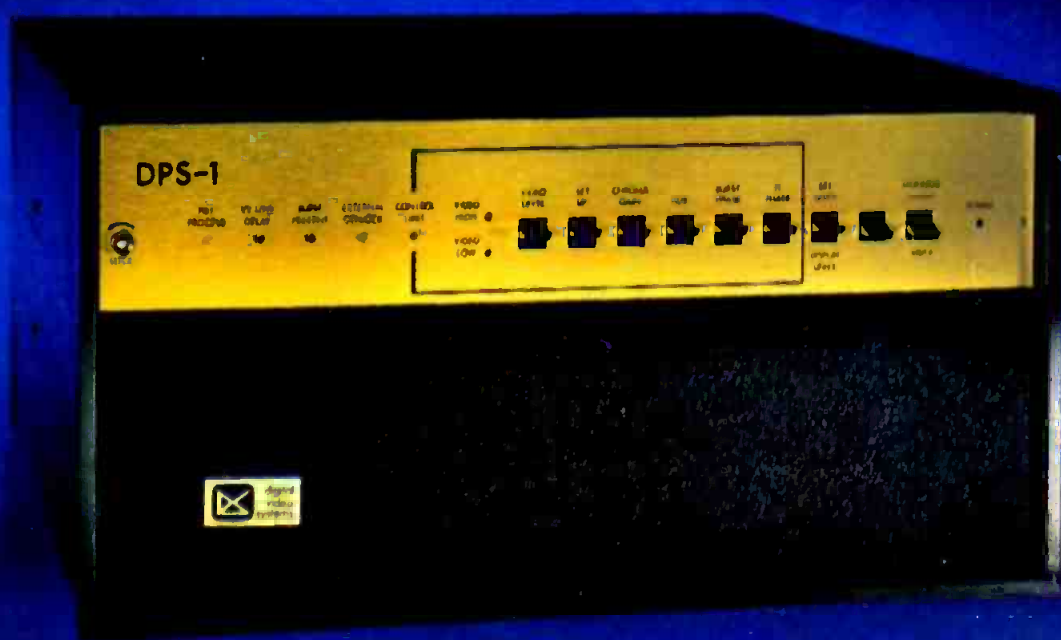

The DPS-1 is the new third generation Time Base Corrector conceived to operate at standards significantly higher than those previously adopted by the television industry, and born through years of dedicated research by a team of experts.

This all-digital processing system, using computer circuitry operating at four times subcarrier, adapts its parameters automatically to incoming video feeds as input sources are changed.

Features include a super-wide 32 line window, digital test signal generator, microprocessor

control, digital burst processing, and a full range of circuit board options to satisfy all operating requirements, including Frame Store.

The DPS-1 offers substantially improved production capability to both broadcasters and industrial producers. Authorized dealer and customer service representatives, strategically located throughout the United States and Canada, will be happy to demonstrate the versatility of this new advanced system to you.

Ask us for full details.



digital
video
systems

DIGITAL VIDEO SYSTEMS, 519 McNicoll Avenue, Willowdale, Ontario, Canada M2H 2C9

Telephone: (416) 499-4826

For More Details Circle (2) on Reply Card

www.americanradiohistory.com



Rack 'em up.



For studio, broadcasting, recording, or public-address, Shure audio components offer more features and more performance, dollar for dollar than similar equipment. And—just as important—Shure audio components are easier to work with. Their compact size and versatility equip them for an extremely wide variety of audio control applications—and built-in input/output flexibility means quick set-up anywhere. For a permanent installation or a component system that can be adapted to meet any need, Shure offers the right combination. To obtain a copy of the Shure catalog, see your dealer or write:

Shure Brothers Inc.
222 Hartrey Ave., Evanston, IL 60204
In Canada: A. C. Simmonds & Sons Limited



Manufacturers of high fidelity components, microphones, sound systems and related circuitry

For More Details Circle (3) on Reply Card

www.americanradiohistory.com