

BROADCAST[®] engineering

April 1983/\$3

design • AM/FM transmitters • Test equipment

A98400-----DNB461050 XXXXX BEQ
F10901820000000 34A I
TERRY W DENBROOK G M
PUGAT SOUND AUDIO
5105 N 46TH
TACOMA WA 98407



ADM takes AM/FM versatility to new levels

We are proud to announce a major new development in our ST Series II AM/FM stereo consoles. These popular, highly versatile consoles are now available in four basic main frame sizes with 10, 16, 20 or 24 inputs. Each can be initially equipped with your choice of a variety of input, output and signal processing modules. Each has built-in capacity for future expandability.

For superior, unflinching *stereo-tracking*, ADM® has developed a unique *stereo VCA*. It

is included on all ST Series II input modules. These new ST II's have the same long list of "plus value" features, as do all ADM consoles. And they're backed by our same exclusive 5-year warranty. There is no better assurance of performance and reliability in audio equipment.

Let's talk AM/FM technology soon. Contact ADM Technology, Inc. - The Audio Company - 1626 E. Big Beaver Road, Troy, MI 48084, Phone (313) 524-2100. TLX 23-1114.



ADM

The
Audio
Company

WEST CENTRAL SALES
(817) 467-2990

WEST COAST SALES
(415) 945-0181

MAIN OFFICE AND
EAST COAST SALES
(313) 524-2100

WKRC, Cincinnati



**"When
the news
breaks,
we get it
together
with
Midwest
and
Ikegami."**

"Taft demands the best, and when it comes to presenting to our viewers a clear and accurate picture of the world, we turn to Ikegami cameras. Their rugged durability, combined with the "studio" quality, that Ikegami delivers, brings the news in focus for the millions of viewers who depend on Taft news operations to keep them informed.

That's also why Midwest designs and builds our mobile news gathering units.

Midwest custom designed the right mobile units to meet our needs - and our deadlines. They're tough, designed to take all the punishment that on-location ENG can dish out. Midwest delivered our Ikegami-equipped mobile units on time.



John Owen, Vice President
of Television Engineering
Taft Broadcasting.

Circle (2) on Reply Card

We're covering the news stories and Midwest covers our needs. Taft demands the best, and we have it - with Midwest and Ikegami on our news team."

For more information on how Midwest can help you get it together with quality equipment and mobile units, call toll-free today: 1-800-543-1584 (In Kentucky 606-331-8990).



Cincinnati, OH 606-331-8990	Lexington, KY 606-277-4994
Columbus, OH 614-476-2800	Nashville, TN 615-331-5791
Dayton, OH 513-298-0421	Charleston, WV 304-722-2921
Cleveland, OH 216-447-9745	Virginia Beach, VA 804-464-6256
Pittsburgh, PA 412-781-7707	Washington, DC 301-577-4903
Detroit, MI 313-689-9730	Charlotte, NC 704-399-6336
Indianapolis, IN 317-251-5750	Atlanta, GA 404-457-4300
Louisville, KY 502-491-2888	Miami, FL 305-592-5355

One Sperti Drive
Edgewood, KY 41017

WTVN, Columbus



BROADCAST engineering

The journal of broadcast technology

April 1983 • Volume 25 • No. 4

BROADCAST STUDIO DESIGN

16 Case study: WISH-TV 8 update

By John Demshock, chief engineer, WISH-TV 8, Indianapolis, IN

48 Case study: Studio 5 at WDCR/WFRD

By Brad Carpenter, engineering consultant, Cambridge, MA

102 Studio renovation

By Jerry Whitaker, chief engineer, KRED/KPDJ, Eureka, CA

OTHER FEATURES

30 Test equipment: Know your needs

By Gary A. Breed, chief engineer, WCBU-FM/WTVP-TV, Peoria, IL

34 New test equipment at NAB-'83

By Carl Bentz, technical editor; Bill Rhodes, editorial director; and Rhonda L. Wickham, managing editor

56 SMPTE TV Conference replay

By Bill Rhodes, editorial director; and Carl Bentz, technical editor

81 Improving tube life in high power transmitters

By David P. Hebert, chief engineer, KONA-AM/FM, Tri-Cities, Washington

90 AM/FM transmitter update

By Donald L. Markley, facilities editor, D. L. Markley & Associates, Consulting Engineers, Peoria, IL

DEPARTMENTS

6 FCC update

10 Satellite update

12 Editorial

It's getting crowded backstage

14 Spec Book supplement

124 Associations

126 New products

128 Business

129 People

130 Calendar

131 Index of advertisers


133 Classified ads

136 Coming events

©Copyright 1983, by Intertec Publishing Corporation. All rights reserved. Photocopy rights: Permission to photocopy for internal or personal use is granted by Intertec Publishing Corp. for libraries and others registered with Copyright Clearance Center (CCC), provided the base fee of \$2.00 per copy of article is paid directly to CCC, 21 Congress St., Salem, MA 01970. Special requests should be addressed to Cameron Bishop, publisher.

ISSN 0007-1994.

BROADCAST ENGINEERING (USPS 338-130) is published monthly by Intertec Publishing Corporation, 9221 Quivira Road, P.O. Box 12901, Overland Park, KS 66212-9981. Postmaster, return form 3579 to P.O. Box 12938 at the above address.

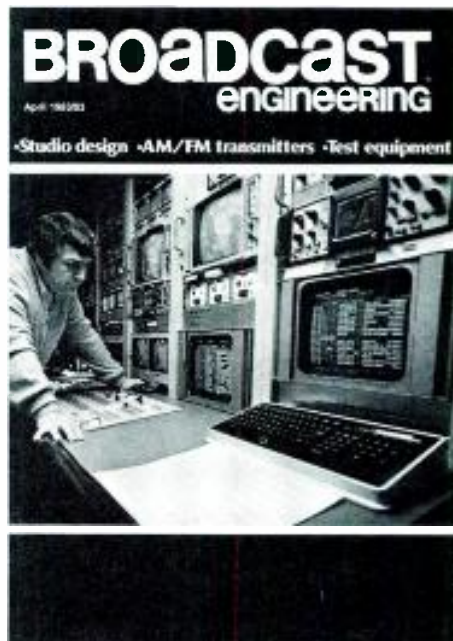

THE COVER shows the control automation system at WISH-TV 8, Indianapolis, IN, with Charlie Clark at the controls. An article describing the upgrading of the station including new equipment and station layout, "Case Study: WISH-TV 8 Update," is presented in this issue (page 16). The author is John Demshock, WISH chief engineer. Cover photo is provided courtesy of Jamie McMahan, Data Communications Corporation.

NEXT MONTH BE will include the following features:

- Studio switcher update
- TV captioning
- Panel antennas for FM
- Timing/phasing in television

**“I want a world-class camera
I can take a mile from the van,
and still get 57 dB S/N and
600-line resolution.”**



HITACHI HEARD YOU.

Then you're looking for broadcast-quality. Then you're looking for lightweight equipment you can carry unencumbered by anything but a lightweight triax cable.

Well, Hitachi heard you. Because now our Hitachi SK-91 and SK-81 can both be connected to our triax DU-91 Digital Command System by up to 6,000 feet of cable.

The SK-91 is an example of the lengths Hitachi will go to give you the camera your craft and courage demand. Though just 9.7 pounds, including its 1.5-inch viewfinder, this \$33,000 camera has been hailed as a bargain by perfectionists. And it's I.B.A. and C.B.C. accepted.

Its shock-mounted optical system—with Saticons® Pluimicons® or Diode Guns®—gives you up to 57 dB S/N and 600-line resolution. All in an incredibly tough

magnesium alloy package.

It has an auto-iris closure. A +9/18 dB high-grain switch. Horizontal and vertical blanking widths adjustable over a wide range. An auto black balance control as well as an auto white balance control.

The SK-81 gives you just a shade less performance for \$22,000. The DU-91 at \$18,900 lets you get great pictures with either the SK-91 or SK-81 whether you're shooting at the low-light levels of a coal mine or going to the top of the world. Who from? Who else? Hitachi Denshi America, Ltd., 175 Crossways Park West, Woodbury, NY 11797. (516) 921-7200. Offices also in Chicago, Los Angeles, Atlanta, Cincinnati, Dallas, Denver, Seattle and Washington, D.C.

Circle (3) on Reply Card

April 1983 *Broadcast Engineering* 3

The Classic Look in Audio Consoles

Audio performance? Exceptional! For both 150 and 250 series: Distortion .05% IM and THD from 30 Hz to 20 kHz at +18 dBm output with ± 0.5 dB frequency response. Each mixer in every model has a preamp selectable for either microphone or high level plus a full complement of line, monitor, cue and headphone amplifiers...all plug-in.

Choose from 10 different models, mono or stereo.



5M150



5S250



8M150



8S250



10S250

For more information, contact your local Broadcast Electronics distributor, or write for our new brochure.



**BROADCAST
ELECTRONICS INC.**

4100 N. 24th STREET, P.O. BOX 3606, QUINCY, IL 62305, (217) 224-9600, TELEX: 25-0142

Circle (4) on Reply Card

BROADCAST® engineering

Editorial and advertising correspondence should be addressed to: P.O. Box 12901, Overland Park, KS 66212-9981 (a suburb of Kansas City, MO); (913) 888-4664. Circulation correspondence should be sent to the above address, under P.O. Box 12937.

EDITORIAL

Bill Rhodes, *Editorial Director*
Carl Bentz, *Technical Editor*
Nils Conrad Persson, *Electronics Editor*
David Hodes, *Video Editor*
Miguel Chivite, *International Editor*
Rhonda L. Wickham, *Managing Editor*
Karen Arnhart Booth, *Associate Editor*
Mary Thornbrugh, *Editorial Assistant*
Tina Thorpe, *Editorial Assistant*
Pat Blanton, *Directory Editor*

ART

Kevin Callahan, *Art Director*
Kim Nettie, *Graphic Designer*

TECHNICAL CONSULTANTS

John H. Battison, *Antennas/Radiation*
Blair Benson, *TV Technology*
Dennis Ciapura, *Technology*
Dane E. Ericksen, *Systems Design*
Howard T. Head, *FCC Rules*
Wallace Johnson, *FCC/Bdct. Engr.*
Donald L. Markley, *Facilities*
Harry C. Martin, *Legal*
Hugh R. Paul, *International Engr.*
Art Schneider, *A.C.E., Post-production*
Elmer Smalling, III, *Cable Systems*
Vincent Wasilewski, *Communications Law*

CORRESPONDING ASSOCIATIONS

American Society of TV Cameramen
Assn. for Bdct. Engr. Standards
National Association of Broadcasters
National Radio Broadcasters Assn.

CIRCULATION

John C. Arnst, *Director*
Evelyn Rogers, *Manager*
Dee Manies, *Reader Correspondent*

ADMINISTRATION

R. J. Hancock, *President*
Cameron Bishop, *Publisher*
Eric Jacobson, *Associate Publisher*

ADVERTISING

Mary Birnbaum, *Production Manager*

Regional advertising sales offices listed near the Advertisers' Index.

Member,
American Business Press



Member,
Business Publications
Audit of Circulation



BROADCAST ENGINEERING (USPS 338-130) is published monthly by Intertec Publishing Corporation, 9221 Quivira Road, P.O. Box 12901, Overland Park, KS 66212-9981. Postmaster, return form 3579 to P.O. Box 12938 at the above address.

BROADCAST ENGINEERING is edited for corporate management, engineers/technicians and other station management personnel at commercial and educational radio and TV stations, teleproduction studios, recording studios, CATV and CCTV facilities and government agencies. Qualified persons also include consulting engineers and dealer/distributors of broadcast equipment.

SUBSCRIPTIONS: BROADCAST ENGINEERING is mailed free to qualified persons in occupations described above. Non-qualified persons may subscribe at the following rates: United States, one year, \$25; all other countries, one year, \$30. Back issue rates, \$5, except for the September Buyers' Guide issue, which is \$15. Rates include postage. Adjustments necessitated by subscription termination at single copy rate. Allow 6-8 weeks for new subscriptions or for change of address. Controlled circulation postage paid at Shawnee Mission, KS.



©1983. All rights reserved.
Intertec Publishing Corp.

The fastest rising stars in video test instruments.

Video engineers, studio managers and station managers can now agree. Only Leader offers outstanding performance and reliability with more features, plus immediate delivery, economy and two-year warranties on all parts and components, CRT's included! Chances are the video cameras, recorders and monitors you are using today were built by companies using Leader's NTSC, PAL and SECAM test equipment.

The first half-rack waveform monitor with a line selector.

Leader's LBO-5860 has many more features than higher priced half-rack waveform monitors.

- Front panel line selection for displaying VITS and VIRS.
- Lines 14 through 21 on fields 1 or 2 can be individually selected.
- Output blanks vectorscope to display selected line vector only.
- Compatible with existing racks.

The only vectorscopes with etched or electronic graticules.

Only Leader's LVS-5850/A gives you a choice of standard graticule, or electronically generated targets which are easily read from afar or in the dark...

- Compensates for non-linearities caused by CRT aging.
- Compensates for improper horizontal and vertical set-up.
- Compatible with existing racks.

The video engineer's oscilloscope.

Video engineers will reach for the 100 MHz Leader LBO-518, first. It's the better way to troubleshoot systems and equipment.

- 2 independent active sync separator trigger inputs.
- 4-channel, 8-trace capability.
- PDA CRT, with 20 kV potential.

Low cost vector display.

A direct low-cost replacement for the Tektronix 602A, the Leader LBO-51M-V delivers outstanding performance.

- Driven by R-Y and B-Y video signals from a precision chroma decoder or Tektronix 650HR picture monitor.

Get the generators with every important feature...immediately!

Compare the LCG-400M/S to any other sync/test generators. Feature for feature, dollar for dollar, they can't be beat!

- Seven primary test signals with many auxiliary outputs.
- Genlock with adjustable horizontal delay and subcarrier phase.
- Sync, set-up, burst, luminance, and chrominance levels, all front panel adjustable.

Call toll free (800) 645-5104
In Canada call Omnitronix Ltd.
(514) 683-6993

Ask for an evaluation unit, our 1982/83 full line catalog, special video brochure and the name of your nearest Leader distributor.

For Information Circle (5) on Reply Card
For Demonstration Circle (6) on Reply Card

For video engineers who know the difference.

LEADER
Instruments Corporation

380 Oser Avenue
Hauppauge, NY 11788 (516) 231-6900

Regional Offices:
Los Angeles, (213) 618-0695,
Chicago, Dallas, Dayton, Boston.

LEADER VECTORSOPES,
WAVEFORM MONITORS,
SYNC/TEST GENERATORS
AND OSCILLOSCOPES
PHOTOGRAPHED AT REEVES
TELETAPE, NEW YORK CITY.

FCC update

Harry C. Martin, partner, Reddy, Begley & Martin, Washington, DC

April 1983



Reallocation policies dropped

In another deregulatory move, the commission has eliminated its Berwick Doctrine and Suburban Community Policy, under which the commission attempted to ascertain whether a broadcast applicant intended to serve its specified suburban community or a nearby, larger central city. Also eliminated was the De Facto Reallocation Policy, which required a hearing when it appeared that a TV or FM applicant was attempting to remove, *de facto*, a channel assigned to a particular community to some other, larger community.

The commission found that these policies imposed costly and difficult burdens on applicants and the FCC, thereby slowing down the establishment of new stations.

These changes are effective immediately. Berwick, Suburban Community and De Facto reallocation issues will be deleted from all hearings now in progress. However, applicants proposing to serve a suburban community still will have to prove that the community is separate and distinct, and in need of a broadcast transmission service, in order to win a Section 307(b) preference in a comparative hearing.

In the same Report and Order, the commission eliminated its 10- and 15-mile rules under which Berwick and De Facto reallocation issues have arisen. Previously, those rules permitted TV and FM applicants to specify communities not listed on the Table of Assignments if such communities were within 10 (Class A FM) or 15 (Class B/C FM and TV) miles of a community so listed. This rule change, like the policy changes discussed previously, will serve to eliminate hearing issues dealing with whether a central city or its suburb best deserves a new station.

The commission rejected a suggestion by Commissioner Stephen Sharp that the Section 307(b) term "community" be redefined to encompass an entire metropolitan area. (This would be another way to eliminate community comparison issues.) The FCC said that such a redefinition would be handled in a further rulemaking to be

initiated later this year.

Amendment for AM coverage requirement proposed

The commission has adopted another Notice of Proposed Rulemaking in which it is seeking to delete the requirement in Section 73.24(j) of the rules that AM broadcast stations place a 25mV/m signal over a community's business district.

The 25mV/m business district coverage standard, and the related requirement that residential areas receive a 5mV/m signal, are intended to guarantee that the principal community served by an AM facility receives premium reception service. The basis for requiring higher signal levels over business areas is found in the propagation characteristics of frequencies used by AM stations. Because AM signals are susceptible to "noise" caused by electric equipment and are absorbed by large steel-girdered buildings, a higher signal level generally is necessary in high density areas.

In proposing its rule change, the commission said that the vast majority of AM grants today are for small communities that have neither large buildings nor the extent of manmade noise prevalent in industrial cities. Another reason given for the proposed change is that business and factory areas are not easily defined and often are not concentrated in one central area. Growth patterns in many American cities, the commission said, have given rise to extensive suburban retail areas that have replaced declining central business districts. Under these circumstances, the rule could be interpreted to require 25mV/m signal coverage over every business area—even in cities in which such areas are widely scattered.

In a related matter, the commission is proposing to eliminate Section 73.151(a) (3) of the rules. This requires permittees of directional AM facilities, in connection with their covering license applications, to take field strength measurements to determine that their 25mV/m contours cover the main business district and that their 5mV/m and nighttime

interference-free contours encompass the city of license. The commission said these requirements are needlessly burdensome, because Section 73.24(j) presently requires a showing from applicants that their specified contours will cover the community of license. Further, the rule section in question applies only to directional AM facilities. The absence of a similar requirement with respect to non-directional AM facilities has resulted in no significant public interest problems, the commission said.

Inquiry initiated on technical regulation

The commission has initiated a sweeping inquiry on the efficacy of its existing technical regulations. The inquiry will seek to identify those technical rules that have outlived their usefulness. Behind this initiative is the FCC's belief that technological innovation has reached a level at which rigid regulatory constraints needlessly stifle the development of improved telecommunications services.

In the broadcasting area, the commission said increased competition and diversity have created an environment in which revision of technical quality regulations is possible and desirable. Market forces have created incentives that may be better than regulation in ensuring high quality technical performance.


One of the major thrusts of the inquiry is in the area of interference control. Present rules limit transmitter output power and effective radiated power (ERP). Although power-related limits appear to be essential, the commission said it believes it may be possible to change or simplify them. For instance, transmitter output power limits may not be needed at all. ERP is a more direct means of controlling interference potential.

Still less constraining, the commission said, would be direct regulation of coverage areas and field strengths—as opposed to the present system that regulates power and antenna height. Under the new concept, any combination of ERP and tower height (or antenna directivity) might be permitted if calculated field strengths at established boundaries did not exceed a specified limit.

In the same proceeding, the commission proposed deletion of its transmission quality standards for broadcast equipment. The FCC said competition among broadcasters probably is sufficient to ensure high picture and sound quality. It asked for comments on the impact that elimination of these and other quality control regulations would have on broadcasting.

1:~:~)))

Our story; **THEIR WORDS.**

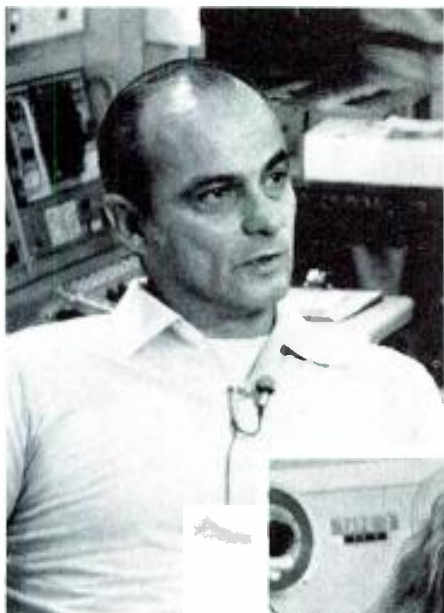

CHARLES



TRUMBULL



SCOLIS



STEVENS

Pictured are tv station personnel in Tucson, Arizona, and San Francisco and Los Angeles, California. All were photographed during location videotaping sessions for a new Grass Valley Group presentation on M200 Modular Automation operation.

On the tape Roy Trumbull of KRON-TV in San Francisco, Marian Stevens at KCOP-TV in Los Angeles, and Catherine Scolis and Harry Charles of KGUN-TV in Tucson (and others not pictured) were questioned

about their station operations, how M200 Automation has affected them, and their views on automated tv broadcasting generally.

See our new tape, "Au-To-Ma-Tion" in your facility, at your convenience. Just call the GVG sales office nearest you.

Ask for users' references, too; there's a tv station near you using Grass Valley Group M200 Modular Master Control Automation.

THE GRASS VALLEY GROUP, INC.®

P.O. BOX 1114 GRASS VALLEY CALIFORNIA 95945 USA • TEL: (916) 273-8421 TWX: 910-530-8280

A TEKTRONIX COMPANY

Offices: *Eastern Regional:* 499 Thornall St, Edison, NJ 08817, (201) 549-9600 • *Southeastern District:* 1644 Tullie Circle N.E., Ste 102, Atlanta, GA 30329 (404) 321-4318 • *Midwestern Regional:* 810 West Bristol St, Elkhart, IN 46514 (219) 264-0931 • *Northwestern District:* 3585 North Lexington Ave, Ste 238, Arden Hills, MN 55112 (612) 483-2594 • *Southwestern District:* 316 Seminary South Office Bldg, Fort Worth, TX 76115 (817) 921-9411 • *Western District:* 1032 Elwell Court, Ste 244, Palo Alto, CA 94303 (415) 968-6680 • *Western Regional:* 21243 Ventura Blvd, Ste 206, Woodland Hills, CA 91364 (213) 999-2303

Circle (7) on Reply Card

April 1983 **Broadcast Engineering** 7

PROVEN PE

PERFORMANCE

Why the Ampex VPR-2B is the world's most popular video tape recorder.

With over 4000 machines in use, the Ampex VPR-2 Series is without question the most widely acclaimed line of VTRs in broadcasting history. Outstanding performance and simple operating features, backed by a global network of parts, service and training, are just a few of the reasons why.

Ampex leadership began with technical innovation. You'll find the highest standards of design, production and quality control in every VPR-2B. And today, after more than 25 years of dedicated service to the television industry, Ampex continues to lead the way in providing high quality, reliable tools to the video marketplace.

As Ampex leadership started with outstanding products, it continues with the strongest worldwide service

support. With Field Engineers on call and an extensive computerized parts network, you get immediate answers to all your video questions. And each year, more than 2000 students throughout the world go through comprehensive product training at Ampex centers. There are more people skilled on Ampex VTRs than on any other video recorder in the world.

But the VPR-2B is more than just the dominant force in the video

business. It's a part of the Ampex tradition. A tradition born of technical innovation, product reliability and proven product performance. And it's a name you can count on. Call your Ampex representative, or write Ampex Corporation, Audio-Video Systems Division, 401 Broadway, Redwood City, CA 94063 (415) 367-2011. Sales, spares and service worldwide.



AMPEX

TOOLS FOR TOMORROW

Ampex Corporation • One of The Signal Companies 

Circle (8) on Reply Card

www.americanradiohistory.com

AST® Automatic Scan Tracking
Delivers disturbance-free transitions between play, slow motion and still frame modes.

Frame-Accurate Editing
Results from the VPR-2B's precise tape timer and search systems, AST® and simple edit controls.

Operational Convenience
With continuously variable slow motion instantly available.



Satellite update

By John Kinik, satellite correspondent

Earth terminal technology

The major trend in C-Band satellite earth terminal technology today is toward the use of dual-beam antennas in order to receive two adjacent satellites with a single antenna. When Hughes' Galaxy 1 satellite goes into operation alongside RCA's Satcom 3R this June, most existing receive antennas will be retrofitted with dual-beam kits that will add the second satellite feed at an additional antenna cost ranging from \$700 to \$1500 (depending on the antenna type) and at an almost insignificant penalty to the performance of a normal single-beam antenna. This technique is possible because the focusing properties of a parabolic reflector are only slightly compromised if the antenna is aimed at the midpoint between the two satellites and the two feeds are placed on either side of the physical center axis of the reflector.

The new requirement to look at more than one satellite with one antenna also brings into the picture the *multibeam* antenna, which, with a single reflector and multiple feeds, can receive signals from all satellites in the North American orbital arc. The need for multibeam antennas increases as the number of satellites carrying programming increases, and cable operators and broadcasters find it a worthwhile trade-off to install a single, larger antenna instead of a new antenna for each new satellite.

Antenna location

Another C-Band technology trend is the integration of the Low Noise

Amplifier (LNA) with the downconverter into a Low Noise Converter (LNC) mounted at the antenna feed. The converted output signal may be transmitted over a much longer and lower grade coaxial cable between the downconverter and demodulator, because a much higher loss is acceptable after conversion. By comparison, the conventional receiver design, with only the LNA at the feed, does not allow a separation distance greater than 150 feet without incurring significant cable costs from the antenna to the downconverter. More freedom in locating antennas makes installation easier, particularly when trying to avoid antenna blockage by trees and buildings, or when antenna shielding by buildings or natural terrain is desirable either for local microwave interference reasons or aesthetic considerations.

Lowering the threshold

A significant development in C-Band receiver technology is the use of *threshold extension* techniques to lower the "effective" threshold in carrier-to-noise (C/N) ratio to 8dB or less. Until 1980, conventional receivers exhibited impulse noise threshold points of approximately 10dB, and threshold extension was an expensive technique. The low cost receivers developed by entrepreneurs in the past few years for the private earth terminal market use extremely low cost components to achieve lower thresholds. The method used reduces the instantaneous receive bandwidth by means of a dynamic tracking filter concept based on phase-locked loop demodulator techniques. One innovative receiver manufacturer has developed a method for further reducing threshold by filtering out impulse noise *sparklies* with digital processing circuitry.

A combination of threshold extension and impulse noise filtering makes possible an acceptable receive signal with an antenna as small as 4 feet in diameter. Although this is an extreme example, the techniques described are important for a more typical case in which a 10-foot diameter antenna could replace a 15-foot diameter antenna. It is important to note that lowering the C/N threshold does nothing for the delivered video signal-to-noise (S/N) ratio, because S/N is directly related to C/N. The lower the C/N, the lower the S/N. However, the most disturbing degradation to the viewer, the pulse noise occurring below threshold, can be more easily avoided with the new technology.

Better equipment, lower prices

In a typically competitive market, the products get better and the prices drop. This is true for computers, and it is equally true for earth terminal equipment. C-Band earth terminals have dropped in price from the \$10,000 level in 1979 to the \$3000 level today, for equivalent performance. Low cost terminals (with 8- to 10-foot antenna) can be configured for less than \$2000, and this figure could drop to the \$1000 level within the next few years as offshore suppliers enter the competition. The new Ku-Band Direct Broadcast Satellite (DBS) technology will also tend to force C-Band terminal prices downward as private terminal suppliers try to attract customers reluctant to buy C-Band terminals in favor of waiting for DBS. With the type of intense competition that will occur in the next few years, it is not difficult to visualize an earth terminal *per channel* cost of \$500 being attained by 1987. Not bad when one considers that the same channel cost was roughly \$50,000 in 1972 and \$5000 in 1979.

||:~::~||

THE ALL-AMERICAN WINNER FOR QUALITY. INSIDE AND OUT.



THE BCC-20/21 CAMERA SYSTEM.

No other camera system matches the BCC-20/21 Digicam for superb pictures and total operational flexibility. The BCC-21 is a top-quality, fully automatic camera for both studio and mobile operation. Simply remove the BCC-20 from the studio frame and you have a compact EFP camera perfect for any portable situation where size and weight are critical, and performance cannot be compromised.

The Digicam cameras come with impressive features, including: "computer-in-the-head", Spatial Error Correction for outstanding registration and sharpness, remote control, and an optional Automatic Setup Unit for more accurate,

faster and simpler setup.

The Digicam system. It gives you the most flexibility with a single camera—inside and out. For details, call your nearest Ampex sales office.

- Atlanta 404/451-7112 • Chicago 312/593-6000 • Dallas 214/960-1162
- Los Angeles 213/240-5000 • New York/New Jersey 201/825-9600
- San Francisco 408/255-4800
- Washington, D.C. 301/530-8800



AMPEX
Ampex Corporation • One of The Signal Companies

SETTING
THE FASHION
IN BROADCAST
VIDEO

Circle (9) on Reply Card

It's getting crowded backstage

Guest editorial by Richard A. Rudman,
chairman, SBE National Frequency
Coordinating Committee

Your opinions on our editorial, on other critical issues facing broadcasters, or on the views of our authors is welcome. Address comments to The Editor, Broadcast Engineering, P.O. Box 12901, Overland Park, KS 66212.

If Part 73 governs the on-stage part of our business, Part 74 surely rules backstage. Just like an elaborate play, broadcasting requires a lot of backstage help. Part 74 controls the audio and video that makes much of our radio and TV programming possible.

Unfortunately, the FCC has not allowed for interference-free growth in this vital area. The type of terrain, existence of new stations and new programming services mean that in many markets no more aural STLs will fit comfortably. There may be constant 2-way interference, and Channel X's ENG van may light up on top of Channel Y's video STL. Current FCC rules do not allow TV ENG prime use of any microwave spectrum. Mobile microwave must either share on a coequal basis to fixed links or use only channels on a secondary relationship to fixed.

Backstage managing

In 1976, Bob O'Connor of CBS set up meetings in major markets to discuss the impact of FCC changes to portions of Part 74 affecting dispatch and aural remote pickup. We believed after the CBS meeting that the FCC's attempts to deal with the situation needed adjustments to meet the needs of Southern California broadcasters.

Those of us in large markets live on the twin cutting edges of grief and technology. With this in mind, it is not hard to see why those of us in Southern California decided to form an active local coordination group. In the spirit of enlightened self-interest, the Southern California Frequency Coordinating Committee was formed. After more than six years, we have the following items to show for our efforts:

- a waiver that let us split the N1 and S Channels in our region on a coordinated basis to allow a significant increase in the number of people who can use 450-451MHz and 455-456MHz;
- a monthly newsletter with a nationwide mailing to more than 450 broadcast engineers, consultants and equipment manufacturers;
- operational ground rules for ENG truck crews for day-to-day and special operations;
- a comprehensive Part 74 database for a multicounty region covering more than 200,000 square miles; and
- many, many broadcast engineers who now know each other on a first name basis and know it is possible to talk problems out before they become too serious.

What's in it for you?

The Society of Broadcast Engineers has identified local frequency coordination as an ongoing chapter project. Of the 75 SBE chapters, 54 are already involved in coordination or are working with other groups.

With AM stations looking for high quality STLs for stereo or improved mono, more stations doing live radio and TV news, and more stations conducting field operations far from home, you might begin to see what is in it for you.

At the recent SBE board of directors meeting, SBE frequency coordinators said that their biggest Part 74 problem was interference from broadcasters coming in for special programming such as election coverage or sporting events. Networks were perceived as prime offenders. The SBE National Committee has representatives from ABC, CBS and NBC. All three network representatives are sensitive to this problem. In the Southern California region, we have worked on this problem for several years and have made significant progress. Based on our experience, we have suggested some ways to change the perception on a national level.

The SBE has compiled an accurate list of frequency coordinators and the regions they are able to coordinate. Once this list is circulated among operations people throughout the country, we believe interference from our fellow broadcasters will diminish.

To reduce such problems to an even lower level, a *Truck Level Awareness* campaign has to be mounted. There is a need to educate every person on every field crew that the simple act of keying a hand-held transceiver on an uncoordinated channel can blow a fellow broadcaster off the air.

In March, in Washington, DC, the SBE and FCC conducted the first-ever "tutorial" meeting for regulatory and non-regulatory personnel on how broadcasters use microwaves in their day-to-day operations and on some of the things that leaders in our industry are doing to make the most of what we have.

On April 14, in Las Vegas, the day after NAB '83, the first National Broadcast Frequency Coordinating Committee meeting will be held. It will bring together

The Ampex ATR-800 is built to last.

Others talk about audio "workhorses". But only Ampex has been manufacturing reliable professional audio recorders since 1947. Recorders that can take everything you can dish out day after day.

The Ampex ATR-800 continues our tradition by offering you unmatched editing ease, complete interfacing capabilities with a variety of peripherals (synchronizers, editors, etc.), a rugged cast transport that maintains tape path alignment, standard built-in features without an accompanying

premium price tag, and a full range of accessories for all kinds of applications. And, as with all Ampex audio recorders, you get our worldwide sales and service support to keep your workhorse racing along.

Try the ATR-800. Another winning audio workhorse from Ampex.

For details, contact your nearest Ampex dealer, or write Willie Scullion, National Sales Mgr., Ampex Corporation, Audio-Video Systems Division, 401 Broadway, Redwood City, CA 94063.

OUR WORKHORSES DON'T DIE YOUNG.

AMPEX

Ampex Corporation • One of The Signal Companies



Circle (10) on Reply Card

Cetec CP/TV


PAYS OFF WITH HANDSOME DIVIDENDS!

★ INCREASE YOUR AUDIENCE
PENETRATION

★ IMPROVED MARKET SHARE

★ CETEC ADDS:

TECHNICAL EXCELLENCE
PROVEN PERFORMANCE
QUICK DELIVERY
COMPETITIVE PRICING

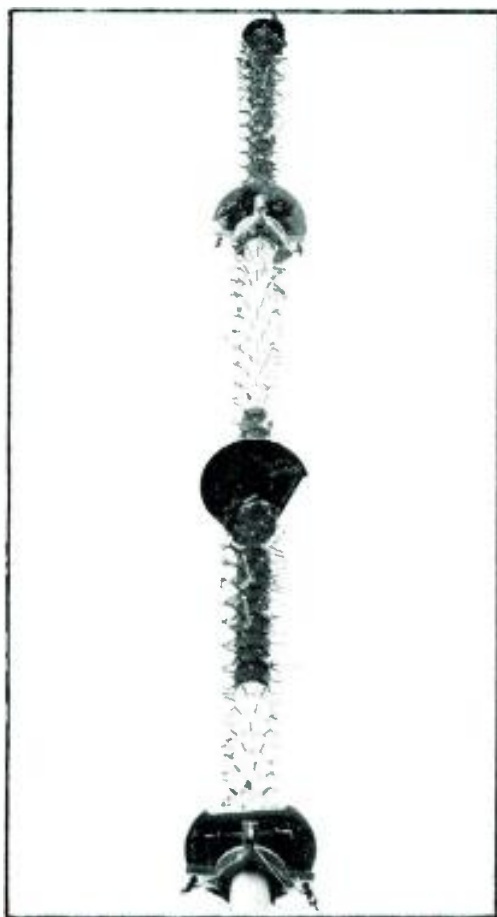

YOU SHOULD GET THE CETEC
PICTURE

CETEC ANTENNAS, PIONEERS IN
CP TV

CALL FOR TECHNICAL DETAILS
AND TEST RESULTS

Circle (11) on Reply Card

Cetec Antennas
The Edge In Coverage!

6939 Power Inn Road, Sacramento, California 95828
(916) 383-1177 Telex: 377321

many of the 54 local coordinators that SBE has identified to discuss how we can best meet the needs of our industry.

We must all work to raise broadcast management awareness on Part 74 matters. When a broadcast engineer asks for extra funds to install cavity filters, circulators and reject loads on transmitting equipment; wants to purchase a truck identifier for TV microwave; or even wants some time to attend a monthly coordination meeting, the requests should be evaluated as investments in an insurance policy.

Based on our experience in South California, the SBE believes coordinating committee activity also enhances professional development. We have initiated many engineers into the mysteries of aural and visual STLs, spectrum-efficient amplitude-companded sideband dispatch, 800MHz trunked dispatch systems, high quality narrowband audio remote pickup techniques, interference tracking and spectrum analysis techniques, to name a few general topics. If any of the preceding items seem unfamiliar to you, and your station is involved in Part 74, you have gaps in your technical education.

If, like many of us, you learned about Part 74 through trial and error, the level of current activity has made this learning process as professionally unwise today as setting up a rifle range in a playground.

Are we going to be upstaged?

Other services are hungry for what little Part 74 spectrum we have. In the case of land mobile interests (the 2-way radio industry), there is an organized lobbying campaign to denigrate the broadcast service. We are portrayed as wasteful spectrum users. Although they point most often to Part 74 FM, VHF and UHF channels when talking about our "wasteful" tendencies, our Part 74 holdings have not escaped their notice.

The grandfathered aural STL band (942-947.5MHz) has been in jeopardy for a decade. We may be forced to relocate aural STL refugees elsewhere on a 5-year timetable. Unfortunately the FCC has not come up with a viable "elsewhere."

The FCC has already allowed cable systems to obtain 13GHz channels on a shared basis with broadcast. The FCC Docket 82-334 would have us share all broadcast microwave spectrum from 947MHz-40GHz. If we do not convince the FCC that such sharing may create chaos in all services involved, things could become interesting, indeed. We must coordinate at the local level to make such shared spectrum slices work. This must include bringing cable systems into our regional coordinating committees.

On the theory that we can defend our use of valuable spectrum and adopt more spectrum-efficient techniques, local coordinators must support a national broadcast spectrum policy best called, "Use It Or Lose It."

There may still be time to solve our internal and external problems concerning Part 74. If we don't, some of us may have to exit the theater.

1:~:~)))))

Editor's note:

Rudman, who is also engineering manager, KFWB, Los Angeles, CA, wants to clarify this address as being founded on the position of the National Frequency Coordinating Committee. Thus, it does not necessarily represent the views of KFWB or the Westinghouse Broadcasting Company.

Spec Book supplement

The following information is offered as an update to the 1982 Spec Book issue. This information includes additions, corrections and deletions to data in Spec Book.

EDITING CONTROLLERS

Datatron

- The Vanguard editing equipment is capable of operation with control track pulses as the timing reference. When used with SMPTE equipment and code, the accuracy is 0 frames. Readers are included; generators are optional. Editing decisions may be stored on various media, including paper tape and magnetic disc. Three additional sources beyond VTRs may be interfaced with the editing system. All 1- and 3/4-inch and most 2- and 1/2-inch VTRs, as well as a majority of

production video switchers and audio mixers, may be interfaced.

TURNTABLES

Broadcast Electronics

- The QRK Custom II is not available.
- The QRK 16SA is now the 16C. Indication of operating speed is determined by position of the speed change lever.
- The QRK 12C is available as a 3-speed (12C3) or 2-speed (12C2) unit.
- Rumble ratings for the QRK Galaxy model should be - 50dB, per NAB specs.

1:~:~)))))


Double Your Troubleshooting and Testing Productivity . . . Or Your Money Back!

Six-digit readout: Automatically tracks every CRT test. We call it digital autotracking. It's patent pending.

Bright dual-trace CRT: 60 MHz (–3 dB); 100 MHz (–12 dB)

Delta PPV, Time, Freq: Measure any part of a waveform for PPV, time or frequency using Delta measurements. Just dial in the waveform section you want to measure and push.

Simplify Freq ratio tests: Automatically compare input/output ratio of multiply/divide stages from 1:1 to 1:999,999 with the push of a button.

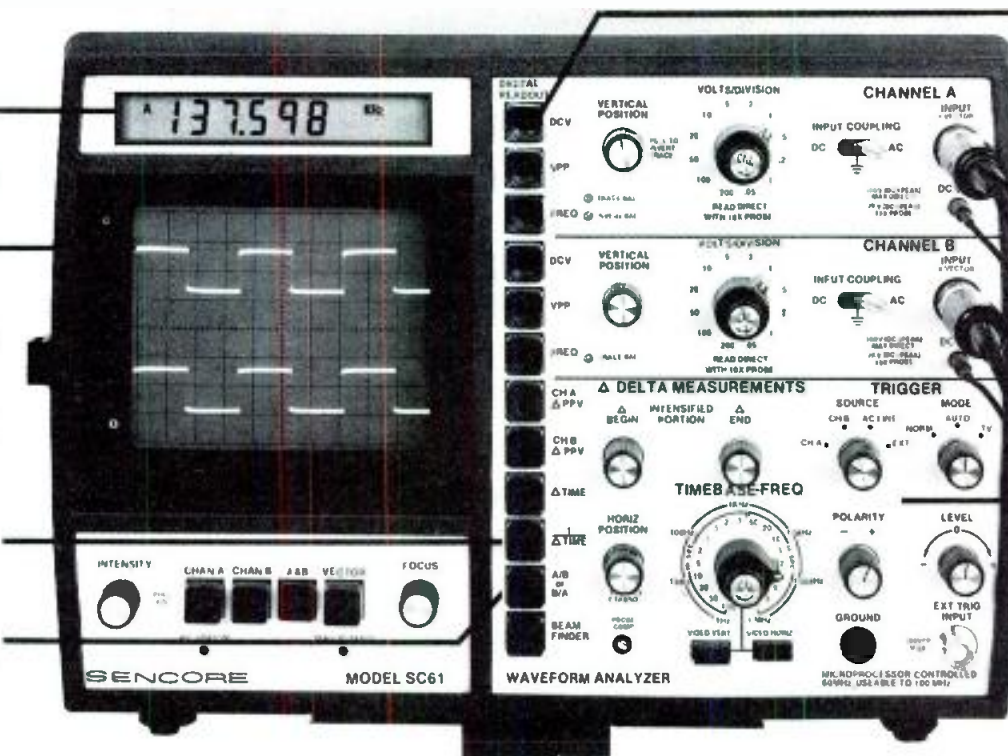

Autotracking DCV, PPV, Freq: Measure DCV to 5%; PPV to 2%; freq. to .001%. Just push a button for either Channel A or B.

One probe input: One probe input per channel for all measurements - digital and scope - with 5 mV to 2000 V measuring range. (2 lo-cap probes provided.)

Super sync: ECL provides rock-solid sync trigger circuits with only 4 controls; includes TV sync separators for video work.

U.S. Patent Pending
Financing Available

The first scope with push button digital readout. If you use general purpose oscilloscopes for troubleshooting or testing, we can double your present productivity with the SC61 Waveform Analyzer, the first instrument to turn every conventional scope measurement into an automatic digital readout.

No more graticule counting. Connect only one probe to view any waveform to 100 MHz. Then, just push a button to read DCV, PPV, frequency and time — automatically!

There are no graticules to count or calculations to make, which speeds every measurement.

The digital readout is from 10 to 10,000 times more accurate as well.

Plus you have everything you want to know about a test point, at the push of a button, which speeds troubleshooting tremendously.

A special Delta function even lets you intensify parts of a waveform and digitally measure the PPV, time or frequency for just that waveform section.

And it's neat. No more tangled leads, piles of probes or dangling cords. The SC61 is an entire test station in one unit.

The one and only. There are other scopes with digital readout, but none of them completely automate every conventional scope measurement so you can automatically analyze any waveform without counting one single graticule. Totally automatic waveform analyzing at the push of a button. It will make all the difference in your productivity.

Double your productivity. When we say the SC61 will double your productivity, we're being conservative. We've seen cases of

three, four, even ten time increases in productivity with this first-of-its-kind, automated oscilloscope. Every situation is different, however, so try the SC61 and judge for yourself. Here's our offer.

Money back guarantee. If the SC61 does not at least double your productivity during the first thirty days, you may return it for a full refund, including freight both ways.

Call today. Get the entire SC61 Waveform Analyzer story. Call toll-free today, and ask for our eight page color brochure. It could be the most productive call you make this year!

Phone Toll-Free
1-800-843-3338


Alaska, Hawaii, Canada and
South Dakota call collect
(605) 339-0100

SENCORE
3200 Sencore Drive, Sioux Falls, SD 57107

Circle (12) for information
Circle (131) for demonstration

Case study: WISH-TV 8 update

By John Demshock, chief engineer, WISH-TV 8, Indianapolis, IN

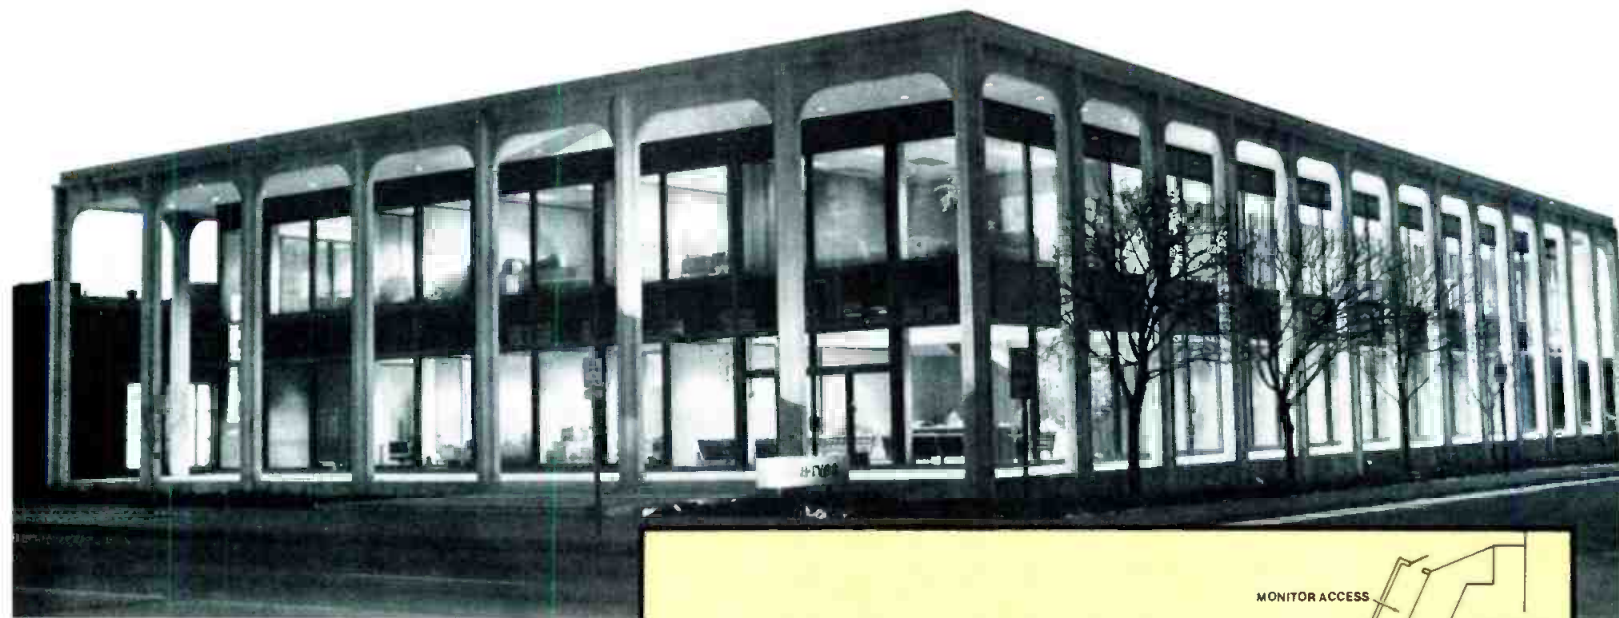

The WISH-TV 8 facilities.

My role as chief engineer of a station in a highly aggressive market has changed drastically from one of crisis management at the start to one of actually controlling the engineering operation, particularly in view of the ambitious plans of our station's management. This was possible through a lot of hard work and the progressive attitude of our parent organization, the Corinthian Broadcasting Corporation. Today, given the tools we have to work with, comparatively it's like being in a candy store.

Our position is best illustrated by the upheaval we experienced during remodeling, and the opportunities the company seized during the interim that enhanced our engineering operation and service to the station. New equipment was being readied for installation that would help streamline our operation. The decision to automate master control was made during this crucial period. From that time on, the mood in engineering has been to carefully heed the latest technological developments in television, because they might be the solutions for future demands.

Much of the credit of Corinthian's future thinking goes to Art Biggs, vice president of Engineering. His ideas do not reflect status quo, but match the pace set by new programming, news services and broadcast needs that are constantly being set before us.

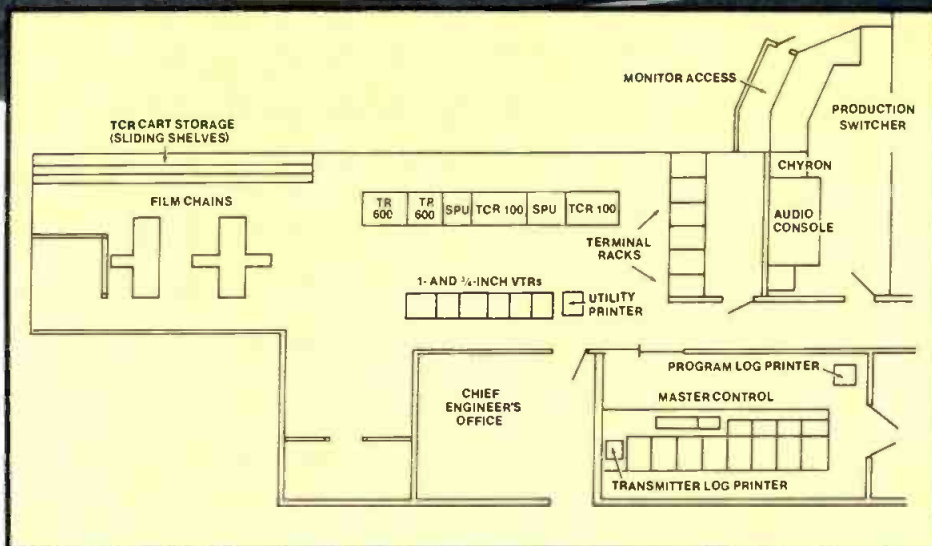


Figure 1. WISH-TV engineering facilities floorplan.

Chaos


It was a dubious honor, however, being brought in as chief in February 1981. When I walked in the door, it was similar to walking into a diamond-in-the-rough, and I mean rough. The control room, tape and production control areas were torn apart. The previous chief had left during the first stages of remodeling. After an initial shock period, I was able to gain a certain amount of composure by reminding myself of the equipment already in-house as well as the equipment to come. Being associated with Corinthian Broadcasting in different capacities over the past few years, I was aware of its philosophy toward engineering, and I was reasonably confident that it would carry the philosophy through here at WISH. Simply put, the plan of

attack is to fully use technology in order to meet increasing demands made to engineering for more and better products.

At the time remodeling began, evidence of this philosophy had begun to show through several equipment purchases, including Grass Valley switching systems for master control, production and routing; RCA TK-47 cameras with auto setup for studio use; a new RCA transmitter with TFT remote control and auto logging; two new RCA TR-600 tape machines; and an ADM custom 36-input production audio board.

The new equipment having not been installed turned out to be a blessing in disguise, because the existing studio installations had to be undone com-

Continued on page 20

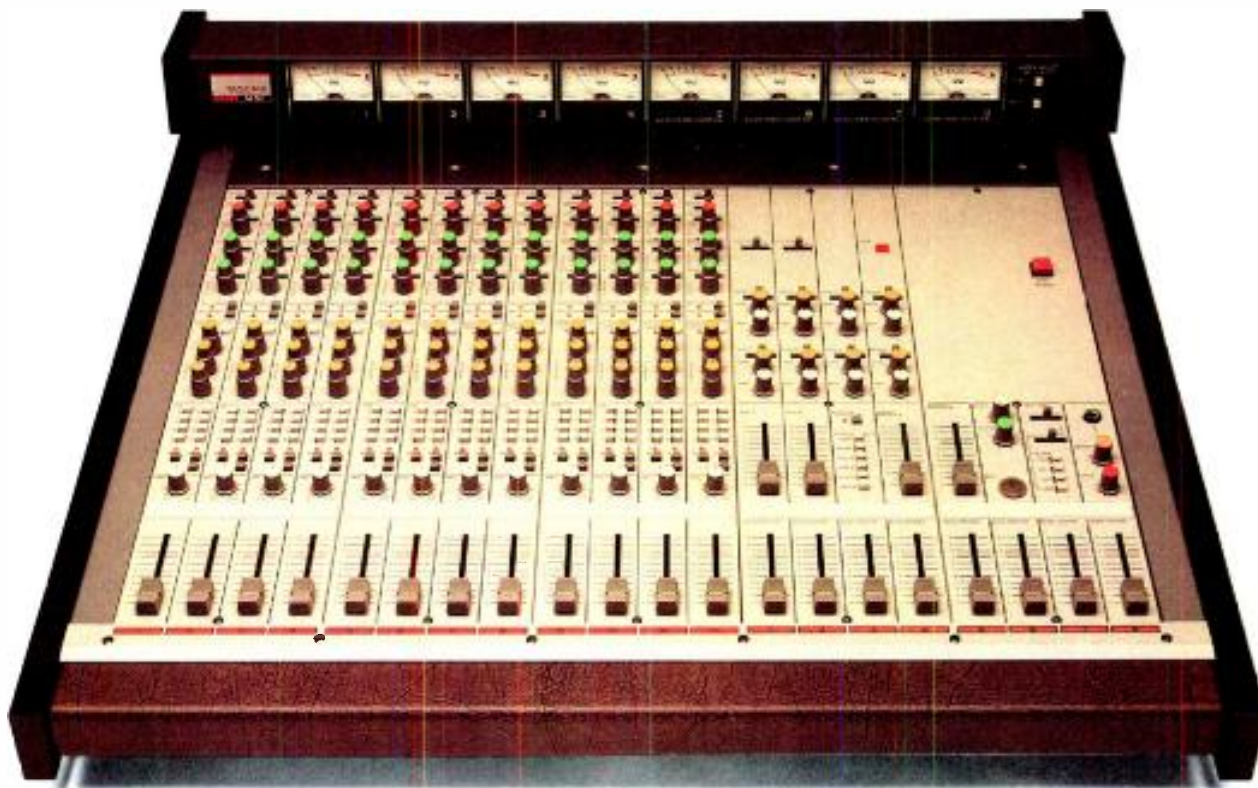

WE JUST MADE HIGH PERFORMANCE STANDARD EQUIPMENT.

TASCAM's M-50 is the compact 12x8x8 mixing console audio production professionals have been looking for. With its multiple inputs per channel, plus assignable submixes and monitor sections, you get the flexibility to get the job done in all production modes—record, overdub and remix or assembly.

By including direct boxes to accept instrument inputs, phono pre-amps for replaying effects library or reference disks and stereo solo "in place" permitting monitoring of individual channels or whole portions of a mix, you get what you need. High performance functions as standard equipment.

The M-50 is reliable and fast, with extremely flexible signal routing. A valuable asset to the ad agency production room, the small video production/post-production company, the multi-media production facility, and in many other applications.

Because the M-50 includes Solo and PFL, multiple auxiliary mixes, plus balanced and unbalanced inputs and outputs, it is also well suited to final film assembly, small club P.A., and broadcast with clean feeds provided.

TASCAM's extensive design and manufacturing experience in professional recording equipment made it possible to create the M-50. Compact and affordable, this modular 8-track mixer is within the reach of any serious professional.

For additional information, see your TASCAM dealer, or write TASCAM Production Products, 7733 Telegraph Road, Montebello, CA 90640, (213) 726-0303.

Copyright 1983—TEAC Corporation of America

TASCAM
TEAC Production Products

DESIGNED BY POPULAR COMPLAINT.

Circle (13) on Reply Card

www.americanradiohistory.com

TEK 110-S FRAME
SYNCHRONIZER

A frame synchronizer from Tektronix that sets a new standard of comparison.

Now. Authentic reproduction from any signal source. The Tek 110-S is the frame synchronizer with 10-bit resolution and accuracy. Performance that's every bit Tektronix! You get highest signal quality with correct SCH phase from any source. Resulting in the least signal degradation of any frame synchronizer on the market today.

Ten-bit digital circuitry offers digital signal processing with negligible quantizing errors. This 10-bit capability lets you cascade multiple units and depend on the 110-S for unexcelled performance. With four passes through the 110-S your signal is still better than with one pass through an 8-bit synchronizer. *Including quantizing effects*, the 110-S has the following specifications:

- 1% Diff Gain
- 1° Diff Phase
- 60dB Signal-to-Noise
- 1% Freq Response
- 0.5% 2T K-Factor

Compare these values to other frame synchronizers which omit quantizing effects from their specifications.

Noise performance unmatched. Signals can be tracked to low signal/noise ratios, such as those encountered during ENG Microwave fades. Or the operator can select field freeze or black. Adaptive clamping prevents streaking while quickly responding to hot switches.

Accurate color framing. With the adaptive decoder or optional four-field memory, field 1 to field 3 conversions can be accomplished without introducing 140 nanosecond picture shifts. With four-field memory (one complete color frame), accurate color framing can be obtained without decoder artifacts.

Accurate RS-170A timing. With the 110-S's 10-bit digitizer and full memory, your original sync and burst can be passed with the signal. Or you may choose to insert a new digitally generated sync and burst with RS-170A timing.

Front loaded interchangeable boards. Internal diagnostics allow you to quickly identify any impending problems. Circuit boards are calibrated individually so you can change boards quickly, minimizing downtime.

Processing amplifier with remote control provides adjustments for signal level, set-up, chroma gain and hue. Other controls such as field/frame freeze are also provided on the remote control.

The 110-S is built in our tradition of reliability, excellence and long-term value. And backed by a worldwide service network and proven technical support.


Call your nearest Tektronix Field Office (listed in major-city directories) for more information. Or call 1-800-547-1512 for descriptive literature. (In Oregon, 1-800-452-1877).

Tektronix, Inc., P.O. Box 1700, Beaverton, OR 97075. In Europe: Tektronix Europe B.V., Postbox 827, 1180 AV Amstelveen, The Netherlands.

Tektronix 110-S SYNCHRONIZER

Copyright © 1983, Tektronix, Inc. All rights reserved. TVA-334-1 (Product available at NAB.)

WORKING HARD FOR
YOUR SIGNAL QUALITY

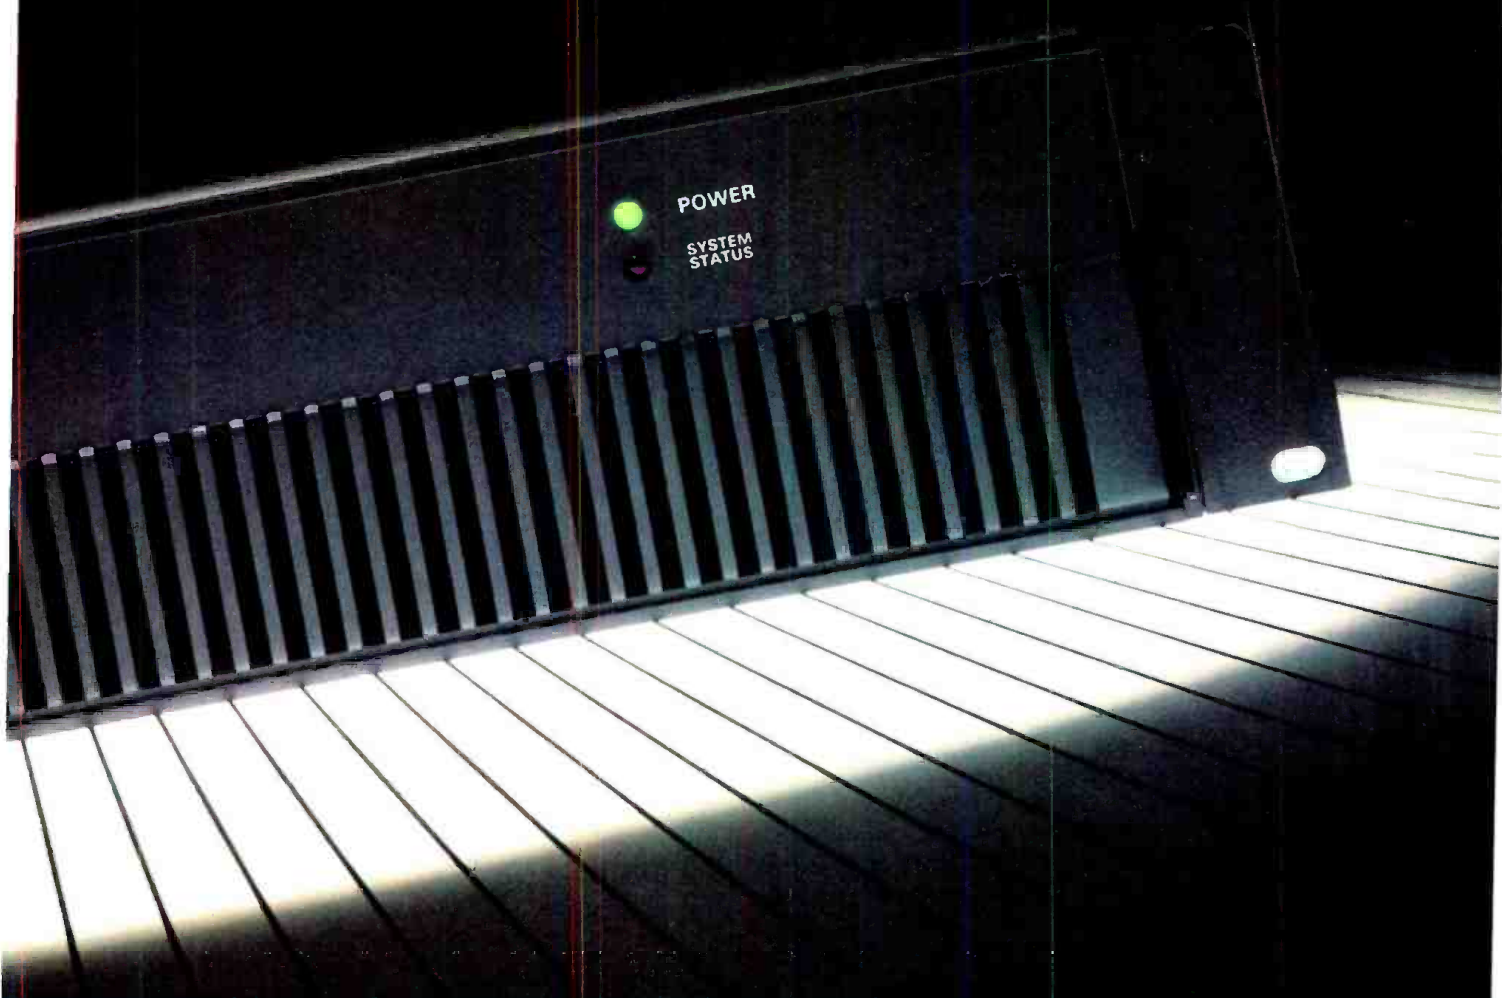

Tektronix
COMMITTED TO EXCELLENCE

For Literature Circle (14) on Reply Card

pletely to accomplish remodeling. About midway through the cleanup, it became obvious that short-range production and programming goals would be impossible to meet, even with our existing new equipment. These plans included the production of an hour-long late news block; extensive use of *Live Eye* reports from the field; and rumors of an hour-long local show, complete with remotes, adjacent to the hour-long early news. These plans could not have been timed better for the engineering department, because the remodeling project allowed us to tailor the operation to these increased production requirements.

Early steps

The first steps had really already been taken. The selection of an automatic logger for the transmitter remote control, along with cameras that could be set up automatically, were definite advantages. We also realized that master control automation could be implemented faster with the installation of our new switcher. We chose Data Communication Corporation's BIAS Master Control Automation (MCA), a sister product that interfaced with the BIAS Traffic System that had already been in place for several years. The system opened all kinds of new avenues to us but, at this point, I was happy to design a control room that could be efficiently operated by one person under most conditions. Automated switching, automated setup of studio cameras, automatic transmitter logging and automatic program logging gave us what we needed to meet our immediate demands without having to add staff members.

One of the unique features of the BIAS MCA system was that we had only one company to deal with for our traffic and switcher automation. The same computer for our MCA area served the sales and traffic department and left us the option of adding other software packages for other departments, with the luxury of programming our own ad hoc applications.

The engineering staff at this point was running flat out just to keep the station on the air. I still don't know how they kept us looking as good as we did while contending with the obstacle course on the floor, an old Visual switcher, camera controls mounted above and behind the master control operator, no monitoring to speak of, and, because of the remodeling, no assurance that something that was in one place yesterday would be in the same place tomorrow. When the announcement of the purchase of

an automation system was made, it was met with some apprehension, although a lot less than I expected, and a great deal of curiosity. The fact that we would have a new Grass Valley switcher and an automation system at the same time seemed like heaven, especially when we looked around at our existing circumstances.

Advantages in remodeling

Another advantage of the remodeling then came into play. We were able to practice on the new switcher before we put it on-line. The operators had a chance to become familiar with it at their own pace. This eliminated the need to learn an automation system and a switcher at the same time. We



WISH's *Live Eye* news, on location.



Jack Parker, news photographer, sets up his truck for a live feed.



The WISH-TV automation system cuts on-air errors and improves billing. Charlie Clark (at the keyboard) demonstrates the log generating capabilities of the WISH automation system, while the author looks on.

The new digital generator that lets you access and configure the vertical interval any way you want it.

Now. Four external VITS inputs. Non-volatile memory. And 39 test signals. All wrapped up in one test signal generator with all-digital family features. The new 1910 from Tektronix gives you the most access offered to the vertical interval—for inserting and configuring the location of test signals, Teletext, closed captioning, source ID and more.

No other generator gives you that kind of capability. Plus, the proven performance of the leading family of digital test signal generators. With the 1910, Tektronix has combined its 1900 Series Transmitter, NTC7 and Studio Test Sets in one highly capable unit. You get a full signal complement, with the accuracy and stability of 10-bit digital signal generation. The digital code for each signal is stored in replaceable PROMs so your 1910 won't become obsolete. Its RS232 control port adds even more versatility to the 1910 by pro-

viding a means for automatic control from such devices as the Tektronix 1980 ANSWER Automatic Video Measurement Set, with added flexibility for programming VITS and VIRS in either field on lines 10 through 20, signal matrixing, VITS sequencing, redefining signal selection in the front panel or remote control unit—and more.

Solid support completes the package. The 1910 comes with a worldwide service network and proven technical support, plus the Tektronix reputation for reliability, excellence and long-term value.

Contact your nearest Tektronix Field Office (listed in major city directories) for more information. Or call 1-800-547-1512 for descriptive literature. (In Oregon, 1-800-452-1877.)

Tektronix, Inc., P.O. Box 1700, Beaverton, OR 97075. In Europe: Tektronix Europe B.V., Postbox 827, 1180 AV Amstelveen, The Netherlands.



WISH-TV equipment list

RCA TT-25 FH parallel transmitters
TFT remote control system with model 7640 telescan
M/A-COM microwave equipment
Grass Valley 1600-7K, 1600-4S and 400 series switching systems
BIAS Master Control Automation (MCA)
Lenco pulse and video generation and distribution equipment
RCA TK-47 studio cameras with auto setup
ADM 36-input audio console
RCA TCR 100A cart machines
RCA TR 600 quad VTRs
Sony BVH 2000 1-inch VTRs
Sony BVW-3 Betacams
Ikegami, Tektronix and Videotek monitoring



An Apple II computer at home lets the author communicate with the WISH facilities.


had hoped to wait until the automation system arrived before putting the new MC switcher on-line, but the old Visual didn't make it. We couldn't wait. As it turned out, everything worked out well, because training on the system was relatively easy and was done during periods of network operation. Because we knew it was coming, installation of the system proved to be relatively simple.

When terminal equipment was installed, rack space was left to hold the computer; switcher interface and machine control junctions were made on punch block immediately behind

the interface frame area. This design allowed for easy paralleling of machine controls to the computer. The switcher electronics were located in the rack immediately adjacent, to provide easy access to it. The switcher-computer interface was accomplished by a cable that simply paralleled the switcher push-buttons with the computer interface frame. No modifications to the switcher were necessary. In almost no time, we were off and running with a control room that was an example of the use of computers and microprocessors in on-air operation. It was a thrill the first time I was in there for a break as we were going into the evening newscast. The computer was running and logging the break, the transmitter log printer was dutifully spitting out readings, and the MC operator was recalling camera setup for studio-A lighting conditions out of the TK-47's memory.

Maintenance

Because our staff size is limited, during the remodeling effort we opted for some things that might save maintenance time as well. Simplicity of system design was the rule for most applications, resulting in limited patching and an easy-to-use labeling system. All cables are labeled with Thomas and Betts wraparound stickers that indicate the source and destination of the wiring. There was no need for a reference manual, as numerical coding was not used. All equipment power was run overhead, as much as possible, to help prevent spikes. And, probably most importantly, the master control equipment racks were sealed with panels and back

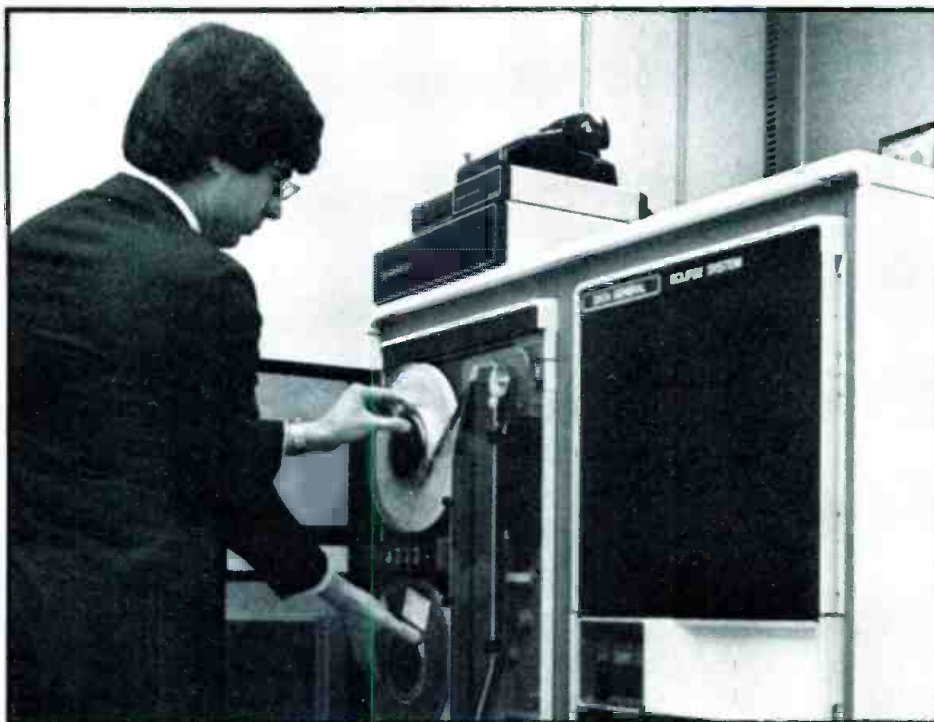

Bill Redpath, assistant financial manager, prepares a tape transfer for backup of accounting data.

Continued on page 26

A completely automated audio analyzer package and advanced portable scopes to simplify your job.

Now. Four new products from Tektronix deliver more capability and performance than ever before.

SG 5010 Programmable 160 kHz Oscillator/AA5001 Programmable Distortion Analyzer.

Two new members in our TM 5000 family of modular, IEEE-488 compatible instruments. The SG 5010 is the first oscillator to offer both GPIB programmability benefits and less than 0.001% (-100 dB) total harmonic distortion. Plus all the standard IMD test signals and high level, fully balanced, fully floating output. Together, the SG 5010 and AA 5001 make a completely automated audio analysis system with the highest performance available today. Fully automatic even when the oscillator and analyzer are separated, by yards or by miles.

2236 100 MHz Portable Oscilloscope. Measurements that had taken three or four instruments can now be done with one: the 2236 with integrated counter/timer/digital multimeter. It's a whole measurement system packed in a portable scope that's lightweight, versatile and easy

to use. Priced-right performance for tasks from circuit continuity testing to gated frequency, time and event counting. Standard features include TV field and TV line triggering.

2445 150 MHz Portable Oscilloscope. The new industry standard with more performance for the dollar than you've ever seen before. Four-channel capability. Auto level "hands-off" triggering. Standard Δ time and delay sweep. 1 ns/div sweep speed. Overdrive aberration of only 0.5%. Extensive CRT readout. Plus more. And state-of-the-art microprocessor design keeps the 2445 simple to operate. It's everything that a portable scope should be and the only one that is.

Contact your nearest Tektronix Field Office (listed in major city directories) for more information. Or call 1-800-547-1512 for descriptive literature. (In Oregon, 1-800-452-1877.)

Tektronix, Inc., P.O. Box 1700, Beaverton, OR 97075. In Europe: Tektronix Europe B.V., Postbox 827, 1180 AV Amstelveen, The Netherlands.





THIS IS WHERE STICKTION PROBLEMS BEGIN.

It takes a very tough tape to withstand edit after edit through today's VTR equipment and still deliver a crisp, clean playback image.

And tough is exactly what new Scotch® 480 one-inch video tape is.

A special coating formulation on Scotch 480

means you no longer have to worry about problems like sticktion.

In fact, during computer editing, 3M lab tests have shown 480 is capable of delivering over 1,000 edits from the same preroll point, with no significant reduction in playback quality.

“Scotch” is a registered trademark of 3M. © 3M, 1983.

Scotch®

480

**NEW
SCOTCH® 480
IS WHERE
THEY END.**

And in today's tough video production environment, that kind of durability can mean a lot.

Scotch 480 is further proof of why 3M is the leader in professional use video tape. And why we sell more one-inch tape for professional use than all other

manufacturers put together.

For a free brochure on new Scotch 480 call 1-800-328-1684 (1-800-792-1072 in Minnesota). And find out more about the tape that's as tough as today's editing equipment.

Magnetic Audio/Video Products Division/3M.

See us at NAB Booth No. 1002




**NEW
SCOTCH 480
1" VIDEO TAPE.
LASER TESTED FOR
CONSISTENCY.**

3M hears you...

3M

Circle (18) on Reply Card

April 1983 *Broadcast Engineering* 25

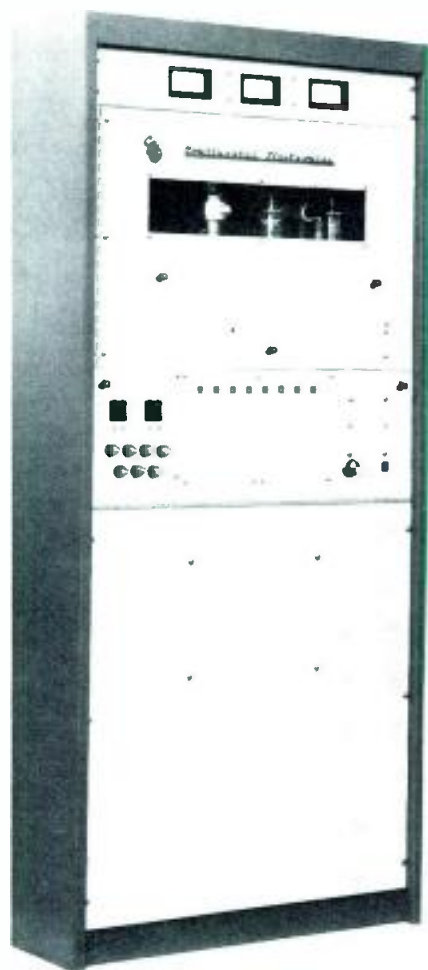

Continental's 1 kW AM Power Rock: a sound winner that's ready for AM stereo.

Tough market or not, the Power Rock is designed to give you the best signal around. Listen to the loud, clear signal, and you know you have a winner. The Power Rock is ready for AM Stereo and accepts sophisticated audio. Conservatively-rated components give you an extra margin of safety for steady and reliable on-air performance.

For information, call 214-381-7161
Continental Electronics Mfg. Co.
Box 270879 Dallas, TX 75227

Continental
Electronics

Send me 1 kW AM Power Rock brochure

Name

Station

Address

City

State Zip

Phone ()

© 1982 Continental Electronics Mfg. Co. 4966

Circle (19) on Reply Card

Continued from page 22

doors, and 55° air, filtered by a moving roll and an electrostatic collector, was pumped in. In the equipment area, the backs and tops of the racks were sealed, and the entire area was supplied with the same air feed. This provided for a walk-in access area for all terminal equipment, as well as ready access to the audio console. The entire terminal area can be accessed without opening individual doors, and can be neatly isolated by keeping the entry door closed.

We finished the major part of the remodeling effort just in time to confront another challenge. We were in need of a satellite receive system in order to receive news and programming feeds. Scientific-Atlanta had just introduced a micro-controlled receive system that allowed simple and quick changes of transponder number and antenna position. That was added to the complement of computerized tools already possessed by the MC operator. Two additional ENG microwave trucks were also needed, along with an additional receive system to meet programming and news objectives. We opted for M/A-COM MA 2-MX systems to provide simple and efficient use in the field. This selection helped ease the dilemma of manpower for ENG microwave units.

The plan was to make these units

easy to set up and functional so that their operation could be performed by the news photographer assigned to the truck. We did not have the manpower necessary to send an engineer along. This is obviously asking a lot of our photographers. It's usually hard enough just to get the story on tape, and now a live shot was added to the list of things to do. After some initial failures, we have worked out a system that allows us to do an average of 20 news remotes per week during the summer months when lighting conditions are most advantageous. This includes nightly weather remotes from Stan's Weather Van.

Adding to the excitement was that the hour-long local live show leading into the early news subsequently became a reality. Two adjacent 1-hour live shows complete with live action from our remotes and auxiliary feeds kept us on our toes, but we managed the transition without expanding our workforce. We are expecting new developments that will demand more from us in the coming months and, thanks to automation in our master control, we will be up to the task.

The computer transition

Also, during the course of this year, the computer that had been installed to handle traffic and master control has become more fully used. Presently, BIAS has supplied us with several additional applications packages, in-

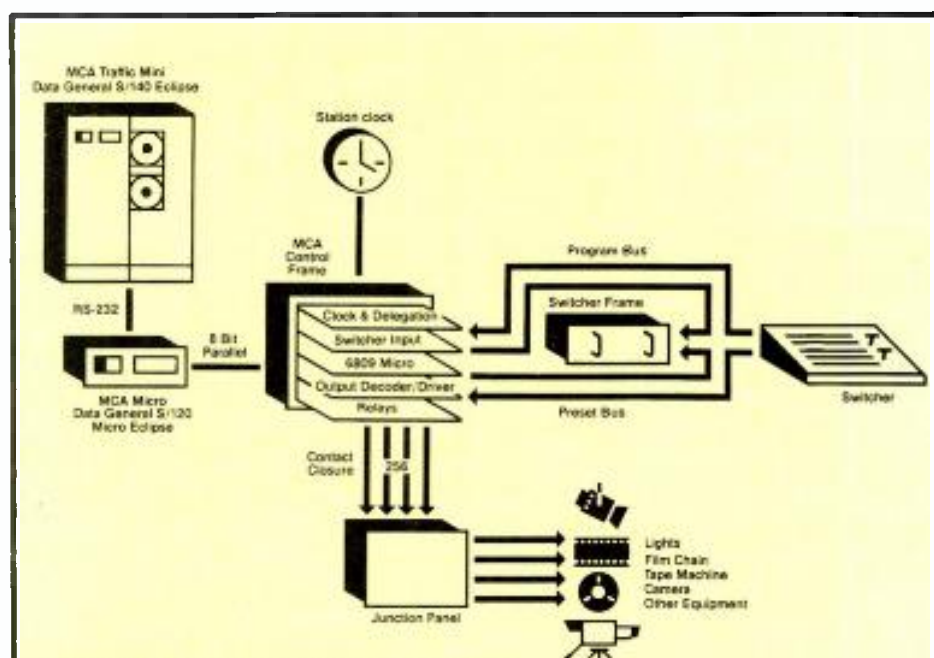


Figure 1. BIAS Master Control Automation.


The staff from Data Communications Corporation was on hand at the SMPTE '82/New York convention to describe the BIAS Master Control Automation (MCA) system (Figure 1). This product extends computerization to the TV

station's engineer for machine controls and all on-air switcher activity. After receiving the program log formatted with the events with machine assignments, the MCA performs all subsequent controls.

PROGRESS

...the new High Resolution Studio 12A

Videotek's commitment to progress has resulted in the most versatile RGB/NTSC 12" broadcast color monitor on the market today. The Studio 12A employs an advanced fine-pitch CRT for 43% better resolution; Set-up Controls are now secured in an easy-access Slide-out Drawer; and Switchable Comb Filter, Notch Filter, and Analog RGB Inputs have been added to an already-impressive list of standard features found on monitors costing twice as much: High Voltage Regulation, A-B Split Screen, Selective H-AFC, ACC Defeat, Preset Controls, Pulse Cross, Underscan, and more.

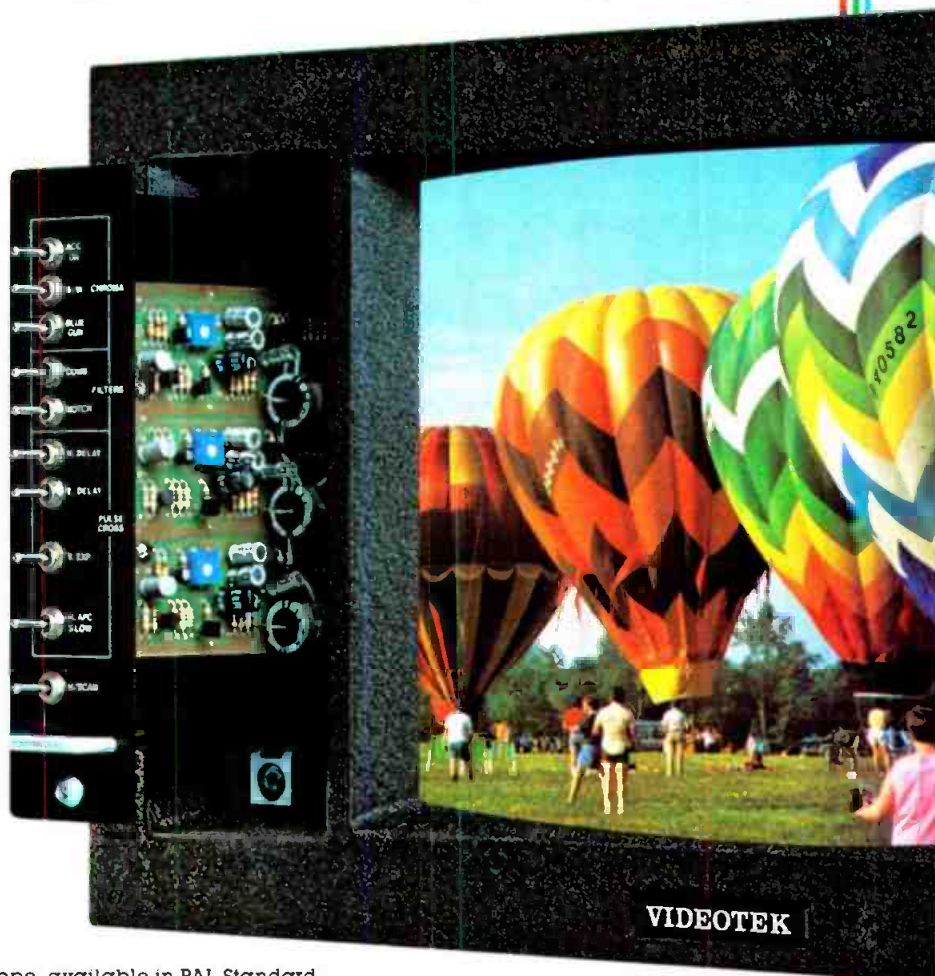

TSM-5A Waveform Monitor / VSM-5A Vectorscope available in PAL Standard

...the TSM-5A Waveform Monitor & VSM-5A Vectorscope

New developments in the TSM-5A include: 30% less power consumption for increased efficiency and reliability; Dynamic Focus for critical waveform analysis; and a refined CRT for improved geometry and sensitivity.

Now that's Progress...

BY · DESIGN

125 N. York Street, Pottstown, PA 19464, (215) 327-2292, TWX: 710-653-0125
9625 N. 21st Drive, Phoenix, AZ 85021, (602) 997-7523, TWX: 910-951-0621

Circle (20) on Reply Card



VIDEOTEK
INC.

cluding word processing, general ledger, accounts payable, feature film inventory and amortization and supercomp.....all on one system. By means of terminals distributed throughout the building, these additions allowed other departments to share in the increased productivity that engineering had already enjoyed. The programming department uses its terminal for feature film and as a means of input to the traffic system for program-related input. This eliminates some paperwork and decreases the workload in traffic.

We were concerned at that time that if we did not take advantage of the latest technology it might be difficult to catch up later because of the rapid changes taking place in the information age. In order to gain a better understanding of computers, which are becoming an integral part of our business, I purchased an Apple II personal computer. I have taken some liberties in extending automation on the computer at WISH to my home or any other remote location. The system's dial-up modem allows me to access its activities through my Apple II personal computer and a special communications software package. At any time, I can monitor on-air status or use the station's word processing package for reports or memos.

Because we are on-the-air 24 hours daily, transmitter maintenance requires switching from one side to the other of our parallel FH transmitters while we are on-the-air. Of course the name of the game is to do this at the most opportune time. Dial-up access to the on-air log from the transmitter site provides the needed information about when to switch with minimal disruption.

An example of the benefits of the marriage of my microcomputer with the station's host computer is illustrated by what happened recently. Once, at 5 a.m., the phone rang with the startling news that "the computer won't work." Instead of driving to work, I signed on with my Apple II and examined the problem. A wrong log date had been accessed, and this proved to be the culprit. A quick fix was all it took to remedy the situation. Still in my pajamas, I went back to bed.

When the phone prohibits me from getting any paperwork done, I can spend an afternoon at home with the Apple composing memos, etc., on the station computer. The secretary then calls them up on her terminal, corrects them and prints them out on her letter-quality printer.

Things to come

Past progress has been at a rapid pace, but, 1983 is off to an exciting start as well. Our tape room was in



At the SMPTE-'82/New York convention, Art Biggs (right), Corinthian Broadcasting, appeared before the press with Neil Vander Dussen and Sony's 1/2-inch Betacam video recorder/camera system. This system is one of the

innovations to be incorporated in the remodeling of WISH, one of Corinthian's six stations. An interview with Biggs concerning his selection of the Betacam appeared in the January 1983 issue of BE, pages 48-50.

need of a means to record the ever-increasing production schedule, as well as satellite-provided syndicated programming. The replacement of two old quads with three Sony BVH-2000s provided the remedy for the two-few-machine blues. Use of the auxiliary events system provided in the MCA allows us to control these machines for delay and production purposes automatically and independently from on-air operations. The command for record, for instance, is entered on the log at the appropriate time, and the computer rolls the selected machine.

The workload that our news photographers are under is also being addressed this year. The purchase of Sony Betacams dramatically reduces equipment weight while offering superb quality. The absence of old familiar cables to the VTR has not saddened anyone in maintenance or news. Although a standard has not been developed in this area, we believe that it is to our advantage, as well as the viewers' to use such a

dramatic improvement in the area of ENG.


Additional enhancements for the future include automatic control of the studio cameras by the MCA system to allow unattended setup and automatic scene recall for each show we produce. The addition of bar code readers for our two cart machines, as well as the possibility of wand readers for the reel-to-reel machines, have been discussed. Computer access to an electronic still-store would eliminate slide errors, and the possibility of newsroom automation is never too far away.

We are certainly not perfect, but the impact that new technology and automation have made at WISH has helped us offer the services necessary to not only survive, but also to advance in such a competitive environment.



Acknowledgement

The assistance of Jamie McMahan of Data Communications Corporation and Trish O'Leary of the Strayton Corporation in the preparation of this article and providing photos is recognized.

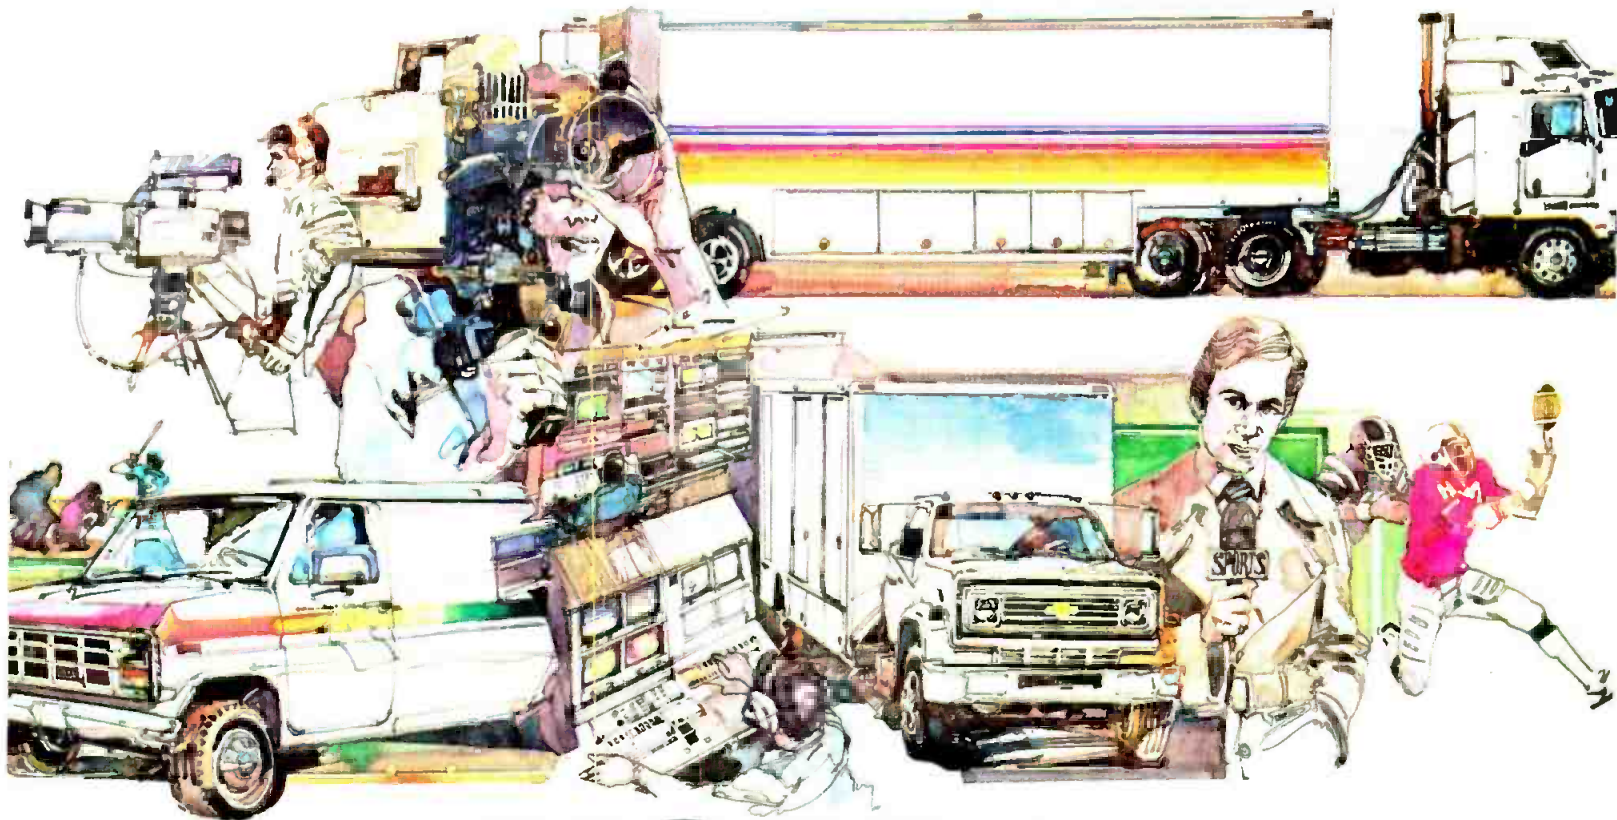


MOBILE TELEVISION UNITS



14' CUBE VAN

\$189,000

- Hitachi 3-FP 22 3 tube cameras with microprocessor for automatic set-up, 10:1 lens and all equipment for studio or ENG use
- 3 O'Connor Fluid Heads • Tripods, spreaders and dollies
- 3 Christie Reflex 20 batteries and 1 charger
- 16001-AN Grass Valley Production Switcher
- Character Generator System with Chyron VP-1 and Sony SMC 70 Microcomputer
- Sony ¾" VTRs 5850/5800
- HVS516/16L TBC • Tektronix Test Equipment
- Yamaha 12 Input Audio Board • Fully monitored — B&W and color
- Full audio and video patching
- On board power and air conditioning

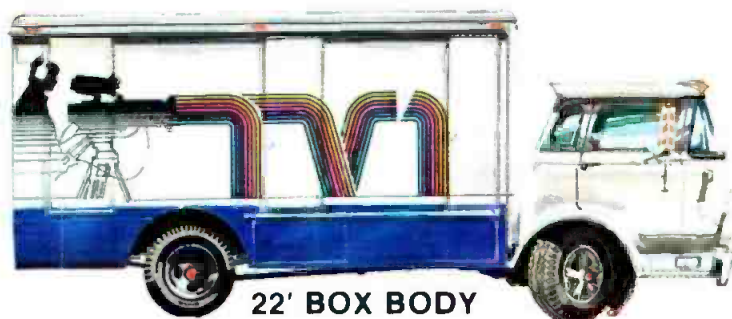

22' BOX BODY

\$312,600

- Hitachi 3-SK91 3 tube color cameras
- 10:1 lens. Plumbicons or Saticons and all equipment for studio or ENG use
- 3 O'Connor Fluid Heads • Tripods, spreaders and dollies
- 3 Christie Reflex 20 batteries with 1 charger
- 16001-AN Grass Valley Production Switcher
- Character Generator System with Chyron VP-1 and Sony SMC 70 Microcomputer
- Sony ¾" VTRs 5850/5800
- Quantel DFS 1750 B TBC/Synchronizer
- Tektronix Test Equipment
- Yamaha 16 Input Audio Board • Fully monitored — B&W and color
- Full audio and video patching
- On board power and air conditioning

DESIGNED TO ACCOMMODATE 1" HITACHI VTRs - TRIAX ADAPTORS ALSO AVAILABLE



LERRO

ELECTRICAL CORPORATION

3125 N. Broad Street, Philadelphia, Pa. 19132

For more information, call Bob McTamney at (215) 223-8200

MOBILE UNITS ENGINEERED AND BUILT TO YOUR REQUIREMENTS

www.americanradiohistory.com

Although the market for test equipment is rapidly expanding, not every piece of equipment is practical for every station.

By keeping actual needs and resources in mind, broadcast engineers can choose the best-suited equipment for their particular stations.

Test equipment: Know your needs

By Gary A. Breed, chief engineer, WCBU-FM/WTVP-TV, Peoria, IL

Choosing test equipment is getting to be as tough a job for the broadcast engineer as choosing studio equipment. With a growing variety of equipment, new models seem to be introduced almost daily, at every level of complexity as well as the entire range of the price spectrum. Making a decision on the purchase of test gear for your AM, FM or TV station can be made easier if approached from a systematic evaluation of your station's needs and resources.

The decision process

In the simplest terms, the process of decision-making occurs in three question-and-answer steps:

- Do you really need the equipment?
- Do you know how to make good use of it?
- Can you afford it?

These steps are fundamental, but certainly are not always easy to follow. Management, Programming, News and Sales all have their questions for Engineering when it comes to the quality of the product, whether it is

the on-air signal, or the ENG or production output. The pressure is on engineering to have the facts on the station's technical quality, as well as the ability to maintain the equipment in the most reliable condition. It is the engineer's job to watch over his department's contribution to the success of the station, which may mean saving money by doing without a helpful, but not essential, piece of test equipment. Alternatively, it also may mean spending a substantial chunk of money to purchase a piece of test equipment that makes it possible to improve the quality and competitive position of the station.

Before looking at specific examples of situations that might arise at AM, FM or TV stations, we should go over the three steps of decision-making in more detail. First, is the equipment really needed? Does your station require a specific test function to provide maintenance support, quality evaluation or enhanced reliability? Is the need a response to a technical problem or to input from any number of outside influences from within or outside of the station? Beware of an argument that begins, "If we had this

new gadget, we could..."; it's a sure sign that the *real need* may require some further examination. Balance the value of time savings, new capabilities and the current inventory of test equipment before deciding if a piece of new gear is needed.

Second, do you have the expertise available (talent and time) to make the equipment worthwhile to have on hand? I have seen situations in which the only engineer who knew how to properly use an advanced piece of equipment took on a new job, leaving behind an expensive unit that just gathered dust because the successor chose not to learn to use it, being quite satisfied with the other equipment available. So, remember that it is not always the equipment that makes the repair or evaluation possible, but the ability of the user to get the most (or least) out of that piece of equipment.

And third, can your station afford a new test unit that you want? Sometimes the answer is that the station cannot afford to be without it! More often, when the proposed purchase involves something other than the most basic test gear, there needs to be an evaluation of the cost factor of



VISIT NEC AT NAB. WHERE A LITTLE SLEIGHT-OF-HAND MAKES MORE VIDEO MAGIC THAN EVER BEFORE.

Take the controls of the new NEC E-FLEX Perspective Rotational Accessory. You can add it to your E-FLEX DVE® System to get pictures that compress, enlarge, tumble, spin and split. Images that rotate into perspective. Even pictures that roll or swirl like a whirlpool. Virtually any picture manipulation you can imagine, all with absolute fidelity...and all for a price that's more than magic—it's

a miracle. Plus something no other system offers at any price—future add-on flexibility.

See all the new NEC Imagination Machines, including the E-FLEX Perspective Rotational Accessory; portable 7GHz Short Range Microwave Link; and 3 Chip CCD Camera, at the NEC Imagination Theatre, Booth 1415, NAB, Las Vegas, April 10-13.

NEC

IMAGINE WHAT WE'LL DO NEXT

NEC America, Inc., Broadcast Equipment Division, 130 Martin Lane, Elk Grove Village, IL 60007 312/640-3792

VISIT BOOTH 1415 ■ FS-16 FRAME SYNCHRONIZER ■ DV-10 DIGITAL MULTIPLEX ■ TVL 807 ■ MNC-1 CCD CAMERA ■
MNC-10 CCD CAMERA ■ FBN 7000 SERIES FM TRANSMITTERS ■ E-FLEX OFFLINE EDITING SYSTEM ■ HPA-4536B FM EXCITER

Circle (22) on Reply Card

test equipment. If equipment is needed for a specific job that is urgently in need of attention, but that is not particularly common, it may pay to rent the necessary equipment. On the other hand, it might be advisable to call in a factory service technician or a consultant to do a job, rather than to purchase equipment that might not be used again for a long time.

The hard decisions, though, are for optional equipment, not absolutely necessary for the survival of the station, but having significant value to the quality, reliability or efficiency of the station. This type of purchase must eventually be paid back through better use of available manpower, less downtime or an improved competitive position. All equipment purchases, whether test equipment or otherwise, must be treated as investments by a station; as such, it must provide a payback, whether or not that payback can really be measured in terms of dollars. Engineering and management need to have serious and honest communications to determine the affordability of a new piece of test equipment.

Some examples

Let us apply the principles outlined previously to the situation of AM, FM or TV stations that are contemplating the purchase of some of the interesting new pieces of equipment available recently on the market.

AM stations. Let's suppose that the chief engineer at an AM station wants to get a common point in-line impedance bridge. *Is it needed?* If he has a simple 2-tower array, it is probable that such a unit is not needed. Only an array with a history of instability would need such an impedance bridge. I would rather see that the instability is remedied; but, in a large array, that may not be possible.

Is the staff capable of using it? In this case, the unit is pretty easy to use, but the temptation could be to do more than adjust the common point tuning! Would this piece of equipment encourage the person of marginal competence with directional arrays to tamper with an array that requires no adjustment?

Finally, *is the value worth the price? Will an FCC citation be avoided? Will it help track down trends in a troublesome array that might allow it to be fixed once and for all? Does the profitability of the station allow its purchase?*

FM stations. Another chief engineer wants to get a field intensity

meter to answer questions he has been plagued with from the sales staff regarding the signal strength of the station throughout its coverage area. Assuming that the problem is judged to need a solution, the equipment is needed. But, *does the engineer have time to go out and do numerous field measurements? Can the person sent out to do the measurements be trusted to use the meter correctly?*

What about cost? Maybe renting the meter would be a better choice. If the station is part of a group, purchase and subsequent sharing of a unit might be wise. In the case outlined here, a serious consideration is calling in an outside resource to run the measurements. The price could be quite a bit less than a new meter, and the need for the measurements could be better met by the credibility of an outside expert.

TV stations. Two pieces of equipment that might be considered by engineering managers today are a sophisticated, microprocessor-based remote control and monitoring system and automatic video test equipment. *What are the needs? Perhaps the engineering staff has been trimmed or the facility expanded, and more work needs to be done by fewer engineers. Maybe an older transmitter needs closer watching than can be done by someone with other duties besides manning the remote control point. Has there been trouble with production material that has been shipped out-of-house that would have been caught by that test set? In the effort to increase the profits of the production facility, is the enhanced technical capability a good sales tool?*

Making good use of sophisticated equipment often takes more time than anticipated. *Is your station ready to send someone to school, if necessary, to properly operate and maintain that automatic video test package? Remember, these new gadgets also become equipment added to your maintenance and repair responsibility! Can that aspect be handled? Is the initial reason for getting the equipment circumvented by the attention that the equipment requires once it is placed in operation?*

Costs have to be evaluated in terms of eventual payback. Lost business or transmitter downtime is pretty good justification, if they are improved by the new gear. It is also quite common for stations with excellent profitability to have the policy that they will stay one step ahead of the competition by providing the best facilities to all

departments, including engineering. The engineer who gets most of the things he wants needs to be especially careful not to abuse the trust he has been given to select equipment wisely.

Your "wish list"

The following are some of the more important pieces of equipment that might require careful consideration before they are purchased for use at your station.

AM stations:

- common point in-line bridge
- impedance bridge and oscillator/receiver

FM stations:

- field intensity meter
- wattmeter and dummy load
- VHF impedance measuring equipment

TV stations:

- microprocessor-based remote control and status monitoring system
- video noise meter
- automatic video test system
- VHF or UHF impedance measuring equipment
- field intensity meter
- logic analyzer
- digital storage oscilloscope


All stations:

- spectrum analyzer—RF or audio
- multifunction audio analyzer
- microwave power meter
- time-domain reflectometer
- small computer or large programmable calculator
- portable equipment to replace or complement existing bench equipment
- precision sound level meter
- calibration standards

These are not complete lists, just some of the test equipment that may not be essential to a particular station, but certainly could be considered by many stations as additions to their tools of the trade.

Many of the items on the previous list would make life a lot easier on the engineering staff, if they had them available when they needed them.

It is the job of the chief engineer to carefully decide on the needs, the usage and the financial impact that the purchase of one of these pieces of equipment would have at his station. Making the decision is only partly technical. It is mainly a decision made by the chief engineer as part of the management team that has the overall goal of making his station as successful as possible.



There's only one reason to call Calvert first.

You'll get exactly what you want at
the lowest price in America.

TRANSMITTING TUBES

3CX1000A7 ... 500.00	4CX1500A ... 630.00	807 ... 5.50	ML7007A ... 3385.00
3CX1500A7 ... 460.00	4CX1500B ... 460.00	810 ... 68.00	7527 ... 105.00
3CX2500A3 ... 426.00	4CX3000A ... 862.00	811A ... 11.00	7527A ... 159.00
3CX2500F3 ... 415.00	4CX5000A ... 1018.00	813 ... 40.00	8008 ... 22.00
3CX3000A1 ... 420.00	4CX5000J ... 1550.00	828 ... 80.00	8122 ... 110.00
3CX3000A7 ... 540.00	4CX10000D ... 1050.00	829B ... 16.00	8773 ... 6413.00
3CX3000F1 ... 495.00	4CX15000A ... 1480.00	833A ... 80.00	8791 ... 460.00
3CX3000F7 ... 638.00	4CX20000A ... 1455.00	866A ... 6.80	879TV1 ... 460.00
3CX10000A3 ... 1180.00	4CX35000C ... 5935.00	872A ... 19.50	8792 ... 822.00
3CX10000A7 ... 1420.00	4CX40000G ... 6722.00	889RA ... 1775.00	8792V1 ... 793.00
3CX10000U7 ... 2175.00	4X150A ... 47.00	892R ... 2200.00	880E ... 3145.00
3CX15C00A3 ... 1350.00	4-65A ... 61.00	4055V1 ... 105.00	8807 ... 2954.00
3CX15C00A7 ... 1470.00	4-125A ... 69.00	5671 ... 5685.00	8873 ... 190.00
3CX20000A7 ... 1855.00	4-250A ... 86.00	5762 ... 675.00	8874 ... 185.00
3-400Z ... 82.00	4-400A ... 86.00	5867A ... 143.00	8875 ... 90.00
3-500Z ... 88.00	4-400AX ... 159.00	5894A ... 55.00	8890 ... 3053.00
3-1C00Z ... 367.00	4-400B ... 105.00	6076 ... 650.00	8891 ... 3456.00
4CX25CB ... 60.00	4-400C ... 85.00	6076A ... 625.00	8916 ... 3570.00
4CX25CBC ... 68.00	4-500A ... 212.00	6146A ... 7.00	8976 ... 3064.00
4CX25CK ... 110.00	4-1000A ... 411.00	6146B ... 7.25	8977 ... 2776.00
4CX250R ... 115.00	5CX1500A ... 655.00	6155 ... 70.00	8984 ... 7082.00
4CX300A ... 175.00	5CX3000A ... 1075.00	6156 ... 70.00	8985 ... 1790.00
4CX300Y ... 214.00	5-500A ... 250.00	6166A(7007) ... 2840.00	8986 ... 1600.00
4CX350A ... 105.00	9C25 ... 10,285.00	6181 ... 4396.00	8988 ... 3200.00
4CX350F ... 110.00	12AX7 ECC83 ... 1.50	6550A ... 6.25	8990 ... 1455.00
4CX 000A ... 395.00	575A ... 27.00	6696A ... 2790.00	9007 ... 4250.00
4CX 000K ... 480.00	805 ... 50.00	6697A replace with 8773	9011 ... 1755.00

RCA CAMERA TUBES

PART NO.	PRICE	PART NO.	PRICE	PART NO.	PRICE	PART NO.	PRICE
BC486 series	2495.00	BC4809	715.00	EC4993R	2460.00	BC7735	245.00
BC4890 series	1840.00	BC4809B	715.00	EC4994 series	2460.00	BC8134	850.00
BC4891 series	2160.00	BC4908 series	1850.00	5820A-L	3058.00	BC8134B	850.00
BC4532U	1235.00	BC4909	2140.00	7295C	2830.00	8480	1315.00
BC4592 series	2225.00	BC4992 series	2225.00	7389C	2850.00	BC84E0	2015.00
BC4593R	2400.00					BC85C7	295.00
BC4594 series	2400.00					BC8541	395.00

NEW CUSTOMERS—we accept telephone orders. Inquire about our convenient Net 30 terms.
Prices and items subject to change or withdrawal without prior notice.

TOLL FREE 800-526-6362
EAST COAST (Except New Jersey)

7 DAYS—24 HOUR
EMERGENCY PHONE SERVICE
Circle (23) on Reply Card

TOLL FREE 800-421-7549
WEST COAST (Except California)

Test Your Knowledge
of Ceramic Power Tube
Technology with the



- Q.** How do you minimize spontaneous arcing in power tubes?
- A.** Bake out all grid impurities under the highest possible temperature. Design grid and cathode support structures that are inherently arc-free.
- Q.** How do you achieve extremely high bake-out temperatures during processing without damaging the tube seals?
- A.** Develop a special metalizing process which will enable you to build the world's best high temperature metal-ceramic seals.
- Q.** How do you minimize grid damage if an internal arc should occur?
- A.** Make your grids out of Molybdenum or Tungsten. These refractory metals are more difficult to manufacture and more expensive than using copper alloys, but they have better ability to recover when an arc occurs.
- Q.** How do you consistently manufacture every tube with optimum performance?
- A.** Your assembly jigs must have the capability to allow critical alignment of the cathode and grid on each tube. You must design and build rugged cathode and grid support structures. Do not re-use parts.
- Q.** How do you insure getting a tube with all these favorable construction features?
- A.** Always specify new EIMAC tubes before you buy.

CALVERT ELECTRONICS, INC.

ONE BRANCA ROAD, EAST RUTHERFORD, NJ 07073

800-526-6362 • 201-460-8800 • TWX 710-989-0116/ERFD • TELEX 4990274

West Coast: 1355 Redondo Avenue, Suite 6, Long Beach, CA 90804 • 213-498-3504

England: Imperial House, Victoria Rd., Chelmsford, Essex CM1 1NY • Telephone: 0245 358585 • Telex: 995849

New test equipment at NAB-'83

By Carl Bentz, technical editor; Bill Rhodes, editorial director; and Rhonda L. Wickham, managing editor

In late January, manufacturers who were scheduled to be exhibitors at NAB-'83/Las Vegas were invited to submit materials on new test equipment to be introduced at the show. Entries for this listing were accepted until Feb. 23.

Being busy preparing for the show, not all exhibitors of test equipment took time to respond to our questionnaire. However, for those who did respond, the following excerpts give an idea of what NAB-'83 has to offer.

A Reader Service Number is included so that you may request further details on each product. For other new equipment at the show, watch for our NAB-'83 show replay in June.




Amber Electro Design 3501

AMBER ELECTRO DESIGN

Model 3501 audio distortion/noise measuring system. Harmonic measurements are possible down to -102dB, 0.0008%, with noise capabilities to less than -120dBm. Internal generator produces +30dBm signals into a 600Ω load over a range of 10Hz to 100kHz. Optional intermodulation distortion and rechargeable battery pack are available for this portable unit.

Circle (300) on Reply Card

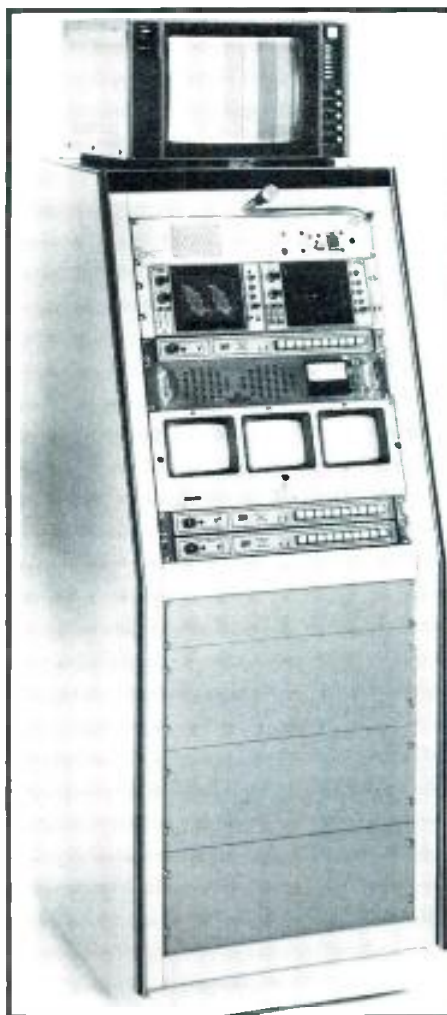

Broadcast Systems VTM-1000

BROADCAST SYSTEMS

VTM-1000 videotape monitoring/input switching support system. Monitor bridge functions and A/V multiple input selection for two videotape machines work for all popular 1-inch VTRs.

Circle (302) on Reply Card




Broadcast Systems VTC-1

VTC-1 studio/video test system. A mobile video test system for broadcast studio maintenance and monitoring includes a color monitor, waveform and vector monitoring, a video noise meter, test signal generator and videoscope.

Circle (303) on Reply Card

BJ-240A and BJ-200 prewired audio jack panel systems. The two systems include 24 and 26 normal-

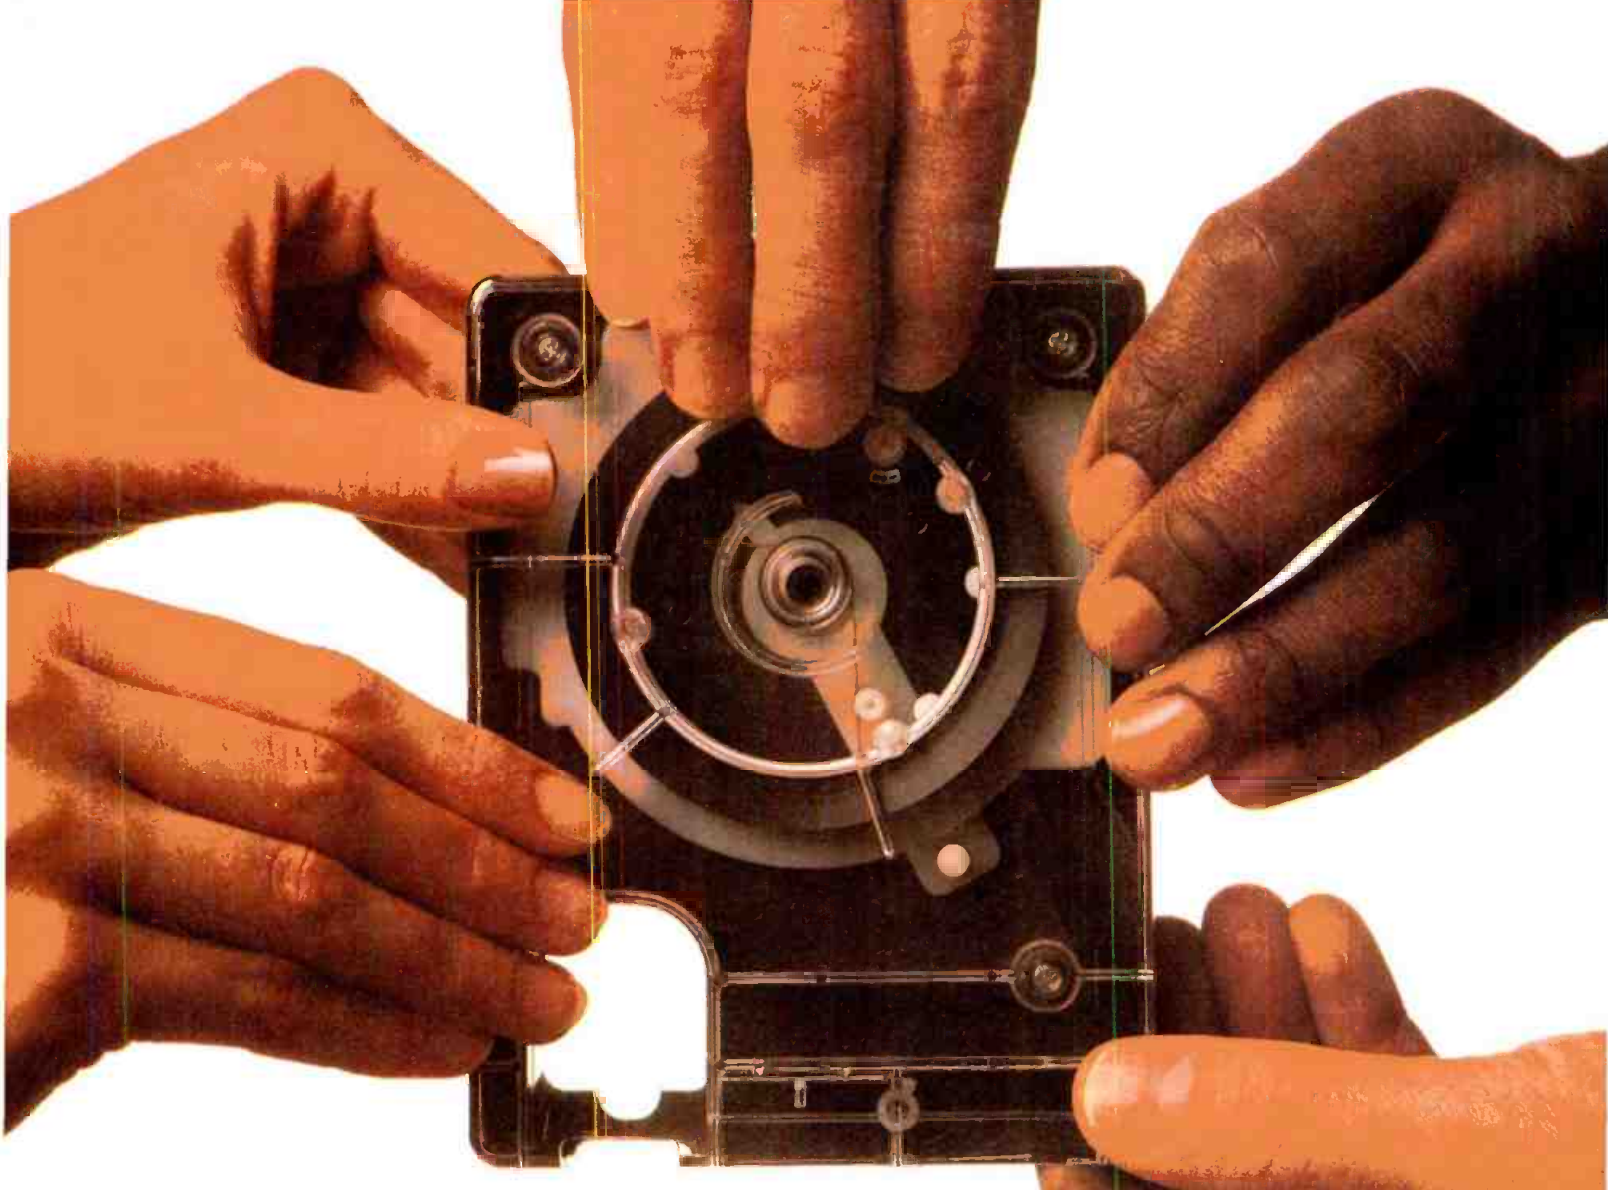

Get your hands on a free Scotchcart® and your ears will notice the difference.

Our new Scotchcart® has already scored points with a growing number of broadcasters. But there are still a few of you who haven't heard what you're missing.

So to make sure you hear the difference in the new Scotchcart, we're offering you a free one. We know that once you listen for yourself, you'll agree that Scotchcart sounds better than any other cartridge. And it actually sounds as good as reel-to-reel.

It sounds that good because of the way it's designed. There's a new tension system that eliminates pressure pads and gives you more uniform performance throughout the life of the cart. And there are no rotating components, so there's less flutter and phase jitter.

The tape itself is better, too. It features our 226 oxide, one of our best professional mastering formulations. Right away, that means more head room and stronger highs for a greater number of passes.

So if you still think a cart can't sound that good, give us one chance to change your mind. Let us send you a Scotchcart at our expense. Just send us the coupon. Or see us at Booth 203 of the NAB Show. Offer expires April 30, 1983.

Free Scotchcart®

Magnetic AV Products Division
Bldg. 223-5S, 3M Center
St. Paul, MN 55144

Name _____

Address _____

City _____

State _____ Zip _____

Company/Station _____

Title _____

Offer expires April 30, 1983.

BE

®Scotch® is a registered trademark of 3M

3M hears you.

Circle (24) on Reply Card

3M

MAKE YOUR MOBILE 1 NUMBER ONE IN MOBILITY.



HANNAY REELS GET YOU IN AND OUT FAST.

Save precious seconds in set-up, tear-down time. Just pick up the durable, lightweight Hannay Portable Cable Reel, and go. When the story's in the can, direct rewind makes pick-up easy. And the Portable Cable Reel is compact to take up minimal storage space.

It's the newest addition to our complete line of cable reels, for an even bigger selection of unlimited sizes, shapes and capacities to choose from.

When it comes to getting in and out fast, no other reel is "remotely" as efficient as a Hannay Reel!



Send Today
For A Free Catalog.



CLIFFORD B. HANNAY & SON, INC. • WESTERLO, NEW YORK 12193
TELEPHONE: (518) 797-3791

Circle (25) on Reply Card

through audio circuits, respectively. The 240A requires 3½ inches of vertical rack space, the 200 only 1¾ inches.

Circle (304) on Reply Card

TM-100 transmitter input monitoring system. A prewired system includes the remote control system, VIR corrector, A/V jack panels, A/V test switching, waveform and picture monitoring, a precision demodulator, and monitoring for modulation and frequency. Custom designs are available.

Circle (305) on Reply Card

BROADCAST VIDEO SYSTEMS

Introduced at NAB-'83 were the Electronic Visuals Ltd. EV4040A waveform monitor and EV4020A vector monitor, distributed in the United States and Canada by BVS. Details of the -A models of these test monitors were not available at press time.

Circle (301) on Reply Card



EEV P4225

EEV

P4225 TV camera tube test system. This equipment allows a check of camera tube quality on delivery and during the operational life of the tube. Interchangeable head assemblies accommodate 30mm, 1- and ¾-inch tube sizes with front or rear access to focus/deflection equipment.

Circle (306) on Reply Card



Eastman Kodak color monitor analyzer

EASTMAN KODAK

Color monitor analyzer. The Eastman Kodak color monitor analyzer combines a signal generator and photometer. Telecine operators use a probe to read relative brightness between white and gray patches generated by the unit. The monitor is then adjusted for optimum conditions.

Circle (307) on Reply Card

Telecine Analysis Film (TAF). Adjustment of subcarrier balance and gain centering on the telecine is aided with the TAF. Negative, print or inter-positive materials in 16mm or 35mm formats contain an 8-color bar chart and a 6-step gray scale, surrounded by a neutral density area.

Circle (308) on Reply Card

EVENTIDE CLOCKWORKS

APX252 real time audio analyzer. For use with Apple II and Apple II Plus computers, this system provides a display with 48-element resolution on a color video monitor. Levels from -20dBV to +14dBV into the 10kΩ unbalanced input are applied to 31 2-pole filters from 20Hz to 20kHz on ISO centers.

Circle (309) on Reply Card

Specsystem 2.0 software. An optional accessory to the APX252 analyzer, the Specsystem software allows measurements of RT60 reverb time and decay curve plots. Three-dimensional plots of frequency vs. amplitude vs. time are drawn on an Apple HIRIS screen.

Circle (310) on Reply Card




Fidelipac 65-390

FIDELIPAC

Model 65-390 wow-and-flutter meter. Measurement of wow and flutter from any recording or reproducing system may be taken with the 65-390 meter. The internal reference oscillator (3.15kHz) and weighting filter sense speed instabilities with calibration standard signal sources designed for wow-and-flutter testing.

Circle (311) on Reply Card

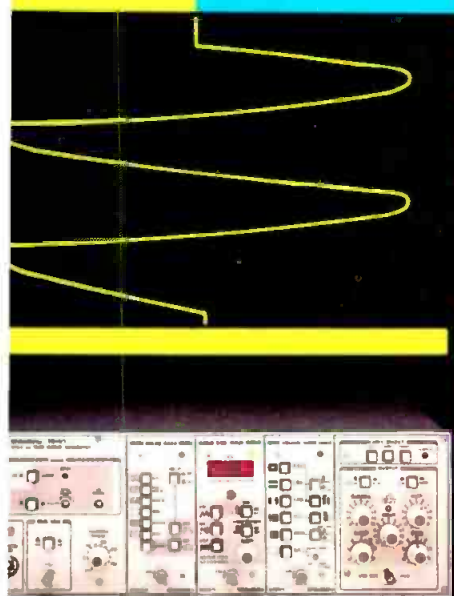


TG-7 TEST SIGNAL GENERATOR

The TG-7 TEST SIGNAL GENERATOR is a unique system which contains a total of 48 different signals and functions and may also be completely automated with the optional IEEE-488 interface bus. Because of its modular design, you may select the perfect configuration for your facility and then expand at any time. Its special features are...

- A main frame with sync generator, color lock, gen lock with the VBS or sync with color burst.
- Chroma phase may be varied 360°
- Signals may be remote controlled by using the optional IEEE-488 interface bus.
- Seven modules are available: LINEARITY, SIN², COLOR BAR (10 signals), SINE WAVE, SQUARE WAVE, NOISE TEST, and a VITS Generator.
- Complete drives system (VBS), Sync, Black Burst, Sub Carrier, Burst Flag, and Blanking - Stability of $\pm 5\text{Hz}$
- Output amplifier with R-Y, B-Y modulator is built into the main frame and allows variations of the Burst, Luminance, Chroma, Sync, and pedestal level, available in NTSC and PAL.

226 COLOR BAR GENERATOR

The 226 is a COLOR BAR GENERATOR designed for use as a testing and adjustment device for ENG applications. The unit contains split field color bars and a programmable prom to generate station identification as well as a 1 KHz oscillator and a 600 ohm output signal at 600 ohms. The 226 may be operated on both AC or DC power and it is available in NTSC only.




CB53A1 COLOR BAR GENERATOR CHARACTER GENERATOR

The CB5 3A1 combines a COLOR BAR GENERATOR and CHARACTER GENERATOR in one versatile instrument you can take right into the field for remotes and on-location shooting. It generates SMPTE and Y/REF color bars, plus red bar, black burst, multiburst, cross-hatch and dot signals. Standard NTSC sync signals and the gen-lock function are built in. You can insert character information into each signal using a special keyboard with Random Access Memory that retains the signals even if your power is lost. The CB53A1 gives you a total of 31 character spaces on 2 lines.

- Black burst output.
- Selectable black or white background, four characters.
- External or internal switching for video and audio signals.
- Output range of +8 dBm $\sim$ -50 dBm for 400 Hz and 1 kHz audio signals.
- RF signal on USA channels 3,4 and 6.
- AC-DC operation.
- Available in NTSC.

216 COLOR BAR GENERATOR

The 216 COLOR BAR GENERATOR is adaptable to all video service applications. It contains 2 color bar signals, Red, Green, Blue, & White Rasters, and 4 cross hatch & dot patterns. With this versatile instrument, you may obtain a video output as well as use the unit as a TV channel modulator with an internal or external video signal (2 VHF, 1 UHF). For audio, a one KHz signal is generated internally and modulated to form an RF signal. The 216 is available in NTSC, PAL B, M, N, and SECAM.



ASACA/SHIBASOKU CORP. OF AMERICA

Write for brochures or call 800 423-6347

12509 Beatrice Street Los Angeles, CA 90066 (213) 827-7144 (800) 423-6347 Telex 182089

Circle (26) on Reply Card

www.americanradiohistory.com

GRASS VALLEY GROUP

Model 3259 phase meter.

Establishing and maintaining a constant subcarrier/horizontal phase relationship(SC/H) is made simpler with the GVG 3258 phase meter for NTSC TV systems. Recently added to the line is the 3259 meter, designed for use in PAL systems. These two units may be used in place of a waveform monitor or oscilloscope and vectorscope for such phasing problems. Front panel switches allow selection of a reference (A or B video or external reference); A or B input for measurement; and SC/H or time base error modes. Seven-segment indicators display numerical values as well as alpha characters to prompt the operator in correct readings.

Circle (312) on Reply Card




HM Electronics PAL system

HM ELECTRONICS

Precision Audio Link systems (PAL). The PAL equipment is a wireless system capable of processing and transmitting audio information for remote acoustic measurements. The system handles an audio bandwidth of 20Hz-20kHz $\pm$ 2dB and uses an FM carrier in the 150-174MHz range.

Circle (313) on Reply Card

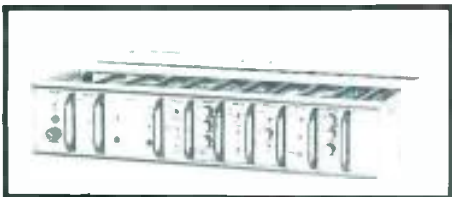

Lenco 300-312T

LENCO ELECTRONICS DIV.

Model 300-312T video test set. The 3½-inch rack panel includes power

supply, RS-170A sync generator, color bars, bar dot, multiburst, sweep, staircase, pulse bar, window, flat field and blackburst signals. Sync generator outputs and dual outputs from each test are available.

Circle (314) on Reply Card



Lenco PVS-430

PVS-430 videoscope. The videoscope gives a graphic representation of the SC/H phase relationship between a video signal and a reference signal. Output from the unit is displayed on a standard video monitor. The equipment allows quick certification of a studio SC/H phasing condition.


Circle (315) on Reply Card



Lenco VNM-428B

VNM-428 video noise meter. Noise may be measured at any point from peak sync tip to peak white video. The noise value is given on a front panel LED display.

Circle (316) on Reply Card

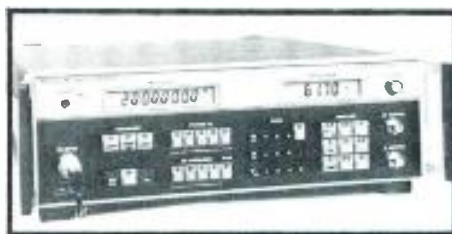

Marconi 2305 modulation meter

MARCONI INSTRUMENTS

Model 2305 modulation meter. FM and PM deviation or AM depth of modulation may be measured on carriers from 0.5MHz-2GHz. Automatic or manual tuning is possible. The GPIB-programmable equipment also provides frequency response and power measurements, as well as optional distortion and noise figures.

Circle (317) on Reply Card



Minolta Color Analyzer II

MINOLTA CORPORATION METER DIV.

Color analyzer. Four white standard/reference memory channels and four CRT matrix characteristic memory channels in the Minolta TV-Color Analyzer II make the unit adaptable to different monitors and different studios' operations. Primary analyzer and chroma modes are available.

Circle (318) on Reply Card



J. Osawa VS-1000N

J. OSAWA & COMPANY LTD.

Model VS-1000N sync/test signal generator. The VS-1000N includes four standard signal sources: sync generator, color bars, linearity and convergence. Multiburst and sweep or pulse and bar are factory-installed options. Capable of RS-170A, the unit will gen-lock with 10Hz or optional 1Hz accuracy of the subcarrier.

Circle (319) on Reply Card

SG-1000N dual sync generator. Two independent generators are included in the SG-1000N, using 1Hz accuracy of subcarrier as the standard. Meeting RS-170A, the dual configuration allows switch-over from one unit to the other in case of failure (auto switching is optional.) Field reference and blackburst are standard outputs.

Circle (320) on Reply Card

PHILIPS TEST & MEASURING INSTRUMENTS

PM5631 programmable color pat-
Continued on page 42

Studer Re-States the Art



With the new A810, Studer makes a quantum leap forward in audio recorder technology. Quite simply, it re-states the art of analog audio recording.

By combining traditional Swiss craftsmanship with the latest microprocessor control systems, Studer has engineered an audio recorder with unprecedented capabilities. All transport functions are totally microprocessor controlled, and all four tape speeds (3 75 to 30 ips) are front-panel selectable. The digital readout gives real time indication (+ or - in hrs. min. and sec) at all speeds, including vari-speed. A zero locate and one autolocate position are always at hand.

That's only the beginning. The A810 also provides three "soft keys" which may be user programmed for a variety of operating features. It's your choice. Three more locate positions: Start locate, Pause, Fader start, Tape dump, Remote ready, Time code enable. You can program your A810 for one specialized application, then re-program it later for another use.

There's more. Electronic alignment of audio parameters (bias, level, EQ) is accomplished via digital pad networks. (Trimpots have been eliminated.) After programming alignments into the A810's memory, you simply push a button to re-align when switching tape formulations.

The A810 also introduces a new generation of audio electronics, with your choice of either transformerless or transformer-balanced in/out cards. Both offer advanced phase compensation circuits for unprecedented phase linearity. The new transport control servo system responds quickly, runs cool, and offers four spooling speeds.

Everything so far is standard. As an option, the A810 offers time-coincident SMPTE code on a center track between stereo audio channels. Separate time code heads ensure audio/code crosstalk rejection of better than 90 dB, while an internal digital delay automatically compensates for the time offset at all speeds. Code and audio always come out together, just like on your 4-track. Except you only pay for 1/2" tape.

If you'd like computer control of all these functions, simply order the optional serial interface. It's compatible with RS232, RS422, and RS422-modified busses.

More features, standard and optional, are available. We suggest you contact your Studer representative for details. Granted, we've packed a lot into one small package, but ultimately you'll find that the Studer A810 is the most versatile, most practical, most *useable* audio recorder you can buy.

The Swiss wouldn't have it any other way.



STUDER REVOX
PRELUDING THE FUTURE

Studer Revox America, Inc. • 1425 Elm Hill Pike, Nashville, TN 37210 (615) 254-5651
Offices: Los Angeles (213) 780-4234 • New York (212) 255-4462 • Dallas (214) 760-8647 • Canada: Studer Revox Canada, Ltd.
Circle (27) on Reply Card


Why ABC Sports selected Panasonic

ABC Sports demands uncompromising picture quality. Mt. Everest demands absolute portability. Panasonic Recam delivers both.

That's why Recam was the natural choice for ABC's "American Sportsman" to capture all the beauty

and danger of the U.S. expedition scaling Mt. Everest this Spring. John Wilcox, executive producer of "American Sportsman", said it best: "Recam's picture quality is as good as one inch... the 3-tube Plumbicon® camera and M-Format recorder give us the opportunity to shoot broadcast quality pictures in any location."

And perhaps no location is as demanding as Mt. Everest. As the expedition ascends the mountain, ABC will capture it all on Panasonic half-inch video equipment. Recam

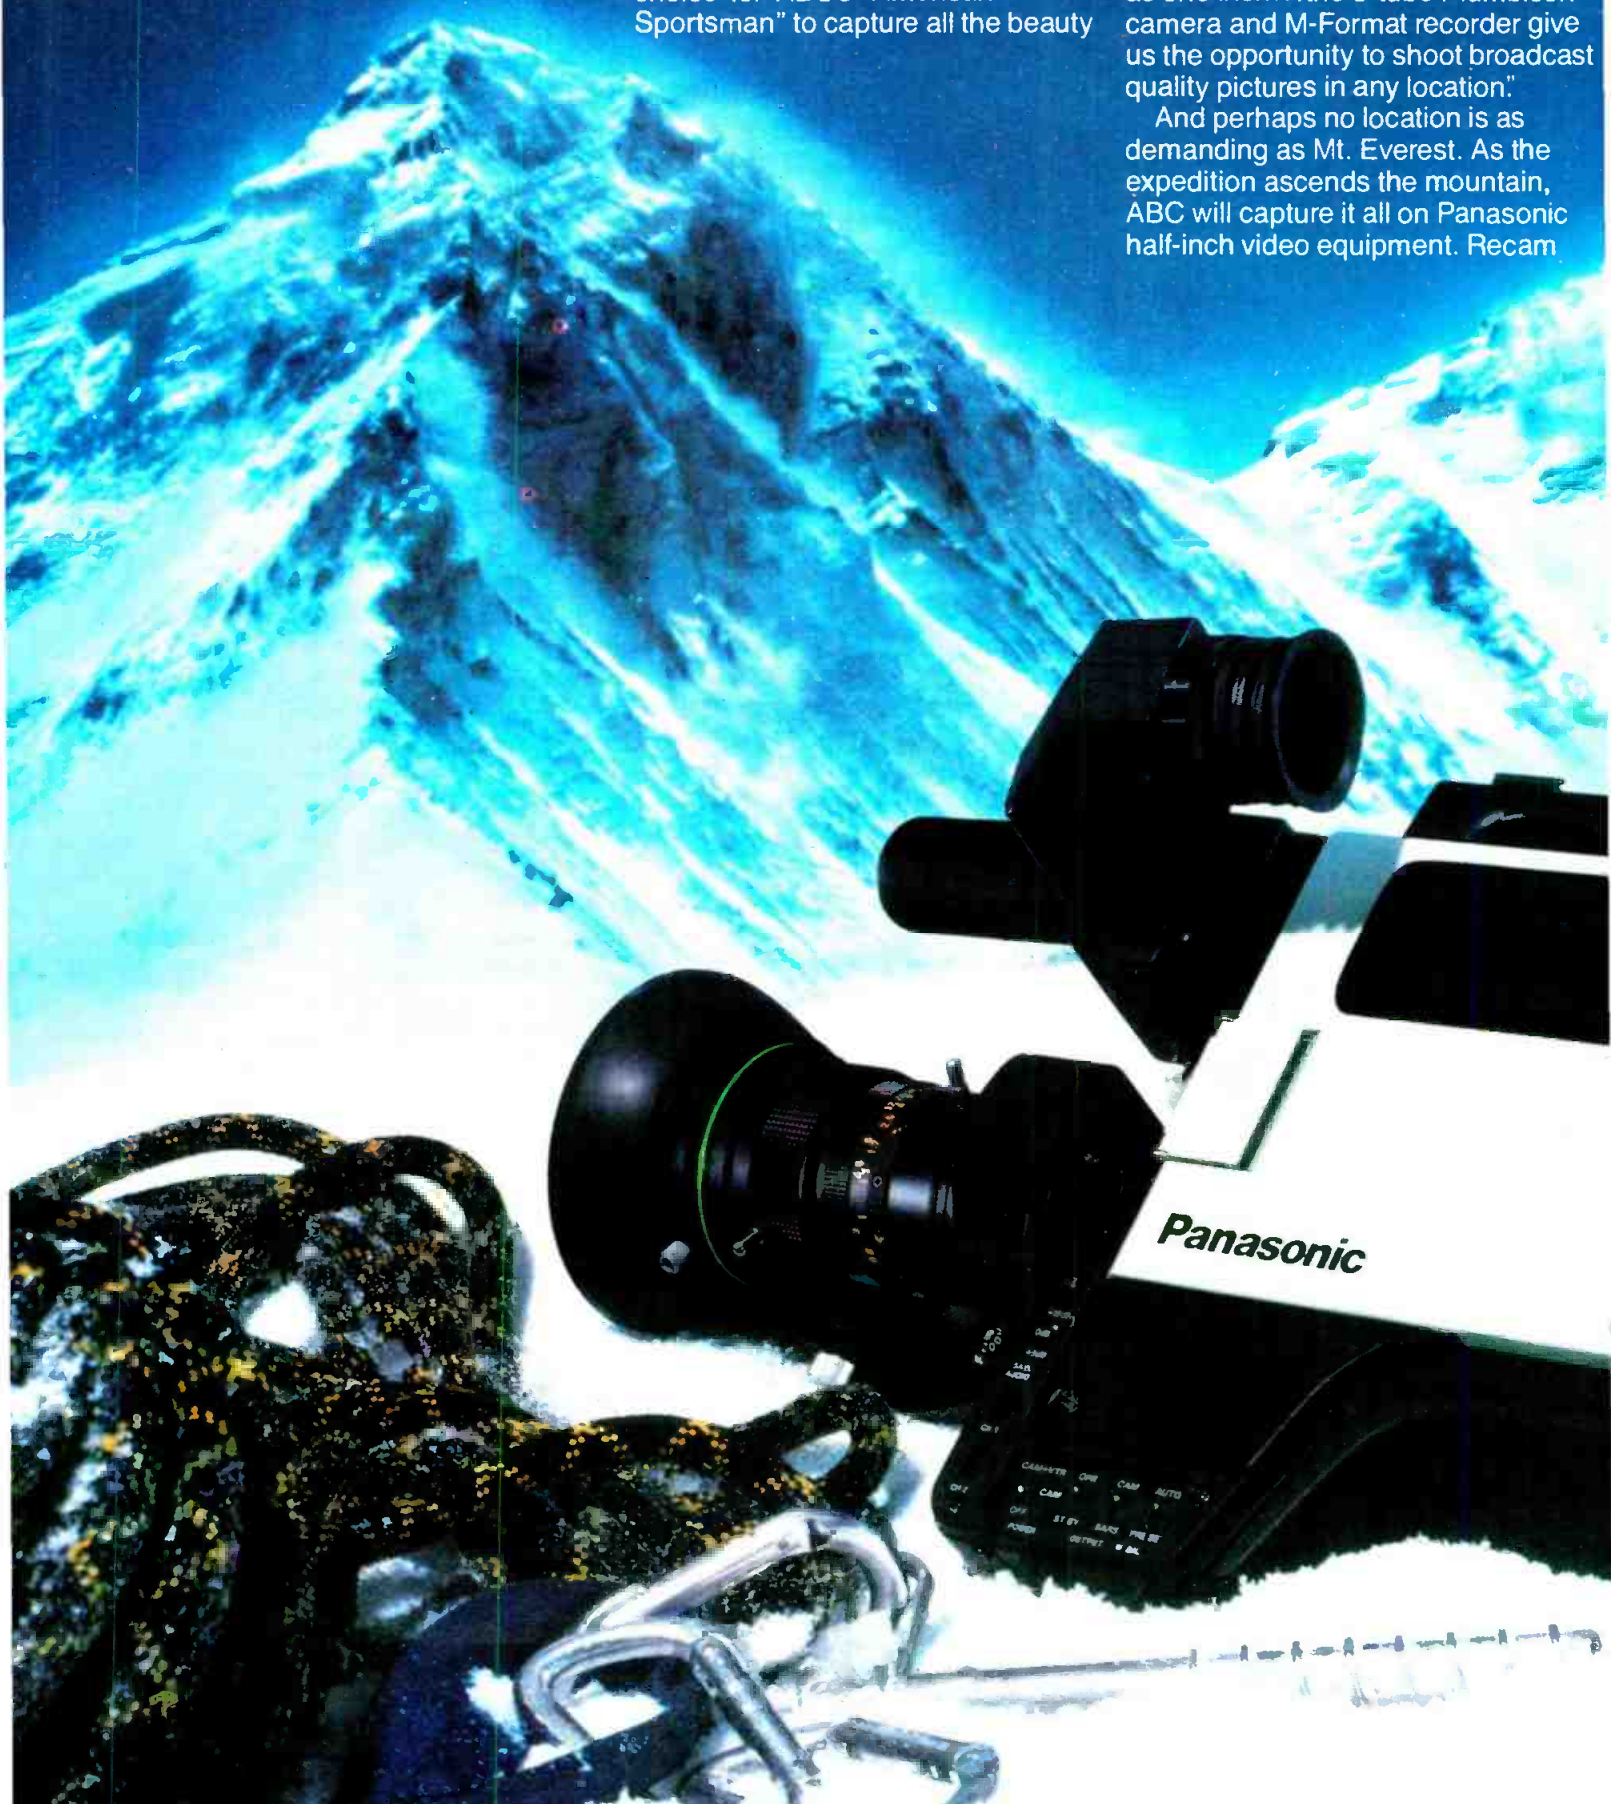

Recam to climb Mt. Everest.

recorder/cameras will transmit pictures via microwave to a base station specially outfitted with two Panasonic AU-300 source decks, an AU-A70 editing controller, an AS-6100 switcher and another AU-300 for mastering. These high-quality Recam pictures will then be

beamed via satellite to the U.S.

But this is just the beginning. Recam's picture quality and portability will be used by ABC Sports for future remote locations whenever the going gets rough.

Look into Recam for yourself and see why it's becoming the choice of demanding professionals whatever their EFP needs.

Panasonic
AUDIO-VIDEO SYSTEMS DIVISION



Circle (28) on Reply Card

tern generator. NTSC and PAL test signals are available from PM5631 models. Manual front panel- or computer-GPIB-selected patterns include color bars, checker boards, gray scales, staircases, ramps, VITS and VIRS.

Circle (321) on Reply Card

PM5630 TV signal generator. With sync meeting RS-170A requirements, the PM5630 provides composite sync, composite blanking, H/V drive, color flag, subcarrier and burst on parallel outputs. A gen-locking sync generator is included, as well as signal generators for color bars, PLUGE and other tests. NTSC and PAL systems are available.

Circle (322) on Reply Card

PM5634 sync test generator. This instrument tests the lock-in range of a video device accepting external sync drive inputs. Horizontal line rate and subcarrier frequency are variable in discrete steps around the nominal values. Availability is for the NTSC and PAL.

Circle (323) on Reply Card

PM5651 VITS generator/insertor. NTC-7 VITS or EBU ITS are generated and inserted into the video signal by the PM5651 equipment. Incoming VITS may be stripped if desired. Source IDs are possible, as an option.

Circle (324) on Reply Card


POLARAD ELECTRONICS

632-B1 spectrum analyzer. Monitor, service and test procedures may use the Polarad 632B-1 spectrum analyzer. A frequency coverage range from 100kHz-2GHz handles broadcast radio and television, CATV, CB and other communications requirements, as well as distortion or noise measurements.

Circle (325) on Reply Card

Switchable waveform/vectorscope

One of the products reported to be of high interest again this year at NAB'83/Las Vegas is a color signal monitor, from Broadcast Video Systems, which is switchable between waveform and vec-

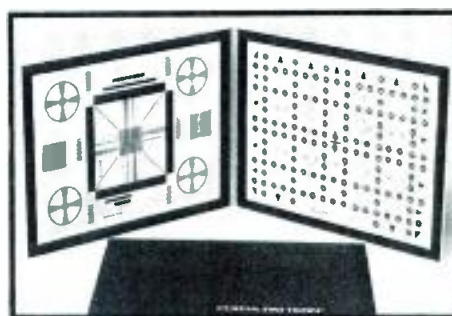

Porta-Pattern 020-10

PORTA-PATTERN

020 series duochart test system. The duochart test systems include the 020-10 resolution/linearity charts, 020-12 multiburst/flesh tone reference and 020-11 registration/log gray scale charts. The test patterns are mounted in hinged-to-fold packaging and include a vinyl carrying/storage case.

Circle (326) on Reply Card

Other test products to be introduced at the show include: the 001-44 11-step log gray scale chart; the 001-45 BBC #62P color bar chart; the 016-10 high resolution color calibration test chart system; the 017-10 waterproof test chart; and the 021-10 pocket test chart system.

Circle (327) on Reply Card



QSI Demod 105

QSI SYSTEMS

Demod 105. A varactor-tuned modulator, the Demod 105 tunes 105 standard broadcast, midband and superband channels. Replacement sync and burst may be selected. A

front panel speaker and 600Ω balanced audio are available, as is optional remote control.

Circle (491) on Reply Card



QSI BG200 display

BG200 series color bar generator. Three models fall in the BG200 series. The BG200 includes full-field color bars with 1kHz, 600Ω balanced tone output. The BG208 adds a positional, 8-character ID. The BG216 includes a 16-character ID. ID characters are field-programmable.

Circle (492) on Reply Card

CB-9000V series video identifier/color bar generators. During test periods, the CB-9000V series provides test color bars and tones. Color bars are dropped for live feeds and the ID information is transferred automatically to the vertical interval of the live video.

Circle (328) on Reply Card

ROHDE & SCHWARZ

DZF TV data distortion meter. Useful in teletext, Ceefax, Oracle and Didon-Antiope technologies, the DZF system provides a quality assessment of videotex signals. Eye height, half-eye height and videotex amplitude measurements are quickly made. Modification is required, to measure data at different bit rates, such as station ID coding and dual-sound coding.

Circle (329) on Reply Card

LFM2 group-delay measuring set. The generator/indicator set of the LFM 2 determines group delay and absolute delay of active and passive 2-port networks. For television it may appropriately be used to check systems and TV links. The frequency span is 0.1MHz (expandable to 1GHz with the Rohde & Schwarz MUF2).

Circle (330) on Reply Card

UPSF 2 video noise meter. Dual-standard measurement capabilities of the UPSF2 may allow fully automatic measurements in NTSC and PAL systems. The video response is 40Hz-

Satellite Radio Receiving Equipment. Microdyne has it all.



Whether you want to install a complete new system or simply expand your existing one — Microdyne can meet your needs with our complete line of standard and proven satellite radio equipment.

We start with a full line of electronics with conversion at the antenna or in your building. You can optimize the system to your needs and budget. SCPC program channel demodulators are fully tuneable to all radio channels with a front panel switch. Sub-carrier demultiplexers are available.

Microdyne offers a full line of satellite antennas — featuring the precision and lifetime durability of molded fiberglass construction; the simplicity and selectivity of a prime focus feed design.

Where parabolic antennas won't work — in areas of high microwave interference — we offer our highly selective conical horn antenna — an industry exclusive.

Microdyne products are characterized by exceptional standards of performance and reliability. We stand behind these products with our

exclusive 48 hour service policy.

Our service depots provide 48 hour turn around on all returned equipment.

There is no company more qualified to meet your needs for satellite radio equipment. We provide both down-link and up-link equipment; complete turnkey installation or individual components. We have thousands of satellite terminals installed throughout the world. We have the experience, the hardware and an uncompromising commitment to excellence.

We have it all.



Microdyne Corporation

P.O. Box 7213 • Ocala, FL 32672 • (904) 687-4633 • TWX: 810-858-0307

Circle (29) on Reply Card

10MHz. Chroma-noise (AM and Θ M) from videotape is measured along with video level. An IEEE bus is available, along with autoranging from 0-80dB.

Circle (331) on Reply Card

TEKTRONIX

1980 ANSWER Option 04 software. When the Option 04 is installed in the base 1980 system, the ANSWER equipment provides automatic monitoring of baseband video signals for standard FCC, NTC-7 and RS-170A measurements. Real values are compared to user-defined limits, with alarm messages printed on out-of-tolerance conditions.

Circle (332) on Reply Card



Tektronix 1910

1910 digital test generator. Improving upon the model 1900 of several years ago, the TEK 1910 generator and

VITS inserter includes 10-bit word generation. The unit is compatible through RS-232 with the ANSWER system. VITS rotation allows programming of VITS to sequence in a single line (10-20) and matrixing of up to 16 signals into any of three user-defined matrices.

Circle (333) on Reply Card

Other new test equipment includes: the 2235 and 2236 portable 100MHz oscilloscopes (2236 includes CTM multimeter); the 2445 portable 150MHz oscilloscope; and the 2465 portable 300MHz oscilloscope.

Circle (334) on Reply Card

TELEVISION EQUIPMENT ASSOCIATES

MK II color monitor comparator. Made by IRT (West Germany), the MK II comparator is based on a recommended world standard of D6500°K. The operator adjusts the monitor screen and gain controls so that the kine white balance will match the comparator in high and low light areas.

Circle (335) on Reply Card

VGE 1032 zone plate generator. Use of the zone plate test signal

generator allows frequency response of a TV system to be tested in the horizontal, vertical and temporal dimensions simultaneously. Produced by VG Electronics Ltd. under license from the BBC, two systems are available for 625- and 525-line TV use.

Circle (336) on Reply Card



Tentel L2-H20-CBD

TENTEL

Tentelometers. Two models of the Tentelometer gauge series handle tension measurements for 1-inch C Format and ¼- or ½-inch reel-to-reel. The T2-H20-CBD gauge is designed for Sony BVH and Ampex VPR machines, using ball-bearing rollers to reduce tape drag. The T2-L20-A gauge is intended for use with audio recorders, providing measurements to 20 ounces full-scale.

Circle (338) on Reply Card



A new way to stamp out a nasssty habit.

It's no secret: Some of the greatest singers and announcers in the world habitually have problems with their "esses". And small sibilance problems can turn into big ones when extra compression, equalization, and other signal processing is used.

Now Orban, the de-essing expert, introduces the *new* Model 536A—a two-channel line-level de-esser with fast, simple setup, and the same unsurpassed performance as our popular single-channel 526A. All at less cost-per-channel.

Orban's control techniques offer accurate de-essing of voice tracks regardless of input levels. Accordingly, the 536A lets you EQ without compromise and record tight-to-the mike without fear—you're protected from excessive sibilance energy which might otherwise overload tape, disk, cassette, or optical film. Call or write today for details on the new Orban 536A De-Esser. And help control a nasssty habit.

orban

Orban Associates Inc., 645 Bryant Street
San Francisco, CA 94107 (415) 957-1067
TLX: 17-1480

Circle (117) on Reply Card

ART BIGGS ON MASTER CONTROL AUTOMATION.



In the 1950's, two broadcasting engineers in Tulsa built a small, crude, mechanical device to automate station breaks. One of those engineers, Art Biggs, is now Vice President, Engineering, Corinthian Broadcasting—and his interest in master control automation remains strong. The respected, 34-year veteran of the industry works with the engineering staffs of all six Corinthian stations, of which two—WISH-TV, Indianapolis, and KXTV, Sacramento—are now using DCC Master Control Automation.

EVEN FORMER SKEPTICS LIKE IT

"At first, some of the engineering staff were enthusiastic, some were skeptical. But within three weeks after it was released to them, they did their first total day's operation on the MCA system. And now, even the most skeptical depend upon it."

CREATES TOGETHERNESS

"MCA brings the traffic department and technical department closer together. This makes everything go more smoothly for everyone."

GIVES MORE CONTROL

"I think some engineers are afraid that with MCA, they'll be giving control of their operation to a machine and be a robot, sitting there, watching it. Actually, the exact opposite is true. Even the most vocal of our

engineers who opposed the idea have found that MCA frees them from so many nitty-gritty, demanding, split-second, button pushers, that they have more time to learn what all the machine can do and can do even more than they could before. Now, if you take it away from them for some reason, there's a lot of yelling to get it back. They've learned they didn't relinquish control—they gained a tool that gives them greater control."

WHO NEEDS IT?

"How do you know if you need MCA? If the chief engineer is constantly trouble-shooting switching errors or one engineer is a total slave to switcher buttons, MCA can certainly help. It also liberates personnel from many manual chores, such as log-keeping, to make their time more productive."

FOR BIAS OR NON-BIAS SYSTEMS

"All of our stations are on the BIAS traffic system from DCC, so by using the DCC MCA, we're dealing with one manufacturer, one computer, and one system that embraces the master control operation, the traffic operation, the financial operation, word processing, film inventory. One source for everything."

For a free brochure on how DCC Master Control Automation can interface with your on-air switcher and traffic system, write DCC Marketing.



BROADCAST DIVISION
DATA COMMUNICATIONS CORPORATION
3000 Directors Row, Memphis, Tennessee 38131, 901-345-3544
www.americanradiohistory.com

Circle (31) on Reply Card

Head protrusion gauge. Measurement of head protrusion in microns or ten thousandths-of-an-inch are possible with a universal video head protrusion gauge. Mounting on virtually any Beta VHS or U-Matic deck, including 1/2-inch VHS and Beta VRC equipment, is suggested.

Circle (339) on Reply Card

TOWNSEND ASSOCIATES

IR-500 impedance plotter. Manufactured by Olektron Corporation, the IR-500 allows measurements of VSWR, impedance and admittance of transmission lines and antenna systems. Covering the 54-890MHz

spectrum, the system uses a resolver and sampling head for operation with X-Y oscilloscopes and sweep generators. The display of measurements on the oscilloscope screen are referenced to a Smith Chart overlay on the scope.

Circle (337) on Reply Card

Transport cases

Transporting test equipment can also be an important factor in making measurements. Responding for our call on *What's New at NAB-'83*, Anvil Cases unveiled for us some of its transport cases for the video and TV markets that they expect to have on hand at the show in Las Vegas.

Anvil offers a full line of EIA rack-mount cases for any and all rack-mountable components, designs particularly useful in the field when fast setup and tear-down is essential. At the show will be the company's extensive line of standard case designs plus details on custom design work.

These and other cases at NAB-'83 will be covered in our June wrap-up issue.



Anvil rack-mountable case

UREI

Model 200 X-Y recorder main-frame. After a cooperative effort by UREI and Hewlett Packard, the 200 chart recorder uses UREI plug-in modules for automatic response plotting, impedance measurements and frequency/amplitude measurements. Applications of the 200 test system cover a wide variety of audio equipment checks.

Circle (490) on Reply Card

Model 21 mic preamp warble generator. In addition to providing a +18Vdc phantom supply, the model 21 offers 20dB or 40dB gain selection as a preamp. A 5Hz sine wave output signal is available when the unit is incorporated with the model 200 test system.

Circle (340) on Reply Card

[:T=))]]

CASH FOR YOUR TOWER

(Need a new tower?)


- Sale leaseback arrangement
- Professional management and maintenance
- Relief from liability
- Relief from tower maintenance
- Repurchase option
- Low monthly lease payments
- Free up cash from your fixed asset
- New construction or existing tower

CALL US TODAY (817) 261-5353

Ask for Jim Tiner, President, Tiner Associates, Inc. **24 Hour Phone**

TINER COMMUNICATION SERVICES, INC.

A complete tower service system
616 Six Flags Drive, Suite 136
Arlington, Texas 76011

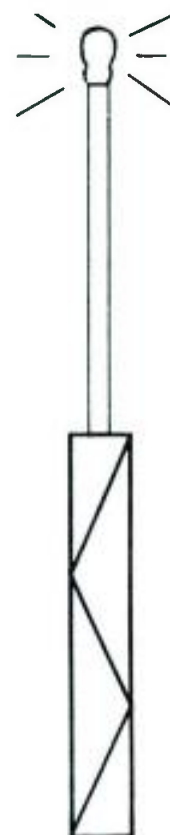

Circle (105) on Reply Card

Built into every LGT low power TV transmitter is a feature nobody else can offer: 25 years of TV transmitter experience. In 98 countries. That's why LGT is the big name in low and medium power transmitters.

Experience the design. All our transmitters are solid state. Built to full broadcast equipment standards for year after year of reliable service. External diagnostic lights let you know what's going on internally. And the plug-in chips and transistors, as well as the replaceable modules, make the transmitter extremely easy to service.

Experience the support. What's behind our transmitters is just as impressive as what's inside them. A complete stock of both parts and test equipment. A team of field-test

and application engineers. All available where needed, when needed. And to make sure your transmitter gets off to a good start, *we'll send an engineer to your station to commission it.*

Experience the confidence. All around the world, LGT spells "peace of mind." If you're looking for a trouble-free transmitter that will still be pouring out strong signals years from now, LGT fits the description to the letter.

For more information on the LGT experience, contact Thomson-LGT, Division of Thomson-CSF Broadcast, Inc., 37 Brownhouse Road, Stamford, CT 06902.

Tel. (203) 965-7131.

TWX (710) 474-3346.




THOMSON-LGT

Division of Thomson-CSF Broadcast, Inc.

Thomson-LGT Low Power TV Transmitters.

Experience our experience.

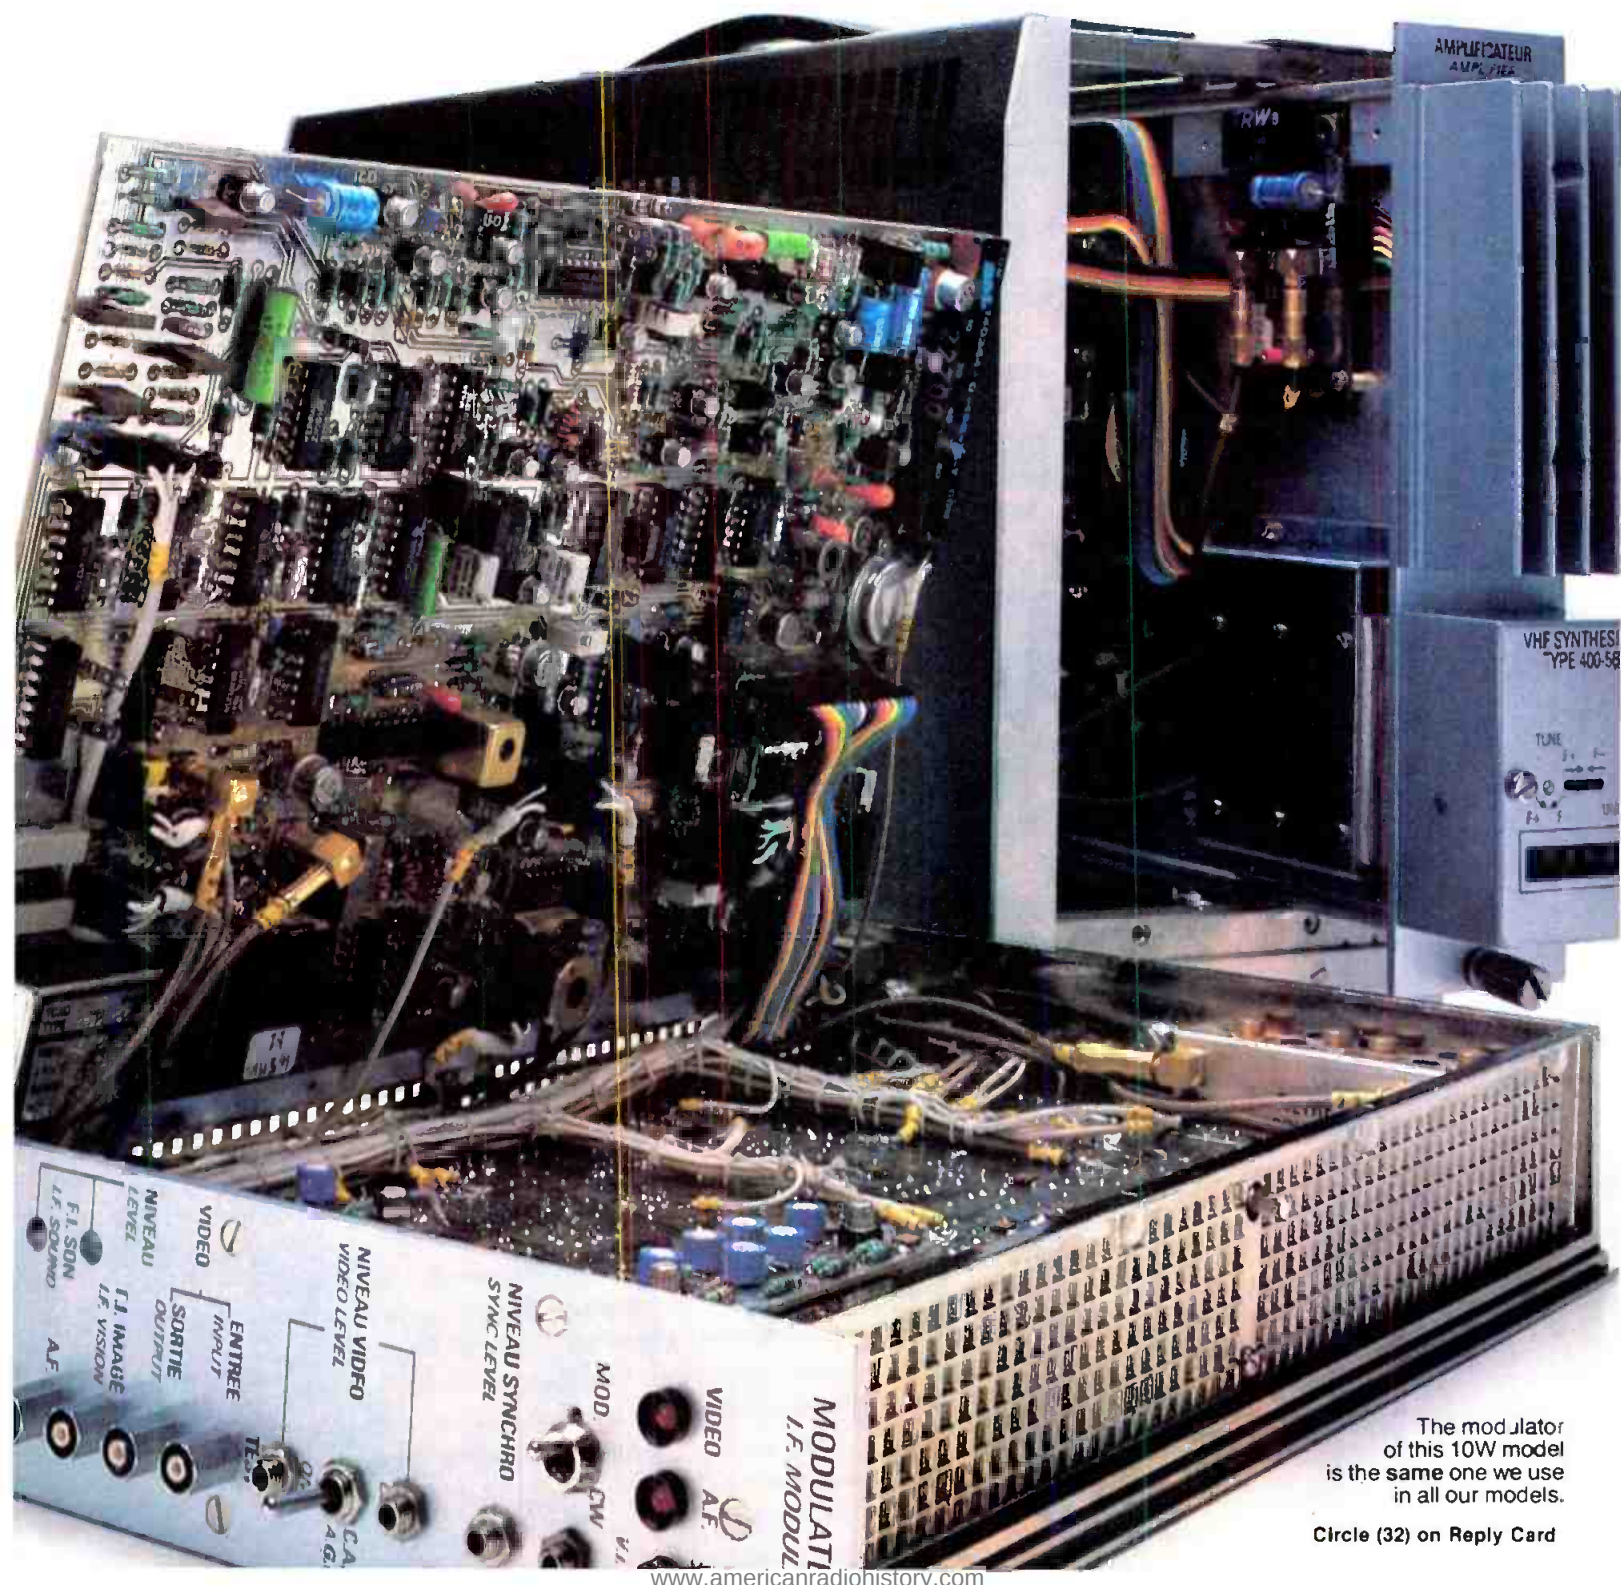

The modulator of this 10W model is the same one we use in all our models.

Circle (32) on Reply Card

- Silver Jubilee
April 1983
- WFRD — 99.3 FM
WDCR — 1340 AM
- 1000W AM
3000W FM stereo
- Hanover, NH

Case study:

Studio 5 at WDCR/WFRD

By Brad Carpenter, engineering consultant, Cambridge, MA

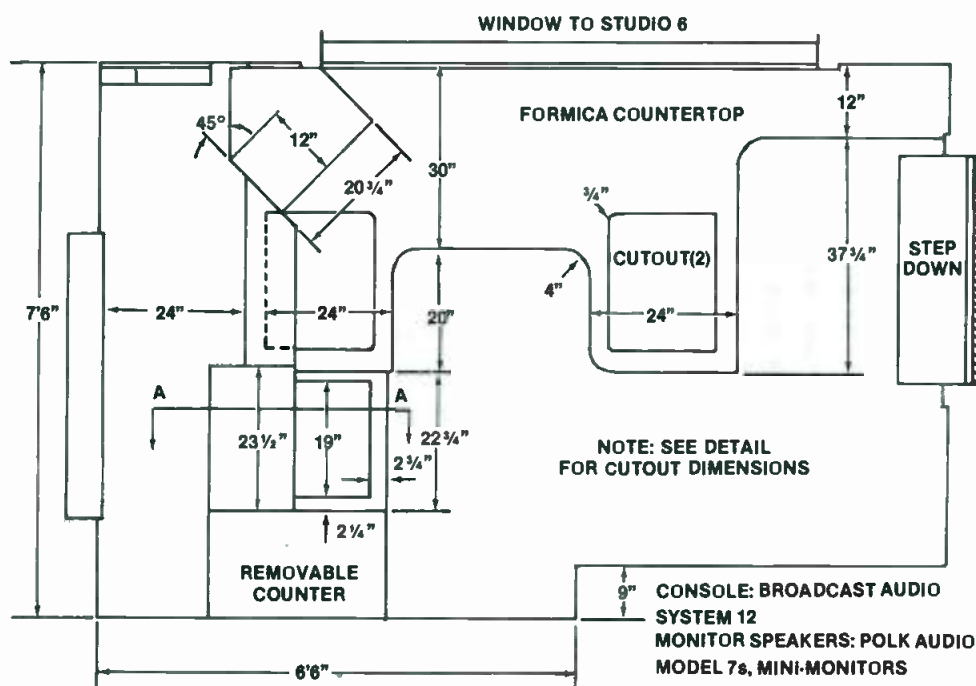


Figure 1. Floor plan for Studio 5.

WDCR is a 25-year-old commercial station that is operated nearly exclusively by students of Dartmouth College. The 1kW AM signal at 1340kHz covers the upper Connecticut River Valley in New Hampshire and Vermont and operates year round, 18 hours a day. The companion FM station, WFRD at 99.3, went on the air in 1976.

History

In 1958, WDCR started broadcasting with a Gates BC-1T transmitter and Gatesman console in Studio 3x. This equipment was used until 1982 when Studio 5 was put on the air, and again more recently when a Nautel transmitter was installed. When I became involved at the stations in 1978, Studio 3x had long been a problem to maintain; the console badly needed replacement. The question was how to do it cost-effectively and without sacrificing reliability.

Some of us believed that replacing the console as a drop-in operation was the simplest and cheapest method, while others believed that, because the wiring would have to be replaced anyway, it would be best to start from scratch. WFRD was put on-the-air out of Studio 7, which was totally student designed and built over a period of 1½ years. Although the console was initially satisfactory, it soon became a maintenance nightmare. It was built from modular components, wired and mounted by the student engineers, who spent little time documenting their work.

The critics of the new studio plan cited Studio 7 as an example that it was too big a project to use the start-from-scratch approach. My reply was that it was an example of how not to start from scratch and that we had certainly learned from that endeavor. Meanwhile, the problems in Studio 3x festered.

Ned Roos (a subsequent technical director) and I visited many stations in the Boston area to gather ideas on new equipment, studio layout and wiring practices. We also wanted to determine if it would be possible to have an outsider come in and build a complete studio for a reasonable fee. We found that not only is it expensive to do it that way, but that most stations have the resources to design and construct their own facilities, perhaps with some installation help and design consultation.

Redesign

Once we stopped considering rebuilding Studio 3x, we set out to use an empty room that had been designated as a studio when WFRD was built, but that had not been built for lack of funds. It was a small room, just less than 7.5' x 11.5'. We enlisted the help of Lindsay Collins, consulting engineer, of Collins and Vanni Associates, Bradford, NH, to oversee the design processes. As a result of discussions with Collins and another acoustical consultant, I rebuilt the existing raised floor to eliminate the drum effect caused by unsupported 2" x 10" joists. Stiffening these joists and adding insulation and a layered floor created a solid base for the furniture.

The next step was selecting a console. WDCR's programming is music-oriented, played in about equal proportions from carts and from records; this requires a medium-sized console with modest flexibility. We chose the Broadcast Audio System 12 with 10 input modules because of its many convenient features—such as three inputs per channel and interchangeable



The cabinet panels are quickly removable to reveal the patch bay and hidden circuitry.

Continued on page 52

Introducing our new klystrons for UHF TV

— 32kW of high efficiency power and
no beryllium oxide ceramics

K3230 and K3231 join our family of
high efficiency klystrons.

- * Power output 32 kW
- * Efficiency 40% minimum
- * Long life, 25,000 hours plus
- * Bandwidth 8 MHz
- * Water or vapor cooled



— 470 to 860 MHz in one tube and
no beryllium oxide ceramics.

K3270 BCD up to 15 kW power output
K3271 BCD up to 25 kW power output

- * Efficiency 40% minimum
- * Beam control device for low beam current
- * Water or vapor cooled

Another innovative, cost-effective product
from EEV, the Company that has continuously
advanced high power tube technology for over 40 years.

EEV

Achievement in electron tube technology

EEV, INC.
7 Westchester Plaza, Elmsford, N.Y. 10523.
Tel: 914 592 6050. Telex: 646180



In Canada: EEV Canada Ltd., 67 Westmore Drive, Rexdale, Ontario M9V 3Y6, Tel: 416 745 9494. Telex: 06 989363. In Europe: English Electric Valve Co. Ltd., Chelmsford, Essex CM1 2QU, England. Tel: 0245 61777 Telex: 851 99103.


Circle (33) on Reply Card

EEV4a

Introducing Ampex 197, that's broadcast-



the new 3/4" videocassette quality in every way.

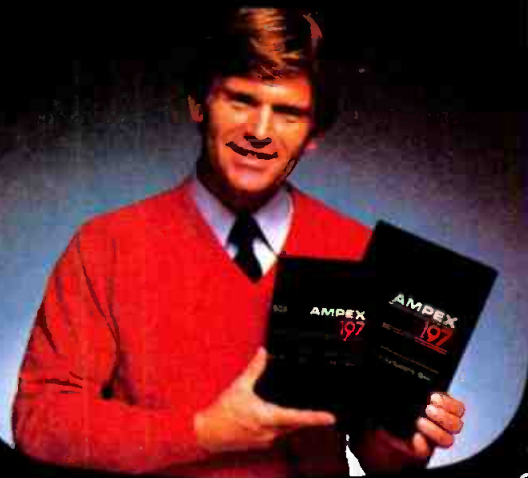

Broadcast-quality color & sharpness.

The new Ampex 3/4" videocassette has been designed with nothing less than perfection as its goal.


Its superb chrominance and luminance performance makes it ideal to meet the stringent demands of broadcast applications such as electronic news gathering, electronic field production and on-line editing.

And the tape in Ampex 197 has been especially formulated to optimize the performance of the Sony BVU series of recorders.

Broadcast-quality sound.

Ampex award-winning sound has been an industry leader for a quarter of a century. Now Ampex 197 brings this award-winning expertise to video.


Ampex 197 offers superior signal-to-noise and low distortion characteristics. This translates into crisper, cleaner audio performance under heavy editing conditions and multiple generation dubbing. It also delivers excellent stereo fidelity when used for music recording.

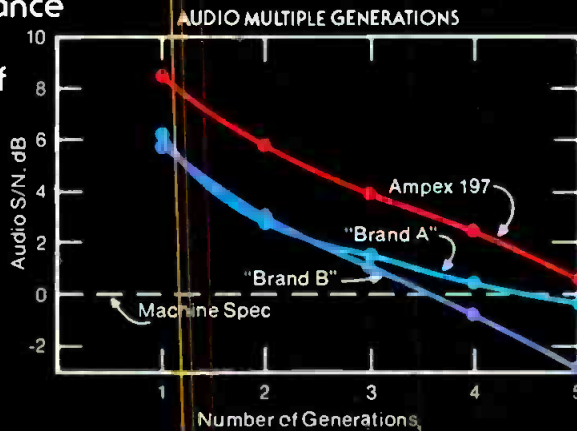

Even after five generations, Ampex 197's audio signal-to-noise ratio exceeds the BVU series machine specifications.

Broadcast-quality reliability.

This new 3/4" videocassette is a blend of the finest broad-

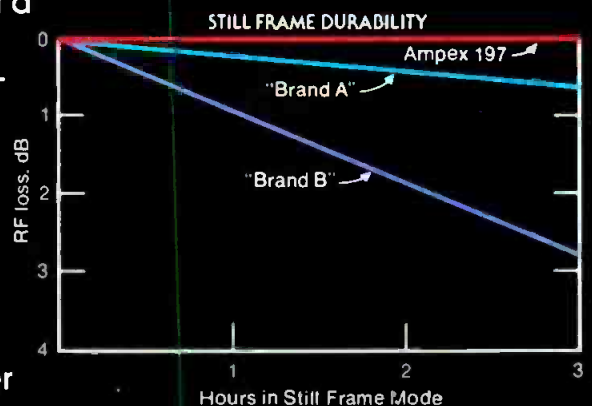

Laboratory tests proved that Ampex 197 held up for three full hours with no RF loss.

cast materials and Ampex's unique technical expertise. In blind field testing, Ampex 197 got the highest marks from broadcast professionals for its picture quality, stability, and durability.

In laboratory trials, Ampex 197 held up in the still-frame mode for three full hours and showed no dropout increase or RF loss.

Ampex Corporation,
Magnetic Tape Division,
401 Broadway, Redwood City,
CA 94063 (415) 367-3809

AMPEX

Ampex Corporation • One of The Signal Companies

Quality worth broadcasting.

Circle (34) on Reply Card

mic/line modules. It has three independent stereo output buses, plus stereo cueing and a mono output driver that is selectable from any of the other buses. There had been much discussion about whether to look for rotary or linear faders, but once the operators were familiar with the new system, there were no complaints.

Although the programming was drifting toward more exclusive use of carts, turntables were viewed as an item not to be skimmed on. All of our turntables had been of the idler wheel/rim-drive type, and we were becoming increasingly dissatisfied with their performance. The Technics SL-1015 was chosen because it is a self-contained direct-drive turntable system of the highest caliber—important because it would be the primary reproducer. Yet it is still less expensive than a cartridge player.


The cart machines we used are considered an industry standard: the ITC SP. We considered using a triple-decker as we do in Studio 7, but we needed at least four players (we had five in Studio 3x). We installed one record/play machine for taping network feeds as the fourth deck. The individual decks afford better overall reliability and maintainability.

Belar modulation meters were installed as part of a separate project, and the AMM-3 was chosen partly for its provisions for multiple remote meters. An NAD 3020 amplifier was used with Polk Audio model 7 speakers because of their high quality sound at consumer equipment prices. Possible problems of reliability (we've had none) were offset by the fact that they could be serviced locally by a stereo dealer if necessary.

Cabinetry

After looking at modular furniture components, it quickly became clear that the existing space was too small for all-purpose furniture, so I set about designing custom cabinetry around the chosen equipment. The key features of the design are that all faces of the base are removable, and that everything is easily reached by the operator or technician. The basic construction uses 2" x 4"s and ¾-inch plywood in an open frame with a thick countertop. Side panels are covered with the same carpet as the flooring, and they latch on. Rack space is provided underneath for all related equipment, including the patch bays, which are thereby hidden from normal view. The SL-1015 turntable bases are set into the counter and isolated on the sides with a thin layer of felt.

Finding a contractor/carpenter took a bit of searching, but it was well

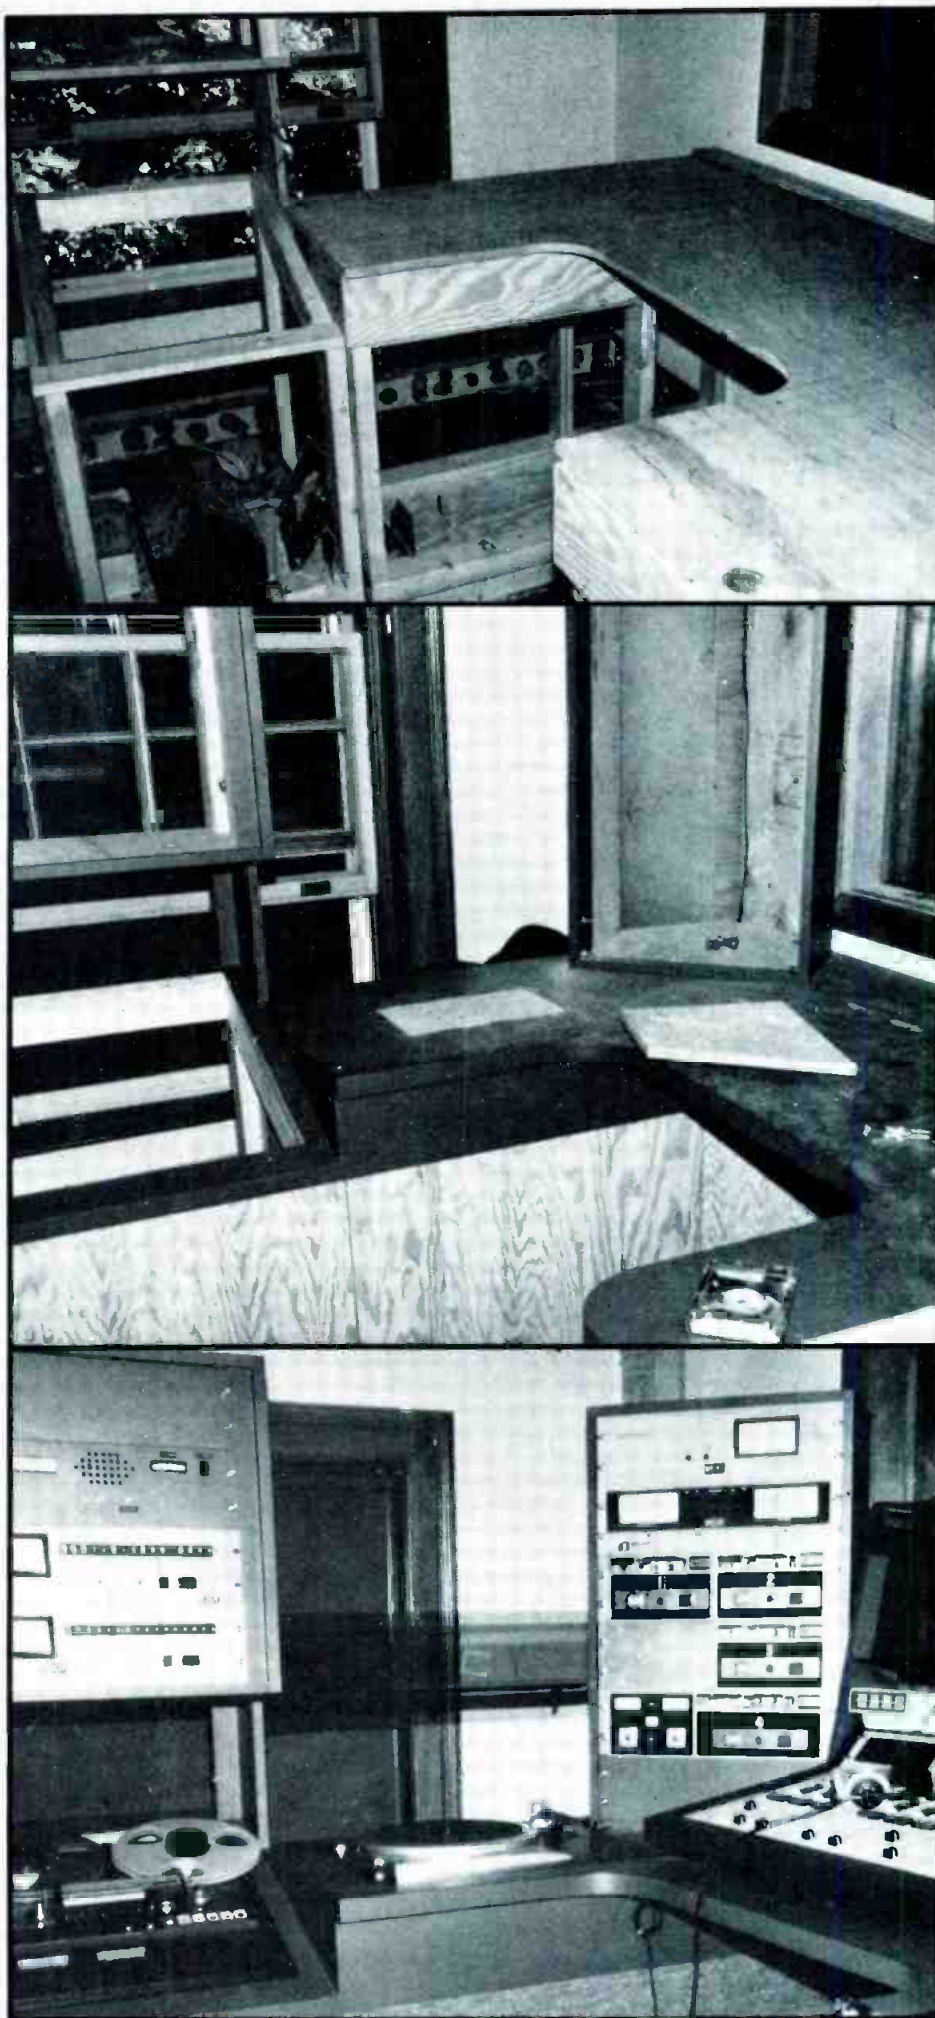

This series, taken during the studio renovation, shows how construction on Studio 5 progressed.

The Bosch BCN family. Type "B" master quality— generation to generation.

The superior quality of Bosch 1-inch Type "B" videotape recording has always been accepted by teleproduction professionals.

That superiority has made Type "B" the preferred tape mastering system—the videotape equivalent of film negative.

No matter what the ultimate distribution format—2-inch, 1-inch Type "C," U-matic—the quality is better when "B" is the master. Here's why.

Quality is inherent in the design.

The Bosch BCN family was designed for the stringent demands of 625-line systems. So it has a very comfortable performance reserve in 525-line NTSC systems.

High head-to-tape speed gives BCN recorders a leg up in signal-to-noise ratio.

And superior head-to-tape contact yields cumulative chroma noise advantages. So the BCN gives clean

pictures even after the most complex post production, with low sensitivity to dropouts.

With the BCN, even a sixth or seventh generation tape is broadcastable!

Start with film or tape.

If your production is shot on film, you can retain a lot more fidelity if you transfer to Type "B" before duplicating in any format.

If your production is shot on tape, you get a head start on quality



BCN 21. At only 17 pounds it's highly portable. With all the quality inherent in the Type "B" 1-inch format.

if you record and post produce on Type "B."

Generation to generation.

Models for all requirements.

The Bosch BCN family includes 1-inch recorders for every requirement.

For field production, the super compact BCN 21 weighs only 17 pounds.

The BCN 41 is ideal for mobile units. It's compact, too, at less than 150 pounds.

The BCN 51, perfect for studio use, has a built-in time base corrector and sophisticated monitoring capabilities.

With our digital store option you can have superb slow motion, step motion, and stills, plus fast visible search.

You can go further with videotape still storage, quad splits, quad freeze, and mirror effects. Plus long play versions.

And all BCN models, including the portable BCN 21, have identical performance specifications. With absolute tape interchangeability from system to system.

Why not the best?

Top production facilities across the country—and the world—are moving to Type "B" mastering. Because better "B" masters don't cost any more than "C" masters. So why compromise?

Your local Bosch-Fernseh office has full details. Call today. Or write Fernseh Inc., P.O. Box 31816, Salt Lake City, UT 84131, (801) 972-8000.

BOSCH

BCN 51. The world's preferred 1-inch videotape mastering system.



Circle (35) on Reply Card

©1983 Fernseh Inc. All rights reserved.

SAVE
\$310⁰⁰

DIGITAL AUDIO DELAY

BLEEPMATE™ 675/II

\$1315

~~\$1625~~

NAB Sale

Now you can buy this solid-state simplicity for hundreds less than many tape delays cost.



Comex's new Bleepmate-675/II a simple yet sophisticated, fixed, 6-second solid-state delay, has no moving parts (so technical and on-air talent aren't bothered by endless tape/head upkeep). And the 675/II has a broad $\pm$ 1dB, 20Hz to 7.5KHz response. Its low price makes systems redundancy practical, too.

- Limited offer.
- Call or write now.
- Sale ends
6-30-83

Comex Systems
2 Columbia Drive
Amherst,
N.H. 03031
(603) 889-8564
Telex 953120

COMEX
SYSTEMS
A Division of the Successor Corporation

Circle (36) on Reply Card



Bob Gray, program director at WDCR, checks out the system's operation.

worth the effort to find one who, from the start, was truly concerned with the quality of the construction and precision that we required. It took about a week for the cabinets to be built and finished.

The wiring design concept was simple: Bring as much as possible out through patch bays, and use a consistent grounding procedure. We extended the jackfields out onto punch-down blocks, with the top row of jacks being normalled to the bottom; the source was on top, destination below. All cable shields were grounded at the destination end only.

A 2-inch copper strap ground system was added to all the studios. We ran six 12-pair cables into our master control room; all audio and control connections were made on these cables. Microphone and control cables were run to adjacent Studio 6, which acts as the news booth and all-purpose studio, and a custom remote control panel for the console was installed there.

One of the problems encountered when students were building Studio 7 was a time limitation; they were required to be on-the-air by a certain date. When we started this project, we decided not to set a deadline. A student organization can perhaps better afford this type of decision than an

operation with higher overhead, but it allowed us to do things correctly and carefully. The total equipment cost was about \$28,000, but all the labor of the students involved was free; otherwise, the total cost of construction could have been much higher.

In the near future, Studio 3x will be stripped and rebuilt to be identical to Studio 5. WFRD will then use that as the main air studio, allowing Studio 7 to be refitted as a production studio. Other recent purchases include two Otari 5050B reel-to-reel decks.

About the author:

Brad Carpenter graduated from Dartmouth College in June 1982, with a major in engineering sciences. His specialization was radio, although that is not part of the Dartmouth curriculum. He served as technical director for the WDCR/WFRD stations in 1980. Joel Margolese of WDCR/WFRD asked him to prepare this article as a result of his design and construction work on Studio 5.

He is currently working for WRKO in Boston as a temporary engineer helping to design and install its new facilities, including 10 studios with Pacific Recorder consoles. His plans are to do graduate work in architecture.



The performance is
all you hear.



ENTIRELY
NEW

Introducing the Cetec Vega R-41 and R-42 PRO PLUS wireless-microphone receivers.

PRO PLUS is a new standard of performance in wireless microphone systems, exemplified by the R-42 diversity receiver with "infinite gain" technology and ultralow noise, and DYNEX II, an advanced new audio processing technique. PRO PLUS gives you every feature you should want in a wireless system, including:

- **DYNEX II, a new standard in audio processing.**
Can be switched in or out of the PRO PLUS system, to accommodate all requirements.
- **Measurably the highest signal-to-noise ratio and widest dynamic range.**
Quiet as a wire. 101 dB (108 dB, A-weighted) with DYNEX II. Even with DYNEX II switched out, the ULNR (ultralow-noise receiver) has an 85-dB SNR (92 dB, A-weighted). So good you may have difficulty measuring it, but you can definitely hear the difference.

- **"Infinite gain" receiver technology for highest performance.**
Developed for the demanding aerospace telemetry industry, "infinite gain" provides improved performance in the critical threshold region, superior accommodation of multipath conditions, better signal-to-noise ratio, and constant receiver audio level output.
- **Lowest distortion.**
0.25% maximum, 0.15% typical.
- **Professional audio circuits.**
Output is adjustable from +20 dBm to -60 dBm in four ranges. Also featured are selectable phasing, user-calibratable metering, and 0.2-watt independent headphone amplifier.
- **Diversity or single-channel models.**
The R-42 provides true dual-receiver diversity, and the R-41 nondiversity receiver has all of the other features of the R-42.

- **High-performance helical-filter front end.**
Plus all of the other standard features expected in Cetec Vega's professional wireless equipment, famous for quality and reliability.

PRO PLUS wireless microphone systems achieve the highest performance possible with today's advanced technology. Write or call for further information and location of your nearest dealer: Cetec Vega, P.O. Box 5348, El Monte, CA 91734. (213) 442-0782. TWX: 910-587-3539.

In Canada: A.C. Simmonds & Sons Ltd.

 **Cetec Vega**
Division of Cetec Corporation
Circle (37) on Reply Card

SMPTE TV Conference replay

By Bill Rhodes, editorial director; and Carl Bentz, technical editor

- Feb. 4-5, 1983
- Westin St. Francis Hotel
San Francisco, CA
- 700 registered attendees
- 26 exhibitors
- 5000 square feet of displays
- 33 technical papers

The 17th Annual SMPTE Television Conference was built around its theme, "Pictures of the Future," but history may record it as the user-friendly conference. Unexpectedly, the conference brought together a broad spectrum of speakers who stressed the integration of computers into broadcast controls. As a result, attendees heard more about user-friendly computers than ever before at a broadcast conference.

THE PRESS MEETING

For members of the press, the Winter SMPTE Conference began with its traditional press meeting. This year Toni Roth, SMPTE vice president for Educational Affairs, served as host.

The purpose of this early meeting is to give members of the press advance notice of the scope and content of the conference. Also if any last minute surprises are scheduled, this is the time for SMPTE to unveil them.

Short addresses to the press were given by the following SMPTE officers and members of the conference arrangements committee: Leonard F. Coleman, president; Roland J. Zavada, Engineering vice president; L. Merle Thomas, vice president for TV Affairs; and Glen Pensinger, general arrangements chairman.

Also on hand to greet the press were Charles Anderson, former SMPTE president; Mary Connolly, editorial/program coordinator; Lynette Robinson, executive secretary; Jeffrey Friedman, editor of the *SMPTE Journal*; Alex Alden, manager of engineering services; and Barry Detweiler, TV engineer.

By the end of the press meeting, two conclusions could be drawn: Attendees could look forward to a fine

Get-together lunch



The lunch address by Boris Townsend focused on TV technological advances.

One of the highlights of the conference was a delightful address by Dr. Boris Townsend, head, Engineering Services, IBA, England, at the get-together lunch. Townsend directed his remarks toward the quantum leaps being seen in TV technological advances, but he addressed the group with a gift for wit and humor that kept attendees thoroughly entertained, often in stitches.


Referring to the opportunity of addressing such an esteemed group as the SMPTE attendees, he said that it was a challenge that "only the intelligent would reject." On a more serious note, he went on to address the future language of television, with concern about bandwidth constraints, crosstalk and channel capacity, the increasing quality of the TV picture, with

DBS and HDTV looming on the horizon; the rapid growth in solid-state chip technology, especially the falling price of chips with increased usage; and, again humorously, the ZIP (Zero cost of Information Processor).

Some of the elements of technology that future broadcasters and manufacturers should pay attention to, according to Dr. Townsend, are uniform world transmission; smart receivers that automatically adjust to the transmission standard being received; and modular systems for easy service/replacement. In accepting the challenges of the future, Dr. Townsend seemed to be calling for wisdom and flexibility, noting that "an idea is not responsible for the people who believe in it."

Who's Pulsing the Editors?

**Convergence,
CMX, Datatron, and
Videomedia know something
about RS-170A Sync Generators
that you should know.**

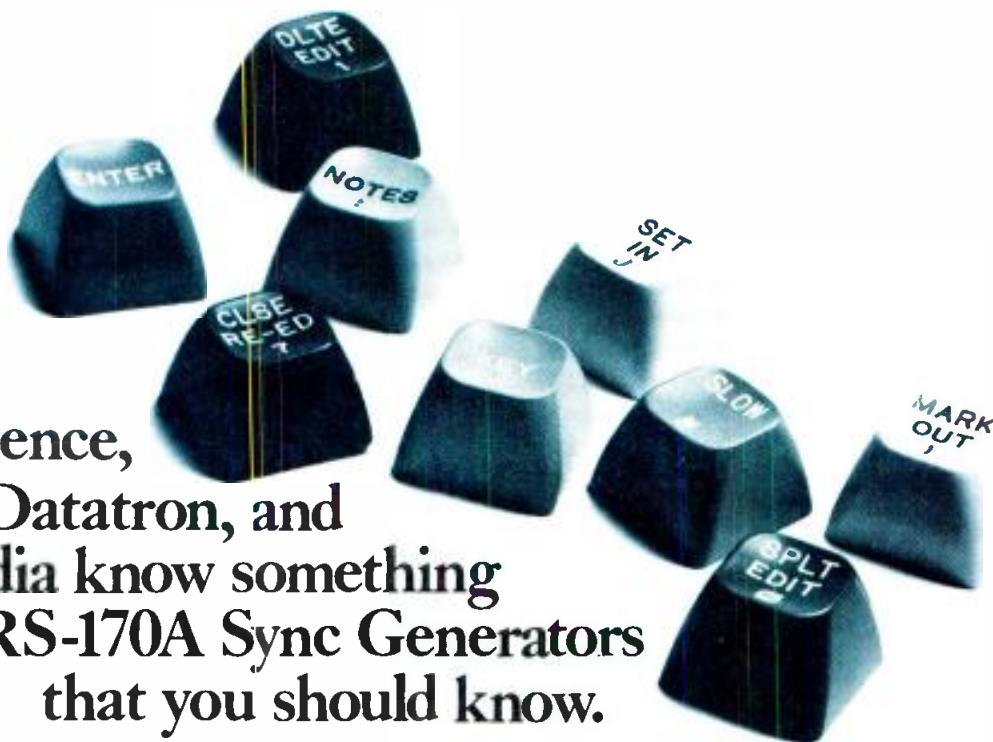

These and other leading manufacturers are committed to producing the ultimate in quality videotape editing equipment. How? By using the PMG-312 Master Sync Generator system to test and pulse their editing systems.

The complete dual sync system consists of a dual power supply frame, two RS-170A Generators, and an Automatic Changeover. The Automatic Changeover meters each generator pulse and DC voltage for fault indication. The PMG-312 offers chrominance subcarrier with an accuracy of .35Hz stability over a one year period. Subcarrier to horizontal phase relationship is maintained in reference to line 10, RS-170A. Black burst is optional. Professional broadcast quality at very attractive prices. Two year parts and labor warranty.

These manufacturers of editing systems know who's pulsing the system and now so do you. Is Lenco pulsing your editing equipment? Don't you think it is time we did?



Lenco, Inc., Electronics Division 300 N. Maryland St. Jackson, Missouri 63755.

Telephone: (314) 243-3147

Engineered and manufactured in the United States



The Professionals' Choice

Circle (38) on Reply Card



Booth activity at the SMPTE Winter Conference was brisk even though the technical sessions were heavily attended.

Photos: Donna Foster-Roizen. Courtesy of SMPTE.

selection of retrospective and forward-looking papers and there would not probably be any surprises at the convention.

As you may recall, the last time this conference was held in San Francisco, it made history with demonstrations of a digital TV studio at KPIX. This year's convention did not make history, but it was an excellent con-

ference, nevertheless.

THE TECHNICAL SESSIONS

In keeping with the theme of this year's convention, "Pictures of the Future," the Program Committee, chaired by David Fibush, scheduled four sessions, each lasting half of a day. These covered generating,

manipulating, recording and programming the video picture. A listing of the papers and authors is provided in a sidebar to illustrate the scope of the overall program. (See page 60.)

The conference proceedings, published in book form, were targeted for release in March. Copies may be ordered* from the SMPTE and were

*See the previously mentioned sidebar on page 60.



You don't need a special diversity receiver to solve your wireless microphone dropout problems

- Only Swintek offers multi-antenna RF switching diversity that can be used with any Swintek or most VHF/UHF receivers thus providing true RF switching diversity for much less than a dedicated diversity receiver.
- The Model RFSD switches RF instead of audio, thereby, virtually eliminating transients (clicks and pops) normally found in most conventional dual diversity receivers.
- Contains two narrow band frequency modules that discriminate between adjacent channels allowing many closely spaced frequencies to be used on a set.
- Plug in module allows frequency to be changed in the field.

Call or write for your free catalog that details the RFSD and Swintek antenna products. Swintek—the proven performers.

Swintek
TELECOMMUNICATIONS DIVISION


1180 ASTER AVENUE, UNIT J / SUNNYVALE, CA 94086
(408) 249-5594 / TELEX 172-150 SWINTEK SUVL



Model RFSD
3 1/2" W x 1 3/4" H x 5 1/4" D

Circle (39) on Reply Card

With state-of-the-art technology in their recording studios, Lucasfilm Ltd. didn't settle for do it yourself jackfields.

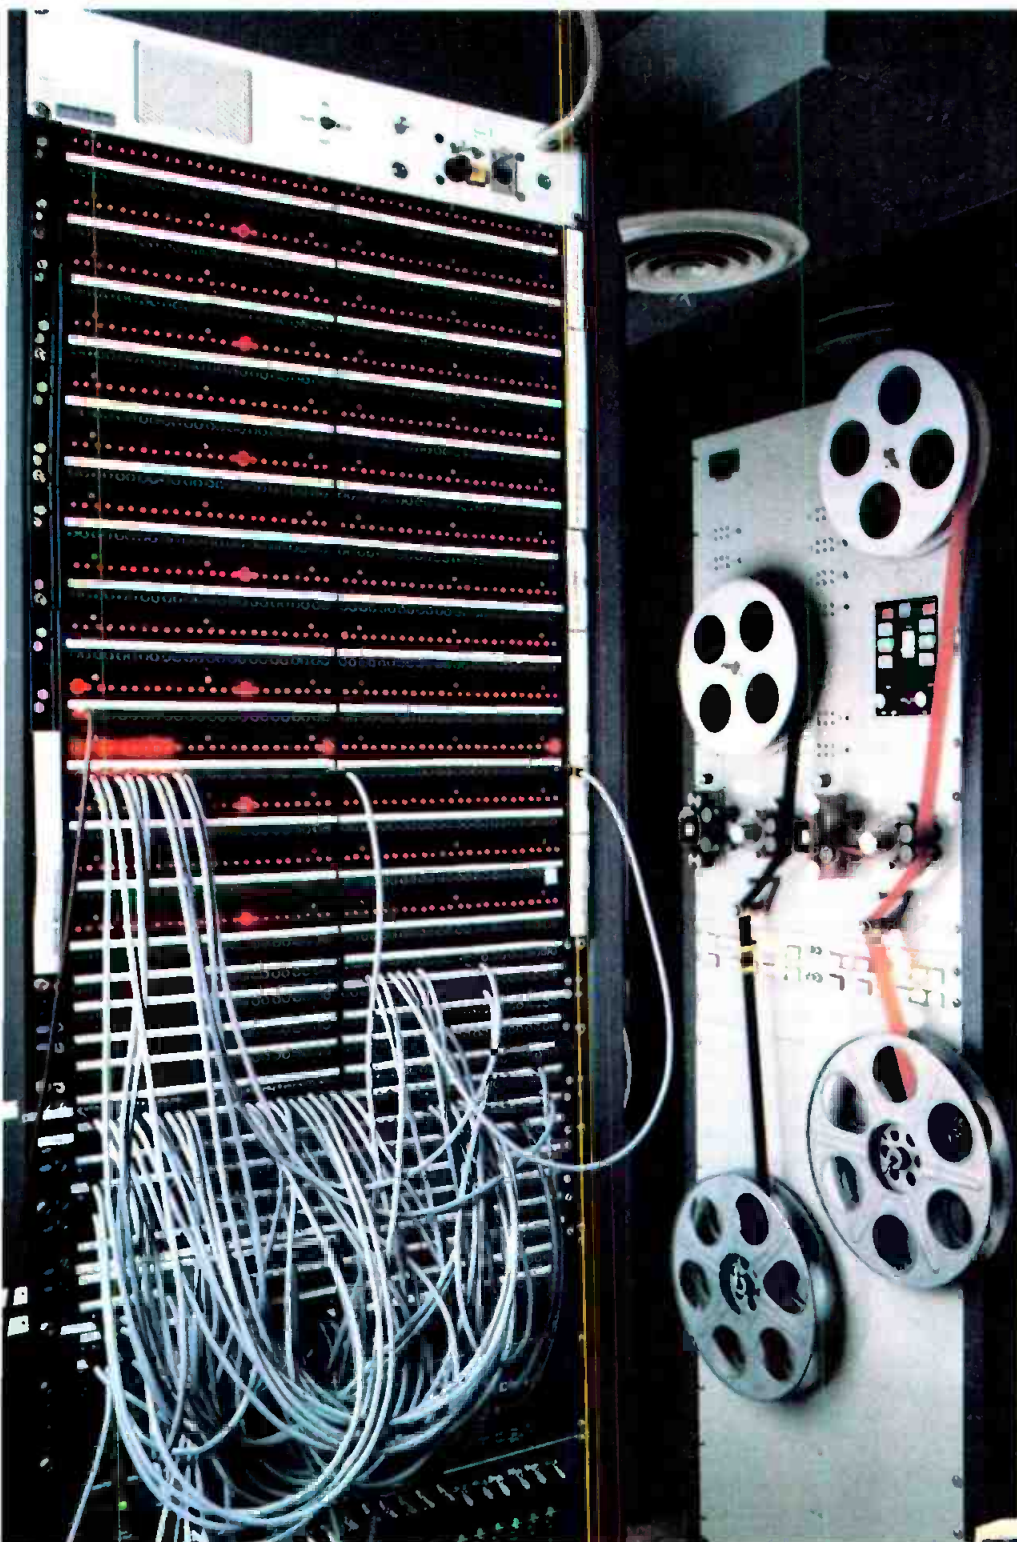

Lucasfilm's special effects in sight and sound have become the hallmarks of the STAR WARS saga. To achieve those other-world sound effects takes a lot of patching, switching, and mixing.

When Lucasfilm's audio patching requirements called for a unique and complex design to provide high-quality audio throughout its complex, Chief Audio Engineer Tom Holman selected ADC to manufacture jackfields to fit those requirements. All Tom had to do was plug them in, and the jackfields were ready to go—guaranteed and pre-tested—eliminating the hours of wiring, testing, and correcting that do-it-yourself jackfields often require. ADC custom and standard jackfields can save as much as 50% of the cost of do-it-yourself jackfields.

In addition, we offer more than 240 configurations in 1/4" or Bantam jacks, wire wrap or solder terminations, variable cable lengths, plus a variety of normalling configurations and types of terminations (including our revolutionary new "punch-down" connectors, introduced at this year's NAB). We inspect and computer-test every circuit to make sure it lives up to spec. That's why we can offer a five-year warranty on every unit.

Best of all, we can have any of our standard jackfields on their way to you in only two to four weeks. And that's a promise we can deliver. For information about ADC's standard or custom jackfields, write ADC, 4900 West 78th Street, Minneapolis, MN 55435. Or call our toll-free hotline—1-800-328-6188. In Minnesota, call (612) 835-6800.



(Above) ADC custom jackfields form an integral part of Lucasfilm's state-of-the-art audio technology.

(Right) Tom Holman, Chief Audio Engineer for Lucasfilm Ltd., selected ADC for responsiveness, quality, and reliability.



Circle (40) on Reply Card



Stephen Kerman (left) of Tektronix and Robert Daines of Custom Video Systems chaired the session on TV graphics and special effects.



David Fibush (left) of Ampex and Thomas Mehrens of Sony chaired the session on the future of videotape formats.



Roy Trumbull (left) and S. Merrill Weiss chaired the session, "Programming the Picture," and delivered individual papers as well.

Technical sessions

GENERATING THE PICTURES

- Session chairman: Gerry Brill, Ampex.
- "New Chrominance Components for Multiplexed Component Video Signals in HDTV Systems," Charles Rhodes, Scientific-Atlanta, Atlanta, GA.
 - "The HDTV Camera - Fighting the Resolution/Noise Battle," Dr. Ulrich H. Reimers, Robert Bosch GmbH, West Germany.
 - "A High Definition Still-Frame TV System," Glen Southworth, Colorado Video Labs, Boulder, CO.
 - "Extended Definition Television with High Picture Quality," Dr. B. Wendland, Univ. of Dortmund, Dortmund, West Germany.
 - "Today's Photographic Imaging Technology for Tomorrow's HDTV System," Richard Schafer, et al, Eastman Kodak, Rochester, NY.
 - "Compatible Systems for High Fidelity Television," Richard N. Jackson, Philips Research Labs, Surrey, UK; and Dr. M. Annegarn, Philips Research Labs, Eindhoven, The Netherlands.
 - "Switching and Distribution of High Resolution RGB Video Signals," Patric L. Lewis and Lee V. Good, Ames Research Center, Moffett Field, CA.

MANIPULATING THE PICTURES

- Session chairman: Steve Kerman, Tektronix.
- Vice chairman: Bob Daines, Custom Video Systems.
- "Arithmetic Control Algorithms for Digital Video Effects," Jim Blecksmith, Grass Valley Group, Grass Valley, CA.
 - "Technical Director's Interface to Digital Video Effects," Richard Dienhart, NEC, Elk Grove Village, IL.
 - "The Computer-controlled Frame Buffer as a Production Tool," Tom Klimek and Herman Towles, Jr., Computer Creations, South Bend, IN.
 - "Computer Graphics Animation," Peter Black, Xiphias, Santa Monica, CA.
 - "Menu-Driven User Interfaces for Videographics," Richard Shoup, Aurora Systems, San Francisco, CA.
 - "Tools for Interactive Picture Processing Systems," Alan Bridges, Via Video, Cupertino, CA.
 - "Digital Special Effects," Lance Williams, NYIT, Old Westbury, NY.
 - "Graphical Digits," Richard Taylor, Quantel Ltd., Berkshire, UK.

RECORDING THE PICTURES

- Session chairman: David Fibush, Ampex.
- Vice chairman: Tom Mehrens, Sony.
- "The Type C Format - A Moving Target," William Carpenter, Ampex, Redwood City, CA.
 - "A Second Generation of Type C 1-inch VTR," H. Tanimura and Y. Fujiwara, Sony Video Products, San Jose, CA.
 - "Analog Components, Multiplexed Components and Digital Components - Friends or Foes?" John Baldwin, IBA, Winchester, Hants, England.
 - "An Introduction to Analog Components Recording Technique," Koichi Sadashige, Matsushita Electric, Secaucus, NJ.
 - "Digital Video Recording: New Results in Channel Coding and Error Protection," Juergen K. R. Heitmann, Robert Bosch GmbH, Darmstadt, West Germany.
 - "8-9 Block Code: A dc-free Channel Code for Digital Magnetic Recording," H. Yoshida, Y. Hashimoto and T. Shimada, Sony, Kanagawa-Ken, Japan.
 - "Design Criteria for the New Broadcast Video Recording System Employing 1/2-inch VHS Cassette Tape," I. Arimura and Koichi Sadashige, Matsushita Electric, Secaucus, NJ.

PROGRAMMING THE PICTURES

- Session chairman: Merrill Weiss, KPIX-TV.
- Vice chairman: Roy Trumbull, KRON-TV.
- "How Not To Be Frightened by Microprocessors," E. Stanley Busby, Ampex, Redwood City, CA.
 - "Sharing the Software Development Load Between User and Manufacturer," Larry Seehorn, Control Video, Campbell, CA.
 - "Microprocessor Control Achieves Design Flexibility for Video Production Switchers," Howard P. Butler and David C. White, Grass Valley Group, Grass Valley, CA.
 - "Diagnostics for a Microprocessor-based Videotape Recorder," M. Glen Rose and Gary Warren, Ampex, Redwood City, CA.
 - "Product Growth Through Software," Bernard Hurley, RCA, Camden, NJ.
 - "A Microprocessor-based Camera Remote Control Unit," John A. Grey, RCA, Camden, NJ.
 - "An Intelligent Time Peripheral for Computer-based Videotape Editing Systems," Mike Racelo, EECO, Santa Ana, CA.
 - "Digital Diagnostics - How Much Should the Patient Tell," Roy Trumbull, KRON-TV, San Francisco, CA.
 - "Rolling Your Own - Customized Microcomputers for Custom Applications," Merrill Weiss, KPIX-TV, San Francisco, CA.
 - "The Evolution of a Comprehensive Computer Support System for the TV Operation," John Anderson and Michael Tooms, Protel Computer Systems, Wokingham, UK.

TOWNSEND

The Television Transmission Specialists

Running a straight course keeps Townsend a step or two ahead of the competition.

The many opportunities in television have attracted several of today's largest corporations into our industry from a variety of backgrounds. Since the beginning, Townsend Associates has been dedicated to the design, development, and manufac-

ture of television transmission equipment exclusively. It's not a sideline with us. And we're not someone else's subsidiary. From transmitters to components, everything we develop and produce is mainstream to the transmission of television.

INNOVATIONS THROUGH SPECIALIZED R&D

High Power UHF & VHF Television Transmission

FIRST solid state exciter.

FIRST to employ emergency klystron multiplex circuitry for UHF.

Low Power UHF And VHF Transmission Systems

FIRST manufacturer of High Power transmitters for L.P.T.V.

FIRST integrated antenna and amplifier transmission system for low power UHF.

Satellite Rebroadcast Systems

FIRST transmitter manufacturer to introduce satellite system concept through a cooperative effort with a TVRO manufacturer.

FIRST to have a complete line of transmitters for satellite rebroadcast systems. We design and build rebroadcasting systems for UHF and VHF and each is available in either low or high power configurations.

Multipoint Distribution Service (MDS) And ITFS

FIRST 100% solid state transmitters in both 10 watt and 100 watt.

FIRST with intermod free external diplexing of the aural and visual carriers.

Custom Engineering

FIRST and only manufacturer with hardware and the know-how to up-power all major brands of T.V. transmitters.

Major Components

FIRST
solid state pulser.

FIRST
to introduce external cavity klystrons.

FIRST
to provide a regulated and adjustable power supply...PERVEAC.

FIRST
to manufacture and employ plug in vacuum contactors for T.V. transmitters.



**The R & D Group
Our "FIRST" Team,**

The many transmission innovations developed by the Townsend R & D group have often involved technologies borrowed from other fields. Their singular purpose is to find ways to measurably raise the state-of-the-art in just one field...television transmission.

TOWNSEND

ASSOCIATES, INC.

79 Mainline Dr., Westfield, MA 01085 Tel. 413-568-9581 TWX #710-356-1521 • West Coast: 1080 Los Molinos Way, Sacramento, CA 95825 • Bangkok: Box 11-1240, Nana, Thailand 10112 • Canada: Comad Comm., 91 Kelfield St., Rexdale, Ontario M9W 5A3 • Australia: TBC PTY. Ltd., 6 Chlvers Rd., Thornleigh, N.S.W. 2120

Circle (41) on Reply Card



Richard Dienhart of NEC America discussed the technical director's interface to digital video effects, with special emphasis on automation of digital effects.

to be available for purchase at NAB-'83/Las Vegas.

Overall, the papers this year provided an excellent balance by covering the state-of-the-art and future trends in each subtopic addressed: picture generation, manipulation, recording and programming. As mentioned, the proceedings should be available before this report on the conference is off the press. You can read the full papers there, but the following are a few comments of note that will not appear in the book:

- Charles Rhodes, long identified with Tektronix but now with

Scientific-Atlanta, presented a new luminance equation and addressed a question foremost in the minds of many: Should a new video signal standard be developed that perpetuates the present situation?

- A number of papers considered video pictures of high quality, but many authors took issue with HDTV as a designation for this newly developing technology. Other recommendations included *High Quality*, *Higher Definition*, *Extended Definition* and *High Resolution*. But regardless of what it is called, higher quality video pictures are in our future, and the SMPTE provides the setting for this advancing technology to flourish.

- As observed in the outline of papers, attendees saw a lot of emphasis on graphics generation and animation. We first began to see papers on these techniques at SMPTE about four years ago, and they are always fascinating to sit through. Of special note is the dramatic way that authors now combine displays of slides, still-stores and videotape to bring out the power of modern electronic videographic systems.

In his paper, Richard Taylor of Quantel explored the power of the Quantel Paint Box with its capability of electronically mixing paints as in traditional brush artwork. He finished his paper with a videotape of picture manipulation that brought out other Quantel equipment capabilities.

- Throughout the videographics papers, there was a common theme that authors stressed in various ways. Dick Shoup of Aurora Systems may have brought this point out most clearly: The graphics system is just a tool, and the system must know who is the boss. All stressed the crucial role of the creative person at the controls.

- Dick Dienhart of NEC chiefly addressed the interfacing to digital video effects systems, with special emphasis on automation. He also mentioned other aspects of technology assuming their roles in broadcasting, including bubble memories, voice-operation of equipment and remote control techniques.

- With the advent of the M Format equipment, Koichi Sadashige of Matsushita pointed out that there is a definite trend for professional and consumer equipment to grow closer together in performance.

- The most significant report at the meeting may well be the address presented jointly by Robert McAll, chairman of the SMPTE Working Group on Digital Control; and M. J. Stickler, chairman of the EBU Ad Hoc Group for Control. They reviewed the

THERE'S A VIDEO PATCHING SYSTEM THAT'S BETTER.


HERE IT IS.

HERE'S WHY.

Only THE DYNATECH COAXIAL PATCH Gives You All These Features: normal-thru connection, cross-patching, non-interrupting on-line monitoring of live circuits, AND Coterm's automatic termination of patched-out circuits *within the jack*.

All These DYNATECH Features Plus the least amount of noise pick-up, signal degradation and signal loss. This patented, shielded jack helps reduce interference due to EMI, RFI, hum, noise and cross-talk. Unbalanced line, coaxial equipment transmits signals in excess of 400 MHz with negligible insertion loss, cross-talk or VSWR.

Normal-Thru Connection eliminates patch cords or normalling plugs for dedicated circuits — you get less signal degradation and you get a clean, uncluttered patchfield — reducing the possibility of errors when a patch must be made.

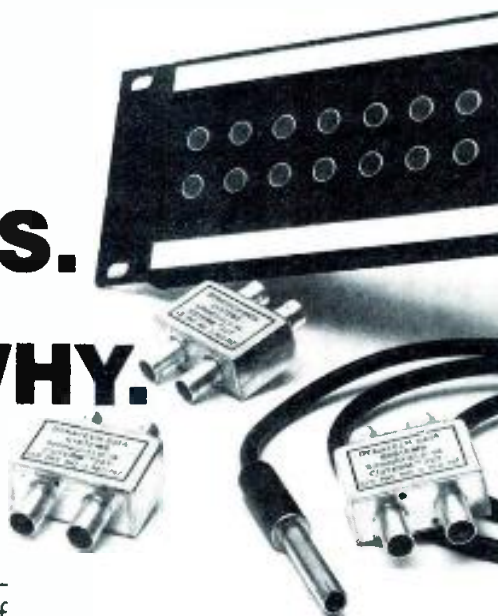

To Break The Normal-Thru Connection, you insert a patch cord that allows cross connections to be made. Sources that are patched-out are automatically terminated *within the jack in the proper impedance*. Test probes may be inserted in the jack to monitor a signal *without interrupting the live circuit*.

TO FIND OUT HOW Dynatech's coaxial patching/switching system can fulfill your requirements, CALL OR WRITE TODAY.

Dynatech

Data Systems

7644 Dynatech Court
Springfield, Virginia 22153
800-368-2210
In Virginia, (703) 569-9000

Circle (115) on Reply Card

Take a close look at Harris SX Series solid-state AM transmitters...

When you add up all the benefits, the choice is clear.

Available in 1 kW, 2.5 kW and 5 kW, the field-proven Harris SX Series transmitter is packed with advanced technology to bring you the utmost in operational efficiency and performance. Compare overall specifications with any competitive transmitter.

MAXIMUM OVERALL EFFICIENCY

MOSFETs (Metal Oxide Semiconductor Field Effect



Transistors) in the modulator and PA stages give you significant benefits over older bipolar transistor and tube technology. For example, MOSFETs incorporated into the Harris design result in higher overall efficiency — typically 70% or better.

ENHANCED AUDIO QUALITY

PDM Harris' patented Polyphase Pulse Duration Modulation is a highly efficient 4-phase system. The audio input is sampled four times during each PDM cycle. Your listeners will notice the marked improvement in audio quality.

PUSHBUTTON DIAGNOSTICS

Here is your centrally located monitoring point for a vast number of useful operating parameters — all right up front — all at fingertip command.



AM STEREO COMPATIBLE

Harris is the only transmitter manufacturer with extensive AM Stereo experience. That's a plus, as special consideration is given to incidental phase modulation...audio input to RF envelope output phase linearity...and RF channel phase response.

DIRECT POWER SAVINGS



SX Series transmitters save you up to 46% more power than other transmitters currently in use. A definite edge when there's a premium on every kilowatt consumed.

So add up all these benefits. Today you simply can't afford to be without a Harris SX transmitter. For more information, contact Harris Corporation, Broadcast Division, P.O. Box 4290, Quincy, Illinois 62305-4290. 217-222-8200.



THE STATE-OF-THE-ART IN ROUTING

There are a number of people in a number of places who claim they're state-of-the-art. But let's face it, the state-of-the-art in routing switchers hasn't changed significantly in years.

Until now. Because 3M is introducing a whole new approach to switching technology. And starting today, you can look to Minnesota for

the true state-of-the-art.

Our Series H Switching Systems utilize hybrid integrated circuitry, a technology developed in the aerospace and medical industries.

The results are the best performance specs in the business. Reliability is improved and maintenance is reduced.

Expansion is easier than ever.

A photograph of a desert landscape. A two-lane asphalt road with yellow double lines curves through the foreground and middle ground. The terrain is arid, with brown and tan soil and sparse, low-lying vegetation. In the background, a prominent butte with a flat top rises against a clear sky. The overall scene is bright and sunny.

Professional Audio/Video Equipment/3M.

SWITCHERS JUST CHANGED STATES.

And thanks to miniaturization, there's at least a 300% increase in crosspoints-per-rack-unit. What used to take up an entire room can now fit in a closet.

Best of all, we offer all these advantages at a price that's actually comparable to the price of conventional switching systems.

So if you still think of the state-

of-the-art in terms of yesterday's technology, stop by our booth at the NAB or call us toll-free at 1-800-328-1684. In Minnesota, call toll-free 1-800-792-1072. Outside the continental U.S., call International Operations collect at 1-612-736-2549. We'll give you a whole new sense of direction.



3M hears you ...

3M

Circle (45) on Reply Card

Continued from page 62

history of the extensive SMPTE/EBU efforts to evolve a serial digital control (interface) for TV and related equipment and presented a digest of the standard being recommended. A formal release is reported in an accompanying sidebar (at right). Also, a series of articles and special notices are being planned to aid in the adoption of the standard into new hardware.

- The award for the most humorous paper at the conference goes to Stan Busby for telling us how not to be frightened by microprocessors. He cranked his paper out on a home computer/word processor to emphasize the modern trend in "writing" an address.

- The most unique session, the last, saw the session chairmen serving both as chairmen and as principal speakers. Roy Trumbull of KRON touched on a subject dear to most engineers: diagnostics and maintenance, with special attention to digital equipment. Merrill Weiss of KPIX outlined the unique system he has developed at KPIX for computer control of station functions. The main thrust of his message was for engineers to do their design planning thoroughly so that manufacturers could build special equipment needed

Standards agreement reached on remote control of broadcast TV equipment

The SMPTE Working Group for Remote Control of Broadcast Television Equipment (T14.10), under the chairmanship of Robert McAll, met with the European Broadcasting Union (EBU) Ad Hoc Group on Remote Control, under the chairmanship of Michael J. Stickler, during the recent SMPTE Television Conference. During this meeting, the combined groups finalized and achieved agreement on two additional documents concerned with message architecture and interconnection between units.

These two new documents will complement the two previously agreed upon standards: Electrical and Mechanical Characteristics for Digital Control Interface, ANSI/SMPTE 207M; and Supervisory Protocol for Digital Control

Interface, RP 113, published in the September 1982 *SMPTE Journal*.

The combined set of standards will constitute the general specifications for a real time remote control system for broadcast equipment used by the TV and radio industries. The newly developed documents have been submitted to the Committee on Television Video Technology, under the chairmanship of David Horowitz, for formal letter ballot.

Stickler further reported that functionally identical documents will simultaneously be submitted by the EBU Ad Hoc Group to its parent committee G-5 on Production Systems Engineering for acceptance. These joint actions are the preliminary steps to international agreement and standardization.

Continued on page 70

Unmeasurable Performance

The SPECTRA SOUND Model 1500 is the only graphic equalizer available with unmeasurable distortion. The 1500 is also the quietest of all equalization devices. The result, a *measurable* improvement in audio system performance when varied equalization requirements exist.

DISTORTION
I.M. and T.H.D. below .0018%, 20Hz to 20kHz, +18dBv, test equipment residual.

SIGNAL TO NOISE RATIO
104dB, + 4dBv input, unweighted, 20Hz to 20kHz.

Spectra Sound 


3750 Airport Road
Ogden, Utah 84403
(801) 392-7531

Spectra Sound is a wholly owned subsidiary of Spectra Sonics

SPECTRA SOUND

MODEL 1500

GRAPHIC EQUALIZER

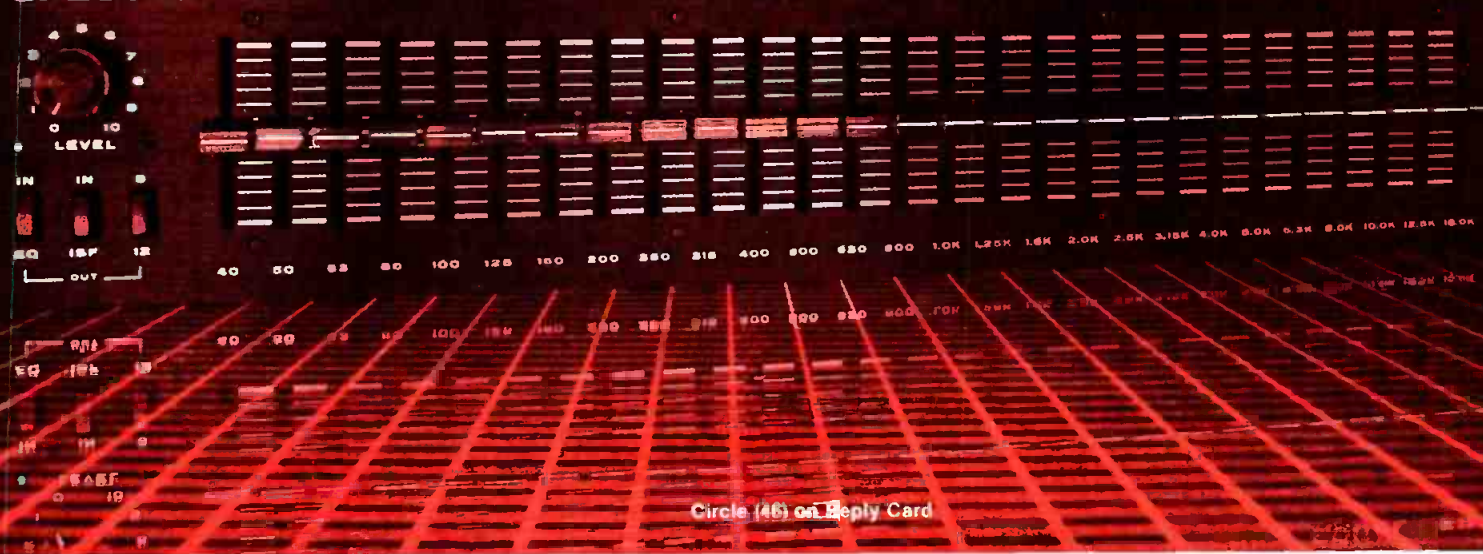

Circle (46) on Reply Card

New Gould portable video monitor/oscilloscope lets you select by number any line of composite video.

Meet our new OS3350/5. It's the first-ever NTSC 525-line waveform monitor, complete picture monitor, and 40 MHz oscilloscope combined in a single, portable package.

Through an onboard time-base generator, it lets you examine each of the composite video signal's 525 lines—one at a time. PAL plug-in available.

Or you can display complete pictures, highlighting any line selected for inspection to show the relationship between waveform and picture.


And finally, our OS3350/5 functions as a general-purpose 40 MHz, 5mV/cm dual-trace scope.

Our compact monitor/oscilloscope is suited for testing and troubleshooting TV, CATV, CCTV, video recorder/playback and other equipment in mobile TV, microwave repeater, broadcast station, institutional, military, plant and production-line applications.


For more information, contact Gould Inc., Instruments Division, 35129 Curtis Boulevard, Eastlake, OH 44094. Phone 800/321-3035.




Electronics & Electrical Products
Circle (47) on Reply Card

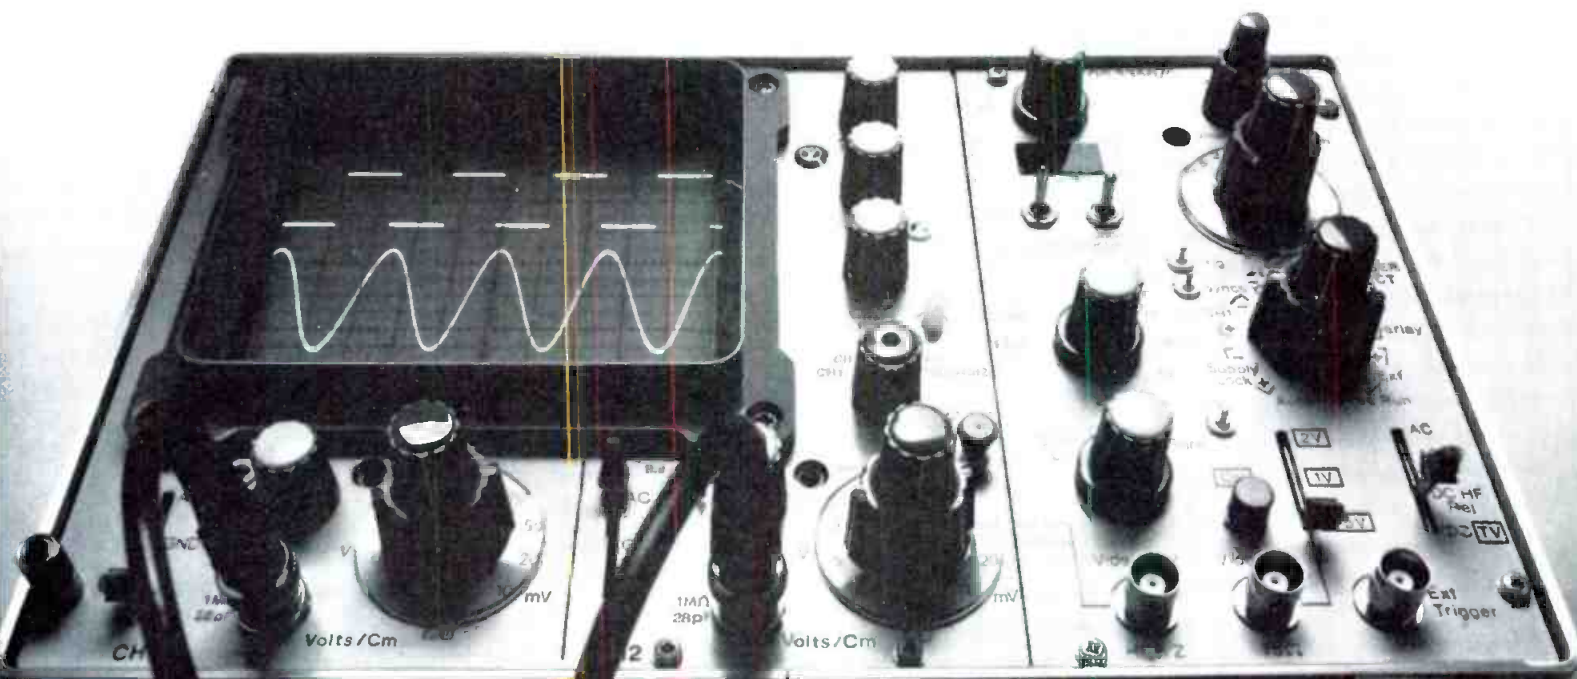

Gould's monitor/oscilloscope can display a complete picture with a bright line indicating the line under examination.

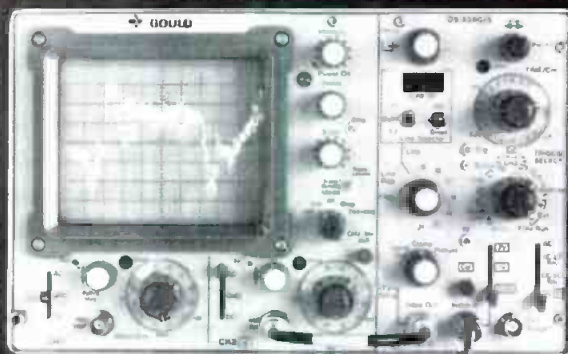

Or it can look at a video signal line-by-line.

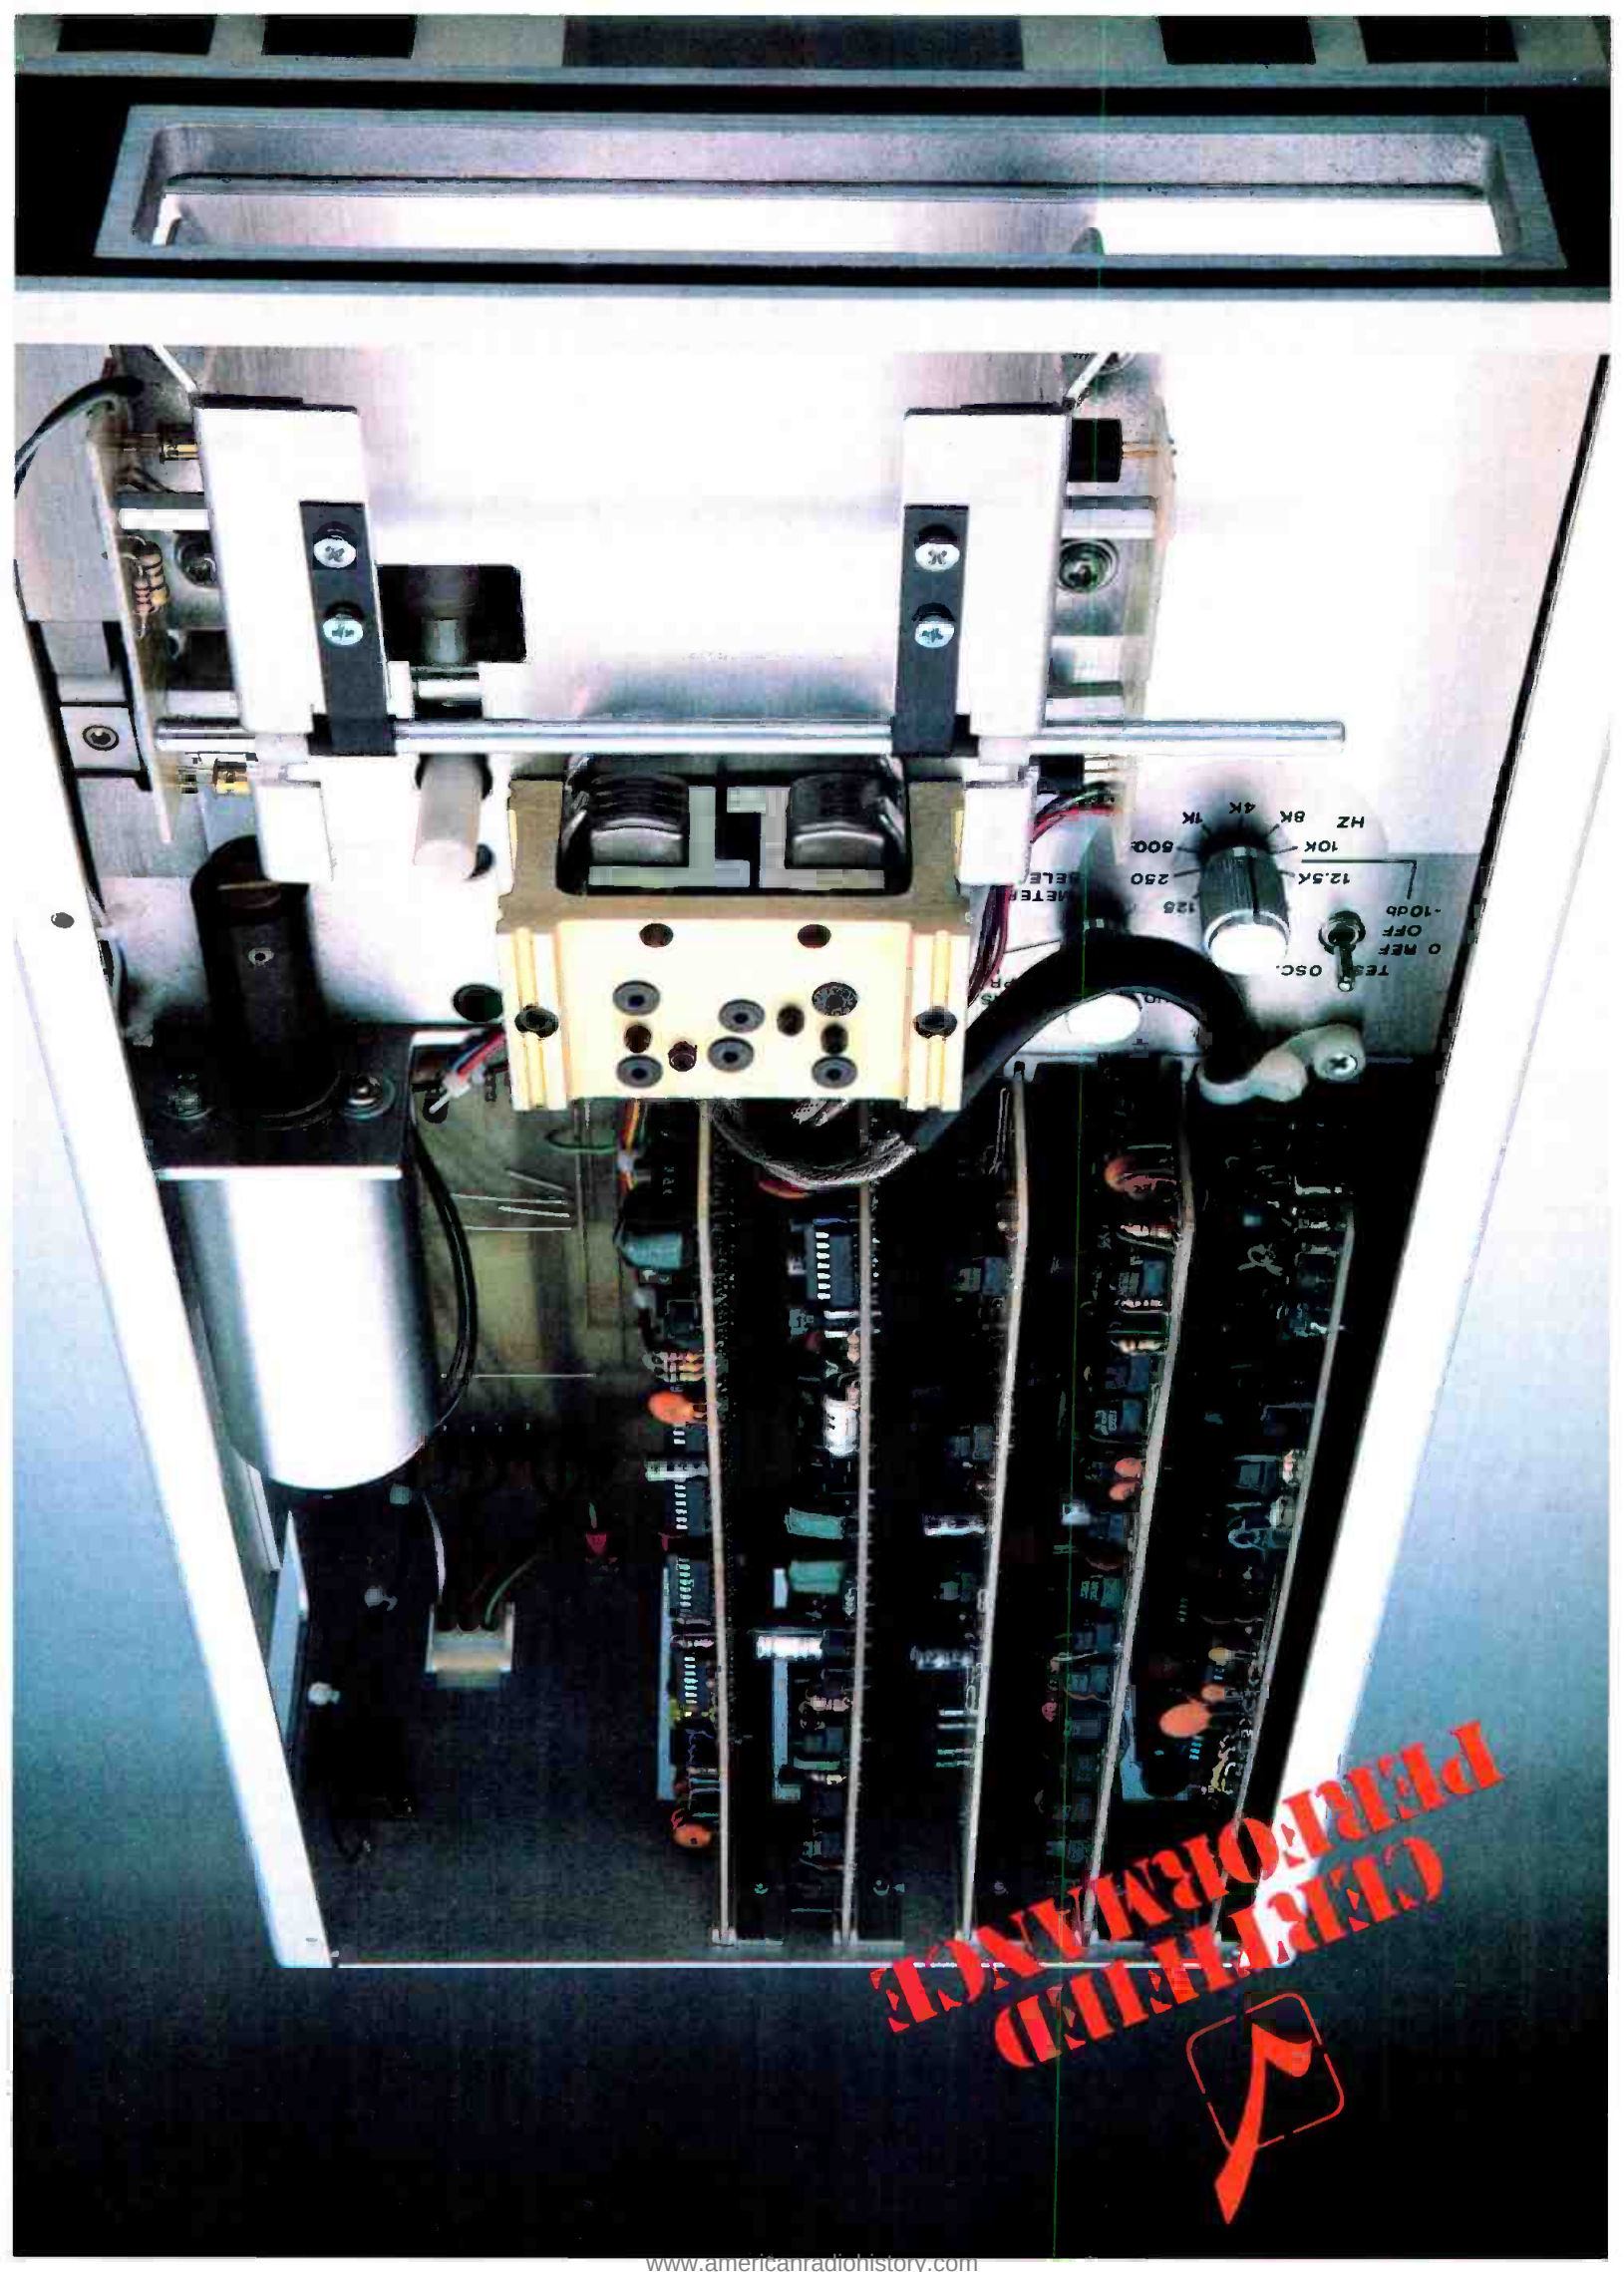

**CERTIFIED
PERFORMANCE**



TAKE A CLOSE LOOK AT THE NEW PRIMUSTM CART MACHINES.

Introducing the PRIMUS (pree-mūs) cartridge recording/reproduction system from Ramko Research.

These new cart machines are engineered to be demonstrably and dramatically better than any other cart machines in the industry. They deliver signal-to-noise, distortion and frequency response specifications that are unrivaled. They set a new standard for the lowest wow and flutter. They're built rugged throughout to guarantee adherence to specifications.

COMPARE THESE SPECIFICATIONS: YOU BE THE JUDGE.

roller is engaged by an adjustable air-dampened solenoid with a Teflon-coated plunger for friction-free, quiet operation. Optical sensors start the motor when a cart is inserted. This not only eliminated start-up wow, but it means there are no mechanical switches to break or jam. Bearings have a longer life too because the motor doesn't need to run continuously. A crystal-controlled, brushless D.C. servo motor insures timing accuracy to within 0.05%. The minimal motor heat is kept away from your tapes by a high traction, ceramic capstan. Tape speeds (7.5 & 15 ips) are field selectable.

With PRIMUS, you have three cue tones with sharp, error-free digital sensing. Solidstate bar graph meters and dynamic noise reduction are standard. An

sistently repeatable, accurate electronic phase alignment. A front panel phase meter and internal diagnostics are added for operating ease.

PhaseMaster works flawlessly with any cartridge and eliminates the compromise of unreliable and inconsistent electromechanical schemes. The trade-offs imposed by noise-inducing and non-compatible matrixing approaches are now history. Complex, inexact cross-correlation techniques have been discarded. With PhaseMaster you're positively guaranteed compatibility with all your previously recorded carts. Here's a cart machine truly ready for superior FM & AM Stereo applications — a machine that rivals the performance of an open reel recorder.

	PRIMUS TM	ITC RP SERIES	AUXICORD #128	BE SERIES 3280		PhaseMaster	TOMCAT	ITC SERIES 99B	ATR-800* (Reel-to-Reel)
Signal-to-Noise Ratio:	-60 dB	-60 dB	-47 dB	-52 dB	Signal-to-Noise Ratio:	-65 dB	-58 dB	-55 dB	-60 dB
Distortion (System):	0.9%	2.0%	1.0%	2.0%	Distortion (System):	0.9%	0.9%	0.8%	0.7%
Frequency Response:	±1.5 dB	±2.0 dB	±2.0 dB	±2.0 dB	Frequency Response:	40 Hz - 16 kHz ±1.5 dB	40 Hz - 16 kHz ±1.0 dB	31.5 Hz - 16 kHz ±1.0 dB	31.5 Hz - 16 kHz ±2.0 dB
Wow & Flutter:	0.095%	0.2%	0.15%	0.15%	Wow & Flutter:	0.06%	0.09%	0.15%	0.06%
Price:	\$2,550	\$2,610	\$1,975	\$2,450	Real-time Phase Correction:	locks to ±0.15 dB	none	none	none
					Price:	\$3,850	\$5,290	\$5,330	\$6,230

All measurements referenced to 160 mW/m, distortion is THD at 1 kHz.
All models are R/P stereo, priced with three cue tones.
All prices are based on latest available manufacturers' information 3/83.

All measurements referenced to 250 mW/m, distortion is THD at 1 kHz.
All models are R/P stereo, priced with three cue tones (excepting ATR-800).
*measurements referenced to 370 mW/m.

A CLOSER LOOK AT BETTER ENGINEERING

Mono or Stereo, R/P or playback, here are more reasons why the PRIMUS cart machines are the industry's most advanced.

The PRIMUS transport deck is 5/8" thick cast alloy for superior stability. It's covered with stainless steel for wear resistance and EMI shielding. The machined headmount allows easy and precise adjustments. In addition, the heads are internally illuminated for cleaning and inspection. For smoother insertion and withdrawal and to prevent distortion, carts are securely held at the edges by spring-loaded rollers, rather than friction springs. To prevent tape skew, pinchroller parallelism is adjustable with the motor running. The pinch

automatic 4 1/2 digit timer is optional. All electronics are on plug-in modules and rear panel connectors are quick disconnect type.

In summary, the PRIMUS cart machines have been engineered to be the most sophisticated broadcast reproduction system you can buy for under \$3,000.

COMPARE THE PHASEMASTERTM: YOU'RE THE JUDGE AGAIN.

If you're in the market for the ultimate Stereo phase-correcting cart machine, look to our PhaseMaster, the broadcaster's premier phase-correcting, stereo cart machine.

The PhaseMaster has all the features as PRIMUS plus, the advantages of con-

THE CERTIFIED PERFORMANCE GUARANTEE

Whether you invest in PRIMUS or PhaseMaster, you'll receive a two year warranty* and a *Certified Performance Gold Card* that instantly puts you in contact with our Technical Assistance Department over our toll-free hotline.

To put PRIMUS or PhaseMaster to task call (800) 821-2545 or contact your nearest Ramko Research sales representative or distributor. Ask about our two week free trial.

Take a close look at how the Certified Performance of PRIMUS or PhaseMaster can make your job a whole lot easier.

PRIMUS

PRIMUS is a division of Ramko Research, Inc.

Ramko Research, 11355 A Folsom Blvd., Rancho Cordova, CA 95670 (916) 635-3600 Telex: 176493 RAMKOSAC Heads are warranted for one year

Circle (48) on Reply Card

1983 Ramko Research

MCI/Quantel expands



MCI/Quantel announced at the SMPTE conference that it has expanded its operations into a new 21,000-square-foot facility in Palo Alto, CA. In the process, it has combined its previously separate headquarters and manufacturing group and increased available floor space by 50%.

The new facility, located at 3290 West Bayshore Road, also includes an additional 21,000-square-foot for future expansion. An important feature of the building is a central signal distribution system. Designed by George Hamilton, MCI/Quantel's director of engineering, the system feeds controlled video signals to all manufacturing test stations, field-service work stations, demonstration rooms and classrooms.

The building has also been equipped with a burn-in area in which the company's sophisticated electronic broadcasting equipment can be tested over a range of temperatures. Dedicated product demonstration rooms and classrooms will enable the company to increase its already heavy schedule of customer training courses.


Digital video products currently being manufactured by MCI/Quantel in Palo Alto include the DFS 1550 TBC/synchronizer, the DFS 1750 frame-store synchronizer, the DPE 5000/SP production effects system and peripheral equipment such as switching devices.



Moderator Robert Daines (kneeling) gives last minute instructions to speakers of the session concerning TV graphics and special effects.



Glen Southworth (left), one of the early speakers, discusses some of the historical work in HDTV with Bill Rhodes, BE editorial director.

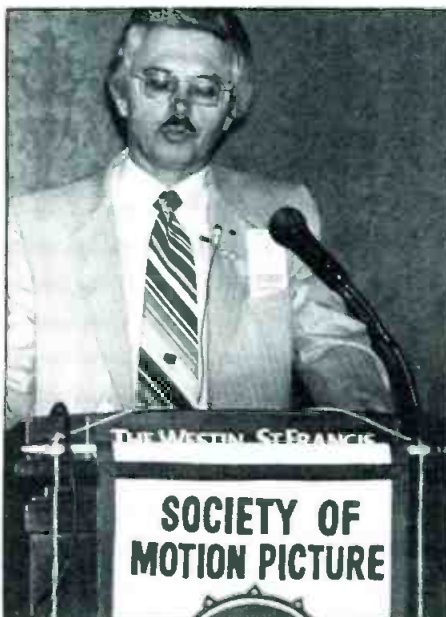

Robert McAll (left) and M. J. Stickler brought attendees up-to-date on the status of serial digital control of TV and related equipment.

Photos: Donna Foster-Roizen. Courtesy of SMPTE.

Digital Test Generator



Price/Performance at its Peak

If cost effectiveness of your equipment dollar is as important to you as state-of-the-art technology, then you cannot afford to ignore the DTG-1100N.

In just one rack unit you get 35 computer generated, precision video test signals and microprocessor controlled signal selection.

The user-friendly front panel menu and status indicators let you look and select... easy as 1-2-3!

Full remote control is also available.

NEW FOR NAB '83

The VIP-1101N Vertical Interval Processor is a sophisticated, versatile companion for the DTG-1100N Digital Test Generator. It is a stand-alone unit featuring a digital sync generator which always maintains RS170A in the digitally generated black output. Microprocessor control with digital read-out allows insertion/deletion of VIT signals or data in lines 10 to 21 of either field. The unit is scheduled to be shown at NAB '83. Don't miss it!

LEITCH

Engineering Committee meetings

A number of important SMPTE Engineering Committee meetings sponsored by the society took place during the conference. The purpose of the committees is to aid the development and maintenance of engineering standards and practices for the TV arts. The 17 committees that met during the conference were as follows:

- Subgroup on Camera/Recorder System Design
- Subgroup on Camera/Recorder Interface
- Working Group on Camera/Recorder Component Analog
- Working Group on Digital Video Standards
- HDTV Subgroup #2 — Psychophysics
- HDTV Subgroup #4 — Equipment
- Working Group on Digital Tape Recording
- Study Group on Digital Tape Recording
- Study Group on Digital Television
- HDTV Subgroup #1 — Production
- HDTV Subgroup #3 — Distribution
- Study Group on Digital Studio Implementation
- Working Group on Time and Control
- TV Technology Committee
- Study Group on High Definition Television
- Standards Committee
- Working Group on Digital Control of TV Studio Equipment

Progress resulting from these meetings will be included in our *Associations* department as the SMPTE issues formal statements.



Stanley Busby of Ampex: *Don't let microprocessors frighten you.*

Photo: Donna Foster-Rolzen. Courtesy of SMPTE.

ANY WAY YOU MIX IT.

248

Any way you plan it, the **Quad-Eight 248 Series** is the affordable performance leader. TV, Radio, Recording, P.A., or Film, the 248 system allows you to tailor the console to your current and future needs.

All of this flexibility, available at a price competitive with the "pre-packaged" consoles. Check it out — more features, **Quad-Eight** performance, and **Quad-Eight** reliability.

CALL YOUR DEALER, OR:



Quad-Eight Electronics For the artist in every engineer.


11929 Vose Street, North Hollywood, California 91605

Telephone: (213) 764-1516

Telex: 662-446 QUADFATHER LSA

Circle (50) on Reply Card

NOW: ADVANCED TECHNOLOGY TETRODES FOR FM-RADIO BROADCASTING

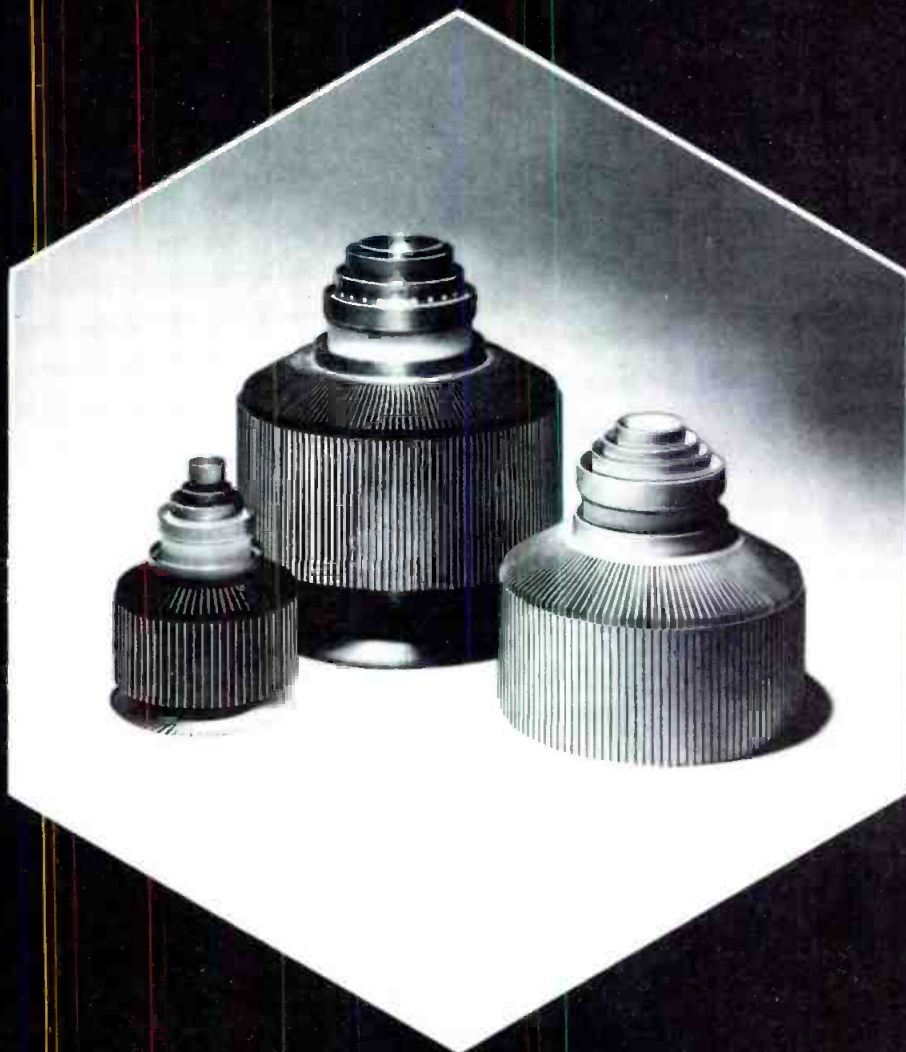

- State-of-the-art technology. ■ High gain, for simpler transmitters.
- Top-quality performances. ■ Unbeatable reliability.
- High output carrier power:
TH 298: 3 kW • TH 369: 5 kW • TH 399: 12 kW • TH 374: 30 kW.
- Specially designed, proven RF line-circuit assemblies,
matched to the tubes.

**And backed up by the reputation for quality of THOMSON-CSF,
a name to rely on!**



**THOMSON-CSF
COMPONENTS**

THOMSON-CSF COMPONENTS CORPORATION ELECTRON TUBE DIVISION
301 ROUTE SEVENTEEN NORTH, RUTHERFORD, NEW JERSEY 07070 / TEL.: (1.201) 438-23 00 / TWX: 710 989.7286

BRAZIL
THOMSON CSF
COMPONENTES DO BRASIL Ltda
SAO PAULO (11) 542.47.22

CANADA
THOMSON-CSF CANADA Ltd./Ltée.
OTTAWA (613) 236.36.28

FRANCE
THOMSON CSF
DIVISION TUBES ELECTRONIQUES
BOULOGNE BILLANCOURT
TEL.: (1) 604.81.75

GERMANY
THOMSON CSF
BAUELEMENTE GmbH
MÜNCHEN (089) 78 79 0

UNITED KINGDOM
THOMSON CSF
COMPONENTS AND MATERIALS Ltd.
BASINGSTOKE (256) 29.155

ITALY
THOMSON CSF COMPONENTI
ROMA (6) 638.14.58

SPAIN
THOMSON CSF
COMPONENTES Y TUBOS S.A.
MADRID (1) 419.88.42

SWEDEN
THOMSON CSF
KOMPONENTER & ELEKTRONRÖR AB
STOCKHOLM (8) 225 815

JAPAN
THOMSON JAPAN K.K.
TOKYO (3) 264.63.46

CG 5018

Circle (51) on Reply Card



John Baldwin of the IBA: *Analog/multiplexed/digital components — friends or foes?*



Richard Shoup of Aurora Systems: *Menu-driven user interfaces for videographics.*



Charles Rhodes of Scientific-Atlanta: *New chrominance and luminance components.*



Boris Townsend of the IBA: *In the next decade...chips of biological complexity.*

during implementation. "And if you do it right, everyone gains," he said.

• With all the emphasis on computers in the broadcast environment, it was not unexpected that the most-used term to emerge from this convention was *user-friendly*. This term was liberally bandied about to express the responsiveness of computers as a tool, an aid to broadcasters for control functions.

OTHER ACTION

Not all the action during the SMPTE meetings takes place in the formal exhibits and in the sessions. There is typically added action in hospitality suites, as noted elsewhere for Via Video, Quantel and RCA.

For members of the press, this year's SMPTE meeting provided a special added attraction: a tour of the Ampex Museum of Magnetic Recording. Because of a flight delay, the **BE** staff did not get to join the press for this special occasion. But we did arrive, hours late, to receive a special showing by George Boardman, Ampex, and Peter Hammar, curator of the museum. A short article on this unique museum appeared in the March 1983 issue of **Broadcast Engineering**.

FINAL NOTE

Next year's SMPTE Winter TV Conference is scheduled for Montreal, Canada, with dates to be announced. In 1985, it will return to the St. Francis Hotel in San Francisco. |:->))))

SMPTE exhibits

The equipment exhibition associated with the Winter SMPTE conference for television enjoyed heavy traffic even during the technical papers. In all, 26 manufacturers or representatives displayed innovative equipment, including those using hospitality suites.

• **ADDA** provided demonstrations of multigeneration graphics building with the ESPC still-processor. The recently introduced AC-20 dual-channel TBC caught attention as well, with its added

digital production effects.

• **Adams-Smith** displayed its versatile time code generator/reader equipment, the 2600 series. Capabilities include SMPTE and EBU longitudinal and VITC time codes and interfacing auxiliaries.

• Several videotape-related items of particular interest in the **AMPEX** exhibit caught the attention of conferees. The HPE-1CN editor ("N" for news) now includes the capability for interfacing to a variety of 1/2-inch, 3/4-inch and 1-inch VTRs. Among the 3-play

VTRs interconnected was the ARC-40, the studio compatible 1/2-inch VCR that complements the ARC-10/FPC-10 VCR system, along with the VPR 3 and a 3/4-inch U Format system. At several points during the technical papers, an ARC-10/FPC-10 recorder/camera was being used to document the presentations.

• Master Control Automation was the theme of **Data Communi-**

Continued

Share in Our Pride.



We're 20 years old and we're proud of it.

In switchers, digital effects, and automation, we have led the way.

We put the star in switchers.

Our SqueeZoom is to production what coke is to soft drinks.

And we continue to write the rules on automation.

Look to Vital for engineering excellence for the next 20 years.

VITAL INDUSTRIES, INC.

3700 N.E. 53rd. Avenue, Gainesville, Florida 32601
904 378-1581, 800 874-4608
TWX 810-825-2370, TLX 80-8572 Vital-A-Gain

Circle (52) on Reply Card

cations Corporation's booth. DCC's BIAS package manages on-air switching, machine delegation and control, as well as provides FCC logs and business reports. (See an application of BIAS at WISH-TV, on page 16 of this issue.)

- **Broadcast Marketing Associates** demonstrated the Lake Systems Corporation program automation equipment. The La-Kart broadcast software package is capable of controlling up to 30 machines, with U, M and C Formats all possible, and with broadcast LPTV and CATV applications suggested.

- **Cinema Products** used an Ikegami EC-35 camera equipped with a wide-angle anamorphic prime lens to display a widescreen picture. A modified Barco TV projector was used in the demonstration. Cinema Products also promoted the Starnet Teleconferencing services of Starcast Services.

- **Control Video Corporation**, known for its Sequencer commercial insertion system for satellite-relayed programming applications, stressed its latest system, the Lightfinger editing controller.

Besides allowing access to the system software with a keyboard, the monitor's CRT screen allows interactive operator control, using infrared technology.

- **Fortel** presented three systems: the Y-688³² total error corrector for color under VCR equipment; the C-YIQ³² TBC processor for component-based video recorder systems; and the Digibloc synchronizer, a 2-frame system that includes remote control capability.

- Providing tape was the main thrust at the **Fuji Photo Film** exhibit. On display were 2-, 1-, ¾- and ½-inch M, Beta or VHS Format tape materials. An improved color signal-to-noise ratio is claimed for the Fuji tape formulation with BERIDOX oxide materials.

- **Fujinon** provided a glimpse at a lens being suggested for HDTV applications. Designed for use with microprocessor-controlled cameras, the 1300-TVL high resolution capable lens includes a compact RGB pattern projector for rapid camera adjustment.

- The **Grass Valley Group** multi-booth display included the 300/Mark II digital video effects

production system; automation and digital control with the modular M200 system; the 3258 digital SC/H phase meter; a 3280 digital audio multiplex/de-multiplex system; and the 3291 fiber-optic data transmission units.

- The SK-110 TV camera drew attention at the Hitachi exhibit. The advanced computer control system tracks and adjusts 31 parameters within the camera. A complex system, containing up to 96 of the cameras, could be aligned within two minutes.

- **MCI/Quantel** showed its DLS6030 digital still-store library system, capable of recording and manipulating images, alongside its SP system. The SP equipment allows manipulation of live video images in custom or catalog moves. Within the quieter environs of the suite, Quantel's Paint Box intrigued by-invitation-only visitors. Staff artists demonstrated the innovative unit.

- **Merlin Engineering Works** displayed its ME-278 digital frame audio delay unit for lip sync restoration. One of its ME-258

Continued

4 Models—8 and 10 mixer dual stereo with rotary or linear faders • Transformer Balanced Inputs and Outputs • 3 Inputs Per Mixer—internal pads allows mic/line selection on the same mixer • Two 4-Input Auxiliary Input Selectors—may be assigned to any mixer • Pre-fader Pushbutton Cue—in addition to normal CCW fader cue position • LED Status Indicators—color coded to aid in instant identification of function selectors • Momentary or Continuous Remote Control Contacts—internally selectable, also controls optional digital timer reset/start • Full Metering Capability—two meters standard, up to four meters and/or digital clocks and timers optionally available, all meters provided with LED peak indicators • Gain Selectable Microphone Preamps—provided with center tap access for phantom condenser microphone power, processor input/output port with buffer amplifier for outboard compressors, limiters, etc. • Programmable Muting Logic—internal pin-programmed matrix allows any selection of monitor and cue muting for the first five mixer positions • Pushbutton Aural Phase Test • Announcer's Microphone Intercom-Air Selector • Full Dual Channel Operation—-independent program and audition assignment push-buttons • Five Monitor Driver Outputs—four muted, one non-muted • All Mixers Switch-Selectable to Mono or Stereo • Ground-Plane Techniques Used Throughout for Increased RF Immunity • Selectable Internal or External Master Level Controls • Accessories and Options—mono mixdown, high impedance (cassette) line input plug-ins, reference oscillator/line input plug-in, additional microphone input plug-ins, digital clock, digital timer, linear faders.



LPB® **citation** series Everything you want in an audio console
 LPB Inc. • 28 Bacton Hill Road • Frazer, PA 19355 • (215) 644-1123
 Manufacturers and Distributors of Broadcast Equipment since 1960
 © 1981 LPB Inc.



3M
IS HELPING
A LOT OF
COMPANIES
FILL A
ONE-INCH
GAP.



For many broadcasters and production companies, wanting a one-inch VTR system is one thing. But finding the money to buy one is quite another. That's where 3M can help. We've put together a financing package that makes our TT-8000 VTR very affordable. And the special combination of enhanced editing features, automatic track following and controlled tape interchange program make the TT-8000 an even more attractive package. For a free brochure, call us toll-free at 1-800-328-1684 (1-800-792-1072 in Minnesota), and find out how we've brought professional quality one-inch VTR within reach.


Professional Audio/Video Equipment/3M.

3M hears you . . .

Circle (54) on Reply Card

3M

IT'S A
Stik-Up™

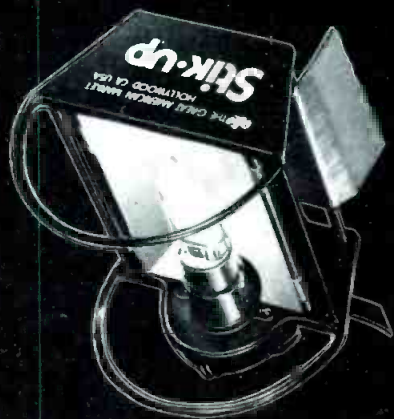

**TIGHT SPOT?
LOW CEILING?
DARK CORNER?**

Stik-Up™

Mbunfs where you need it, in any position — it weighs only 8 ozs. Small, tough, bright light...the problem solver you can tuck in your brief case. The ultimate trick for your bag of tricks.

Ideal for TV, film, stills.
100 watts, 3000° Kelvin.
Clip-on extension arms hold color media.

A ready-to-go Stik-up Kit containing three heads and accessories is available.
Write or call for info.

Stik-Up™

THE GREAT AMERICAN MARKET

POB 178 WOODLAND HILLS CA 91365-0178
TELEPHONE 213/883-8182 TWX 910 494 1233

COPYRIGHT 1983

Circle (55) on Reply Card

Table I.
SMPTE exhibitors

For information from exhibitors at the Winter SMPTE TV Conference, the following Reader Service Numbers are provided for your convenience.

ADDA Corporation	(365)	Hitachi Denshi (America)	(376)
Adams-Smith	(366)	MCI/Quantel	(377)
Arnpex Corporation	(367)	Merlin Engineering Works ...	(378)
Broadcast Marketing Associates	(368)	NEC America	(379)
Cinema Products Corporation	(*)	Philips Television Systems ..	(380)
Control Video Corporation ..	(369)	Precision Echo	(381)
Data Communications Corporation	(370)	RCA Broadcast Systems	(382)
Fortel	(371)	Sony Corporation	(383)
Frezzolini Electronics	(372)	3M Company	(384)
Fuji Photo Film USA	(373)	Tentel Corporation	(385)
Fujinon	(374)	Thomson-CSF	(386)
Grass Valley Group	(375)	Via Video	(387)
		Videomedia	(388)
		Vital Industries	(389)

*For more information, contact: Cinema Products Corporation, 2037 Granville Ave., Los Angeles, CA 90025.

ultrawideband VTR units provided the source of an HDTV demonstration tape on the video monitor. The VTR, with a 10MHz bandwidth, played the material developed by **Compact Video** and presented via satellite at the Fall '81 SMPTE convention in Los Angeles. (See **BE**, January 1982, page 84.)

- Digital effects, with trajectory, multimove and the exclusive (optional) bubble memory, are featured in the E-Flex from **NEC**. Video from the TT-7000 series VTR allowed an impressive demonstration of the E-Flex system capabilities.

- Introduced at the NAB'82 show, the **Philips Television Systems** LDK-6 camera presented its true colors at SMPTE'83 on the LDH-6200 color monitor. The camera system includes individual microprocessors in its various components to maintain stable camera operation. Also at SMPTE'83, the highly portable LDK-14LS camera caught its own share of attention.

- **Precision Echo** featured the SQ-1 digital image compression and manipulation equipment. A single-channel system, the SQ-1 allows compression, positioning, horizontal inversion, border effects and more.

- Video component recording with the Betacam brought many to the **Sony** display. Once there, the conferees also found the digital post-correction BVX-30 unit, as well as the BVW-10, BVU-820 and BVH-2000 machines, featuring digital bus control capabilities.

- **Tentel** presented the Tentelometer tension gauge equipment for diagnosis and setup of 1-inch C Format, as well as U, VHS and Beta Format. VCRs. The TSH gauges for 1/2-inch Beta or VHS and 3/4-inch U Format machines demonstrated determination of sources of tape edge damage and

tape path errors.

- The eye-catching capability of the Graphics V system from **Thomson-CSF** included the Vidi-font character generator/graphics system. Composition, text-editing and animation effects provide artistic freedom with a multiplane frame store for special effects graphics manipulations.

- The **NEC** TT-8000 1-inch C Format VTR shown by the **3M Company** included some cosmetic changes from the equipment introduced at NAB'82 and several internal improvements. The performance of the machine remains high quality. Along with the VTR, 3M displayed the 40X routing switcher with microprocessor control.


- **Videomedia's** Eagle series edit controllers include Z80 distributed intelligence similar to the well-known Z6000 series. The Z80 chip also finds use in the VCM-200 master control automation system (and VCM-201 remote sequencer units) and the Q-Star serial transport automation and remote equipment (upgradable to a VCM-200). The STC-1 and STC-2 systems provide highly flexible remote control via a twisted pair based on Z80 processor technology.

- A digitally controlled production switching system, the 250P/N from **Vital Industries**, incorporates an RS422 interface proposed by SMPTE standards work. The small switcher joins the Vital line of innovative products highlighted by the SqueezeZoom effects system.

- Other products evident at the show, but not in the exhibit halls, included the **RCA** Hawkeye video recording camera (VRC) and a universal recorder by **Frezzolini**, the FOC-1, for VRC operation with many current ENG cameras. **Via Video** presented its System One electronic graphics system with a digitizing camera, graphics tablet and friendly software system.

||:~(=))|||

NEW!

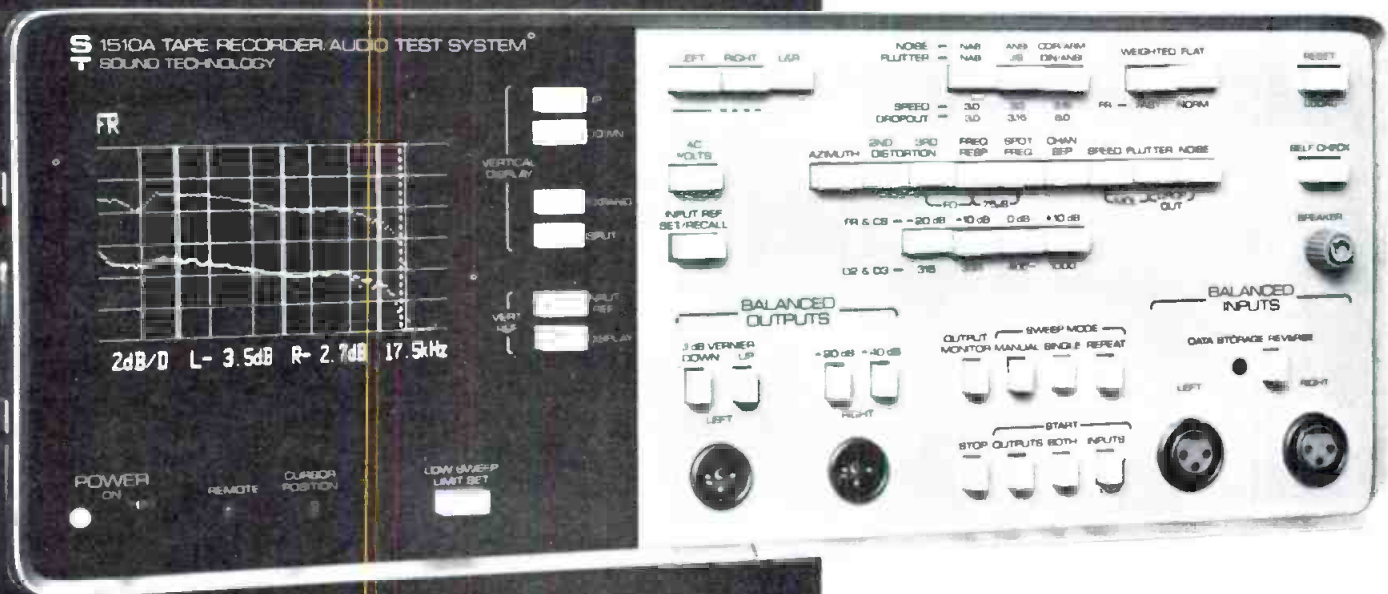

The Sound Tech 1510A ... the most advanced audio measurement system available today.

WHY?

Because one 1510A can do in minutes what used to take hours with more conventional and ordinary test set-ups, and at a price you can afford. It can also show you test results you've never seen before.

Designed around the most advanced microprocessor hardware, the 1510A incorporates all the necessary on-board software programs to get the job done: you don't need to waste time and money writing programs.

DESIGNED FOR THE BROADCASTER

The Sound Technology 1510A features differential inputs, electronically balanced outputs with a clean low-distortion signal (typically .003%) from +30 dBm to -70 dBm.

WHAT WILL THE 1510A DO?

Here's a small sample of the varied jobs the 1510A will perform for you:

- Exclusive asynchronous inputs and outputs for remote location

testing (satellite, transmitter, studios)

- Total tape recorder and cart machine mechanical and electronic checks
- Transmission line analysis
- Automated production testing using GPIB option
- One-third octave spectral analysis of noise
- Verify mixing console performance
- Evaluation of audio quality for VTR's
- Verify threshold points on compressor/limiters using compression ratio test
- Thoroughly evaluate and certify magnetic film and audio tape
- Complete reference turntable and phono cartridge analysis

FOURTEEN COMPREHENSIVE AUDIO TESTS

Here are some of the tests you can run with the 1510A:

- Frequency Response; ± 0.1 dB
- Channel Separation
- Autoranging AC Volts
- Phasing

- 2nd and 3rd Harmonic distortion vs. level
- Spectral and composite noise
- Dynamic range vs. frequency
- Wow and Flutter
- Delta speed and drift
- Compression ratio
- Dropout vs. time

TV AUDIO GOING STEREO?

The 1510A is the only two-channel test instrument available today. When the FCC decides on a TV stereo system, the 1510A will be ready to go to work for you.

WHAT ABOUT AUTOMATION?

With the addition of the General Purpose Interface Bus, the 1510A can be run using a computer. Testing time is cut down to seconds rather than minutes. Using the bus, the engineer can set up a regular equipment maintenance schedule.

CALL SOUND TECHNOLOGY TODAY!

We'll be pleased to send full information on the 1510A and our other industry standard test equipment. Or, for immediate action, call (408) 378-6540.


**S SOUND
T TECHNOLOGY**

1400 DELL AVENUE
CAMPBELL, CALIFORNIA 95008
Telephone: (408) 378-6540
Telex: 357445

Circle (113) on Reply Card

www.americanradiohistory.com

INCREASE YOUR MARKET SHARE WITH A MULTI-BEAM SIMULSAT

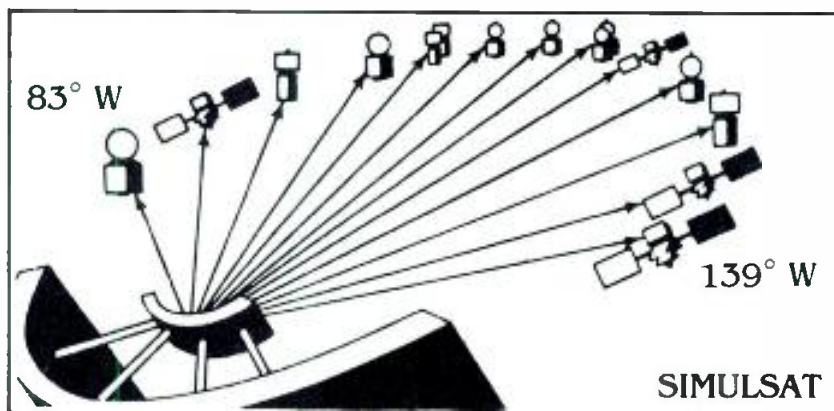

**SIMULSAT-7 SEES ALL SATELLITES SIMULTANEOUSLY
WITH 7 METER PERFORMANCE**

Simulsat can give you a new freedom in program selection and access. With Simulsat, your programming decisions are never affected by your hardware's limitations. This flexibility allows you to be more competitive in your market, more responsive to your customers needs.

SIMULSAT GIVES YOU FLEXIBILITY FOR TODAY AND TOMORROW.

As programs shift to different satellites and new satellites are launched, the need for your station to access any combination of satellites simultaneously, increases. Simulsat's technology gives you the flexibility to deal with these changes efficiently and economically. When it comes time to organize a teleconference or supply audio feeds for the radio station next door, Simulsat paves the way for these new profit opportunities.

SEVEN METER PERFORMANCE


Our new Simulsat-7 will give you 7 meter performance on every satellite. Consider the equipment expense and maintenance headaches associated with conventional steerable antennas compared to one fixed Simulsat.



SIMULSAT-5

CHOOSE THE SIZE THAT'S RIGHT FOR YOU.

Simulsat-3	41 dBi gain
Simulsat-5	44 dBi gain
Simulsat-7	47 dBi gain

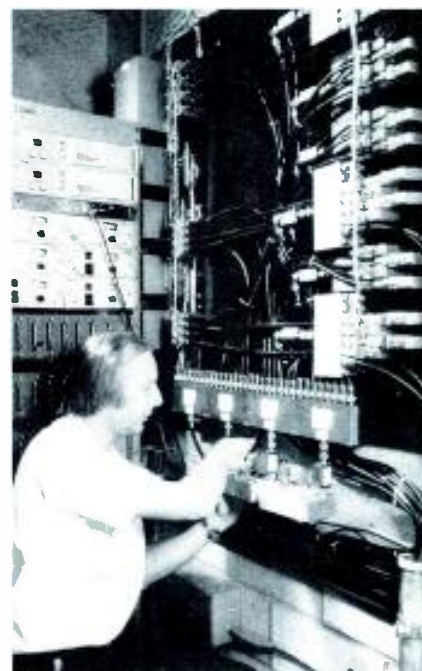

TURNKEY INSTALLATIONS

Antenna Technology can provide you with a completely installed and engineered system specifically designed for your unique situation. Whether you require a remote switching system from your antenna site to your studio or a standard electronics package with your Simulsat, our engineers can design a system to meet your needs. Let our Broadcast Specialists show you how we can save you time and money with a Simulsat installation.



**ANTENNA
TECHNOLOGY
CORPORATION**

8711 East Pinnacle Peak Road Suite C-103
Scottsdale, Arizona 85255
(602) 264-7275

Circle (56) on Reply Card

www.americanradiohistory.com


Improving tube life in high power transmitters

By David P. Hebert, chief engineer, KONA-AM/FM, Tri-Cities, Washington


Soon after the installation in 1980 at my station of a recently manufactured 25kW FM transmitter, I became aware of a problem with premature tube failure. Through my experiences, I found causes of shortened tube life and modifications that could correct the problem. These may prove helpful to other stations that have encountered a similar problem.

When the McMartin BF25K transmitter was originally designed, a 3CX20,000A7 zero-bias triode was chosen as the power amplifier. This was a sound decision by the manufacturer, because the tube dissipates about 8kW of heat when operating at a power output level of 25kW. Manufacturers, eager to ensure adequate amplifier headroom, found the choice of this tube to be nearly perfect.

Continued on page 84

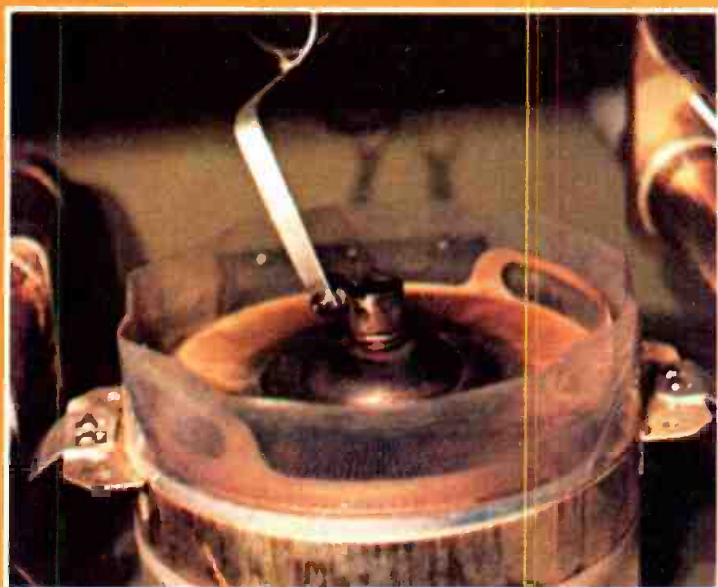


(a) Just before modification. Note discoloration of tube, which had less than 2000 hours on it.

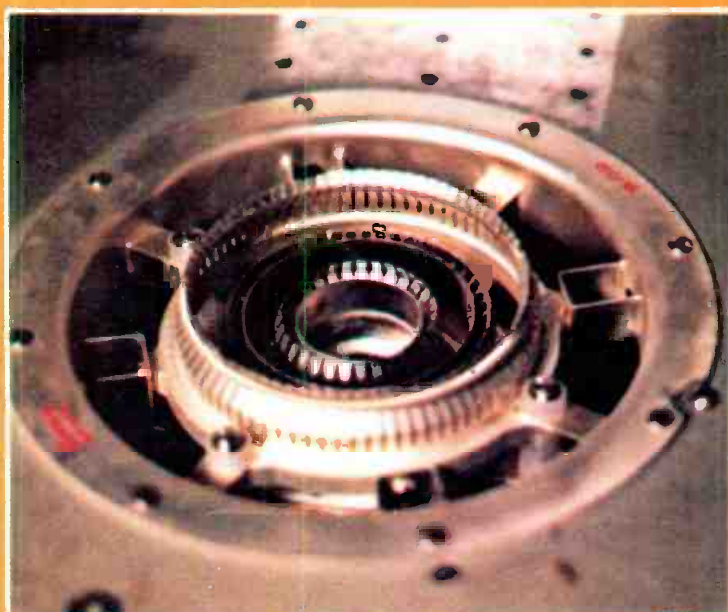

(b) The PA tube socket, just 30 minutes after photo (a) was taken.



(c) The new EIMAC type SK-1306 chimney in place.

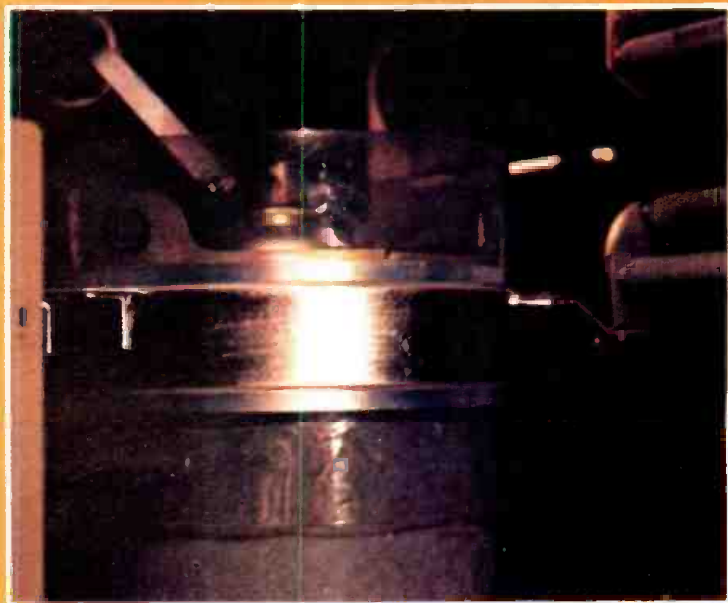

(d) The completed project.


AMPEX 196 ONE- IT'S NOT JUST ANO

Beautiful pictures generation after generation.

The high energy formulation of Ampex 196 has been designed to give you pictures of perfection time after time. With clarity and color rendering that's truly amazing even after many generations.

Recent laboratory tests comparing signal loss after multiple generations demonstrated Ampex 196 is measurably superior in chroma signal-to-noise, audio distortion and video signal-to-noise. These tests put Ampex directly against all other leading brands in multi-generation uses.

Multi-generation Testing

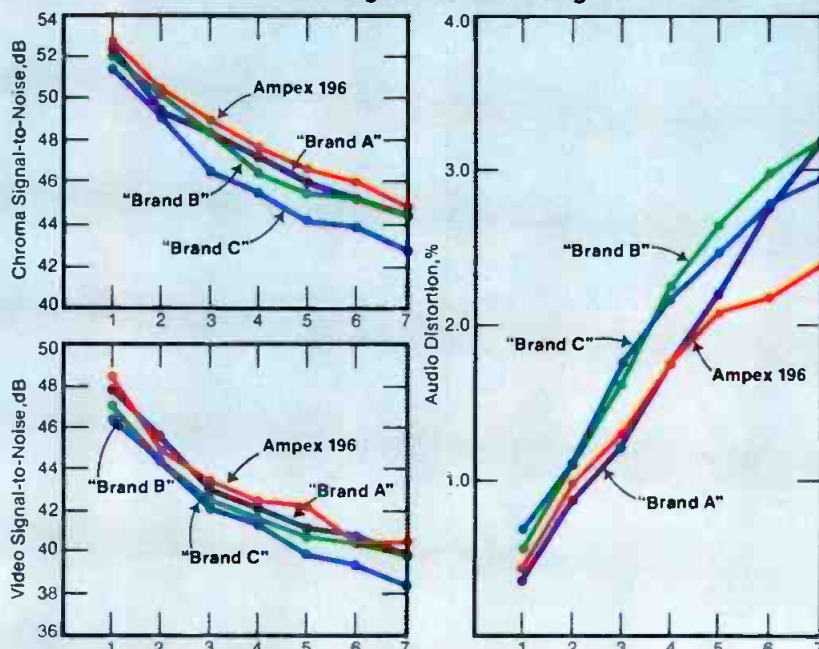

INCH VIDEO TAPE. OTHER PRETTY TAPE.



Even troublesome shades of red hold up brilliantly after seven generations with Ampex 196. And audio distortion is insignificant.

But don't take our word for it. Check the charts that show the test results. Better yet, give Ampex 196 your own test. You'll quickly realize why so many video professionals use Ampex 196 for mastering, editing and duplication.

To find out more about how Ampex 196 One-Inch Video Tape can make your productions look brilliant over and over again, call your Ampex representative.



AMPEX

Ampex Corporation • One of The Signal Companies

QUALITY WORTH BROADCASTING.

AMPEX CORPORATION, MAGNETIC TAPE DIVISION
401 Broadway, Redwood City, California 94063 (415) 367-3809
Circle (57) on Reply Card

Design maximums of 8kV and 5A on the plate were easy limitations to meet.

Almost immediately after installation, I became aware of the premature tube failure. Informal study revealed other transmitters in the area that also had this problem, but no clear pattern could be determined as to tube life vs. operating power level, or even frequency. I found that the same transmitter in other situations would not necessarily deliver better tube life when operated at a lower transmitter power output, while in other circumstances it would sometimes deliver better tube life when operated higher than 25kW. Clearly, no pattern could be found.

My study continued as to the apparent cause of tube failure after 3000-4000h. From what I could determine, the failure was caused by severe distortion of the grid caused by heat; however, the exact cause of the heat seems to be a matter of disagreement.

Back to basics

I concluded that there were six basic items that could characteristically contribute to poor tube life. They are the following:

Improper tube filament voltage. Filament voltage would seem to be the greatest contributing factor in the early death of many transmitting tubes. The 3CX20,000A7 is specified to operate with a filament voltage of 6.3V and 160A of current. Operation above these levels cannot be tolerated for long. Therefore, the importance of an iron-vane voltmeter cannot be overstressed. Measuring the filament voltage at the tube is a must (especially when it is fed from a voltage regulator with a non-sinusoidal waveform output), and care must be taken to ensure the mechanical integrity of all mechanical connections in the filament circuit. Full 25kW output should be obtainable with a filament voltage of slightly more than 6.05V for a new tube.

Excessive RF drive. Because autopsies from discarded tubes indicate overheating of the grid structure, this would be a natural item to suspect. However, the three tubes in the series (the 3CX10,000, 3CX15,000 and the 3CX20,000) all share the same common grid structure and ratings. It is important to remember that the grid does not actually dissipate all the drive to it, when operated in a grounded-grid circuit, but rather only a small part. Therefore, the 500W rating of the grid would seem adequate, as published specifications for this tube indicate a drive requirement of about 1700W when operated at the rated power level. EIMAC, the

manufacturer of these tubes, has concluded that problems encountered in tube life are usually the result of excessive RF drive.

Improper tuning. Certainly, for efficient transfer of power from the cathode to the plate and then to the antenna, proper stage tuning is paramount. Because the grid is electrically in series with the plate circuit, any operating mismatch in the plate circuit will reflect to the grid, resulting in increased grid structure heating. Most transmitters of the BF25K type use a cathode current meter, and one can arrive at the grid current by subtracting the plate current from the cathode current. This figure should approximate the original tuneup values for the particular transmitter in question. Generally, the tube will be properly tuned when proper power can be obtained with minimum drive from the preceding stage.

Reduced air flow. Typical air flow around the tube should normally run at least 1600cfm. As the tube is producing about 90,000 BTUs of heat, it is important to provide both a fresh constant supply of cool, clean air and a means of removing the heated air as fast as possible. An exhaust fan rated at least 2000cfm, along with an efficiently designed exhaust duct, is a cost-effective purchase. With an outside temperature of 75°F, a thermometer should show an exhaust temperature of about 145° to 175° in the hottest portion of the exhaust port. Overheating of the tube can sometimes result in damage to the tube stem seals and resultant internal damage to the tube.

Spurious emission. A grounded-grid amplifier is intolerant of spurious activity, and will reflect spurious action unfavorably to the grid circuit. My experience has shown that the most frequent source for spurs will be the exciter, but other causes should not be ruled out. There could be high harmonic activity (anything much higher than 30dB below carrier, measured before the harmonic or low-pass filter), defective harmonic trap, excessive antenna VSWR, improper tuning, intermodulation products from nearby transmitters or objects, or an artifact somewhere in the transmitter itself.

Tube socket damage. Incomplete or inadequate physical contact with any part of the tube can be counterproductive. With the circuit considerations of high filament current and low grid circuit impedance, secure contact is important. The fragile finger stock inside the tube socket may become bent, broken or tarnished and will show signs of stress (especially when the tube is changed often). But one can be too careful and not fully insert the

tube into the socket to avoid socket damage, resulting in no contact at all to the grid ring. This also results in arcing to the tube and possible damage.

The modification

My studies revealed that the problem of short tube life can be corrected by replacing the 3CX20,000 with the physically smaller 3CX15,000, provided, of course, that none of the previously mentioned problems exist. The electrical ratings of both tubes are identical, according to EIMAC published specifications. Communications with the FCC indicated that this modification is considered acceptable as a Class II permissive change, as defined in Section 2.1001 (b) (1) of the commission's rules. After the procedure, a proof-of-performance should be made to demonstrate compliance with the technical requirements of Section 73.317. The replacement modification is relatively simple and can be done by one person in less than three hours.

Before modification

Before attempting to make a modification such as the one described in this discussion, the following steps are recommended.

- Be sure the transmitter is running properly, and is not suffering from any of the conditions described previously. In most cases, if there is something basically sick about the transmitter, modifying the transmitter will not be a cure.

- Before the modification, I installed an in-line wattmeter between the driver and the final stage. This was possible because a short piece of 1½-inch rigid line runs between the two stages. Not all transmitters use a 50Ω feed, as was the case in my modifications. I have found this helpful in recording the amount of drive required by the PA, and also ensuring the good match to the driver stage. I can also be certain that the drive actually delivered to the PA tube is within specs. An added bonus is that monitoring the RF drive to the PA is a good check of the preceding tube stages and is a helpful diagnostic aid.

- Be sure of all meter indications. If you know that the plate current, cathode current and power output meters are accurate to begin with, then you have a pretty good handle as to what's going on in the PA cavity.

The modification will require a good 3CX15,000A7, an EIMAC type SK-1306 chimney, a new plate blocker and two new RF connection straps to attach from the smaller plate blocker to the tuning and loading components. It should be possible to accomplish the entire modification for about



New Tools of the Trade

The new 200 Series list management video editing systems are built to be hardworking tools of the trade you can depend on.

200 Series list management functions do all of the tedious record-keeping for you while you concentrate on creative, visual editing decisions. With only one or two keystrokes you can add, delete, or replace edits, and choose to ripple the edit list to reflect your changes. You can sort through your edit decisions by time code, by reel number, or by audio or video edits to locate material instantly, and you can move whole blocks of edits if you wish. Overlaps and inserts can be automatically cleaned after each edit, or the "409" program can clean the entire list at one time. On-board memory stores the list while you edit (up to 866 lines of memory in the 204 system).

The new modular design of the 200 Series editing systems includes keyboard, detached status display monitor, and separate rack-mountable control electronics for more elbow room and options in your editing suite configuration. Optional DD-200 Dual Disk Drive also available. Each of the four models in the 200 series is upgradeable, and can be interfaced to most editing VTR's in 1/2", 3/4", or 1" format.

For more information, call or write Convergence Corporation.

CONVERGENCE CORPORATION

1641 McGraw, Irvine, CA 92714 Tel: (714) 549-3146. Tlx: 277717 CONV UR
3575 Cahuenga Blvd. West, Suite 255, Los Angeles, CA 91403 • 250 W. 57th Street, Fisk Building,
Suite 815, New York City, NY 10019 • 1 Lochaline Street, London W6 9SJ U.K. Tel: 01-741 7211, Tlx: 263559 MICRO G

Circle (58) on Reply Card

April 1983 **Broadcast Engineering** 85

THE ONLY NEW AM & FM TRANSMITTER LINE AT NAB WAS SINGER BROADCAST

Completely new, inside and out. Quietly, we've been developing transmitters that benefit from 40 years' manufacturing experience. We've improved on technology already trusted by more than 2,000 customers.

The new Singer Broadcast transmitters are something to get excited about.

SINGER BROADCAST PRODUCTS, INC.

P O BOX 5500 • CHERRY HILL, NEW JERSEY 08034 • TEL 609-424-1500

Circle (59) on Reply Card


Whisper Glide™

The "High Performance"
fader that "FEELS"
as good as it sounds

WHISPER GLIDE...

The new name in professional audio faders.

Absolutely the SMOOTHEST action in faders available... AND... with superior MystR® conductive plastic elements. Continuous, computer-generated, noise-free output functions provide excellence to the serious audio professional.



Waters Manufacturing, Inc.

Longfellow Center,
Wayland, MA 01778
(617) 358-2777 - (617) 893-6900.

Available in 100 and 65 mm lengths linear, modified audio, logarithmic tapers. The SMOOTH choice for Broadcast and Recording Mixer Service. Even the price "FEELS" good.

Circle (60) on Reply Card

\$2300 (somewhat less if you use a rebuilt tube).

After modification

It is too early to be conclusive, but our initial results are encouraging. The first modification, which was done by factory personnel, has produced about 11,000 hours within the originally installed 3CX15,000A7 (this is more than three times the best life of any preceding 3CX20,000 before the modification.) The tube is still capable of more than 25kW output.

I am encouraged by the initial efforts. During the spring, I performed a similar modification to another transmitter in the general area. This particular modification was not initially as successful, because the tube used had some problems of its own, and there were other problems within the transmitter of which I was not aware. However, this later proved to be a satisfactory step, after the limitations were cured. This modification has been successfully performed by other engineers having similar difficulties. I am sure they have found their efforts as worthwhile as I have.

To those who may doubt the similarities that exist between the two tubes, I say that, in the first case, little retuning was required after the procedure was completed.

As with all good things, the tube finally came to the end of its life after 12,000 hours. The decision was made to remove the tube early to allow Econco Broadcast Service to autopsy the tube while it still had something inside to examine.

The tube was still producing full 25kW when removed. The only symptom noticed was increased drive requirements. Exhaust air was not unusually hot and, upon removal, the anode fins were not excessively discolored. Engineers at Econco determined that the tube had simply come to the end of its useful life, and there was nothing unusual about the failure of this particular tube. So it is believed that this experiment was successful and the decision was made to continue with the 3CX15,000 in the future.


John Sullivan, Econco service technician, believes that the problem with the 3CX20,000 is one of poor heat distribution. Whereas the 15,000 showed a relatively evenly spread heat discoloration on the heat exchanger fins, the 20,000 tube was highly discolored toward the center, and appeared as new toward the edges.

1:~>))))

Acknowledgements

In conclusion, I would like to acknowledge the help of Dick Johnson, Brian Locke, Charlie Goodrich, Dick Dennis and Bill Abbot of McMartin Industries for their help in these projects.

NOW YOU CAN HAVE THE BEST IN WIRELESS WITHOUT GOING PENNILESS.

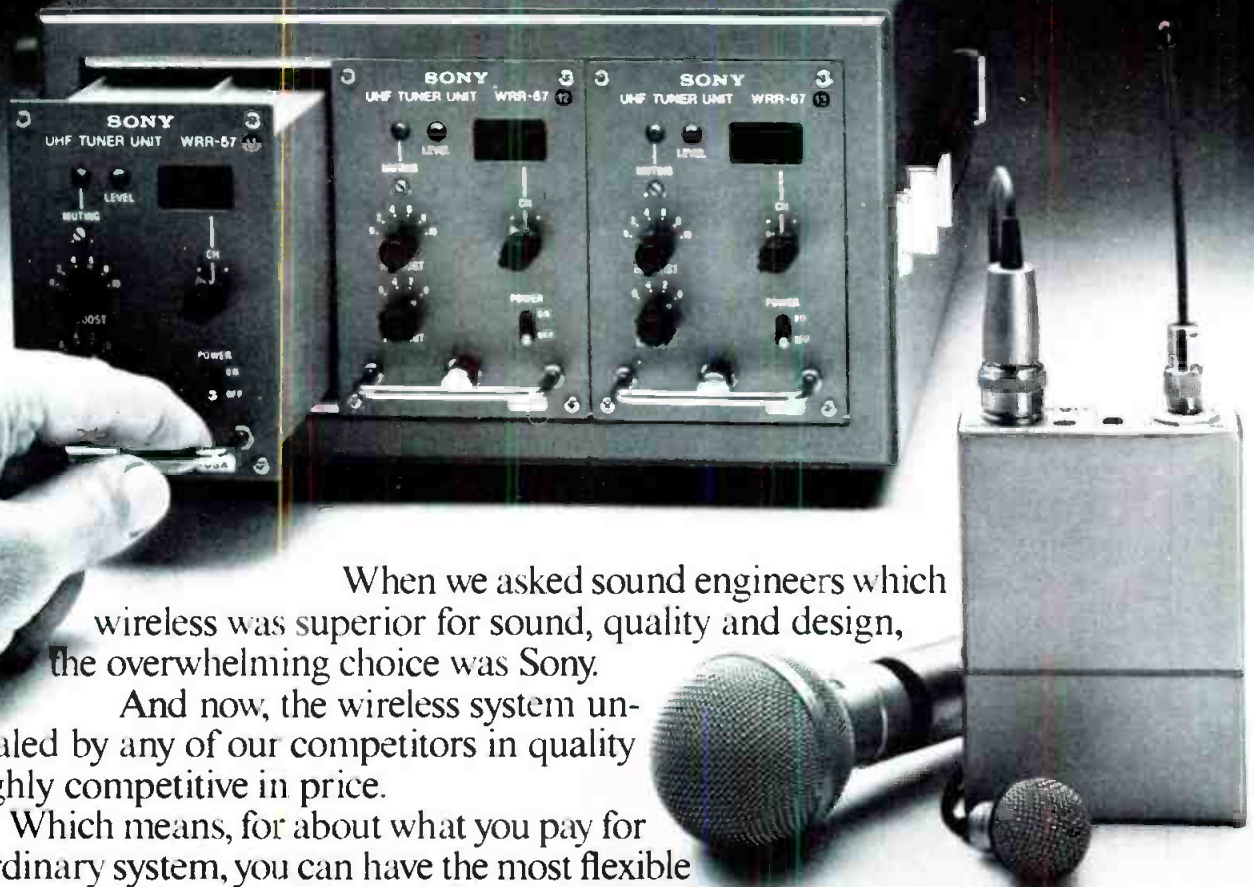

When we asked sound engineers which wireless was superior for sound, quality and design, the overwhelming choice was Sony.

And now, the wireless system unequaled by any of our competitors in quality is highly competitive in price.

Which means, for about what you pay for an ordinary system, you can have the most flexible system you can buy. A modular system that can be set up and rearranged in the greatest possible number of configurations in a mere fraction of the time it takes to set up any other system. So it's suitable for any production requirement—studio or field.

Then there's the performance. The dynamic range is 96dB. The frequency response is 100-15000 Hz. And signal-to-noise is greater than 60dB.

And because the wireless system is based on the Sony theory of total system technology, it's compatible with all standard professional audio and video systems on the market today. For all the facts on how you can have the state of the art in wireless without going into a state of bankruptcy, contact Sony Professional Audio Products, Sony Drive, Park Ridge, New Jersey 07656.

SONY
Professional Audio

Sony Communications Products Company, Sony Drive, Park Ridge, New Jersey 07656. © 1983 Sony Corp. of America. Sony is a registered trademark of the Sony Corp.



If you're going half-inch, you're only going half-way.

Quartercam™ from Bosch leapfrogs half-inch technology with a remarkable quarter-inch recorder-camera.

Here's your current choice in recorder-camera combinations: either of two incompatible half-inch formats, or the breakthrough Bosch KBF-1 Quartercam.

Quartercam is smaller than the half-inch systems. Lighter—just 16 pounds including lens and battery. More maneuverable.

And the 20-minute quarter-inch cassette is about *one-third* the size of a Betacam cassette. *One-fifth* the size of a VHS. So small you can stuff it in your pocket. A couple in each pocket!

Quality? Outstanding. Bosch's unique Lineplex™ format


produces quality you have to see to believe. Far better than current three-quarter inch tape. Beautiful audio, too.

There's a lot more including field editor, studio VTR, and other system components. Quartercam is a full system.

Is there any point in going half-way with half-inch? Go all the way with Quartercam—the new video recording standard.

Call your local Bosch-Fernseh office. Or get in touch with us directly: Fernseh, Inc., P.O. Box 31816, Salt Lake City, UT 84131, (801) 972-8000.

BOSCH

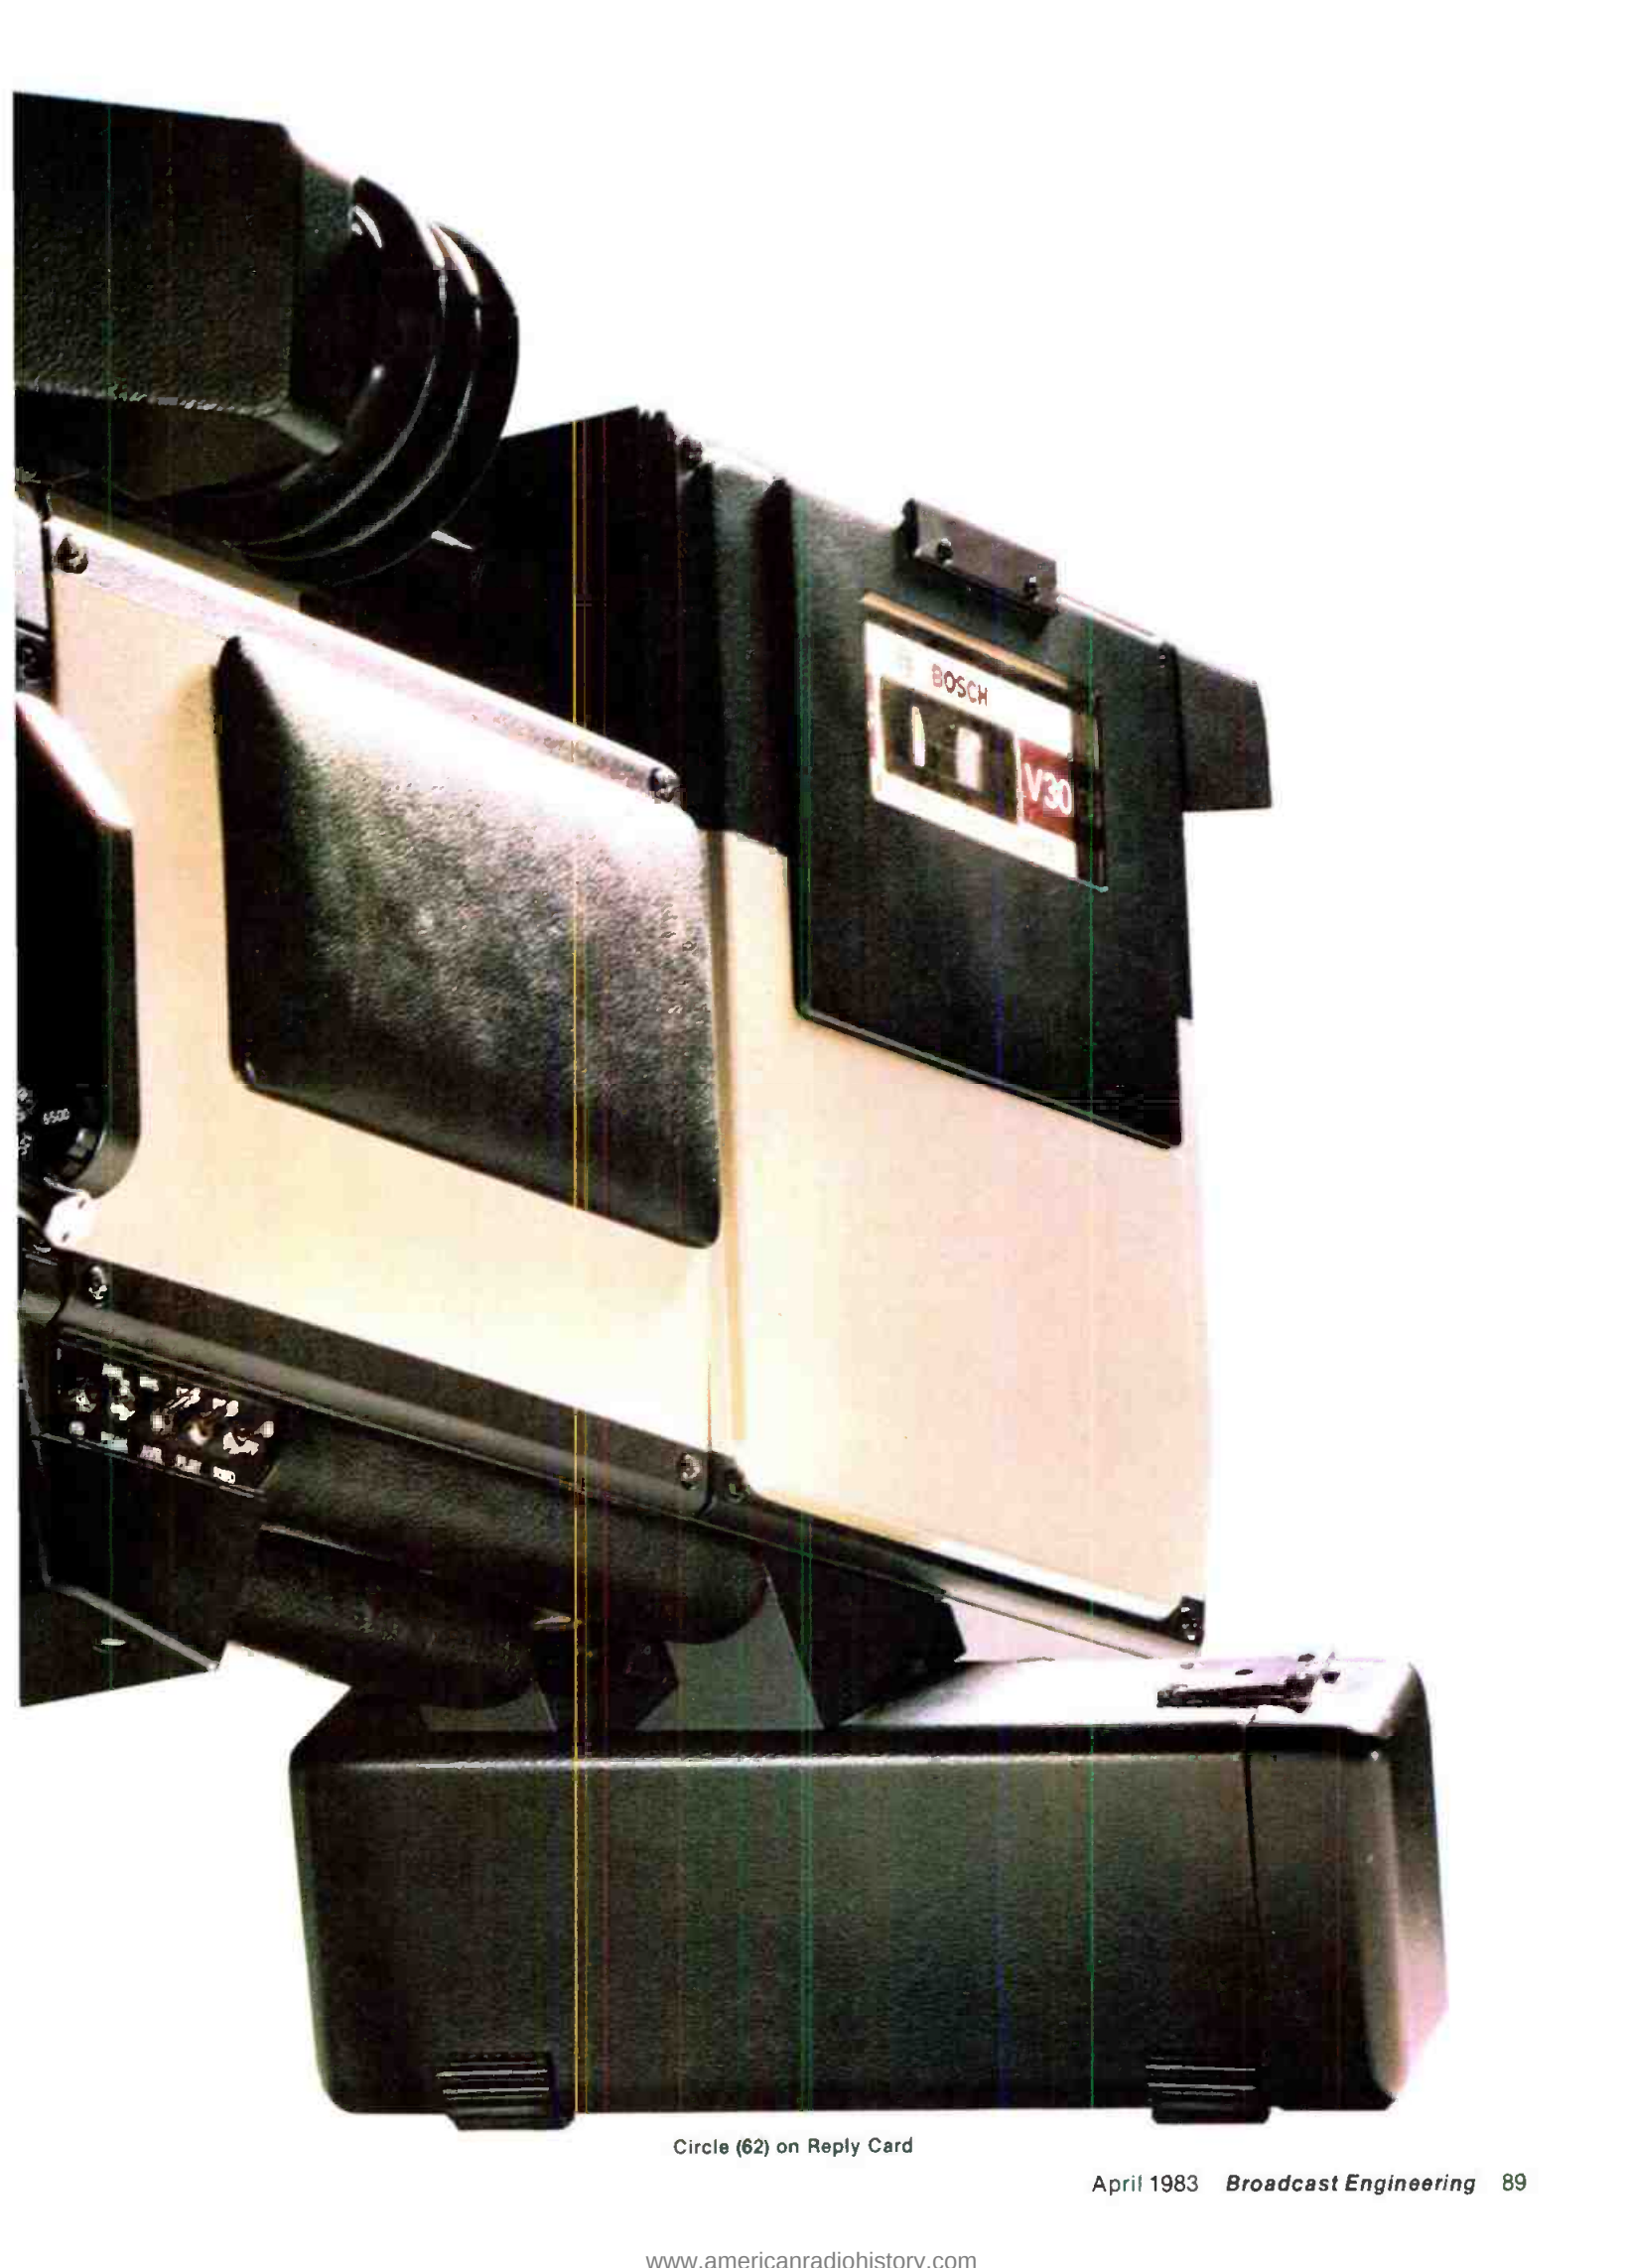

Circle (62) on Reply Card

AM/FM transmitter update

By Donald L. Markley, facilities editor, D. L. Markley & Associates, Consulting Engineers, Peoria, IL

Transmitter manufacturers update their systems with new models and innovations as new technologies become available. We asked the author to take a look at some of the changes expected at NAB-'83/Las Vegas in AM/FM transmitters. He agreed to do so, and included some trends in antennas and TV transmitters that he uncovered along the way.

As part of the report preparations, **BE** mailed inquiry forms to NAB-'83/Las Vegas exhibitors requesting data on new AM/FM transmitter systems to be introduced at the show. Updates on these latest transmitters are included herein, for those manufacturers who returned our forms. For those who did not, look for their data in the June issue of **BE**.

A sidebar included here, prepared from the **BE** files, lists manufacturing sources of AM/FM transmitters. Complete data on the companies' products may be obtained by using the Reader Service Numbers in Table I. In a second sidebar, **BE** has included tables of performance data on selected transmitters. Similar information can be obtained from the manufacturers' data sheets for other models of interest.

The transmitting equipment and antenna systems to be shown at NAB-'83/Las Vegas do not contain any major or revolutionary changes in the area of the transmitters themselves. Instead, a continued improvement in existing models is being shown by most manufacturers, with only a few new models actually being demonstrated.

One major antenna system to be shown this year offers a great deal of promise. This is the new slotted waveguide antenna system offered by Harris Corporation. The UHF slotted waveguide antenna, the Wavestar, is

currently available in either a cardioid or peanut-shaped pattern and will soon be available in an omnidirectional antenna. The antenna provides the broadcaster with a horizontally polarized signal with the advantages of extreme simplicity in the antenna itself, as well as a rugged construction. The antenna basically consists of slots cut into a piece of waveguide. Power dividing and matching is simple and straightforward. The primary advantage of a waveguide antenna of this type is the same as the primary advantage of waveguide used for transmission line: It is fairly rugged and extremely immune to burnout. It should be interesting to follow the development and use of this antenna.

The other Harris contribution to the transmitting area at NAB is a slightly improved version of its UHF transmitting line identified as the E series. This series of UHF transmitters incorporates a new SAW filter and variable output coupling on the klystrons for

improved efficiency. Some other minor corrections complete the changes found in this new model.

The SX series of AM transmitters will be shown again. Harris now assures buyers that the 5kW version will be available within 30-45 days after NAB. The engineering test units are in the field in operation at the present time. 1kW and 2.5kW SX series transmitters have been shipped for several months.

Two manufacturers are demonstrating new FM exciters and stereo generators this year: Singer Broadcasting Products and Harris Corporation. The Singer system is a 30W direct FM exciter with digital AFC. The audio path is without transformers, and the system uses a phase-locked FET oscillator. The stereo generator also uses no transformers in the audio stages. It uses a matrix system to generate the stereo signals. The new Harris FM exciter is identified as the model MX-15. The com-

Table I.
Transmitter manufacturers

The following is a list of manufacturers of radio broadcast transmitters. Included are sources of AM broadcast and HF shortwave systems, as well as FM broadcast. AM and HF systems cover the general spectrum from 535kHz-30MHz, while the FM models are designed for 88-108MHz (Band II) operation. Reader Service Numbers are included for your convenience in receiving information about the equipment.

Bayly Engineering Ltd.(364)	Nautel Maine(352)
Broadcast Electronics(341)	QEI Corporation(353)
CSI Electronics(342)	RCA Broadcast Systems(354)
Continental Electronics Mfg. (343)	Rohde & Schwarz GmbH(355)
Eddystone Radio Ltd.(485)	Rohde & Schwarz Sales
Elcom-Bauer(344)	Company(356)
Harris Broadcast Products ..(345)	CN Rood BV(357)
LPB(346)	Scientific Radio Systems(358)
Larcan Communications	Singer Broadcast Products ..(359)
Equipment(347)	Solid Electronics Labs(360)
Marconi Communications	TTC/Wilkinson(361)
Systems Ltd.(348)	Tesla(486)
Marconi Electronics(349)	Thomson-CSF/Radio & TV
McMartin Industries(350)	Department(362)
NEC America(351)	Versa Count Engineering(363)

HITACHI

SK110

Computer Controlled 3 Camera System

\$244,000

Price Includes:

- 3-SK110 Cameras
- 3-Sets 30mm Plumbicons
- 3-7" Viewfinders
- 1-SCU-Set Up Control Unit
- 1-DSU-Delegation Switching Unit
- 3-Vinten Mark 3 Heads
- 3-MTI/ITE Tripods
- 3-D7/ITE Dollies
- 3-50' Camera Cables
- 1-5742RSI3 Conrac Color Monitor
- 1-1420 Vectorscope
- 1-528A Waveform Monitor
- 1-Tektronix Rack Adaptor
- 1-Teletype Printer

- Automatic set-up for R, G and B Channels for up to 96 cameras in 2 minutes using parallel control.
- Five automatic set-up modes.
- One computer per camera each capable of storing 5 files of set-up data in RAM.
- Fault Diagnosis, Quick Check and Auto Set-Up status is displayed on picture monitor and also available as a hard copy from a high speed printer.
- Full Remote Capability for up to 5,000 feet available with the optional Hitachi FM Triax System.



Lens not included. Large selection of Canon and Fujinon available.

LERRO

ELECTRICAL CORPORATION

COMMUNICATIONS SYSTEMS DIV.
3125 North Broad Street
Philadelphia, PA 19132

*For further details call
215-223-8200 and
ask for Fred Dorn
or Dick Murphy.*

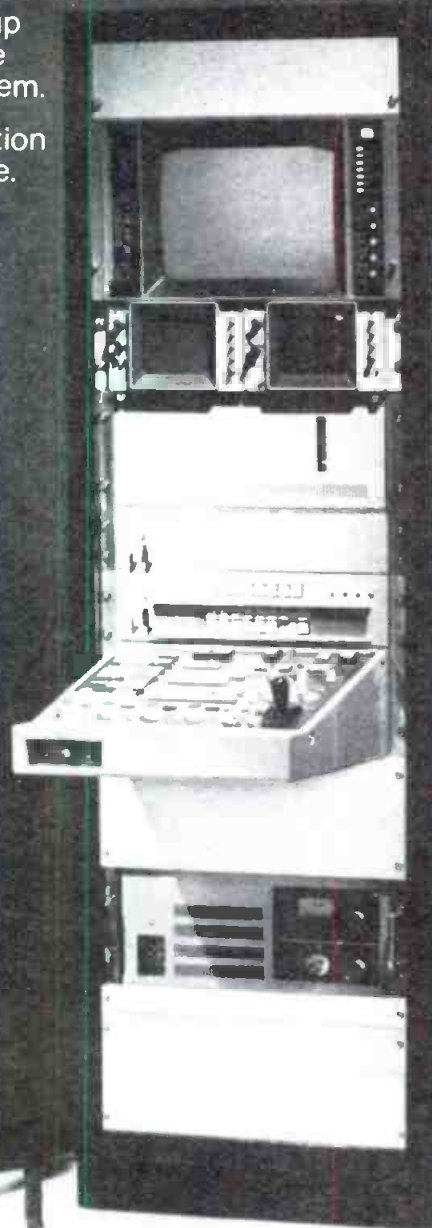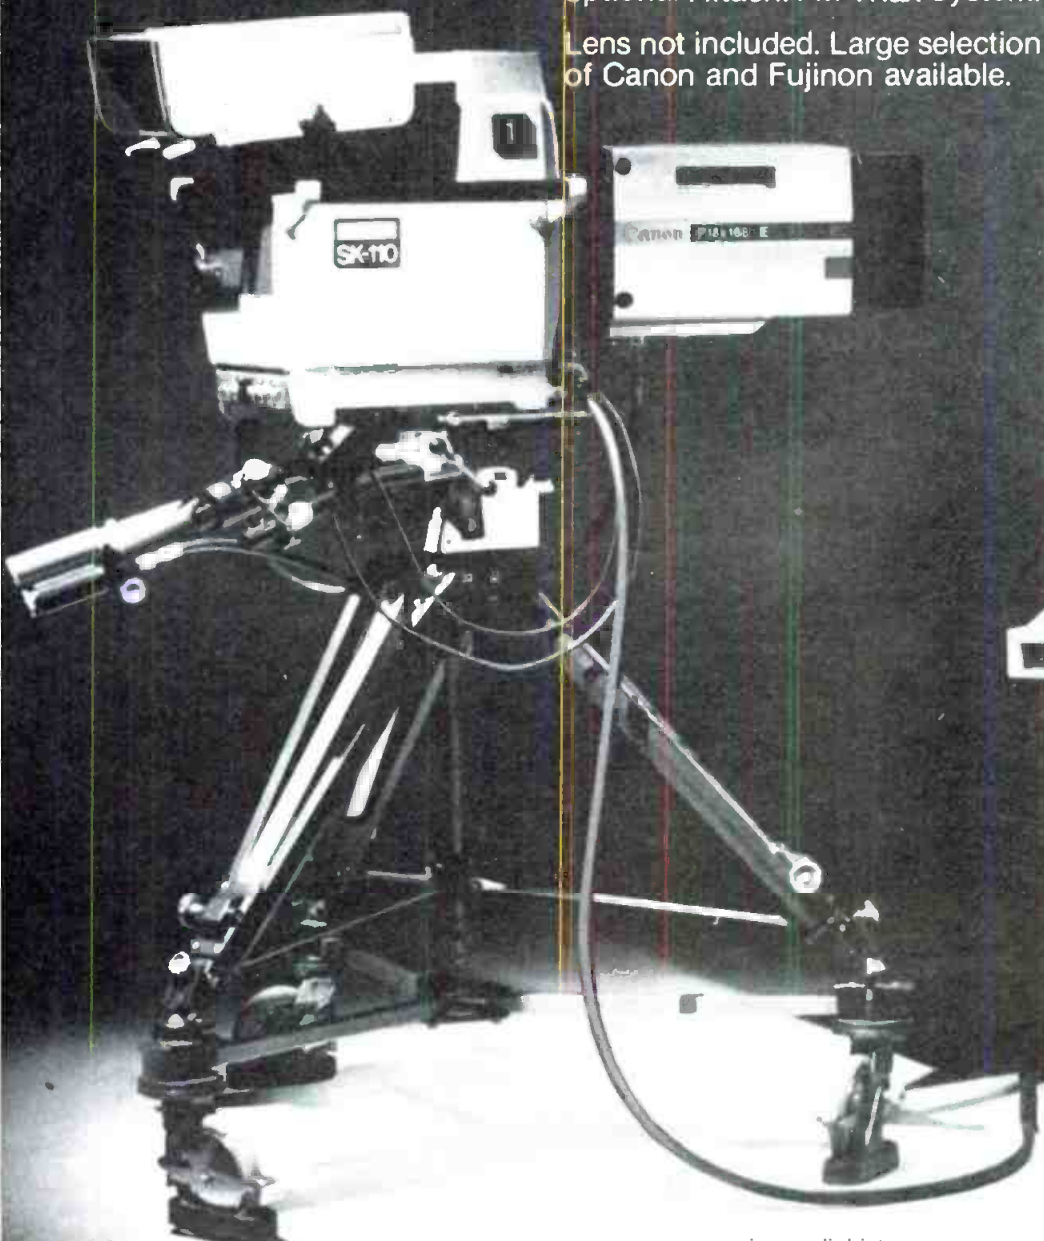

ALLIED INTRODUCES A NEW EXCITER — THAT'S EXCITING!



If absolute clarity is the goal of your sound then the ALLIED POWERPAK SMX-40 EXCITER will do the job!

With distortion figures like .2% or less for harmonics and intermodulation, a 30 to 100,000 hertz audio frequency response, a -70 dB signal-to-noise ratio and 45 dB of stereo separation you can see why so many stations are saying that the ALLIED POWERPAK SMX-40 EXCITER is a wonder.

Features include up to 40 watts output with optional blower, composite audio inputs including two SCA inputs, analog metering of all critical circuits, LED BARGRAPH metering of modulation and remote control capability make this the answer to your exciter needs.

ALLIED POWERPAK, quality which will complement the finest component receivers for just \$2995.

For details contact your ALLIED sales engineer today.

ALLIED
Broadcast Equipment

Richmond	(317) 962-8596
Seattle	(206) 927-4337
Chicago	(312) 794-0224
Dallas	(214) 423-8667
Atlanta	(404) 964-1464

635 South E Street • Box 1487 • Richmond, IN 47374

Circle (64) on Reply Card

When accuracy Counts...Count on Belar for AM/FM/TV MONITORS



BELAR
AM MODULATION MONITOR

BELAR CALL ARNO MEYER (215) 687-5550
ELECTRONICS LABORATORY, INC.
LANCASTER AVENUE AT OORSET, DEVON, PA. 19333 • BOX 826 • (215) 687-5550

Circle (65) on Reply Card

ARTICLE REPRINTS

Interested in reprints of an article out of this or another issue? Reprints of articles about your company or the industry can be valuable sales and marketing tools. For information, call or write Mark Raduziner, Intertec Publishing Corp., P.O. Box 12901, Overland Park, Kansas 66212; (913) 888-4664.

bination of stereo generator and exciter offers signal-to-noise ratios for monaural of 80dB with IM distortion of 0.2% or less. The new generation stereo generator offers separation of up to 60dB at midband.

Continental Electronics is not demonstrating any new products at the show this year, but is returning with a complete line of broadcasting equipment as in the past. As well as its line of FM and AM transmitters for domestic use, Continental has an extensive line of high power medium-wave and shortwave transmitters for the international market.

Larcan Communications Equipment is showing three new FM transmitters. These are available at 10kW, 15kW and 20kW power levels. Larcan has followed a lead first made by RCA in its VHF transmitter line and then by Broadcast Electronics and Harris in their FM transmitter lines. This mode of design calls for all solid-state, broadbanded amplifiers up to the final amplifier stage. There is a great deal to be said for the simplicity of replacement parts and simplicity of operation that accompanies this type of broadbanded design. All three of these Larcan transmitters use a single final amplifier tube.

Singer Broadcasting Products is showing three new transmitters in its line. These include 3kW and 25kW systems, both of which use two tubes. In accordance with the heritage of this product line, the transmitters use grounded grid power amplifiers for output stages. The 3kW also uses a grounded grid IPA. Singer's third system is a new 5kW AM transmitter with solid-state low level circuitry. However, Singer still uses a vacuum tube as a final amplifier and uses high level modulation.

Rohde and Schwarz is showing two new TV test transmitters with rather limited applicability for the average broadcaster in the United States. However, these units are worth mentioning for the quality of construction and performance that one has come to expect from Rohde and Schwarz. The units are tunable from 25-1000MHz and generate a series of test patterns from internal waveform synthesizers.


Several other manufacturers are showing basically the same equipment that they have brought to the convention in past years. Nautel is showing its solid-state transmitter. This unit is available in 1kW, 2.5kW, 5kW and 10kW sizes and is totally solid-state. To the best of my knowledge, the 10kW unit is the only 10kW solid-state transmitter available in the market at the present time. Some of the 10kW units have been sold in Canada, and transmitters at the lower power levels have been

40 to 1

Canon PV40 x 13.5B IE: THE OLYMPIAN

Canon moves you a giant step forward with a 40X broadcast quality zoom lens. An incredible new lens that allows you to cover a stadium at wide angle or fill the frame with the quarterback's eyes.

Never before has a single lens provided this much flexibility and sensitivity, with remarkably little change in effective aperture throughout its entire 13.5mm-540mm* range. Built-in extenders let you go all the way to 1080mm and each lens is diascoped-equipped for modern microprocessor-

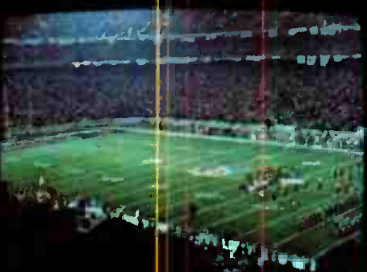

controlled cameras.

We call it The Olympian. Not only because it is ideally suited for sports coverage but also because of the dedication and team effort required of our optical and electronic engineers in making this lens a reality.

Enlarge a dollar bill forty times and it covers an area twenty feet long and eight feet wide. Now think about what you could do with the Canon PV 40 x 13.5B IE!

*1" cameras. Also available in 30mm plumbicon.



Canon®

Optics Division

Canon USA, Inc., Head Office: One Canon Plaza, Lake Success, N.Y. 11042 (516) 488-6700

Dallas Office: 11311 Stemmons Freeway, Suite 1, Dallas, Texas 75229 (214) 620-2641 Chicago Office: 140 Industrial Drive, Elmhurst, Ill. 60126 (312) 833-3070

West Coast Office: 123 Paularino Avenue East, Costa Mesa, Ca. 92626 (714) 979-6000

Canon Canada, Inc., 3245 American Drive, Mississauga, Ontario L4V1B8, Canada (416) 678-2730

© 1982 Canon U.S.A., Inc.

Circle (66) on Reply Card

delivered in the United States.

McMartin is demonstrating its previous product line without significant changes from prior conventions.

Wilkinson, now under the auspices of Television Technology Corporation, offers the same broad line of equipment that it demonstrated before the change in corporate ownership.

Townsend is again placing emphasis on its Perveac control system for use with 55kW klystron amplifiers. This unit is claimed to permit simple control of the beam operating parameters to optimize transmitter performance and efficiency. The company is also showing its solid-state

anode pulser for use with all UHF klystron transmitters.

CSI will demonstrate its basic line of transmitters. These units are known for their simple design and construction, which results in an economical price structure.

Low power AM and FM transmitters are primarily being manufactured by Radio Systems and Low Power Broadcasting. These units are not significantly changed from last year.

In summary, it seems that the push in UHF transmitters is still toward improvement of overall operating efficiency, using couplers and improved pulser systems.

In FM, the state-of-the-art seems to dictate the use of single-tube transmitter designs with limited use of multiple-tube designs in new FM transmitting systems. AM transmitters are progressing toward totally solid-state designs, with power levels up to 5kW currently available from three manufacturers and up to 10kW available from one manufacturer. There still seems to be a significant market for vacuum-tube type transmitters. It does not seem that this market is going to end in the near future, primarily because of the somewhat lower comparative price of such equipment.

Selected equipment specifications

Performance specifications for AM and FM broadcast transmitters are given in Tables I(a), I(b), I(c), I(d), I(e), II(a) and II(b). The information in these listings, taken from the 1982 *Broadcast Engineering Spec Book*, was derived from the manufacturers' specification/data

sheets. Although these tables are offered for comparison purposes, we suggest that interested individuals contact manufacturers for the most recent, up-dated data on their products.

Table I(a).

Transmitter, amplitude modulation

The RF output impedance is 50Ω. Audio signals applied to the transmitter are approximately +10dBm for 100% modulation, 600Ω balanced. Additional model numbers and their associated power levels of transmitters with similar performance specifications are given.


Manufacturer	CCA (Singer)		Continental Electronics	
Model Number	AM-2500D	AM50000D	315R-1	317C-2
Power Output Level	3kW	55kW	5.5kW	60kW
Frequency Stability (±)	5Hz	5Hz	5Hz	5Hz
Carrier Shift	3%, at 100%	3%, at 100%	<3%, at 100%	1% at 100%
Modulation Capability	125%	125%	125%	125%
AF Response (± dB/Hz)	1.5/50-10k	1.5/50-10k	1.5/20-10k	0.3, - 0.8/10-15k
Harmonic Distortion	2.5%	3%, 90% modulated	<3%	<2.5%, 95% modulated
AM Noise Figure	-45dB	-55dB	-60dB	-60dB
Power Consumption	10kW	140kW	28.4kW	60% efficient
Final Amplifier	(2)4-1000A	4CX35000C	(2)4CX10000	(2)4CX35000C
Modulator Final	(2)4-1000A	(2)4CX15000A	Solid-state	(2)3CX3000A1
Drivers	Tube type	Tube type	Solid-state	Tube type
Other Models	AM-1000D 1.2kW		315F 5.5kW	314R-1 1.1kW

Table I(b).

Transmitter, amplitude modulation

Manufacturer	CSI Electronics Inc.		Elcom-Bauer	Harris Broadcast
Model Number	T-10-A	701B	710	SX-1
Power Output Level	12kW	1.1kW	12kW	1.1kW
Frequency Stability (±)	10Hz	5Hz	5Hz	10Hz synthesizer
Carrier Shift		3% at 100%	2% at 100%	2% at 100%
Modulation Capability	100%	125%	125%	125%
AF Response (± dB/Hz)	1.5/50-10k	1.5/50-10k	1/50-10k	1/20-12.5k
Harmonic Distortion	2.5%	2.5%	2%	<1.5%
AM Noise Figure	-55dB	-55dB	-60dB	-60dB
Power Consumption	27kW	4.15kW	27kW	1.8kW typical
Final Amplifier	3CX10000A3	(2)4-500A	4CX15000Z	High power
Modulator Final	(2)4CX3000A	(2)4-500A	(2)4CX5000A	MOS FET
Drivers	Tube type	Solid-state	Solid-state	Devices
Other Models	T-3-A 3.3kW	705C 6kW	715C 15kW	SX-2.5 2.5kW
	T-5-A 6kW			

AUDIO ROUTING SWITCHER . . .

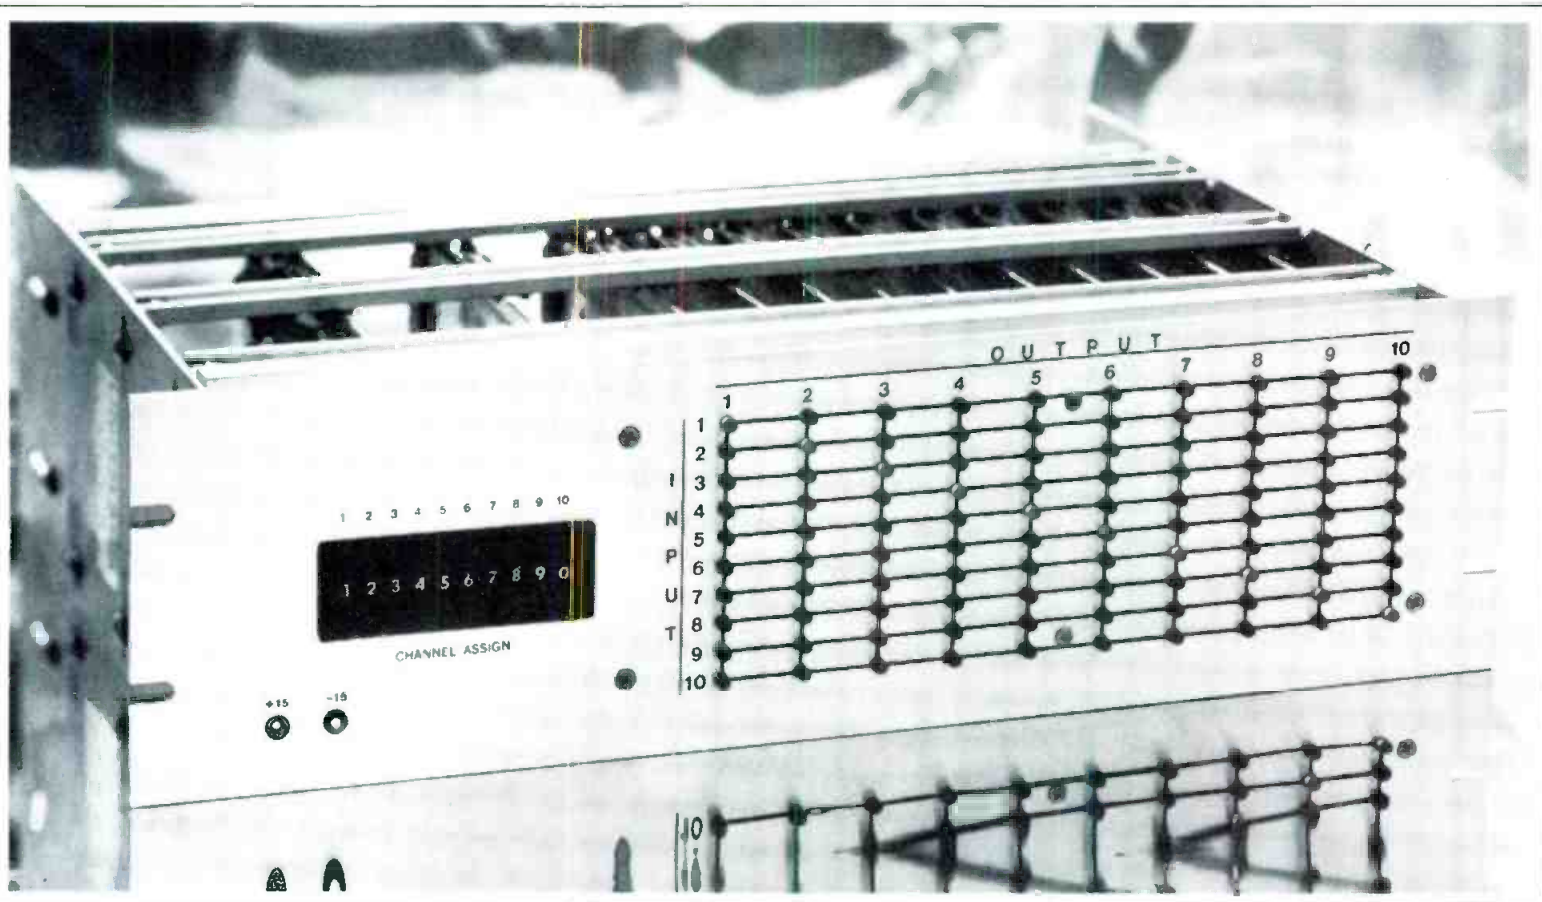

. . . the Biggest Little Machine in the Business

Do you put up with obsolete mechanical patch panels? Are you tired of bad connections, phase reversals, RF and hum pickup, impedance mismatch, source loading, poor frequency response and poor signal-to-noise ratio — all the patch problems that make an engineer's life a nightmare?

BSM Systems has the answer!

With the series 500 Audio Routing Switcher you can change programs instantly. Your production staff won't be bothered by cross talk, distortion or phasing problems — or the hassle of mechanical patch panels. Your programming ability will be limitless.

- Replace all that unreliable mechanical patch panel wiring
- Deliver flexibility and convenience in one package!
- And all for a price you can afford

SPECIFICATIONS

Inputs	20K Bridging or 600 Ohm Balanced, with clamping terminal strips
Input Level	10 to +24 db
Output	600 Ohm Balanced, with clamping terminal strips
Output Level	+22 db Max (Adjustable 30 db range)
Frequency Response	+5 db 50 Hz to 20 KHz
Hum and Noise	Better than -70 db
THD	Less than .3% at +8 db output
Slew rate	13V Micro Sec.

Look At The Advantages

All the signal inputs and outputs are hard wired in place. In an instant you can change signal routing from one source to another. Any combination you dream up can be put into action INSTANTLY — no hassle of changing patches. Your engineer is freed up for more important projects.

The front panel thumbwheel control makes routing a snap. The LED readout tells you at a glance exactly where everything's going. And — the signal doesn't suffer. It arrives at each destination just as clear as when it started. Forget the nightmare of mechanical patch panels. Get BSM's Series 500 Audio Routing Switcher — it really delivers!

What's Inside

We've taken advantage of the latest breakthroughs in electronic technology to bring you the best. An all aluminum mainframe uses an intricate system of interchangeable circuit module boards. Every PC card is made of high quality glass epoxy. The power supply is fully regulated, filtered and RF bypassed.

All amplifiers are the latest in integrated circuits to provide extremely low noise and distortion (check our specs). The balanced outputs are buffered so that you can feed a single input to all 10 outputs with no interaction — even if one or more of the outputs is shorted.

Switching is controlled through a common BCD bus so remote control is simple and straightforward.

Our units are built for you with cost savings in mind. The PC cards contain all active components and can be popped in and out — no problem. Isn't that great? Down time is kept to a minimum (if ever).

Why put up with a system that does not deliver the absolute best? Install a BSM Series 500 Routing Switcher and you will be steps ahead.

- CONVENIENCE
- FLEXIBILITY
- RELIABILITY

These are the benchmarks of the series 500 Audio Routing Switcher.

Get the Most Out Of
Your Equipment with —

**BSM Broadcast
Systems**

MANUFACTURER OF
QUALITY BROADCASTING EQUIPMENT

Since 1978

Box 8081 Manito Station
Spokane, Washington 99203
(509) 448-0697

Circle (67) on Reply Card

**Table I(c).
Transmitter, amplitude modulation**

Manufacturer	Harris Broadcast				LPB
Model Number	MW-10B	MW-50B	VP-100A	TX2-20	AM-250
Power Output Level	10kW	50kW	100kW	2-20W	25-27W
Frequency Stability ($\pm$)	<20Hz	20Hz	5Hz	0.0003%	10Hz
Carrier Shift	<2% at 95%	<2% at 100%	<5% at 100%	<2% at 100%	<2% at 100%
Modulation Capability	125%	125%	100% continuous	125%	125%
AF Response ($\pm$ dB/Hz)	1/20-10k	1.5/20-12.5k	1/40-10k	1.5/20-15k	1.5/20-15k
Harmonic Distortion	2% at 95%	<3% at 95%	<3% at 95%	1.5% max at 85%	2% max, 95%
AM Noise Figure	-60dB	-60dB	-55dB	-55dB max	-55dB max
Power Consumption	28kW	110kW	215kW	90W	2.4kW
Final Amplifier	3CX15000H3	4CX35000C	4CX100,000C	Solid-state	Solid-state
Modulator Final	4CX15C00A	4CX35000C	4CX100,000C	Solid-state	Solid-state
Drivers	Solid-state	Tube type	Tube type	Solid-state	Solid-state
Other Models	MW-5B 5kW			TX2-30-TIS	AM-50 55W
					AM-100 110W
					AM-150 165W

**Table I(d).
Transmitter, amplitude modulation**

Manufacturer	Marconi Communications		McMartin Industries		RCA Broadcast
Model Number	B6034	B6026	BA-5K	BA-50K	BTA-5SS
Power Output Level	50kW	750kW	6kW	50kW	5kW
Frequency Stability (±)	10Hz	10Hz	5Hz	5Hz	3.5Hz
Carrier Shift	4% at 100%	5% at 100%	3% at 100%	2% at 100%	1.5% at 100%
Modulation Capability	125%	100%	125%	125%	125%
AF Response (± dB/Hz)	1.5/30-10k	1/60-7.5k	1/10-10k	1.5/40-10k	1/20-12k
Harmonic Distortion	3% at 90%	3% at 95%	2.5% at 100%	2% at 95%	3% at 95%
AM Noise Figure	− 59dB	− 60dB	− 60dB	− 63dB	− 60dB
Power Consumption	117kW	1,170kW	3.5kW	106.99kVA	11.4kW
Final Amplifier	(2)4CX35000C	(3)VCP2002	(4)4-1000A	(2)4CX20000A	Solid-state
Modulator Final	(2)4CX1500B	(2)VCP2002	(4)4-1000A	(2)4CX20000A	Solid-state
Drivers	Solid-state	Tube type	Solid-state	Solid-state	Solid-state
Other Models		B6021 500kW	BA-1K 1kW	BA-5K2 5.5kW	
			BA-2.5K 3kW	BA-10K 11kW	

Continued on page 100



SONY FORMALLY INTRODUCES THE ECM 50-PBW.

Covering the Emmys? The Grammys? The Oscars? Or merely having a little tête-à-tête with the President of the United States in front of 40 million people? You'll find the world's most preferred broadcast mic is now even more suited for the occasion. Because the legendary Sony ECM 50 lavalier mic now comes in an elegant, black satin finish.

Ask your Sony dealer about the ECM 50. It's what all the best-dressed newscasters will be wearing this year.

SONY
Professional Audio

Sony Communications Products Company, Sony Drive, Park Ridge, New Jersey 07656. © 1983 Sony Corp. of America. Sony is a registered trademark of the Sony Corp.

INDIVIDUALLY POWERED

AUDIO D.A.'S AND D.A. PACKAGES

Model M76 D.A.



Typical 24 hr. installation time for package of 24 D.A.'s includes patchfields and test/monitor panels.

- **EASIER TO INSTALL • EASIER TO USE**
- **EASIER TO PAY FOR**

FARRTRONICS MANUFACTURES QUALITY INTER-COM SYSTEMS, AUDIO PATCHFIELDS, DISTRIBUTION AMPLIFIERS AND AUDIO CONSOLES.

Ask for our customer list.



151 BENTLEY ST., UNIT 1, MARKHAM, ONTARIO, CANADA

L3R 3X9, (416) 475-6720

Write for our free folder of Product Data

Circle (69) on Reply Card


**When you
absolutely,
positively,
unequivocally,
categorically
need to look
your best.**

FUJI
VIDEO TAPE
MADE IN JAPAN

Available in 2", 1", $\frac{3}{4}$ " and $\frac{1}{2}$ " Beta and VHS.



"TO RELIEVE MY CAMERAMEN'S BACKACHES AND MY

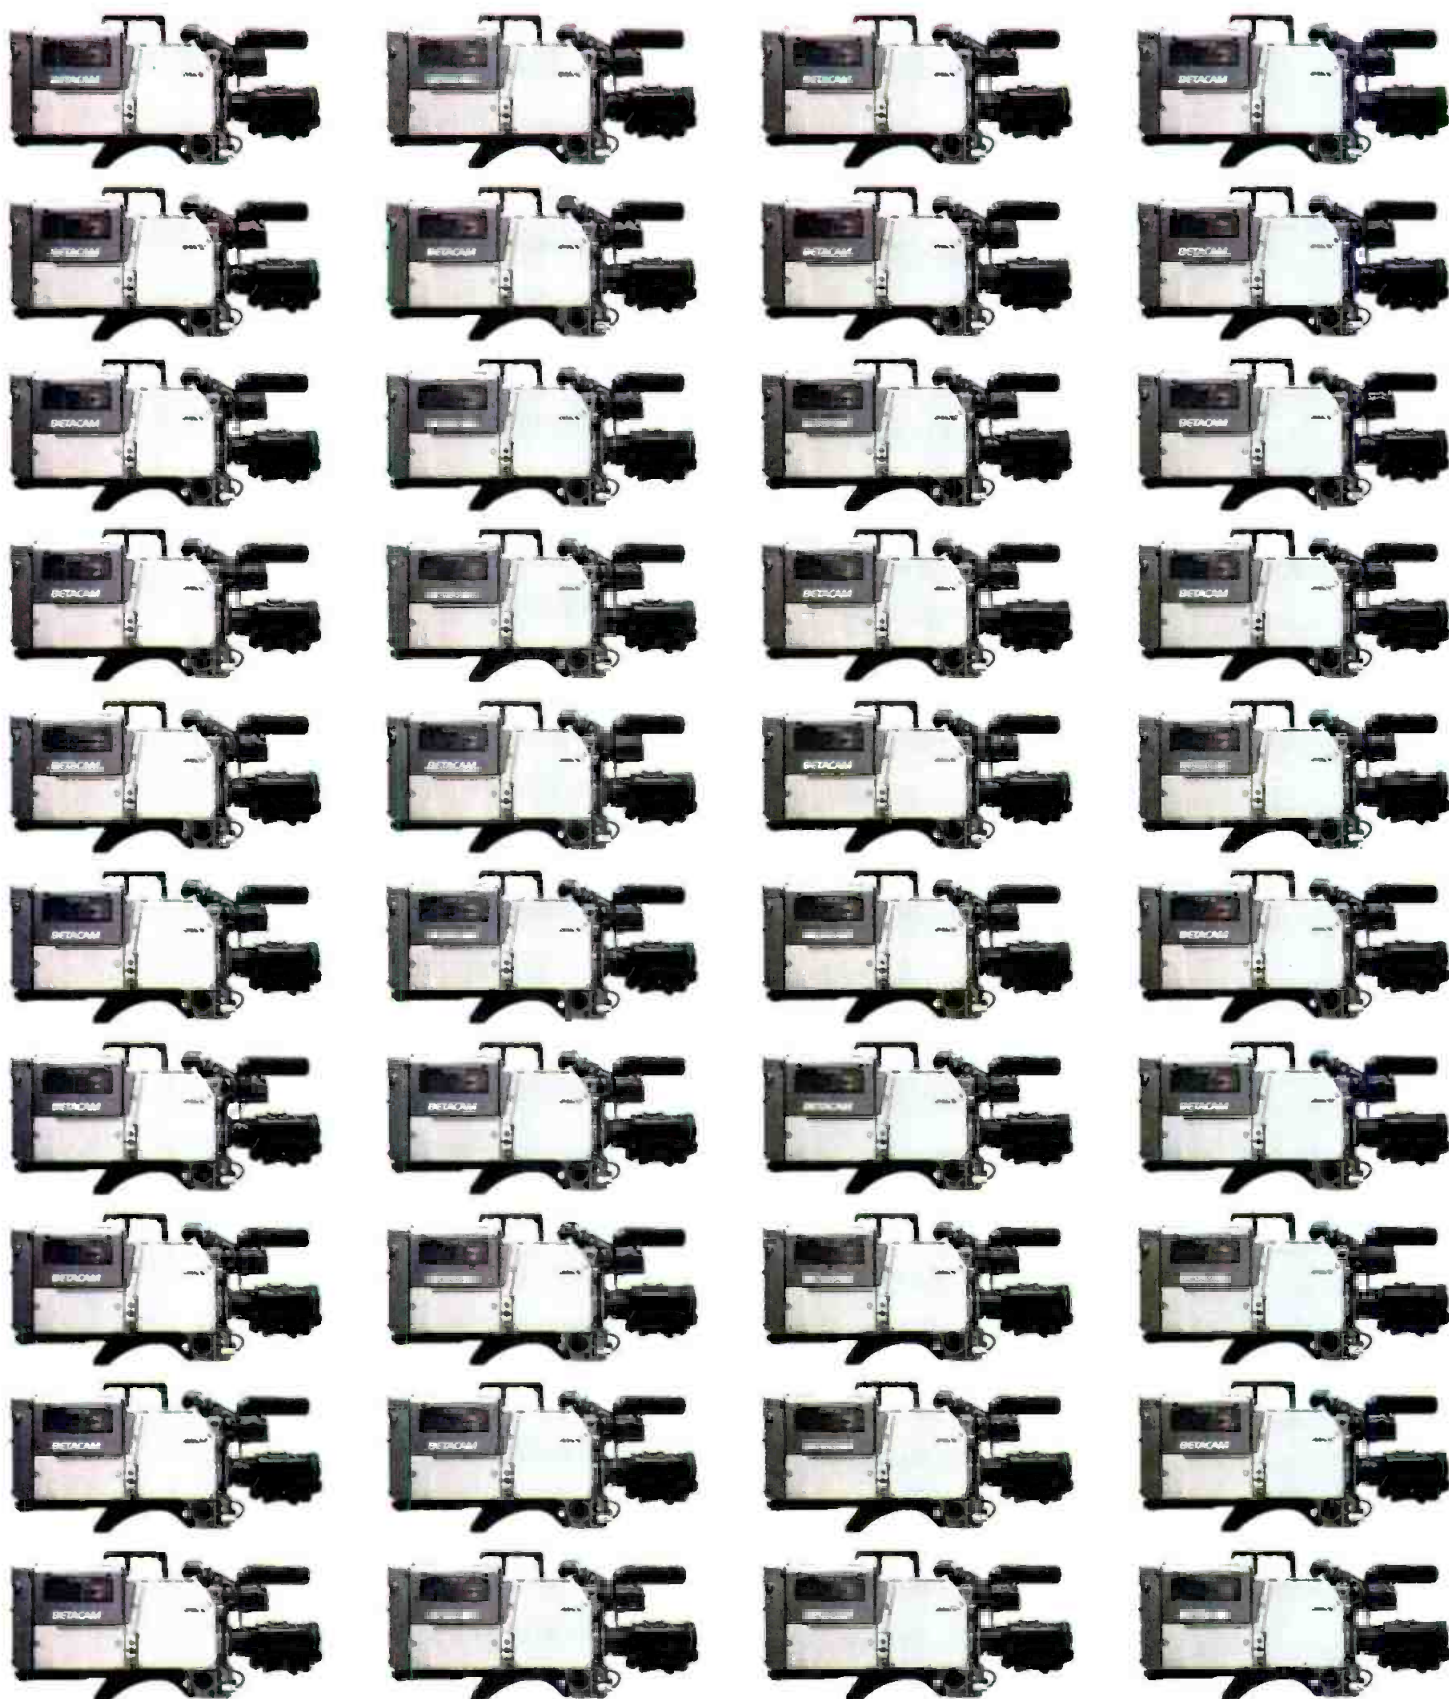

Art Biggs coordinates major engineering purchases for the six Corinthian stations. After careful evaluation of all the 1/2-inch camera/recorders on the market, he made a multi-million-dollar purchase of the Sony Betacam™ system.

"Betacam has several pluses. The most obvious of them are size and weight. We have one-man camera crews at all our stations. The camera/recorder that they take into the field is

right at 54½ pounds. Betacam will reduce this load by more than half—a significant reduction.

"As for quality of playback, you can see the difference with the naked eye. Its superiority is most apparent in scenes of fully saturated colors, particularly reds. It's cleaner. It doesn't have quite as much of the heavy, stringy-type noise we've grown to tolerate over the years.

© 1983 Sony Corp. of America, 9 W. 57th St., New York, NY 10019. Sony is a registered trademark and Betacam is a trademark of the Sony Corp.

CONTROLLERS' HEADACHES, I TOOK ALL OF THESE."

—Art Biggs, Vice President, Engineering, Corinthian Broadcasting Corporation



"Another Betacam plus is that it's not a patchwork approach. It's a total Sony system developed from the camera to the recorder to the player.

"Then there's the bottom line. Betacam is at a very attractive price. It would have cost me hundreds of thousands of dollars more to get the same amount of camera/recorders that even approach this kind of quality from someone else.

"I'll definitely be back for more."

For more information on the Sony Betacam system, and there's a lot more to know, contact Sony Broadcast in New York/ New Jersey at (201) 368-5085; in Chicago at (312) 860-7800; in Los Angeles at (213) 841-8711; in Atlanta at (404) 451-7671; or in Dallas at (214) 659-3600.

SONY
Broadcast.

Table I(e).
Transmitter, amplitude modulation

Manufacturer	Sintronic (Singer)			TTC/Wilkinson	
Model Number	S1-A-5	S1-A-10	AM-250SS	AM-1000B	AM-2000C
Power Output Level	5.5kW	12kW	250W	1kW	26.5kW
Frequency Stability (±)	0.0005%	0.0005%	10Hz		
Carrier Shift	2% at 100%	2% at 100%		3% at 100%	5%
Modulation Capability	125%	125%	125%	125%	125%
AF Response (± dB/Hz)	1.5/50-10k	1.5/50-10k	1/50-10k	2/40-10k	1.5/50-10k
Harmonic Distortion	2.5%	1.5%	2% at 95%	3%	3.5% at 95%
AM Noise Figure	– 55dB	– 55dB	– 60dB	– 55dB	– 54dB
Power Consumption	12kVA	22.5kVA	0.5kVA	4kW	65kW
Final Amplifier	4CX5000A	4CX15000A	Solid-state	(2)4-400C	8990
Modulator Final	(2)4CX5000A	(2)4CX5000A	Solid-state	(2)4-400C	(2)4CX10000D
Drivers	Solid-state	Solid-state	Solid-state	Solid-state/tube	Tube type
Other Models	S1-A-1 1.2kW			AM2500B 2.5kW	
				AM5000D 5kW	
				AM10000D 10kW	

Table II(a).
Transmitter, FM broadcast

The RF output impedance is typically 50 Ω . Frequency modulation at 100% results in a carrier deviation of $\pm$ 75kHz. Values given for monophonic.

	Broadcast	Continental			
Manufacturer	Electronics	Electronics	CSI Electronics	Harris Broadcast	
Model Number	FM-30	817R-1	T-25-F	FMD-50K	FM-40K
Power Output Level	15-30kW	50kW	27.5kW	20-50kW	20-40kW
Feed Line Size	3¼" EIA	6¼" EIA	3¼" EIA	6¼" EIA	3¼" EIA
Carrier Stability	± 300Hz	± 500Hz	± 250Hz	± 300Hz	± 300Hz
Modulation Capacity (±)	± 200kHz	100kHz	± 100kHz	± 75kHz	± 75kHz
Audio Input for 100%	+ 10dBm nominal	+ 10dBm nominal	+ 10(± 2)dBm	+ 10(± 1)dBm	+ 10(± 1)dBm
Audio Input Impedance	600Ω bal.	600Ω	600Ω bal.	600Ω bal.	600Ω bal.
AF Response (± dB/Hz)	0.5/30-15k	1/per 7tus curve	0.5/30-15k	0.5/30-15k	0.5/30-15k
Harmonic Distortion	<0.08%	<0.25% THD	0.5% max	<0.2%	<0.2%
Pre-Emphasis	25, 50, 75µs	75µs, other options	75µs	0, 25, 50, 75µs	0, 25, 50, 75µs
AM Noise	< -55dB	< -55dB	-55dB	-50dB	-50dB
FM Noise	< -72dB	< -65dB	-65dB	-68dB	-68dB
RF Harmonic Suppression	Meets FCC/CCIR specs	> -80dB		Exceeds FCC specs	Exceeds FCC specs
Recommended Exciter*	FX-30	Continental 510R-1	EX-20-F	Harris MS-15	Harris MS-15
Power Consumption	50kW	80kW	36kW	ca. 80kW	ca. 60kW
Input Power Requirements	208-240Vac3φ	200-250Vac3φ	190-460Vac3φ	220 or 360-415Vac	208-240Vac3φ
Overall Efficiency		62%		62%	66%
Power Factor		0.9		0.95	0.95
Automatic Recycle	Yes	Yes	Yes	Yes	Yes
Final PA Tube(s)	4CX20000A/8990	(2)4CX15000A	3CX15000A7	(2)8990	(2)4CX15000A
Driver Tube(s)	Solid-state	(4)4CX250B	8874	Solid-state	(4)4CX250B
IPA Tube(s)	Solid-state	Solid-state	3CX3000A7	Solid-state	4X150A
Related Models		816R-2A, 21.5kW	T-20-F, 22kW		FM-25K, 25kW
		816R-3, 25kW	FM1200-E, 13kW		FM-20K, 21.5kW
		817R-2A, 40kW			
		816R-1, 11kW			

Table II(b).
Transmitter, FM broadcast

Manufacturer	Larcan Communications	McMartin Industries	NEC	Singer/CCA	TTC/Wilkinson
Model Number	FMT 25F	BF-55M	FBN-7200E	FM55000EP/Dual	FM30000E
Power Output Level	25kW	55kW (Dual BF-25M)	20kW	60kW(2xFM27500E)	30kW
Feed Line Size	3/4" EIA	6 1/4" EIA	3 1/4" EIA	6 1/4" EIA	3 1/4" EIA
Carrier Stability	$\pm$ 350Hz	$\pm$ 500Hz	$\pm$ 500Hz	0.0005%	$\pm$ 1kHz
Modulation Capacity ($\pm$)	$\pm$ 100kHz	$\pm$ 150kHz	$\pm$ 100kHz	$\pm$ 100kHz	$\pm$ 150kHz
Audio Input for 100%	+ 1.5, + 13.5dBm	- 10($\pm$ 2)dBm	- 10, + 12dBm	+ 10($\pm$ 2)dBm	+ 10($\pm$ 2)dBm
Audio Input Impedance	600 Ω	600 Ω bal.	>2000 Ω bal.	600 Ω bal.	600 Ω
AF Response ($\pm$ dB/Hz)	0.5/30-15k	0.5/30-15k	0.3/30-53k	1.5/75 μ s curve	1/50-15k
Harmonic Distortion	0.4%	<0.3% THD	<0.5% (-46dB)	<0.5%	0.5% THD
Pre-Emphasis	0, 75 μ s	75 μ s standard	50, 75 μ s	50, 75 μ s	75 μ s standard
AM Noise	< -61dB	< -55dB	< -50dB	< -50dB	-55dB
FM Noise	-67dB	< -65dB	< -63dB	< -60dB	-65dB
RF Harmonic Suppression	-80dB		< -70dB(1mW)	< -80dB	
Recommended Exciter*	S3161-C	BFM-8000	HPA-4536B	FM-40E	FME-10
Power Consumption	37kVA	98kVA	35kW	87kW	45kW
Input Power Requirements	208-240Vac3 ϕ	208-240Vac3 ϕ	220, 306-440Vac3 ϕ 50Hz	220Vac3 ϕ	208-240Vac3 ϕ
Overall Efficiency			>0.9		
Power Factor	0.95				0.9
Automatic Recycle	Yes	Yes	Yes	Yes	Yes
Final PA Tube(s)	8985	(2)3CX19000A7	4CX15000A	(2)3CX20000A7	8990
Driver Tube(s)	Solid-state	(2)3CX1500A7	Solid-state	Solid-state	Solid-state
IPA Tube(s)	Solid-state	(2)4CX250B	Solid-state	(2)5CX1500A	4CX250B
Related Models	FMT 15F, 15kW	BF-25M, 27.5kW		FM16000EP, 18kW	FM25000E, 25kW
	FMT 10F, 10kW	BF-30M, 30kW		FM24000EP, 26kW	FM 20000E, 20kW
		BF-10M, 15kW		FM40000EP, 44kW	
				FM 20000E, 22kW	




Finally. On-Air Boards Designed By Broadcasters!

The UREI Broadcast Consoles

Before we started designing the new Series 1650 and 1680 consoles, we talked to you... engineers, jocks, announcers and consultants. Then we went to the drawing boards to plan a line of on-air boards with the features you wanted... built with UREI's traditional quality and reliability.

The result is a fresh answer to the operational requirements of the broadcaster of the '80's. Six all-new on-air boards... choice of 5 mixers (1650 Series) or 8 mixers (1680 Series)... choice of Penny & Giles slide pots, Shallco or conductive plastic rotary attenuators... +24 dBm output... better than 90 dB signal to noise ratio... inputs from +8dB down to -10 dB... built-in cueing amp and speaker.

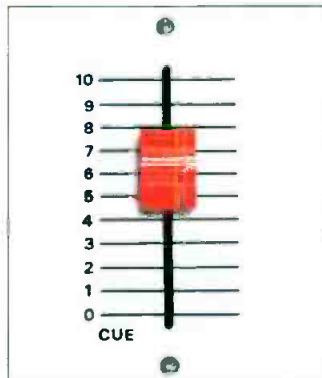

Best of all, both Series are competitively priced!

Ready to Go

You can customize the new UREI consoles, but no accessories are required to go on the air. They are supplied with full sets of input preamps. All preamps are interchangeable in all positions. We even designed a new acces-

sory phono preamp for these new boards that mounts at the turntable and takes its power from the console. Ask about the Model 1101 Phono Stereo Preamplifier.

The Modern Ones

You've been asking for a new line of UREI on-air consoles for years. We took the time to make them "the modern ones"... the ones that will meet your requirements through the 80's and beyond. For more information on the UREI Broadcast Consoles, see your authorized UREI dealer, or write:

From One Pro to Another 

United Recording Electronics Industries
8460 San Fernando Road
Sun Valley, California 91352
(213) 767-1000 TLX 472 0889 UREI SNVY
Canada: E. S. Gould Marketing, Montreal



Studio renovation

By Jerry Whitaker, chief engineer, KRED/KPDJ, Eureka, CA

It is not too difficult to construct a first-class production or on-air facility when you have got plenty of money with which to work. More often than not, however, that is not the case. The suggestions outlined in this article will help produce a quality installation, without breaking your budget. The mark of a good engineer isn't necessarily what you've got, but what you do with what you've got.

The place to start in planning a renovation project is at the operating position. Spend some time in the operator's chair; run the shift yourself. Make note of what is well-placed, and what is not. The cart rack should be near the cart machines, not on the other side of the console. Are source machines laid out in a logical manner? Are audio console inputs grouped to provide a minimum of channel input switching? Is there a standard reference point for the mixer pots that will provide a good level in most cases?

After 10 or 20 hours on the board, draw up a plan and pass it around to management and the operators. Ask

for comments and see if some compromises need to be worked out. Once a plan has been finalized, set it aside for several weeks. When you go back to it, see if it still seems like a good layout.

I went through a stack of proposals before finally deciding on a new arrangement for our AM control room. The final plan was far removed from the original, which would have cost more, been more difficult to build and taken more time.

Part of the planning must include connection trees, cabling and access to equipment. Install console and source machines so that they can be serviced while in operation. Preferably, allow an access path to the rear of equipment that is separated from the operator's area. This allows maintenance to be performed while the studio is in use. Carefully planning the cable runs and connection tree placement leads to a neat and efficient installation.

There are a couple of alternatives to the usual Christmas tree terminal block. I personally prefer this method, but a barrier strip panel or the newer Telco push-in block will perform equally well. I've used barrier strip panels for terminal connections in the past, but they require quite a bit of space and cost can get out of hand. In addition to the barrier strips themselves, you must add the cost of the somewhat expensive insulated terminal connectors and many hours of tedious work. Telco blocks provide a fast, neat and easily modified terminal. These blocks, however, cannot be easily used with larger sizes of wire, such as the popular Belden 8441 2-conductor shielded cable.

Consider running multiple shielded cables, such as the Belden 8766. This type provides 15 individually shielded audio pairs. The cable is expensive, but is much less costly and more convenient than stringing 15 individual audio pairs. For cable runs between studios or equipment racks, always run spare pairs. No matter how much long-range planning you do before in-



An access path of at least 18 inches should be left behind the control room equipment to allow servicing.

stalling cable runs, it will not be many months before you run out of lines and have to string more cables.

In addition to audio cables, I always install at least one 15-pair control cable between each studio or rack. These lines are useful for remote control, intercom and switching uses.

Although more expensive initially, it is always cheaper in the long run to buy cable in large quantities. One thousand feet of 8441, for example, may cost about \$150, but 10 100-foot rolls could cost \$199. One thousand feet of audio cable will go fast, so don't underestimate your needs.

The importance of documentation cannot be overemphasized. A master schematic showing audio and control signal flow will aid you, and your successor, in figuring out how the system is put together. An accurate and complete list of cable number codes should be prepared and kept in the files.

Establish a standard reference output level for all sources, usually 0dB. If your audio console has bridging in-




Equipment layout at KRED-AM. Source machines are arranged to be within arm's length of the operator.

puts, make sure the sources are terminated with a proper resistor (620 Ω in most cases). Place microphone-level cables apart from control or ac lines. It's much easier to wire a studio right the first time than it is to modify the system later because performance is unacceptable.

Plan a station grounding system using heavy gauge wire (#6 or larger) if the studio is not in an RF field. If RF is present, use a wide ground strap, 3-inch minimum. This strap should run from the transmitter and tie all racks and studios together. Establish a main station ground point (the transmitter ground connection will do nicely) and branch out from it to the other equipment rooms. In each room or group of racks, establish a local ground point and branch out from there to the equipment. Use a separate ground cable, #14 or larger, for each piece of equipment. Do not rely on the input or output audio cable shield to provide grounding for the unit. Audio cables should be grounded at one end only, the load end. For example, the output cable from a tape deck should be grounded at the audio console. The input cable to a tape deck should be grounded at the tape deck. (See Figure 1 and Figure 2, pages 104 and 106.)

The ac line ground connection presents a built-in problem. If you ground a piece of equipment through the chassis to the equipment room ground point, once you plug it in (with a 3-prong plug) you've created a ground loop. A solution would be to use a ground adapter plug (3-prong to 2-prong) and separately ground the equipment, with a wire size at least as large as that used for the power line, to the ground point of the room. At the power distribution panel, tie the ground connection to the main station ground point. When doing this, check each piece of equipment before connecting it to the ground point to make sure a fault in the unit does not cause current to flow through the ground connection.

Some equipment includes small capacitors (0.01 to 0.001 μ f) between each ac line and ground to clip transients and prevent noise generation. I have never been fond of these, and if you have a particularly tough RFI problem, you might consider removing them. In the proper locations with a marginal ground system, they may cause ground currents to circulate, due to the fact that the neutral line is tied (in most cases) to ground at the power distribution panel. An alternative to removing the capacitors would be use of an isolation transformer to provide a balanced ac line with respect to ground to feed the equipment. RFI line filters are commercially available, but they should be

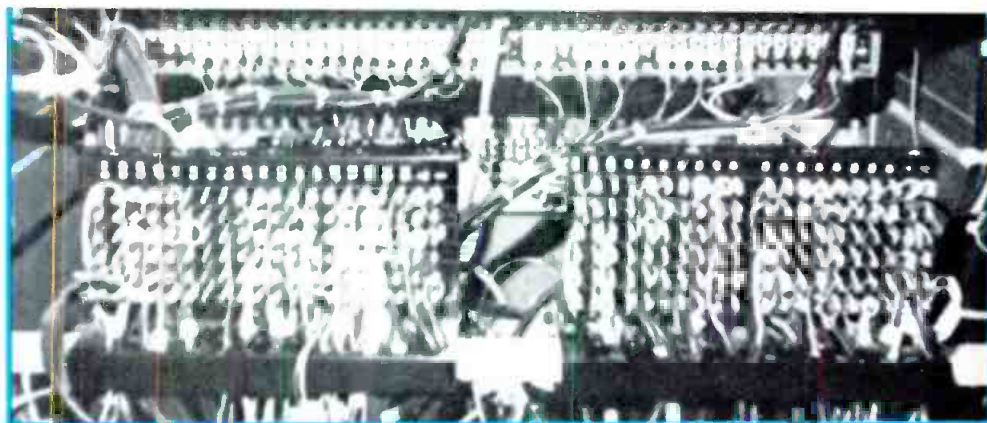

Use of Christmas Tree terminal blocks makes for a neat and easily modified installation.



ANALOG METERING WENT OUT WITH SLIDE RULE HOLSTERS.

Seriously. Isn't it about time you converted to digital telemetry? Save yourself time, money, and prevent the hassles brought on by misreading the analog meters on your remote control system.

Hallikainen & Friends TEL Digital Telemetry with programmable decimal points will provide you with the add-on accuracy you're looking for. It's simple to install, monitor and calibrate. And, it's available now.

Convert your analog remote control system to digital with our TEL Digital Telemetry

TEL 171 for the Moseley TRC - 15A \$800 TEL 172 for the Moseley PBR - 30A \$920

Hallikainen & Friends

101 Suburban Road, San Luis Obispo, CA 93401 805/541-0200

Circle (72) on Reply Card

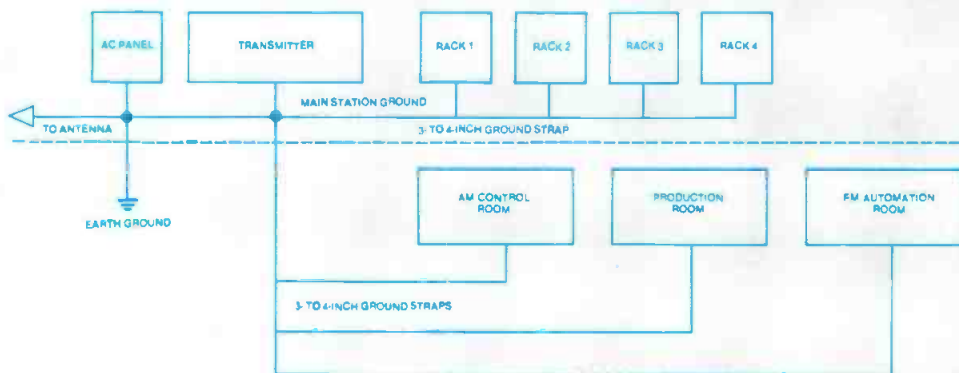


Figure 1. Grounding system layout for radio station with local transmitter.

used as a last resort. Try to locate the problem and eliminate it first.

Protection against transients on the ac power lines should be provided at the utility company service entrance and at any noise generating equipment. This includes power relays for blowers, heavy load switchers and so forth. Examples of transient suppression for a typical studio environment are shown in Figure 3. The Dale transient suppressor is a sparkgap type of unit that is effective in protection against lighting and high level transients. The MOV (metal oxide varistor) device consists of a pair of voltage-dependent, symmetrical resistors that perform similar to back-to-back zener diodes in circuit protection. When exposed to a high energy voltage transient, the varistor impedance changes from a high standby state to a low impedance, thus clamping the spike. The thyrectors perform in a similar manner. The capacitor presents a high reactance at 60Hz and, in effect, is out of the circuit. A typical transient on an ac line is made up mostly of high frequency components, so the capacitor reactance will drop, depending on the frequency of the spike, and shunt the energy to ground. At KRED/KPDJ, the four device types are used in parallel, as shown in Figure 3 (page 107), to take advantage of their various characteristics and to provide mutual backup for one another.

Other considerations for studio renovation include laying out the ac power distribution panel to provide for logical and convenient switching of line voltages. Install separate breakers for each studio, for fans and blowers and for each rack or group of racks (depending on the current requirements of the equipment). This will allow you to drop power to a particular studio for service work without affecting other operations. If one breaker feeds a couple of studios and the program director's office, for ex-

SONEX

FOR KILLING BACKGROUND NOISE

SONEX is a special sound-absorbing acoustical foam with a sculptured anechoic design that absorbs noise four times better than acoustical tile or carpeting. It emulates the sound quality of a professional recording studio at a low cost, so your voice-over sounds rich and clean. Or use it when mixing to hear the real sound on tape. Or use it on location to trap the sound you want and to kill the noise you don't want.

Get the facts today. SONEX is manufactured by Illbruck/usa and distributed exclusively to the pro sound and A/V Industries by Alpha Audio, 2049 W. Broad Street, Richmond, VA 23220.

**Alpha
Audio**

804/358-3852

Acoustic Products for the Audio Industry



Shown in the KRED-AM control room is Dan Hoff, program director at KRED/KPDJ.

Circle (71) on Reply Card

Acclaimed as the new industry leader...



AGFA

BROADCAST U-MATIC VIDEOCASSETTE

In less than twelve months since its introduction, the Agfa "Professional Performance" U-Matic Videocassette has become the industry's leader in high quality performance. Television networks, producers, engineers and performing artists now regularly specify Agfa U-Matic Cassettes because they deliver a new dimension of color brilliance and definition to their masters.

Technical superiority of Agfa U-Matic Cassettes can be measured by 3dB more video signal-to-noise, 3dB more color signal-to-noise and 2dB more RF output. Drop-out rate is exceptionally and consistently lower when compared to conventional U-Matic cassettes.

In addition to superior video characteristics, Agfa U-Matic Cassettes feature a black

anti-static backcoating for better tape transport and winding properties. Agfa-Gevaert's unique proprietary formulation delivers unsurpassed durability. Even with constant editing, repeated playbacks and conditions unfit for other videocassettes, Agfa U-Matic's perform flawlessly.

It all adds up to unsurpassed professional mastering performance.

AGFA-GEVAERT

MAGNETIC TAPE DIVISION
275 North St., Teterboro, NJ 07608
(201) 288-4100



Circle (75) on Reply Card

ample, service of hardwired ac equipment can be difficult.

Through careful studio layout and planning, many headaches and costly delays can be avoided. The initial investment in time and money can be substantial, but in the end you'll have a system that is versatile and reliable.

Checking source equipment

Pull each piece of equipment, one at a time, and check for adherence to specifications. There is no reason why all the source equipment in a studio, if

properly maintained, should not be able to meet the new equipment specifications for frequency response, distortion, noise, wow and flutter, etc.

The first step in maintaining equipment in good repair is to have the proper tools. For cart machines and tape decks, two audio voltmeters, an audio generator and an oscilloscope are required to properly setup a 2-channel unit. High quality, industry-standard test tapes for reel-to-reel and cart machines are a must. Ideally you should have two sets of test tapes: a

working set and a file set. Periodically compare the working set with the file set to determine if use of the working set has degraded the tape. For turntables, a copy (again preferably two copies) of the NAB standard reference test disc is a necessity, as is a stroboscope-type speed disc.

Establish minimum acceptable performance limits for all of the source equipment. Typical outside limits would be frequency response $\pm 3\text{dB}$, 50Hz-15kHz; distortion below 1%; noise below -50dB, wow and flutter equal to new equipment specifications.

Before running performance tests, clean the unit and demagnetize the tape heads. Never put a standard reference test tape onto a dirty machine.

Reel-to-reel

Make a visual inspection of the tape path over the heads. An equal amount of the head face should be visible on the upper and lower sides of the heads. The head face should be perpendicular to the deck surface. Variations from 90° will cause increased head wear and poor performance.

Align the playback section of the tape deck first. On 2-track machines,


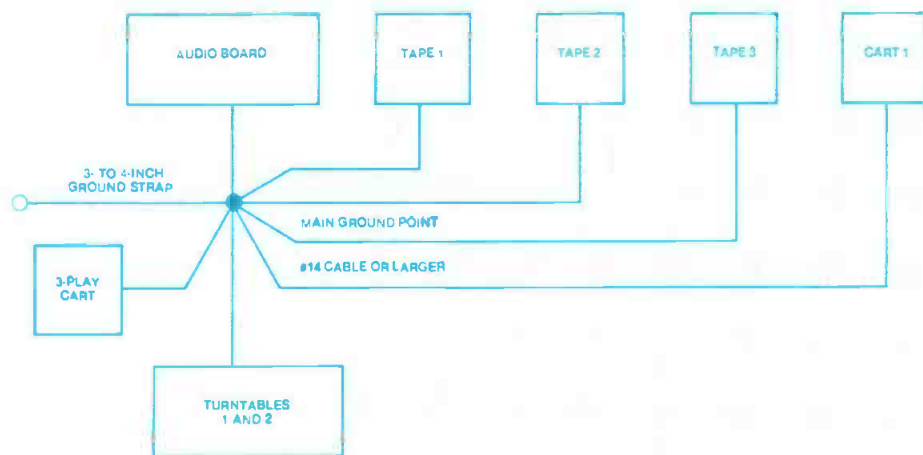


Figure 2. Ground system layout for individual equipment rooms.

 **GRASS VALLEY GROUP**

VERSATILITY

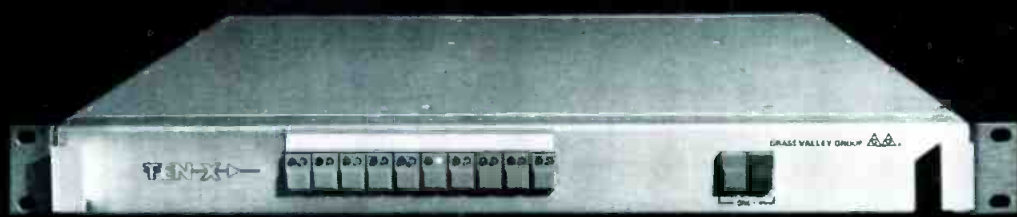

in the all-new program quality 10x1 routing switcher by Grass Valley Group...the TEN-X™!

The TEN-X is available video-only... Video-plus-audio, and... Audio breakaway, or... Add audio later to your video-only version.

TEN-X control from GVG includes... local and remote, or... Build your own remote panel.

The TEN-X operates by local or remote control simultaneously.

Also, your local-control TEN-X may have remote control simply plugged in later. Or, vice-versa; buy TEN-X with remote control now, plug in local control later.

VERSATILITY: the last word in 10x1 utility routing switching by Grass Valley Group.

GVG Sales Offices: Edison, NJ (201)549-9600; Atlanta, GA (404)321-4318; Elkhart, IN (219)264-0931; Arden Hills, MN (612)483-2594; Fort Worth, TX (817)921-9411; Palo Alto, CA (415)968-6680; Woodland Hills, CA (213)999-2303.

THE GRASS VALLEY GROUP, INC.

P.O. BOX 1114, GRASS VALLEY, CALIFORNIA 95945, U.S.A. • TEL. (916) 273-8421 TWX 910 530 8280
 A TEKTRONIX COMPANY

Circle (76) on Reply Card

feed the left channel into an audio voltmeter and into the vertical input of an oscilloscope. Feed the right channel into a second audio voltmeter and also into the horizontal input of the scope. (See Figure 4, page 110.) Polarity inversion available in some oscilloscopes will display the signals 180° out of phase, when they are actually in phase. If this is the case, reverse the polarity of the horizontal channel input.

Find the 16kHz section on the test tape and adjust head azimuth for simultaneous peak outputs on each audio voltmeter and a correctly phased display. Several high points may be found, but take the one with the peak response and 0° phase shift. Equipment manuals should be consulted for any special procedures.

Once the reproduce head has been aligned, run through the frequency response bands and check for uniform output. Resist the temptation to adjust the electronics equalization to provide the same output at 10-15kHz as the reference (generally 700Hz or 1kHz). On many machines, equalizing 10kHz to the reference will result in a 1-2dB bulge around 5kHz. A tape deck, when set up this way, will meet new equipment specifications, but when used as a production machine, prob-

lems begin to crop up. After several generations, the 2dB boost at 5kHz will turn into 4dB or 6dB, resulting in an annoying tinny sound. Much better performance will be achieved by holding the frequency response flat (within 0.5dB) from 1-8kHz, allowing the high end (above 8kHz) to droop a couple of decibels. This will result in a much cleaner production sound when a number of generations are required. All test tapes include a NAB standard reference level output. Make note of

that level, for it will be used later to adjust the record drive.

When the reproduce system is within specifications, alignment of the record head can proceed. Feed 15kHz into the recorder at 10dB below normal operating level. While monitoring the output of the two channels as outlined above, adjust the head azimuth for peak response with proper phasing. When that point has been found, check the phasing at other frequencies (1kHz, 5kHz, 10kHz) to be certain that

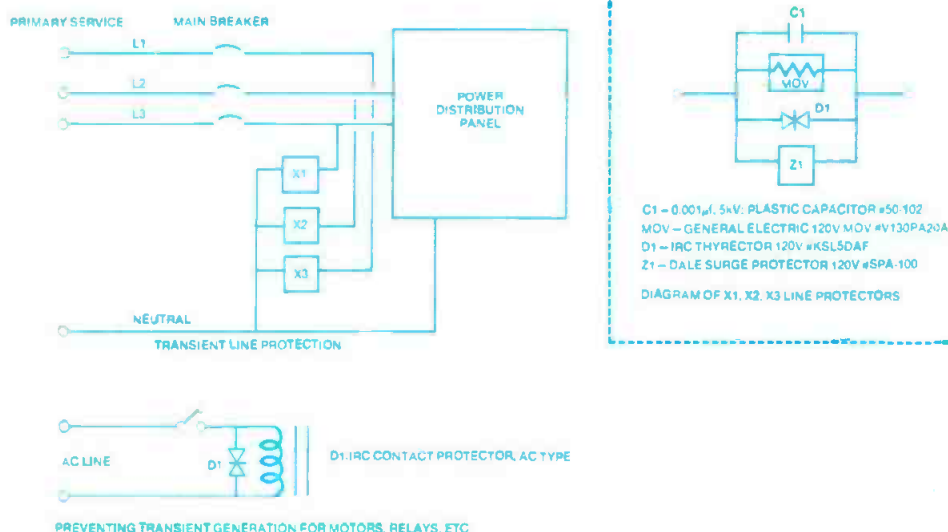


Figure 3. Methods of suppressing transients on the ac power line.

GRASS VALLEY GROUP

At Grass Valley Group we believe that television terminal equipment should represent the highest degree of long-term reliability and stability."

We build the 3250 Series Sync Generators that way.

Featuring:

- ★ SC/H phased slave sync generator
- ★ System color frame identification
- ★ SC/H phased genlockable master sync generator



And now the NEW Model 3258 Digital SC/H Phase Meter...making accurate SC/H

H phase measurements and comparisons easy!

GVG Sales Offices: Edison, NJ (201)549-9600; Atlanta, GA (404)321-4318; Elkhart, IN (219)264-0931; Arden Hills, MN (612)482-2594; Fort Worth, TX (817)921-9411; Palo Alto, CA (415)968-6680; Woodland Hills, CA (213)999-2303

THE GRASS VALLEY GROUP, INC.

P.O. BOX 1114 GRASS VALLEY CALIFORNIA 95945 USA TEL (916) 273-6421 TWX 810 530-6280 A TEKTRONIX COMPANY

Circle (77) on Reply Card

THE SOURCE

For all your equipment needs



- AKG • Amperex • Ampex
- Atlas • Audiopak
- AudioTechnica • Belden
- Broadcast Electronics
- CRL • CSI • Crown
- Cablewave Systems • DBX
- Deltalab • Electro-Voice • EXR
- Fidelipac • Inovonics
- Jampro-Cetec • JBL • Leader
- Instruments • Lexicon • 3-M
- Marti • Micro-Trak • Nortronics

Orban Associates • Otari • Phelps Dodge • Revox • Russco

- Shure • Sola • Staco • Stanton • Surcom • Tapco
- Technics • Telex • Urei • VIF and many more.

Call us for fast shipments
from stock

305-651-5752

Telex 51-4733 ELECTREX MIA



ELECTREX COMPANY © 1983

18680 N. E. 2nd Avenue, Miami, Florida 33179

Circle (78) on Reply Card

NEW FM AND TV FIELD STRENGTH METER FIM-71

- Accurate — Direct Reading — Volts or dB ■ 45 MHz to 225 MHz — Continuous Tuning ■ Peak or Averaging Detector (switch selectable) ■ Wide or Narrow IF Bandwidth (switch selectable) ■ 20 dB or 60 dB Meter Range (switch selectable) ■ AM or FM Demodulator (switch selectable) ■ Calibrated Dipole Antenna, Mounted on Case for Near-Ground Measurements or Removable for TSO Measurements ■ 140 dB Measurement Range (1 μ V to 10 V) ■ 4 1/2-Inch, Mirrored Scale, Taut-Band Meter
- Front Panel Speaker
- Recorder Output
- Rugged, Portable Package ■ Calibrated Signal Generator, 45 MHz to 225 MHz
- Battery or External Power ■ Use as Signal Source/Selective Voltmeter for Insertion Loss Measurements of Filters, etc. ■ Measures FM Harmonics to -80 dB



CONTACT US FOR DETAILS.

POTOMAC INSTRUMENTS

932 PHILADELPHIA AVE.
SILVER SPRING, MD. 20910
(301) 589-2662

Circle (79) on Reply Card

no phase reversals occur.

When adjusting the azimuth on either of the two heads, it may be noted that the point of peak audio output and 0° phase shift do not occur simultaneously. This is due to gap scatter, a non-colinearity of the gaps of the individual channels of the tape head. If, for example, the top channel gap is mechanically offset (through manufacturing tolerances) a small amount from the bottom channel gap, it will be impossible to achieve both peak audio output and 0° phase shift because the head will have to be tilted a small amount to zero out the phase difference. This will result in reduced high frequency output from one or both channels.

The high frequency equalization adjustment must then be used to compensate for the high end droop, leading to a peaky, less uniform high frequency response. The amount of equalization needed to compensate for gap scatter is small, generally 0.5-1dB at 15kHz.


The next step in recorder alignment is to set the bias level. Consult the equipment manual for this adjustment, because it differs from one type of unit to another. Next, set the record drive level. While recording 1kHz at normal operating level, adjust the drive to give the same output as was recorded with the alignment tape standard reference level. Next, proceed with the frequency response measurements and adjust the record channel equalization for flat response, keeping in mind the 5kHz bump problem outlined previously.

Wow-and-flutter measurements require special instruments and the equipment manuals for that test gear should be consulted for correct procedures.

When performing alignment and electrical adjustments on reel-to-reel and cart recorders, always use a typical production tape or good quality cartridge. Optimum record bias will vary from one type of tape to another. It is important to set up the unit with a



Locate any equipment that generates appreciable heat or noise outside of the studio area.

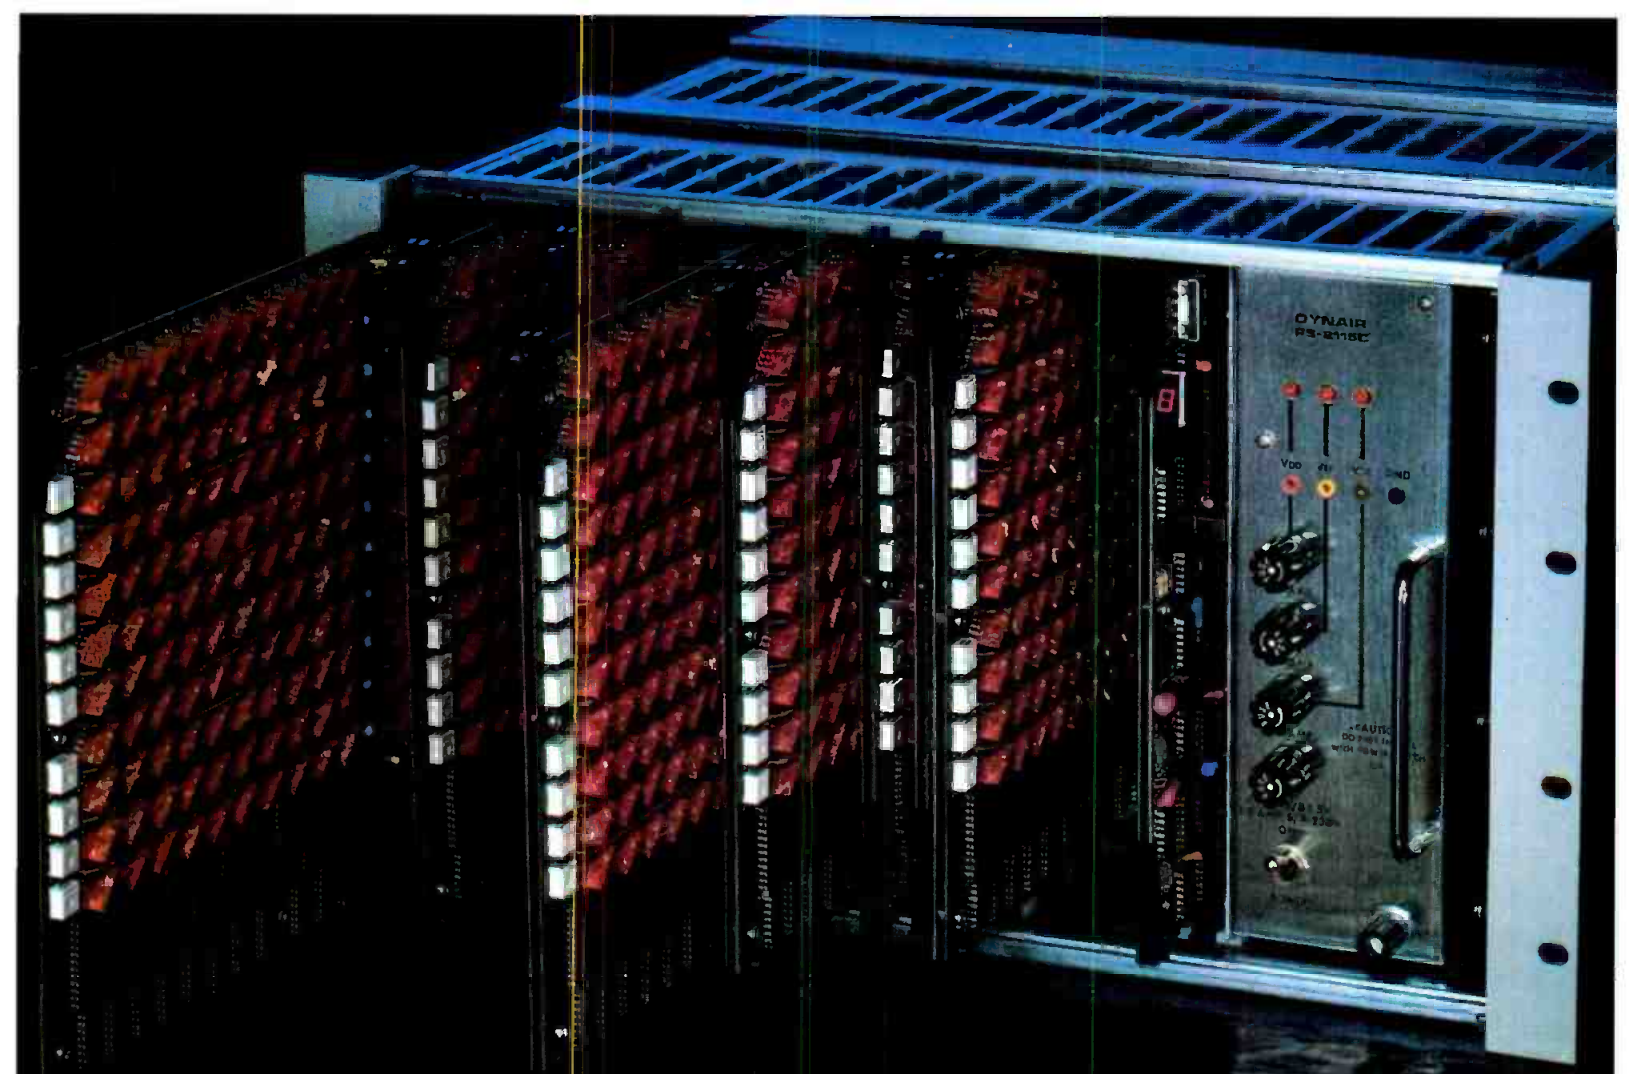

Only the beginning

A thing of beauty . . . this Dynair System 21.

Begin with this single, high density frame using as few as 10 inputs and 10 outputs. Select combinations of video, audio, time code, data, tally, or machine control switch modules.

Grow sensibly, easily and cost effectively to impressive matrices of one thousand inputs and one thousand outputs of every module type by simply adding frames and modules.

Grow into high definition TV, if this possibility is in your future, without changing a thing. Bandwidth of the System 21 is already 30 MHz.

Write or phone. We would like to send you additional information. Give us a chance to begin with you as you upgrade your plant.

DYNAIR

5275 Market Street, San Diego, CA 92114 U.S.A. Phone (619) 263-7711 TWX (910) 335-2040

Circle (80) on Reply Card

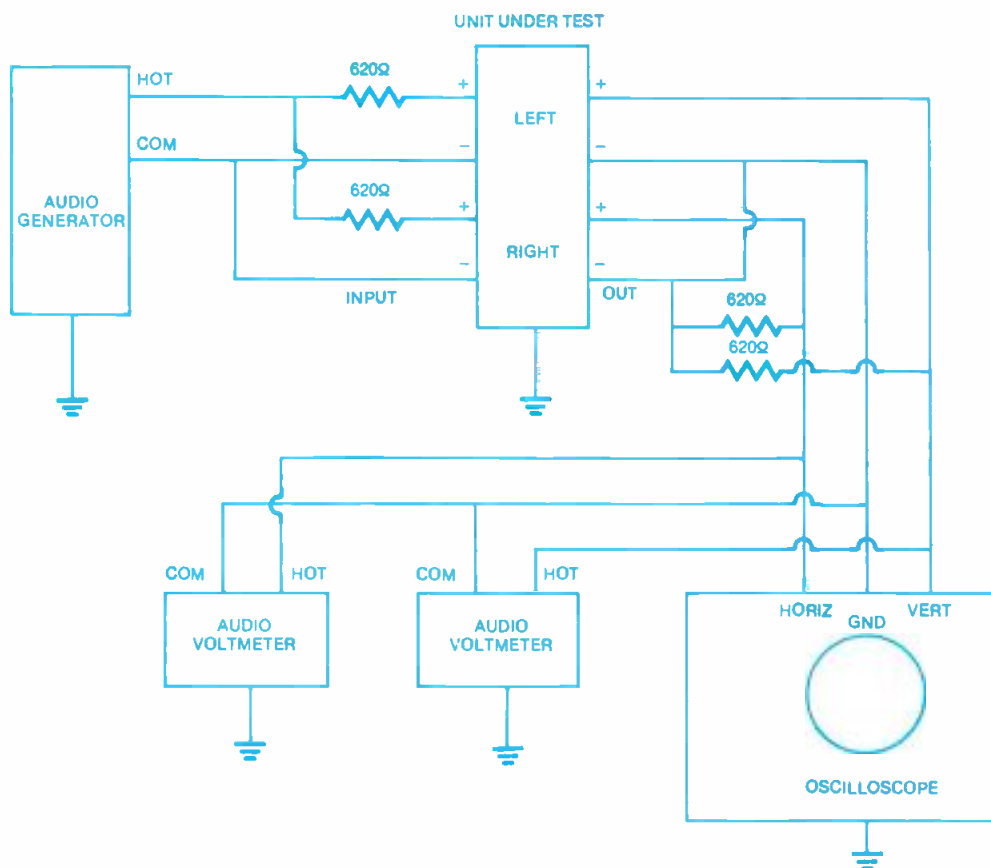


Figure 4. Tape deck alignment test setup.

commonly used type of reel or cartridge material.

Cartridge machines

Proper alignment and maintenance of cartridge machines involves several test devices. A right angle zenith gauge is helpful if head replacement is to be accomplished with a minimum of trouble. This device is a precision 90° square, designed for a reference when setting the cartridge head zenith and height. A head insertion gauge simplifies accurate setting of the head penetration into the cartridge. The device shows the minimum and maximum penetration given by NAB standards. Tape guide height should be checked using the gauge recommended by the tape deck manufacturer. These guides rarely need readjustment, but should be checked from time to time.

A standard spot frequency calibration cartridge is used to align and equalize the playback system of the cart machine. The procedures outlined for reel-to-reel decks apply equally here. Alignment and setup of the record electronics also follow along the same lines as those for reel decks.

A useful alignment cartridge is a fast sweep calibration cart. This gives

ULTRA LOW NOISE MICROPHONE CABLES

• "Star-quad" type mic cables with very high shield density for exceptional rejection of hum and SCR noise—less than 1/10 that of standard, 2-conductor cable

• Tough polyvinyl chloride jacket resists abrasion yet remains flexible below -50°F.

• Available in 10 colors, pre-wired with Cannon XLR's or in bulk

• CANARE utilizes the finest modern materials, advanced engineering, and superior craftsmanship to produce durable, high performance cables used by NHK (Japan broadcasting system) and leading equipment manufacturers for over a decade. At CANARE, we believe there is no substitute for quality.

FREE MIC CABLE

Call or write for cable sample and catalog describing our complete line of Audio/ENG cables, cable reels, snakes and junction boxes.

DEALER INQUIRES INVITED

CANARE

CANARE CABLE INC.
6733 Vineland Avenue
N. Hollywood, CA 91606
(213) 506-7802

Circle (81) on Reply Card

LINEBACKER



BACK UP YOUR SOLAR WITH TELAN AUTO CONTROL

GAS FUELED THERMOELECTRIC GENERATORS
WEATHER PROOF—NO MOVING PARTS
CURRENT AND VOLTAGE AS NEEDED

TELEDYNE ENERGY SYSTEMS

110 W. Timonium Rd., Timonium, Md. 21093-3163 Phone: 301-252-8220 Telex: 8-7780 (Tydyner Timo)
Cable: TELISES

Circle (74) on Reply Card

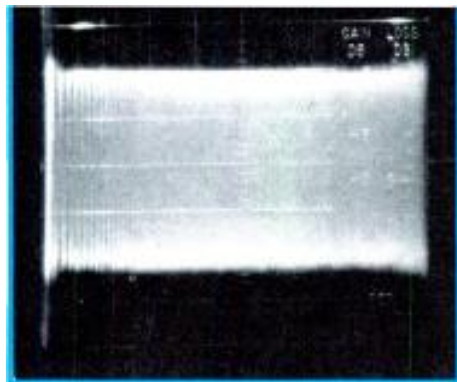


Figure 5(a). Sweep pattern with correct equalization.

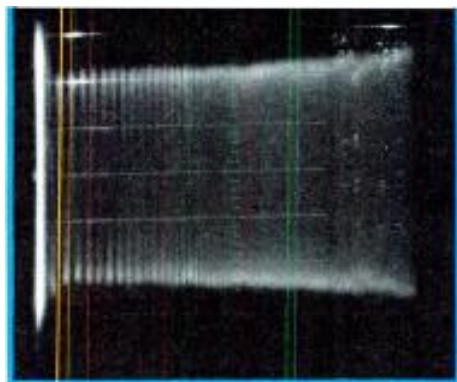


Figure 5(b). Sweep pattern with too much high frequency equalization.

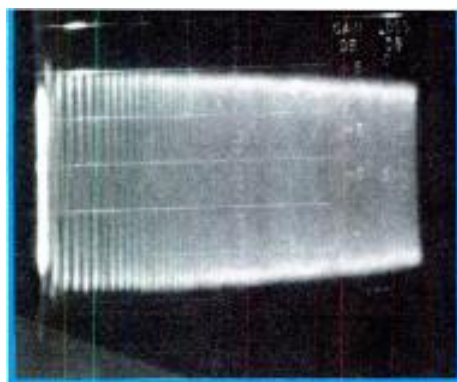


Figure 5(c). Sweep pattern with too little high frequency equalization.

a 500Hz-16kHz sweep with a start pulse for triggering an oscilloscope. Properly aligned and equalized, a cartridge reproducer will provide a uniform output across the band when displayed on a triggered oscilloscope, as shown in Figures 5(a), 5(b) and 5(c). Such a tape provides a convenient check of equalization without the need for waiting through the entire spot frequency cart. A sweep tape is particularly useful when checking the performance of multicart playback machines, such as the IGM Instacart. It would take hours to check all 48 trays with a spot test tape, but by using the sweep tape, the time is reduced substantially.


Some words of caution about reel-to-reel and cartridge test tapes. All magnetic recordings are subject to the effects of magnetic fields, such as those produced by motors. Care should be taken to keep the tapes away from such fields, as well as from temperature extremes.

Cartridge and reel-to-reel alignment tapes are made to exacting specifications. However, no two are exactly alike, so all head alignment should be done with a single standard. As a test tape wears, output levels on the high frequency bands will decrease, resulting in overequalization if the work tape is not compared from time to time with the file tape. Both tapes,

by the way, should be made by the same company to minimize inherent differences.

It is important to know the manufacturer's theory of test tape generation when comparing the work and file standards. One company may produce the alignment tape to give a flat response from the first time it is used. Another manufacturer, on the other hand, may put a slight boost in the high end frequency bands to compensate for the drop in response that results from a certain number of passes across a tape head. If this is the case, a correction factor will need to be considered when comparing the work and file tapes.

Music over T-carrier?

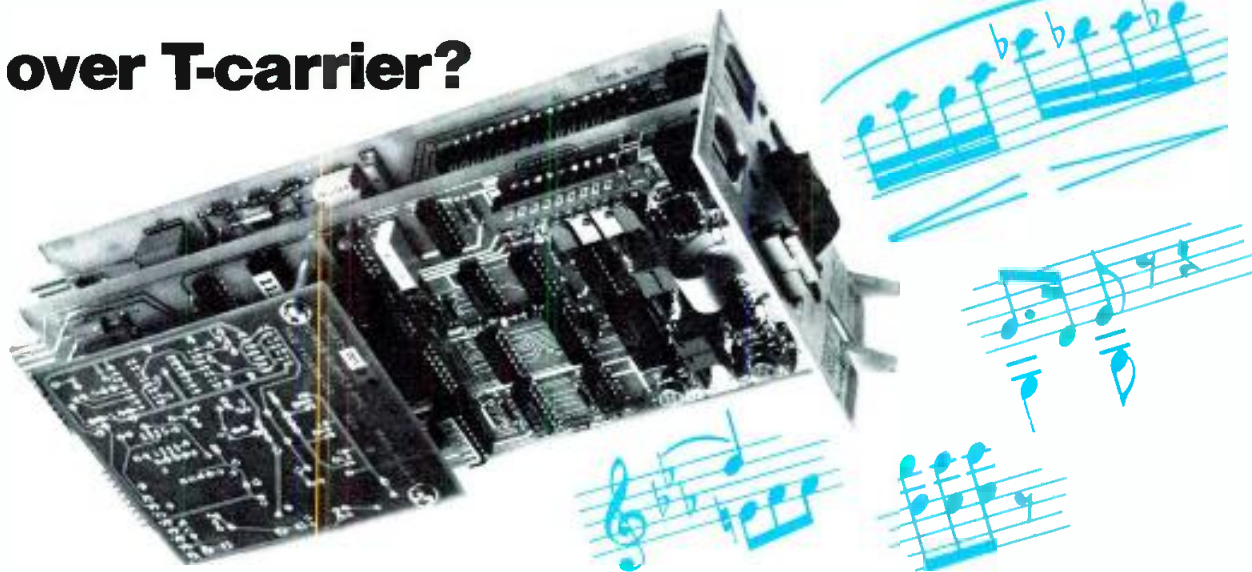

Just plug our 3.5, 5, 8 or 15 kHz modules into your T-cxr Channel banks.

At last someone has made it easy for telcos to extend the benefits of digital transmission to broadcasters...for studio transmitter links, remote to studio links...part-time, temporary, full-time...or whatever. COASTCOM's Model 324 Series Digital Program Channels let you use *existing* WECO D4, GTE 9004, ITT T324, and NTI DE4 channel banks for 3.5, 5, 8 or 15 kHz audio circuits...monaural or stereo...simplex or duplex.

There's no need for the old metallic connections, and you don't need special dedicated channel banks or terminals. The 324 allows

simultaneous message *and* high quality audio transmission...proven over short or long distance. Simply plug COASTCOM modules where voice channel modules used to be. And you don't have to worry anymore about line equalization. It's on-board.

Several hundred audio circuits in Bell, GTE and independent telephone operating companies now use COASTCOM. And the good news is spreading among broadcasters.

So offer the services your broadcast customers want. Quickly, easily, and inexpensively.


Call COASTCOM today. We're at 2312 Stanwell Drive, Concord, California 94520. Telephone: 415/825-7500, TWX: 910/481-5781.



Circle (82) on Reply Card

WE MAKE AMPEX BETTER

SAKI hot-pressed, glass-bonded ferrite recording heads.
The best is now available for your Ampex recorder.
in all sizes and models.

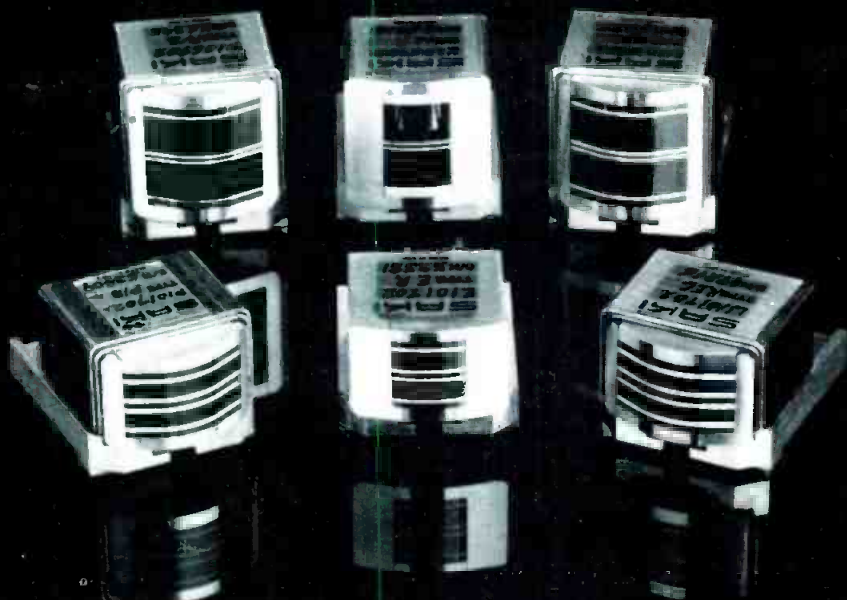

SAKI MAGNETICS, INC.

A CALIFORNIA CORPORATION

8650 Hayden Place, Culver City, CA 90230 • 213 / 559-6704 (TWX-910-328-6100)

Circle (104) on Reply Card



Multiple playback decks, such as the IGM Instacart (shown) can add a great deal of flexibility to either an automated or live-assist operation.

Turntables

The stroboscope-type turntable speed test disc provides a convenient and reliable indication of turntable accuracy. Any speed variation of more than 2% from normal will be audible on most recordings. Many turntables have an idler wheel pressure adjustment that will have a definite effect on speed. Consult the equipment manuals for proper adjustment procedures.

Stylus replacement is the maintenance most often required for turntables. Always be sure a good quality stylus is in place before playing a test disc. Also, check the tonearm for alignment with the platter. In many cases, this is adjustable. Stylus pressure should be set for the value recommended in the literature accompanying the needle.

The NAB test record includes a monophonic 1kHz standard reference level, wow-and-flutter test and frequency response test. The stereo-



Careful layout and planning of a studio renovation project will save time and money when construction actually begins.

CINE 60 SUN-GUN

Beautifully Simple

Beautiful... because it's fresnel-soft and uniform — ideal for video. And simple because... if 250 Watts is too much, change to 150 Watts. Need more? Go to 350 Watts. Want to go really light? Use 100 Watts (12V.). Outdoors, swing-in the built-on Daylight Filter. You color correct instantly! Indoors, swing away the Filter and you have tungsten light! Never a need to readjust camera color controls here! For focus, vary the beam from 8 to 14 Ft. For power, choose from 20 Sun-Gun Powerbelts and Powerpaks. And, to make it beautifully simple... we put it all together for you in any one of 17 Portable Sun-Gun Kits. See your dealer or send for data, today.

CINE 60

INCORPORATED
630 Ninth Ave. 6430 Sunset Blvd.
New York, N.Y. 10036 Hollywood, CA. 90028
(212) 586-8782 (213) 461-3046



Circle (83) on Reply Card

TELCO 1	TELCO 2	TELCO 3	EBS ALARM	AM SILENCE	AM TRANS	FM TRANS	FM SILENCE	SCA CARRIER	WARNING DEFEAT	RPU	INTERCOM PTT
TAPE 1 STOP	TAPE 2 STOP	TAPE 3 STOP	CART 1 STOP	CART 2 STOP	CART 3 STOP	CART 4 STOP	CART 5 STOP	TURN 1 STOP	TURN 2 STOP	INTER STA 1	INTER STA 2
TAPE 1 START	TAPE 2 START	TAPE 3 START	CART 1 START	CART 2 START	CART 3 START	CART 4 START	CART 5 START	TURN 1 START	TURN 2 START	INTER STA 3	RESET INTERCOM

CHANGE NEWS			FIRE TRANS	FIRE SHOP
CHANGE CART			FIRE FM	FIRE GEN
UPDATE WEA			CALL 1	CALL 2



Figure 6. Layout of remote control and status alarm panel.

One of the three remote control-status panels custom-built for KRED/KPDJ.

Howe 7000 Series Stereo Consoles . . . The \$10,000 console for only \$5800.



Now Available with
DAVEN Step Attenuators

For further information contact:
Howe Audio
3085-A Bluff Street
Boulder, CO 80301
(800) 525-7520 or (303) 444-4693



howe audio productions, inc.

P.O. Box 383, Boulder, CO 80306


"I spent 14 years with Group W, and had come to expect quality equipment. Howe provided that for us at a most reasonable price."

Dugan Fry, General Manager WWOJ
Avon Park, Florida

All our users recommend the cost-effective Howe line of broadcast equipment. The purchase price and low maintenance costs contribute to the valued position Howe Audio maintains in the industry.

With the advent of **Opti-Cue™**, Howe Audio now offers an all-inclusive three-year warranty.

Contact a Howe Audio products user today. Contact us for a **complete** users list.

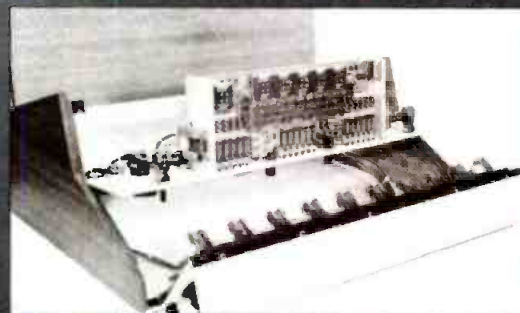

Opti-Cue™ is a trademark of Howe Audio

Circle (84) on Reply Card

phonic side of the record has a phase-and-balance test, spot frequency test, separation test and level check. Equalization for a turntable pre-amp may be fixed, but check the print to be sure.

As part of any studio improvement effort, tests should be made on the performance of the audio control board. Conduct frequency response, distortion, noise and crosstalk measurements, comparing them to new equipment specifications to determine if servicing is necessary. If the attenuators on the board have removable covers, clean them and check for any dirty contacts on the channel input key switches.

In nearly all cases, the original specifications for source machines can be maintained throughout the life of the unit. With regular maintenance and the proper tools, this can be easily accomplished. The adjustment procedures outlined in this section apply to most, but certainly not all, source machines. For this reason, your unit's instruction manual should be consulted before attempting any adjustments.

Control and status

At KRED-KPDJ, as new equipment and features were added over the

years, the status indicators and remote controls began to get out of hand. EBS and RPU lamps were in one spot. FM system alarms were tacked on somewhere else. The telephone talk show ready lights were mounted on the wall. The remote start switches, installed five years ago, were wearing out. Then there were the new features we wanted to add, but didn't have room to install.

The solution to these problems was to consolidate all remote control and status indicators into one large, conveniently located panel consisting of lighted push-button switches. The result is shown in Figure 6.

The Telco 1, Telco 2 and Telco 3 lamps signal which telephone lines are ready to go on-the-air for our talk show program. The EBS indicator will blink at a 1Hz rate when the EBS receiver is activated by a 2-tone transmission from the station we monitor. The AM Silence Sense and FM Silence Sense alarms signal when modulation of either system drops below a preset level for a certain length of time. The AM Transmitter and FM Transmitter alarms are activated by a loss of carrier. The SCA Carrier lamp signals loss of the SCA carrier. The Silence Sense, Transmitter and SCA alarms, in addition to light-

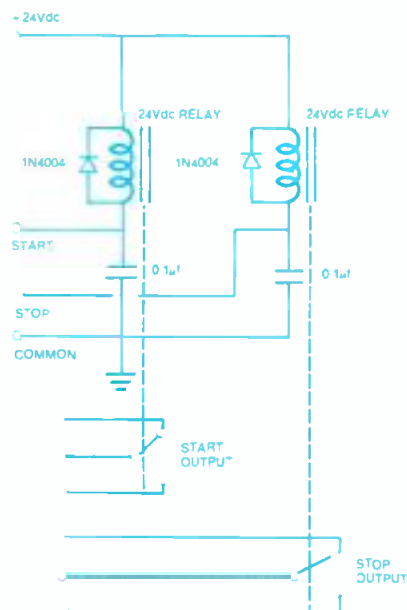


Figure 7. Source control unit.

ing their respective lamps, trigger a Sonalert device that can be defeated by a switch near the remote control panel. This is done at sign-off to prevent the Sonalert from beeping through the early morning hours. When the Sonalert is defeated, a lamp labeled Warning Defeat is lit.

An intercom system ties the control room with other parts of the building.

You'll meet your match with our EDITING CONSOLES

No matter what VTR equipment you use, Winsted offers Editing Consoles to match your requirements! Our designs are based on consultations with professional users like yourself.

You've chosen your VTR equipment carefully, to meet your specific needs. Now choose the Editing Consoles that fit your equipment - quality consoles from Winsted.

For our free full-color FULL-LINE CATALOG call us toll-free:

800-328-2962

Winsted

9801 James Circle
Minneapolis, MN 55431



Circle (85) on Reply Card

STL Offers The Most Complete Selection Of Test Tapes Available Anywhere

STL can serve all your needs with precision test tapes for frequency alignment, level set, azimuth set, flutter & speed tests, sweep frequency tests and pink noise analysis. Also available is the Standard Tape Manual & the Magnetic Tape Reproducer Calibrator.


Phone for fast delivery or free catalog

STL

STANDARD TAPE LABORATORY, INC.

26120 EDEN LANDING ROAD #5 HAYWARD CALIFORNIA 94545 • (415) 786-3646

Circle (86) on Reply Card

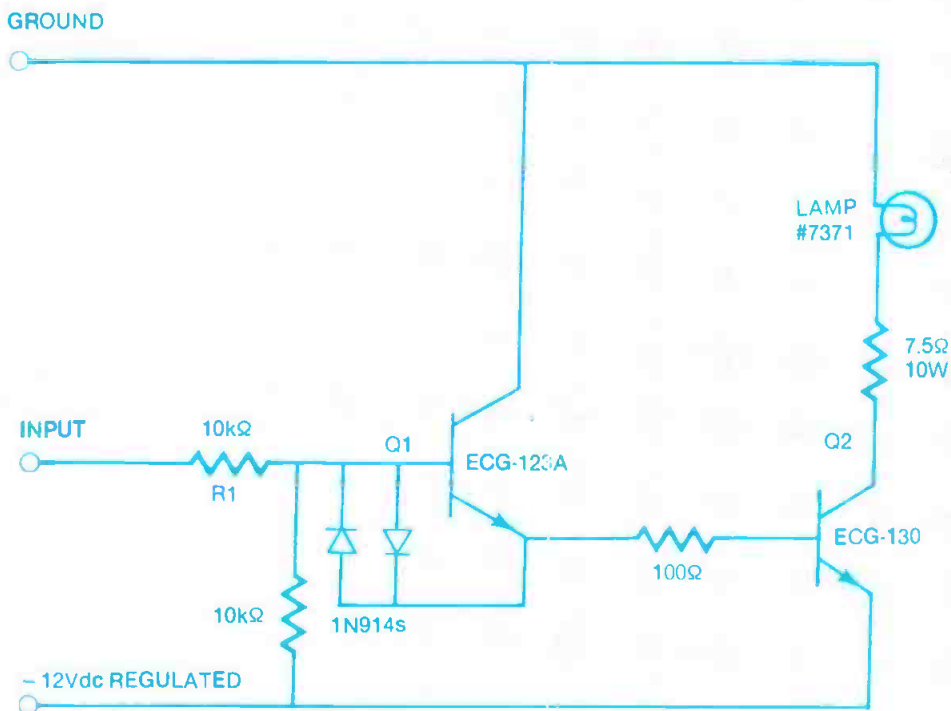

TO ACTIVATE LAMP, GROUND INPUT LINE.
FOR SOURCE MACHINES THAT PROVIDE +24V AT READY OR PLAY, MAKE R1 36kΩ

Figure 8. Status and alarm lamp driver.

The Intercom 1, Intercom 2 and Intercom 3 buttons select the remote sta-

tion desired. The Reset button clears the intercom, and the Intercom PTT is

the push-to-talk button for the system.


The remainder of the buttons on the main control panel are remote starts and remote stops for the 10 source machines used in the KRED-AM control room. The Stop light indicates the ready state (cart loaded, tape tension arm up, etc.) The Start light will come on when the source is in the run state.

Other machine control functions and status alarm indicators in the AM control room are contained on another panel. The matrix includes a fire alarm system readout that monitors four locations: the AM transmitter room; standby generator room; engineering shop; and FM automation system room. An alarm from any of these points activates the Sonalert and lights the respective lamp. After-hours call lamps alert the operator if someone is at either of two outside doors. Reminder lamps tell the operator to change the FM news cart, update the weather or change a cart on the FM automation system. These are activated by real time commands programmed into the automation system memory. Six other switches are uncommitted, for further expansion.

The system of two panels gives our operators the ability to monitor the status of the AM and FM systems, as

AFFORDABLE BY DESIGN

We build a functional Master Control Switcher with all the necessary capabilities for your on air needs.

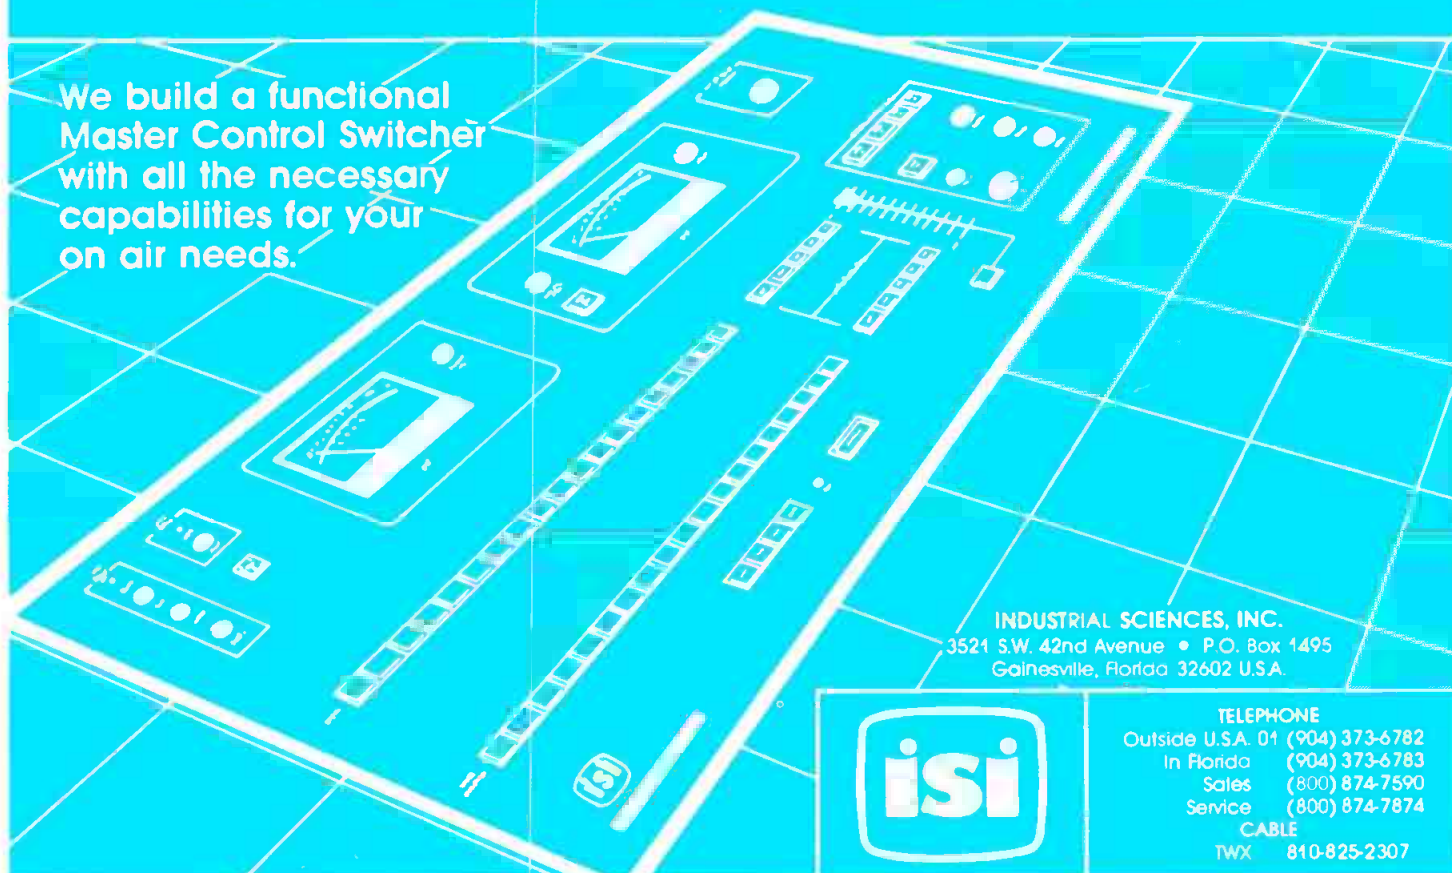

INDUSTRIAL SCIENCES, INC.
3521 S.W. 42nd Avenue • P.O. Box 1495
Gainesville, Florida 32602 U.S.A.



TELEPHONE
Outside U.S.A. 01 (904) 373-6782
In Florida (904) 373-6783
Sales (800) 874-7590
Service (800) 874-7874
CABLE
TWX 810-825-2307

Circle (87) on Reply Card

Wide Eye I & II

Low-cost, lightweight,
wide-angle lens
attachments for your
ENG/EFP video zoom lenses.



- Front-mounted *Wide Eye I & II* readily convert most video zoom lenses into *ultra wide-angle* fixed focal-length lenses with no loss in light transmittance.
- Made of high-quality optical glass with multiple anti-reflective coatings.
- *Wide Eye I* increases the widest angle of the zoom lens by about 35% with minimal distortion. *Wide Eye II* increases it by about 50% for a "fish eye" effect.
- Easily attached to most professional ENG/EFP zoom lenses which feature macro and/or adjustable back-focus.
- Ruggedly constructed. Supplied with Naugahyde pouches featuring Velcro closure and belt loops.



Rental • Sales • Service



Film/Video
Equipment
Service Co.

1875 So. Pearl St., Denver, CO 80210 • 303/778-8616

Circle (88) on Reply Card

MAINTENANCE & NEW HEAD PURCHASES REDUCED BY 100% with LIFE+™ HEADS

- SUPERIOR SOUND & BETTER HIGH END
- 3 TO 5 TIMES LONGER LIFE
- 2 YEAR WARRANTY
- IN STOCK & AVAILABLE

In another effort to "Lick the high cost of tape heads" Restoration announces the distribution of Minneapolis Magnetics LIFE+ heads for the Broadcast field.

LIFE+ heads have been field tested and proven to be far superior to conventional heads currently available.

Restoration also offers a complete line of refurbishment services, BASF alignment tapes, replacement heads for studios, film and duplicators.

Send for your FREE brochure.



15904 Strathern St. • Van Nuys, CA 91406
Phone: 213 994-6602

Circle (89) on Reply Card

well as control source machines in the air studio from one central location.

The remote Start and Stop buttons control relays that perform the actual machine switching action. Other methods of interfacing were considered, such as solid-state relays or transistors, but were rejected because of the high cost (in the case of solid-state relays) and interfacing difficulty (in the case of transistors). Over the years, relays will require some maintenance in the form of contact cleaning, but this has proved to be only a minor problem in our system.

The status lamps are all driven by transistor buffer amplifiers, resulting in light loading on the source machines and small current through remote status relays.

In all, the system contains 39 4PDT plug-in relays, 64 transistors, nine integrated circuits, about 100 resistors and 50 capacitors. A representative diagram for a single source remote control is shown in Figure 7, and a

typical remote status-alarm is shown in Figure 8.

The relay interfaces are self-explanatory, as are the lamp driver amplifiers. The devices shown handle loads greater than 1W continuously without externally heat sinking Q2. Power for the system is provided by a central $\pm 34V$ supply that also feeds several other pieces of equipment in the AM control room. The lamps are fed from a separate $-12V$ supply rated for 15A. Operating the lamps from the negative supply allows remote status indicators to be activated by grounding of the alarm sense line.

The alarm state detectors for the AM Silence Sense and AM Transmitter functions are contained in the AM modulation monitor. Optional cards in the monitor provide contact closure in the event of a fault. Likewise, the alarm state detectors for the FM Transmitter, FM Silence Sense and SCA Carrier functions from the three FM monitors use optional cards. The

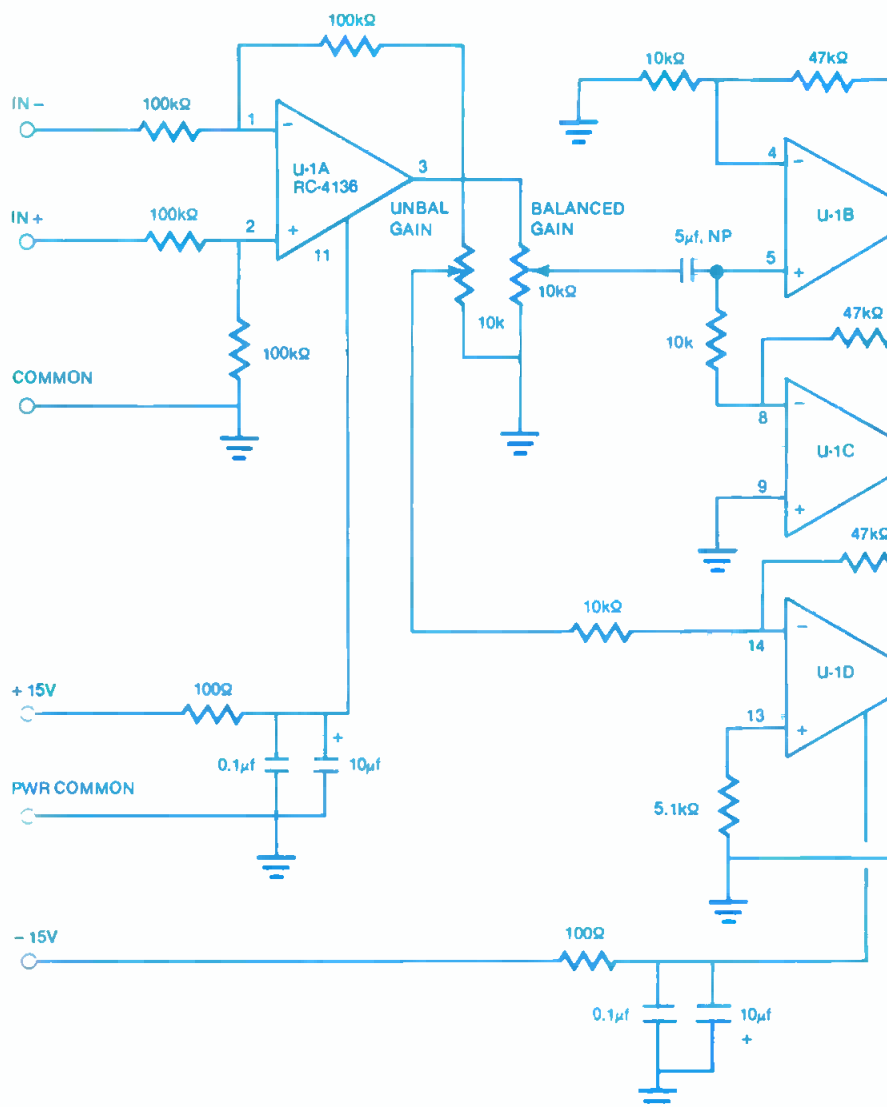


Figure 9. Buffer distribution amplifier.

Fire Alarm system uses standard high temperature sensors to determine an alarm state.

The reminder lamps (Change News, Update Weather, Change Cart) are latched on under software command from the FM automation system. The selected lamps remain lit until the respective button (News, Weather, Cart) is pushed. Relay logic achieves the latch-on, reset function.

A simple tape deck sequencer is included as another feature of the system. When activated, the three music tape decks in the AM control room sequence automatically from one to another upon receipt of end-of-message tones. This allows increased walk-away time for the operator when changing tapes, taking transmitter log readings, etc. When the sequencer is activated, the remote Start and Stop lamps for the three tape decks are blanked, as a reminder that the system is on-line.

The intercom is a conventional design with a pair of IC amplifiers

driving the speaker-talkback arrangement. Balanced lines run to each remote speaker to prevent RF pickup.

There are a number of different methods that could be used to implement such a status and control system. The arrangement described here relies chiefly on relay logic and discrete transistor lamp drivers, however. Depending on what parts a particular station has on hand, a totally different system could evolve. If I were to build this type of remote control unit from scratch now, I would likely use CMOS logic and open-collector IC drivers to interface the

system to the source machines and to drive lamps. Whatever method might be used, a well-thought-out remote control and status board will improve operator efficiency and minimize response times to any problem that might develop at the station.

Audio interface

Distribution and isolation of audio input and output signals in a studio are two of the more important, and sometimes least planned, parts of a production facility. Single-source outputs to single-control board inputs

Spill Coffee In Our Faders! You Still Get Great Sound!



Custom Audio Series Consoles

- P&G's newest splashproof faders. (Most boards still use older, unprotected P&Gs.)
- Clear, crisp sound without hums, pops or RFI.
- Human-engineered layout for mistake-proof operation. (Recently chosen by blind operator who mixes by touch.)
- Field proven modular design. Customized at off-the-shelf prices.

CALL TOLL-FREE 800-231-5870

(Texas, Alaska, Hawaii call collect 713-782-4592)

Logitek Electronic Systems, Inc.

3320 BERING DRIVE • HOUSTON, TEXAS 77057 • (713) 782-4592

(ALL 2.2kΩ)

OUT 1

OUT 2

OUT 3

OUT 4

OUT 5

620Ω

UNBALANCED OUTPUT
(INVERTED)

GND

IONS:

T: +22dB (UNLOADED)

dB: BELOW 0.5%

±2dB: 20Hz-20kHz

DW 60dB

Circle (90) on Reply Card

athena

6000

The Most Cost-Effective Telecine Projector Available

The ATHENA 6000 is designed to meet professional requirements in NTSC, PAL and SECAM countries.

- Automatically phase-locks to NTSC, PAL or SECAM field rates
- Unlimited hold time in still frame mode
- 1-2-4-6-8-12-24 frames per second, forward or reverse, totally without flicker
- Remote control option
- Two-year parts and workmanship warranty
- Modular assembly/easy maintenance



For more information contact:

L-W INTERNATIONAL 6416 Varie! Avenue.
Woodland Hills, California 91367 U.S.A.
Telephone: 213 348-8614

Circle (91) on Reply Card

BROADCAST BEST BUY!



...from
audiotechniques



FOR SERVICE & PRICE
WE'RE THE BEST!

audiotechniques inc.

NEW YORK CITY
212/586-5989
STAMFORD, CT
203/359-2312

Circle (92) on Reply Card

present no interfacing problem, provided the levels and impedances match. However when an audio source is fed to several inputs, perhaps in different studios, problems can crop up.

Isolation is the key to eliminating troublesome operation peculiarities. A net source, for example, feeding two studios and a patch panel or two without a distribution amplifier, may be a problem looking for a place to happen. When patching the net source to or from some point at the patch panel, momentary short circuits will probably occur, dropping the feed to other studios. Switching more than one console input onto the net line at a time may result in a drop in source level. A much more logical solution is to feed the net into a distribution amplifier providing isolated outputs. If one line is shorted out or loaded, the other lines are unaffected. Distribution amplifiers are available from a number of manufacturers at a variety of prices.

An alternate solution would be to build your own distribution amplifier system. Figure 9 shows a typical 1-in/5-out distribution amp. The circuitry is simple and straightforward. U-1A is a differential to single-ended buffer, U-1B and U-1C comprise the differential output drivers and U-1D provides a single-ended output for driving unbalanced loads. More versatile and elaborate systems could certainly be devised, but this circuit pro-

vides more than adequate output drive and isolation in most cases.

The circuit shown in Figure 9 will easily fit on a single-sided 4"x6" printed circuit board and, when used with plug-in edge connectors in a card cage, will make a high quality audio buffer and distribution amplifier system for the entire station. Installed near the Telco terminal and the satellite demodulator units at KRED-KPDJ, this system distributes AM and FM air monitor signals to various parts of the building, RKO Network audio to several locations, Telco toll loops to patch panel outputs and RPU (Remote Pickup Unit) receiver audio to three control terminals.

The use of submixers for audio inputs that are similar in nature is an easy way to expand the functions of the audio control board. An example of a submixer used with a group of cart machines is shown in Figure 10. This is a basic system. If desired, a more complicated and versatile unit could be used that would include cue provisions and variable mixer gain.

Audio output from the control board should follow isolation and distribution methods similar to those used for inputs. In nearly all cases, distribution can be accomplished through the use of a passive circuit, as shown in Figure 11. This circuit will work well if all inputs are balanced. If unbalanced inputs are present, install an isolation transformer, as shown.

Maintaining good program levels is

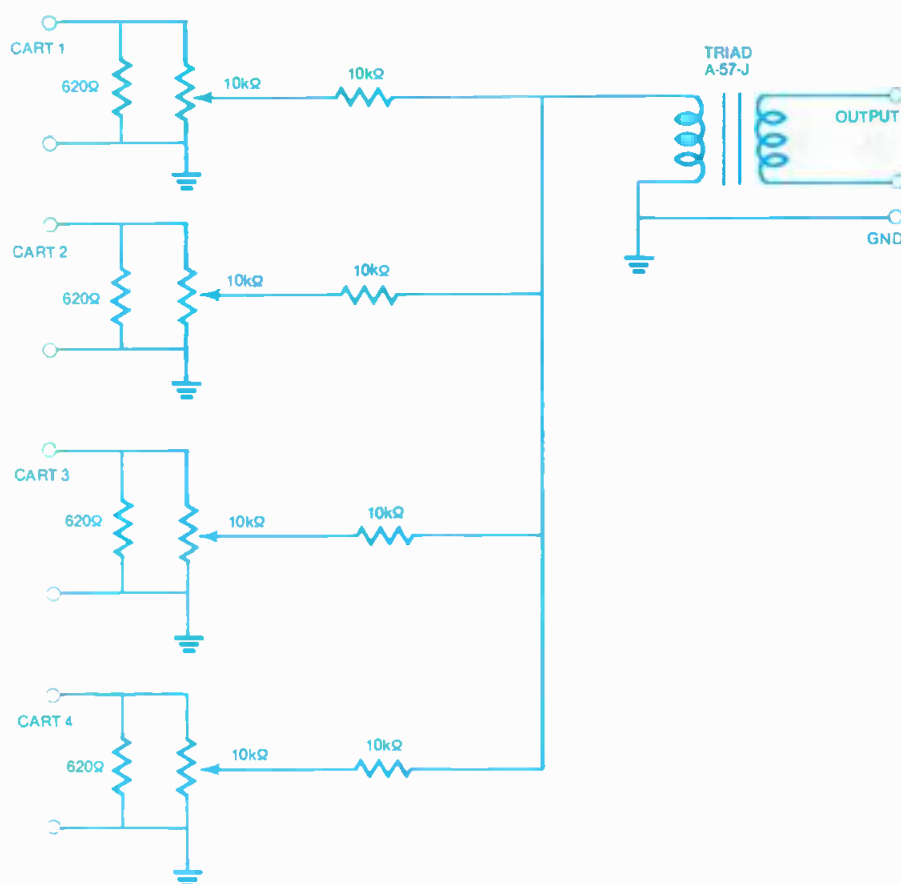


Figure 10. Simple submixer for inputs of a similar nature.

a difficult task without the proper metering. The standard VU meter lets a large number of short duration peaks escape detection because the meter ballistics are relatively slow. A solution to this problem is to incorporate a Peak Program Meter (PPM) into the system so that the transient energy, not shown on a standard VU meter, can be seen. Several manufacturers sell PPMs or VU-to-PPM conversion kits. Ideally, one should have both a standard VU and PPM working simultaneously. The operator can set his level with the standard VU and then reduce it as necessary to keep the PPM reading within range. The PPM is a useful device because it will show transients that could cause distortion in the audio board or further down on the audio chain. Reel-to-reel and cart machines are particularly susceptible to overload distortion.

Phasing audio inputs and outputs is an important step in building or rebuilding an audio studio. Phasing for a stereo installation is absolutely critical, for obvious reasons. Phasing for a mono studio is important as well, but for less obvious reasons. The mono phasing problem shows up in elaborate multisource mixdowns and at the audio limiter just before the transmitter on AM systems. The limiter problem is most pronounced when asymmetrical modulation is used with a limiter that has a peak positive phasing feature.

The main microphone in the air studio should be phased to provide peak positive modulation with the limiter phase switcher in the normal mode. The rest of the air studio, indeed the rest of the station, should be set up to provide peak positive modulation with normal phase.

A convenient way to check for phasing is to connect a 1N914 diode across an audio generator output and bring up the level to give a distinctly clipped audio waveform. Connect the diode to clip part of the negative portion of the

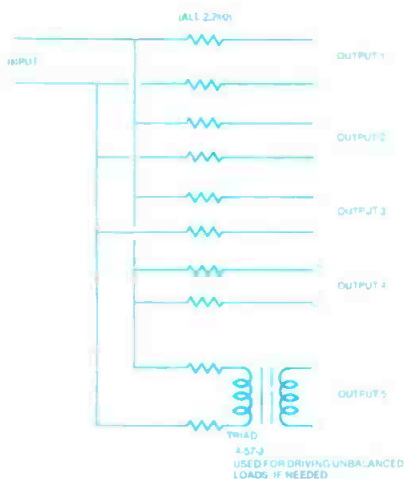


Figure 11. Audio console output distribution board.

For state & regional radio network systems,



COME TO COMTECH FOR THE PERFECT SOLUTION.

Comtech's engineering excellence, cost-effective manufacturing and sustained inventory will assure you prompt delivery of high-quality systems. Just look at the features:

- 3.8 meter antenna/2° spacing
- Optional built-in SCPC demodulator
- Optional composite video baseband for MCPC applications
- Antenna mounted LNC allows single low-cost coax interconnect
- Remote three-channel select
- Broadcast quality audio

For details and prices, call Comtech Antenna Corp., P.O. Box 428, St. Cloud, FL 32769, (305) 892-6111, TWX 810-870-0220. Or Comtech Data Corp., 350 North Hayden Rd., Scottsdale AZ 85257, (602) 949-1155, TWX 910-950-0085.



COMTECH

Creative solutions
in satellite communications.

Comtech Data Corporation
Comtech Antenna Corporation

Subsidiaries of
Comtech Telecommunications Corp.


Circle (93) on Reply Card

YOU ONLY NEED ONE OF OURS.

No reliability problems from microphone or cable with the subminiature Sennheiser MKE-10 electret. Not only better-sounding, it's better looking—because you *don't* see it.

SENNHEISER

ELECTRONIC CORPORATION
10 West 37th Street, New York, NY 10018
(212) 239-0190

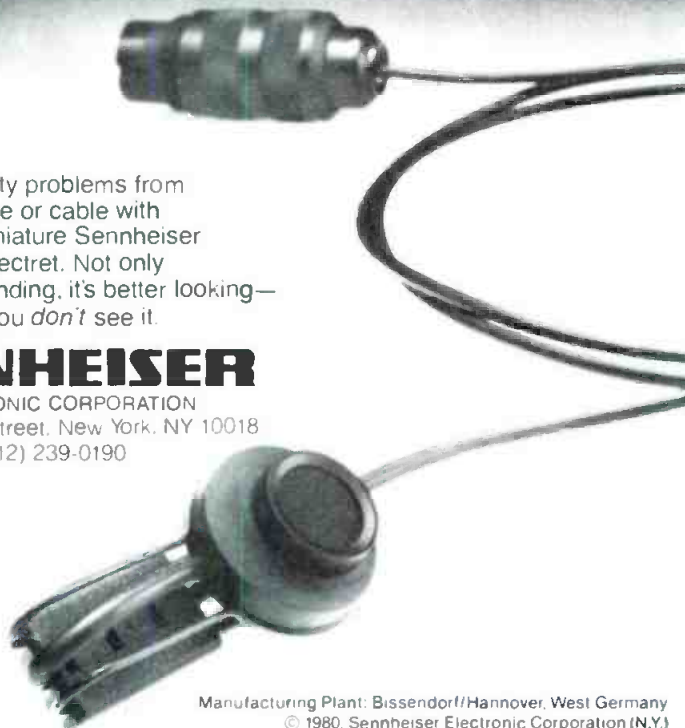

Manufacturing Plant: Bissendorf/Hannover, West Germany
© 1980, Sennheiser Electronic Corporation (N.Y.)

Circle (94) on Reply Card

NEW! Book VIDEOTAPE EDITING

Videotape Editing-Communications With Pictures And Sound answers every videotape editing question:
When to edit? When to (and when not to) use a dissolve or wipe? How to cut? How to use complex sync role editing and audio sweetening? How to affect the mood and pace of a show? Why and how to perform computer editing without losing creative control? It even takes the mystery out of time code and user bits.

Beginning editors, experience pros, film editors, and media managers will all appreciate Videotape Editing. This new book is your guide through the world of computer assisted videotape editing.

Videotape Editing-Communications With Pictures And Sound By Michael D. Sbratter
• 165 pp. • 144 illus. • 6" X 9" • Hardbound
\$32.20 (\$34.00 in IL.)

Order Today!

Brochure Available

(312) 364-1900 Ext. 825


Major Credit Cards Accepted

SE

Swiderski Electronics Inc.
Audio Video Engineers

200 Greenleaf Ave. • Elk Grove Village, IL 60007

Circle (95) on Reply Card

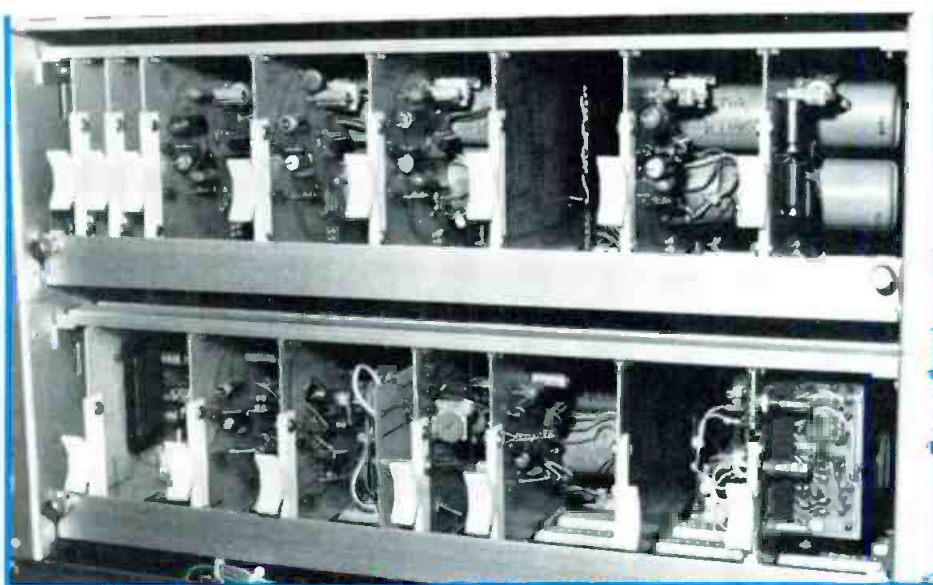

A multifunction audio distribution amplifier system custom-built for KRED/KPDJ.

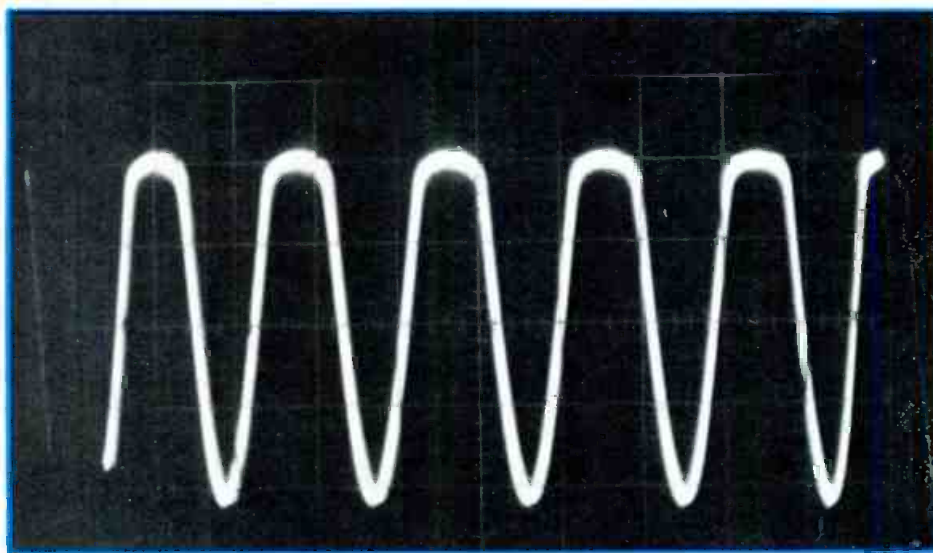


Figure 12. A clipped waveform that can be used to check for proper system phasing.

FREE 32pg Catalog & 50 Audio/Video Applic.
PWR SUPP. EQ. PHONO, MIC, TRANS. ACH. TAPE, VIDEO, LINE, OSC
Stereo/Mono Pwr Ampl. 8-in/2-out, 12-in/4-out, 18-in/4-out
Video & Audio Dist. Ampl. TV Audio & Recd Prod Consoles
OPAMP LABS INC (213) 934-3566
1033 N Sycamore Av LOS ANGELES CA, 90038

Circle (96) on Reply Card

HEAD RE-LAPPING AND NEW HEADS FOR AMPEX

Worn cartridge and reel to reel heads re-contoured and re-lapped for original performance. Send for free brochure.

R. K. Morrison Co.
819 Coventry Road • Kensington, CA 94707
(415) 525-9409

Circle (97) on Reply Card

SENNHEISER
MKH416TU/P48U.....\$553.- MD421U.....\$208.-
MKH816TU/P48U.....\$729.- MD441U.....\$289.-
HMD224.....\$139.- HD414.....\$50.-
ME88.....\$162.- Other Models..Call
Ships & Ins. 3.00 first item - 50c each additional item
MICROPHONICS P.O. Box 37, Brooklyn, NY 11204
(212) 438-6400 audio technicians

Circle (98) on Reply Card

X-10 MUSIC CONTROLLER



- Cycle 2 reversing or 4 regular decks
- Stereo/Mono
- 25 Hz Sensor, Filter Silence Sense

MEI MICROPROBE Call Dave Collins, (312) 440-3111
ELECTRONICS INC 975 N. Michigan Ave. #1532A
Chicago, Illinois 60611

Circle (99) on Reply Card

wave when viewed on an oscilloscope. (See Figure 12.) (Note: If your audio generator has a low internal output resistance to the active stage, use a current limiting resistor of about 620Ω between the hot output and the diode and load.)

When the clipped waveform is recorded and played back on source machines in different studios and through the air chain, the phasing should remain the same. Phase switching will cause the limiter to do more work than it should have to. Ideally the limiter automatic peak phasing circuit will never change from normal. This is not the case in actual practice, however, due to the characteristics of speech and music, but correct phasing of the system will limit the phase changes to that required by the program material.

An interesting problem occurs in an AM air studio when the operator's headphones are being fed from an air monitor and the limiter automatic peak phasing circuit has the phase in reverse. When the announcer opens

the microphone and says something, the headset volume is low and the air signal sounds muddy. This is because sound reaching the operator's ears from the headphone is 180° out of phase with the sound reaching his ears from his mouth. There is, therefore, cancellation of the signals, particularly at the higher frequencies. The situation is cleared as soon as the limiter returns to normal, generally a couple of seconds.

Finally, an important part of renovating or building a studio is clearly labeling the sources and preparing a detailed operations manual outlining how to use the equipment. The manual can be divided into sections dealing with normal operation, patch panel use, special functions and troubleshooting. This will save much time on the part of operators using the equipment and the engineers who must answer the questions. The best studio in town isn't much good if only the engineering staff knows how to run it.

1-7-81

RESULTS



A.F. ASSOCIATES, INC.
100 Stonehurst Court, Northvale, N.J. 07647 / 201-767-1000

February 11, 1983

Mr. Cameron Bishop
Publisher
Broadcast Engineering
P.O. Box 12901
Overland Park, KS 66212

Dear Cam,

A.F. Associates has doubled its business each year for the past six years. And I'm pleased to say Broadcast Engineering has played a key role in that growth.

Through the years, our ads in BE have generated hundreds of qualified, and more importantly, productive sales leads.

With solid results like these, we know BE delivers the market so our advertising is efficient and cost-effective.

With Broadcast Engineering as an ongoing part of our marketing program, A.F. Associates will continue its trend of unprecedented growth.

Very truly yours,

Louis H. Siracusano
Louis H. Siracusano
Executive Vice President

LHS/jm

Thanks A.F. Associates
for taking the
BROADCAST
engineering AD-vantage

P.O. Box 12901
Overland Park, KS 66212
913-888-4664



This is no time to be s

Quite simply, the McMichael ACE Digital Standards Converter is regarded by those who know as the best in the world.

For a start, it's the only one to offer four fields of digital storage.

What's more, it offers bi-directional conversion between

any internationally recognised T.V. standards.

Naturally, it performs brilliantly. You won't find a flicker on the horizontal edge.

While neither vertical nor horizontal motion will give you the judders.

For more information about broadcast equipment, clip the coupon and mail to GEC McMichael, Sefton Pa



Simulated picture.

uck with second best.

What you will find is rock-steady, pin-sharp detail. Even on panning.

With all that going for it, you won't be surprised to learn that the McMichael Standards Converter isn't exactly cheap.

But then the best never is.

Please send me further details on the GEC McMichael ACE Digital Standards Converter.

Name _____

Title _____


Company _____

Co. Address _____

City _____

State _____

Zip _____

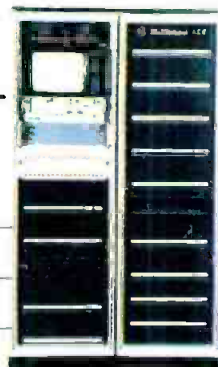

Circle (132) on Reply Card

Is Hill, Stoke Poges, Slough, Berks. SL2 4HD, England. ACE Digital Standards Converter.

PUT IT ON . . .

Our **HEAD** dept. provides heads for all varieties of recording applications.

Our **SERVICE** dept. overhauls and fine tunes your audio and video recorders. **TABER** also maintains parts for Ampex, Scully and Sony recorders.

TAKE IT OFF . . .

TABERASER thoroughly erases all audio, video, instrumentation tapes and magnetic films.

See us about heads, recorders, erasers at **N.A.B.** or send for free brochure.

TABER

A Total Communications Services Co.

(415) 635-3831

2081 Edison Ave. • San Leandro, CA 94577

Circle (101) on Reply Card

Audio Tape for professionals



REEL TO REEL TAPE

Ampex, 3M. All grades.
On reels or hubs.

CASSETTES, C-10—C-90

With Agfa, TDK tape.

LEADER & SPLICING TAPE

EMPTY REELS & BOXES

All widths, sizes.

Competitive!
Shipped from Stock!

Ask for our recording supplies catalog.

Polyline Corp. 312/298-5300

1233 Rand Rd. • Des Plaines, IL 60016

15

Circle (102) on Reply Card

associations



**National Association
of Broadcasters**

1771 N Street, NW
Washington, DC 20036
1-202-293-3570

Brussels Satellite Convention receives support

The NAB's Copyright Committee supports US ratification of the Brussels Satellite Convention. The convention is an international treaty designed to protect broadcasters and other legitimate distributors of programs and signals transmitted internationally by satellite. The treaty requires countries that ratify it to take "adequate measures" against unauthorized interception and use of program-carrying signals within their borders.

The committee said that since 1974 the value of revenues from the sale and use of US intellectual properties abroad, including TV programming, has risen to between \$5 billion and \$6 billion annually. Unauthorized use of copyrighted materials, including interception of US satellite communications, has also increased substantially abroad. The main potential benefit to US broadcasters is that ratification should bolster the principle, throughout the world, that programs must be regarded as property, having owners who must be paid when the property is used.

Consistent system of standards needed for emerging technologies

NAB President Edward O Fritts issued the following statement regarding the FCC's issuance of a combined notice of inquiry and proposed rulemaking on the basis of the FCC's technical regulations:

"The appropriate role of government is to ensure the integrity of the spectrum, somewhat like a traffic cop. We applaud the commission for its ongoing efforts to eliminate unnecessary regulations and its logical approach regarding a free marketplace. We caution, however, that in this emerging technological age with a plethora of new electronic communications delivery systems that a consistent system of technical standards must soon be introduced for all to live by—much like driving on the right side of the road. Broadcasting by its nature must have compatible transmission standards to operate. Without technical standards, chaos could result. New products will be

slow in reaching the marketplace, competitive markets will be limited, the United States manufacturers may lose market shares and the public will suffer."

NRBA

**National Radio
Broadcasters' Association**

1705 De Sales Street, NW
Washington, DC 20036
1-202-466-2030

NRBA officer and director are honored

RADIONEWS readers, in that publications' 1982 poll, selected Sis Kaplan, NRBA president, as Association Executive of the Year. NRBA Director Bob Duffy was selected as Rep. Executive of the Year. Duffy is the president of Christal Company, New York, NY.



Society of Broadcast Engineers

P.O. Box 50844

Indianapolis, IN 46250

1-317-842-0836

KC chapter meeting focuses on spectrum analyzers

The Kansas City chapter of the SBE met in February in the studios of KCMO-TV 5, Kansas City, MO, to hear a discussion of spectrum analyzer and oscilloscope applications. Chuck Hilger, sales engineer for the Overland Park, KS, office of Tektronix, presented concepts of spectrum analysis that should be considered by broadcasters. Based on the TEK 492 and 496 models, his discussion centered on user controls, relative vs. absolute measurements, performance factors, digital storage capabilities and cautions regarding input signal levels.

The second half of the presentation focused on new additions to the 2000 series of oscilloscopes, the 2400 group (150MHz and 300MHz) and the 2600 group, with integral digital multimetering and other new features.

Of particular interest to many was the availability of applications/instructions on videotape through local TEK field offices, as well as application notes on all TEK products.

During the business meeting of the KC chapter, Harold DeGood, chief engineer, KSHB-TV 41, Kansas City, MO, was elected as chairman of the chapter for the coming year. [:? :)))]

Pick a number from 9 to 52!

You've just chosen the ideal DC voltage to phantom-power these new ATM electret microphones.

ATM11R

ATM10R

ATM31R

ATM91R

AT8501

Introducing four "universal" phantom-powered electret microphones. Designed to work from external power, internal regulation automatically handles any voltage from 9 to 52 VDC without adapters, switches, or rewiring. Just plug in and enjoy. With current drain a mere 0.3 mA at 9 volts (4 mA at 12-52V) a 9V battery lasts thousands of hours, not just the 60 or 70 hours typical of other mikes.

When your power supply isn't available, or isn't enough, use ours. The new AT8501 Dual Battery Supply holds two 9V batteries. One to use, and one in reserve. Instant switchover and test LED eliminates guesswork. And spares are as near as the closest shopping center. Neat!

But convenience and versatility are just two of the advantages of the new ATM models. All-new electronics provide plenty of headroom inside the microphone with no more than 1% THD even when used in acoustic fields of 141 dB SPL. Which sets new standards for clean sound even close-up to big brass or inside a powerful drum kit.

And the sound you hear is wide-range and *musical*. Presence without peaks. Highs to 20,000 Hz but without a raspy "edge." Yet despite their responsiveness, these new ATM microphones have the "Road Tough" reliability proved so often on stage and in the studio.

Before you add another microphone, compare our sound, our convenience, our reliability, and our cost. Write for literature and list of nearby ATM microphone specialists. Get great sound...right from the start! AUDIO-TECHNICA U.S., INC., 1221 Commerce Drive, Stow, Ohio 44224. (216) 686-2600.

Circle (106) on Reply Card

www.americanradiohistory.com

audio-technica®

International Wholesalers INDUSTRIAL & PROFESSIONAL VIDEO PRICE LIST



U-matic 1/2"

SONY VP 5000	\$1390
SONY VO 5600	\$1690
SONY VO 5800	\$3270
SONY VO 5850	\$5295
SONY VO 4800	\$2410
JVC CP 5550	\$2200
JVC CR 6650	\$2900
JVC CR 8250	\$4470
JVC CR 4700	\$3100
PANASONIC NV 9100	\$1060
PANASONIC NV 9240	\$3100
PANASONIC NV 9600	\$4990
PANASONIC NV 9400	\$2100
PANASONIC AU 700	\$6000

Special Effects Generator

SONY SEG 2000	\$3600
PANASONIC WJ 4600	\$1650
PANASONIC WJ 5500	\$3000
PANASONIC AS 6100	\$5900
JVC KM 2000	\$4100
ROSS POINT LATCH 6112	\$6360
SCITECH H-1	\$1400

1/2" Industrial

SONY SLO 383	\$2000
PANASONIC NV 8350	\$950
PANASONIC NV 8950	\$1420
PANASONIC NV 8500	\$2500
JVC BR 6400	\$1300
JVC BR 6200	\$939

U-matic Tape

KCS 10	\$11.99
KCS 20	\$14.20
KCA 30	\$15.19
KCA 60	\$21.19
KCS 10 BR	\$13.25
KCS 20 BR	\$15.39
KCA 30 BR	\$16.99
KCA 60 BR	\$23.65

Tripods-Heads-Dollies

BOGEN 3069	\$375
------------	-------

Color Monitor

SONY CVM 1250	\$602
SONY CVM 1900	\$870
SONY PVM 8000	\$600
NEC 12" COLOR MONITOR	\$299
NEC 25" COLOR MONITOR	\$699
PANASONIC CT 110MA	\$360
PANASONIC CT 1350MG	\$490
PANASONIC BTS 1300N	\$515
PANASONIC BTS 1900N	\$620
PANASONIC CT 1920M	\$499
PANASONIC CT 2000	\$760
PANASONIC CT 10.000M	\$5400
PANASONIC WV 5203B	\$600
JVC TM 22U	\$320
JVC AV 2000	\$599

Cameras

SONY DXC-1800K	\$2350
SONY DXC-6000L	\$9100
JVC KY1900 CHL10	\$4300
PANASONIC WV3060	\$590
PANASONIC WV3070	\$720
PANASONIC WV3400	\$920
PANASONIC WV3400 6X	\$920
PANASONIC WV3400 6AF	\$1000
PANASONIC WV3400 12X	\$1050
PANASONIC WV3890 B	\$1750
PANASONIC WV3990 B	\$2350
PANASONIC WV777	\$5490
HITACHI FP 10 UC	\$2900
HITACHI FP 21	\$7000
IKGAMI ITC 730	\$6000

Lighting

SMITH VICTOR K74	\$675
SMITH VICTOR K76	\$900

Automatic Editing Control

SONY RM 440	\$1300
JVC RM 88	\$2500
JVC VE 90	\$4100
PANASONIC NVA 500	\$1125
PANASONIC NVA 970	\$2900
PANASONIC AUA 70	\$5900

1-800-327-0596

International Wholesalers

17866 Ipco Road, N. Miami, FL 33162 (305) 940-7542

Send \$5.00 for our complete industrial catalog.

We carry the complete line of SONY, JVC, PANASONIC, HITACHI, NEC, IKGAMI, CROSS POINT LATCH, SMITH VICTOR, SENNHEISER, SHURE, QUICKSET, ITE, BOGEN, & LOWEL. Phone or write us for the lowest prices anywhere! We gladly honor American Express, Visa, and MasterCard by phone or mail.

Circle (107) on Reply Card

new products

Color TV test pattern generator

The Signal Source 1206A has been made available by Visual Information Institute and is an updated version of the original 1206. The 1206A provides a complete selection of TV display test patterns plus clocked vertical pulse widths (thumbwheel selectable), bounce with bars for evaluation of high voltage capability, split or full centering pattern and front panel adjustment of sync and blanking levels.

Circle (490) on Reply Card

Test equipment

EEV is offering type P4225 camera tube test equipment. The equipment enables broadcasters to check the quality of camera tubes on delivery and during operational life.

Circle (491) on Reply Card

Studio systems

Human engineering is included in system designs from the Audio Broadcast Group. High technology components and specially designed cabinetry are used. Low-profile equipment, easy-to-reach controls, suspended turntables and special leveling devices are featured.

Circle (492) on Reply Card

Reference monitor

The BBSM-12 portable reference monitor incorporates two 12-inch drivers, a 6 1/2-inch midfrequency cone and a 1 1/4-inch dome tweeter. The new product from Westlake Audio includes a 24dB/octave crossover slope.

Circle (493) on Reply Card

Audio power amp

Protective circuits for the power supply and driven speakers are included in the BGW 7000B Proline power amplifier. Thermostatic switches in the power transformer protect the power supply, while dc speaker protection avoids amplifier-caused speaker damage.

Circle (494) on Reply Card

Remote control

IGM Communications has announced the MARC manual-assist remote control for use with all models of the IGM Instacart system. To operate up to nine Instacart systems, MARC consists of a 12-button keypad, LED indicators for selected source and tray number, serial interface, power regulator and an 8748 microprocessor.

Circle (495) on Reply Card

Flame retardant cases

Plastic cases for 1-inch videotape from 3M Magnetic Audio/Video Products Division have been shown to be self-extinguishing in five seconds. The high impact plastic makes the cases lighter than previous ones. Dust and moisture seals are included.

Circle (496) on Reply Card

UHF spurious trap

Microwave Filter Company introduces the #4215 UHF transmitter notch filter. Capable of handling 1kW signals, the filter provides 25dB attenuation at its center frequency with less than 0.5dB reduction at ± 5 MHz. Frequency range covers the 470-812MHz spectrum.

Circle (497) on Reply Card



Tek 2465

Growing Family of Tek Scopes

The 2000 family of oscilloscopes produced by Tektronix was originally developed to place higher reliability and performance in the hands of service technicians. At the same time, the effort was to keep a price tag on the equipment within reach of many who otherwise could not get high performance and new technology test equipment. The introduction in 1981 of the 2300 ruggedized scopes provided the service community with a highly portable package that could read 100MHz signals reliably.

Soon after came the 2200 low cost/high-volume line, replacing most models of an older T900 and lower performance 400 series. In February 1983, the 2000 family grew still more with four new models — 2235, 2236, 2445 and 2465.

Both the 2235 and 2236 feature 100MHz bandwidths, trigger view and sweep speeds to 5ns/div. The dual-channel units have a single sweep mode for transient photography, separate A and B intensity controls and a 14kV CRT. Also, the 2236 includes new measurement capabilities with the digital counter/timer/multimeter (CTM) system, which is integrated into the triggering systems of the scope. According to Tektronix, the 2236 now allows direct digital waveform measurements previously unavailable in a portable instrument.

The strictly high performance models of the 2000 series now include the 2465 and 2445, offering 300MHz and 150MHz bandwidths, respectively. These two instruments replace the previous 465B and 475 scopes with broader bandwidths, four channels, extensive CRT readouts, faster sweeps and increased timing accuracy. Two design features in the 2400 models are a meshless scan-expansion CRT and increased use of microelectronics.

The meshless scan-expansion (MSE) CRT is physically shorter than previous CRTs (about an inch) with greater shock resistance than conventional tubes. Capable of withstanding shocks to 150G, the MSE CRT is announced as producing a finer, brighter trace, an additional plus in portable instruments.

Automated laser wafer trim, 100% chip and wire hybrid array assembly and special packaging have been included in the 2400 series. New processes now provide the highest level of custom analog integration ever used in an oscilloscope, according to Tektronix, with more hybrids now in use than have ever been used in an instrument to date. Additional reliability is expected from the capability of direct drive of the CRT from the microelectronics devices.

BE's editorial director was in the Tektronix plant for a demonstration of the prototype of the 2200 series scope. It was an impressive demonstration. To show the ruggedness of the CRT, a Tek engineer took hold of the CRT socket, with the tube connected to the faceplate of the scope, and used the system for a hammer. Ironically, the CRT seemed to enjoy the abuse.

For details of the portable Tek scopes, contact your nearby rep or write the Tektronix Marketing Communications Dept., P.O. Box 500, Beaverton, OR 97077. [:-)]]

SYMTEC PGS III



ONE GRAPHICS GENERATOR THAT DOES IT ALL

AT A FRACTION OF THE COST OF COMPARABLE SYSTEMS

- VIDEO GRAPHIC DESIGN
- REAL TIME ANIMATION
- 512 X 480 RESOLUTION
- 4096 COLOR PALLETTE
- RS-170A BROADCAST OUTPUT
- RGB OUTPUT
- SLIDE AND PRINT PRODUCTION
- TRUE KEY OVERLAY
- TEXT CRAWL AND SCROLL
- TEXT FONT CREATION
- ZOOM AND REDUCTION
- VIDEO POST PRODUCTION
- INTERACTIVE VIDEO TRAINING
- STORES HUNDREDS OF TEXT PAGES

PGS III is an easy to use, low cost, versatile video production tool used to create video still frames, and animated sequences for commercials, weather graphics, titles, credits, interactive video frames, overlay frames, and much more.



APPLE OR IBM P.C. SOFTWARE

Current software supports Apple II, Apple IIe, and IBM P.C. host computers. But PGS III can be interfaced to almost any computer from micros to mainframes.

SLIDE & PRINT PRODUCTION

Feeding a video still frame or overlay image to a video-photo unit will result in acceptable slides or prints at a cost close to 50¢ each.



PGS DISTRIBUTORS:

VICTOR DUNCAN

Irving, TX. (214) 869-0200
Chicago, IL. (312) 943-7300
Madison Hgts. MI. (313) 589-1900

TRI-TRONICS

Burbank, CA. (213) 843-2170
Del Mar, CA. (714) 450-9002
Foster City, CA. (415) 572-1216

VISUAL SYSTEMS CORP.

Atlanta, GA. (404) 457-1388

OMNIVUE

Jamaica, N.Y. (212) 465-3536

IMAGE TECHNIQUES

Bossier City, LA. (318) 949-8481

BCB ELECTRONIC SALES

Bolton, Ontario, Canada
(416) 857-0790

SYMTEC, INC.
15933 West Eight Mile Road
Detroit, Michigan 48235
(313) 272-2950

Apple is a trademark for Apple Computer Inc.
IBM is a trademark of International Business Machines



Circle (108) on Reply Card

Oh God!

You're sitting there - working hard when someone yells that the audio has gone! Of course you turned the sound off on 20 monitors - if you hadn't, you couldn't hear yourself think. Then comes that phone call, someone yelling or an irate superior, "You've lost the !x*!x*! sound!"

"Oh God!" - you think to yourself. We have \$100,000 worth of equipment and I can't tell if we lost the audio! It happens to all of us at one time or another, but why hasn't someone come up with a simple, inexpensive device to help all of us.

Well, thank goodness! Video Aids of Colorado has! It took our engineers 26½ minutes to design, develop and test a product that may just save you a lot of problems, hassles and ugly words. It is designed so if there should be any loss of volume (and you can set the sensitivity) it will set off an alarm bell and/or a light, as well as cause your digital clock to flash. Thus you have a permanent record (as required by the FCC) as to any interruptions.

Where else could you use an **AUDIO ALARM?**

Control room to/from...	Relays...
Cameras to van...	Video to control...
Remote units to...	Security...
Helicopters to...	# of monitors...
Transmitters to...	Other...

Just think of what one minute off the air will cost you! Now you will be the **first** to know of an audio problem (not get it 2nd, 3rd or 4th hand). The Audio Alarm is very easy to install, as it comes in a complete, ready to plug-in unit.

Call your video dealer **NOW!** If you can't remember your dealer's phone number, call us **immediately** and we will be glad to direct you to one of our stocking dealers.

VIDEO AIDS OF COLORADO
(303) 443-4950

P.S. Yes, we have Video Alarms too!
Ask us about them!

Circle (109) on Reply Card

business

Tektronix introduces a 3-year warranty

For its family of 2000 series oscilloscopes purchased Jan. 1, 1983 and after, Tektronix is offering a 3-year warranty covering parts and labor, including the CRT. Introduced to underscore the Tek commitment to quality and reliability in instrumentation, the new warranty offer is claimed as an industry-first. Also, there are three new optional warranty-plus-service agreements that provide choices of extended calibration and service.

For more details, contact your Tek representative or write: Marketing Communications Department, P.O. Box 500, Beaverton, OR 97077.

India buys Townsend LPTV systems

LPTV systems from Townsend Associates are planned to increase TV broadcast coverage of India. For many areas presently lacking TV reception, a satellite receiver system feeds the LPTV retransmit equipment. Ten complete systems have been requested by the Indian government to provide program distribution via satellite.

Andrew makes tentative purchase agreement

In a pending \$9.5 million cash transaction, Andrew Corporation has announced a tentative agreement to acquire the assets of Grasis Corporation, a privately held manufacturer of microwave towers and equipment shelters with facilities in Kansas City, MO. The transaction is subject to the signing of a definitive agreement.

EQUIPMENT SALES

Tribune Cable Communications has authorized a blanket purchase order with **Antenna Technology Corporation** for 10 Simulsat-5 satellite receiving antennas. These antennas will be used throughout the continental United States.

DJM, a New York-based post-production facility, has purchased a second **Dubner CBG2**.

Larcan Communications Equipment has recently received an order for a 30kW VHF transmitter model TTC-30000FH from **WVAN**, Channel 9, Savannah/Pembroke, GA. It also received an order for a 60kW VHF transmitter, model TTP-60FH, from **WBIQ**, Birmingham, AL.

Recent production switcher sales for **Ross Video Ltd.** include a model 508 to **CFRN TV** in Edmonton, Canada; to **Video House** in Melbourne, Australia; a model 514 to **Channel 11** in Mexico City; and a model 504 to **CBC Television** in Ottawa.

NEW ADDRESSES, DIVISIONS

Elector has opened its Eastern sales office, located at 30 Chapin Road, P.O. Box 699, Pine Brook, NJ 07058; 1-201-882-0584.

Anixter has announced the formation of a new operating division, **Anixter Communications**. It will combine the activities of **Anixter Pruzan**, **Anixter Communications Systems**, **Anixter-AED** and **Anixter Mark**.

1:1:~)))

people


The International Production Center has recently named **William Jarret** as its new director of engineering. Jarret and his staff will be responsible for all engineering functions and duties at the videotape production, post-production and duplication facility.

Gordon Peters is the new national sales manager for Vital Industries. Peters has been with Vital since 1975 as the regional sales manager for the Southwestern and South Central states. Vital Industries has also named **Jim Moneyhun** senior vice president. Moneyhun has begun a series of policy changes, specifically in the areas of quality control, warranties and customer service.

Hans R. Groll, technical director of the Robert Bosch Television Systems Division in Darmstadt since 1971, retired upon reaching his 60th birthday at the end of 1982. He worked in the division for about 32 years, making a significant contribution to the standards of technical excellence achieved there. His work was most recently acknowledged by the Fernseh- und Kino-technische Gesellschaft e.V. with the award of the Richard Theile Gold Medal.

Hal Morrison has joined Peirce-Phelps from J. P. Lilley & Son, where he was sales manager. Morrison will be based in Peirce-Phelps' Camp Hill facility and will be concentrating on the Harrisburg, PA, market. Morrison brings with him a 7-year background in the video business and is a state certified media specialist.

**FAST BECOMING
AN INDUSTRY STANDARD**



**ELECTRONIC VISUALS
EV4060 COLOR
SIGNAL MONITOR**

- Switchable between waveform and vector display
- Full broadcast specifications
- A-B inputs with buffered video output
- Half rack width, 5¼" high
- Mounts beside all popular half rack pix monitors
- Sharp, high brightness trace
- Ideal for mobile and studio applications
- Available in NTSC or PAL
- Line-by-line display with optional line selector.

broadcast video systems ltd.

1050 McNicoll Avenue, Agincourt, Ontario M1W 2L8
Telephone: (416) 497-1020 Telex: 065-25329

Circle (73) on Reply Card

Perfect Timing

MASTER CLOCK SYSTEMS



If seeing the same time on all your clocks is important, select **ES 192 - Line Frequency** timebase, for only \$325.

If a guaranteed accuracy of three seconds per month is what you want, choose **ES 160—\$1,050.**

How about one second per month? ES
160/1 – \$1,225.

**Or National Bureau of Standards accuracy!
ES 190 is synchronized to Radio Station
WWV to provide a Master with unquestioned
accuracy. \$1,225 with receiver and antenna.**

For a Time/Temperature Master, ask for ES 196-\$766.

ESE Master Clock Systems are simple to install. All Masters have a Serial Time Code output, able to drive twenty slave displays without buffering. Slaves range in size from .3" LED to 2" gas discharge displays, priced from \$158 to \$449.

IF YOU ALREADY HAVE A SYSTEM AND WANT TO EXPAND IT, get the ES 167 Serial Time Code Generator (\$146), then add any number of our low cost slaves.

Many, many options and accessories are available. Ask us about them. Our brochure tells the whole story, but not for long. We keep adding new products.



Write, Wire or Call: (213) 322-2136

142 SIERRA STREET • EL SEGUNDO, CALIFORNIA 90245

Circle (110) on Reply Card


What's New At The NAB?

A fully remote controlled FM transmitter with features for total automation and satellite feed.

A transmitter with micro-processor based digital diagnostics, built-in alarm points, a memory, even the ability to talk to the factory's computer.

All of this with a super-low distortion exciter, in a totally solid-state one kilowatt transmitter. Or, a single tube 3.5 kilowatt.

Get both from QEI, the FM people. For more information call John Tiedeck at 609-728-2020

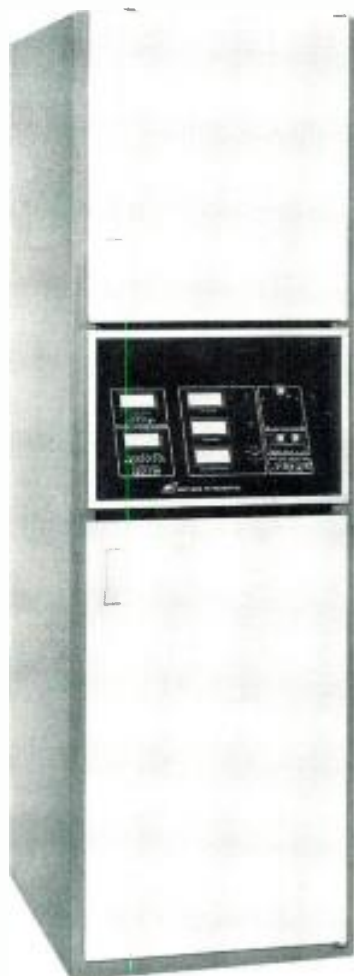

The New 695T1KW



QEI Corporation

Box D / Williamstown, NJ 08094

Phone (609) 728-2020

Telex II (TWX) 710 942 0100

Circle (111) on Reply Card

calendar

April 14

The SBE National Frequency Coordinating Committee, under the chairmanship of Richard A. Rudman, engineering manager, KFVB, Los Angeles, CA, will meet at station KLAS, Channel 8, in Las Vegas, NV. Those interested in attending may call Rudman for arrangements at 1-213-462-KFVB.

April 25-27

Satcom '83, sponsored by the International Association of Satellite Users, will be held at the Hyatt Orlando, Orlando, FL. The Third Annual SATCOM Conference and Exhibition will cover broad satellite industry topics and issues ranging from the newest satellite user applications to future satellite systems designed for the '80s and '90s.

For more information, contact Dr. Kerry Joels, program chairman, at 1-202-357-2828.

May 2-5

The Test and Measurement World Expo will be held at the San Jose Convention Center in San Jose, CA. Communications technology issues comprise 25% of the technical program. Workshops include the topics of "Communications/Microwave Test" and "EMI/RFI Test and Evaluation." For more information, contact: Meg Bowen, Conference Director, Test and Measurement World Expo, 215 Brighton Ave., Boston, MA 02134; 1-617-254-1445.

May 8-11

The International Television Association's 15th Annual Conference, "Window on the World," will take place at the Royal York Hotel in Toronto. The event will feature 107 1½-hour time blocks of seminars; two general sessions; ITVA's Annual Video Festival Awards Ceremony; and a 2-hour teleconference. For more information, contact: ITVA, 136 Sherman Ave., Berkeley Heights, NJ 07922; 1-201-464-6747.

May 28-June 2

The 13th International TV Symposium will be held in Montreux, Switzerland. A technical exhibition is planned. Keynote addresses will focus on HDTV. Among session topics are the following: wireless TV broadcasting, cable TV broadcasting, digitization of video signals, HDTV and home terminals. A roundtable discussion among invited speakers, other experts and symposium participants will also be featured. For more information, contact the International TV Symposium and Exhibition, P.O. Box 122, CH-1820, Montreux, Switzerland.

Aug. 16-18

The Third Annual WOSU Broadcast Engineering Conference will be held at the Fawcett Center for Tomorrow at Ohio State University, Columbus, OH. Final plans for the program are still being completed. Among the speakers will be John Reiser, FCC; Dr. George Brown, formerly of RCA; Dr. John Kraus; and Wally Johnson. A visit to the "Big Ear" radio telescope at OSU will also be offered as an extra part of the conference.

Registration for the three days, including all meals, has been maintained at \$99, with a reduction for early registration. Additional exhibitor space has been provided this year. Further information may be obtained from John H. Battison, director of engineering, WOSU-AM/FM/TV, 2400 Olentangy River Road, Columbus, OH 43210.

1:~:~)))))

professional services

VIR JAMES P.C. CONSULTING ENGINEERS

Applications and Field Engineering
Computerized Frequency Surveys

3137 W. Kentucky Ave. — 80219
(303) 937-1900

DENVER, COLORADO
Member AFCCE & NAB

STEIGER, HURRAY & ASSOCIATES INC.

Broadcast Technical Consultants
ANTENNA SYSTEM SPECIALISTS

6816 Westview Drive
Cleveland, OH 44141
(216) 526-7187

RALPH E. EVANS ASSOCIATES CONSULTING COMMUNICATIONS ENGINEERS

216 N. Green Bay Road
Suite 208

Thiensville, WI 53082
Phone: (414) 242-6000 Member AFCCE

ATLANTIC RESEARCH CORPORATION

Jansky & Bailey
Telecommunications Consulting

Member AFCCE



5390 Cherokee Avenue
Alexandria, Virginia 22314
(703) 642-4000

dataworld inc

AM • FM • TV • LPTV

Computerized

Allocation Studies/Directories

1302 18th St., N.W., Suite 502

Washington, D.C. 20036

(800) 368-5754 (202) 296-4790

Established 1971

D. L. MARKLEY

& Associates, Inc.
CONSULTING ENGINEERS

206 North Bergen
Peoria, Illinois 61604
(309) 673-7511

Member AFCCE

R. L. HOOVER

Consulting Telecommunications
Engineer

11704 Seven Locks Road
Potomac, Maryland 20854

301-983-0054

Member AFCCE

CHARLES F. KOCHER, P.E.

Consulting Radio and TV Engineer

Allocation Engineering
Antenna Systems

27235 Berkshire Drive
Southfield, Michigan 48076

(313) 357-2304

Member AFCCE

Radiotechniques

RADIO CONSULTING ENGINEERS

STATION DESIGN AND SERVICE
ELECTRONIC PRODUCT DESIGN

Edward A. Schober, P.E.
402 Tenth Avenue, Haddon Heights, NJ 08035
(609) 546-1841



RADIO ENGINEERING CO. CONSULTANTS

NORWOOD J. PATTERSON

BOX 420
SANTA YNEZ CA 93460
(805) 688-2333

Serving Broadcasters over 35 years

MIDWEST ENGINEERING ASSOCIATES Consulting Engineers

150 Wesley Rd.
Creve Coeur, Illinois 61611
Phone (309) 698-3160

F. W. Hannel, P.E.

Member AFCCE

McCLANATHAN & ASSOCIATES, INC.

Consulting Engineers

APPLICATIONS & FIELD ENGINEERING
TURNKEY INSTALLATIONS — RADIO & TV
DIRECTIONAL ANTENNA DESIGN

P.O. Box 750
PORTLAND, OREGON 97207

Phone: 503/246-8080 Member AFCCE
TWX 910-464-6112/Front!

BROADCAST ENGINEERING SERVICE COMPANY

TV-FM-AM Field Engineering —
Emergency Maintenance — Turnkey Installation —
System Design — Survey and Critique —
Interim Maintenance or Chief Engineer

B E S COMPANY

100 Star Trail New Port Richey Fla 33553 813-868-2989

SMITH and POWSTENKO

Broadcasting and Telecommunications
Consultants

2000 N Street, N.W.
Washington, D. C. 20036
(202) 293-7742

EFFICIENT USE OF AVIATION ASSETS

PAUL F. KELLEY C.P.

AVIATION CONSULTANT

SMEL, R-H, INST. A-H, CFII, CGI-AI, A&P

15 yrs Broadcast Exp. FCC General Lic

ENG Installations, Heliport

Construction Maintenance and Pilot

Qualifications

165 Garfield Ave., Hyde Park, Ma., 02136

BROADCAST engineering

Advertising Sales Offices

NEW YORK, NEW YORK

Joe Concert,
Phone: (212) 682-6630

Anita K. Gold
Phone: (212) 682-6040
630 Third Ave., Eighth Floor
New York, NY 10017

KANSAS CITY, MISSOURI

Jan Winters,
P.O. Box 12901, Overland Park, KS 66212
Phone: (913) 888-4664

SANTA MONICA, CALIFORNIA

Herbert A. Schiff,
Schiff & Associates
1408 Santa Monica Mall, Suite 200
Santa Monica, CA 90401
Phone: (213) 393-9285

LONDON, ENGLAND

John Ashcraft & Co., John Ashcraft
12 Bear Street
Leicester Square, London WC2H 7AS
England
Phone: 930-0525
Telex: 895-2387

AMSTERDAM, HOLLAND

John Ashcraft & Co., John J. Lucassen
Akerdijk 150A, 1171 PV-Badhoevedorp,
Holland
Phone: 0-2968-6226
Telex: 11640

TOKYO, JAPAN

Sumio Oka
International Media Representatives, Ltd.,
2-29, Toranomon 1-chome, Minato-ku
Tokyo 105, Japan
Phone: 502-0656

TAIWAN, R.O.C.

Antony Liu
Long Life Advertisement Agency Co.
P.O. Box 36-1094
8F-3.50.sec 5
Naking E Road
Taipel, Taiwan
Telephone: (02) 760-2468
Telex: 25923 Fondland
Cable: Longad Taipei

NORWOOD, AUSTRALIA

Hastwell, Williamson, Rouse Pty. Ltd.
P.O. Box 419
Norwood 5067, Australia
Phone: 332-3322
Telex: AA87113

ad index

ADC/Magnetic Controls	59	L-W International	118
ADM Technology, Inc.	IFC	Leader Instruments	5
Adams Russell Video Information Systems .	CE-9	Leitch Video Systems	71
Agfa-Gevaert Inc.	105	Lenco, Inc.	57
Allied Broadcast Equipment	92	Lerro Electrical Corp.	29, 91
Alpha Audio	104	Logitek Electronic Systems Inc.	117
Ampex Corp.	8-9, 11, 13, 50-51, 82-83	3M Magnetic Tape	24-25, 35
Antenna Technology Corp.	80	3M Professional Audio/Video ...	64-65, 64A-B, 77
Asaca/Shibasoku Corp. of America.	37	McCurdy Systems Ltd.	IBC
Audio-Technica US Inc.	125	Microdyne Corp.	43
Audiotechniques Inc.	118	Microprobe Electronics Inc.	120
BSM	95	Midwest Corp.	1
Belar Electronic Labs	92	R. K. Morrison Co.	120
Bosch/Fernseh Inc.	53, 88-89	NEC America Inc.	31
Broadcast Electronics Inc.	4	Opamp Labs	120
Broadcast Video Systems	129	Orban Associates Inc.	44
C-COR Electronics	CE-7	Panasonic Co.	40-41
Calvert Electronics Inc.	33	Polyline Corp.	124
Canare Cable, Inc.	110	Potomac Instruments	108
Canon USA Inc.	93	QEI Corp.	130
Cetec Antennas	14	Quad-Eight Electronics	72
Cetec Vega	55	Ramko Research	68-69
Cine 60	112	Restoration	116
Coastcom	111	Roscor Corp.	CE-11, CE-14
Comex Systems	54	S.A.L. Communications	CE-17, CE-23
Comsonics	CE-5	Saki Magnetics, Inc.	112
Comtech Data Corp.	119	Sencore	15
Continental Electronic Mfg. Co.	26	Sennheiser Electronic Corp.	119
Convergence Corp.	85	Singer Broadcast Products Inc.	86
Crosspoint Latch Corp.	136	Sony Corp. of America	87, 96, 98-99
Data Communications Corp.	45	Sound Technology	79
Dynair Electronics Inc.	109	SpectraSonics	66
Dynatech Data Systems	62	Standard Tape Laboratory Inc.	114
EEV, Inc.	49	Studer ReVox America Inc.	39
ESE	129	Swiderski Electronics Inc.	120
Electrex	108	Swintek Enterprises Inc.	58
Electroline	CE-8	Symtec, Inc.	127
Falcone	CE-13	Synchronous Communications, Inc.	CE-21
Farrtronics Ltd.	96	Taber Mfg. Co.	124
Film/Video Equipment Corp.	116	Tascam div TEAC Corp. of America.	17
Fort Worth Towers	CE-19	Tektronix, Inc.	18-19, 21, 23
Fuji Photo Film USA Inc.	97	Teledyne Energy Systems	110
GEC McMichael	122-123	Thomson-CSF Components Corp.	73
Gould Inc.	67	Thomson-LGT	47
Grass Valley Group	7, 106-107	Tiner Communications Services Inc.	46
Great American Market	78	Townsend Associates, Inc.	61
Hallikainen & Friends	103	Trompeter Electronics	129-130
Hannay Reels	36	UREI	101
Harris Corp.	63	Video Aids of Colorado	128
Hitachi Denshi America Ltd.	3	Videotek Inc.	27
Howe Audio	113	Vital Industries	75
Industrial Sciences, Inc.	115	Ward-Beck Systems Ltd.	BC
International Wholesalers	126	Waters Mfg. Co.	86
LPB, Inc.	76	Winsted Corp.	114

classified

Advertising rates in Classified Section are 75 cents per word, each insertion, and must be accompanied by cash to ensure publication.

Each initial or abbreviation counts a full word. Minimum classified charge, \$10.00.

For ads on which replies are sent to us for forwarding (blind ads), there is an additional charge of \$10.00 per insertion, to cover department number, processing of replies, and mailing costs.

Classified columns are not open to advertising of any products regularly produced by manufacturers unless used and no longer owned by the manufacturer or distributor.

TRAINING

ELECTRONICS DEGREE by correspondence. Earn A.S.E.T., then B.S.E.T. Free catalog. Grantham College of Engineering, 2500 La Cienega, Los Angeles, California 90034. 7-82-tfn

FCC GENERAL RADIOTELEPHONE operators license through cassette recorded lessons at home plus one week seminar in Boston, Washington, Detroit or Philadelphia. Our twentieth year teaching FCC license courses. Bob Johnson Radio License Preparation, 1201 Ninth, Manhattan Beach, Calif. 90266, Telephone (213) 379-4461. 8-81-tfn

TRAINING: ARE YOU A BROADCAST NOVICE LOOKING AHEAD. studying for certification, looking to television, or just more savvy? My Broadcast Radio and Television Handbook is for you. 480 pages, 324 illustrations. \$16.95 plus \$2.00 handling. PA 6%. ED NOLL BOOKS, BOX 75, CHALFONT, PA 18914. 4-83-11

SERVICES

ONE STOP FOR ALL YOUR PROFESSIONAL AUDIO REQUIREMENTS. Bottom line oriented. F.T.C. Brewer Company, P.O. Box 8057, Pensacola, Florida 32506. 7-71-tf

HELIX-STYROFLEX. Large stock—bargain prices—tested and certified. Write for price and stock lists. Sierra Western Electric, Box 23872, Oakland, Calif. 94623. Telephone (415) 832-3527. 1-73-tf

TRANSMITTER TUBES REPROCESSED—Save 40 to 50%. 3CX2500, 4CX5000, 4CX15000 and many others. Write for details. FREELAND PRODUCTS CO., Rt. 7, Box 628, Covington, LA 70433. (504) 893-1243. 6-79-tfn

HEAD RE-LAPPING SERVICE. We expertly refinish all professional non-glass heads. Fine hand crafted work by professionals. 1/4" heads—\$35. 1/2"—\$135. 1"—\$250. 2" 16TK—\$460. 2" 24TK—\$590. Price includes shipping. Compare our prices over buying new heads. TUCKER ENTERPRISES, P.O. Box 10120, Alexandria, Virginia 22310-0120. 1-83-tfn

DO YOU HAVE A NOISY TAPE RECORDER motor? We can provide quick economical service on cart machine and reel to reel motors. Write for price list. J & R Enterprises, 10335 Cambridge Street, Westchester, IL 60153. 3-83-31

MISCELLANEOUS FOR SALE

COPPER STRAP, WIRE, SCREEN. Check our prices. (317) 962-8596 ask for copper sales. 1-83-61

QUALITY BROADCAST EQUIPMENT: New and Used. Buy and Sell! Transmission, Video and Audio. Formed my own company. Call Ray LaRue. (813) 685-2938. 10-82-tfn

EQUIPMENT FOR SALE

IVC 7000P CAMERA with tubes, mini-control unit, auto irs, two 200 foot cables, one 100 foot. Angenieux 15 two 1 zoom lens, body support brace. Never used on mobile. Call Bob Canaday at (515) 255-2122. 12-82-6t

DEALER DEMO EQUIPMENT FOR SALE: "Hitachi HR-200 Type-C 1" VTR w/HST. "DVS DPS-1 TBC. "Sony 1/4" Edit Systems. "Hitachi FP-40SS ENG Camera w/Super Saticons. "Remote Cube Van with or w/o Equipment. "Much more. Excellent prices. Call today: 518-449-7213—Terry, Ted or Bob. 4-83-11

EQUIPMENT FOR SALE (CONT.)

HARRIS, MSP-90 STEREO LIMITER with AGC. Excellent condition. \$2100 or best offer. Paul Christensen, WDEK. (815) 758-8686. 4-83-11

COMMUNICATIONS TOWER—insulated, 350' galvanized w/48" face. Includes guys & starmounts \$12,500. Owensboro, KY 502-275-4769 Nights. 4-83-21

IVC 3000 VTRS: Two fully loaded machines with spare scanner, tension modulator and 4 drums. Datatron editor with interfaces. Package \$140,000—FOB Washington, D.C. Call Don Doughty (301) 654-2600. 4-83-21

HARRIS SYSTEM S-90 AUTOMATION 3-42 tray go-carts, RPD, time announce, instacart, 5-ITC R to R, encoding, logging with 2 printers, 3 consoles. \$37,500 or best offer. 408-475-5527. 4-83-41

COLOR REMOTE VAN FOR SALE: Includes (5) RCA TK44, (5) Varatol lenses, GVG 1600-1L Switcher, Clearcor Intercom System, Quantum QM-12P Audio Console, monitoring and pulse equipment, etc. Call Bob Martin (408) 998-7344. 3-83-21

WANTED TO BUY

WANTED: Pre-1923 radio equipment and tubes. August J. Link, Surcom Associates, 305 Wisconsin Ave., Oceanside, CA 92054, (619) 722-6162. 3-76-tf

HIGHEST PRICES PAID for 112 Phase Monitors and for clean, 12 year old or less, 1 KW and 10 KW AM Transmitters. All duty and transportation paid. Surplus Equipment Sales, 2 Thorncliffe Park Dr., Unit 28, Toronto, Canada M4H 1H2, 416-421-5631. 2-79-tfn

WANTED: STATION LIBRARIES OF MUSIC, 16" ET's, 12" Transcriptions, 45's, 78's, LP's. Boyd Robeson, 2425 W. Maple, Wichita, KS 67213, (316) 942-3673, 722-7765. 5-82-tfn

LPFM TRANSMITTER AND EXCITER needed for new 1kW station. Contact David Adcock, P.O. Box 93, Gadsten, AL 35902. (205) 546-7767. 4-83-11

COMPLETE BROADCAST SOFTWARE SYSTEM, A/P, general ledger, payroll for the Wang 2200. Write Dept. 598, Broadcast Engineering, P.O. Box 12901, Overland Park, KS 66212. 4-83-21

WANTED: GOOD SURPLUS TYPE T12-A AM broadcast crystals for crystal bank; mutually beneficial so contact: us for details of plan. BROADCAST CRYSTALS: for AM, FM and TV transmitters. Frequency change, repair or replacement of oven types, also vacuum types available. Over 30 years in this business. Eidson Electronic Co., Box 3751, Temple, TX 76501. (817) 773-3901. 4-83-eom

WANTED: Turn your excess components inventory to cash—transmitting and camera tubes, lamps, solid state, etc. S & M ASSOCIATES, 105 Cedar Ave., Hewlett, N.Y. 11557, (516) 599-6434. 4-83-11

WANTED: CHRISTIAN SCHOOL NEEDS TV and radio production and transmitting equipment; any condition. Tax receipt for donations. Contact: Dave Willis, 3607 Woodruff, Louisville, Kentucky 40215. 4-83-11

HELP WANTED

10,000 RADIO AND TELEVISION JOBS YEARLY. Up to 300 weekly! Engineers, D.J.s, Programmers, Newspeople, Salespeople. \$6.00 per week, special: 6 weeks \$14.95. Save \$21.00! American Radio Job Market, Dept. 1, 6215 Don Gaspar, Las Vegas, Nevada 89108. 3-83-21

ENGINEERS, TV Systems Engineers, Electronic Technicians, Technical Supervisors, Maintenance. Immediate openings. Experienced. Full time. Full benefits, plus Pension. Excellent salary plus commissions. Send resume to Technical Operations, Inc., P.O. Box 84C, New Hyde Park, N.Y. 11040, or call Personnel Mgr. (516) 352-2238. 9-80-tfn

VIDEO SALES—Major N.J. video dealer offers a challenging opportunity for professional video sales people. Previous industrial and/or broadcast experience required. Salary commensurate with experience. Commission, car, excellent fringe benefits. Reply in confidence to: Video Corporation of America, 1913 Route 27, P.O. Box 697, Edison, N.J. 08818. 1-82-tfn

HELP WANTED (CONT.)

WE PLACE TV and Video Engineers

Come to the source
COME TO

KEY SYSTEMS

Westminster Road
Wilkes-Barre, PA 18702

Phone Alan Kornish at
(717) 655-1458

ENGINEER: TELEVISION PRODUCTION ENGINEER for public broadcast station. Responsible for production recording, editing and remotes. Completed minimum of two years studies in electronics technology at a reputable institute or equivalent military training. Minimum two years experience in production recording, editing and repairing electronic equipment in a television station. FCC license required. Send resume and salary requirements to Chief Engineer, 42 Coliseum Drive, Charlotte, N.C. 28205. EOE. 3-83-31

ENGINEER/TECHNICIAN WITH EXPERIENCE in studio maintenance RCA quad, Ampex 1", Sony, JVC, Panasonic 1/4", and TBC's. Salary: DOE. To work in Alaska's largest city. Contact Ron Moore, KTVA-TV, 1007 W. 32nd Ave., Anchorage, AK 99503, (907) 272-3456. An EEO Employer. 3-83-21

TRANSMITTER SUPERVISOR: Immediate openings. Strong RF background. UHF experience preferred. Ability to work unsupervised. Openings at two locations: KTXA-TV 21, Arlington, Texas and KTXH-TV 20, Houston, Texas. Salary commensurate with experience. Send resume to Ed Reid, Director of Engineering, KTXA-TV 21, 1712 E. Randol Mill Rd., Arlington, TX 76011. An Equal Opportunity Employer. 3-83-21

Analog/Project ENGINEER

Come and participate in the design and development of high performance electronic graphics equipment for the broadcast & video industries.

Chyron's state-of-the-art graphics-generating systems create and display the high resolution, multicolor graphics seen daily on T.V. programs.

We have a newly-created position for an Analog Engineer to assume complete project responsibility on all new development programs.

The position requires a BSEE or equivalent with 3+ years experience in video signal processing, including amplifiers, MPSC and PAL encoders, switches, mixers and gen lockable SYNC generators.

Share in our planned dynamic growth. We expect in 1983 to top last year's 33% increase in sales.

To be considered for this outstanding career opportunity, qualified applicants should forward resume with salary requirements, in confidence to: L. DiLavore, Chyron Corporation, 265 Spagnoli Road, Melville, NY 11747.

An equal opportunity employer.

CHYRON
CORPORATION

VIDEO TECHNICIAN

Bench and Field Technicians - minimum of 5 years' experience. Capable of 1/2", 3/4", 1" VTR's maintenance; industrial and studio camera maintenance.

Please send resume including salary history and requirements to the attention of Bob Hemenway.

LAKE SYSTEMS CORPORATION

P.O. Box 65
Newton, MA 02160

An Equal Opportunity Employer

CHIEF ENGINEER - small market television station in the west seeks experienced engineer interested in exciting opportunity in one of America's most liveable areas. Should be familiar in all phases of television technology. Dept. 586, Broadcast Engineering, P.O. Box 12901, Overland Park, Kansas 66212. 3-83-21

STATE OF THE ART KQDS seeks a combo engineer/part-time AOR announcer to maintain our studios and to learn the finer points of FM under the tutelage of our contract chief who has 30+ years experience. Send resume and tape to KQDS, Box 6167, Duluth, MN 55806. 4-83-11

BROADCAST MAINTENANCE ENGINEER: Full time maintenance engineer. Minimum two years experience in repairing and trouble-shooting U-matic VTR's, ENG/EFP type portable cameras, one inch type C VTR, two inch quad and other broadcast equipment. Experience with and knowledge of maintenance procedures essential. Must be able to work well with people and understand importance of strong client relations. Send application to Curt Lundgren, Chief Engineer, WISC-TV, 7025 Raymond Road, Madison, Wisconsin 53711, or call 608/271-4321. EOE/M-F. 4-83-11

BROADCAST TELEVISION TECHNICIAN. Must have FCC General Class Radio Telephone License. Minimum of 2 year college level training in television engineering or equivalent. Two year minimum experience as a television Master Control Operator. Write Bob Swayze, WJRT-TV, 2302 Lapeer Road, Flint, MI 48502. 4-83-11

ELECTRONIC ENGINEER: Required for video & digital design. Thorough knowledge of video theory a must. EE degree helpful but other education & experience will be considered. Position entails responsibility for complete R & D of pro video products, working for high tech 33-year old company. Salary to 36K, informal, relaxed environment, ground floor opportunity in new company division. Send resume to ICM Video, P.O. Box 26330, Oklahoma City, OK 73126. 4-83-11

WTVF NASHVILLE

Audio/Video Maintenance Technician needed to repair various technical equipment. General class FCC license required. Send resume to: Bill Nunley, WTVF, 474 James Robertson Parkway, Nashville, TN. 37219. An Equal Opportunity Employer M/F. 3-82-21

ASSISTANT CHIEF ENGINEER - KCSO TV Channel 19 has an opening for an Assistant Chief Engineer. Must be capable of extensive studio maintenance. Knowledge of RCA TR-22, TK-27, TP-66, Sony 2860, studio camera set-up and maintenance helpful. UHF transmitter experience an asset. Equal Opportunity Employer. Send resume. Chief Engineer, KCSO-TV, Post Office Box 3689, Modesto, California 95352. 4-83-31

WANTED: CHIEF ENGINEER - Midwest maximum power VHF. Small community adjacent to major market. WCEE-TV, Rt. #1, Kell, IL 62853. 4-83-11

CHIEF ENGINEER for leading television remote facilities company. Unique opportunity for maintenance oriented experienced individual. Good salary + extras. Submit resume for prompt reply to: Roland Maynard, Video Tape Enterprises, 8610 Sunset Blvd. Los Angeles, California 90069. 4-83-11

TRANSMITTER ENGINEER. SMALL CONNECTICUT GROUP has immediate opening to handle AM non-directional array. Salary commensurate with experience. Send resume to David Quinn, VP, WNLC, Box 1031, New London, CT 06320. 4-83-11

MAINTENANCE ENGINEER - To maintain broadcast television equipment in Seattle Production/Post-Production Facility. Contact Michael Lyon (206) 623-5934. 4-83-11

CHIEF ENGINEER - KPTV Channel 21 has opening for a working chief engineer. UHF transmitter, studio maintenance, Sony u-matic, and ENG experience required. General class license. 30K plus for right person. Call August Ruiz, KFTV, Fresno, California (209) 268-4204. 4-83-11

Product Manager Television Products

Talk to Tektronix, the industry leader, about our immediate opportunities in our Television Products Group based at our Oregon headquarters.

Primary responsibilities will be the development of product proposals for new generation digital television equipment such as our new state-of-the-art frame synchronizer. You will also be responsible for worldwide product management and support of existing products to include development of marketing plans and order level forecasts.

Your background should include a BSEE or equivalent experience. Extensive work experience in the technical operations area of a sophisticated television production facility is required.

Salary is open. Benefits include profit sharing, health, life and dental insurance, and educational support programs.

Please send your complete resume and salary history to Cindi Hall, DS 58-012, Tektronix, Inc., P.O. Box 500, AF12, Beaverton, Oregon 97077.

We are an equal opportunity employer m f h.

Tektronix
COMMITTED TO EXCELLENCE

WANT ADDITIONAL COPIES OF SPEC BOOK?

You can easily obtain extra copies of Broadcast Engineering's Spec Book. With its many uses, this special issue is a must for **everyone** interested in comparison data on a multitude of broadcast products.

Spec Book is your basic reference source for broadcast equipment comparisons. To order your additional copies, in their easy-to-use, convenient format, send a check or money order for \$15 to:

Spec Book
P.O. Box 12901
Overland Park, KS
66212

Spec Book - for **everyone** involved in buying and specifying products.

TELEVISION SYSTEMS DESIGN ENGINEER

National TeleConsultants, Inc., a leader in television broadcast and teleproduction system design, is seeking an experienced television systems design engineer.

Responsibilities will include systems engineering design, project planning, and project management, for a broad range of broadcast and teleproduction facilities. Background in the design of video and audio post production systems is essential.

Applicant must have a BSEE degree and a minimum of two years television engineering experience. Send written resume to:

NationalTele@nsultants

3330 Barham Boulevard
Los Angeles, California 90068

SATELLITE COMMUNICATIONS: EXCELLENT DP OPPORTUNITY for an experienced person to head operations and maintenance of transportable uplink facilities. Prefer strong video and microwave background. Hands-on position with considerable travel, as well as training responsibilities. Call 213/841-8855 for more information. 4-23-11

ASSISTANT CHIEF ENGINEER: WLNE-TV, a VHF CBS Affiliate in Southeastern New England, is seeking an Assistant Chief Engineer. Candidate, preferably, will possess a BSEE Degree, or equivalent technical background, FCC First Class or General Class Radio-Telephone License, a minimum of five years experience in TV Broadcast Operations and Maintenance, and proven ability of accomplishment with minimum supervision. All replies confidential. Contact: C. Robert Ogren, Jr., Chief Engineer, WLNE-TV, 430 County St., New Bedford, MA 02741. 4-83-11

WANTED, VIDEO TECHNICIAN, Maintenance experience required. ENG experience preferred. Great opportunity for Operations Engineer, doing some maintenance to move into a maintenance oriented position. Live and work in a warm resort community. Contact: John Ross, Chief Engineer, KIII-TV, P.O. Box 6666, Corpus Christi, TX 78411, (512) 854-4733. 3-83-21

POSITION WANTED

TECHNICAL MANAGEMENT POSITION desired in AM&FM broadcasting or related field. 25 years experience in transmitters, antenna arrays, audio, etc. Desire to be home based in western Washington. Dept. 588, Broadcast Engineering, P.O. Box 12901, Overland Park, KS 66212. 4-83-11

ASSISTANT MAINTENANCE SUPERVISOR

If you're a maintenance pro ready for a career move to a major market here's your opportunity.

As a major Los Angeles television station, and teleproduction facility, we need a "hands-on" Maintenance Engineer who has the desire and ability to assume supervisory responsibilities. This union position demands an individual with a strong background in installation and maintenance of studio television equipment. A minimum of 3 years experience and a FCC First or General Class license. Previous supervisory experience is preferred with project planning experience a plus.

We offer an excellent salary and benefit package which includes health, major medical, dental and life insurance. For prompt confidential consideration, please send resume or call (213) 851-1000, Ext. 317

Sharon Wysinger
Personnel Administrator
KCOP — TV
915 N. La Brea
Los Angeles, CA 90038

Equal Opportunity Employer M/F
Your station for Opportunity

KCOP



**SAVE
TIME**

For fast, accurate service, please remove the Peel-Off Label (which is used to address your magazine) and affix it to the Reader Service Card, the Address Change Card, or to any correspondence you send us regarding your subscription.

coming events

April 17-21

Public Radio Conference, Hyatt Regency, Minneapolis, MN

May 28-June 2

13th Int'l TV Symposium and Technical Exposition, Montreux, Switzerland

May 30

American Women in Radio and Television 32nd Annual Convention, Royal York, Toronto, Canada

June 12-15

National Cable Television Association (NCTA) Annual Convention, Houston, TX

June 22-26

Broadcasters Promotion Association (BPA) 26th Annual Seminar and Broadcast Association, Fairmont Hotel, New Orleans, LA

Aug. 28-31

NAB Radio Programming Conference, Amfac Hotel, Dallas, TX

ference, Amfac Hotel, Dallas, TX

Sept. 21-23

IEEE Third Annual Broadcast Symposium, Washington Hotel, Washington, DC

Sept. 22-24

Radio Television News Directors Association (RTNDA) International Conference, Las Vegas, NV

Sept. 25-28

Broadcast Financial Management Association (BFMA) 23rd Annual Conference, Hotel Regency, Riviera Hotel, Orlando, FL

Oct. 2-5

NRBA Annual Convention, New Orleans, LA

Oct. 4-6

LPTV East, Sheraton, Washington, DC

Oct. 5-9

CIRT, Mexico City, Mexico

Oct. 9-12

AES 74th Technical Meeting & Exhibits, New York Hilton, New York, NY

Oct. 23-26

CCBA Convention, Toronto, Canada

Oct. 29-Nov. 3


SMPTE 125th Annual Conference, LA Convention Center, Los Angeles, CA

Nov. 6-9

Scientific-Atlanta Earth Station Seminar, Atlanta, GA


November-December

Western Cable Show, Anaheim, CA



A POWERFUL COMBINATION FOR YOUR POST-PRODUCTION FACILITY

SWITCHER INTERFACE EDITOR CONTROLLED

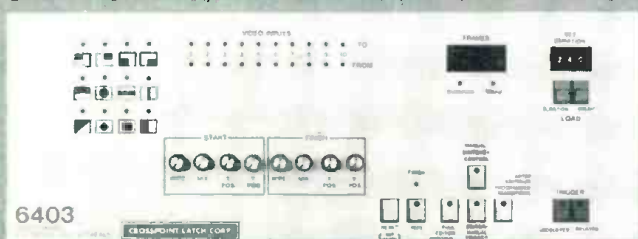

The 6403 allows the editor to talk to, and control your CROSSPOINT LATCH 6112, 6124, 6139 switchers.

With any editor, it can accept the 'cut-in' command pulse from the editor, and perform frame accurate mixes and wipes, and keys. It can even perform wipes which start or stop part way on the screen. It also performs delayed transitions.


With sophisticated editors, it permits the switcher to be controlled entirely from the editor keyboard, accepting and executing commands such as, duration times, pattern types etc.

**6403
\$2750**

**Editor Module \$995
(specify editor)**

95 Progress St., Union, N.J. 07083
(201) 688-1510 Telex 181160

AUDIO MIXER EDITOR CONTROLLED

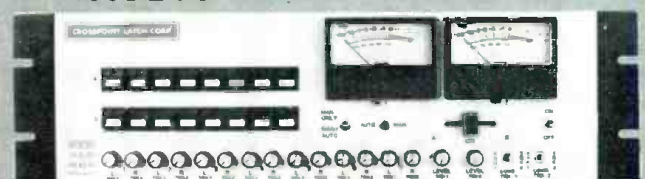

The 6800 is an audio mixer which can be controlled directly from an editor, to perform dissolves or cuts. It has a built in tone generator. Input 7 can be internally jumpered to perform a voice over function. The 6800 accepts commands such as duration times, and input selection from the editor keyboard. It also has a front panel manual override. The 6803 is an audio-follow mixer for the 6139, 6112 and 6124 switchers.

On both mixers the inputs are dual channel (stereo) and can be reversed or combined at the outputs.

6800 \$3500

6803 \$2500 (audio-follow only)

6112 \$7950

6124 \$13,700

6139 \$14,500

CROSSPOINT LATCH CORP.

Circle (112) on Reply Card

MRI Systems' new 24-channel stereo audio console stands alone in quality and performance...



Total control of mixing and monitoring, in stereo, over 24 channels, is not easy at the best of times. Now however, MRI SYSTEMS' new SS8824, stands alone in its ability to supply that total control.

The SS8824 is loaded with standard features that provide ease of operation and quality of reproduction. Items like two individually assignable stereo buses, plus an auxiliary stereo bus, with individual level and assignment, electronic cue switching and improved on/off switching.

The MRI SYSTEMS' SS8824 also has an extensive list of prewired, plug-in options and is compatible with a wide range of MRI SYSTEMS' auxiliary audio equipment.

All this gives you quality audio, simplicity of use and flexibility for best possible component matching.

Let us show all the reasons why the new MRI SYSTEMS' SS8824 stands alone in quality audio reproduction. Call us today.

Totally engineered audio and video systems.

INTRODUCING THE MODULAR

SS8824



MRI SYSTEMS LTD.
Toronto (416) 751-6262

MRI SYSTEMS INC.
Chicago (312) 640-7077

Circle (1) on Reply Card

www.americanradiohistory.com

This ultra-sophisticated Ward-Beck audio system for the Post Production Control Room at Group W's, KPIX, San Francisco, is the third of a series operating at their new station facilities. Using top of the line Ward-Beck Series 460 modular components, its features include an integral routing switcher with alpha-numeric dot-matrix displays to indicate the status of the 48-input/24-output configuration.

This particular unit is employed on program-post-production for Group W's highly successful, nationally syndicated *PM Magazine*.



First by Design.

Ward-Beck Systems Ltd.
841 Progress Avenue, Scarborough,
Ontario, Canada M1H 2X4.
Tel: (416) 438-6550.
Tlx: 065-25399.