

# BROADCAST<sup>®</sup>

AN INTERTEC PUBLICATION

## engineering

July 1992/\$4.50

Audio  
technology  
update:  
digital solutions

A33100-----MYE757000 XXXXX BEQ  
F1040992000000 23 A 001  
RAYMOND MEYERS PRES DIR  
BENCHMARK COMMUN CDRP  
4700 SW 75TH AVE  
MIAMI FL 33155

DAB —  
radio's next  
frontier

Video production  
switcher update  
p. 64

# “but have you ever built a *big* one?”

asked NBC, CBS, RTO 1992 Olympics (International Broadcast Center), Sunset Post, Video Post & Transfer, U.S. Air Force, Mills/James Productions, University of Arizona, The Family Channel, NEP and The United Nations.

## Looking 100MHz ahead...

SYSTEM 5 A/V routing switcher met their specs. Its 100MHz bandwidth is essential for computer graphics and advanced TV signals. It can be configured up to 1024x1024 with multi-level control (up to 16). SYSTEM 5 is a disc based system, has virtual matrix mapping, full system reconfiguration ...and it maintains system specification integrity. And there are scores of smaller SYSTEM 5s installed by a wide range of users from airlines to telco companies.

“Are you *competitive*?” Call us.

**PESA**  
Switching Systems

Pesa America, Huntsville, AL  
205-880-0795 · Fax 205-881-4828  
Burbank, CA 800-323-7372  
New York City 800-328-1008

NBC routing switcher  
for 1992 Olympic  
Summer Games in  
Barcelona, Spain.

THE  
**PESA** CHYRON  
GROUP

PESA

CHYRON

CMX

AURORA

*Carrying  
the torch  
for Albertville  
and Barcelona.*

Circle (1) on Reply Card  
[www.americanradiohistory.com](http://www.americanradiohistory.com)

Probably not. But the new Shure VP64 microphone could go on with show, after show, after show.

The new Shure VP64 is good news for broadcasters — and their audiences.

In short, it delivers all the qualities you demand for a broadcast microphone — and then some. A high-energy neodymium magnet in the VP64 maximizes signal-to-noise

ratio. Result: your on-the-scene reports cut through background clutter to make sure your audience gets the message. What's more, the frequency response is tailored for unbeatable speech clarity and crispness, while all but eliminating boominess and low frequency background noise.

And you won't find a better looking,

easier-handling microphone anywhere. All of which makes the competitively priced VP64 the best value in its class.

See the biggest news in broadcast microphones today at your Shure dealer. For more information, call 1-800-25-SHURE.

The Sound Of The Professionals®...Worldwide.

**SHURE®**



If You Were Dropped  
6 Feet, Head First,  
Would You Still Be Able  
To Cover The Story?

Get a  
\$25 Rebate  
from Shure  
Purchase a VP64 and any  
Shure FP or M Series  
mixer thru Oct. 2, 1992.  
For details, call  
1-800-25-SHURE


Circle (3) on Reply Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)


# Contents

July 1992 • Volume 34 • Number 7


## BROADCAST engineering

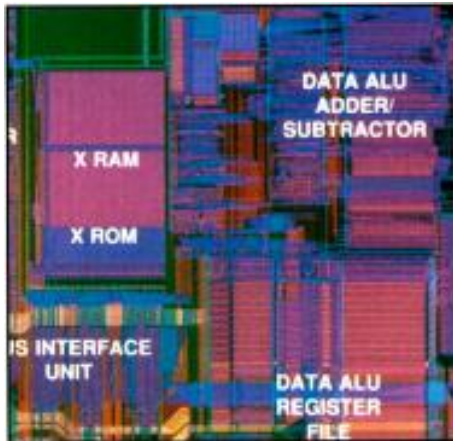

Page 26

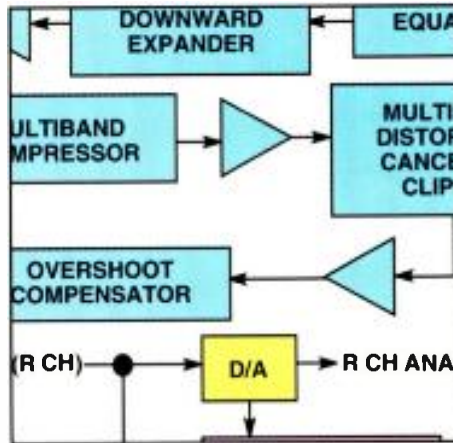

Page 32

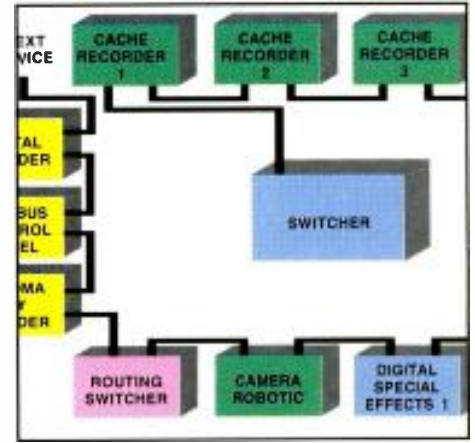

Page 64

### AUDIO TECHNOLOGY UPDATE: DIGITAL SOLUTIONS

The familiar world of analog audio is being shaken by a number of new digital formats and solutions. Consumers and professionals alike are discovering that new and cost-effective digital products are available. Audio production at radio, TV and production facilities relies more on digital hardware than ever before. Although the quality advantages provided by digital are usually obvious, engineers and producers rely on the technology because it solves problems. This month's issue examines the problem-solving advantages of digital hardware.

### FEATURES:

- 26 Digital Audio Processing Production Tools**  
*By Curtis Chan, professional audio, broadcast and video consultant*  
The range of possibilities continues to grow.
- 32 Digital Audio Processing for Transmission (Special Report)**  
*By Dennis R. Ciapura, Noble Broadcast Group*  
An examination of today's digital audio broadcast processors.
- 46 Replacing the Analog Cart Machine**  
*By Skip Pizzi, technical editor*  
In the new world of broadcast audio recording, life imitates cart.
- 52 Using DAT in the Field**  
*By Flawn Williams, National Public Radio*  
DAT makes a great acquisition format — but choose your hardware carefully.
- 60 Digital Radio Update**  
*By Skip Pizzi, technical editor*  
Tomorrow's radio is taking shape today, but much still hangs in the balance.

### DEPARTMENTS:

- 4 News
- 6 Editorial
- 8 FCC Update
- 10 Strictly TV
- 12 re: Radio
- 14 Management for Engineers
- 16 Circuits
- 18 Troubleshooting
- 20 Technology News
- 71 Preview
- 78 Field Report: Sierra Automated Systems' Routing Switcher
- 80 SBE Update
- 81 Industry Briefs
- 83 New Products
- 86 Classifieds
- 88 Advertisers' Index


### OTHER FEATURES:

- 64 Video Production Switcher Update**  
*By Andy Sheldon, Abekas Video Systems*  
Switchers lead the way in integrated control.
- 72 Multitone Audio Testing**  
*By Bill Thompson, Tektronix*  
Modern DSP techniques make implementation of this old idea a reality.

### ON THE COVER

Today's competitive environment requires that stations provide their audiences with the highest-quality audio possible. Although the addition of new hardware may allow a facility to offer its customers or audience unprecedented features or services, it also may result in increased revenues and visibility within the community. (Cover credit: Photography and console — Solid State Logic; facility — WMAQ-TV.)

# The Digital Video Jack For The Future...

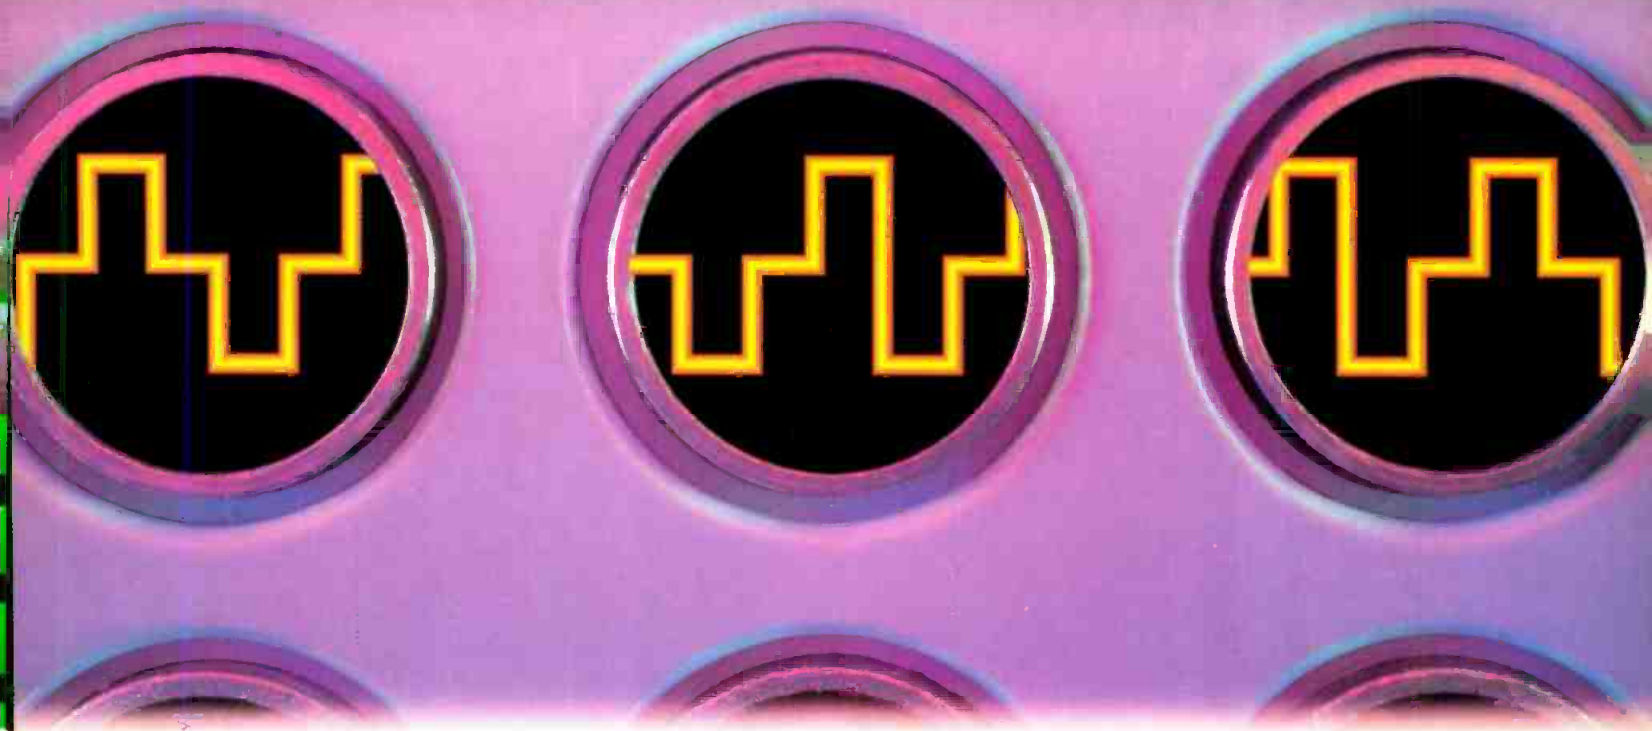

## Is The One You Already Have.

As you prepare for advanced high bandwidth applications such as serial D1, D2, D3, HDTV and high resolution computer graphics, one thing is for sure. The ADC SJ2000 Dual Video Jacks you've been using for years are ready to handle any high rate digital application you can throw them. Because the SJ2000 is designed to



provide low return loss and true 75 ohm impedance, it can easily handle high rate digital signals up to 600 MHz. For more information and the name of your local distributor, call us at 1-800-726-4266.

**ADC Telecommunications**

4900 West 78th St., Minneapolis, MN 55435

Circle (4) on Reply Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

By Dawn Hightower,  
senior associate editor

## TV digital compression delivery in contract phase

Cable Television Laboratories' (CableLabs) process to obtain digital compression and transmission equipment for use by the cable TV industry and public television is moving to the next phase. The first phase has achieved two goals: 1) to accelerate the use of digital compression in the delivery of the current NTSC TV system to the home; and 2) to facilitate the cross-licensing and interoperability of this digital compression technology.

In the next phase, systems will be selected for testing, and individual contracts to buy equipment will be signed. CableLabs announced the digital TV Request for Proposal (RFP) last fall.

CableLabs' RFP partners — TeleCommunications, the Viacom Network unit of Viacom International and the Public Broadcasting Service — foresee testing in mid-1992 and equipment acquisition in late 1992 and early 1993. Certain participants intend to buy digital compression devices that would allow program suppliers to provide multiple program services on one satellite transponder to cable head-ends, public TV stations and educational institutions, as well as multiple programs in one channel over cable to the home.

The nine parties that responded to that RFP are: 1) AT&T, ComStream Corporation and News Datacom; 2) C. Itoh & Co. of Japan; 3) the Digital Television Consortium, which includes OAK Communications, Leitch Video International and C-Cube Microsystems; 4) General Instrument Corporation's VideoCipher Division; 5) Macrovision; 6) Magnavox CATV Systems/Philips Electronics N.V. and Hughes Network Systems; 7) Scientific-Atlanta/Zenith Electronics; 8) Thomson Consumer Electronics supported by the David Sarnoff Research Center; and 9) Toshiba's Imaging & Information System Division.

## Approving licenses should be altered

The National Association of Broadcasters (NAB) feels federal regulators should alter the methods used to approve broadcast licenses. However, it should reject any random selection process, such as lotteries, because these schemes would not properly test the fitness of would-be broadcasters.

Comparative hearings are used by the FCC, using different criteria to measure the fitness of broadcast station applicants. NAB said this process should not be abandoned. One reason is that it requires applicants "to be aware of the needs and interests of their communities and to provide programming and other services that meet those needs..." in accordance with the Communications Act.

However, NAB believes some tinkering is necessary to ensure the license evaluation process evolves with the times. For example, NAB believes the FCC should depend less on outdated criteria and give more weight to preferences that reward station management practices that show a commitment to serving the local community.

License preferences should be granted to station applicants who have identified the need for new services in a community, who commit to long-term operation of a new station, and who demonstrate a realistic proposal to ensure a local market can support the successful operation of a new station.

NAB also suggested that the FCC focus its attention on new standards for comparative renewal hearings for existing broadcasters. NAB called attention to its pending FCC petition asking for changes in the FM allocation policies, and pointed out that these changes might reduce the number of comparative hearings because applicants would have to show the market can support an additional station.

The FCC should continue to provide special preferences to increase minority ownership in broadcasting.

## SBE regional convention builds on 20 years of experience

SBE Chapter 22 in central New York, with the cooperation of the Binghamton, Rochester and Albany, NY, SBE chapters, will be holding its 20th regional convention in Syracuse, NY, Sept. 25. The event will be held at the Sheraton Convention Center in Liverpool, NY, from 9 a.m. to 5 p.m. Admission is free.

### EDITORIAL

Brad Dick, *Editor*  
Carl Bentz, *Special Projects Editor*  
Skip Pizzi, *Technical Editor*  
Dawn Hightower, *Senior Associate Editor*  
Stefanie Kure, *Associate Editor*  
Tom Cook, *Senior Managing Editor*  
Pat Blanton, *Directory Editor*

### ART

Nenita Gumangan, *Graphic Designer*

### BUSINESS

Cameron Bishop, *Group Vice President*  
Deane Hefner, *Group Publisher*  
Tom Brick, *Marketing Director*  
Catharina Inan, *Group Director, Special Projects*  
Evelyn Hornaday, *Promotions Manager*  
Sally Nickoley, *Promotions Coordinator*  
Dee Unger, *Advertising Business Manager*  
Mary Birnbaum, *Advertising Production Supervisor*  
Michelle Costlow, *Advertising Coordinator*  
Mia Fountain, *Classified Advertising Coordinator*  
Lori Christie, *List Rental Sales*

### ADMINISTRATION

R.J. Hancock, *President*  
Doug Wilding, *Circulation Director*  
Customer Service: 913-967-4711

### TECHNICAL CONSULTANTS

Eric Neil Angervine, *Broadcast Acoustics*  
John H. Battison, *Antennas/Radiation*  
Dennis Clapurn, *Radio Technology*  
Dane E. Erickson, *Systems Design*  
John Kean, *Subscriber Technology*  
Donald L. Markley, *Transmission Facilities*  
Harry C. Martin, *Legal*  
Elmer Smalling III, *Cable/Satellite Systems*

### MEMBER ORGANIZATIONS

Sustaining Members of:  
• Acoustical Society of America  
• Society of Broadcast Engineers  
• Society of Motion Picture and TV Engineers

Member,  
Association of Business Publishers

Member,  
Business Publications  
Audit of Circulation

ABP

BPA

**BROADCAST ENGINEERING** is edited for corporate management, engineers/technicians and other station management personnel at commercial and educational radio and TV stations, teleproduction studios, recording studios, CATV and CCTV facilities and government agencies. Qualified persons include consulting engineers and dealer/distributors of broadcast equipment.

**BROADCAST ENGINEERING** (ISSN 0007-1794) is published monthly (plus three special issues) and mailed free to qualified persons within the United States and Canada in occupations described above. Second-class postage paid at Shawnee Mission, KS, and additional mailing offices. POSTMASTER: Send address changes to **Broadcast Engineering**, P.O. Box 12960, Overland Park, KS 66282-2960.

**SUBSCRIPTIONS:** Non-qualified persons may subscribe at the following rates: United States and Canada, one year, \$50.00. Qualified and non-qualified persons in all other countries: one year, \$60.00 (surface mail); \$115.00 (air mail). Subscription information: P.O. Box 12937, Overland Park, KS 66282-2937.

Photocopy rights: Permission to photocopy for internal or personal use is granted by Intertec Publishing Corporation for libraries and others registered with Copyright Clearance Center (CCC), provided the base fee of \$2.00 per copy of article is paid directly to CCC, 21 Congress St., Salem, MA 01970. Special requests should be addressed to Cameron Bishop, group vice president. ISSN 0007-1794 \$2.00 + \$0.00.

### CORRESPONDENCE

Editorial and Advertising: P.O. Box 12901, Overland Park, KS 66282-2901. Telephone: 913-341-1300; Editorial fax: 913-967-1905. Advertising fax: 913-967-1904.

©1992 by Intertec Publishing  
All rights reserved.

Advertising offices listed on page 87.

**INTERTEC**  
PUBLISHING CORPORATION

**Nikon ENG/EFP lenses.  
All you need to look good.**

When you're on location with a CCD camera reaching for the best shot possible, you need ENG/EFP lenses that are compact, lightweight, and easy to maneuver. Lenses with the flexibility to adapt to any situation. Lenses with all the star qualities found only in a Nikon.

Our ENG/EFP precision lenses are created from the same superior glass and coating technology that have made Nikon the world renowned name in optics. Which means they're made with Nikon's exclusive Extra-Low Dispersion (ED) glass. And treated with special anti-reflection coatings to minimize ghosts and flare. Plus, their strong magnesium housing makes them extremely durable. So no matter how tough the assignment, Nikon ENG/EFP lenses are even tougher.

Our full line of outstanding ENG/EFP lenses includes the Nikon S9x5.5 wide angle lens — perfect for tight, close-up shots. The Nikon S19x8, with its unsurpassed focal length and range. The all-purpose Nikon S15x8.5. And the economical Nikon S13x9.

Want to create special effects with your CCD camera? We have two ENG/EFP converters that will allow you to use your whole bag of Nikkor 35mm SLR lenses. One lets you use wide angle lenses down to an effective focal length of 2 mm. The other lets you use long focal lenses out to 1200 mm.

And in the unlikely event something should

happen to your Nikon lens, a simple call to our Nikon Express Loaner Service hotline will get you a loaner lens overnight. So you don't ever have to worry about a crew being out of action until you can get a lens repaired.

To learn more about how Nikon

ENG/EFP lenses can make you look good, call 800-52-NIKON or (516) 547-4355 for our complete brochure. Or write: Nikon Electronic Imaging, Dept.D1, 101 Cleveland Avenue, Bayshore, NY 11706.

## SHOOTING STARS.



# Nikon

## ELECTRONIC IMAGING

r e c r e a t i v i t y

## Editorial

# Glass houses



One of the advantages of being the editor of a magazine is that I have the opportunity to speak my piece in a forum such as this. Since taking this position, I've seldom used it to express my personal opinion on a subject that is so close to home.

I'm talking about the SBE. As a former president of the society, I feel I can view recent problems with a bit more objectivity and long-term viewpoint than can most others. This month, I'd like to offer my perspective.

The last six months have been peppered with accusations, charges and claims by an extremely small faction of dissatisfied SBE members, principally from the West Coast. These people have allowed their emotions (not facts) to launch the second-most public (and most detrimental) debate in the society's history.

After spending almost 10 years as an elected official, I'd like to offer a different and more candid perspective on recent events. Let's look at the first of two issues that have been described by the nay sayers as errors or mistakes made by SBE leadership.

The first issue is the convention. The convention was originally a small source of revenue to the SBE. However, in recent years, economic realities in the broadcast industry have made it increasingly hard to generate the kind of profits that were predicted (and hoped for). A recent diatribe from the complainers wondered how a convention could actually lose money. Let's review some facts.

The broadcast industry has been in the pits. Making money with a convention in this economy has been difficult at best. It is also a fact that the convention's money problems date back to the Denver show, not the Houston show.

The nay sayers didn't look at the realities of running a convention. It's a business, and businesses rely on contracts signed years in advance with penalties for non-performance. Moving the show from Houston anytime after October 1990 could have cost the society tens of thousands of dollars in penalties, not to mention the additional costs of any relocation.

Some have complained because the show has been moved around the country. It's been moved because the 1989 membership survey showed that members *wanted the convention moved to new locations*. SBE leadership was simply following the members' directive.

The second issue centers on hiring SBE professional management. Some, including a few inexperienced board members, think SBE should go back to the old days of having a small SBE office, staffed with one or two clerical people. They suggest that the affairs of a quarter-of-a-million-dollar company can be run by part-time volunteers (themselves) spread across the country.

Give me a break! How in the world are elected officials with full-time jobs, which may require considerable travel, supposed to attend to the daily needs of a 6,000-member organization? The simple truth is they can't. Full-time, professional association management is not an option if SBE is to meet its members' needs.

Finally, it is foolhardy to expect the SBE to work effectively in the real world of association business without a person trained in this area. The standards for training originate from the American Society of Association Executives (ASAE). As SBE members, we promote the value of certification. Yet, some have proposed that the SBE executive director *not* have ASAE certification. SBE members deserve professional management, and that means someone with ASAE certification.

It's time for everyone to pause and take a breath. We shouldn't let emotion dictate the society's future.

Being an elected official forces you to live in a glass house. It's easy for others to throw stones in the form of second-guessing and armchair quarterbacking, none of which we need. To those who are working so hard to destroy what has taken almost 30 years to build, be careful. The house you destroy could be your own.



Brad Dick, editor

# TOTALLY TRANSPARENT TRANSMISSION PROTECTION.




## TRANSMISSION LIMITER ▶ 4000

### Pure Sound.

Protecting transmission systems from peak overload without audible artifacts—while stringently preserving natural sound quality—is the primary objective of many of the world's finest broadcast operations. That is why so many facilities around the world are choosing the Orban Transmission Limiter 4000. The 4000 provides the peak control they need, without audibly adding, subtracting or interfering with their signal in any way.

### Don't Take Our Word for It.

The 4000 provides transparent limiting with any source. Blind tests confirm that the sound of the Orban Transmission Limiter 4000 is virtually indistinguishable from the original source when driven as much as 15dB into limiting—even to trained listeners. Try it for yourself and hear what your facility can deliver when it is protected, not just restricted.

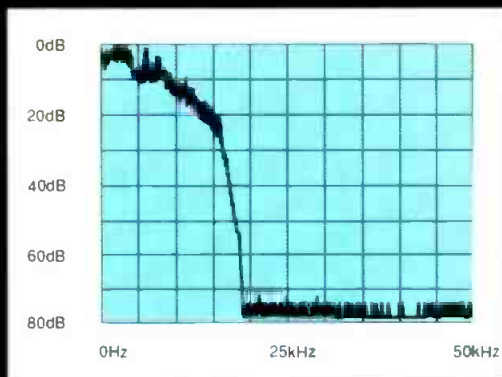

Power spectral density at the 4000's output using "maximum peak hold" measurement. (10kHz/div. horizontal; 10dB/div. vertical)

### Sophisticated, Easy to Use.

Orban engineers took years to develop the complex algorithms which permit the 4000 to protect inaudibly. Yet, they kept the front panel of the 4000 clean, clear and businesslike. The precision LED displays indicate any action of the compressor or HF limiter circuitry. The only adjustments are for INPUT level and OUTPUT level. The built-in tone generator and test mode permit rapid system setup and alignment.

### Orban Signature Quality.

The Transmission Limiter 4000 is one of a family of reliable, quality Orban products designed for demanding broadcast applications. Call your local Orban dealer for a hands-on demonstration of the Orban Transmission Limiter 4000—another breakthrough product from the leaders in broadcast audio processing.

**orban**®

# FCC Update



## TV ownership deregulation proposed

By Harry C. Martin

The FCC is seeking comments on the following approaches to relaxing its national and local TV ownership restrictions:

- **National limits.** The agency wants to raise the numerical limit and the national audience "reach" limit. It is offering two proposals: 1) increase the ownership cap from 12 stations and 25% of national TV households to 20 or 24 stations and 35% of TV households; or 2) increase the cap to 18 stations with an audience reach limit of 30%. The agency also is asking for comments on whether the numerical cap should be increased while keeping the current 25% audience cap.

- **Duopoly limits.** The FCC is considering using the Grade A rather than the Grade B contour in determining when prohibited ownership overlap occurs. It also is considering a relaxation that would permit Grade A contour overlap where at least one of the stations involved is UHF, if at least six other independently owned stations exist in the market.

- **One to a market.** The FCC is considering eliminating its radio-TV local cross-ownership prohibition. The commission might allow local ownership of one AM, one FM and one TV station in a market.

- **Network ownership.** The commission is considering eliminating its dual-network rule, which prohibits TV stations from affiliating with a network entity that operates more than one network serving substantially overlapping areas. The agency is considering a plan where multiple network channels could be provided by the same network entity to a single station. Furthermore, the FCC is re-examining its current rules restricting network ownership of small-market TV stations, and the rules requiring networks to offer their programming to independent stations in 2-network markets before offering it to one of the two affiliated stations in the market.

### PCS update

Personal communications service (PCS) is expected to be the next wave of advanced telecommunications services. PCS could offer significant economic opportunities for early entrants.

Martin is a partner with the legal firm of Reddy, Begley & Martin, Washington, DC.

- **What is PCS?** PCS is a digital, low-power mobile technology that may replace much of today's wire and cellular telephone services. According to the FCC, PCS will provide a vast array of advanced voice and data services.

- **Configuration.** A PCS network will have a configuration similar to a cellular network with several electronic transmit and receive devices installed in neighborhoods and business districts. These electronic devices will be linked to the public switched telecommunications network by fiber optics, copper or microwave. High-speed computer systems will be installed in central switching hubs with a capacity to route numerous calls. The outdoor cells and hand-held consumer receivers are expected to be smaller and less expensive to build than cellular equipment.

- **Experimental licenses.** It is believed that the existing cable TV system, with its copper and fiber-optic infrastructures, could form the ideal return system for the PCS cells. Accordingly, several cable system operators have requested experimental PCS licenses from the FCC. Although PCS capability would allow cable operators to provide some types of telephone services, certain cable operators also are considering using PCS to enhance cable system functions.

- **Technical issues.** Unresolved questions include which frequencies should be allocated for PCS use and what transmission standards should be adopted. The equipment, cost and international considerations suggest that a portion of the spectrum to be allocated should come from the 1.8GHz to 2.2GHz band. However, the commission is concerned about the effect on incumbents in this band and intends to allocate the spectrum needed for PCS with minimum disruption to existing users.

- **AMS and PCS.** The FCC is considering expanding the scope of the PCS proceeding to include eight industry petitions concerning the use of advanced message services. AMS refers to paging systems designed to transmit messages to portable computers as well as transmit facsimile messages and operate with digitally compressed voice paging.

- **Status at FCC.** The period for filing

comments to the commission's Notice of Inquiry and requests for a pioneer's preference with respect to such services expired earlier this year. Although the commission previously announced that the first allocation phase would occur this year, it is doubtful that any allocations will be made until 1993.

---

## Call signs for broadcast stations are awarded on a first-come, first-serve basis.

---

### Use of relinquished call signs

Under the FCC's rules, call signs for broadcast stations are awarded on a first-come, first-serve basis. When requests to change call signs are pending, the call sign to be relinquished is not available for application by other broadcasters until the effective date of the change. Effective dates for changes are specified in public notices released weekly by the FCC. Agreements between licensees regarding call sign changes are not considered by the FCC in determining the award of any such relinquished call signs.

### A fine is assessed

The commission has notified a Georgia FM station that it is liable for a fine of \$20,000 for failure to light its antenna tower, and then neglecting to notify the FAA that the tower lights had malfunctioned.

The antenna tower was inspected by the FCC's Atlanta field office in August 1991, and all the lights were out. The inspection further revealed that the FAA had not been notified that the lights were not working. Failure to comply with the commission's antenna rules is an extremely serious matter because of the potential danger it poses to aviators.

Pursuant to the commission's forfeiture standards, the base fine for failure by a licensee to comply with the FCC's tower lighting rules is \$20,000.

An affordable, easy to learn multitrack disk recorder for radio.

For around \$7000, Roland's DM-80 will speed up your spot and promo production amazingly! This

**WITH EVERY NEW  
TECHNOLOGY,  
THERE COMES A DAY  
WHEN PRICES DROP  
AND PERFORMANCE JUMPS.  
TODAY IS THAT DAY.**

means you'll have the freedom to experiment with many different approaches—a creative process that will make your programming more exciting. And, because you can remove and add lines almost instantly, updates are a snap!

And there's no computer shock! The DM-80's optional controller makes it "look" like a tape recorder, so it's extremely easy to learn, and even faster to use.

The DM-80 is easily upgraded from 4 to 32 tracks, and for on-air applications you can add SCSI compatible disk drives for




Roland's custom VLSI chips give the DM-80 amazing power at a price that will astound you!



up to 12 hours of recording time per 4 tracks.

And because it all comes from Roland, you'll get great service, too!

Call (213) 685-5141, ext. 337 for a brochure, or to schedule a demo at your station.

  
**ProAudioVideo**

Roland Corporation US, 7200 Dominion Circle, Los Angeles, CA 90040-3696

©Roland Corporation US 1992

Circle (7) on Reply Card

# Strictly TV

## Unique ENG camera lens accessories

By Douglas E. Howe

Suppose you are a videographer who wants expanded capability for special effects by taking super wide angle and telephoto shots. How could you obtain them?

You could go out and spend big bucks — up to \$10,000 — on an additional zoom lens. In fact, until a few years ago, that was all you could do. However, a second alternative is now available in the form of lens-mounting converters, which allow the use of some 35mm still camera lenses on ENG video cameras.

---

***Lens converters are a more cost-effective way to gain increased special effects capability because still lenses are typically less expensive than video lenses.***

---

### The advantages

In addition to providing many more lens options, these converters offer users of  $\frac{2}{3}$ -inch ENG/EFM cameras a number of important benefits compared to a dedicated ENG/EFM lens. The first benefit is increased functionality. The videographer now has access to a wider range of lenses. The second advantage is that these lens features are available at a low cost. Even large market stations cannot afford to provide each ENG camera operator with a selection of ENG lenses for every possible shooting task. The cost is simply too great. Lens converters are a more cost-effective way to gain increased special effects capability because still lenses are typically less expensive than video lenses.

Finally, many videographers began their careers as still photographers using 35mm cameras. Some may still own that equipment. If so, some of those lenses might be usable on the ENG cameras with the new

series of converters. Once again, the advantage is increased feature options, at a low cost.

### Improved camera performance

In addition, the converters also improve optical performance by canceling the aberrations caused by the camera's color separation prism. The converter's superior optical design virtually eliminates color shading by shifting the exit pupil so that it is close to infinity.

One converter has  $\frac{1}{3.98}$  magnification relay, which means the angular field of view remains constant. The unit's maximum aperture remains f2.8, regardless of the lens that is used.

Most lens converters are designed for F-mount-type 35mm lenses. This allows the use of telephoto and micro (more than f:105mm) SLR lenses. The converter helps produce high-resolution images by using the center of the lens' image circle to minimize distortion.

An ENG converter adapter may have relay lenses of 1× magnification. Thus, the lens' effective focal length and aperture does not change. The user merely turns the lens aperture ring manually to adjust the aperture.

### Many options available

Videographers will still use basic video lenses to handle most applications. The familiarity and functionality of these lenses makes them primary tools for many shooting assignments. However, when you need special effects or have unique requirements, a standard ENG lens may not do. Or, you may not be able to afford one.

Enter plan B. By using an ENG lens converter on the camera, a new world of special effects and lens features becomes available. Converters may not be the solution to every ENG shooting problem, but they offer a cost-effective and practical solution to the issues faced by videographers. ■

---

***The converters also improve optical performance by canceling the aberrations caused by the camera's color separation prism.***

---



*Optical converters extend the capabilities of existing lenses and permit the use of 35mm photographic optics on many TV cameras.*

Howe is general manager for Nikon Electronic Imaging, Melville, NY.



## Get Auditroneics' 900 audio console... for television that sounds as good as it looks

Upgrade your stereo audio to full parity with your video using the Auditroneics 900 Series of audio consoles designed specifically for television news and production.

Now you can deliver seamless, glitch-free audio with source and assign switching functions controlled by the 900's built-in hard-disk computer. The console's computer remembers up to 64 set-ups and communicates with your house audio/video router via an RS232 or 422 communications bus.

Our 32-input 900 with 12 microphone and 20 line-input modules handles 48 mic and 200 stereo line inputs. And Auditroneics' deft design crams all this functionality into a one-operator console that uses less than 20 square feet of precious control room space.


If you're ready for stereo audio production that makes your station sound as good as it looks, get your hands on Auditroneics' computer-based 900 television console.

Call today for your information package.



**auditroneics, inc.**

3750 Old Getwell Road  
Memphis, TN 38118  
901-362-1350  
FAX 901-365-8629

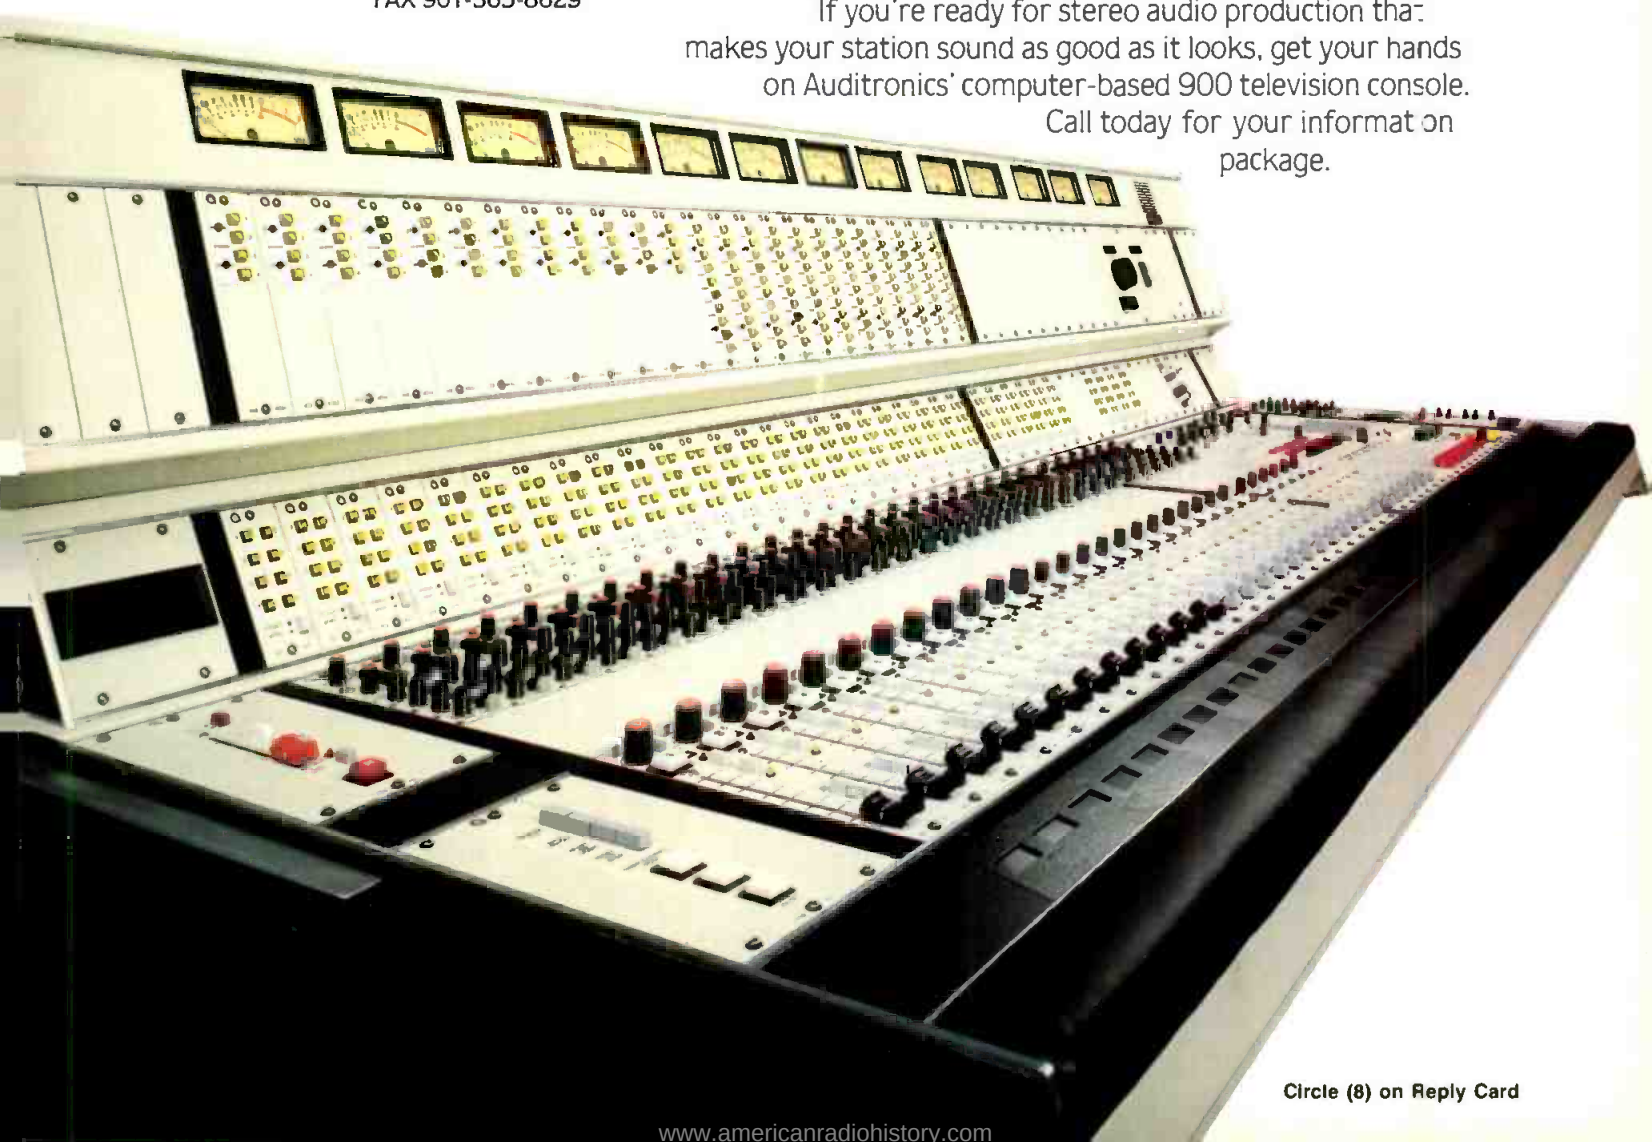

Circle (8) on Reply Card

## re: Radio

## Rules and radials

## Measuring field strength

By John Battison, P.E.

For reasons I don't understand, it appears that not as many AM directional antenna (DA) systems are having radials run. It seems that engineers aren't running antenna proofs, or station engineers are doing them themselves. In either case, a series dealing with measuring field strength seemed worthwhile.

Although field-strength measurements are an essential part of a DA proof, they are also valuable for other purposes. Every AM station should have at least one set of measurements made when it is first put on the air. These need not be complete radials. However, such information would be useful as years pass and coverage changes — at least according to anecdotal reports.

A full set of readings taken when the station goes on the air will establish a reference. If the field is down, you will know how far it has dropped, and perhaps obtain some hints on why it's low. Even if it is not a new station, it's worth taking readings on radials that cover the major audience areas. However, wait until you have everything running well, and management is pleased with coverage before doing so.

## Non-DAs are often in the dark

The only requirement that a non-DA station has to meet is a *theoretical* one in the FCC Form 301, where the required city coverage, the 2mV/m and 0.5mV/m service contours and a few other contours have to be plotted on the proposed coverage map. Unless the commission has some reason for doubting a station's claimed efficiency, the station has no need to run field-strength measurements after going on the air. Therefore, measurements are rarely taken.

It is unfortunate that such measurements are not required, because these stations never confirm their predicted patterns and field strengths. I've been called in by non-DA stations who suspected field-strength problems, and found that although their Form 301 showed 25mV/m over prime listening areas, the measured

signal was only 15mV/m or 16mV/m in those locations. So how do you account for this discrepancy?

## Checking antenna system performance

First, measure the antenna-base operating impedance. If it is much the same as the original Form 302 showed and the transmitter appears to be operating properly, look for any construction adjacent to the antenna, and between it and the area in question. Be sure to check the ground system.

Many installations are more than 30 years old, and their original ground systems have been sitting quietly corroding away or, in some cases, have been stolen. Check the copper strap from the ground system to the tower base for good connection. Good installations have four straps, one on each side of the pedestal, going down into the expanded copper sheet or radials. Also, try to find some that can be checked with a VOM for continuity out to the end of the ground system. If all else fails and you still suspect the ground system, try to obtain an authorization to plow in at least 120 50-foot radials around the tower. If you can tie these into the remaining system, your efficiency should improve.

Here is a small point worth checking: A surprising number of stations do not have a copper strap from the transmitter out to the tower base. Instead, they rely on the coax's outer conductor to complete the circuit. It may not make any appreciable difference, but installing such a strap if finances permit removes one potential source of trouble.

Try to borrow an in-line bridge and measure the base operating impedance. It should still be extremely close to its original measured value. After all, the characteristic impedance of a tower does not change much unless a lot of items have been hung on it (or if an FM or TV antenna is on it with a 1/4-wave matching stub). If the impedance is still fairly close to original value, and  $I^2R$  and plate operating efficiency are close to your licensed values, you can be reasonably sure that the RF output is within limits. This ex-

cludes the questionable condition and efficiency of the ground system.

In addition, check the base current meter to be sure that its *calibration* has not changed over the years. If you have a delta current transformer, its output should track the meter. If you can't borrow a second standard RF ammeter, you can insert several meters that you have borrowed from nearby stations in the line when checking the calibration. They should all read approximately the same. Be extremely careful not to run the current too high — it's bad enough to burn out your own meter, but don't hit your neighbor's as well.

## Running the radials

If you still can't get a satisfactory answer, try running a single radial. Find a direction on the map that is relatively clear of buildings and other obstructions. Draw a line from the transmitter out to approximately a 10-mile distance. Mark at least 15 points along the line, spacing them about 1/4-mile to 1/2-mile apart at first, and gradually increase their spacing to approximately a mile apart as you move toward the distant end. Some engineers warn against plotting your points in advance, because they may not work out when you get there. However, I always like to have a point in mind as I drive along. If the one I chose in advance doesn't work, I pick another.

Be sure to identify carefully every actual measurement point. It's not enough to say "outside red house." When you go back in a year or so, the house may be green or white. Identify by street address, house number and exact location. You should also reference power poles when you have to make a reading near one. Most have an identification number, but these too can change. Beware also of road names that have changed. I recently went looking for a street that had been renamed 15 years earlier. I finally found it from monitor point *photographs* — another good idea.

Next month, we'll consider what to do with field-strength measurement data once it's been collected.

Battison, BE's consultant on antennas and radiation, owns John H. Battison and Associates, a consulting engineering company in Loudonville, near Columbus, OH.

# MAKE A CLEAN SWEEP WITH PORTABLE ONE

Replace the clutter on your audio test bench with the Portable One Plus from Audio Precision. With one instrument you can make 12 different audio measurements. All in a test set designed from the start with 2 channel level, crosstalk and phase measurement capability.


Use the unique AC Mains check function for monitoring power line problems and the built-in wow & flutter meter for measuring analog tape & disc.



The Portable One Plus is built to Audio Precision performance and durability standards... so you know you'll get the same superior performance in the field as on the bench.

Clean sweeps are a breeze with the graphic sweeping capabilities of the Portable One Plus. Plot amplitude or level (stereo), phase or distortion versus frequency.

The graph may be rescaled after a sweep, and the graphic cursor with numeric readout gives you data readings for each measured point.



Connect a dot matrix printer for hard copy printouts of both graphs and

tabular data, as well as instrument panels and bargraphs.



The Portable One Plus... the single instrument solution for both your bench and portable audio testing.



**Audio  
precision**

P.O. Box 2209, Beaverton, OR 97075-3070  
(503) 627-0832 FAX: (503) 641-8906  
US Toll Free: 1-800-231-7350

Circle (9) on Reply Card

INTERNATIONAL DISTRIBUTORS: Australia: IRT Electronics Pty. Ltd., Tel: (61) 2 439 3744 Austria: ELSINCO GmbH, Tel: (43) 222 812 1751  
Belgium: Trans European Music NV, Tel: (32) 2 466 5010 Bulgaria: ELSINCO, h.e. Strelbishte, Tel: (359) 92 581 698 Canada: GERRAUDIO Distribution,  
Tel: (416) 696 2779 China, Hong Kong: A.C.E. (Int'l) Co. Ltd., Tel: (852) 424-0387 Czechoslovakia: ELSINCO GmbH, Tel: (43) 222 812 1751 Denmark:  
npg Elektronik aps, Tel: (45) 86 57 15 11 Finland: Genalec OY, Tel: (358) 77 13311 France: ETS Mesurair, Tel: (33) (1) 45 83 66 41 Germany: RTW  
GmbH, Tel: (49) 221 70 91 30 Hungary: ELSINCO KFT, Tel: (36) 112 4854 Israel: Dan-El Technologies, Ltd., Tel: (972) 3 544 1466 Italy: Medea S.r.l.,  
Tel: (39) 2/4840 1780 Japan: TOYO Corporation, Tel: (81) 3 (5688) 6800 Korea: Myoung Corporation, Tel: (82) 2 784 9942 Malaysia: Test Measurement  
& Engineering Sdn. Bhd., Tel: (60) 3 734 1017 Netherlands: TM Audio B.V., Tel: (31) 034 087 0717 New Zealand: Audio & Video Wholesalers,  
Tel: (64) 7 847 3414 Norway: Lydconsult, Tel: (47) 9 19 03 81 Portugal: Acufon Electroacustica LDA, Tel: (351) 1 9414087 / 9450862 Poland: P.H.U.  
INTERLAB, Tel: (48) 22 335 454 Singapore: TME Systems Pte Ltd., Tel: (65) 298 2608 South Africa: SOUND FUSION, Tel: (27) 11 477 1315  
Spain: Telco Electronics, S.A., Tel: (34) 1 531-7101 Sweden: Tai & Ton Elektronik AB, Tel: (46) 31 80 36 20 Switzerland: Dr. W.A. Gunther AG,  
Tel: (41) 1 910 41 41 Taiwan: ACESONIC Int'l Co., Ltd., Tel: (886) 2 716-8896 United Kingdom: SSE Marketing Ltd., Tel: (44) 71 387-1262

www.americanradiohistory.com

# Management for Engineers

## Conflict resolution revisited

*Problem ownership*

By Judith E.A. Perkinson

In January and February, this column featured a 2-part series on conflict resolution. In another 2-part series, we will revisit this issue and focus on two components of conflict resolution: understanding the principles of problem ownership and developing skills in constructive confrontation.

### The nature of the beast

Conflict can be the result of unmet expectations. Often, it arises out of the interface between technical and non-technical disciplines, and is the result of a disagreement or misunderstanding of details.

Engineers are technical people. They live and die in a world of detail. Any engineer worth his or her salt has learned to pay attention to the particulars. Conflict is worsened when the person you are dealing with does not understand the significance of the details that are being considered. It is common for engineers to be in conflict over details that are important to them and insignificant to the non-technical person.

When you find yourself in this situation, it is time to closely examine problem ownership. A basic understanding of problem ownership can help you comprehend the resistance you are encountering. Learning basic coping strategies can reduce your stress and frustration.

### Understanding problem ownership

Understanding problem ownership begins with the realization that just because an issue is bothering you does not mean it is bothering the other person with whom you are dealing. If you are concerned by the problem, you "own" the problem. You must take the responsibility for resolving it.

If another person's behavior is intolerable, do not assume it is a purposeful slight. Begin by examining your own tolerance, not the other person's motivation.

One common occurrence that demonstrates the difference between understanding and motivation can be exemplified by return phone calls.

A problem arises and you need to get



information from another person. You call him, but he is not available. You leave a message to have him return your call as soon as possible. You wait but don't hear back. As more time passes and you still don't have your information, you become annoyed and even angry. Finally, you reach him, and the first question you ask is, "Why didn't you get back to me earlier?" He tells you he didn't know it was important. If he had known, he would have returned your call sooner.

You had the problem, not the person from whom you were seeking information. Because the other person did not see it as a conflict, he did not react as if he was dealing with a problem situation.

## Conflict can be the result of unmet expectations.

Many work conflicts arise out of this tolerance differential. When another person is driving you crazy because he is not providing you with information, performing expected tasks, or appears unable or unwilling to meet a schedule, it is likely that the problem is yours, not his.

### What to do

Your first reaction might be to find a way to make it the other person's problem. Usually, we do not have the necessary authority or power to enforce our will. Even so, remember that the person who owns the problem must take responsibility for the problem. As a result, you need to look at other methods of diminishing the effect that the tolerance differential has on your ability to perform.

The following three approaches can prove successful in getting the other person to respond:

1. *Communicate the importance.* In the case of the phone call scenario, the person receiving the message did not understand the importance of an immediate reply. This is one of the most common communication problems.

Before you become upset, be sure you

have communicated to the other person the importance of a response. Many problems are eliminated when people understand how their behavior affects another's ability to perform. This is true whether you are dealing with a supervisor, peer or subordinate. If it is important to you, then it is worth the time and effort to communicate the importance to the person who can impact your performance.

At the same time, don't cry wolf. If you constantly tell everyone that everything is critical, then nothing will be considered important. Be honest in your assessment of the problem's significance.

2. *Tie lack of response to consequences.* Some people will not care about your problems. That is the time to try to link your problem to them. This is usually possible on the station level. The station's operation is affected in one way or another by the engineering department. The trick is to make the other person see that your inability to perform can and will ultimately affect him as well.

This issue is not about blackmail. Blackmail is a bad policy, because it breeds resentment and accomplishes nothing.

3. *Negotiate agreements to obtain what you need.* The other person may never consider your issue to be important. This is when you should attempt to negotiate for what you want. One of the best starting points in such a discussion is the simple phrase, "What does it take?" This question avoids the issue of permission and moves immediately into resolving the problem. If you get this far into the problem, be sure to put your agreement in writing. It can be a confirming memo, a thank you note that spells out the terms of the agreement or a formal agreement. Typically, you will not need a formal agreement. The degree of formality will be determined by the situation.

Understanding problem ownership and developing techniques in order to have your needs met can go a long way toward reducing conflict. Next month, we will examine constructive confrontation in conflict resolution.

Perkinson is a senior member of the Calumet Group Inc., Hammond, IN.

## Circuits

### Looking into CCDs

CCDs: Colors without prisms

By Gerry Kaufhold II

In Part 1 of this series, we introduced charge-coupled devices (CCDs) and showed how they can store analog luminance signals. Part 2 explained how the CCD can intake signals from one complete field in parallel, and then act as a "bucket brigade" to output those signals serially in NTSC or PAL formats.

#### The CCD storage elements underneath the lenses are electrically identical circuits.

For a broadcast-quality camera, a prism precisely splits incoming light into red, green and blue hues. One CCD is positioned behind each side of the prism to detect the luminance value of each color. A mixing circuit conditions the signals to provide correct color output and proper timing.

This month, in the last part of this series, we'll examine how consumer camcorders can generate color with only one pickup device and without a prism.

#### Microelectronics makes it possible

There is no inherent reason why the number of charge-coupled analog memory cells in a CCD pickup must exactly equal the number of pixels that the NTSC or PAL standards require. If more than one CCD memory cell can be used per video pixel, signal processing can be performed to obtain color from a single pickup.

Because CCDs are semiconductors, hundreds of thousands of active circuit elements can be placed on each CCD device. The added cost for this overabundance of circuit elements is extremely low, especially when compared to the cost of a precision color prism and the use of three CCDs per camera.

Camcorder CCDs contain approximately eight times the number of photodiodes

and analog memory cells as there are video pixels in NTSC or PAL broadcast formats.

To obtain color, manufacturers of CCDs implant microlenses that contain color filters over each row of CCD cells. They then use an interesting technique to mix the outputs from eight adjacent cells to obtain correct color information for each actual pixel of the video picture.

#### The CCD color mosaic

Figure 1 shows a schematic diagram of the eight photosensitive elements that go into one pixel of color video.

The lens that filters light entering the CCD photodiodes is called a *color mosaic*. Each tile of the mosaic is approximately one square micron in size.

The mosaic contains a detailed pattern that repeats four color combinations. The first two pairs of color lenses are magenta + yellow and green + cyan. These are used to filter out luminance and the red color-difference signal.

The second pair of color lenses are green + yellow and magenta + cyan.

These are used to filter out luminance and the blue color-difference signal.

The CCD storage elements underneath the lenses are electrically identical circuits. These CCD circuits still only store the analog luminance value of the colored light that gets through each lens.

The system works because the analog signals stored under each of the eight lens elements represent various mixtures of colored light, which can be reconstructed to create a single correct pixel of color video.

The lenses must provide enough color discrimination to permit a follow-on color separation circuit to decode the matrix and create accurate luminance and color-difference signals.

The color mosaic method is limited by the ability of CCD manufacturers to make these specialized microlenses and position them correctly over the CCD pickup device.

For practical high-volume manufacturing, CCDs using the color mosaic filter method cannot produce true NTSC or PAL video quality.


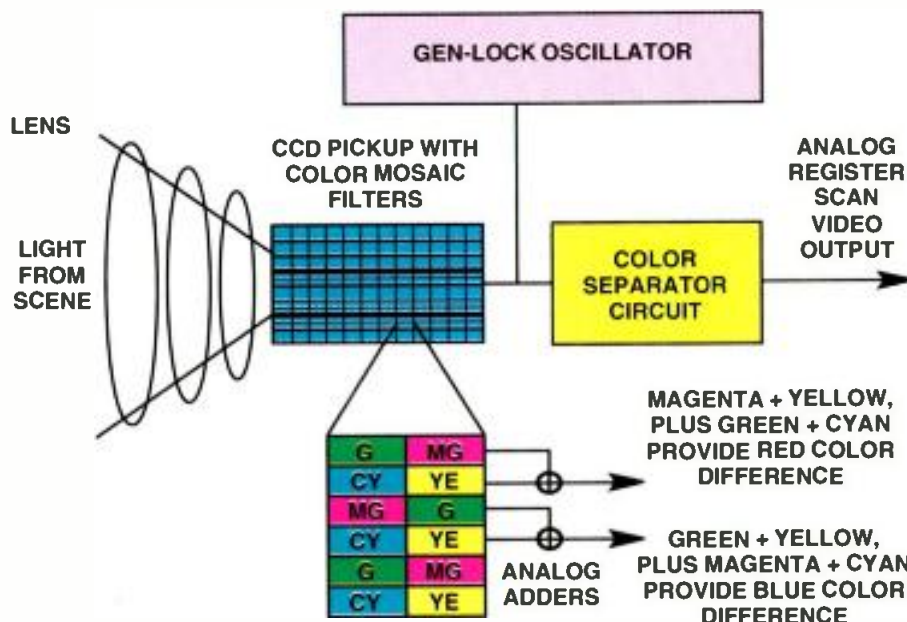


Figure 1. The CCD scanning circuits sum two pairs of vertical analog memory cells to obtain each color-difference signal. Luminance (and green) are also provided as part of the color separation processing.

Kaufhold is an electronics industry analyst based in Tempe, AZ.

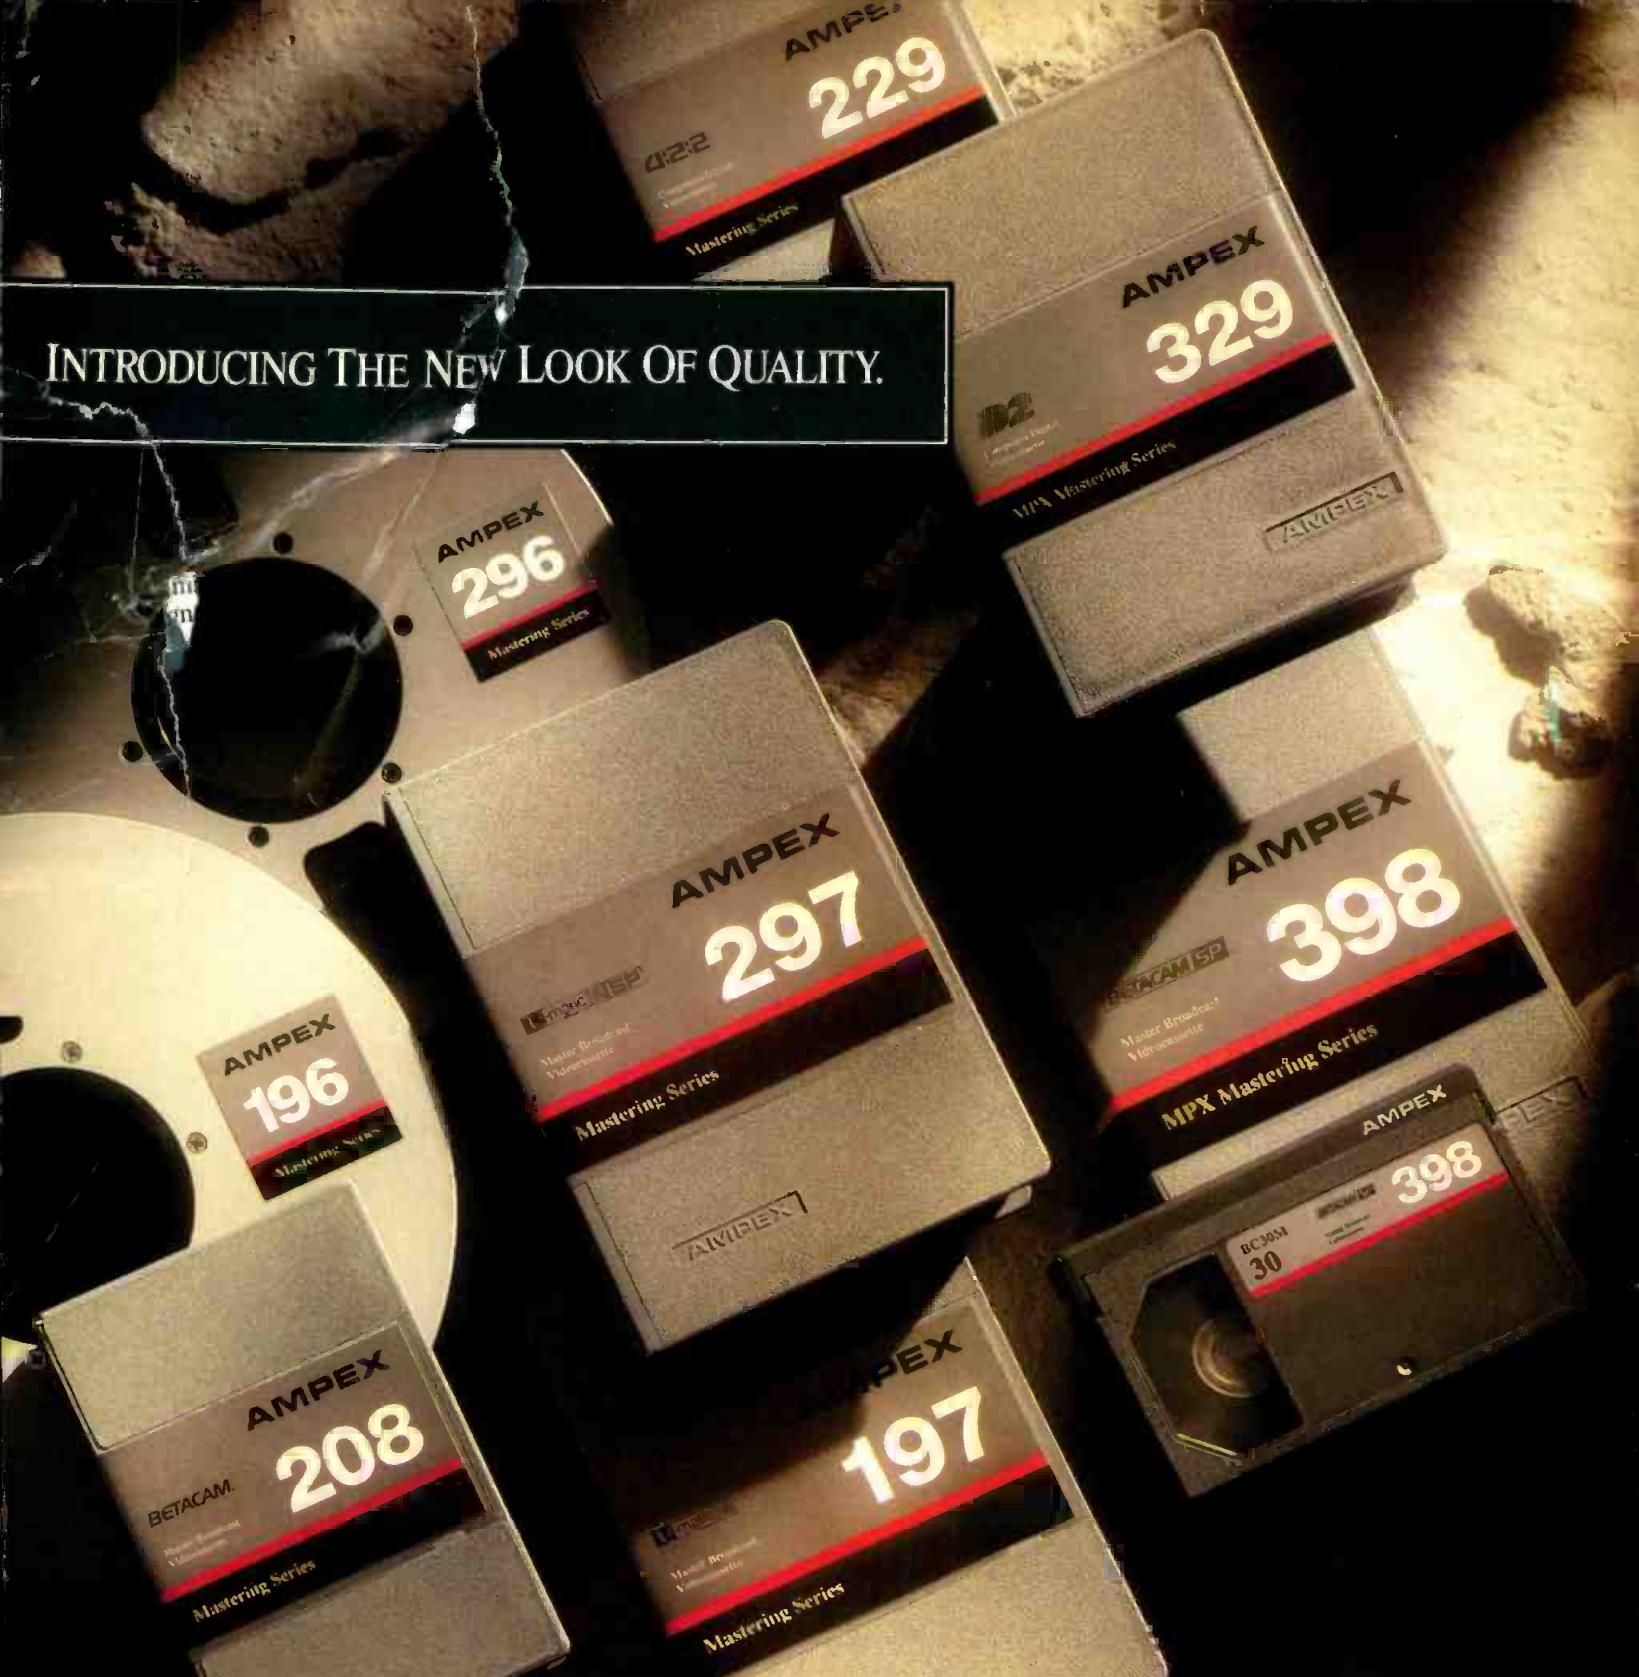

INTRODUCING THE NEW LOOK OF QUALITY.

You're looking at the most comprehensive line of new and improved videotapes in Ampex history.

All the result of the an uncompromising commitment to quality.

We evaluated every aspect of every one of our products against the most rigorous standards of all—those of demanding professionals like you.

That's why we developed new formulations. New backcoats. New basefilms.

That's why we designed new cassette mechanisms. New spools. New plastics.

That's why we refined our manufacturing processes. Incorporated new automated assembly systems. Added new high resolution inspection procedures.

All to give you new levels of performance, quality, and consistency. Dramatically reflected in new colors, new packages, new labels.

But see for yourself. Take a look at our new line of video products—Ampex 398 Betacam SP and 208 Betacam, Ampex 329 D-2 and 229 D-1, Ampex 196 and 296 1" Type C, and Ampex 197 U-matic and 297 U-matic SP.

And see the new look of quality.

**AMPEX**

# PURE EXCITEMENT.



**“It’s louder and cleaner than the 8100A.”**

Bill Ruck, Engineering Manager,  
KFOG, San Francisco.

**“This is the most incredible audio processor I have ever heard!!”**

Ronald Sweatte, Engineering Manager,  
KUBE, Seattle.

**“Looks like you did it again; what a machine, and the manual is great!”**

George Bisso, Director of  
Engineering, KMPS, Seattle.

**OPTIMOD-FM**  
DIGITAL

**“Sounds so good that the jocks thought they were monitoring program.”**

Chip Morgan,  
Chip Morgan Broadcast Engineering.

**“There are 8200 units in WQHT, New York and KPWR, Los Angeles. Both have exceeded our expectations.”**

Terry Grieger, Vice President of Engineering,  
Emmis Broadcasting.

**“During evaluation, we had it sounding like we wanted in 10-12 minutes.”**

Jeff Gulick, Chief Engineer,  
WNCI, Columbus, Ohio.

Stations around the country are taking advantage of the power, potential and profitability of the OPTIMOD-FM 8200. Don't be the last in your market.

Call your dealer now to hear the power of OPTIMOD—in pure digital.

**orban®**

© 1992 AKG Acoustics, Inc.  
Orban and Optimod are registered trademarks of AKG Acoustics, Inc.  
AKG is a registered trademark of Akustische u. Kino-Geräte Ges.m.b.H, Austria.

A Division of AKG Acoustics, Inc.  
1525 Alvarado Street, San Leandro, CA 94577 USA  
Tel: (1) 510/351-3500 Fax: (1) 510/351-0500

Circle (11) on Reply Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

## Troubleshooting

### Maintaining STLs

*Routine maintenance*

By Chris Durso

**R**egular low-level maintenance schedules keep engineers aware of their equipment's general condition, and help catch small problems before they become big ones.

Equipment with lots of moving parts (such as VTRs) or hardware that is actively used by station personnel (such as switchers) tends to receive more maintenance than devices that function untended in the rack (such as STLs). But it is the station engineer's responsibility to ensure that *all* equipment is checked regularly for proper operation.

#### The perils of redundancy

Many stations have redundant backup STL systems with automatic switchover in case the active system fails. With this kind of arrangement, it is easy to forget about the condition of STL components that are not currently on-line. In the worst case scenario, a main system may have failed days earlier, and the system may have switched undetected to the alternate. The station is now operating without a backup STL, but no one is aware of it. If the alternate system failed for some reason, the station would be off the air. This may be the station's only method of finding out that the main STL has failed.

Therefore, it is good practice to switch between main and alternate systems on a regular basis. This will require some method of remotely switching between STL receivers at the transmitter site. If possible, interface the receivers' status indicators to the remote-control system as well, so the operator is alerted to a change in the on-line STL receiver.

#### Run a tight ship

As with any electronic equipment, heat buildup can shorten the life of the STL system. Always allow for adequate airflow when rack-mounting STL hardware. Keep all heat sinks, fans and air filters clean and in the clear.

Check audio, video and RF connections at each end of the STL link during the preventive maintenance cycle. Be sure the

connectors are still securely fastened to the wire/transmission line and equipment. Cables should make gentle bends and have sufficient service loop. If the cables are not labeled, take the time to clearly mark each wire so that during emergency troubleshooting procedures, you won't become confused if forced to reconfigure the system.

Check all transmission lines' points of building penetration for any evidence of water leaks. For pressurized transmission lines, verify that pressurization equipment is in good working order. Nitrogen systems may require occasional cylinder replacement, while dehydrator desiccant may need drying or replacement.

In an STL maintenance log, track equipment meter readings so that trends can be identified. Typical readings should include power supply voltages, final amplifier current, relative power output, subcarrier levels and receive signal strength. (See Table 1.)

Spare parts for your STL system should be on-hand. The STL manufacturer can recommend a list of spare parts. Although some items may be expensive, their cost must be weighed against the cost of down-


time from an inoperative STL. Redundant systems not only reduce downtime, but lessen the burden of stocking a large variety of spare parts.

#### Be prepared

If the system requires bench maintenance, you should have on hand the equipment discussed in last month's column. (See "Troubleshooting," June 1992.) An understanding of the basic circuits found in your STL is also essential to effective troubleshooting. Take the time to study the technical manual *before* a problem develops. Be sure to use appropriate caution around the high voltages found in many STL transmitters.

Often, the equipment maintenance manual will offer step-by-step troubleshooting procedures designed to isolate specific problems. Most manufacturers also offer technical assistance by telephone. Using this service can accelerate station engineers' learning curves and return the equipment to service quickly.

As in all other areas of station technical operation, a regular maintenance routine will ensure that an STL system is operating at peak performance.

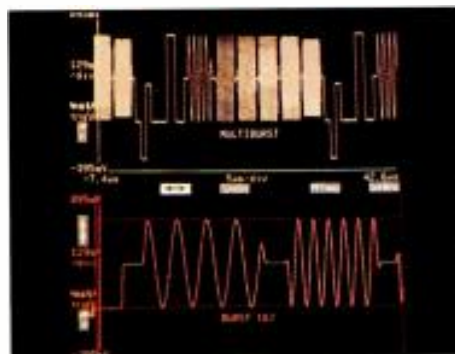

| TRANSMITTER                  |     |              | RECEIVER           |     |              |
|------------------------------|-----|--------------|--------------------|-----|--------------|
| MAIN                         | ALT | (Circle one) | MAIN               | ALT | (Circle one) |
| Final voltage _____          |     |              | Signal level _____ |     |              |
| Final current _____          |     |              | Mix levels _____   |     |              |
| Power output _____           |     |              | DC voltage _____   |     |              |
| DC voltage _____             |     |              | Modulation _____   |     |              |
| Modulation _____             |     |              | Audio output _____ |     |              |
| Audio input _____            |     |              | Video output _____ |     |              |
| Video input _____            |     |              | RF connector _____ |     |              |
| RF connector _____           |     |              | RF feedline _____  |     |              |
| RF feedline _____            |     |              | Line press. _____  |     |              |
| Line press. _____            |     |              |                    |     |              |
| Maintenance performed: _____ |     |              |                    |     |              |
| Comments: _____              |     |              |                    |     |              |
| Date/Time/Technician: _____  |     |              |                    |     |              |

Durso is chief engineer at KPBS-FM, San Diego, CA.

Table 1. A sample form for routine STL system maintenance.

# ROSS.



## ... fills another hole in the switcher market.

You need to handle more than 10 inputs but don't want to give up the space or budget for a large 16 input switcher ...

Ross has the solution.

... the compact, 16 input, reasonably priced, model RVS 216A.



- the production power of 6 more video inputs than any other compact switcher on the market today
- the flexibility of a true Multi-Level effects system
- 12 Event Memory
- Serial Interface to a wide range of editing systems
- Wipe to Downstream Key with full fader control
- Linear Downstream Keys
- a compact, cost effective package ... priced to fit your budget
- 3 year warranty

# RVS 216A

Ross Video Limited, P.O. Box 220, 8 John St., Iroquois, Ont., Canada K0E 1K0 Phone (613) 652-4886 Fax (613) 652-4425  
Ross Video Inc., P.O. Box 880, Ogdensburg, New York, U.S.A. 13669 0880

Circle (12) on Reply Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

# Technology News

## Using BST on your PCB

By Carl Bentz, special projects editor

The levels of sophistication in electronic products for communications have reached new heights. Product miniaturization and new devices to operate the compact designs have seriously hindered older test procedures for quality control testing and repair troubleshooting. The Boundary-Scan Test concept is a new look at improving test procedures and testing efficiency.

### Foreseeing a crisis

Constructing electronic equipment from printed circuit boards (PCBs) used to cause quite a stir among technicians who would eventually be expected to track down malfunctions and failures. The big question was, "How does a person find the fault on a large PCB?" Previously, it was possible to actually follow a conductive trace across a board and check each interconnection. However, more complex circuits produced more densely populated boards with multiple layers and double-sided layouts.

Manufacturers responded with integrated diagnostics and board exchange programs. When a PCB failed, the diagnostics would help a technician locate the faulty board. Once identified, the module was shipped to the manufacturer and a replacement unit was rushed to the customer. "Bad" modules were delivered to the repair technician, who used special test fixtures to sequentially track down the component(s) responsible for the problem.

### Laying on a bed of nails

The technician's tasks in board repairs were simplified by a device called a *bed of nails*. Such a test fixture used numerous probes that contacted specified test points on the board.

The program examined circuit paths and, within minutes, produced a report showing those steps that failed. This data led a technician to the section of a PCB with a failure or intermittent condition.

### The plot thickens

On IC packages with larger pin counts, component density often made placement of probes on the right connections an awkward proposition. Designs turned to surface-mount technology (SMT), and con-

ditions became extremely difficult. With application-specific integrated circuits (ASIC) on the board, the test procedures became next to impossible.

The conductive traces on today's PCBs are in the 100 $\mu$ m range. The signal and power pins of the devices, becoming more numerous (numbering into the hundreds), exhibit a shrinking of the pitch from 2.5mm to 0.3mm.

### Introducing Boundary-Scan Testing

One answer to modern PCB testing is called *Boundary-Scan Testing* (BST), a design-for-testability technique. Instead of probes, a port permits the test system to communicate with the components to determine the status of individual I/O paths. Initially, an additional expense is required to design and manufacture a new generation of ICs that include the test port.

An example of a BST IC is shown in Fig-

All internal functions fall under the Test Access Port (TAP) controller, also located in the new generation IC. A minimum of four conductors form a communications path between the test control computer and the individual chips with test data input, test clock, test mode selection and test data outlines. Complete analysis of a circuit device is now possible.

When the boundary-scan ICs are assembled on a PCB, the test lines to individual components can be connected in a serial path around the entire board. Other requirements may specify that each device is individually accessed by its own set of test lines, or several serial paths may be developed.

### PCB — heal thyself

Although this technology is only now emerging, test systems using boundary-scan concepts are in use. The big challenge will be to redesign the myriad inte-

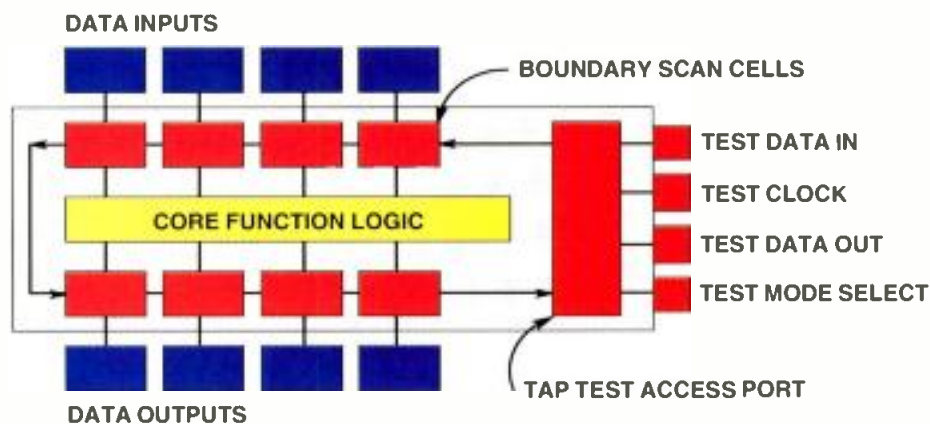


Figure 1. The shaded series of blocks intercept all lines between I/O pins as an on-chip shift register to access circuit nodes in the IC.

ure 1. Intercepting the signal paths between each pin and the core function logic are boundary-scan cells (BSCs). These cells form a serial path as a shift-register chain, called the boundary scan register. To access different circuit nodes for tests, appropriate data, clocking and control signals are applied to the test port inputs. An instruction register may contain a choice of tests to be performed. Optional registers may be included for an ID code memory, which might contain IC and manufacturer data.

grated circuits now in use to contain the special cells. Another challenge will be to incorporate boundary-scan techniques with new equipment designs and devices with redundant gates, thus creating a PCB with the capability of self-healing, based on diagnostic programs offered by the system control computer.

Editor's note: This information is based on material in "The ABCs of Boundary-Scan Test," published by John Fluke Manufacturing Company and Philips Test & Measuring Equipment.

# Have you ever wanted to get your print graphics into video...



## and your video graphics into print?

## Now you can, with the Motif Character Generator.

### MOTIF

The remarkable Motif character generator opens a new world of total interchangeability from print to video to print—and between PC and Macintosh® applications.

Its secret: Motif's "The Fixer™" software, which enables you to make use of the unique capabilities of Adobe Photoshop™ software.

Freely import text, photos and graphics to your CG. Or take that high-quality agency ad and turn it into an on-air graphic.

Then turn around, grab your creative video image and take it back into print.

You can also access every PostScript™ Type 1 typeface software. That alone opens doors to major creativity—and major dollar savings.

Motif is a broadcast-quality full-featured CG with on-line resizing, 32-bit color, 256 levels of anti-aliasing. It's also multi-standard: 525/625/4:3 and 16:9.

Call toll-free (800) 962-4BTS for more information.



## BTS

A PHILIPS AND BOSCH COMPANY

94 West Cochran Street  
Simi Valley, California 93065  
USA

800-962-4BTS

Outside the U.S. and Canada  
(801) 977-1551

Motif's "The Fixer" is a trademark of BTS, Inc. Postscript and Adobe Photoshop are trademarks of Adobe Systems Inc. which may be registered in certain jurisdictions. Macintosh is a registered trademark of Apple Computer, Inc.

*Creative Television Technology from BTS*

Circle 13 on Reader Service Card

[www.internationaladvertising.com](http://www.internationaladvertising.com)

# Audio technology update

Digital technology is revolutionizing the way we do  
business. Are you up to speed?





**T**o those of us who began our engineering careers in the good old days of analog, the changes brought about by digital technology are almost astounding. I remember when tape recorders required constant maintenance just to maintain the factory specification of  $\pm 1.5\text{dB}$  record/play frequency response. Wow and flutter was a common issue, as was tape hiss. Often, squeezing that last half decibel of top end performance out of the machine while balancing the low end or upper mid-range bump was akin to magic. The final performance was highly machine dependent, and even the best of engineers couldn't make an old tube-type Magnecord perform miracles.

Technology for audio has come a long way. Nowadays, we expect our audio equipment to operate not within  $\pm 2\text{dB}$  ranges, but tenths of decibel tolerances. Noise floors on today's digital audio equipment are as close to theoretical limits as the math predicts.

Because we expect almost pristine performance from our DAT and CD recorders, anything less seems unacceptable. We now rely on as much digital technology as we can afford, usually based on the assumption that if it's digital, it must be better.

However, that easy leap in assumption isn't necessarily true. Even so, the advantages provided by today's digital hardware make it easier than ever to improve audio performance or production capability.

In this month's issue, we examine five areas in which digital technology has revolutionized (or soon will revolutionize) how we do business. If you're not up to speed on how digital can improve your operation, keep reading. Some important answers lie within the next few pages.

- "Digital Audio Processing Production Tools" ..... page 26
- Special Report: "Digital Audio Processing for Transmission" ..... 32
- "Replacing the Analog Cart Machine" ..... 46
- "Using DAT in the Field" ..... 52
- "Digital Radio Update" ..... 60

*Brad Dick*

Brad Dick,  
editor

Lost two miles down beneath dark, frigid seas, the Titanic has been buried from human sight for over 80 years.

But after a joint expedition from the U.S., Canada and Russia last summer, the secrets of the Titanic are no longer submerged.

After using over 300 Sony Betacam SP video cassettes to capture more than 155 hours of footage beneath the North Atlantic seas, a video documentary has shed new light on events of that ill-fated night.

The entire six week outing was preserved on Sony Betacam SP tape by Al Giddings, the renowned underwater photographer and director/producer of the research mission.



New Sony BCT-MA Series Betacam SP Videocassette

Betacam SP videotapes are haunting images of a huge hulk frozen in the curl of a 50 foot mud wave, with a gaping hole under the bridge.

"The results have been nothing but phenomenal," said Giddings. "In the course of seven dives to the Titanic, we

did not see a single dropout on tape. The imagery we captured was clear, bright and dramatic. I've tried other tapes and had only mixed results. Sony Betacam

SP cassettes will continue to be the tape of choice for all of my future projects."

It's adventures like this that help inspire our engineers to pursue ever deeper expeditions into the realm of metal tape technology.


Because for all the strengths that make it the professional's choice, we felt our Betacam tape could be even stronger.

So now in our new BCT-MA series Betacam SP video cassettes, you'll find further improvements to ensure optimum tape durability and performance. Plus a greater archival life. All to provide picture quality of startling clarity, and tapes that hold up in virtually any environment.

We never stop refining, because we never stop listening to the people who use our tapes.

So thanks, Al, from the Professional Tape Division of the world's most innovative recording media manufacturer. By going to such depths, you've helped us raise our technology even higher.


**SONY**  
SONY RECORDING MEDIA

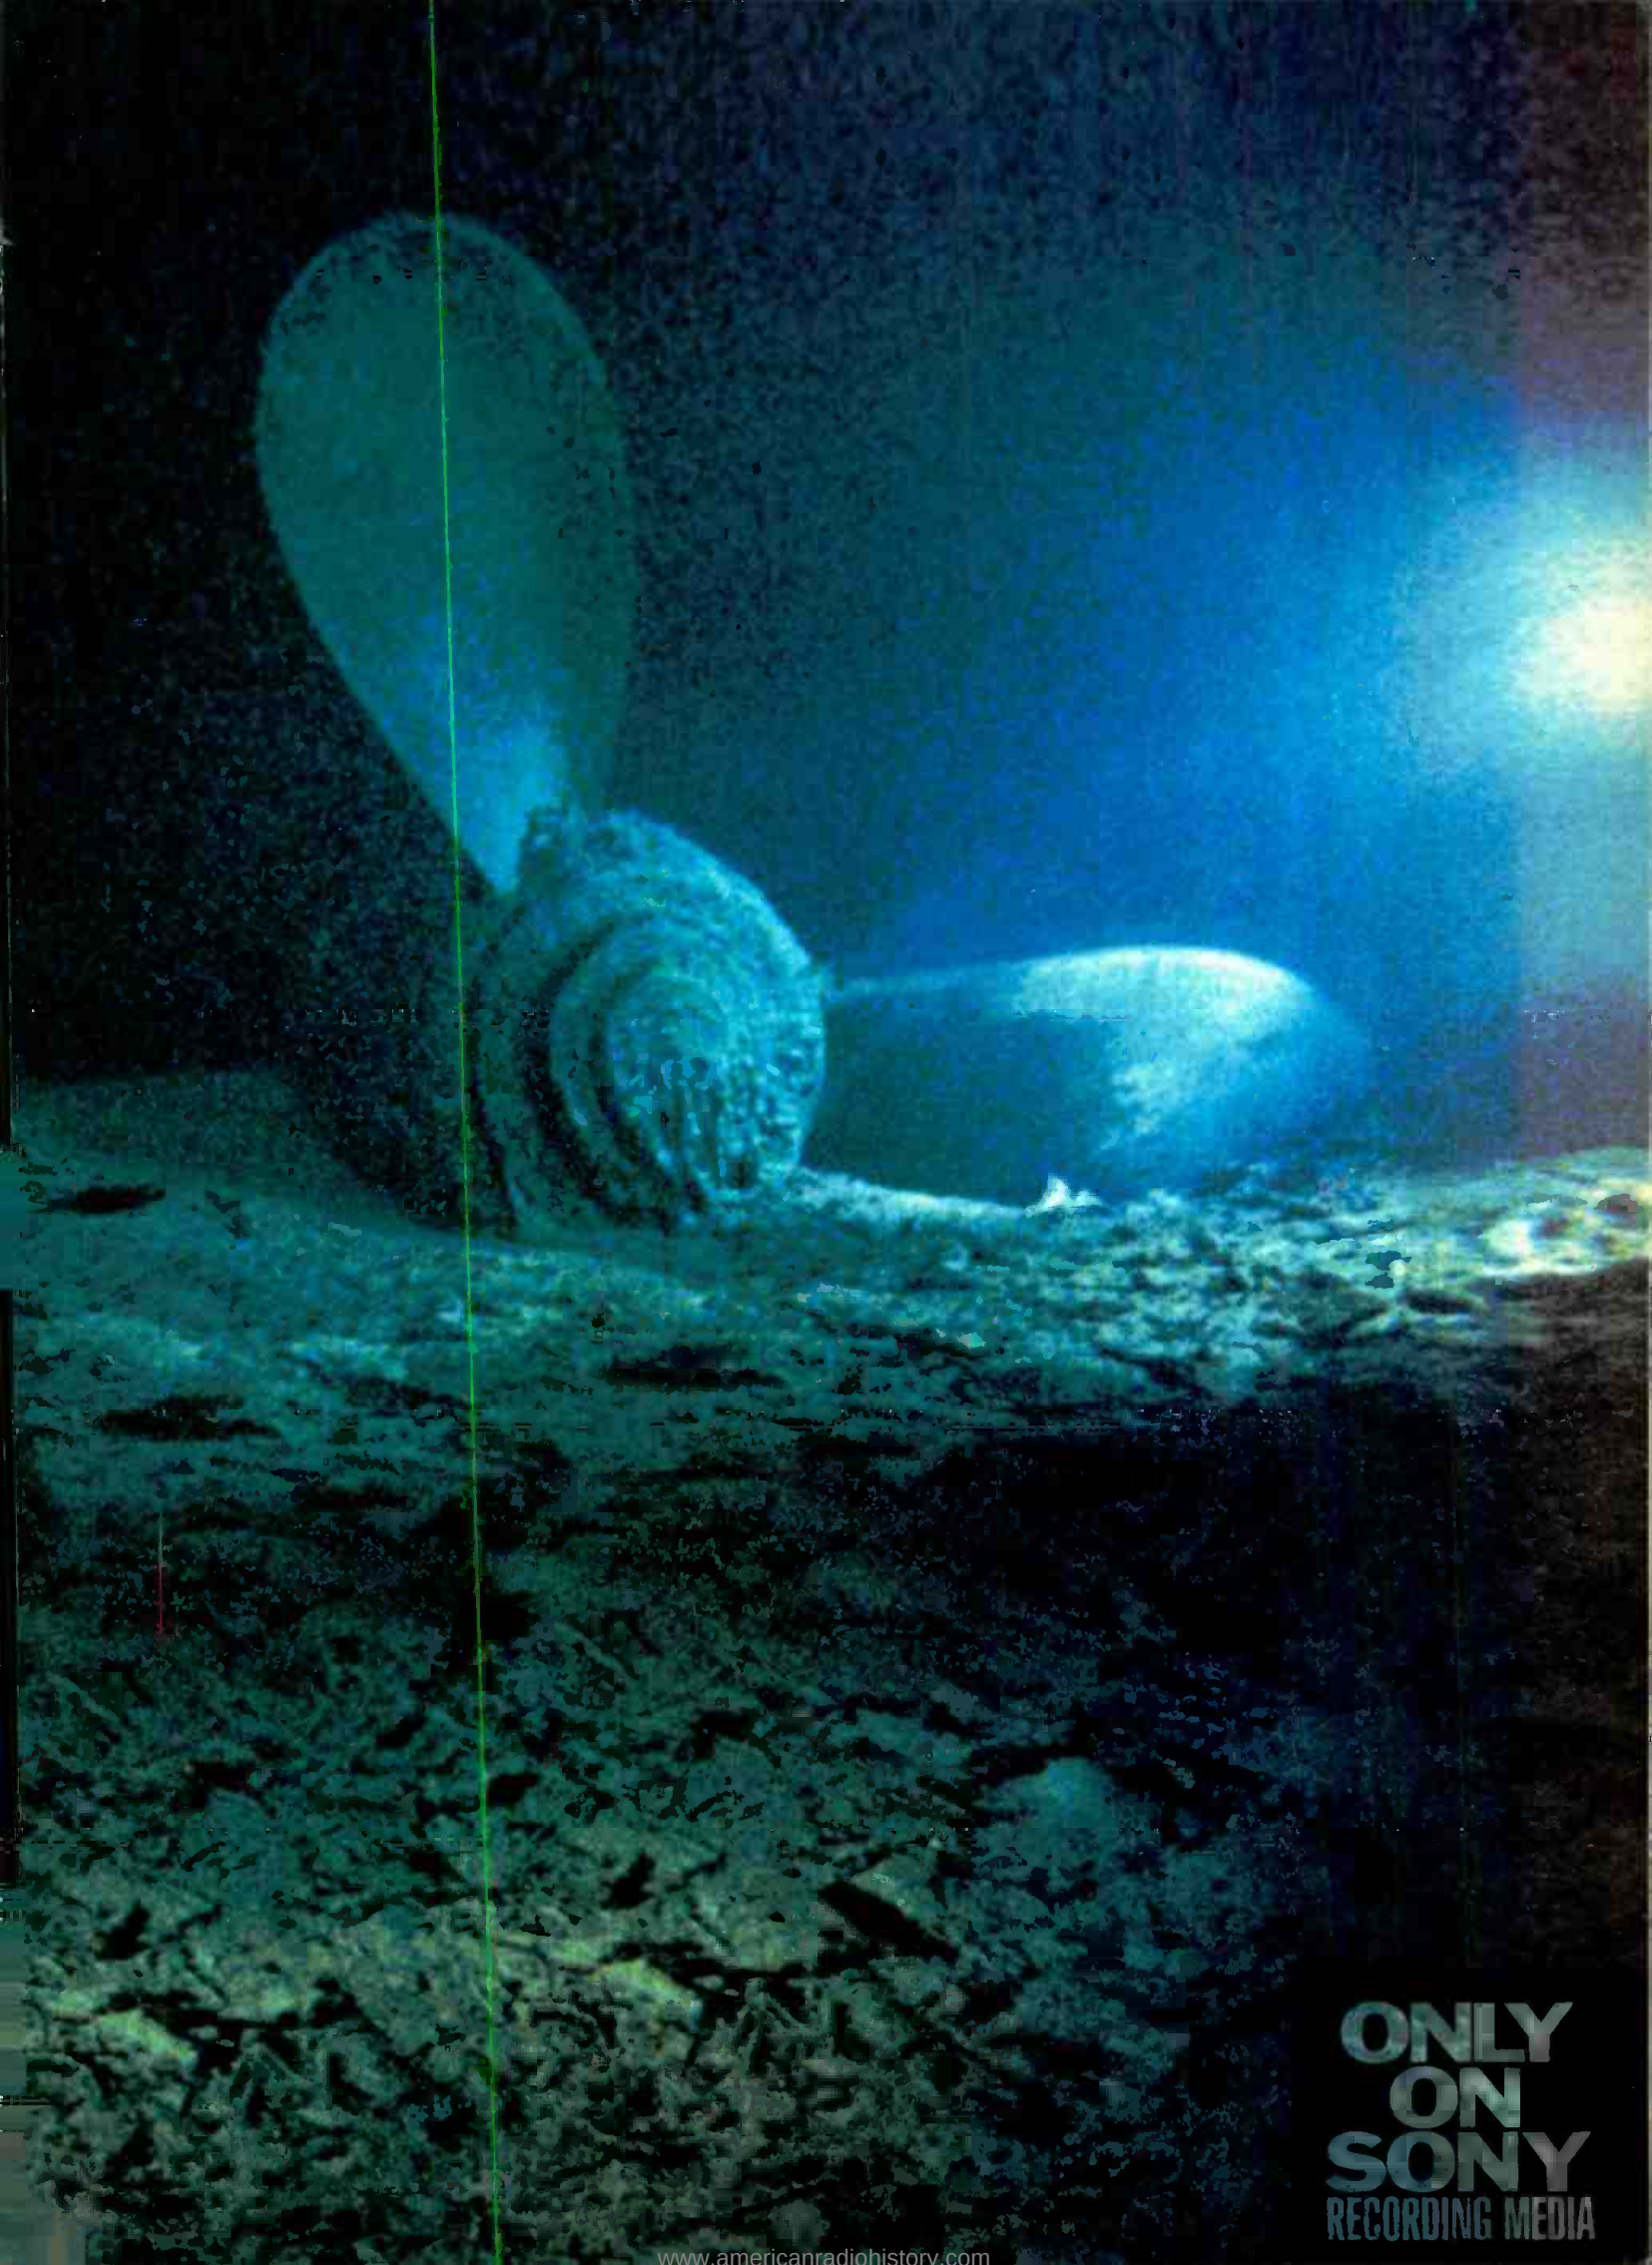

**ONLY  
ON  
SONY**  
RECORDING MEDIA

# WHEN YOU WANT MORE THAN JUST AN ANTENNA

**JAMPRO** has been providing the broadcasting industry with state-of-the-art antennas for over 35 years, longer than any other US antenna manufacturer. With over 3000 antenna systems delivered, at **JAMPRO** you don't just buy an antenna, you invest in experience.



JAHD CP  
Arrowhead  
Screen Dipole

## THE LEADERS IN ANTENNA TECHNOLOGY

- Complete line of FM & TV broadcast antennas
- RF components, Filters & Combiners
- Modern 7000 ft FULL SCALE test range
- Directional antennas and pattern studies.

Call or fax us your needs today.


**(916) 383-1177**

Fax (916) 383-1182



6939 Power Inn Road  
Sacramento, CA 95828

Circle (15) on Reply Card

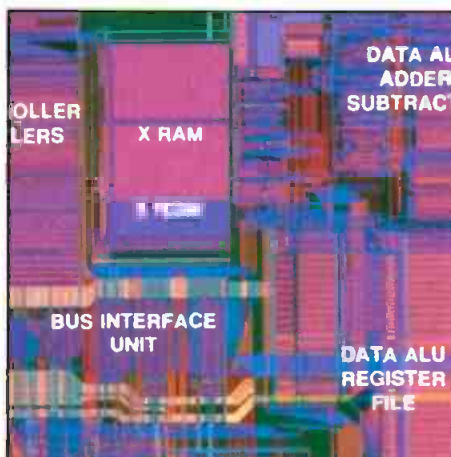

*This processor for multimedia applications has 750,000 transistors and performs what previously required multiple chips. It is capable of handling graphics and sound simultaneously, with compact disc-quality sound. (Courtesy of Motorola.)*

al, enhance it digitally and play it back in many different ways. In addition, the reverb device can either be source or slave to MIDI events, which ties it to the majority of musical instrument products available today.

On the subject of MIDI and timing, many newer reverbs allow a wide range of control via MIDI or even SMPTE time code. These features become especially useful when the reverb device is used in conjunction with a digital audio workstation, most of which can take either MIDI or SMPTE (or both). Many separate effects can be preset on a single device, and then called up sequentially as needed during the mix by the workstation (or a MIDI controller/sequencer) from embedded automation commands.

Some digital reverbs also provide the sonic benefits of direct digital interface with other digital audio equipment. This has become increasingly useful and important because DVTRs, digital mixing consoles and many other high-end A/V production devices now offer digital audio I/O via an AES/EBU or SPDIF port.

### Digital noise eliminators

Even the best reverbs cannot eliminate noise and hum in the signal path. For example, assume that the original program material has inherent background noise and tape hiss along with AC hum. Also assume that the master tape has time-code bleed and the VTR has pickup hum from a ground loop in the rack being injected through the XLR connector, along with SCR noise from a dimmer. It's five minutes to air and the producer is frantic. A decade ago, the engineer would have called it a day. If, by chance, the program was fixed, it probably would have lost much of its sonic punch in the process.

Today, thanks to digital audio processing technology, the engineer has many solutions to choose from in such a situation.

The so-called digital *noise eliminators* are the most recent solution. These are available in the form of software packages that operate on PC platforms or digital audio workstations or as dedicated hardware products. Both approaches have their merits.

The computer systems are more sophisticated and versatile, but the dedicated units are portable and simpler to operate. Common to most of these units is multiband downward expansion that attenuates output level when the input signal level falls below a user-defined threshold in each band. If the input signal level is high enough to mask the noise, then the signal passes through unchanged. The multiband approach will generally provide greater noise reduction with fewer artifacts than wideband expansion.


Because each band can have its own attack time, release time, threshold level and separate envelope follower, the natural attack and decay dynamics of a sound are largely retained, along with more of its spectral content. One of these systems can be a useful addition to the broadcaster's production tool kit.

### Digital sampling systems

Another breakthrough in digital audio technology is the recent use of digital sampling systems for broadcast production. Although the major market share of samplers is still in the music recording business, more and more are finding homes at stations, audio-for-video and film-post facilities, ADR and Foley rooms, and effects generation and program production studios. What makes the sampler unique is its ability to record a short piece of audio, manipulate it, sequence it, and add polyphony and multitimbral attributes to it, all in one box.

Often, the power of these devices is not realized until the full *variety* of their benefits has been experienced. Imagine having the flexibility to sample and synthesize sounds or create complex sonic passages for program filler or background music beds. Then, add the ability to create dramatic sound effects and fly them into other program material. If that's not enough, add the spectral and dynamic processing that DSP allows, and the pitch-shifting or time compression offered by most samplers. Lastly, the sampler can be used as a slave or master to control other MIDI devices, thereby forming a complete sound production system for sound recording and playback. Sampled libraries are available that perform all of the front-end work.

Many samplers are on the market today, and not all of them are created equal. Again, systems are available in either dedicated hardware units (often disguised as a keyboard instrument) or in the form of a software/hardware package integrated

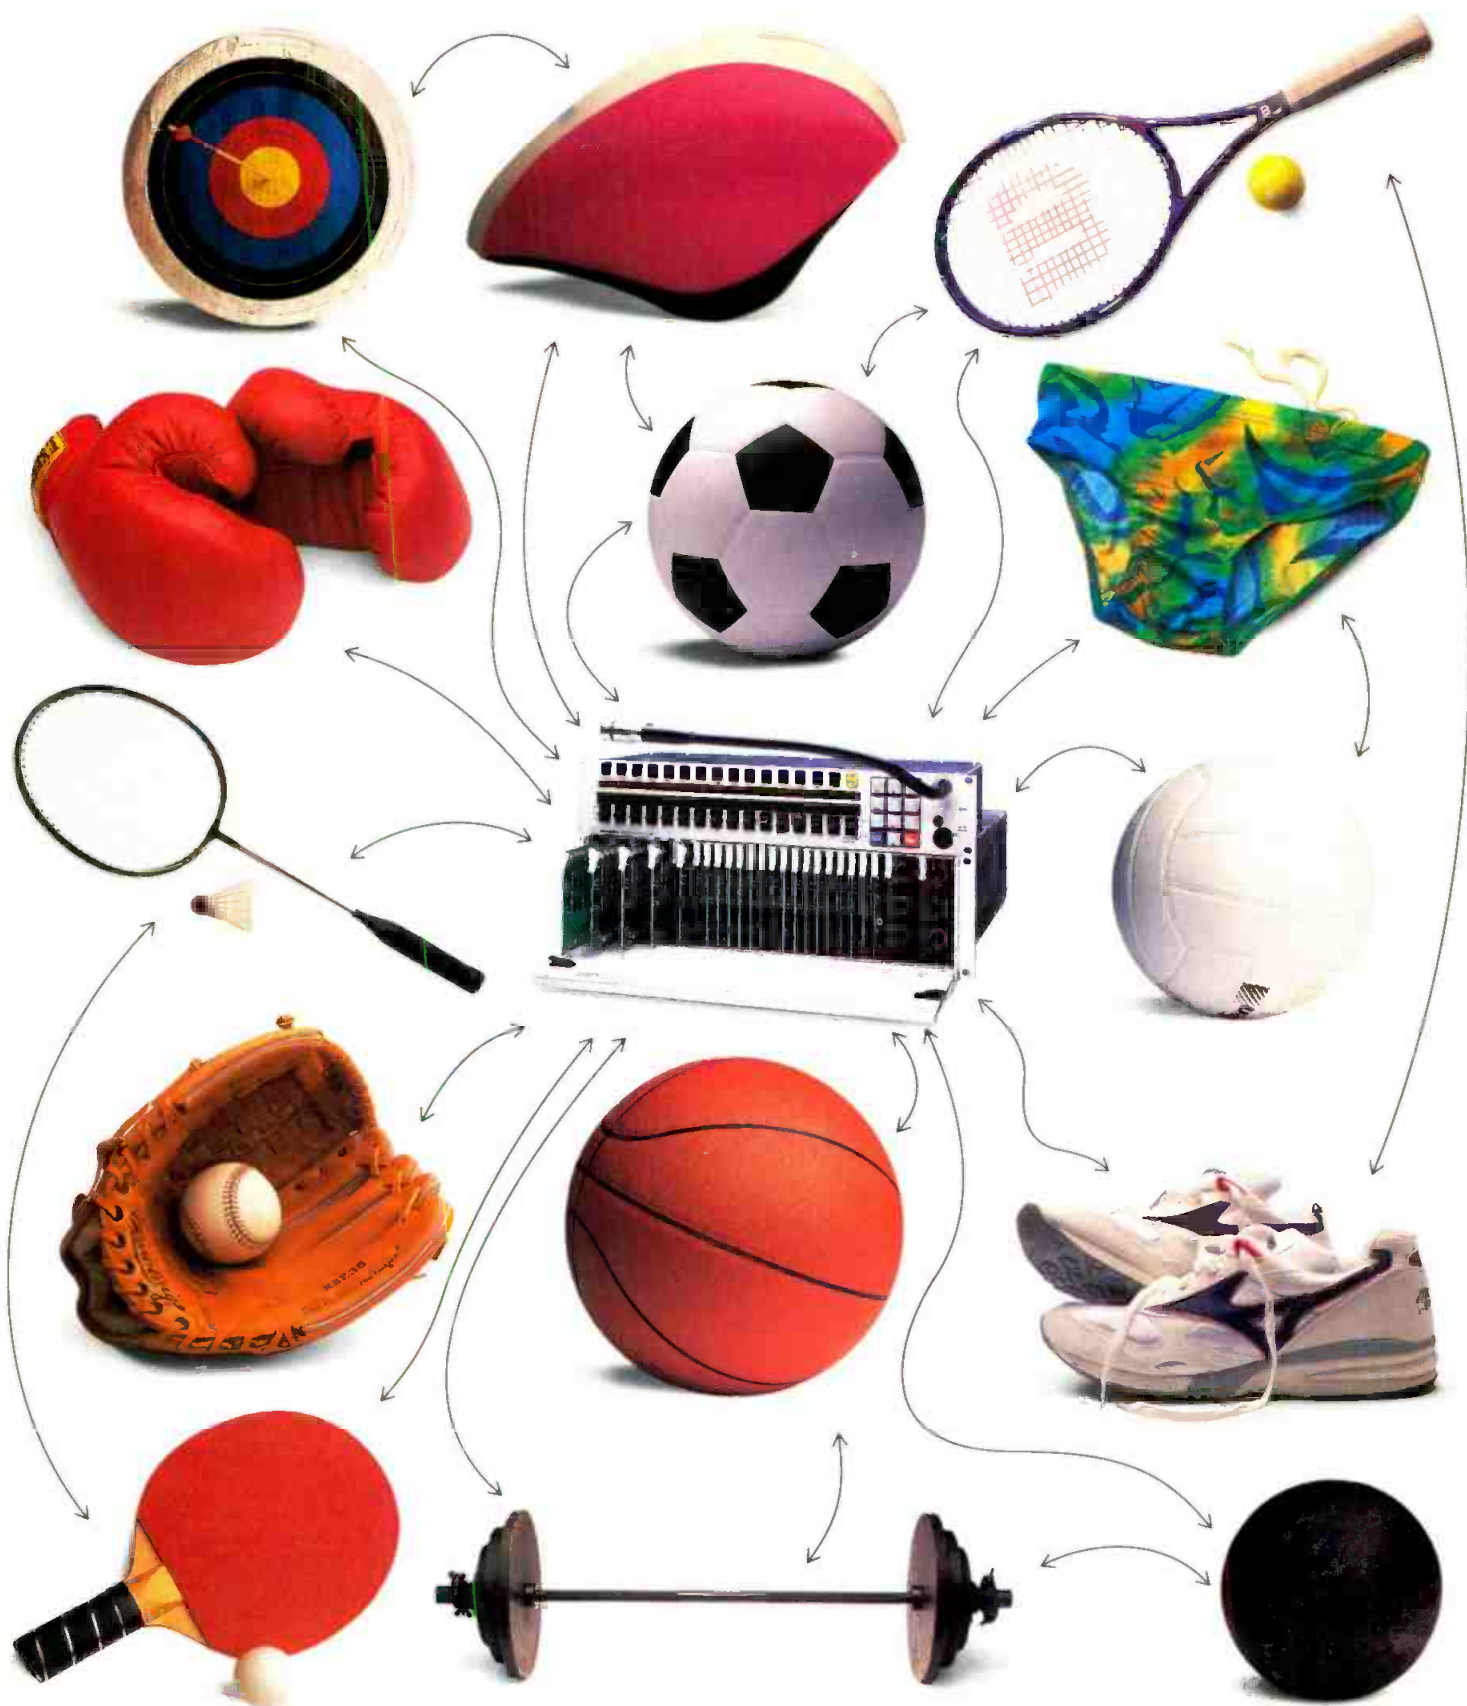

## At The '92 Summer Games, Coordination Is Everything.

When NBC needed flexible, reliable intercoms for the Barcelona telecasts, we weren't surprised they chose three of our CS Series digital systems, as well as over a dozen of our TW systems.

The modular design of the CS Series lets you start small and expand later, or go straight to the max: up to a 450 x 450 matrix. And user-friendly programmability makes it easy to set or reassign your options in real time – even just minutes before a deadline.

No matter how big or small your intercom needs are, we can meet them. In the East, call (201) 891-6002; in the Midwest: (313) 360-0430; in Burbank, CA: (818) 566-6700.

Because even with world-class talent you still have to put it all together.

**RTS SYSTEMS**  
A TELEX COMMUNICATIONS PRODUCT

**110%.  
25 HOURS  
A DAY.  
366 DAYS  
A YEAR.**



TASCAM's industry-standard 122MKII has a lot to live up to.

Starting with its own reputation as the hardest working professional cassette deck in broadcasting.

No problem.

Because the 122MKII was designed from Day One to withstand the ravages of people who detest dead air as much as you do.

Its FG servo, direct-drive capstan motor was designed to handle the kind of round-the-clock cueing and rewinding that burns most other motors out fast.

The unique Hysteresis Tension Servo Control actually lets you adjust take-up, back-tension and torque with open-reel precision. So you maintain the same back-tension throughout the entire cassette, significantly reducing wow and flutter and distortion.

And while relentless play tends to take its toll on conventional tape heads, the 122MKII's three cobalt amorphous heads are built for the long run, delivering crisp, clean sound that's enhanced even more by a choice of Dolby\* B, C and HX-PRO.

But even all that's not all. Because the 122MKII also features front-panel bias and EQ, +4 dBm XLR-balanced Ins and Outs and a suggested retail price of just \$1,099.

For more on the broadcast deck built to work like there's no tomorrow, every day, call or write TASCAM.

**TASCAM.**

© 1991 TEAC America, Inc., 7733 Telegraph Road, Montebello, CA 90640 213/726-0303  
\*Dolby B, C and HX-PRO are registered trademarks of Dolby Laboratories Licensing Corporation.

Circle (18) on Reply Card

into a PC. Each system has unique attributes that make it appropriate for its intended market.

Today's better dedicated devices typically use VLSI architecture with expandable RAM memory for stereo sampling and 16-bit to 20-bit resolution. A 24-bit internal bus processing structure is also common. Editing capability and other features are included, along with interface to magnetic or magneto-optical (MO) disk via digital I/O.

So why would a broadcaster or production house use one? Simply, because a digital audio sampler has the ability to extensively and quickly modify sampled sounds to create a multitude of new sonic possibilities for production. For instance, samplers use an assortment of digital waveform generators and low-frequency oscillators to synthesize sound, with sweepable digital time-variant filters for spectral control, and the ability to control amplitude shaping and pitch bending. Some also can perform sample reconstruction synthesis, to completely redefine certain parameters of the original sound.

Furthermore, the sampler can perform editing, auto-looping, crossfades and transition-smoothing functions. When it's time to compile an event list and sound elements, many samplers simplify the process with their extensive data organization utilities. Some of these sophisticated data management tools match the best found in the video world. In addition, most samplers have the ability to read and write to MO and SCSI hard disks, and are compatible with most available CD-ROM systems. Now try to imagine doing your next audio production epic without one of these in your stable.

### Conclusion

The world of digital audio has evolved tremendously during the last decade and has touched almost every facet of broadcasters' lives. Looking to the future, digital audio processing technology is likely to merge more harmoniously with video and computer-based technologies. Similarly, advancements in software design coupled with VLSI development will take the digital audio frontier to new heights. The end result will be added flexibility and performance for the broadcaster, along with a richer feature set, allowing background tasks to be performed more transparently. This will leave the operator with more time to create. Stay tuned.

➡ For more information on digital audio processors for production use, circle Reader Service Number 300.



# Engineers and Producers Agree On The Versatility, Variety and Dependability of Maxell.

**That's Why Over 2,000 Pros Nationwide Use Maxell Exclusively.**

It's all on your shoulders. You have to create, enhance, preserve, make it work. So you do what you've done reach for Maxell. Rugged, reliable Maxell tapes for state-of-the-art performance... punish it, push it to the limit, these superb video and audio tapes just won't quit. Durable Maxell tapes for the glorious sound, the brilliant image and the superior specs you *must* have when your reputation is on the line.

## maxell®


Maxell Corporation of America, 22-08 Route 208, Fair Lawn, NJ 07410, 1-800-533-2836.

Circle (17) on Reply Card

©Maxell Corp. of America

[www.americanradiohistory.com](http://www.americanradiohistory.com)

## Applied Technology

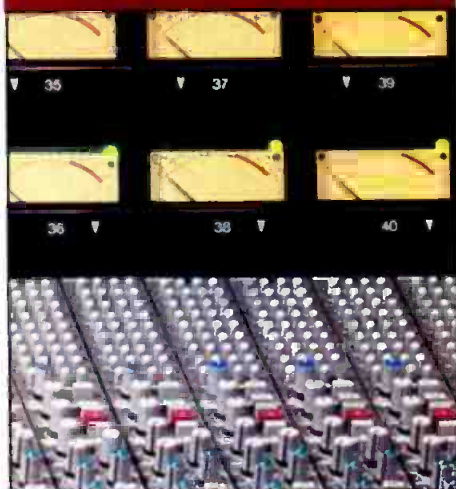

# Digital audio processing for transmission

An examination of today's digital audio broadcast processors.

By Dennis R. Ciapura

## The Bottom Line

*The widespread digital buzzword has recently invaded the land of broadcast air-chain processing in a big way. But sorting out the facts from the hype can sometimes be difficult for the prospective purchaser. All of the current "digital" processors use digital techniques in different ways, and each presents a separate set of issues for the broadcaster to consider. Here is a brief overview to get your comparison-shopping started.*

**\$**

Analog audio processing has reached such a high degree of sophistication in the past 20 years of its evolution that further improvement may be considered doubtful. Nevertheless, many have assumed that the powers of digital audio will offer radical new techniques, enabling higher loudness levels with less audible artifacts and vastly improved parametric flexibility. As is often the case, reality lies somewhere between the worst and best of expectations. Now that several new systems incorporating digital elements have debuted, we can begin making assessments of what this new generation of hardware can and cannot do.

### Digital is a relative term

Today, the term *digital* is used widely within the broadcast industry. It is important to understand that the word does not have a uniform meaning when applied to systems as complex as today's state-of-the-art audio processors. Different manufacturers apply digital technology in different ways. This can range from those who use digital control for analog processing (such as Aphex, CRL and Cutting Edge Technologies) to those who process audio in the digital domain for most or all of their signal paths (such as Audio Animation, Gentner and Orban).

It is easy to get caught up in the "digital is better" and "how much is really digital" debates when looking at these systems. But for the broadcaster, such analysis is academic, if not frivolous. It

may also cloud more important issues, such as the differences in sonic quality, functions, control methods and available options among today's systems, which may also vary considerably.

The new design methodologies that digital audio allows have changed what broadcasters can expect from processing devices. This article will examine the three current systems that use digital signal processing (DSP) to process audio, and will discuss the various philosophies that their

***The new designs that digital audio allows have changed what broadcasters can expect from processing devices.***

respective designers espouse. This will help the user to best understand and most effectively use the features provided by such new directions.

### Peak control methodology

The approach to control of audio peaks is a good place to start. On this issue, today's digital broadcast processors fall into two broad categories: clipping and non-clipping. Although it is possible to totally

*Continued on page 36*

Ciapura, BE's consultant on radio technology, is senior vice president at Noble Broadcast Group, San Diego.

**How to make certain the news always comes from a reliable source.**



They say you  
can't believe every-  
thing you hear. But  
when you're listening to  
a Sony lavalier micro-  
phone, they're wrong. Sony  
lavallers offer exceptional  
reliability. And we have a full  
line to suit every application—  
from sound reinforcement to TV  
broadcast. For the complete story,  
call the Professional Audio Group at  
1-800-635-SONY, ext. 913.

**SONY**

Sony Business and Professional Group, 1 Paragon Drive, Manville, NJ 07645-1719. © 1992 Sony Corporation of America. Sony is a trademark of Sony. actual size.

# CAMERA SUPPORT EQUIPMENT: ANALOG.



| AUDIO                |          | REC TALLY |  |
|----------------------|----------|-----------|--|
| NO. 1                | *ODB     |           |  |
| (.35-.55)            | Curr New |           |  |
| *Gamma (NOR)         | .45 .40  |           |  |
| *Gamma (SHT)         | .45 .45  |           |  |
| Knee Point           | 98 98%   |           |  |
| White Clip           | 110 110% |           |  |
| *H. DTL Level H      | 31 31    |           |  |
| *V. DTL Level H      | 31 31    |           |  |
| *H. DTL Level L      | 15 15    |           |  |
| *V. DTL Level L      | 15 15    |           |  |
| • SHTR • BATT • AUTO |          |           |  |
| H.G                  |          |           |  |

EVF display of "current" and "new" settings for critical adjustments

When you take Panasonic's WV-F700 digital processing camera into the field, you get studio quality pictures and performance without taking the studio camera support equipment with you. That's how Panasonic puts digital theory into practice—in the very practical WV-F700.

Panasonic's applied digital technology in the WV-F700 gives you control over a wide range of camera settings and set-up procedures. To adjust gamma in the field, you don't need the linearity chart, lighting kit, picture monitor or waveform monitor. Just use the "electronic tweaker"—a small on-board adjustment panel—and enter a new, numerical gamma value. Read the new setting in the electronic viewfinder (EVF).

EVF menus show you current and new settings not only for gamma, but for knee, white clip, horizontal and vertical detail, matrix masking, zebra indicator settings, shading correction and flare compensation.

\*Suggested list price. Betacam SP is a trademark of the Sony Corporation.

For the Panasonic Professional Video Dealer nearest you, call: 1-800-524-0864



WV-F700 Digital Processing Camera  
pictured with AU-410, MII VTR and optional  
accessories.

# DIGITAL.


You can control all this with the "electronic tweaker" or the small remote control box. Because digital circuitry is constantly comparing and adjusting the camera's performance to the settings you established in memory, you can leave your vectorscope, tweaker tool and screwdriver home too. Drift is virtually a thing of the past. Digital circuitry gives you enhancement for chroma, dark, high and low band details; cross color suppression, highlight aperture, automatic shading correction, and much more.

Digital camera technology like this should be available to everybody, so Panasonic priced the WV-F700 at just \$10,000\*, and designed it to dock with MII, S-VHS and Betacam SP VTRs without need of special adaptors. Even at this price, the camera's 750-line resolution, super high sensitivity 2/3-inch 3-CCD image system (f8.0 at 2000 lux), and 62 dB signal-to-noise ratio are coupled with features like SMPTE color bars in the EVF, with time, date and camera ID.

When it's time to choose your next camera, consider Panasonic's all-digital processing WV-F700. It's a decision that will require very little additional support.

Panasonic Communications & Systems Company  
Division of Matsushita Electric Corporation of America, One Panasonic Way, Secaucus, NJ 07094

## Panasonic

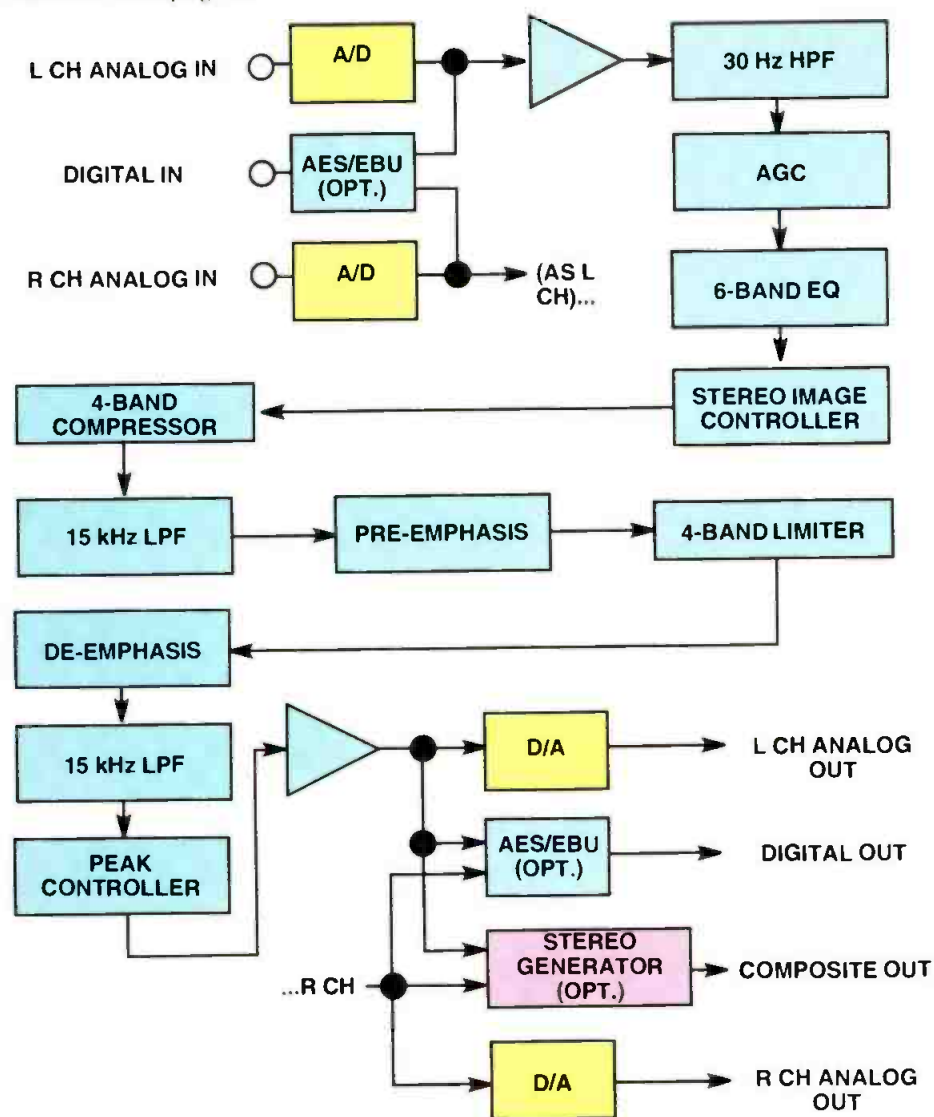

**Figure 1.** A block diagram of the Audio Animation Paragon-transmission.

At the center of the debate is the effect of total waveform gain reduction vs. simply clipping brief program peaks. The output of any limiter with release times slow enough to prevent distortion due to gain reduction on fractional cycles will exhibit peaks to approximately 10dB above the equivalent tone level of the program output. This also is true of multiband limiters with each band as fast as possible. Therefore, a typical limiter without some form of instantaneous attack and release (clipping), or near instantaneous limiting and release, would need to be operated at an average level of approximately 30% to avoid overmodulation by the peaks. This level may be 2dB to 4dB lower than what it takes to produce competitive loudness in most markets today.

fast limiter approach involves the long-term level problems it may create: Program content with higher peak-to-average ratios will encounter more gain reduction in such a system. This presents the danger of loudness variation from source to source. Moderate peak clipping, on the other hand, will leave long-term program levels unchanged. However, considerable distortion will be generated unless sophisticated filtered clipper arrangements are employed. Some designers make a compromise solution by teaming a non-clipping multiband limiter and final peak limiter in the audio section with a composite clipper in the stereo generator.

When examining specific units in this light, today's systems exhibit a variety of design methodologies. The Audio Animation *Paragon*-transmission takes the audio purist approach of no clipping anywhere in the system. The AKG/O ban *Optimod*

8200 follows in the footsteps of its designer's analog predecessors, using filtered audio clippers but no composite clipping. The Gentner *Lazer* employs no clippers in the audio (although its wideband final limiter can be set to act as a clipper), and includes a composite limiter in the stereo generator output. A more detailed look at each of these designs will provide an extremely useful overview of the state-of-the-art in digital processing at the moment.

Audio Animation designers believe there is a significant market for a totally non-clipping processor, if one could be configured to provide competitive loudness levels. Figure 1 is a block diagram of the *Paragon-transmission*. It resembles a conventional processing chain, but the final peak limiter design is really the key to the system's peak control effectiveness. The fully adjustable attack and release times can be as fast as a *single sample* at 44.1kHz (approximately 23 $\mu$ s), and the limiting ratio can be as high as 500:1. Even when set for release times of approximately 100 samples, the peak limiter gets in and out fast enough to function much like a clipper, but without actually clipping the waveform.

The *Optimod 8200* takes a different approach. It makes use of a multiband clipper-distortion-cancellation technique and filter overshoot control technology developed for the analog *Optimod*, in an attempt to maximize source-to-source loudness uniformity. Audible artifacts of the filtered clipping are minimal until the processing is set aggressively. Its operative strategy assumes that intelligent clipping is the best way to get competitive loudness, as long as clipping artifacts remain inaudible. Peak audio level control is absolute, in keeping with the company's philosophy against composite clipping. (See Figure 2.)

Gentner's *Lazer* uses 3-band limiting followed by a wideband limiter that employs a soft-knee action, allowing the operator

***System reconfiguration flexibility is another asset of digital audio processing systems.***

to set thresholds at which its limiting begins and ends. The second (higher) level serves as a brick wall maximum output setting. If the two thresholds are set to the same level, the limiter acts as a clipper. Otherwise, the limiter senses the amount of attenuation necessary for any signal it encounters between the two thresholds. A fast composite limiter controls final mod-



*The last thing a station needs to do is replace manual error with mindless automation.*

If you haven't already heard, the newest buzzword in broadcast is *smart automation*. In an era of split-second timing, \$10,000 make-goods, and news rating wars, stations are having to face a new reality.

People are imperfect. On-air mistakes are expensive. Broadcast automation is behind the times. And something ought to be done about it.

Something has — OOPS.

PARDON? Object-Oriented Programming is more than a breakthrough in automation, it's a boon to stations who want a smarter way to control devices.

Those days of external interface boxes? Geriatric throughput? Unfriendly software? Gone. With OOPs, devices are treated as software "objects."

So, you get a PC-based system that is faster, intuitive to use, and completely customizable to any station.

The Louth ADC-100 can control any device: Switchers, VTRs, Multiple Cart Machines, Still Stores, Satellite feeds; even custom devices and existing station software can be incorporated right into the system.

**HOW MUCH FASTER?** On average, the ADC-100 is ten times faster than any existing automation system. With virtually no obstacles

# HOW TO REPLACE "OOPS" WITH OOPS.

to throughput, you can run as many as 8 lists *simultaneously*, each with up to 1000 events.

More impressive, though, is how fast people warm up to Louth's text-based windows and pulldown menus. Everyone from Traffic to Production to News "gets it" immediately. Even a trainee can be editing full playlists within hours. So operators can be freed for more important tasks.

**FUTURE PROOF.** Since things change so rapidly in broadcast, Louth has designed the ADC-100 to adapt to any changes in equipment, personnel or procedures.

Advanced computer technology and client-server architecture make the system easily expandable. And with OOPs, Louth

can respond immediately to customize and support new devices.

**MAKE NO MISTAKE.** The best way to see how fast, easy, and powerful broadcast automation has become is to watch the ADC-100 at work. For more information or to arrange a demonstration call (415) 329-9498.

With Louth, Smart Automation has come a long way in solving the big drain in broadcast. Human error.

Louth Automation. Because air-time is money.

**L-OUT-H**  
A U T O M A T I O N

Circle (19) on Reply Card

ulation level. Its operation takes place ahead of pilot injection. (See Figure 3.) Additional 4-band compression for users desiring it is available separately with the company's companion device, the *Prizm*. (See Figure 4.)

All three devices (four, including the *Prizm*) use a wideband AGC at the front-end, preceding their limiter sections.

#### Configuration and control

System reconfiguration flexibility is another asset of digital audio processing systems. Once again, the available products seem to fall into two broad categories. The *Lazer* and *Optimod 8200* are updated via firmware (chip) changes, while the *Paragon-transmission* is a disk-based system. Each approach has its advantages and disadvantages. The firmware-based systems don't have disk drives that can fail and preclude user-programming intervention, but the disk system encourages more frequent updates and allows file import/export.

Another key flexibility issue is the degree of parametric control afforded by the various systems. Again, this is related to vendor design philosophy. The *Optimod*

*8200* provides a great deal of factory standard setups arranged by programming format. It gives the user some adjustment latitude to alter the factory setups and/or create entirely new ones. The degree of control, however, is somewhat limited. This approach minimizes the possibility of a user accidentally putting something atrocious on the air, and it plays to the comfort zone of the manufacturer's previous customers.

On the other end of the control spectrum, the *Paragon-transmission* provides wide control flexibility, and can put the user in the processing designer's seat (for better or worse). Several generic, fidelity-oriented factory setups are provided, spanning the usable range of the processor's loudness enhancement. In the product's accompanying literature, users are encouraged to experiment with their own designs, employing the factory setups as starting points. Gentner's *Lazer* and *Prizm* provide a level of user control that lies somewhere in between the other two. The *Lazer* offers more access to adjustment of parameters than the *Optimod 8200*, but the structure of the processor is not as reconfigurable. The *Lazer* opts for a fixed

3-band approach in its multiband limiting section (the *Prizm* is a fixed 4-band processor), while the *Optimod 8200* can be configured via software to operate as anything from a single-band to a 4-band processor.

Orban and Audio Animation also chose a single box approach, while Gentner split its processing (and its system price) into two devices, with the thought that some stations may not need the whole package.

#### Display and user interface

A variety of control surfaces and displays are used in these systems. The

### *A variety of control surfaces and displays are used in these systems.*

*Paragon-transmission* uses a touchscreen in combination with an assignable rotary control and four dedicated push-buttons (cancel, load, setup and help). The display is a graphic user interface (GUI) running on the internal processor, which can be displayed on the on-board video monitor or an outboard PC monitor. The *Optimod 8200* employs an on-board liquid crystal display (LCD) window with five softkeys and two dedicated push-buttons (escape and help). Four-way cursor arrows and a continuous rotary pot are used for setting parameter values.

Using optional software, an outboard PC can provide a larger, higher-resolution color display. The *Lazer* and *Prizm* use perhaps the simplest approach. Each device employs a single, 4-line alphanumeric LCD window and five push-buttons. Two of the buttons are up/down arrows for stepping through parameter values and moving the screen cursor. The other three buttons select, enter and escape the device's various functions.

Metering philosophy also differs among these systems. Audio Animation and Orban use their display screens to show meters, while Gentner uses horizontal LED displays. Some of these LED meters are dedicated to a particular parameter, and others are assignable.

All systems allow (or plan to allow) remote control via RS-232 or a similar interface. This means that a standard dial-up modem can be used to control these devices remotely via PC. All of these devices also offer password protection to prevent unauthorized access to active and stored settings.

#### Digital interface considerations

Another issue foremost in the minds of

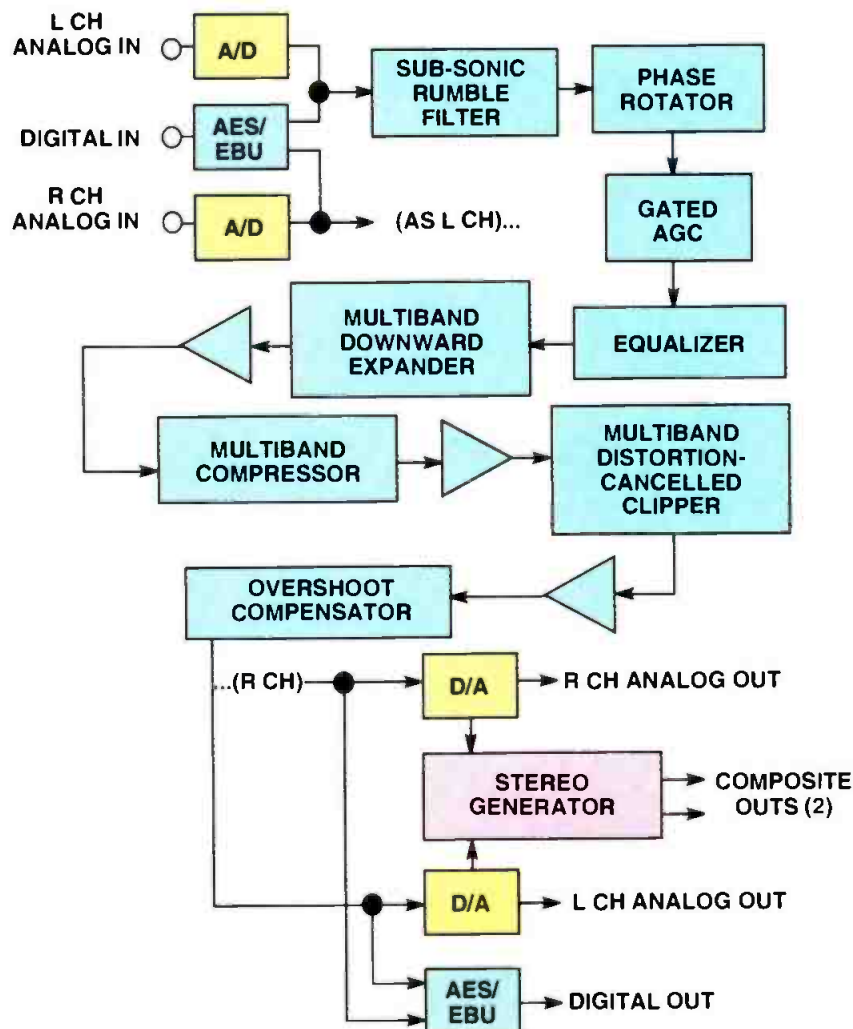


Figure 2. A block diagram of the Orban Optimod 8200.

# We admit, there may be alternatives to LINC technology.



With LINC technology you control the peripheral systems in your edit bay from your Abekas switcher. It couples your peripherals to the switcher time line. You get faster, more accurate effect creation and previewing. You can also save all your set-ups on a single floppy. LINC makes your edit suite more efficient... more profitable. It's also the stepping stone to full station automation in the production world. For more information call your local sales office.

**Abekas**  
A Carlton Company

---

ABEKAS VIDEO SYSTEMS, INC., 101 Galveston Drive, Redwood City, California 94063. For details: 415-369-5111; Atlanta 404-451-0637; Chicago 708-699-9400; Dallas 214-385-4544; Los Angeles 818-955-6446; New York 516-829-0820; San Francisco 415-369-6791.

Circle (20) on Reply Card





## AMPEX HAS CHANGED THE POWER OF VIDEO.

It's the power to realize your dreams.

It's the impact of innovative design. It's the precision of uncompromising engineering. It's the rock-solid dependability of the Ampex commitment to quality.

It's the power to deliver video with the clarity, crispness, and multi-generational integrity available only with digital component processing.

It's called DCT™—Digital Component Technology.

It's the world's first realistic CCIR-601 digital component system available from one manufacturer.

Tape drive, tape cartridge, switcher, editor, ADO®, character animator, and interconnect equipment.

All available now. Only from Ampex.

And DCT also gives you a clear upgrade path to the digital video technologies of the future.

So now you can have the video power you've always dreamed about. You can have it today. And you'll still have it tomorrow.

**AMPEX**  
**DCT**™

Ampex Corporation 401 Broadway, MS 3A-01, Redwood City, CA 94063-3199  
© 1992 Ampex Corporation

Circle (21) on Reply Card

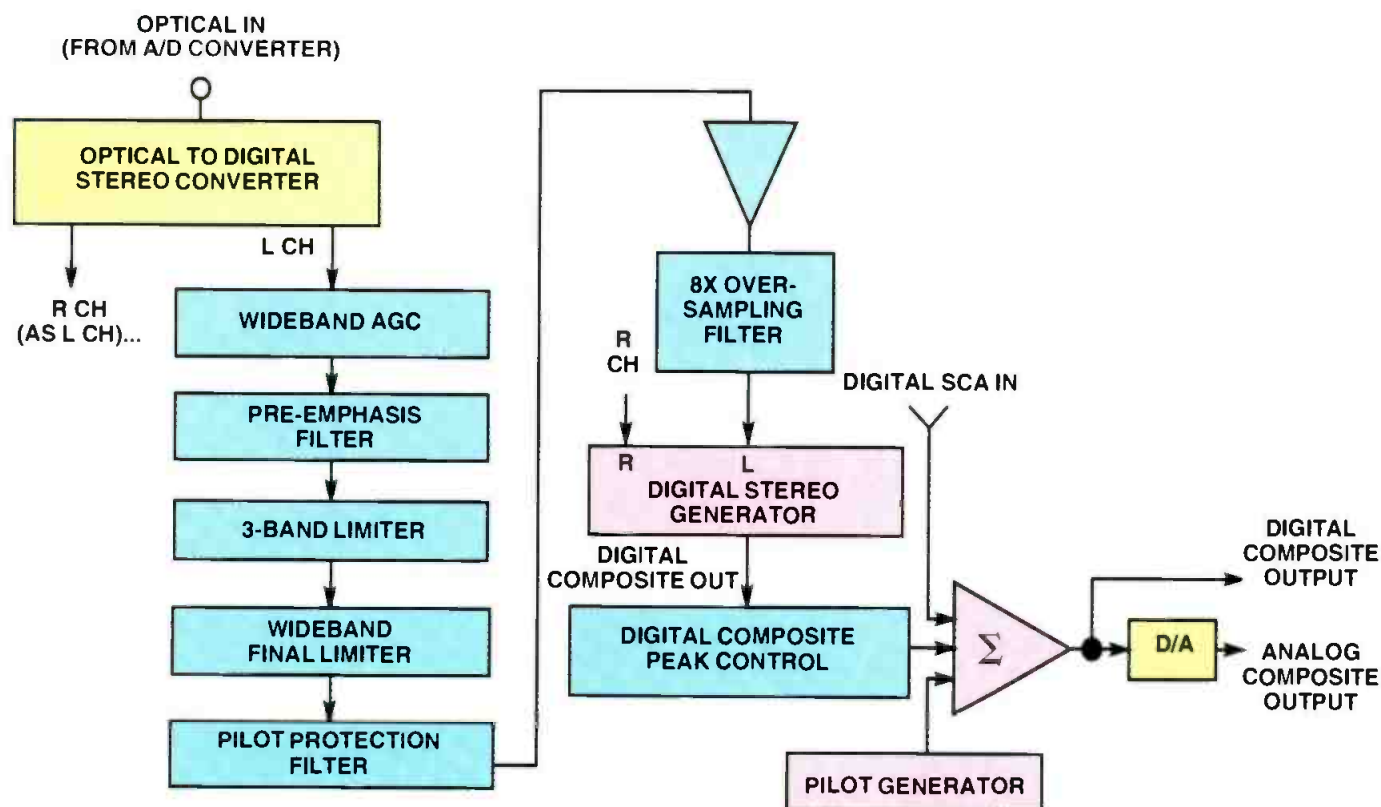


Figure 3. A block diagram of the Gentner Lazer. Analog-to-digital conversion is handled by a preceding device, whose fiber-optic output feeds the Lazer's optical input.

many broadcasters is the fully digital system of the future. This implies some compatibility and standardization for interconnection of digital devices, including the audio processor. Unfortunately, progress in this area has been slow. Decisions there will greatly affect some important audio processor design issues, including sampling rates for systems with integrated stereo generators, and time base accuracy for carrier frequency generation in excitors. Manufacturers have different opinions on optimum sampling rate (32kHz, 38kHz and 44.1kHz all have merit for obvious reasons), and a number of efforts have been launched to sort out a standard. All of the currently available digital audio processing systems include provisions for eventual direct digital audio input and output, but at this point, these remain largely unused.

Beyond the sampling rate question is the issue of *where* the broadcast system's time base should be located. For example, CD tolerances have been shown to be insufficient for translation to FM carrier frequency. Should the station time base be in the console? Should it be at the transmitter and referenced back to the studio? What about digital STL delays? Some interesting debates lie ahead.

Just where in the processing chain the signal enters and leaves the digital domain is an important issue for interface reasons, at least in the short term (while the digital audio processor still exists as an island

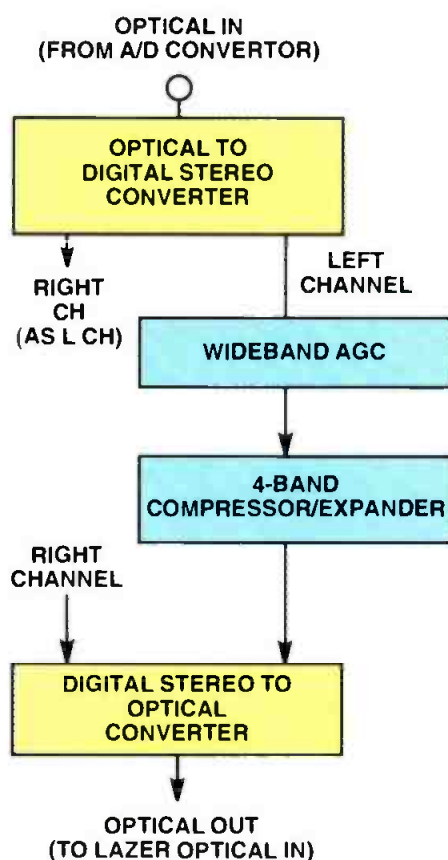


Figure 4. A block diagram of the Gentner Prizm. Designed for use as an optional preprocessor to the Lazer, the Prizm is inserted between the analog-to-digital-to-optical converter (described in Figure 3) and the Lazer, accounting for its exclusively optical I/O.

in the otherwise analog audio chain). Here, too, differences between the systems apply.

The *Paragon*-transmission takes audio straight from the source (typically the on-air console or switcher) and immediately converts it to the digital domain. After processing, it provides either analog or digital audio output to an outboard stereo generator. The release of an on-board stereo generator upgrade for the system

**Which processing philosophy is best?  
What level of user control is optimum?**

(of hybrid analog/digital design) was impending at this writing. This would allow provision of an analog composite output as well. The *Optimod 8200* also converts analog inputs immediately to digital audio for processing, and includes an analog stereo generator. As a result, the unit offers analog or digital audio outputs, and a pair of (identical) analog composite outputs. Gentner's *Lazer* and *Prizm* are fully digital devices, to the extent that they do not include onboard analog-to-digital converters. A separate conversion device is

# You Need It.

*Infinite windows TBC with SVideo Composite Video inputs and outputs*  
\$1,995



# You Need It.

*With true Wide Band performance in all modes including heterodyne*  
\$2,995



# You Need It.

*SVideo, U-Dub and NTSC video inputs and outputs plus Betacam MII output and 48 built-in test signals*  
\$5,495



# You Need It.

*Four Field Synchronizer features Wide Band composite processing and auto-switch TBC*  
\$5,495



# You Need It.

*10-Bit Master Sync Test Generator with 32 test signals, source ID and audio tone*  
\$2,995



# You Got It?

Here's some of our video equipment.

Instead of miles of copy and hundreds of images showing stunning effects, we thought you might want to see something a little different. Like our products up close and personal.

And you have to know how much the equipment is going to cost, so we put in the



price, right there above the product.

Lastly, you have to know where you can get this equipment. That's where the logo, phone number and address come in.

Advertising is easy when you have such great products to offer.

Digital. It's what you need.

Circle (22) on Reply Card

**DIGITAL**  
PROCESSING SYSTEMS INC.

55 Nugget Ave, Unit 10 • Scarborough, Ontario M1S 3L1 Canada • Phone: 416-754-8090 • Fax: 416-754-7046  
11 Spiral Drive • Florence, Kentucky 41042 • Phone: 606-371-5533 • Fax: 606-371-3729

[www.americanradiohistory.com](http://www.americanradiohistory.com)

used, which applies phase rotation in the analog domain and then converts the signal to digital audio. The converter's output is sent to the *Lazer* or *Prizm* via a fiber-optic interface. Therefore, both the *Lazer* and *Prizm* have optical inputs only. The *Prizm* also has an optical output only, while the *Lazer* includes a digital stereo generator, so it offers composite outputs in analog and digital form (the latter is designed for use with exciters offering a compatible digital input).

#### Which is best?

Choosing a digital audio processor is a matter of individual station culture and personal preference. All of the systems mentioned here are well-designed and constructed, and each will likely find its following in the marketplace. Which processing philosophy is best and what level of user control is optimum are the two primary questions that anyone considering digital audio processing will confront.

Digital audio processing does not offer a loudness bonanza, and all of these manufacturers candidly point out that the methods developed for analog have already pushed the loudness quest to its practical limit. What digital systems do offer is the opportunity for the user to participate in the processing *design* to a greater extent than is possible in the analog domain. For those who have amassed racks full of repeatedly modified analog gear in the never-ending quest for a unique sound in today's ultracompetitive radio markets, this can be a compelling incentive. Greater uniformity and repeatability in performance, full remote control (using optional PC display/interface software in some cases) and the ability to vary settings by daypart (or some other criteria) are among the other advantages presented by this new technology.

These manufacturers have also begun discussing the possibilities offered by open-architecture and third-party software for their systems. Perhaps the authoring of such software will be the role of tomorrow's audio consultants and radio gurus.


***Digital systems allow the user to participate in the processing design to a greater extent.***

Finally, although movement toward a fully digital audio chain has been long in coming, most agree that its eventual arrival is inevitable. A sensible approach to this transition is to take it incrementally, concentrating on where a digital replacement will provide the greatest benefit at the current time. Broadcast audio processing is certainly one of those replacement points. As the products described here clearly demonstrate, it's not too soon to start looking seriously at digital alternatives for this important part of the air chain. ■

Editor's note: The block diagrams shown in this article are simplified versions of documentation supplied by the manufacturers.

■ For more information on digital audio broadcast processors, circle Reader Service Number 301.

## Join the stereo evolution!

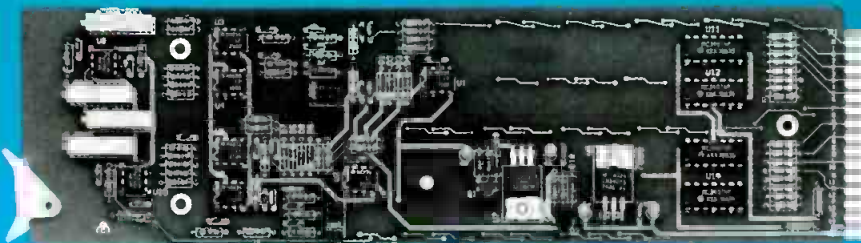

### Introducing the 880 Series Stereo DAs for only \$ 295.-

- Two balanced channels with four outputs per channel
- Very low noise (100 dB S/N)
- Outstanding interchannel crosstalk (> 95 dB)
- +30 dBu maximum output level
- Gain range of -6 to +33 dB
- Input over-voltage protected
- Excellent output isolation
- 12 cards per frame (2RU)

**LEITCH**®

For further information please contact your local LEITCH dealer or call:

In U.S.A.: 1-800-231-9673

In Canada: 1-800-387-0233

Circle (23) on Reply Card

# One of the rare times when reality exceeds expectations...



## Proven High Power UHF Tetrode Transmitters!

Acrodyne, the pioneer in tetrode technology, has delivered the only 30kW single tetrode UHF TV transmitters in the world. Consider the following:

- Plant efficiency—cuts cost 50-60%—**Proven**
- Tube life 24,000 hours—**Proven**
- Price advantage—**Proven**
- Less precorrection needed—**Proven**
- Tube operating voltage less than 10kV—**Fact**
- Smaller footprint—**Fact**
- Low cost tetrode replacement—**Fact**
- No diplexer—**Fact**

The proof is in; the facts are undeniable. Models are available from 5kW to 60kW. Talk to **Acrodyne...**the leader in UHF tetrode technology for 25 years.

Tomorrow's digital TV transmitter company.

# ACRODYNE

Acrodyne Industries, Inc.  
516 Township Line Road  
Blue Bell, PA 19422  
800-523-2596 or  
(215) 542-7000  
FAX: (215) 540-5837

© 1992 Acrodyne Industries, Inc. All rights reserved.

Circle (24) on Reply Card

# Replacing the analog cart machine



In the new world of broadcast audio recording, life imitates cart.

By Skip Pizzi, technical editor

## The Bottom Line

*Manufacturers have long been taking aim at the broadcast audio cartridge format, but without great success. As much as users decry the cart's many flaws, its inherent reliability, familiarity and standardization make it difficult to relinquish. Nevertheless, digital systems are mounting an increasingly serious challenge to the workhorse cart. Broadcasters' growing comfort with computer hardware has opened the door to such replacement technologies, causing many stations to rethink their use of cartridge-based systems.*

\$

Someone once called the audio cartridge "the format that broadcasters love to hate." Yet, rumors of its demise have been greatly exaggerated. Some of this longevity has come from cart machine manufacturers' resourcefulness in providing incremental improvements over the years. Retrofitted audio upgrades, mechanical rebuilds, wholesale recorder redesigns, new tape formulations and cartridge designs, new tape speeds and track widths, noise-reduction systems, matrixed stereo and other stereo phase-compensation, bar code identification and more — the format has experienced significant evolution.

Today, audio cartridge systems are still widely prevalent. Almost all radio stations use them in some capacity, and many use them as a predominant on-air audio source. In some cases, if it's not live or from the network, it's on cart. But the trend away from carts has already been established. Purchase of new cartridge hardware dropped by 30% in 1991.<sup>1</sup>

Most likely, carts' reliability and familiarity have kept them in use. But as computers and digital audio equipment migrate into more areas of the broadcast operation, carts' perceived advantages in these respects have diminished. On one hand, audio quality of the facility is improving beyond what carts can deliver. On the other hand, broadcasters are now more conceptually trusting of computerized audio operations. Sensing this opportunity, manufacturers have approached the cart machine replacement market from a number of different directions.

### Variations on a scheme

Cart replacement technologies can be divided into three general categories. (See Table 1.) First are the direct machine-for-machine replacements, where in an oper-

ational sense, only the media changes. Instead of a cart, audio is stored on some sort of digital carrier, typically disc-based. Hardware looks and acts like a cart machine, with similar size and control features.

A second type of system uses a bank of RAM to store a brief and/or bandlimited message. These are especially useful in lieu of carts for call-in announcement lines, for which purpose they often incorporate telco hookup and auto-answer functions.

The final group of replacement devices

## The trend away from carts has already been established.

are a different breed altogether, replacing all of the cart machines in the facility with a single computer system. This global approach is implemented either on a PC platform or in proprietary hardware. In most cases, this kind of device is really a station automation system that incorporates hard disk recording, rather than a cart machine replacement per se.

### Cart for cart's sake

Although difficult to explain, most broadcasters still find it reassuring to be able to hold that car dealer's spot or contest promo in their hand and physically load it into its playback device. Perhaps it stems from a basic human need for tactile feedback (or maybe just for the satisfaction of flinging it across the room when it jams). In any case, this "warm and fuzzy" factor argues for a replacement system

that uses the same physical carrier approach.

Some of these products come from new companies, but several are made by traditional cart machine manufacturers. Available systems use a variety of media, spanning a range of optical and magnetic systems. Although the use of removable media is a key design element, some of these digital cart machines offer additional storage on internal hard disk drives. Some simple editing capabilities also are included.

Media choices are typically from the standard computer storage inventory. For example, high density (1.4Mbyte) and extra-high density (4Mbyte) 3.5-inch floppy disks are used by some systems, employing data compression to allow several minutes of high-quality stereo on each disk. (See "Digital Audio Data Compression," February 1992.)

One philosophical step removed from exact cart-for-cart replacement is a system that uses removable media, but on a *multiple message-per-carrier* basis. This category includes Bernoulli disks (removable hard disks), recordable CDs (CD-R) and magneto-optical (MO) systems. Although not a random-access format, the fast winding and accurate ID-point marking of DAT makes it another player.

Among the magnetic drives using removable (floppy or Bernoulli) media, some also offer an internal hard disk option for additional storage. Most of the random-access systems (magnetic and optical disk formats) include some simple editing capabilities as well.

Your choice of format hinges on several criteria, foremost of which is the facility's intended application. Some operations use carts only for short, occasional announcements or drop-ins, while others use them as their primary media. In the latter case, long-form storage offered by DAT, optical and Bernoulli disks may be more appropriate. Other criteria of choice include hardware cost, media cost and capacity, user-friendliness, the importance of rewritability (all formats except CD-R are erasable) and the likelihood of long-term format support by the manufacturer.

Most of these devices also include an RS-

232 and/or other type of control port, allowing their integration into an automation system. Don't overlook this important element when assessing the appropriateness of various systems to your facility and its applications.

#### No moving parts

For a few specific applications traditionally handled by carts (primarily for their automatic recuing capacity), RAM recorders are offered by a few manufacturers. These are designed for repeated play of the same message(s), typically via telephone. Not only do these systems automatically recue, but they also can do so *instantaneously*.

Digital audio allows the trade off of bandwidth for record time, so these systems typically offer longer storage times at lower audio fidelity, and vice versa. Therefore, a range of audio quality levels is available. Other features offered by different products include multiple message storage, multiple simultaneous outputs, auto-answer capability and DTMF (telephone touch-tone) sensing.

#### Station on a screen

Other manufacturers support a different transition philosophy in their cart replacement systems. Rather than simply replac-

### Purchase of new cartridge hardware dropped by 30% in 1991.

ty's intended application. Some operations use carts only for short, occasional announcements or drop-ins, while others use them as their primary media. In the latter case, long-form storage offered by DAT, optical and Bernoulli disks may be more appropriate. Other criteria of choice include hardware cost, media cost and capacity, user-friendliness, the importance of rewritability (all formats except CD-R are erasable) and the likelihood of long-term format support by the manufacturer.

Most of these devices also include an RS-

1.  
IOT  
Transmitters

2.  
MSDC  
Transmitters

3.  
Solid-State  
Transmitters

4.  
Tetrode  
Transmitters

5.  
Klystron  
Transmitters

# ONE COMPANY.

**Straight Answers.** When you call TTC you're not going to hear a big sales pitch on the only transmitter we make. We make them all. TTC manufactures transmitters for all current amplification technologies. No other company can make that claim. In fact, TTC has been designing and building products for the broadcast transmission industry around the world for 25 years. If you want straight answers, and choices, about the technology that best suits **your** needs, call TTC.

*A Global Force In Broadcast Transmission Technology*



650 S. Taylor Ave. Louisville, CO 80027 USA Fax(303)673-9900 Telephone(303)665-8000

Circle (25) on Reply Card

| MANUFACTURER                     | DIGITAL<br>CART<br>MACHINE |   |     |     |    | RAM<br>RE-<br>CORD-<br>ER | HARD DISK<br>W/AUTO-<br>MATION |      | RDR<br>SVC<br>NO. |
|----------------------------------|----------------------------|---|-----|-----|----|---------------------------|--------------------------------|------|-------------------|
|                                  | FD                         | B | CDR | DAT | MO |                           | PC                             | Prop |                   |
| Acutron Electroacustica (PORT)   |                            |   |     |     |    |                           | X                              |      | 395               |
| AEQ (SPN)                        |                            |   |     |     |    | X                         |                                |      | 396               |
| Agap (FR)                        |                            |   |     |     |    |                           | X                              |      | 397               |
| Arrakis (USA)                    |                            |   |     |     |    |                           | X                              |      | 398               |
| Asaca Shibasoku (JPN)            |                            |   |     |     | X  |                           |                                |      | 399               |
| ASC (UK)                         | X                          |   |     |     |    |                           |                                |      | 400               |
| Barco/EMT (GER)                  |                            |   |     |     | X  |                           |                                |      | 401               |
| Basys/D-CART (USA/AUSTRAL)       |                            |   |     |     |    |                           | X                              | X    | 402               |
| Broadcast Electronics (USA)      | X                          |   |     |     |    |                           | X                              |      | 403               |
| Cipher Digital (USA)             |                            |   |     |     |    |                           |                                | X    | 404               |
| Computer Concepts (USA)          |                            |   |     |     |    |                           | X                              |      | 405               |
| Dalet Digital Media Systems (FR) |                            |   |     |     |    |                           | X                              |      | 406               |
| Denon (JPN)                      |                            |   | X   |     |    |                           |                                |      | 407               |
| Enco Systems (USA)               |                            |   |     |     |    |                           | X                              |      | 408               |
| Ferroglyph (UK)                  |                            | X |     |     |    |                           |                                |      | 409               |
| Fidelipac (USA)                  | X                          |   |     |     |    |                           |                                |      | 410               |
| FOR-A (JPN)                      |                            |   |     |     |    |                           |                                | X    | 411               |
| Fostex (JPN)                     |                            |   |     | X   |    |                           |                                |      | 412               |
| Fougerolle Audio (FR)            |                            |   |     |     |    |                           |                                | X    | 413               |
| Gentner Communications (USA)     |                            |   |     |     |    |                           | X                              |      | 414               |
| Giese Electronic (GER)           |                            |   | X   |     |    |                           |                                |      | 415               |
| Gotham Audio (USA)               |                            |   | X   |     |    |                           |                                |      | 416               |
| Henry Engineering (USA)          |                            |   |     |     |    | X                         |                                |      | 417               |
| IMC/Akai (JPN)                   |                            |   |     |     | X  |                           |                                |      | 418               |
| Marantz (JPN)                    |                            |   | X   |     |    |                           |                                |      | 419               |
| MediaTouch Systems (USA)         |                            |   |     |     |    |                           | X                              |      | 420               |
| Otari (JPN)                      |                            |   |     | X   |    |                           |                                |      | 421               |
| Panasonic (JPN)                  |                            |   |     | X   |    |                           |                                |      | 422               |
| PKE International (AUSTRAL)      |                            |   |     |     |    |                           | X                              | X    | 423               |
| R.G. Barth (GER)                 |                            |   |     |     |    |                           | X                              |      | 424               |
| Racom Broadcast (UK)             |                            |   |     |     |    |                           |                                | X    | 425               |
| Radio Systems (USA)              |                            |   |     | X   |    |                           |                                |      | 426               |
| Ranson Audio (UK)                |                            |   |     |     |    |                           |                                | X    | 427               |
| Rodman/Brown Associates (USA)    |                            |   |     |     |    |                           | X                              |      | 428               |
| Smarts Broadcast Systems (USA)   |                            |   |     |     |    |                           | X                              |      | 429               |
| Sonifex (UK)                     | X                          |   |     |     |    |                           |                                |      | 430               |
| Sony (JPN)                       |                            |   |     | X   |    |                           |                                |      | 431               |
| Studer Digitec/Numisys (SWIT/FR) |                            |   |     |     |    |                           |                                | X    | 432               |
| Studer Revox (SWIT)              |                            |   | X   | X   |    |                           |                                |      | 433               |
| Tascam (JPN)                     |                            |   |     | X   |    |                           |                                |      | 434               |
| TBS (FR)                         |                            |   |     |     | X  |                           |                                |      | 435               |
| The Management (USA)             |                            |   |     |     |    |                           | X                              |      | 436               |
| 360 Systems (USA)                |                            | X |     |     |    |                           |                                |      | 437               |
| Wheatstone (USA)                 |                            |   |     |     |    |                           |                                | X    | 438               |
| XIS (FR)                         |                            |   |     |     |    |                           | X                              |      | 439               |
| Yamaha (JPN)                     |                            |   | X   |     |    |                           |                                |      | 440               |

**Table 1.** A listing of manufacturers of cart machine replacement systems and the general nature of their products. The "Digital Cart Machine" heading covers any appropriate digital audio recording format using removable media, including floppy disk (FD), Bernoulli (B), CD-R, DAT or MO systems. (FD and Bernoulli systems may also include internal hard drives.) The "Hard disk with Automation" heading includes PC-based and proprietary/stand-alone systems, some of which can incorporate optical drives.

ing the analog decks and cartridges with digital ones, these companies take a more integrated approach, centered on the automation controller. They leap-frog the digital cart machine transition and move into a more fully computerized environment.

In this context, carts are replaced by hard disk (or optical disk) storage. An automation controller accesses the hard disk drive(s), calling up audio spots from disk as required by the automation's programming instructions. Typically, the automation system and hard disk recorder are part of the same software, and run on the same PC (although external hard disk drives may also be involved, typically interfaced via SCSI ports).

The level of integration among these systems is another variable. Some put only short-form programs (for example, spots, PSAs, jingles/drop-ins and announcer breaks) on the hard disk, keeping longer program elements on other outboard devices, such as reel-to-reel, DAT, CD or other formats. Control of these devices is handled by the automation system (generally via RS-232 interface), but these devices must still be properly loaded and otherwise regulated. Such a system can be used in live-assist and full automation applications.

More advanced systems place *all* recorded audio on hard disk, and originate their entire local programming from the automation computer. In this case, more than just the cart machine has been replaced. The most sophisticated concepts integrate the entire station (i.e. master control, production studio, newsroom) into a common file server system interconnected by LAN. This allows spots to be produced in the production studio and aired in master control with no recording media changing hands. Traffic assumes a new meaning at such a facility. (See "Increasing Your Audience Through Technology: Integrating Digital Workstations," June 1992.)

As with removable-media formats, some systems include provisions for data compression, thereby expanding hard disk capacity. Basic editing features are also included on most systems.

Automation systems include a switching or mixing function as well, allowing incorporation of network audio feeds. Routing and recording of incoming spots and programs to be aired later can also be handled automatically.

Furthermore, hybrid systems can be created, using elements of all of the aforementioned methodologies. For example, a computer-based automation system might employ internal hard disk storage for spots, while it controls external removable-media drives for music programming, DAT for time-shifting of satellite-delivered, long-form programs

and a RAM recorder for listener call-in lines.

### Assessing your needs

To help in your planning, ask yourself and your vendors the following questions concerning cart replacement:

- *What kinds of programming do you use carts for now?*

Do you use them for spots and breaks only, or all of your music? Consider news applications, too.

- *What kind of automation are you currently running (if any) or do you envision?*

Can/will the system easily support internal hard disk storage, or will you need to use outboard devices? In the latter case, what machine control protocols are supported by the automation system?

- *How fast is the turnover of the material you use carts for now?*

Are carts re-recorded quickly or do they stay on the shelf after recording for many months? (This addresses the applicability of multiple message-per-carrier systems, and the issue of erasable vs. write-once media.)

- *What is the typical length of program*

*segment you usually put on cart?*

(Some removable-media systems have limited record times.)

- *How big are your download/time-shift requirements for satellite-fed programming?*

(These are best handled by the more sophisticated integrated automation/hard disk recording systems.)

- *Are you a multiple operation in which the same audio material may be needed by two studios at or near the same time?* (If so, you're a good candidate for the integrated LAN/file server-type of system.)

- *How trainable are your operators?*

Can they handle the full-blown change-over to station-on-a-screen overnight, or should you take a more gradual approach?

- *What are your call-in announcement line needs? How frequently are they updated? How many calls must be handled at once?*

Your final decision will probably involve a philosophical element: Can you eliminate the tangible carrier used by familiar cart systems and replace it with unseen data from an austere hard disk? Is an intermediate step preferable? Or are you

content with audio carts as they are? Any of these are a viable choice, although the industry's direction is clearly moving away from analog toward integrated digital systems.

Transition planning also should include some ramp-up time. Carts and their replacement systems should be operated in tandem for the first month or so. If all goes well, then the trusty (or is it rusty?) carts can be retired.

Moving beyond the "if" and on to the "when" and "how" is your first challenge regarding cart replacement. Then the serious research and shopping can begin. The choices are numerous and diverse. Know what you want, and find the system that meets your requirements. Chances are it's already out there. ■

■ For more information on analog cart machines, circle Reader Service Number 302.

#### Footnote:

1. 1991 Radio Market Profile, Intertec Corporate Market Research, August 1991. (Don't blame the recession for the drop in cartridge equipment purchases — this same survey shows that overall equipment spending was up slightly for 1991.)

# FORGET ABOUT IT!

Not many products are designed to be ignored. But Thomson believes that you've got enough to worry about when you're operating a facility with both analog and digital equipment. Once your system is integrated, you should not have to think about how or where the signals interface.

Your signal converters should be out of sight, out of mind, doing their job. That's why Thomson converters are such a perfect choice. They do so many jobs so well you can easily forget they're there.



**The only converters that give you both serial and parallel digital in the same unit.** Analog to digital or digital to analog, no converters are more versatile than Thomson's.

- ▶ Each A/D converter is equipped for both serial and parallel digital output.
- ▶ Each D/A converter is equipped for both serial and parallel digital input.
- ▶ You can join two converters in one 1U frame, doubling the unit's versatility and capacity.

Now here's the catch. Because a Thomson converter is so versatile and reliable, it's easy to forget it's there. But for the very same reasons, you'll always remember it's a Thomson.

**THOMSON BROADCAST**  
**Switching America To Digital**

THOMSON BROADCAST P.O. Box 5266, Englewood, New Jersey 07631 • (800) 882-1824 • Fax (201) 569-1511  
-17, rue du Petit Albi - BP 8244-95801 CERGY-SAINT-CHRISTOPHE CEDEX FRANCE • Phone (33-1)34.20.70.00 • Telex 618780F • Fax (33-1)34.20.70.47

Circle (26) on Reply Card



OTARI

ALCANTARA UNIT  
RECORDING, AUDIO, RECORDING, RECORDING PD-454

PRODISK 404


PRODISK

OTARI

ALCANTARA UNIT  
RECORDING, AUDIO, RECORDING, RECORDING PD-454

# There are a lot of multitrack digital audio workstations out there, but only one with Otari's name on it.

Right now, it seems like everyone is building audio disk recorders. The difference is, we'll still be building them three years from now.

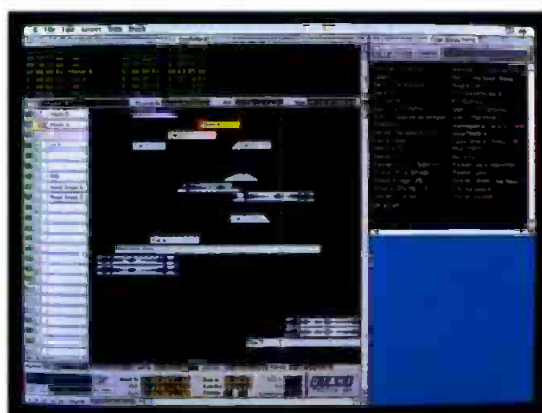

*ProDisk's new Graphical User Interface for Digital Editing (guide™) combines several windows into an intuitive, easy-to-use display. Far from just an EDL list, the relationship between all tracks is shown.*

Speaking of the future, you can be sure that ProDisk's open architecture allows for hardware, software, and storage media enhancements as they come along, and that it's plug-compatible with your current equipment. And if you're familiar with Otari's product philosophy, you know you're getting the best possible value on the market.

Most of all, you can be sure you've purchased "The Technology You Can Trust."

Call Otari at (415) 341-5900 for complete information.

Sure. Otari's new ProDisk™ 464 is the only system to give you up to 64 tracks. True, it's one of the few to use standard SCSI devices so you won't be locked-in as technology advances. But as much as we'd like to tell you about the rest of its great features, the most important thing about the ProDisk system (given the changes that are certain to occur in this technology) is the Otari name up front—a name that professionals around the world have come to trust for product support and customer service.



**OTARI**

Otari Corporation  
378 Vintage Park Drive  
Foster City, CA 94404  
U.S.A.  
(415) 341-5900  
Fax: (415) 341-7200

Circle (27) on Reply Card


Otari Corporation  
U.S.A.  
(415) 341-5900  
Fax: (415) 341-7200

Otari Inc.  
Japan  
(0424) 81-8626  
Fax: (0424) 81-8633

Otari  
(UK) Ltd.  
United Kingdom  
(0753) 580777  
Fax: (0753) 42600

Otari  
Deutschland GmbH  
Germany  
02159 50861-3  
Fax: 02159 1778

Otari Singapore  
Pte., Ltd.  
Singapore  
(65) 743-7711  
Fax: (65) 743-6430

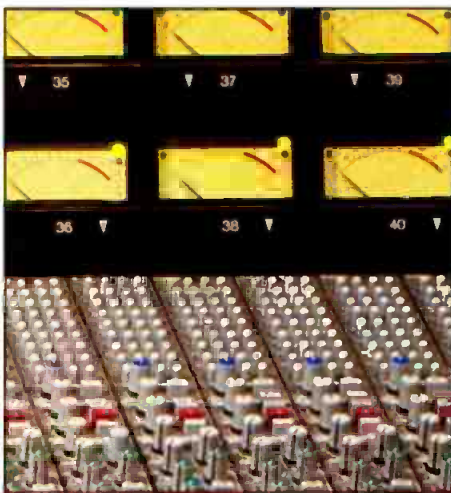

# Using DAT in the field

**DAT makes a great acquisition format — but choose your hardware carefully.**

By Flawn Williams

## The Bottom Line

*Ever since this little cassette started creeping into the broadcast world about five years ago, it's been making cleaner field recordings possible, while improving portability and cost-effectiveness. But with every new format comes inevitable early difficulties, and pioneering users have learned a lot the hard way. This article details some of the features that make field use of DAT a pleasure, and tells how to avoid some of the pain.*

\$

If you look at the current crop of recorders using the digital audiotape (DAT) format, you will see indications of its growing acceptance among users and manufacturers. From bare-bones units to full-blown production systems, DAT has found its niche as a long form, small size and low-cost option for digital audio recording.

Its small size and long recording time make DAT particularly attractive for portable recorders, either for stand-alone audio recording or for high-quality post-synched audio-for-video and film.

### DAT stats

DAT uses a 4mm tape loaded in a self-enclosed housing, similar to a videocassette. Commercially prepackaged tapes are available in lengths up to two hours, but the cassette shell can actually accommodate two hours and 20 minutes of tape. If that extra 20 minutes of uninterrupted recording is important to your recording needs, contact a custom loading company to buy 140-minute DAT tapes.

All of the tapes currently marketed for audio applications use the same thickness of tape stock, so no ruggedness or fidelity is traded off for longer recording times, unlike analog recording media. On a cost-per-minute basis, the 2-hour tapes are cheapest. But if you're doing a lot of short recordings, you may find it less confusing and time consuming in post-production to use separate cassettes of shorter lengths.

Some recorders offer a half-speed record/play option, which doubles the amount of time on a tape, but uses a reduced sampling rate (32kHz instead of 44.1kHz or 48kHz) and lower resolution (12 bit instead of 16 bit). This translates into reduced high-frequency response and a lower signal-to-noise ratio. If you're getting into DAT for high audio quality, this is not the best way to economize. However,

if size and uninterrupted record time are primary concerns, and analog audiocassettes provide adequate audio quality, extended-play DAT may be for you.

DAT has also been adopted by the computer industry for data storage. Sixty-meter length data tapes that are sold in the computer stores are the same as 120-minute audio DATs. These data DATs use a slightly higher-quality tape and cassette shell than the typical audio DAT, and are reportedly subjected to tighter quality control, in deference to the lower error rates required by computer data. Computer DATs of 90-meter length are also available (using thinner tape), which theoretic-

---

***Some recorders offer a half-speed record/play option, which doubles the amount of time on a tape.***

---

cally could hold three hours of audio information. To date, no manufacturer of audio DAT recorders has recommended the use of this non-standard tape stock for audio purposes.

### Getting audio onto DAT

Like videotape, the DAT cassette is opened after insertion in the recorder and a loop of tape is pulled into contact with the heads. A helical-scan head drum writes or reads diagonal lines of magnetic data on the tape. (See "DAT in the Professional Environment," August 1990.)

Most of this information is digital audio data, but some of the tape is set aside for

Williams is a technical producer and trainer for National Public Radio, based in Chicago.



## **WE MAKE IT VERY, VERY HARD TO BLAME IT ON THE TAPE.**

While we can't fix all your problems, we can make sure 3M tape isn't one of them. You get consistently high quality in every audio and video format. And flawless support from the people who know more about tape than anyone. **We won't be satisfied until you are.**



3M Professional Audio/Video Products Div.  
3M Center, St. Paul, MN 55144  
36USC380 ©1992 3M

**3M** |   
Worldwide Sponsor 1992 Olympic Games

Circle (28) on Reply Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

the so-called *subcodes*, where location markers and other descriptive messages about the audio can be stored. More important, subcode data can be erased or rewritten separately from the audio data by most recorders.

The audio data for the original DAT standard is sampled at 48kHz, but many professional DAT decks (and some recent consumer models) can record at either 44.1kHz or 48kHz sampling, from either digital or analog sources. Your application will determine which rate is more suitable. If no direct digital transfers to or from CD are anticipated, 48kHz is usually the better choice.

#### Microphone input options

Most DAT decks intended for in-studio use do not have microphone inputs, because they are expected to be installed in an analog line-level or digital I/O environment. On the other hand, all *portable* DAT decks — from the smallest pocket-size models to the briefcase-size, full-featured machines — include microphone inputs. Beyond that, however, other decisions must be made regarding your needs. (See Table 1.)

- *Balanced or unbalanced.* Lower-cost machines often use unbalanced microphone inputs, either on separate 1/4-inch phone jacks or a single tip-ring-sleeve mini-jack. These leave you more vulnerable to RF interference and hum or accidental unplugging. The mini-plugs are not rugged enough to withstand the rigors of long-term field use. Other recorders offer a pair of 3-pin XLR input jacks or a single 5-pin XLR input for stereo-balanced microphone inputs.

- *Microphone powering.* Many of the best microphones for field work are condenser types that need phantom or Tpower. Only a few of the most expensive DAT decks offer this as a built-in feature. With the others, you'll need an outboard power supply, which increases the complexity of the cabling and requires another battery. If you're feeding an unbalanced mic input with an outboard-powered condenser microphone, the mic power supply

must have blocking capacitors on its signal outputs. If not, the unbalanced input will short out the supply voltage, and the microphone will not be powered.

- *Sensitivity.* Your DAT's excellent dynamic range may be wasted if your microphones don't have enough output power to drive the inputs, or if the signal is strong enough to drive the microphone pre-amps into clipping.

If you're recording distant, quiet sounds with dynamic microphones, then the pre-amps of the DAT may add significant noise to the signal. In this case, buying higher-output microphones, buying a top-of-the-line DAT deck with the cleanest input gain structure, or switching to an outboard microphone pre-amplifier of higher quality would be best.

If you anticipate having hot signals from

---

### *DAT's ability to provide index marking and time coding of tapes may be an advantage.*

---

close microphone placement, or you are working with extremely loud sounds and/or high-output microphones, then some type of attenuation may be needed before the signal reaches the DAT's pre-amps. Most DAT portables offer some sort of switchable pad for the microphone inputs, usually 20dB or 30dB.

Because many of these machines lack state-of-the-art pre-amps, you may be faced with a tough choice. With the pad *out*, you run the risk of occasional distortion. But with the pad *in* and gain brought up to compensate, the pre-amplifier noise may rise to intolerable levels. If you want to compromise with more moderate attenuation, for example 10dB or 15dB, you'll have to buy microphones that have pads of this value built-in, or buy in-line XLR attenuator barrels. Some outboard

microphone power supplies also include switchable attenuation.

- *Mono or stereo.* All DAT recorders are stereo. Unlike their open-reel competitors, they cannot be configured to double their recording time by using only one channel at a time. A few models are easy to use as mono recorders. On these, flipping a switch can route the signal from one microphone jack to both recording channels, and allow monitoring in both ears on stereo headphones.

Some machines include a more ingenious mono mode. The input from one microphone is routed to one channel at normal level, and simultaneously to the other channel at a level 15dB lower. This allows levels to be run less conservatively. If you distort the louder channel, then you have another independently encoded mono channel 15dB quieter as a backup. (This sort of split configuration can be accomplished on other DAT decks by using a Y-adaptor and an in-line attenuator on one side of the Y's output.)

#### Handling other inputs and outputs

DAT recorders also may be required to handle line-level analog inputs in the field, typically from a wireless-microphone receiver, mixer, outboard microphone pre-amp or another recorder. Less-expensive decks offer unbalanced line inputs on RCA jacks or a stereo mini-jack. Higher-priced machines will accept balanced line-level inputs, often sharing the microphone inputs' jacks and using a line/mic input switch.

Most DAT decks select line or mic level for *both* left and right inputs with one switch. On these decks, if you need to record a microphone on one channel and a line-level signal on the other, you'll need some external means of padding the line-level signal down to mic level.


In order to keep portable decks' size and cost down, analog line outputs are often unbalanced only, on RCA or mini-jacks. Manufacturers assume that critical playback will occur in the studio environment on another deck. Similarly, D-to-A conversion is not of ultimate fidelity on some

| INPUT                                                                                                 | DISPLAY / CONTROL                                                                                                                  | OUTPUT                                                                                                                     | POWERING                                                                                                                                     |
|-------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| Mic/line<br>Balanced/unbalanced<br>Mic powering<br>Mic attenuation<br>Mono/stereo<br>Dig. input, type | Start IDs<br>PNOs<br>Skip IDs<br>Erase/Write/Renumber<br>Error IDs<br>Absolute time<br>Program time<br>SMPTE time code<br>Metering | Balanced/unbalanced<br>Dig. output, type<br>Monitor speaker<br>Confidence replay<br>Monitor selection<br>(L/R/St/Mono/M-S) | Alkaline/rechargeable<br>NiCad/lead-acid<br>"Bridge" battery<br>Charge in/out of deck<br>Ext. AC supply<br>Ext. DC conv<br>Ext. battery pack |

**Table 1.** Issues worth exploring when choosing portable DAT equipment.

# Satellite Splatter

**The Cause:  
Over  
Modulation  
from  
Pre-Emphasis**

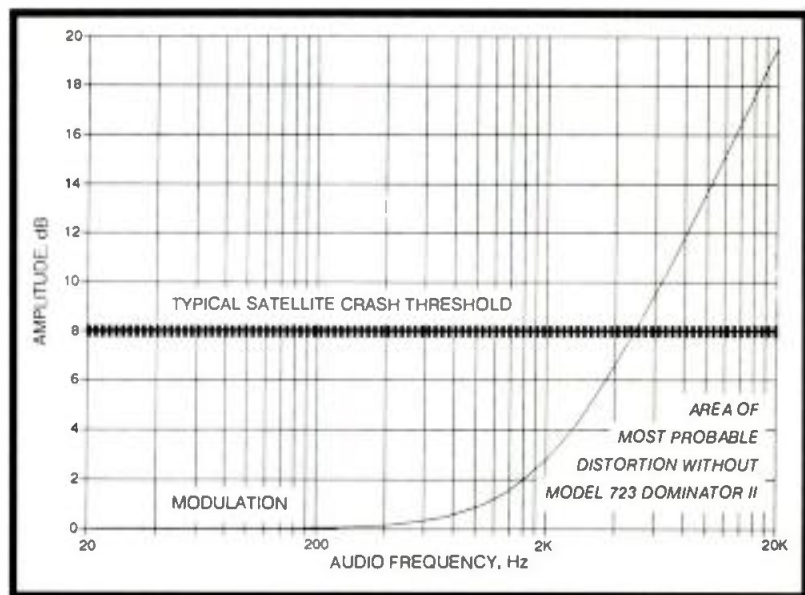

**The Cure: Aphex® Dominator™ II**



The Dominator II Model 723 is the ideal transmission limiter. It provides absolute "brick wall" limiting, while maintaining maximum loudness without distortion. And since the Model 723 has built-in Pre- and De-Emphasis it keeps the modulation

under perfect control ... completely eliminating splatter in satellite, STL, microwave or digital transmission. Contact us today to receive more details on the answer to your transmission problems.

**APHEX**

SYSTEMS 11068 Randall Street ■ Sun Valley, CA 91352-2621 ■ (818) 767-2929

Aphex is a registered trademark of Aphex Systems Ltd. Dominator is a trademark of Aphex Systems Ltd.

Circle (29) on Reply Card  
[www.americanradiohistory.com](http://www.americanradiohistory.com)

portable decks.

### Connecting to the outside world digitally

The shortcomings of the analog outputs can be bypassed by using the digital output that most DAT portables offer. This allows the signal to be decoded through a higher-quality outboard D/A converter, or to make a direct digital interconnection or transfer to another device. Some portables offer digital *outputs* only, but most of them also have some option for digital inputs.

You may be aware of the bitter history of differing digital interconnect standards, copy-protection schemes and other sources of incompatibility. So if you're planning on making direct digital connections to or from a DAT recorder, check the details of its digital ports carefully. The two most commonly found digital ports are AES/EBU (on XLR-3) and S/PDIF (on RCA jacks). In both cases, a single connector serves both stereo channels.

If you can get a pair of decks that work properly together, the S/PDIF link may be more useful than the AES/EBU. Some machines can transmit and receive subcode markers, such as start IDs and program numbers along with the audio data on S/PDIF, but only the audio data can be passed through the AES/EBU links.

### Powering DAT in the field

The best equipment in the business won't be any good if you don't have the power to run it. This is one of DAT's major weaknesses compared to other audio recording formats.

The helical-scan head drum, multiple tape drive motors and high-speed digital circuitry add up, making the DAT power-hungry. Although all portable DATs offer some option other than mains powering, their practicality and cost vary widely. If your needs involve a lot of self-powered recording, then read on and plan carefully.

- **Batteries.** A few DAT portables can run off large numbers of alkaline C or even AA cells, but they will exhaust these batteries quickly. Most rely on some kind of proprietary, removable NiCad or lead-acid rechargeable batteries. Depending on the machine and the battery, these can last from 40 minutes to two hours in reasonable weather, and less in cold weather. You'll probably need to change batteries more often than you change tapes.

Multiple rechargeable batteries can be used to accomplish longer field-recording assignments. In most cases, however, this means interrupting the recording while you change batteries.

Some of the decks that have an alkaline-

battery option can do long *uninterrupted* recordings on battery power, because they allow you to switch from NiCad to alkaline power for a few moments, change NiCad packs, then switch back to the NiCad source. The alkaline "bridge" batteries can handle many changeovers before being depleted.

Although some portable DAT batteries can be recharged on external chargers, others must be inserted in the DAT deck for recharging. The least practical decks will not recharge their internal battery while operating on line power — the decks must be turned *off* in order to recharge the batteries inside.

### External power supplies

If your work requires long hours of battery-powered operation, then a power belt or some other type of external DC source will be a better solution. The power pack may weigh more than the deck it's powering, but the grief saved is worth the weight.

Make sure you select a DAT recorder that has some provision for accepting external DC power, and then pull together the necessary charger and cells to make a power system. To date, few DAT manufacturers are marketing dedicated powering accessories for their machines, so

## This is no way to design a digital STL.



some hunting will be necessary.

The most practical common denominator will be a DAT deck that accepts 12VDC from the outside world, perhaps through some sort of proprietary DC-DC adapter. Then you can choose from a wide range of generic external power options developed for video, film and lighting gear, which offer 12V outputs on car cigarette-lighter-style sockets.

#### Location markers and other subcode options

When the DAT standard was established, an important feature was its ability to put extra data in *subcode* form. At the time, many possible (but unspecified) uses were foreseen for subcode in the expected consumer incarnation of DAT — locating songs, lyrics and other graphic displays, timing data, and so on (similar to the CD format and its offshoots). Therefore, a margin of undesignated flexibility was built into the DAT standards for subcodes.

Since then, consumer DAT has metamorphosed into professional DAT. Each manufacturer has taken that range of subcode flexibility and branched off in a different direction. Some features have become standardized in an ad-hoc manner, but some shocking inconsistencies still ex-

ist from maker to maker, and even from model to model from the same maker.

The following is a rundown of some of the subcode features offered by current DAT decks:

- **Start IDs.** This is the most basic subcode feature. This electronic marker can be located in fast-wind mode. Most DAT recorders will write a start ID each time the deck is placed into record. Some also offer an audio level-sensing trigger to write a start ID each time a few seconds of silence is followed by a loud signal during recording. An unlimited number of start IDs can be placed on a DAT tape, although each ID takes about nine seconds to write, so two successive start IDs cannot be placed closer together than that. Many DAT decks have trouble reading start IDs (in fast wind) that are less than 30 seconds apart on the tape.

- **Program numbers.** Commonly abbreviated as *PNOs*, these are similar to start IDs but also encode a discrete identifying number. Up to 99 such numbers can be put on a single tape. Just as track/index numbers on a CD, they can be used to mark and locate passages on the tape by number. Here, at least 30-second spacing is required for reliable locating.

- **Skip IDs.** This subcode marker tells the deck to fast-wind to the next start ID or PNO. It is useful for programming selective dubbing or listening after a tape has been recorded.

- **Erase, write and renumber.** The earliest generation of DAT portables lacked the ability to change the subcode contents after recording. Manufacturers assumed these functions would be performed on studio machines, not out in the field. However, most newer portables offer a full range of subcode marker editing options.

*Erase* allows you to remove a previously written start ID, skip ID or PNO. *Write* lets you add a new ID to a previously recorded tape. *Renumber* starts at the beginning of the tape and assigns (or reassigns) consecutive PNOs each time it finds a start ID (or existing PNO), up to 99 per tape.

If you think you'll be renumbering PNOs often, determine how long a particular model takes to perform this task. Although it's a fully automatic process requiring no user intervention beyond pushing the renumber button, some machines do it much faster than others.

- **Error IDs.** Many of the more expensive

## However, *this* is.

Introducing the new Dolby DSTL™.

It's the world's only digital STL designed from the ground up to combine high quality audio coding with sophisticated digital modulation and ultra linear RF sections. This results in extremely high audio quality, significant advances in spectrum efficiency, and unparalleled freedom from interference and fade that only a systems approach can accomplish. Add-on schemes yield compromises that just won't fly in the end.

For further information, contact your Dolby DSTL distributor, or Dolby directly.



Dolby Laboratories Inc. • 100 Potrero Avenue, San Francisco, CA 94103-4813 • Telephone 415-558-0200 • Facsimile 415-863-1373 • Telex 34409  
346 Clapham Road, London SW9 9AP • Telephone 071-720-1111 • Facsimile 071-720-4118 • Telex 919109  
Dolby, DSTL, and the double-D symbol are trademarks of Dolby Laboratories Licensing Corporation ©1992 Dolby Laboratories Inc. S92/9516

Circle (30) on Reply Card

DAT decks have four heads rather than the usual two. This allows off-tape monitoring during the recording process (read after write). By adding a data comparator, some 4-head decks can detect occasions where the data coming back from the tape differs from what was entered. The deck can then write an error ID marker at those points.

After recording, you can search to each error ID, and playback to see if the error was significant enough to cause audible problems. This is an extremely useful feature, but for now it is only available on the more expensive machines.

### Time code

DAT is inherently stable when it comes to record/playback timing. However, many users need a particular unique time code locked to their audio recording for synchronizing it with video, film or other audio decks.

Time code has been a long time coming to DAT decks, but it has finally arrived. A few top-of-the-line portable decks can now record SMPTE time code of any necessary rate and format, using a recently accepted, retrofitted standard that emulates SMPTE data in DAT subcode. These decks can accept external code or generate their own, and sync to external word clocks (digital house sync) or supply their own to the outside world. At present, the universe of portable DAT decks offering SMPTE time code is still small and expensive.

For users who need to locate and time particular sections of a tape precisely, but don't need the actual chase/lock or other synchronization possibilities afforded by SMPTE, there is a subcode feature called *Absolute time* (or A-time). This records in the subcode the elapsed time from the beginning of the cassette. A companion feature offered on some decks is *program time*, which shows the elapsed Absolute time since the last PNO number.

A-time is touted by some as "the poor man's time code," and the features available on some mid-priced studio decks make that description apt. You can search to a particular point on the tape by punching in the A-time location on a keypad. More synching and editing features using A-time are promised for the future. Few portables on the market have A-time *search* features built in, but many of them — including some of the cheaper consumer decks — now *write* A-time on their recordings. This makes those tapes easier to use in post-production with studio machines.

Beware of the visual tape-timing displays on DAT decks that are *not* using A-time or SMPTE time code. Those displays are often just estimations of timing, based on counting revolutions of the feed and take-up spools and calculating time from that. These displays can be grossly inaccurate,

particularly when rewind or fast-forward is used, even though the time stability of the audio on the tape is almost perfectly accurate.

### Environmental factors

Like all recorders using rotary head technology, DAT portables have an interesting physiology that includes three potential areas of weakness. They are affected by *temperature*, *humidity* and *contamination* from dust or other foreign matter.

Temperatures below freezing can cause DAT batteries to emit less power, and have a much shorter useful running time. Extreme cold can cause increased shedding of particles from the tape, which can cause head blockages. But the most common problem in cold weather involves conden-

---

## *DAT is inherently stable when it comes to record/playback timing.*

---

sation on the head drum when a DAT recorder is brought in from the cold to a warmer, more humid indoor environment. Moisture on the head drum can cause the tape to stick to the drum. The most expensive portables compensate for this with heaters in the head drums. Others simply shut down. Some decks issue a "moisture" message under these conditions.

A DAT recorder's digital circuitry radiates a good deal of heat. This is an advantage in cold weather, but in hot environments, if the recorder is kept wrapped in an insulating case or bag while running, temperatures can reach dangerous levels. Above approximately 140°F, the base film of the tape can deform, and the shell may warp.

Any foreign matter, such as dust, moisture, salt spray at the beach or coffee spilled on the machine, can wreak havoc on a DAT. A format with this high of data density must have consistently good tape-to-head contact, and any foreign matter or crinkling of the tape will lead to dropouts or tape transport shutdown.

Look for recorders that offer *double enclosure* (two sets of doors over the tape insertion point), to minimize the chance of dirt reaching the head drum inside. Or plan on keeping your portable DAT in a shoulder bag or other insulating case when using it outdoors.

Most of these precautions are the same ones you should use with open-reel or cassette recorders in the field. In general, DAT should be considered slightly more sensitive than earlier formats.

### Monitoring

Some DAT portables offer a built-in monitor speaker (typically of low fidelity), but all of them include reasonably high-quality headphone outputs.

However, there is a wide variation in what can be monitored through headphones. Most decks offer only straight stereo monitoring: left channel to the left ear and right channel to the right one. But other options can be helpful in the field, such as the ability to sum stereo to mono or listen to just one channel through both ears.

On decks that don't offer confidence (off-tape) monitoring, it is wise to perform a trial recording and playback after every loading of a DAT tape. Occasionally, loading will not be properly accomplished, yet the recorder will seem to be operating normally. Upon playback, the recordist may be horrified to find nothing on the tape. If improper loading is detected during a test recording, reloading the same tape in the same deck may clear the problem. But if another tape is handy, use it instead. After returning to home base, check the suspect tape and the deck's loading mechanism — either one could be the culprit. (See "Troubleshooting: DAT Maintenance," Parts 1-6, March-August 1991.)

### Hit the road

Any portable DAT deck can make excellent field recordings with the right accessories. The first portables to reach the market cost approximately \$2,500. Today, the bottom end of the range has dropped 75% below that, and the top end has gone up about 400%.

The less-expensive machines offer simpler controls and therefore fewer possible errors in a basic recording situation. What the more expensive decks offer is greater flexibility, confidence (through off-tape monitoring), ruggedness, dependability in climatic extremes and time-code synchronization. They also offer high-quality analog and digital performance in a variety of recording scenarios, without having to resort to endless chains of outboard gizmos.

On balance, DAT offers a cost-effective and extremely high-quality field acquisition format that is appropriate for many applications. If it turns out to be right for you, you'll wonder how you ever got along without it.

■ For more information on portable DAT equipment, circle Reader Service Number 303. ■

**Totally in sync with your needs.**




### **Sony PCM-7000 Series Time Code DAT Recorders**

Film and video professionals agree that DAT is rapidly replacing 1/4" analog tape as the standard audio interchange format—it's faster, smaller, more economical and provides superior sound quality.

And now the leader in DAT technology brings you the PCM-7000 Series, professional DAT recorders that offer time code recording and sophisticated serial control for the most advanced electronic editing.

Whether you're involved in video post production under editor control, audio sweetening configured with built-in chase synchronization or on-air broadcasting requiring instant-start and variable-speed playback, the PCM-7000 Series DAT recorders will keep you totally in sync. For more information, call the Sony Professional Audio Group at 1-800-635-SONY, ext. 7050.

**SONY**

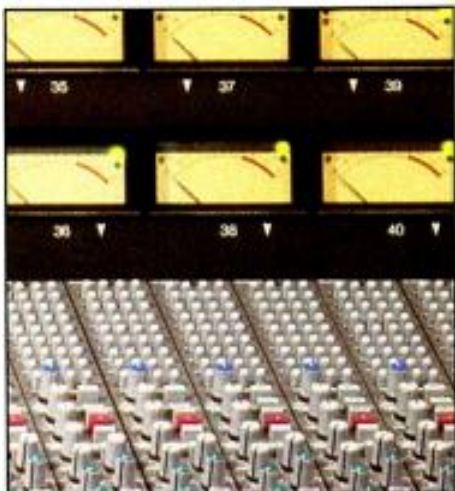

# Digital radio update

Tomorrow's radio is taking shape today, but much still hangs in the balance.

By Skip Pizzi, technical editor

## The Bottom Line

*The clouds in the crystal ball are breaking up as radio's future begins to form. Around the world, broadcasters wait with expectation — and some trepidation — at what lies ahead. Tomorrow's possibilities for today's broadcasters could fall anywhere between massive windfall and abject ruin. Keeping up-to-the-minute with where technologies stand is the only way broadcasters can remain in advantageous positions during the coming transitional times.*

\$

Like a growing child, digital radio seems to be developing in fits and starts, and moving in many different directions at once. Like that child's parents, broadcasters are worried. During the last year, enough progress has been made by various players to cause considerable concern about future worldwide (and perhaps even intracontinental) compatibility, and about the viability of today's broadcasters in the digital age.

In terms of formats, the pioneering *Eureka 147/DAB* system continues to find favor in Europe and Canada, while in-band systems from *USA Digital* and *Strother/LinCom* lead the pack in the United States. The divergence doesn't stop with formats, but also includes frequency bands. (See Figure 1.) Although in-band systems by definition use existing AM and FM bands, *Eureka 147* will be implemented in new spectrum. And even though the World Administrative Radio Conference (WARC-92) held in Torremolinos, Spain, last February and March defined a worldwide standard at L-band (1,452-1,492MHz) for digital radio use, deviation from this standard has been declared by the United States, the former Soviet Union, Japan and other nations. (See "re: Radio," June 1992.) These countries have opted for higher-frequency allocations in the S-band (2GHz) region.

Further confusion exists in Europe, where plans call for an interim VHF terrestrial application of *Eureka 147* in existing TV broadcast spectrum. This would be followed after 2007 by direct satellite and terrestrial use of *Eureka 147* at L-band.

In the Western Hemisphere, Canada has jumped out in front with a simpler approach: L-band terrestrial broadcasts will begin this fall, using *Eureka 147*. Direct

satellite broadcasting will begin after 2000, using the same format and spectrum.

Complicating this is the U.S. government's prohibition of L-band application of digital radio, citing that spectrum's continued use for aeronautical testing by military and other users. How Canadian L-band allocations will be dealt with by U.S. authorities remains an open question.

Although previous debate on the power requirements for L-band applications was settled by definitive Canadian tests during 1991, the actual power needed for S-band digital radio remains untested. This is now an important issue for those countries that have adopted S-band as their preferred allocation. Theoretical extrapolations indicate that four times the power required for equivalent FM coverage would be needed for terrestrial S-band application of digital radio, but this has not been empirically confirmed.

## In-band developments

At present, all eyes are upon American in-band digital radio developers. Their work shows tantalizing progress, but more testing is required before these systems can be said to work reliably and comprehensively. FM and AM in-band developments continue, although FM is further along. On-channel (AM and FM) and adjacent-channel (FM only) systems are under study.

If in-band development should bear fruit, the impact will be significant, but not only in the United States. The planned transition methodologies for digital radio abroad are not without their critics in those countries, and an in-band solution might prove advantageous there as well.

Presently, laboratory tests of the two in-band systems mentioned previously have

ing plain paper fax,  
 Sharp Thinking.  
 nking just created a unique  
 y affordable, high-technology plain  
 that have everything:  
 e laser resolution, and automatic  
 hing. Ultra-fast transmission time.  
 al access and memory function.  
 o double as a high quality PostScript®  
 laser printer.  
 ur exclusive Sharp FAST program option

**For more information call:**

**SHARP**  
FROM SHARP MINDS  
COME SHARP PRODUCTS

[www.americanradiohistory.com](http://www.americanradiohistory.com)

been successful. USA Digital has reached the Beta stage in receiver development with a VLSI decoder chip prototype for its FM system. Both proponents made impressive demonstrations of their systems at NAB '92. These companies also plan over-the-air testing with fixed and mobile receivers as their next developmental milestone, perhaps by this fall.

### The satellite situation

The greatest concern to existing broadcasters regarding digital radio has always been the possibility of its direct broadcast satellite (DBS) application. Although this potential still exists, it appears certain to be a second-wave implementation, lagging behind terrestrial applications by as much as a decade. Under many plans, satellite systems will require a different receiver from the one used for terrestrial digital radio (or at least some additional converter hardware). Canada is a clear exception, with a plan that implements a single receiver for terrestrial and satellite digital radio from the outset.


In the United States, satellite systems have taken a back seat in development for domestic application, but *Satellite CD Radio* (SCDR) and *Radio Satellite Corporation* (RSC) are still officially on the books as DBS digital radio proponents. (SCDR has taken a wait-and-see approach while terrestrial developments unfold, and RSC has been involved in a regulatory and legal entanglement.) On the international front, however, *USIA/VOA* and *Afrispac* are steadily moving forward with their plans for DBS audio services to markets outside the United States.

Concern over the potential impact of DBS services has not subsided among U.S. broadcasters, especially since the introduction of digital cable audio services. The surprisingly positive results reported in some test markets by these services and their customers (even as a *wired* delivery method) have given the radio industry an inkling of what impact DBS audio services might have.

### Standard-setting activities

The industry's best hope of successful digital radio implementation lies with the timely establishment of standards. As with any such enterprise, timing is critical, so that the standards are set neither too soon nor too late. To this end, two bodies are currently at work on standardizing digital radio formats: the Electronic Industries Association (EIA) and the International Consultative Committee on Radio (CCIR).

The EIA, a trade association of electronics manufacturers, has established a Digital Audio Radio (DAR) subcommittee to undertake standard-setting for that industry. The subcommittee includes broadcast representation, and has set an ambitious schedule. Nevertheless, the active digital

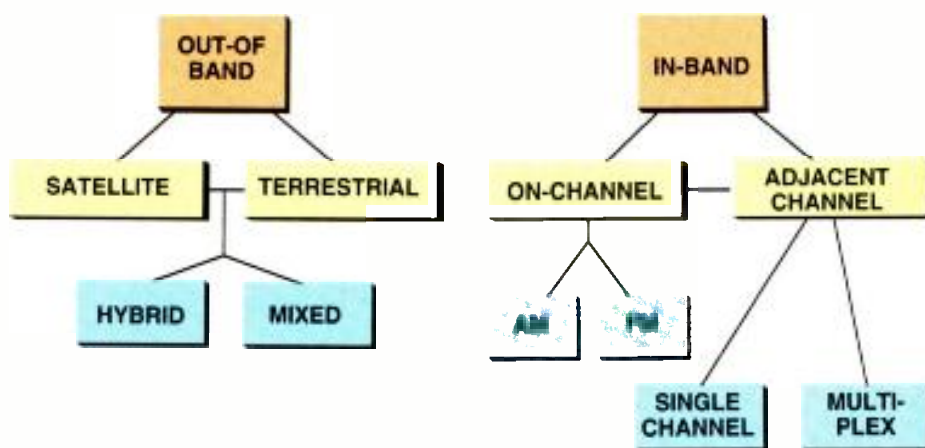

**Figure 1.** A tree of the different format types proposed for digital radio. Out-of-band requires new spectrum, while in-band uses existing broadcast frequencies. Hybrid satellite-terrestrial systems include low-power, ground-based gap-filler transmitters for satellite signals. Mixed systems include satellite and terrestrially originated channels in the same band.

radio proponents in the United States have all agreed to abide by it. The CCIR has an only slightly more conservative approach, running about six months behind EIA's.

The actions of these groups will have tremendous impact on the industry, which currently contemplates a worst-case scenario of a half-dozen or more different receiver types worldwide. If EIA and CCIR narrow this down to one or two formats, digital radio could become a mainstream reality before the decade's end.

On another front, the bit-rate reduction algorithms proposed for *source coder* use in digital radio broadcast systems continue to undergo testing by various entities worldwide, even as new systems and refinements are introduced. No clear consensus has emerged on a unified format of choice, but one is certain to be defined as part of any broadcast standard.

### On the business side

Problems of AM/FM parity, shared-carrier dislocation and control, licensing procedures and cost/benefit ratios still exist (see "Digital Radio: The First Five Years," July 1991), but these must all be considered secondary to the choice of standard format. Because some of these issues are format-dependent, some will be

decided de facto upon format selection. Other remaining issues can then (and only then) be worked out in the standard's detail.

Meanwhile, broadcasters are beginning to sense the new opportunities that digital radio service might provide. Besides improved audio fidelity to help compete with recorded and cable-delivered formats, digital radio might offer an increased number of channels to better accommodate the niche programming trends that may lie ahead. (Channel ownership regulations and broadcast rights fee structures will require amendment before that scenario can become viable, however.) The most untapped potential may lie in *datacasting*, the transmission of multiple channels of data in the excess capacity of the digital radio broadcast channel. (See the related article, "Datacasting — Profit Center of Tomorrow?" below.)

As all this detail transpires within the industry, interest is starting to grow among the world's general public for what digital radio may have to offer. Right now, the stakes are high and the pace is quick. Much that is currently undecided will be cast in stone soon. Let the faint of heart be forewarned: The next two to three years will define the future of radio for generations to come. ■

## Datacasting — profit center of tomorrow?

By Robert D. Culver

Since the earliest days of digital radio discussions, every proposed format has included a specification for *auxiliary data*. However, only vague ideas of how this could be used have been presented, with the majority of interest natu-

rally being focused on the main audio channel's performance.

Auxiliary data capacity is available on most systems because of the difference between the peak and average data bandwidths required by bit-rate reduced digital audio signals. The actual data rate required for audio programming will

*Continued on page 85*

Culver is a consulting engineer for Lohnes & Culver, Washington, DC.

"WE PAID  
AD THAN  
OUR PR

MORE FOR THIS  
YOU'LL PAY FOR  
PRODUCT."

NV1000



**DIGITAL AUDIO  
TERMINAL EQUIPMENT**


NV1000—a new trend in terminal gear. Up to twelve different modules for A/D - D/A signal conversion, plant distribution, and synchronization may be installed in one compact 2 RU frame.

Available *now* for all your digital audio applications.  
NVISION. Specializing in affordable solutions.

**NVISION®**  
AUDIO PRODUCTS DIVISION

NVISION, Inc.  
P.O. Box 1658  
Nevada City,  
California 95959  
Tel.: 916.265.1000  
FAX: 916.265.1010

Circle (32) on Reply Card

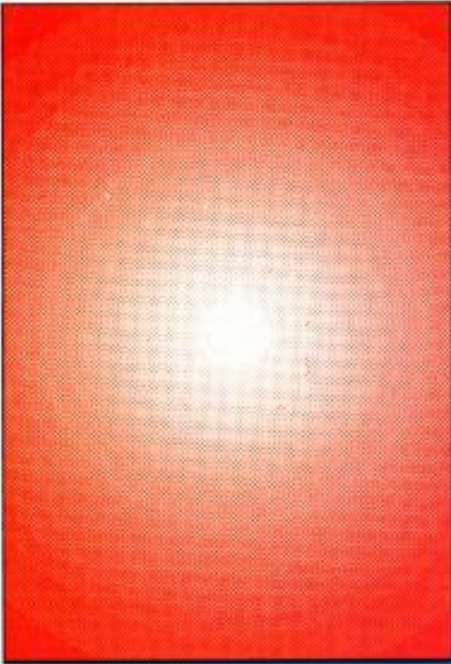

# Video production switcher up

Switchers lead the way in integrated control

By Andy Sheldon

## The Bottom Line

*Efficiency in the workplace can translate into a more profitable operation. Many production facilities today have equipment configurations that are not as efficient as they could be. Integrated control systems that allow the entire production environment to be simply and logically controlled from one location can offer more rewarding solutions.*

\$

The broadcast and teleproduction market is constantly bombarded with products designed to make life simpler for the operator. With a few exceptions, these systems perform a single function. Each has its own separate control system—with its own operating system and interface. Meanwhile, editors and producers have tried to gain more control over the myriad devices of the editing or production environment, but no systems could control all of the variety of equipment from different manufacturers.

Today, that is beginning to change. A new generation of digital disk-based switchers exists that can provide integrated control over a complete editing or production environment. Such switchers may oversee more than 30 peripheral devices, including routers, frame buffers, time base correctors, camera robotics, VTRs and audio recorders.

### The need for integrated control

Although a separate control system may be the "optimum" for some devices, each has a unique operating system the operator must learn. Each user interface has its own control anomalies and visual feedback methods. Obviously, a good deal of time and expense can be involved in operator learning curves and control system design.

Many systems use separate CRT monitors to display all of the information needed to operate the device. In a modern facility, edit bay or production environment, a monitor wall is almost essential to display control system feedback for the devices in the room. Coupled to these are dedicated control panels, each occupying a piece of real estate on the console. It is not uncommon to find sprawling edit bays

with every inch of counter space filled with control panels and displays.

Dealing with all of these devices comes quite cumbersome and inefficient, and it poses a problem for the operators—they must trolley back and forth to operate each piece of equipment. Continual switching of operations from one control panel to another wastes time.

Apart from the obvious physical liabilities of numerous separate systems, related drawbacks crop up when storing effects, configurations or other data. Many man-

---

**Switchers can provide integrated control over a complete environment.**

---

ufacturers use inexpensive floppy disks for data storage archiving. Many jobs end up with four or five floppies each. Without appropriate labeling, numerous disks become inefficient.

Video and audio standards provide program interconnection between system pieces, but a similar standard does not yet exist for the control interface. Recommended SMPTE practices may connect the video switcher controls to a computerized editing system, VTR controls to editing systems or digital special effects systems to video switchers. However, few of these systems provide control over the whole environment. Many systems specializing in control, such as videotape editor controllers or station automation packages, probably control only a small subset of a controlled device's functions.

Sheldon is product manager for Abekas Video Systems, Redwood City, CA.

# Introducing a value-packed platform for waveform/vector monitoring.



## See it. Believe it.

You can expect more from your next waveform/vector monitor — more performance, more convenience, more value — now that the 1740A, 1750A and 1760 Series from Tektronix have arrived.

An intuitive user interface, streamlined front panel and outstanding display capabilities — all in a half-rack package — make up a new platform for future products to follow. The platform is built on actual input from TV engineers — people whose time is too valuable to be spent learning and re-learning equipment.

Eight video input channels, 12 user presets, waveform and vector cursors, time code display, stereo audio phase monitoring, full field line select and a host of other features are easy to put to work, without slow, hierarchical menus or ambiguous results. You can even view actual pictures at the push of a button.

The 1740A Series offers all this and much more. The 1750A Series adds SCH phase

monitoring, and the 1760 Series provides capability for component TV.

Each series includes NTSC, PAL and dual standard monitors — all with an unsurpassed 3-year warranty.

### Seeing is believing.

Just call your Tek representative to arrange a demonstration — get a closer look at the quality Tek delivers in a new platform for waveform/vector monitoring.




**Tektronix**

Television Systems

Copyright © 1992, Tektronix, Inc. All rights reserved. TVG-121

Circle (33) on Reply Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

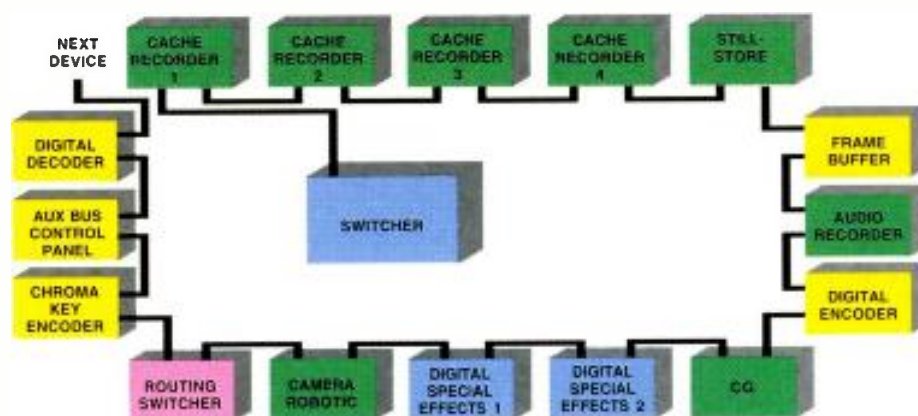

**Figure 1.** Integrating control of the entire edit suite is possible with some of today's new digital switchers. A switcher with control protocol ties external device time lines to the switcher's reference for recalling, previewing and running effects, and delegates functions on the switcher control panel to the peripheral so its control may be partially or completely integrated into the switcher control system.



Start Routing D2 for Less Than \$6,000,  
Then Grow As Far As You Like.



**DYNA MITE Idea.**

Don't be fooled by its compact size. DYNAIR's DYNA MITE is much more than a versatile, inexpensive, D2 broadcast and production router.

Not only is it available in serial D2 for less than \$6,000, DYNA MITE is so flexible it's also available in Hi Res, RGB, Component, HDTV, NTSC or PAL video, and wide band TC, with two level control. Built-in control panel with readout is standard.

But don't stop here. This modular little DYNA MITE system can grow from 10 x 10 to 20 or 30 x 10 video, audio, or 10 x 10 audio/video in only two rack units. Want a lot more switching power? Expand from DYNA MITE to board interchangeable DYNASTY, our top-of-the-line 1000 x 1000 switcher.

And if analog is your interest, imagine a 10 x 10 40 MHz video/audio switcher with local control standard for less than \$6,500. No one else can touch that.

We've been building our indestructible switchers for over 35 years. Call **1-800-854-2831** to learn about DYNA MITE staying power.

**DYNAIR**

**DYNAIR Electronics, Inc.**

5275 Market St.  
San Diego, CA 92114



Circle (34) on Reply Card

Obviously, more than consolidation of control panels is needed. Reducing the time and expense involved in operator training on multiple control systems is also essential. But most important, there's a need to give the operator all the information and systems required to do the job as efficiently as possible.

#### Configuring an integrated control system

Because most systems now include computers, the technology exists to provide integration. For any form of integrated control to be useful, it must meet two basic constraints: 1) It must have an interface that is flexible in type and number of controlled devices; and 2) It should have an interface that is easy to implement from the standpoint of other manufacturers.

It's difficult to interconnect products from several manufacturers or existing station devices unless such equipment follows standard recommendations. Many manufacturers now incorporate an RS-422 interface in their equipment; RS-422 has replaced the RS-232 interface in newer equipment, and complies with the SMPTE standard interface.

The newest digital switchers feature easily implemented protocols and incorporate the RS-422 standard interface, allowing third-party systems to be controlled from the switcher panel and required control information to be stored as part of a switcher effect.

Switchers need to control two types of devices: field-based devices (systems that can be run) and devices that provide static recall. An interface function must enable peripheral devices, which can be run, to be coupled to the switcher time line and to provide a display and means to control the peripheral device.

#### • Field-based devices

These devices require time-code updates on a field-by-field basis to execute an effect or replay an element previously recorded. Such devices include digital special effects systems, digital disk recorders, VTRs, camera robotics, character generators, audio recorders and mixers and lighting controllers.

- **Static devices**

These devices store a setup or configuration and, in some cases, permit parameters to be dynamically adjusted. Constant time-code updates are not required to replay or restore selected parameters. Such equipment includes still-store systems, encoders, decoders, noise reducers, routing switchers and time base correctors. Static devices' settings can be recalled as part of a switcher effect, and with access from the switcher's menu system to display setup parameters and adjustments.

To communicate with field-based and static devices, serial communications ports on the switcher serve as a "multidrop" master controller. Baud rate is 38,400 even parity with one stop bit. A standard 9-pin to 9-pin cable looped from one device to the next connects each to the network.

More than 30 devices can be connected to the network in this way. In practice, the network is restricted to 12 different field-based devices, with the remainder being static devices. Each device has a unique network address in the range 0 to 31.

The switcher polls each field-based device and one static device once per TV field. Each device informs the switcher of:

1. its availability (operational, power on);
2. its identity (what type of device);
3. its current position (a tape, disk source);

and

4. its functional status (stopped, running forward, running backward or recording).

Two types of communication are used: private and multicast messages. Private messages are directed from the switcher panel (master) to a specific device (slave).

---

***Switchers need to control two types of devices: field-based devices (systems that can be run) and devices that provide static recall.***

---

This data is unique to each slave and must be sent prior to sending multicast messages. A multicast message is a global command from the switcher to several devices.

Return communication from slave devices takes the form of either a constant update of position and state or menu display.

The switcher gathers current position in-

formation from one device per field until all are polled, at which time the process is repeated. If 10 field-based devices are on the network, it takes 10 fields to update each device's time-code values for their current positions. When the device is stopped, a field-accurate time-code value appears on the switcher.

A display of slave device menus on the switcher shows communication. By selecting the device's menu, it saturates the network for up to four fields and writes its screens into the switcher displays. Menus reside in the processor at the slave device end.

Once the menu is written, only differential data is sent over the network. This data is easily accommodated by each field and reverts to a real time parameter update.

#### **Benefits of integrated control systems**

Integrated control of peripherals is a powerful production tool, but the real potential is not appreciated until peripheral devices are attached to the switcher's time line effects system.


When a switcher creates an effect with two or more key frames (a switcher snapshot), the effect appears on the time line menu as a block along a time axis. The time line is calibrated in seconds and is

# ***CLEAN As YOUR AUDIO***

This compact yet powerful 11 kW FM transmitter receives your high quality audio and transmits it with the same quality provided by your compact disc. Combining efficiency with outstanding specifications provides your station with another competitive advantage.

All Continental transmitters come standard with a 2 year limited parts warranty and 24 hour technical service via phone. Leasing packages are available upon request.

**Contact your local Continental sales manager to get information on increasing your competitive advantage.**

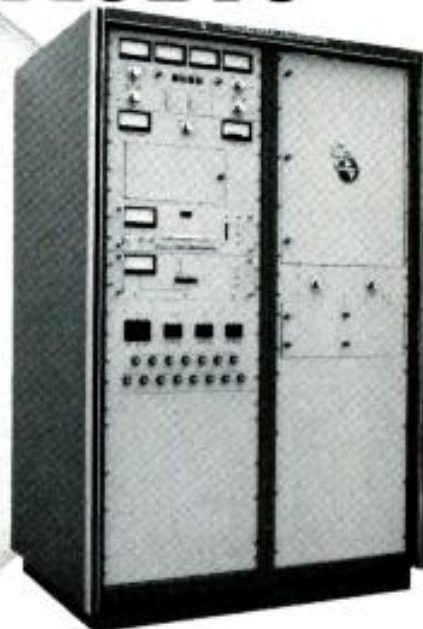

## ***Continental Electronics Corporation***

P.O. BOX 270879

DALLAS, TEXAS 75227-0879

214-381-7161

TELEX: 73-398

FAX: 214-381-4949

Circle (50) on Reply Card

an hour long. It indicates graphically the effect on each M/E and peripheral device. A cursor tracks the current position along the time line. Time line controls adjust effect start, effect end, effect offset and effect duration parameters.

A unique feature of such an effects system is the dynamically interactive relation between the controls and the actual effect. An effect with a wipe pattern move responds dynamically to an offset adjustment. This removes the guesswork from effects creation and editing, providing faster and more accurate editing.

Another important feature is the system's interaction with existing computerized editing systems. The switcher time line appears to the editor/controller as a VTR transport by emulating a SMPTE or Sony-type tape transport with the edit decision list (EDL), providing transport control over the switcher time line and, in turn, the peripherals attached to the time line. Most important, the editor can "gang jog" the switcher time line and a VTR, and elements on videotape can be previewed in non-real time together with switcher effects. This increases the accuracy and

---

### ***Integrated control of peripherals is a powerful production tool.***

---

speed of effects previewing.

#### **The other pieces of the production puzzle**

Today's edit suite contains a mixture of analog and digital, component and composite products and various interface products to bridge the gap between different formats. These interface systems form part of the integration package and can be controlled under a multidrop protocol.

#### **Routing switchers**

Routine day-to-day recording, monitoring and maintenance for most teleproduction facilities presupposes an ability to select from any number of available sources. It is the function of the router to provide a method of switching signals and directing them to the correct destination.

When a router is integrated into the switcher, three advantages are realized. First, it eliminates the cost of installed, fixed control panels. Second, the switcher front-end may require less operator training than a conventional panel because the interface can effectively disguise the router from the user. Third, the work-

ing of the facility can be handled effectively by a small staff.

One manufacturer recently announced a serial router that works with all different standards. The router not only interfaces with the new digital switchers, but also listens to other router control systems, effects machines and 3-D rendering systems.

#### **Time base correctors and frame buffers**

Basic to the teleproduction or broadcast facility is the time base corrector (TBC). The TBC provides control of video levels and timing, allowing the editor to adjust VTR outputs as needed.

An interface between the TBC and a digital switcher permits the operator to access memory functions of the TBC directly from the switcher control panel. TBC settings — video and chroma levels, setup, hue and registration transition rate — are saved directly into the EDL, along with common edit parameters, such as in/out points, duration and edit type. No matter how large the facility or how distant the tape room, full control is achieved from the edit bay — no running back and forth to set levels and timing.

The benefits of integration materialize in projects involving large amounts of raw footage. In this case, TBC memory registers contain a TBC setup for each reel or group of similar scenes. As the switcher triggers the memory registers directly, the need to adjust a VTR for every reel change is eliminated.

Combining frame buffers with the production switcher not only saves on control panels, but significantly extends the effects power of the production system. With integrated dual frame buffers, both stores are available as inputs to the switcher, serving as video or key signals. Graphic elements composited to the switcher output are captured in the buffer and returned as inputs to the switcher for further layering. By using two buffers — one to playback the previous layer, the other to capture the next pass — several passes through the buffer-switcher system can double, triple or quadruple what a less-sophisticated switcher can do in a single pass.

Additionally, analog inputs of the buffer can be used to perform analog-to-digital conversion of NTSC signals for use in the switcher. The buffer will function as a frame synchronizer and pass real time signals to the switcher.

#### **Camera robotics**

Computer control of cameras has emerged as an integral part of the broadcast world, because it reduces the labor required to physically place the camera and frame the shot. Integrating camera robotics into a switcher takes the technolo-

gy of simplification one step further by putting the power of camera positioning into one central tool.

With camera robotics control available at the switcher, a technical director (TD) who may know little about cameras has the ability to work cameras without a dedicated camera crew. In a news station situation this feature permits a smaller news production facility to handle late-breaking stories with only a TD.

Integrating computer-controlled camera positioning into a switcher allows the user to access a selection of pre-orchestrated camera moves, which may include camera walks, twists, turns, angles and height changes. This leaves the switcher operator only the job of framing the subject, a task that can be accomplished from the switcher.

#### **Audio recorders**

A growing number of tasks within post-production facilities involve coordination of audio and video functions with one another. For instance, consider a complex video editing session with a series of complimentary audio-follow-video level fades and pans.

In addition to video capabilities, some new switcher designs feature interfaces to audio recorder systems. The recorder is directly controlled from the switcher control panel.

Audio recorders have an independent time line in the effects system. Audio segments can be learned as part of a switcher effect or edit. When coupled to the switcher time line, the audio recorder can be used as a "scratch track" to facilitate scripting of animation and effects.

#### **Editing with the integrated control system**

Substantial benefits can accrue when editing with this type of system. Most editors know roughly how an edit session will go, and most clients have an idea how their job should be put together. Therefore, a good deal of session time is spent fine-tuning the edit to achieve just the right timing. Thanks to cache recorders, a switcher time line effects system eliminates waiting for VTRs to preroll and lock-up. This also takes guesswork out of the editing process and allows operators to pursue "what-if" scenarios.

Another advantage is control over a single VTR to upload and download elements to and from cache recorders. Using a protocol control, the system interface protocol must be translated into SMPTE or Sony protocol for controlling the VTR. Standard transport controls are provided for the VTR, and search algorithms make loading the required elements fast and easy.

The VTR transport, as a device in the switcher edit menu, also has a dedicated time line in the effects system. Now, effects

**NEW**

# Live Production

30 Video Inputs

Two 4-Bus Multi-Level Effects Systems (MLE)

Storage & Recall of 40 complete switcher set-ups

PGM/PST Bus

12 linear keys

DOWNSTREAM Multi-KEYER!

totally integrated DVE control

## On-air PRODUCTION

The RVS 630 combines the power of 30 video inputs, the flexibility of two 4-bus Multi-Level Effects Systems (MLE), totally integrated DVE control, the Ross Downstream Multi-Keyer, and complete switcher set-up storage, with the convenience of uncomplicated operation provided by the PGM/PST busses.


In addition to the power and versatility of the 630, the compact size makes it ideal for mobile installation.

The 47 3/4" x 27 1/4" control panel stands a mere 4 3/4" above the desk ... and, the supportive electronics take up a minimal 10 R.U.s.



## RVS 630

... handle any On-Air or On-Location production with confidence.

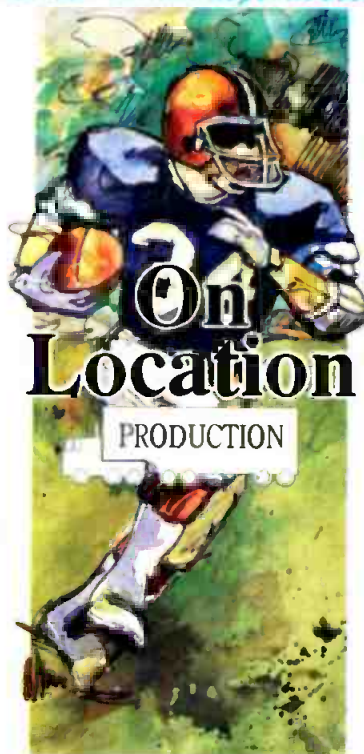

For a detailed Installation and Planning Guide  
call us today at **(613) 652-4886**



Ross Video Inc., P.O. Box 880, Ogdensburg, New York, U.S.A. 13669 0880  
Ross Video Limited, P.O. Box 220, 8 John St., Iroquois, Ont., Canada K0E 1K0

Circle (35) on Reply Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

can be generated that encompass the switcher, DVE, still-store, character generator and cache recorder elements, in addition to VTR elements off tape.


A finished composite can be layed-off for archiving. A periodic automatic lay-off function can be preset into the editing system with the switcher keeping track of recorded elements. This is particularly useful when assembling an edit, because composited elements can be recalled rather than starting from scratch.

For each edit, a conventional list is generated. Unlike most editing system EDLs, however, an integrated system

tracks significantly more data — the entire switcher setup can be saved as part of the edit. The switcher learns the current effect from the effects system, current page from the character generator and still-store, all related time-code values for each cache recorder and the VTR — and any other connected device.

Recalling the list restores data to all peripheral devices, the switcher and cache recorders. This increases the speed and accuracy of auto-assembly and reduces the number of notes that must be taken in a complex layering session.

Hard copy can be produced, or the list

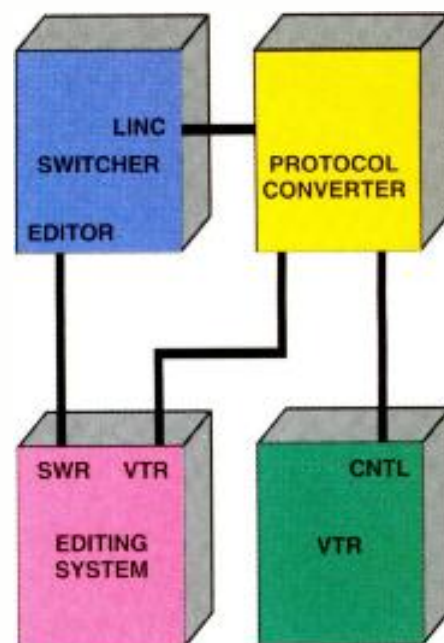

**Figure 2.** Centralizing control over the numerous video sources and designations is an effective and efficient way to improve production. The newest digital switchers feature easily implemented protocols, which allow a variety of devices to be controlled from the switcher panel. Such features also allow control information to be stored as a part of a switcher effect.

# The Digital Audio Cart Machine

**P**eople like the sound of Digital Audio. It's revolutionized the way listeners respond to radio. Today, 360 Systems' DigiCart brings consistently great sound to spots and ID's too.

DigiCart delivers the production values of an expensive workstation in a cart-sized format. Seamless back-to-back cuts. Smooth fades. Fast and precise editing.

Your production people will appreciate its ease of operation the first time they use it.

But the best reason to go digital is for quality, and DigiCart delivers on every count. Rugged Bernoulli cartridges with a ten-year field track record. Dolby AC-2 data compression that puts six times more audio on every



disk. Optional hard disks by Hewlett-Packard, with a 250,000 hour MTBF figure. And premium audio specs that leave every other cart machine in the dust.

At \$3,995 DigiCart is the most cost effective record-play stereo cart machine on the market today. And it's also the best sounding one ever made. Call us today for a brochure on how DigiCart can bring an even better on-air sound to your station.



# DigiCart™

by 360 Systems

18740 Oxnard Street, Tarzana, California 91356 U.S.A.  
Telephone (818) 342-3127 • Fax (818) 342-4372

Bernoulli is a trademark of Iomega Corp. Dolby and Hewlett Packard are trademarks of the respective companies.  
© Copyright 1992 by 360 Systems. DigiCart is made in the U.S.A.

Circle (36) on Reply Card

can be stored on a floppy disk. Edits appear as a grammatical edit description when the effect is recalled on a DOS-based PC. Thus, editors and clients can produce simple cut lists off-line without tying up an expensive edit suite, and can modify edits off-line and then reassemble them in the edit suite.

Several manufacturers are investigating ways to import other EDL formats. One possible method would enable a CMX-compatible EDL to be re-created on a switcher with cache recorders. Re-creating Mac or PC-based off-line edits in an on-line edit bay with cache recorders will be a big step forward to fully integrated, full broadcast-quality, disk-based on-line systems.

## A glimpse at the future

The most noticeable feature of the broadcast facility with an integrated control system is what's missing. There are no banks upon banks of control panels and monitors — no separate panels for each piece of equipment. When operators want to switch a new source into their machines, they call up a menu on the switcher control panel screen.

The future production workstation where everything is integrated into one box, and perhaps the digital special effects system is on a floppy disk, is still some years away. However, the new generation of digital disk-based switchers with control interfaces provide a stepping stone to the ultimate integrated control production environment.

■ For more information on video production switchers, circle Reader Service Number 305. ■

# Preview

August...

## VIDEO TECHNOLOGY UPDATE

### • HDTV: Who's On First?

Part 1. An update on the HDTV standard selection process. Emphasis will be placed on those systems under test (or finished) by the ATTC. The industry issues on timing, cost and market factors will be examined.

### • HDTV Transmitter Requirements

Part 2. A discussion of the demands to be placed on UHF transmitters when required to transmit a digital HDTV signal. In many cases, the specifications and techniques used effectively for years for NTSC will have no meaning in the digital world. Knowing what to look for in a new HDTV transmitter will be important in meeting the needs of the audience and challenging the competition.

### • The HDTV Antenna System

Part 3. A cost/feasibility analysis approach to installing the UHF HDTV antenna. The focus is in finding ways to place the new HDTV antenna on a station's current tower. The article reviews a survey conducted by MCI to determine station needs and options in converting to the HDTV world. This is a *BE* exclusive.

### • HDTV Routing Switchers

Part 4. As stations begin buying HDTV-compatible equipment, routing switchers are foremost on many minds. The article reviews a current product developed by TRW, which is capable of handling full HDTV bandwidth signals.

### • Selecting and Servicing Video Effects Systems

This will be a 2-part article. The first part will look at the options available. Part 2 will examine modern servicing techniques for this equipment. Equipment discussions will emphasize 2-D and 3-D effects hardware.

### • Digital Videotape Recorders

An examination of digital videotape recorder technology. The coverage will examine D-1, D-2 and D-3 systems. This means that component and composite systems will be examined.

September...

## AUDIO AND VIDEO PRODUCTION SYSTEMS

### • Desktop Video

A look at PC-based video editing, production and effects systems. The article will emphasize the use of small, non-proprietary platform-based hardware.

### • Audio Console Technology Update

A review of modern audio consoles. The article will consider the various features available in audio consoles, including automation and digital control and processing.

### • Inside Video Graphics Systems

A look at the technology used in modern video effects hardware. The article will not concentrate on the outside of this technology, but rather on what makes it work. Integrated circuit-level technology will be the basis for the article.

### • Production Suite Technology

A review of the hardware used in modern production suites. This may include recorders (D-1, D-2), production switchers, graphics systems and sophisticated routing switchers that allow suites to "share" expensive hardware.



## Cole Wire & Cable

*Finally, a source for all your 'Broadcast' wire and cable needs.*

- Audio/Video cable
- Video systems control
- ENG/SNG composites
- Fiber optics
- Entertainment and stage lighting cable

**CWC**

**1-800-323-1403**

Ask for 'Broadcast Division'

Fax: 1-708-673-2243

*Specializing in hard-to-find cable*

Circle (37) on Reply Card



## SAS

Sierra Automated Systems

### SAS 32000 Series Switching & Mixing Systems

**New CPL-80 & APC-88 console mount controls!**

The 32000 System features Advanced Multi-Processor Architecture, full Unlimited Summing capability, Dual redundant Power Supplies, High Density Central Matrix, +28dBu Max. IN/OUT, PC interface, >114dB Dynamic range, and more. The new Console Control Panels provide full alpha-numeric control with "assignable" "Hot Punch" buttons.

- 8-character Alpha-numeric display
- 8-Programmable "Hot Punch" pushbuttons
- Rotary Encoder for Source Selection


**Celebrating our 5th year of Providing High-Quality Audio Products.**

For more information contact:  
Sierra Automated Systems & Engineering Corp.  
2112N. Glenoaks Blvd., Burbank, CA 91504  
Tel: 818-840-6749 Fax: 818-840-6751

Distributed by:  
RAM Broadcasting Systems Inc.  
P.O. Box 3100, Barrington, IL 60011-3100  
Tel: 800-779-7575 Fax: 708-382-8818

APC-88 CPL-80

Circle (38) on Reply Card

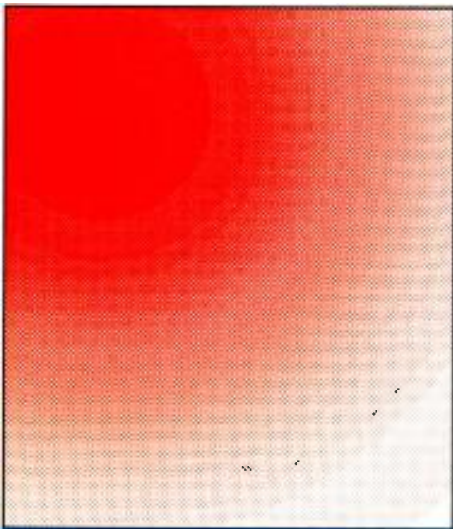

# Multitone audio testing

Modern DSP techniques make implementation of this old idea a reality.

By Bill Thompson

## The Bottom Line

*Today, audiences are more aware of audio quality. Many consumers own high-quality receiver/tuners, amplifiers and speakers, and they are more critical of what they hear. Previously, stations that tried to get the best results from their equipment meant all-night system audio test sessions. Now, with multitone testing, this approach can reveal much more about your audio chain in a matter of seconds — without sacrificing air time.*



The sophistication and technical quality of today's broadcast audio, in conjunction with better home entertainment equipment, has created an audience that is more critical of the audio portion of programming than ever before. One logical response for broadcasters would be to perform rigorous audio tests more often while minimizing (or, if possible, eliminating) downtime.

Another option is to develop tests more relevant to perceived audio quality. Making measurements that were not previously possible also might help appease this demanding audience.

Once broadcasters have settled on an approach, they still have to face the issue of taking gear off-line for testing. Engineers need time to perform tests and make adjustments or repairs; the rest of the staff needs the equipment on-line to produce, edit and broadcast the programming. Automated digital signal processing (DSP) techniques offer a better solution, and multitone testing is up to the challenge.

### What is multitone?

For those unfamiliar with the term or the technology, *multitone testing* uses the premise that audio equipment can be stimulated to the same extent by a simultaneous combination of sine waves as it can by a series of discrete tones occurring one at a time. The advantage of multitone analysis is clear: It provides complete system evaluation in one step, eliminating the time-consuming process of applying a series of individual tones, allowing a settling time after each, making adjustments af-

ter each, and then repeating the process to check for interactions.

If multitone testing is such a great idea, why has it only recently emerged from the laboratory? The history of multitone dates back several decades. Early attempts to implement multitone testing encountered problems not at the stimulus end, but rather with the bulk, expense and performance of the analysis equipment.

Analog filtering of multitone stimulus was a staggering venture. Recent advances in digital signal processing equipment and techniques have reduced multitone signal acquisition and analysis to a manageable, affordable task. Multitone equipment is currently available from a small but increasing number of vendors.

Multitone test techniques use carefully designed mixtures of tones applied simultaneously to the device under test (DUT). The individual tone elements have well-defined frequency, phase and amplitude relationships. The frequencies of multitone components are selected to avoid mathematically predictable harmonic and intermodulation products that would fall on or extremely near any of the fundamentals. The phase of each tone is fixed, but randomly selected relative to each of the other tones. Amplitude relationships may vary, depending on the device under test.

Multitone signals may be created with an inverse fast Fourier transform (FFT) for highly accurate and stable signal parameters. Figure 1 shows a spectral display of a multitone signal designed for testing wideband audio recording equipment.

Because the frequency, phase and amplitude relationships of the elements of a

Thompson is marketing manager for the TV Audio Measurements Group, Tektronix, Beaverton, OR.


multitone signal are well defined, DSP techniques allow easy detection of changes in these relationships. Thus, frequencies not present in the original multitone are due to distortion and noise. Similarly, changes in phase relationships of the multitone elements can be used to derive phase response information. It follows that deviation from the known amplitude relationships will provide frequency response information.

Simply stated, multitone signal analysis consists of analyzing the level, frequency and phase characteristics of the fundamental frequencies at the DUT's output, and conversely, looking for noise and distortion at frequencies where no signal is expected.

A more detailed explanation of multitone analysis techniques is in the related article, "Analysis by FFT," on page 77.

#### Typical results/displays available

Although implementations of multitone analysis vary from vendor to vendor, most provide plots of level vs. frequency, level difference between channels, phase difference between channels vs. frequency, and noise and/or distortion vs. frequency. Figures 2 and 3 show two other types of

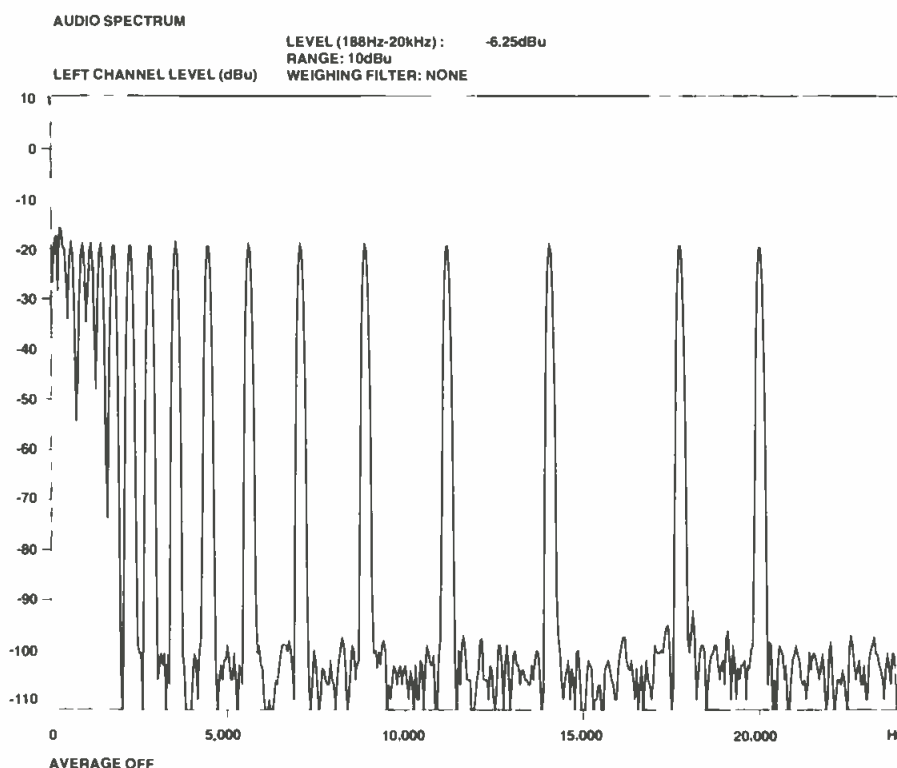

**Figure 1.** An audio spectrum display shows the spectral distribution of the numerous fundamental frequencies in a multitone signal.



## JOYSTICKS & TRACKBALLS For the OEM

Complete line of precision low profile designs with optional features to suit most requirements. Both panel mount and desk-top models available.

- Competitive Prices
- American Made Quality

**CH PRODUCTS**  
970 Park Center Drive  
Vista, CA 92083  
619-598-2518

Circle (51) on Reply Card



## SONEX!

The standard in absorption material.

- Patented SONEX pattern
- Tremendous performance
- Easy to install

Find out how SONEX can work for you.

*Free Acoustical Information Packet!*



SONEX Acoustical Products Division  
3800 Washington Avenue North  
Minneapolis, MN 55412

**1-800-662-0032**

Circle (52) on Reply Card

## Do You Use SMPTE Time Code?



- **READERS** — 1/2" and 2" LED displays, Desk Top or Rack Mount.
- **WINDOW DUBS** —  
— Continuous size adjustment 5% - 20% screen size  
— Continuous position adjustment. Locate anywhere on the screen.
- **GENERATORS** — Jam Sync, User bits, Reconstructed code output.
- **COMPARATORS** — Readers with contact closure outputs or programmed time code.



Practical Solutions Since 1971  
142 Sierra St., El Segundo, CA 90245  
(310) 322-2136

Circle (53) on Reply Card

MULTITONE ANALYZER  
 REF (L) : -20.59dBu AT 562 Hz  
 REF (R) : -20.32dBu AT 562 Hz  
 RANGE (L) : 10dBu, RANGE (R) : 10 dBu  
 ANALYZED SIGNAL: MTONE 2

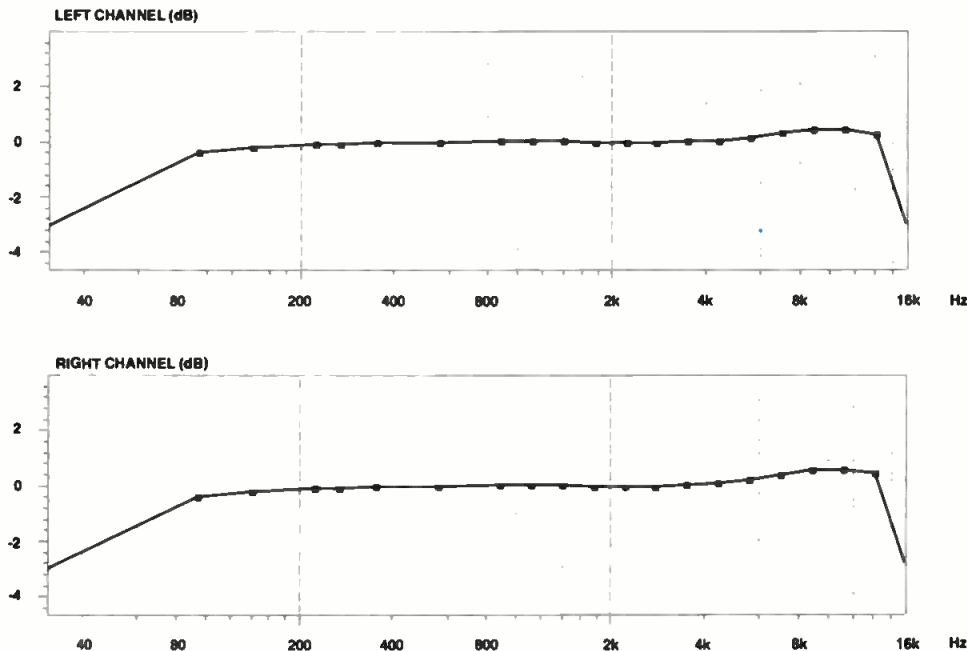


Figure 2. Level vs. frequency plots are one of several typical multitone displays.

multitone displays available, the levels vs. frequency display (frequency response) and the level/phase differences between channels plotted against frequency. An audio spectrum display, such as the one shown in Figure 1, is also a valuable tool when combined with the multitone signal.

#### Multitone vs. discrete tones

Multitone testing differs from traditional single-tone testing in several ways. As previously mentioned, multitone analysis reduces testing and calibration times. This speed advantage stems from several properties:

- All tones are applied at once.
- Entire spectrum is measured/adjusted at once.
- Only one settling time is needed for the generator, DUT and measurement device, because a single signal acquisition is made.
- Level, phase and noise and distortion calculations are made from one FFT record.

Not only does multitone eliminate the step-and-repeat process, but it also can provide immediate feedback on equipment adjustments. Watching the entire audio spectrum respond to interactive adjustments with no annoying time lag further simplifies audio equipment calibration.

When compared to a single sine wave tone, looking at a multitone signal in the time domain (see Figure 4) illustrates how closely a multitone signal resembles program audio. Two factors contribute to this resemblance. First, multitone fills more of the spectrum than single sine wave tones. Second, the crest factor of multitone is similar to that of music or voice signals.

With multitone's similarity to program material, it can be argued that the adjustments performed and measurement results obtained through multitone give more realistic noise and distortion values than discrete tone testing. (In this case, "more realistic" means a value better representing the noise and distortion present with program material.) In the past, noise measurements were made on audio equipment while no input signal was present. Therefore, the quantization noise and other level-related anomalies were not a

part of the noise measurement result. Furthermore, signal processors often operate at different gain ranges, depending on the input signal level. So, a no-input noise measurement would be even less representative of actual operating conditions.

The different type of stimulation provided by multitone can, however, lead to measurement results that do not exactly match results obtained with conventional tones or tone sequences. With this in mind, multitone testing should not be used interchangeably with tests made on single-tone input signals. The strengths of multitone testing are speed and convenience, so it excels in the roles of calibration, production line testing and equipment performance tracking.

When compared with conventional discrete tone sequence testing, multitone wins again. Standardized tone sequence tests require settling, acquisition and measurement times for each tone in the sequence. All of the advantages of multitone previously mentioned apply here as well. And because multitone is a DSP-based technology, it is always backed up with the computing power necessary for automation. To fully mimic standard tone sequences, a "multitone sequence" of two or three different levels of multitone can be performed in one-tenth the time of conventional sequences.

#### Multitones for maintenance

Multitone analysis can be implemented with display update rates of at least eight times per second. Combine this near real time analysis capability with a level vs. fre-

MULTITONE ANALYZER  
 REF (L) : -20.57dBu AT 562Hz  
 REF (R) : -20.31dBu AT 562Hz  
 RANGE (L) : 10dBu, RANGE (R) : 10dBu  
 ANALYZED SIGNAL: MTone2

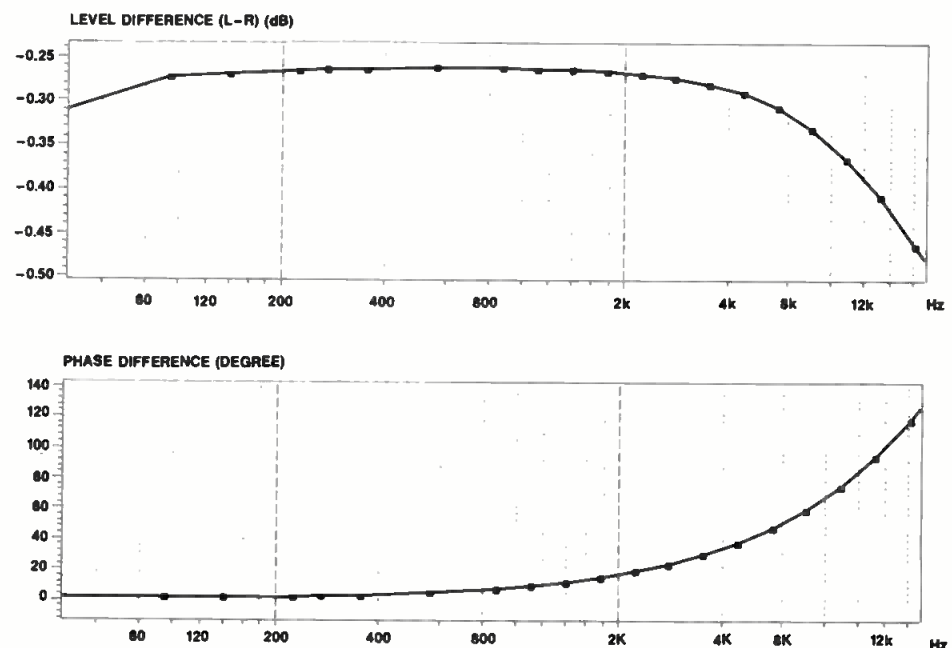


Figure 3. Matching phase and levels between two channels or pieces of equipment is simplified with level and phase differences between channels vs. frequency display.



W

I

T

H

T E C H N O L O G Y

# SBE 92': PLUG INTO YOUR FUTURE

**SBE National Convention and Broadcast Engineering Conference  
October 14-17, San Jose.**

Join the Society of Broadcast Engineers in San Jose this Fall and plug into the future of Technology. Keep up with the rapid changes in the professional audio/video industry.

- Informative seminars will give you insight into developing technologies, and what they mean to the business of broadcasting.
- Hands-on workshops will give you the training you need to be successful today, and a valuable part of the team tomorrow.
- A large exhibit floor filled with the latest in broadcast products will provide you the opportunity to consider new equipment purchases.

San Jose is the capital of Silicon Valley, a place where the achievements of today expand the boundaries of technology.

Become a leader in the industry. Stay ahead of the game. Attend the SBE National Convention and **Broadcast Engineering** Conference.

**For more information call SBE at 317-253-0122.**  
*Register early to enjoy reduced rates.*

quency graph, and frequency response adjustments are easier and faster.

Some calibration procedures in VTR service manuals specify a single tone for minimizing crosstalk in playback circuits. Using the single tone specified by the manufacturer makes the adjustment simple. With multitone tools and techniques, the adjustment is just as easy, and the additional means to optimize crosstalk across the entire spectrum is provided. The multitone version of the adjustment is made while viewing level vs. frequency plot of the undriven channel. Multitone fundamentals feeding through from the driven channel sneak up from the noise floor as the adjustment is made, with the correct adjustment being the best compromise across the spectrum.

Preliminary experimentation using multitone for azimuth adjustments shows considerable promise. Viewing the phase difference between the channel display, the adjustment can be made. Because this display shows the entire audio spectrum, it eliminates the standard practice of maximizing a low-frequency tone amplitude, then switching to a mid-range tone, and finally a high frequency tone. This type of display immediately shows the effect of the adjustment throughout the spectrum. Additionally, a phase-difference display provides resolution not previously available for this type of adjustment.



Even without a multitone analyzer, the multitone signal could simplify this adjustment when used with an X-Y audio monitor (Lissajous display). With azimuth properly adjusted, the Lissajous pattern made by a multitone will be a straight line, just like a single sine wave tone. But instead of the ellipsoidal opening of the sine wave tone, multitone spreads into a complex pattern that resembles stereo program material when azimuth is misadjusted.

Remember that standard alignment tapes don't (yet) contain multitones. Until they do, making a pseudo-alignment tape containing multitone on the reference deck in a facility is the only way to use multitone for azimuth adjustments.

#### Split-site testing

Multitone is a strong candidate for rapid performance tests of common carrier and broadcast audio transmission links — while on the air. A short burst of multitone, typically about one second, is all that is needed for analyzers to do a complete audio path characterization.

Although most multitones don't sound particularly symphonic, they aren't abrasive either, especially in the short bursts necessary for measurement. Multitones can be transmitted during local insertion of station IDs or during an occasional fade-to-black prior to a commercial — without annoying the audience.

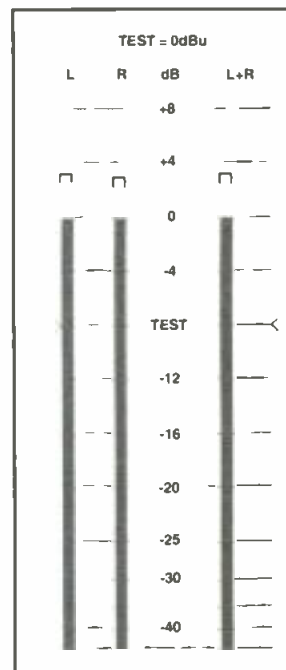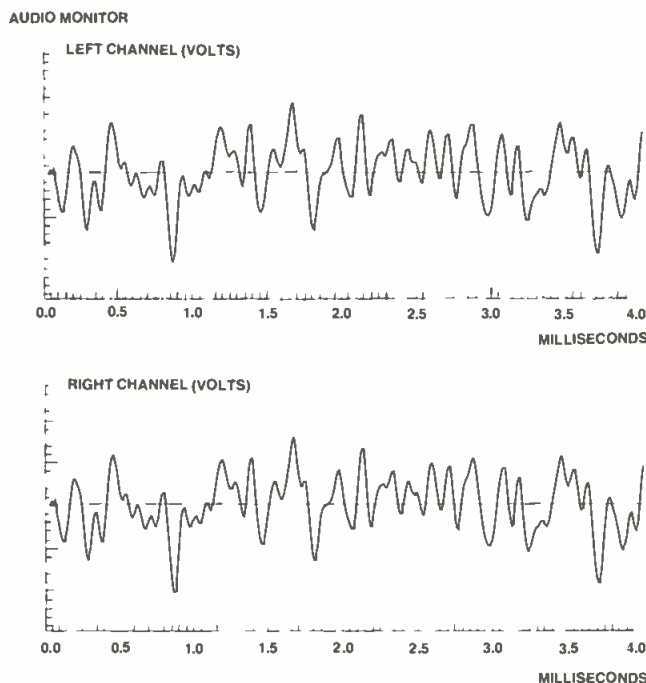

**Figure 4.** In the time domain, multitone bears a much stronger resemblance to program material than a single sine wave tone.

Given the distance between ends of the system during split-site testing (i.e., transmitter and studio), it is not practical to lock the sampling clocks of the generator and

analyzer, resulting in slight frequency shifts in the multitone elements. Split-site testing is one application where frequency shifts in the multitone can occur, and

# The difference with Belden® Digital is clear

Copyright ©1992 Cooper Industries Inc.

windowing prior to the FFT analysis should be employed to ensure accurate measurement results. (See the related article, "Analysis by FFT," on this page for a discussion on windowing.)

### Summary

The power of digital signal processing can be brought to bear on the challenges of audio measurements and adjustments through multitone testing. The inherent strengths of multitone testing — speed, repeatability, flexibility and convenience — can be enhanced by integrating these measurements into a facility's automation system.

Use of multitone equipment is spreading throughout the broadcast industry. Although still in its infancy, many applications for multitone testing have been discovered, and it is likely that more will surface. As more facilities come on-line with multitone, and as industry support grows, standards committees will want to consider endorsing this technology by including it in standards and alignment tapes.


■ For additional information on multitone audio test systems, circle Reader Service Number 306.

## Analysis by FFT


A closer look at multitone analysis shows the need for caution when processing the signal. Figures 1 and 2 illustrate how different processing techniques produce drastically different results, only some of which are meaningful. Both figures are based on a simulated 8192-point (8K) FFT with a 48kHz sampling frequency and a 588.87Hz tone. FFT bin numbers (e.g., bin 100 out of 4,096 bins) label the horizontal axes of each graph. The fundamental frequency of 588.87Hz falls halfway between bin numbers 100 (585.94Hz) and 101 (591.80Hz).

Transforming time domain information into the frequency domain with an FFT requires that the period of the time domain signal be an integer multiple of the period of the FFT. When such a periodic relationship occurs, a fundamental frequency will fall into a single FFT bin.

The graph in Figure 1 shows the effects of leakage. If the fundamental was at 585.94Hz, a single line at bin 100 with no energy in adjacent bins would result.

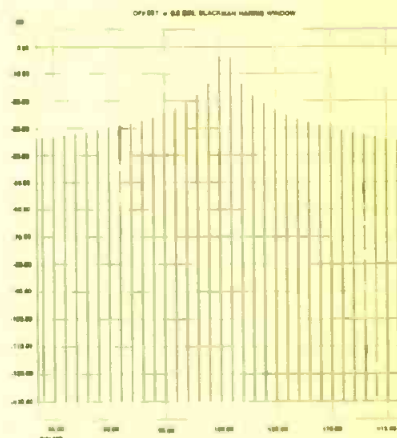

**Figure 1.** The 588.87Hz fundamental frequency in this computer model does not correspond exactly to an FFT bin. The result is leakage that provides a misleading noise floor display.

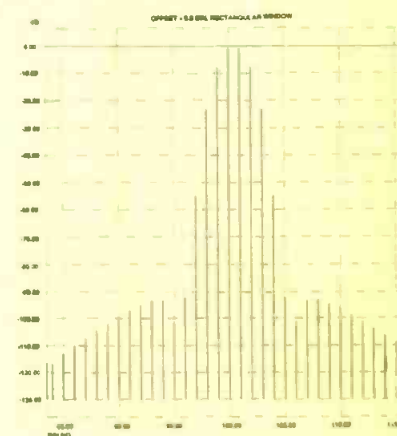

**Figure 2.** Application of windowing prior to the FFT drastically reduces the effects of leakage. Within 23.44Hz either side of the fundamental, leakage is more than 90dB down.

A rectangular window, which is equivalent to no window, was used here.

The graph in Figure 2 shows the effect of applying a Blackman-Harris window to the same data. After only four bins either side of the fundamental, the leakage is down more than 90dB. In actual application, an algorithm can determine the exact frequency and amplitude of the fundamental. To compensate for significant shifts in pitch, the spectra surrounding each expected multitone fundamental may be searched  $\pm 5\%$  of the frequency of each fundamental.

For noise and distortion measurements, the eight bins surrounding each fundamental in a multitone are set to zero. The remaining bins are plotted to represent the noise (and distortion) floor of the device under test. ■

## Really clear.

Sure everybody knows Belden® cables are renown for their reliability. Why else would they be the broadcast industry's No. #1 choice? But, can you imagine the signal integrity and clarity achieved when Belden quality meets digital technology?

Well, you don't have to, because Belden offers the industry's most complete line of audio/video cabling options, including products that support the latest digital technologies. In fact, over 60% of our entire line is new in just the last few years, proving that Belden clearly leads in innovation, too.

**COOPER**

Belden

Quality from Cooper Industries

But that's only part of the story. We also offer the industry's largest distributor network for local product availability. Plus, peace-of-mind knowing that Belden guarantees the compatibility of our cables with leading broadcast equipment.

No wonder the Belden difference is so clear to so many. Call **1-800-BELDEN-4** for your FREE copy of our catalog, and see for yourself. Because, if you think we sound too good to be true, you should see how we *look*.

# Field Report

## Sierra Automated Systems' routing switcher

By Margaret Bryant

When WMAQ-AM decided to move to a new studio/office facility, the station also decided to expand its existing Media Touch control system. To do so, an audio routing switcher was needed that could perform functions the existing switcher could not. WMAQ wanted a routing switcher that had the ability to sum several inputs to one output. Other considerations included customer support, flexibility, ease of operation, reliability and cost. With these requirements in mind, the station began shopping for a switcher. After much searching before and at the NAB Convention, only three routers were found that met WMAQ's requirements. One system was immediately eliminated because of cost. Demos of the two remaining products were scheduled. Of them, only the Sierra Automated Systems (SAS) routing switcher met and exceeded the station's expectations.

### Meeting the needs

At WMAQ-AM All News Radio, many needs must be met by a routing switcher. Not only are there three on-air studios, four edit booths, a production studio and a tape dubbing room, but the station also has a massive newsroom. Each room has a different need for signal routing, depending on the function of the room. Some router outputs must be controlled by the Media Touch system. Other rooms must have outputs that are controlled manually and by computer. The SAS switcher fulfills those needs, and does it with style. The designers appear to have put much thought into all aspects of the unit. From a dependability standpoint, they thought of all the worst-case problems and found ways to make the switcher exceptionally reliable. They also took into consideration the environments in which the switcher would be used, and again planned for worst-case use (and abuse).

### The cutting edge

The SAS switcher has a modular design with many possible combinations of inputs and outputs produced by assembling



### Performance at a glance:

- Summing capability
- High-density matrix
- Multimicroprocessor design
- Dual-redundant power supplies
- Alphanumeric control heads

groups of modular frames. In addition, the system can be configured for a combination of stereo and mono inputs rather than all stereo or all mono. When a mono input is selected, the input is split by the switcher and fed to the two channels of a stereo output. In its present configuration, WMAQ's switcher fills six frames, consisting of 32 stereo inputs, 64 mono inputs and 48 stereo outputs.

Each modular frame contains input cards, crosspoint/output cards, power supply modules and a controller card. Any of

the cards can be removed with the power on and not cause damage. You might think most switchers designed for broadcast would include this feature. However, this is not always the case. With the routing switcher, the heart of the operation — being able to remove the cards without disrupting the operation of the rest of the switcher — is extremely important. The cards are keyed, so if a card is inserted into an incorrect slot, no damage will occur. This is just one of many details to which the designers paid attention.

Furthermore, there are dual-redundant power supplies with separate AC cords for each frame — another feature that is not necessarily included in every switcher.

This modular design is not only expandable, but also extremely compact. Although this is a tremendous advantage in saving space, the frames tend to run a little hotter than desired. Fan trays were built

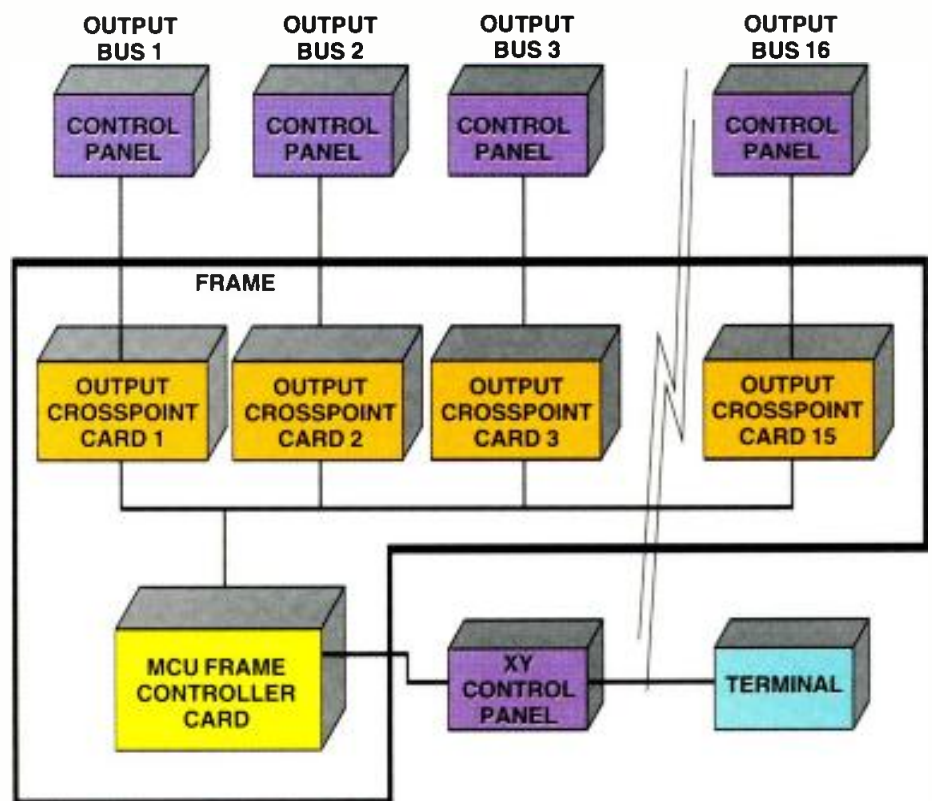


Figure 1. A block diagram of the Sierra Automated Systems routing switcher.

Bryant is engineering manager, WMAQ-AM, Chicago.

to help solve this problem. The compact design extends to the input and output connectors on the rear of each frame. The package uses euroconnectors, which work quite well when you get the hang of the crimp tool. Although the actual connection is easy to make, the density of the wir-

---

***The designers appear to have put much thought into all aspects of the unit. From a dependability standpoint, they thought of all the worst-case problems and found ways to make the switcher exceptionally reliable.***

---

ing can make wire dressing difficult.

Perhaps one of the switcher's best features is its use of multiple microprocessors. Because each crosspoint/output card has a microprocessor, communication occurs directly with the output control panel. There are no intermediate steps to slow operations or intermediate components to fail. This makes switching faster and easier. The reliability is enhanced because the entire switcher is not dependent on only a few processors.

#### **Specifications**

When it comes to specifications, the switcher met or exceeded all of the published information. With the high-density central matrix in the switcher, crosstalk and noise performance were primary concerns. They were tested with various configurations of inputs and outputs, and the results were better than expected. The crosstalk measurements were limited by our test equipment. However, the -80dB measurement we obtained was quite respectable (and better than the claim in the spec sheet). As expected, the frequency response was flat and the THD extremely low.


The documentation on the switcher is extensive and thorough. Although all of the necessary information is present, occasionally it took some searching to find what we needed. Apparently the company is working on improvements to the manual.

Summing was an important criteria in selecting this router. At WMAQ, the switcher is used for many purposes. The first use is in conjunction with the Media Touch in the on-air chain. Virtually all program elements, except the microphone and actuality carts, pass through the routing switcher. This means that a variety of stereo and mono sources, such as equal-

ized phone lines for weather and traffic, 2-way radio, cellular phone, radio networks, regular phone hybrids and Instacarts, are selected and/or summed by the routing switcher. Through the computer serial interface, the inputs are selected and switched or summed to the on-air output.

Second, routing switcher outputs appear in all the studios (eight studios in all) and in various locations in the newsroom and taping room. These outputs are for news and spot production and dubbing. All outputs on the switcher can be addressed by the computer serial interface and the manual thumbwheel controller, which is another unique feature of the switcher.

Presently, we use the thumbwheel control heads in each of the studios and an XY thumbwheel controller that selects input and outputs right at the switcher. The XY controller is also where the connection is made for a computer to control the system. An LED display on the XY control shows the input(s) assigned as each output is dialed up. Should the output have several summed inputs, the LED display scrolls through the input numbers being summed. The display is helpful in keeping track of what is going on the air — especially when you aren't sure if it's an operator problem or an equipment problem. The disadvantage of the thumbwheel con-

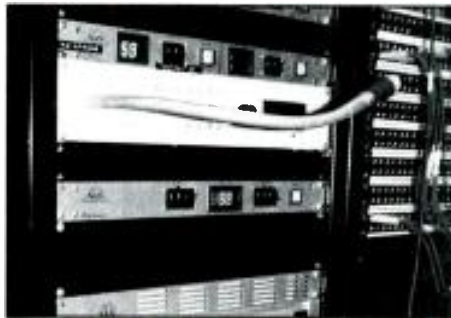

trollers is the need for an outboard list of available inputs. Although this is not a significant drawback, SAS has since developed an alphanumeric controller.

The alphanumeric controller is rack-mounted, taking up one rack unit in height. The input selector uses a shaft encoder. As the knob is rotated, source names are displayed in alphabetic order (even if that isn't how the inputs are wired to the switcher). An 8-character LED display is enough to spell most input names. Two buttons allow either the "active input" or the "selections available" to be displayed. The box is a creative solution to viewing the available inputs.

Two other controller options are available, which were tested during the demo before our purchase. One is a 1-rack unit push-button panel to select inputs. It features a "sum" button to combine various inputs to one output.

The second is an interface to connect a computer terminal directly into the XY controller. This option produces a cross-point map on the terminal, showing the

I/O configuration of the switcher at a quick glance.

#### **Serving the needs**

Factory help is outstanding. A mysterious problem developed in the communications between the switcher and Media

---

***When it comes to specifications, the switcher met or exceeded all of the published information.***

---

Touch, which was immediately corrected with a software modification. From the start, the company was clearly customer-oriented. The company eagerly seeks input from customers on how to improve its product. Moreover, it uses an innovative approach to finding solutions to customers' needs, taking any suggestions several steps further. You might expect this to increase the price, but the switcher is affordable. WMAQ's experience with the Sierra Automated Systems switcher has been favorable, and we look forward to seeing the product in other installations. ■

---

Editor's note: The Field Report is an exclusive BE feature for broadcasters. Each report is prepared by the staff of a broadcast station, production facility or consulting firm.

In essence, these reports are prepared by the industry and for the industry. Manufacturer's support is limited to providing loan equipment and to aiding the author if support is requested in some area.

It is the responsibility of Broadcast Engineering to publish the results of any piece tested, positive or negative. No report should be considered an endorsement or disapproval by Broadcast Engineering magazine.

---

# SBE Update



## SBE Day at NAB a success

By Jerry Whitaker

The society moved into a new era of visibility and respect this year at the annual NAB Convention in Las Vegas. The SBE prepared and presented a full day of engineering sessions targeting future trends and current hands-on technical needs. The sessions were packaged as "SBE Day at NAB '92."

Concurrent radio and TV sessions were presented, along with a combined regulatory session on technical issues.

Papers on a wide variety of subjects also were presented. The papers relating to FCC enforcement efforts seemed to attract the greatest attention. Richard Smith, a member of the FCC Field Operations Bureau, discussed the enforcement activities of the commission, and the effects that increased fines are having on stations. He also addressed the budget problems facing the agency, and the potential negative effects that such shortfalls could have on enforcement efforts.

Jim Zoulek, of the FCC Los Angeles office, outlined the self-inspection program for broadcast stations that his office has instituted. A number of questions were raised regarding the scope of the program and the likelihood of it being expanded to other areas of the country.

Additional papers presented on the topic of regulation included a detailed background report on tower construction and safety standards presented by John Windle of Stainless Inc. Significant changes are contained in ANSI/TIA/EIA standards, and Windle discussed how these will affect the typical broadcast station.

Richard Rudman, chair of the SBE frequency coordination task force, discussed the current status of the 2GHz frequencies. He cautioned the audience that "we have won the battle, but not the war...yet." The upcoming political conventions, proposed spectrum reassignments and the looming issue of HDTV simulcast channels have made frequency coordination more critical than ever.

### Membership meeting

An important part of SBE Day was the annual SBE chapter chairs meeting and

the annual membership meeting. The two events, which merged into one large gathering, provided an opportunity for chapter chairs and members to express their views on any subjects they wished.

Richard Farquhar, SBE president, opened the gathering by stating that in the past the national organization had not effectively communicated important information to its members. He assured those present that communication was a high priority.

---

### *The SBE board adopted three resolutions to ensure an informed membership and open meetings.*

---

#### Board actions

At its April meeting, the SBE board adopted three resolutions to ensure an informed membership and open meetings. The first resolution establishes that the SBE will annually publish in its house organ a financial statement, with narrative, explaining any significant profits or losses. Although such a publication is currently called for in the existing bylaws, the actual implementation is not specified. Furthermore, the resolution requires that any request by a member in good standing for a line-item profit and loss statement, and a copy of any recent audit shall be honored.

The second resolution establishes that the SBE publish a summary of proposals and actions taken in the first practical national newsletter following a board meeting.

The third resolution affirms, as a matter of written policy, that board meetings are open to any member. Closed sessions are to be used sparingly, and only in the most unusual circumstances.

Although these resolutions do not have the force of formal bylaws changes, they do establish in writing national level protocols that heretofore have been subject

to the style of individual SBE governing officers.

#### Bylaws changes

The board also unanimously agreed to add a procedure to the bylaws that allows any five chapter chairs, representing a majority of the membership, to place a bylaws change before the board of directors. More importantly, if the board fails to ratify the change, it will automatically go to a full vote of the membership.

The last set of bylaws changes (fall of '91) that removed the member vote did have a practical purpose. Full membership votes are expensive. Typically, the first class mailing to each member costs approximately \$3,500. Likewise, if done correctly, they are slow, requiring time to publish the intended changes and allow for discussion. Furthermore, most bylaws changes are technical or address an issue that already has full membership approval, and a full membership vote would be unjustified.

An example of this was the board's decision to back board member Paul Montoya, and the membership committee's request to permit recently unemployed members continued access to the society's resources while they seek re-employment. Few, if any, of the membership would disagree with this bylaw change, and the need is immediate.

The bylaw addition passed at NAB does not prevent the board from making rapid and technical adjustments to the bylaws. It does, however, allow the membership to overturn those decisions or initiate its own changes.

Another avenue of change remains unaltered. Under the bylaws, any 25 members in good standing can place a resolution before the board. Although this places an issue on the agenda, it does not force the board to act. In practical terms, the board frequently discusses and often adopts these kinds of resolutions.

The result is that the membership has a larger voice. In the past, the membership merely voted on what the board (or more practically, a committee) proposed. Now the SBE membership can initiate change.

---

Whitaker, a technical writer in Beaverton, OR, is vice president of the Society of Broadcast Engineers.

# Industry Briefs

TV, Kansas City, MO. KCPT is the first public TV station in the United States to purchase D-3 1/2-inch composite digital VTRs.

Additionally, WOAY-TV, Oak Hill, WV, has purchased a M.A.R.C.II-100 MII automated recording/playback cassette system to air commercial spots and some of its programming.

Vyvx, Tulsa, OK, and CBS, New York, signed an agreement that calls for the network to increase its use of fiber optics over the next year for various occasional TV transmission requirements.

The agreement guarantees Vyvx a minimum number of hours in occasional service as specified by CBS from points across the United States.

**Broadcast Video Systems**, Richmond Hill, Ontario, Canada, delivered eight MASTERKEY 4 linear downstream keyers to NBC for use at the '92 Summer Olympics in Barcelona, Spain.

**Harris Allied Systems**, Quincy, IL, received an order by KBHK-TV to coordinate a turnkey relocation of the station

to new facilities. The project is expected to be completed by Nov. 1, 1992.

**Canon**, Irvine, CA, sold a J33ax 11B IAS internal focus telephoto zoom lens to Modular Video Services, Seattle.

Winged Vision, Crofton, MD, has also acquired a J33ax 11B IAS lens.

**The ALTA Group/Calaway Editing**, San Jose, CA, has been awarded a general service administration contract effective March 16, 1992 through March 31, 1994.

**Sony Broadcast & Communications**, Basingstoke, England, received an order from Scottish broadcaster Grampian Television for two digital library management systems. Central Television, another U.K.-based company, also has purchased a Sony BZC-2100 software system.

**Pinnacle**, Santa Clara, CA, delivered nine video workstations to various broadcast, corporate and governmental TV producers in the western United States.

**Quantel**, Darien, CT, sold its first Hal digital compositing system to 4:2:2 Video-

**Panasonic Broadcast & Television Systems Company**, Secaucus, NJ, delivered three AJ-D350 studio VTRs to KCPT-

## Winsted® Send for a FREE SAMPLE!



**TapeCube**  
Storage System  
Protects Tapes  
Simplifies  
Handling

**TapeCube** is a unique injection molded ABS plastic cube that holds 5 half-inch D2 cart tapes. Helps protect tapes from dust and dirt contamination. Optional labeling system identifies tapes easily, simplifies filing and retrieval.

**Call or write for FREE sample**  
**Toll-Free: 800-447-2257**

**THE WINSTED CORPORATION**  
10901 Hampshire Ave. So. • Minneapolis, MN 55438 • (612) 944-8556  
FAX: 612-944-1546

**Preferred by Professionals Worldwide**

Circle (41) on Reply Card

## SHRUNK TO FIT!



**The Logitek TR2 Console**

- A Full-size Console in a 19" Rack
- 12 Mixers with 36 Inputs
- 12 Mic Preamplifiers
- 4 Metered Outputs with DAs
- 2 Monitor Drivers plus Cue
- Machine Control & Tally Outputs
- Modular Construction

Call 1-800-231-5870 for your nearest dealer!  
or write us at 3320 Bering Drive □ Houston, TX 77057

Circle (42) on Reply Card

graphics, Bristol, England.

**Television Technology Corporation** (TTC), Louisville, CO, has teamed up with Zenith and AT&T to broadcast the first long-distance over-the-air field test of an all-digital HDTV signal. The signal was broadcast from WMV-TV in Milwaukee 75 miles to Zenith's technical center in Glenview, IL, on May 29.

**JVC**, Elmwood Park, NJ, and **Fox Broadcasting Company** reached an agreement whereby JVC will supply Fox affiliates and Fox-owned stations with professional S-VHS-C camcorders and S-VHS editing systems for electronic news gathering.

**Kline Towers**, Columbia, SC, and **Electric Communications**, Raymond, ME, have agreed to a joint venture. The venture will allow the two companies to offer turnkey packages in the design, fabrication, construction and installation of towers, transmission equipment and antennas; complete inspection and maintenance services; HDTV feasibility studies; and structural design analysis and rein-

forcement requirements of existing towers for future broadcast capability.

**Harris Allied Broadcast Division**, Quincy, IL, has established Harris Allied Europe, a radio distribution company based in Cambridge, England.

In addition, Harris will open two offices to serve the Latin American radio and TV broadcast market. The first office and headquarters was opened in Miami on July 1. A branch office, Harris Mexico S.A. de C.V., will open in Mexico City shortly thereafter.

## PEOPLE

**Schoichi Takada** was promoted to president for Fujinon, Wayne, NJ.

**Mark L. Dziekan** has been named national sales and marketing manager of the Professional Video System Group for Toshiba, Tokyo.

**Jack Fenster** was promoted to manager, operations and programs, for Scientific Atlanta's Broadcast Radio and Data Systems unit, Atlanta.

**Marin H.**  
New York of,  
ist/designer.

**Doug DiGiac**  
Midwest regional s,  
Graphics and Quan


**Quentin R. Nelson**  
ed national sales manag  
poration, Natick, MA.

**Joe Mack** has joined Har  
tems, Highland Heights, KY,  
elite sales and product spec

**Glen Curry** has been appointed  
regional sales manager for Digit  
Mountain View, CA.

**David Kerstin** is the newly appoin  
president of Broadcasters General Sto  
Ocala, FL.

**Patricia Seeley** has been named mar-  
keting communications manager for the  
ALTA Group/Calaway Editing, San Jose,  
CA.

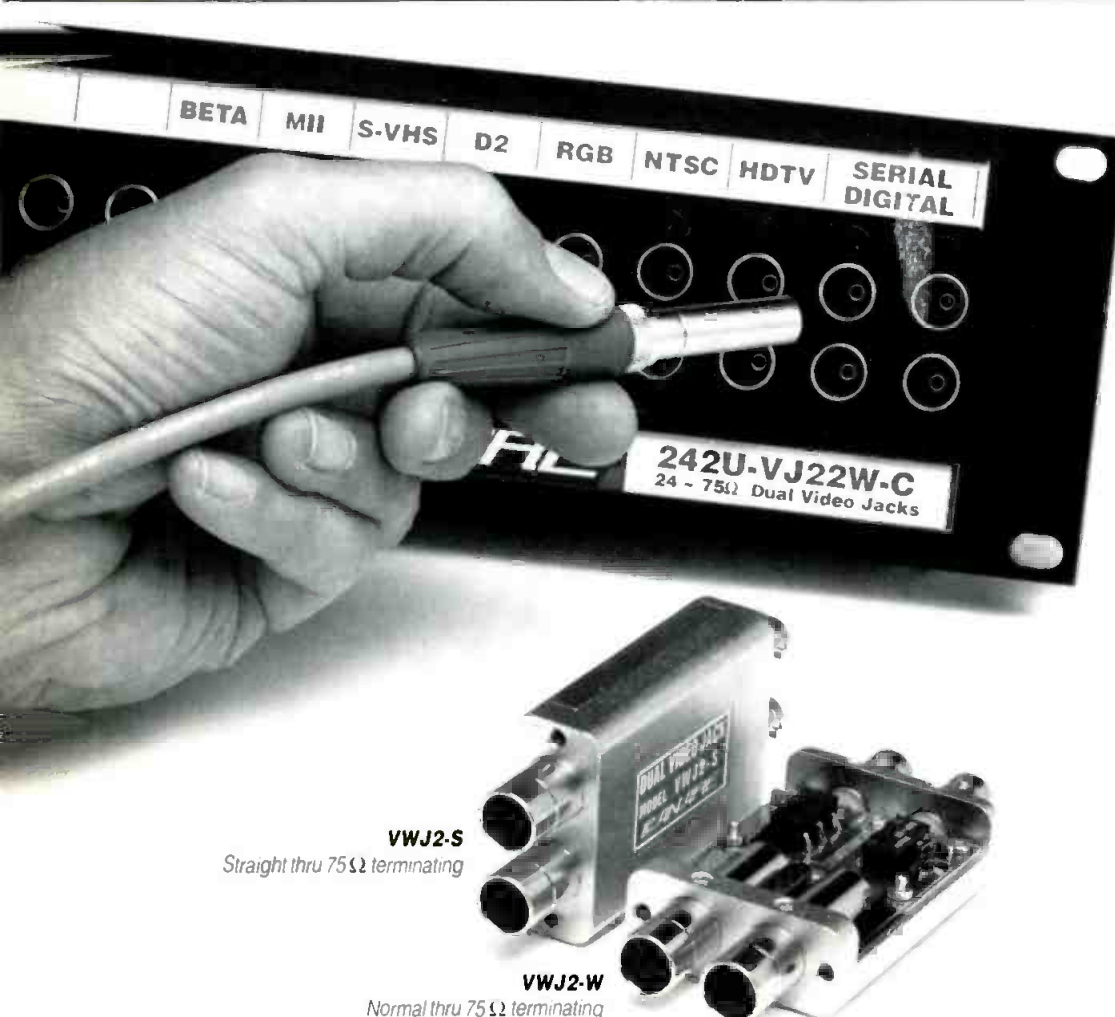

## STANDARD EQUIPMENT.

Canare Patchbays handle every 75Ω standard in your plant, from Baseband Video to High Resolution Computer Graphics and, the studio interface standard of tomorrow...Serial Digital. Plus you get the following:

- **WIDEST BANDWIDTH**  
DC ~ 600MHz
- **LONGEST LIFESPAN**  
"Microswitch" contacts
- **EASIEST INSTALLATION**  
Jacks Screw To Front
- **PERFECTLY COMPATIBLE**  
Your Cords or Ours
- **BEST BOTTOM LINE**  
Less Expensive!

Call, or write today for a **FREE** technical brochure with complete specifications and the number of your local Canare dealer.

**CANARE**

511 5TH Street, Unit G, San Fernando, CA 91340  
(818) 365-2446 FAX (818) 365-0479

# New Products

## Advanced FM technology

By Continental Electronics

- **Model 802B exciter:** broadband FM unit operates at 5W to 50W output; PLL-controlled frequency in 10kHz steps; inputs for composite, monaural audio, three SCA sources; comprehensive LED, digital front panel indicators; rear panel includes access to remote control and monitors as well as all inputs; integral harmonic filter.



Circle (362) on Reply Card

## Frequency analysis

By Rohde & Schwarz

- **ESBI test receiver:** extends upper frequency limit of EMI test series to 5GHz; covers fundamentals to 1GHz; for investigation and measurement of unintended spurious emissions produced by computer-related equipment.
- **ESS test receiver:** covers 5Hz-1GHz range for EMI measurements; compact unit with auto test system, manual tuning; battery operation.



Circle (389) on Reply Card

## Captioning enhancement

By Image Logic

- **Autocaption placements:** closed-caption system offers automatic centering, zone features; inserts sequential list of captions into line 21 of the video signal based on time codes; zone commands place caption under the appropriate speaker; permits caption text to be prepared by staff member in-house.

Circle (374) on Reply Card

## Audio interfacing

By Sonitech International

- **SAIB:** stereo audio/telephone interface box; stereo audio A/D, D/A converter; 16-bit, with dynamic range to 80dB; integrated anti-aliasing and smoothing filters;

I/O connections for line, mic, telephone; speaker output.

- **DAI:** digital audio interface for CD player or DAT deck through SPDIF or

AES/EBU specifications; 32, 44.1, 48ksamples/s with 16- to 24-bit word sizes; C-, U-bit access.

Circle (390) on Reply Card



## LINEAR KEYERS



### OPAQUE TO TRANSPARENT INSERTS AT YOUR FINGERTIPS

FIVE MODELS WITH FEATURES AND CONTROL SYSTEMS FOR EVERY APPLICATION

- Downstream or stand alone
- Frame accurate mix to key, fade to black
- Serial remote control • GPI interface
- Key source input switcher • Key set memory
- Preview output • Processed black
- Key area masking




**broadcast video systems Ltd.**

40 West Wilmot St., Richmond Hill, Ontario L4B 1H8  
Telephone: (416) 764-1584 Fax: (416) 764-7438

Circle (44) on Reply Card

**Affordable...  
Portable...**

**Power!**

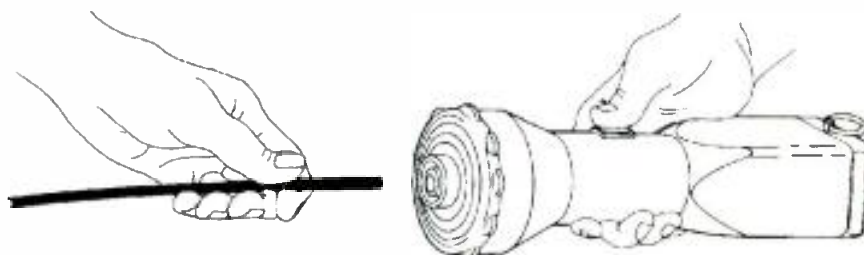

Now there's a faster way to strip coax cable for Trompeter's Tough BNC's!  
**BCS: Portable, Hand-held, Powered Coax Cable Stripper**

- Easy:** Quick-change cutting heads for 3-level (Tool Crimp) or 2-level (Wrench Crimp) stripping of coax cables (O.D. - .070" to .430") for Trompeter BNC's.
- Precise:** Tool steel cutter blades hardened to Rockwell 64 and precision ground for up to 15,000 strips. Blades independently adjustable for critical applications.
- Portable:** Lightweight (< 2.25 lbs.), portable driver. Ideal for production and field use. 7.2V Ni-Cad battery (without memory affect) gives up to 250 strips per charge.
- Powerful:** Cutter heads rotate at 2,220-2,500 RPM.
- Fast:** 2-3 seconds! All cuts made simultaneously. Reduces labor cost.

Send for New Product Bulletin or a Free Demo of the BCS & Trompeter BNC's

For pricing and availability contact your Local Trompeter Rep  
or call our New 800# for Sales/Service/Technical Support

**(800) 982-COAX**  
Inside California Call...  
**(800) 655-2028**

**Quality doesn't cost...  
It pays.**



31186 La Baya Drive • Westlake Village, CA 91362

(818) 707-2020 Fax (818) 706-104C

Circle (45) Send Literature

Circle (46) Call Now

### Multitrack optical recorder

By A/Z Associates

- **Augan 408 OMX:** digital audio workstation; records on removable, rewritable magneto-optical disk; stores audio and session information; stand-alone system with separate control/edit panel, track-sheet display; by Augan Instruments from The Netherlands.

Circle (351) on Reply Card

### Facility control

By ABB Infocom

- **BROADCASTER:** automatic control system for broadcast centers; monitors and displays status of complete broadcast center with analog, digital values on color CRT; handles switching between transmitters, antennas, program lines.

Circle (352) on Reply Card

### Powered speakers

By Audix

- **Power House speaker series:** for studio monitoring or use with computers and workstations; four 2-way models; PH3 18W, PH4 22W, PH5 25W, PH6 25W; integrated power amplifier uses high-gain, low-voltage hybrid design.

Circle (356) on Reply Card

### Digital cart system

By Barco-EMT GmbH

- **BEDAS 466:** removable magneto-optical disk system; stores 3.2 hours of stereo in ISO Musicam format; system expansion to eight drives extends time to 25.6 hours; Jukebox configurations possible; external control and monitor unit.



Circle (357) on Reply Card

### Audio measurements

By Gold Line

- **Model DSP-30:** real time analyzer includes digital 1/4-octave spectrum analysis; filters adjust by keypad to triple-tuned or sharper notching modes; 0.25-5dB scales check studio machines with test

tapes, equalize rooms, adjust PA systems; user-programmable curves; LED display; auto sum and average function; operates from eight AA cells.

Circle (371) on Reply Card

### Product literature

By Motorola Semiconductor Products

- **RF products selector guide:** data and cross-reference to more than 50,000 semiconductor devices for RF applications.

Circle (380) on Reply Card

### Microwave equipment

By N Systems Inc.

- **Spectrum Series:** center-fed parabolic antennas for terrestrial microwave; models for 17.7GHz-19.7GHz and 21.2GHz-23.6GHz; reflectors from 27- to 72-inch diameters; single and dual linear polarization; modular design permits easier transporting of the units.

Circle (381) on Reply Card

### Reference material

By Lester Laboratories

- **DAS-2000 brochure:** 8-page publication describing digital fiber transmission system.

Circle (377) on Reply Card

**dPatch**  
DIGITAL PATCHING  
SYSTEM

**NORMALING RS 422 EDITOR TO VTR  
MACHINE CONTROL PATCHING**

Call Jem-Fab to order your D Patch Model One  
**(516) 867-8510 • FAX 867-8007**

**JFC**  
Jem-Fab Corp.

Circle (47) on Reply Card

**Free Catalog & Audio/Video Applications**

Routing Switchers (SI-A-V)  
(24, 16, 12, 8, 4, 2 stations)

Video & Audio Dist. Amplis.  
RGB-Sync Dist. Amplis.

Press Boxes  
1-In/16-out  
Video/Audio  
2-In/24-out Audio

**OPAMP LABS INC (213) 934-3566**  
1033 N Sycamore Av LOS ANGELES CA, 90038

Circle (48) on Reply Card

**MOVING?**

**TAKE US WITH YOU.**

Just peel off your subscription mailing label and attach it to the address change card inside this issue. Please allow 6-8 weeks to process your address change.

**F30**

- Time Code Generator/Reader
- Character Inserter

**SMPTE ■ EBU ■ 24 fps ■ MIDI**  
Converts between any two formats

**\$1495.00**

"Window Dubs" Time code on video  
Regenerates and Jam syncs to existing code  
RS-422 Serial Control  
GPI Output (General Purpose Interface)  
XLR and RCA Connectors  
Color Frame  
User Bits

Call **Fast Forward Video**  
1-800-755-TIME (8463) for a dealer near you

Dealer inquiries invited.  
Circle (49) on Reply Card

Continued from page 62

vary between those two amounts, but the actual system output must remain at a constant data rate. The remaining bandwidth can be filled with data that allows its transmission on a space-available basis.

Such auxiliary data does not have the real time requirements of digital audio signals, but rather can be sent in bits and pieces as the excess bandwidth allows, and collected by buffers on the receiving end.

#### Plugging in some numbers

Various digital radio formats have proposed auxiliary data rates ranging anywhere from 8kbit/s to 80kbit/s on average (instantaneous auxiliary data rates will vary, as mentioned). Let's pick a round number in the middle of this range — for example, 50kbit/s — and examine what it could mean in real terms.

The average double-spaced page of text represents approximately 2,000 characters. Each character might require 10 bits for its transmission. Therefore, the 50kbit/s auxiliary data channel can transmit 5,000 characters, or approximately 2.5 pages of text each second. A bit-mapped graphic image (such as a data-compressed photograph) of reasonable size might take 50kbits to 500kbits of data, requiring up to 10 seconds to transmit. A little math shows that a large

newspaper could be transmitted on this channel in a few hours (for example, 1 a.m. to 5 a.m.).

Across a full day (86,400 seconds) the 4.3Gbits of throughput on this channel represents a lot of auxiliary data. If it were 100% used and charged at a penny per second, gross revenues would amount to \$315,360 per year. That \$0.01/s rate schedule is just a shot in the dark — the market might bear much higher rates.

Consider it from the customer's perspective. Suppose a real-estate agency wants to distribute its listings on a daily basis to its clients. Auxiliary data transmission provides the 1-way, point-to-multipoint service that it needs, and with a delivery speed and flexibility that serves its purpose. Color and resolution surpasses fax transmission quality. But more important, one transmission is received by all the clients at once, instead of requiring many sequential calls. Assume the clients' digital radios are hooked up to their home computers for display and selective printout. Even if the transmission takes an hour, the \$360 cost is probably a bargain, given the quality, distribution coverage and timeliness of service. In this respect, a higher rate could easily be considered feasible.

#### Addressability

Addressability is another issue. Even

without requiring radios to have unique addresses (such as cellular phones or pagers), a number of *pseudo-addressabilities* could be implemented. For example, *label acceptance* methodologies might allow news service data to be coded by subject (a Dewey Decimal System of the air). Listeners could collect data only on desired subjects by setting their receivers to the appropriate codes. Position or time data could also be used to filter messages, or any combination of the above. Mass messaging ("R-mail?") could be developed as a cross between advertising and direct mail.

Meanwhile, on the receiving end, smart radios incorporating adaptive information management techniques will be deemed critical by tomorrow's consumers who are likely to be inundated by continually increasing amounts of junk data.

Program-associated data (PAD) can also be offered, whereby supplemental information relating to main-channel programming can be received. Overall, datacasting may well become the largest part of the business of broadcasting in the not-too-distant future. ■

■ For more information on digital radio broadcasting, circle Reader Service Number 304.

## Professional Services

### TEKNIMAX

TELECOMMUNICATIONS

DENNIS R. CIAPURA  
PRESIDENT

11385 FORESTVIEW LN.  
SAN DIEGO, CA 92131 (619) 695-2429



INTERNATIONAL

Satellite Systems Engineering Design & Construction

T. L. BUSTING • TRACKING SYSTEM • TRANSPORTABLE & FIXED UPLINKS

1-800-444-0856

PH: (805) 963-3765 FX: (805) 962-0920  
425 E. Montecito St. Santa Barbara, CA USA 93101

A DIVISION OF HEMEC COMMUNICATIONS

### NETCOM

STATE-OF-THE-ART ENGINEERING FOR AUDIO & VIDEO

TURN-KEY SYSTEMS  
DESIGN & DOCUMENTATION  
EQUIPMENT SALES  
CAD SERVICES

1465 PALISADE AVE., TEANECK, NJ 07666 / (201) 837-8424

### D. L. MARKLEY

& Associates, Inc.  
CONSULTING ENGINEERS

2104 West Moss Ave.  
Peoria, Illinois 61604  
(309) 673-7511  
Member AFCCE

### ERIC NEIL ANGEVINE, P.E.

architectural engineer

specializing in broadcast studio acoustics

1002 Greystone Street Stillwater, OK 74074  
405-744-6444 405-372-3949



Radio/Tv Engineering  
Company

Serving Broadcasters over 35 Years

Consultants Norwood J. Patterson, Pres.  
1416 Hollister Lane LOS ANGELES, CA 90042  
Ph (805) 528-1996 & Fax (805) 528-1982

Invest your Advertising Dollars  
where your Prospects  
Invest their Time...

**BROADCAST  
ENGINEERING**

### JOHN H. BATTISON PE, CONSULTING BROADCAST ENGINEER,

FCC APPLICATIONS AM, FM, TV, LPTV

Antenna Design, Proofs, Fieldwork

2684 State Route 60 RD # 1

Londonville, OH 44842

419-994-3849

### East Coast Video Systems

A full service  
company providing...

- Consultation
- Engineering & Design
- Installations
- Training

Serving...

- Cable Systems
- Corporate Facilities
- Broadcast Facilities
- Teleproduction Facilities

52 Ralph Street, Belleville, NJ 07109 (201) 751-5655

For Classified Advertising or Professional Services information  
Call Renée Hambleton at (913) 967-1732

# Classified

## HELP WANTED

United Services Automobile Association, an integrated family of companies providing insurance and financial products and services, has an immediate opening for:

### Video Systems Engineer

The qualified candidate will serve as Video Communications Systems Engineer, responsible for the technical maintenance of the video communications production, broadcast, distribution, and teleconferencing systems. Additional responsibilities entail engineering design, installation and maintenance of all audio/video communication and electronics for USAA and oversee and supervise Technicians operating these systems. You must have broad hands-on experience with studio cameras, Sony Betacams, one inch and Beta SP Tape formats. System design desirable. Familiarity with broadband cable, satellite and fiberoptic transmission would be a plus.

To qualify, you must have eight to ten years experience as a Video Communications Systems Engineer.

USAA offers superb work and recreation environments, a four day week, innovative benefits and vigorous career development. Qualified candidates should send a resume to:

USAA  
USAA Building  
San Antonio, TX 78288-0058  
Attn: Employment Placement/SM  
An Equal Opportunity Employer.



**DIRECTOR OF ENGINEERING FOR LOS ANGELES**  
Spanish-language TV station. Applicant must have 7-10 years in engineering management, including planning, maintenance, design/installation, FCC rules and regs. UHF transmitter and SNG truck experience. Supervises a department of 12. Send resume or fax (818)247-2561 to P. Gallagher, KVEA, 1139 Grand Central Avenue, Glendale, CA 91201 EOE 7-92-11

**TV MAINTENANCE ENGINEER NEEDED AT NBC VHF** in 77th market. 39 year engineer retiring. Engineering staff averages 20 years tenure. Solid owners. 48 share in news. Ozarks. Table Rock Lake. Branson country music less than hour away. You must be able to fix and maintain Sony Beta. Grass Valley, etc. Resume (no calls) Chief Engineer, KYTV, P.O. Box 3500, Springfield, MO 65808. EOE. 7-92-11

Classified advertising now available as Classified Display or By-the-word.

**Classified Display:** \$112 per column inch, per insertion, with frequency discounts available. 1 inch minimum, 10 inches maximum per ad. Blind ads \$40 additional. Reader Service number \$50 additional. Spot color available for \$150 (color determined by publisher).

**By-The-Word:** \$1.75 per word, per insertion. Initials and abbreviations count as full words. Blind ads \$40 additional. Minimum charge \$40 per insertion. No agency discounts allowed for classified ads.

Contact Renée Hambleton, at (913) 967-1732, for information on frequency and pre-payment discounts. To place your classified ad send your order and materials to Broadcast Engineering, Classified Ad Mgr., P.O. Box 12901, Overland Park, KS 66282-2901.

## HELP WANTED

### FIELD SERVICE ENGINEER (San Diego)

Join us in San Diego. Apply your NTSC and video/audio transmission expertise servicing and supporting a new commercial scrambler system, both by phone and at customer sites worldwide.

Previous experience with Broadcast and CATV technologies and mini-computer operating systems (i.e., VAX/VMS) is required. Knowledge of satellite comm. systems, data comm. hardware and video processes is desirable. ASET or formal training in two of the above technologies is essential, along with computer coursework.

Duties include troubleshooting, maintaining, repairing the systems' hardware and software; testing and configuring equipment; and conducting field tests. Travel involved.

Please mail or fax (619/535-2497) resume, including current salary, to: Human Resources, VideoCipher Division, General Instrument Corp., 6262 Lusk Blvd., San Diego, CA 92121. EOE.

VideoCipher Division

**GENERAL INSTRUMENT**

## RF ENGINEERS

**General Atomics**, a diversified high technology research company, has openings for qualified RF engineers to work on nuclear fusion programs including the design, building and operation of power supplies and components for pulsed and CW RF systems with a frequency range of 30 to 120 MHz.

Qualifications include an EE degree (advanced degree desirable) and experience in operation and maintenance of high voltage power systems and broadcast equipment. Must be capable of troubleshooting down to component level.

**General Atomics** offers opportunities for professional advancement along with excellent salary and benefits. Candidates should send their resume to: Dept. 92-7, General Atomics, P.O. Box 85608, San Diego, CA 92186-9784. We are an Equal Opportunity Employer. Principals only, please.



**GENERAL ATOMICS**

**CHIEF ENGINEER FOR TAMPA BAY AM/FM.** Must be able to handle R.F., audio, studio, antenna maintenance etc. Please reply in total confidence to Broadcast Engineering, P.O. Box 12901, Dept. 732, Overland Park KS 66282-2901. 7-92-11

**VETERAN MAINTENANCE ENGINEER WITH 7+ YEARS' EXPERIENCE.** Individual must be capable of performing maintenance on all types of electronic equipment including "D2" type. If you are a self-motivated, highly experienced broadcast engineer with an in-depth background in state-of-the-art software and hardware currently implemented in today's broadcast facilities, this job is for YOU! Expedite your resume via FAX 213/460-5527 or send to KTLA, Channel 5, Human Resources Department, 5800 Sunset Boulevard, Los Angeles, CA 90028. A Tribune Broadcasting Station. An equal employment opportunity employer. 7-92-11

Fax your ad to 913-967-1901  
Attn: Renée Hambleton  
It's that EASY!

# Classified

## SERVICES

**BROADCAST STANDARDS CONVERSIONS**

VIA STATE-OF-THE-ART, 4 FIELD, EMMY AWARD-WINNING CONVERTER

PAL BETACAM SP • PAL 1" • S-VHS  
3/4" • D-2 • HI-8 • VIDEO-8 • 1/2"

VIDEO DUPLICATION  
ALL FORMATS

**1-800-USA-DUB1**  
1 8 0 0 • 8 7 2 • 3 8 2 1

**USA STUDIOS**

TRANSMITTER TUBE REBUILDING SINCE 1941:  
3CX2500, 4CX5000, 4CX15000 and many others. Write for details. FREELAND PRODUCTS INC., 75412 Hwy. 25, Covington, LA 70433. (504) 893-1243 or (800) 624-7626.  
1-91-tfn

**PATCHPRINTS** VIDEO TIE LINES  
In 1 2 3 4 Aux

**Custom Patch Bay Labeling**

**PATCH BAY DESIGNATION COMPANY**  
Div. of Glendale Rubber Stamp & Printing Co., Inc.

P.O. Box 6278, Glendale, CA 91205 Telephone (818) 241-5585  
4742 San Fernando Road (818) 241-5585  
Glendale, CA 91204 FAX (818) 507-5050

## FOR SALE

**NEW PANASONIC EQUIPMENT!**  
BROADCAST-PROFESSIONAL-INDUSTRIAL  
FANTASTIC PRICES—FULL WARRANTY  
FACTORY AUTHORIZED TOP QUALITY!  
**ADVANCED VIDEO SYSTEMS**  
800-233-2430, 9am-7pm, M-F

**CALL US** For New and Rebuilt Radio Broadcast Equipment

**HE HALL Electronics**

**(804) 974-6466**

1305-F Seminole Trail • Charlottesville, Va. 22901

Circle (39) on Reply Card

**BCS BROADCAST STORE, INC.**

VIDEO / AUDIO  
Buy • Sell  
Consign • Service  
Over 3000 Items in inventory

1/2 inch recorders to digital

Burbank, CA 818/845-7000  
New York, NY 212/268-8800

AS A PACKAGE: SONY BVP 70 IS CAMERA, CA-3A (With Anton Bauer goldmount bracket), Fujinon 14 x 8.5 lens, Fujinon remote zoom control/pistol grip (SRD-52), BVW-35 VTR, CCZ-10 cable, Sachtler video 20 tripod head w/carbon fiber medium legs, Nalpak hard case for Sachtler tripod, Sachtler lightweight spreader, Thermodyne camera case, all excellent condition. Best offer. (415) 243-8880.  
6-92-21

**AMERICAN BROADCAST MC-50 SEQUENCER.** Complete System. Fully Maintained and On Line, with 12 1/4" SP Sony VCR's. Contact Joe Brunke Chief Engineer. KDFI Dallas, TX 214-637-2727.  
7-92-11

**COPPER** - For Construction. Strap, screen, #10 wire. 800-622-0022.  
7-92-11

### -NEW- COLOR BARS, BLACK SYNC \$379

The CSG-50 from HORITA generates both SMPTE or full-field color-bars or black-burst, and composite sync signals. Built-in timer switches from color bars to black after 30 or 60 seconds. Full RS-170A spec. Genlock your system, laydown color-bars and black. Desktop and rackmount versions. UNCONDITIONAL GUARANTEE. Contact your local video dealer or

**HORITA - P.O. Box 3993  
Mission Viejo CA 92690 (714) 489-0240**

**TUBES 4CX3000A, 833A, 4-1000A, 4CX10000D, and more.** We carry large inventory, all major brands (EIMAC, AMPEX, RCA) Call Stew 1-800-842-1489.  
1-91-tfn

**SALE: 2 VHF(8) XMITTERS, POWER OUT 5KW IN COLOR.** Dumont 1956 Model 8000, RCA 1965 Model TT-5BH. Contact Norm Johnson or Ivan McKinnon 207-764-4461. Dumont will be available by the end of June and the RCA will be available by the end of August or first of September.  
7-92-11

Use Broadcast Engineering Classifieds

## FOR SALE

### BROADCAST EQUIPMENT RESALE NETWORK

A VAST SELECTION OF ITEMS LISTED...  
MANUFACTURER & DEALER DEMO UNITS...  
MULTIPLE LIQUIDATIONS & CLEARANCES...  
NOW IS THE TIME TO BUY!!!

**BROADCAST BULLETIN BOARD SERVICE**  
INSTANT PRICING AND AVAILABILITY  
24 HOURS A DAY!!

**CALL (708) 670-7790**

REGIONAL SUPPORT - EXPERIENCED SALES ENGINEERS - FAST ANSWERS - NEW, USED, DEMONSTRATOR AND NEWLY INTRODUCED PRODUCTS AVAILABLE, AND MOST IMPORTANTLY, OUR CONCERN FOR TOTAL CUSTOMER SATISFACTION! THE ONLY PRODUCT SUPPLIER YOU SHOULD CONSIDER IS:

### PROVID SUPPLY CORP.

Chicago (708) 670-PROS  
St. Louis (314) 469-7297  
Tampa (813) 789-1285

### SONY BVC-10 BETACART \$135,000

#### C-FORMAT

SONY BVH-2500 from \$22,000  
SONY BVH-3100 from \$25,000

#### CHARACTER GENERATORS

CHYRON INFINITI \$48,000

CHYRON 4200 FROM \$24,000

CHYRON SUPER SCRIBE \$22,000

#### MICOR VIDEO EQUIPMENT SALES

(312) 334-4300  
CHICAGO

(310) 921-3306  
LOS ANGELES

### GENLOCK YOUR SYSTEM BLACK-BURST, SYNC, AUDIO TONE \$289

Need to genlock your video system? The BSG-50 from HORITA generates black-burst, composite sync, and a 1-KHZ audio tone. Provides 6 separate outputs of any mix of up to 4 each of RS-170A black or sync. Also provides subcarrier, blanking, drive. UNCONDITIONAL GUARANTEE. Contact your local video dealer or

**HORITA - P.O. Box 3993,  
Mission Viejo CA 92690 (714) 489-0240**

## TRAINING

**FCC GENERAL CLASS LICENSE.** Cassette recorded lessons with seminars in Washington, Newark, Philadelphia. Bob Johnson Telecommunications. Phone (213) 379-4461.  
5-90-tfn

## EQUIPMENT WANTED

**WANTED: USED VIDEO EQUIPMENT.** Systems or components. **PRO VIDEO & FILM EQUIPMENT GROUP:** the largest USED equipment dealer in the U.S.A. (214) 869-0011.  
4-91-tfn

## Advertising sales offices

### NEW YORK, NEW YORK

Gordon & Associates  
210 President Street, Brooklyn, NY 11231  
Telephone: (718) 802-41488 Telefax: (718) 522-4731  
Joanne Mathon  
Telephone: (212) 332-0622 Telefax: (212) 333-0663  
885 7th Avenue, 38th Floor  
New York, NY 10106

### CHICAGO, ILLINOIS

Vynn Oboons  
Telephone: (312) 435-2361 Telefax: (312) 822-1408  
85 East Jackson, Suite 1100  
Chicago, IL 60604

### SANTA MONICA, CALIFORNIA

Herbert A. Schiff  
Telephone: (310) 393-9285  
Joan Perlman  
Telephone: (310) 458-3987  
Kathy Daugherty  
Telephone: (310) 453-8695  
Schiff & Associates  
501 Santa Monica Blvd. Ste. 401  
Santa Monica, CA 90401  
Telefax: (310) 393-2381

### OXFORD, ENGLAND

Richard Woodley  
Inneter Publishing Corp.  
Unit 3, Fern Business Centre  
Chilton Road, Deddington  
Oxford OX15 4TF, England  
Telephone: (0865) 38794 Telefax: (0865) 38040  
Telex: 837449 BESC G

### TOKYO, JAPAN

Mitsy Yoshikawa  
Orient Echo, Inc.  
1101 Grand Maison Shinjyokyo-Chu 2-48  
Shinjyokyo-ku, Tokyo 162, Japan  
Telephone: (03) 235-9961 Fax: (03) 235-5402  
Telex: J-33376 MYORIENT

### FRIEVELLE, SOUTH AUSTRALIA

John Williamson  
Thurswell, Williamson, Rep Pty Ltd  
109 Conyngham Street, Frievelle 5063  
South Australia  
Phone: 759-522 FAX: 08 79 9522  
Telex: AA87113 HANQM

### CLASSIFIED ADVERTISING

OVERLAND PARK, KANSAS  
Renee Hamblen  
P.O. Box 12901, Overland Park, KS 66282  
913-967-4732

# Ad Index

|                              | Page<br>Number | Reader<br>Service<br>Number | Advertiser<br>Hotline |                                       | Page<br>Number | Reader<br>Service<br>Number | Advertiser<br>Hotline |
|------------------------------|----------------|-----------------------------|-----------------------|---------------------------------------|----------------|-----------------------------|-----------------------|
| Abekas Video Systems         | 39             | 20                          | 415-369-5111          | Logitek                               | 81             | 42                          | 713-782-4592          |
| Acrodyne Industries, Inc.    | 45             | 24                          | 800-523-2596          | Louth Automation                      | 37             | 19                          | 415-329-9498          |
| ADC Telecommunications       | 3              | 4                           | 800-726-4266          | Maxell Corp. of America               | 31             | 17                          | 800-533-2836          |
| Ampex (AVSD)                 | 40-41          | 21                          | 800-25AMPEX           | Nikon Electronics Imaging             | 5              | 5                           | 800-NIKONUS           |
| Ampex Recording Media        | 15             | 10                          | 415-367-3809          | NVision Inc.                          | 63             | 32                          | 916-265-1000          |
| Aphex Systems Ltd.           | 55             | 29                          | 818-767-2929          | Opamp Labs, Inc.                      | 84             | 48                          | 213-934-3566          |
| Audio Precision              | 13             | 9                           | 800-231-7350          | Orban, Div. of AKG Acoustics          | 7,17           | 6,11                        | 510-351-3500          |
| Auditronics, Inc.            | 11             | 8                           | 901-362-1350          | Otari Corp.                           | 50-51          | 27                          | 415-341-5900          |
| Belden Wire & Cable          | 76-77          | 40                          | 800-BELDEN4           | Panasonic                             | 34-35          |                             | 800-524-0864          |
| Broadcast Video Systems Ltd. | 83             | 44                          | 416-764-1584          | Pesa America                          | IFC            | 1                           | 205-880-0795          |
| BTS Broadcast TV Systems     | 21             | 13                          | 800-962-4BTS          | Pioneer RVR Division                  | BC             | 2                           | 201-327-6400          |
| Canare Cable, Inc.           | 82             | 43                          | 818-365-2446          | Roland Corp. US                       | 9              | 7                           | 213-685-5141          |
| Cellcast                     | 27             | 14                          | 918-272-8504          | Ross Video Ltd.                       | 19,69          | 12,35                       | 613-652-4886          |
| CH Products                  | 73             | 51                          | 619-598-2518          | Sharp Electronics                     | 61             | 31                          | 1-800-BESHARP         |
| Cole Wire & Cable Co.        | 71             | 37                          | 708-673-2210          | Shure                                 | 1              | 3                           | 800-25SHURE           |
| Continental Electronics      | 67             | 50                          | 214-381-7161          | Sierra Automated Systems              | 71             | 38                          | 818-840-6749          |
| DPS                          | 43             | 22                          | 416-754-8090          | Sony Business & Professional<br>Group | 33,59          |                             | 800-635-SONY          |
| Dolby Labs Inc.              | 56-57          | 30                          | 415-558-0200          | Sony Pro Video Tape                   | 24-25          |                             | 800-635-SONY          |
| Dynair Electronics, Inc.     | 66             | 34                          | 800-854-2831          | Tascam                                | 30             | 18                          | 213-726-0303          |
| ESE                          | 73             | 53                          | 310-322-2136          | Tektronix, Inc.                       | 65             | 33                          | 800-TEK-WIDE          |
| Fast Forward Video           | 84             | 49                          | 800-755-TIME          | Telex Communications, Inc.            | 29             | 16                          | 800-828-6107          |
| Hall Electronics             | 87             | 39                          | 804-974-6466          | Thomson Broadcast                     | 49             | 26                          | 800-882-1824          |
| Illbruck                     | 73             | 52                          | 800-662-0032          | Trompeter Electronics                 | 83             | 45,46                       | 818-707-2020          |
| Jampro Antennas, Inc.        | 28             | 15                          | 916-383-1177          | Television Technology Corp.           | 47             | 25                          | 303-665-8000          |
| Jem-Fab Corp.                | 84             | 47                          | 516-867-8510          | Videotek, Inc.                        | IBC            |                             | 800-800-5719          |
| Leitch Video International   | 44             | 23                          | 800-231-9673          | The Winsted Corporation               | 81             | 41                          | 800-447-2257          |
|                              |                |                             |                       | 3M Pro Audio/Video Products           | 53             | 28                          | 612-733-1959          |
|                              |                |                             |                       | 360 Systems                           | 70             | 36                          | 818-342-3127          |

# Total Recall.



## More Memory Is Only One Reason Our 18-Input Switcher Is So Unforgettable.

With a 100-event memory — much more than any other switcher its size — our new PDG-418 has all the features of our popular Prodigy.<sup>™</sup> Plus lots more that you told us you wanted. Like a downstream keyer that can either be linked to the multi-level effects transition system or operated separately. An optional border generator for the downstream keyer. A key loop that allows key bus cut and fill to be looped through an external effects processor. Even a clean feed/third program video output that bypasses the downstream keyer and blanking processor. All of which makes our PDG-418 the best value around in a compact, affordable switcher. Call us today to find out more about the new PDG-418. Another American-made innovation from Videotek.

 **VIDEOTEK<sup>™</sup>**  
*First, we listen.*

243 Shoemaker Road, Pottstown, PA 19464 1 (800) 800-5719 (215) 327-2292 Fax: (215) 327-9295

Prodigy is a trademark of Prodigy Services Company.

# THE MOST IMPORTANT ADVANCE IN VIDEO PRODUCTION SINCE VIDEOTAPE.



## THE PIONEER REWRITABLE VIDEODISC RECORDER WITH INSTANT ACCESS.

The Pioneer Rewritable Videodisc Recorder can revolutionize the way you do video production.

Through laser technology, the VDR-V1000 provides the world's fastest, most accurate broadcast-quality editing plus the greatest media reliability available.

It offers near instant non-linear

access and the most precise frame-by-frame editing in a recording device. Gone are the typical editing problems associated with shuttling, jogging, and pre-roll.

The VDR-V1000's unique, dual-

head system gives you real-time non-linear playback. You get a perfectly clean edit every time. You can erase and record simultaneously. No pre-roll or post-roll is necessary.

There's no head contact with the media. Discs can be erased and re-recorded over one million times — the quality of the millionth recording is the same as the first. Discs contain up to 57,600 still frames, or 32 minutes of full motion video.

The VDR-V1000 can record audio and video simultaneously or separately, so you can dub PCM stereo audio onto video. Control is available through RS-422A or RS-232C ports. It can read and write SMPTE time code, and transmit signals compatible with component, composite or RGB formats.

With so much going for it, the VDR-V1000 leaves only one question unanswered: What are you waiting for?

For more information or a demo, contact in the East:

Linda Toleno at  
(201) 327-6400, in the

Midwest: Chris Boldt at

(708) 285-4500, and in the West:  
Bill Blair at (310) 492-9935.



**PIONEER**  
Pioneer Communications of America, Inc.

Circle (2) on Reply Card