

BROADCAST[®] engineering

An INTERTEC Publication

June 1994/\$5.00

VIDEO PRODUCTION SYSTEMS

•VIDEO SERVERS and DISK-BASED STORAGE •COMPLEX ROUTING for POST-PRODUCTION



|||||
#BXNCFHL***** 5-DIGIT 08034
#00070128# 30 BEQ 0035
0 LYTLE HOOVER
OLH- TV PROD
38 PLYMOUTH DR
CHERRY HILL NJ 08034-3643

Studio Cameras
P.44

Buy a digital camera or else.....

Or else you may be stuck with a camera left behind by digital technology.

As we all know, communications, video, information...everything is going digital. Isn't it time cameras did? Today's digital camera not only outperforms the best analog can offer but sets new benchmarks in video quality, features, stability and reliability. The days of the analog camera are numbered because digital offers too many advantages to be ignored.

With DIGITAL advantages such as a new video transparency, flesh tone detail to soften facial blemishes, precision detail correction, precision transfer of setups between cameras, a plug-in memory card to recreate exact setups of all cameras weeks or months later and serial digital outputs for D-1 or D-2/D-3 VTR's, now is the time to consider what all cameras will be...digital.

Introducing the *Digital SK-2600*



Unique PIP (Picture in Picture)
Allows a second video source to be windowed with camera video in any of four quadrants or reversed with camera video

Separate H&V detail generator
for viewfinder makes focus "pop" for camera operator

The Hitachi developed single LSI device provides full 13 bit digital processing for RGB video including detail and masking. Only Hitachi offers 13 bit video processing.

The 500,000 pixel CCD yields 900 TV line resolution and dramatically reduces aliasing. An optional, 520,000 pixel CCD is available allowing switching between 4:3 and 16:9 aspect ratios at the push of a button.

High performance Ultra-Band triax system (12MHz Green) or Field triax system for long cable lengths or Digital optical fiber system

Plug-in 6 position ND and CC filter wheels allow easy insertion of special effects filters



SK-2600² Portable Companion

- "No Diascope" internal automatic camera setup
- "Thru-the-Lens" automatic setup with standard grey scale chart

Network Users:
CBS TV City, Los Angeles
CBC Toronto, Canada

Call today for more information or a demonstration.

HITACHI

Hitachi Denshi America, Ltd.

New York	(516) 921-7200	Atlanta	(404) 242-3636
Los Angeles	(310) 328-6116	Dallas	(817) 488-452E
Chicago	(708) 250-8050	Canada	(416) 299-590C

Circle (1) on Reply Card



**WE'VE SOLVED THE KNOTTY PROBLEM OF INTERFACING YOUR
AUTOMATION, ROUTERS AND MASTER CONTROL.**

Utah Scientific is the *only* source for a completely integrated broadcast automation system. TAS, our Total Automation System, effectively squeezes seconds into the day and makes control effortless. TAS speaks directly to our AVS family of routing switchers and the MC-500 Master Control Line, featured in more stations than any other single master control switcher.

This system is unique in the industry. With it, Utah Scientific has powered working solutions for important customers such as CBS-TV, WGN and Star Television, Hong Kong.

And now, the transition to digital is in your

reach with our new DMC-601, the world's *first* Digital Component Master Control Switcher. The DMC-601 is easily upgradable from Utah's famous MC-500 series, smoothing the transition to digital at the important final step before you go on-air.

Let Utah Scientific help you make the right tie.
Call 800-453-8782. Knot calling could be costly.

utah scientific



4750 Wiley Post Way, Salt Lake City, UT 84116-2728 United Kingdom FAX: 44-734-892022 PHONE: 44-734-890111 Hong Kong FAX: 852-525-8297 PHONE: 852-868-1993

DYNATECH
VIDEO GROUP

The best professional video in the world

ALPHA IMAGE • ALTA • CABLE PRODUCTS • CALAWAY EDITING • COLORGRAPHICS • D'S² • DA VINCI • NEWSTAR • QUANTA • UTAH SCIENTIFIC

Circle (3) on Reply Card

www.americanradiohistory.com

Contents

June 1994 • Volume 36 • Number 6

BROADCAST[®] engineering



Page 23



Page 38



Page 58

VIDEO PRODUCTION SYSTEMS:

If you can shoot it, route it and store it, you've accomplished most of what you need for video production. This month's feature coverage looks at ways to do all of these tasks and more in new, innovative and cost-effective ways.

DEPARTMENTS:

- 8 **FCC Update**
FCC compliance checklist
- 10 **Strictly TV**
Audio for HDTV
- 12 **Management**
Engineering image is important
- 14 **Production**
Selecting the right location
- 16 **Troubleshooting**
LAN technology
- 20 **Technology News**
Power PC
- 72 **Re: Radio**
Back to basics
- 74 **Transmission Technology**
Tubes vs. solid-state devices
- 78 **SBE Update**
International Committee
- 80 **Applied Technology**
Tektronix Profile
- 84 **Applied Technology**
Virtual crosspoints
- 87 **New Products**
- 96 **Field Report**
Studio Audio and Video SADIe

COLUMNS:

- 4 **News**
- 6 **Editorial**
- 91 **Industry Briefs**
- 99 **Classifieds**
- 104 **Advertisers' Index**

THIS MONTH...

- 23 Disk-Based Video Storage**
By David Leathers
From desktop to video servers, disk use for video is increasing.
- 30 Complex Routing for Post-Production**
By Andrew Delle
Creating a unified control system solves many of the problems.
- 38 Digital Effects Systems**
By Curtis Chan
Getting away from the black box.
- 44 Studio Cameras**
By Marcus Weise
High tech, advanced features and smarter heads combine to make better pictures.
- 52 Audio/Video Routing Systems**
By Curtis Chan
Handling audio and video in digital and analog forms is a challenge to today's routers.
- 58 World Cup Soccer '94**
By Gerald M. Walker
The quadrennial spectacle will feature many firsts this time, particularly for U.S. audiences.
- 62 Wrist-Watch Profits**
By John C. Kean
Dick Tracy move over — the MessageWatch is here, and broadcasters get a piece of the action.
- 66 "Radio in Transition:" Implementing RBDS**
By Skip Pizzi
Getting RBDS on the air sooner rather than later has its advantages.

ON THE COVER:

Cover photography by Douglas Schwartz Photography. Video images courtes Rushes, London, England. Featured Utah Scientific equipment includes the MC master control system and the Digistore disk-based video playback device.

The Only Thing It Can't Do Is Open A Bottle Of Wine.



Telex V-Series headsets do it all. Their unique modular design make them the most versatile headsets you can buy, with interchangeable mic and cable assemblies that let you use one headset for most any application.

Comfort and sound quality are second to none, with revolutionary floating earcups that automatically adjust to any head size. And, like our other Telex headsets used by pilots and NFL coaches, the durability is built in. Of course, parts and accessories are easy to get and always available.

See and hear for yourself. For the Telex pro audio dealer nearest you, call 1-800-392-3497 (416-431-4975 in Canada).

The V-Series. Maybe we should have called it the swiss army headset.



The V-Series headset, models V-220 and V-210

Made with pride in the USA.

©1994 Telex Communications Inc.

TELEX

Circle (4) on Reply Card

www.americanradiohistory.com

News

By Dawn Hightower,
senior associate editor

Broadcasters oppose spectrum royalty fee proposal

The National Association of Broadcasters (NAB) opposes the creation of spectrum royalty fees to help pay for implementation of the GATT treaty.

Broadcasters would be charged a 1% gross receipts tax the first year, with the amount increasing 1% every year for five years. The proposal is designed to raise \$4.8 billion during the first five years of its implementation.

NAB opposes the tax for the following reasons:

- A spectrum royalty gross receipts tax will have a devastating impact on thousands of broadcasters. Many radio and TV stations lost money last year. A tax on gross receipts will put many of those stations out of business.
- Broadcasters already pay millions of dollars in business taxes, FCC fees and cost-of-regulation fees. They also pay for using the spectrum through providing the public free-of-charge with news, weather, public service, local and other public interest programming.
- Broadcasting is dependent on ad revenues, so the cost of spectrum royalties cannot be passed on to consumers.
- The creation of new fees goes against the foundation of broadcasting. Broadcasters receive licenses to serve the public interest in exchange for providing free, over-the-air service. By charging broadcasters for their spectrum licenses, the government is renegeing on that contract.
- Congress rejected the notion of auctioning mass media or broadcast spectrum last year, when it passed legislation creating spectrum auctions for other types of spectrum. The new royalty proposal goes against the Congressional recognition that broadcasters' role is unique among spectrum users.
- To use spectrum royalty fees to help offset the costs of implementing a trade treaty is absurd. Broadcasting is not involved in these trade issues, and entertainment issues were not included in the GATT agreement.

Standards group reviews infopike proposals on data broadcasting

The following industry groups have submitted data broadcasting proposals as they vie for the industry standard for delivery of high-speed data services that

would be built-in to conventional TV broadcast signals: BlueMont Telecom, Montreal, Quebec; Centris Communication/Leitch Video, Columbia, MD; Digideck Inc., Menlo Park, CA; Radio Telecom and Technology Inc., Riverside, CA; and Wave-Phore Inc., Tempe, AZ. Each company hopes to have its system chosen by the National Data Broadcasting Committee (NDBC), a voluntary standards-setting group sponsored by the NAB and the Electronic Industries Association (EIA).

The selection of a data broadcasting standard is important because it will allow broadcasters to participate in the information superhighway and offer consumers digital services built-in to today's analog TV broadcast signal. At data rates of hundreds of kilobits per second, a variety of digital video, audio and computer services can be offered to consumers and may also provide a second revenue stream for broadcasters.

The NDBC will evaluate all the proposals, select one or more practical systems, initiate evaluation tests and recommend voluntary standards. Testing is expected to begin in the last quarter of this year.

For more information, contact Lynn Claudy at NAB at 202-429-5346 (fax 202-775-4981) or Brian Markwalter at EIA at 202-457-7733 (fax 202-457-4985).

EIA announces EDS standard

The Electronics Industry Association (EIA) has announced the official release of its extended data service (EDS) standard "Recommended practice for line 21 data service," EIA-608 document. The document was developed by the EIA's Television Data Systems Subcommittee (TDSS), and describes a method for full use of the VBI line 21 field 2 for additional captioning and other extended data services. The first draft of the EIA-608 document was released in April of 1993. An initial prototype was shown at NAB '93. Since that time the document has undergone final revisions and has been approved as an EDS standard by EIA members, the American National Standards Institute (ANSI) and the TDSS committee. Products incorporating EDS technology were shown for the first time at NAB '94. EDS can provide program name and description, length in hours and minutes, rating, category type and amount of time until a program concludes, and other information such as time of day and emergency weather reports.

BROADCAST engineering

EDITORIAL

Brad Dick, Editor
Skip Pizzi, Technical Editor
Steve Epstein, Technical Editor
Dawn Hightower, Senior Associate Editor
Deanna Reed, Associate Editor
Tom Cook, Senior Managing Editor
Carl Bentz, Directory Editor

ART

Ruth Knotts, Associate Art Director

BUSINESS

Raymond E. Maloney, President
Cameron Bishop, Group Vice President
Dennis Triola, Publisher
Tom Brick, Marketing Director
Stephanie Hanaway, Group Director, Special Projects
Kathryn Buckley, Promotions Manager
Sandra Tomczak, Promotions Coordinator
Dee Unger, Director Advertising Services
Nancy Hupp, Advertising Production Manager
Susan Jones, Advertising Coordinator
Chris Coughlin, List Rental Sales Representative
Doug Coonrod, Corporate Art Director
Virginia Picotte, Circulation Manager
Customer Service: 913-967-1707 or 800-441-0294

TECHNICAL CONSULTANTS

Eric Neil Angevine, Broadcast Acoustics
John H. Battison, Antennas/Radiation
Dennis Clapura, Radio Technology
Dane E. Erickson, P.E., Systems Design
John Kean, Subcarrier Technology
Donald L. Markley, Transmission Facilities
Harry C. Martin, Legal
Curtis Chan, Audio/Video Technology

MEMBER ORGANIZATIONS

Sustaining Members of:
• Acoustical Society of America
• Society of Broadcast Engineers
• Society of Motion Picture and TV Engineers

Member,
American Business Press

Member,
BPA International

ABP

BPA
INTERNATIONAL

BROADCAST ENGINEERING is edited for corporate management, engineers/technicians and other station management personnel at commercial and educational radio and TV stations, teleproduction studios, recording studios, CATV and CCTV facilities and government agencies. Qualified persons include consulting engineers and dealer/distributors of broadcast equipment.

BROADCAST ENGINEERING (ISSN 0097-1394) is published monthly, except semi-monthly in November, and mailed free to qualified persons within the United States and Canada in occupations described above. Second-class postage paid at Shawnee Mission, KS, and additional mailing offices. POSTMASTER: Send address changes to Broadcast Engineering, P.O. Box 12668, Overland Park, KS 66282-2960.

SUBSCRIPTIONS: Non-qualified persons may subscribe at the following rates: United States and Canada, one year, \$50.00. Qualified and non-qualified persons in all other countries: one year, \$60.00 (surface mail); \$115.00 (air mail). Single copy sales, \$5.00. Subscription information: P.O. Box 12937, Overland Park, KS 66282-2937.

Authorization to photocopy items for internal or personal use, or the internal or personal use of specific clients, is granted by Intertec Publishing, provided that the base fee of U.S. \$2.00 per copy, plus U.S. \$0.00 per page is paid directly to Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923 USA. For those organizations that have been granted a photocopy license by CCC, a separate system of payment has been arranged. The fee code for users of the Transactional Reporting Service is 0097-1394/94 \$2.00 + \$0.00.

CORRESPONDENCE

Editorial and Advertising: 9800 Metcalf, Overland Park, KS 66212-2215. Telephone: 913-411-1300; Editorial fax: 913-967-1905. Advt. fax: 913-967-1904. © 1994 by Intertec Publishing. All rights reserved.

INTERTEC
PUBLISHING


AirPlay.™

Tapeless commercial playback will make you an Avid fan.

Today, more broadcasters choose Avid AirPlay over any other disk-based playback system to replace their aging cart systems.

They're becoming Avid fans with good reason. AirPlay provides instant access to commercials, promos, and news stories. It's flexible and easy to use, so you can juggle playback schedules right up to the last minute. Even while playing to air.

AirPlay is scalable, allowing you to grow from single- to multi-channel playback. It handles up to 56 hours of online storage and offers multiple redundancy options, including RAID-3. AirPlay's unique architecture also eliminates single points of failure for exceptional reliability. "Make goods" are a thing of the past.



AirPlay's user interface is designed for quick and easy operation.

Fully compatible with Avid's online editing systems, AirPlay is the only disk-based playback system that can be

networked with your promo production and news-gathering operations. For maximum efficiency, it can also be integrated with your traffic and billing systems, automation systems, and newsroom computer systems.

With over 4,000 systems installed, Avid is the world leader in disk-based technology for recording, editing, and playback. Call us today. We'll help you become an Avid fan of AirPlay! 1-800-949-AVID (#2)



Avid is a registered trademark and AirPlay is a trademark of Avid Technology, Inc.

Avid Technology, Inc., One Park West, Tewksbury, MA 01876

Circle (11) on Reply Card

Editorial

The changing face of American broadcasting

The stone foundation of broadcast television was shaken on May 24 with the announcement by Fox Broadcasting of the addition of 12 new affiliates. Although Fox looked the part of a winner, CBS, ABC and NBC scrambled to put a best light on the situation where they all lost stations.

When Fox out bid CBS last fall for NFL's National Football Conference broadcast rights, some saw it as a big mistake. After all, how could the network make any money with the games being broadcast in some markets by second-tier stations. Well, those pundits apparently didn't know Rupert Murdoch very well. The NFL contract was clearly but one step in his bold plan to become not just another "me-too" network, but a full-time player in every sense of the word.

Here at my home base, the talk around the drinking fountain wasn't so much what our former NBC affiliate will be broadcasting as a Fox affiliate, but who's going to get the NBC network. The viewers don't really care whether the Simpsons is on Channel 4 or 41. What they do care about is their favorite soap opera and local baseball team.

The larger issue isn't what afternoon soaps will be on what stations, but how this realignment may affect the entire national network structure. In one sense, it weakens all the networks. The pie isn't any bigger, it just will be divided among four semi-equal players instead of three semi-equal players. And if Paramount and Time Warner have their way and launch their networks, look for more affiliate shakeups.

This mega deal may remind you of the TCI-Bell Atlantic story. While the transaction was never completed, the mere audacity of such an arrangement shook the media world. Although the deal eventually fell from its own weight, it clearly set the tone for future ventures.

The key point for terrestrial broadcasters is that the Fox announcement is but another example of the changing nature of this business. While station managers and engineers shouldn't quake in their boots about the recent changes, they should recognize that sitting back and assuming the view (or channel) won't change is more than short-sighted. It's suicidal.



Brad Dick

Brad Dick, editor



See spot.



See spot run.



See spot run without
aggravating the entire audience because it's
too damn loud.

Who needs the aggravation? With the new OPTIMOD-TV DIGITAL you never have to worry about poorly mixed programs, complaints from irate viewers, or advertisers devising

diabolical new ways to "punch" their sound. The 8282 handles it all quietly, digitally, and automatically. The OPTIMOD-TV is fully programmable to optimize audio processing of

your programs. And with built-in presets, general programming, news, sports, film, fine arts and other broadcasts will always sound great at home. Never too loud, too soft, or too spotty.

orban®

H A Harman International Company

1525 Alvarado St., San Leandro, CA 94577 USA Phone 1•510•351•3500 Fax 1•510•351•0500.

© 1994 AKG Acoustics, Inc. Orban and OPTIMOD are registered trademarks of AKG Acoustics, Inc. All other trademarks are property of their respective companies.

Circle (12) on Reply Card

www.americanradiohistory.com

FCC Update

Better safe than sorry

Harry C. Martin and
Andrew S. Kersting

Broadcasters should periodically conduct a self-inspection of all facilities, including their transmission site and tower, to ensure compliance with applicable FCC rules and regulations. The first step in reviewing a station's technical operation is to check the areas where FCC inspectors most often issue violations. See the inspection checklist for the pertinent sections of the FCC rules.

Broadcasters need to periodically conduct a self-inspection of their facilities. This is not only good business practice, it's the law. The point of such an examination is to ensure that the station is in compliance with all FCC regulations.

The first step in such a process is to review your station's technical operation and the place to begin is where FCC inspectors are issuing violation notices. The example checklist will help you to identify those technical areas often targeted by the FCC for a close look.

Work through this list. Look closely at these areas for the stations for which you are responsible. For some engineers (chief operators) this process will need to be completed for each station. (*Editors note:* The NAB publications department has a guidebook called the *NAB Guide for Broadcast Station Chief Operators*, which provides a checklist that engineers and managers can use for technical and non-technical areas. The cost is \$30 for members and \$60 for non-members. It may be ordered by calling 1-800-368-5644.)

Although it may take some time to work through the list, it represents time well spent. The last thing any engineer or manager wants is a notice of violation or even a fine for not complying with FCC rules. The adage "Better safe than sorry," certainly applies here.

FCC initiates inquiry into broadcast and cable EEO regulations

The FCC has initiated an inquiry regarding the effectiveness of its EEO rules governing the broadcast and cable industries. The commission is requesting in-



Sample FCC inspection checklist

- ✓ All towers are correctly painted — (17.50)
- ✓ AM towers are properly fenced — (73.49)
- ✓ All current station authorizations (including auxiliary) are posted — (73.1230(a))
- ✓ Chief operator is designated in writing and posted — (73.1230(a) & (b))
- ✓ Contract chief operator agreements are on file — (73.1870(b)(3))
- ✓ Chief operator's and all duty operators' licenses posted — (73.1230(a) & (b))
- ✓ AM monitor point descriptions are correct — (73.158)
- ✓ Chief operator is making weekly station log review — (73.1870(c)(3))
- ✓ Station logs for the past two years are available and complete — (73.1840)
- ✓ All station logs indicate a weekly EBS test sent and received — (73.961)
- ✓ Remote control and metering operational and calibrated (73.1410)
- ✓ Most recent equipment performance measurements available and complete — (73.1590)
- ✓ Transmitted signal meets FCC specifications and is in accordance with station license — (73.44/73.317)
 - (i) Operating power within limits (90%-105%) — (73.1560)
 - (ii) Modulation within limits 100% — (73.1570)
- ✓ Operators are properly trained — (73.1860)
- ✓ EBS receiver working and tuned to proper station — (73.932)
- ✓ EBS test transmissions OK.
 - (i) Both tones present — (73.906)
 - (ii) Each tone modulates transmitter at 40% — (73.906(c))
 - (iii) Tone duration 20-25 seconds — (73.906(d))
- ✓ EBS encoder is FCC-type accepted (i.e. no tones on cart) — (73.942(a))
- ✓ EBS checklist with authenticator envelope at operator duty position — (73.908)

formation to assist it in preparing its October 1994 report to Congress on the effectiveness of its EEO policies as required by the 1992 Cable Act.

The FCC noted that some broadcasters believe they have unique difficulties attracting and retaining minority employees because they are located in small markets.

In addition, the commission proposed changes in its standard inquiry letters, which currently request recruitment and hiring information for the last three years of the license term. The FCC requested comment concerning whether its inquiry letters should be revised to request information for the entire license term, or for some lesser period of time.

The commission also requested comments concerning whether part-time employees no longer should be considered in an EEO review, or, alternatively, how much consideration should be giv-

en to part-time hires in light of the FCC's emphasis on full-time positions.

In another initiative, the FCC asked whether it should supplement its renewal inquiry procedures by conducting on-site audits of broadcasters in certain cases. ■

Date line

Annual ownership reports or ownership certifications for commercial broadcast stations in the following states must have filed by Aug. 1, 1994: North Carolina, South Carolina, Illinois, Wisconsin and California. In addition, TV stations in California, and LPTVs and TV translators in Kansas and Nebraska must file their renewal applications by Aug. 1, 1994.



Martin and Kersting are attorneys with Reddy, Begley & Martin, Washington, DC.

The V4228 Digital Varicomb Decoder

Vistek Electronics is proud to announce the launch of the V4228 Digital Varicomb Decoder.

Designed to be the ultimate composite decoder for the analogue and digital world the industry standard Varicomb technology has been refined and implemented digitally providing performance that actually exceeds that of the existing Varicomb product!

The propriety Varicomb algorithm has long been acknowledged as the most transparent process for transferring from the composite to component domain for real pictures, eliminating the artifacts of cross colour and cross luminance without sacrificing resolution. Add to this the accuracy and stability of digital technology and the optional adaption to a frame comb for perfect decoding of still pictures, whilst maintaining all the conventional Varicomb benefits when there is motion and you have the best decoder available.

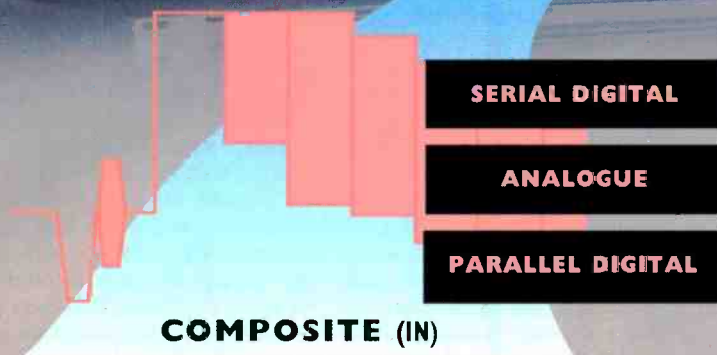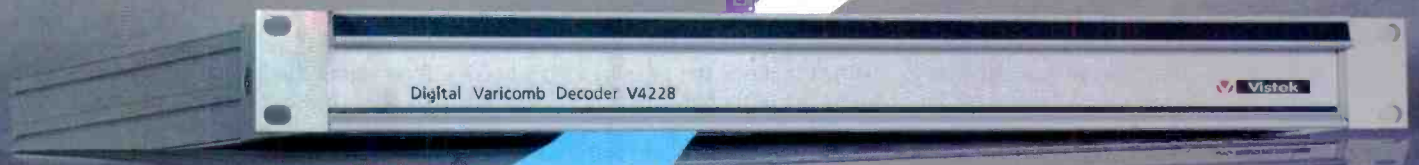

The flexibility of configuration allows the tailoring of analogue and digital interfaces to suit the requirements of any installation with the easy addition of interfaces as needs change. PAL or NTSC, analogue or digital, two dimensional or three dimensional adaptor the V4228 IS the ultimate solution!



The World's Standard for all World Standards

Vistek Electronics Ltd., Unit C, Wessex Road, Bourne End, Bucks SL8 5DT, England. Telephone: (+44) 0628 531221 Telex: E46077 Facsimile: (+44) 0628 530980
U.S. Sales contact: Preferred Video Products, 4405 Riverside Drive, Burbank, CA 91505 Tel. (818) 562 6544 Fax. (818) 562 3342

Circle (13) on Reply Card

www.americanradiohistory.com



Strictly TV

Audio for HDTV

By Curtis Chan

On the HDTV news scene, a letter from the NCTA, addressed to FCC chairman Richard Wiley, asked for limitations on the uses of the full HDTV bandwidth. MSTV's president, Margita White, said that she regrets the letter's objection to ancillary services because it introduced "discord and confrontation near the end of a historical cooperative process." The letter further pointed out broadcasters have been able to use the vertical interval of NTSC for non-broadcast commercial purposes for years, and turning over part of the HDTV channel to such uses would simply be an extension of that. White concluded the cable industry would be the major beneficiary of the quick introduction of HDTV because it didn't have to wait for the ratification of the standard to begin its own service.

The HDTV audio standard

This month's focus turns to the acceptance of Dolby's AC-3 digital coding system, which was selected by the Grand Alliance to deliver multichannel digital surround sound for HDTV. Furthermore, AC-3 has been approved by the FCC's Technical Subgroup for the Advisory Committee on Advanced Television Service for incorporation and testing later this year. AC-3's 2-channel form is already being offered by General Instrument, as an integral part of its DigiCipher II all-digital satellite and cable TV systems.

AC-3

Dolby AC-3 is a perceptual digital audio coding technique designed to take maximum advantage of human auditory masking. AC-3 allows for the storage or transmission of up to six audio channels in less bandwidth than is required for only one channel on a CD. The current SMPTE-recommended 5.1 channel system running at rates as low as 320kb/s, comprises five full bandwidth channels representing left, center, right, left-surround, right-surround and a low-frequency subwoofer channel.

AC-3 is fundamentally an adaptive trans-

form-based coder using a frequency-linear, critically sampled filter bank technique. The advantage of the filter bank-based coding is signal components and corresponding quantization noise components are each kept within *critical bands*. This derives maximum benefit from the masking characteristics of the human ear, and minimizes the resulting data rate needed for perceptually noise-free coding. In the presence of wideband transients, the transform block length of the filter bank can be dynamically reduced to contain quantization noise within a small temporal region about the transient. That is, AC-3 divides the audio spectrum of each channel into narrow frequency bands of different sizes optimized with respect to the frequency selectivity of human hearing. This makes it possible to sharply filter coding noise so that its frequency is forced to stay close to the frequency components of the audio signal being coded. By reducing or eliminating coding noise wherever there are no audio signals to mask it, the sound quality of the original signal can be subjectively preserved. In this way, bits are distributed among the filter bands as needed by the particular frequency spectrum or dynamic nature of the program material. A built-in model of auditory masking allows the coder to alter its frequency selectivity to make sure a sufficient number of bits are used to describe the audio signal in each band, thus ensuring that the noise is fully masked.

To capitalize on the multiplicity of channels, a dynamic bit allocation technique assigns bits across frequencies and channels as needed from a common bit pool, while taking into account both intra- and interchannel masking effects. This common bit pool technique allows channels with greater frequency content to demand more data than channels with less frequency content. It can also be used as a selective and powerful noise reducer where strong sounds in one channel can be used to mask noise in other channels.

Finally, coding gain is derived from separating and independently coding high-frequency carrier and envelope information. As a result, AC-3 can process at least

20-bit dynamic range digital audio signals over a wide frequency range. Sampling rates of 32, 44.1 and 48kHz are supported with subsequent data rates from as low as 32kb/s for a single mono channel to a high of 640kb/s.

Forethought

AC-3's absence of matrix-based (adding and subtracting of signals) processing has no impact on already-matrixed program material, such as Dolby Surround Lt/Rt signals applied to two of the five full-bandwidth AC-3 channels. In addition, the bitstream syntax and decoder operation have been designed to allow future encoder algorithm improvements to be compatible with current decoder hardware. The data format and overall system operation have been designed to allow editing at a block level without the signal having to be re-encoded. The data input to the decoder can be rocked back and forth, and when fed in reverse block order, the decoder will properly reproduce the audio time-reversed. Last, it's anticipated that an AC-3 encoder might be able to derive an amplitude compression signal that would allow the listener to select compressed, partially-compressed or undercompressed sound presentation.

AC-3 on a chip

One of the primary design objectives of AC-3 was to facilitate implementation on, and portability across, multiple DSP platforms. Initially, the encoder used six 27MHz Motorola 56001 chips; the decoder needed 11. Early units employed a pipeline architecture that imposed significant data-passing overhead. Recently, the encoder and decoder have been realized on silicon. Versions of both have each been implemented on a single Zoran ZR-38000 chip.

By coding a multiplicity of channels as a single entity, Dolby's AC-3 is able to achieve greater coding efficiency than is possible with equivalent single-channel coding techniques.

Chan is president of Chan and Associates, a marketing consulting service for audio, broadcast and post-production, Fullerton, CA.

Maxell Is On The March with the exacting digital performance of our D-2 and D-3 videocassettes. Using advanced magnetic tape technology, featuring Ceramic Armor Metal particles, Maxell has produced the perfect production tapes for every recording application from ENG/EFP to broadcasting. Both D-2 and D-3 feature

unmatched error rate and consistent quality, even under the severe operating conditions. Add an incredibly strong binder system for increased durability and lower error rates, and you'll be using the superior digital videotapes that keep *Maxell On The March* creating innovative tape technology for demanding professionals.

maxell

Circle (14) on Reply Card

Maxell of America 22-08 Route 208, Fair Lawn, NJ 07410 Phone 1-800-533-2835

Management

Engineering image is important

By Rick Morris



Sam had been a chief engineer for the last five years. The general manager who hired him had taken another job, and the national sales manager was promoted to general manager. The new GM didn't understand what engineering was all about. He turned down most of the capital requests for the year, saying that the station was running fine. Sam's salary review also was lower than last year's. It was clear that the GM didn't understand what Sam did or how well he did it. Sam listened to others at the station who said that upper management never understood or cared about the engineering department and couldn't understand the complexities of the engineering part of the business. He decided it was up to him to change that attitude.

The best engineers can be their own worst enemy

Well-run engineering departments are marked by the fewest problems. A good engineering department maintains near 100% transmitter system reliability, keeps problems down by performing routine maintenance, responds quickly to repair requests and handles remotes without a hitch. Compare this performance level with other departments in a station. Programmers are successful if one in five of their program picks are a success; salespersons achieve top status by making only one in 10 sales. But an engineer who maintains only 90% transmitter reliability could be fired for excessive off-the-air time.

Often, general managers who supervise chief engineers understand little about what they do. It's up to you to make others aware of the good job you're doing.

Educating others

The lack of understanding of what the engineering department does goes beyond the GM to interaction with all departments. If someone doesn't understand what it takes to provide the requested services, they won't support your requests for resources to meet those needs.

Benefits of an "engineering literate" station are enormous. It takes time and training to become a good broadcast engineer. However, there is nothing so complex about broadcast engineering that you cannot impart an understanding of the issues and abilities to your non-technical colleagues.

Your goal in this process is to impart an understanding of: 1) the capabilities of the existing facilities of the station, 2) the limitations of the existing facilities of the station, 3) additional capabilities that new resources could provide and, 4) the challenges and performance of your department in meeting the needs of other departments. If other departments have an understanding of these concepts, they will know what you're working with, your challenges and successes, will appreciate when you perform well for them, and can advocate for new equipment.

Educate the station painlessly

Watch the content of your communications outside of the department. For example, suppose you are chief at a UHF TV station and your final visual klystron is showing its age and has tripped off a couple of times so you're sure that a replacement will be required soon. If you're a good engineer, you will order the replacement tube and when the old one fails, slip into multiplex operation and replace the klystron on the first overnight available. The engineering department would look good; however, no one would know about the high level of skill and forethought you had brought to the situation.

Instead of just replacing the klystron, and going on with business as usual, you should speak up at the GM's weekly staff meeting, and discuss how you identified that a klystron was failing, and explain that it is the main power tube for the station. Without it the station would put most of its coverage area at risk. However, because engineering is prepared for these situations, a new klystron has been shipped and will be standing by for replacement and off-air time will be minimized.

This defines the engineering concept

...an engineer who maintains 90% transmitter reliability could be fired for excessive off-the-air time.

and places the action in terms that are relevant and important to other departments (minimizing off-air time/protecting revenue). It also educates other departments about the work engineers do. After the klystron has been replaced, issue a memorandum thanking your engineering staff for their swift and competent action. A memo is a good way to make public your department's success while also providing positive feedback to your employees.

If your station has a newsletter, use it to educate others on the successes and challenges of engineering. Also, when someone asks you a question, take the time to make sure they understand the answer. This is a chance to spend a few extra minutes and give a mini-tutorial to someone that is interested in finding answers. The solution to not being appreciated is communication. You are already doing a good job, and you need to help others understand that.

Educating your boss (technically)

As you work with the general manager, take extra time to explain the technical basis for your decisions and why equipment, parts or people are important to achieve the station's goals. Be farsighted. Generate position papers on the future challenges facing the engineering department. It is better to have discussed the costs and benefits of Radio Data Services, or the new equipment that you need, before the GM has identified the business imperative. By making sure that the GM is engineering literate, you will help him to identify business opportunities, protect existing revenue, and prepare him to respond to questions from group headquarters.

Morris is an assistant professor of radio/TV/film at Northwestern University. He is a former chief engineer and a former manager of engineering and maintenance for a major TV network.



**Constant
Change.**



Constant.

ADC's New LightSwitch™ — The "Future-proof" Digital Router.

As digital formats come and go, so does a lot of expensive equipment. But while changing formats often requires upgrading cameras, decks and other source equipment, it doesn't have to affect your switching system.

Introducing the new LightSwitch digital router from ADC. A switching system that literally doesn't care what format you use. By avoiding internal reclocking, the LightSwitch router is able to switch any true digital signal, regardless of format—even ones that don't exist yet! It can interface with either coax or fiber and features on-site matrix mapping, group takes, chop mode and RS232/RS485 control panel interfaces.

So, regardless of what digital format the future holds—from D1 to HDTV—turn on the LightSwitch router from ADC. For more information about LightSwitch or our digital video and audio fiber optic links and DAs, call us at 1-800-726-4266 or circle the reader service card below.



Circle (5) on Reply Card

www.americanradiohistory.com

Production

Selecting the right location

By David Leathers



When your production hits the road, plenty of factors need to be considered when selecting a suitable remote location. First, before starting a location search or site survey, you must fully understand what the director is looking for and what will occur on the shoot. Then you can examine prospective sites in an informed and careful manner.

Although the director or field producer will be concerned with the right look, it is only one of the many concerns that your thorough location evaluation should address. Start by checking out any limitations to access and availability at a location. If a site can only be used one day a week, the production manager must know this early on to avoid scheduling problems.

Next, consider the logistical needs for water, power, restrooms, telephones, food, meal areas, make-up and wardrobe space. Locate the closest emergency/medical facilities and services; this is especially important when stunts or special effects are involved. For longer-term projects, a secure area to store equipment or a place to set up a production office is often necessary. If there are minors involved, you'll need classroom space, as well.

What about the surrounding noise? If there is an airport nearby, this can ruin live sound and result in time delays (or costly post-production fixes) for recorded takes.

Other important considerations include the number of talent and crew, whether utility or portable generator power will be used, the number and types of vehicles involved, whether dressing rooms will be needed, and what other special equipment might be required. Determine any existing or potential traffic and accessibility problems, and ensure adequate parking will be available. Oversized vehicles may require special parking permits, especially if their specific location is critical during the shoot. This is particularly important in crowded urban environments where shoot permits obtained in advance will guarantee that temporary no-parking is enforced by local po-

lice to reserve the required locations for your vehicles.

Will overnight accommodations or a shuttle bus for talent and crew be required? If so, for how long and how many people? When other crews or the public will also be traveling to the area at the same time, reserve your accommodations well in advance. Also book a few extra rooms that you can cancel without charge at the last minute if they aren't needed.

Locations and the shooting schedule

Even after deciding on a location, try to have a viable back-up site in mind. Many factors can affect a production, so having a "Plan B" is important. Also consider the following preparation issues:

- *Special access and permits:* Certain locations may present problems or restrictions for stunts or special effects. They often may require additional preparation time and special permits, which could require access to the location many days before the actual shoot.
- *Period pieces:* For dramatic productions with scripts set in anything other than the present, location elements may have to be made to fit the desired period. For example, a 1950's street scene can't have 1990-vintage streetlights. Special sets may have to be constructed, requiring time to be allotted and scheduled.
- *Interiors/exterior, day/night:* Know in advance whether indoor and/or outdoor sites will be used on location, and whether daytime and/or night-time scenes will be shot. This will affect scheduling and the amount of control you'll need on the surrounding areas. Shooting at night can simplify and complicate location shoots. Neighbors may object to having a crew working all night; on the other hand, in a downtown area, there may be no one around who cares. For scheduling purposes, determine the hours of daylight available and the times of local sunrise and sunset when evaluating any location.
- *Seasons and weather:* The time of year also will determine the suitability of many

locations. Along with shorter daylight hours in winter months in the northern hemisphere, unusual weather conditions may also occur during other times of the year in certain areas. A location's propensity for fog, high winds, snow, ice, rain, tornadoes, hurricanes, excessive heat/humidity, bitter cold or other inclemency will be well known by local residents and meteorologists. Knowing about these problems ahead of time can help keep things on schedule.

Of course, volatile weather conditions are sometimes just what a producer needs. When one production company did a recent Budweiser spot, it wanted 10-foot waves on the north shore of Hawaii during a 4-week summer shooting window. The weather service they consulted advised them that those conditions would be highly unlikely and instead suggested Mexico, Tahiti or Fiji due to the storm patterns. The producer paid heed and sent a small second unit to Fiji, leaving the main crew in Hawaii filming beach scenes. This strategy paid off, getting them the shots they needed at minimum expense.

Help is available

Before you set out on a search for locations, take advantage of the resources that are available. Local and state film commissions can be helpful, especially for areas you are not familiar with. They can supply you with pictures, labor and housing costs, weather patterns and other valuable information, usually at no cost. If the budget allows, consider using a location service, which typically charges the production company for its work.

Many weather services also are available. Some are free and others charge a fee for providing more detailed, up-to-the-minute reports on specific areas.

A location scout must be able to think like a producer, a director, a cameraman, a production manager and virtually every other key crew member. The more information that scouts can gather before the location-search or site-survey process begins, the better equipped they will be to suggest the best locations. ■

Leathers is president of Eye Square, Culver City, CA.

SADiE 2.1

There's a lot more behind a SADiE™ than you might think. Our job doesn't finish when you purchase your SADiE™ system.

For a start you can telephone for advice, support or just a chat from early morning 'til late evening, seven days a week and because we combine our sales and service into one customer support operation, you'll most likely be speaking to the same person that sold you your SADiE™. And if your system stops working (don't let anyone tell you "break-downs never happen!") customer support will get you up and running again as rapidly as possible. As our support team often work with clients on actual projects, we really understand SADiE™ and the pressures of audio production. Every SADiE™ user has the latest software - we know you are the best advertisement for SADiE™ so free software updates are a sound investment for all of us.

Finally, we don't try to make money out of maintaining your SADiE™ - an extended 3 year hardware maintenance contract will cost you less than \$1,500 and you don't have to purchase it until the end

of the 12 month free maintenance period. The price of a SADiE™? - same as ever - a complete system for \$9,995 (plus the odd local tax, duty and delivery, where applicable)



It's the little things that matter

NEW IN VERSION 2.1

fader, pan and mute automation

auto-conforming

machine control

CMX support

even faster editing

background networking

playlist overview

CD-R support

all this in addition to SADiE's phenomenal editing and proven audio processing capabilities.



FOR FURTHER INFORMATION CONTACT:

Studio Audio Digital Equipment Inc
1808 West End Avenue,
Suite 1119, Nashville, Tennessee 37203 USA
TEL: +1 615 327 1140
FAX: +1 615 327 1699



Circle (6) on Reply Card
SADiE™ DISTRIBUTORS WORLDWIDE

Argentina Kappa T 081 31 0818 F 081 31 1493 • Asia Pacific VW Marketing T +44 372 728481 F +44 372 724009 • Australia Audio & Recording T 02 316 9935 F 02 666 3752 • Canada JSGS Ltd. T 416 751 7907 F 416 751 7975 • Denmark SC Sound T 43 99 88 77 F 43 99 80 77 • Finland oy HedCom AB T 90 682 866 F 90 682 8489 • France Coach Audio T 87 77 00 00 F 87 77 01 21 • Germany Stefan Mayer Audio Engineering T 0 6851 6519 F 0 6851 6519 • Israel Sontronics Electronic Equipment T 03 5705223 F 03 6199297 • Korea Avix Trading Co. Ltd. T 02 565 3565 F 02 565 3561 • New Zealand Videot T 09 444 6085 F 09 444 3837 • Philippines Tracks T 2 631 3277 F 2 631 3267 • Poland Unico T +44 223 63025 F +44 223 301488 • South Africa Tru-fi Electronics SA (Pty) Ltd T 011 462 4256 F 011 462 3303 • Spain Lexon T 93 203 48 04 F 93 280 40 29 • Sweden Transcom T 08 730 3710 F 08 730 5125 • Switzerland Media Solutions T 064 410 031 F 064 410 035 • Taiwan Acesonic T 2 716 8896 F 2 719 2065 • Thailand KOM Trading T 2 318 2724 F 2 318 6186 • United Kingdom Studio Audio & Video Ltd T 0353 648888 F 0353 648867 •

*Windows is a registered trademark of Microsoft Inc. Studio Audio & Video Ltd reserve the right to change specifications without prior notice


Troubleshooting

LAN technology

Selecting the right network

By Kevin McNamara

In the PC-based network world, there are two choices — client-server or peer-to-peer. When most people think of networks, they envision expensive computing apparatus. This may be true in larger operations, however, many businesses are using plain old PCs with a minimal amount of additional "stuff." Depending on your specific needs, you must decide which type of network operating system to purchase. Key factors to consider are:

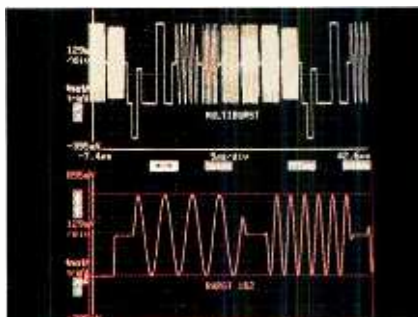

Client-server networks

Novell has dominated the "client-server" market. In client-server networks, one computer must be a "file-server" and the rest are "clients." A file server is in the business of serving files and, once properly configured, will hold the applications and data files common to the network. It also handles the network operating system and related utilities.

Novell presently offers three versions

Security within the network will be the single most important administrative task. All users on the network will be given a log-on name and password by the network supervisor. It's also the supervisor's job to assign users appropriate "rights" to programs or data that reside on the network file server. Network security has four levels:

- **Password** — gives user access to the file server
- **User's rights** — information the user can access, create or modify
- **Attribute rights** — further limits the user's ability to change a file or directory (i.e. deleting, copying, viewing)
- **File server** — allows user to access/manipulate functions of the file server (i.e. shutdown or modification of the system, addition or deletion of users)

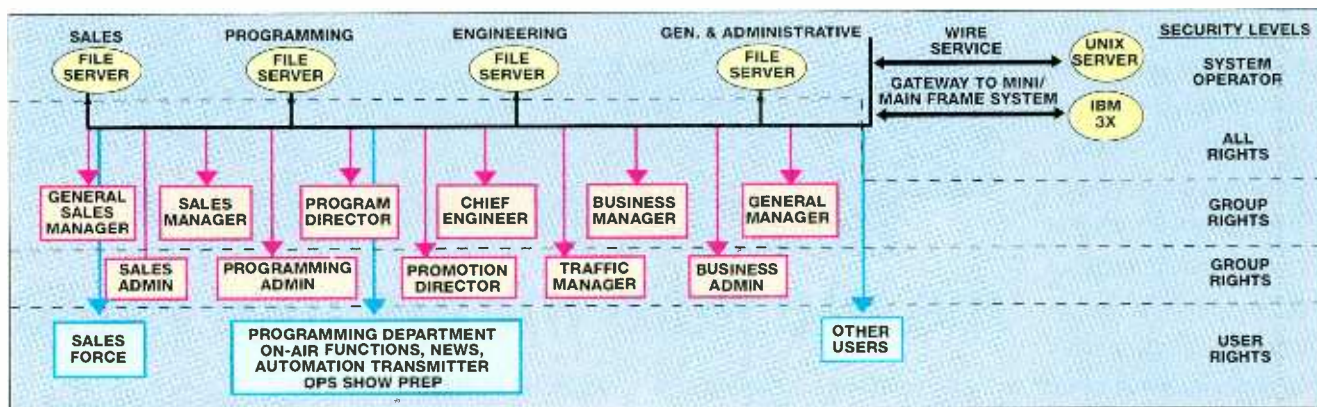


Figure 1. A basic LAN layout for a broadcast facility. Note the various security levels and the use of servers to group common areas.

1) number of users, 2) types of applications, 3) ease of administration, 4) protection of data, 5) security issues, and 6) the ability to interface with other operating systems (i.e. UNIX, Mac, OS/2, etc.).

Another factor that is important, but may get overlooked is, "What does the network need to accomplish?" The answer may differ among system users. Have meetings with staff members who will be affected, initially or in the future. Use the meetings to establish present and long-term requirements, such as: Who needs which applications? Who needs to share devices (i.e. printers, modems)? How will critical data be preserved? Be detailed and take lots of notes. At the conclusion of the meetings there should be enough information to draw a matrix that associates specific users to specific tasks. This will form the basis for the next step — choosing an operating system.

of network operating systems — version 3.11, 3.12 and 4.01. Version 3.12 is an upgraded version of 3.11 that fixes some bugs from the prior release and adds support for CD-ROM drives in the file server. Version 4.01 is a new operating system suited for large networks that contain multiple file servers in multiple locations (also called wide area networks or enterprise networks). However, its use is not limited to just large systems.

If you're concerned about losing data because of a disk drive failure, Novell supports disk mirroring (two identical drives, one controller) or disk duplexing (two drives, two controllers). A tape backup system also is recommended.

The directory structure of a hard drive on a file server is different from that of the PC on your desk. The highest level in the directory structure of a network hard drive is called a "volume" and is similar to the letter designations assigned to disk drives in DOS. Unlike DOS, a volume can span up to 32 hard disks.

Peer-to-peer networks

Let's say that your needs are more generic — you would like to have access to files that reside on Bob's PC, use the laser printer on Susan's desk and the CD ROM drive on Ed's machine. It would also be nice to have access to the fax/modem. A peer-to-peer network may be the solution. Any computer with a disk drive connected to the network can be a file server. Ethernet (bus or hub) is the topology of choice for interconnection.

Peer networks are easy to assemble — add an NIC to each computer, connect the cables and install the software. You can then redirect resources (disk drives, printers, CD-ROMs, modems) to and from the computers that are attached. In practice, once the redirection is assigned, the PC looks and acts as it would normally, except that there may be additional drives available. One final thing to be aware of is peer-to-peer networks offer only limited security at the directory and file levels of each PC attached.

McNamara is engineering manager for WGAY/WWRC radio, Washington, DC.

WHEN IT CAME TIME TO OFFER A BONUS WITH OUR A82 AND A83 SWITCHERS, WE KNEW YOU'D WANT SOMETHING OUTRAGEOUSLY VALUABLE AND TOTALLY WARPED. SO WE'RE GIVING IT TO YOU.

You want something incredibly valuable? Buy our A82 or A83

Digital Switcher with a 100 second Cache Recorder. Its multi-element

timelines give you visual, independent control of effects on each

section of the switcher plus the A57 or any other peripheral devices

under switcher control.

Then, get this.


We'll throw in an A57 Digital Effects System—FREE.*

That's tens of thousands of dollars worth of every effect imaginable.

Not to mention some unimaginable.

But call soon. Even our switchers can't make the A57 price tag

dissolve forever. Offer expires 9/30/94.

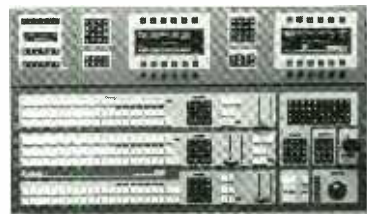

Abekas
A Carlin Company

a radical

departure

*Buy an A82 or A83 standard (2ME). Control Panel, 100 second Cache Recorder with LIPC and receive the A57 Standard System and Control Panel free. No other discounts apply.
For Details: 415-369-5111 • Atlanta 404-451 0637 • Chicago 708-699-9400 • Dallas 214-385 4544 •
Los Angeles 818-955-6446 • New York 515-939-9000 • San Francisco 415-599-3078

Circle (7) on Reply Card

www.americanradiohistory.com

Technology News

Power PC

By Curtis Chan



Everyone, including broadcasters, using a desktop or workstation computer will ultimately benefit from the continual improvements in CPU design. This month, we'll look at the PowerPC family and see how it compares with Intel's Pentium. The PowerPC or PPC for short, was jointly designed by Apple, IBM and Motorola. The PPC prefix is IBM's terminology, while Motorola uses the MPC (not to be confused with Multimedia PC) prefix.

RISC advantages and market challenges

Although the lines between reduced instruction set computer (RISC) and complex instruction set computer (CISC) are blurring, RISC architecture offers many fundamental benefits over CISC. Some of these benefits include small sets of simple hard-wired instructions that execute fast; *superscalar pipelined* design that breaks instruction execution into manageable steps; multiple instruction execution and intelligent large register sets to reduce RAM access needs. With regard to pipelining, the PPC's architecture divides the processing of an instruction like an assembly line process. A CPU with a single pipeline is a *scalar processor*, CPUs with multiple pipelines are called *superscalar*. Additional pipelines improve performance in a non-linear fashion because conflicts for resources frequently arise. These conflicts force the processor to freeze one or more pipelines until shared resources are available.

These benefits do not necessarily mean RISC is better than CISC in all instances, nor do the PPC's so-called technological advantages mean it will be widely accepted. Many challenges remain in order for PPC to expand into the mainstream of desktop computing.

Key differences

Let's look at some key differences between the PPC and x86/Pentium families. First, the PPC 601 is designed around a 0.6 micron, 4-metal layer CMOS process, which results in a small die size. This

translates to lower manufacturing costs (as compared to the first-generation Pentium using a 0.8 micron process). The 4-metal layer process eliminates the pad ring normally surrounding a processor core, further reducing the size and cost of manufacturing. The PPC 603/604/620 will be based on a 0.5 micron process. Second, the PPC specification defines an architecture that can be implemented in several ways. Third, to Intel's advantage, the CISC Pentium is touted to be superior on almost all applications not requiring floating-point operations, which translate to most business-oriented programs. On the other hand, an RISC-based system's strength, in theory, lies in floating-point operations, which include technical, graphical and scientific software. Fourth, x86/Pentium systems have secondary caches ranging from 64k to 256k, most PPC systems have none due to their large primary cache sizes. Fifth, PPC's RISC technology uses a large register set, which lets programs store many variables on the chip, reducing memory access. Sixth, unlike x86 systems, PPC chips contain on-board variable clock multipliers, enabling them to operate at multiple frequencies internally and externally. Last, the original Pentiums consumed upward of 12W, newer versions consume 4W, and its new-generation 0.6 micron, 3.3V/4W-based Pentiums, the current PPC 601 chips operate at 8W.

PPC family tree

Just as x86 describes an entire family of CPUs, so does the PowerPC designation. There are four PowerPC entries; the PPC 601, 603, 604 and 620. Each processor places a different emphasis on performance, power consumption and price. IBM and Motorola will introduce their own versions of other PPC products including a series of embedded controllers.

The PPC 601 was designed as a strategic transitional product. It diverges slightly from the PPC architecture, in part so that it can be a better bridge to the IBM POWER (Performance Optimization With Enhanced RISC) architecture. It also runs on 3.6V instead of the 3.3V standard. It's offered at 50/66 and 80MHz speeds with

power consumption around 8W for the 80MHz version.

The PPC 603 is supposed to be as fast as the 601 but will have a new design. The 603 will be optimized for use in portables and energy-saving desktop computers. It will run on 3.3V and have extensive power management features, including shutting down of all non-active portions of its circuitry. The 66/80MHz versions will use a 0.5 micron process and consume 3W.

The line between CISC and RISC is blurring.

Moving upscale, the 32-bit PPC 604, which will debut next year, promises to double the PPC 601's performance with its dual pipeline architecture. Aimed at high-end desktop, workstation and network server applications, the PPC 604 will offer vendors strong price/performance and multiprocessor capability at affordable prices.

The cream of the crop, designed to compete with Intel's P6 (Pentium's next generation), will be the 64-bit PPC 620. Expect to see similar integer performance as the 604 but with incredible floating-point capability. The PPC 620 is targeted at the extreme high end and will probably find applications in supercomputers and processor clusters for mainframes and supercomputers.

Conclusion

The line between CISC and RISC is blurring. The Pentium incorporates a number of features that were once the domain of RISC, like superscalar operations. Similarly, present PPC chips diverge from traditional RISC theory by incorporating more than 200 instructions (128 theoretical for RISC). The bottom line is markets are big enough for multiple players and users ultimately will decide for themselves which operating system running on which processor will be best suited for their application.

Chan is president of Chan and Associates, a marketing consulting service for audio, broadcast and post-production, Fullerton, CA.



Space age CCD-cameras don't fit on iron age pedestals

The new Sachtler Vario Pedestals offer unique features for studio and OB operation:

1 Continuous column stroke, for shooting from sitting to standing person's height – Vario Ped 2 - 75.

2 Rock steady and 50 kg/110 lb lightweight, to carry equipment up to 90 kg/200 lb – Vario Ped 1 - 90.

3 Carriage and column can be disassembled in seconds – compact modules for ease of transportation.

4 Quickfix, allows instant change of fluid heads for flexibility – included.

5 Track width, narrow and wide, symmetric and asymmetric – set

in no time


and you

well can



expect precise, easy steering and crabbing, smooth and jerkfree column movement thanks to

the patented Sachtler pneumatic system. Test for yourself the optimum camera support for all compact Studio/OB cameras, now!



55 North Main Street
Freeport, N.Y. 11520
Phone (516) 867-4900
Telex 140 107 sac frpt
Fax (516) 623-6844

California office:
3316 West Victory Blvd.
Burbank, CA 91505
Phone (818) 845-4446



sachtler
corporation of america

- "Disk-Based Video Storage"page 23
- "Complex Routing for Post-Production"..... 30
- "Digital Effects Systems"..... 38
- "Studio Cameras" ... 44
- "Audio/Video Routing Systems"..... 52

Video production systems

Take advantage of digital solutions in your facility so you won't be left in the analog dust.

There's never been a more exciting time for those involved in video production. From Toasters to All-Play to Clip-Boxes, manufacturers have brought a wealth of products and feature sets to the market. For the users, this all represents a veritable plethora of goodies.

Even five years ago, few would have guessed at the power and capability that can now be placed on desktop. From print-quality graphics to Emmy award-winning special effects, if you can creatively think of it, there is probably a

desktop system capable of producing it.

This month's feature coverage looks at some of the hottest video technologies, DVEs, routing, cameras and the sexiest technology of them all — video servers.

And if that's not enough, WBN's editor-in-chief, Jerry Walker, shows you how the World Cup Soccer matches will be covered by U.S. broadcasters. With a total projected TV audience of more than 31 billion (yes, that's billion) there's no room for error.

Maybe you're in the mood to make money. In "Wrist-Watch Profits," we'll show you

how FM stations are using a new version of "Dick Tracy" watches to increase their station's revenue stream.

So don't be left in the analog dust. Learn how you can apply these ideas to your production facility or broadcast station before your competition beats you to the digital solution.

Brad Dick

Brad Dick, editor

Edit Suite #1 at Pacific Video Resources, San Francisco. One of two Complete Digital Component Editing Suites that support both D1 and Digital Betacam formats. Suites include: SONY DVS 6000 Switcher, DME 5000 and D/FX Compositing graphics and effects system. Both Edit Suites can be configured for NTSC or PAL operation.

Disk-based video storage

From desktop to video servers, disk use for video is increasing.

By David Leathers

The Bottom Line

As disk drives improve, the number of uses for the technology continues to increase. Over the last several years, hard drives have gotten large enough to store reasonable amounts of video. At the same time, disk drive arrays have gotten fast enough to play back that video at 60 fields per second. These facts, combined with the benefits of random-access and digital storage, are making it advantageous to replace tape machines with disk-based storage systems in several applications.

At this year's NAB, there were more than 100 manufacturers moving video on and off of hard drives. The applications and equipment configurations cover a wide spectrum. This acceleration in technology development is increasing exponentially as manufacturers and users gain experience in applying disk storage technology in video post-production and broadcast environments. New generations of products are appearing at every level that promise to transform operations in all video applications.

Desktop technology

Basic SCSI hard drive technology, the basis for mass storage in all current levels of systems, is getting predictably much better, faster and cheaper. Advances in capacity, speed and reliability along with dramatic drops in the cost per megabyte are exciting and encouraging for the continued rapid development of desktop video technology. There are now dozens of non-linear editing systems in delivery or advanced development stages that will deliver good quality video. The advances in SCSI drives and affordable RISC technology will increase the penetration of desktop solutions into professional applications.

Leathers is president of Eye Square, Hollywood, CA, and operates the Broadcast Engineering/Video Systems Digital Media Lab.



The Silicon Graphics Challenge server product family.

Seagate leads the way with several dramatic products. The "Elite 9" is a fourth generation of the Elite product line, with 500,000-hour MTBF rating. It formats to about 9.1GB, depending on sector size and system requirements. It drops the cost-per-megabyte to below 50 cents for small purchase end-users. The Elite 9 has an internal data rate of up to 7.9MB/s.

The second generation of the Seagate Barracuda line, the Barracuda 4, is a 4.3GB (formatted), 3.5-inch form factor, half-height SCSI drive with a fast spindle rate of 7,200rpm. It's capable of a high sustained data rate of up to 8.7MB/s and has a MTBF rating of 800,000 hours. In the

year or so the Barracuda 2 (the 2.4GB little brother of the Barracuda 4) has been in the field, it has performed well in a variety of systems. The Barracudas come in SCSI, SCSI-2 fast and SCSI-2 fast and wide configurations.

In perhaps its most exciting development, Seagate is introducing 2-head parallel processing drives. These drives effectively accomplish the same functionality as using two drives in a striped array. Striping is the process of splitting data between two drives, usually on separate SCSI channels to accomplish a doubling of data throughput. The Seagate Barracuda 2 2HP and the Hawk 2LP family provide this internal striping effect within a single drive by using two heads and a buffer to move data on and off the drive twice as fast. Under optimum SCSI-2 fast/wide conditions the units are capable of processing 20MB/s.

IBM also has two high-performance SCSI drives — a 4GB and a 2GB. Both drives have a maximum data rate of 5.22MB/s. The 3.5-inch, 2GB version has an MTBF rating of 750,000 hours. The 4GB, 5.25-inch drive has an MTBF of 375,000 hours. Other drives have been introduced, notably the Micropolis AV line and a line of high-performance drives from Fujitsu, that appear to be optimized for video and audio applications.

Many random access computer video systems are not compatible with drives using thermal re-calibration (TCAL). They require drives with either no TCAL or with on-board processors that provide "smart thermal re-calibration." Smart TCAL, as it's called, will not go into re-calibration when it senses drive activity. There are a number of other issues that tend to be application and product specific. With the constant changes in both systems' requirements and drive specifications, systems integrators like Rorke Data Systems, who are video application savvy and market a wide range of products, are a good source of information.

Full bandwidth digital disk recorders

In the area of digital disk recorders, there have been significant improvements and enhancements to real-time uncompressed DDRs from Abekas and Accom.

Abekas has the new Hexus system. The Hexus combines two to six Abekas A-66 DDRs in a tower configuration. Each channel can be used by a separate workstation in a workgroup or they can be used together to provide more than six min-



Hewlett-Packard Broadcast Video Server capable of storing six hours with up to 51 hours available as an option.

Avoiding closed-captioning problems with disk-based systems

By Carlos W. Suarez

No one knows where the path of the information superhighway will end, however, several companies are working hard at building the first models. To re-tool for this highly digital world, changes within the video production and broadcast communities will need to continue accelerating rapidly. Every technology area will be touched, and closed captioning is no exception.

For real-time closed-captioning applications, the immediate impact will likely be less dramatic because captioning information can normally be merged live at the head-end. For future live or semi-live situations where merging at the head-end for some reason might not be possible, the problems of digital conversion will be the same as those for off-line closed captioning.

Technologies such as video servers and non-linear editing systems are generally geared more toward off-line production environments. In those environments, closed captioning is performed on specialized SMPTE time-code-based, off-line editing equipment. Whether for real-time (live) or off-line applications, whenever information is converted into digital format, the system design must preserve the closed-captioning data or it will be lost.


Several companies have announced initial implementations of video servers. Most of the methods being implemented today require the digitization, compression and transmission of the original video from the head-end. The information is decompressed at the receiving end. Generally, some sort of motion compression technique is implemented. In all cases explored, the method used was MPEG or MPEG II. Unfortunately, when the information is compressed in this manner, the closed-captioning information generally is lost. To get around this, captioning information needs to be treated as a separate datastream within the MPEG specification.

Several server vendors were contacted for this article. Silicon Graphics of Mountain View, CA, is providing software for the video server and setback boxes, as well as the server itself for the Time Warner Cable trial. This trial is scheduled for first phase implementation later this year. According to Jim Barton, general manager of Silicon Graphics' Broadcast Group, closed captioning will not be addressed until the second release. He does not perceive that supporting closed captioning will be a difficult technical issue and believes it can be solved by implementing minor software changes. The date for the second release has not been set.

Another vendor, Philips Consumer Electronics of Knoxville, TN, is developing software for the highly publicized Bell Atlantic trials in Washington, DC. Brian Smith, vice president of market development for video communications explained that closed-captioning support is built into its first release.

For digital non-linear editing applications, support of closed captioning is considered somewhat less of a priority. The key vendors developing off-line editing products are at early stages in their development processes for implementation of closed captioning. Currently, after the video has been edited on a non-linear editing system, it is closed captioned using an off-line caption editing system. This 2-system process works well for many applications. However, this method always requires re-editing the material through an off-line captioning system when additional changes are needed. Representatives at Avid Technology and Matrox were contacted for this article. Avid explained that it is exploring methods for dealing with closed-captioning information directly from within the product. The company was clear that we will need to look to future releases of the company's products before we will see this capability designed in. Matrox is also reviewing how to add this capability to its systems.

Suarez is principal of the Naples Cupertino Group, a marketing and technology consulting service for interactive television and media technology, Santa Clara, CA.

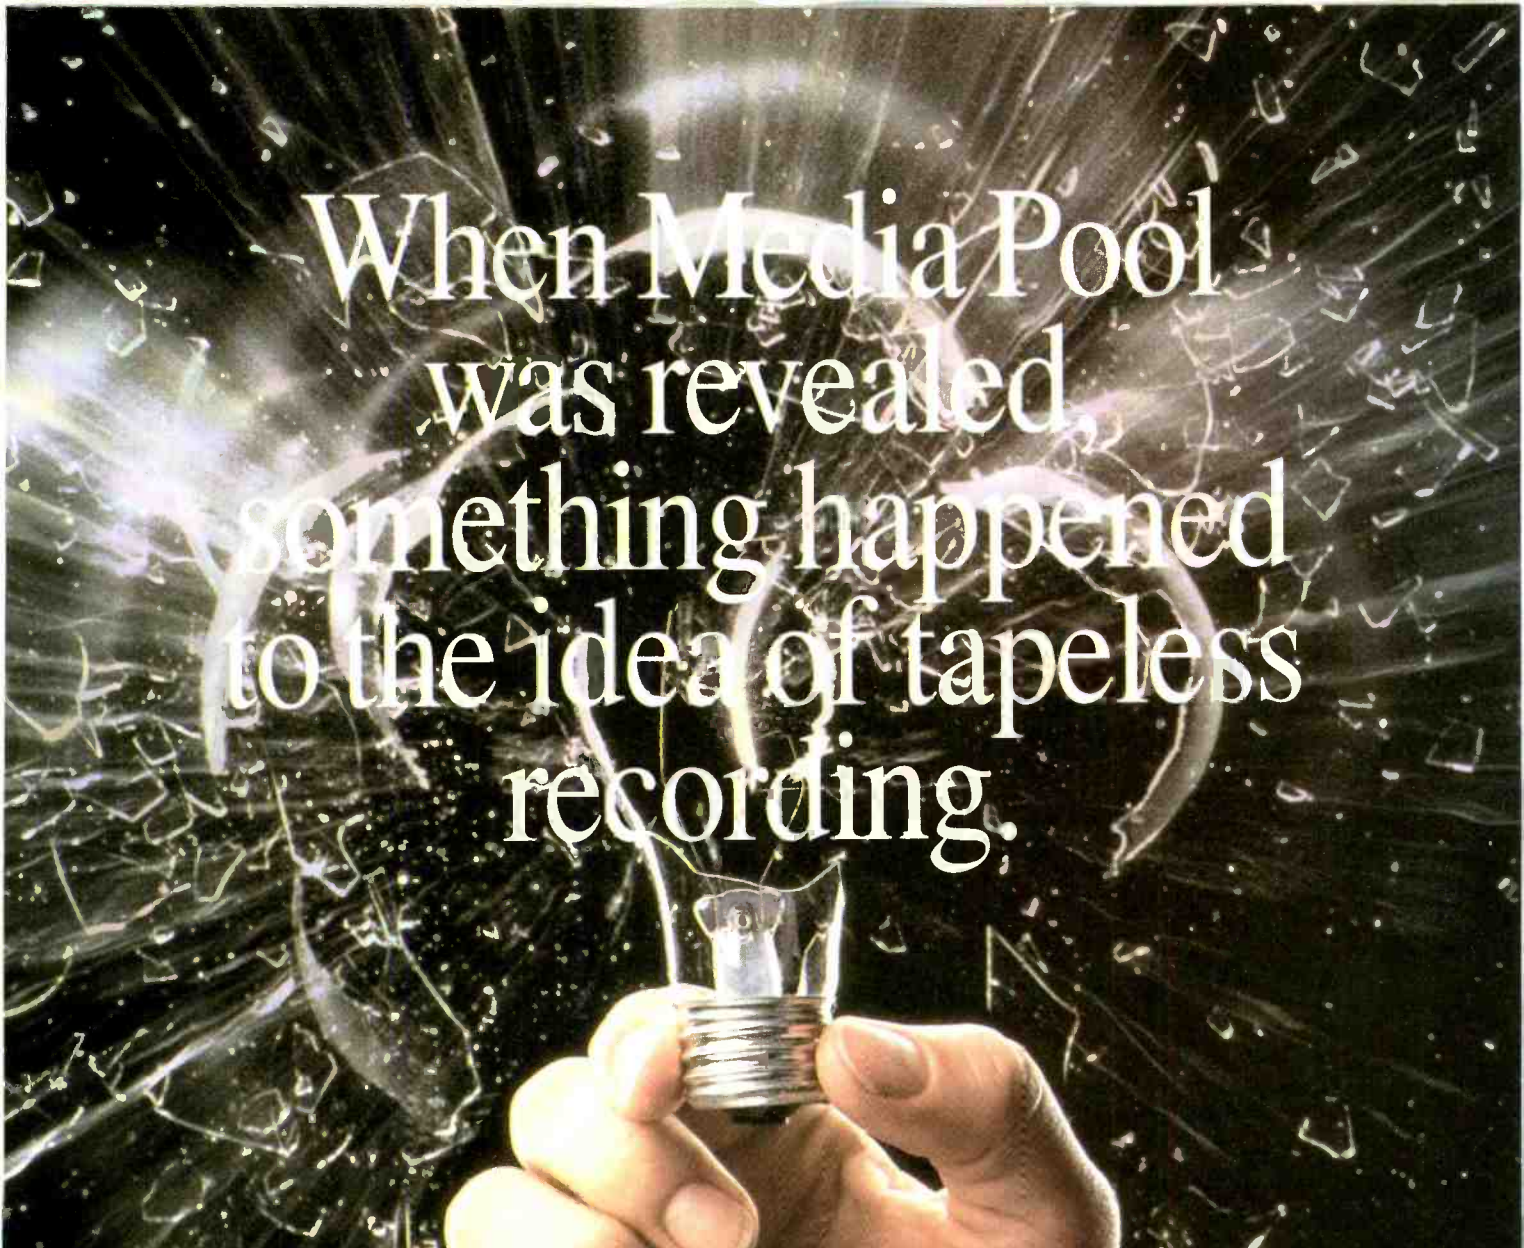

When Media Pool was revealed, something happened to the idea of tapeless recording.

Media Pool is the video server system from BTS that is shattering everyone's idea of what tapeless recording should be. BTS for the first time revealed idea shattering features such as:

Expandable Time from 10 minutes to hundreds of hours of video on-line!

Expandable Channels from one user to a dozen or more can have simultaneous real-time access to the entire pool of storage.

Variable Data Compression From full bandwidth 10-bit CCIR 656 video to any level of compression, you choose the quality of each video clip.

Unparalleled Reliability. RAID error correction perfectly corrects all errors and disk failures. Redundant hot-swappable drives, electronics, power supplies and fans guarantee that you stay operational when your revenue stream depends on it.

Media Pool provides the first professional video alternative to tape.

BTS

Call toll-free (800) 962-4BTS
Outside the U.S. and Canada,
call (805) 584-4700

A PHILIPS COMPANY


utes of uncompressed D-1 instantly accessible and controllable storage. The Hexus is controlled either via ethernet or D-1/RS-422 links.

Accom has the innovative Work Station Disk (WSD). The WSD has a capacity of 32 seconds of uncompressed D-1 video. In addition to ethernet, D-1, RS-422 and RS-232 ports, it has a direct SCSI interface for the workstation. This creates a much faster interface than ethernet, or the frame-by-frame transfer process currently used to move uncompressed video directly on and off workstation hard drives. Because the drive/bus/processor combinations currently available in desktop systems cannot process data at rates sufficient for real-time video transfer, the WSD SCSI interface becomes the best alternative for moving uncompressed video on and off the desktop. The WSD interface also allows control of an external video device from the WSD keyboard. This means the workstation operator can move data/video between a tape machine, the WSD and the workstation without having other control systems involved in the process.

There is a relatively new generation of video DDRs built on desktop computer platforms. Sierra Design Labs has a family of real-time digital disk recorders called Quick-Frame. Quick-Frame systems come in a range of configurations with or without compression. The newest entry is the Quick-Frame EX24 that provides almost 24 minutes of uncompressed 8-bit D-1 in 5 1/4 inches of rack space. The system will support expansion units for up to 180 minutes of storage. It supports VTR-compatible RS-422 control, true non-linear playback, 8/10 bit and 525/625 selectable video formats and has ethernet and multifunction SCSI interfaces. The Quick-Frame EL line, which has been shipping since mid-1993, starts at a 3-minute capacity.

Hewlett-Packard has developed a 4:2:2 video disk recorder that was developed jointly with Sierra Design Labs. It uses Sony Betacam RS-422 control protocol and stores three, six or 12 minutes of uncompressed D-1 video, depending on configuration.

Advanced Digital Imaging's Digital Magic system uses the Intelligent Resources Video Explorer card for D-1 input and output to a high-performance Macintosh

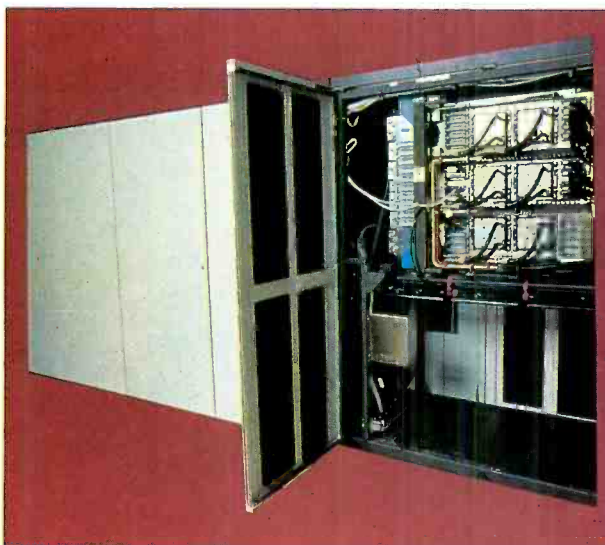

IBM-9000 scalable video servers based on IBM's ES/9000 series are capable of serving thousands of simultaneous video-multimedia streams.

subsystem that provides up to 8.5 minutes of real-time 8:1 compressed D-1 or Betacam quality on specially configured 2.4GB Fujitsu SCSI-2 disk drives. It is capable of motion JPEG compression ratios as low as 3:1. Multiple drives can be added to the system to expand the compressed storage capacity to more than an hour of compressed D-1. It is compatible with the Mac environment and works as a video device in real time. The quality of the Video Explorer card and the low compression ratios make it a practical device in the most demanding environments.

ASC of Burbank, CA, has introduced the Virtual Recorder (VR). The VR is a digital random access storage system. It has Betacam component, RGB, S-video and composite video I/Os and two channels of 16-bit audio in and out. Video is stored at compression ratios that are dynamically variable to accommodate quality or data rate requirements up to 8:1. The Virtual Recorder is rapidly catching on as a way to provide random access "video for audio" to digital audio workstations.

Videoservers

Different perspectives on exactly what a video server is provide different definitions. One way to look at it is mechanical, that is an inventory of the components. A typical video server might include one or more fast processors, a large array of mass storage devices in a RAID or other high throughput configuration and a solid-state buffer for real-time video and audio outputs. Other components may include internal processing schemes for uncompressed D-1 video and various MPEG and/or JPEG compression, interfaces for multiple inputs, outputs workstations and terminals.

Microsoft unleashes its Tiger

By Carlos W. Suarez

Microsoft has recently entered the "server" game with the announcement of its Tiger media server technology. The software is based on the Windows NT advanced server operating system. Tiger software is designed to be flexible, scalable, reliable and cost-effective. The number of servers implemented can be scaled up as needed from one to virtually any number. Tiger is designed to be hardware independent and deployable across a wide range of hardware. Distribution media can include cable television, LANs, WANs or telecommunications networks.

The server software is one of the first major server announcements that can be implemented on lower-cost PC processor technology. Microsoft believes many applications will not require the higher cost and performance platforms. With this design, multiple low-cost servers can be linked and controlled by the Tiger software so they function as a single, virtual massive server. Because of its inherent scalability, additional servers can be easily added as required by the application.

Using a proprietary file system, Microsoft claims to have achieved greater reliability and solved the inherent problems of continuous-media servers. The file system allows for bits of files to be stored over an array of storage devices. Two copies of each video file are stored across the storage media. Microsoft believes that this method is as effective and less expensive than other redundancy methods. Fault tolerance is provided through the distributed system design, no single failure will stop the system. If a disk fails, the system will compensate by redirecting the data, the same is true if a disk server fails.

Intel, Compaq and General Instrument have announced plans to implement this technology for video server applications. Intel recently demonstrated a video-on-demand application on its scalable multiserver. The configuration used 16 Pentium-based nodes capable of delivering more than 3,000 simultaneous video streams with full VCR control. The demonstration system also included 64GB of hard disk capacity capable of storing more than 50 feature-length films.

General Instrument plans to develop solutions for the cable head-end, the broadband network and the in-home set-top interactive terminal using the Tiger architecture. A first-generation interactive terminal for multimedia applications is being developed that will deliver introductory interactive services including programming guides, video-on-demand and home shopping. □

Suarez is principal of the Naples Cupertino Group, a marketing and technology consulting service for interactive television and media technology, Santa Clara, CA.

*"Management wanted
to control costs.
My operators wanted
less handling of tapes.
Maintenance wanted
high reliability.
I wanted
excellent video quality.
DigiStore had
the answer."*

*-Fred Lass, Chief Engineer-
WRGB-TV, Schenectady, NY*



**EXCELLENCE
ENGINEERING**



DIGISTORE IS VIDEO TECHNOLOGY WORTH WATCHING.

Fred Lass is careful. When it comes to reliable storage and dependable quality, he demands only the best for his operation.

He chose DigiStore, the leading installed video playback server in the broadcast industry. Like Fred, dozens of general managers and chief engineers realize that digital storage *is* the future.

DigiStore is superb video quality and automated dubbing and scheduling software designed to augment or replace traditional videotape cart machines. The perfect spot buffer, DigiStore supports library expansion for thousands of commercials, promos, and interstitchals. DigiStore's AdWare gives you daily reconciliation and as-run logs.

DigiStore has the flexibility to plug into your operation today—without requiring extra software or new equipment.

So don't wait to call DigiStore, 801-328-1839. Don't wait to save on maintenance, support, and make-goods. Choose DigiStore, the sound, realistic choice for automating broadcast spot output that's good enough for the best station engineers.

digistore

180 Wright Brothers Drive
Salt Lake City, Utah 84116 U.S.A.
Phone: 801-328-1839
Fax: 801-328-3668



DYNATECH
VIDEO GROUP

The best professional video in the world

ALPHA IMAGE • CABLE PRODUCTS • CALAWAY EDITING • COLORGRAPHICS • DA VINCI • DIGISTORE • EMC • NEWSTAR • QUANTA • UTAH SCIENTIFIC

Circle (17) on Reply Card
www.americanradiohistory.com

Go Green



HIGH-DEFINITION

with RCI

Protect Your Environment

No other video disk recorder allows you to recycle your original investment of a D2 system into D1 or even HDTV!



Key Features

- 4, 8.2 and 13.7 minute disks
- Uncompressed video
- Real-time random access
- Switchable multi-format (D2/D1 & D1/HDTV)
- FDDI and Ethernet options
- TIMELINE compatible
- D1, D2, HDTV models
- Two year warranty

*For more information
call today or try our
fast fax service.*



Recognition Concepts, Inc.

5200 Convair Drive
Carson City, NV 89706

Phone: (702) 882-7817
(800) 2 GET RCI
FAX: (702) 882-5381

Circle (18) on Reply Card



The Media Pool from BTS, a fully redundant media server developed for broadcast and post-production. Compression can be used if desired, but is not required.

From the system's perspective, a server may be defined as a highly accessible, large-capacity random access storage device that ties together a number of workstations and their functions. With today's technology, this can be a dangerous perspective. Users who expect to find a server in the form of a box that they can use to tie together several disparate hardware and software systems to share data and increase productivity are likely to be disappointed. Standards and systems continue to evolve and many of the cross-platform and even cross-application incompatibilities with the same platform make it difficult at best to use servers as the glue that is hoped for.

Perhaps because of this, there is an emerging trend toward the development of large, dedicated array systems under single manufacturers with the processing, software, electronics and storage to provide hundreds of hours of random access full-bandwidth storage that is instantly and simultaneously available in a multi-user, multiworkstation environment.

Silicon Graphics has the Challenge servers as part of its developing Silicon Studio approach to building a video environment on its Onyx line. Actually, the full range of Silicon Graphics workstations can be tied together on a network. As the video I/O capabilities of Serius video becomes available to the larger systems and Galileo video for the Indigo 2 system, a true all-encompassing video solution is conceivable. Many of the software applications on SGI are already operating at the most advanced levels. The Challenge servers can accommodate up to 32 hours of uncompressed D-1 video.

Ciprico has the Spectra 6000 disk arrays. Using hot-swappable RAID technology, they can be configured up to 16GB per unit. It is available in a variety of

configurations and provides transfer rates in the 19MB/s range. It is designed to work with and has software drivers available for the full range of SGI workstations.

Broadcast uses

The Dynatech DigiStore is a multichannel all-digital video spot playback machine. With seven systems in the field, it is the leading system of its type today. A single DigiStore unit can have as many as 14 2GB (9GB soon) drives on each of three channels. It provides instantaneous and programmable access to hours of high-quality storage at variable compression ratios. It is compatible with other automation systems and also does program delay duties.


Avid's disk-based AirPlay system is now in use in two stations. The AirPlay provides random access to clips, spots, bumpers, opens, closes and standbys.

Channelmatic offers the Adcart/D digital ad insertion system. It promises to be a high-performance, cost-effective system that interfaces with a variety of software modules for traffic and verification.

BTS has announced the Media Pool. The Media Pool promises to take the concept a step further with a system that can be scaled up to include access to hundreds of hours of storage that can be accessed by up to 16 workstations or terminals simultaneously at full bandwidth. It also will feature various compression ratios. The system, which is expected to deliver this year, will initially have all the components for spot insertion and management, program delay and VTR emulation.

Tektronix has introduced the Profile, designed and built around off-the-shelf components. Profile is capable of up to four channels of digital or analog video, with up to four audio channels

The major advantage to storing video and audio hard drives is the speed and convenience of random access.

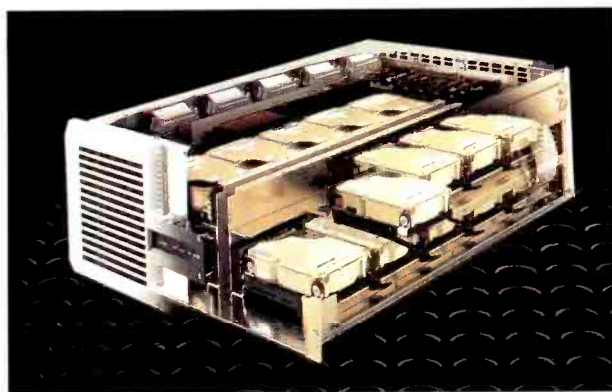

Quantel's Dylan, a disk array consisting of 20 SCSI drives that can deliver CCIR 601 images at faster than video rates.

per video channel.

Disk-based video is not limited to a specific application. As the technology continues to improve, expect to see these systems in a wide variety of uses, and doing a lot of the work currently being done by tape-based systems.

Beyond disk-based storage

The major advantage to storing video and audio hard drives is the speed and convenience of random access. However,

er, while disk drives are looking to replace linear tape-based technologies in many applications, they still leave some issues unaddressed.

Cost of storage, system flexibility and compatibility between systems and sites are all concerns in today's applications. Removable magneto-optical disk technologies are in limited use in video today. They are improving in performance and can add to a system's flexibility. However, they still lack the speed required for highest performance of many systems

and are not yet available in multigigabyte sizes.

Disk drives are complex mechanical devices that have numerous moving parts and consume a significant amount of power. A new generation of storage products based on holography is being developed. (See "Technology News," February 1994.) Holographic storage involves scanning special multilayered media with lasers. Storage density is already 10 times greater than current magneto-optical or optical recording technologies. Holographic storage devices also have few moving parts and low power consumption. As work proceeds on these devices, rapid improvements are possible, as is the likelihood this technology will be of interest to broadcasters in the future.

Editor's note: For additional information, see "Video Servers," May 1994; Applied Technology, Tektronix Profile, this issue, pg. 80; and the upcoming Applied Technology on the Quantel Clipbox in July.

➡ *For more information on disk-based video storage, circle (339) on Reply Card.*

Universal Audio/Video Sync Generation

Digital Audio Transmission

Synchronous AES/EBU Digital Audio Routing

RS-422 Control Data Routing

Digital Audio Conversion, Processing & Sync

Digital Audio Sample Rate Conversion

AES/EBU & Time Code Routing

nVISION

DEFINING THE CREATIVE EDGE OF DIGITAL TECHNOLOGY

Call for our Digital Audio Design Handbook and Product Catalog
nVISION, INC. • P.O. Box 1658
 Nevada City, CA 95959
 916/265-1000
 800/719-1900

Circle (9) on Reply Card

Complex routing for post-production



Creating a unified control system solves many of the problems.

By Andrew Delle

The Bottom Line

With the wide variety of equipment available, the number of possible facility configurations is almost infinite. Tying the equipment together can be a daunting task. Faced with the problem and given the resources to solve it, custom hardware and software can be used to streamline operations to the benefit of all concerned. Despite the up-front costs, the payback can be significant and long-term, making the overall process cost-effective.

In 1974 The Post Group was founded in Los Angeles. By 1990, the company had outgrown its primary facility and digital technology needed to be incorporated into the operation. A separate facility was built to house the digital equipment while the primary facility continued to house the analog edit bays. This arrangement worked fine until 1992.

The marketplace became saturated, and efficiency and labor costs became new concerns for management. It was decided to renovate the primary editing facility cosmetically and technically in two phases. Phase one required rearranging public space along with a complete technical rebuild. Phase two involved moving the D-1 edit bays to consolidate all editing under one roof.

Designing for efficiency

Operational efficiency simply had to improve. The facility's large routing matrices were all controlled separately. In addition, too much equipment was accessible only by direct patching. The router's final equipment load was determined to be more than 60 broadcast VTRs, 11 channels of DVE, 13 digital disk recorders and eight channels of character generation. This equipment would feed the switchers for eight edit bays.

The Post Group has always avoided dedicating equipment to a particular room. Today's multitude of tape formats makes this an even more complex problem. The new facility needed to be designed around one unified routing system, not necessarily one routing switcher, but one central control network that

appears as one router to operators. The system required custom software and hardware unavailable from any manufacturer.

Designing custom software and hardware was nothing new at The Post Group. Several specialized routing systems had been developed over the years. The next step was to design a system that incorporated all these old ideas into one system. The system incorporates 23 separate matrices from 192x160 to 8x4. The control system consists of 16 IBM PCs networked to two industrial computers then to the matrices via standard RS-232/422 serial ports.

Custom panels were rejected quickly due to the rigid design rules dictated when you cut holes in metal.

Human interfaces

Various human interfaces were studied including custom control panels, CRT/keyboard terminals, mouse-driven "Windows" programs, and touchscreens. Custom panels were rejected quickly due to the rigid design rules dictated when you cut holes in metal. The interface had to be flexible and reconfigurable. Text-based CRT terminals were deemed awkward because of the numerous keystrokes required. A Windows program would be state-of-the-art, but required operator training and substantial memory and CPU horsepower to achieve the needed operational speed. Touchscreens were select-

Delle is vice president of engineering for The Post Group, Los Angeles, CA.

For your move to serial digital video...

...take Sierra Video Systems along.

The Model 1616D breaks new ground in serial digital video switching. With state-of-the-art cable equalizers on every input and a 2 GHz GaAs crosspoint array, the Model 1616D provides the performance you need:

- ▶ 16 x 16 serial digital switching matrix
- ▶ Data rates from 140 to 400 Mbps
- ▶ Automatic equalization for up to 300 meters of cable
- ▶ RS-232 or RS-422 serial port for external control
- ▶ Up to 64 control panels on a robust RS-485 network
- ▶ Modular design, in just 1 RU



In your move to serial digital video, you can count on Sierra Video Systems to lead the way. The proven leader in analog routing switchers is now the *new* name in digital video.

Sierra Video Systems — for an easy move to serial digital video.



...you can see the difference!

To find out more
about the **Model 1616D**
Serial Digital Video Routing Switcher,
contact your nearest SVS® dealer, or
call Sierra Video Systems at
(916) 478-1000.

P.O. Box 2462
Grass Valley, CA 95945 USA
Tel (916) 478-1000
Fax (916) 478-1105

Circle (10) on Reply Card

D I G I T A L L E A D E R S .

Since its inception as the nation's first advertiser-supported basic cable network in 1980, USA Networks has aggressively fulfilled its mandate to create a cable network providing a wide variety of programming for all family members.

USA's programming is seen in over 98 percent of America's cable households. Our network features exclusive original dramatic series and situation comedies. We produce over 24 original World Premiere movies per year featuring top Hollywood stars, and we continue to license top-rated off-network series. To our coverage of *The Masters*, we've added 11 PGA Tour Golf Tournaments. In 1994, we'll add the French Open Tennis Championships to the more than 90 hours of the U.S. Open Tennis Championships.

In 1992, we launched the Sci-Fi Channel, now in 15 million homes nationally, and in April, 1994 we will launch USA Network for Latin America. The Sci-Fi Channel formula blends classic favorites and contemporary off-network sci-fi shows. Its movies are theatrical blockbusters and original productions that are part of our "Planetary Premieres" series.

To accommodate our expanding networks, USA created a completely digital Broadcast Center

in Jersey City, NJ. The new Center handles all of our post-production needs and our entire network origination, including the signals for USA's East and West Coast feeds, the Sci-Fi Channel and our blackout programming.

At the heart of our facility is the Panasonic Digital M.A.R.C. Type III

**"THE LOOK VIEWERS DEMAND,
AND THE EFFICIENCIES A
GROWING COMPANY...REQUIRES."**

KAY KOPLOVITZ
President & Chief Executive Officer
USA Networks

automated record/playback library system. The system uses 10 Panasonic AJ-D350 D-3 VTRs with a completely redundant backup system, and is the major source of all program and commercial material seen on USA Network and the Sci-Fi Channel throughout the day.

In post-production, we are using the first non-linear edit systems with Panasonic D-3 VTRs. Our four edit suites connect to a "pool" of videotape machines, including 12 Panasonic D-3s.

Our decision to use the Panasonic M.A.R.C. system was the right decision. We've achieved the look our viewers demand and the efficiencies that a growing company in a highly competitive field requires. Panasonic worked with us to develop the right software and provided extensive training to our employees.

The Digital M.A.R.C. has run so much faster and more



accurately that we got an unexpected bonus: a few extra minutes of air-time in our schedule. We're using it to promote more of our programming to our viewers.

We firmly believe that we have the highest-quality, best designed Broadcast Center anywhere.

Panasonic's strategy offers a simple, combined composite and component digital system that provides all digital solutions for diverse video recording applications through the eventual HDTV era.

Panasonic believes that digital composite and component signal equipment will continue to co-exist for many years. The company sees interrelated D-3/D-5 facilities with each equipment performing the tasks to which it is best suited.

Kay Koplovitz is founder, president and chief executive officer of USA Networks. She continues to be one of America's most influential corporate executives, charting new territory and keeping her network in the vanguard of the television industry.

Whether it's buying off-network series, making World Premiere movies, or building the cable industry's first all-digital Broadcast

Center, Kay Koplovitz and USA Networks have never been reluctant to be first.

It's the industry's visionaries who see an all-clear path to the future.

Panasonic
Broadcast & Television Systems Company

3. Control panel input from edit bay (RS-485)
4. Timeline control from the edit controller (RS-422)
5. Timeline control from the A84 D-1 switcher (RS-485)
6. Menu video output (analog video)

Each of these signals requires a separate "patch" to move this DVE from one room to another. The margin for error plus the time required to reconfigure is quite high. In our system, an operator or editor touches the DVE icon for that device and the desired bay channel position. All the signals are switched within $\frac{1}{30}$ th of a second.

Additional control capabilities

Another feature of the software is automated PAL/NTSC switching. The D-1 bays are dual standard, an efficient means to switch between standards was needed. Switching reference black is done by an analog router. However, this is only part of the problem. Much of the dual standard equipment requires internal DIP switches to be changed and the CPUs reset. Normally this means calling an engineer to power down, remove cards, and restore operation to each device. To address this, all devices have been modified with relays or open collector circuits to allow remote switching. These circuits are wired to a large GPI device on the router network. When a room is switched to another standard, the equipment assigned is automatically switched and reset within seconds.

Another feature of the software is integrated TBC control. Although there are several good systems on the market, none of them provided a total unified interface to the router. The staff wanted to be able to control a machine's TBC from any location without having to work with two control panels and fighting with time sharing within the TBC control systems router. The ARCNET network has sufficient bandwidth to support several stations controlling many TBCs in real time. The level control device or "pot" is a trackball integrated into the workstation keyboard.

The keyboard is also used to type in personalized names for the level memories rather than simply numbering them. Ten memories are provided for every machine at each station exclusively, plus they can be copied to any other station. More than 60 interfaces were designed and built from the component level up to interface with the various tape machines. These custom interfaces are self-configuring for the type of machine connected, i.e. analog voltage or RS-422 control inter-

face. Any changes including the front panel of the tape machine are copied to all stations eliminating the need for exclusive lock-outs.

With all facility functions under the supervision of one system a tally system was implemented for all tape machines. The EWT (electronic white tape) displays above each VTR indicate the controlling source, the status of the destination lock, and the video standard being supplied to the VTR (PAL/NTSC). The display consists of an 8-character 0.6-inch LED display linked through a separate RS-422 receive-only network. The physical inter-



A close-up of one of the touchscreen workstations, note the EWT displays in the background.

face is simple RJ11 telephone wire looped through each display. These devices were also fabricated in-house due to the custom requirements.

Hardware components

The physical hardware of this control system can be broken down into three major sections: high-level controllers, low-level controllers, and sub low-level

central file server, there still must be some place to store the master cross-point status. These industrial computers hold this and also provide protocol conversion from the network to the individual manufacturer's matrices. From these computers, 20 RS-232 ports connect to the routers through a changeover switch, a simple relay array with diode control logic for reliability.

The low-level controllers are custom interfaces used where a matrix does not have an RS-232/422 port. Custom micro-controllers are fabricated with an RS-232 input and parallel outputs to control routers, such as the Grass Valley DPM1325 8x4. Sub low-level controllers are supplied by the router frame manufacturers as required. Because our physical router system is made by Utah Scientific, our RS-232 output talks to its PL320 controllers, which in turn, drive the matrices with proprietary protocol.

The key here is redundancy and reliability. With a system this large, you can only imagine the financial repercussions of a single-point failure. The software was carefully written to prevent this. Any touchscreen computer may fail but will affect only that station. Stations

may depart from or join the network without any disruption to the system. As mentioned, the two I/O processors are redundant through a relay switcher. Sub low-level controllers have their own backups as provided by the manufacturers.

ARCNET distribution was carefully designed to reduce the effects of cable breakage or shorts. All of the custom interfaces have spare cards in inventory to circumvent extended down time. A single matrix may fail but complete system failure for any length of time is not likely. The post-production business can tolerate downtime measured in minutes without substantial revenue loss. Broadcasters, on the other hand, cannot afford signal loss at any time. The design outlined could be further enhanced to provide absolute on-line redundancy.

At the beginning of this article we mentioned the need to increase operational efficiency. Since the commissioning of this system, downtime relating to equipment setup and configuration has been virtually eliminated. Although the costs in materials and man-hours to design and build such a system may be high, the revenue savings paid back will offset these costs several fold. In addition, other factors that contribute to the bottom line, but can't be directly measured, include staff morale and client satisfaction.

Because of its roots in heavy industry, ARCNET is extremely resilient and reliable.

controllers. High-level controllers are the actual touchscreen computers. Each computer has the operating program on its own disk. It is important to realize the network is merely a high-speed data transport medium. There is no "file server" as with most computer networks. Other high-level controllers include the TBC interfaces, the PAL/NTSC switcher controller, and the EWT display controller. These devices communicate with our proprietary ARCNET protocol.

Also on the ARCNET network are the two I/O processors (primary and standby). Although the system contains no

TAKE THE TEST FOR THE BEST


If you're faced with replacing your UHF transmitter, don't make that investment until you've compared the Harris Sigma™ Series family of IOT transmitters to its competition. Take a moment to consider these important questions.

	HARRIS	COMPETITION
1. Which transmitter has total system automatic gain control to keep power output from drifting?	☐	☐
2. Which transmitter design is impervious to AC power interruptions or transients up to 6 kV with proven results?	☐	☐
3. Who can offer you multiple sources for final amplifiers backed up with proof of performance data?	☐	☐
4. Which transmitter features full broadband correction for channels 14-69 for each IOT in the transmitter?	☐	☐
5. Which transmitter has the component accessibility and ease of service you'll like most 10 years after the purchase is made?	☐	☐
6. Which transmitter manufacturer has the reputation for introducing transmission technology when it works, but not until it works?	☐	☐
7. Who has the most on-the-air experience and the broadest line of UHF TV transmitters?	☐	☐
8. Which manufacturer supports its large installed base of equipment with a multi-million dollar inventory of parts and a parts department that is staffed around the clock, every day of the year?	☐	☐
9. Which manufacturer can you call 24 hours a day, 365 days a year, and speak to a service engineer who provides help so you stay on the air or get back on the air as quickly as possible?	☐	☐

NOTE: The short answer to each of these questions is Harris. For the whole story call us. U.S. and Canada: 217-222-8200 or fax 217-224-1439. International: 217-222-8290 or fax 217-224-2764.



Digital effects systems

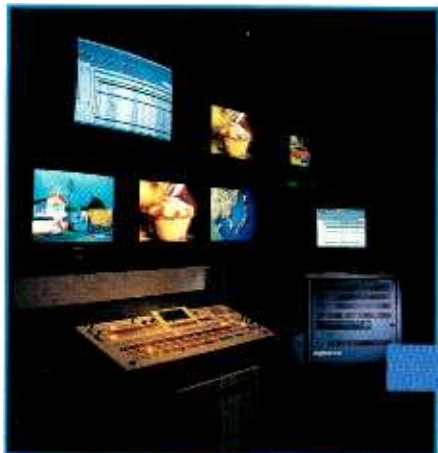

Getting away from the black box.

By Curtis Chan

The Bottom Line

Digital video effects units were once proprietary black boxes. Today, many of those black boxes have been replaced by high-performance computers, running specialized software. Many standard DVE moves can be accomplished on today's desktop systems simply by adding the right software. However, the high-end still exists. Top-of-the-line DVEs are capable of sophisticated real-time effects that were only dreamed of just a few years ago.




The age of interconnected proprietary black boxes is rapidly drawing to a close. Except for high-end products selling to boutique markets, the domain of low- to mid-market black boxes has given way to cross-compatible computer platforms integrated with the latest generation of plug-ins and running customized software. This article will focus on how DVEs are becoming more software-based, and what's new in the latest generation of high-end DVEs.

Improvements in chip design and fabrication technology have allowed DVE manufacturers to integrate high-end performance features onto silicon, resulting in greater cost efficiencies. The next generation of DSP ASICs will make it cost efficient to simply develop code and port it over to a common computer platform. Consider that one day in the near future, it is possible the production environment might be nothing more than multiple workstations linked to a massive client/server network.

Market realities

It simply boils down to money and the economics of doing business. First, realize that much of the latest technology within this industry is borrowed from larger markets, such as the computer or information technology industries. Second, the computer industry has generously supplied us with estab-

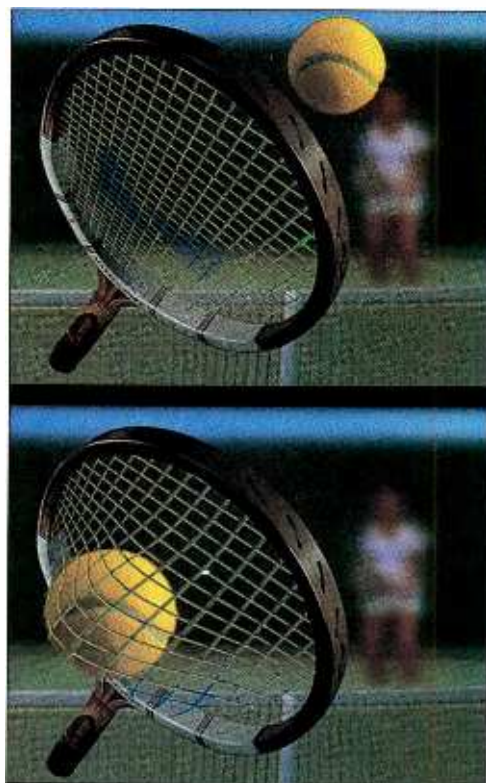

A digital video effect done on a high-end effects system. (Photo courtesy of Quantel.)

lished computing, connectivity and operating system platforms. Because there are multiple sources for vendors, DVE companies can realize the benefits of shortened development times. Last, the financial leap-of-faith is small if a company invests in the development of code rather than fronting capital costs for product development and manufacturing.


It wasn't all that long ago that DVEs (and

Chan is president of Chan and Associates, a marketing consulting service for audio, broadcast and post-production, Fullerton, CA.

See Us At SIGGRAPH Booth #431

There's A New Way To Store And Retrieve Digital Video In Real Time.

Introducing The Spectra 6000 Disk Array.

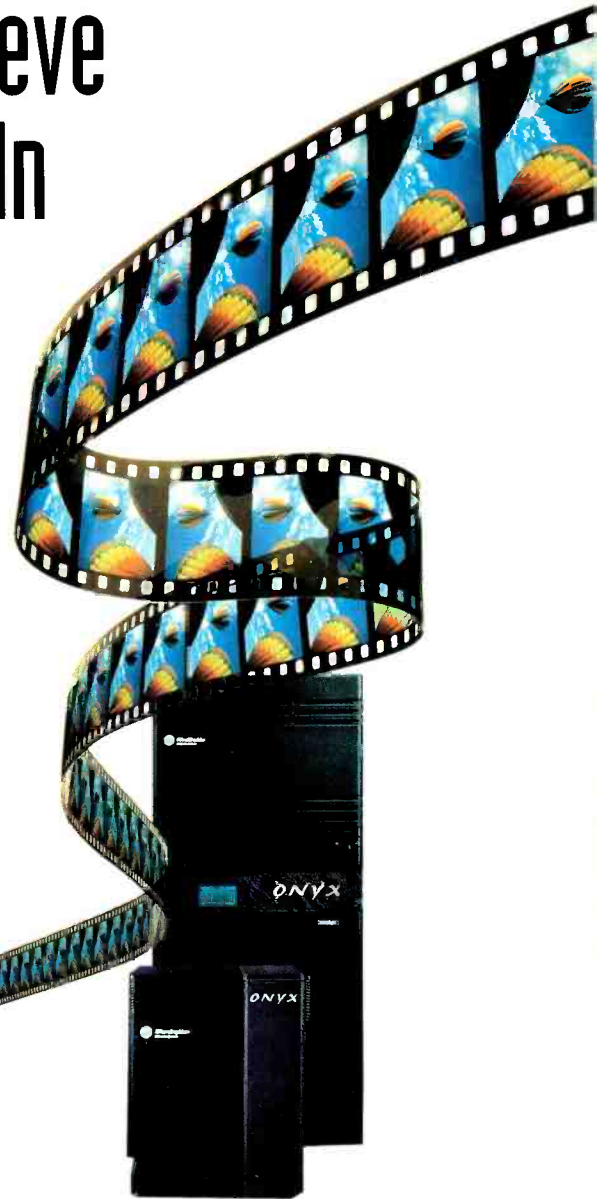

Visual computing just got a whole lot easier. By taking an open system approach to storing and retrieving digital video, Ciprico's Spectra 6000 disk array delivers real-time performance together with unmatched flexibility.

Seamless integration with Silicon Graphics workstations give you the flexibility to switch between digital video applications, i.e. from paint to composite to animation to on- or off-line editing. This impressive versatility eliminates the need for "dedicated use" digital disk recorders (DDRs) and can save you plenty.

Spectra 6000's performance characteristics redefine the concept of productivity. Standard SCSI-2 drives support real-time data transfer rates. Plus, now you can work with storage capacities of *several minutes* of on-line digital video (as

opposed to the old DDR capacity limitations of under a minute!). Each array can provide up to 16GB of storage and can be combined with other arrays for additional capacity. Spectra 6000's fault tolerant design and optional redundant power supply assure continuous on-line performance and no loss of data.

For more information about the Spectra 6000 disk array—the new way to store and retrieve digital video, call us at **1-800-727-4669**.

In the USA
2800 Campus Drive
Plymouth, MN 55441
1 800 SCSI-NOW (727-4669)
In MN: (612) 551-4000
Fax: (612) 551-4002

In Europe:
7 Clerewater Place, Lower Way
Newbury, Berkshire RG13 4RF
England
(44) 635-873666
Fax: (44) 635-871996



any other production equipment) were built on the philosophies of "one button, one function" and "size is proportional to price." The result was a control panel or black box with an assortment of blinking lights, buttons, knobs and sometimes a joystick. The control panel was usually connected to a rack-mount unit, which could take an entire rack. Unlike today's software-based systems, updates were rare and new effects were a long time coming.

Then, small entrepreneurial companies started to spring up with hybrid DVE systems based on commercial-off-the-shelf computer platforms. These were coupled with DSP technology and controlled by software. At the same time, companies began offering feature-rich video plug-ins for the masses. Combined with powerful code, these DVEs sparked a revolution toward low-cost, performance-oriented products.

Software and DSP advantages

Using a common computer platform comprised of dedicated plug-ins for the host, an add-on processor for the necessary video operations and controlling it with powerful code, has several advantages. One primary benefit of coupling powerful software to a computer is the ability to emulate specific control functions. The computer's keyboard and mouse with an optional dedicated controller is usually all that's needed. GUI's offer two additional benefits: 1) powerful performance features can be mapped on the screen using menus, dedicated icons and submenus, and 2) software updates are easily added. Instead of dedicated hard keys, soft keys combined with menu parameters allow instant access to multiple functions.

The computer also allows for the integration of 3-D modeling and animation software with real-time digital effects. Because the software and processor share the same frame, sophisticated effects rivaling much larger systems can be performed. Another benefit is the raw processing power of the new generation of CPUs/DSPs on the market. Three-D rendering times are significantly improved as is the level of filtering and motion prediction emulated through software and DSP. Furthermore, options are easier to design because of the common communications backbone. Plug-ins might include an add-on still-store or a full bandwidth key channel for added effects, newer DVEs support 4:3 and 16:9 operation.

Higher-end improvements

The advancement in DSP and software

design have also allowed for proprietary high-speed processing with novel approaches to digital filtering. Such progress has given way to systems being able to support up to 10-bit 4:2:2:4 (upsampling to 8:4:4:8) processing with real-time 3-D capability along with numerous upgradable effects. High-quality anti-aliasing filters reduce noise components. Faster processing times combined with DSP/software also allow for frame/field-based processing in DVEs. Newer systems also offer selection of digital serial component/composite inputs and outputs for pristine video quality.

Being in a not-so-perfect world with



A "Rubik's cube" effect done on a mid- to high-end system. (Photo courtesy of Microtime.)



Screen-shot of a 16:9 page-turn effect within a 4:3 image. (Photo courtesy of Abekas.)

multiple formats, system flexibility would be a godsend. To this end, several companies offer analog and digital component and composite I/O. In digital component, systems can switch between 525/60 and 625/50. With built-in routers, DVEs can accommodate multiple inputs per channel and, in some cases, control external switcher buses giving programmable input control to the front or back of the DVE channel. In addition, high-end systems usually employ internal sync generators that allow the system to genlock to color black or bars and memorize source timing on an input-by-input basis. This feature allows transformed images to be sent to a switcher for "upstream" manipulation or allows the transformed images to be re-timed to the output of a

switcher in a "downstream" mode. Last, high-end systems are designed to interface to the real world much easier than their lower-priced cousins. For instance, most high-end systems have comprehensive interfaces that provide flexibility in controlling external input selectors, edit controllers, switchers and routers.

Effects, effects and effects

One of the things you won't find lacking in high-end systems is the endless stream of upgradable effects. Aside from standard effects, recursive, lighting and non-linear effects are on the rise. Recursive effects, such as trail, motion-decay, multi-freeze, time strobe and keyframe strobe can be accommodated. Good DVEs also give independent control over each effect. On the non-linear side, new effects are coming like wave, flag, ripple, rings, mosaic glass, split slide, defocus and sepia. Together with lighting and shading effects control, modifiers, such as intensity, pattern, position and color allow precise image creation resulting in 3-D realism for non-linear effects.

The degree of control and the specialization of the effects are also what sets high-end systems apart. Aside from controlling each effect's attributes, such features as keyframe storage add to the overall value. With most functions, intermediate values between the keyframes are automatically calculated and trajectories interpolated to complete the sequence. Motion paths between keyframes can be quickly modified. Various types of motion paths, such as linear, spline, smooth and step are available. Independent function time line processing gives higher control flexibility. Newer systems also incorporate world and set camera views, letting the user manipulate each image in source, target, 'world' or camera space.

Epilogue

The advancements in software-controlled DVE devices will continue at a rapid pace. Parallel advancements in DSP/CPU design, along with higher-power computers will give rise to a new generation of cost-effective DVEs for the low-to-mid end markets. For the high-end, computer-based client/server technology may replace the separate functionalities of the DVE/switcher/editor within the next half decade. It's going to be a bumpy ride, but with profitable opportunities for the visionary companies. ■

For more information on digital video effects, circle (336) on Reply Card. See also "Digital Video Effects Systems" on p. 61 of the BE Buyers Guide.

 THE ADVENTURES OF
PROF. WARHOL FROM[®]
ULTIMATE
AN ENGINEER SHOWS THE
PROFESSOR AROUND A STATE-OF-
THE-ART EFFECTS HOUSE...


How do you like it, Professor? We're now **all digital!**

IMpressive. ...



EXCEPT, OF COURSE, FOR OUR **ULTIMATE!** EVEN DIGITAL WORKS KNOW ULTIMATE SETS THE STANDARD FOR REALTIME BLUESCREEN COMPOSITING!

BUT...

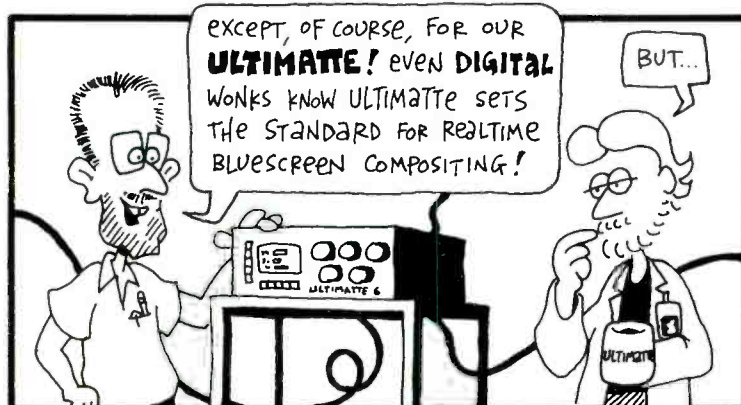


SURE, IT'S A BIT OF A PAIN - WE HAVE TO PATCH OUR DIGITAL SIGNALS THROUGH DIGITAL-TO-ANALOG CONVERTERS, ROUTE THROUGH THE ULTIMATE, THEN BACK THROUGH A/D CONVERTERS - BUT IT'S WORTH IT!

BESIDES, WHAT'S A FEW MORE CABLES AROUND THE PLACE?

UM...

NKR

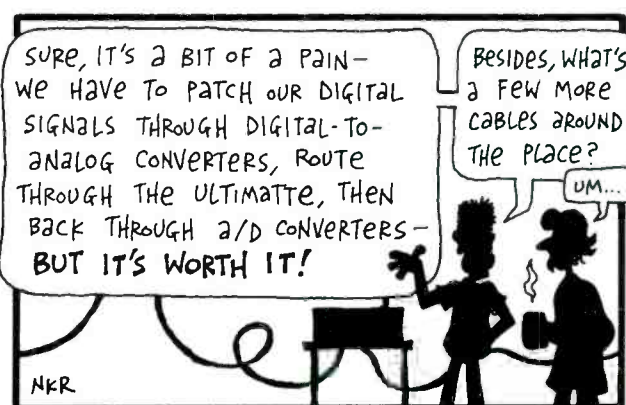

THE PRODUCER IS HERE...

O.K., LET'S TAKE A LOOK AT **WHOa!**



UH OH.

WUMP

YOU DON'T NEED ALL THESE CABLES! THE NEW **ULTIMATE-7** IS **all digital!** PLUG IT RIGHT INTO YOUR DIGITAL SET-UP TO GET THE SAME FLAWLESS COMPOSITING YOU EXPECT FROM **ULTIMATE!**




a **DIGITAL** ULTIMATE? HOW GOOD IS IT?

10-BIT SERIAL I/O... 4:4:4 INTERNAL * PROCESSING...

Wow.

THIS IS A LAW-SUIT, YOU KNOW...

*GEEK TALK. TRANSLATION: "GOOD."

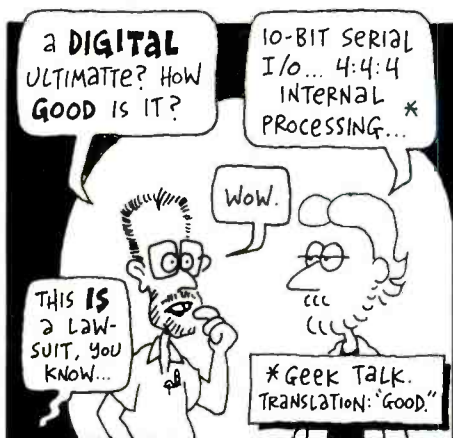

LATER

TERRIFIC! THE COMPOSITES ARE PERFECT!

SO YOU'LL BE DROPPING THE SUIT...?

GET REAL.

THE NEW **ULTIMATE-7**. 100% DIGITAL, 100% ULTIMATE!



Practice safe cabling! Get the
ALL-NEW, ALL-DIGITAL ULTIMATE SYSTEM-7™!
Phone: 818-993-8007 Fax: 818-993-3762

ULTIMATE® 20554 Plummer Street
Chatsworth, CA 91311

Coming in August...

As post and broadcast facilities upgrade their systems, many are turning to serial digital video technology. Although such systems offer many advantages, they require new design and construction skills from the engineering manager. The August issue of *Broadcast Engineering* magazine will provide the guidance needed to properly design and build your facility's new serial digital suite or master control room. Don't miss this important "clip-and-save" feature article.

Photo at right: One of the latest high-tech installations to use serial digital video technology is the DirectTV facility in Castle Rock, CO. The serial digital routing system, installed by Sony System Integration Division, is among the world's largest. It consists of five interconnected matrices — the largest of which is a 512x512 serial digital router.



Your Station Operates 24 Hours a Day So Do We

Meet the Continental Service Team. They are available 24 hours a day, 365 days a year to assist you with solutions to any technical service questions. These people have many years experience troubleshooting equipment in the field and are knowledgeable about all Continental transmitters and accessories.

Continental offers the best service in the broadcast industry.

Dave Chenoweth
Dave Chenoweth

Ken Branton
Ken Branton

John Hutson
John Hutson

Jan Aerts
Jan Aerts

Service 214-388-5800



Continental Electronics Corporation

P.O. BOX 270879 DALLAS, TEXAS 75227-0879 214-381-7161 TELEX: 73-398 FAX: 214-381-4949

Circle (29) on Reply Card

Meet the hottest...



...UHF wireless

**Red hot performance
and solid reliability...**


The UCR190 narrow-band UHF receiver utilizes the proven UNICHANNEL© design with helical resonator front-end filtering and narrow band crystal IF filtering. An all new dual-band compandor provides low distortion and a high signal to noise ratio. Aimed at broadcast ENG applications, the UCR190 receiver provides unmatched interference and IM rejection.

The 195 Series wide-band UHF system utilizes $\pm 75\text{KHz}$ deviation for outstanding dynamic range and signal to noise ratio. An exclusive dual-band compandor and pulse counting detector provide audio quality well suited to the most demanding digital recording techniques. The balanced audio output is adjustable from mic level up to +8dBm studio levels.

More transmitter output power, plus higher receiver sensitivity than any other brand we've tested, all adds up to more operating range than you will probably ever need.

Belt-pack and plug-on transmitters are available in both narrow-band and wide-band UHF versions. Audio outputs are balanced XLR types with separate monitor outputs. All housings and panels are made of machined aluminum for a precise fit and lasting ruggedness. Shock mounted crystals and surface mount components withstand the toughest field use.

Inside Lectrosonics UHF products you will find advanced RF engineering, superb mechanical design and the very latest in surface mount technology. This is the present state of the art in wireless systems.

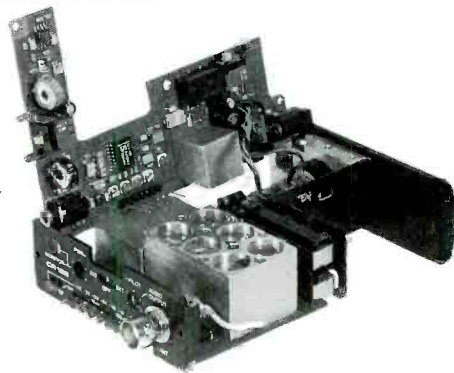

Call for more information

800-821-1121

and a free copy of the 50 page "Wireless Guide"

Distributed in Canada by MILLER CANADA

We invite you to compare these systems with any other wireless system, at any price.



LECTROSONICS

581 Laser Rd., Rio Rancho, NM 87124 USA
Ph: (505) 892-4501 FAX: (505) 892-6243

Studio cameras



High tech, advanced features and smarter heads combine to make better pictures.

By Marcus Weise

The Bottom Line

For years the studio camera has defined the "look" of a facility. Newscasts, promotions and commercials have all been shot through the "eye" of studio cameras. Quality images are primary to a facility's success, and one of the best ways to achieve them is through a top-of-the-line studio camera.



A newly installed BSLDK-10 at Metropolis Studios, New York. Pictured with the camera are Philip J. Mancino, Metropolis executive vice president (left) and Robert C. Weisberger, Metropolis president and CEO.

Cameras can output digital and analog signals in both 4:3 and 16:9 formats.

extraordinarily long cable runs without signal deterioration. This article will look at how these new features have changed the studio camera.

Lens technology

Because the camera output is no better than its input, current lens technology needs to be considered. A standard lens has a dome shaped or spherical cross section. Light passing through a spherical lens does not all focus at the same point on the focal plane. This causes distortions including spherical aberration, chromatic aberration and geometric distortion.

These aberrations are nothing new and are traditionally corrected by adding additional elements to the lens. The development of the aspherical lens shape is an attempt to correct these problems without adding new ones. The aspherical

Weise is president of Marcus and Associates, Hollywood, CA.

FOCUS ON QUALITY WITHOUT LOSING SIGHT OF



SI9 x 8 B1

- Focal length of 8-152mm
- Built-in 2x extender— for maximum range of 304mm
- Lightweight— just 1.65kg
- 0.9m minimum object distance

\$13,576



SI5 x 8.5 B1

- Longest zoom in its class — 127.5mm
- Built-in 2x extender — for 255mm zoom performance
- Shortest length in its class — only 177mm
- Lightest in its class — just 1.25 kg. with lens hood

\$7,995



S9 x 5.5 B1

- Longest zoom in its class — 49.5mm
- 0.3m minimum object distance
- Internal focus system
- 77.3 degree wide angle

\$14,725

It's easy with Nikkor ENG lenses from Nikon. Nikkor TV lenses use the same glass and coating technologies that have made Nikon optics the professionals' standard for quality, worldwide. And when you compare costs with other 2/3 inch ENG lenses, you'll be convinced of the value Nikon delivers.

Plus, Nikon service is second to none. We have service facilities across the country, and you are guaranteed a free loaner lens within 48 hours through our Express Loaner Service program.

Quality, performance, affordability, service — when you add it all up you'll see why more and more video professionals are choosing Nikkor TV lenses.

To learn more about the value of owning Nikkor TV lenses, call 1-800-52-NIKON or (908)935-0175 for our brochure. Or write to Nikon Electronic Imaging, 1300 Walt Whitman Road, Melville, NY 11747.

Nikon
ELECTRONIC IMAGING



The Thomson Broadcast TTV1544.

shape can be varied or customized to meet the needs of the lens or the job required. However, the basic concept is to focus all the light rays at the same point on the focal plane.

Improvements in glass composition have also created an increase in resolution and a decrease in chromatic aberration or color distortion that naturally occurs when light passes through the lens. This improved glass allows a lens formerly used only in 4:3 to be used in 16:9 as well. Because of its capacity for increased resolution, the 16:9 format is much more demanding of lenses.

Several companies have created diagnostic programs or software for their cameras and lenses. These programs make it possible to troubleshoot and

Flesh tone detail allows color correction of the flesh tones independent of the rest of the colors in the picture.

service these units quickly. By hooking into a computer, the diagnostic functions can be carried out remotely. Also, a running track record can be kept if desired. The results can be sent by modem to the manufacturer in the event the problem cannot be fixed locally. Technicians can then analyze the problem and make suggestions to correct it.

Camera technology

The quality of CCD chips has improved, increasing density and resolving capabil-

ities. New CCDs feature 900 lines or more of resolution. Combined with camera signal path bandwidths of 12MHz for green and 10MHz each for red and blue, these CCDs can produce a high quality image. Both triax and fiber systems are available. The optical fiber systems available for some cameras offer true digital transmission.

Another feature is picture-in-picture (PIP) in the viewfinder, which allows the operator to see other images the control room wants to send. PIP's might include special effects setups so

cable connections as options. Cameras have also become considerably lighter. Also, some cameras allow the camera head to be fully remote controlled from a base station by telephone line or radio unit, which increases flexibility for re-

With a fiber-optic cable, runs up to 12 miles without signal deterioration are possible.

motes, particularly sports.

Other features include dual motor-driven filter wheels and full auto-setup and diagnostics on camera functions. The filter wheels are in addition to electronic color temperature compensation or white and black balancing, thus allowing for some interesting in-the-camera color effects. Particular colors or neutral density filters can be added during shooting to create or enhance the feelings in a scene without waiting for post-production.

Many of the studio cameras offer storage systems for camera setups. One type of solid-state memory storage card holds up to 20 setups. The change in setup is instantaneous. This means at the touch of a button the camera can be re-balanced for different studio lighting or a completely different show. Another card




The AQ-235W from Panasonic is 16:9/4:3 switchable.

the camera operator can set framing and still have the camera shot in the viewfinder.

Cameras have through-the-lens auto-setup systems. They also have a great deal of video correction capability, such as flesh tone detail, 6-vector color correction and automatic digital shading correction. Flesh tone detail allows color correction of just the flesh tones independent of the rest of the colors in the picture. Because we are sensitive to what true skin tones are and not as concerned with the colors that make up the rest of the picture this becomes a desirable feature in color correction.

Many manufacturers are using $\frac{2}{3}$ -inch chips for their studio cameras. The larger the chip the more pixels can be put on it, which can increase image detail. Depending on the application, half-inch chips are another good option. Many cameras offer digital as well as analog outputs, which means choices from serial component digital to component analog. Many manufacturers offer triax and fiber-optic

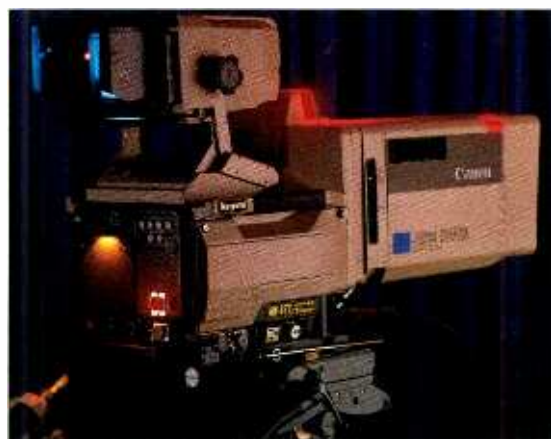

The HK-377 from Ikegami, which features a horizontal resolution of 900 TV lines.

storage system only holds one setup per card but the card can be used in more than one camera. This ensures a good, if not perfect, match if the same card is used to set up more than one camera.

Several cameras offer long cable run compensators. For example, when using 14.5mm triax, cable runs of up to 8,000 feet can be accommodated. With a fiber-optic cable, runs up to 12 miles without signal deterioration are possible.

Continued on page 50

THOMSON BROADCAST would like to thank the National Academy of Television Arts and Sciences for once again recognizing the experience and savoir-faire of the mother of digital with an Emmy Award. In 1993, THOMSON BROADCAST's continual efforts to promote serial digital

STATE OF THE DIGITAL ART

technology, enhanced by the technical mastery of THOMSON-CSF/LER and super-efficient SGS-THOMSON VLSI components, have been unanimously lauded by the video domain. As both a manufacturer and systems integrator, THOMSON BROADCAST offers a full gamut of digital products which operate at the peak of performance. Cameras, routing switchers, color correctors, interfaces, production and post-production switchers, still stores, and master control rooms have all been conceived within the most sophisticated realm of research and development so that you can reap the benefits of tomorrow's technology today. Our drive to push the envelope of efficiency is visible in the 9200 switcher and the whole range of the 9000 series, which capitalize on the advantages of the latest THOMSON BROADCAST digital technology for the greatest satisfaction of video professionals.

MBAYE, GADIGO & ASSOCIATES



 **THOMSON BROADCAST**



9200 Component Digital Switcher

THOMSON BROADCAST - 17, rue du Petit-Albi - B.P. 8244 - 95801 Cergy-Pontoise Cedex FRANCE - ☎ (33) 1. 34.20.70.00. - Fax : (33) 1. 34.20.70.47.
USA - THOMSON BROADCAST, Inc - 49, Smith Street - P.O. Box 5266 - ENGLEWOOD NJ 07631 - USA - ☎ (1 - 201) 569 1650 - Fax : (1 - 201) 569 1511
UNITED KINGDOM - THOMSON BROADCAST, Ltd - 18, Horton Road - DATCHET - BERKSHIRE SL3 9ES - ENGLAND - ☎ (44 - 753) 581 122 - Fax : (44 - 753) 581 196

Circle (21) on Reply Card

www.americanradiohistory.com

The LDK 10 and 10P with Now you can switch from and back again


DPM
DYNAMIC PIXEL MANAGEMENT



Australasia Tel: +61 2 88 88 222 Fax: +61 2 88 80 440
Austria Tel: +43 1 601 01 0 Fax: +43 1 601 01 1599
Benelux Tel: +31 40 78 22 57 Fax: +31 40 78 45 43
China Tel: +852 481 87 79 Fax: +852 481 86 70
Eastern Europe Tel: +49 6151 808 734 Fax: +49 6151 826 37


English Africa Tel: +44 7 34 30 31 23 Fax: +44 7 34 30 28 34
France Tel: +33 1 4728 54 20 Fax: +33 1 4728 54 50
France Africa Tel: +33 1 4728 54 20 Fax: +33 1 4728 54 50
Germany Tel: +49 6151 808 0 Fax: +49 6151 89 44 63
Hong Kong Tel: +852 481 87 79 Fax: +852 481 86 70

Indonesia Tel: +62 21 721 0599 Fax: +62 21 721 0599
Italy Tel: +39 6 51 92 260 Fax: +39 6 51 92 263
Greece Tel: +39 6 51 92 260 Fax: +39 6 51 92 263
Japan Tel: +81 337 40 50 36 Fax: +81 354 79 37 14
Latin & Sth. America Tel: +1 801 977 1551 Fax: +1 801 972 0837

Middle East Tel: +44 7 34 30 31 23 Fax: +44 7 34 30 28 34
Poland Tel: +48 2 628 60 70 Fax: +48 22 218 983
Portugal Tel: +34 1 404 4200 Fax: +34 1 376 6527
Singapore Tel: +65 258 99 73 Fax: +65 258 67 18
South Africa Tel: +27 11 470 54 55 Fax: +27 11 470 53 33

DPM sensors. from 4:3 to 16:9 instantly.

Instantly.

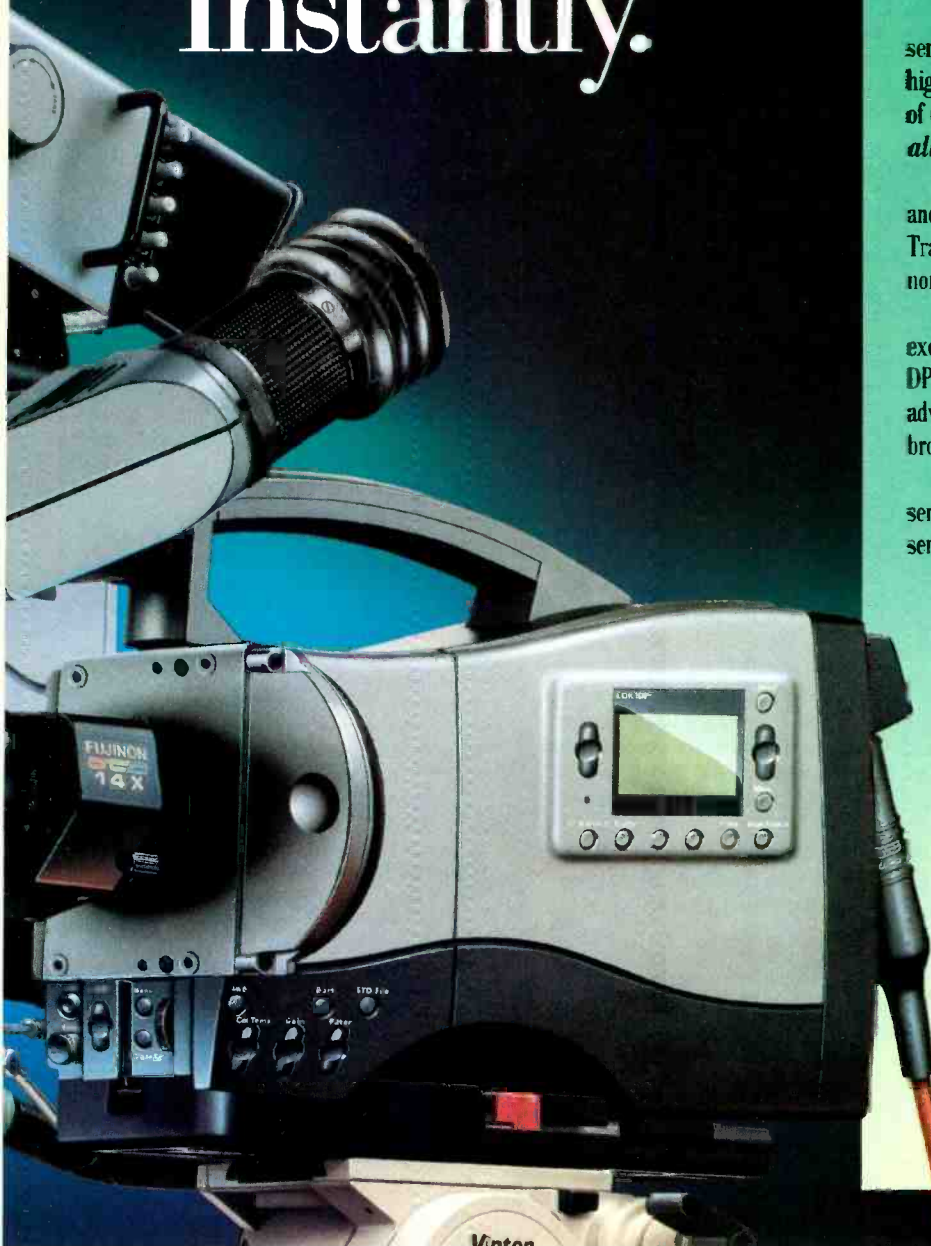

LDK 10 / LDK 10P

The touch of a button is all it takes to go from one format to another (and back again) with the LDK 10 studio camera and its lightweight, compact and portable companion the LDK 10P.

Both incorporate a new BTS development: Dynamic Pixel Management (DPM) sensors.


This exciting technology spares you the laborious task of changing optical blocks or the costly expense of additional DVEs. Whilst simultaneously setting the superlative standards of horizontal resolution that 1900 pixels in both 4:3 and 16:9 formats bring. And without changing in the angle of view.

Other remarkable aspects of these 2/3" DPM sensors include no loss on vertical resolution, a highlight compression/dynamic range in excess of 600%. Plus the highest possible sensitivity over all camera lens apertures.

And like all BTS cameras of course, the LDK 10 and LDK 10P with their DPM sensors, employ Frame Transfer technology. So naturally, you get neither lag nor smear. Just a truly outstanding performance.

To discover more about how these exceptionally talented cameras put the power of DPM technology at your fingertips, you'd be well advised to study our free brochures.

Use the reader reply service, and copies will be sent to you. Instantly.

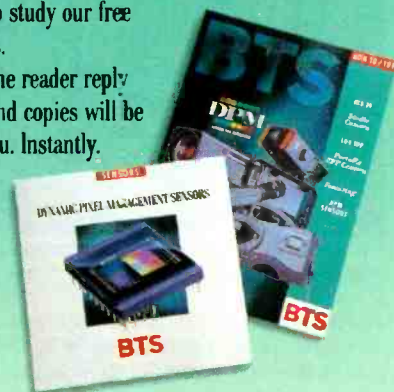

BTS

BTS Broadcast Television Systems, Inc.
94 West Cochran Street, Simi Valley, CA 93065, U.S.A.
Call U.S. and Canada, toll-free: (800) 962-4BTS

A PHILIPS COMPANY

Spain Tel: +34 1 404 4200 Fax: +34 1 326 6527
Switzerland Tel: +41 1 488 23 51 Fax: +41 1 488 32 43
United Kingdom Tel: +44 7 34 30 31 23 Fax: +44 7 34 30 28 34
USA/Canada Tel: +1 801 977 1551 Fax: +1 801 972 0837

— Creative Television Technology from BTS —

Circle (22) on Reply Card

www.americanradiohistory.com

Borrowing something from consumer cameras, many manufacturers offer variable speed shutters. Speeds vary from $1/60$ th of a second to $1/2,000$ th of a second. This allows the operator to shoot video from a computer monitor without flicker or phasing bars. A high-speed shutter also allows the shooting of action shots without blurred images.

Future needs

In preparing for the future, cameras are now switchable from a 4:3 aspect ratio to the new 16:9 format. Because of this, these cameras should not become obsolete in the near future. There is still some debate as to how the change in size should be accomplished. At the present time, the sides of the 16:9 image are cut off to produce a 4:3 image. There are those who would rather see a letter box-type image in 4:3 with black at the top and bottom. In this way none of the image would be lost from the sides. However, the viewer would be

same time. The 4:3 recording can be used today and the 16:9 recording archived for a later date. The additional recordings can be accomplished without having to reshoot a scene just to accommodate the other formats.

Scene-to-scene color correction can be done in the camera before shooting.

Summary

Several of the cameras allow for full remote control of all camera functions. This includes the usual production operations, such as white and black levels, and remote control of all the setup functions and correction circuits. In the area of set up, most cameras now offer excellent control of picture details; automatic flesh tone adjustment, 6-vector color correction, automatic shading correction and best of all, setup memory storage. Storage of setup parameters allows the immediate recall of either exactly the same setup used earlier or whatever was decided upon in advance. Scene-to-scene color correction can be done in the camera before shooting.

Today, many of the studio cameras have $2\frac{2}{3}$ -inch CCDs, with from 400,000 to 600,000 pixels. Bandwidth over tri-

ax is between 10MHz and 12MHz for each of the RGB channels. Resolution can be upward of 900 lines. Auto-setups and diagnostics are almost universal.

With all of these features available, the only thing that remains to be seen is what will be added next year. ■



The JVKY-27, set up in a studio configuration. Many facilities are opting to use EFP-style cameras for studio use.

seeing an image in a form they may not be used to. In conjunction with this switchable aspect output there is also a new possibility in changing the scanning output available from the camera. One manufacturer is offering a camera with progressive and interlace scan output. (See "Cameras with Progressive and Interlace Scan," at right.)

In the midst of all this, just in case you're still not sure, an aspect ratio converter has been developed. Cameras switched between 4:3 and 16:9 aspect ratios still can only output one format at a time. This device, when hooked to a 16:9 camera output can output both formats simultaneously. It accepts component analog 16:9 and outputs serial component digital 16:9, serial component digital 4:3 and analog component 4:3. Simultaneous outputs allow all formats to be recorded at the

Cameras with progressive and interlace scan

The standard output from a video camera, whether it is analog or digital, is the successive lines from one field followed by the successive lines from the next. Each field is composed of every other line of the frame, first the odd lines followed by the even lines. The result is two fields that interlace to produce one frame. Each field is half the picture. In tube cameras the target is scanned by the beam in this manner, and becomes the output. In a chip or CCD camera the information is read out from the sights or pixels on the chip. Progressive scan systems, on the other hand, output the entire image, generally scanning it from top to bottom. Each frame is output complete, rather than as two separate fields.

Because of persistence of vision, images shown at a rate greater than 30 times a second appear as continuous motion. However, depending on the number of images per second, they may exhibit some flicker. Consequently, in a TV scanning system, breaking the image up into two parts (fields) reduces flicker problems as well as accommodates transmission and spectrum space requirements. Picture quality suffers, however. The number of horizontal lines is not that high in current analog systems and showing half the picture at a time does not help matters.

Among other reasons, HDTV was created to address the low-resolution (number of horizontal lines) aspect of current TV standards. The need still exists for greater than 30 images a second, and digital technology allows the 60 fields or images each second to be full images rather than half. In that case, cameras would output 60 frames per second rather than fields, providing 60 full images a second rather than 30.

One way to create a *progressive and interlace* scanning system in a CCD camera is to store the image information in two field buffers. Each buffer holds one field. When used in the interlace mode, the image data is read from each buffer alternately, producing interlaced fields. In the progressive scan mode, single lines from each buffer alternate to the output creating a full frame. Thus, instead of one image split into two parts as in the field interlace mode, there is a full image each time or a total of 60 frames each second. The end result is a doubling of the number of frames and an increase in the resolving capability of the camera. It becomes obvious the image quality would be enhanced. Add to this high-definition scanning with its increased line output and the results should be the best images a TV system has to offer. □

➔ For more information on studio cameras, circle the following numbers on Reply Card:

BTS (328)
Hitachi (329)
Ikegami (330)
JVC (331)
Panasonic (332)
Sony (333)
Thomson Broadcast (334)

What video professionals have been waiting for...

The **NEW** Matrox Studio

Nonlinear Productivity and Linear Production Power Combined

Fast random-access, nonlinear editing.

Log, trim, rearrange, split, slip, slide, cutaway with lightning speed. Choose from the widest range of compressed video quality in the industry — from preview-quality at one hour per gigabyte to quality rivaling Betacam™. You decide.

True analog component online production.

Don't sacrifice video quality — master from your high quality source tapes. Pull your program into the powerful, true online, A/B/C roll linear suite. Work with five layers of video/graphic mix effects, hundreds of transitions, CG, keying, 2D and 3D DVE, audio mixing, digital audio processing

Do it all.

The NEW Matrox Studio is unique. In one system you have the benefit of fast random-access, nonlinear editing and the versatility and quality of true component online. Without compromise.

Better than ever.

The NEW Matrox Studio features: vastly improved DVE, complete program controls; balanced audio I/O; a color-coded editing keyboard, an optional jog/shuttle knob; a hi-res, lightning fast editing interface based on the award-winning Matrox MGA Windows accelerator; and many more enhancements.

For less.

Don't settle for so called nonlinear "online" when you can spend less and get the productivity boost of nonlinear editing AND true component online (price of the decks included — no kidding!).

For more information call us today.

1-800-361-4903

or (514) 685-2630

See us at:

INFOCOMM Booth 2270

SIGGRAPH 94 Booth 1801

ITS Suite 10

Matrox is a registered trademark and Matrox Studio and Matrox M3A are trademarks of Matrox Electronic Systems Ltd. Betacam is a trademark of Sony Corporation. Matrox Video Products Group
1055 St-Regis Blvd., Dorval, Quebec, Canada, H9P 2T4
Fax: (514) 385-2853

MATROX
STUDIO

Audio/video routing systems



Handling audio and video in digital and analog forms is a challenge to today's routers.

By Curtis Chan

The Bottom Line

Performance, reliability and flexibility are critical to any switching topology. Successful systems provide all three at a reasonable cost. These challenges are solved in various ways by the current crop of audio/video routers. Today's best systems offer their users flexible architecture, configurable intelligent control and the ability to handle digital and wideband analog signals of numerous formats.



With the variety of analog and digital signals used in today's multiformat production environment, a signal routing system must be extremely versatile and able to accommodate changes in the facility it supports.

The three key functions of today's routing systems are:

1. An ability to handle I/O assignments.
2. The ability to perform *virtual mapping*.
3. Flexibility to handle multiple formats.

The following describes how these operations are handled by current routers.

Router functions

- **Input and output assignment:** Present-day routers allow free assignment of inputs and outputs so that sources and destinations on different levels can be grouped under a single source or destination name. Multiple crosspoints can also be switched simultaneously with a single keystroke and saved in memory. With this feature, the complete system can be updated with a few keystrokes.

- **Virtual mapping:** One of the unique attributes of routers is virtual mapping, of which there are two types. In the first, a single routing matrix can be mapped to operate as a number of separate routers. For instance, a single 32x32 matrix can be divided into a 20x20 and a 12x12 router or two 16x16 routers. The second type of mapping allows multiple routers or matrices to be mapped into a larger, virtual routing level. This is useful in tie-line

management of routers when selecting signals across two or three routing switchers. By selecting the source and destination points, the control system automatically establishes the desired routing path, and an auto-protect function prevents the selected path from interruption.

One of the unique attributes of routers is virtual mapping.


- **Multiformat operation:** Today's routers can operate in a multiformat environment, which eliminates the need to provide separate routing systems for different signals. Intelligence in the router also protects the source and destination paths so that each is fed the correct format signal. Most wideband analog routers have bandwidths of 30MHz, but RGB routers have typical bandwidths of 250MHz. With the advent of digital video and the integration of low-cost chip sets for serialization and deserialization, digital composite and component video can be supported. Data rates are 143Mb/s for composite NTSC, 177Mb/s for composite PAL, 270Mb/s for digital component and 360-400Mb/s for 16x9 (at 18MHz) digital component.

Routing system architecture

Routing features vary depending upon the cost and complexity of the system. To meet the basic requirements of today's production environment, however, four router matrix types are available: analog/

Chan is president of Chan and Associates, a marketing consulting service for audio, broadcast and post-production, Fullerton, CA. Respond via the BE FAXback line at 913-967-1905.

WORK,

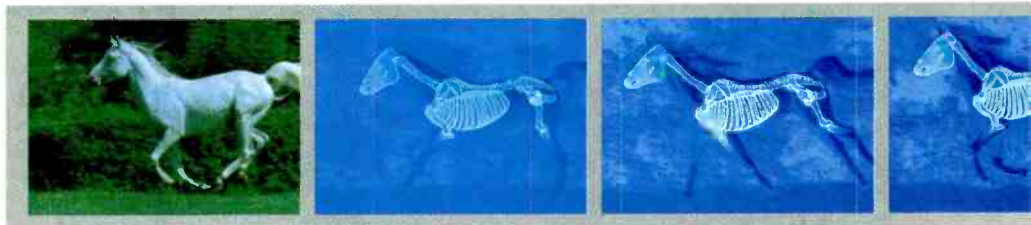

4:2:2 Videographic Design, Bristol



TSI Video, London/Take Three Productions

WORK,

WORK,



Post Perfect, New York/National Geographic



Editz, Manchester

WORK,

WORK.



Fox Promo, Los Angeles - Jon Lee/Rick Morris

will it never end?

Hal means work, and lots of it.

Hal combines simultaneous multi-layering with creative design to produce commercials, titles, programme content, stings and promos at a workrate and quality unmatched in the industry.

Hal uses an intuitive pen, tablet and menu control system to integrate a powerful range of capabilities, including precision keying, multichannel effects, audio and graphics, into the

industry's only complete compositing system.

And the development goes on; the introduction of extended storage (now up to seven and a half minutes) and the availability of mindbending effects packages such as Spatial Dynamics, makes Hal the choice for now, the future, your clients and of course...the bank manager.

HAL™

The Complete Compositor



Quintel Inc., 85 Old Kings Highway North, Darien, CT 06820 Tel: (203) 656 3100 Fax: (203) 656 3459

Circle (31) on Reply Card

digital video, digital audio, data (RS-422A, RS-232 or GPI) and time code.

The number of matrices and the maximum size of the router depend mainly on the matrix type. Control typically comes from a PC or dedicated control panel. In addition, crosspoint switching and assignment can be controlled from either distributed intelligent remote-control units or from a master management system. Source and destination displays are either displayed on the control unit(s) via an LCD, LED, fluorescent or video display.

Typical routing system components are described below. In most cases, RS-232 is used for communication between the terminals and ethernet is used between routers and control units. (See Figure 1.)

- **Main routing array:** The heart of any routing system is the router matrix. Each router frame is equipped with a full facility controller card that can control the router as a stand-alone switcher or as part of a larger multilevel router. In most cases, frames can be connected via a proprietary protocol or IEEE 802.3 on ethernet to allow larger matrices or multilevel systems to be built up. To maintain high reliability, most controllers have full redundancy.

The main switcher frame can support multiple standards via plug-in modules. In most cases, partitioning the frame with different modules results in a shared multiformat architecture on the same chassis. The basic switcher begins with a rear-mounted I/O connector panel and cabling. Next comes some sort of matrix card like a 16x32 and a pair of output buffer cards for each n output (e.g., $n = 32$). These building blocks are combined to develop the desired matrix configurations. Today's largest and most advanced routers can be flexibly configured by combining small (e.g., 16x16) arrays into large matrices of 1,024x1,024 or even larger. Intelligent hardware/software control interfaces can accommodate up to 32 levels of control.

Signal processing is crucial to signal integrity in these systems, and many companies now use dedicated chip sets for this purpose. For instance, one manufacturer's modular approach includes five chips: crosspoint, serializer, deserializer, regenerator and equalizer. This eliminates unnecessary signal processing, equalization and jitter while also reducing power consumption, heat, size and cost. In ad-

dition, reclocking takes place only at the point of entry and exit from the router, resulting in a cleaner, jitter-free signal.

- **General-purpose resource unit (GPRU):** Although not always necessary, a GPRU can house a variety of interfaces for

Today's routers can operate in a multiformat environment.

easier access. Interfaces might include video status reporting, cue and tally routing, multiplexed control interface and GPI I/O. The front panel of the GPRU can be fully customizable and fitted with specific switches, displays and key panels.

- **Master and remote-control panels:** Control panels can be simple push-button, X-Y programmable or complex multibus alphanumeric programmable units. On the simple end, push-button strips with each

button dedicated to a source/destination can be used with a standard router. Moving up,

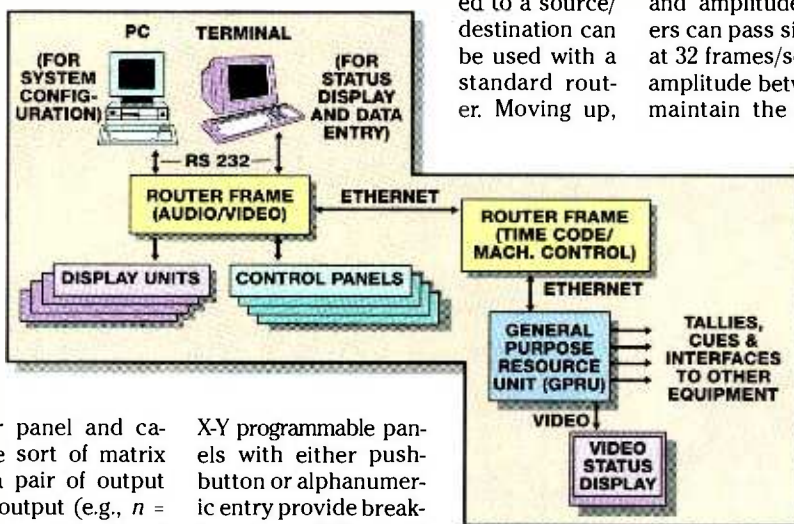


Figure 1. A typical routing system configuration.

X-Y programmable panels with either push-button or alphanumeric entry provide break-away capability and positive feedback. These allow break-away sequences to be built for single-button takes, and they can use any combination of control levels. Warning prompts are usually given to indicate selection of inhibited, non-existing or protected sources. On the high-end, multibus control panels can control multiple switcher blocks with single keypad entry, and their status will appear on alphanumeric displays. These types also offer memory registers to store frequently used combinations. Most multibus panels can select any source with up to four levels of breakaway, and send it to as many as eight destinations, with the press of a single key.

- **Monitor display and/or PC control center:** The monitor display usually involves a dumb terminal that displays the status of events and allows simple data entry, such as changing of source names and log events. The control center can be a PC using a graphical user interface (GUI) for system configuration and control panel programming. The GUI display can also allow off-line storage, editing and recall of all configurations.

Routing time code and machine control

Despite the best efforts of ANSI/SMPTE time-code standard 12M-1986, inconsistencies of implementation abound, which complicate the proper routing of time code around a facility. Today's professional equipment uses either balanced or unbalanced and twisted pair or BNC for time code I/O. On top of that, neither the amplitude nor slew rate is controlled, and the problems usually get worse as tape speed increases in ATRs and VTRs.

The easiest solution uses a time-code router, which processes the input time code as a digital signal, routes it as asynchronous bi-phase data, then reprocesses the signal to ensure correct rise times and amplitude. Typical time-code routers can pass signals from 1/30 to 100x play at 32 frames/sec, keep a constant output amplitude between +1.9dBu/+2.6dBu and maintain the output rise-time proportional to the play speed.

Routing RS-422A machine control signals can also be problematic. On a bad day, mapping RS-422A through a router is like facing midtown Manhattan during rush hour — every other street is one-way and sometimes it is better just to sit it out. Because commands are transmitted on one balanced

pair and received on another, the system's crosspoint count, wiring density and complexity are inherently double that of a simple program router.

To further complicate matters, internal circuitry within the machine reassigns the interface pin assignments to allow it to operate in either controlled or controlling mode. Whether the switch is physical or under software control, traditional routing can't adapt to a reversal of data direction. Finally, when sending a command down a daisy chain of slaved devices, it is difficult to discern which of the slaved devices is responding or having a bus-contention problem.

ONE GENERATION AHEAD



J15ax8B IRS

IFplus

Internal Focus

The future of broadcasting is here. The J15ax8B is Canon's first lens to feature new **IFplus** technology. The challenges of wide screen technology require lenses with higher resolution, higher MTF, and reduced chromatic aberration. Canon's IF plus technology meets these challenges.

Highest Optical Quality

IFplus features Hi-UD Glass which provides extraordinarily low dispersion, and effectively corrects chromatic aberrations. These high-quality optics also make optical specifications previously thought unattainable a reality

Highest MTF

16x9 wide screen applications will require a scanning line density of 20% higher than today's standards. Canon's **IFplus** technology offers the higher MTF required.

Highest Specifications

- Widest standard lens, with a wide angle of 8mm (57.6°)
- Longest Focal Range: 8~120mm
- Shortest MOD in a standard ENG Lens: 0.65m

Each generation must face the challenges of the future. Face the future of broadcasting by using **IFplus**, one generation ahead in lens technology. For additional information about **IFplus** or any lens question, call us at 1-800-321-4388 (In Canada call 905-795-2012).

Canon
The Number One Lens

Circle (38) on Reply Card

www.americanradiohistory.com

Traditionally, relay or analog audio routers were used to switch machine control data, which became an expensive proposition. Newer routers can fully address RS-422A switching with NRZI data rates up to 5Mb/s, however, and they have the ability to dynamically configure each I/O port to one of three states: controlling, controlled or high-impedance. Executed automatically with each take command, this transparent changeover action in the router emulates the mode-swapping capability of the external machines and simplifies system configuration.

Hints on routing system design

For the most part, handling video signals is relatively straightforward. The trouble usually starts when you have to mix analog and digital audio along with the video. The following are some hints that might make your job easier in designing your routing system for an audio/video digital facility.

- **Consider fully digital audio switching:** Direct digital transfers across dissimilar format machines will eliminate unnecessary conversions, save equipment costs and configuration time. The overall cost

is small compared to the benefits, even if asynchronous routing is used.

Today's most advanced routers can be flexibly configured into large matrices up to 1,024x1,024.

- **Plan your routing options:** Use synchronous digital routing for on-air situations or frame-accurate editing. Use asynchronous routing for pegged circuits (i.e., where routing remains fixed throughout a session), and for mixed sample-rate audio production. A small asynchronous router as a preselector to a synchronous router will allow sharing of resources to process wild inputs.

- **Synchronize and standardize your facility:** For synchronous routing, lock all audio and video to a common reference. Also, sample-rate convert wild inputs to the facility master time base. It might make sense to convert all analog signals


to digital early in the path (i.e., ahead of the router) to keep the quality as high as possible before converting back to analog. As is the case for video, define an in-house full-scale digital audio reference level and stick to it.

Arming yourself with today's technology, a few house standards and some basic knowledge will allow you to navigate smoothly through the increasingly complex labyrinth of audio/video signal routing and distribution. There is no more important element in the infrastructure of a broadcast or production facility.

Editor's note: The author wishes to thank Birney Dayton and Charles Meyer at NVision for their assistance in preparing this article.

➔ For more information on audio/video routers, circle (335) on Reply Card. See also "Routing Switchers," p. 56 of the 1994 BE Buyers Guide.

A Stereo Audio Signal Test Set with the Widest Range Ever Designed

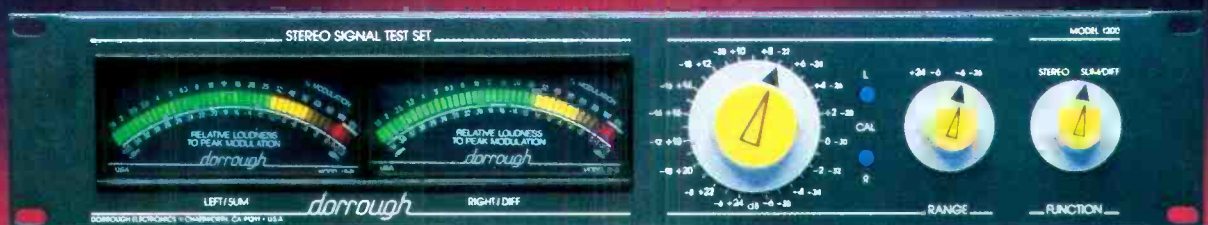

STEREO SIGNAL TEST SET

MODEL 1200

This simple and easy to operate gain set allows stereo measurements of level, balance, crosstalk, and signal-to-noise over the entire dynamic range of your system from noise floor to clipping. The solution to balanced stereo lines.

FEATURES

- Range of 100 dB
- Simultaneous Peak & Average
- L/R or Sum/Diff Modes
- 2 B scale Loudness Meters
- Easy to Use

MEASUREMENTS

- Signal-to-noise ratio
- Program Balance
- Separation
- Crosstalk
- Headroom
- Phase

APPLICATIONS

- Stereo Television
- FM Stereo
- Recording
- Duplication
- Uplink
- Price: \$1650.00



Simultaneous Display of Peak and Average.

dorrough

Dorrough Electronics • 5221 Collier Place • Woodland Hills, CA 91364 • (818) 998-2824 • Fax: (818) 998-1507

Circle (34) on Reply Card

Customized Storage Solutions



HOW CAN CUSTOMIZED DISK STORAGE SOLUTIONS BE COST-EFFECTIVE FOR RORKE DATA?

Simple, it makes our customers cost-effective.

Understanding our customers' needs enables us to develop precise, focused solutions.

STORAGE PERIPHERALS

REMOVABLE DRIVES

MULTI-DEVICE ENCLOSURES

RACKMOUNT SUBSYSTEMS

HARD DRIVES

- SEAGATE'S 3 1/2" Barracuda 7200 RPM, up to 2.1 GB/Drive
- SEAGATE'S 5 1/4" Elite 5400 RPM, up to 9 GB/Drive

OPTICAL AND TAPE

- Direct relationships with today's technological leaders:
SONY, HEWLETT PACKARD, MAXOPTIX
- Rorke Data Brand ISO Standard 650 MB & 1.2 GB Optical Disks
- **SONY, MAXELL, & EXABYTE** tape cartridges

CUSTOMIZED INTEGRATION

- Desktop, tower or rackmount, we will tailor a disk subsystem to fit your needs with any combination of disk, tape, or optical.
- Removable large capacity hard drives are Rorke Data's forte—transport up to 3.5/GB between workstations, also excellent for postponed back-up and data security.



NEW FOR 1994: EXPANDED RACKS AND
REMOVABLE CARTRIDGES UP TO 9 GB/DRIVE!

1-800-328-8147

612-829-0300 FAX 612-829-0988

Rorke Data Inc, 9700 W. 76TH ST., Eden Prairie, MN 55344

Seagate and the Seagate logo are registered trademarks of Seagate Technology, Inc.

Circle (33) on Reply Card



World Cup Soccer '94

The quadrennial spectacle will feature many firsts this time, particularly for U.S. audiences.

By Gerald M. Walker

The Bottom Line

It's being called the biggest broadcast show on Earth — the 1994 World Cup Football Championships, which begin this month with the United States as host for the first time. Even with the infinitesimal U.S. audience for "soccer" (as they call it), the Cup has had enormous impact: Stadiums have been altered, real grass has replaced artificial turf (even inside the Pontiac Silverdome), and a massive communications network has been installed. The broadcasts will also be unusually free from commercial interruption. Overall, the games are estimated to have a \$4 billion economic impact on the United States.



The most bizarre aspect of the 1994 World Cup is that the host country is not the host broadcaster. The rights as host broadcaster went to EBU Sports International (ESI), a U.S. corporation formed by the European Broadcasting Union. ESI has established its offices in Atlanta, and created the International Broadcast Center (IBC) in Dallas, using a combination of experienced World Cup broadcasters from the EBU and American staffers familiar with the high-tech style of U.S. sports broadcasting.

As host broadcaster, ESI is charged with originating and transmitting the *World Feed* for all 52 matches. Feeds will be in classic international style — non-biased with standard soccer graphics and replays and no unilateral elements, such as on-camera appearances of the commentators.

ESI will also provide facilities and services at the IBC and the nine competition venues for nearly 100 rights-holding radio and TV broadcasters from other countries. This includes studios and production facilities for the broadcasters' unilateral coverage, along with scheduling of satellite time and other interconnection services. ESI will also provide broadcasters with statistical information about the 24 participating teams, the venues and the game in general.

Setting up the IBC

All video in and out of the IBC will be in NTSC format. This includes NTSC satellite delivery, so conversion will be done by foreign rights-holders upon receipt, if necessary. The bulk of the IBC's equipment is rented, so use of easily available

hardware was essential. In keeping with its conservative philosophy, the IBC video format is Beta SP.

Conservative or not, the ESI procurement is big. More than 1,000 people will be employed at ESI during the Cup. There will be nine production trucks, 120 cameras, 250 VTRs, 5,000 videocassette tapes, 1,100 commentary positions, 1,800 audio commentary circuits, more than a dozen satellites, and almost 40,000 miles of fiber-optic cable in use.


Backhaul challenges

World Cup '94 has already been labeled the largest satellite broadcast effort in history. Surprisingly, the biggest challenge to the production was choosing and organizing a workable system within the American climate of regulatory freedom, which allows so many communications providers to coexist.

Nevertheless, ESI has harnessed this abundance to serve up the Cup to a cumulative world audience estimated to be 32 billion by the time the Final rolls around on July 17 in Los Angeles. An expected two billion will watch that game alone. All of the international feeds will be live — no tape delays will be provided by ESI — so most of these 32 billion viewers will be ignoring time zones to view the action. This also implies that there is no room for failure.

After the first round, satellite links will be especially challenging. This is because it will be impossible to plan which countries' teams will play in later rounds and how much demand there will be for pre- and post-game feeds. ESI will have a single day to make connections and routes that it had three months to prepare for in the first round. To deal with this, ESI has "warehoused" satellite capacity to use as

Walker is editor-in-chief of *World Broadcast News*. Respond via the BE FAXback line at 913-967-1905.

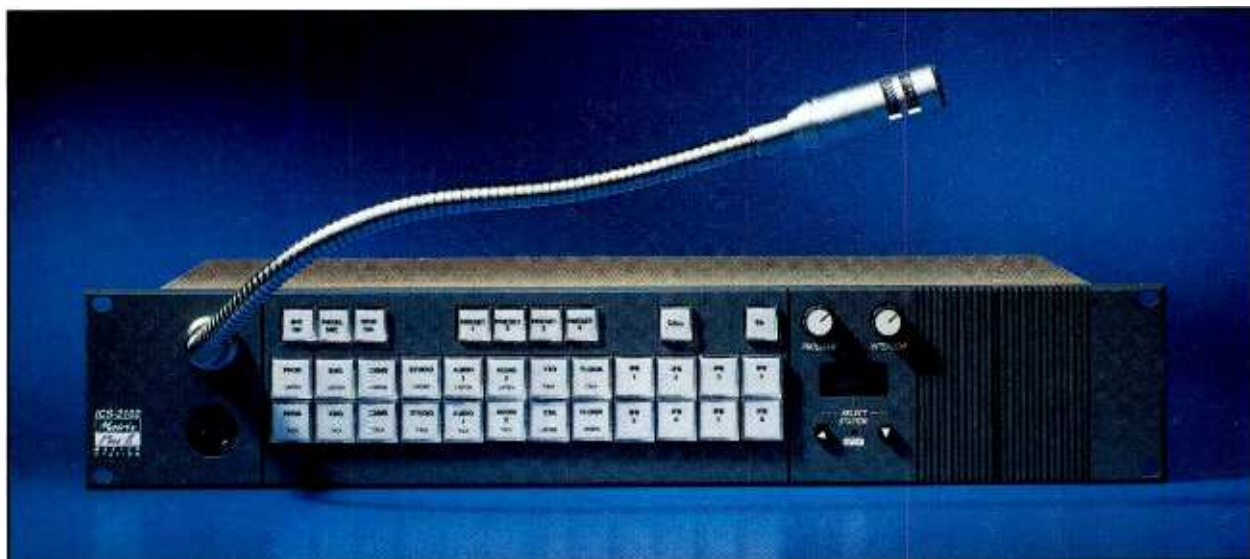

The new ICS-2102 push-button master station.

Matrix Plus™ II... Absolutely the best in television intercom systems.

Our system continues to expand with new stations, interfaces, and software features to further broaden your ability to communicate under a wide range of situations. Matrix Plus II—a truly integrated, **100 x 100**



The Matrix Plus II interface modules.

digitally-controlled intercom with stations for every application, a comprehensive modular interface system, and simplified PC pull-down menu programming. Exclusive features include



The Matrix Plus II connects to a variety of intercom stations.

"Intelligent System Linking", paging, call-signalling, IFB, ISO, DTMF dialing, **DTMF inward access**, variable crosspoint levels and many other sophisticated features. There's also **versatile station communications**.

Long line remote capability. Fully-digitized **single pair wiring** plus much more,

including the highest level of service and support in the industry. Want all the details? Call us at 510-527-6666.

Matrix Plus™ II
FROM CLEAR-COM INTERCOM SYSTEMS

needed through the later rounds. Adding in the regional birds used for transmission in other parts of the world, as many as 30 satellites could be involved during the World Cup.

ABC/ESPN do it the American way

ABC Sports and ESPN cable network are the joint U.S. rights-holders for the World Cup matches. ABC will cover 11 matches, including the final championship game. ESPN will cover the other 41 matches, so all 52 games will be televised in the United States. Both broadcasters will combine the World Feed with augmentation from their unilateral cameras, plus their own commentators.

The biggest accommodation that American broadcasters have made for the Cup coverage is the decision to forego commercial interruptions during play. Commercials will be aired during the pre-game, half-time and post-game segments only. Major sponsors' logos will be super-



The Rose Bowl in Pasadena, CA, is the site of the 1994 World Cup Final. Other matches will be held in New York, San Francisco, Washington, DC, Boston, Chicago, Detroit, Orlando and Dallas.

imposed on the on-screen "game clock" during play. (There is no real stadium game clock in soccer. The official clock is the responsibility of the officials on field, who have discretionary power over the time.)

Because ABC Sports has been covering NFL or college football at most of the stadiums involved in the World Cup, they have no need for a unilateral facility at

the Dallas IBC. The network will tap into the IBC's information pool to support its own commentators, however. ABC will employ the same trucks and backhaul links that it uses to cover NFL Football.

For ESPN, no sweat

ESPN will embellish its coverage with remote-control cameras behind the goals and a unilateral Super Slo-Mo system for some games. (Security requirements limit what ESPN and ABC can do with on-field ENG cameras, hence the reliance on remote-controlled cameras.)

ESPN will also provide reverse angle coverage, and its commentators will have on-screen drawing capability. Like ABC, ESPN will use its usual domestic satellite backhaul links.

The result of all this will be the first time an entire World Cup has been available in English on U.S. television. It also will be presented in a distinctly American TV style — except for the commercials. ■

Finally... Affordable 20-bit technology from Lightwave Systems



Digital Audio Fiber Optic System

Now, sonic purity can be yours without interference.

Fibox Features:

- 108 dB dynamic range
- 2.5 miles transmission distance
- .004 THD

- 70 dB Mic Preamp built-in
- 48V Phantom Power
- Less than \$2,000

Ride the Lightwave into the future. Call us today at (800) 525-3443 for more information on the remarkable new Fibox.

LIGHTWAVE SYSTEMS, INC.

900 Jackson Street, Suite 700, Dallas, Texas 75202


Phone (214) 741-5142 ♦ Fax (214) 741-5145

Circle (36) on Reply Card

Shooting Star.



The HK-377 Ultra-wideband Studio/Field CCD Camera System has the highest resolution, sensitivity and pixel count of any NTSC camera currently available. The camera employs newly-developed 2/3" FIT CCDs, each with more than 600,000 pixels. An ultra-wideband triax system with 10MHz bandwidth for each RGB channel delivers an unprecedented 900 TV Lines resolution at the base station output. The new base station has provisions for digital signal output (optional) to accommodate the demands of high-quality production.



The HK-377P portable companion offers the same performance characteristics as the HK-377 and operates through the same Base Station or can be configured for stand-alone operation.

Unique features of Ikegami's new high-end camera also include extensive remote control of detail functions, including

the Skin Detail to soften the complexion and to give your stars a more youthful appearance. A high-resolution viewfinder has its own VF DTL (Viewfinder Detail) and PIP (Picture-In-Picture) circuits. The HK-377 has an AHD (Auto Hue Detect) circuit for "skin tone capture." Master Control Panels are equipped with memory card I/O Ports. A "Snap Shot File" permits control and scene file data to be written into, and read quickly, for shooting parameter replication.

Current users include: ABC (*20/20*, *World News Tonight*, *Good Morning America*, *All My Children*, *Loving*, *Prime Time Live*, etc.), CBS (*Late Show with David Letterman*, *60 Minutes*, *CBS Evening News*, *Sunday Morning*, etc.), Disney/MGM, MTI, TNN, Turner Entertainment Network, Goodyear Blimp, Unitel Mobile Video, GC & Co., and Channels 2 and 13 Buenos Aires.

Shoot your stars, with the HK-377. Call the nearest Ikegami Regional Office.

T H E P R O F E S S I O N A L ' S C H O I C E

Ikegami Electronics (U.S.A.), Inc. 37 Brook Avenue, Maywood, NJ 07607 East Coast: (201) 368-9171
West Coast: (310) 534-0050 Southeast: (305) 735-2203 Southwest: (214) 869-2363 Midwest: (708) 834-9774

Ikegami

Circle (24) on Reply Card

www.americanradiohistory.com

Wrist-watch profits



Dick Tracy move over — the MessageWatch is here, and broadcasters get a piece of the action.

By John C. Kean


The Bottom Line

FM subcarrier applications are about to get a boost as the long-awaited wrist-watch pager debuts. Buoyed by the name recognition of a popular watch manufacturer, this service could become the most successful subcarrier service ever launched. It provides subcarrier-leasing opportunities for multiple FM stations in every market as the system builds its planned worldwide coverage.

From a broadcast engineer's perspective, leasing subcarrier capacity is like renting out a guest room in your home. The additional revenues it provides must be balanced against the overall cost of management and oversight of one or more subcarrier lessees. The *Advanced Com-*

STS plans to expand its network of radio stations to cover all major metropolitan areas in the United States by 1995. It is also planning to establish ACTT networks in a number of countries including Canada, China, France, Japan and the Netherlands, with the goal of becoming the first global subcarrier network.

The ACTT subcarrier communications protocol is called the *High-Speed Data System* (HSDS). It is based on a packet-oriented, time-division multiplexed (TDM) scheme with a raw data rate of 19kb/s. The HSDS FM-subcarrier channel is centered at 66.5kHz, to be compatible with international subcarrier spectrum standards of 53kHz

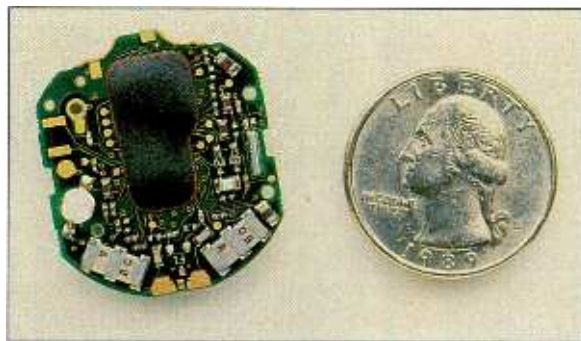

The MessageWatch circuit board.

munications and Time-keeping Technology (ACTT™) system from Seiko Telecommunication Systems (STS) of Beaverton, OR, is a subcarrier lessee who, like a good housemate, strives to be neat, quiet, relatively undemanding of physical space and financially stable.

Now installed at 13 FM stations in Portland, OR, and Seattle (areas well-known for their challenging terrain conditions), the ACTT system is used to broadcast paging and other data to approximately 12,000 *MessageWatch* wearers in those markets. The MessageWatch combines a Seiko electronic timepiece with a versatile pager in a men's-sized wrist watch.

to 75kHz and the (stereo-compatible) U.S. standard of 53kHz to 99kHz. The center frequency is 3.5 times the 19kHz stereo pilot, which allows phase-locking to the pilot for ease of receiver implementation. The subcarrier is summed onto the FM station's baseband signal with a typical injection of 10% (7.5kHz deviation).

ACTT keeps to itself

In FM subcarrier applications it is critical that the subcarrier not interfere with the main audio channel in a way that would affect perceived audio quality. There are two principal considerations in this regard. The first relates to the transmission filter and out-of-band attenuation. HSDS filtering at the transmitter is implemented digitally with a finite impulse response (FIR) filter. The subcarrier

Kean is BE's consultant on subcarrier technology, and a consulting engineer at Moffet, Larson & Johnson, Falls Church, VA. Respond via the BE FAXback line at 913-967-1905.



ANTENNA SPECIALISTS FROM LF TO UHF

74-Foot Coil-Loaded Self Supporting Whip Antenna V-33070 Series

INSTALLED BY
CKWX/CKKS-FM
and Selkirk's Satellite
Radio Network in
Vancouver, B.C., Canada

*Antenna also covers the
LF MF/AM Band*



P.O. BOX 603
GUELPH, ONTARIO
CANADA N1G 3M5
TEL: (519) 824-3220
FAX: (519) 824-3411

Circle (25) on Reply Card

FEATURES

- Coil loaded
- High efficiency
- High strength filament wound fiberglass base
- Low cost installation
- Low cost maintenance

**The ACTT system
broadcasts data to
approximately 12,000
MessageWatch
wearers in Portland
and Seattle.**

er energy is attenuated more than 60dB at the channel edges.

Figure 1 shows a spectrogram of an actual FM station operating with processed stereo audio and an HSDS subcarrier. The 19kHz stereo pilot is plainly visible at a level approximately 20dB below reference modulation ($\pm 75\text{kHz}$ peak deviation). The 38kHz L-R subchannel energy extends from approximately 23kHz to 53kHz. The HSDS subcarrier centered at 66.5kHz in Figure 1 shows the steep attenuation slopes provided by digital filtering. (Due to the integration time of the filters in the spectrum analyzer, the indicated level of the modulated subcarriers is less than their steady-state values.)

The HSDS spectrum has been shown to be compatible with RBDS service, which operates at 57kHz. After thorough testing of RBDS receivers, STS has determined that the HSDS modulation spectrum degrades RBDS by an average of less than 1dB, based on the typical RBDS bit error rate (BER) performance of 10^{-2} and the recommended (minimum) RBDS injection level of 2.66%.

Regarding spectral space requirements, as implied earlier, the ACTT subcarrier is friendly to existing stereo main channel audio, RBDS and 92kHz subcarrier services. Only existing 67kHz subcarrier services would have to be removed to accommodate ACTT transmission.

The second potential interference source is non-linear mixing of the subcarrier and the main-channel audio caused by multipath. As a countermeasure, the HSDS protocol uses data-randomization to "whiten" the signal, thereby avoiding generation of perceptible beat notes (birdies). Extensive testing and operational experience in Seattle and Portland

have demonstrated HSDS has no noticeable interference with the main channel audio. To demonstrate this performance, recordings of mobile stereo FM reception have been presented by STS at various local SBE meetings.

High data-transmission rate

The ACTT system currently operates one of the world's highest data transmission rates for paging-style *personal communications services* (PCS) devices. The 66.5kHz subcarrier is a double-sideband, suppressed-carrier, PSK amplitude-modulated signal using a technique of controlled intersymbol interference called *duobinary encoding* to achieve 1bit/s/Hz efficiency. At 19kb/s, HSDS is 16 times faster than the current RBDS standard

**The MessageWatch
combines an electronic
timepiece with a versatile
pager in a men's-
sized wrist watch.**

ity to use multiple-station transmissions and retransmissions of paging and other data. This ensures high reliability, especially in multipath situations where signal "collisions" can cause loss of data. The use of multiple FM stations for transmission within a single market is accommodated by the ACTT system's use of frequency-agile receivers, precise time-offset message transmission on each station, and transmitted lists. By transmitting the same message from one or more stations, using short time delays (offsets) between transmissions, the HSDS protocol affords ample time for a patented, frequency-agile antenna in the ACTT receiver module to change its tuned FM frequency to a clear signal containing a message packet. (The antenna also adapts to whether the watch is being worn, and even to the wrist diameter of the wearer.)

The multiple-station capability of the HSDS protocol not only ensures high message reliability, but also allows FM stations to be easily networked together into a single system. It achieves this through the following technique.

Along with formatting, address, Universal Coordinated Time (UTC) and message data, each HSDS protocol data packet contains a list of surrounding FM stations using the protocol. By reading this list and then automatically adjusting its subcarrier receiver to an available signal, an ACTT receiver module can operate continuously as it moves out of one FM station's broadcast area and into another's. With this ubiquitous coverage capability, STS plans to cover the United States, and eventually the world, with a unified global ACTT network.

It also means that many FM stations may have an opportunity to share in STS's success by providing the system's delivery channels on their subcarriers. ■

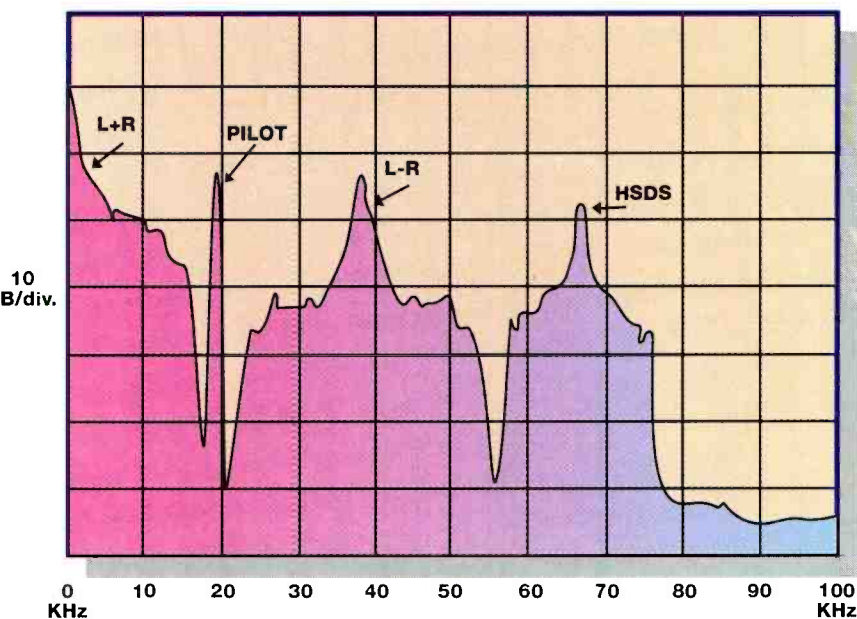


Figure 1. Baseband spectrum display of actual stereo-FM station running 66.5kHz HSDS subcarrier.

and eight times faster than the new 2,400bit/s paging code standard. This means radio stations in a market may be able to serve millions of subscribers.

HSDS allows the use of extremely small receivers with extremely long battery life. Receivers may have duty cycles that range from continuously on to as low as 0.01%, providing flexibility to optimize message delay, data throughput and battery life.

Unique to the HSDS protocol is its abil-

➡ **For more information on the
Seiko Telecommunication
Systems ACTT system, circle
(318) on Reply Card.**

ENERGY SAVING EEV IOTs

...the tubes with the proven track record!

EEV has been a prime mover in energy efficiency improvements throughout its involvement in the US UHF television industry. One of the most recent technologically advanced products added to the EEV range is the high power UHF TV IOT. In addition to its energy saving features, the EEV IOT has shown that it is ideally suited to combined amplification transmitters for conventional NTSC service, together with the requirements of digital HDTV transmission.

EEV IOTs follow the Company's established philosophy of providing customers with products that are user friendly, while satisfying their technical requirements. This, together with applications engineering support and a reputation for service second to none, has established EEV as the market leader.

Why not contact EEV today to find out how you can save up to 50% on your electric power bills.



IOTs are presently available for 40kW and 60kW visual service and combined amplification powers of up to 42/4.2kW.

EEV Power Tubes

USA: EEV Inc, 4 Westchester Plaza, Elmsford, NY 10523
Telephone: (914) 592 6050 or 'Toll Free' 1-800-DIAL-EEV
Fax: (914) 682 8922

UK: EEV Ltd, Waterhouse Lane, Chelmsford, Essex CM1 2QU, England
Telephone: (0245) 493493 Fax: (0245) 492492

CANADA: EEV Canada Ltd., 67 Westmore Drive, Rexdale, Ontario M9V 3Y6
Telephone: (416) 745 9494 Fax: (416) 745 0618

FRANCE: EEV France, Division Tubes Electroniques et Optronique de GEC France s.a,
2 Rue Henri Bergson, 92665 Asnières, Cedex
Telephone: (331) 4080 5400 Fax: Paris (331) 4733 1131

Subsidiary of the General Electric Company plc of England **gEC**

Circle (37) on Reply Card

Implementing RBDS



Getting RBDS on the air sooner rather than later has its advantages.

By Skip Pizzi, technical editor

The Bottom Line

The Radio Broadcast Data System (RBDS) has been an official U.S. standard for about a year, and the industry is slowly beginning to implement it. The classic "chicken and egg" problem has kept it from rapid success, with most receiver manufacturers waiting for the number of RBDS stations and the consumer demand for RBDS radios to increase. Broadcasters needn't wait to reap the benefits from RBDS, however. New "industrial" applications can allow the service to turn some quick profits.



Major receiver manufacturers have maintained a wait-and-see attitude about RBDS.

Nevertheless, RBDS encoding hardware is relatively inexpensive and easy to install. (See "Re: Radio," May 1992.) The starting point is an RBDS coder, which is a programmable data modulator and 57kHz subcarrier generator in a single box. RBDS data is generated either by the coder's internal processor or by an external PC connected to the coder via RS-232 (or both). Incoming data via telco line from a third-party client can also be incorporated. The composite FM signal is sampled by the coder for synchronization of the 57kHz subcarrier and its 1,187.5Hz word clock to the 19kHz pilot. Finally, the RBDS coder output is sent to the stereo generator's subcarrier input,

data settings are initialized, and RBDS service is up and running.

Space requirements are typically a few rack units and perhaps some desktop space for a PC (or just a laptop). Coder costs are typically under \$5,000, although a station can spend from about \$2,500 to \$10,000 or more to implement RBDS.

The downside

As the early adopters of RBDS have become more familiar with the system, they have encountered stumbling blocks that are impeding RBDS from reaching its full potential. Consider the following:

- *Is it RDS or RBDS?* The Radio Data System (RDS) was developed in Europe in the 1980s. It is now in relatively widespread use there among state-sponsored/controlled and other public broadcasters. (Private commercial/independent stations in Europe have not yet fully embraced the system.) Subsequently, the U.S. variant of RDS was developed, using the same core technology but with different coding definitions and other details. To distinguish between systems, the U.S. standard is called Radio Broadcast Data System (RBDS). However, receiver manufacturers are generally sticking with the "RDS" terminology in labeling and marketing RBDS-equipped receivers in the United States. Naturally, this has caused some confusion within the industry.

- *Not all RBDS radios are created equal.* For a radio receiver to display the RDS/RBDS logo, not all RBDS functions have to be included. In fact, no current RBDS radio incorporates every possible function of the system, and probably few ever will. The RBDS receiver standard is vol-


Talk Shows Can Be Difficult. Your Phone System Shouldn't Be.

Weirdo on line one. Bitter psycho on two. Irritated mom on three. Religious zealot on four. Talk shows seem so simple. At least your phone system is, if it's the new TS612 from Gentner.

The TS612 is a six-line (expandable to 12) Telephone System. It features Gentner's Direct Connect Technology™, which allows you to hook it into a regular phone line. Plus, its built-in handset and keypad eliminate the need for another screening phone. With the TS612, you can talk to callers (even the Pizza Guy) off-air, while other callers are on-air.

Technologically, the TS612 features built-in mix minus, to complement Gentner's digital audio enhancement. It has two DCT Superhybrids, automatic level control, dual air control surfaces, optional screener control surface, and dual audio bus operation. You also have DCT connection to your hard disk or studio PC, for screening and controlling calls. But what would you expect — the TS612 was designed specifically for talk shows.

See your Gentner rep today, or call
1-800-945-7730 and make your life
easier with the TS612. After all,
that psycho's still on line two.

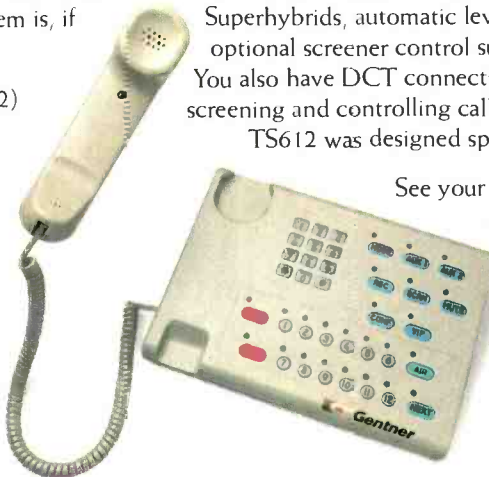

 **Gentner**

1-800-945-7730

Circle (32) on Reply Card

untary. Receiver manufacturers need only to comply with it to the level that they feel is appropriate to a product and its market. (Some encoders are not fully capable of implementing all the RBDS standard's features.)

- *The RBDS data rate is low.* With the advent of several new non-RBDS subcarrier data systems offering data rates up to 19kb/s (see "Wrist-Watch Profits," p. 62), some broadcasters have questioned the wisdom of establishing a subcarrier service with a data rate of only 1.2kb/s.

- *Sufficient consumer demand has not been demonstrated.* RBDS service is unlike anything ever presented to the broadcast consumer. It is unclear if listeners will accept and use the text data and "smart-radio" features delivered by RBDS. Traffic data and emergency alerting functions seem to be the only items that are considered generally desirable to today's average user.

- *Encoding hardware is still largely Euro-centric.* Much of the RBDS equipment available to U.S. broadcasters is Europe-



The EIA is promoting the cause of RBDS within the consumer electronics industry. This display appeared at the 1993 Summer CES in Chicago, where more than a dozen FM stations were broadcasting RBDS data.

an hardware that has been adapted to RBDS operation. This can make it expensive or difficult to use.


The upside

There is hope on the horizon regarding some of the problems just mentioned. For example, RBDS proponents argue that even at only 1.2kb/s, RBDS can still provide a significant amount of program-associated data (PAD), plus some ability

to serve third-party functions for industrial users (i.e., non-listeners), such as paging or Differential GPS. (See "Radio in Transition," December 1993). Meanwhile, most of the new higher-speed subcarrier data services are targeting non-PAD applications. It may be some time before any of these new systems are actually producing revenue for their host stations (if ever). RBDS is already an accepted standard, and hardware is in production. New third-party RBDS applications continue to develop, and a station can support several of these services simultaneously on the so-called Group 3 (and other) data packets of its RBDS service. Furthermore, RBDS does not preclude the use of other higher-frequency, higher data-rate subcarriers by an FM station, using either existing or proposed technologies. Therefore, no avenues to future datacasting growth are closed by implementing RBDS today.

Concerning consumer demand, the EIA has recently begun a survey of consumer preference for RBDS services. Results should be available soon. EIA is also con-

Your Listeners Are Ready For RDS/RBDS... Are You?

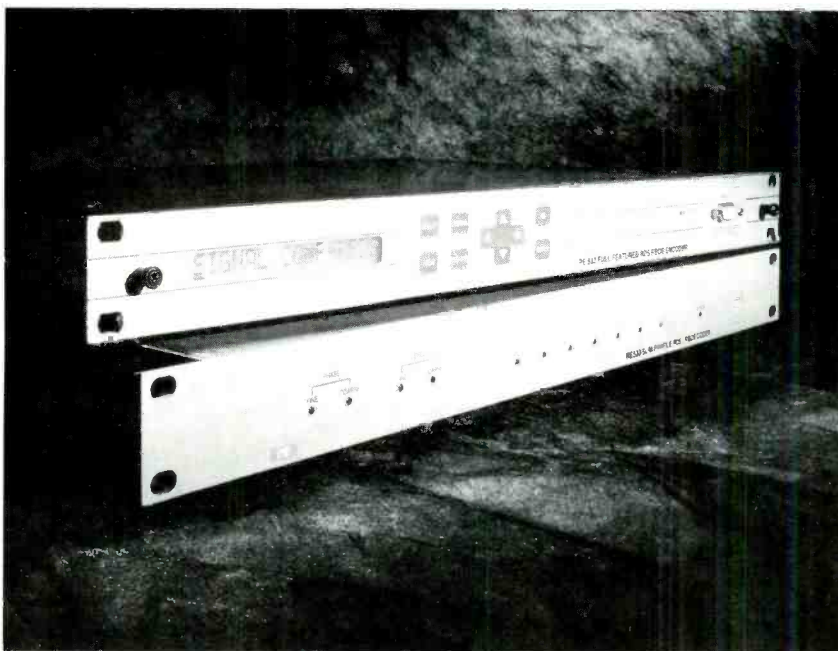

Available through: ▲ Broadcasters General Store ▲ Harris Allied ▲ RF Specialties

This year, RDS/RBDS consumer radios are being purchased by your listening audience, which means the time is right to pursue the revenue opportunities RDS/RBDS has to offer.

RE AMERICA continues its tradition as the leader in RDS/RBDS technology, now with a family of products. Whether you choose the RE 533 for single-user datacasting or the RE 532 for multi-user datacasting, RE has the right encoder to meet your budget and operational needs.


RE takes the risk out of choosing an RDS/RBDS encoder by employing flashprom technology in both the RE 533 and the RE 532. Future upgrades and enhancements are simply downloaded via disc software available from RE. You make the choice, the RE family has got you covered.




RE AMERICA, INC.
31029 Center Ridge Rd.
Westlake, Ohio 44145

Phone: (216) 871-7617 ▲ Fax: (216) 871-4303

Circle (39) on Reply Card



You get the same CRT-type displays you're used to, with 10-bit internal resolution, so they're sharper than any other rasterized monitor available.



A red prompt on the bottom of the picture shows when your signal goes out of limit.



You can improve overall video signal quality while holding your expenses down.

**WHAT IF YOU COULD
AUTO-MEASURE VIDEO
SIGNALS BY REMOTE,
HAD A SYSTEM FOR
ADVISING OPERATORS
WHEN SOMETHING IS
OUT OF LIMIT, HAD AN
ASSISTANT TO ISOLATE
PROBLEMS AND PRINT
STATUS REPORTS, AND
YOU COULD AFFORD IT
TOO? IMPOSSIBLE? NO.**




That's right. Real time auto-measure. You can monitor studio signals constantly, without being there yourself. And since WVM-710 displays on your existing picture monitors, you can centrally route and control signals to and from remote points, even over phone lines.



Connect a printer to the WVM-710, and you can get hard copies of waveforms and auto-measure screens whenever you want. A big help in trouble-shooting.




THE WVM-710 VIDEO MONITORING SYSTEM FROM MAGNI.



MAGNI
MAGNI SYSTEMS, INC.,
9500 S.W. Gemini Drive,
Beaverton, OR 97005 USA
PHONE: (503) 626-8400
1 - (800) 237-5964
FACSIMILE: (503) 626-6225

WHEN QUALITY COUNTS

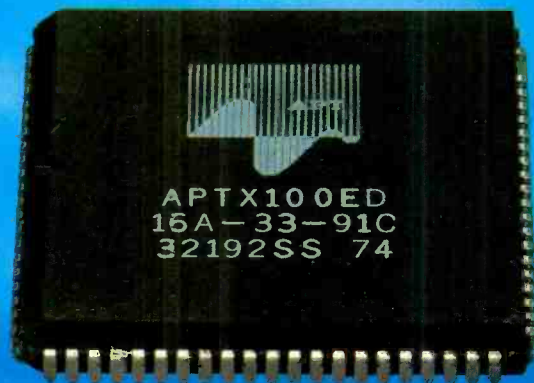

**It has to be apt-X100 -
the only true single chip
audio compression
solution - adopted by
the world's leading
manufacturers of
broadcast equipment.**

In professional broadcast, telecommunications and recording applications, the benefits of APT's predictive audio compression system are clear. Higher resistance to tandem coding errors, lower coding delay and a higher immunity to data errors mean less noise - so if you need to exploit the advantages of compression without risk - you'll be using the most appropriate solution. For details of both single chip and board level solutions - call APT.

Audio Processing
Technology
Edgewater Road
Belfast BT3 9JQ
Northern Ireland
Tel 0232 371110
Fax 0232 371137

Audio
Processing
Technology



Audio Processing
Technology
6255 Sunset Boulevard
Suite 1026
Los Angeles
CA 90028 USA
Tel 213 463 2963
Fax 213 463 6568

apt-X and apt-X are registered trademarks of APT

ducting training and awareness workshops for broadcasters and retailers about the RBDS service.

Meanwhile, second-generation RBDS encoding hardware is now becoming available, which is more appropriate and configurable to current and future U.S. needs.

Monitoring the RBDS signal

As radio stations begin to implement RBDS, it has become necessary to monitor for presence and quality of the subcarrier and its data. Just putting an RBDS radio in your car and checking the display on the ride home is not enough.

Responding to this need, a few manufacturers have released RBDS monitors with many special features. Currently, these monitors are designed either as rack-mounted, dedicated devices or as PC-based, software-driven systems.

One important feature that some of these monitors provide is the ability to measure the actual injection level of the 57kHz RBDS subcarrier. This is critical because at its nominal recommended level of 2.6%, the RBDS subcarrier may fall outside the injection measurement tolerance of some FM modulation monitors. Another useful feature on some RBDS monitors is a tunable front end, allowing a station to closely monitor its competitors' RBDS signals.

Short-term vs. long-term benefits

Although only about 2% of U.S. FM stations have implemented RBDS, there may be considerable advantages (and minimal risk) for stations adding the service today. Short-term payback to broadcasters on their RBDS implementation may come from industrial users of third-party applications, while the value-added advantages of PAD and "smart-radio" RBDS features may not be experienced until later.

Industrial RBDS applications and hardware may soon experience significant expansion. For example, RBDS paging, which to date has been dominated by one or two companies, may soon have several new players and much wider availability. Other industrial RBDS receivers have also been developed, providing enhancements that make them appropriate for new mobile data applications. These features include addressability, custom configurability, integrated locating ability and full RBDS feature-set decoding.

Because of their easily targeted markets and valuable services, industrial applications may achieve quick viability and profitability. It may benefit stations to be among the first to implement RBDS in their markets, thereby attracting third-party service providers to established 57kHz subcarriers.

Although it will take time before RBDS provides service to large numbers of listeners, it may bring an earlier revenue boon to stations via its other uses. ■

➡ For more information on RBDS encoding hardware, circle the following numbers on Reply Card:

AEV	(319)
Broadcast Electronics	(320)
Circuit Research Labs	(321)
Modulation Sciences	(322)
RE America	(323)
Rohde & Schwarz	(324)
SCA Data Systems	(325)
Teli AB	(326)
Tectan	(327)

Circle (41) on Reply Card

France : VELIZY-
VILLACOUBLAY
Tel. : (33-1) 30 70 35 00
Fax : (33-1) 30 70 35 35

Asia : SINGAPORE
Tel. : (65) 227 83 20
Fax : (65) 227 80 96

ELECTRON TUBES FOR TV AND RADIO BROADCAST.



**Extending
your broadcast performance.** We make broadcast performance go

further with a complete selection of tubes and circuit assemblies for TV, FM and radio. OEMs and broadcasters choose Thomson time and again for reliability, power and ongoing optimization of tube lifetime.



Our TH 563, featuring 30 kW UHF in common amplification, opens new horizons in tetrode performance, and joins our full range of VHF and UHF tubes for TV.

Our FM tubes, from 10 to 100 kW, are economical, easy to use and available in industry standard designs.

For the latest radio transmitters, our outstanding new 500 kW TH 576 offers a higher level of efficiency, resulting in lower operating costs.



Whichever tube you need, Thomson delivers the service, quality and innovation that's ready to take your performance to new heights.

Brasil : SÃO-PAULO
Tel. : (55-11) 542 47 22
Fax : (55-11) 240 33 03

Deutschland : MÜNCHEN
Tel. : (49-89) 7879-0
Fax : (49-89) 7879-145

España : MADRID
Tel. : (34-1) 564 02 72
Fax : (34-1) 564 19 40

India : NEW DEHLI
Tel. : (91-11) 644 7883
Fax : (91-11) 645 3357

Italia : ROMA
Tel. : (39-6) 639 02 48
Fax : (39-6) 639 02 07

Japan : TOKYO
Tel. : (81-3) 3264 63 46
Fax : (81-3) 3264 66 96

Schweiz : LENZBOURG
Tel. : (41-64) 50 45 01/45
Fax : (41-64) 50 45 11

Sverige : TYRESO
Tel. : (46-8) 742 02 10
Fax : (46-8) 742 80 20

United Kingdom :
BASINGSTOKE
Tel. : (44-256) 84 33 23
Fax : (44-256) 84 29 71

USA : TOTOWA, NJ
Tel. : (1-201) 812-9000
Fax : (1-201) 812-9050

For other countries,
call France

THOMSON TUBES ELECTRONIQUES

Circle (42) on Reply Card

www.americanradiohistory.com

Re: Radio

Back to basics

By John Battison, P.E.

I've been meeting quite a few new entrants to the radio field recently. Despite the industry's current loss of technical positions, it seems that some young men and women *are* going into radio station work. Some radio stations are also offering LPTV as an extra service — a sort of "radio with pictures" — and these will also need technical help.

To my surprise, some of these new AM/FM/LPTV combo stations do not have a steady, or contract, technician or engineer. It is amazing what some station managers will do when establishing an operation. Recently I visited an AM/FM/LPTV operation. For part of its programming, the station simulcast a popular talk-radio show on AM and LPTV. The day that I was there the station had audio problems. Everything was normal on the AM side, but no audio was being broadcast on the LPTV signal. I tried to track down the audio path through a maze of unlabeled cables in master control. I finally discovered that for some unknown reason, the LPTV audio feed for this simulcast came from the AM *air monitor*. No audio signal was present because someone had flipped an output selector switch on the air monitor, cutting off the AM audio feed to LPTV master control.

I asked why they didn't use a hard-wired audio line from the AM console to the LPTV switcher, but no one seemed to know why or perhaps how to do it. (Because this was a regular daily program, hard wiring seemed an obvious solution.)

In earlier times, technical and operations personnel had to know the basics and understand how things worked. They had to know what to try if something failed. They also had to know what was inside the black boxes — although the equipment was often *not* in a black box, but rather on a breadboard.

Paths toward competence

The much-maligned First Class Radio-telephone Operator's License was finally laughed out of use by the proliferation of

"5-week wonders" who memorized answers and became DJ/engineers on the strength of a dubious certification. Yet, in its earlier days, the "first ticket" had great value. There was a large number of "first phones" who studied engineering while taking transmitter readings every half-hour and became competent engineers. Unfortunately, that number is growing smaller every day.

In earlier times, technical personnel had to know the basics and understand how things worked.

The SBE has attempted to remedy the situation with its broad range of certification by examination. Failure to join SBE or take its exams does not mean that an individual is incompetent. It *is* important, however, when looking for a new job to have some certificate that attests to your abilities. Passing an SBE test generally indicates that a person has reached a specified level of knowledge, and, in some cases, experience.

Fewer do-it-yourselfers

There seems to be an increasing tendency to send pieces of equipment back to manufacturers for service. In many cases, this makes more sense than having some ham-fisted individual with a 100W soldering iron attempting to change a transistor. More seriously, the cost of the test equipment and spare parts stock required to repair modern black boxes often makes it uneconomical, not to mention the time and know-how required at the station.

On the other hand, the enthusiastic engineer wants to know what's in the box and feels honor-bound to repair it. There is a point at which labor costs become untenable, and engineers must recognize this. Returning small units to the manufacturer makes some sense, but large

items, such as transmitters or RF/antenna components are usually best serviced at the station.

In another nearly extinct tradition, station personnel built a lot of the station's equipment from scratch. Sometimes this was the result of the exact device's unavailability off-the-shelf, or because of its prohibitive expense. In other cases, long delivery dates or simply the chief engineer's love of construction projects was the reason. I expect that many of these home-brew items cost more than their store-bought equivalents when labor charges were included. Yet the knowledge acquired while designing and constructing the project was an intangible and invaluable element. Few stations allow this today.

Some powerful advice

One of the first important lessons to newcomers is the advice to not believe everything you are told. For example, we tend to assume that because incoming power from the utility is identified as "240V, single-phase, 60Hz," that it truly is just that. If you are having unexplained equipment problems take a look at the quality of your primary power that is delivered from the utility company. Sine waves are not always sine waves. Sometimes they have spikes that can damage equipment and put you off the air. Modern solid-state and computerized equipment can be fussy about pure waveforms.

This can make veteran broadcasters envious of older tube equipment — but then consider who among newer technical personnel could work with it? I know of one recent hire that fell through when the prospective individual said to station management, "Oh, it's a tube transmitter? I don't think I could handle it — never mind." How disappointing. Here was a chance to learn something new, an important motivation that seems to be missing from today's technical personnel in radio. This type of attitude will not help new technical people succeed in the future broadcast environment.

Battison, BE's consultant on antennas and radiation, owns John H. Battison and Associates, a consulting engineering company in Loudonville, near Columbus, OH.

BUSINESS TODAY

STAYING IN TUNE WITH THE LATEST
TECHNOLOGIES IN YOUR INDUSTRY
HAS NEVER BEEN SO EASY!

Order the tape library of BUSINESS TODAY'S entire series
in this industry to receive a wealth of information--and a
special 1/2 price offer! CALL 800-55-TODAY!

WJMK, Inc. 2424 N. Federal Hwy. Suite 462 Boca Raton, FL 3343
Circle #43 on Reply Card

The following companies are
featured in a show titled:
"Audio & Video Technology"
which previously aired via the
Discovery Transponder.
Check your local public television
listings for airdates in your area!

Riser Bond
INSTRUMENTS

RISER-BOND INSTRUMENTS

Manufacturing precision TDR, Cable Fault
Locators and Identifiers for telecommunica-
tions companies world-wide.

HUGHES JVC
TECHNOLOGY

HUGHES-JVC TECHNOLOGY CORPORATION

A technology for the '90s where our
brightness keeps you out of the dark.

apt-X

AUDIC PROCESSING TECHNOLOGY (APT)

Digital audio compression technology and
products for professional transmission and
storage applications.

COMSONICS, INC.

COMSONICS, INC.,

An employee-owned manufacturing and
repair services company specializing in
broadband communication technologies for
the cable television industry.

NEWTON
INSTRUMENT COMPANY, INC.

NEWTON INSTRUMENT COMPANY

We wrote the book on telephone structural
components.

Abekas
A Calson Company

ABEKAS VIDEO SYSTEMS

Manufacturing high value tools for the
creation, production and distribution of
video images.

Transmission Technology

Tubes vs. solid-state devices

By Don Markley

When Einstein was a young man, he briefly worked as a patent examiner. He was good, and was able to cut through the rhetoric of patent applicants and quickly evaluate the basic principles involved in each application.

Although solving the problems involved in selecting a new transmitter will not win you a Nobel prize, it will keep the suits in the front office happier. However, the Einstein analogy applies. Sweep aside the rhetoric and look at the bottom line, which is money.

Solid-state devices have improved significantly for high-power applications from 100MHz to 1GHz. The number of devices found in each amplifier has decreased as the power-handling ability of the devices has increased. The "catch 22" that has always surrounded high-power design involves heat and capacitance. When the junction area is made larger to better dissipate heat, the junction capacitance increases, reducing the maximum frequency at which the device can be used.

For all practical purposes, VHF television has gone totally solid-state. Efficiency has never been the significant item of interest for the big boys who play in that arena. Regardless, the solid-state transmitters for VHF approach tube efficiency and the costs are about the same. The improvement in dependability that accompanied the conversion to solid-state transmitters has been a significant factor as well as stability and the broadband nature of the amplifiers.

Virtually all solid-state transmitters use multiple amplifiers operating in a paral-

lel configuration. These amplifiers normally operate in a "soft-fail" manner, wherein the failure of one amplifier module only reduces the total power output and does not take the transmitter off-the-air. Also, virtually all modern transmitters have hot plug-in capability and diagnostic systems that permit a failed module to be identified and removed from the transmitter while maintaining normal operation. The modules

significant. Let's compare small FM transmitters with either a solid-state or a tube final amplifier. We'll assume only one tube will be used in the transmitter.


Looking at a Class A FM station, we will assume a transmitter power output (TPO) of 3.8kW is needed. A careful search of the literature finds a solid-state transmitter for \$36,500. Being thorough, you also look for a tube-type transmitter. The nearest thing is a 5kW model that lists for \$36,300. At first glance it looks like the sensible move is to buy the solid-state system. Just think of the huge increase in reliability.

Wait. Now is the time to do your Einstein imitation and look at the basics. While the mean time between failure (MTBF) of solid-state devices

is normally higher than for a tube, it is not infinite. In addition, the solid-state transmitter has replaced one vacuum device with several solid-state devices. Therefore, the MTBF of the overall amplifier has been reduced by $1/n$, where n is the number of devices. It really isn't that simple. Many other things are involved like

high-voltage supplies, tube sockets, etc. In any case, it is not unreasonable to assume a module may fail once every two years (rough approximation).

When an RF amplifier module fails, you are back to the field-repairable 747 syndrome. The typical technician is experienced in audio and is not ready for one of these modules. Therefore, the module ends up going back to the factory for repairs. For this system, the module exchange price is approximately \$1,100. A new spare is about \$2,300. On the other

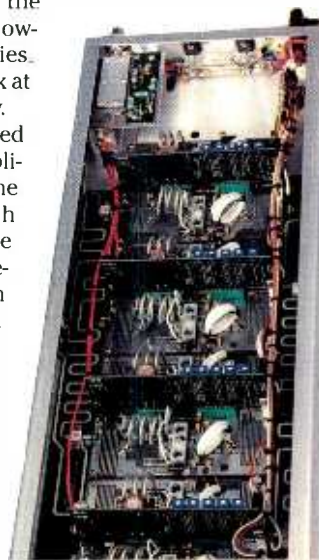

The 60kW TH760 Diacode, one of the newest IOTs from Thomson Tubes Electronics.

A Harris Platinum series solid-state module used for VHF.

paired and, in some cases, bench tested while the rest of the system plays on. Many manufacturers proclaim their modules to be "field repairable," which is a nice feature if you have the personnel and parts. Of course, Boeing's 747 can be called "field repairable" if you like.

FM transmitters

In smaller applications, such as a small FM station, other criteria may be more

Markley is president of D.L. Markley and Associates Inc., Peoria, IL.

In 1986, Comark invented IOT transmission technology. Eight years later, we still set the world's standard.



Despite what you may have heard, IOT technology wasn't born yesterday. We saw its potential to change the transmitter industry quite some time ago.

We showed the first Klystron amplifier at NAB in 1986, and put the first IOT transmitter into full-time broadcast service in 1988. Since then, we've used more than three million hours of on-the-air experience to lead the way in IOT research & development.

In 1991, our patented aural carrier corrector technology and advanced linearity corrector were developed to meet today's requirements for high efficiency common amplification transmission. And in 1992 we introduced the exclusive DUAL USE™ system that lets you operate with NTSC today and, in the future, convert to D-HDTV.

But we didn't stop there. At NAB 1993, we introduced our third generation IOT system, the IOX. Its ultra linear Class A drivers, optically-isolated solid state control logic, constant impedance output filter, leading-edge crowbar design and IEC-215 implementation make it the most advanced UHF-TV transmitter in the world today.

So if you're looking for the most advanced, proven IOT solution, go with the company that's been pioneering the technology for eight years—not eight months. For more information, or to request a set of our latest **HDTV TECH BRIEFS™**, call us today at 1-800-688-3669.



Route 309 & Advance Lane • Colmar, PA 18915
TEL: (800) 688-3669 • FAX: (215) 822-9129

hand, the tube transmitter probably uses a 4CX3500A in the final amplifier. A new tube will cost around \$2,000 or a rebuilt can be had for about \$1,100. With care, the tube should last for about two years in a 24-hour-per-day operation.

So, what is left to help you in your decision? The most significant item is efficiency. The 3.8kW solid-state model will draw 10.5kW from the power line. Don't get sidetracked listening to the salesman tell you about amplifier efficiency. All that counts is what shows up on the meter outside of the building. The 5kW tube model will draw 7.9kW from the

line when operating at 3.8kW TPO. This will result in a difference of more than \$2,200 per year at \$0.10/kWh. Now you have a better idea of the real numbers involved and can make a rational, informed decision.

UHF transmitters

The differences grow much faster when looking at UHF TV transmitters. At low power levels, such as 1.0kW for LPTV and translators, the prices are close for either version. As a result, many manufacturers and users have opted for the soft-fail mode with its accompanying reduc-

tion in down time. Because of this, solid-state units have essentially taken the market. As the power levels increase, the differences become more apparent.

At a power output of 10kW, one manufacturer offers an excellent tetrode amplifier system. The power consumption for average picture is about 20kW and the cost is less than \$200,000. A new solid-state transmitter with a power consumption of 30kW for average picture is just under \$400,000. The cost for a replacement tube is much higher than in the previous example, but the number and complexity of the amplifier modules has also increased.

For the next example, we will look at a 30kW transmitter. A single IOT will provide that power level for just under \$325,000. The power consumption will be 56kW for average picture with 10% aural. To match this with a solid-state transmitter requires paralleling two 15kW amplifiers. The price would be about \$1,100,000 with a power consumption of 92kW. You have to want a solid-state transmitter to swallow those numbers.


Still, the solid-state transmitter could be a viable alternative. For example, a stand-by transmitter in a major market would be much better if it could be placed on the air in seconds rather than waiting for the tubes to warm up. Also, the soft-fail mode is a selling point, especially when a few minutes off the air can cost several thousand dollars in lost revenues.

Conclusion

Changes in technology will continue to reduce the gap between the two transmitter types. One manufacturer has announced a line of solid-state transmitters with liquid-cooled modules, which results in a significant reduction in junction temperature. Reducing junction temperature can double the MTBF of the solid-state devices. As the failure rate of modules is reduced, the gap between price and efficiency is narrowed.

For VHF transmitters, solid-state is about the only choice. For FM units, solid-state devices are becoming a viable alternative with minor real price differences at the lower power levels. At power levels above 10kW, the old-fashioned tube amplifier still appears to be the choice in normal circumstances. For UHF transmitters, the big break-point in power levels appears to be between 1kW and 5kW. For some specific users with well-defined needs, the solid-state transmitter could be the choice. Otherwise, the IOT appears to be the tube of choice for the immediate future. But in another few years, who knows? ■

The Story Of Our BNC Connectors Has A Very Predictable 75Ω Ending.

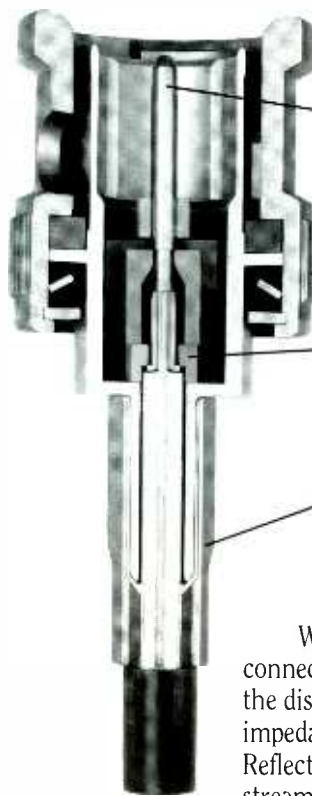

The gold-plated center conductor locks into place making sure that cable and connector are properly aligned during termination.

Nickel-plated, tarnish-resistant bodies.

Ultem® plastic center conductor insulator eliminates any impedance mismatch.

Cable size is clearly marked on crimp ferrules eliminating guesswork.

With the emerging digital video standards, BNC connectors play a vital role in assuring the quality of the distributed signal. Mismatched BNC connector impedance can be a major source of signal degradation. Reflections caused by mismatches degrade digital bit streams, making it impossible to recover the digital information correctly. What was trouble for 4.5 MHz analog transmission can be a disaster for a 270 Mbps serial digital signal!

ADC has designed and manufactured a BNC plug with true 75Ω characteristic impedance. By using molded Ultem conductor insulators, every ADC BNC connector provides consistent 75Ω characteristic impedance. To find out more about how your connectors can have very predictable (and happy) endings, call us at **1 800 726-4266** for the name of the ADC Professional Audio and Video distributor near you.



Ultem is a registered trademark of GE Plastics.

Circle (45) on Reply Card

➔ For more information on solid-state devices, circle (315). For more information on tube devices, circle (316) on Reply Card.

"ONLY SHARP COULD PUT TOGETHER
THE MOST RELIABLE TEAM IN THE GAME."

RICK PITINO, CHAMPIONSHIP COACH

Productivity, consistency and reliability are the stuff championships are made of. They also make for good business. So does the Sharp copier line-up.

From high-volume models that automatically collate, insert and staple, to modular systems that grow as your business does, to compacts that fit small offices and budgets alike, Sharp copiers represent what's possible in copier technology. In fact, Sharp's SD-3075 is the most reliable high-volume copier ever tested by Buyers Lab. That means increased productivity and lower operating costs.

See how the right Sharp copier can make your team the best in the game. Call for a free copy of Sharp's new Winning Game Plan Video. Or fax 1-800-3-SHARP-3.



FREE VIDEO

**YOU NEED A
WINNING GAME PLAN.
CALL 1-800-BE-SHARP**

SHARP.
FROM SHARP MINDS
COME SHARP PRODUCTS™

LCD

COPERS • FAXES • COLOR PRINTERS • NOTEBOOK COMPUTERS • COLOR SCANNERS • CASH REGISTERS • CALCULATORS • WIZARD® ORGANIZERS


© 1994 Sharp Electronics Corporation • Models Shown: SF-2010, SF-2030, SD-2060 • Buyers Laboratory, Inc., Independent Testing Firm. 1993 Study. Report Available Upon Request.

SBE Update


Going international

The International Committee

By Martin Sandberg

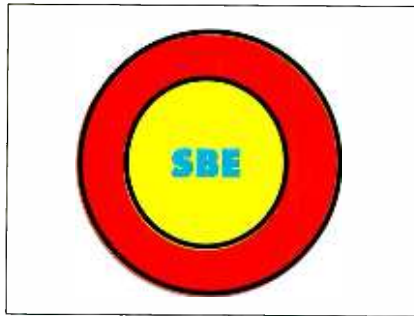

Wuxiandian
Gongchengshi
(Chinese)



Ingénieur radio
(French)



Rundfunktechniker
(German)



Ingeniero de
radiocomunicaciones
(Spanish)



Radio Engineer (U.S.A.)

This is the way "radio engineer" sounds around the world. The universality of broadcast engineering requires that a common platform for the exchange of knowledge and standards be supported and spread about the world. The languages are different, but opportunities for cooperation are the same.

The laws of physics that relate to broadcasting know no political boundaries. The broadcast engineer in Africa and his counterpart in Europe have similar requirements. They face the same problems, work with the same tools and parts, and come up with similar solutions.

The knowledge that comes from experience and training is a necessary ingredient. There is no need to reinvent the wheel whenever a problem arises. Broadcast engineers are providing the best broadcasting with the electronics available. Engineers can share information that will raise the level of technical expertise for the entire industry. The art is changing rapidly and a method to keep current is required.

The Society of Broadcast Engineers has taken advantage of this opportunity to share information. SBE members are found in more than 100 chapters and in 25 countries. The society is affiliated with broadcast engineering organizations in Korea, Belize, Mexico, India, Canada, Philippines, Brazil and Uruguay. The local chapters, through their meetings and technical presentations, inform the membership of state-of-the-art developments in broadcast engineering.

Sandberg is a member of the SBE board of directors and chairman of the International Committee. He is also an engineering consultant.

The SBE has established standards for professional competence through the program of certification. The SBE national office provides study guides, SBE Radio Operators Certification Handbooks and certification examinations. These levels of certification are accepted around the world.

The benefit of these affiliations is the sharing of technical expertise, technical papers and friendships. The society is translating the study guide into Spanish, and in the future, will have available study

The universality of broadcast engineering requires that a common platform for the exchange of knowledge and standards be supported and spread about the world.

The SBE Bookstore

Members of the Society of Broadcast Engineers have available to them the SBE Bookstore. In conjunction with CRC Press, Inc., McGraw-Hill Professional Book Group and other publishers, it is possible for SBE members to purchase industry resources at 20% off the retail price. These books are a collection of the most outstanding group of experts in the industry.

In addition to resource books, members can order study guide software for the different levels of certification. Other merchandise, such as membership and certification pins, hats, mugs and shirts are also available.

To have these resources at your fingertips, contact the SBE Bookstore at:

Society of Broadcast Engineers, 8445
Keystone Crossing, Ste. 140, Indianapolis,
IN 46240.

guides and certification examinations in additional languages. The society is exploring a program for the exchange of broadcast engineers with other countries. These exchanges for short periods will permit engineers to view operations and techniques of stations in other countries.

Through the International Committee, the SBE continues to develop communication with broadcast engineering organizations in other countries. If you, or your organization, are interested in learning more about affiliating with the SBE, contact: Chairman, SBE International Committee, Society of Broadcast Engineers, 8445 Keystone Crossing, Ste. 140, Indianapolis, IN 46240 (USA).

The Society of Broadcast Engineers is a dedicated group with dedicated members, eager to share their collective knowledge with colleagues around the world. Members look forward to each opportunity to expand their own understanding of broadcast engineering from those in other countries.

VIDEO DISCOUNTS

We guarantee lowest prices anywhere in *USA World*

SENSATIONAL NEW! JVC S-VHS CAMCORDER




\$ Call
FOR
LOWEST
PRICE

GY-X2

Optional SMPTE Timecode
Low Lux Mode • 650 TVL, 6Jdb S.N

SONY Special Closeout DXC-537L




\$5490⁰⁰

Including
Lens
Hurry
Quantities
Limited

Panasonic S-VHS Editor

PROFESSIONAL/INDUSTRIAL VIDEO



\$ Call For
The
Lowest
Prices

AG7750H

Built in TBC • Built in Noise Reduction
RS422A Serial Interface • 32X Speed Search
On Screen Set Up Display

SONY

Call Us For All
The New
Products

**WE BUY
(FOR CASH)
USED EQUIPMENT
HIGHEST PRICES PAID**

SONY DISCOUNT PRICES

(We will beat any bona fide quote from another dealer)

SVC1410 (VHS).....	\$305
VO9600 3/4" SP.....	\$3,439
EVO-150TR Hi8 Camcorder.....	\$2,095
PVW 1341 1/2" Fine Pitch Monitor.....	\$745
PVW 1344Q 13".....	\$945
PVW 1380 13" Monitor.....	\$295
DXC325L.....	\$3,549

• Above are new in factory sealed boxes.
• Ask about our other Sony products.

We Have **BETACAM** At Prices You Won't Believe!

Panasonic Special Price...

PROFESSIONAL/INDUSTRIAL VIDEO

Low Priced S-VHS Edit System with TBC



AG1970



AGA96



AG1970

Jog & Shuttle • Auto Assemble Edit • Flying Erase Heads
HD Audio 90db • Hi-Fi Tuner • Preview Edit Function • Digital


Panasonic WJ-MX50

PROFESSIONAL/INDUSTRIAL VIDEO

Digital A/V
Mixer

- 4 Input with Audio
- 287 Wipe Patterns
- RS-232 or 422 Control

Call for Special Price



SPECIAL DEMO and USED SALE ALL INCLUDE WARRANTY

Panasonic AG-7300 S-VHS.....	\$1,890	Sony BVE900 Editor.....	\$7,990	Alta Cygnus TBC with Effects.....	\$1,890
Panasonic NV-8950 Sio-Mo with Tuner.....	\$1,590	Sony BVU850 "i" Editor.....	\$4,790	Crosspoint Latch 6114 Switcher.....	\$890
Panasonic WV777 3-Tube.....	\$890	Sony VO9850 U-Matic.....	\$5,990	Crosspoint Latch 6119.....	\$990
Panasonic WJMX12 Mixer.....	\$1,599	Sony VO9800 U-Matic.....	\$3,990	Chyron VP-2 Character Generator.....	\$1,190
Panasonic WVD5000 with ENG Kit.....	\$990	Sony PVV1 Betacam Docking Recorder.....	\$5,990	DPS 270 TBC.....	\$990
Panasonic AG-450 S-VHS Camcorder.....	\$1,190	Sony DXC-300J with 12X.....	\$3,690	For-A VTW400 Character Generator.....	\$1,590
Panasonic AG6400 S-VHS Portable Recorder.....	\$990	Sony DXC-327AL/CA-327/13x Package.....	\$6,890	Fortel V688 TBC.....	\$1,690
Panasonic AGA770 Controller.....	\$1,790	Sony BVU-900 Broadcast "i" Player.....	\$4,490	Hitachi VO99 Waveform.....	\$890
Panasonic WV-D5000 with Studio Kit.....	\$1,590	Sony BVU-950 Broadcast "i" Editor.....	\$8,290	ISI/Intergroup 9410 Switcher.....	\$3,290
Panasonic WV-F700 / AG-7450 with 15X.....	\$9,990	Sony EVV-900 Hi-8 Dockable Recorder.....	\$1,990	Laird 700P Character Generator.....	\$990
Panasonic AU-Broadcast Edit Controller.....	\$590	Sony EVO-965J Hi-8 Animation Recorder.....	\$3,990	QTV VPS-100 Prompter.....	\$1,990
Panasonic AG-7750H S-VHS Editor.....	\$5,225	Sony VO-7600 "i" Recorder.....	\$2,290	Quanta Microgen 100 Character Generator.....	\$890
Panasonic AG-7650 S-VHS Record/Feeder.....	\$3,290	Sony VP-9000 "i" SP Player.....	\$2,390	Tektronix 1420 Vectorscope.....	\$1,190
Sony RM-440 Edit Controller.....	\$790	Sony VO-8800 "i" SP Portable Recorder.....	\$2,790	Tektronix 520 Vector Scope.....	\$1,590
Sony GVM-1300 Multi Scan 13".....	\$695	Sony VPH-127 IQ Hi-Res Data Projector.....	\$11,990	Tektronix 528A Waveform.....	\$990
Sony Type 5 "i" Edit System.....	\$4,890	JVC KY25411J Package.....	\$5,990	Tektronix 1480 Waveform.....	\$1,590
Sony BVU150 with Timecode.....	\$2,990	JVC KM2000 (SEG with Chroma Key).....	\$1,790	Videotek TSM-5A Waveform.....	\$890
Sony VO4800 "i" Portable.....	\$390	JVC KY19 with 13X1 Complete.....	\$6,179	UMI Commette A/B Roll with Sony Interfaces.....	\$1,290
Sony EVO9700.....	\$4,790	JVC TM-1400SU 14" Color Y/C Monitor.....	\$569		
Sony DXCM2 3-Tube Camera.....	\$1,290	Adda Vision TEC.....	\$590		

Center Video Industrial Co., Inc.

The Midwest's Largest

5615 W. Howard St. • Niles, IL 60714

We will beat any bona fide dealer's quote!

(708) 647-8700 • FAX (708) 647-8707

All sales and transactions are governed by the laws of the State of Illinois.

Circle (56) on Reply Card

www.americanradiohistory.com

Call Toll-Free Outside Illinois
(800) 621-4354


All merchandise subject to prior sale.
Prices subject to change without notice.

All Prices F.O.B. Niles, IL

Applied Technology

Tektronix Profile

By Jeff Noah

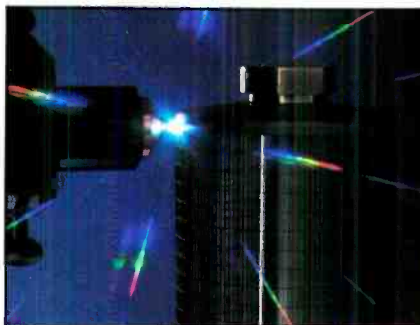

Disk recording technology has been the catalyst precipitating the tremendous success non-linear off-line editing systems have experienced in the last few years. However, the use of disk recorders outside that application has been limited by the image quality they offer or the significant expense of storing relatively small amounts of video.

Tektronix' Profile Professional disk recorder overcomes these limitations in three basic ways. First, it uses many off-the-shelf commodity items from the

personal computer industry to minimize cost. Second, it optimizes the motion JPEG compression algorithm and uses high data rates to preserve image quality. Third, it provides an open-platform system architecture and on-board processor to simplify the porting of existing applications or the development of new ones.

Open architecture, standard components

Figure 1 shows the basic architecture and major components of the Profile disk recorder system. The backbone of the system is a 17-slot EISA motherboard with

an integral 32x32 CCIR 601 8-bit parallel digital component router. Besides offering speed, the EISA bus makes adding many personal computer peripherals a no-brainer. Controlling the bus is an off-the-shelf PC-on-a-card with an i486DX2/66 processor. A 340MB IDE hard drive and 3.5 inch floppy drive support the processor board.

Because potential applications are broad, the architecture allows many possible combinations of video and audio I/O. With this in mind, all video I/O and analog audio I/O are added as options. Analog composite, parallel composite digital, and serial component dig-

Noah is a technical writer for Tektronix Television Division, Beaverton, OR.

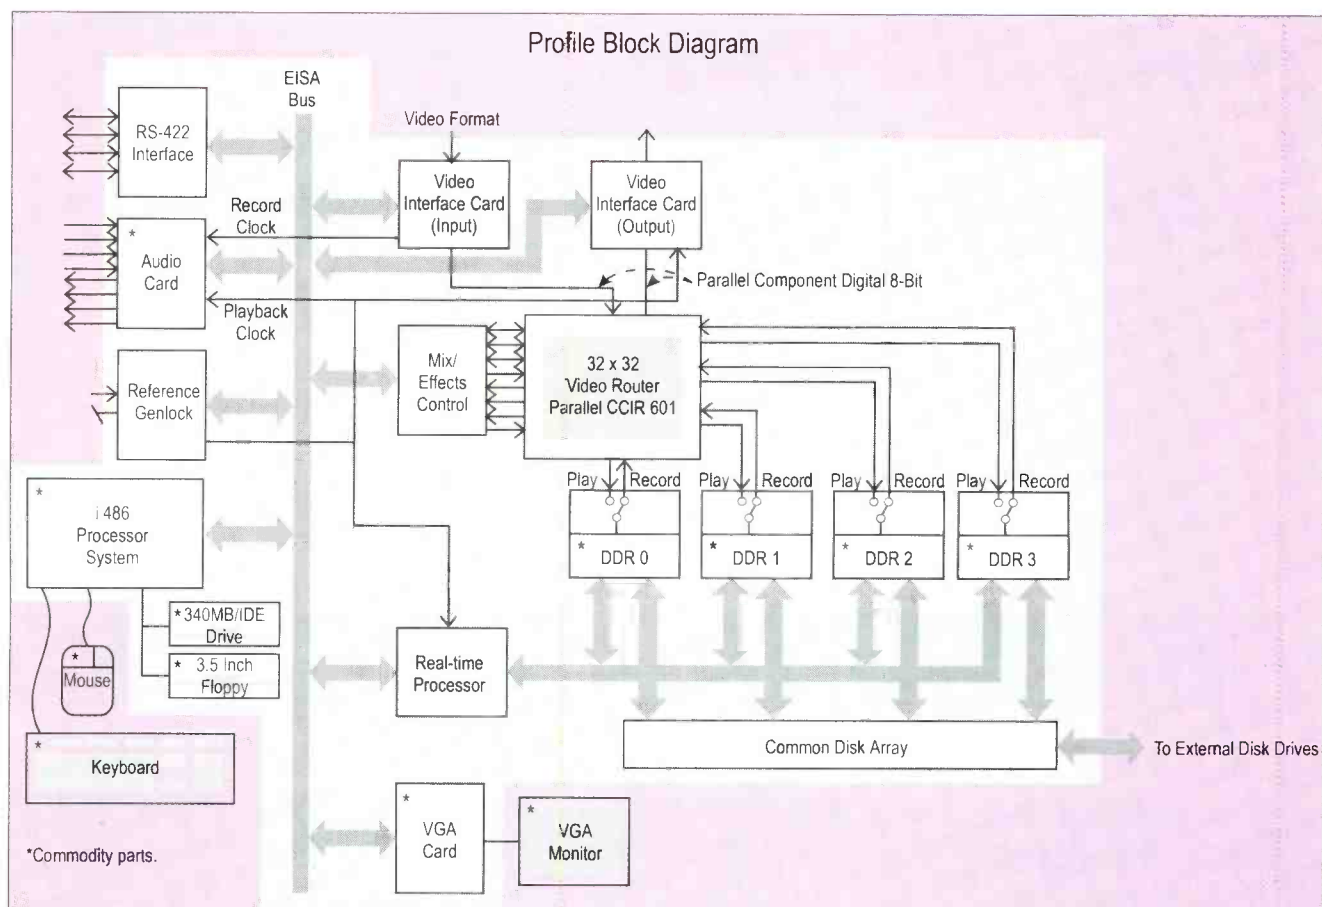


Figure 1. Block diagram of the Profile. Note the use of common computer parts throughout the design, thereby reducing cost and simplifying spare parts requirements.

ital video I/O are available. Digital audio makes its way into or out of Profile as embedded AES/EBU audio on a serial digital component video channel. Analog audio is digitized at a 48kHz sample rate by an off-the-shelf 16-bit linear PCM digitizer card. All audio is routed over the EISA bus, and Profile allows recording of four channels of digital audio for each video codec channel.

Once video is inside the platform, it travels across the 32x32 router to installed devices. With high-speed video data transfer occurring on the router, the EISA bus is free for control functions and passing audio data. The integral router also eliminates the expense and hassle of an external router and the associated wiring and system timing.

To get video onto and off the disk array, Profile employs motion JPEG codecs and SCSI-2 fast/wide disk control. The base instrument includes one codec/disk controller card that provides two bidirectional codec channels and two SCSI-2 control channels. Achieving four bidirectional codec channels simply requires adding a second codec/disk controller card.

The disk array consists of four or eight 2.1GB or 4GB, off-the-shelf drives providing up to 160 minutes of video storage. An external expansion chassis doubles that capacity by adding up to 16 drives to the array.

Commodity parts keep system costs significantly lower than an architecture built from custom parts. And as technology breakthroughs occur, the modular architecture will accept the best technology the industry has to offer. This open system approach minimizes the expense and difficulty of upgrades, and also eliminates built-in obsolescence.

Careful compression

One of the most significant engineering challenges facing the designers of disk recorders is the balancing act between image quality and storage time. The best image quality requires full-bandwidth recording, but compressionless

With high-speed video data transfer occurring on the router, the EISA bus is free for control functions and passing audio data.

recording eats up gigabytes at an alarming rate. Conversely, high compression ratios significantly reduce the number of gigabytes per minute needed for stor-

The backbone of the system is a 17-slot EISA motherboard with an integral 32x32 CCIR 601 8-bit parallel digital component router.

age, but wreak havoc on image quality.

Profile attacks the image quality/storage time/cost equation from two directions. First, all disk drives in the array are commodity items. This avoids the expense often associated with proprietary hardware, while at the same time leaving the platform open to developers of new applications.

Second, the compression coefficients for the motion JPEG algorithm were chosen to optimize image quality, not to maximize bandwidth reduction. The compression ratio can be varied on a field-by-



VISIBLE RESULTS.

NEW BELDEN® DIGITAL VIDEO CABLES SUPPORT EXTENDED DISTANCE TRANSMISSIONS UP TO 400 METERS.

Looking for a new interconnect cable for component or composite Serial Digital transmission? One that exceeds the SMPTE distance requirements of 300 meters? And provides exceptional picture definition as well as eliminates problems resulting from periodicity?

Well, look at new Brilliance® Low Loss Coax Cables from Belden.

Belden No. 1694A and No. 1695A (plenum version) are 75 ohm precision cables specially designed to handle the high data speeds of Serial Digital video distribution at 270 or 360 Mb/s, allowing you to experience the full benefit of digital technology. They are also suitable for interconnection from camera to monitor and for analog video distribution.

The cables are RG-6U size, so they're smaller, require less space, and weigh less than standard precision video cables. They also offer 20% lower loss at Serial Digital frequencies, and 33% lower loss at 1 GHz than standard precision video cables.

Specify the cables that will go the distance for you. Call **1-800-BELDEN-4** and request New Product Bulletin No. 105.



Belden

© Copyright 1994, Belden Inc.

Circle (57) on Reply Card

field basis to optimize storage time. The resulting image quality level depends on the amount of information in the source material and the available disk I/O bandwidth. The unit is capable of data rates of about 48Mb/s per channel. To achieve image quality equivalent to that of a Beta-cam SP deck using metal tape, a 24Mb/s per channel data rate is all that is needed.

In contrast to other compression schemes, motion JPEG compression does not introduce motion artifacts. The combination of commodity recording media

*The compression ratio
can be varied on a
field-by-field basis to
optimize storage time.*

and optimized compression results in a cost-effective device capable of outputting a video signal with image quality equal to or better than that of a high-end

component analog VTR. Storage time works out to approximately five minutes of video (and four channels of digital audio) per gigabyte.

The video I/O interface boards were designed in-house, using decades of experience to eliminate potential sources of significant video degradation.

Open platform, open opportunities


Subtle design considerations extend the unit's range of applications beyond what might normally be expected in a disk recorder. Up to four video channels can be recorded or played back simultaneously. What's more, the codec channels are not tied to a physical disk or set of disks, meaning any channel can access any information at just about any time. For example, channel one could be writing to the disk array while channels two, three and four could be reading the information written by channel one with only fractions-of-a-second delay. In this mode, Profile could be thought of as a virtual VTR with four sets of heads that could each independently read or write to any spot on the tape.

In order to more closely duplicate the operation of a VTR, all the information contained by the source material is captured — not just picture information — but information in the vertical interval as well. Losing closed-captioning, teletext or Nielsen codes is unacceptable and would eliminate the possibility of using a disk recorder as a play-to-air device in broadcast applications.

*Profile could be
thought of as a virtual
VTR with four sets of
heads that could each
independently read or
write to any spot on
the tape.*

As mentioned, video and audio I/O cards are added as options. Many of the options take up one or more of the EISA slots on motherboard. Among the options are: an NTSC composite input channel that requires two slots, a card that adds two serial digital component inputs and outputs (one slot), four composite analog output channels (one slot), a composite digital input channel (two slots) and composite digital output channel (one slot). A video combiner card can be added for mix effects (one slot), and four channels of analog audio input and output also require a single slot. Other options include a 2-button mouse and 101

Channelmatic invented commercial insertion... now, we're revolutionizing it.

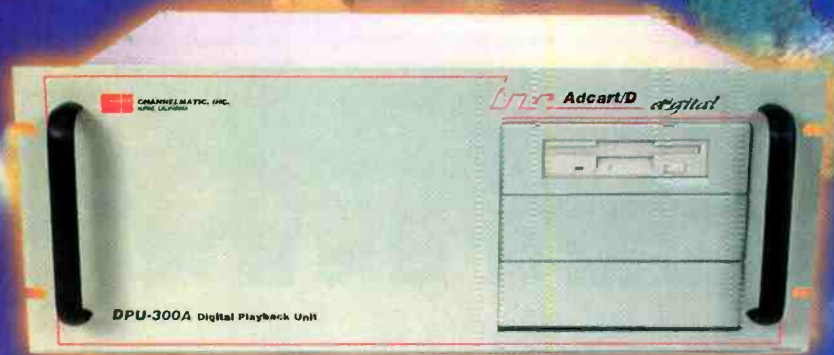

**ADCART/D... The Next Generation.
The first Digital Ad/Program Insertion System.
A Complete Compressed DIGITAL solution for
Television Automation and the new Superhighway.**

1990 FIRST FULL-FEATURED AUTOMATED TAPE COMPILING/EDITING SYSTEM • 1988 FIRST SATELLITE-DELIVERED SPOT TAPE INTERCONNECT SYSTEM • 1986 FIRST AUTOMATIC DUBBING INSERTION SYSTEM • 1983 FIRST RANDOM ACCESS AD INSERTION SYSTEM • 1982 FIRST AND LARGEST MICROWAVE AC INTERCONNECT • 1980 FIRST MICRO-COMPUTER SYSTEM FOR CABLE • 1979 FIRST SEQUENTIAL AD INSERTION SYSTEM

CHANNELMATIC

821 Tavern Road • Alpine, CA 91901 • (619) 445-2691 • Fax: (619) 445-3293 • 800-766-7171

Circle (64) on Reply Card

Profile applies the best of today's video compression technology to a set of well-defined applications.

key keyboard, an ethernet LAN adapter and 17-inch color monitor and VGA display board. The LAN adapter and VGA card take a single slot each. A bypass and breakout adapter converts the audio DB25 connector to four male and four female XLRs. It can also bypass the inputs to outputs in the event of failure.

Conclusion

Profile applies the best of today's video compression technology to a set of well-defined applications previously considered beyond the scope of traditional uses for disk recorders. Applications already identified for the platform include disk caching for tape library management systems, spot payout, store-and-forward and time delay. With



The Tektronix P-profile, a professional disk recorder that uses optimized motion JPEG compression.

four simultaneous I/O channels and high image quality at a reasonable cost, new applications for the platform continue to surface.

➔ For more information on the Tektronix Profile, circle (317) on Reply Card.

Always on cue, even when you're not.



Believe it or not, the biggest mistake that happens in the studio isn't a tracking error or a missed cue, it's not owning a TASCAM CD-601. Because the CD-601 was specifically designed with such precise cueing, looping and programming functions, your music is always on cue, even when you're not.



This powerful programming not only allows you to cue to music, which eliminates dead air, it makes cross-fades and accuracy a snap. A jog wheel allows fast, repeatable searching. And as an added advantage, instant start-up is available with an optional RAM buffer.

And all this in a heavy-duty half-rack package that can take the knocks of a busy studio environment while offering truly outstanding sound quality day after day.

To err may be human, but you'll never go wrong with a TASCAM. Call us about our professional CD series and optional remote control packages.



For post-production users, the full function remote package is a practical addition: you get three locate points—ideal for spotting effects, and direct locating to any track, index or time reference location.

TASCAM®
Take advantage of our experience.


©1993 TEAC America, Inc. 7733 Telegraph Road, Montebello, CA 90640 213/726-0303.

Circle (58) on Reply Card

Applied Technology

Virtual crosspoints

By Mike Andrews and Steve Monsen

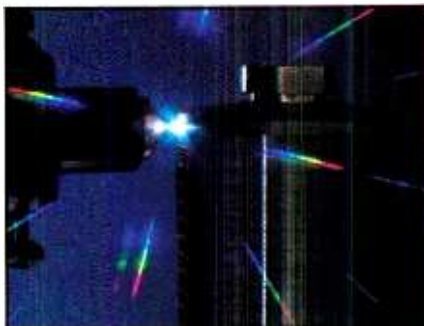

Today, more than ever, facilities are recognizing the need for larger and more powerful routing systems for signal distribution. Many devices, including editors, mixers and preview switchers, are able to control a crosspoint matrix for source selection and auxiliary routing. This demands an overall control system that allows any number of different control devices to control a large router.

In a traditional routing system, the various control systems are isolated by the crosspoints of the various routing switchers that make up the system. What is now needed is facility integration to the point that a single large routing switcher can handle all the needs.

The first digital edit suites used many small routing switchers, parallel digital as well as analog. The three main functions of these routers were: 1) house routing, 2) source selection for switchers, and 3) preview switching. Serial digital routing systems now combine these



The AlphieEX, a component digital switcher capable of using virtual crosspoint technology.

functions into a single large router, replacing the original two or three routers used in the parallel digital and analog systems.

Virtual crosspoints

For the single large router, with internal partitions, to function properly in the system (that is, to preview switch and source select), it must be able to switch in real time. Another problem has been the ability of router partitions to "talk" to each other without wasting external BNC connections. This is where virtual cross-

point technology is used.

Figure 1 shows the evolution of routing systems from analog to large serial digital systems with virtual crosspoints. In Figure 1a, a classic simple routing system is shown with the house router and preview switcher router separate. The outputs of the preview switcher connect to the house router under a house router control system.

With a DYN control system (but no virtual crosspoints) a routing switcher would connect the preview switcher output to the house router. The preview switcher output could be routed to a point in the system by the use of a control panel. A coax cable from the preview switcher output to the house router would be used, as shown in Figure 1b. Figure 1c shows how a virtual crosspoint eliminates the need for the coax and saves one input BNC and one output BNC, replacing them with an internal register connection from a virtual destination (in this example, virtual destination 65 is used) to a virtual source (65). This method frees valuable router crosspoints for other uses.

The beauty of virtual crosspoints is they remove the need for the external connections. Using virtual crosspoints, the routers are able to make connections between router partitions without having to patch between actual input and output connections. A 64x64 router, for example, cannot have any more physical inputs or outputs. It can, however, have internal registers or internal patch panels for the source and destination values.

Virtual crosspoints are in addition to the standard crosspoints of the router. For example, in a

Andrews and Monsen are product managers for Utah Scientific, Salt Lake City.

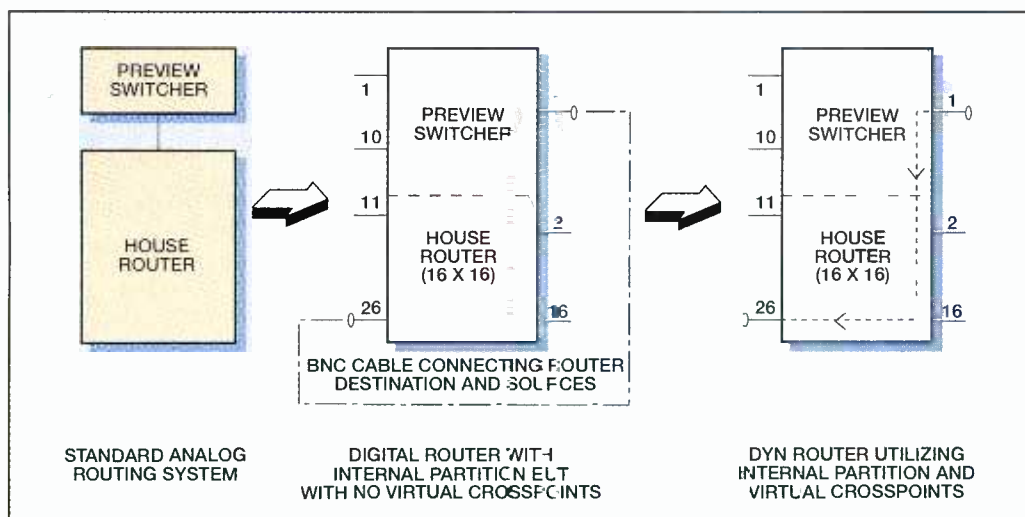


Figure 1. The evolution of routing switchers, from (a) separate crosspoints and control to (b) separate crosspoints with common control and today, (c) the use of virtual crosspoints.

Advanced Television:

Bit by Bit Into the Future

**A Critical New
Industry Conference
Sponsored by**

BROADCAST[®]
engineering

WORLD BROADCAST
News

HDTV NEWSLETTER

September 26-28, 1994

**Crystal Sands Resort
Hilton Head, SC**



Hilton Head Island, South Carolina

An Industry First

On September 26-28, the broadcast industry's top players will gather at beautiful Hilton Head to set the agenda for the high definition and digital future. Join us for what is sure to be big news—the first national forum to thoroughly air the views of everyone with a stake in HDTV, digital transmission, and our industry's place on the information highway.

Your Future is at Stake.

It's now absolutely critical to understand precisely how and when to incorporate advanced television and HDTV into your operation. Everyone who is responsible for planning, designing, engineering, budgeting and managing advanced television—or marketing its technologies and services—will benefit from this major event.

You'll learn how the industry's leaders are tackling the digital challenge. You'll discover new ways to build today for tomorrow's implementation. You'll learn how regulatory matters will impact your future, and that of our industry. And you'll find out how it is possible to survive in the new world of multimedia, DBS, cable and telco competition.

Plan now to attend. Mark it on your calendar. And fax us right away at 312/922-1408 to be included in all information mailings for this event.

**Fax this page to 312/922-1408
Attn: Chris Lotesto
Or call Chris at 1-800-458-0479**

I'm interested in this important event, "Advanced Television: Bit by Bit Into the Future." Please make sure I'm included in all the mailings.

Name

Title

Company

Division/Department

Address

City, State, Zip, Country

Phone

Fax

Organized by:
Intertec Publishing, publishers of Broadcast Engineering and World Broadcast News and Advanced Television Publishing, publishers of the HDTV Newsletter.

Broadcast Engineering/Intertec Publishing,
9800 Metcalf, Overland Park, KS 66212

64x64 DYN router, there are 64 standard crosspoints and 32 virtual crosspoints. In 128x128 configuration of the DYN, there are 64 virtual crosspoints. From an economic viewpoint, it is as if with a 64x64 router, you get an additional 32x32 virtual router. In many applications these extra virtual crosspoints could actually save a facility the expense of buying an additional router.

For a real example, Figure 2 shows a compact component digital switcher (AlphieEX) in a large system. An Alphie can have a maximum of 16 inputs. In this system there are 15 inputs plus a programmable/switchable input. This allows any of the router sources to be connected to the Alphie inputs using a virtual crosspoint and the house router control panel.

The Alphie usually has 16 sources that can be mapped inside the serial router to any of the router outputs, while the house router panel is controlling the auxiliary routing destinations. Using this system, the inputs to the Alphie can be altered only by changing the router mapping using the PC. Applying virtual crosspoint technology to this system, Alphie inputs can be switched from the control panel without using any physical outputs of the router. This is shown in Figure 3.

Further developments in serial digital distribution have arisen as facilities have become more complex, installing, for instance, multiple digital edit suites. Figure 4 shows a facility with four component digital edit suites (two Alpha 500 rooms and two Alphie rooms) running off the Alpha Image MCI (multiple control interface) connected to the central DYN router. Such facility integration had not been available before. In fact, it is now possible to run up to eight switchers using more than one Alpha MCI system.

In addition to the applications with Alpha Image switchers, virtual crosspoints are also useful in broadcast applications, such as master control suites

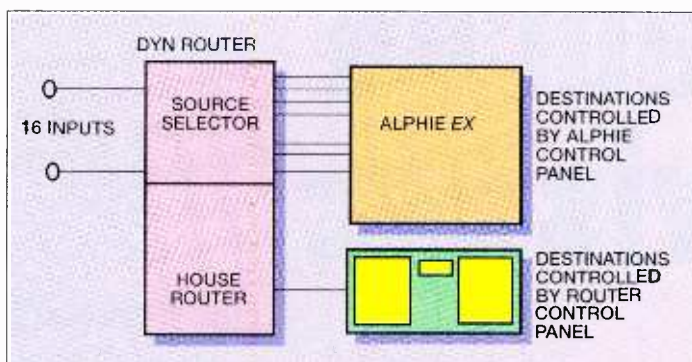


Figure 2. A conventional Alphie system, which has a maximum of 16 inputs, one or more of which can be supplied by a router crosspoint.

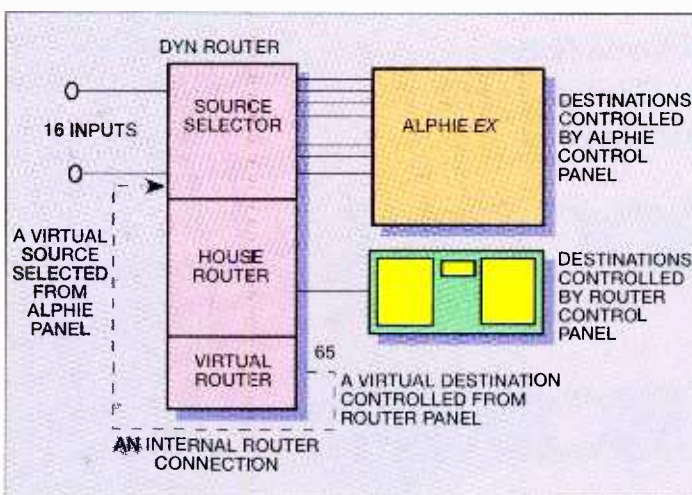


Figure 3. An Alphie system using a virtual crosspoint, which allows the inputs to be selected directly from the Alphie control panel, rather than a router panel. It also frees the router outputs, which are no longer needed.

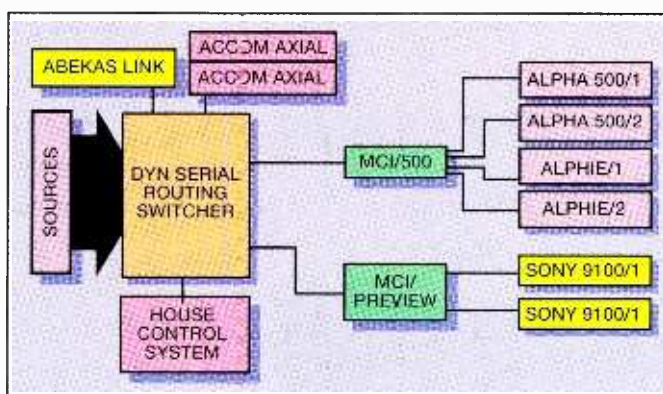


Figure 4. Block diagram illustrating the power of the Alpha Image control system. Using multiple control interfaces (MCIs), the system can be used to feed several switchers.

where a master control has a set number of inputs. Like the Alphie system, the house router control panel can be used to provide a selectable input to the master control switcher. The configuration can save one output on the house router and one input on the source selector.

An unquenchable thirst for quality

Further developments in digital prod-

ucts for broadcasters and post-production houses will be driven by quality issues. Recently, quality issues have lead to increased use of 4:4:4 signals in the telecine suites of high-end post-production houses. This translates into the need for routing the 4:4:4 signals.

Theoretically, the problem of routing 4:4:4 is not difficult. A 4:4:4 signal is the same as two serial signals, having a data rate of 2x270 Mb/s. The two signals must be treated as separate signals, and they are not interchangeable. The signals can be routed with existing serial digital technology as long as the 4:4:4 signal is treated as a matched pair of signals and is routed to a matched destination pair.

There are two main requirements:

1. D-1, D-2 PAL, D-2 NTSC and 4:4:4 can all be routed in the same chassis.
2. Blocking must be ensured when different formats are chosen (i.e., avoid D-1 to D-2 or D-1 to 4:4:4 etc.)

DYN routers were designed for the eventuality of 4:4:4 and a simple software upgrade is available that allows existing DYN routers to route 4:4:4 signals for telecine suites. The software upgrade allows 4:4:4 signals to be treated as matched pairs, and allows the user to define different formats all within one router.

Any format can be routed from a standard control system. In addition, the matched-pair solution developed for 4:4:4 has other potential applications, such as matched-pair video and key.

Editor's note: For additional background on routing systems and virtual crosspoints, see "Three-Stage Switcher Design," September 1991, "Multiformat Routing," September 1991, "CBS Edit 12," March 1994, and the upcoming August feature on "Building Serial Digital Facilities."

➔ For more information on virtual crosspoint routers, circle (337) on Reply Card.

New Products

Video server

By Hewlett-Packard



• **HP broadcast video server:** provides disk-based on-line storage and delivery of six hours to 51 hours of broadcast-quality video and audio; includes the HP Ad Management System and on-line file management software running on a broadcast-control workstation; system architecture is scalable.

Circle (350) on Reply Card

Modular video processing system

By Nova Systems



• **NovaBlox Video Processing System:** new signal processing components and additional chassis configurations.

• **NovaMate XT:** component transcoding TBC/frame sync features YUV, Y/C and composite inputs and outputs; median filter noise reducer/DOC option plus RGB and U-dub in/out options.

• **NovaY/C Max:** image enhancer and Y/C decoder/encoder for sharper pictures; variable Y/C timing correction plus wide-band Y/C and composite transcoding.

Circle (355) on Reply Card

Digital audio tool box

By Nvision

• **Digital Audio Tool Box:** system of three modules for interface, conversion and synchronization; the NV1050 4-channel sample rate converter accepts any AES/EBU format signal at sample rates between 32 and 50kHz; the NV1055 4-channel digital audio mix/minus and routing module allows four channels of AES-format I/O to be intermixed and phase inverted.

Circle (356) on Reply Card

Video server/Editing systems

By Accom

• **Axial 2010 on-line editing system:** offers high-resolution graphics display, simultaneous control of 12 serial devices, EDL timeline displays, and networking capabilities; user definable controls and displays with soft knobs and soft keys.



• **Axial WSE workstation editor:** allows users of paint, graphics, animation, and compositing software running on Silicon Graphics systems to perform on-line editing; interfaces to virtually all VTRs, switchers, mixers; effects devices are standard; features custom Q-Pad user control panel; fingertip controls include jogging, searching, cuing, and mark or set in/out.

• **Brontostore video server:** disk-based storage and presentation system; manages clips containing still frames, real-time video, key, and audio; network can have up to 32 nodes offering up to 53 hours of uncompressed D-1 video plus audio.

Circle (352) on Reply Card

Routing systems

By Dynair Electronics



• **System 2000:** high performance, ultra-compact, video and stereo audio routing

systems; routes high-resolution computer graphics video, encoded broadcast video including HDTV, NTSC, PAL and SECAM; 864 to 1,728 video crosspoints and 1,728 to 3,456 audio crosspoints per rack unit.

Circle (354) on Reply Card

Measurement grade switchers

By Tektronix

• **ASW-100 series measurement grade switchers:** two analog multiplexers; the switchers serve as routing switchers, permitting the inputs and outputs of analog audio test equipment to be switched between multiple signal sources and destinations.

Circle (353) on Reply Card

Scrambling system/Control panel/Sync generator

By Leitch



• **ViewGuard:** new and enhanced high security TV scrambling system; uses "high-tech" digital circuitry; provides transmission over terrestrial and satellite networks; contains ALU for decryption control and authorization and AGC of incoming video.



• **Alphanumeric X-Y remote control panel:** uses an 8-level control system to command all Leitch routers.

• **SPG-1680N sync pulse generator module:** a sync generator on a card; can be housed in any Leitch 680 series video DA frame, or as the SPG-1680MB in a stand-alone, self-powered, mix box.

Circle (351) on Reply Card

New Products

UHF transmitters

By Harris Allied

- **UltraVision series 5, 10 and 15kW**

UHF TV transmitters: available in models for any CCIR system and color formats with NICAM, IRT and BTSC multichannel sound; replaces tubes with broadband (470-860MHz) power amplifiers modules that are interchangeable for visual and aural.

Circle (363) on Reply Card



Parametric equalizer

By dbx



- **242 parametric equalizer:** 5-band, parametric equalizer with three bands of fully parametric peak/dip equalization and two bands of shelving filters; independent control of bands.

Circle (358) on Reply Card

Graphics/Production switcher

By Grass Valley


- **TypeDeko:** a graphics system based on the Windows NT operating system; features special effects including rolls, crawls, fades, dissolves, wipes, flips and tumbles at variable or programmable speeds; video inputs and outputs are composite, Y/C, YUV/RGB and linear key and are selectable as NTSC or Pal.

- **Model 1200 component digital production switcher:** features built-in setup and configuration screen, internal floppy disk drive, direct aux bus control, and auto setup on the chroma key.

Circle (364) on Reply Card

Tape erasers

By Weircliffe

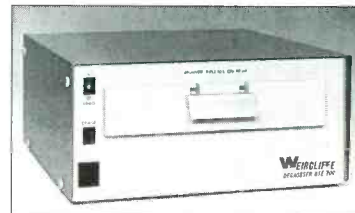

- **BTE 220 shielded tape eraser:** capable of erasing six Hi8 or 8mm metal particle tapes at one time for a throughput of 270 tapes per hour; shielded to restrict exposure of non-ionizing low-frequency electromagnetic radiation; can be connected to a standard 120V power source.

Circle (370) on Reply Card

Camera support equipment

By Cinekinetic

- **Clever Clamp:** camera support that enables camera operator to clamp a camera to any vertical, horizontal or angled support; available with either a 100 or 150mm bowl.

Circle (359) on Reply Card

ALL BROADCAST ANTENNAS ARE NOT CREATED EQUAL

Ours are better.

Our FM sidemount antennas have served more users for more years than any other brand.

Our UHF panel antennas have superior bandwidth and flexibility for all applications.

Our FM panel antennas are built with the most rigid specifications in the industry.

Our VHF panel antennas are the most versatile antennas available in their class.

Our UHF slot antennas can withstand the harshest environments known to man.

And our dual-mode antennas are already providing solutions for HDTV broadcast.

Unrivalled engineering. Impeccable service. Affordable pricing.

BECAUSE EVERY INDUSTRY HAS TO HAVE A LEADER.

FM antennas, VHF and UHF antennas, combiners, directional arrays, and a complete line of RF components.



JAMPRO ANTENNAS, INC.
6340 Sky Creek Drive
Sacramento, California USA 95828
(916) 383-1177 phone
(916) 383-1182 fax

Circle (47) on Reply Card

New Products

Fiber-optic video transmitter

By Math Associates

• **Fibercube:** self-contained fiber optic video transmitter designed to convert CCTV cameras and other video signal sources to fiber optics; FX-5505 module clips onto the BNC video output connector of the camera.

Circle (360) on Reply Card



Monitor for surround sound

By Wohler Technologies

• **AMP-SUR:** housed in a magnetically shielded 2U chassis, incorporates surround sound decoder, LED level meter for all four channels.

Circle (368) on Reply Card

HDTV recorders

By Recognition Concepts



• **HDTV Series:** line of digital video disk recorders; four disks combined by adding a video interface card that conforms to the SMPTE 240/260M HDTV standard.

Circle (365) on Reply Card

Audio restoration device

By HHB/Cedar

• **AZ-1 Azimuth Corrector:** detects and corrects phase problems and time delays left between left and right channels of stereo signals; easy to operate.

Circle (366) on Reply Card

Routing switcher

By Knox Video

• **RS12x2 matrix routing switcher:** stereo audio/composite video router in a stream-line 1 1/2" chassis; front panel push-button operation and can also be controlled via RS-232 input; front panel LED indicators display present routes at all times.

Circle (367) on Reply Card


Power conditioners catalog

By Superior Electric

• **Catalog**

WHC194: an 8-page catalog describing WHC series STABLINE power conditioners for AC power systems up to 600 VAC; units feature ratings from 12 to 33kVA single phase, 10 to 125kVA three phase.

Circle (361) on Reply Card



Oscilloscope

By B+K Precision

• **Model 2190A:** an improved 100 MHz, 3-channel, 6-trace oscilloscope; maximum sensitivity is 1mV per division, accuracy is better than 3%, and rise time is less than 3.5ns; sweep speed is adjustable from 50ns/div. to 0.5s/div. in 22 calibrated steps with fine adjustment.

Circle (371) on Reply Card



10 Stereo In - 1 Stereo Out

AS-101 Audio Switcher

- Illuminated and legible control buttons
- Instant or overlap switching
- Front panel accessible level controls
- Options include: RS-232 interface, remote control, relay-follow-switch outputs
- Network proven quality and reliability

P.O. Box 1342 Bellingham, WA 98227
1-800-645-1061 FAX (206) 676-4822

Conex Electro-Systems, Inc.

Circle (50) on Reply Card



Go Tapeless!

**High Capacity
Uncompressed
Component Digital
Video Disk Recorders.**

That's right. The tapeless suite is here. For virtually any project.

The *Quick-Frame*™ is redefining creative opportunities for satisfied clients all over the world—3 to 90 minutes in less than 37 inches of rack space.

Starting at under \$39,000, *Quick-Frame* offers seamless real-time non-linear playback for telecine, broadcast, edit suite and animation/effects. Just plug it in—no need for expensive equipment re-investments—and no need for tape!

SCSI and Ethernet, of course.

Quick-Frame

...it's D1...it's here...and it works!

Call for Information

(702) 831-7837

Fax: (702) 831-5710



SIERRA
DESIGN LABS

Circle (49) on Reply Card

New Products

Surge suppressors

By EFI



• **Omni-Phase power line filters:** improved version of transient voltage surge suppressors featuring an audible alarm, a new system for internally encapsulating the suppressor elements for increased safety, and an optional weather-tight enclosure for installation in rugged operating environments.

Circle (362) on Reply Card

RF power measurement products

By Bird Electronic Corporation

• **Moduload series RF load resistor:** self-cooled transmission line termination; ideal for CW, AM, FM, SSB, TV and pulsed transmission systems.

• **Model 6085 broadband high-power RF calorimeter:** fast, accurate, and easy-to-operate power measurement; measurement uncertainties of better than $\pm 3\%$ of readings; optional interface board available for automated testing applications.

Circle (357) on Reply Card

Portable broadcast mixer


By AEQ

• **TLE-02:** portable broadcast mixer with frequency extender; allows 2-way communication to two totally independent wires through the digital hybrid incorporated within the equipment; functional with two or four wires; features three audio inputs and auxiliary program output; universal power supply via transformer or eight batteries

Circle (372) on Reply Card

Suspension and lighting

By Sachtler

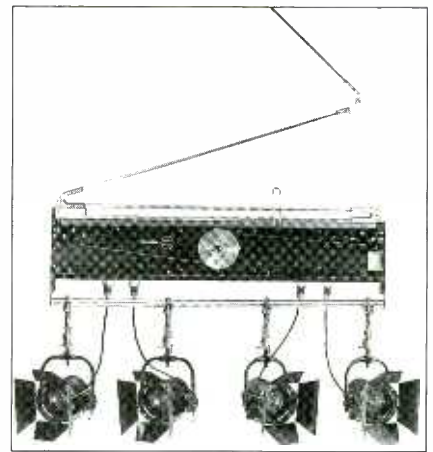

• **Teleclimber:** a barrel hoist with a rated payload of more than 140 kg (310 lbs) weighing less than 90 kg (195 lbs), able to take 4 metric tons.

Circle (369) on Reply Card

BETA MII S-VHS D2 RGB NTSC HDTV SERIAL DIGITAL

242U-VJ22W-C
24 ~ 75 Ω Dual Video Jacks

VWJ2-S
Straight thru 75 Ω terminating

VWJ2-W
Normal thru 75 Ω terminating

Circle (59) on Reply Card

STANDARD EQUIPMENT.

Canare Patchbays handle every 75 Ω standard in your plant, from Baseband Video to High Resolution Computer Graphics and, the studio interface standard of tomorrow...Serial Digital.

Plus you get the following:

- **WIDEST BANDWIDTH**
DC ~ 600MHz
- **LONGEST LIFESPAN**
"Microswitch" contacts
- **EASIEST INSTALLATION**
Jacks Screw To Front
- **PERFECTLY COMPATIBLE**
Your Cords or Ours
- **BEST BOTTOM LINE**
Less Expensive!

Call, or write today for a **FREE** technical brochure with complete specifications and the number of your local Canare dealer.

CANARE

511 5TH Street, Unit G, San Fernando, CA 91340
(818) 365-2446 FAX (818) 365-0479

Industry Briefs

BUSINESS SCENE

Sachtler, Munich, Germany, received an order to equip four new studios for TV Globo, Brazil, with Sachtler Gridclimbers, Scenery Hoists, Pantographs, Lite Trolleys and 2kW and 5kW fixtures. Sachtler AG, Munich, developed Gridclimber hoists based on the well-proven Sachtler hoist modules.

Sony Electronics, Montvale, NJ, was selected by the Associated Press as primary provider of equipment for APTV, AP's international TV news service to be launched later this year.

Sony sold several Digital Betacam VTRs to CBS Television City and Entertainment News Television. Americom purchased a Sony Library Management System with six Sony Digital Betacam VTRs

Leitch, Chesapeake, VA, was awarded a multimillion dollar contract to supply each of NBC and Fox Broadcasting Company with ViewGuard encryption systems to scramble broadcasts of the National Football League games, commencing in September 1994.

McCurdy Radio Industries, Toronto, and **Philip Drake Electronics**, England, have joined forces in an international marketing and manufacturing agreement. McCurdy Radio will manufacture and market the Drake DCS3000 Digital Communications System in North America. Philip Drake will market the McCurdy M/2000 Broadcast Automation System and the McCarty digital audio storage system throughout Europe.

Magni Systems, Portland, OR, marks its tenth anniversary this month and celebrates the milestone with key customer start-up and operation on its newest video monitoring product, and announcement of nine major patent awards.

Video Design Pro, Las Cruces, NM, received an order from PESA, Atlanta, for VidCAD engineering automation software. PESA will supply Atlanta Olympic Broadcasting, 1996, with broadcast equipment and systems designs, installation and integration.

Solid State Logic, Oxford, England, installed one of the latest SSL G Plus consoles with Ultimotion as part of a major refurbishment of The Town House Studios, London.

Quantel, Darien, CT, has opened a new headquarters office in Dallas to service the South Central region (TX, LA, OK, MS, and western TN). The address is: The Meridian Building, 1425 Greenway Dr., Suite 470, Irving, TX 75038.

Quantel also sold customized Picturebox packages to: FOX TAPE, Hollywood; KCBS-TV, Los Angeles; KDAF-TV, Dallas; WCVB-TV, Needham, MA; WLWT-TV, Cincinnati; and WRC-TV, Washington, DC.

Arrakis Systems, Fort Collins, CO, and **Gentner Communications**, Salt Lake City, have introduced new technology protocol and product systems resulting from a strategic alliance between the two companies. The protocol, GAP², which defines the method of linking telephone technology to hard disk studio systems, is the platform on which the companies' new "Smartphone Systems" family is based.

Continued on page 92

STORCOOL[®] CORP

NOTHING REMAINS THE SAME

Whatever the size . . . Worldwide, Storeel can help!




STORCOOL[®]

3337 West Hospital Avenue, Post Office Box 80523, Atlanta, Georgia 30341
404-458-3280, Fax 404-457-5585

*Call Today For A Free System Design Consultation
Tailored To Your Individual Requirements*

Circle (51) on Reply Card

Technology is transforming the tape storage industry. Keeping in touch with customer requirements is our top priority. Call Storeel today when space saving becomes your priority.

Winsted[®]

FREE!

Cabinet Design Kit



This simple design kit helps you plan and order equipment cabinets more efficiently. Specially designed "Rack Ruler" lets you measure electronics equipment for accurate rack size. With this information, Winsted will design rack cabinets specifically for your electronics.

Write today or call TOLL-FREE
1-800-447-2257

THE WINSTED CORPORATION
10901 Hampshire Ave. So. • Minneapolis, MN 55438 • (612) 944-8556
FAX: 612-944-1546

Preferred by Professionals Worldwide
Circle (52) on Reply Card

ENCO Systems, Farmington Hills, MI, has relocated its headquarters to the Detroit, MI, area. For more information, contact: ENCO Systems, 24403 Halsted Rd., Farmington Hills, MI 48335-1669; phone 800-362-6797 or 810-476-5711; fax 810-476-5712.

Comark Communications, Colmar, PA, acquired the RCA Broadcast Transmitter Service Business & Parts from General Electric.

Harrison by GLW, Nashville, TN, and **AT & T Digital Studios Systems**, Greensboro, NC, announced a strategic alliance for the development and delivery of digital products.

Vyvx, the TV services affiliate of WilTel, Houston, and **VDI**, Los Angeles, have announced the formation of a service to deliver spot advertising to local TV broadcasters.

360 Systems, Westlake Village, CA, moved to a new facility. The address is: 5321 Sterling Center Dr., Westlake Village, CA 91361; phone 818-991-0360; fax 818-991-1360.

TouchVision Systems, developers of D/Vision, Chicago, sold 20 turnkey D/Vision-Pro systems to CBS News.

Comprompter, La Crosse, WI, installed Comprompter's complete electronic newsroom system with 20 workstations at NBC affiliate WPSD-TV. Comprompter also installed a small electronic newsroom at WYHS-TV, Miramar, FL.

Fast Electronics U.S., Natick, MA, has moved its corporate headquarters to the Silicon Valley area. The new address is: One Twin Dolphin Dr., Redwood City, CA 94065; phone 415-802-0772; fax 415-802-0746.

PEOPLE

John Schwan has been named vice president worldwide sales for the production business unit of Dynatech Video Group, Salt Lake City.

Robert L. Wilson has been appointed executive vice president, chief operating officer, and chief financial officer for Accom.

Daniel W. Castles has been appointed president of Grass Valley Group, Inc., Grass Valley, CA, a subsidiary of Tektronix.

Stanley D. Becker and **Robert M. Polan** have been appointed to positions with Louth Automation, Menlo Park, CA. Becker will be responsible for engineering management and product development. Polan will be responsible for all southeastern and northeastern U.S. sales.

Gerald R. Jensen has joined Comprompter, Inc., La Crosse, WI, as an account representative for computer newsroom sales.

Patrick A. Burns has been appointed vice president and general manager of West Coast operations of the Chyron Corporation, Melville, NY.

Alex Osadzinski has been named vice president of marketing at the Grass Valley Group, Grass Valley, CA.

Steve Gordoni has joined 360 Systems, Tarzana, CA, as sales engineer.

LOGO INSERTERS 908 Series

WITH TIME/TEMP OPTIONS



It's as easy as A,B,C!

- You create the logos in your favorite graphics program.
- Run QSI Key Edit software and set transparency levels to your images.
- Save your logos to a 3.5" floppy and ...

the 908 does the rest!



Logo shown with embossed Time/Temp display

FILE	KEY	GPI	SYSTEM
CLR SCREEN			
LOAD IMAGE	FOX-NET		
SAVE	FOX-EMBOSS		
	NEWS LOGO		
	LIVE		
	TIME		
	TEMP		

Video Output

Menu Output

Features:

- 24 bit (paletted) color
- Built in linear keyer
- 8 Programmable GPI ports
- Linear ladder
- Mouse controlled menu driven
- Reposition logos
- Transparency adjust
- Separate menu output
- 1 rack unit high
- Stand alone

Programmable GPI Macros: The 908 series allows the user to construct powerful automated programs that will execute with a simple contact closure. Programs are assembled on the menu output using an internal command structure. They may then be saved to disk and or linked to any one of the 8 GPI contacts located on the 908 rear panel.

Example: A GPI macro could be constructed to perform the following: load a logo from disk, fade logo onto screen, wait 1 minute, fade logo off screen, wait 20 minutes, repeat and continue until GPI contact releases.

Time and Temp Option:

This version of the 908 enables the reception of RS232 data from various devices for on screen updating of time, temp, latitude and longitude, etc. Users can design their own fonts or use the fonts provided with the 908TMP


QSI
systems, inc.

Southeast Salem Business Park

7B Raymond ave Unit 8 Salem NH. 03079

Phone (603)893-7707 Fax (603)893-7714

Tired of fighting ac power system problems? Get the answers you need.

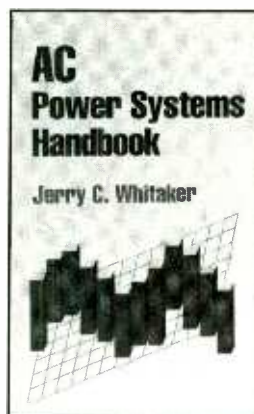

• 330 pages

• 200+ illustrations

Topics include:

- AC transients
- Lightning effects
- Grounding
- Power distribution
- AC system design
- Standby power
- Power conditioning
- Safety

Written by Jerry C. Whitaker, an authority on ac power system design and transient suppression.

From CRC Press and the *Intertec Information Age Catalog*, **AC Power Systems** is an authoritative handbook that explains what you need to know to protect electronic systems from power outages, transients, and related disturbances.

To order call 1-800-543-7771
Catalog #CT-714 \$39.95



"THE PROFESSIONAL'S SOURCE"



For Orders & Info Call

800-947-9928

212-444-5028

For Fax (24 Hours)

800-947-7008

212-242-1400

119 WEST 17TH STREET • NEW YORK, N.Y. 10011

NRG

970 Power-MAX

The 970 Power-MAX is designed for power-hungry professionals who have high-current draw situations and long run times.



- Highest capacity quick-charge capable 12 Volt 14-AMP sintered nicad power pack (removable)
- Rugged high-grade, black leather belt case; chassis assembly with dual 3-pin XLR inputs for pack interchange without shutdown
- 2,500-cycle cell life provides lowest cost per cycle
- Microprocessor-controlled 5-step multi-colored power indicator display
- Belt with cellpack weighs a comfortable 7.5 lbs
- Charge in little over two hours with the optional 650-III IntelliQuick Fast charger
- Dual outputs allow simultaneous powering of two devices (eg. camera and light); Output configurations include cigarette lighter and 4-pin XLR in any combination
- Includes Power-MAX belt and power chassis, 14-amp cell pack in 12V or 13.2 volt configuration, model 600 overnight charger, comprehensive owner's manual. Fits waist size 29"-44"

VARI-LITE PRO Professional DC On-Camera Light

Thanks to on-board control IC's using NRG's Light-Gate technology, light intensity can be infinitely adjusted by the user within a range of 10% to 100% of the lamp's rated power. You can instantly adjust light output to exactly meet changing light requirements, all without changing hot bulbs or fussing with power rabbit diffusion filters. Best of all, the Vari-Lite Pro virtually eliminates color shift and dramatically reduces precious battery power by using only the power required for the selected light level. Accommodates bulbs from 20W to 100W DC.



- Prismatic Pyrex dispersion grid provides smooth even light output and reduced glare without changing light intensity
- Sturdy all-metal click fit mounting bracket with unique ratchet action. Eliminates shake during action shooting
- Front retainer assembly pops off for instant bulb access without the bother of screws
- Rugged mild aluminum light head disperses heat and provides years of service under adverse conditions

Power Station Series



Designed to replace expensive original-manufacture AC power supplies, the affordable Power Stations deliver precisely-regulated 12-volt DC power from AC sources worldwide. High-current capability allows for powering not only large camcorders, dockables, decks, and cameras, but lights, monitors, and other high draw 12-volt equipment as well. The stations provide up to 9 amps of precisely regulated DC power eliminating the need for battery power in stationary applications where an AC source is available. The Power Stations exceed all original manufacturer performance specifications.

- Available in different configurations: The 12560 features a single cigarette or 4-pin output and up to 5 amps of output current. The 129100 features dual outputs in any combination of cigarette or 4-pin and 9 amps of output current capability

- Features:
 - High-current output
 - 4-pin cigarette or cigarette lighter outputs
 - Wide-voltage selection
 - Lighted power switch
 - Rugged steel case

Power Station-2 Series

- Just plug the PowerStation-2 into any AC outlet in the world and out comes perfectly regulated 12-volt DC power through four 4-pin XLR connectors and one cigarette lighter connector. It uses an advanced pulse-width-modulated power supply which allows for ultra-light weight and small size. It operates with little heat even at full output. The PowerStation-2 is the ultimate multi-output professional power source for cameras, decks, lights, monitors, and a host of other video accessories.
- 85-264 volts worldwide auto-adjusting input (just plug in). Supply is fully protected from overcurrent.
- Ultra-light weight - under 3 lb.
- Outstanding 300,000 hour mean time between failure is far in excess of any other manufacturer.
- Ultra-efficient PWM regulation generates far less heat than linear type supplies.
- Provides the ultimate in performance and reliability in a universally compatible and compact package.



Panasonic Broadcast & Television Systems



WJ-MX50 Digital A/V Mixer

- Four input switcher and any two sources can be routed to the program buses
- Two-channel digital frame synchronization permits special effects in each of the A/B buses
- Combination of 7 basic patterns and other effects creates 287 wipe patterns
- External edit control input for RS-232 or RS-422 serial controls. Also has GPI input
- Wipe boundary effects: soft/border (bold, 8 back colors available)
- Digital effects including strobe, still, mosaic, negative/positive, paint, monochrome, strobe, trail, and AV synchro
- Real-time compression - the entire source image is compressed inside a wipe pattern
- "Scene Grabber" makes it possible to move a pattern, upholding the initially trimmed-in picture integrity
- Non Additive Mix (NAM): selects between A and B sources, passing only the signal with the highest luminance value
- Fade-in and fade-out video, audio, titles individually or synchronously faded
- Down stream keyer with selectable sources from character generator or external camera
- Incorporates 8 separate memories that enable virtually instant recall of frequently used effects
- 8 preset effects include: Mosaic Mix, Position Stream, Corkscrew, Bounce, Flip, Shutter, Vibrato, and Satellite
- Audio mixing capability of 5 sources with 5 audio level adjustments



NEW! AG-DP800 SUPERCAM

S-VHS FIT 3-CCD Digital Signal Processing Camcorder



- Three high-density 380,000 pixel CCDs with half-pitch pixel offset to over 700 lines of horizontal resolution, a S/N ratio exceeding 60dB and remarkable sensitivity of 18 at 2000 lux result in simply extraordinary image quality
- Additionally the Frame Interline Transfer (FIT) CCDs minimize vertical smear, so you maintain impressive picture quality even in very bright illumination
- Uses advanced digital signal processing circuitry which provides four valuable benefits:
 - 1) Consistently reliable up-to-spec performance
 - 2) Fine adjustment of a wide range of parameters
 - 3) Memory storage and instant recall of specific settings
 - 4) More flexible and higher quality image processing, as well as easier maintenance
- Some of the DSP circuits and their functions:
 - CHROMA DETAIL - This function compensates for poor resolution in the high chroma areas of the picture
 - DARK DETAIL - Determines optimum degree of contour enhancement in dark areas to deliver crisp, natural-looking images
 - HIGHLIGHT COMPRESSION - Expands the dynamic range of the highlighted areas and prevents halation. The highlight compression circuit allows a wide dynamic range producing detailed images even against bright backlight or daylight
 - FLARE CORRECTION CIRCUIT - Compensates for unsteady black caused by light or by a subject's movements

- Six Scene File modes: There are two user modes for custom digital parameter settings including Horizontal Detail, Vertical Detail, Chroma and Dark Detail, and Color Correction. The four preset modes are normal, fluorescent, special and sparkling
- In addition to regular AGC (Automatic Gain Control), Supercam has a Super High Gain Mode. At F1.4 this enables shooting under illumination as low as 2 lux while retaining detail and color balance
- Synchro Scan function allows flicker-free shooting of computer monitors. Electronic shutter increments can be set variably from 1/61 seconds to 1/253 of a second
- Built-in internal time code generator lets you record with SMPTE LTC/VITC (Longitudinal/Vertical Internal) time code
- 26-pin connector for direct signal output from camera section for easy backups using 2nd VCR equipped with 26-pin connector
- Two hi-fi stereo audio channels with a dynamic range of 80 dB, as well as two linear audio channels with Dolby NR. Normal/Hi-Fi recording is selectable and the levels of all four channels with Dolby NR. Normal/Hi-Fi recording is selectable and the levels of all four channels are controllable. Uses XLR connectors to further ensure high-quality sound
- Phantom power can be supplied to an optional microphone. Power can be switched off to prevent battery drain when not in use

NEW! AG-DS840/AG-DS850

S-VHS Slow-Motion Editing System

Editing machines truly designed for professionals

The AG-DS840 player and AG-DS850 Editing VCR are state-of-the-art S-VHS editing machines that provide the quality required for professional video production and even broadcast systems. Equipped with Panasonic's advanced digital technology they offer features such as Digital VHS Circuitry, Digital 3-D Time Base Correctors, Digital Slow Motion, and Digital Noise Reduction. They also have built-in Time Code Generator/Readers for frame accurate editing, and component video output for connection to MII and Betacam machines.

AG-DS840 & AG-DS850 Features:

- They provide clear, noise-free, high quality slow playback. Playback speed, including Digital Still is selectable in 10 steps (-1/4, -1/8, -1/16, -1/25, D, -1/25, +1/16, +1/8, +1/4, +1/2)
- Built-in enhanced performance, 3-dimensional digital TBC with a correction range of one field. With the VCRs continuously retaining one field in memory, the data is used for 3-D time processing thereby providing excellent dropout compensation
- Digital Signal Processing for improved picture quality, and for maintaining uniform picture quality during editing. A Chroma Aperture Compensation (CAC) circuit eliminates color blurring and expands chroma bandwidth. Other digital processing circuits include:
 - Digital Noise Reduction (DNR): Processes Y and C signals separately to boost S/N ratio by minimizing noise during playback
 - Digital Comb Filter: Uses an advanced 3-dimensional system for complete Y/C separation. The result is reduced color and luminance blurring
 - Switching Noise Mask Circuit: Effectively eliminates noise caused by head switching during slow motion playback
- Employs amorphous video heads that have a higher magnetic coercivity than conventional ferrite heads. Expanded color signal frequency response from the amorphous heads enhances picture quality by minimizing color blurring
- They have built-in LTC/VITC (Longitudinal/Vertical Internal) time code reader/generators for absolute frame accurate editing
- Equipped with component outputs allowing easy connection to other component video equipment. This allows high quality transfer of S-VHS source material to Betacam or MII
- Equipped with RS-422 (9-Pin) serial interface. The standard control system for professional broadcast machines
- IQ (Intelligent Quest) mechanism delivers precise, high-speed operation, plus the reliability needed. The dual-loading system achieves high-speed response while protecting tapes and heads from damage. The tape transport mechanism uses five direct drive motors, including two reel drive motors. Automatic head cleaning is also provided
- Capstan Control System with large capstan spindle allows high-speed search at 32x normal speed
- Four channel audio including two hi-fi stereo channels with a dynamic range of 90dB as well as two linear channels with Dolby NR. Each audio channel has its own input (AG-DS850 only) and output with individual channel-level setting capability. All audio channels use XLR connectors
- Provides 16.9 wide area compatibility so they are fully equipped for the next generation of televisions
- 3 rack units high, they are unbelievably compact for easy space saving installation. 19" rack-mountable with optional AG-M730.



LEADER

Model 5850C

Vectorscope

An ideal companion for the 5860C Waveform Monitor, the 5850C adds simultaneous side-by-side waveform and vector monitoring. Featured is an electronically-generated vector scale that precludes the need for fussy centering adjustments and eases phase adjustments from relatively long viewing distances. Provision is made for selecting the phase reference from either (A or B) inputs or a separate external timing reference.

Model 5860C

Waveform Monitor

A two-input waveform monitor, the 5860C features 1H, 1V, 2H, 2V, 1 us/div and 2V MAG time bases as well as vertical amplifier response choices of flat, IRE (low pass), chroma and DiF-STEP. The latter facilitates easy checks of luminance linearity using the staircase signal. A PIX MDN output jack feeds observed (A or B) signals to a picture monitor, and the unit accepts an external sync reference. Built-in calibrator and on-off control of the DC restorer is also provided.

5864A



Model 5864A

Waveform Monitor

A fully portable waveform monitor for field use, the Model 5864A is a two-channel unit that provides 2H and 2V sweeps with MAG, FLAT and IRE response, and normal and X4 gain.

Model 5854

Vectorscope

2-channel portable vectorscope is ideal for field use and features A and B phase reference, fixed and variable gain. Both units shown with optional battery holder and NP-1 type battery

MAGNI



MM-400

- The MM-400 is a combination waveform and vector monitor especially configured for the cost conscious producer. A low-cost alternative to CRT-based waveform monitoring the MM-400 produces a video picture of the input signal's waveform and displays it on any video monitor. It provides a simple, affordable and accurate way to set camera levels before a shoot, or to check time base correctors and color fidelity in editing. Problems like hue shift, smearing, muddy contrast and loss of detail are easily identified for correction.

FEATURES:

- Converts waveform or vector display information into a standard video signal which can be displayed on a video monitor or routed around a video facility, no need for additional expensive monitors. Switch between pictures and waveforms at the push of a button
- Incorporates an advanced SC/H phase and color frame indicator that is a must for editing and post production. At a glance it tells you if a signal's subcarrier-to-horizontal phase is properly adjusted and if the signal's color frame matches the house black burst connected to the MM-400 external reference input
- Works anywhere and with any analog video format—NTSC, PAL, Component or S-Video. It has automatic detection between NTSC and PAL formats
- Three loop-through inputs can accept three composite signals or one component, or RGB signal
- No complex displays or special test signals are required for component video monitoring
- Interchannel timing and amplitude display make component analog monitoring easy. Has color bar limit markings for Betacam, M-II and SMPTE formats
- Waveform and vectorscope controls, including channel, sweep speed, position control, phase rotation are on easy-to-see dedicated pushbuttons
- Besides instant toggling between picture and waveform, a mix mode combines waveform and picture displays for simultaneous viewing
- The MM-400 can be readily used by even novice operators. It has easy-to-understand set-up menus for display color, interchannel timing, SC/H phase alarm
- Usable in any video facility of any size for displaying signals, its low cost makes it affordable by the smallest studio, while its features and performance make it ideal for monitoring in high-end facilities as well.

WE ARE AUTHORIZED PANASONIC INDUSTRIAL VIDEO DEALERS. ALL PANASONIC VIDEO INCLUDE ONE YEAR USA WARRANTY ON PARTS AND LABOR.

Circle (60) on Reply Card

www.americanradiohistory.com



"THE PROFESSIONAL'S SOURCE . . ."

FOR ORDERS CALL:

800-947-9928

212-444-5028

OR FAX (24 HOURS):

800-947-7008

212-242-1400

**OVERNIGHT AND
RUSH SERVICE
AVAILABLE**

PROFESSIONAL VIDEO TAPE



H4715 S-VHS Double Coated		
ST-30	7.69	ST-60
ST-120		8.99
M221 Ni 8 Double Coated		
Metal Particles		
P630HMP	4.99	E630HME
P660HMP	7.19	E660HME
P6120HMP	9.69	E6120HME
Metal Evaporated		
	8.79	
	11.29	
	15.79	

AMPEX

187 KCA 3/4" U-matic Broadcast (In Box)		
KCAD5	6.49	KCA10
KCA20	7.69	KCA30
KCA40	8.49	KCA60
KCA15	7.29	
KCA10	6.89	
197 RCA 3/4" U-matic Master Broadcast (In Box)		
BSC10 (mini)	8.49	BCA10
BSC20 (mini)	9.59	BCA30
BSC40 (mini)	10.20	BCA60
BSC15 (mini)	8.54	BCA20
BSC10 (mini)	8.54	BCA20
BSC20 (mini)	9.59	BCA30
BSC40 (mini)	10.20	BCA60
297 SPA 3/4" U-matic SP Master Broadcast (In Box)		
SPS10 (mini)	10.21	SPA10
SPS20 (mini)	10.85	SPA20
SPS40 (mini)	12.40	SPA60
SPS15 (mini)	10.20	
SPS10 (mini)	10.20	
SPS20 (mini)	10.85	
SPS40 (mini)	12.40	

208 Betacam Master Broadcast (In Box)		
BC-SA (small)	4.89	BC-10A (small)
BC-20A (small)	7.59	BC-30A (small)
BC-40A (small)	12.69	BC-60A (small)
BC-10A (small)	4.89	BC-10A (small)
BC-20A (small)	7.59	BC-30A (small)
BC-40A (small)	12.69	BC-60A (small)
BC-10A (small)	4.89	BC-10A (small)
BC-20A (small)	7.59	BC-30A (small)
BC-40A (small)	12.69	BC-60A (small)

398 Betacam SP Master Broadcast (In Box)		
BC-SA (small)	15.99	BC-10A (small)
BC-20A (small)	20.49	BC-30A (small)
BC-40A (small)	25.99	BC-60A (small)
BC-10A (small)	15.99	BC-10A (small)
BC-20A (small)	20.49	BC-30A (small)
BC-40A (small)	25.99	BC-60A (small)
BC-10A (small)	15.99	BC-10A (small)
BC-20A (small)	20.49	BC-30A (small)
BC-40A (small)	25.99	BC-60A (small)

maxell.

BQ Certified 8mm High-Grade		
P6-60 HG BQ	4.99	P6-120 HG BQ
P6-60 HM BQ	6.49	P6-120 HM BQ
BQ Certified Hi-8 Metal Cassettes		
P6-60 HM BQ	6.49	P6-120 HM BQ
P6-60 HM BQ	6.49	P6-120 HM BQ

P/PLUS Expitaxial VHS		
T-30 Plus	2.29	T-60 Plus
T-90 Plus	2.69	T-120 Plus
T-30 Plus	2.29	T-60 Plus
T-90 Plus	2.69	T-120 Plus

HGX-PLUS Expitaxial VHS (Box)		
HGXT-60 Plus	3.49	HGXT-120 Plus
HGXT-60 Plus	3.49	HGXT-120 Plus
HGXT-60 Plus	3.49	HGXT-120 Plus

BQ Broadcast Quality Expitaxial VHS (Box)		
T-30 BQ	5.49	T-60 BQ
T-120 BQ	6.39	T-120 BQ
T-30 BQ	5.49	T-60 BQ
T-120 BQ	6.39	T-120 BQ

BQ Certified Professional S-VHS (In Box)		
ST-31 BQ	6.49	ST-62 BQ
ST-126 BQ	7.69	ST-182 BQ
ST-31 BQ	6.49	ST-62 BQ
ST-126 BQ	7.69	ST-182 BQ

KCA 3/4" High Grade w/Album & Sleeve		
KCS-10 HG (mini)	6.99	KCS-20 HG (mini)
KCA-5 HG	7.29	KCA-10 HG
KCA-30 HG	8.99	KCA-60 HG
KCS-10 HG (mini)	6.99	KCS-20 HG (mini)
KCA-5 HG	7.29	KCA-10 HG
KCA-30 HG	8.99	KCA-60 HG

KCA 3/4" Broadcast w/Album & Sleeve		
KCS-10 BQ (mini)	7.49	KCS-20 BQ (mini)
KCA-5 BQ	7.69	KCA-10 BQ
KCA-30 BQ	8.99	KCA-60 BQ
KCS-10 BQ (mini)	7.49	KCS-20 BQ (mini)
KCA-5 BQ	7.69	KCA-10 BQ
KCA-30 BQ	8.99	KCA-60 BQ

SONY

Hi-8 Professional Metal Video Cassettes		
P6-30 HMPX	5.99	P6-30 HME
P6-60 HMPX	8.59	P6-60 HME
P6-120 HMPX	11.69	P6-120 HME
P6-30 HMPX	5.99	P6-30 HME
P6-60 HMPX	8.59	P6-60 HME
P6-120 HMPX	11.69	P6-120 HME

PR Series Professional Grade VHS		
T-30PR	2.49	T-60PR
T-30PR	2.49	T-60PR
T-30PR	2.49	T-60PR

PM Series Premier Grade Professional VHS		
T-30PM	3.49	T-60PM
T-30PM	3.49	T-60PM
T-30PM	3.49	T-60PM

BA Series Premier Hi-Grade Broadcast VHS (In Box)		
T-30BA	3.79	T-60BA
T-30BA	3.79	T-60BA
T-30BA	3.79	T-60BA

MQ Master Quality S-VHS (In Box)		
MOST-60	8.19	MOST-120
MOST-60	8.19	MOST-120
MOST-60	8.19	MOST-120

BRS 3/4" U-matic Broadcast Standard (In Box)		
KCS-10 BRS (mini)	7.99	KCS-20 BRS (mini)
KCA-10 BRS	7.89	KCA-20 BRS
KCA-30 BRS	9.29	KCA-60 BRS
KCS-10 BRS (mini)	7.99	KCS-20 BRS (mini)
KCA-10 BRS	7.89	KCA-20 BRS
KCA-30 BRS	9.29	KCA-60 BRS

XBR 3/4" U-matic Broadcast Master (In Box)		
KCS-10 XBR (mini)	8.49	KCS-20 XBR (mini)
KCA-10 XBR	8.99	KCA-20 XBR
KCA-30 XBR	11.49	KCA-60 XBR
KCS-10 XBR (mini)	8.49	KCS-20 XBR (mini)
KCA-10 XBR	8.99	KCA-20 XBR
KCA-30 XBR	11.49	KCA-60 XBR

KSP 31/4" U-matic SP Broadcast (In Box)		
KSP-S10 (mini)	9.19	KSP-S20 (mini)
KSP-10	9.69	KSP-20
KSP-30	12.49	KSP-60
KSP-S10 (mini)	9.19	KSP-S20 (mini)
KSP-10	9.69	KSP-20
KSP-30	12.49	KSP-60

BCT G Betacam Broadcast Standard (In Box)		
BCT-5G (small)	4.99	BCT-10G (small)
BCT-20G (small)	7.39	BCT-30G (small)
BCT-40G (small)	9.29	BCT-60G (small)
BCT-5G (small)	4.99	BCT-10G (small)
BCT-20G (small)	7.39	BCT-30G (small)
BCT-40G (small)	9.29	BCT-60G (small)

BCT Metal Betacam SP Broadcast Master (Box)		
BCT-5M (small)	16.99	BCT-10M (small)
BCT-20M (small)	21.29	BCT-30M (small)
BCT-40M (small)	25.99	BCT-60M (small)
BCT-5M (small)	16.99	BCT-10M (small)
BCT-20M (small)	21.29	BCT-30M (small)
BCT-40M (small)	25.99	BCT-60M (small)

SANYO GVR-S950

S-VHS Single Frame Recording VCR

- Single-Frame Animation Controller eliminates the need for separate or computer plug-in animation controllers. Industry-standard protocols, make it compatible with most popular graphic and animation software packages.
- SMPTC Time Code Generator and Reader with Built-in Drop and Non-Drop Frame Read/Write is fully programmable from an external computer and resettable from the front panel.
- Video and Audio Switcher with Two Independent Video and Audio Channels. Each video channel contains both composite and S-Video inputs. Each audio channel contains two linear and two Hi-Fi inputs. Switching can be performed either manually, or under RS232C or RS422 control. Video and audio channels are switched independently letting you perform break-away edits.
- Auto-Sensing Single RS422/RS232C input eliminates the need for optional external interfaces. Interface requirements are automatically sensed and adjusted within the recorder.
- Input and Playback Video Processing allows adjustments to the video level of the incoming signal. Signal levels and hue can be adjusted during playback.



BTS

Broadcast Television Systems

Betacam SP-2000 PRO Series

PBC 2600 Player

- Superior picture quality to any other professional system.
- Brings virtual Betacam SP quality within the budgets of professional users.
- More than 90 minutes of playback time using L-size Metal or Oxide cassettes.
- High-speed picture search provides recognizable color pictures at up to 10 times normal speed in forward and reverse (24 times normal speed in monochrome).
- Two longitudinal audio channels with Dolby C-type NR (Noise Reduction) system.
- Equipped with RS-422 9-pin serial interface which is broadcast standard protocol.
- Built-in Time Base Corrector with advanced high quality digital dropout compensator.
- Optional VTR-50 provides remote control of the VCR.
- Built-in LTC/VTC/User Bits reader, and character generator.
- User friendly dial menu operation, enhanced serviceability with built-in self diagnostics.
- Y/R - Y/B-Y component signal outputs via BNC or 12-pin Betacam DUB connectors. Also has S-Video output.
- Optional BKW-2020 provides U-matic DUB output capability.

PBC 2650 Player with Dynamic Tracking (DT)

- Same as PBC-2600 plus-
- Dynamic Tracking (DT) provides broadcast quality noiseless playback within -1 to +3 times normal speed

PBC 2800 Player/Recorder

- Same as PBC-2600 plus-
- Built-in comprehensive editing facilities
- Dynamic Motion Control with memory provides slow motion editing capability (when used with a player VTR equipped with DT function)
- More than 90 minutes of recording/playback time using L-size Metal (for both recording and playback) or Oxide (for playback only) cassettes.
- Built-in LTC/VTC/User Bits generator and reader, also built-in character generator
- Y/R - Y/B-Y component signal inputs and outputs via BNC or 12-pin Betacam DUB connectors. Also has S-Video input and output.

SONY

PROFESSIONAL S-VHS SYSTEM

SVP-9000 S-VHS Player

SVO-9600 S-VHS Player/Recorder



The SVP-9000 S-VHS player and SVO-9600 recorder are designed as multi-purpose machines with the use of various optical interface boards. By selecting one or more of a particular board, they become dedicated machines for satellite recording, office viewing, video library, sports analysis and editing. At the same time, they adhere to Sony's professional VTR concept of reliable mechanism, rigid construction and easy operation, ensuring reliable and reliable operation in the industrial and professional environment.

They both feature:

- Using the S-VHS format, they deliver superb picture playback and recording. With newly developed Digital Y/C separator maintained picture quality even in composite.
- Newly developed video cross talk canceller eliminates color blur providing more accurate color and sharper images.
- Four channel audio system - Two Hi-Fi with a dynamic range of 90dB and Two Hi-Fi with a dynamic range of 90dB and Two Hi-Fi with a dynamic range of 90dB.
- Two direct-drive reel motors provide rapid response and smooth operations. Mode transitions such as S-OP to REC, FAST FWD to PLAY, STOP to REWIND are instantaneous.
- Picture search from -10 to +10 times normal speed.
- SYNC IN for synchronizing with other video sources.
- Automatic repeat and automatic rewind can be accomplished with programmed operation.
- There is a TIMER switch for either REC or PLAY (SVP-9000 PLAY only) when selected automatically executes the selected mode when the power is turned on. This is very useful for unattended operation such as satellite recording.
- Auto head cleaner - each time a cassette is loaded or ejected, a cleaning roller automatically passes over the video/MT audio heads removing tape residue and providing preventive care of the tape heads.
- The SVO-9600 features sensor recording. When video signals are input, it automatically starts recording.
- 19" EIA rack mountable plus adjustable front controls.

Optional Interface Cards:

- SVBK-100 33-pin interface board allows remote control of basic VTR functions.
- SVBK-120 RS-232 interface board allows for machine control from a computer.
- SVBK-140 RS-422 interface board allows either machine to be configured into any professional system.
- SVBK-150 Digital Noise Reducer board reduces jitter, noise and Y/C delay and provides clear, crisp still frames.
- SVBK-160 SMPTC Time Code interface board can only be used with SVBK-140 board).

NEOTEK VIDEO TOASTER 4000



- Production Switcher
- Luminance Keyer
- Frame Grabber/Frame Store
- ChromaFX Color Processor
- Digital Video Effects
- Character Generator
- ToasterPaint
- Dual Frame Buffers/Genlock
- Lightwave 3D



NovaBlox

VIDEO PROCESSING SYSTEM

The NovaBlox Video Processing System is comprised of individual function modules called NovaCards. The range of NovaCards modules includes time base correctors, frame synchronizers, sync generators, encoders, decoders, transcoders, distribution amplifiers and routing switchers. NovaCards have the flexibility of plugging into either a computer or one of four NovaChassis that hold from one to 5 modules. NovaCards fit into an IBM or compatible expansion slot including Amiga. Most of the NovaCards utilize RS-232C serial data for operational control and include DOS, Windows, and Amiga software. For desktop and portable applications, the C-28 chassis hold two cards. There is also the C-4 single rackmount chassis that accommodates up to four NovaCards and the three rack C-15 NovaFrame, which features 15 slots. To provide operational control when using one of the NovaChassis there are two NovaTro Serial Control Units to choose from. They provide LCD status display with four button operation or the NovaTro2 which has enhanced operation with dedicated function controls and LCD status display.



NOVAMATE TBC/Frame Synchronizer

One of the NovaCard modules of the NovaBlox system, the NovaMate is a unique TBC/Frame Synchronizer that satisfies a wide range of VCR signal correction and video interface requirements from desktop video to satellite systems. NovaMate plugs directly into a computer or one of several chassis configurations. Control is performed either by software or NovaTro control units. The flexibility of its modular design and microprocessor control plus its superior quality make NovaMate the ideal alternative to stand-alone and computer based TBCs.

WE CARRY ALL OTHER NOVACARDS:
ENCODERS, DECODERS, TRANSCODERS,
DISTRIBUTION AMPLIFIERS AND ROUTING SWITCHERS

HORITA

BSG-50

Blackburst/Sync/Tone Generator

The BSG-50 provides an economical means for generating the most common RS-170A video timing signals used to operate various video switchers, effects generators, TBCs, VCRs, cameras and video edit controllers.

- 6 BNC video/pulse outputs
- Now available: 6 blackburst, 4 sync, 2 subcarrier
- Each sync output individually adjustable for composite sync, composite blanking, H-drive, or V-drive
- Separate buffer for each output-maximum signal isolation
- 1KHz, 0dB sine wave audio tone output, locked to video
- Outputs can easily be configured to meet specific user and equipment needs



CSG-50

Color Bar/Sync/Tone Generator

- Generates full-SMPTC color bars, blackburst and composite sync signals.
- Built-in timer can automatically switch video output: from color bars to color black after 30 or 60 seconds. Easy and convenient for producing tape leaders and stripping tapes with color bars and black.
- Front panel selection of full-field or SMPTC color bar patterns or colorblack (blackburst) video output.
- Includes crystal-controlled, 1KHz, 0dB audio tone output.
- Outputs: video, sync, ref frame, 1 KHz, 0dB
- Audio tone switches to silence and color bars change to black when using 30/60 second timer
- Fully RS-170A S/GH phased and always correct
- No adjustment required

WE STOCK THE FULL LINE OF HORITA PRODUCTS INCLUDING:

- WQ-50 - Window Dub Insertor
- TG-50 - Generator/Insertor
- TRG-50 - Generator/Insertor/Search Speed Reader
- TRG-50PC - Has all of the above plus RS-232C control.
- VG-50 - VITC Generator, LTC-VITC Translator
- VLT-50 - VITC-To-LTC Translator
- VLT-50PC - VITC-To-LTC Translator / RS-232C Control
- RLT-50 - HSB (RS-170A S/GH) LTC to LTC Translator
- TSG-50 - NTSC Test Signal Generator
- SCT-50 - Serial Control Titrer "Industrial" CG
- Time-Date Stamp, Time Code Captioning
- SAQ-50 - Safe Area, Convergence Pattern and Oscilloscope Line Trigger and Generator

ALL VIDEO COMES WITH A SEVEN-DAY SATISFACTION MONEY-BACK GUARANTEE

... FOR PHOTO & VIDEO "



TO INQUIRE ABOUT YOUR ORDER:

800 221-5743 • 212 807-7479

OR FAX 24 HOURS: 212 366-3738

119 WEST 17TH STREET, NEW YORK, N.Y. 10011

Store & Mail Order Hours:

Sun 10:4-5 • Mon & Tues 9-6 • Wed & Thurs 9-7:30 • Fri 9-2 • Sat Closed

RUSH OR OVERNIGHT SERVICE AVAILABLE (extra charge)

MILLER Fluid Heads & Tripods

The silky, smooth action of each Miller Fluid Head is the product of the finest quality cast and machined parts functioning together in a fluid environment. They are engineering masterpieces, built to operate even under extreme conditions. They are engineered to exceptionally fine tolerances and their mechanisms are protected effectively against ambient moisture and dust.



Miller 20 - Series II Fluid Head

- Continuously adjustable fluid drag control
- Sliding Quick Release camera platform
- Weights only 4 lbs. will handle cameras up to 22 lbs.
- Counterbalance system designed to compensate for nose heavy or tail heavy camera configurations, and permits fingertip control of the camera throughout the tilt range.
- Includes independent pan and tilt locks, bubble level, dual pan handle carriers and integrated 75mm ball levelling.

#440 - Lightweight Tripod

- Weights only 4.5 lbs., supports up to 30 lbs.
- Minimum height down to 24", maximum height to 57".
- Extremely portable, folds down to 33".
- Engineered from thermoplastic moldings, diecast alloy and hard anodized tubular alloy.
- Fast one turn, captive leg locks
- Includes 75mm (3") ball levelling bowl

#420 - 2-Stage Tripod

- Two extension sections on each leg. Operates at low levels as well as normal heights without the use of mini legs.
- High torsional rigidity, no pan backlash
- Weights 6 lbs., supports 50 lbs.
- Very portable, folds to 27"
- Includes 75mm (3") ball levelling bowl with model 420 model 402 includes 100mm (4") ball levelling bowl

System 20 Catalog #338

- Miller 20 II fluid head • 440 lightweight tripod
- 410 tripod spreader with foot pads \$149.00

System 20 ENG Cat. #339

- Miller 20 II fluid head • 420 2-stage tripod
- 410 tripod spreader with foot pads \$189.00

Vinten

Vision SD 12 and SD 22

Pan and Tilt Heads with Serial Drag

- The Vision SD 12 and SD 22 are the first heads with the "Serial Drag" pan and tilt system. The system consists of a unique, permanently-sealed fluid drag and an advanced lubricated friction drag. So for the first time, one head gives you all the advantages of both fluid (viscous) and lubricated (LT) drag systems - and none of their disadvantages. Achieve the smoothest pans and tilts regardless of speed, drag setting and ambient temperature.
- Simple, easy-to-use external control for perfect balance.
- Patented spring-assisted counter-balance system permits perfect "hands-off" camera balance over full 180° of tilt.
- Instant drag system breakdown and recovery overcome inertia and friction for excellent "wiper" pans.
- Consistent drag levels in both pan and tilt axes.
- Click on, flick off pan and tilt caliper disc brakes.
- Greater control, precision, flexibility and "touch" than any other head on the market.
- Touch activated, time delayed illuminated level bubble.
- Working conditions from as low as -40° up to +60°C.
- SD 12 weighs 6.6 lbs and supports up to 35 lbs.
- SD 22 weighs 12.7 lbs and supports up to 55 lbs.

Vision Two Stage ENG and LT Carbon Fibre ENG Tripods

- The ultimate in lightweight and innovative tripods, they are available with durable tubular alloy (Model #3513) or the stronger and lighter, axially and spirally wound carbon fibre construction (Model #3523). They incorporate torque safe clamps to provide fast, safe and self-adjusting leg clamps.
- "Torque Safe" requires no adjustment, its unique design adjusts itself as and when required, eliminating the need for manual adjustment and maintenance and making for a much more reliable clamping system.
- New hip joint eliminates play and adds rigidity.
- They both feature 100mm levelling bowl, fold down to a compact 26", and support 45 lbs.
- The #3513 weighs 6.5 lbs and the #3523 CF (Carbon Fibre) weighs 5.2 lbs.

Vision 12 Systems

- All Vision 12 systems include #3364-3 SD 12 fluid and lubricated friction drag pan/tilt head, single telescoping pan bar and clamp with 100mm ball base

SD-12A System

- 3364-3 SD-12 Pan and tilt head
- 3513-3 Single stage ENG tripod with 100mm bowl
- 3363-3 Lightweight calibrated floor spreader

SD-12D System

- 3364-3 SD-12 Pan and tilt head
- 3513-3 Two stage ENG tripod with 100mm bowl
- 3314-3 Heavy-duty calibrated floor spreader

Vision 22 Systems

- All Vision 22 systems include #3364-3 SD-22 dual fluid and lubricated friction drag pan and tilt head, single telescoping pan bar and clamp with dual 100mm/150mm ball base

SD-22E System

- 3364-3 SD-22 Pan and tilt head
- 3219-52 Second telescoping pan bar and clamp
- 3516-3 Two stage EFP tripod with 150mm bowl
- 3314-3 Heavy-duty calibrated floor spreader

SONY

EVW-300 Hi-8 3-CCD CAMCORDER



The EVW-300 is a complete one piece camcorder which includes a variety of innovative and advanced operational features. So, whether your shoots require basic recording capabilities or premier performance, the EVW-300 offers a wide range of features and remarkable recording quality to best suit your needs.

Features:

- Equipped with three high density 1/2" IT Hyper HAD image sensors. Has an excellent sensitivity of F8.0 at 2,000 lux, high S/N of 60 dB, and delivers over 700 lines of horizontal resolution.
- Provides high quality PCM digital stereo and single channel AFM Hi-Fi recording. Has XLR balanced audio connectors.
- Quick start 1.5" viewfinder with 550 lines of resolution plus Zebra pattern video level indicator and color bar generator.
- Quick-start recording - takes only 0.5 seconds to go from REC PAUSE to REC MODE for immediate recording in the field.
- Built-in 8mm Time Code generator records absolute addresses. (Either non-drop frame or drop frame mode can be selected.) Furthermore the EVW-300 incorporates a variety of time code features such as Time Code PRESET/RESET, REC RUN/FREE RUN and User Bits.
- Variety of automatic adjustment functions for different lighting conditions. **ATW (Auto Trace White Balance)** - optimum white balance is always ensured during recording, even for changes in color temperature. Conventional white balance adjustment is still provided with the Auto White Balance. **AGC (Automatic Gain Control)** - in addition to manual Gain Up AGC provides linear gain up in the range of 0 dB to 18 dB. **Intelligent Auto Iris** - where the lighting between subject and background is different (subject is underexposed) the Intelligent Auto Iris automatically adjusts the lens iris for proper exposure.
- Selectable Gain-up from 1 dB to 18 dB in 1 dB steps for Mid & High positions
- Clear Scan function - provides a variety of selection of shutter speeds ranging from 60-200 Hz allowing recording of almost any computer display without flicker.
- Compact, lightweight (12 lbs with NP-18) ergonomic design provides well balanced and extremely comfortable operation.



TOSHIBA

TSC-200 3-CCD Hi-8 Camcorder

- 3 1/2" CCD chips mounted with spatial offset technology deliver resolution of 700 horizontal lines
- Low noise design provides extreme sensitivity of F8.0 at 2000 lux. Min. illumination 7.5 lux with excellent color reproduction
- New IMA (low noise amplifier) delivers a S/N (signal-to-noise) ratio of 62dB - the highest achieved for this type of camera
- 26-pin connector outputs Y/C or component video signal allowing hook up to a portable S-VHS, MII or Betacam recorder and simultaneously record with Hi-8.
- Quick-start 1.5" viewfinder needs no warm up time so you never miss a shot. Zebra pattern in the viewfinder alerts operator to excessive video levels.
- Genlock capability allows synchronization with other cameras. Also full calibration functions are built-in as well as color bar generator.
- Variable high-speed shutter from 1/60 to 1/2000 second
- Built-in 8mm time code generator records an absolute address to every frame.
- High-performance back electret condenser mic records to all three audio tracks. Low cut filter eliminates wind noise.
- Very low power consumption. Draws only 18 watts per hour allowing 100 minutes of recording time with 1 NP-18 battery.
- Body made of magnesium alloy previously found only on broadcast cameras. Still only 13 lbs. in standard configuration.

JVC GY-X2 3-CCD S-VHS CAMCORDER



- Three 1/2" CCD image sensor delivers 650 lines of horizontal resolution
- New micro-lens technology provides exceptional sensitivity of F7.0 at 2000 lux and new LUX mode lets you shoot with almost no light! Now you can shoot superb footage with excellent color balance at a mere 3 lux illumination
- Variable Scan View allows flicker-free shooting of a computer monitor.
- Quick Record Mode - when turned on the camera is set to the auto iris even if lens is set at manual. Also activated is (ALC) Automatic Level Control and EEL Extended Electronic Iris which provides both variable gain and variable shutter. Now you can shoot continuously from dark room to bright outdoors without having to adjust gain, iris or ND filter.
- Full Time Auto White circuit lets you move from incandescent to fluorescent to outdoor lighting without changing white balance or the filter wheel.
- Genlock input allows synchronization with other cameras.
- Dual output system allows camera output to be connected directly to an external recorder



KY-27UB 3-CCD Color Video Camera

- New 3" CCDs with 380,000 pixels (360,000 effective) with advanced electronics delivers resolution of 750 horizontal lines and reduced smear.
- Special low reflection membrane for CCD shielding screen greatly reduces smear while minimizing light leakage.
- Sensitivity of 1/8.0 at 2000 lux. Min. illumination 7.5 lux with 1/1.4 gain, +18dB.
- LUX mode allows shooting scenes that were previously impossible due to insufficient lighting. CCDs are maximized for low light sensitivity equivalent to an electronic gain of 24dB plus a JVC pixel readout system which provides an additional 6dB. Together they provide +30dB without the noise and picture degradation normally associated with this much gain. Excellent color balance is maintained even down to 1.5 lux illumination.
- Auto Shooting Mode where you only have to zoom, focus and record. All other parameters are controlled automatically.
- Enhanced ALK (Automatic Level Control) mode for continuous shooting in all light levels. This allows continuous automatic shooting from dark interiors to bright outdoors. Also features an aperture priority mode. Manually set iris for desired depth of focus, and ALK circuit automatically achieves correct video level.
- The Multi-Zone Iris Weighting system gives preference to objects in the center and lower portions of the picture. The Automatic Peak/Average Detection (APB) provides intelligence to ignore unusual objects such as bright lights.
- Auto knee circuitry extends a scene's light to dark dynamic range reproduction by up to five times without overexposure.
- Has large 1.5-inch viewfinder with 500 lines of resolution and SMPTE color bars. Status system provides audio levels, accumulated or remaining recording time and VTR operation. Also battery voltage and camera setup. Zebra pattern indication and safety zones with a center marker are also provided.
- Equipped with Variable Scan function. This allows flicker-free shooting of computer screens. Variable scan enables a precise shutter speed from 160.2 to 1/96.7 of a second in 256 increments to be set, matching a computer's scan rate. Almost any computer display can be clearly recorded.
- Star filter creates dramatic 4-point star effects. Users can also select from a wide range of optional filters.
- Advanced Memory System (AMS) stores customizable settings for various shooting conditions.
- Camera head is designed for durability and light weight. Provides excellent resistance to vibration and impact, for enhanced reliability. Overall balance is perfect with all controls optimally located for ease of use.
- Uses just 12.4 watts of power with camera adapter and viewfinder, so battery time can be allocated to VTR operation.
- Easily adjustable pedestal and detail enhancement through the Camera Setup Menu.
- Docks directly to the JVC BR-S422U, BR-S411UB and BR-S420CU professional S-VHS recorders. Optional adapters available for other models.



Quick-Draw Professional FOR CAMCORDERS OR STAND ALONE CAMERAS



- Designed for working from the back of a van or the trunk of your car. The top loading case has a wide open fold back top that stays neatly out of the way. It's lighter and more compact than shipping cases, thus saving valuable storage space. With other equipment crowded around it the sturdy built-in frame provides added protection.
- Heavy duty shoulder strap & comfortable leather hand grip
- Carry it in crowds - crush proof aluminum guard protects viewfinder
- Fits into back seat and fastens securely with seat belts.
- Holds camera with on-board battery attached
- Lid closes with Velcro for quick-opening or secure with full-length zippers.
- Two trim exterior pockets and clip board pocket
- Dual purpose rear pouch is an expandable battery chamber or all-purpose pouch



Logic Series DIGITAL Gold Mount Batteries



The Logic Series DIGITAL batteries are acknowledged to be the most advanced in the rechargeable battery industry. In addition to the comprehensive sensors integral to all Logic Series batteries, each DIGITAL battery has a built-in microprocessor that communicates directly with Anton/Bauer InterActive chargers, creating significant new benchmarks for reliability, performance, and life. They also complete the communications network between battery, charger and camera. With the network in place, DIGITAL batteries deliver the feature most requested by cameramen: a reliable and accurate indication of remaining battery power.

DIGITAL PRO PACS

The Digital Pro Pac is the ultimate professional video battery and is recommended for all applications. The premium heavy duty Pro Pac cell is designed to deliver long life and high performance even under high current loads and adverse conditions. The size and weight of the Pro Pac creates perfect shoulder balance with all camcorders.

- DIGITAL PRO PAC 14 LOGIC SERIES NICAD BATTERY**
14.4v 60 Watt Hours 5 1/8 lbs.
Run time: 2 hours @ 27 watts, 3 hrs. @ 18 watts
- DIGITAL PRO PAC 13 LOGIC SERIES NICAD BATTERY**
13.2v 55 Watt Hours 4 3/4 lbs.
Run time: 2 hours @ 25 watts, 3 hours @ 17 watts

DIGITAL MAGNUM COMPACS


Extremely small and light weight (almost half the size and weight of a Digital Pro Pac), the powerful Compac Magnum still has more effective energy than two NP style slide-in batteries. The high voltage design and Logic Series technology eliminate all the problems that cripple conventional 12 volt slide-in type batteries. The Compac Magnum is the professional choice for applications drawing less than 24 watts. Not recommended when using an UltraLight.

- DIGITAL COMPAC MAGNUM 14 LOGIC SERIES NICAD BATTERY**
14.4v 43 Watt Hours 2 3/4 lbs.
Run time: 2 hours @ 20 watts, 3 hours @ 13 watts
- DIGITAL COMPAC MAGNUM 13 LOGIC SERIES NICAD BATTERY**
13.2v 40 Watt Hours 2 1/2 lbs.
Run time: 2 hours @ 18 watts, 3 hours @ 12 watts

Field Report

Studio Audio and Video SADiE

By Ian Britton

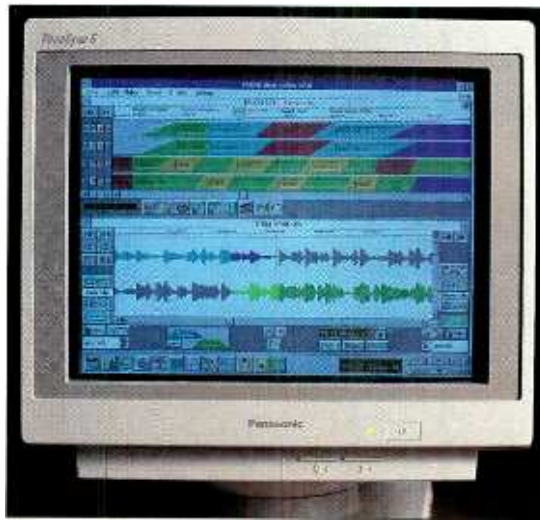

Metro Radio operates a group of commercial radio stations in northern England. The company's commercial production department has as its core business the production of effective radio advertising for the stations' clients.

In the fall of 1993, the department was planning an upgrade of its 8-track analog system when we encountered Studio Audio and Video's SADiE at an exhibition. This caused us to change our minds about the direction of the upgrade. Three months later, a SADiE system was installed, and we have never looked back.

Setup and operation

SADiE is a PC-based digital audio disk editor, using a 486 computer running under DOS 6 and Windows 3.1. A turnkey system includes the PC, SADiE software, a digital audio processing card, an analog converter/time-code card, 1.2GB SCSI drive for storing audio data and a breakout box. The system has two inputs and four outputs, all available in S/PDIF, AES/EBU and analog formats. Up to eight tracks can be played simultaneously. Interconnections to the rest of the studio are straightforward using the breakout box that is supplied.

The system's operating instructions are clear and concise, which meant that by the end of day one we were making commercials on the system. It was always our intention to attend a SADiE training

Performance at a glance:

- A fast and user-friendly disk-based digital audio workstation
- Operates on IBM-compatible PCs in Windows 3.1 environment
- Eight-track system with mixing and powerful audio processing
- Screen displays and design philosophy keep learning curve short
- Appropriate for radio and TV production applications
- Can be outfitted with removable SCSI drives for efficient accommodation of multiple ongoing projects



The author at work on SADiE, in the Metro Radio Group's production studio in Newcastle, England.

course after the first month, but we found the system so easy to use that in the end we didn't bother. The system was clearly designed by sound engineers who have made it operate in an intuitive way.

You record into SADiE just like any tape machine except you give each recording a name and then the computer automatically allocates take numbers. Once audio is in the system, you can work on it as if it's in a word processor: cut, copy, paste, change the EQ, slow it down, compress it, even play it backward. It really is that simple. All editing is non-destructive, so at any time you can start a job again. The audio is actually stored on a SCSI drive that holds up to two hours of stereo, or four hours of mono audio (on the basic system costing \$9,995). At Metro Radio, we have since added another SCSI drive to increase our storage to five hours stereo or 10 hours mono.

Real-world advantages

In this facility, SADiE has been used exclusively for producing radio commercials. It has been standard practice for us to record one basic commercial with 17 different inserts or tags, to run on 17 different stations. On an 8-track tape system, this involved a few hours work. On SADiE the same job can be completed in less than half the time. On more complex jobs SADiE can save even more time.

Another common discipline in commercial production is making ads with precise, standard running lengths (typically in increments of 10 seconds). Working on a multitrack tape system, it could take 20 minutes to lay all the sound for a 40-second spot, only to discover it was two seconds short. Another 20 minutes of work

Britton is production manager at Metro Radio Group PLC, Newcastle, England. Respond via the BE FAXback line at 913-967-1905.

followed to re-lay everything. With SADiE it only takes 10 minutes to lay all the sound, and if it comes up short, it's just a minute's work with the mouse to re-space everything.

SADiE also will allow you to mix the sound using faders on the screen. There is even automation on the faders so you can build up a complex mix and then store it for later use. Alternatively, it is possible to mix down internally to one stereo pair.

The system allows great flexibility in editing announcer tracks to correct errors or piece together the perfect take. The same can be done for music beds. By placing multiple versions of a bed

After eight months of constant use, we are pleased to report that we have had no problems.

into SADiE, you can cut any version you want. You can also perform some beautiful music edits. For example, I recently turned out a 30-second, 40-second and 50-second version of Mozart's "Marriage of Figaro." SADiE has had such a positive effect on our productivity we now handle the complete production load for two radio stations. This amounts to an average of 100 finished commercials a week.

In another recent case, a client called and asked for her 30-second ad to be recut to 20 seconds. Fifteen minutes later the job was done. Her boss then changed his mind, so we cut it yet another way instead. Eventually, the client was delighted with the end product — so much so that a bottle of champagne arrived on our doorstep the next day.

SADiE has other features that we never have occasion to use but perhaps some would find useful. For instance, you can use SADiE to help in the production of CD-R discs. You load all the audio into the system, add the cues and the system will speak directly to a CD-R recorder, automatically placing all the cues appropriately. You can also do all the prep-

aration work for the master of a standard, mass-produced CD.

Reliability

When we decided to invest in a SADiE system, one area of concern was how reliable it was going to be. Stories abound on other hard disk editors crashing in the middle of a session. If SADiE were to crash at anytime, it would have an unacceptable impact on the running of the studio. Clients would lose faith and the facility's image would suffer. After eight months of constant use we are pleased to report that we have had no problems. The system has even survived power outages with no ill effects.

Since Metro Radio has invested in SADiE, two other production companies have visited the station to see the system in operation. In both cases they have gone out and bought one.


By now you will have gathered that staff members at this operation are fans of the SADiE system, and all of its benefits. You need to get your hands on one to fully appreciate all it could do for your

business. The management at Metro Radio will tell you that SADiE's biggest impact has been on the bottom line. The system has made us a smarter operation, allowing us to offer a better service to our clients while at the same time becoming more profitable. ■

See "Radio SADiE" on page 98

Editor's note: Field Reports are an exclusive BE feature for broadcasters. Each report is prepared by the staff of a broadcast station, production facility or consulting company. These reports are performed by the industry and for the industry. Manufacturer's support is limited to providing loan equipment, and to aiding the author if requested. It is the responsibility of *Broadcast Engineering* to publish the results of any device tested, positive or negative. No report should be considered an endorsement or disapproval by *Broadcast Engineering* magazine.

➔ For more information on Studio Audio and Video's SADiE, circle (338) on Reply Card.

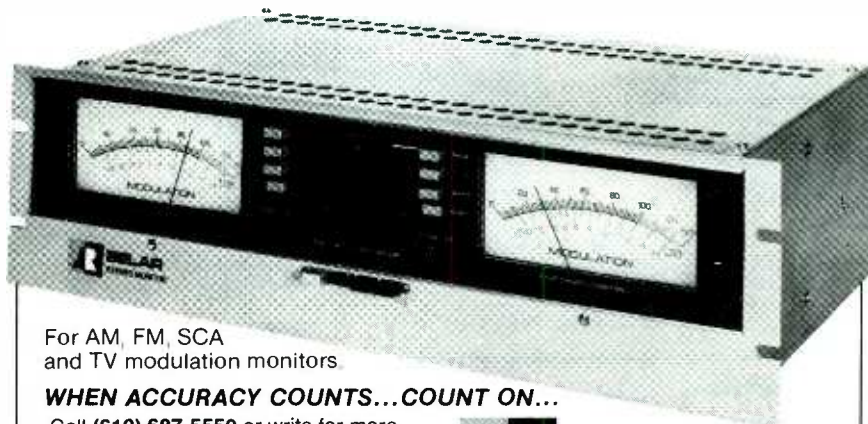

For AM, FM, SCA and TV modulation monitors

WHEN ACCURACY COUNTS...COUNT ON...

Call (610) 687-5550 or write for more information on Belar AM, FM, Stereo, SCA and TV monitors.
FAX: 610-687-2686

BELAR
ELECTRONICS LABORATORY, INC.
LANCASTER AVE. AT DORSET, DEVON, PA 19333

Circle (53) on Reply Card

FREE 44pg Catalog & 80 Audio/Video Applic.
PWR SUPP. EQ. 250 PRODUCTS
PHONO, MIC, TRANS, ACH, TAPE, VIDEO, LINE, OSC, PRESS BOXES
1-in/18-out Video/Audio
1-in/18-out Video/Bus
2-in/24-out Audio Only
1-in/2-out Video/Audio
Video & Audio Dist. Amps.
RGB Sync Dist. Amps.
Routing Switchers
OPAMP LABS INC (213) 934-3566
1033 N Sycamore Av LOS ANGELES CA, 90038

Circle (55) on Reply Card

PC STUDIO AUTOMATION!

- Sony 9 Pin RS-422
- 2, 4, & 8 Port RS-232, 422 & 485
- Relay I/O Boards
- Driver Software Available
- Made in USA
- Excellent Technical Support
- Call for FREE Catalog

Sealevel Systems Inc.
P.O. Box 830
Liberty, SC 29657
803-843-4343

SEALEVEL
COMMUNICATIONS & I/O

Circle (54) on Reply Card

Radio SADiE

By Richard Dean

The installation of 24 SADiE systems at the BBC's Network Radio facility in Bristol, southwest England, has done more than save time and tape costs. It has turned an ardent sticky-tape and razor-blade man into an almost evangelically zealous technological convert.

Ian Bell, senior history and travel producer for BBC Radio 4 features department, admits to having harbored a strong skepticism toward computer-based editing techniques before the radio network installed its first SADiE last summer. By fall, he was convinced.

So how does an old-style 1/4-inch producer get along without a trusty edit

block? The first step is to log raw material recorded on DAT and load it into the disk editor. The next step is to go through the footage and make the edit decisions. This is where the digital workstation approach really scores over traditional methods. Not only are individual actions reversible — there are 25 layers of undo on the latest software release — but the original remains intact.

Because SADiE operates in a Microsoft Windows environment, other applications can share the screen. When Bell is working on presenter links or the instructions for ambiances or music, he likes to run a word processor (in this case Word-



SADiE in a studio at the BBC's network radio production facility in Bristol, England. This is one of 24 SADiE systems now in use at that facility.

Perfect) on the lower half of the screen. This allows him to time scripts while keeping an eye on the progress of existing tracks in the upper window.

Applications abound

At BBC's Pebble Mill facility, where much of the network's radio drama originates, all six SADiE systems have removable SCSI drives. This enables all original recordings to be transferred to studio post-production systems, where engineers can immediately add music and effects without having to load edited DAT material onto disk first.

Another advantage of this "transportable media" approach is that any errors in existing work can be corrected in its native format. By opening up a SADiE Processor window, the operator offers a console's worth of digital signal processing functions, available to each channel, and all performed in real-time. Like most other parameters, these are set with the mouse, and can be saved to disk for reuse on other material. All major input/output signal standards and digital sampling rates also are supported, plus analog I/O and SMPTE or MIDI time code.

The secret to SADiE's speed is that the audio is processed through a custom-designed internal card (which appears in a number of OEM products including the Lightworks video editing system), leaving the 486 host computer to concentrate on remembering edit decision lists and supporting screen graphics.

"When I started at Birmingham in 1979, I thought my Uher portable ATR and typewriter were the ultimate tools of the trade," Bell recalls fondly. "I have since concluded — if reluctantly at first — that however good you are with a razor, there are some SADiE edits that are simply not possible any other way."

Great News!

Shielded Tape Erasers

Features:

- Shields your employees from low frequency electromagnetic radiation.
- Full erasure without spoking.
- Modern design and construction.
- Rack mountable.
- Low weight & small footprint.
- Low power consumption.
- Very competitive pricing.



WEIRCLIFFE
World Class Quality™ since 1964

Call Today 1-800-227-8887


Preco Inc., 7720 East Evans Road, Scottsdale, Arizona (602) 483-6645 Fax: (602) 483-9357
In Canada call: The Pringle Division (416) 222-2447

Circle (63) on Reply Card



DATA TRANSMISSION IN VERTICAL BLANKING

PUT YOUR
VBI TO
WORK-



VBI232 Encoder / Decoder board plugs into LEITCH or GRASS VALLEY GROUP DA frames.

The VBI232 allows any RS232 data to be transparently inserted and recovered from a user selectable line in the vertical blanking interval of a baseband video signal

- THINK OF THE POSSIBILITIES!

broadcast video systems ltd.

40 West Wilmot St., Richmond Hill, Ontario L4B 1H8
Telephone: (905) 764-1584 Fax: (905) 764-7438

Circle (62) on Reply Card

BE FAXback survey

Broadcast Engineering magazine is always interested in what readers want to know. You can help us in planning our coverage of industry issues by completing this questionnaire.

Please complete the following questions and mail or fax it back by Aug. 1. (Fax 913-967-1905) (Mail to *Broadcast Engineering* magazine, 9800 Metcalf, Overland Park, KS 66212-2215)

Name _____

Title _____

Address _____

State, zip _____

Telephone number (optional) _____ Fax # (optional) _____

(Respondents who provide their telephone number may be called by BE editors so we can better understand your concern.)

Type of facility: Radio _____ TV _____ Post-Production _____ Other (describe) _____
Market ADI _____

Please answer those questions pertaining to your type of facility, as well as the common-issue questions.

Common issues:

(All respondents should answer these questions.)

- 1) Describe one area of technology you need to know more about. _____
- 2) Do you use any electronic communication service? (CompuServe, Prodigy, America On-Line, Internet)
Yes _____ No _____ What service do you use? _____
How often? Daily _____ Weekly _____ Once or more per month _____
- 3) Do you have CD-ROM capability? Yes _____ No _____
- 4) Would you use the BE BBS to provide feedback to our editors and for other purposes? Yes _____ No _____
- 5) What kinds of articles would you like to see more of? _____

TV facility questions:

- 1) Is your facility planning now to implement HDTV? Yes _____ No _____
If so, when will you first make a purchase? _____
- 2) Is your facility planning on implementing any non-HDTV 16:9 production capability? Yes _____ No _____
- 3) Does your facility have non-linear editing capability? Yes _____ No _____
If not, when do you plan to add that capability? _____
If yes, what brand of editor are you using? _____ How many do you have? _____
- 4) What primary use in your facility do you see for video servers? _____
- 5) What percent of your equipment/facility is digital? Audio _____ Video _____
How long will it be until your facility is 90% digital? _____

Radio facility questions:

- 1) Is your station planning now to implement RBDS? Yes _____ No _____
If yes, when will you first make an RBDS equipment purchase? _____
- 2) Is your station automated? Yes _____ No _____ If yes, what dayparts? _____
- 3) Concerning cart replacement, do you favor a digital cart machine or a PC-based hard disk/file server? _____
- 4) Does your station have a digital audio workstation? Yes _____ No _____
If no, do you plan to purchase one? Yes _____ No _____ When? _____
- 5) Does your station use switched 56 or ISDN services? Yes _____ No _____
If so, for what purposes? _____
- 6) Are you involved in an LMA or duopoly-type arrangement? Yes _____ No _____
If so, how would you describe the results of that arrangement so far? _____
- 7) What types of radio technology do you need to know more about? _____

Professional Services

JOHN H. BATTISON PE.
CONSULTING BROADCAST ENGINEER,
FCC APPLICATIONS AM, FM, TV, LPTV
Antenna Design, Proofs, Fieldwork
2684 State Route 60 RD #1
Londonville, OH 44842
419-994-3849

NETCOM

STATE-OF-THE-ART ENGINEERING FOR AUDIO & VIDEO

TURN-KEY SYSTEMS
DESIGN & DOCUMENTATION
EQUIPMENT SALES
CAD SERVICES

1465 PALISADE AVE., TEANECK, NJ 07666 / (201) 837-8424

East Coast Video Systems

ON-LINE IN-TIME

A full service
Company providing...

- Consultation
- Engineering & Design
- Installations
- Training

Serving...

- Cable Systems
- Corporate Facilities
- Broadcast Facilities
- Teleproduction Facilities

52 Ralph Street, Belleville, NJ 07109 (201) 751-5655

CHAN & ASSOCIATES

A Consulting Service for the Professional Audio/Video Industries

Business Development • Marketing • Public Relations • Writing

CURTIS J. CHAN

Principal

2212 Heritage Way, Fullerton, CA 92633
Phone 714-447-4993 Fax: 714-578-0284

Radio Systems Engineering

FCC Applications
Systems Design • Installations
Property Evaluation
AM-FM

3031 Dogwood Lane
Florence, SC 29505

800-399-1501 24 Hr
803-661-2933 facsimile

For Classified Advertising or
Professional Services
information Call Renée
Hambleton at (913) 967-1732
FAX (913) 967-1735

Classified

FOR SALE

STUDIO EXCHANGE BURBANK
(818) 840-1351 FAX (818) 840-1354
NEW & USED VIDEO EQPMT.
BUY, SELL, CONSIGN;
25 YRS. EXP.

Quality, Used Video Equipment

AURORA AU-280 CADET Graphics System with
3-D, multi-machine control, 600mb optical disk,
and 4.2 software. \$25,000

CHYRON 4200 Character Generator \$10,000

CHYRON SCRIBE CG with Adv. font create and
approx. 15 fonts. \$7,000

SONY BVW-25 Portable Betacam VTR. \$3,500

SONY Series 5 SYSTEM VO-5800 U-matic, VO-

5850 U-matic Editor Deck, and RM-440. \$5,000

SONY VO-9600 U-Matic-SP Recorder \$1,700

MICOR VIDEO EQUIPMENT
CHICAGO 312 334 4300

RS422 VTR REMOTE CONTROL
with TIMECODE DISPLAY & JOGWHEEL

SONY, AMPEX, JVC, BTS
PANASONIC, HITACHI

Low Cost — Lots of features

DNF INDUSTRIES


(213) 650-5256 • LA, CA 90069

CALL US For New and Rebuilt
Radio Broadcast Equipment

HE HALL
Electronics
(804) 974-6466

1305-F Seminole Trail • Charlottesville, Va. 22901

TAPE ERASERS

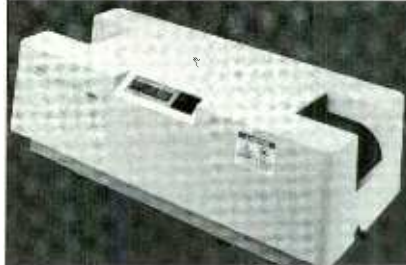

garner

WHEN COST IS
IMPORTANT AND
QUALITY IS CRITICAL

1-800-228-0275

Erases all formats in
quantities of 1 to 1,000,000

garner industries

4200 North 48th Street • Lincoln, NE 68504

Circle (72) on Reply Card

Our
prices
can't
be
beat.

Factory Direct Cases



Custom
or Stock
Sizes

Call for
Catalogue or Quote
Roadie Products, Inc.

800-645-1707
In NY 516-563-1181
Fax: 516-563-1390

AMPEX VPR-3 Air Supply Assembly, Ampex ADO-1000
keyboard, Ampex Ace keyboard, BTX Shadow,
Panasonic TQ-2024F disc, Fortel Y688 TBC, Video Heads,
3/4" VCRs, players and HP5334B counter. 15150 De La
Pena Circle, Rancho Murieta, CA 95683. (916) 354-1990
or 920-8339.

HAVE CABLES

ASSEMBLED • BULK • CUSTOM



HAVE PROFLEX™
BELDEN

CANARE™
WEST PENN WIRE
MOGAMI

FREE CATALOG of Audio/Video Tape,
Cable, Equipment, Accessories, Supplies

518/828-2000

309 POWER AVE. HUDSON, NEW YORK 12534

Sony Interface for your VPR-2 or BVH-1100

- Convert Sony serial to parallel control.
- Complete editing capability.
- RS-422 Interface for editors and automation.
- Controls ATR's and VCR's.



Phantom II VTR Emulator

FOR INFORMATION:

Call 1-800-331-9066



30 W. PATRICK ST., SUITE 310
FREDERICK, MD 21701

Circle (70) on Reply Card

BROADCAST QUALITY SCA DECODER CARD — \$20.00.
Large quantity available. Contact: Background Music
Engineering, P.O. Box 2142, Springfield, MO 65801. Call
800-944-0630/417-881-8401.

Classified

FOR SALE

SONY . AMPEX . BTS . DUBNER GRASSVALLEY . PANASONIC

If You're Looking For the Best in Used Equipment
and You Want the BEST: . **DEAL . VALUE . SERVICE**
CALL MIDWEST: (708) 251-0001 . CANADA (604) 850-7969

midwest

AUDIO/VIDEO EXCHANGE, INC.
1131 Central Ave. Wilmette, Illinois 60091
International Brokers and Appraisers Serving the Audio / Video Industry

Circle (71) on Reply Card

BE
CLASSIFIEDS



913-967-1732
Ask for
Renée.

BCS Builds Systems Affordably!

Thinking of building a new studio, post facility,
graphics suite, truck, or broadcast station?
Consult with BCS's systems experts. You'll get
world class engineering, turn-key performance
from design to installation, guaranteed workman-
ship, follow-up maintenance and a great price.

BROADCAST STORE
Systems Engineering & Integration
LA-818-551-5858 NY-212-268-8800

DUB FRIENDLY.

Make dubs on recycled video
tapes. Save money, save the
planet. Every tape guaranteed.
For more info, or to order, call: **CARPEL**
(800) 238-4300

BROADCAST engineering

9800 Metcalf
Overland Park, KS 66212
(913) 967-1732
Fax (913) 967-1735

Call
Renée Hambleton
for all your
advertising needs

HELP WANTED

EDITOR - VIDEO SYSTEMS, the leading professional video magazine, has an excellent opportunity for the EDITOR to plan, develop and implement editorial content and oversee production of monthly publication. Will represent magazine as speaker and attendee at trade shows and serve on committees of industry associations. The successful candidate will have five years' managerial exp. in publishing, professional video or a related field. A bachelor's degree in Journalism, Radio/TV, Engineering/Electronics or a related field is required. Please send resume and salary requirements to: Intertec Publishing, Human Resources Dept. EVS, P.O. Box 12901, OP, KS, 66282-2901.

TRANSMITTER/STUDIO ENGINEER needed for top 40 market UHF-TV station. SBE Certification desirable. Experience maintaining UHF full power transmitters required. Knowledge of Type "C", Betacam SP, and U-Matic videotape maintenance also desired. Full time position, EOE. If interested please send (or FAX [804] 399-3303) resume to WGNT-TV Channel 27, Attention: George Randell, 1318 Spratley Street, Portsmouth, VA 23704.

MAINTENANCE TECHNICIAN: Familiar with installation, maintenance, and operations of all types of TV Broadcast Equipment. Prior experience with TV Broadcast Equipment required. FCC license required. Send resume to: WXEL PERSONNEL DEPT., P.O. Box 6607, West Palm Beach, FL 33405. NO PHONE CALLS PLEASE!! WXEL is an EOE, M/F/H.

CHIEF ENGINEER: Min. 5+ years broadcast experience. Familiar with scheduling, operations, installation, and maintenance of equipment for TV station including transmitter. FCC General Class & SBE Certification License required. Send resume to: WXEL PERSONNEL DEPT., P.O. Box 6607, West Palm Beach, FL 33405. NO PHONE CALLS PLEASE!! WXEL is an EOE, M/F/H.

MASTER CONTROL OPERATOR: Min. 5 years Exp. & FCC License Required. Send Resume to: KRCA-TV CH62, 1813 Victory Pl., Burbank, CA 91504. An Equal Opportunity Employer.

CHIEF ENGINEER - Become part of a team that is developing an amazing News and Technology environment. Located in the Washington, DC area, it will include a digital broadcast studio, a HD theater and multimedia interactive displays. Must have 10 years experience in broadcast engineering and computers. Please fax resume to The Freedom Forum 703-284-3509 or send to: Director of Human Resources, The Freedom Forum, 1101 Wilson Blvd., Arlington, VA 22209, no phone calls please, EOE..

MAINTENANCE ENGINEER opening at Century III at Universal Studios, Orlando, FL. Large post facility loaded with state of the art equipment. Must be capable of troubleshooting studio equipment to the component level. Experience in maintaining digital and microprocessor-based equipment required. Send resume to: 2000 Universal Studios Plaza, Orlando, FL 32819. Attn: David Wilson, or fax 407-352-8662.

ENGINEER WANTED: Northern Ontario company looking for a full-time engineer to maintain 2 A.M. radio stations. Experience with both transmitters and studios required. For more details contact our retiring engineer, Bob White. (705) 647-7334.

SMALL TV STATION with high standards and excellent equipment needs a hands-on type chief engineer. Maintenance skills essential for this position. Good benefits and good salary. We are an EEO employer. Please send resume to: Broadcast Engineering, Dept. 743, P.O. Box 12901, Overland Park, KS 66282-2901.

ASSISTANT VICE PRESIDENT ENGINEERING: SCETV is seeking someone to assist the Vice President in the planning, design, construction, operation, and maintenance of technical facilities used in the production and transmission of television and radio programs. This includes television studio facilities, recording and post production facilities, master control, television and radio transmitter facilities, satellite uplink and downlink facilities, microwave systems, ITFS transmitting and reception systems, fiber optic systems, building distribution systems. Must be a Registered Professional Engineer in South Carolina and have a Commercial Radio Operators License from the Federal Communications Commission. Must have a BS degree in engineering and eight (8) years experience or equivalent training and experience in the design and construction of: television and radio transmitting facilities, satellite earth terminals, television and radio studio facilities, microwave transmission systems, fiber optic systems, digital systems and the architecture of computers and computer systems. Must be qualified and experienced in the use of computer programming for engineering purposes. EOE. SALARY RANGE: \$39,254-\$58,882. 40 HOURS PER WEEK. POSITION #: 119768. For More Information Contact: Ethel Brown, Personnel Assistant. (803) 737-3457.

KMGH TV is seeking a Maintenance Engineer. Must have 5 years experience in a TV station maintenance situation, component level troubleshooting skills, Associates degree in Electronics, and FCC General class license. Good interpersonal skills, and ability to work well under pressure needed. Must be willing to work nights and weekends. Send or Fax resume to KMGH TV, Attn: Ron Hays, 123 Speer Blvd., Denver, CO 80203. Fax: 303-861-5694.

WANTED: Assistant Chief Engineer. Requires strong management and technical skills. Experience, 10 years in television. 3 years in a management position. Send resume to: KLAS TV, P.O. Box 15047, Las Vegas, NV 89109. Attn: Management. NO CALLS PLEASE.

TRI-STATE CHRISTIAN TV has chief engineer openings in different locations. Must possess good basic electronic skills. Experience in broadcasting helpful but not required. Send resume to P.O. Box 1010; Marion, Illinois: 62959. An EEO employer.

FULL TIME INSTRUCTIONAL TELEVISION TECHNICIAN at Wisconsin Indianhead Technical College - Rice Lake, WI. Candidates must have two years of post-secondary education in electronics; two years of full-time work experience in audio-visual services, microwave, and/or television studio engineering field; or one year post-secondary education and four years full-time work experience. WITC Office and Technical Support application must be postmarked by July 8, 1994. Contact: Educational Services Assistant, WITC Rice Lake, 715/234-7082. TDD #715/468-7755. AN EQUAL OPPORTUNITY EMPLOYER.

CHIEF ENGINEER, Las Vegas, NV. New 24-hour cable channel needs a chief and assistant knowledgeable in video cart and disk based recording, "C" band uplinks, fiber optics, Abekas and general broadcast equipment. Chief will be responsible for design, construction, maintenance and training in this state of the art facility. Please mail resume to: Robert Porter, 4009 Rand Ct., Sherman Oaks, CA 91423-4704. Fax 818-986-3979.

MAINTENANCE TECHNICIAN for studio/transmitter. Experienced in Sony Beta Cart, Beta SP Players, as well as 1" VTRs. Other equipment includes GVG 1600's, GVG 300, Sony BVE 5000 editor and Harris TVE 120S transmitter. Send resume and salary requirements to Chief Engineer, WGBS-TV, 420 North 20th Street, Phila, PA 19130 or Fax to (215) 563-5786. No phone calls please. M/F EOE.



Classified

HELP WANTED

AVID TECHNOLOGY BROADCAST PRODUCTS GROUP

With over 4,000 installations worldwide, Avid is the global market leader in disk-based technology for recording, editing, and playback. Our rapid expansion into the broadcast industry is being fueled by the overwhelming success of our digital news gathering and commercial playback systems. We are pleased to offer the following opportunities:

Broadcast Maintenance Engineers

As a broadcast engineer, you will provide in-depth technical support to all members of our Broadcast Products Group. Working in a fast-paced environment, you will assist the Support, Engineering, Sales and Marketing departments with daily technical and operational issues; maintain, repair and update demo systems; test new product developments, and assist the field sales force with operational and technical issues. Candidates must have at least 3 years' engineering experience in a broadcasting environment. Knowledge of computer systems highly desirable. **Dept. BME**

Customer Support Representative

As a customer support representative, you will respond to customer inquiries, provide on-site technical support, and collaborate with Engineering to test new product development. We seek an individual with excellent troubleshooting, diagnostic and communication abilities to provide front line telephone customer support. Candidates must have at least 2 years' experience in the broadcast industry. Computer systems experience is required, as are strong customer support skills. **Dept. CSR**

Software Engineers

As a software developer on our Broadcast products team, you will finalize architecture, design, code and test features. AirPlay, Avid's disk-based playback system for broadcast television, incorporates video compression, disk-array and high-speed networking technology with an easy-to-use Macintosh interface. NewsCutter, Avid's digital nonlinear editing system for news applications, gives you instant random access to material stored on high-speed disks, with built-in tools for titling and transition effects. Bachelor's degree in Computer Science or equivalent, with a minimum of 5 years' related experience is required. Strong C programming skills; C++ experience highly desirable. **Dept. BSE**

In addition to a competitive salary and excellent benefits package, Avid offers an upbeat, exciting environment that is conducive to professional growth.

Interested candidates should forward a resume to the corresponding Department at: Avid Technology, Inc., Metropolitan Technology Park, One Park West, Tewksbury, MA 01876, FAX (508) 640-1552. An Equal Opportunity Employer.



We need an aggressive Broadcast Engineer for Cleveland's busiest technical team. Studio, RF, & Remote experience necessary. SBE Certification preferred. FAX or send your resume FAST to:

Barry Thomas, Dir., Eng.
WMJI/WMMS/WHK
310 Lakeside Ave., 6th Floor
Cleveland, OH 44113
FAX #: 216-696-3299

EOE



TELEVISION ENGINEERS

Turner Broadcasting System, the leading News, Sports and Entertainment system in satellite communications, has career opportunities for engineers with broadcast maintenance experience. These positions demand an extensive background in television engineering and at least two years of training in electronics technology. Turner Broadcasting System offers an excellent benefit and compensation program. Send resumes to:

Jim Brown, Corp. Engineering
Turner Broadcasting System, Inc.
One CNN Center, Box 105366
Atlanta, Georgia 30348-5366
TBS is an equal opportunity employer.

EQUIPMENT WANTED

WANTED: USED VIDEO EQUIPMENT. Systems or components. PRO VIDEO & FILM EQUIPMENT GROUP: the largest USED equipment dealer in the U.S.A. (214) 869-0011.

CASH PAID - for used Klystron and UHF transmitter parts, production equipment, S-VHS tape equipment, etc. Must be reasonably priced...Call 205-718-0003 or Fax list and prices to 205-764-7750.

TRAINING

FCC GENERAL CLASS LICENSE. Cassette recorded lessons for home study. Our 30th year preparing radio technicians for the license. Bob Johnson Telecommunications. Phone (310) 379-4461.

SERVICES



Freeland Products, Inc.
Serving the world with quality
rebuilt tubes since 1940.

CALL TODAY FOR A FREE INFORMATION PACKET

75412 Highway 25 • Covington, LA 70433
800-624-7626 • 504-893-1243
Fax 504-892-7323

BIG DOG COMMUNICATIONS

System Design and Integration
Installation • Troubleshooting
DIGITAL • VIDEO • RF • AUDIO
(209) 962-6254
P.O. Box 39, Groveland, CA 95321

Classified

HELP WANTED

ABC RADIO

CUSTOMER SUPPORT MANAGER/D-CART

AMERICA AND UK/EUROPE

The Australian Broadcasting Corporation is looking for two D-CART Customer Service Engineer/Managers, one for the Americas (based in New York) and one for United Kingdom/Europe region (based in London).

D-CART is the revolutionary multi-user audio system pioneered by the ABC. This leading edge technology is now being used by the world's largest broadcasters. Development work is continuing to expand D-CART into other industries and applications including a fully digital on-air audio mixer.

The success of D-CART in the Americas and UK/Europe has created a need for locally based Customer Service Engineers who will provide local and regional technical support for current and future customers in America, Canada, Mexico (New York position); and UK/Europe (London based position).

You will:

- Be responsible for all customer D-Cart support issues within the Americas/European region.
- Develop and direct appropriate programs and procedures for the maintenance, planning, installation, commissioning, and technical operations for the D-CART customers in the Americas/Europe.
- Ensure the prescribed D-CART technical standards are met efficiently and effectively.
- Oversee and/or perform planning, maintenance, installation, and/or commissioning duties for D-CART in the Americas/Europe.

- Liaise and consult with ABC D-CART Marketing, the Technical Research and Development staff, marketing partners, and external customers as required.
- Perform appropriate duties in other areas connected with support of ABC Digital systems as required.
- Apply corporate EEO policies.

It is expected that you will have extensive experience (5 years +) in digital audio systems including the planning, installation, maintenance, and technical operation of both hardware and software components of similar broadcast and/or audio systems.

You will also have a high level of communication skills and demonstrated abilities in the administration of service personal and software and hardware management.

As well as being suitably qualified, the ability to speak a second language appropriate to the region would be desirable.

This position will be on a contract basis to the Australian Broadcasting Corporation for an initial period of six months, with options to renew. Salary is negotiable and determined by qualifications and the specific terms of the contract.

Initial enquiries should be directed to Reem Saad on +612 333 2209 Australia or by fax to +612 333 1413.

Applications quoting Reference Number ZNR41936/37 should be sent to the Employment Officer-Southside, ABC, GPO Box 9994, Sydney NSW 2001 Australia or by fax to +612 333 3444.

Applications close 1.7.94.

This is an equal employment opportunity and the ABC promotes a smoke-free work environment

ABC

Australian
Broadcasting
Corporation



Apply for a **FREE** subscription to the industry's leading information source, *Broadcast Engineering*.

Turn to the reader service card in this issue and fill out the subscription application section.

Soon you could be receiving monthly issues of *Broadcast Engineering* . . . **FREE!**

BROADCAST[®]
engineering

Note: Sign and date the form to speed processing.



Advertise in *BE Classifieds* and see how your money speaks for you.
Call Renée Hambleton TODAY! at (913) 967-1732 or fax (913) 967-1735

Ad Index

	Page Number	Reader Service Number	Advertiser Hotline		Page Number	Reader Service Number	Advertiser Hotline
Abekas Video Systems	17	7	415-369-5111	Leitch Incorporated	BC	2	800-231-9673
ADC Telecommunications	13,76	5,45	800-726-4266	Lightwave Systems, Inc.	60	36	214-741-5142
Audio Processing Tech. Ltd.	70	41	232-371-110	Magni Systems, Inc.	69	40	800-237-5964
Avid Technology	5	11	800-949-AVID	Matrox Electronic Systems	51	23	800-361-4903
Belar Electronics Laboratory	97	53	215-687-5550	Maxell Corp Of America	11	14	800-533-2836
Belden Wire & Cable	81	57	800-235-3364	Midwest			
B&H Photo - Video	93,94-95	60,61 ..	800-221-5662	Audio/Video Exchange	101	71	708-251-0001
Broadcast Video Systems Ltd.	98	62	905-764-1584	Nikon Electronic Imaging	45	20	800-NIKON-US
BTS Broadcast				NVision, Inc.	29	9	916-265-1000
TV Systems	25,48-49	16,22 ..	800-962-4BTS	Opamp Labs, Inc.	97	55	213-934-3566
Canare Cable, Inc.	90	59	818-365-2446	Orban, Div. of AKG Acoustics	7	12	510-351-3500
Canon USA Broadcast Lens	55	38	201-816-2900	Panasonic Broadcast & TV	34-35		800-524-0864
Center Video Industrial Co.	79	56	800-621-4354	QSI Systems, Inc.	92	48	603-893-7707
Channelmatic	82	64	619-445-2691	Quantel	53	31	203-656-3100
Ciprico Digital, Inc.	100	70	301-695-0200	RE America, Inc.	68	39	216-871-7617
Ciprico	39	27	612-551-4037	Recognition Concepts, Inc.	28	18	702-882-7817
Clear-Com Intercom Systems	59	35	510-527-6666	Rorke Data, Inc.	57	33	800-328-8147
Comark Communications, Inc.	75	44	215-822-0777	Sachtler Corp. of America	21	15	516-867-4900
Conex Electro Systems	89	50	206-734-4323	Sealevel Systems, Inc.	97	54	803-843-4343
Continental Electronics	42	29	214-381-7161	Sharp Copier Division	77		
Dorrough Electronics	56	34	818-999-1132	Sierra Design Labs	89	49	702-831-7837
Dynatech Video Group	1,27	3,17	608-273-5828	Sierra Video Systems	31	10	916-478-1000
EEV, Inc.	65	37	800-DIAL-EEV	Storeel	91	51	404-458-3280
Garner Industries	100	72	800-228-0275	Studio Audio & Video Limited	15	6	353-648-888
G C Video, Inc.	32A-B		505-293-6516	Tascam/Teac America, Inc.	83	58	213-726-0303
Gentner Communications	67	32	801-975-7200	Telex Communications, Inc.	3	4	800-554-0716
Grass Valley Group	18-19	8	800-343-1300	Thomson Broadcast	47	21	800-882-1824
Harris Allied	37	26	800-622-0022	Thomson Tubes Electroniques ...	71	42	201-812-9000
Hitachi Denshi America	IFC	1	516-921-7200	Ultimatte	41	28	818-993-8007
IBC-International				Utah Scientific/Dynatech			
Broadcasting Convention	IBC	46	71-240-3839	Video Group	1	3	800-453-8782
Ikegami Electronics, Inc.	61	24	201-368-9171	Valcom	63	25	519-824-3220
Intertec/HDTV Conference	85		800-458-0479	Vistek Electronics Limited	9	13	628-531-221
Intertec Info Age Books	92		913-967-1856	Weircliffe	98	63	602-483-0303
Jampro Antennas, Inc.	88	47	916-383-1177	The Winsted Corporation	91	52	612-944-8556
JVC Professional Products Co. ...	33	19	800-JVC-5825	WJMK	73	43	407-367-0703
Lectrosonics	43	30	800-821-1121				

Advertising sales offices

NEW YORK, NEW YORK

Gordon & Associate
Josh Gordon
210 President Street
Brooklyn, NY 11231
Telephone: (718) 802-0488
FAX: (718) 522-4751

Joyanne Melton
888 7th Avenue, 38th Floor
New York, NY 10106
Telephone: (212) 332-0628
FAX: (212) 332-0663

OXFORD, ENGLAND

Richard Woolley
Intertec Publishing Corp.
Unit 3, Farm Business Centre,
Clifton Road, Deddington,
Oxford OX15 4TP England
Telephone: (0869) 38794
FAX: (0869) 38040
Telex: 837-469 BES G

AGOURA HILLS, CALIFORNIA

Duane Hejner
5236 Colodny Ave., Suite 108
Agoura Hills, CA 91301
Telephone: (818) 707-6476
FAX: (818) 707-2313

SANTA MONICA, CALIFORNIA

MC Magazine Communications Marketing Corp.
Jason Perlman
Telephone: (310) 458-9987
FAX: (310) 393-2381
Deborah Kern
Phone: 310-458-8080
FAX: 310-393-2381
501 Santa Monica Blvd., Suite 401
Santa Monica, CA 90401

CHICAGO, ILLINOIS

Vitas Urbonas
55 East Jackson, Suite 1100
Chicago, IL 60604
Telephone: (312) 435-2361
FAX: (312) 922-1408

TOKYO, JAPAN

Orient Echo, Inc.
Masayoshi Yoshikawa
1101 Grand Maison
Shinomiyabi-Cho 2-18
Shinjuku-ku, Tokyo 162, Japan
Telephone: (3) 3235-5961
FAX: (3) 3235-5852
Telex: J-33376 MYORIENT

CLASSIFIED ADVERTISING OVERLAND PARK, KANSAS

Renée Hambleton
P.O. Box 12901
Overland Park, KS 66282
(913) 967-1732 FAX: (913) 967-1735

ANY WAY YOU SEND IT THE MESSAGE IS LOUD AND CLEAR

By word of mouth, through the mail, comments and reviews in magazines and more recently through radio, satellite and cable television, the message comes through loud and clear.

IBC is *the* broadcast and electronic media event of the year. Organised by people working in broadcasting and associated fields, dedicated to giving you value for money, IBC offers something for everyone in the industry.

Helpful people, a great Exhibition, a superb Technical Programme with Papers, Panel Sessions and Workshops, a wide range of Social Events in a City with easy access and excellent facilities, you really can't afford to miss it.

**Contact: Sarah Campbell. International Broadcasting Convention
Savoy Place, London. WC2R 0BL United Kingdom**

Telephone: +44 (0)71 240 3839 Fax: +44 (0)71 497 3633


Circle (46) on Reply Card



**AMSTERDAM 16-20
SEPTEMBER 1994**

Preserve Your Still Image Quality!

Store both Component and Composite Stills in a Dual Format STILL FILE® and eliminate the unnecessary transcoding quality losses of a single format still store.

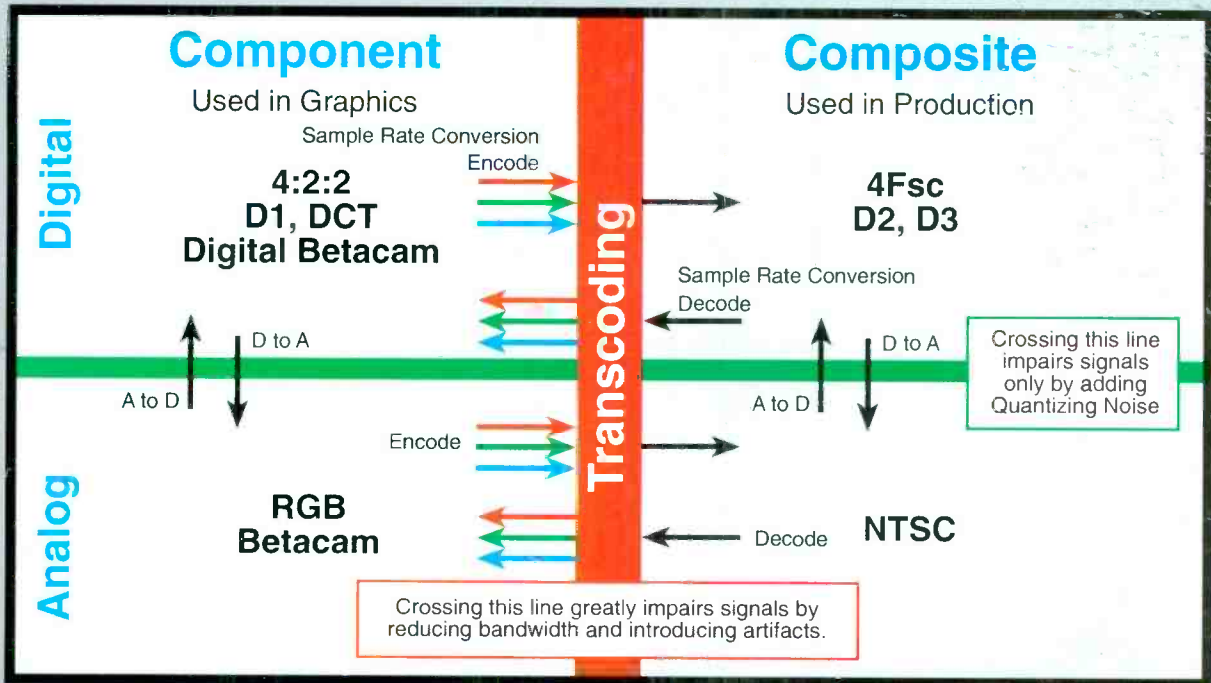

Why Cross This Line?

The Dual Format STILL FILE® stores BOTH Component and Composite stills using one STILL FILE® maintaining the highest quality images by remaining in the original format without transcoding.

But When You Do...

It should be done with the Dual Format STILL FILE® which transparently transcodes all images in the background, producing the same superior quality as the high-priced dedicated transcoders.

Call Now
1-800-231-9673

STILL FILE
DUAL FORMAT®

Still Store Requirements

- ✓ Need D2 for Production
 - ✓ Need D1 for Graphics
 - ✓ Can we have both in one unit?
 - ✓ Simultaneous users available?
 - ✓ Need up to 8 channels
 - ✓ Need 24 hour service
 - ✓ Get Demo
 - ✓ Call Leitch for system quote
- Order on PO# 12345



LEITCH®

Circle (2) on Reply Card

Leitch Incorporated, 920 Corporate Lane, Chesapeake, VA 23320 Tel: (800) 231-9673 or (804) 548-2300 Fax: (804) 548-4088

Leitch Video International Inc., 220 Duncan Mill Rd. #301, North York, ON, Canada M3B 3J5 Tel: (800) 387-0233 or (416) 455-9640 Fax: (416) 445-0595

Leitch Europe Limited, 24 Campbell Ct., Bramley, Basingstoke, Hants., U.K. RG26 5EG Tel: +44 (0) 256 880088 Fax: +44 (0) 256 880428