

BROADCAST[®]

An INTERTEC[®] Publication

August 1995/\$5.00

engineering

Cover Story: Video storage

Also Featured:

- Digital audio workstations
- Format conversion



CNN International Control Room

Nothing's **FASTER** than **LIVE TV!**

And There's No TV
More **LIVE** Than CNN!

WHEATSTONE's TV-600 Audio Control Console gives your operators what they need: powerful mix-minus capability to feed your IFB system; an input preselector matrix, so you can have a myriad of sources – and the option to control them with Wheatstone's built-in Event Computer, a computer that can also talk directly to your station router, letting you integrate your entire system. And of course the TV-600 has plenty of bussing: eight mono or stereo subgroups, with twin stereo masters so you can feed both local and uplink mixes, *plus* mono masters for both SAP and mono sum side chains. Today's TV-600 makes a lot of sense; it offers simplicity of operation, the power to handle challenging tasks, and the professional level of performance that only Wheatstone's experience delivers.



The Wheatstone TV-600 Live TV Audio Console

 **Wheatstone Corporation**

7305 Performance Drive, Syracuse, NY 13212
(tel 315-452-5000/fax 315-452-0160)

Circle (1) on Reply Card



Introducing the best supporting cast in television news.

Over 500 years of design and integration experience are standard on every Harris Allied ENG vehicle.

The difference between a Harris Allied ENG vehicle and others comes from our team's more than 5 centuries of combined experience and world-class engineering capability – right down to component level. Our full-time staff provides unmatched expertise in every discipline, including electrical, mechanical, RF and systems engineering. In fact, Harris Allied has set the industry standard with its M-1ENG vehicles – a design so extraordinary in its utility, that it is the yardstick for every other manufacturer.



Unrestricted customizing insures that you get a guaranteed system perfect for your assignments.

We offer the industry's broadest selection of electronic equipment, backed by the industry's finest warranty and 24-hour support, worldwide. As a result, at Harris Allied you get the best ENG vehicles for your needs. And you never have to accept more or less than you want.

Harris Allied
7920 Kentucky Drive
Florence, KY 41042 USA
Phone: 606 282-4800
Fax: 606 283-2818



Circle (4) on Reply Card

©1995 Harris Corp.



40



54

THIS MONTH...

- 28 Combining Tape and Disk Storage**
By Tim Slate and Ray Baldock
How well do tape and disk systems play together?
- 40 RAID Storage Technology**
By Bill Moren
RAID arrays are needed even with 100-year MTBF disks.
- 54 Optical Storage Solutions**
By Richard Bauarschi
As storage choices broaden, the application rather than the technology can become the defining factor.
- 60 Hard-Drive Technology**
By James Frantzreb
As capacity and throughput increase, hard-drive technology is finding its way into more and more areas of broadcast and post-production.
- 64 Digital Audio Workstations**
By Skip Pizzi
Non-linear production is moving into the audio room, too.
- 70 Getting There: Format Conversion**
By Phil Hejzmanek
The path from origination to delivery can involve many conversions.



60



64

DEPARTMENTS:

- 8 FCC Update:** *Senate passes telecom reform bill*
- 10 EAS Update:** *System overview, part 1*
- 12 Transition to Digital:** *Digital basics, part 1*
- 16 Management:** *The mark of excellence*
- 18 Production:** *Managing resources in a computerized environment*
- 20 Interactive:** *Receiving E-mail*
- 24 ATV Update:** *ATV channel assignments*
- 76 Transmission Technology:** *Tower maintenance secrets revealed, part 1*
- 80 New Products**



12

COLUMNS:

- 4 News**
- 6 Editorial**
- 79 Industry Briefs**
- 84 Classifieds**
- 88 Advertisers' Index**



ON THE COVER:

Video storage has come a long way since the days of 2-inch quad tape. Today's fast-paced video production environments need instantaneous access to source material. The Quantel Clipbox is shown on the cover. (Cover design courtesy of Quantel.)

BROADCAST ENGINEERING (ISSN 0007-1994) is published monthly (except semi-monthly in June and November) and mailed free to qualified persons within the United States and Canada by Intertec Publishing, 9800 Metcalf, Overland Park, KS 66212-2215. Second-class postage paid at Shawnee Mission, KS, and additional mailing offices. POSTMASTER: Send address changes to *Broadcast Engineering*, P.O. Box 12902, Overland Park, KS 66282-2902. CORRESPONDENCE: Editorial and Advertising: 9800 Metcalf, Overland Park, KS 66212-2215. Phone: 913-341-1300; Edit. fax: 913-967-1905. Advert. fax: 913-967-1904. © 1995 by Intertec Publishing. All rights reserved.

Introducing The DSA309 Digital Studio Analyser



All Format Digital Video Analyser: Tests component and composite serial digital video signals in both 525 line and 625 line formats.

Real Time Measurements: Continuous real time, on-line measurements of all key parameters permits live monitoring of:

- Serial Jitter
- Signal Amplitude
- Color Levels
- Non-Recommended Value Errors
- EDH Errors
- Parity Bit Errors
- TRS Errors
- Bit Activity
- Reserved Code Errors

Real Time Color Level Monitoring: Monitors component digital video in real time for RGB or NTSC/PAL color space infractions.

Extensive Error Logging: Permits system performance monitoring and documentation by logging system errors on either the built-in LCD display, external printer, or on the built-in 3.5" disk drive.

Alarm Interface: Provides immediate notification when user defined thresholds are exceeded.

Comprehensive Digital Displays: Complemented by simulated analog waveforms, these displays help bridge the gap between analog and digital testing, creating a user friendly interface for both operations and engineering staff.

Easy To Use: The touch screen interface and easy to use menu system permits full instrument utilization while minimizing user reference to the manual.

**Designing
Excellence**

Circle (5) on Reply Card

**For a comprehensive information
packet, call 1-800-769-AAVS (2287).**

www.americanradiohistory.com

AAVS by Sencore

The Name To Know In Digital Video Testing

Advanced Audio Visual Systems by Sencore
3200 Sencore Drive, Sioux Falls, SD 57107
Direct (605) 339-0100 Fax (605) 339-0317

Sony develops flat panel display

Sony Corporation has developed a flat panel display for large-screen use tentatively called the PLASMATRON. The display is based on Plasma Addressed Liquid Crystal (PALC) technology jointly developed with Tektronix. The display features high-brightness, high-contrast and clear picture quality. Sony plans to introduce PLASMATRON sometime in 1996 in Japan.

The display is an active matrix system that separately addresses each pixel of the liquid crystal. The address method is based on PALC technology, which uses plasma as an electronic switch. The backlight, which is independent of the panel, is used as the light source to reproduce a picture with high brightness. Each single scanning line corresponds to a single plasma channel. The picture is composed of about 450 plasma channels.

To facilitate the multilayer printing process needed in producing the panel's plasma address board, Sony developed a high-precision screen-printing technology. Because the screens can be produced in low-grade clean rooms rather than semiconductor facilities, the manufacturing process is simpler, resulting in higher yield rates and lower costs.

EIA/ATV Committee urges universal access to HDTV broadcasting

Although the Advanced Television Committee of the Electronic Industries Association (EIA/ATV Committee) supports many of the viewpoints of the Broadcasters' Proposed TV Allotment Assignment/Approach filed with the FCC in January, the committee has urged the commission to require broadcasters using the ATV channel to provide universal access to HDTV.

The EIA/ATV Committee feels that now is the time to develop a table of allotments and assignments for VHF and UHF channels. In accordance with the broadcasters' proposal, the FCC should adopt this timetable at the same time it adopts ATV transmission standards. This will give broadcasters, manufacturers and programmers the incentives and tools to implement ATV.

Although broadcasters should be accorded flexibility in their use of ATV spectrum, the committee maintains that it is essential for HDTV to be the centerpiece of the FCC's ATV policies. If the FCC is to achieve its ATV policy goals and ensure that the additional spectrum made available is used in the public interest, broadcasters should be

required to transmit a minimum amount of HDTV broadcasting each day. Alternatively, the commission may wish to pursue a policy that gives broadcasters an incentive to transmit HDTV programming by assigning additional spectrum only to those licensees that demonstrate a commitment to HDTV.

SCTE issues call for papers

The Society of Cable Telecommunications Engineers (SCTE) is seeking abstracts for technical papers. The papers will be presented at SCTE's 1996 Conference on Emerging Technologies Jan. 8-10 in San Francisco.

Topics will include digital compression and transmission, telephony, multimedia and future technologies. Those interested in presenting papers should contact Roberta Dainton at SCTE by calling 610-363-6888 or via fax at 610-363-5898. Submissions are due by Sept. 1 and should include an abstract of the proposed paper.

New Orleans to sponsor World Media Expo '95

New Orleans is the site for the 1995 World Media Expo Show and the SBE/NAB Broadcast Engineering Conference that will run from Sept. 6-9.

The SBE, in cooperation with NAB, will present three days of seminars on various equipment and services important to radio and TV stations. The one-day Ennes Workshops will precede the conference on Sept. 6. The workshops are available for an extra fee and are open to full-paid conference registrants. Registration is on a first-come, first-served basis, and you must pre-register for the Ennes Day.

The Broadcast Engineering Conference is the heart of the seminar schedule. Sessions will focus on regulatory issues, including EAS, unattended operation and FCC/FAA considerations; digital technology for television; RF technology for television; tower design; and safety and liability considerations.

Registrants for the SBE Program are invited to attend the opening reception on Sept. 7. The Ham Radio Reception is Sept. 8, and the awards banquet is Sept. 9.

SMPTE sponsors compression tutorial

The Rochester section of the Society of Motion Picture and Television Engineers (SMPTE) is sponsoring a one-day tutorial compression seminar on Oct. 28. "The Com-

pression Experience" seminar will be held in Rochester, NY, at station WXXI. The morning will be devoted to fundamentals and the theory of digital compression. The afternoon session will focus on digital compression applications for moving pictures and sound.

For SMPTE members, the cost of the one-day event is \$35 for advance registration, which includes lunch. Registration after Oct. 2 and at the door will be \$50.

Non-member advance registration is \$50 but after Oct. 2 and at the door will be \$65. Student advance registration is \$20 or \$25 after Oct. 2.

Inquiries and requests for a registration form should be sent to Tom Hope, 58 Carverdale Drive, Rochester, NY 14618-4004 or faxed to 716-442-1310.

Pixar Animation president to deliver SMPTE keynote address

Edwin E. Catmull, president of Pixar Animation Studios in Richmond, CA, will be the speaker at the opening session of the 137th SMPTE Technical Conference and World Media Expo on Sept. 6 in New Orleans.

Catmull created one of the first computer-generated animation effects for film. He has won three Academy Awards for his company's work with computer graphics and motion imaging on major motion pictures.

The opening session, including the keynote address, is free to all full conference registrants to the SMPTE, NAB, SBE and RTNDA conferences. The session will be held in Meeting Room 42 of the New Orleans Convention Center on Sept. 6.

For more information, contact the SMPTE Marketing Department at 914-761-1100.

Rocky Mountain Film and Video Expo '95 set for September

The eleventh annual Rocky Mountain Film and Video Expo will run from Sept. 26-28 at the John Q. Hammons Convention Center in Denver.

The expo will feature state-of-the-art equipment, cameras, computers, software, lights and sound recording equipment in addition to several speakers and seminars.

For more information, call ExpoMasters at 303-771-2000 or fax 303-843-6232. ■

Coming up in New Orleans:
World Media Expo (202-429-5335)

NIKON'S NEW S20 LENS GIVES YOU LESS.

**LESS WEIGHT. LESS SIZE.
LESS RESTRICTIONS.**



Nikon's newest high performance 2/3" ENG lens, the S20x8 TV Nikkor, is the lightest, most compact lens in its class. It's even a little lighter on your budget, compared to competitive lenses. Virtually the same size and weight as a typical 15x lens, you can use the Nikon S20 as a high performance alternative.

Its internal focus design allows users greater ease of operation and more flexibility with filters and accessories. With a minimum object distance (MOD) of only 31.5 inches and a maximum focal

length of 320mm, with Nikon's 2x extender, the new Nikon S20 lens gives videographers superior range of use.

Like all of Nikon's ENG lenses, the S20x8 boasts aspheric lens technology with minimal chromatic aberration. And its exclusive adjustable zoom torque and new ergonomic design allow you to customize its performance to meet your specific requirements.

To learn more about all the benefits of owning TV Nikkor lenses, including our express loaner lens service, call 1-800-52-NIKON or (908) 758-0308. Or write to Nikon Electronic Imaging, 5775 Lindero Canyon Road, Westlake Village, CA 91362.

Nikon
ELECTRONIC IMAGING

What train?

You country music fans may recall the song that laments those occasions in life when sometimes you're the Louisville slugger and sometimes you're the ball, sometimes you're the windshield and sometimes you're the bug. I recently experienced firsthand what the songwriter may have meant. My analogy was more like that of being hit by a freight train. Not literally, of course, but in a figurative sense. There were times, however, when I would have gladly chosen the literal option.

While struggling to put some perspective on what was going on in my life, I turned to some of my trusted friends and books that have offered me good counsel and advice over the years. For what it's worth, here's some of what I relearned.

One of the most important things I had to rediscover was, as Charlie Brown says, "We need all the friends we can get." In the world of business, it's often easier to make enemies than it is friends. And friends, like plants, need cultivation. When was the last time you called a long-time friend and asked how he or she was doing or planned a lunch date together? If you saw the plants in my office, you'd think I never paid any attention to them. Don't do that to your friends.

I also had to relearn that when business or personal relationships go sour, there are only three ways to make things better:

- Change the situation,
- Change the other person,
- Change yourself.

If the problem is your boss, then changing your job may be the only answer. If the problem is a significant other, then the only solution may be to dump him or her. Tough choices, I know, but let's consider the other two options.

Most of us, especially managers, want to try and change the other person. After all, we're not the problem — the other person or employee is. You can forget trying to change the other person. It doesn't work. How many times have you tried to get those difficult employees of yours (or even your kids) to change their ways? Were


you successful? How long did the improved behavior last — two weeks, a month, maybe 20 minutes? Think about it. Would the imposition of someone else's will on you make you feel any better? Heck no. You'd be as mad about them trying to change you as they are about you trying to change them.

Now, I'm as guilty as the next manager (or parent) in this way, and sometimes I attempt to solve problems by trying to get others to "fix" their behavior. Although I'm a slow learner and it took a while, I finally remembered something I learned a long time ago. That is, it's impossible to change people, places or things.

Which returns me to where I began. My life's lesson this month was to relearn one of life's important lessons: Forget trying to change anything but yourself. You are the only thing over which you have any control. Any other approach is guaranteed to fail.


Brad Dick

Brad Dick, editor

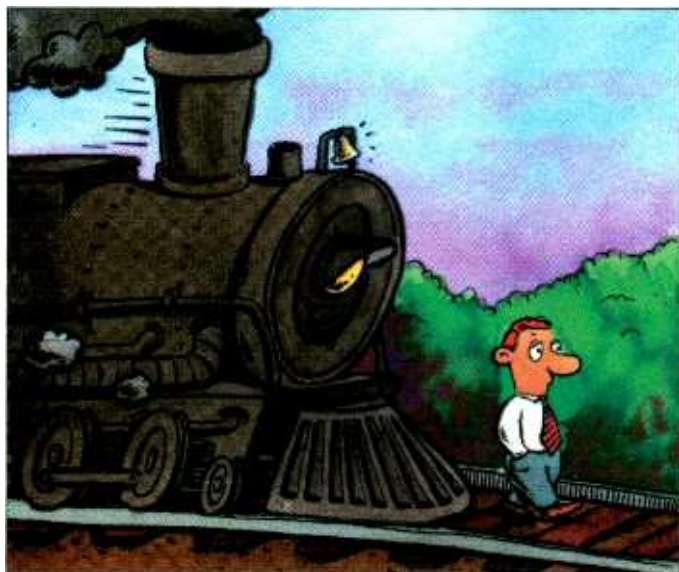

Future-Safe Audio Testing

Carved in Stone?



That's the way most audio test equipment is designed... The instrument maker chooses analog or digital, lays out a front panel, builds in a fixed level of internal processing power and adds a display from today's choices.

They'll never adapt to the future like System One and System Two from Audio Precision.

First a comprehensive selection of digital *and* analog measurement capabilities and options allows you to tailor your initial purchase to an exact fit for your needs of *today*.

Tomorrow, you benefit from continuous product and technology improvements, as System One and System Two grow with your needs. Both System One and System Two allow you to later add options not originally fitted.

DSP versions gain new functions and features by simply downloading different and newer versions of our DSP software.

You get better and faster system performance as well as higher resolution displays by upgrading PC technology without buying new audio measurement hardware. Upgrade to the popular Windows™ graphical user interface.

We introduced our first System One audio test sets in 1985. Today over 4000 of our PC and GPIB-based System One and System Two analyzers are in service worldwide, testing everything from aircraft to automobiles, satellites to cell phones, hi-fi to hearing aids.

Our customers who purchased System One in 1985 are still enjoying the benefits of our open-ended design philosophy. Those who purchase System Two in 1995 will enjoy the same benefits well into the next millennium. You can join them by contacting one of our worldwide Audio Precision representatives today for information and an onsite demonstration.

**Audio
precision**

P.O. Box 2209
Beaverton, OR 97075-3070
(503) 627-0832, 1-800-231-7350
FAX: (503) 641-8906

The recognized standard in Audio Testing



INTERNATIONAL DISTRIBUTORS: **Australia:** IRT Electronics Pty. Ltd., Tel: 2 439 3744 **Austria:** ELSINCO GmbH, Tel: (1) 815 04 00 **Belgium:** Trans European Music NV, Tel: 2 466 5010 **Brazil:** INTERWAVE LTDA., Tel: (21) 325-9221 **Bulgaria:** ELSINCO, h.e. Strelbishte, Tel: (2) 58 61 31 **Canada:** GERRAUDIO Distribution, Tel: (416) 696-2779 **China, Hong Kong:** A C E (Int'l) Co. Ltd., Tel: 2424-0387 **Croatia:** AVC Audio Video Consulting, Tel: (41) 624 622 **Czech Republic:** ELSINCO Praha spol. s r.o., Tel: (2) 49 66 89 **Denmark:** npn Elektronik aps, Tel: 86 57 15 11 **Finland:** Genelec OY, Tel: 77 13311 **France:** ETS Mesureur, Tel: (1) 45 83 66 41 **Germany:** RTW GmbH, Tel: 221 70913-0 **Greece:** KEM Electronics Ltd., Tel: 01-6478514/5 **Hungary:** ELSINCO KFT, Tel: (1) 269 18 50 **India:** HINDITRON Services PVT, Tel: 22 836-4560 **Israel:** Dan-El Technologies, Ltd., Tel: 3-6478770 **Italy:** Link Engineering s.r.l., Tel: 0521/648723 **Japan:** TOYO Corporation, Tel: 3 (5688) 6800 **Korea:** B&P International Co., Ltd., Tel: 2 546-1457; B&P (Kumi Office), Tel: 0546 53-7347/8 **Malaysia:** Test Measurement & Engineering Sdn. Bhd., Tel: 3 734 1017 **Netherlands:** Heynen b.v., Tel: 08851-96300 **New Zealand:** Audio & Video Wholesalers, Tel: 7 847-3414 **Norway:** Lydconsult, Tel: (47) 66-988333 **Poland:** ELSINCO Polska sp. z o.o., Tel: (22) 39 69 79 **Portugal:** Acutron Electroacustica LDA, Tel: 1 9414087 / 9420862 **Singapore:** TME Systems Pte Ltd., Tel: 747-7234 **Slovakia:** ELSINCO Bratislava spol. s r.o., Tel: (7) 784 165 **South Africa:** SOUNDFUSION Broadcast, Tel: 11 477-1315 **Spain:** Telco Electronics, S.A., Tel: 1 531-7101 **Sweden:** TTS Tal & Ton Studioteknik AB, Tel: 31-803 620 **Switzerland:** Dr. W.A. Gunther AG, Tel: 1 910 41 41 **Taiwan R.O.C.:** Cha Wei Electric Trading Co., Tel: 2-5612211 **Thailand:** Massworld Company Ltd., Tel: 662-294-4930 **United Kingdom:** Thurlby Thandar Instruments, Ltd., Tel: (1480) 412451

Windows is a trademark of Microsoft Corporation

Circle (14) on Reply Card

www.americanradiohistory.com



Senate passes telecom reform bill

The House is likely to vote on H.R. 1555 in August or September. If this happens, a final bill could be sent to the president by Oct. 1.

FCC to speed processing of assignment/transfer applications

The FCC's Mass Media Bureau is operating under a new mandate to reduce the backlog of pending TV and radio assignment and transfer applications. The bureau also will be acting more swiftly on current and new applications and petitions. The accelerated processing procedure is based on a new set of review criteria that will result in the dismissal of frivolous or otherwise baseless petitions to deny or oppositions filed against

1) *Jurisdiction* (i.e., whether the FCC has the legal authority to resolve the complaint);

2) *Standing* (i.e., whether the petitioner or opponent has the legal right to file against the applicant);


3) *Remedy* (i.e., whether processing of the assignment/transfer application should be delayed when the likely penalty for an alleged rule violation would be only a small fine).

The staff's new "triage" processing system should result in greater equity and faster service in the assignment/transfer application process.

In June, the Senate overwhelmingly passed the telecom reform bill (S.652). The bill includes amendments to the Communications Act dealing with spectrum flexibility, the elimination of the national numerical cap on the number of TV stations one entity can own, total radio ownership deregulation, a 2-step license renewal process and an extension of radio and TV license terms to 10 years.

The companion bill in the House of Representatives (H.R. 1555) is less deregulatory. It prohibits any entity from owning or controlling two or more TV stations in the same market unless the FCC finds such ownership will not result in a loss of competition or diversity in the market. However, UHF-UHF and UHF-VHF combinations would be permitted unless such ownership results in a loss of competition or diversity.

The House bill would permit the FCC to grant TV license renewals for up to seven years instead of the current five years. The new 2-step renewal process in the House and Senate bill would require the FCC to renew a broadcast license once the agency finds: (a) the station has served the public interest during its license term, and (b) there have been no serious rule violations or patterns of rule violations by the licensee. Applications filed in competition with renewals would not be considered if these threshold public interest findings are made.

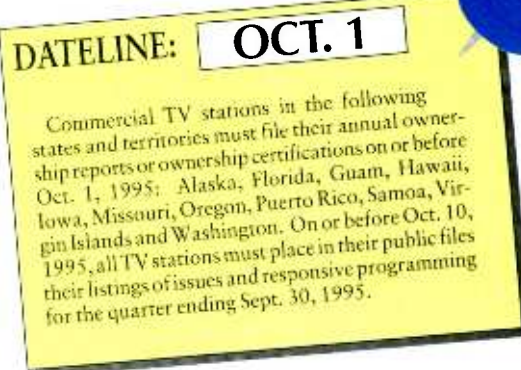

broadcast applications. The Mass Media Bureau's initial goal was to resolve all uncontested cases that had been pending for more than 180 days by June 30, 1995. Some of those cases, particularly those that raised novel issues or involved complex facts, had been pending for years. The staff also set July 31 as the deadline to resolve all contested station sales that had been pending for more than 180 days. In order to achieve these goals, the bureau adopted tougher standards concerning:

FCC adopts 1995 regulatory fees

The FCC adopted new 1995 regulatory fees that require each licensee and permittee to pay for each license or permit granted on or before Oct. 1, 1994. See Table 1 for a list of the fees for each type of authorization.

Licensees with auxiliary licenses (e.g., remote pickup stations, STLs, intercity relay stations and low-power auxiliary stations) must pay a \$30 regulatory fee for each such license. Licensees of low-power TV, TV translator and TV booster stations whose licenses were granted on or before Oct. 1, 1994, must pay a regulatory fee of \$170 per station.

All fees are due on or before Sept. 20, 1995, and must be accompanied by FCC Form 159.

The commission generally has retained the same procedures established in 1994 for the payment of regulatory fees. However, because the time for collecting fees will be limited and regulatees will have at least 90 days' notice of the amount of their fees, installment payments will not be permitted.

1995 REGULATORY FEES FOR TV STATIONS

VHF stations		UHF stations	
Markets 1-10	\$22,420	Markets 1-10	\$17,925
Markets 11-25	\$19,925	Markets 11-25	\$15,950
Markets 26-50	\$14,950	Markets 26-50	\$11,950
Markets 51-100	\$9,975	Markets 51-100	\$7,975
Remaining markets	\$6,225	Remaining markets	\$4,975
Auxiliary station	\$30	Auxiliary station	\$30
Construction permits	\$4,975	Construction permits	\$3,975

Table 1. 1995 regulatory fees for stations.

Harry C. Martin and Andrew S. Kersting are attorneys with Reddy, Begley, Martin & McCormick, Washington, DC.

E-mail:
be@intertec.com

CompuServe:
74672,3124

FAXback:
913-967-1905

Video 18/20 Plus.

The Best. For Professionals.

The only high capacity head with super smooth, pure fluid damping, constant and even counterbalance with any load. The new standard!

- 1** True precise fluid damping: Can be set from "0" for whip pans to the optimum step 7 for extreme telephoto lens.
- 2** Identical damping levels on pan & tilt. Perfect for any diagonal movement.
- 3** The first counterbalance system allowing $\pm 90^\circ$ tilt even under maximum load.
- 4** Unequalled fast and safe: Touch & Go camera locking system with safety lock.
- 5** Illuminating spirit level. "Touch & Light", works with standard batteries.
- 6** Easy to operate: Lightest professional camera heads. All controls are ergonomically designed and positioned.



The new Plus Heads

camera configurations:
Video 18 Plus up to 22 kg/48 lb
Video 20 Plus up to 28 kg/62 lb

アマック ザハトラー株式会社
Japan
Amic Sachtler Corp.
東京都世田谷区三軒茶屋
1-2-21 〒154
電話 (03) 3413-1212
Fax (03) 3413-0888

U.S.A.:
sachtler®
corporation of America
New York office:
55, North Main Street
Freeport, N.Y. 11520
Phone (516) 867-4900
Fax (516) 623-6844

Eastern Europe:
Sachtler
Vertriebsgesellschaft m.b.H.
Germany
Segelfliegerdamm 67
12487 Berlin
Telephone (030) 636 43 11
Telefax (030) 636 34 66

Headquarters:
Sachtler AG
Germany, Gutenbergstraße 5
85716 Unterschleißheim
bei München
Telephone (089) 32 158 200
Telefax (089) 32 158 227
Telex 5215340 sac d



sachtler
Support & Lighting

Circle (15) on Reply Card

www.americanradiohistory.com

EAS update

System overview, part 1

By Paul Montoya

A colleague recently mentioned that he was glad the "BS" has been taken out of EBS. General managers and owners will be happy that their listeners won't be driven away by 22 seconds of obnoxious tones. Engineers will be happy that they don't have to maintain a system that never worked well.

The first phase of the EAS system is already being implemented. These regulations are incorporated into Part 11 of the FCC rules. Before delving into the new system, however, a bit of history is in order.

How we got here

The 2-tone EBS system was established in the early 1970s. This approach provided the most robust way to transmit signals without false triggering. EBS relies on stations passing information from one to another to get the

message to the public. This system breaks down often due to a station not passing on information or because of barriers and distances between stations. By the mid-1980s, problems with this system moved broadcasters and the FCC to consider alternatives. A few of those activities ultimately had input to the new EAS. Here are some examples:

The Colorado Broadcasters Association put together a task force to explore delivery of alerting signals around the state. This was a challenge because of the state's topography. The task force came up with a plan using multiple means for point-to-point communications between broadcasters, including microwave and satellite. This *web* approach became the basis of distribution for the system.

Meanwhile, in the Los Angeles area, another engineering group put together a plan for distributing more detailed information about disasters to news departments around the area. Using *packet radio*, the group developed a method of delivering long-form, coded information around the service area.

The National Weather Service also needed a way to reach specific areas through its VHF-based NOAA Weather Radio. Through basic coded information, it came up with a protocol to notify specific populations with multiple alert levels. The system, called *Weather-Radio Specific Area Message Encoder* (WRSAME), serves as the basis for the data protocol found in the EAS system.

In 1993, the FCC began testing new sys-

tems with the cooperation of state emergency communications groups in Colorado and Maryland. Testing took about a year.

The FCC then proposed rule changes for the EBS system and after processing comments, it issued a Report and Order outlining the rules in December 1994.

Implementation is the key

Given the level of effort put into the development of EAS it should work well for many years to come, if implemented properly. But that's a big "if." Its most important component is not at the federal or the state level, but on the local level. This is where EAS will be used most. If the system works well at the local level, then the state and national plans should fall into place easily.

The EAS should be a system that broadcasters will want to participate in if it's put together correctly. A well-implemented EAS can become a valuable resource for the broadcaster rather than simply a new regulatory burden from the FCC.

Next month, this column will explore how the web system works and why this is such an important part of the new EAS. ■

Paul Montoya is president of Broadcast Services of Colorado, a contract engineering firm in Lakewood, CO.



For information on EAS equipment, circle (100) on Reply Card.

Editbox is editing




QUANTEL

Quantel Inc., 85 Old Kings Highway North, Darien, CT 06820 Tel: (203) 656 3100 Fax: (203) 656 3459

No waiting, no worries, just sheer editing power.

EDIT
BOX™

Circle (16) on Reply Card

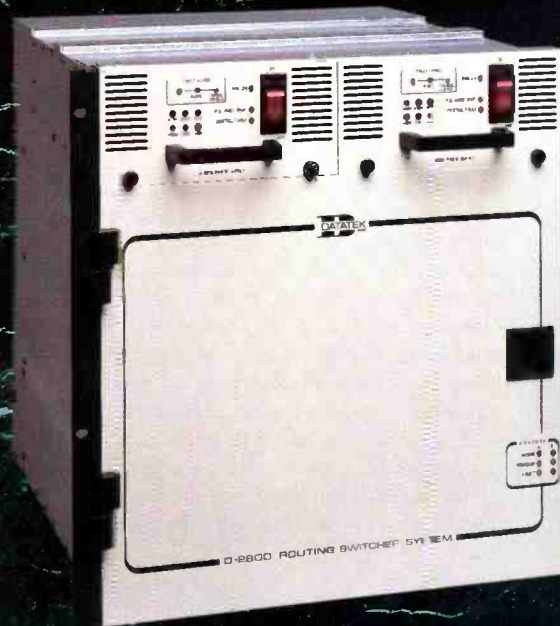

D-2800 Series, systems 32x32 to 1024x1024



D-2600 Series, systems 16x8 to 32x32



No system too small... No system too large.

Datatek's Routing Switchers.

Meeting the needs of every broadcaster...and every budget.

At Datatek, we've been supplying leading-edge routing switchers for large and small broadcast systems for over 25 years. That tradition continues with our newest additions, the D-2800 and D-2600 series. These new switchers support all signal formats: serial digital video, AES/EBU digital audio, data, analog video, analog audio, and time code. The D-2800 and D-2600 also deliver a number of other advantages:

- Total Upgradability—Each switcher uses a common control system, so the smaller D-2600 can be integrated into the larger D-2800 system...when you're ready
- You can mix formats and levels...in the same rack frame
- An advanced virtual tally system
- Serial digital video to 400 Mb/s with auto equalizing and reclocking
- Tie-line control management, your gateway to mixed digital/analog facilities
- Central control panel management with no system interruption
- No external common control system is required
- A full line of control panels is also available with your choice of 4 to 8 character alphanumeric displays

Datatek. The routing switcher company that's been ahead of the pack for 25 years.

For more information, please call or Fax:
Datatek Corporation
1121 Bristol Road, Mountainside, NJ 07092
Tel: 908-654-8100 • 1-800-882-9100 • Fax: 908-232-6381



Circle (17) on Reply Card



For those familiar with digital, the early part of this series may seem basic. However, for those beginning to emerge from analog and venturing into digital, this series should provide a solid foundation and a comprehensive source of digital information.

Signal basics

In analog circuits, time-varying voltages (or currents) are used to represent analog light or sound energy (information). In a typical analog circuit, the information represented by the signal and the signal itself are one and the same. Signal amplitude or level can be increased with amplifiers or decreased with attenuators for required signal processing. Equalization (frequency selective amplification or attenuation) can also be used to provide the desired output characteristics. Many times, signal attenuation and/or equalization is an undesired result of signal processing. When this happens, the information represented by the signal becomes distorted.

In digital circuits, information is represented numerically. The signal contains the information, but the information is not directly affected by amplification, attenuation or equalization of the signal. For example, in an analog circuit, a signal level of 5V may represent a 100% amplitude signal and a 0V level represents a 0% amplitude signal. If, due to excessive cable lengths, a 5V signal was attenuated to 3.5V, an analog circuit would interpret it (incorrectly) as a 70% signal level. However, in a digital circuit where signal levels from 0V to 2V represent a "0" and levels from 3V to 5V represent a "1," a 5V signal attenuated to 3.5V would still be interpreted correctly as a "1" at the receiver. In digital circuits, attenuation and equalization may affect the signal, but as long as the numeric values can be correctly recovered, the original information can be reproduced with little or no distortion. To process, in the analog sense, the original waveforms, the numeric representations must be manipulated

Digital basics, part 1

mathematically.

This is a key difference between analog and digital. Changes to the waveform, whether desired or not, will cause distortion of the information in analog circuits but not in digital circuits. However, gross signal distortions in digital circuits can render it impossible to recover sufficient data to properly reproduce the information. Analog signals tend to degrade predictably, whereas in digital circuits there is no apparent degradation of the information until signal recovery is impossible, at which time all information is lost.

Converting analog to digital

Analog signals are *analogous* to the natural sources they represent. These analog electronic representations must be converted to digital. To convert this information, it must be *sampled* and *quantized*. *Sampling* is the process of measuring signal levels at periodic intervals. According to Nyquist theory, to properly resolve a signal that contains a frequency of x , the signal must be sampled at a frequency of at least $2x$. It follows that to resolve an audio frequency of 20kHz, the *sampling rate* must be at least 40kHz. Common sampling rates for audio include 44.1kHz and 48kHz. For video, sampling rates include 14.3MHz (composite NTSC) and 13.5MHz (CCIR 601).

Aliasing occurs when signals contain frequencies that are higher than half the sampling rate. (See Figure 1.) To prevent aliasing, an anti-aliasing (low-pass) filter is used to remove frequencies higher than half the sampling rate prior to the sampling process.

Quantization is the process of attaching an integer value to the sample. Fractional representations are not allowed. As the range of

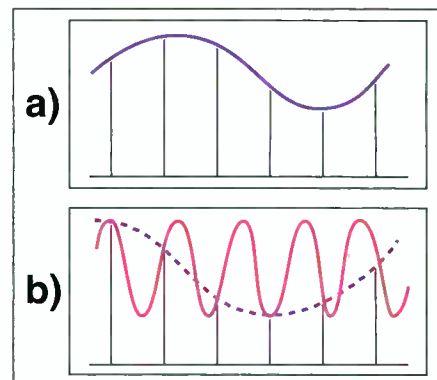


Figure 1. Aliasing occurs when frequencies are sampled using a sampling rate less than twice the signal frequency. In (a) the sampling rate is adequate for the waveform, in (b) the sampling rate is too low. The dashed line shows the resulting sampled waveform.

quantization values is increased, the quantization process becomes more precise. For instance, if a studio lamp is brought up to half brightness and you are asked to represent its brightness level within a quantization range of two (full on or full off), either choice represents a 50% error. If, however, the range was increased to 16, the choice of a seven or an eight would represent an error of 3%. For those that think the middle value would be between eight and nine, digital systems normally refer to the first value as zero, not one. A range of 16 values would start at 0 and go to 15 rather than 1 to 16.

The choice of 16 is not arbitrary. In digital systems, bits are represented as either zeros or ones. Numeric values of groups of bits follow the powers of two. A group of four bits can represent 16 values or 2^4 , eight bits can represent 256 values or 2^8 . More often than not, in the future "round numbers" will be powers of 2, rather than powers of 10.

Quantization ranges are chosen based on the amount of storage space available, and balanced with the precision required. A common quantization range for audio is 16 bits, with 8 or 10 bits used for video. For component video, each component may be represented by 8 or 10 bits.

Digital video

Numerous standards exist for analog video, unfortunately the same is true for digital video. Luckily, the CCIR-601 standard exists that takes into account the need for converting to/from the various worldwide



As stations transition from analog to digital, equipment must be chosen carefully to minimize budgeting considerations while ensuring that existing equipment is not rendered obsolete prematurely. (Photo courtesy of Hewlett-Packard.)

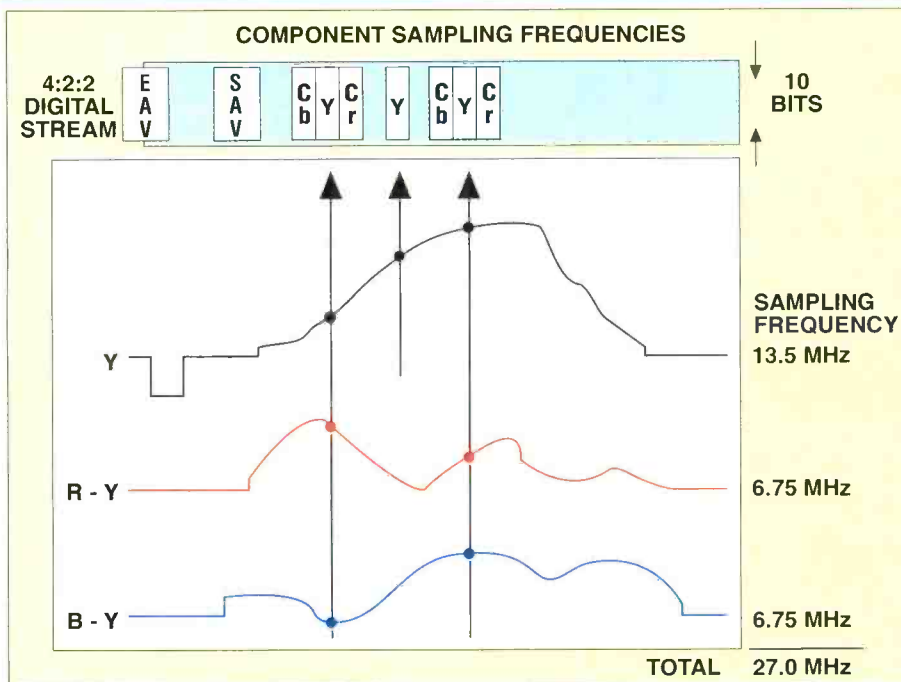


Figure 2. When sampling video for a 4:2:2 digital stream, all three components are sampled, followed by a Y-only sample, then all three samples again.

standards. Like analog, there are composite and component varieties. In addition, the computer graphics world has given us a new

group of standard formats to deal with. Let's start with a few basic video signals and deal with the computer graphics world in future

columns.

Common digital video types include composite NTSC, sampled at 14.3MHz, using 8-bit quantization. This is the SMPTE 244 specification and is used on the D-2 series of VTRs. A composite PAL standard exists that uses a 17.7MHz sampling rate and up to 10-bit quantization. (For more information on these standards, see "Strictly TV," January and February 1994.) Probably the most common digital format is the CCIR 601 specification. This specification provides for component digital video, sampled at 13.5MHz for luminance with either 8- or 10-bit quantization. If an 8-bit signal is used in a 10-bit system, the eight bits are used as eight most significant bits and the two least significant bits are assumed to be zero.

One common term in digital component video is 4:2:2. Variations of 4:2:2 exist, including 4:4:4, 8:8:8 and 4:4:4:4. All of these numbers refer to sampling rates used with the video in question. In 4:2:2, the luminance is sampled at 13.5MHz ($4 \times 3.375\text{MHz}$). The chrominance components, R-Y and B-Y, are each sampled at 6.75MHz ($2 \times 3.375\text{MHz}$) (See Figure 2.) In a 4:4:4 system, all three components are sampled at 13.5MHz, resulting in 50% more data. (See Figure 3.) Systems using 8:8:8 use a sampling rate of



"YES! THE WAY AHEAD TO DIGITAL CAN BE PRETTY TRICKY" CAUTIONED SNELL.

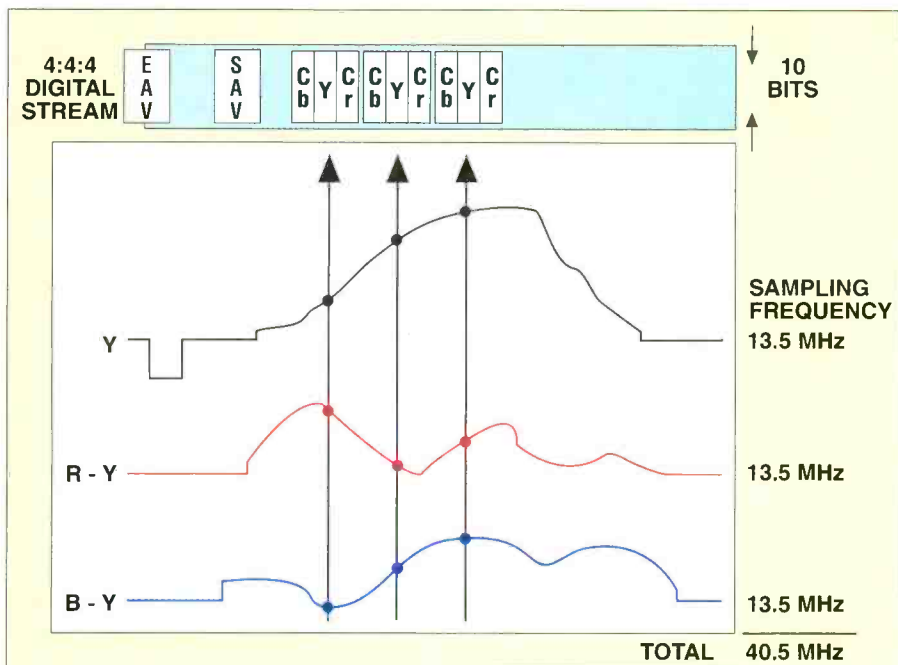


Figure 3. When sampling for a 4:4:4 stream, all three components are sampled every time.

27MHz. The fourth number in the series denotes the sampling rate of a luminance-only alpha channel that is used for keying or compositing purposes.

In component systems, to reduce the number of samples needed, synchronization information is not sampled, but rather, reserved symbols (SAV and EAV) are used to


indicate the start of active video and end of active video. When composite video is converted to digital, the sync signal is sampled and included as data in the stream. Unfortunately, this means that quantization levels used to describe the sync pulse reduce the number of levels for describing the video. The sync area of the composite signal is not wasted entirely, because it can be used to embed additional data including multiple audio channels.

Acknowledgment: This article was prepared with materials supplied by Michel Proulx, Leitch Incorporated and Synergistic Technologies, Incorporated. Additional information was taken from "Your Essential Guide to Digital" by John Watkinson.



E-mail:
be@intertec.com
CompuServe:
74672,3124
FAXback:
913-967-1905

On Nov. 15-17 in Chicago, *Broadcast Engineering* presents *Advanced Television '95: Transition to Digital*. For attendance information, see the advertisement on page 77 or call: FAX ON DEMAND at 1-800-601-3858 or Susan Link at 913-967-1969.

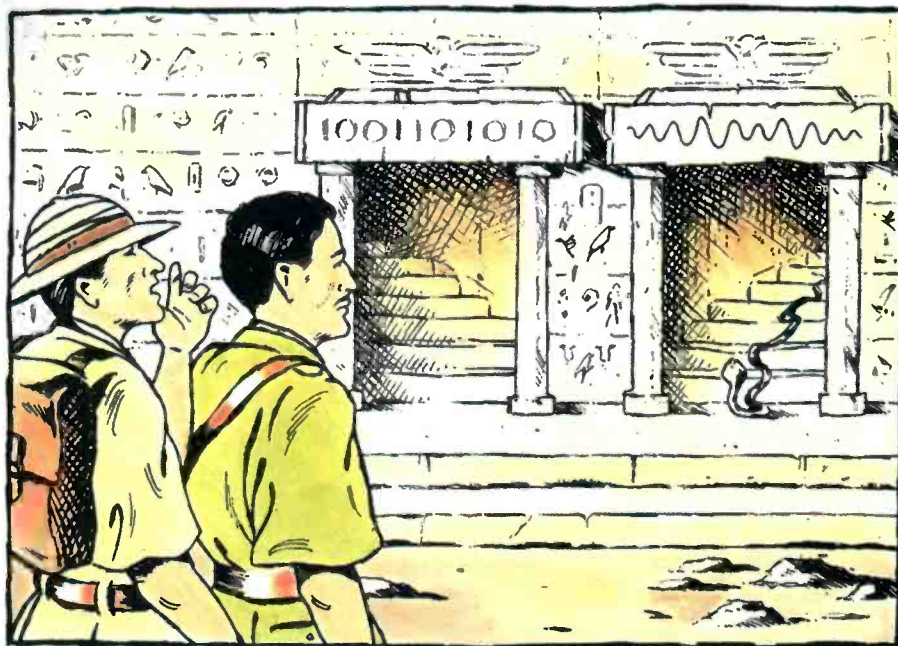

"AT LAST...THE DOORWAY TO DIGITAL!"
WHISPERED WILCOX.

Snell & Wilcox.

"Your essential guide to digital."



"THIS MUST BE THE LEGENDARY
ANALOG'S GRAVEYARD..."
GUESSED SNELL.

Do you really need to dump your existing equipment
to change to digital?



"THEY OBVIOUSLY WENT DIGITAL
TOO ABRUPTLY" GASPED WILCOX.

Does changing to digital have to be so daunting?



"WHEN THE WORLD WENT
DIGITAL THEY GOT LEFT
BEHIND" SNELL EXPLAINED.

Don't get left behind! Come and explore the way ahead with
Snell & Wilcox.

Buy "Your essential guide to digital" only at address below.



Engineering with Vision

Circle (6) on Reply Card

Telephone: US (408) 734 1688. Fax: (408) 734 4760.

UK +44 (0) 181 607 9455. Fax: +44 (0) 181 607 9466.

Email: Info@Snell.co.UK

www.americanradiohistory.com



The mark of excellence

out and work with the other departments for the mutual good of the company. You cannot sit around and complain about other departments or the way they do business without damaging your own reputation. Remember, "the scent of the rose lingers on the hand that threw it."

Making the effort

As a manager, I am always pleased when someone makes an effort to help me do my job. Managers do not have all of the answers (even if at times they think they do). They need your input. What would happen if you stopped complaining and started taking an active interest in resolving situations that affect other departments within your organization? What would happen if you made the effort to communicate with those other departments and actually pitched in and made suggestions?

If you are not being invited to daily, weekly or monthly staff or department meetings, why not simply say "I want to learn more about our operations so may I attend your meetings?" At a facility I worked at a few years ago, two new managers came onboard and did exactly that. The results were fantastic. New ideas were shared and we created a team that became unbeatable. Everyone viewed everyone else as a professional.

If you follow the advice of author and teacher Dr. Edward Deming, you will have something better than a testimonial; you will have the respect of your peers. Here are Deming's four steps to success:

1. *Be a leader:* Successful people are leaders. They inspire others to do their best and bring about greater results all around them. Subordinates do a better job of solving problems and coming up with creative ideas. Leaders make good and timely decisions and are self motivated.

In other words, stop talking about the situations in your facility and become involved in correcting them. Each day resolve to enrich the lives of three people. It doesn't take much effort. If your receptionist has a good phone voice, tell her so.

2. *Be organized:* Most successful people manage their time well. They make time work to their advantage rather than against it. They are organized and remember what needs to be done. Their days are planned, and everyone seems to be amazed at how they can accomplish so much and how many different types of projects they can handle. Throughout the day ask yourself, "Is this the most valuable use of my time?"

3. *Be a time manager:* People who properly manage their time find themselves able to get more things done without running out of time. The quality of their performance increases, and they can accomplish more in fewer hours. They rarely miss deadlines.

Plan each day's activities the night before. If you don't have a plan, you will end up somewhere. Choose your direction.

4. *Be a good communicator:* Most successful people are good communicators. In many cases, people who make it to the top are not those with the best technical capabilities, but those who are best able to communicate. To improve your ability to communicate, concentrate on the following:

- Develop good speech
- Speak at a moderate rate of speed
- Use words your listeners understand
- Be a good listener
- Develop your public speaking
- Understand and use body language
- Speak with a purpose
- Know how to get and keep attention
- Speak clearly and concisely

As you work at Deming's four steps to success, you will be more successful and be more in control of your own destiny. You will have your own testimonial in the form of letters of recommendation from your employers, raises and more. As Zig Ziglar once said, "America was built by people pulling on the oars, not resting on them." You need to pull your own boat away from the dock and move to the open sea. You will be glad you did.

Continuing education

Engineering is a dynamic field and those who decide to enter it must commit themselves to a lifetime of education. For engineers, receiving a college degree or SBE certification is just the beginning of the learning process. Whether you are an accountant, engineer or association executive, your professional organization has tests to measure your professional growth. No one can guarantee you lifetime employment, but by following the steps outlined here and becoming professionally certified, you can achieve a professional level that makes you proud. Work always comes to those who are prepared. Are you ready? ■

Richard Farquhar is president of RAF Associates, a management, engineering, consulting firm in Canal Winchester, OH.

The Society of Broadcast Engineers (SBE) introduced the Certification Program in 1975. Since then, engineers have been asking "What is in it for me?" or "Will certification help me gain employment or keep my job?"

While gathering information for this article, I was looking for people who could give testimonials or relate real-life stories of how being SBE certified enabled them to find the job of a lifetime. I am sure there are many such stories out there, and if I researched long enough, I'm sure I could share an impressive list with you. But it is more important for you as the engineering professional to create your own testimonial. You can be part of America's new future by helping to create it. Professional organizations such as SBE, SMPTE, IEEE or ITVA can provide the tools you need to begin creating your own testimonial.

Professional organizations can provide the tools you need to begin creating your own testimonial.


Create your own testimonial

What can you do to create your own testimonial? You read a book from the beginning to the end. In creating your testimonial, you work backward. You start with the ending you want and then you do everything you must to reach the beginning of your book.

The first thing you need to do is rid yourself of the current American work ethic of doing the minimum level of service necessary to satisfy your employer. Second, stop being a backseat driver and let the boss know you stand behind him. Many engineers are content to sit in the back room, repair a black box and talk about what is wrong with the other departments in the company. They are reluctant to come

E-mail: be@intertec.com
CompuServe: 74672,3124
FAXback: 913-967-1905

Finally, technology has caught up to your imagination.

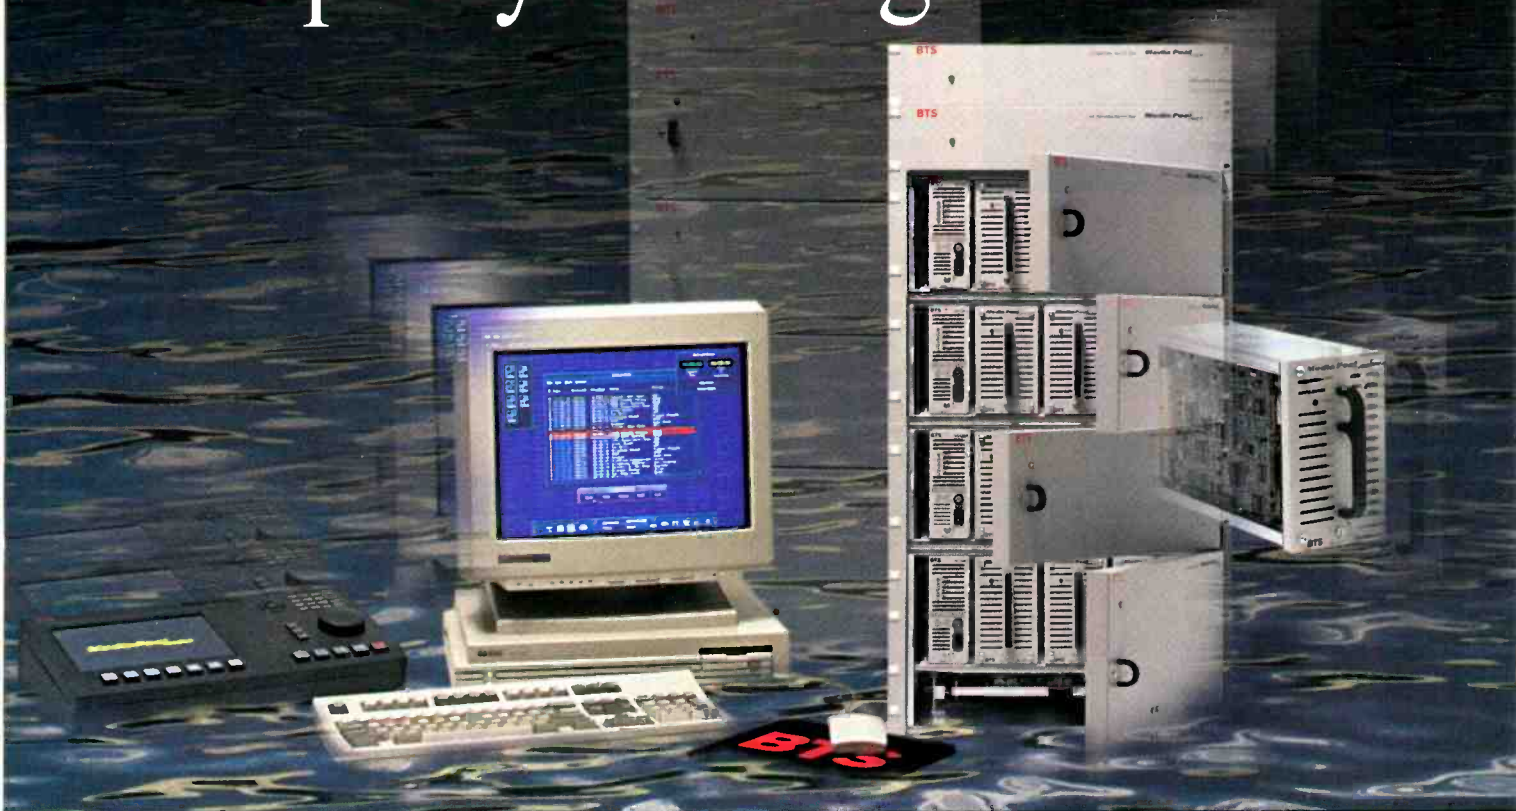

Media Pool for Broadcast

Imagine putting the finishing touches on a news story moments before the director calls for it - or even editing the ending while the beginning is being aired.

Imagine editing a commercial spot minutes before traffic has it scheduled - it's as if you could edit inside your cart machine.

Imagine having all video and audio media available simultaneously - wherever and whenever it's needed.

Imagine a system where quality is never compromised - component digital video and better than CD audio quality.

Imagine recording full bandwidth, or using our variable compression option - choose the level of space-saving DCT compression - 2:1, 3:1, 20:1, you name it - every time you record.

Media Pool gives you the storage, the common access, the bandwidth, the resource management tools, the interfaces, and the video know-how to turn your imagination into reality.

BTS

Call toll-free (800) 962-4BTS
Outside the U.S. and Canada,
call (805) 584-4700

A PHILIPS COMPANY

Circle (7) on Reply Card

www.americanradiohistory.com



Managing resources in a computerized environment

Managing resources is an umbrella business term referring to the monitoring, decisions and action taken in regard to virtually every element of your business to enhance profitability. Valuable tools in accomplishing this goal are automation and integrated facility management software. Most businesses are computerized to some degree, but a fully integrated system allows more complete and specific resource management data to be compiled and analyzed.

In the broadest sense, resources fit into two categories: people (talent, operations, support, management) and things (suites, equipment, cash, tape stock, trucks, etc.). Facility management breaks down these resources into three applications: monitoring projects, inventory management and profitability management.

Monitoring projects

The primary benefit of monitoring projects using integrated facility management software is instant access and updating of real information. When based on factual input, intelligent decisions can be made by production personnel and clients on a more timely basis. Job changes are instantly posted to schedules and/or work orders, cost changes are automatically implemented and anyone with security clearance can pull up the new parameters from on-site or remote locations. By tracking every element along the way, clients and producers can prevent problems or omissions, track actual costs vs. budgets, estimate costs for job completion and avoid last-minute crises and confusion.

Another resource management tool is precise billing of elements. The practice of bundling costs (lighting, grip equipment, catering, transportation or other peripheral services) can be costly and agitating. By employing an integrated management system, individual items can be automatically priced at the bidding stage so there is less money that falls through the cracks, and clients aren't upset at being charged for items that they didn't use or need.

Integrated scheduling software is fundamental in monitoring resources. Information from the bidding process can be pulled up,

special client rates can be accessed and applied, and any applicable purchase orders can be generated and posted to the work order. Past client preferences, present schedules and future schedules can be viewed with a few keystrokes. Room configuration templates can be applied, changed and approved at this time. Bookings can be made with various levels of *hold*, *firm* and *bought*. Potential resource conflicts are flagged and the availability of any given resource at any time can be noted at a glance. Therefore, conflicts can be avoided or resolved ahead of booked time, and client confirmations can be electronically sent immediately or at a specified time.

Let's say you are managing a production from several remote sites with many variable conditions. All of your transportation, equipment, tape, talent and engineers are scheduled, confirmed, priced and approved prior to the shoot. If, after the teams are on site, any last-minute equipment or personnel transfers, rentals, image retrievals, scheduling adjustments or other job changes crop up, any remote site can instantly hook into the software system via modem, find the best and easiest path to procuring or changing the needed resource, and communicate the changes to other remotes, pertinent office staff or to the client, all in a matter of minutes.

Inventory management

For this article, inventory refers to tape and/or film stock. This can be categorized into news footage, raw stock and client stock. In newsroom systems, many parameters can be applied to retrieve materials, including *air date* and *time*, *story*, *subject*, *key word* and *reporter*, to name a few.

A computerized tape vault system that is integrated into your overall facility management system provides an excellent means of tracking inventory and costs more accurately. Physical inventories can be handled through bar codes and bar code readers. Complete or specific raw stock can be instantly viewed and noted by number in stock, number on order and number on back order. Individual raw stock items can be automatically flagged when they fall below specified reorder amounts. Inventory discrepancy reports can be generated at any time for evaluating shortages and non-billable usages. With integration, your vault program can be automatically updated from any applicable purchase orders and the program can automatically post tape usage, shipments and costs to the client work order.

Client libraries can be set up and searches conducted by preset or custom parameters. Clients also can access their libraries from their offices using a modem and security codes. Client

pricing, ship to addresses and labeling instructions can be electronically noted and accessed and movement is posted directly to work orders. This information can be reported in many ways to better evaluate use and minimize losses.

Profitability management

Resource profitability and management is derived from the reporting capabilities of your system and management's ability to make decisions based on these reports. The variety of reports should be evaluated singularly and in combination with others in a timely manner. By doing so, problem areas and revenue losses can be pinpointed and corrected before they have a major impact on the P&L statement.

Resource utilization reports along with sales reports are extremely useful. A summary of resources scheduled by hours booked, pricing or client would make a good start for your analysis. Combine that information with sales reports by department, room, line-item equipment, tape stock, account executive, producer, client or client type.

You now have more powerful tools to help make sound decisions and judgments. This information provides a base for evaluating profitability and productivity of your sales and operational staff, equipment, rooms, departments, clients and client types. From this data, you can direct training and pay raises, ascertain what departments or equipment you should enhance or promote and help determine which clients to pursue.

By perusing maintenance reports, equipment downtime reports, non-billable item summaries and similar reports, you can evaluate and control many of your costs. Staff productivity vs. billing analyses and employee billables/billable overtime/administration time summaries are effective in determining patterns and changes in employee productivity and profitability. Purchasing and rental reports by item and vendor are helpful in ensuring that you are receiving the best prices and can pinpoint equipment that would be more profitable if supplied internally rather than through rental services or vendors.

Job productivity rises because people can spend more time generating income and less time on non-billable functions. By raising the productivity of your resources and evaluating their use, the flow of dollars to the bottom line can only increase. ■

Chris Leonard is president of Tradecom, an industry consultant company in Englewood, CO.

E-mail: be@intertec.com
CompuServe: 74672,3124
FAXback: 913-967-1905

There Are Two Kinds Of Engineers. Those Who Buy Utah Routing Systems. And Those Who Buy Something Else.

Introducing the UTAH-300. History Repeats Itself. Digitally.

If you're in the market for a routing switcher, you'll be happy to know Dynatech's new UTAH-300 is the ultimate achievement of four generations of router technology. In 1978, our AVS-1 proved that rugged, versatile routing switchers could also be affordable. Today the UTAH-300, with analog/digital capability, is the most sophisticated



At 128 x 128 VAA, with redundant power and control, the rugged UTAH-300 takes up only 27 RU of space.

member of a full family of mature, reliable routing products. The UTAH-300 is built for growth. It goes from 32 x 32 to 256 x 256. And beyond. It's compatible with every control system we've ever built,



so it integrates into any Utah installation. And not only does the UTAH-300 manage D1 (serial component) and D2 (serial composite) formats, it's ready for 360 Mb/sec. data rates of future ATV signals. Far more capability, yet it's priced competitively.

Experienced Support, Too.

Over time, we've also learned about what you need in the way



Universal matrix frames allow easy upgrade to digital signals.

of support. That's why we offer reliable 24-hour, 7-day Global Customer Service Support Center, training and on-site repair, and a 10-year warranty. Call your nearest Dynatech sales office for more information on the routing system everyone is smiling about.



Americas
Phone: 801-575-8801 Fax: 801-575-3299

Europe
Phone: 44-1635-521939 Fax: 44-1635-528387

Asia
Phone: 852-2868-1993 Fax: 852-2525-8297

© 1995 Dynatech Video Group, Inc.

Circle (8) on Reply Card

www.americanradiohistory.com



Receiving E-mail

Last month we took a look at sending E-mail and the way it can give your station and its staff quick worldwide connectivity for short text messages. Receiving E-mail is a different story because when someone else is doing the sending, you'll think they control your life.

Your E-mail address

The first thing you'll want to do once your station has E-mail service is to publish an E-mail address at which you want to receive correspondence. There is no complete directory for E-mail addresses, although at least one publisher has gathered E-mail addresses from Internet news groups in an attempt to create such a directory.

You'll have to publish your E-mail address, such as in print advertising, on your letterhead, on invoices and checks, during credits or promos for news or other shows, on other people's computer bulletin boards and on Internet news groups. If your station has a World Wide Web home page, publish your address there. (A home page is an electronic brochure or advertisement about your station that is available to a relatively small but growing percentage of Internet users.) A handful of broadcasters, such as NBC Television and National Public Radio, have published E-mail addresses for some or all of their news programs.

Looking in the box

Once your address is public, you'll start receiving E-mail in your "In Box." It may take several days for you to get your first message or you could receive one in the first five minutes. And it could be on just about any subject: a listener with a question, a viewer complaining about your anchorman's politics or his hair style, a laser-printer toner salesman looking for leads or a potential advertiser inquiring about your station's audience.

If you want to show the world that you are serious about accepting E-mail, you will have to answer each one that is of any significance. Also, you'll have to budget staff time for answering E-mail. With a bit

of proper training, a public relations staffer could handle answering your E-mail along with other duties. With time, you may find that the number of E-mail messages the staff must answer per day will dwarf the number of paper letters that are delivered to your front door. Paper letters take more time to prepare, print and mail, so viewers or listeners with computers and access to E-mail will generally take the E-mail route to correspond with you.

Anyone with the right level of E-mail access and some enthusiastic student know-how could read credit card numbers and use them for less-than-legal purposes.

E-mail triage

To avoid the personnel and office space costs of another staffer, you'll have to divide up the incoming E-mail. Sort the mail into those messages that require an immediate, businesslike answer, those that are pro and con on some issue of the day (which may only need to be tallied), those that are so off-the-wall that you can't figure out how to answer them and junk E-mail. Ask yourself these rhetorical questions and set down procedures:

- Do we answer every E-mail from an audience member or do we have our information systems department set up an "auto reply," an E-mail form letter thanking the viewer or listener for his or her opinion without giving a personalized answer?
- How do we handle E-mail advertisements from potential vendors? Erase it without reading much of it? Send a form letter reply that you are not interested in those products or services? Save the sender's message (or at least their E-mail address) in case you want to do business with them later?

In any case, you'll want to assure yourself that your station's staff can respond in a timely manner to E-mail messages that deal with subjects you would consider important if they arrived by U.S. mail, by phone or by fax. By publishing multiple

E-mail addresses, you can get the senders to do some of the sorting for you. For example, some multiple addresses might include:

programming@wzzz.com
sales@wzzz.com
engineering@wzzz.com
news-tip@wzzz.com
lunchtime-request@98fm.wzzz.com

May we serve you?

To get people onto an E-mailing list, you'll have to set up a computer to act as what's called a *list server* or *listserv* for short. A listserv is an application running on a computer at your station that accepts E-mail addresses from outsiders and adds them to a mailing list. Your publicity or promotions people can compose a list of weekly programming highlights or a monthly program guide that is automatically sent by E-mail to everyone on the list at that moment. (KASU-FM at State University, AR, is doing this now.) Members of the public can add themselves to — or remove themselves from — the list at will. Be sure that what you send out is compelling enough to keep that audience interested. Setting up a listserv requires a computing professional with Unix system experience.

Selling via E-mail

In your electronic newsletter, you could advertise products or services, such as transcripts of news reports and talk shows, licensed sports merchandise or advertiser products. Although it is possible for E-mail users to send you their credit card numbers, expiration dates and billing addresses, there is a significant drawback: security. Individual data packets and E-mail messages on the Internet travel as plain text. Leased data circuits, which make up most of the Internet, pass through routing computers that could be on anybody's premises, including that of a university computer lab. Anyone with the right level of access and some enthusiastic student know-how could read those credit card numbers and use them for less-than-legal purposes. Some E-mail users know this and others don't. Stay out of legal and public relations trouble by warning users that credit card transactions are not secure. Private firms and standards agencies are working on ways to allow retail commerce on the Internet, but the issue is not settled.

Extending your reach

The Internet-connected audience is only about 10% of your station's total audience.

NO OTHER CAMERAS DARE ENTER ITS DOMAIN.

Introducing the ultra-sensitive JVC KY-27C.

JVC
PROFESSIONAL

Only one low-light camera was bred with the features to conquer the most intimidating shooting environments — and with virtually no vertical smear. The JVC KY-27C 2/3" 3-CCD camera.

The KY-27C inherited the technology of the KY-27B — the industry's #1 camera. But, with its key features sharply improved, this new camera can fearlessly roam the darkness like no other. A new generation of high-performance CCD's provides 1 lux low-light capability with 100 percent video level output, 800 lines of horizontal resolution, and a 63dB signal-to-noise ratio. Vertical smear and annoying rings and flare are practically eliminated, because the KY-27C's new CCD's utilize an IT chip constructed with a revolutionary Tungsten material for its pixel mask. This IT chip is clearly far better than any ever produced, and as a result, you are assured of the highest resolution, maximum sensitivity and outstanding image quality.



From the brightest lights to the darkest jungles, the KY-27C's automatic level control and full-time auto white provide continuous shooting. Plus, a Triaxial System permits operation up to 5,000 feet, empowering it with incredible field worthiness.

The only thing tame about our new KY-27C low-light camera is its price. For more information, please call 1-800-JVC-5825 and mention Product Code 103 ■

Circle (18) on Reply Card

But it can also include out-of-town participants who may not be able to view or listen to your station over the air. America is full of Nevadans who used to hail from New Hampshire or Floridians who grew up in Illinois. They may be interested in your station. Your sales department probably won't be able to charge advertisers a premium rate to have their products and services plugged on your station's E-mail listserv. Not yet, anyway. But, if E-mail becomes a viable marketing tool three years from now, wouldn't you like to have an E-mail marketing database already in place?

Advertising culture wars

Don't send unsolicited advertising to your E-mail list. It will be promptly noticed and your station's other E-mail addresses will be promptly "flamed" with complaints. The Internet started out non-commercial, and many believe it should remain non-commercial. The Internet mindset is often stereotyped: "Leave me alone. Don't censor me. Don't advertise to me. Don't tax me. Don't sell to me (unless I'm really interested). Don't charge me. Give me information for free." By having a public relations staffer keep up with changes in the Internet culture, you can use E-mail to build relationships that improve

your station's chances of successfully branching out into alternative media.



E-mail: be@intertec.com
CompuServe: 74672,3124
FAXback: 913-967-1905

Greg Monti is technical manager of National Public Radio's Future Interconnection System Project Office. He may be reached by E-mail at gmonti@cais.com.

Internet road map

INFOSEARCH is an Internet resource that maintains a comprehensive hypertext directory of broadcasting-related sites on the World Wide Web. As a service to the industry, any bona fide broadcast-related company that has a World Wide Web site can get linked to the INFOSEARCH free of charge. There is an on-line sign-up form directly from the INFOSEARCH broadcasting links site. The URL for the INFOSEARCH site is: <http://www.xmission.com/~insearch>.

BROADCAST[®]

engineering

Coming in September

Digital Audio

Discover the tools available for digital audio production.

Building a Transmitter Site

Learn the basics of building RF systems from tower considerations to building transmitters.

Frequency Coordination for the '96 Olympics

Find out how station engineers and producers use advanced planning to troubleshoot problems for this important broadcast.

SPECIAL REPORT

The V-Chip -- Program Censorship and Parental Control

Get up-to-the-minute news on how possible regulations may affect production and programming.

IT'S ADVANTAGEOUS TO GET "the ADVANTAGE"

All-World Standards Conversion...For Only \$3,495



CONVERTS: NTSC, NTSC 4.43, PAL, SECAM, PAL-M, PAL-N

COMPOSITE & Y/C

Optional RGB Component Output

LINE INTERPOLATION

COMB FILTER DECODER

TBC with PROC AMP ADJUSTMENTS

TEST PATTERN GENERATOR

GENLOCK • FREEZE • FADE-TO-BLACK

For More Information
Call 800-331-2019

Circle (19) on Reply Card

FERAL

9204 Bond Street
Overland Park, KS 66214
(913) 492-4666
Fax (913) 492-5556

DISCOVER THE **NEW POTENTIAL** IN BARCO'S GROWING MONITOR FAMILY

BARCO's standard, yet flexible, CVM 3000 Series broadcast monitors offer the highest quality broadcast solution for any application be it viewing, control or master control. Its full interchangeability of boards and its easy to use set-up commands and menus quickly put you in control. The CVM Series allows you to customize your monitor solution based on: size, resolution or input. All CVM 3000 monitors support multiple standards and formats as well as accommodating optional serial digital component inputs.



4:3 and 16:9 scan formats

with guaranteed equal light output for both over and underscan.




Multistandard by design

BARCO's broadcast monitors have been designed to cover every known color standard. The relevant standard can be displayed on-screen.

Backlit keyboard

Push button control adjustments let you feel and see what you are doing. On-screen menus help for easy set-up.

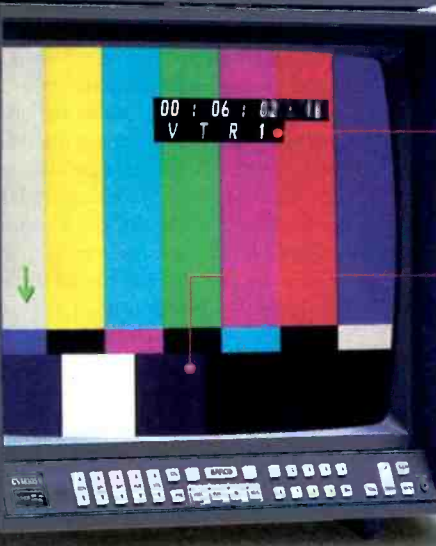

VITC and Source ID

keep you informed on each frame and show the source displayed.

Automatic illegal color detection

when equipped with the optional digital 10-bit decoder.

Barco, Inc.
1000 Cobb Place Boulevard
Kennesaw, GA 30144
Tel.: (404) 590-7900
Fax: (404) 590-8836


BARCO

Infrared remote control
up to 48 CVM 3000 monitors.

Head office: BARCO nv/Video & Communications Broadcast & Cable Products
Theodoor Sevenslaan 106 B-8500 Kortrijk, Belgium Tel: +32 56 23 32 11 Fax: +32 56 23 34 61

Circle (20) on Reply Card

www.americanradiohistory.com

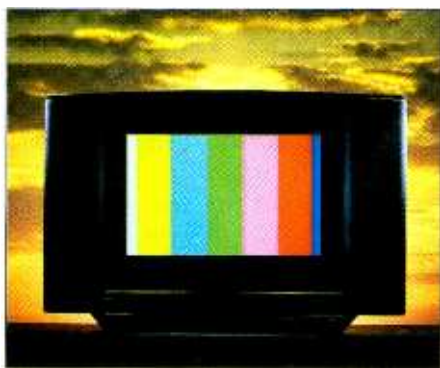

In each area of the country, the new ATV channels will be found among those TV channels that are not used for NTSC broadcasting in that area. The broadcast channels for NTSC were allotted to cities across the country by a complex set of rules based upon providing for minimum separation distances between the use of certain pairs of channels. The intent was to minimize the potential for the broadcasts of a distant station to interfere with the reception of a local station.

The possible channels for ATV in each area are to be found among the NTSC allotments that were never constructed and among the channels whose use for NTSC would cause objectionable interference to existing NTSC stations. The FCC has also announced the intention to allocate *only* UHF channels for ATV. This may not be entirely possible, but certainly most of the new ATV assignments will be in the UHF band. There may be some VHF ATV assignments where UHF assignments are not possible, such as areas where available UHF channels for ATV are scarce. The geographic distribution of NTSC channels and the potential for interference between stations make it difficult to devise a nationwide set of ATV channel assignments that avoid inequities among the channels assigned. *The channel assignments must be carefully crafted for the major markets and for the nation as a whole.* Available channels having the larger co-channel separation distances are preferred. A table of ATV channel assignments recommended by broadcasters has been recommended to the FCC and is available for review and comment.

Chief engineers should be prepared to evaluate the service area of their new ATV channel assignments and should begin preparing to build ATV stations. The FCC Office of Engineering Technology has long used computer software to assign broadcast channels satisfying the technical and regulatory constraints for a particular service. ACATS technical committees have developed receiver planning factors and a model for predicting ATV coverage and interference. Broadcasters have supported this work by providing computer resources and funding software development. They have

ATV channel assignments

also built upon and enhanced the assignment model used by the FCC. (See "Spectrum Studies for Advanced Television Service in the U.S." by William Meintel, 1994 NAB Broadcast Engineering Conference Proceedings.) The ATV service and interference characteristics of the assignment plan developed with the aid of these programs depend on parameters, assumptions and guidelines that must be determined prior to running the model.

In the general approach to making the ATV channel assignments, an allotment table is formed by considering each city or area in turn across the country. For each area, one prepares a list of channels that are candidates for ATV assignment. First, channels that are used in this or nearby cities are eliminated because their use for ATV would cause unacceptable interference to the reception of an existing NTSC station. Other channels are eliminated because they would be susceptible to interference from NTSC stations or ATV-to-ATV interference would result. The channels allotted to one city restrict the channels that can be allotted in nearby cities, and in turn, this effect spreads like a daisy-chain across the United States. When a list has been prepared for each area, the service areas of the ATV channels are calculated and matched to the existing NTSC service areas. Adjustments are then made to better satisfy certain optimizing criteria.

Channel assignment program

This program is used to assign an ATV channel number to every NTSC station in the United States. The assignments are made so that minimum geographical separation distances are maintained between the use of certain pairs of ATV and NTSC assignments. The most important constraints are the distances between two uses of the same number channel for two ATV stations or for an ATV and an NTSC station; this is the co-channel constraint. Also important are the separations between channel numbers that differ by one – the adjacent-channel constraints. There are additional constraints at the Canadian and Mexican borders and between certain offsets of UHF channels termed the UHF taboos.

The program begins with a list of all the NTSC stations. For each station, the program calculates the distance to the nearest use of each TV channel. The channel with the greatest separation distance is examined first. If this channel satisfies all the separation constraints, then a tentative ATV assignment is made. If not, then the channel with the next greatest separation is tested. If no channel satisfies all of the constraints, then no ATV assignment is made. This process is repeated for each NTSC station. There are many assignment tables

that could be considered and many have entries consisting of a pair of stations that violate one or more of the separation constraints. Also, the resulting ATV service areas vary from table to table. As an indication of the complexity of this process, the number of possible nationwide assignment tables is greater than 10 followed by more than 3,200 zeroes.

Coverage and interference model

The channels of an assignment plan are evaluated by using the coverage and interference model. The ATV channel power is set so that the ATV signal can be received at the maximum radial of the paired NTSC channel's Grade B contour. Then the ATV coverage is calculated, taking into account the transmitting antenna pattern of the NTSC station and signal propagation over the terrain. Finally, the impact of other ATV and NTSC stations is considered to determine the loss of service area due to receiving interference from those stations. For most of the ATV channels, there will be no problem satisfying the goals. A number of stations in spectrum-congested metropolitan areas may not have completely satisfactory service areas.

Some areas have so many TV stations in close proximity that it is difficult to fit in an equal number of ATV channels. As geographic problem areas are identified, the assignment program can be run separately for each area. The number of stations in one local area is small enough to completely optimize assignments in a reasonable time. Thus, many local plans can be evaluated to optimize the service areas within that area. These local plans can be "seeded" into the list of NTSC stations for running the assignment program for the entire country. The resulting assignments are then evaluated using the coverage and interference model program to calculate service areas. This may lead to adjustments in local assignments and a new national assignment table. This complex procedure has been repeated until the improvement in service areas become negligible. The result is a table of NTSC-ATV channel pairings with the assigned ATV power, the areas and populations of the NTSC and ATV coverage and the areas and populations lost to interference from NTSC and ATV stations. ■

Louis Libin is director of technology for the National Broadcasting Company (NBC), New York, NY.



Now Supports
ISDN Station
Communications!



From the top, a 12-key LCD display station, a 9-key LED display station, a 20-key LED expansion panel, and a 5-key LED display station

Matrix Plus™ II

The best in television intercom systems...

just
got
better!

Matrix Plus II
with its new
bright LED
display stations



New LED Display IFB Assignment Panel


and new software features broadens your ability to communicate under a wider range of situations. It is a truly integrated, **100 x 100 digitally-controlled** intercom with stations for every application, a comprehensive modular interface system, and simplified PC pull-down menu programming. Exclusive features include “**simplified IFB assignment panel**”, call-signalling, touch-tone dialing, paging, ISO, **station access from remote telephone**, variable input levels and many other sophisticated features. There's also **versatile station communications** including long line remote capability and fully-digitized **single pair wiring**. Plus much more, including the highest level of service and support in the industry. Want all the details? Call us at 510-527-6666.



The Matrix Plus II connects to a variety of intercom stations.

Circle (21) on Reply Card

Matrix Plus™ II
FROM CLEAR-COM INTERCOM SYSTEMS

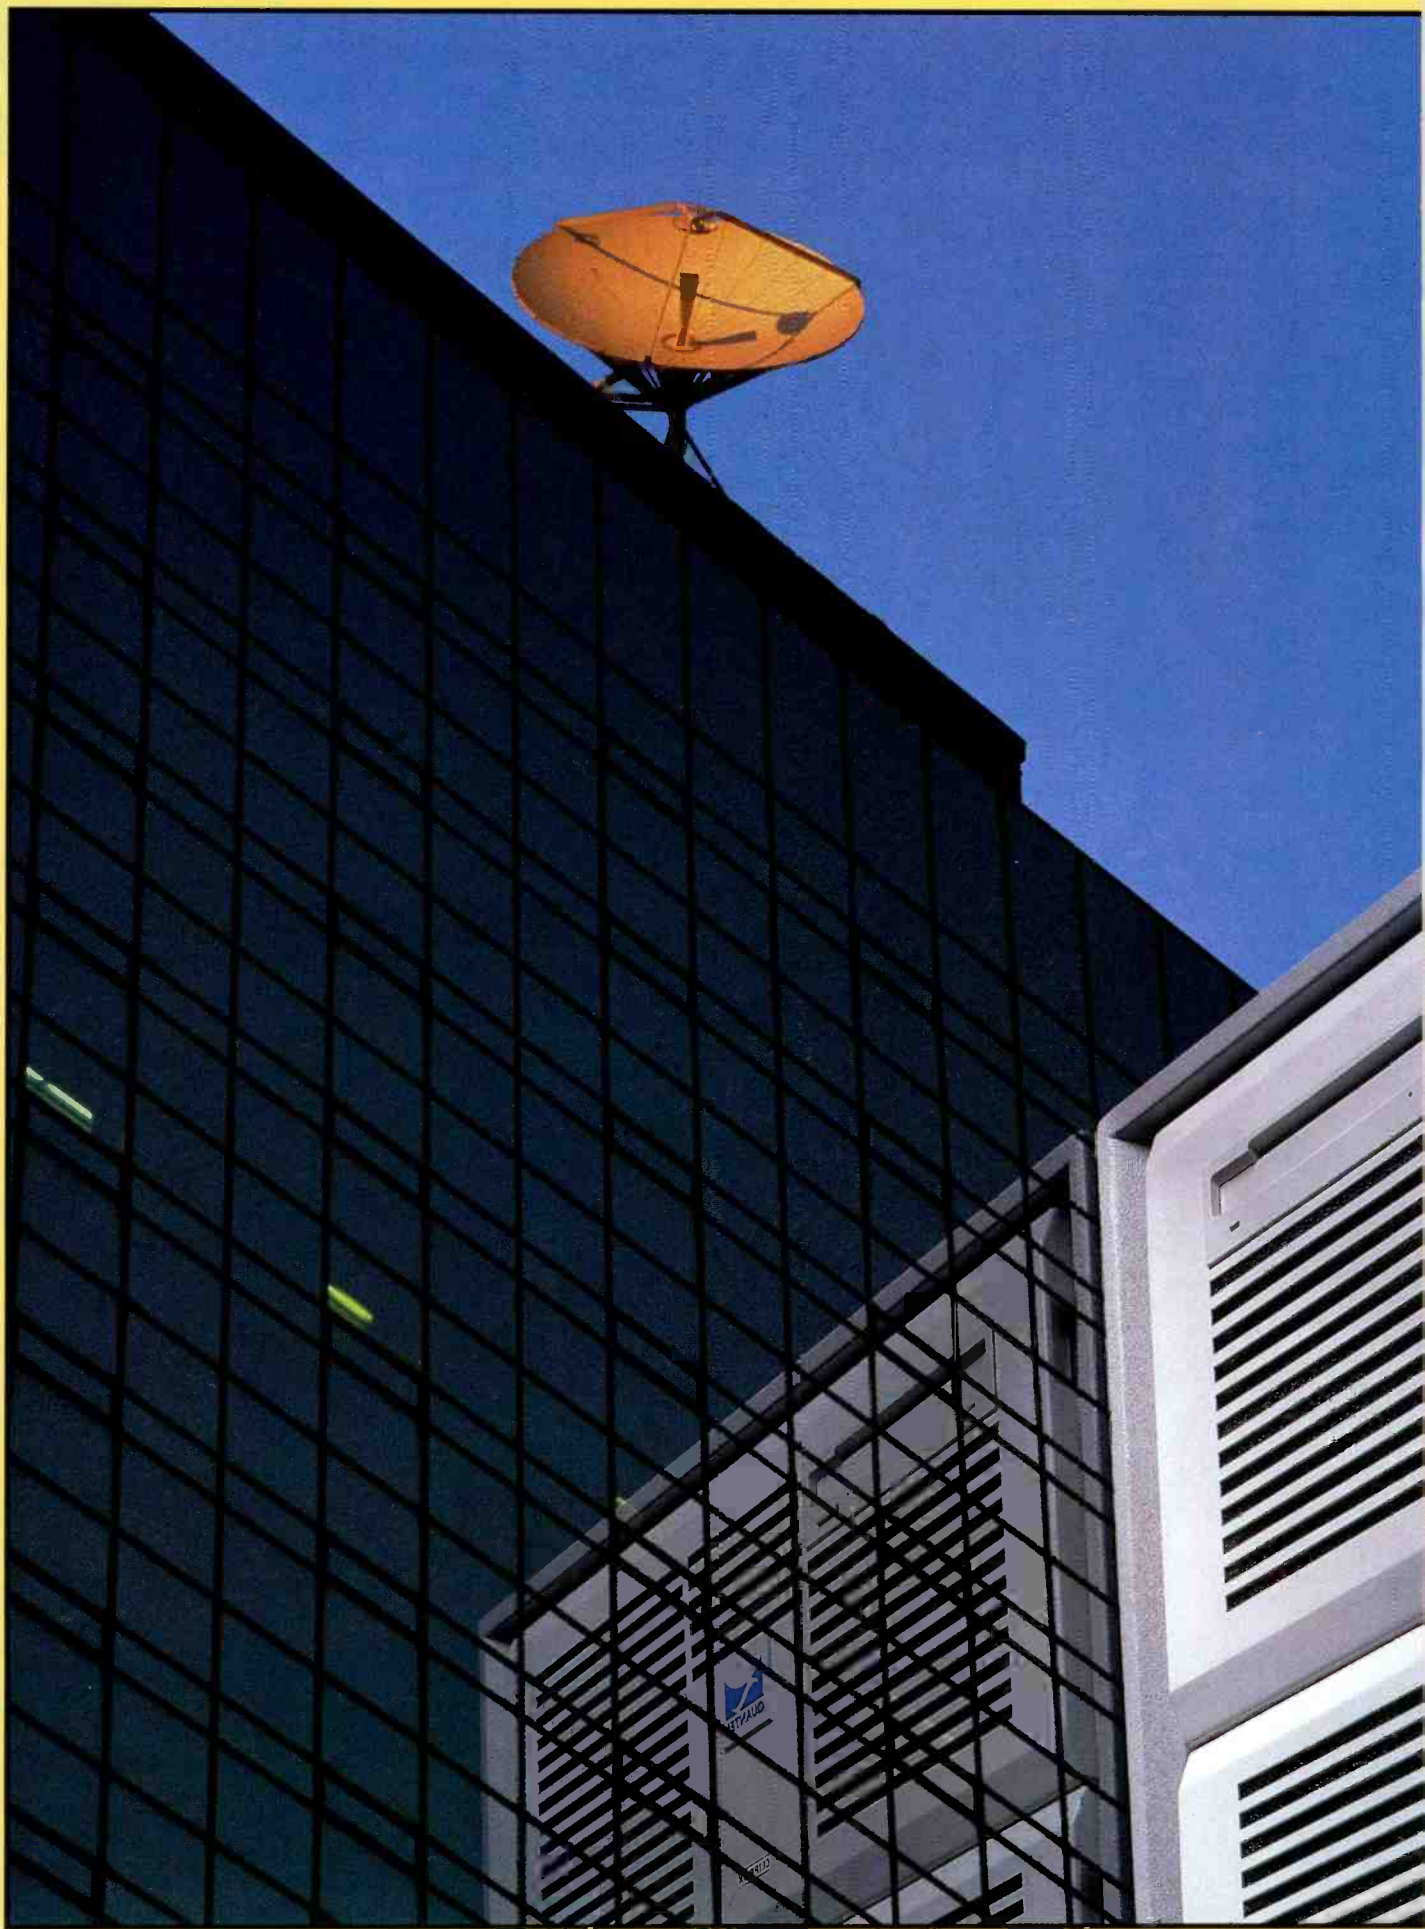

The changing dynamics of storage technology


As computers become more powerful, they are replacing many traditional “black boxes.” Today, video is handled almost entirely by microprocessor-based systems, many of which are integral to dedicated boxes.

Despite the advantages offered by the new and powerful devices, the computer manufacturers are only beginning to recognize the extreme complexity of handling “real-time” video without artifacts and delays.

With this in mind, this issue looks at video storage technology. We are all familiar with the advantages and disadvantages of tape storage, so it is only touched on here. Disk drive technology, both magnetic hard drives and opticals, are examined in depth, as is RAID technology. Engineers and managers can use this information to analyze current and future needs and find cost-effective solutions to their storage needs.

Tape, disk and optical storage systems all have their strengths. Maximizing those strengths is the key to making the most of this technology.

•“Combining Tape and Disk Storage”	28
•“RAID Storage Technology”	40
•“Optical Storage Solutions”	54
•“Hard Drive Technology”	60

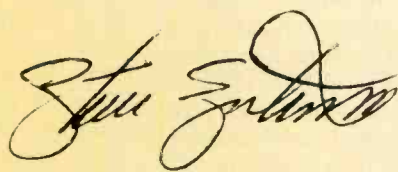

Steve Epstein, issue editor



Combining tape and disk storage

*How well do tape and disk systems
play together?*



The Bottom Line: —

Professional hard-disk recorders used to store compressed video offer flexibility, convenience and cost savings in handling commercial spots, interstitials and short program segments. However, for many broadcast applications, tape may remain the medium of choice for longer-format program material for the foreseeable future. — \$

Advances in data compression are bringing hard-disk storage technology out of its traditional home in the computer industry and squarely into the midst of the broadcast and post-production industries. Disk storage is a high-volume technology that's reliable, economical and proven. Coupled with a well-designed professional disk recorder, hard-disk technology promises unsurpassed flexibility for storage, editing and manipulation of digital video.

But what does the advent of disks mean for the hundreds of thousands of dollars invested in videotape recorders? What are the advantages of disk storage, and when is tape preferable? What do you need to know so you can take full advantage of disk storage technology? This article looks at combined tape and disk storage systems and the advantages they offer.

Multichannel recording

Hard-disk storage represents a milestone in the transformation of television from analog to digital. A typical hard-disk storage system consists of a disk array and a controller unit. Under software control, the system records, files and plays back video and (usually) audio material, moving it to and from the disks as needed. A variety of other capabilities may also be included. Some systems provide multiple internal digital disk recorders (DDRs) with the ability to record or play back multiple audio and/or video channels independently and simultaneously. Source signals can come from a VTR, a VTR playout system or a satellite receiver. External signals can be integrated with video played back from the internal recorders using either internal or external switchers. Paint and effects software may also be included for video manipulation.

Given such broad capabilities, hard-disk storage systems can meet diverse needs, often in ways that extend or complement existing tape-based systems. One role for disk recorders is serving as a cache for a VTR or automated tape

library system. Caching takes its name from the computer world, where frequently used programs and data are kept in fast memory devices for quick access by the CPU. Disk caching relies on one of the key differences between disk and tape; information stored on disks can be randomly accessed.

Combining random or non-linear access with multiple record and playback channels makes disk caching a powerful capability for playout of long- and short-form material. For example, the ability to provide multiple, staggered start and stop times makes it possible to play out a movie to many users from a single stored copy. This is ideal for video-on-demand and near-video-on-demand applications. In many cases, however, the cost of storing many hours of long-form material can be prohibitively expensive. Disk caching short-form material is far more cost-effective.

One TV network that benefits from disk caching's short cycle time is La Cinquieme. It is a publicly funded, privately run UHF network that provides educational programming throughout France. Much of La Cinquieme's programming consists of short shows, many just 15 minutes long. Disk caching is used to store and play out hundreds of promotional spots and short program segments each day. According to the station's technical manager, Sylvain Anichini, "Without the disk recorder, it would be hard to broadcast so many short events, since the back-to-back time cannot be supported by the traditional spot replay methods." Without it, some longer-duration material would have to be inserted.

Support for multiple stations


A multichannel professional disk recorder can also provide affordable disk caching for multiple channels simultaneously — a capability that's being put to good use by the TV3 Broadcast Group in London. Along with its TV3 commercial broadcast, the group offers the TV1000 and TV1000-Cinema subscription movie channels. Customers

Continued on page 32



At times like this, you better have an intercom system you can count on.

Things could go from warm and sunny to partly cloudy rather quickly on the set if you're unable to communicate effectively. That's why Telex developed ADAM™, the most advanced intercom system ever designed. It allows communication with up to 1,000 people with CD quality audio and takes up minimal space, eliminating unnecessary clutter. ADAM™ (Advanced Digital Audio Matrix)

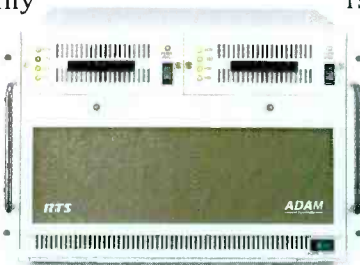

is cost effective, all digital and backward compatible, so it will work with your existing RTS™ CS9000 series key panels. And because there is no size limitation, you'll never outgrow ADAM™. These features make ADAM™ a system of the future, available today. Exactly what you'd expect from a sound company like Telex. Give us a call, we'll help you keep your sunny disposition.



RTS™

RTS™ Intercom Systems. A Product of Telex.

9600 Aldrich Avenue South • Minneapolis, Minnesota 55420 USA • 612-884-4051 Fax 612-884-0043

Circle (9) on Reply Card

www.americanradiohistory.com

Earn money *in your* spare time!



THERE ARE HUNDREDS OF
WAYS TO MAXIMIZE
YOUR SYSTEM'S
REVENUES WITH THE SONY
VIDEOSTORE FILE SERVER.

THE SONY VIDEOSTORE SYSTEM IS:

EXPANDABLE

Each media unit has a storage capacity of 4.5 hours. The VideoStore system can be easily and economically expanded to up to 31.5 hours of storage. That's almost 3,800 :30's.

FLEXIBLE

Because it's digital, the VideoStore system gives you non-linear random access to your entire library. Spots can be added, canceled or moved with an average access time of .2 seconds from command to play.


RELIABLE

Sony's RAID 3 Predictive Maintenance™ technology provides: advance notice of a failing component; interruption-free playback in the event of most any component failure; and hot swappable components. Plus, in the event of hard drive failure, all lost data is rebuilt automatically, as a background task when the hard drive is replaced.

CONFIGURABLE

Up to 12 simultaneous, independent video/audio output channels per server. That could mean hundreds of channels.

SONY



THE SONY VIDEOSTORE SYSTEM'S SMALL
FOOTPRINT MEANS MORE REVENUE
OPPORTUNITY FROM LESS SPACE.




The new Sony VideoStore™ Multichannel Video File Server lets you bring the advantages of digital storage to your commercial playback needs. With the VideoStore system, you can access a huge library of material – instantly and in any order. Last minute changes are simple. Picture quality is improved. The system is designed to be more accurate and reliable than your current analog system – you can have absolute verification every time a spot airs. And there's no more time wasted assembling hundreds of spots onto a cassette – you simply enter the playlist into the VideoStore system. No more resource conflicts. Changes are just a matter of adjusting the playlist. Since the VideoStore system is digital, you save money on labor, maintenance, equipment; you make money from last minute opportunities. You basically make out financially, both coming and going. For further information call 1-800-635-SONY, ext. EARN.

IT WAS JUST ANOTHER PEACEFUL DAY IN THE LIFE OF
BERT CANAVAN, SALES MANAGER. THEN, THE PHONE RANG...

HELLO, MR.
WEINER. YOU
NEED YOUR SPOT
ON AIR? ASAP?!
COST IS NO
OBJECT? ER,
YES SIR!

WOW. WEINER INDUSTRIES IS OUR
BIGGEST ADVERTISER. STILL, THERE
ISN'T MUCH TIME.

THIS MEANS

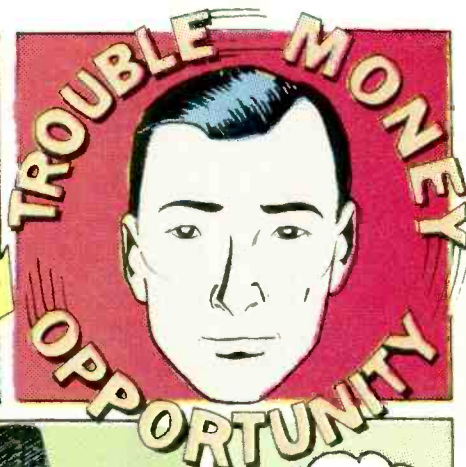


O.K. FIRST I'LL RUN
DOWN TO THE LIBRARY AND
GET THE SPOT HOW TOUGH
CAN I BE?

OH NO!

THERE'S
GOT TO BE A BETTER
WAY TO MANAGE
SPOTS. THIS
IS INSANE.

HERE IT IS.
AND THERE'S STILL
A MINUTE TO GO.

FINALLY CANAVAN
LOCATES THE CASSETTE.

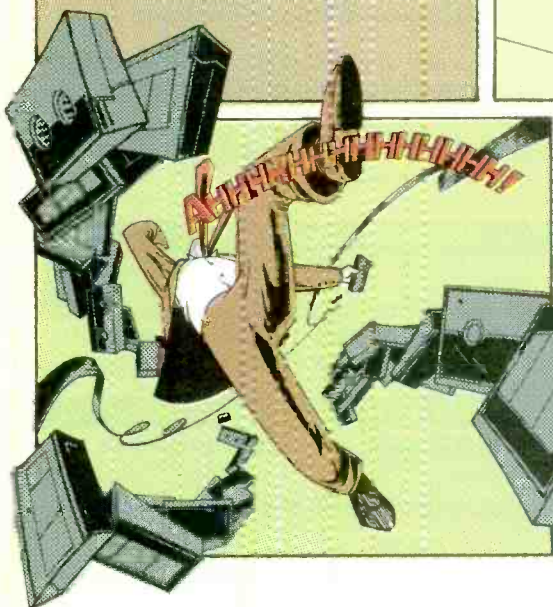

UGH, WHAT AN AWFUL DREAM.
THANK GOODNESS MY OPERATION HAS THE
SONY VIDEOSTORE SYSTEM. I GUESS I HAVE TO
LAY OFF THE ANCHOVY PIZZA BEFORE BED.

YOU TOO
CAN END YOUR
COMMERCIAL INSERTION
NIGHTMARES.
THE EXPANDABLE
FLEXIBLE RELIABLE
SONY VIDEOSTORE
SYSTEM ALWAYS
DELIVERS A HAPPY
ENDING.

the end

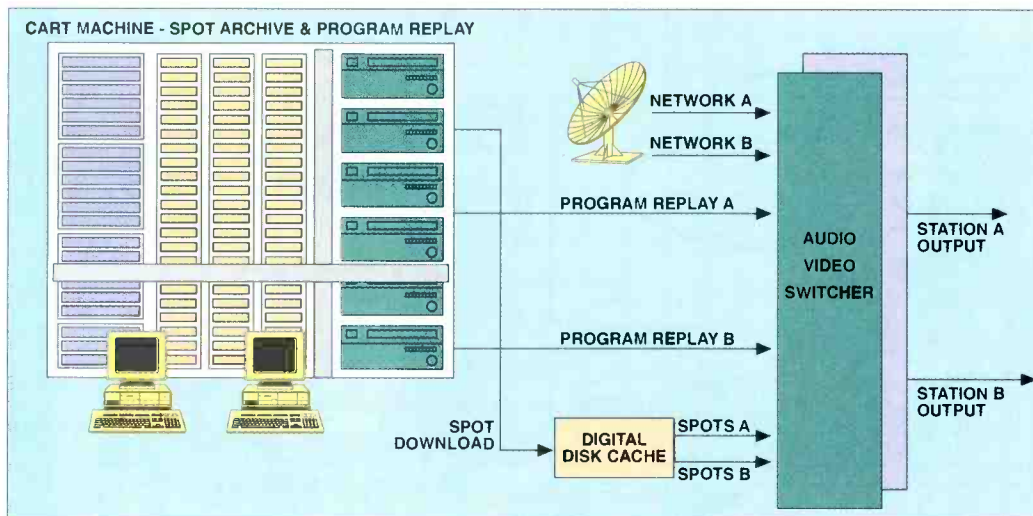


Figure 1. Serving as a disk cache for commercial spots, a professional disk recorder can provide spot playout for multiple channels from the same set of disks.

who subscribe to TV1000 receive TV1000-Cinema for free; both channels play the same movies but on a different schedule. Having the second channel increases value but not revenue, so an affordable way of providing this service is needed. The disk recorder plays back promotional materials and interstitials for both channels, as well as short segment

material to fill out the hour segments.

GloboSat, the cable arm of Brazil's TV Globo and one of Brazil's largest subscription channel providers, also puts multichannel disk recording to good use. One disk recorder handles promos and commercials for GloboSat's own movie, sports, entertainment and news channels. Another

disk recorder stores and plays back commercials for GloboSat's rebroadcasts of the Fox and CNN networks.


Time delay flexibility

Multichannel disk recorders can record video and audio and play it back, delayed, while continuing to record, freeing tape machines for other uses. This feature makes them ideal for program delay, whether the goal is a 10-second delay or to capture programming for playback in a later time zone. When ongoing delays are needed that are longer than the duration of a tape (a 4-hour time delay with 3-hour tapes, for instance), disk technology's higher storage capacity is particularly cost-effective, because it avoids the need for an additional tape deck.

CBS currently runs 10 D-2 tape machines non-stop for each time zone delay; five machines record the network signals, and the other five provide redundancy. The network is currently initiating a system that replaces all 10 tape machines with two disk



SAFE AREA GENERATOR




SA104



- FITS LEITCH OR GRASS VALLEY DA FRAME, STAND ALONE IN BVS FRAME
- REMOTE CONTROL INCLUDED
- LOCKS TO INCOMING VIDEO
- STANDARD OR SPECIAL ASPECT RATIOS



- safe action
- safe title
- center cross
- blanking markers



- positionable full screen cross

broadcast video systems ltd.

40 West Wilmot Street, Richmond Hill, Ontario L4B 1H8
Telephone: (905) 764-1584 Fax: (905) 764-7438

Circle (11) on Reply Card

Hear Digital Here



Digital-to-analog conversion now inside Wohler 1U and 2U powered stereo monitors.

EMBEDDED AUDIO IN SERIAL DIGITAL VIDEO - Serial Digital Audio Extractor (SDAE) strips embedded audio from serial digital video signal and converts it to AES/EBU format.

AES/EBU DIGITAL INPUT - Accepts AES/EBU signal from SDAE or other external source and converts to analog.

SEE DIGITAL HERE



AES/EBU LEVEL METERING MODULES - 1 to 10 stereo channels in 1U. "Mix & match" digital and analog metering modules in the same unit.

AND SWITCH DIGITAL TOO!

AES/EBU ROUTING SWITCHERS - 8x1 to 16x2 in one rackspace.

Complete digital audio solutions from...



Wohler Technologies
Innovative Audio Monitoring Systems

713 Grandview Drive, South San Francisco, CA 94080
(415) 589-5676 FAX: (415) 589-1355

Circle (12) on Reply Card



**Constant
Change.**



Constant.

ADC's New LightSwitch™ — The "Future-proof" Digital Router.

As digital formats come and go, so does a lot of expensive equipment. But while changing formats often requires upgrading cameras, decks and other source equipment, it doesn't have to affect your switching system.

Introducing the new LightSwitch digital router from ADC. A switching system that literally doesn't care what format you use. By avoiding internal reclocking, the LightSwitch router is able to switch any true digital signal, regardless of format—even ones that don't exist yet! It can interface with either coax or fiber and features on-site matrix mapping, group takes, chop mode and RS232/RS485 control panel interfaces.

So, regardless of what digital format the future holds—from D1 to HDTV—turn on the LightSwitch router from ADC. For more information about LightSwitch or our digital video and audio fiber optic links and DAs, call us at **1-800-726-4266** or circle the reader service card below.



Circle (22) on Reply Card

www.americanradiohistory.com

recorders. "Doing time zone delays for several different time zones can tie up a quarter of a million dollars in tape machines very quickly," explained Robert Seidel, vice president of CBS Engineering. A 4-channel disk recorder "essentially provides four virtual VTRs. In terms of the sheer number of tape machines involved, we expect to realize a significant savings in capital and free those assets for other uses."

Peaceful coexistence

As the previous examples suggest, disk and videotape are best viewed as complementary, rather than competing technologies. At roughly a nickel per megabyte, tape is far less expensive than disk, and currently is the storage medium of choice for archival purposes and full-length programming. For short elements, on the other hand, disk technology can increase reliability, performance and system storage capacity, while reducing overall cost.

Disk storage can extend the lifetime and the utility of existing tape equipment. Disk caching can enable one robotics system to serve as a central archive for spot insertion on multiple independent channels. Spots stored on archive tapes in the library can be downloaded to the disk recorder cache on an as-needed basis, enabling a single 4-channel disk recorder to support as many as

three on-air channels simultaneously. Caching can also lessen the wear and tear on tapes, tape heads and robotic systems because tapes are used only to load the disk cache, not for play-to-air. Each element is loaded only once, regardless of how many times it is repeated during the broadcast day. The VTRs that are freed up can be used for archival storage and the playout of long-format material. This can significantly increase the amount of material on-line without adding expense.

In addition, disk-based systems should bring about a reduction in maintenance costs and an increase in reliability. The mean time between failure (MTBF) for disks is close to 800,000 hours and rising. (See the related article, "RAID Storage Technology," p. 40.) A small array of eight drives yields an array MTBF of close to 10 years! Operating costs are lower as well because there are no heads to clog and no brushes or rollers to clean and replace.

Compression quality

Although hard-disk technology has a proven record in the computer industry, a successful disk storage system for TV applications must be tailored to the requirements of professional TV production and playout. When evaluating disk storage systems, look for the features you will need and use, and

pay attention to image quality.

TV disk storage systems rely on image compression to compensate for the tremendous amounts of data needed to represent a video image. For example, a single second of uncompressed CCIR 601 video contains more than 21MB of data, and an uncompressed 30-second spot nearly fills two 340MB hard disks. Not only must the system store this data, but to deliver several streams of video to multiple output channels, it must carefully manage the data flow to ensure a continuous video stream to each channel. Without compression, this task can quickly overwhelm even powerful microprocessors, fast buses and high-speed system-to-disk interfaces.

Compression has been applied throughout the history of the TV industry to deliver practical solutions economically. Representing a continuous image as 525 or 625 lines is a form of compression, as is the sampling of a moving image at 25 or 30 frames per second or the interleaving of luminance and chrominance signals. Modern digital compression techniques extend these principles by eliminating redundancy in the picture.

For professional TV applications, digital disk recording systems succeed or fail on the quality of their compression. Successful systems must compress image data enough to manage it in real time and ensure that when



The Port Authority.

Back in 1986, Sealevel launched its first generation serial I/O interface for the PC. In the nine years that have followed, we have grown to over 75 communication and I/O products for the PC and compatibles.

And each remains true to our original course: to provide you the value of high end features and reliability at low end prices.

Versatile Vessels - Sealevel products provide selectable addressing and flexible interrupt request selections. 16550 UART's are standard while optional 16650 enhanced UART's are available to provide compatibility with twice the buffer size.

Chartered Voyages - And we're one of the few that provides the value of customized products. You can direct our resources to design and build customized products to fit your specific needs.

Lifeline - Of course, we provide the value of comprehensive technical support staffed with knowledgeable people who can navigate you through even the roughest water.

Whatever Floats Your Boat - We manufacture a wide variety of communication and I/O cards for multiple platforms including ISA Bus, PC/104, PCMCIA, and Micro Channel.

Products Include: Multi-port DOS, Windows, and OS/2 Serial I/O

• High-speed Sync/Async • Digital/Latching Relay I/O

• Solid State Disk Emulation Systems

Electrical Interfaces Supported: RS-232, RS-530, RS-422/485, RS-449, 20mA Current Loop, V.35, and more.

Visa and MasterCard accepted. All brand and product names mentioned are trademarks or registered trademarks of their respective holders.



PO Box 830

Liberty, SC 29657

Tel: 803.843.4343 • Fax: 803.843.3067

Circle (23) on Reply Card



Hard Disk. Easy Choice.

Who Says You Can't Buy Experience?



A disk system is just another piece of computer hardware—until you add the decades of broadcast experience that only Odetics offers. Broadcast expertise makes the SpotBank™ from Odetics your most flexible, cost-effective, and dead-on reliable choice in on-air disk systems.

Actually a complete family of format-independent disk automation systems, SpotBank integrates network sources, programs and spots as well as tags and other still images for single and multi-channel applications. It has all the features you need:

- Control of up to 24 devices—digital disks, VTRs, and a variety of switchers

- RAID3 disk controller provides redundancy to protect against data loss
- MicroSpot™ option for easy news replay
- Interfaces for all popular traffic systems
- MediaPrep™ software automates dubbing new spots to disk
- Four playlists on one screen allows single operator control
- Smart management of disk storage prevents fragmentation

So don't compromise on your bottom line. Odetics knows disk technology as well as we know broadcast. That equals an easy choice for you.

Call today to (800) 243-2001.

Director of Sales
Bill Keegan
(714) 774-2200

Northeast
George Anderson
(609) 953-9101

Southeast
Emerson Ray
(813) 960-0853



West
Chuck Martin
(702) 256-7001


South Central
David Scally
(404) 917-9506

Canada
Applied Electronics
(905) 625-4321

© ODETICS 1995 9671

Circle (24) on Reply Card

GOT SERIAL?

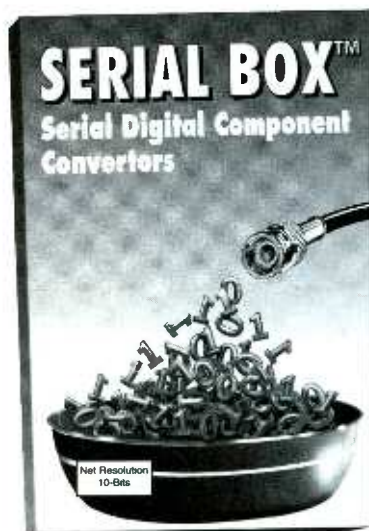

Then see us for
cost-effective
digital-analog
conversion.


Multi format.
Multi-standard.
10-bit clean.

ENSEMBLE
DESIGNS

PO Box 993 • Grass Valley, CA 95945
916 478-1830 • Fax 916 478-1832
info@endes.com

IBC
Booth 11353

Circle (25) on Reply Card

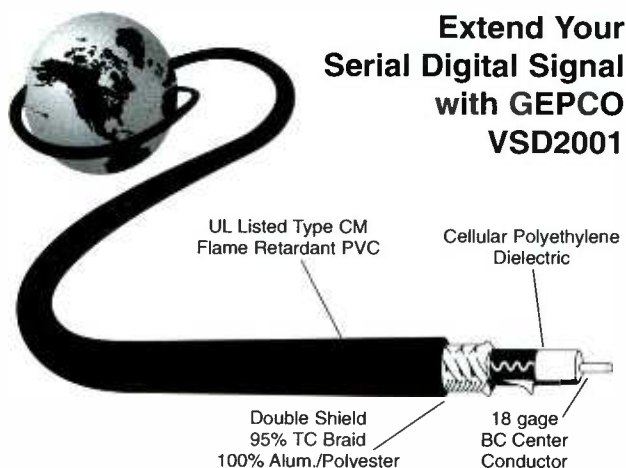

**Extend Your
Serial Digital Signal
with GEPCO
VSD2001**

Gepco's Video Serial Digital cable outperforms traditional precision video cable because it has a larger center conductor and dielectric which means lower attenuation at higher frequencies. This enables you to make longer cable runs.

The RG/6 Type VSD2001 is suitable for all serial digital applications, post production, TV studios and HDTV. It is a stock item available in bulk lengths, various colors and can be connectorized and custom-cut to your length requirements. All Gepco cable is made in the U.S.A.

1-800-966-0069

Ask your sales representative for a VSD2001 sample
Cable to carry you into the next millennium

GEPCO INTERNATIONAL, INC. 2225 W. Hubbard, Chicago, IL 60612
312-733-9555 Fax 312-733-6416 TOLL-FREE: 1-800-966-0069



Circle (26) on Reply Card

played back it meets quality expectations. Steady progress in algorithms and compression hardware have improved image quality to a level that is acceptable to the TV industry.

Regardless of the compression standard used, the results will depend on the manufacturer's sophistication and expertise in implementing the standard. In addition, image quality is affected by interaction between compression schemes and noise in the signal being compressed. For example, interference artifacts between the chrominance and luminance information can impair the picture. These artifacts are represented as image data and bandwidth is wasted compressing them and then playing them back. Thus, the better job a system can do on decoding incoming signals and reducing noise without reducing detail, the better job of compression it can do and the better performance it will provide.

Objective test methods for compressed video systems are being developed. For now, however, the proof of image quality must be in the playback. Careful comparison of the compressed/decompressed video with the original uncompressed video will help when making a subjective judgment of the results.

Performance and flexibility

In addition to high image quality, disk storage systems must provide high performance and flexibility for TV applications. Disk storage systems may provide an industry-standard bus, such as EISA, to control internal devices, such as the disk recorder boards, I/O modules, and mix/effects, and to handle audio data. Even with data compression, however, traditional computer buses are not up to the job of transferring high-quality video data in real time. Systems that rely on a bus architecture severely limit the number and the quality of simultaneous video and audio streams. If you're evaluating disk storage systems, expect to find sophisticated routers or other custom hardware that supplement the standard PC bus in moving the data internally.

Along with the system's central processor, look for dedicated real-time controllers for tasks such as field-accurate playback and switching of video and audio signals. Above all, look for a system that has been designed by people who understand television, not by computer specialists trying to move into a new market. This can become apparent when attempting to integrate the system into the real world. EMI/RFI problems are common in station environments and can wreak havoc on systems if they are not properly designed.

Choose a system with an architecture that interfaces readily with your existing production equipment. Because professional disk recording is still a new and expanding field, look for a system designed for future growth and the addition of new capabilities — from new compression codecs to new video standards and interfaces. Make sure the system also provides a range of recording and playback options, plus the features you need for frame-accurate editing.

In short, computer-based hard disks have long been a cost-effective, reliable storage medium. The combination of high-capacity disk storage and advanced compression techniques have allowed professional disk recorders to provide flexibility and power in handling short elements. These systems can also extend the life of existing tape equipment and robotic library systems, and give them new power as well.

Tim Slate and Ray Baldock are product marketing managers in the Video and Networking Division at Tektronix, Beaverton, OR.



E-mail: be@intertec.com
CompuServe: 74672,3124
FAXback:913-967-1905


Buy a digital camera or else.....

Or else you may be stuck with a camera left behind by digital technology

As we all know, communications, video, information...everything is going digital. Isn't it time cameras did? Today's digital camera not only outperforms the best analog can offer but sets new benchmarks in video quality, features, stability and reliability. The days of the analog camera are numbered because digital offers too many advantages to be ignored.

With DIGITAL advantages such as a new video transparency, flesh tone detail to soften facial blemishes, precision detail correction, precision transfer of setups between cameras, a plug-in memory card to recreate exact setups weeks or months later and serial digital outputs for D-1 and D-2/D-3 VTR's, now is the time to consider what all cameras will be.....DIGITAL.

Introducing the *Digital SK-2600*

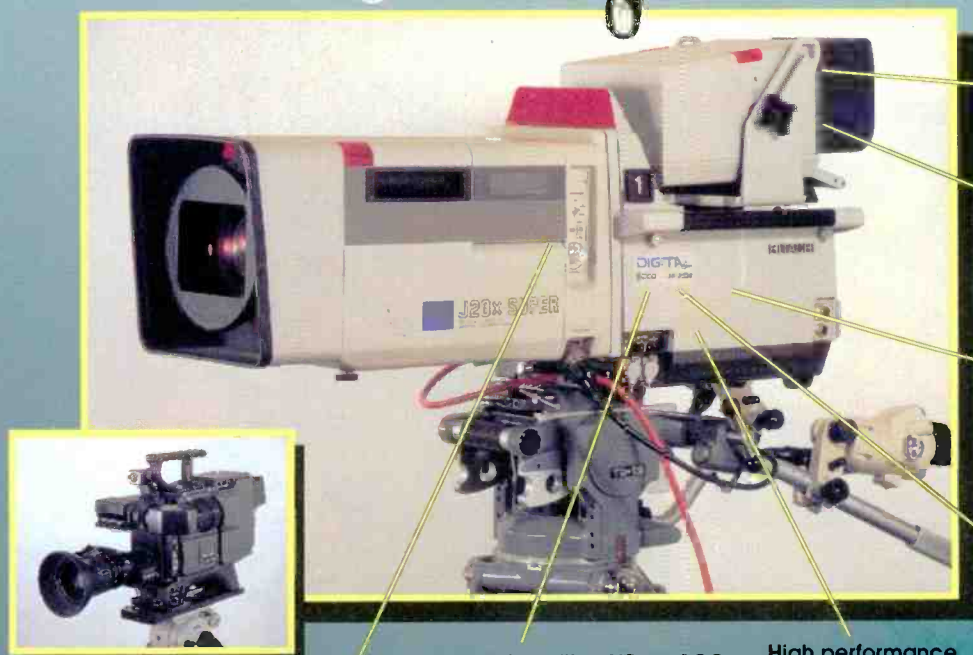

SK-2600P Portable Companion

- No Diascope[®] internal automatic camera setup
- Thru-the-Lens[®] automatic setup with standard grey scale chart

Plug-in 6 position ND and CC filter wheels allow easy insertion of special effect filters with full remote control capability



High performance Ultra-Band triax system (12MHz Green) or Field triax system for long cable lengths or Digital optical fiber system

Unique PIP (Picture in Picture) Allows a second video source to be windowed with camera video in any of four quadrants or reversed with camera video

Separate H&V detail generator for viewfinder makes focus 'pop' for camera operator

Exclusive single LSI device provides 13-bit (minimum) digital processing for RGB video including detail and masking.



The 600,000 pixel CCD provides 900 TV line resolution and dramatically reduces aliasing. An optional, 520K pixel CCD is available to provide switching between 4:3 and 16:9 aspect ratios at the push of a button.



Network Users:
CBS TV City, Los Angeles
CBC Toronto, Canada

Call today for more information or a demonstration.


HITACHI

Hitachi Denshi, Ltd.
Hitachi Denshi America, Ltd.

New York	(516) 921-7200	Atlanta	(404) 242-3636
Los Angeles	(310) 328-6116	Dallas	(214) 891-6381
Chicago	(708) 250-8050	Canada	(416) 299-5900



SNELL & WILCOX

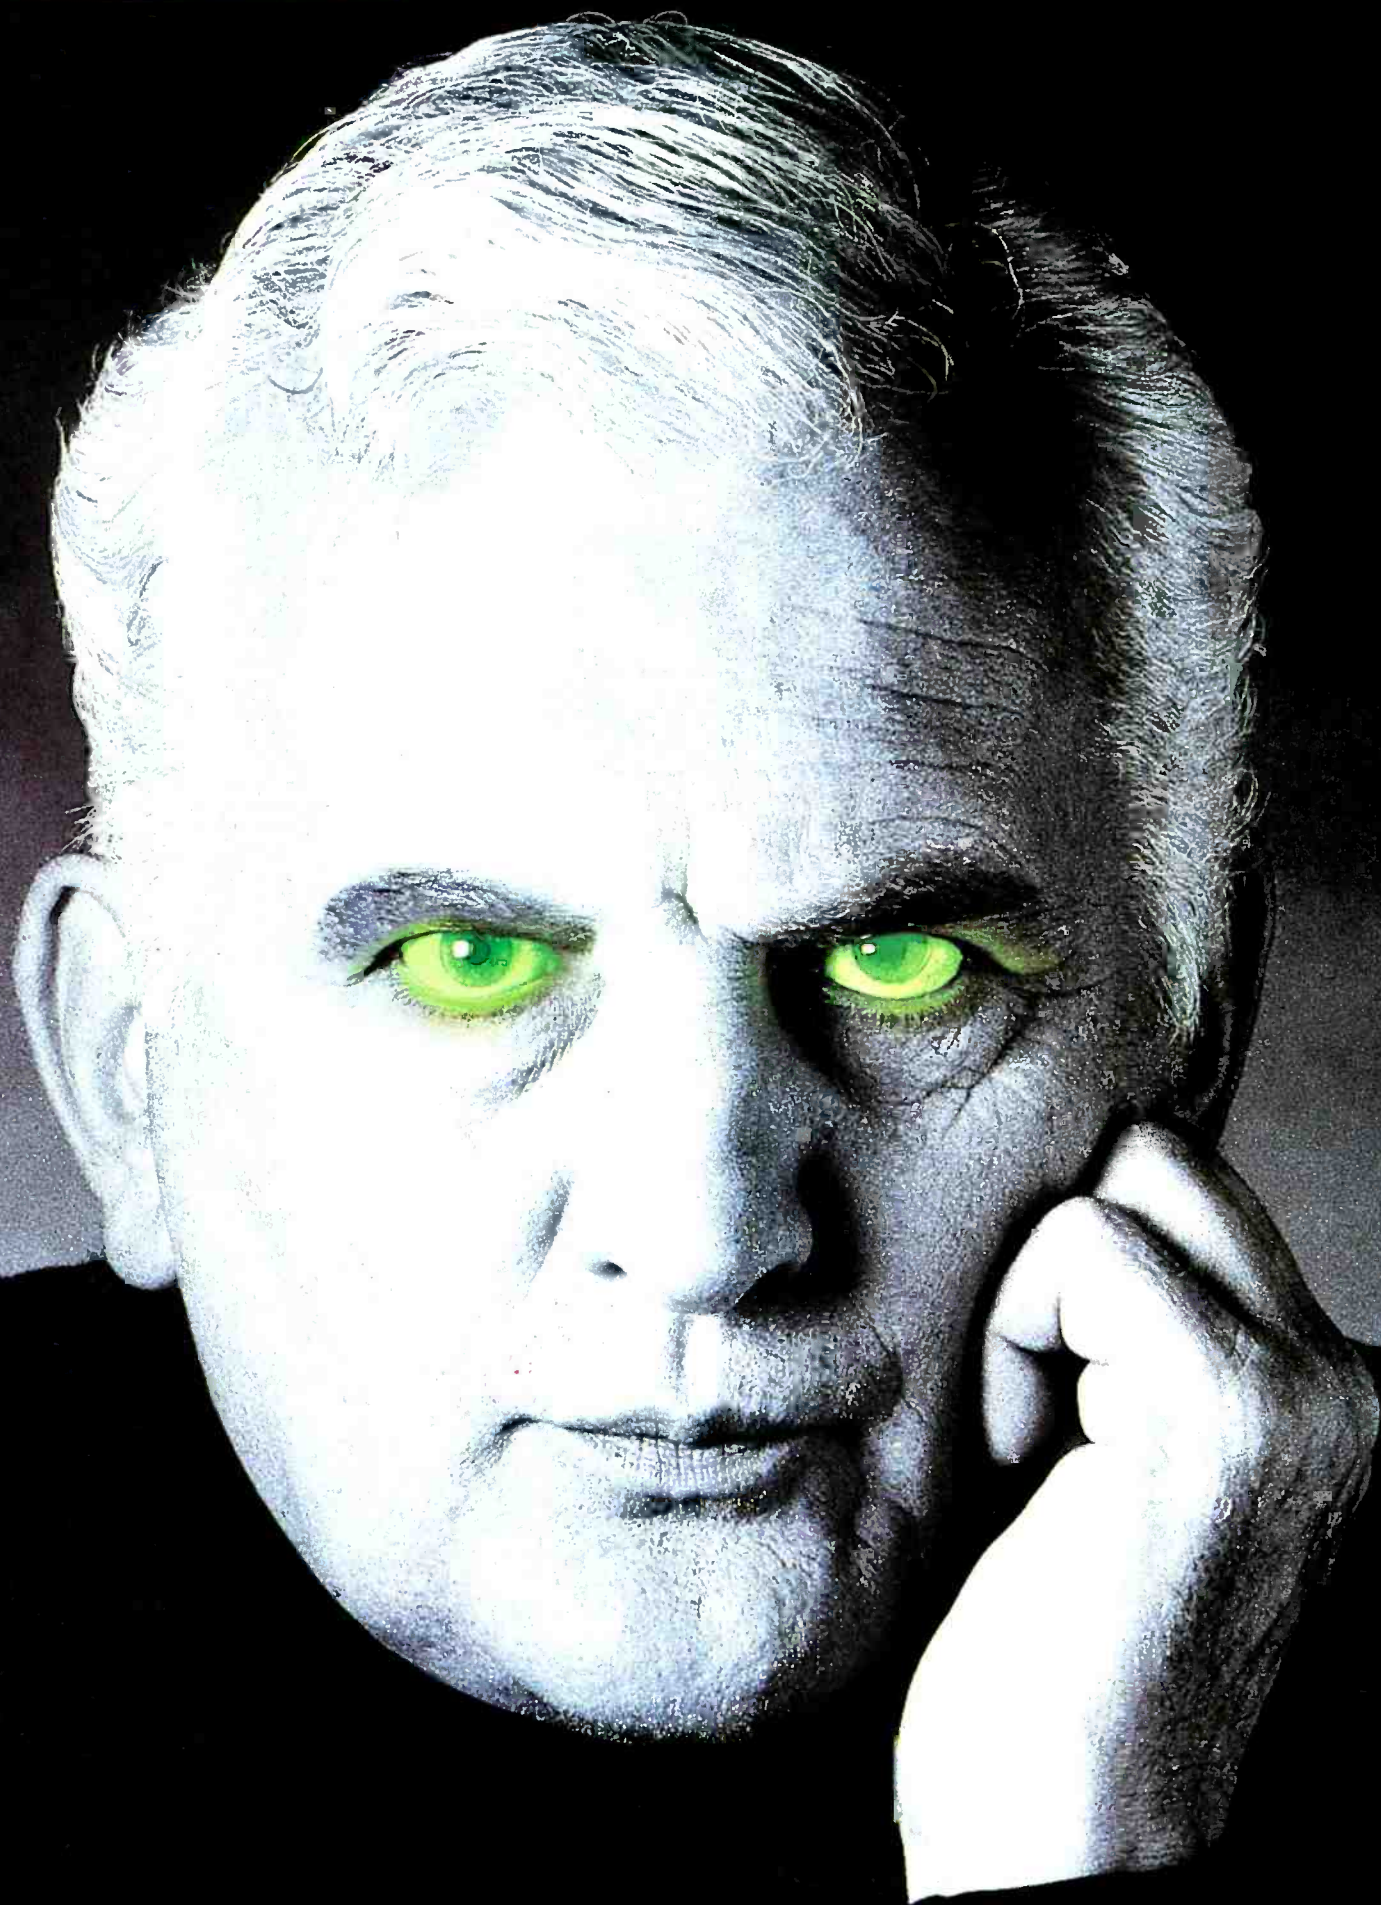

'I can
give you
amazing
powers.'



How can he do it for the price?

Circle (40) on Reply Card

RAID

storage technology

RAID arrays are needed even with 100-year MTBF disks.



The Bottom Line: —

Disk drives, like airliners, don't crash often. But when they do, the amount of damage can be tremendous. Fortunately, a technology called RAID acts as your disk drive's seat belt — keeping the data intact and available after a drive crashes. Even though some disks have published MTBFs of one million hours, using them without RAID in real-time broadcast applications can be like flying without your seat belt fastened. —

How would you feel if the airline you fly with removed all the seat belts, took out the escape slides, sealed the emergency exits, and eliminated the fire extinguishers because, on the average, they crash only once every 400,000 hours of flight? Feel like taking the train?

Disk-drive Mean Time Between Failure (MTBF) is a much-talked-about and generally misunderstood term. The methodologies used by manufacturers to establish MTBF specifications have changed over the past several years. The newer methodologies aren't necessarily better or worse than their predecessors — they're just different, reflecting a different view of how to express the reliability of a family of disk drives. This change, and general improvements in disk-drive technology, are the catalysts for an increase in published MTBFs from under 50,000 hours to well over 500,000 hours and in some cases, more than 1,000,000 hours (114+ years!). And they continue to increase.

MTBF

The MTBF calculation is a statistical method for predicting the reliability of a device. For electronic components, there are published standards for calculating MTBFs. The MTBF of a device is generally determined by the failure rates of the device's individual components. Failure rates for individual components are standardized and found in published reliability references. The arithmetic average, or mean, of the component failure rates yields the device's failure rate, which is easily expressed in hours between failures.

This type of MTBF calculation is interpreted as a prediction of a device's life. In fact, it was common for a drive's warranty and MTBF period to be approximately the same. This methodology predicts the useful life (a component failure rendering a device useless) of an individual device. But it is only a prediction, and then, it only predicts the average time between failures. If you installed a number of like drives, some

would fail before reaching the MTBF while others would last well past the MTBF. Furthermore, it often assumes a period of infant mortality with a decreasing rate of failure until the device's steady-state failure rate is reached.

More recently, other methods of MTBF calculation have become adopted for published disk-drive MTBF specifications. These methods predict the failure rate for a family (e.g. large statistical sample) of disk drives, instead of an individual device. The methodologies are typically based on either field return statistics or ongoing reliability testing (ORT). Field return data is either based on statistics collected for similar products (used for a new product), or on statistics for the actual device if it has a significant installed base. However, given the short life cycles of today's disk drives, by the time statistically significant field return information is available for a particular drive, most users are considering using the next generation of drives.

Using field return data for drives with older, but similar technology has merit, but is not without risk. No matter how similar two drives are, there are differences in design and manufacturing processes. These differences may be enough to mask an endemic problem with the newer drive that manifests itself as a higher failure rate. Furthermore, as drives become more intelligent with higher degrees of onboard processing capability, the influence of microcode design on reliability shouldn't be discounted. After all, a drive failure caused by a microcode bug is just as much a failure as a failed circuit or bad bearing. Unfortunately, software problems tend to be insidious and difficult to identify.

Like field return data, ORT is not foolproof. Accelerated life tests, typically involving a sample of drives exercised to their limits under extreme environmental conditions, do not guarantee a correlation between the test results and actual performance in field conditions. No matter how stressful this type of testing can be, it does not subject a drive to the same conditions as does use

Continued on page 44

Shooting Star.



The HK-377 Ultra-wideband Studio/Field CCD Camera System has the highest resolution, sensitivity and pixel count of any NTSC camera currently available. The camera employs newly-developed 2/3" FIT CCDs, each with more than 600,000 pixels. An ultra-wideband triax system with 10MHz bandwidth for each RGB channel delivers an unprecedented 900 TV Lines resolution at the base station output. The new base station has provisions for digital signal output (optional) to accommodate the demands of high-quality production.



The HK-377P portable companion offers the same performance characteristics as the HK-377 and operates through the same Base Station or can be configured for stand-alone operation.

Unique features of Ikegami's new high-end camera also include extensive remote control of detail functions, including the Skin Detail to soften the complexion and to give your stars a more youthful appearance. A high-resolution viewfinder has its own VF DTL (Viewfinder Detail) and PIP

(Picture-In-Picture) circuits. The HK-377 has an AHD (Auto Hue Detect) circuit for "skin tone capture." Master Control Panels are equipped with memory card I/O Ports. A "Snap Shot File" permits control and scene file data to be written into, and read quickly, for shooting parameter replication.

Current users include: ABC (20/20, World News Tonight, Good Morning America, All My Children, Loving, and all shows shot in NY), CBS (Late Show with David Letterman, 60 Minutes, CBS Evening News, and Sunday Morning), Disney/MGM, MTI, TNN, Turner Entertainment Network, WBNS-TV, Goodyear Blimp, Unitel Mobile Video, Channels 2 and 13 Buenos Aires, and TV Globo, Brazil.

Shoot your stars, with the HK-377. Call the nearest Ikegami Regional Office.



The HK-377/377P cameras have the Skin Tone Detail feature which received the Engineering Emmy Award for technical achievement.

T H E P R O F E S S I O N A L ' S C H O I C E

Ikegami Electronics (U.S.A.), Inc. 37 Brook Avenue, Maywood, NJ 07607 East Coast: (201) 368-9171
West Coast: (310) 534-0050 Southeast: (305) 735-2203 Southwest: (214) 869-2363 Midwest: (708) 834-9774

Ikegami

Circle (41) on Reply Card

www.americanradiohistory.com

4,000 hours
of commercials.
It's either
your worst
nightmare or
our broadcast
video server.



4,000 hours of miniature mariners navigating toilet bowls. Underwear salesmen dressed like fruit. Wimpy little pastry chefs made out of dough. If you think watching it sounds bad, imagine the rigors our new Broadcast Video Server has been put through.

CBS has been testing the HP Broadcast Video Server by playing commercials for more than six straight months. In fact, they're installing our BVS at their affiliate, KCBS in Los Angeles. Looks like we passed the test.



© 1995 Hewlett-Packard Co. TMV1D514/BE

Other stations are way beyond the test phase. Like KOLD in Tucson, where the HP BVS has been on the air for almost a year. And it's about to hit the airwaves in Munich and other major markets around the world.

For a clearer picture, call us at **1-800-452-4844, Ext. 9689.*** We'll send you a brochure with everything else you need to know about the HP Broadcast Video Server.

We now return you to your regularly scheduled publication.

* In Canada call, 1-800-450-2271, Dept. 151.

There is a better way.



**HEWLETT®
PACKARD**

Circle (42) on Reply Card

www.americanradiohistory.com

for an extended time. For instance, even if 500 drives are tested in parallel for 2,000 hours (1,000,000 device hours) there are no assurances an inherent problem won't begin to surface after drives have accumulated 10,000 hours on an individual basis.

Regardless of the methodology used, today's MTBF specifications predict the time between failures exhibited for a family of drives, with no single drive operated longer than its specified service life. The service life of a drive is specified by its manufacturer and qualifies MTBF predictions. With a

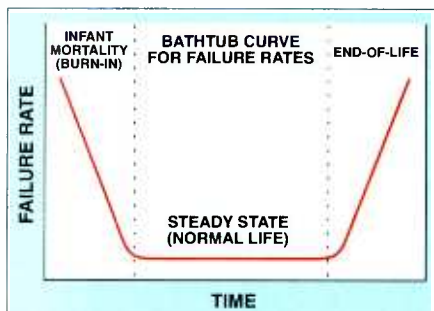


Figure 1. The "bathtub" curve depicts the failure rates of a device over time, from the burn-in phase, in which infant mortality is experienced, to the steady-state period of normal life, to the end-of-life period in which failure rates increase.

published service life, time becomes an environmental specification (similar to temperature, humidity, shock and vibration) not to be exceeded if published reliability specifications are to be realized. Today's high-end drives have service lives of five years, which is the typical warranty period. A drive's service life is analogous to the expiration date on a carton of milk. If you always drink the milk before the expiration date (replace a drive at its service life), you'll likely live your life without pouring a glass of spoiled milk (a high MTBF).

Environmental factors beyond time influence actual and specified reliability. When evaluating drives, care should be exercised to ensure the environmental specifications are similar for different drives. Two drives with identical MTBF specifications are not of similar reliability if their environmental specifications are different. For example, if one 1,000,000-hour drive is specified to operate at 50°C and another is only specified to 35°C, the higher-rated drive will have a higher MTBF rating if only operated at a maximum of 35°C. Even when operated within specifications, two identical drives operated with different levels of stress cannot be expected to exhibit similar failure rates. On this, IBM says, "Gener-

ally, reliability decreases as temperature increases, so drives that are operated in warm environments with poor airflow will tend to have a lower MTBF than those operated in cool environments with good airflow. Drives that experience a high seek rate tend to have a lower reliability than those that experience a low seek rate."

Multiple drive arrays

The total number of failures a user can expect for a pool of drives in a given period is the ratio of the number of drive hours of operation and the drive's MTBF. This is expressed mathematically with the following formula:

$$f \approx (n * s) / \text{MTBF}$$

where: f = total number of failures

n = number of drives considered

s = hours per drive in period under consideration

MTBF = MTBF of individual drive

Consider a video server application. If a video-on-demand (VOD) server was to store 500 titles on-line, how many disk failures can be expected if the server is operated continuously for a 5-year service life? Assuming each title is two hours long and compressed to a video stream rate of 3Mb/s, each title would require about 2.7GB of storage or 1,350GB for all the titles. With approximately 4.2GB of usable capacity per drive, 321 drives would be required. In five years, 14.1 million hours of operation would be put on the 321 drives. If the drives have an MTBF of 1,000,000 hours, then 15 drives, or nearly 5% of the total, would fail.

If, to achieve a higher video stream bandwidth, 2.1GB drives were used in lieu of the higher-capacity drives, 643 drives would be required. These drives collectively would experience 28.2 million hours of operation

during their service life. It follows that 29 drives would be expected to fail.

The distribution of failures over time is generally expected to follow the "bathtub" curve. (See Figure 1.) This type of distribution has a decreasing rate of failure at the beginning of a product's life (infant mortality), followed by a period of steady-state failure, and concludes with an increasing rate of failure corresponding to a bell curve distribution nominally centered at the end of the service life period. While drive manufacturers try to minimize field infant mortality with burn-in testing before shipment, conservative wisdom does not expect new drives to exhibit steady-state failure rates immediately upon shipment. Also, note that the steady-state failure rate is not zero; drives are expected to fail during this period, but the rate of failure is the lowest during the drive's life expectancy.

RAID to the rescue

Video servers are being adopted for a range of applications such as video-on-demand, commercial insertion and on-line editing and playback. A common characteristic of these applications is the need to play back video in real-time. Without redundancy, drive failures in a video server cause interruptions to the video streams being sourced by the server. Fortunately, these interruptions are preventable using a technology called Redundant Array of Independent Disks (RAID).

RAID is designed to provide cost-effective redundancy to groups, or arrays, of disk drives. The technology was originally presented in an academic paper from the Berkeley campus of the University of California. The paper presented five alternative techniques for implementing redundancy. These

techniques were referred to as Level 1 through Level 5, otherwise known as RAID-1 through RAID-5. A redundancy technique predating the paper, typically referred to as mirroring, was used as a frame of reference for the other four levels of RAID and was termed RAID-1. This technique duplicated every disk in an array. If one failed, there was another with a mirror image of the first's data. This technique was common in large-scale computing environments such as mainframes. However, mirroring is expensive because the total purchased storage capacity is twice what is required.

The additional RAID levels were devised to lower the cost of redundancy while preserving the redundancy and performance attributes of RAID-1. The underlying principle of lowering the re-

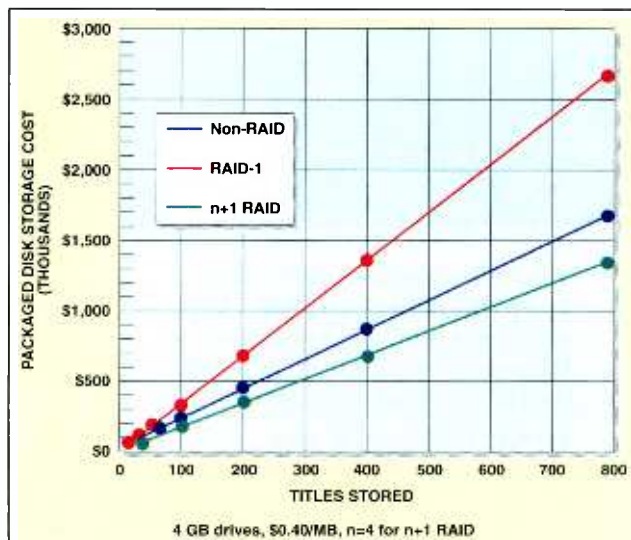


Figure 2. This chart shows the typical storage costs for varying number of compressed (3Mb/s video rate) 2-hour movies. Shown are costs for non-redundant, n+1 RAID and mirroring (RAID-1) configurations.

Don't Miss

PRIME IMAGE

At World Media Expo & IBC



Penta Standards Converter

The new Penta Standards Converter features the breakthrough penta-field interpolation system and reduces anomalies 2 to 1 over other methods, surpassing broadcast specifications worldwide. The converter is contained in a 1 U high rack mountable case.

Prime Image Presents the Prettiest Pictures You'll See at World Media Expo & IBC.

We realize these are just still pictures of boxes printed on a magazine page. But when it comes to good-looking video, nothing you'll see at World Media Expo & IBC. will look as good as the new products from Prime Image. Stop by our booth and see what's newer, better, and less expensive than the competition in audio/video delay, standards converters, logo insertion, and time base correctors/synchronizers.



A/V Delay

The Audio/Video Delay delays audio and video together or separately with no data compression. The 3 U high rack mountable unit consumes less than 50 watts of power.



Time Base Corrector/Synchronizer

Two new Time Base Corrector/Synchronizers: A 2 U high rack mountable unit, with new encoder technology for component transcoding. And a plug-in, high-performance transcoding component time base corrector/synchronizer, with optional standards conversion, for PC-based effects systems.

*See us World Media
Expo Booth # 1960 &
IBC Park Hall #11-542*

Self Contained Logo Inserter

Our Self contained Logo Inserter includes keying effects, synchronization, and time base correction in a 1 U high rack mountable unit.

**Prime
Image®**

Prime Image, inc., 19943 Via Escuela, Saratoga, California 95070, (408) 867-6519, Fax: (408) 926-7294,
Service: (408) 926-5177 • National Sales: (217) 787-5742, Fax: (217) 787-3587

Circle (27) on Reply Card

dundancy cost is the use of error-correcting codes (ECC) stored on a single disk. The ECC enables a disk array subsystem to regenerate the data that was contained on a failed drive. Because the ECC for an arbitrary number (n) of data disks is stored on a single disk, the cost for redundancy is much lower than with RAID-1 ($(n+1)$ disks for RAID-3, 4 and 5, $(2*n)$ disks for RAID-1). See Figure 2 for a comparison of the relative costs.

The $(n+1)$ RAID configurations (levels 3, 4 and 5) have similar redundancy capabili-

ties, but differ in their performance characteristics. This is due to the techniques used to distribute user data (e.g. digitized video) across the array. RAID-3 uses a byte-striping technique. User data is striped a byte at a time across all data drives. As a result, a RAID-3 array appears to the host as a single disk with a transfer rate equivalent to (n) drives operating in parallel. RAID-3 is ideal for applications that transfer large amounts of sequentially stored data, such as digitized video.

RAID-4 and RAID-5 distribute user data using a block-striping technique. Each block

of user data is stored in its entirety on an individual disk. User data is evenly distributed a block (or sequence of blocks) at a time across the data drives. A disk array subsystem using RAID-4 or RAID-5 has the performance characteristics of a multiple spindle configuration, each spindle servicing different user data requests. Because each spindle is independent, the data rate for each request is low, as compared to RAID-3. RAID-4 and RAID-5 are better suited to applications that access small, randomly distributed pieces of data, in which I/O performance is more important than transfer rate. LAN servers and transaction processing are examples of these types of applications. The difference between RAID-4 and RAID-5 is the method used to store the ECC. RAID-4 uses a dedicated disk while RAID-5 rotates the ECC with user data across all drives. RAID-5's write performance is higher because all write requests do not contend for a single disk as in RAID-4.

Because RAID-3 is best suited for video-based applications, the balance of this article will reference RAID-3 for analysis.

RAID's redundancy

RAID provides redundancy by storing an ECC on a separate disk every time user data is written. If a data disk fails, the ECC is used in conjunction with the remaining data to reconstruct the failed disk's data. The ECC is actually a simple parity code applied to the data stored on the data drives.

An analogy illustrates the principle. Each sector of data on each disk is nothing more than a sequence of numbers. Each byte stored on the redundant (or ECC) disk is the simple sum of the same byte position on each of the data disks. If a disk fails, its data can be reconstructed by subtracting from the data stored on the redundant disk the sum of the data on the remaining data disks. The remainder is the data that was stored on the failed disk. For example, if the number 10 is stored on each of four data disks, then 40 is the ECC ($10+10+10+10$). To reconstruct a failed disk's data, the sum of the remaining data disks, 30 ($10+10+10$), is subtracted from the ECC (40), yielding the failed disk's data, the number 10. Figure 3 illustrates how user data and the ECC is stored on an array with four data drives.

The redundancy technique employed in RAID allows any single drive (including the redundant drive) to fail without causing access to the data to be lost, known as data availability. The RAID Advisory Board (RAB), an industry organization that promotes RAID technology, defines data availability as "an application's ability to access correct data in a timely manner." For broadcast applications this means a RAID-based video server can sustain a drive failure (or,

Out here no-one can hear you scream...


...support counts for everything

MILLER

has over 40 years of unrivalled experience in the field.

Tough, reliable camera support - and performance to match.

MILLER - designed for the world's most challenging conditions.

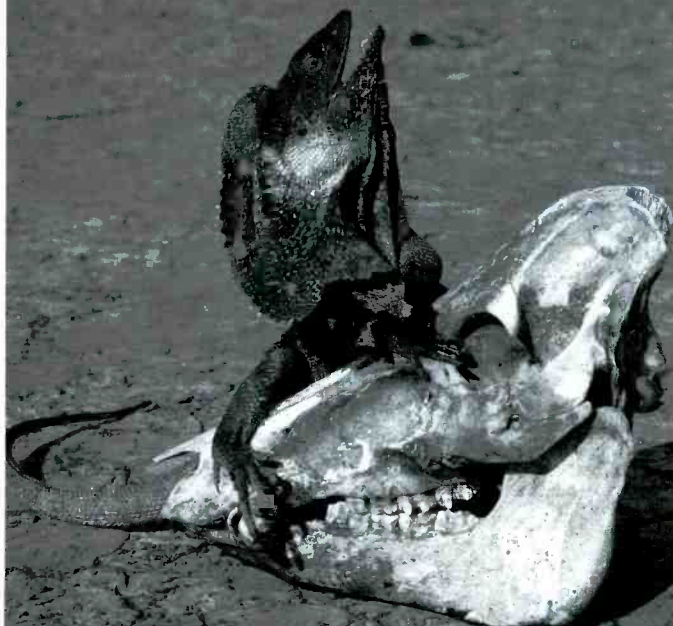

MILLER FLUID HEADS (USA) Inc. Tel: (201) 857 8300 Fax: (201) 857-8188
MILLER TRIPCDs CANADA Tel: (604) 685 5331 Fax: (604) 685 5648

Circle (28) on Reply Card

DIGITAL AUDIO TRAFFIC CONTROLLER.



Control Room A
SSL Axiom

Control Room B
Yamaha ProMix01

Edit Suites
ADAT & DAT'S

Lighthouse introduces its DCA digital audio matrix switcher. The AES digital audio routing capacities start at 8x8(DCA8) and are expandable to 16x16(DCA16M). Larger configurations are available. *Easy-Patch™* software allows for remote RS232 control over signal routing and effects loop configurations. Centralize your effects modules and share them among multiple control rooms. Signal switching is non-protocol dependent with bandwidth to 50Mbit/s. For \$995 the Lighthouse DCA8 can solve your digital traffic jams.

Lighthouse

A SUNDANCE SYSTEMS COMPANY

13451 Colfax Hwy. P.O. Box 1802 Grass Valley, CA 95945 Ph 916-272-8240 Fax 916-272-8248

SEE NO EVIL.

DIGITAL VIDEO WITH DIGITAL AND ANALOG AUDIO TRANSMISSION



Fibox IMS is a 360 mbit/sec digital fiber-optic transmission system which transmits serial digital video plus analog and AES digital audio. IMS offers full compatibility with existing Fibox 20-bit analog and data I/O modules. The addition of AES digital audio and serial digital video makes IMS our most flexible Fibox transmission system to date. IMS is perfect for fiber transmission of up to 8 AES digital audio signals (16 channels of audio). Up to 6 Fibox analog modules can be slaved up for a mixture of analog and digital audio plus digital video in one modular package. Transmit your signals with razor-sharp clarity. See clear to the future with Fibox IMS.

Lightwave

A SUNDANCE SYSTEMS COMPANY

900 Jackson St. Suite 700, Dallas, Texas 75202 Ph 800-525-3443 Fax 214-741-5145

Circle (29) on Reply Card



IT TAKES TEAMWORK TO BE A WINNER.

That's why at Mohawk/CDT we give such priority to quality, service and customer support.

It is these priorities, combined with over 45 years of experience in the broadcast industry, that enable us to offer the widest range of audio and video cables and assemblies available.

Our expanded "Spectrum" product line includes precision audio and video cables and fiber optic digital cables.

For complete information or a copy of our new 32 page catalog write to Mohawk/CDT, 9 Mohawk Drive, Leominster, MA 01453 or call:

1-800-422-9961

MOHAWK

CDT
CABLE DESIGN TECHNOLOGIES



**ISO 9001
CERTIFIED**

LS/ISO 9001/EN 29001

Circle (30) on Reply Card

more precisely, one failure per RAID installed) and still supply video data in real-time for broadcast. In fact, a host accesses (e.g. reads and writes) a RAID no differently after a drive has failed than when all drives are operating. With RAID-3 arrays in particular, there is no performance degradation after drive failures.

The "catastrophic failure" for a RAID array is two simultaneous disk failures. The ECC of a RAID is not able to regenerate the data for two failed disks. However, the principle of RAID says that the likelihood of two disks failing simultaneously is so remote as to be considered negligible. The Berkeley paper presented an analysis that quantified this premise. The metric of concern is the Mean Time until Data Loss (MTDL). MTDL is defined as "the average time from startup until a component failure causes a permanent loss of user data in a disk array." Permanent loss of data occurs when two drives experience failures simultaneously, which, of course, prevents data availability.

MTDL

Like MTBFs, MTDLs are predictions based on statistical probabilities. There are no guarantees that two drives won't fail simultaneously. But because the risk for RAID is so low, there is little justification for pursuing the more costly methods of redundancy that tolerate multiple simultaneous drive failures. The variables in predicting the MTDL of a disk array include the reliability of the drives, the number of drives, and the time to replace and regenerate a failed drive. The Berkeley paper derived the following formula for predicting the MTDL of a RAID disk array:

$$\text{MTDL} = (\text{MTBF})^2 / ((D + C * n) * (G + C - 1) * \text{MTTR})$$

where MTBF = the drive's MTBF,

D = total number of data drives,

C = number of redundant drives per rank (for RAID-3, C = 1),

n = number of ranks (typically n = 1),

G = number of data disks per rank (typically G = 4 or 8),

MTTR = time to replace and regenerate a failed drive.

USER DATA: (512 bytes/block)				
A ₁ ...A ₅₁₂ BLOCK 1	B ₁ ...B ₅₁₂ BLOCK 2	C ₁ ...C ₅₁₂ BLOCK 3	D ₁ ...D ₅₁₂ BLOCK 4	
4 + 1 RAID-3				
DISK 1	DISK 2	DISK 3	DISK 4	REDUNDANT DISK
A ₁	A ₂	A ₃	A ₄	⊕ A ₁ .. A ₄
A ₅	A ₆	A ₇	A ₈	⊕ A ₅ .. A ₈
⋮	⋮	⋮	⋮	⋮
A ₅₀₉	A ₅₁₀	A ₅₁₁	A ₅₁₂	⊕ A ₅₀₉ .. A ₅₁₂
B ₁	B ₂	B ₃	B ₄	⊕ B ₁ .. B ₄
B ₅	B ₆	B ₇	B ₈	⊕ B ₅ .. B ₈
⋮	⋮	⋮	⋮	⋮
B ₅₀₉	B ₅₁₀	B ₅₁₁	B ₅₁₂	⊕ B ₅₀₉ .. B ₅₁₂
C ₁	C ₂	C ₃	C ₄	⊕ C ₁ .. C ₄
C ₅	C ₆	C ₇	C ₈	⊕ C ₅ .. C ₈
⋮	⋮	⋮	⋮	⋮
C ₅₀₉	C ₅₁₀	C ₅₁₁	C ₅₁₂	⊕ C ₅₀₉ .. C ₅₁₂
D ₁	D ₂	D ₃	D ₄	⊕ D ₁ .. D ₄
D ₅	D ₆	D ₇	D ₈	⊕ D ₅ .. D ₈
⋮	⋮	⋮	⋮	⋮
D ₅₀₉	D ₅₁₀	D ₅₁₁	D ₅₁₂	⊕ D ₅₀₉ .. D ₅₁₂

Figure 3. User data is striped a byte at a time across the data drives in a RAID-3 configuration. The redundant disk contains an ECC calculated using the logical exclusive-OR (parity) operator applied to the data stored on all the data disks. This ECC, when combined with the data stored on any three of the data disks, generates the data for the fourth disk.



For AM, FM, SCA
and TV modulation monitors.

WHEN ACCURACY COUNTS...COUNT ON...

Call (610) 687-5550 or write for more
information on Belar Am, FM, Stereo,
SCA and TV monitors.
FAX: 610-687-2686




BELAR
ELECTRONICS LABORATORY, INC.
LANCASTER AVE. AT DORSET, DEVON, PA 19333

Circle (31) on Reply Card

NTL MPEG-2 Video Compression

Tried, Tested and Trusted

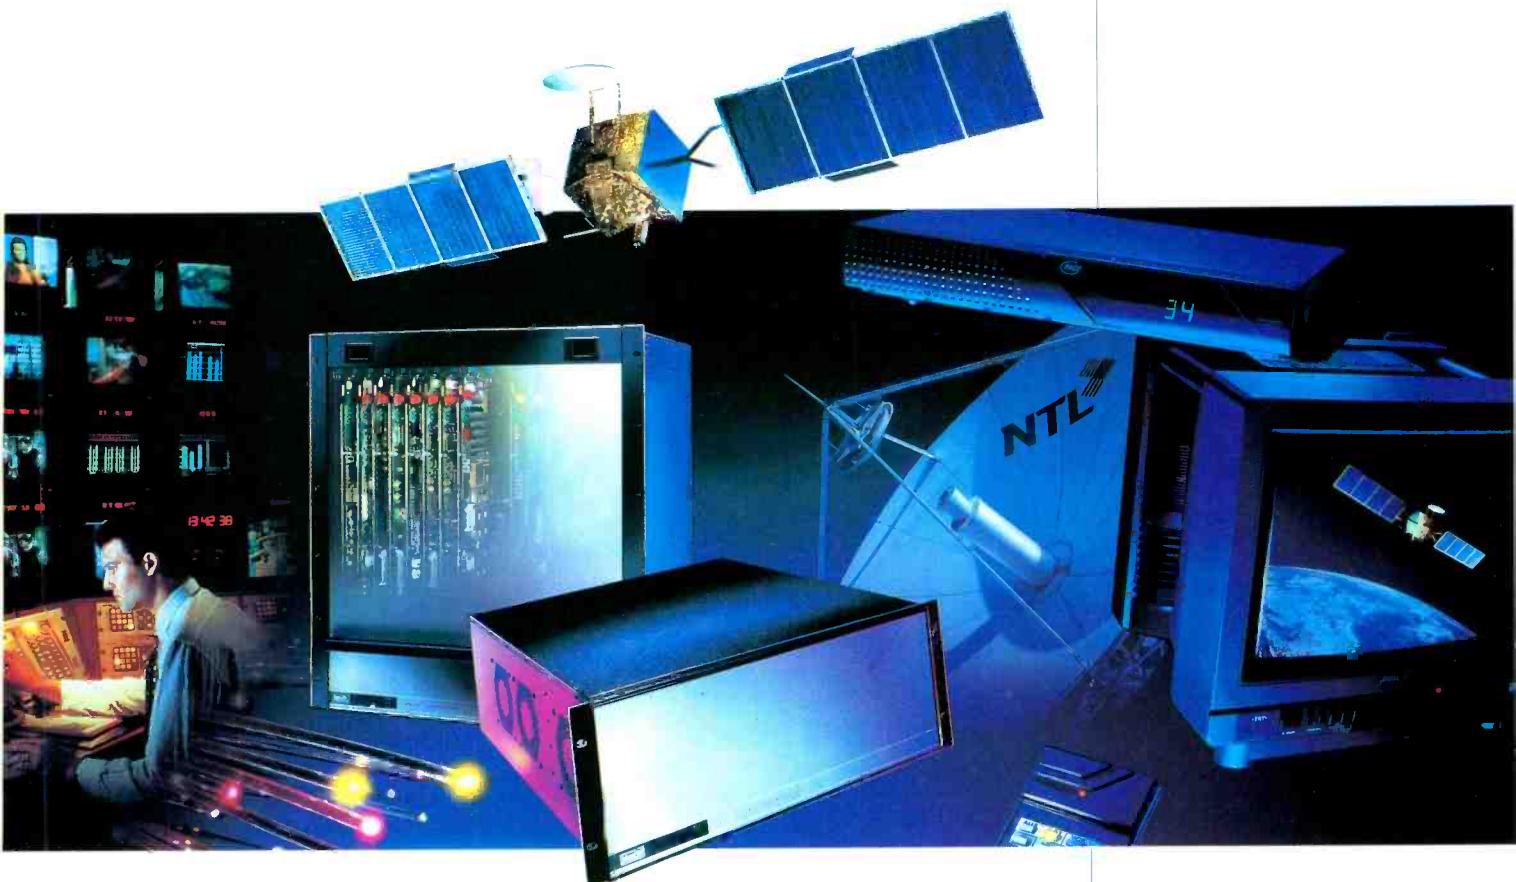

Two years ago NTL set the pace for digital broadcasting with the launch of System 2000, the world's first video compression system based on the MPEG standard.

NTL MPEG systems are now widely in use by television broadcasting operators all around the world giving substantial operational benefits in applications that include broadcast contribution links, distribution to cable headends, satellite news gathering networks, business television and even distribution to terrestrial television antennas.

Now, NTL has launched System 3000, based on the tried and tested technology of System 2000 but enhanced to be compliant with the European DVB standard and the MPEG-2 (Main Profile at Main Level) performance specification.

System 3000 also gives broadcasters additional capabilities including the ability to broadcast up to 18 video channels within a single satellite transponder, statistical multiplexing and various telecom networking capabilities.

This diversity of applications using NTL's established technology means that fully compliant MPEG-2 systems are now being shipped to solve broadcasters' networking problems without the uncertainty of how the system will perform.

When you can't afford to take risks, don't settle for anything less.

Contact Barry Crompton for more information.
Telephone +44 1703-498042.

**See us at
Stand #244, Hall 11
IBC '95**


NTL Advanced Products Division 34 A-C Parham Drive Boyatt Wood Ind. Est. Eastleigh
Hampshire SO50 4NU United Kingdom Tel: +44 1703-498000 Fax: +44 1703-498043

NTL

Circle (32) on Reply Card

www.americanradiohistory.com

New Unique Cable Grounding Kit Series

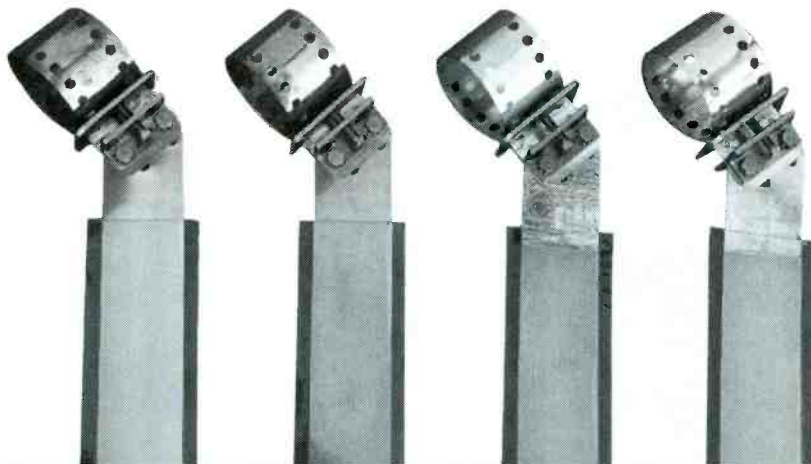

Uni-Kit 2 Series

- ▶ Fits cables up to 2" (down to 1/4")
- ▶ Fits elliptical waveguides
- ▶ Lower resistance (less than half others)
- ▶ Lower inductance (almost half others)
- ▶ Vibration and wind tested
- ▶ Quick nut driver installation
- ▶ Adjustable strap to cable angle
- ▶ Four models for no dissimilar connections
- ▶ Competitively priced



Uni-Kit 2CT
Copper coax
to Tower



Uni-Kit 2CC
Copper coax
to Copper



Uni-Kit 2TT
Tinned coax*
to Tower




Uni-Kit 2TC
Tinned coax*
to Copper

* Can also be used for grounding a galvanized tower leg.

PolyPhaser
CORPORATION

(800) 325-7170 ■ (702) 782-2511 ■ FAX: (702) 782-4476
2225 Park Place ■ P.O. Box 9000 ■ Minden, NV 89423-9000

Circle (33) on Reply Card

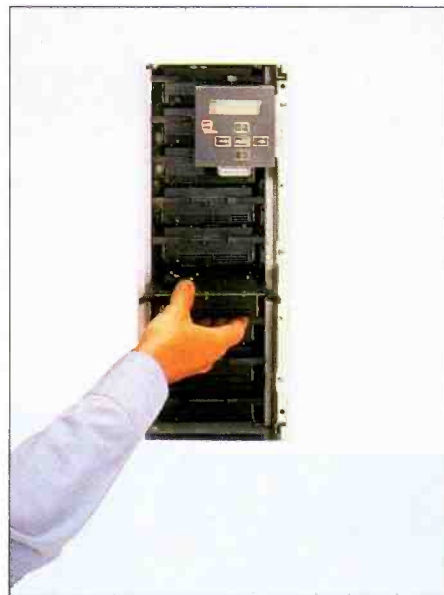

The disks in many RAID arrays are mounted on disk shuttles. The shuttle allows for the hot swap of a failed disk. Once swapped, the controller can immediately begin rebuilding the lost information.

An example based on a typical RAID implementation will show the extremely low probability of two simultaneous drive failures. A typical RAID-3 has four data drives and one redundant drive (e.g. 4+1) configured in a single rank of drives (a rank consists of the data and redundant drives grouped together to form a logical disk). Most users will conservatively replace and regenerate a failed drive within 24 hours (much quicker in many cases). Published disk MTBF specifications are around 1,000,000 hours for high-performance disks. Plugging these values into the Berkeley formula yields: MTDL = 2.08 billion hours = 237,823 years!

Given the earlier analysis of disk MTBFs, a more conservative approach to calculating MTDL substitutes the disk's service life (43,800 hours, typical) for MTBF. In the example, the calculated MTDL drops from an astronomical 237,823 years to a still extremely high 456 years. Regardless, the probability of an individual RAID suffering a "catastrophic failure" is so remote that this technology can be used with confidence in the real-time world of broadcast.

Hot swapping — key to high data availability

In addition to requiring real-time access to video data, broadcast applications often require round-the-clock operations. In this paradigm, servicing a failed disk must not result in downtime. RAID implementations designed to operate in this environment allow users to hot swap failed drives. Special packaging, typically involving a disk shuttle, is incorporated in the array subsystem. The shuttle card slides in and out of the

There are a lot of great performers
in films and videos.



(Many of them are Seagate A/V Professional drives.)

You can get an ordinary disc drive for your audio/video needs. Many people do. But what they don't get is the extraordinary performance these kind of professional applications really demand.

Seagate has a much better approach. It's called the A/V Professional Program.

The program has been developed to provide the A/V industry the absolute best storage technologies. Seagate works with a network of experienced A/V Professional Partners. They're thoroughly trained to assess your system's specific needs and



customize the perfect solution. So you get the highest system performance possible.

With our high performance, high capacity Hawk, Barracuda and Elite drive families, Seagate has long since established a leadership position in the professional A/V market. And now, by using the Seagate A/V Professional Program, you can get an optimized solution that delivers performance other drives simply can't.



You're a professional. So work with the pros. For more information, see our home page at <http://www.seagate.com>, or call 408-438-8111.

 **Seagate**
THE DATA TECHNOLOGY COMPANY

Seagate, the Seagate logo and Elite are registered trademarks and Hawk and Barracuda are trademarks of Seagate Technology, Inc. © 1995 Seagate Technology, Inc.

Circle (34) on Reply Card

The image shows the cover of the 'Winsted 1995 Furniture Catalog'. It features a collage of various furniture items including chairs, tables, and storage units. The text 'Winsted' is prominently displayed at the top in a stylized font, followed by '1995 Furniture Catalog'.

FREE PROFESSIONAL VIDEO EDITORS' GUIDE

- Editing Consoles ● Video Consoles
- Equipment Cabinets ● Micro Computer Stations
- Tape & Film Storage Systems

Preferred by Professionals Worldwide

THE WINSTED CORPORATION

10901 Hampshire Ave. So. • Minneapolis, MN 55438 • 612-944-8556

Phone Toll Free:

(800) 447-2257

FAX: 612-944-1546

The logo for Winsted Corporation, featuring the word 'Winsted' in a bold, stylized font with a registered trademark symbol.

Circle (35) on Reply Card

The logo for BSM (Broadcast Switching Modules), featuring the letters 'BSM' in a bold, stylized font with horizontal lines extending from the sides.

ROUTING/SWITCHING DISTRIBUTION SYSTEMS

Routing/Switching Distribution Systems at the most competitive prices in the country. We have developed our new Cluster System product line which stands alone or interfaces with existing Modula Systems. System pricing, brochures and further information available upon request.

Call or Fax today for a product demonstration in hospitality room at World Media Expo Engineering Conference in New Orleans!

5805 East Sharp Unit C-1
Spokane, Washington 99212
509-534-2499
FAX: 509-534-2428

Circle (36) on Reply Card

array on card guides, much like a printed circuit board. The cards typically plug into a drive backplane that connects the drive shuttles and RAID controller. This approach eliminates internal cabling, a source of failures.

Once a failed drive has been replaced, the RAID controller rebuilds onto the replacement the data originally contained on the failed drive. The controller reads a portion of the remaining data disks and the corresponding location on the redundant disk. With this information, the failed disk's data is regenerated and written to the replacement disk. The process proceeds iteratively until the replacement is completely regenerated. At this point, 100% of the array's redundancy capabilities have been restored.

Disk drive bandwidth is consumed during the rebuild procedure, reducing the maximum user load the array can support. Because of this, most users schedule rebuilds to off-peak hours, when the array normally isn't running at full bandwidth. This way, the array can simultaneously rebuild a replacement disk and service a lower user demand without a degradation in performance.

Hot swap power

Disk arrays can provide redundancy in other components. Power is a good example of this. Many RAID products support hot swap redundant power supplies. However, caution should be used in evaluating redundant power implementations.

Two basic types of redundant power include load-sharing supplies and disk-mounted power supplies. The load-sharing approach uses a technique similar to the redundancy used for the disks themselves. An extra power supply is added to the base number of supplies required to power the array. The gang of supplies share the total power load. If one of the supplies fails, the remaining supplies are adequate to continue powering the array. There is no interruption to service with this approach. Furthermore, there is no linkage between power and disk failures. An array can simultaneously experience a disk and power supply failure with no decrease in data availability. Because the power in this approach is used for the entire subsystem, power redundancy is available for all disk array components such as fans, controllers and displays.

Small, disk-mounted power supplies are the other standard form of redundant power. In this scheme, a power supply failure causes a disk failure. The power supply failure is serviced by replacing the disk/power unit as though it were caused by a disk failure, not a power supply failure. Unlike the load-sharing power supplies technique, here there is a linkage between power and disk failures. As a result, a disk array using disk-mounted power cannot simultaneously experience a disk and power supply failure. This condition would be equivalent to two simultaneous disk failures, the "catastrophic failure" for a RAID array. Furthermore, while this scheme provides power redundancy for the disks, it does not provide power redundancy for other array components.


The reliability of disk drives has improved over the past several years. During this period, disk manufacturers have changed the methodologies used in calculating the MTBF specifications they publish for their disk products. As a result, published MTBF figures have risen by at least an order of magnitude. Upon closer examination, the actual increase in disk reliability is much less. The increase in MTBF is attributable to the change in methodology used to calculate MTBF predictions. Users also need to adjust their interpretation of MTBF specifications. This will show that drives are more reliable, but are by no means failure-free. ■

Bill Moren is senior product manager for Ciprico Inc., Plymouth, MN.



E-mail: be@intertec.com
CompuServe: 74672,3124
FAXback: 913-967-1905

As the manufacturer which performed the world's first installation of a full digital studio back in 1985, THOMSON BROADCAST is proud to introduce the 9200, the newest member of its digital switcher family. This unit is the crowning achievement of a design team that boasts almost a

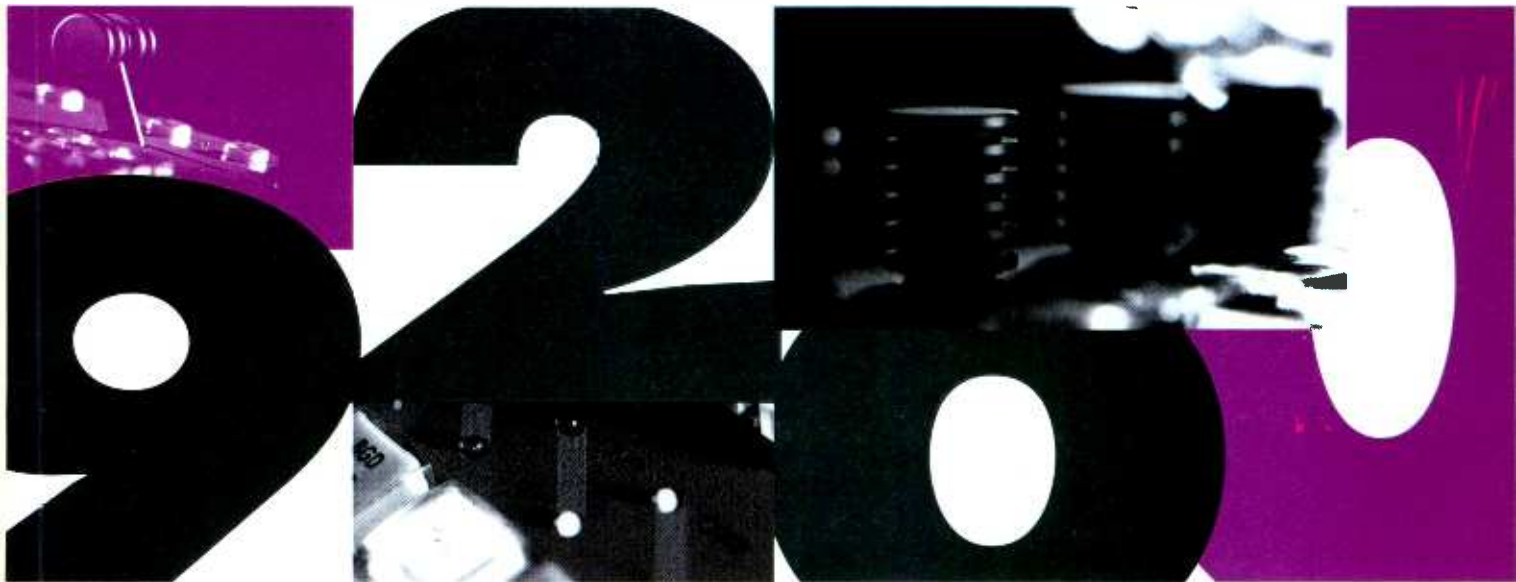

decade of experience in conceiving, manufacturing and delivering only component digital switchers. **The 9200** is a compact 1M/E + DSK with functional innovations that blow away the standard limitations of switchers of this size : M/E or multilayer, video or key freeze, fluorescent display, double transition, input level correction, source memory Mem Box with keyframes and sequences, timeline control, 6 auxiliary busses, and more. Besides being feature-rich, the 9200 switcher is ergonomically designed and interfaces easily with existing equipment. THOMSON has funneled its years of experience to produce a powerful, innovative component digital switcher within an affordable package. We used our expertise to do the hard work, so you won't have to.

THOMSON BROADCAST SYSTEMS

State of the digital art



9200 Component Digital Switcher

Circle (43) on Reply Card

THOMSON BROADCAST SYSTEMS - 17, rue du Petit Albi - BP 8244 - 95801 CERGY-PONTOISE Cedex - FRANCE - Tel: (33 - 1) 34 20 70 00 - Fax: (33 - 1) 34 20 70 47
USA - THOMSON BROADCAST SYSTEMS, Inc - 49, Smith Street - PO Box 5266 - ENGLEWOOD - NJ 07631 - USA - Tel: (1 - 201) 569 1650 - Fax: (1 - 201) 569 1511
U.K - THOMSON BROADCAST SYSTEMS, Ltd - 18, Horton Road - DATCHET - BERKSHIRE SL3 9ES - ENGLAND - Tel: (44 - 1753) 581 122 - Fax: (44 - 1753) 581 196
THOMSON BROADCAST SYSTEMS ASIA - 1000 Toa Payoh North - SINGAPORE 1231 - Tel: (65) 359 8245 Fax: (65) 359 8206



Optical storage solutions

As storage choices broaden, the application, rather than the technology, can become the defining factor.

For many years, storage costs have been part of the day-to-day routine of broadcasting. Tape wore out and you always needed more. The dynamics of video storage have changed over recent years, with new technologies adding flexibility and confusion. This article explores the potential cost savings and revenue opportunities of a new high-density, organic-dye-based write-once, read-many (WORM) drive, the digital laser disc (Digital LD).

The Bottom Line: —

There was a time in broadcasting when being new or better was reason enough to adopt a new technology.

Today, engineering is much more pragmatic. When deciding whether to adopt new technologies, many times the deciding question is: "Will it save money and what will be the return on this investment?" — **\$**

Storage decisions

Not all storage systems are created equal. Many systems read and write data using magnetic energy. With videotape, heads mounted in a spinning drum penetrate into the oxide and binder system of moving tape. Videotape is the least-expensive medium for recording a full-bandwidth video signal, but there is still a price to be paid. The constant friction of the tape means periodic replacement of the heads and guides. Also, the mechanical alignment of the tape path is critical. To maintain reliability, videotape machines require much attention. A sizable maintenance budget must be added to the cost of videotape storage to find its true cost.

The hard-disk drive (HDD) found in most computers also uses a magnetic recording process, but it is somewhat more durable. The head is designed to hover close to, but never touch, the whirling media. To reduce foreign particle contamination that could lead to head crashes, HDD manufacturers seal the heads, platters and drive motor in a metal enclosure. This keeps HDD reliability high, but it also causes one of its major drawbacks: The media is captive. If something goes wrong, the data can be lost. With videotape and optical discs, on the other hand, the recording medium is removable. It can be quickly pulled from one machine and transferred should problems develop with the playback system.

Optical disc systems

There are several optical disc processes. The phase change and magneto-optical (MO) systems

use lasers to apply heat to a thin layer of rare-earth transition metals. In MO systems, a laser heats a tiny patch of the disc to a temperature called the curie point (about 200°C). At that point, a relatively tiny magnetic field can change the magnet polarity of the heated area to record data. At playback, polarized light is beamed at the magnetically polarized surface. The phase angle of the reflected light varies according to the polarization surface, thereby accurately reproducing the input datastream.

In the phase change system, variations in the power of the heating laser cause the metal to go to either an amorphous or crystalline state. The scanning laser will then either be defracted or reflected, representing the binary states of the input data.

Both these systems use metal, which is a good conductor of heat. Laser spot size and duration must be carefully controlled to avoid disturbing the neighboring data, effectively limiting the track pitch, and therefore, capacity.

Non-metallic disc recording systems are also available. These can be printed systems, such as CDs and CD-ROMs, or they can be dye systems. In a dye system, laser light is pulsed onto a thin spin-coated layer of organic dye. The heat changes the dye's surface characteristic, forming a pit. A scanning laser will be reflected when it contacts a pristine surface area and defracted when it strikes a pitted area. The dye is not a good heat conductor, and therefore, pit spacing and track pitch can be much tighter. A double-sided 12-inch Digital LD can hold 19GB of information, about three times the amount that can be stored on MO or phase change discs.

Dye-based discs are write-once, read-many (WORM) devices. For many applications, such as archives and on-line libraries, this can be advantageous. It provides intrinsic write-protection and unlimited random-access playback.

Reliability factors

Digital LD players are designed with few moving parts. Actuators move the optical heads across the disc while a spindle motor rotates the disc at the

PERFECT PICTURES

PICTURE PERFECT

DIGITAL VIDEO OVER FIBER



IMTRAN®

Multi Channel Digital
IMage TRANsmission
From IPITEK®

Broadcast Quality
Multiple Stereo Channels
Data Signaling Channel
Drop and Insert
Multimode or Single Mode
1310 or 1550 Nanometers
Channel by Channel
Upgradable
Digitally Repeatable
Baseband In/Baseband Out

IMTRAN® applications include *Broadcast Video, CATV, Distance Learning, Security and other uses* requiring high video and audio quality over long distances. Call our Application Center for more information.

Call today to discuss your IMage TRANsmission needs.

IPITEK® FIBER OPTICS
A TACAN COMPANY



2330 Faraday Avenue
Carlsbad, CA 92008
Phone: (619) 438-8362
FAX: (619) 438-2412

Circle (44) on Reply Card

proper velocity. Maintenance consists of keeping the unit dust-free, although for highest reliability, it is also recommended that the spindle motor be replaced annually. The media is sealed between polycarbonate discs, and because it is touched only by a beam of light, it is not affected by frequent use.

Media costs over the life of a system are a key factor in determining the overall system price. The most expensive of the three media discussed are the hard-disk drives. On the other hand, they are purchased only once, and operated until they break down. The least-expensive media is videotape, but it also has the shortest life. Digital LDs cost more than videotape, but they can be used heavily without degradation.

This is only half of the story, however. As the equipment we are contemplating will be in service for several years, we would do well to consider what prices may do in the future. The price of hard-disk drives is descending approximately according to Moore's Law. This axiom of the computer industry states that the amount of electronic memory you can get for a certain price doubles every 18 months. By corollary, prices for a fixed amount of memory halve in the same period. There will be a limit to how far HDD prices can drop. Thereafter, it is likely that HDD capacities will increase, but prices will remain constant.

Digital LD prices will also descend as their



The transport mechanism of the Digital LD is shown above. On this unit, one optical pickup is used for playback and the other is for record. Units can be configured for up to four simultaneous output channels from a single side. A 2-pickup unit can provide outputs from both sides. However, only one pickup at a time can be used because the disk rotation must be reversed.

volume increases. However, the Digital LD, being polycarbonate and porfine, is far simpler than hard drives.

Demand for videotape may decrease as emerging non-tape alternatives enter the market. If the volumes fall, prices may rise. Although tape and Digital LD prices may not cross each other directly, by factoring in upkeep and replacement cassettes, the long-term cost difference may be minimal.

Environmental expenses

Special environment costs must be consid-

ered. Hard-disk systems can operate in any environment suitable for office workers because the media is in a protective enclosure.

Videotape machines work best in a controlled environment, and tape vaults are needed to keep archived videotapes at a constant temperature and humidity. Because the tapes should not be exposed to water, the building sprinkler system must often be replaced by special fire-suppression equipment.

The Digital LD system can operate in environments suitable for either videotape machines or computers. The media, however, is much more durable. It is specified for storage at just below boiling and somewhat below freezing. Submersion is not recommended, but will likely cause little or no damage. The discs can sit on the shelf until needed, although the robotic changer is greatly preferred because it keeps discs at the ready, but provides physical protection as well.

Modular expansion

There may be hidden costs in stepping up or down system capacity. Videotape is modular. Tape machines can be added or subtracted as required. All that is needed is to adjust the work schedule to provide personnel to keep the machines loaded and repaired. Hard-disk drive storage can be harder to step up or down in volume. Changing array sizes may require a reload and re-stripping procedure.

Extremely large systems of tape machines or tape machines that must access large libraries, are enhanced by robotics. The Digital LD system is most efficient when used as part of a robotic storage system. A system of 225 discs and two drives can store almost 5TBs. At this level, the cost per GB is much lower than that of hard disks, and approaches videotape.

Revenue matters

It has become increasingly important for facilities to consider additional revenue streams, not just operate more efficiently. One resource that stations often turn to is their own archives, especially news. Providing fast, easy access to news libraries allows producers to create additional programming inexpensively. Organizations with extensive news archives have also sensed the potential profit in allowing outside customers to access their archives. This initial activity may be the seed from which stations develop revenue streams in on-line services, NVOD applications, second-channel digital programming services and National Data Broadcasting Services (NDBS).

Discover the Options Offered in Fiber

Fiber-optic links for transmission of video, voice, and data, over multimode or single-mode fibers.



Applications include:

- broadcast and professional video
- industrial and process control
- intelligent highway systems
- machinevision
- distance learning
- security systems
- CCTV
- and more.

—fiberOptions...Light Years Ahead

80 Orville Drive Bohemia, New York 11716-5232
In NY call 516.567-8320 • Toll Free 800.342-3748 • Fax 516.567-8322

FREE 44pg Catalog & 80 Audio/Video Applic.

PWR SUPP. EQ. 150 PRODUCTS

PHONO, MIC, TRANS, ACN, TAPE, VIDEO, LINE, OBC

PRESS BOXES

SVHS-D, VIDEO-D, A

1-in/8-out Video/Audio
1-in/16-out Video/Audio
2-in/24-out Audio Only
1-in/32-out Video/Audio

Video & Audio Dist. Ampls. RGB-Sync Dist. Ampls. Routing Switchers

OPAMP LABS INC (213) 934-3566
1033 N Sycamore Av LOS ANGELES CA, 90038

Circle (46) on Reply Card

Circle (45) on Reply Card

Digital Microwave Subcarriers from TFT.



For 25 years we've helped set industry standards.
Digital Subcarrier Systems for Microwave
Transmissions are just the tip of the iceberg!



TFT's DSS93 increases high quality program audio channel capacity to four per subcarrier for video STL, TSL, ENG, EFP, and IRC.

A Long History of Leadership

25 years ago TFT developed the first practical off-air TV aural frequency and modulation monitor, the Model 701. When stereo TV was born, we developed the first BTSC aural modulation monitor, the Model 850.

For 25 years we've listened to our loyal customers, and together we've helped set the standards for an industry.



Digital Subcarriers with Six Audio Channels!

TFT's DSS93 Digital Subcarrier System for microwave transmissions gives you the capability to provide four 15 kHz, CD quality audio channels along with two 3 kHz voice grade channels or a high speed data channel on a single FM subcarrier. And multiple subcarriers can be spaced 600 kHz apart from 1.0 MHz to 10 MHz in the baseband of a microwave system.

Call TFT Today!

For years engineers have relied on us for direction. And again we're here to help. Call or fax TFT now for more info on our cost-effective Digital Subcarrier Systems for microwave transmissions. **1-800-347-3383**

TFT INC

Sound Quality for Over 25 Years!

3090 Oakmead Village Drive
Santa Clara, CA 95051-0862
Fax: (408) 727-5942
Phone: (408) 727-7272

Most archives are already videotape, so we will discuss the advantages of electronic archival. First, the entire library is available without having to employ someone to pull tapes and load machines or having to keep machines of various formats running. Second, putting archives on the station server gives all users access to programs within a reasonable period. With videotape, if one user has a cassette, no one else can use that tape until it is re-shelved. Finally, some archive material is fragile. As access is increased, irreplaceable tapes may be damaged.

Archives are meant to be read, not written. The most successful applications of this technology will be those that combine the advantages of Digital LD with the strengths of tape and hard-drive systems. Experience with a few such scenarios will likely fuel the vision for even more effective combinations. ■

Richard Bauarschi is director of broadcast and professional marketing for Pioneer New Media Technologies, Long Beach, CA.



E-mail: be@intertec.com
CompuServe: 74672,3124
FAXback: 913-967-1905

Stand-alone VDR

For those who would like to take advantage of disk technology, but find that the support computers are either too costly or simply take up too much space, the Video MOD-100 from Rorke Data may be just what you are looking for. The unit is smaller than a typical VTR, requires no additional support equipment and has removable media.

Depending on your needs, the unit can be purchased with either a 1.3GB magneto-optical drive or a removable hard drive. Video is stored in a Motion JPEG or MPEG (optional) format. Two channels of 8/16-bit audio is also provided. Depending on the quality required, from 80 minutes of off-line quality to 32 minutes of S-VHS quality can be stored on each 1.3GB magneto-optical disc. For even higher quality levels, up to 54 minutes of Betacam/MII quality can be recorded on a removable 4GB hard drive. Both drive systems can be expanded to up to seven drives using

By Steve Epstein, technical editor

a SCSI connector on the rear panel.

What really makes this unit unique, is that all functions are accessible from the front panel. An RS-422 serial port is provided for easy integration into existing facilities and the unit has built-in LTC/VITC synchronizing capabilities. For film applications, a film-style remote is also available. ■



The Video MOD-100, a stand-alone VDR designed for applications from off-line to broadcast.

Get Set, GO!

In the race for spot news, competition is tough so you can't afford to get tied down. To stay ahead, you have to get the best pictures, and get them on the air first... "live" if possible. It's the winning strategy for exceptional journalism and higher ratings.

But news doesn't always happen where parking a live truck is convenient. The best pictures are often across the busy highway, or beyond the fire department's barriers. Umbilical camera cables will constrict even your best videographers.

Cut your crews loose with Telex's new CamLink™ 200 Wireless Video system. A miniature microwave transmitter snaps onto virtually any camera, sending top-quality video and audio back more than one thousand feet, line-of-sight. The truck-mounted receiver utilizes our exclusive AutoPhase™ triple-diversity reception system to help eliminate multipath problems. The signal can then be relayed to the station using your truck's current ENG or SNG gear.

An optional handheld receiver lets your reporters see what's being shot, live.

Hurry... call the Telex Wireless Video Group at (415) 564-2728. The CamLink 200 will set your crews free to cover the news where it's happening, faster than your competition can. Because in the race for spot news superiority, faster wins.



CamLink™ 200 by Telex

Telex Communications, Inc.
9600 Aldrich Avenue South, Minneapolis, Minnesota 55420
(612) 884-4051, Fax (612) 884-0043

©1995 Telex Communications, Inc.

START

The CamLink 200 is available in frequency-agile 2 and 2.5 GHz models. Patents pending.

Circle (48) on Reply Card

Designed for Each Other



Peaches and cream, a mouthwatering combination. Now there's another. We've introduced the new V4238 Digital Encoder, the perfect partner to the already successful V4228 Digital Varicomb Decoder. Our Industry Standard Varicomb® technology has been refined and implemented digitally so your pictures will never look more appetizing.

Ask to see the menu.



V4228 DIGITAL DECODER

-  2-D OR 3-D VARICOMB® ADAPTIVE DECODING
-  AUTOMATIC MULTI-STANDARD OPERATION
-  ANALOG AND DIGITAL INTERFACES
-  ALL DIGITAL PROCESSING (10 BIT)
-  ULTIMATE COMPONENT QUALITY FROM A COMPOSITE SOURCE

A peach of a decoder



V4238 DIGITAL ENCODER

-  VARICOMB® PRE-PROCESSING FOR 'CLEAN' ENCODING
-  AUTOMATIC MULTI-STANDARD OPERATION
-  ANALOG AND DIGITAL INTERFACES
-  ALL DIGITAL PROCESSING (10 BIT)
-  THE CLEANEST COMPOSITE SIGNAL FROM A COMPONENT SOURCE

The cream of encoders



Because the World is Watching

Circle (49) on Reply Card

Vistek Electronics Ltd, Unit C, Wessex Road, Bourne End,
Bucks SL8 5DT, England. Tel (+44) 01628 531221 Fax (+44) 01628 530980

U.S. Sales Contact: Preferred Video Products, 4405 Riverside Drive,
Burbank, CA 91505. Tel (818) 562 6544 Fax (818) 562 3342

www.americanradiohistory.com



Hard-drive technology

By James Frantzreh

As capacity and throughput increase, hard-drive technology is finding its way into more and more areas of broadcast and post-production.

The Bottom Line: —

Revolutionary changes in video storage systems have brought about new equipment categories, including non-linear editors and video servers. These changes, coupled with the increased availability of sophisticated computer hardware and software, are changing the face of broadcasting.

Understanding the basics of these new systems will facilitate the decisions necessary to move facilities into the next century. — S

As non-linear media production and distribution technologies find acceptance in the broadcast industry, broadcasters have become more and more dependent on storage products for reliable, cost-effective operations. The central element of non-linear storage is the hard-disk drive. This device plays a critical role in non-linear editing, distribution, archiving and even acquisition.

Today's Winchester disk drives, commonly known as mag disks or hard drives, consist of a stack of rigid platters, coated with a magnetic material; read/write heads (generally two for each platter); mechanical assemblies for moving the heads and platters; and sophisticated electronics. At the highest level of abstraction, these components combine to determine four technical elements of interest: sustained data transfer rate, capacity per device, form factor and mean time between failures (MTBF).

Disk-drive performance

Broadcasting applications such as commercial insertion, news editing and on-line video libraries, where extremely large amounts of randomly accessible video are needed instantaneously and in continuous streams, push drive performance to the limits. For these video applications, the most important aspect of disk-drive performance is the ability to produce high-speed, sustained and uninterrupted data transfers. Transfer rate is a measure of how quickly the drive can deliver a datastream measured in megabytes per second. Many other performance specifications typically are reported with any given hard drive. These include seek time, access time, media data rate, burst transfer rate and read channel bandwidth. Although interesting on their own merit, they all combine with the drive's firmware to produce a characteristic overall performance level.

Today's JPEG-compressed, broadcast-quality video streams require at least 4MB/s, including two channels of audio sampled at 44kHz. While the data rate demanded by a single video/audio

stream varies relatively little, the transfer rate from the drive varies based on the data's physical location. Specifically, data stored closer to the center of the platter (the inner diameter or ID) cannot be transferred out as rapidly as data at the outside diameter (OD). For this reason, overall transfer rate is expressed as a range or an average. Broadcasters must ensure that the slowest part of the drive is capable of sustaining an appropriate data rate for the most demanding material.

Firmware modification is another critical component of the sustained data rate equation. Most data-processing applications require fast access to relatively small chunks of data and are premised on the belief that the drive can and will be idle frequently. As such, hard-drive design incorporates heavy use of error correction and does not provide for instant and uninterrupted access to the data. For data processing, a slight delay of the data is acceptable, but losing a single datum is not. With digital video, however, it is acceptable if some pixels are not optimally resolved or drop out completely as long as the datastream is not held up. Disk-drive firmware can be optimized for video by adjusting error correction schemes and eliminating non-interruptible "housekeeping" activities.

The final element of the data transfer pipeline is the external device interface, primarily, small computer systems interface (SCSI). SCSI defines a communication and interface standard for desktop peripheral devices that is being increasingly adopted on higher-end equipment. Fast-wide SCSI, currently the most common high-performance disk interface, allows raw bus bandwidth rates of up to 20MB/s. New SCSI implementations will reach up to 40MB/s, and serial SCSI architecture (SSA) and fiber channel-arbitrated loop interfaces promise to bring raw bus bandwidth to 100MB/s and beyond. All together, these factors account for leading-edge, single-drive performance in the 4.5 to 7MB/s (ID to OD) today.

Disk-drive capacities

The amount of data that can be stored on a hard drive is a function of platter capacity and the

VHF TV TRANSMITTERS

Beginning August 15, 1995
Harris Platinum Series® TV Transmitters
come with the industry's only

5-YEAR WARRANTY



No other VHF TV transmitter manufacturer has the guts to offer a 5-year warranty, *because no other TV transmitter has guts like the Harris Platinum Series®.*

No wonder we're the world-standard for ultra-reliable, high-performance VHF TV transmitters from 500 W to 60 kW. The evidence from nearly 500 units on-air worldwide is in, and we are only slightly amazed to learn that the quality we designed and built into every Platinum Series transmitter is working even better than we expected. Things like our solid-state modules with 500,000 hours MTBF, and a positive pressure, integrated air system that maintains consistent cooling even if a module is removed, and blocks airborne contaminants. Add built-in transient protection and superbly regulated power supplies, plus all the benefits of our

ISO 9001 Quality System, and you can see why our whopping 5-year warranty is a great deal for you!

Contact Harris for a copy of the warranty terms, and to learn more about empowering your station with Harris Platinum and Platinum HT EL, *the only VHF TV transmitters with a 5-year warranty.*

HARRIS CORPORATION
BROADCAST DIVISION
US and Canada
TEL: +1 217 222-8200
FAX: +1 217 224-1439
Elsewhere
TEL: +1 217-222-8290
FAX: +1 217 224-2764



Circle (37) on Reply Card


©1995 Harris Corp.

number of platters in the drive. Platter capacity, in turn, is a function of a platter's "areal density" measured in bits per square inch, and the platter's diameter. For any given diameter or drive form factor, areal density is increasing at the staggering rate of 60% per year. This is the primary reason for the incredible price/performance/capacity gains in hard-disk drive storage. It is being driven by evolutions in read/write head design, platter design and read channel (electronics) technology.

Today, most disk drives use thin-film inductive heads to read and write on the platters. Although inductive head technology is capable of up to about 500 million bits per square inch, the trend toward smaller disks with an increased areal density is taking its toll on thin-film technology. Thin film heads have been proven to work well, but the linear velocity of smaller disk's inner tracks are too low to produce an adequate signal for an inductive head. As tracks become more compressed, the signal is attenuated, making them unreliable for higher-density applications.

A newer head technology, and one currently in use by IBM and other manufacturers, is called magneto-resistive (MR). MR heads deliver significant increases in areal density, reliability and performance. The major advantage of MR heads is a superior signal-to-noise ratio.

For 30 years, the electronic method for detecting the bits on the surface of the media has been the peak detect method. This is a technique in which peak values of transitions are detected through an analog circuit. One major drawback is that noise spikes can be mistaken for signals, and signals can cancel each other out. As such, peak detect is gradually being replaced by partial response maximum likelihood (PRML), which digitizes the incoming transition stream before detection. Because these signals can be stored, the pattern of a sequence of signals can be used to determine the signal value, and the need to use an instantaneous peak to detect a transition can be eliminated. Using MR heads and PRML channels, IBM holds the current areal density record of 644Mb/in². According to IBM, MR heads will sustain an increase of 60% per year in areal density at least until the end of the decade. These areal densities currently allow 9GB per drive on the 5.25-inch form factor products and 4.3GB on the 3.5-inch drives. The next generation of technologies will push these capacities to 18+GB and 8-10GB, respectively.

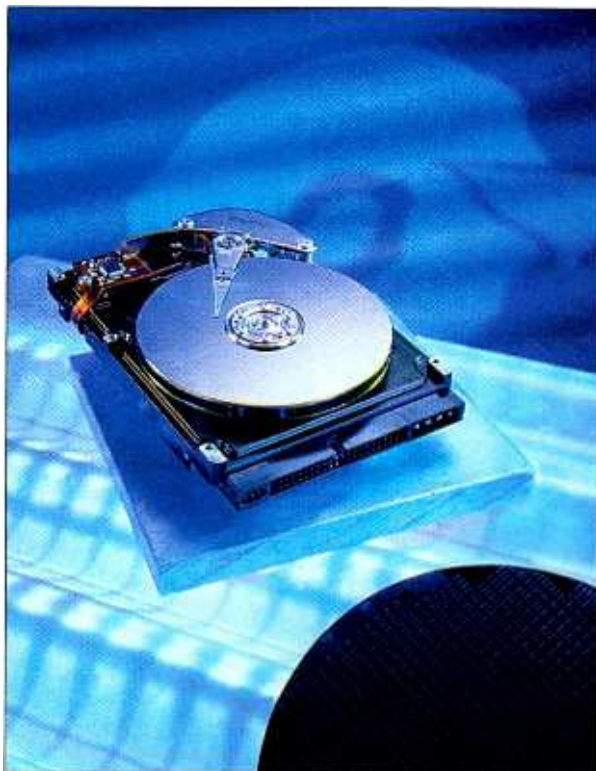

A 3.5-inch form factor hard drive. Current models offer capacities up to 4.3GB. Future units are likely to offer capacities in excess of 8GB.

Reliability and enhancing drive performance

As described earlier, the hard drive is an electromechanical device. It is subject to mechanical wear and failure over time. Furthermore, it is an integrated storage device in which the electronics, mechanics and media cannot be easily separated. These two factors combine to make the reliability of hard drive subsystems a key consideration in the specification decision. Manufacturer MTBF claims are difficult to verify and, at the end of the day, are simply average statistics for large populations of product. Caveat emptor — individual experience may vary substantially from published specifications. In addition, when multiple drives are combined in a subsystem to store data as a single unit, MTBF decreases substantially with the additional components. Certain performance improvement schemes, such as disk striping, point this out.

As fast as disk drives are, they are still not fast enough for the demands of multiple stream or uncompressed NTSC, which can require up to 33MB/s per stream. In these cases, where throughput greater than that obtainable on a single drive is essential, disk striping is a good solution.

With striping, a software utility or hardware controller divides the incoming datastream between two or more drives, so the drives operate in parallel. The disadvantage is the reduced MTBF that results from using additional drives. Unless the media is backed

up, a drive failure can wipe out everything. Even with backups, users are faced with the time it takes to restore the data.

Because loss of data is unacceptable, broadcasters have turned to RAID storage. (See "RAID Storage Technology," p. 40.) With RAID, a parity bit is generated by a RAID controller and included along with the striped data. In the event of a disk failure, missing data is determined on the fly with no effect on the output video. Once the defective drive has been swapped with a new one, reconstruction of the data on the new drive is done automatically by the RAID controller.


Additionally, by migrating infrequently used data from their disk drives, broadcasters can free valuable space and maintain optimum hard-drive storage performance. Software tools, called hierarchical storage managers, can be used to automate the process of analyzing data usage and migrate frequently used data to faster devices and less-requested data to slower devices.

Disk-drive considerations

Hard-disk technology is increasingly becoming an important component for production and playback in broadcast. As station operations migrate to the next-generation facility, disk-based systems will provide high performance, capacities and speed for mission-critical storage. Key features to consider before purchasing hard-disk storage subsystems include:

1. Does the storage subsystem get the job done reliably and at an appropriate cost over its lifetime? The unit must be heavy-duty, reliable, maintainable and cost-effective.
2. Will the vendor support the storage subsystem? Despite claims to the contrary, disk drives running at the edge of their performance envelope and at the limit of the SCSI specification are not commodities. The storage subsystem provider should be able to troubleshoot overall system problems because the user may not be capable of determining the root cause of a problem. On-site maintenance, strategic spares and overnight replacement programs should also be available. ■

James Frantz is a senior product manager for storage products at Avid Technology, Tewksbury, MA.



E-mail:
be@intertec.com
CompuServe:
74672,3124
FAXback:
913-967-1905

31st International Broadcast Equipment Exhibition

Period: November 15-17, 1995 Place: Nippon Convention Center (Makuhari Messe)

DISPATCH OF INFORMATION FOR EXHIBITORS IN MARCH/CLOSING DATE FOR APPLICATION APRIL 20TH



Inter BEE '95



TS: audio equipment • cameras and related equipment • VCRs and related equipment • video processing equipment
mitters and related equipment • measuring apparatus • transmission equipment • link-up systems
ment for multiple broadcasting systems • satellite broadcasting systems • HDTV sets and related equipment

See All You Can BEE

The 31st International Broadcast Equipment Exhibition (Inter BEE '95) is your chance to see the latest in broadcast, video, and audio technologies in action.

And there's more. As well as exhibits, Inter BEE '95 will feature symposiums, forums, and seminars hosted by some of the world's leading broadcasting, audio, and video software developers.

As the largest event of its kind in Asia and one of the world's top three,

Inter BEE '95 will be a magnet for more than 450 manufacturers and around 25,000 visitors from around the world.

Inter BEE '95 will be held on November 15-17, 1995, at the Nippon Convention Center (Makuhari Messe).

So, make the trip to Inter BEE '95 to see all you can BEE.

For more information on Inter BEE '95, contact:

Circle (38) on Reply Card

Japan Electronics Show Association

Tokyo Chamber of Commerce and Industry Building, 3-2-2, Marunouchi, Chiyoda-ku, Tokyo 100, Japan Fax: 81(3) 3284-0165

Digital audio workstations

Non-linear production is moving into the audio room, too.



The Bottom Line: —

The advantages of hard-disk recording, non-linear editing and virtual multitracking are a hard combination to beat. That's why digital audio workstations are becoming so popular in the broadcast and post-production environments. But their use and integration into the TV production facility takes some special skills. — \$

Above photo: The Otari RADAR is a stand-alone, expandable hard-disk recorder supporting 8, 16 or 24 tracks.

Digital audio workstations (DAWs) have been in use for more than a decade, but many in the broadcast production environment have yet to take the plunge. Recent improvements in reliability, speed and cost-effectiveness are rapidly dissolving this reluctance, however.

The advantages of DAWs in broadcast post-production are fairly obvious. The ability to conform audio to last-minute picture changes is what first put DAWs on the map for video and film post. The speed and convenience with which they handled this perennial problem made them worth their weight in gold to the post-production community. Since then, prices for DAWs have fallen dramatically, making them more attractive to a growing range of users. In fact, price has become a primary reason for purchasing DAWs. In many cases, they can replace the bulk of a whole suite of conventional audio production equipment at a fraction of the cost.

Plugging into the video world

The most video-specific element of DAW applications is, of course, audio-video synchronization. Although by no means elementary, this process is often simpler and more reliable with the non-linear media used in DAWs than it is with tape-based audio systems, either analog or digital. Most of today's DAWs — even basic systems — offer some level of video synchronization ability, typically via trigger- or chase-lock to SMPTE time code. Synchronization is available on many basic models via optional hardware and software. On more sophisticated systems, this capability is integral and its operation can be quite comprehensive. Among these advanced features are the capability of following time code at non-standard or variable speed (typically +/-10%), scrubbing/shuttling to time code, generation of time code at various rates and forward/reverse chase-lock.

Some of the more heavyweight systems also

offer machine-control interfaces, allowing the DAW to serve as master or slave to VTRs and other video-production devices. Most of these use RS-422, typically under the Sony 9-pin protocol, but others are also offered. Some systems can control multiple devices simultaneously and independently. A few DAWs offer full VTR emulation capabilities for direct interface to video editors. These systems often include integral support of several popular editors' EDL protocols.

The ability to conform audio to last-minute picture changes is what first put DAWs on the map.

In some sophisticated production environments, it's also important to synchronize a DAW to other digital audio devices. This will allow smooth audio interfacing in the digital domain, typically via the AES/EBU format. For this purpose, higher-end DAWs offer word-clock (or AES/EBU-clock) synchronization. For music production, synchronization to MIDI time code (MTC) is also possible on many units.

A final level of DAW interface with post-production involves integration on the non-linear level. A few DAWs support interconnection with video disk recorders or non-linear editor/production systems, allowing video and multitrack audio to be manipulated fully digitally and with random access capabilities. Some of these systems also allow synchronized video workprints to be copied to hard disk on the DAW, so that off-line audio production and sweetening can continue in an audio-only environment, while retaining the advantage of a synchronized picture for reference throughout.

OPEN
Architecture



Edit Video At The Speed of Sight.

open Your Eyes.

D-Vision OnLINE™, our Windows® NT™/95 – based digital video editing software, helps you edit so fast, you'll see all your cuts and changes instantly. No waiting for decks to rewind and cue, no waiting for video to render to your hard drive.

Whether you're creating video tapes or digital video files for multi-media applications, D-Vision OnLINE™ lets you cut and paste video, add video effects, create titles, layer audio and mix on the fly. And its OPEN architecture gives you more tools to choose from and more room to grow.

What are you waiting for? Probably another video file to render or a deck to cue. Pick up a phone and get more info on digital non-linear editing.

open your eyes to the possibilities.



D-Vision Systems, Inc.
Making Digital Media Work For You.™

1-800-8DVISION (1-800-838-4746)
Or Outside the U.S.: +1-312-714-1400
For the Professional Partner Nearest You.

©1995 D-Vision Systems, Inc. D-Vision is a registered trademark and D-Vision OnLINE and Making Digital Media Work For You are trademarks of D-Vision Systems, Inc. Windows NT and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

Circle (50) on Reply Card

Compatibility

Loading audio on and off a DAW's hard disk has always been a point of contention in broadcast production. Today's systems ameliorate this difficulty with a number of different methods to handle audio I/O.

Upload and download of audio to a non-linear recorder can be handled in either of two basic fashions: via *real-time audio* connections or via *file-based transfer* from another non-linear system. The latter typically can take place at some fraction of real time, although in file exchanges over narrow-

bandwidth transmission paths, the transfer can actually take up to several *multiples* of the file's actual running length.

Real-time audio I/O on DAWs can be handled in the analog domain (usually with standard balanced +4dBu signals), or on most systems, in the digital domain as well (typically via AES/EBU or S/PDIF standard interfaces). Some advanced systems now allow this real-time uploading and downloading to take place as a background operation, while production continues on previously loaded files.

File-based transfer is less standardized because each DAW uses its own file format. Transferring audio files between like-model DAWs is, therefore, relatively simple via disk or LAN, but the process is far more complex between differing systems.

Loading audio on and off a DAW's hard disk has always been a point of contention.

Such cross-system file transfer is now becoming easier, however, because of a number of recent developments. One is the *Open Media Framework* (OMF), developed cooperatively between a number of major non-linear system manufacturers. It defines a common file format that is supported by a growing number of DAW systems, such that files can be interchanged across systems with the retention of audio material and editing/control/auxiliary data elements. Some systems read OMF files directly while others perform conversions. In this respect, OMF is to audio what ASCII text is to word processing (although most audio "formatting" details are retained with OMF).

Other file-exchange or common sound file formats (within platform types) also exist. In the PC/Windows world, the .WAV file is most common, while .AIFF is preferred in the Macintosh environment and .AU is popular among UNIX users. Utilities now exist in the PC and Macintosh world for conversion between some DAW file formats, similar in function to the file conversion software that exists for word-processing applications.

OMF is to audio what ASCII text is to word processing.

As for full networking of DAWs (beyond simple audio file exchange), a number of systems allow interconnection via LAN. Typically, only systems of the same manufacturer can directly communicate in this fashion, however. In some instances, standard (Ethernet-type) networking is used to connect workstations, while in other cases, the manufacturer has developed a proprietary, high-speed network architecture.

System types

Digital audio workstations come in two basic flavors — those made to operate on general-purpose desktop-computer plat-

QUICK-FRAME™

AT HOME IN A DIGITAL HOUSE

At a nearby digital studio, a dozen animation/effects workstations are positively humming, piloted by twelve talented operators, each with their favorite application. And though they're all working with uncompressed 4:2:2 component digital video—in real time—you won't find their cubicles cluttered with towers of disk storage. That's because all the digital material required by the entire team is stored by one Quick-Frame Video Disk System and channeled seamlessly to the workstations via Sierra Design Labs' new SCSI Framer.

Roomy Storage in Tight Quarters.

Quick-Frame revolutionized digital video recording by providing from 3 to 24 minutes of uncompressed D1 in just 5 1/4 inches of valuable rack space. With Ethernet and SCSI interfaces—plus support from all leading SGI-based applications—Quick-Frame now plays host to animation, paint and 2D/3D effects. No wonder broadcast, telecine and post facilities welcome the Sierra solution.

Architects of Network Storage.

Sierra innovation continues with SCSI Framer, a low-cost combination of SCSI, real-time frame buffering, and serial D1. High-speed access to uncompressed CCIR601 video is provided for 1 to 24 applications with no additional workstation hardware investment. Built-in analog video output supports the display of Quick-Frame video data being recorded or played back.


Remodel Your House with Quick-Frame.

Quick-Frame has rapidly become the VDR of choice for post houses, animation and effects software manufacturers, production facilities and television stations worldwide. *Video Systems* even named it a Pick-Hit of NAB '94.

Call Sierra Design Labs today and find out how to furnish your digital studio with Quick-Frame.




SIERRA Tel: (702) 831-7837
DESIGN LABS Fax: (702) 831-5710

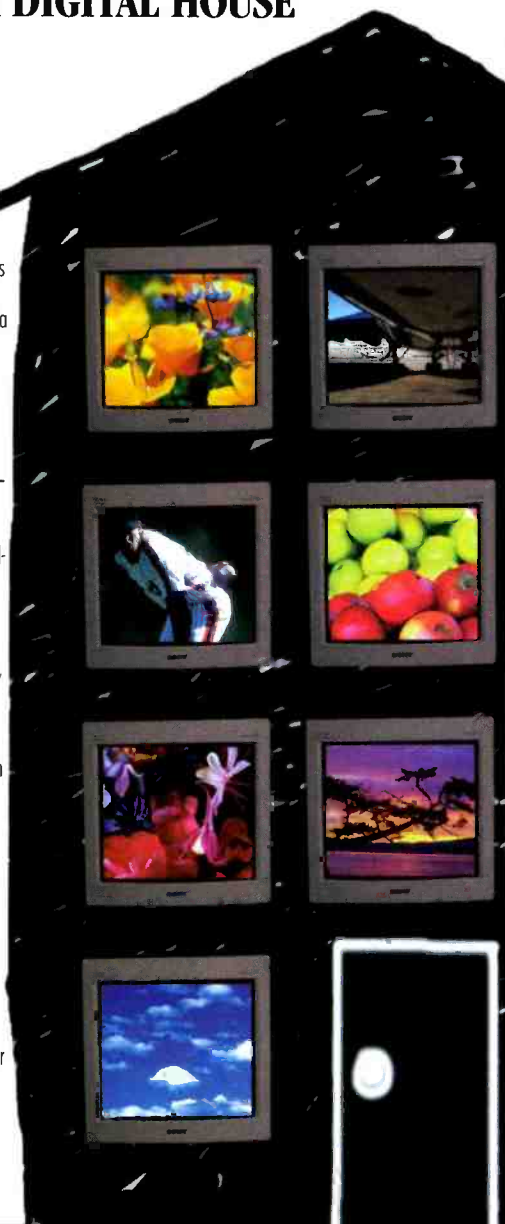

Circle (51) on Reply Card

Come see us at IBC - Stand #11353

MERGING THE WORLDS OF Media

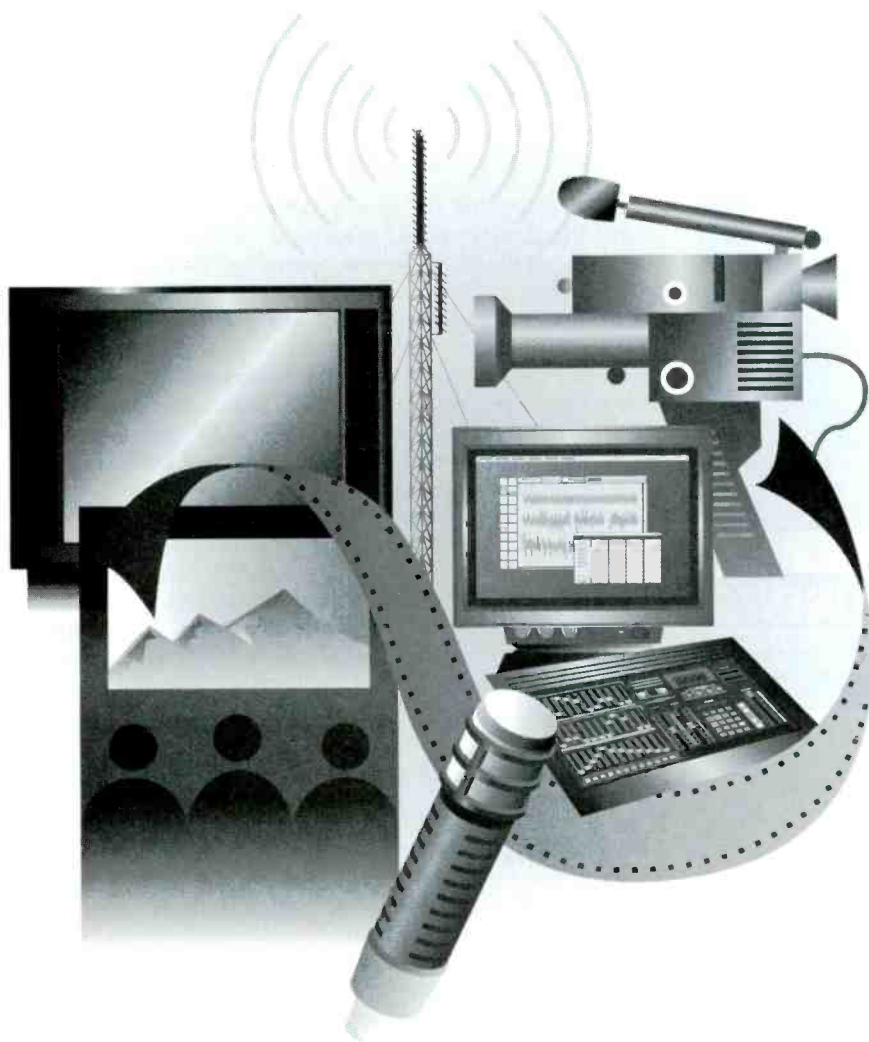

SPONSORED BY:

- National Association of Broadcasters
- RTNDA
- Society of Broadcast Engineers
- Society of Motion Picture and Television Engineers

FOR MORE INFORMATION CALL

(800) 342-2460 OR (202) 775-4970

CALL FAX-ON-DEMAND for immediate access to the most up-to-date convention, registration and conference program details—simply dial the numbers below from the touchtone handset of your fax machine and follow the voice instructions.

World Media Expo Exhibition(301) 216-1847
 The NAB Radio Show(301) 216-1847
 RTNDA International Conference(503) 721-5867
 SBE Conference(301) 216-1853
 SMPTE Conference(301) 216-1850

The media industries—radio & television broadcasting, film, communications, computing, video production and post-production—are converging at an astounding rate. These dynamics are affecting not only the way you do business, but also the products, services and equipment necessary to keep on top and stay competitive with the changing media environment.

By combining four leading expositions and educational programs from the National Association of Broadcasters (NAB), RTNDA, the Society of Broadcast Engineers (SBE) and the Society of Motion Picture and Television Engineers (SMPTE)—World Media Expo is the *one* place where you can keep up with the merging worlds of media.

- See new products and services for radio and television broadcasting, communications, film, entertainment, video production and post-production before NAB '96.
- Take an in-depth look at the trends and technologies that affect the way you do business and allow you to stay competitive and profitable.
- Save time and money by attending one comprehensive fall event!

FREE SESSIONS!

"Profiting From Technology in the '90s"

In two exciting FREE sessions for all World Media Expo attendees, Dr. John D. Abel, NAB's Executive Vice President of Operations, will show you, through entertaining demonstrations, how innovations like data broadcasting, the Internet, the World Wide Web, digital compression and other exciting opportunities made possible by digital technologies can impact your business and your bottom line.



SEPTEMBER 6-9, 1995
 Exhibits: September 7-9, 1995
 New Orleans Convention Center
 New Orleans, Louisiana, USA



FARADAY TECHNOLOGY
LIMITED

Active Hybrid Filters

Filters For QPSK

Surface Mount Filters
(Suitable for Aqueous washing)


SIL 601
(full specification)

See us at IBC '95 - Stand 11284

CROFT ROAD INDUSTRIAL ESTATE
NEWCASTLE STAFFORDSHIRE
ST5 0GZ ENGLAND
TEL (+44) 1782 661501 FAX (+44) 1782 630101

Circle (55) on Reply Card

COMPUVIDEO TEST INSTRUMENTS



6" CRT
CLEAR
CHOICE

COMBINATION NTSC or PAL
• WAVEFORM MONITOR
• VECTORSCOPE
• DUAL TRACE OSCILLOSCOPE

MULTI INPUTS
• COMPOSITE S-VHS/Hi-8/COMPONENT

• EXT REFERENCE

BASIC FEATURES

• FLAT IRE CHROMA 1H, 2H,

1mS/DIV, 2V, 2V MAG

• CIRCLE VECTOR

• OVERLAYS DC REST

• H-PHASE SUB-PHASE

ADVANCED FEATURES

• LINE SELECT

• DG DP


• X-Y DISPLAY (STEREO/AUDIO)

• VIDEO/AUDIO HEADS CHECK

POWER (AC/DC/BATTERIES)

DESK TOP OR RACK MOUNT

Priced from \$1421



REAR CONNECTIONS

IN STOCK NOW



NTSC or PAL

VIDEO SYNC & TEST GENERATORS

MULTI OUTPUTS / MULTI PATTERNS

• ALL SIMULTANEOUS OUTPUTS

• COMPOSITE • S-VHS

• COMPONENT • RGB

• 12 PATTERNS incl SMPTE & BLACK

• 6 BLACK BURST OUTPUTS (GENLOCK)

• SYNC & SUBCARRIER OUTPUTS

• AUDIO TONE


• 2-CH XLR AUDIO BALANCED OUTPUTS

POWER (AC/DC/BATTERIES)

DESK TOP OR RACK MOUNT


Priced from \$299

NTSC or PAL



REAR CONNECTIONS

JUST ASK FOR "POCKETGEN"



SIDE VIEW

HANDHELD

VIDEO/AUDIO GENERATOR

• 10 PATTERNS INCLUDING

SMPTE BARS AND BLACK BURST

• ALL SIMULTANEOUS OUTPUTS

• COMPOSITE • S-VHS

• COMPONENT • RGB

• AUDIO TONE

• 2-CH XLR AUDIO BALANCED OUTPUTS

POWER (AC/DC/BATTERIES)

Priced from \$357

VIZ TECHNOLOGIES

TEL: (718) 714-9873

FAX: (718) 714-0242

Circle (56) on Reply Card



Avid's AudioVision is an example of a DAW that includes synchronized random access video playback.

forms and those that use entirely dedicated, proprietary hardware. Among the general-purpose varieties, a number of systems use the Macintosh platform and several operate on IBM-compatible PCs.

Each of these categories also exhibits a range of system costs and capabilities. Both low-end and high-end products exist for the Mac, IBM and proprietary platforms.

High-end proprietary systems predominate in the largest post-production houses, while most other production environments use high-end and midrange Mac-based systems. TV stations have begun to implement the low-end Mac- and IBM-based DAWs, along with a few of the low- and midpriced proprietary systems.

Continuing DAW and computer-platform development stretches the pricing spectrum ever wider, so that today's non-linear audio production can be conducted on systems that range from less than \$2,000 to more than \$200,000. Facilities' and clients' requirements will dictate which system is appropriate, but as price/performance ratios continue to improve, engineering managers have to constantly re-evaluate their directions and decisions.

*Non-linear audio production can
be conducted on systems that range
from less than \$2,000 to more
than \$200,000.*

At the low end, the sound boards on multimedia desktop computers — or the native hardware available on the newest Mac and PowerPC platforms — allows the purchase of "software-only" DAWs for as little as \$500 for virtual 4-track or 8-track editing and mixing capability. Audio processing (non-real-time) is available for a bit more, as are more tracks.

At the high end are many more inputs, outputs and tracks, simultaneous playback/mixing of a large number of virtual tracks, and powerful real-time audio processing (including equalization, compression/limiting, reverberation and time compression/expansion). Many of these systems also offer fully automated operations, high-speed networking to facility servers, comprehensive synchronization and machine control/emulation capabilities (including integral non-linear video support), and hardware control surfaces, such as real faders (including moving-fader automation), continuous turnpots, transport controls and LED/LCD/fluorescent metering panels. This control-surface hardware is often supplied in a small set (e.g., eight faders on a compact console) that is assignable to a much larger number of actual tracks (e.g., 192 virtual tracks and 32 real inputs/outputs).

Between these two extremes are quite a few variations on proprietary and general-purpose platforms. Some of these intermediate systems are finding life increasingly difficult, however, as the market seeks out products that provide either the most power or the greatest value.

New directions

Recent developments have heightened this race to be either best or best-priced. One important feature in this regard is the inclusion of data-compression capabilities on some DAWs. This allows increased storage densities such that four to six times more audio data can be recorded on a given hard disk. (The standard metric of 10MB/min of full-fidelity stereo audio can thereby be reduced to less than 2MB/min.) Perhaps more important in the TV production environment, however, is the increased transfer speed and LAN capacity that such file-size reductions offer.

Recent developments have heightened the race to be either best or best-priced.

File-based audio transfers between DAWs and other non-linear audio devices are also revolutionizing the distribution of audio outside the facility. Production houses and stations are able to send compressed audio files in non-real-time fashion over analog or digital phone lines or via the Internet and other on-line services.

Multimedia production is having its effect on DAWs as well, with several systems incorporating specific elements for this purpose. These include support of reduced sampling rates and resolutions plus various audio data-compression algorithms for CD-ROM production. A few systems include mastering capabilities for CD and CD-ROM formats.


Finally, as more production moves exclusively to computer-based systems, data backup has become increasingly important. New backup media options and faster backup speeds are an important (and often overlooked) area of current development. More powerful platforms also allow increased use of background operations for backup processes.

All the talk of media convergence notwithstanding, TV production actually seems to be *diverging*, with numerous new venues of distribution arising. The move toward multicasting and multiversioned production argues strongly for a non-linear environment in which DAWs play a key role.

The purchase and operating cost-reductions that DAWs offer have also made them attractive, even under purely traditional production scenarios. The digital audio workstation is clearly well-suited for the broadcast facility of today and tomorrow. ■



For more information on digital audio workstations, circle (102) on Reply Card. See also "Recording & Playback Products," p. 58 of the BE Buyers Guide.



E-mail: be@intertec.com

CompuServe: 74572,3124

FAXback: 913-967-1905

In videotape, quality is everything.

Processes that introduce dropouts — whether they are in manufacturing, shipping, storage, or usage — need to be identified and the sources of dropouts removed. ⓧ That's why we at Ampex Recording Media Corporation have never taken our eyes off one goal: *No Dropouts.*



Every day, 365 days a year, we're identifying — and removing — the causes of dropouts *wherever* they are. This includes a world-class Quality Improvement Program within our manufacturing facility — but it also includes helping our customers improve *their* storage, handling, and usage of tape, to minimize dropouts.

AMPEX Recording Media

PLEASE CALL OUR TOLL-FREE NUMBER


800/240-7042

AND REQUEST A COMPLIMENTARY COPY OF OUR BOOKLET:

ACHIEVING EXCELLENCE IN VIDEO PRODUCTION — VIDEOTAPE QUALITY IS *EVERYONE'S* BUSINESS.

THIS BOOKLET PROVIDES THE AMPEX APPROACH TO REACHING THE GOAL OF 'NO DROPOUTS.'

Circle (57) on Reply Card

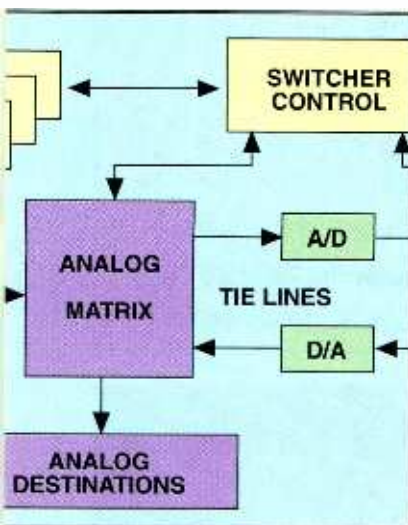

Getting there: Format conversion

The path from origination to delivery can involve many conversions.

The Bottom Line: —

As the number of video and audio formats used in the broadcast environment continues to grow, building a flexible facility becomes more difficult.

Conversion between formats is possible, but not without significant cost and potential quality loss. Sensible conversion strategies and long-term planning are required to minimize these difficulties. — \$

In the good old days of TV broadcasting, audio was audio and video was analog composite, period. This meant that interconnection within a broadcasting facility was fairly simple. Subcarrier timing was about the most complex issue that an engineer had to deal with. Unfortunately, those simpler days of yesteryear are gone forever. Advances in technology have forever changed the nature of audio and video equipment, and the emergence of the computer in video production has made digital expertise a must for today's engineers.

Now that the FCC is poised to approve a digital transmission standard for terrestrial TV broadcasting and equipment manufacturers are rolling out new product lines of computer-based digital production equipment, there is pressure on broadcasters to begin the transition from the traditional analog facility to an all-digital environment. Unfortunately, in the real world, the cost of a complete new facility is quite high, and it may not fit into the financial plans of facility owners. There is also considerable uncertainty about the specifics of ATV that makes large investments in technical equipment somewhat risky. The most prudent course for broadcasters today is to follow the trend and build toward digital with a reasonable capital investment, while still getting the most from existing equipment.

Format soup

Although today's engineers seem to be wading ever deeper into a swamp of formats and acronyms, TV broadcasters have had to deal with format changes from the industry's earliest years. For example, the natural output of a

color-TV camera has always been an RGB signal, that has to be encoded into the NTSC composite format for transmission to the receiver, where the signal is decoded back to RGB drive signals for the picture tube. Advances in videotape technology have since added numerous analog and digital component formats to the mix. Signal processors, such as DVEs and standards converters that perform spatial manipulation of images, cannot function in the composite domain. These devices inherently contain functional stages that decode incoming composite video into component form and encode the processed components back into composite. A typical TV operation today may have three or more different video formats present, as well as several audio formats. Just being familiar with all the various formats in use in your facility at the moment can be challenging.

More significant format-conversion problems began raising their heads for broadcasters when analog component video equipment became available. The component format's signal-quality advantages over composite were hard to resist, but they did not come without costs in complexity and dollars.

The latest wave in this transition involves some form of component serial digital signal routing. This conversion is likely to make the majority of broadcasters think twice about the economics involved. Unless facility owners are prepared to finance a complete rebuild, most of the existing production equipment, tape machines and graphics hardware will need to be *adapted* to the new digital standard. It is therefore possible that a hybrid system of analog and digital will be present in most broadcast facilities for some time into the future. A TV facility's engineering de-

partment will then be charged with acquiring the proper format conversion devices to make it all work.

Fortunately, broadcast equipment manufacturers have responded with a seemingly endless array of black boxes to handle the job. The trick lies in picking the right tool for the problem at hand, and designing the overall system for maximum functionality at minimum cost.

Finding the building blocks

Many devices are available that transform video and audio signals from one format to another. These products are known variously as encoders, decoders or

Many devices are available that transform video and audio signals from one format to another.

transcoders depending upon their function. One group of these devices is designed to convert video signals between composite NTSC (or PAL or SECAM) and analog formats offering component I/O, such as Betacam, MII and S-VHS. Some modern TBCs and frame synchronizers on the market also provide simultaneous transcoding functions between these formats.

On the digital side, there are serializers and deserializers to transform parallel digital formats to serial formats, as well as transcoders that convert composite digi-

tal ($4f_{sc}$) to 4:2:2 component digital (CCIR 601) and back. There also are devices to fully transform composite or analog-component recording formats directly to component serial digital (SMPTE 259M) and back. (See "Transition to Digital," March and April 1995.) Finally, there are devices to transform computer video display formats (monochrome, CGA, EGA, VGA, SVGA, XGA) with their various pixel ratios and color resolutions to NTSC composite, component analog or component digital. Prices for these transcoding devices range from a few hundred to several thousands of dollars, depending on the function to be performed. (See Figure 1.)

Note that some signal-quality losses can occur in these format conversions. When simply going from digital to analog, but staying within the component or composite domain, minor degradation from A-to-D and D-to-A conversions can occur, usually resulting from the addition of quantization noise. More significant artifacts are likely when crossing the component/composite boundary in either the analog or digital domains, generally due to changes in bandwidth and the introduction of intermodulation distortion products.

Audio formats also abound in the modern broadcast facility. Converters exist to adapt signals between analog and the AES/EBU serial digital audio formats, as well as others. Sample-rate converters effectively translate between the compact-disc sampling rate (44.1kHz) and that used for most professional digital audio recording devices (48kHz). There are also units to interleave and extract *embedded* digital audio information from a serial digital video bitstream. (See "Transition to Digital," July 1995.) Typical AES/EBU digital encoder/decoder functions have been in-

	ANALOG	DIGITAL
COMPOSITE	NTSC	$4f_{sc}$
	PAL	D2
	SECAM	D3
COMPONENT	RGB	4:2:2
	Betacam	D1
	M-II	D5
	Most computer displays	DCT Digital Betacam

Figure 1. Video formats exist in either analog or digital domains and either component and composite modes. This diagram shows today's most popular formats and their respective categories.

Editbox is editing



**EDITTM
BOX**

No waiting,
no worries,
just sheer
editing power.



QUANTEL

Quantel Inc.

85 Old Kings Highway North
Darien, CT 06820
Tel: (203) 656 3100
Fax: (203) 656 3459

Circle (58) on Reply Card

Some people in this particular line of work tend to live in a world of their own.



tegrated into a small chipset, making it simple for audio equipment manufacturers to offer digital and analog I/O on current hardware.

Some system examples

Many TV stations faced with the digital upgrades required for implementing ATV will find that their current video signal routing systems are in need of expansion. Rather than making a full investment in an all-digital backbone, some station owners have decided to make the transition to digital signal distribution in stages. This decision is heavily influenced by the costs

The transcoding devices needed for transition can approach the cost of the serial digital routing switcher.

involved in the total replacement of often relatively new analog routers with serial digital systems. Lack of space in the existing facility may also be a contributing factor, making the construction of a totally new routing system difficult without a major upheaval or a move to new quarters.

Much of the cost of conversion to a fully digital signal routing system comes from the many individual format-converter boxes required to transform existing composite analog, component analog and composite digital devices to SMPTE 259M (serial component digital). In larger established facilities with substantial investment in older hardware, the cost of the transcoding devices needed for a full transition can approach the cost of the serial digital routing switcher itself.

One sensible, long-term transition strategy for coping with this problem is based on the acquisition of an expandable serial digital router frame. This router is initially fitted with enough crosspoints to accommodate just the existing number of signal sources that already use component digital inputs and outputs. This digital matrix is then linked to the existing analog matrix via tie lines and equipped with appropriate transcoders to convert between analog and serial digital. As remaining analog devices in the facility are replaced by new component serial digital units, the digital router frame can be expanded to accommodate the new sources, and a corresponding num-

ber of analog crosspoints can be eliminated. Ideally, the router manufacturer must offer software that can effectively link the two matrices together under a common control system and automatically route signals from one matrix to the other via tie lines using *path-seeking* techniques. Several router manufacturers now offer this capability, but if the router of choice does not offer such features, the same effect can be realized — though less elegantly — through the use of multiple control panels.

Similar arrangements apply to audio-only routing. In many cases, audio routing systems require upgrading due to simple growth and/or the need to manage AES/EBU signals. Often, small stand-alone audio routers also cannot be controlled by external computers. Many digital VTRs and audio-only devices (including DAT machines, audio workstations and signal-transmission codecs for terrestrial and satellite interconnection) that interface with today's routers offer analog and AES/EBU I/O, so the external format-conversion boxes often needed for video signals are not generally required.

One other important point applies to the cost analysis for audio-only switcher replacement. Because two analog audio channels are multiplexed together in a single AES/EBU digital stream, only one AES/EBU audio matrix is necessary, rather than

*An analog-to-digital
format conversion
process can involve a
number of hidden
problems.*

two matrices for analog stereo. Multi-channel audio environments maintain this 2-for-1 arrangement, with every two audio channels requiring only one AES/EBU switcher matrix or level. The cost savings that this provides, combined with the corresponding savings in cable and connectors, can often pay for the additional encoders and decoders needed to interface any remaining analog-only devices still in use at the facility. (These audio conversion devices are relatively low-priced.) In the future, new digital devices can be added to such a hybrid system, while the older analog-only sources continue to be supported. Some analog distribution will likely be maintained at many facilities for monitoring, news/field operations and other utility uses.

And then there
are those who prefer
to stay extremely
well connected.



If you're one of these people, then we have exactly what you need: systemization and connectivity products designed to help you do your job better, as well as the design expertise to help you put it all together.

Today, Grass Valley offers a comprehensive range of single-function, "bread-and-butter" products—everything from small, off-the-shelf distribution, timing, processing, and format conversion products to large signal-routing systems—that allow all those "bells-and-whistles" production systems to operate flawlessly.

In fact, it's these type of reliable support products that effortlessly bridge the worlds of analog and digital and ensure that everything's well connected. All of which makes Grass Valley the one company that can help you put it all together.

For more information, call us at **1-800-474-8889, ext. 210** and ask for a copy of our Designing Digital Systems Handbook.

Grass Valley. The best connection you can make.

Grass Valley
A TEKTRONIX COMPANY

Circle (59) on Reply Card

© 1994 The Grass Valley Group, Inc. A Tektronix Company.

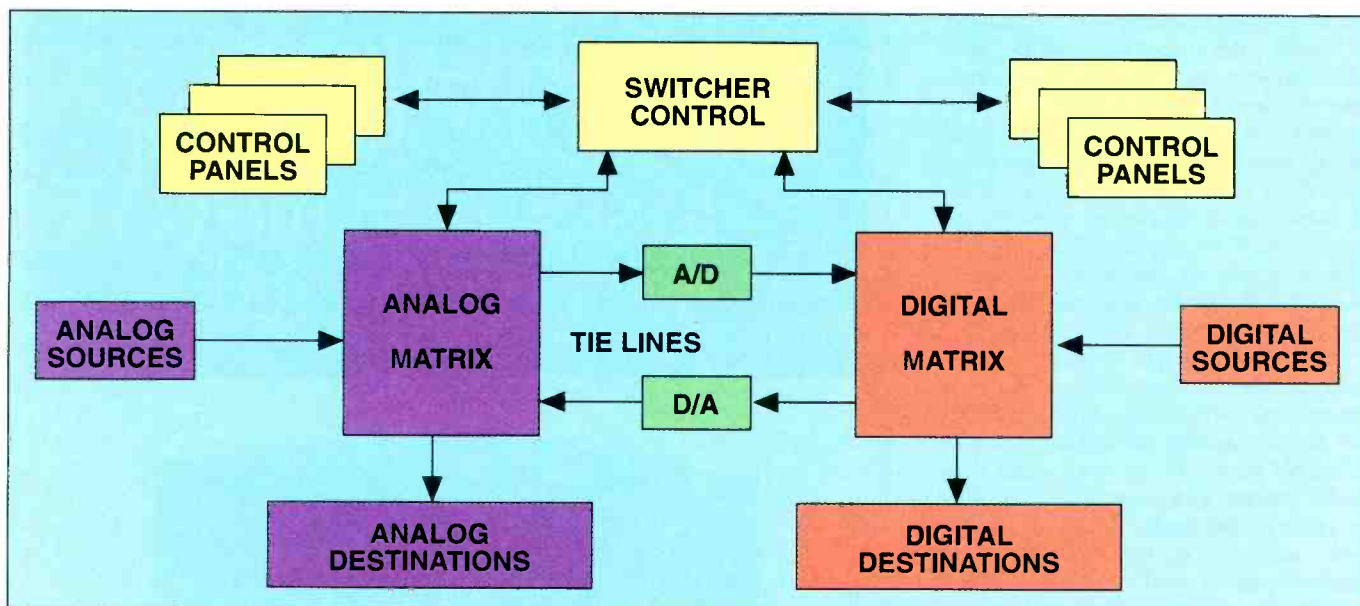


Figure 2. A conceptual block diagram of a hybrid analog/digital routing environment. As the transition to digital progresses, the size of the analog matrix will decrease and the size of the digital matrix will increase. The number of tie lines and converters can also be reduced over time.

Caveat emptor

An analog-to-digital format conversion process can involve a number of hidden problems that will add to its challenges.

For example, mixing digital and analog video can result in huge timing differences, due to the relatively long delays associated with digital encoders and decoders.

Delay values of 70 μ s or more can appear, which are orders of magnitude greater than those delays compensated for with timed cable lengths in analog-only systems.

The GALLERY

Take Control
with Programmable Event
Controllers from LEIGHTRONIX!

- AUTOMATED BROADCAST
- UNATTENDED RECORDING
- TIMED EVENT VIDEO & AUDIO SWITCHING
- REMOTE VCR & SWITCHER CONTROL



LEIGHTRONIX, INC.
2330 Jarco Drive • Holt, MI 48842
Tel: (517) 694-8000 • Fax: (517) 694-1600

Circle (61) on Reply Card

A Versatile VTR Control System...

Control Solutions from DNF Industries
Your Source For High Quality, Low Cost Control Solutions

1X8 RS422 Switcher
Gang Roll 8 VTRs at the press of a button
Select 1 of 8 VTRs for individual control

Slow Motion Controller
100 Cue Point Memory
Cue points are retained when controller is off
Vary from -100% to +200% of play speed



Call now for a free catalogue
213-650-5256 ♦ 213-650-6639 Fax

VTR Control Solutions from \$250.00

Circle (60) on Reply Card

tems. Therefore, the cost of digital frame synchronizers must be factored into the total price of conversion. There are also rather severe limitations on cable lengths for serial digital video between reclocking distribution amplifiers.

Routing AES/EBU signals along with low-level analog audio can cause crosstalk, so this should be avoided.

On the audio side, routing AES/EBU signals along with low-level analog audio can cause crosstalk, so this should be avoided. There are also cable-length restraints associated with AES/EBU signals, and audio test-monitoring and troubleshooting can no longer be done with a headphone and clip leads.

The transition between analog and digital formats is something that all broadcast engineers will be facing in the future. Ultimately, TV engineers may be converting their existing NTSC facilities to simultaneously feed both an analog NTSC transmitter and a component digital HDTV transmitter. Simultaneous full-time feeds from multiple sources and to multiple outputs may also have to be handled. A full understanding of the formats themselves and the tools available to make the required transitions will be critical to the technical and economic success of these upcoming projects. ■

Phil Hejtmanek is director of technology for the Southern Illinois University Broadcasting Service (WSIU-FM/TV and WUSI-FM/TV), Carbondale, IL.



For more information on format conversion, circle (101) on Reply Card. See also "Signal Conversion Equipment," "Encoders, Decoders" and "Format Translators," pp. 75-81 of the BE Buyers Guide.



E-mail:
be@intertec.com
CompuServe:
74672,3124
FAXback:
913-967-1905

WANTED: TECHNICAL WRITERS



Broadcast Engineering magazine is looking for experienced engineers and technical managers to provide leading-edge articles on a free-lance basis. If you are interested, contact the editor by sending or faxing your telephone number along with a brief description of your experience and areas of expertise to:

Fax: 913-967-1905

Mail: Editor, Broadcast Engineering magazine
9800 Metcalf, Overland Park, KS 66212

Digital Output (SMPTE 244M) 20 Bit Audio Companion Stereo Delays AES/EBU Format One Rack Package



10 BIT FRAME SYNCHRONIZER HOTRONIC AT61

Price from
\$2,400.00

- * Freeze Field/Freeze Frame
- * Full Proc-Amp Control
- * Pass VIR/VIT
- * No visible quantization noise
- ...and more....


The 8X Sub-carrier, 10 bit processing achieve no visible quantization noise. The matching audio delay can handle the lip sync perfectly. The Analog to Digital format transcode will meet with the needs of the new digital world.



HOTRONIC, INC.

1875 So. Winchester Blvd. • Campbell, California 95008 • USA
Tel: (408) 378-3883 • Fax: (408) 378-3888

Circle (52) on Reply Card

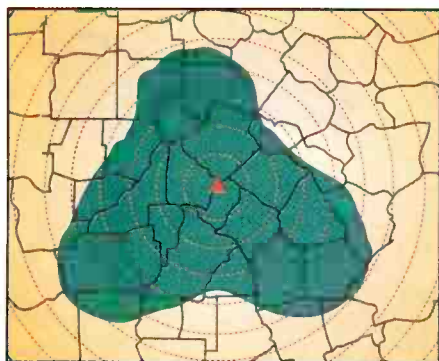

Tower maintenance is a phrase that is widely used and largely undefined. Yet, tower maintenance is a crucial part of every operating system that helps to assure continued operating performance. A well-conceived plan for tower maintenance is critical for all tower sites.

A tower is part of an operating system that encompasses the tower, antennas, transmission lines, radio equipment, shelter, and the site itself (road, compound, fencing, etc.). Several parts of the system require special maintenance beyond the scope of these articles. "Tower maintenance," as defined here, relates to the tower structure, the shelter and related attachments.

Governing agencies

FAA — Requires lighting and painting on towers over 200 feet.

EA — Suggests maintenance criteria and intervals for towers.

OSHA — Requires fall protection for workers. Also sets forth specific limits for worker exposure to RF during tower maintenance.

Tower maintenance is the act of "keeping up" a tower or "maintaining" it as close as possible to its original intended design and/or purpose. This is necessary and desirable for several reasons:

- Continued good performance of the system and the structure itself.
- Safety and health of workers and employees that must work on or under the structure.
- Safety of aircraft that must fly near the site.
- To fulfill regulations imposed by governing agencies.

Several governing bodies have a vested interest in the proper and timely maintenance of towers. There are four main agencies that affect the area of tower maintenance. They are:

- Federal Aviation Administration (FAA) — governs painting and lighting requirements.
- Federal Communications Commission

Tower maintenance secrets revealed, part 1

(FCC) — the enforcement arm for FAA.

- Electronics Industries Association (EIA) — recommends design and maintenance criteria.

- Occupational Safety and Health Administration (OSHA) — governs worker safety.

There may also be other local or private agencies that have a vested interest in how your specific tower is maintained. For example, your insurance company may require periodic inspections or special points of inspection.

The maintenance plan

The first step in managing anything, including tower maintenance, is planning. A plan must be well-conceived and outlined to be effective. Develop a list of items that you would like to have maintained while the inspection proceeds.

For example, during the inspection, the crew finds some loose tower bolts. Would you have the crew tighten the bolts while on site? This may sound like an almost absurd question. However, it is a question that comes up often and can lead to a great deal of investment. If there are two bolts loose, it would be a minor problem. If there happen to be a hundred or so bolts loose, this could mean several crew days to repair. Would your inspecting company need to figure this into their bid, or look for additional funding over the original inspection cost?

EIA specifications

Guy tensions: Must be within manufacturer's specifications for tension, based on temperature, within +/-10%.

Tower plumb: 1 in 400 for overall tower height or between any two guy points. This can also be translated as 0.0025 times the distance in question.

There are several areas where this question might come up over the course of an inspection:

- **Tower lighting and marking:** Tower lighting and marking is an item dear to the heart of the FAA. Current FAA regulations state that a tower owner has 30 minutes to report a non-compliance condition and 15 days to correct the condition if it pertains to a tower's main lighting system. Penalties can be large for non-compliance, so immediate attention should be given to these items.

- **Tower alignment and/or tension:** When tower alignment or guy wire tensions are found to be outside of EIA specifications, immediate attention is required. EIA specifications are lenient in comparison to many customers' specifications. When EIA specifications are not met, this can mean trouble for the structural integrity and longevity of the tower.



Originally an AM tower, the structure was converted to a paging/2-way tower. All of the new antennas were located at the top of the tower. The tower was not designed for the increased windload and eventual collapse of the tower occurred.

How to
plan now for
tomorrow's
digital
facility.

Now is the time to begin the conversion process. It's no "plug and play" endeavor. Proper technical planning is vital today to prepare stations and post facilities for the future in digital.

Join us in November when Broadcast Engineering prepares you for the coming digital age. A future that will require new delivery methods, multiple program streams and multichannel operation including HDTV and interactive services.

Advanced Television Summit '95 Transition to Digital

November 15-17 • The Westin Hotel O'Hare • Chicago

Your future is at stake.

**For a detailed
conference agenda
and registration
materials, call:**

**FAX-ON-DEMAND
1-800-601-3858**

**Or Susan Link
913-967-1969**

It is now absolutely critical to understand precisely how and when to incorporate digital systems into your operation. Everyone responsible for planning, designing, engineering, budgeting and managing the transition to digital will benefit from this major learning event.

Top experts in broadcast and post-production offer surprising solutions to the challenges you face today and will face tomorrow. How can you design a system that handles analog now but upgrades to digital in the future? How can you avoid throwing away expensive equipment as the transition moves forward? Can you plan a video routing system that expands to accommodate the changing requirements of all-digital operations? What are the critical issues in audio? Connectivity? Testing? Network integration?

This is your opportunity to discover the answers to tough questions and return to your facility with practical knowledge you can use right away.

ATTENTION VENDORS
Sponsorship opportunities
available. Call Dennis Triola,
Publisher: 913-967-1833.

Special FACILITY TOUR available in conference package.

Sponsored by

BROADCAST[®]
engineering[®]

Together with
Video Systems[®] and World Broadcast News[™]

Produced by Intertec Presentations, a division of Intertec Publishing

Tower???

Stainless.

**Absolutely
everything you
need to know
about towers...**

design

fabrication

erection

modification

service

insurance

leasing

**...in one call
215-699-4871**



210 S. 3rd, North Wales, PA 19454

Circle (53) on Reply Card

Contractor qualifications

- Request information from at least six companies.
- Obtain prior experience and reference information.
- Take into consideration mobilization costs when choosing a contractor.
- Obtain bids from at least three contractors.

• **Grounding:** Proper grounding is crucial for continued system performance. Any major grounding problems should be handled at the time of inspection. Broken ground wires at the tower base or transmission line grounding should be repaired immediately.

• **Shelter environment:** An inspection should include an overview of the shelter. If air-conditioning is required for equipment cooling, an inspection would reveal an inoperable system. Remedy should be given to the situation immediately.

• **Corrosion protection on tower:** This may not be a critical item unless deterioration has progressed to the point of damaging tower members. However, it could be quite cost-effective to have the crew make minor finish repairs to the tower. This would include wire brushing, cold galvanizing and topcoating.

Each of these items should be planned for well in advance of implementation. They must also be communicated with the inspection crew at the time of proposal. In addition to this list, an inspection format must be developed. This will include inspection procedures and a list of items to be inspected. (This will be explored in part 2 of this article.)

Develop a standard for intervals of inspection. EIA recommends that guyed towers be inspected every three years and that self-supporting towers be inspected at 5-year intervals. Again, this is lenient, in comparison to many owner requirements. Some owners require that their towers be inspected on a yearly basis.

Much of the discrepancy between the intervals lies in the reason behind the inspections. There is little chance of the structure having major problems between 3-year inspections without outside forces acting upon it. However, the performance of the equipment on the tower can be materially changed by normal conditions. Example: weather-proofing can deteriorate over a 3-year period, possibly allowing water to enter the lines.

As our recommendation, all tower structures ought to be inspected at intervals no longer than three years. More stringent intervals should be followed where equipment concerns are paramount and where outside forces act unusually upon the structure. (For example, inspection after a large wind storm.)

Towers should be maintained at regular intervals no less stringent than the tower inspections. Some items will need maintenance at more frequent intervals, such as yearly antenna system sweeps, and repairs will need to be made between regularly scheduled maintenance times as required. Cost savings can be realized by having the inspecting crew perform simple maintenance items while already at the site. As a minimum, there will be cost savings from mobilization.

As managers, we deal regularly with three criteria in our projects: time frames, budgets and quality standards. Internally in a corporation, a system must be implemented to assure that tower inspections must be completed at pre-determined intervals, according to specified procedures and according to a realistic budget.


Assuming that the inspection work will be done with outside sources, there is some homework that must be done. Contractors must be screened carefully and all necessary information regarding inspection requirements must be clearly communicated.

Bidding documents should include the following information:

- Clearly state the final objectives of the maintenance/inspection effort.
- Include a full technical requirement outline. For example, a specific form that must be filled out or a specific procedure for measuring guy wire tensions, etc.
- Ask for bids that would offer a certain scale of economies. For example, awarding multiple sites to one contractor may generate savings in mobilization expenses.

Tower maintenance is a critical item to help assure continued system performance. Planning is a key starting point to the tower maintenance. Part 2 of this article will investigate specific areas that should be inspected on tower systems. ■

John Crooks is the vice president, and instructor at the tower technology school, for Broadcast Communications, New Glarus, WI.



E-mail:
be@intertec.com

CompuServe:
74672,3124

FAXback:
913-967-1905

BUSINESS

TimeLine Vista Inc., Vista, CA, has formed an alliance with **Computer Concepts, Inc.**, Lenexa, KS. Under the terms of the agreement, Computer Concepts will market a radio production and post-production version of TimeLine's DAW-80.

BTS Broadcast Television Systems, Simi Valley, CA, has announced the sale of its Media Pool video server to KGO-TV, the Capital Cities/ABC Network-owned TV station serving San Francisco and northern California, for its new all-digital studio.

Abekas, Redwood City, CA, has installed its 8100 switcher, a pair of A57 DVEs and the new Diskus digital disk recorder in Video-smith's post-production facility, Philadelphia.

Pixel Power Inc., United Kingdom, has announced the 100th purchase of its Col-lage generator and graphics system by **The BBC** at Elstree, UK.

Telex Communications, Inc., Minneapolis, and **NBC** have reached an agreement for Telex to supply several RTS intercom systems to NBC during the next year.

Sony Corporation, United Kingdom and **Oracle Corporation**, Redwood Shores, CA, have signed a letter of intent to work together to develop video, audio and text news database products. The companies' goal is to increase broadcast newsroom productivity by combining video and audio clips with wire service text on a single edit workstation.

Tektronix, Beaverton, OR, and **Lightworks Editing Systems** have closed the transaction for Tektronix to acquire Lightworks.

Graham-Patten Systems, Grass Valley, CA, has supplied Editel-LA, Hollywood, CA, with three D/ESAM 400 digital edit suite audio mixers for use with a trio of recently completed telecine suites equipped with Rank Ursa systems with Renaissance Da-Vinci color correction and Alpha Image Alphie component switchers.

Itelco, Orvieto, Italy, has opened its second office in the United States. The new office is located in Denver, and will serve North America, including Canada. The phone number for the Denver office is 303-431-1699; fax 303-431-2868.

PEOPLE

Al Jensen has been named marketing communications manager for BTS, Simi Valley, CA.

David E. Acker has been appointed vice president of engineering for Nova Systems, Canton, CT.

Dean Winkler has been named president of Post Perfect, New York, NY.

Kevin Dauphinee has been appointed product marketing director for the Digital Video Storage Systems business unit of Tektronix, Beaverton, OR.

David Gardner has been named director of media services for the Satellite Services organization of Orion Atlantic, Rockville, MD. Also, **Arthur Hill** has been named executive director of satellite services sales.

Chris Emery has rejoined Sony, Park Ridge, NJ, as director of marketing for professional media.

Michael Wellesley-Wesley has been elected to the board of directors at Chyron Corporation, New York, NY.

CREATE A MASTER CLOCK SYSTEM

ECONOMY MASTER CLOCK CAPABLE OF DRIVING 100 SLAVES FOR \$260.00

5 DIGITAL SLAVES FOR UNDER \$1000.00

MASTER CLOCK

- ESE TIME CODE OUTPUT
- EXTERNAL SYNC INPUT
- 1PPS OUTPUT
- 3 TYPES OF ENCLOSURES
- DRIVE 100 DIGITAL SLAVES
- NEW "LX" ENCLOSURE
- SYSTEMS UPGRADABLE TO CRYSTAL, WWW, MODEM AND GPS



ES-192A



ES-192AP



NEW! LX-192A

DIGITAL SLAVES

- 5 TYPES OF ENCLOSURES
- 4 SIZES OF L.E.D.'s
- DISPLAY TIME OR DATE
- OPTIONAL TIME ZONE OFFSET
- VIDEO INSERTER
- COMPUTER INTERFACE
- MANY OPTIONS AVAILABLE



3 YEAR WARRANTY
PRACTICAL SOLUTIONS SINCE 1971

142 SIERRA ST., EL SEGUNDO, CA 90245 • (310) 322-2136 / FAX: (310) 322-8127

Audio/video delay

Prime Image

• A/V delay: a self-contained, solid-state unit that delays both video and audio for up to 30 seconds (standard configuration is shipped with just over 10 seconds of delay) without data compression and switches in alternative audio and/or video feeds as required; either audio or video — or both — signals can be replaced, recorded or rerouted as necessary within the unit; video input and output are composite, Y/C, Y/U/V, or Y/R/B, and the unit is fully compatible with component signals.

Circle (350) on Reply Card



Miniature HMI light

Frezolini Electronics

• Day-Arc light: a miniature HMI, high-output daylight temperature light in a single self-contained unit; the Day-Arc provides daylight temperature light (5,500°K) by drawing only 24W of power and outputting the equivalent of a 100W quartz bulb; with a single Frezzi NP battery, the Day-Arc will provide the equivalent of 100W of light for an hour; the operating life is over 500 hours.

Circle (358) on Reply Card

MOD-based digital video recorder

Rorke Data/ Future Equipment Design

• Video MOD 100: a magneto-optical drive (MOD)-based standalone fully featured digital video recorder; the Video MOD 100 replaces all analog VTRs from VHS to Betacam and is capable of CCIR 601 component digital video output and full serial remote control; two channels of selectable 8/16 bit digital audio are provided for original or master audio applications with full insert edit functions; all functions are accessible from the front panel.

Circle (351) on Reply Card

Edit controller

Editing Technologies Corporation (ETC)


• Stiletto: an edit controller that features a graphical user interface screen and includes all the necessary hardware and software for control of VTRs, switchers and other devices; available as a 2- or 3-machine package that includes two general-purpose interfaces; the open architecture allows for multilinear and non-linear editing compatibility; a complete Aladdin software package is included with the software to run most popular production switchers; the Stiletto supports Sony, Panasonic, JVC and BTS 9-pin serial protocols.

Circle (352) on Reply Card



Stable real-time clock for PCs

B&B Electronics Manufacturing Company

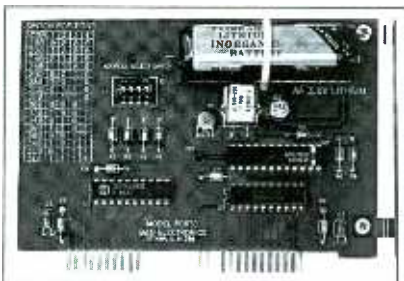

power is off, a 3.6V lithium battery maintains the clock and a battery function status allows the battery to be replaced before the time is corrupted.

Circle (354) on Reply Card

• Model PCRTC: an accurate, temperature-stable, real-time clock for PCs; the clock is based on a highly stable oscillator circuit and uses a software driver to update the DOS clock every minute; the 8-bit (short slot) PCRTC card does not require IRQ lines and reduces the computer's clock error to 15 seconds/month; when the

Integrated computer interface

Varian Associates Inc.

• F series integrated computer interface: Varian's 400W to 700W F series satellite communications (SATCOM) uplink amplifiers now include an integrated computer interface and standard pin diode attenuator (optional integral linearizer available); the interface allows direct communications with the user's PC/digital interface for monitoring and control without taking up valuable rack space with the placement of an external controller; the interface is designed to work with all current F series amplifiers and all SATCOM frequencies.

Circle (355) on Reply Card

Rotator


TIC General, Inc.

• Ringrotor: rotator that allows antennas and dishes to be mounted at any safe mounting location on a tower and rotated around the tower 360 degrees in either direction; a rugged steel mounting ring encircles the tower and the Ringrotor rides on a drive bracket assembly that allows the ring to rotate around the tower; features a 24-VDC gear motor; RS-232 interface and/or remote port also available.

Circle (356) on Reply Card

Non-linear editing system

Applied Magic

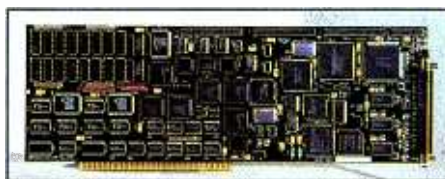

II hard drives on the market; the Elite works in composite, Y/C or Betacam SP formats; to work in the component domain, the Elite uses three on-board digitizers for Betacam SP, one for each component of Y, Cr and Cb.

Circle (353) on Reply Card

• Broadcaster Elite: an Amiga-based non-linear video editing system designed to enhance the video editor's ability to compose images and sound; the system is capable of sustaining transfer rates equivalent to the fastest SCSI



"THE PROFESSIONAL'S SOURCE"

FOR ORDERS CALL:
800-947-9928
212-444-5028

OR FAX (24 HOURS):
800-947-9003
212-444-5001

**OVERNIGHT AND RUSH
 SERVICE AVAILABLE**

E-Mail at 70550.1616@compuserve.com

SONY

EVW-300 3-CCD Hi-8 Camcorder

- Equipped with three high density 1/2" IT Hyper HAD image sensors. Has an excellent sensitivity of F8.0 at 2,000 lux, high S/N of 60 dB, and delivers over 700 lines of horizontal resolution.
- Provides high quality PCM digital stereo and single channel AFM Hi-Fi recording. Has XLR balanced audio connectors.
- Quick start 1.5" viewfinder with 550 lines of resolution plus Zebra pattern video level indicator and color bar generator. Also, quick-start recording - takes only 0.5 seconds to go from REC PAUSE to REC MODE for immediate recording in the field.
- Built-in 8mm Time Code generator records absolute addresses. (Either non-drop frame or drop frame mode may be selected.) Furthermore the EVW-300 incorporates a variety of time code features such as Time Code PRESET/RESET, REC RUN/FREE RUN and User Bits.
- A variety of automatic adjustment functions for different lighting conditions are incorporated into the EVW-300.
 - ATW (Auto Trace White Balance) - when ATW is turned on optimum white balance is always ensured during recording, even for changes in color temperature. Conventional white balance adjustment is still provided with the Auto White Balance.
 - AGC (Automatic Gain Control) - in addition to manual Gain Up AGC provides linear gain up in the range of 0 dB to 18 dB.
 - Intelligent Auto Iris - for situations where the lighting between subject and background is different (subject is underexposed) the Intelligent Auto Iris automatically examines the scene and adjusts the lens iris for proper exposure.
- Selectable Gain-up from 1 dB to 18 dB in 1 dB steps for Mid and High positions.
- Clear Scan function - provides a variety of selection of shutter speeds ranging from 60-200 Hz allowing recording of almost any computer display without flicker.
- Compact, lightweight (12 lbs with NP-18) ergonomic design provides well balanced and extremely comfortable operation.



EVW-300 with Canon 13:1 Servo Zoom Lens, VCT-12 Tripod Mounting Plate and Thermodyne LC-422TH Shipping/Carrying Case



Quick-Draw Professional FOR CAMCORDERS OR STAND ALONE CAMERAS



The Quick-Draw Camera Case provides a convenient way to carry and protect your camera on the ground, in your car and in the air. While much lighter and more compact than shipping cases, this padded nylon case has hard-shell construction and an aluminum viewfinder guard for 100% protection and security. It is particularly designed for working out of the back of a van or the trunk of your car. The top loading case has a wipe-open fold back top that stays out of the way.

- FEATURES:**
- Heavy-duty shoulder strap and comfortable leather hand grip.
 - Crush proof aluminum guard protects viewfinder.
 - Fits into back seat and fastens securely with seat belt.
 - Holds camera with on-board battery attached.
 - Lid closes with Velcro for quick opening or secures with full-length zippers.
 - Two trim exterior pockets and clip board pocket.
 - Dual purpose rear pouch is an expandable battery chamber or all-purpose pocket.

antonbauer

Logic Series DIGITAL Gold Mount Batteries

The Logic Series DIGITAL batteries are acknowledged to be the most advanced in the rechargeable battery world. In addition to the comprehensive series integral to all Logic Series batteries, each DIGITAL battery has a built-in microprocessor that communicates directly with Anton/Bauer Interactive chargers, creating significant new benchmarks for reliability, performance, and life. They also complete the communications network between battery, charger and camera. With the network in place, DIGITAL batteries deliver the feature most requested by cameramen: a reliable and accurate indication of remaining battery power.



DIGITAL PRO PACS

The Digital Pro Pac is the ultimate professional video battery and is recommended for all applications. The premium heavy duty Digital Pro Pac cell is designed to deliver long life and high performance even under high current loads and adverse conditions. The size and weight of the Digital Pro Pac creates perfect shoulder balance with all cameras/camcorders.

- **DIGITAL PRO PAC 14 LOGIC SERIES NICAD BATTERY**
14.4v 60 Watt Hours, 5 1/8 lbs. Run time: 2 hours @ 27 watts, 3 hrs @ 18 watts
- **DIGITAL PRO PAC 13 LOGIC SERIES NICAD BATTERY**
13.2v 55 Watt Hours, 4 3/4 lbs. Run time: 2 hours @ 25 watts, 3 hours @ 17 watts

DIGITAL COMPAC MAGNUM

Extremely small and light weight (almost half the size and weight of a Pro Pac), the powerful Digital Compac Magnum still has more effective energy than two NP style slide-in batteries. The high voltage design and Logic Series technology eliminate all the problems that cripple conventional 12 volt slide-in type batteries. The Digital Compac Magnum is the professional choice for applications drawing less than 24 watts. Not recommended when using an UltraLight.

- **DIGITAL COMPAC MAGNUM 14 LOGIC SERIES NICAD BATTERY**
14.4v 43 Watt Hours, 2 3/4 lbs. Run time: 2 hours @ 20 watts, 3 hours @ 13 watts
- **DIGITAL COMPAC MAGNUM 13 LOGIC SERIES NICAD BATTERY**
13.2v 40 Watt Hours, 2 1/2 lbs. Run time: 2 hours @ 18 watts, 3 hours @ 12 watts

GOLD MOUNT BATTERIES

The Logic Series Gold Mount batteries are virtually identical to their respective DIGITAL versions (above) with respect to size, weight, capacity, IMPAC case construction, and application. They are similarly equipped with micro-code logic circuits and comprehensive ACS sensors that communicate directly with all Logic Series chargers, providing the essential data critical for optimum performance, reliability and long life. They do not, however, include DIGITAL microprocessor features such as the integral diagnostic program "Fuel Computer", LCD LED display and Interactive viewfinder fuel gauge circuit.

- **PRO PAC 14 NICAD BATTERY** (4.4v 60 Watt Hours)
- **PRO PAC 13 NICAD BATTERY** (3.2 v 55 Watt Hours)
- **MAGNUM 14 NICAD BATTERY** (14.4v 72 Watt Hours)
- **MAGNUM 13 NICAD BATTERY** (13.2 v 66 Watt Hours)
- **COMPAC MAGNUM 14 NICAD BATTERY** (14.4v 43 WH)
- **COMPAC MAGNUM 13 NICAD BATTERY** (13.2v 40 WH)

MP-40 DIGITAL FAST CHARGER w/LCD and DIAGNOSTIC PORT

The most advanced and versatile Anton/Bauer charger. In addition to features such as four-position one-hour sequencing fast charge, five fast charge termination systems, it also has:

- SSP (Selective Sequence Programming) which automatically arranges the charging order among the 4 batteries to assure fully charged batteries in the shortest time possible.
- Multifunction LCD checks each of the four battery positions and indicates charge status, available capacity, battery type/rating, percent of maximum charge, battery serial number, date of manufacture, accumulated charge/discharge cycles and other data.

KY-27UB JVC

3-CCD Color Video Camera

- New 1/3" CCDs with 380,000 pixels (360,000 effective) with advanced electronics delivers resolution of 750 horizontal lines and reduced smear.
- Sensitivity of f/5.0 at 2000 lux. Min illumination 7.5 lux with f/1.4 lens, +18dB.
- LOIUX mode allows shooting scenes that were previously impossible due to insufficient lighting. CCDs are maximized for low light sensitivity equivalent to an electronic gain of 24dB plus a JVC pixel readout system which provides an additional 6dB. Together they provide +30dB without the noise and picture degradation normally associated with this much gain. Excellent color balance is maintained even down to 1.5 lux illumination.
- Auto Shooting Mode where you only have to zoom, focus and record. All other parameters are controlled automatically.
- Enhanced ALC (Automatic Level Control) mode for continuous shooting in all light levels. This allows continuous automatic shooting from dark interiors to bright outdoors. Also features an aperture priority mode. Manually set iris for desired depth of focus, and ALC circuit automatically achieves correct video level.
- The Multi-Zone Iris Weighting system gives preference to objects in the center and lower portions of the picture. The Automatic Peak/Average Detection (APD) provides intelligence to ignore unusual objects such as bright lights.
- Auto knee circuitry extends a scene's light to dark dynamic range reproduction by up to five times without overexposure.
- Has large 1.5-inch viewfinder with 500 lines of resolution and SMPTE color bars. Status system provides audio levels, accumulated or remaining recording time and VTR operation. Also battery voltage and camera setup. Zebra pattern indication and safety zones with a center marker are also provided.
- Equipped with Variable Scan function. This allows flicker-free shooting of computer screens. Variable scan enables a precise shutter speed from 1/60 to 1/196.7 of a second in 256 increments to be set, matching a computer's scan rate. Almost any computer display can be clearly recorded.
- Star filter creates dramatic 4-point star effects. Users can also select from a wide range of optional filters.
- Advanced Memory System (AMS) stores customizable settings for various shooting conditions.
- Docks directly to the JVC BR-S420U, BR-S411UB and BR-S420CU professional S-VHS recorders. Optional adapters for docking to Hi-8 and Betacam SP are also available.



Vinten

THE ADVANCED RANGE OF VISION LIGHTWEIGHT HEADS AND TRIPODS



Vision SD 12 and SD 22

Pan and Tilt Heads with Serial Drag

The Vision SD 12 and SD 22 are the first heads with the "Serial Drag" pan and tilt system. The system consists of a unique, permanently-sealed fluid drag and an advanced lubricated friction drag. So for the first time, one head gives you all the advantages of both fluid (viscous) and lubricated (LF) drag systems - and none of their disadvantages. Achieve the smoothest pans and tilts regardless of speed, drag setting and ambient temperature. The Serial Drag system provides the widest range of infinitely variable precise settings with repeatable, consistent drag in each pan and tilt direction.

- Features:**
- Simple, easy-to-use external control for perfect balance.
 - Patented spring-assisted counter-balance system permits perfect "hands-off" camera balance over full 180° of tilt.
 - Instant drag system breakaway and recovery overcome inertia and friction for excellent "whip pans".
 - Consistent drag levels in both pan and tilt axis.
 - Redesigned flick on, flick off pan and tilt caliper disc brakes.
 - Greater control, precision, flexibility and "touch" than any other head on the market.
 - Touch activated, time delayed illuminated level bubble.
 - Environmental working conditions from as low as -40° to as high as +60°C.
 - SD 12 weighs 6.6 lbs and supports up to 35 lbs.
 - SD 22 weighs 12.7 lbs and supports up to 55 lbs.

Vision Two Stage ENG and LT Carbon Fibre ENG Tripods

The ultimate in lightweight and innovative tripods, they are available with durable tubular alloy (Model #3513) or the stronger and lighter, axially and spirally wound carbon fiber construction (Model #3523). They each incorporate the new torque safe clamps to provide fast, safe and self-adjusting leg clamps that never let you down. Two stage operation gives them more flexibility when in use as well as greater operating range.

- "Torque Safe" requires no adjustment. Its unique design adjusts itself as and when required, eliminating the need for manual adjustment and maintenance and making for a much more reliable clamping system.
- New hip joint eliminates play and adds rigidity.
- They both feature 100mm levelling bowl, fold down to a compact 28", and support 45 lbs.
- The #3513 weighs 6.5 lbs and the #3523 CF (Carbon Fibre) weighs 5.2 lbs.

Vision 12 Systems

All Vision 12 systems include #3364-3 SD 12 dual fluid and lubricated friction drag pan/tilt head, single telescoping pan bar and clamp with 100mm ball base.

SD-12A System

- 3364-3 SD-12 Pan and tilt head
- 3518-3 Single stage ENG tripod with 100mm bowl
- 3363-3 Lightweight calibrated floor spreader

SD-12D System

- 3364-3 SD-12 Pan and tilt head
- 3513-3 Two-stage ENG tripod with 100mm bowl
- 3314-3 Heavy-duty calibrated floor spreader

SD-12LT System

- 3364-3 SD-12 Pan and tilt head
- 3523-3 Two-stage carbon fibre ENG tripod w/100mm bowl
- 3363-3 Lightweight calibrated floor spreader
- 3425-3A Carry strap
- 3340-3 Soft case

Vision 22 Systems

All Vision 22 systems include #3386-3 SD-22 dual fluid and lubricated friction drag pan/tilt head, single telescoping pan and clamp with dual 100mm/150mm ball base.

SD-22E System

- 3386-3 SD-22 Pan and tilt head
- 3219-52 Second telescoping pan bar and clamp
- 3516-3 Two-stage EFP tripod with 150mm bowl
- 3314-3 Heavy-duty calibrated floor spreader

SD-22 LT System

- 3386-3 SD-22 Pan and tilt head
- 3219-52 Second telescoping pan bar and clamp
- 3523-3 Two-stage carbon fibre ENG tripod w/100mm bowl
- 3314-3 Heavy-duty calibrated floor spreader
- 3425-3A Carrying strap
- 3341-3 Soft case

SD-22 ELT System

- 3386-3 SD-22 Pan and tilt head
- 3219-52 Second telescoping pan bar and clamp
- 3383-3 Two-stage carbon fibre EFP tripod w/150mm bowl
- 3314-3 Heavy-duty calibrated floor spreader

**CALL FOR
 PRICES**

WE BUY, SELL AND TRADE USED VIDEO EQUIPMENT

SEVEN-DAY CUSTOMER SATISFACTION GUARANTEE

Circle (62) on Reply Card

www.americanradiohistory.com



"THE PROFESSIONAL'S SOURCE"

FOR ORDERS CALL:

OR FAX (24 HOURS):

800-947-9928

800-947-9003

212-444-5028

212-444-5001

OVERNIGHT AND RUSH
SERVICE AVAILABLE

E-Mail at 70550.1616@compuserve.com

TASCAM DA-88 Multi-Track Recorder



The first thing you notice about the eight channel DA-88 is the size of the cassette - it's a small Hi-8mm video cassette. You'll also notice the recording time - up to 120 minutes. These are just two of the advantages of the DA-88's innovative use of 8mm technology.

- Intrinsic to the 8mm video format is the Automatic Track Finding (ATF) control system. This approach records the tracking control information, along with the program material, using the helical scan (video) head. Competing S-VHS based system record the tracking data with a linear recording head, independent of the program data. The S-VHS tape must be run at a higher speed (thereby delivering shorter recording time) to deliver control track reliability, and requires some form of automatic or manual tracking adjustment. Synchronization and tracking must be adjusted, either automatically or manually (just like on your home VCR) as the machine ages, or if the tape is played back on another machine.
- On the other hand, the ATF system ensures that there will be no tracking errors or loss of synchronization. The DA-88 doesn't even have (or need) a tracking adjustment. All eight tracks of audio are perfectly synchronized. What's more, this system guarantees perfect tracking and synchronization between all audio tracks on all cascaded decks - whether you have one deck or sixteen (up to 128 tracks!).
- Incoming audio is digitized by the on-board 16-bit D/A at either 44.1 or 48kHz (user selectable). The frequency response is flat from 20Hz to 20kHz while the dynamic range exceeds 92dB. As you would expect from a CD-quality recorder, the wow and flutter is unmeasurable.
- One of the best features of the DA-88 is the ability to execute seamless Punch-ins and Punch-outs. This feature offers programmable digital crossfades, as well as the ability to insert new material accurately into tight spots. You can even delay individual tracks, whether you want to generate special effects or compensate for poor timing. All of this can be performed easily on a deck that is simple and intuitive to use.

OPTIONS

- RC-808 - Single Unit Remote Control
- RC-848 - System Remote Control
- MU-8824 - 24-Channel Meter Unit
- SY-88 - Complete SMPTE/EBU Chase Synchronizing and MIDI Machine Control interface

Fostex

RD-8 Multi-Track Recorder



This digital multitrack recorder is designed specifically for the audio professional. Fostex has long been a leader in synchronization, and the RD-8 redefines that commitment. With its built-in SMPTE / EBU reader/generator, the RD-8 can stripe, read and jam sync time code - even convert to MIDI time code. In a sync environment the RD-8 can be either Master or Slave. In a MIDI environment it will integrate seamlessly into the most complete project studio, allowing you complete transport control from within your MMC (MIDI Machine Control) compatible sequencer.

- Full transport control is available via the unit's industry-standard RS-422 port, providing full control right from your video bay. The RD-8 records at either 44.1 or 48kHz and will perform Pull-Up and Pull-Down functions for film/video transfers. The Track Slip feature helps maintain perfect sound-to-picture sync and the 8-Channel Optical Digital Interface keeps you in the digital domain.
- All of this contributes to the superb sound quality of the RD-8. The audio itself is processed by 16-bit digital-to-analog (D/A's) converters at either 44.1 or 48kHz (user selectable) sampling rates, with 64X oversampling. Playback is accomplished with 18 bit digital-to-analog (D/A's) and 64X oversampling, thus delivering CD-quality audio.
- The S-VHS transport in the RD-8 was selected because of its proven reliability, rugged construction and superb tape handling capabilities. Eight tracks on S-VHS tape allow much wider track widths than is possible on other digital tape recording formats.
- With its LCD and 10-digit display panel, the RD-8 is remarkably easy to control. You can readily access 100 locate points, and cross-fade time is fully controllable in machine to machine editing. Table of Contents data can be recorded on tape. When the next session begins, whether on your RD-8 or another, you just load the set up information from your tape and begin working. Since the RD-8 is fully ADA T compliant, your machine can play tapes made on other compatible machines, and can be controlled by other manufacturers' ADAT controllers. Your tapes will also be playable on any other ADAT deck.
- In addition to familiar transport controls, there are a number of logical, user friendly features. This is the only unit in its class with an on-board, back-lit variable contrast LCD display. It provides all of the information you'll need to keep track of offsets, punch points, generator functions and other pertinent data. Three function keys, combined with HOME, NEXT and UP/DOWN buttons, enable you to navigate the edit menus effortlessly. If you need to have access to the front panel controls, the optional model 8312 remote control gives you remote command of the most common functions.



RF SERIES CONDENSER MICROPHONES

Unlike traditional condenser microphones, the capacitive transducer in Sennheiser condenser microphones is part of a tuned RF-discriminator circuit. Its output is a relatively low impedance audio signal which allows further processing by conventional bi-polar low noise solid state circuits. Sennheiser microphones achieve a balanced floating output without the need for audio transformers, and insure a fast, distortion-free response to audio transients over an extended frequency range. The RF design yields exceptionally low noise levels and is virtually immune to humidity and moisture. The comparatively low RF-voltage across the elements of the transducer also eliminates arcing and DC-bias creeping currents. Sennheiser employs RF-technology to control residual microphone noise. Optimizing the transducer's acoustic impedance results in further improvement in low noise performance. Sennheiser studio condenser microphones operating according to this RF-principle have proven their superior ruggedness and reliability in the past decades under every conceivable environmental condition.

MKH 20 P48U3 Omnidirectional

Low distortion push-pull element, transformerless RF condenser. Flat frequency response, diffuse/near-field response switch (6 dB boost at 10 kHz), switchable 10 dB pad to prevent overmodulation. Handles 142 dB SPL. High output level. Ideal for concert, Mid-Side (M-S), acoustic strings, brass and wind instrument recording.

MKH 40 P48U3 Cardloid

Highly versatile, low distortion push-pull element, transformerless RF condenser. High output level, transparent response, switchable proximity equalization (<4 dB at 50 Hz) and preattenuation of 10 dB to prevent overmodulation. In vocal applications excellent results have been achieved with the use of a pop screen. Recommended for most situations, including digital recording, overdubbing vocals, percussive sound, acoustic guitars, piano, brass and string instruments, Mid-Side (M-S) stereo, and conventional X-Y stereo.

MKH 60 P48U3 (Short Shotgun)

Short interference tube RF condenser, lightweight metal alloy, transformerless, low noise, symmetrical capsule design, smooth off-axis frequency response, switchable low cut filter (<5 dB at 100 Hz), high frequency boost (+5 dB at 10 kHz) and 10 dB attenuation. Handles extremely high SPL (135 dB), ideal for broadcasting, film, video, sports recording, interviewing in crowded or noisy environments. Excellent for studio voiceovers.



MKH 70 P48U3 (Shotgun)

Extremely lightweight RF condenser, rugged, long shotgun, low distortion push-pull element, transformerless, low noise, switchable presence (+5 dB at 10 kHz), low cut filter (<5 dB at 50 Hz), and 10 dB preattenuation. Handles 133 dB SPL with excellent sensitivity and high output level. Ideal for video/film studios, theater, sporting events, and nature recordings.

MKH 416 P48U3

Supercardloid/Lobe (Shotgun)

Transformerless, RF condenser designed as a combination of pressure gradient and interference tube microphones. Very good feedback rejection, low proximity effect, 128 dB SPL. Rugged and resistant to changing climate conditions. Ideal for boom, fishpole, and camera mountings. A long-distance microphone for video, film, and studio recording. Excellent for interviewing for reporters, podium or lecture microphone.

MKH 816 P48U3

Ultra-directional Lobe (Shotgun)

Narrow-beam pattern, transformerless RF condenser microphone. Handles 124 dB SPL and has high output voltage. Perfect for crowded news conference, movie sets, TV stages, sporting events and nature recording.

CHYRON Graphics

PC-CODI TEXT and GRAPHICS GENERATOR

A PC-compatible (ISA bus) board, the PC-CODI incorporates a broadcast quality encoder and wide bandwidth linear keyer to provide a complete and affordable solution for information displays, broadcast, video production or multi-media applications.

- Standard PC/AT ISA bus interface, 2/3 length form factor
- Fully anti-aliased displays
- Less than 10msec. effective pixel resolution
- 16.7 million color selections
- Fast, realtime operations
- Character, Logo and PCX Image transparency
- Display and non-display buffers
- Bitstream typeface library selection
- Variable edges: border, drop shadow and offset
- Variable flush
- Full position and justify control of character & row
- User definable intercharacter spacing (squeeze & expand)
- Multiple rollover speeds • Automatic character kerning
- User definable tab/template fields
- Shaded backgrounds of variable sizes and transparency
- User definable read effects: wipes, pushes, fades
- High quality composite & S-video (Y/C) encoder
- Integral composite and S-video linear keyer
- NTSC or PAL sync generator with genlock
- Module switchable NTSC or PAL operation
- Software controlled video timing
- Board addressability for multi-channel applications
- Auto display sequencing
- Local message/page memory
- Preview output with safe-title/cursor/menu overlay
- Composite & S-video input with auto-genlock select

SONY COLOR MONITORS

PVM-1350

13" Presentation Monitor

- Employs a P-22 phosphor fine pitch CRT to deliver stunning horizontal resolution of 450 horizontal lines.
- Equipped with beam current feedback circuit which eliminates white balance drift for long term stability of color balance.
- Has analog RGB, S-video and two composite video (BNC) inputs as well as 4 audio inputs.
- Automatic Chroma/Phase setup menu facilitates the complex, delicate procedure of monitor adjustment. Using broadcast standard color bars as a reference, this function automatically calibrates chroma and phase.
- Chroma/Phase adjustments can also be easily performed with the monochrome Blue Only display. In Blue Only mode video noise can be precisely evaluated.
- Factory set to broadcast standard 6500K color temperature.
- Provides an on-screen menu to facilitate adjustment/operation on the monitor. The on-screen menu display can be selected in English, French, German, Spanish or Italian.
- On power up, automatic degaussing is performed.
- There is also a manual degauss switch to demagnetize the screen.
- Sub control menu allows fine adjustments to be made on the knob control for contrast, brightness, chroma and phase. The desired level can be set to the click position at the center allowing for multi-

PVM-1351Q

13" Production Monitor

- Has all the features of the PVM-1350 PLUS -
- Is also a multistandard monitor. It accepts NTSC, PAL and NTSC video signals. NTSC 4.43 can also be reproduced.
- Equipped with a SMPTE 259M Serial Digital Interface. By inserting the optional serial digital interface kit BKM-101C for video and the BKM-102 for audio the PVM-1351Q can accept SMPTE 259M component serial digital signals.
- Equipped with RS-422 serial interface. With optional BKM-103 serial remote control kit all of the monitor's functions can be remotely controlled with greater confidence and precision.
- Equipped with input terminals such as component (Y/R-Y/B-Y), analog RGB, S-video, 2 composite video (BNC) and 4 audio terminals for complete flexibility.
- Aspect ratio is switchable between 4:3 and 16:9 simply by pressing a button.
- Underscan and H/V delay capability. With underscan, entire active picture area is displayed. Allows you to view entire image and check the picture edges. H/V delay allows viewing of the blanking area and sync/burst timing by displaying the horizontal and vertical intervals in the center of the screen.
- Color temperature switchable between 6500K/9300K/UP. User preset: 6500K is factory preset. 9300K is for a more pleasing picture. User preset is 3200K to 10,000K.

PVM-1354Q/PVM-1954Q 13" and 19" Production Monitors

All the features of the PVM-1351Q PLUS.

- SMPTE G standard phosphor CRT is incorporated in the PVM-1354Q/1954Q. SMPTE C phosphors permit the most critical evaluation of any color subject. Provides over 600 lines of horizontal resolution.
- The PVM-1354Q mounts into a 19-inch EIA standard rack with the optional MB-502B rack mount bracket and SLR-102 slide rail kit same as PVM-1351Q. The PVM-1954Q mounts into a 19-inch EIA rack with the optional SLR-103 slide rail kit.

SHURE



FP32A PORTABLE STEREO MIXER

This small and rugged portable mixer is well equipped to handle the demands of EFP, ENG, live music recording or any other situation that requires a low noise high performance mixer.

- High quality-low noise electronics, perfect for digital recording and transmission
- Three balanced inputs, two balanced outputs plus tape out and monitor
- Supports all types of condenser mics with internal phantom supply
- Inputs can be switched between mic and line level
- Each channel has own pan pot
- Each channel has illuminated meter and peak indicator
- Two units can be cascaded to provide six input channels
- Internal 1KHz oscillator for record and send level calibration
- Internal (2x9V alkaline batteries) or external power
- Switchable low cut filters

MACKIE



MicroSeries 1202 12-Channel Ultra-Compact Mic/Line Mixer

Usually the performance and durability of smaller mixers drops in direct proportion to their price, making lower cost models unacceptable for serious recording and sound reinforcement. Fortunately, Mackie's fanatical approach to pro sound engineering has resulted in the Micro Series 1202, an affordable small mixer with studio specifications and rugged construction. The Micro Series 1202 is a no-compromise, professional quality ultra-compact mixer designed for non-stop 24 hour-a-day professional duty in broadcast studios, permanent PA applications and editing suites where nothing must ever go wrong. So no matter what your application, the Micro Series 1202 is ideal. If price is the prime consideration or you simply want the best possible mixer in the least amount of space, there is only one choice.

CR-1604

16-Channel Audio Mixer

In less than three years, the Mackie CR-1604 has become the industry standard for compact 16-channel mixers. It is the hands-down choice for major touring groups and studio session players, as well as for broadcast, sound contracting and recording studio users. For them the CR-1604 offers features, specs, and day-in-day-out reliability that rival far larger boards. Its remarkable features include 24 usable line inputs with special headroom/ultra-low noise Unityplus circuitry, seven AUX sends, 3-band equalization, constant power pan controls, 10-segment LED output metering, discrete front end phantom-powered mic inputs and much more.

TASCAM

M-2600 Series

16/24/32 Channel Eight Channel Mixers



LOW NOISE CIRCUITRY

- Combining completely redesigned, low noise circuitry with Absolute Sound Transparency™ the M-2600 delivers high quality extremely clean sound. No matter how many times your signal goes through the M-2600, it won't be colored or altered. The signal remains as close to the original as possible. The only coloring you hear is what you add with creative EQ and your outboard signal processing gear.
- Double reinforced grounding system eliminates any hum.
- World-class power supply provides higher voltage output for better headroom and higher S/N ratio.

THE BEST AUX SECTION IN THE BUSINESS

The most versatile AUX section in its class, rivaling expensive high-end consoles. 8 sends total, 2 in stereo. Send signal in stereo or mono, pre- or post-fader. Available all at once. Return signal through any of 6 stereo paths.

LARGEST IN-STOCK INVENTORY IN THE WORLD

www.americanradiohistory.com

... FOR PHOTO & VIDEO"



TO INQUIRE ABOUT YOUR ORDER:

119 WEST 17TH STREET, NEW YORK, N.Y. 10011

800 221-5743 • 212 807-7479

Store & Mail Order Hours:

Sun 10-4:45 • Mon & Tues 9-6 • Wed & Thurs 9-7:30 • Fri 9-2 • Sat Closed

OR FAX 24 HOURS: 212 366-3738

RUSH OR OVERNIGHT SERVICE AVAILABLE (extra charge)



HORITA

WG-50 Window Dub Inserter

- Makes burned-in SMPTE TC window dub copies
- Indicates drop-frame or non-drop-frame time code
- Also functions as play speed SMPTE time code reader
- Adjustments for horizontal and vertical size and position
- Dark mask or "see-thru" mask surrounds display
- Provides reshaped time code output for copying TC
- Displays time code or user bits
- Sharp characters
- Field 1 field 2 indicator
- Always frame accurate (on time)

\$269

TG-50 Generator / Inserter

Combination time code generator and window dub inserter. It includes all features of WG-50 PLUS—

- Generates SMPTE time code in drop/non-drop-frame format
- Jamsync mode jams to time code input and outputs new TC
- Simple "on screen" preset of time code and user bits
- Run/stop operation using front panel momentary switch
- Selectable 30/60/90/120-second automatic generator back-time
- Make a window dub copy while recording TC on source tape

\$349

BSG-50 Blackburst/Sync/Tone Generator

- The BSG-50 provides an economical means for generating the most common RS-170A video timing signals used to operate various video switches, effects generators, TBCs, VCRs, cameras and video edit controllers.
- 6 BNC video/pulse outputs
- Now available: 6 blackburst, 4 sync, 2 subcarrier
- Each sync output individually settable for composite sync, composite blanking, H-drive, or V-drive
- Separate buffer for each output—maximum signal isolation
- 1KHz, 0dB sine wave audio tone output, locked to video
- Outputs can easily be configured to meet specific user and equipment needs

\$269



CSG-50 Color Bar/Sync/Tone Generator

- Generates full/SMPTE color bars, blackburst and composite sync signals
- Built-in timer can automatically switch video output from color bars to color black after 30 or 60 seconds. Easy and convenient for producing tape leaders and stripping tapes with color bars and black
- Front panel selection of full-field or SMPTE color bar patterns or colorblack (blackburst) video output
- Includes crystal-controlled, 1KHz, 0dB audio tone output
- Outputs: video, sync, ref frame, 1KHz, 0dB
- Audio tone switches to silence and color bars change to black when using 30/60 second timer
- Fully RS-170A SC/H phased and always correct.
- No adjustment required

\$349

TSG-50 NTSC Test Signal Generator

- The TSG-50 generates 12 video test signals suitable for setting up, aligning, and evaluating the performance of various video equipment found in a typical video editing system, such as video monitors, distribution amplifiers, VCRs, switchers, effects generators, TBCs, etc. In addition to the video signals, the TSG-50 also generates composite sync and, with a video DA such as the Horita VDA-50, becomes a high quality, multiple output, house sync generator.

- Fully RS-170A SC/H phased and always correct. No adjustments ever required
- Built-in timer automatically switches video output from color bar pattern to black after 30 or 60 seconds. Makes it easy to produce tape leaders of color bars followed by black
- Video signals generated are in accordance with industry standard EIA RS-170A video timing specification
- Audio tone switches to silence and color bars change to black when using 30/60 second timer
- Convenient pattern selection - 12 position front panel switch
- Includes crystal-controlled, 1KHz, 0dB audio tone output
- Generates precise oscilloscope trigger output signal one H line before start of color field 1
- Outputs: video, sync, ref frame, 1KHz, 0dB

\$439

WE STOCK THE FULL LINE OF HORITA PRODUCTS INCLUDING:

- WG-50 - Window Dub Inserter
- TG-50 - Generator/Inserter
- TRQ-50 - Generator/Inserter/Search Speed Reader
- TRG-50PC - Has all of the above plus RS-232 control.
- VG-50 - VITC Generator, LTC-VITC Translator
- VLT-50 - VITC-To-LTC Translator
- VLT-50PC - VITC-To-LTC Translator / RS-232 Control
- RLT-50 - Hi8 (EVO-9800/9850) TC to LTC Translator
- TSG-50 - NTSC Test Signal Generator
- SCT-50 - Serial Control Tiller "Industrial" CG, Time-Date Stamp, Time Code Captioning
- SAG-50 - Safe Area, Convergence Pattern and Oscilloscope Line Trigger and Generator

SONY

SVP-5600 and SVO-5800 S-VHS Player/ S-VHS Editing Recorder

SVP-5600 and SVO-5800 features:

- By combining the high resolution (400 horizontal lines) of S-VHS with high quality signal processing techniques like DNR, Digital Field DDC and Chroma Process improvement, they deliver the consistent picture quality so essential to editing. They also incorporate a wide video head gap and track width (58mm) for stable and faithful picture reproduction.

- Each has a built-in TBC with an advanced Digital Noise Reducer (DNR) for both the chrominance and luminance signals to eliminate noise during playback. At the same time, a field memory incorporated in the noise reducer removes jitter to provide sharp, stable pictures. The field memory also includes a Digital Field DDC (Dropout Compensator), which replaces signal dropout with information from the previous field.

- They also incorporate Chroma Process Improvement circuitry for excellent color picture quality in the playback mode. This advanced circuitry greatly improves the chroma bandwidth, thus enabling sharper and clearer color picture reproduction.

ADVANCED EDITING FUNCTIONS

- For frame accurate editing, both machines employ a sophisticated servo system, an improved quick response mechanism and built-in LTC/VITC time code capability. This makes them ideal for animation and computer graphic recording, where a frame-by-frame editing function is indispensable.
- They are equipped with industry standard RS-422 9-pin serial interface. The 9-pin connector carries edit commands and time code data between the VCR and the edit controller.
- When connected to an RS-422 equipped edit controller, the SVO-5800 functions as an editing recorder. It performs assemble and insert functions and also provided audio split editing capability of normal audio tracks 1 and 2. In the insert mode, video, audio and time code can be inserted independently, or in any combination.



FOUR CHANNEL AUDIO SYSTEM

- They each incorporate four-channels of high quality video. There are two channels with Hi-Fi (AFM) tracks and two with longitudinal (normal) tracks. The Hi-Fi tracks provide a wide frequency response from 20Hz to 20kHz and a superb dynamic range of 90dB. The normal tracks incorporate Dolby B noise reduction for high quality sound reproduction. XLR connectors are used for the inputs and outputs for all four channels.

MULTIPLE INPUTS & OUTPUTS

- Both machines employ composite and S-Video connectors. With optional SVBK-170 Component Output Board, they provide component signal output through BNC connectors. With the board, the VCRs can be integrated into Betacam SP editing systems.

USER FRIENDLY OPERATION

- Built-in character generator which superimposes characters on the "video monitor output" signal. This allows time code data, control track, menu setup and VCR function status to be shown on a monitor.
- For more efficient operation they have an on-screen setup menu which allows a variety of customized VCR mode operations. Programmed in the form of a layer structure, you simply go through the menu and initialize VCR operation.
- All parameters of the TBC, such as luminance level, chroma level, setup, hue, Y/C delay, sync phase and SC phase are easily controlled from the front panel, and can be remotely controlled from the optional UVR-60 TBC Remote Control. The UVR-60 also accesses field freeze function in the still mode and allows on/off control of the chroma and luminance noise reducer.
- Quick and smooth picture search can be performed by either using an RS-422 equipped edit controller or the optional SVRM-100 Remote Control. Recognizable color pictures are provided at up to 10x normal speed in forward or reverse.

FXE-100 ALL-IN-ONE VIDEO EDITING SYSTEM

The new FXE-100 is an A/B roll editing system designed for quicker, easier video editing, and is well-suited for today's professional audio/visual communications. It is at once an edit controller which controls basic VCR functions, a special effects generator which cuts, mixes, wipes and composites the video sources with stunning effects, and an audio mixer with various fading and switching abilities. There is no longer a need to configure multiple devices for video editing. With either Hi-8 or S-VHS VCRs and the FXE-100, an ideal professional editing system can be easily configured.

- Switchable machine control of three RS-422 equipped VCRs or three RS-232 equipped VCRs. Basic VCR functions, such as play, stop, still, fast forward, rewind and record are controlled through these interfaces. Variable speed control is also possible for VCRs equipped with Dynamic Tracking.
- Accepts time code, control track (CTL), and 8mm time code as editing references. These can be set separately for each VCR.
- Performs assemble and insert editing (Video, Audio 1, Audio 2). The first EDIT mode, which allows you to record sufficient timecode for synchronization to a new tape is also featured.
- Features a split audio edit function which allows setting of audio and video in-points separately. This permits you to bring in the audio source before a visual transition.
- Store up to 99 scenes, including effects settings, in memory.
- Edit list data can be saved and downloaded to an IBM-compatible PC, allowing you to review or modify edit data at any time.
- The FXE-100 has two program buses, the A- and B-bus. Each bus provides Player 1, Player 2, Aux inputs and Background Color. Both composite and S-Video signals can be input.
- Taking advantage of the freeze function, two machine editing with effect transitions is realized by freezing the recorder OUT point picture. Also, by selecting the same video source in both A and B bus, wipe or mix in/out of the digital effects is possible without picture transition. This "Self A Roll" function is another feature which allows effective two machine video editing.

SWITCHER AND SPECIAL EFFECTS GENERATOR

- Multiple wipe patterns, including picture scroll and slides, are programmed in. Wipe patterns are easily accessed, and transition rates can be set. Soft edges or a choice of 15 color borders can be added to most wipes and effects.
- Variety of mix effects, such as mosaic mix, black and white mix, postselection mix and picture-in-picture (PIP). Also fade to black and fade to white effects.
- Digital effects, such as mosaic, paint, pixel trail, multi-picture, monochrome, and zoom. Picture freeze function is also featured in frame or field mode.
- Because all the special effects can be set separately to the video sources of each bus, wipes or dissolves of the sources with the digital effects can be executed. It is also possible to combine multiple effects to create stunning images, such as wiping the multi-picture effect with the paint effect and dissolving color corrected picture with mosaic effects.



ADJUSTABLE TRANSITIONS

- Transitions are done using the fade lever, or they can be automatically set. Transition time can be set from 0 to 999 frames. Transition can also be paused and reversed. Other parameters such as GPI timing, wipe selection and pre-roll time can be set.

CHROMA KEYS

- The FXE-100 features chroma and luminance keys to superimpose characters, figures, or video sources onto a background. Clip and gain levels can be adjusted to give clean and sharp keys. Color correction is done via the joystick for both buses with memory to hold a favorite setting for storage and recall.

WIPE CONTROL

- By moving the location stick, you can move the closed wipe patterns such as square, circle and heart, around the screen. This function also enables you to start the wipe transition from any desired position on the screen.

AUDIO MIXING

- Audio-follow-video editing can be performed with the FXE-100. Two channels are assigned to each player VCR's input and one channel for the recorder VCR's input. Two channels of AUX inputs and a MIC input are available for mixing background music with voice-over. All audio input levels can be adjusted separately. Two Program output channels and one monitor channel are provided. A switch for -7.5dB and +4.0 dB is provided for flexibility in choosing input levels for VCRs with either RCA or XLR connectors.

USER FRIENDLY OPERATION

- All keys and buttons are logically grouped by function, and are color coded for quick identification and economy of keystrokes.
- Permits one monitor operation. No need for multiple monitors. Various editing data, such as edit mode and time code address of each VCR, can be monitored on the same screen.

VERSATILE SYSTEM INTEGRATION

- No need to configure multiple devices. By simply connecting three VCRs, a professional video editing system is formed.
- Two frame synchronizers allow perfectly synchronized wipes and dissolves without time base correctors.
- Equipped with two GPIs for control of external devices, such as character generators and audio mixers. Also has a GPI input, allowing it to be controlled from an external edit controller.
- Has four black burst outputs to distribute internally generated sync signal, synchronizing connected devices. There is no need for an external sync generator.

MAGNI



MM-400

- The MM-400 is a combination waveform and vector monitor especially configured for the cost-conscious producer. A low-cost alternative to CRT-based waveform monitoring the MM-400 produces a video picture of the input signal's waveform and displays it on any video monitor. It provides a simple, affordable and accurate way to set camera levels before a shoot, or to check time base correctors and color fidelity in editing. Problems like hue shift, smearing, muddy contrast and loss of detail are easily identified for correction.

FEATURES:

- Converts waveform or vector display information into a standard video signal which can be displayed on a video monitor or routed around a video facility, no need for additional expensive monitors. Switch between pictures and waveforms at the push of a button.
- Incorporates an advanced SC/H phase and color frame indicator that is a must for editing and post production. At a glance it tells you if a signal's subcarrier-to-horizontal phase is properly adjusted and if the signal's color frame matches the house black burst connected to the MM-400 external reference input.
- Works anywhere and with any analog video format—NTSC, PAL, Component or S-Video. It has automatic detection between NTSC and PAL formats.
- Three loop-through inputs can accept three composite signals or one component, or RGB signal.
- No complex displays or special test signals are required for component video monitoring.
- Interchannel timing and amplitude display make component analog monitoring easy, has color bar limit markings for Betacam, M-II and SMPTE formats.
- Waveform and vectorscope controls, including channel, sweep speed, position control, phase rotation are on easy-to-use dedicated pushbuttons.
- Besides instant toggling between picture and waveform, a mix mode combines waveform and picture displays for simultaneous viewing.
- The MM-400 can be readily used by even novice operators. It has easy-to-understand set-up menus for display color, interchannel timing, SC/H phase alarm.
- Usable in any video facility of any size for displaying signals, its low cost makes it affordable by the smallest studio, while its features and performance make it ideal for monitoring in high-end facilities as well.

LEADER

Model 5850C

Vectorscope

- An ideal companion for the 5860C Waveform Monitor, the 5850C adds simultaneous side-by-side waveform and vector monitoring. Featured is an electronically-generated vector scale that precludes the need for fussy centering adjustments and eases phase adjustments from relatively long viewing distances. Provision is made for selecting the phase reference from either (A or B) inputs or a separate external timing reference.

Model 5860C

Waveform Monitor

- A two-input waveform monitor, the 5860C features 1H, 1V, 2H, 2V, 1 ps/div and 2V MAG time bases as well as vertical amplifier response choices of flat, IRE (low pass), chroma and DiF-STEP. The latter facilitates easy checks of luminance linearity using the staircase signal. A PIX MON output jack feeds observed (A or B) signals to a picture monitor, and the unit accepts an external sync reference. Built-in calibrator and on-off control of the DC restorer is also provided.

Model 5864A

Waveform Monitor

- A fully portable waveform monitor for field use, the Model 5864A is a two-channel unit that provides 2H and 2V sweeps with MAG, FLAT and IRE response, and normal and X4 gain.

Model 5854

Vectorscope

- 2-channel portable vectorscope is ideal for field use and features A and B phase reference, fixed and variable gain. Both units shown with optional battery holder and NP-1 type battery.

We are an authorized Service Center for Sony and Panasonic Industrial and Professional video equipment. Call (800) 963-2525. In NYC (212) 206-8861 (24 hour service available)

PROFESSIONAL SERVICES

JOHN H. BATTISON P.E.
CONSULTING BROADCAST ENGINEER,
FCC APPLICATIONS AM, FM, TV, LPTV
Antenna Design, Proofs, Fieldwork
2684 State Route 60 RD #1
Londonville, OH 44842
419-994-3849

CHAN & ASSOCIATES
BUSINESS DEVELOPMENT • STRATEGIC MARKETING • PUBLIC RELATIONS
CURTIS J. CHAN
PRESIDENT
2212 HERITAGE WAY
FULLERTON, CA 92633
PHONE: (714) 447-4993
FAX: (714) 578-0284
PAGER: (714) 506-1357

HAMMETT & EDISON, INC.
CONSULTING ENGINEERS
RADIO AND TELEVISION
DANE E. ERICKSEN, P.E.
Box 280068
San Francisco, CA 94128
707/996-5200 707/996-5280 Fax

D.L. MARKLEY
& Associates, Inc.
CONSULTING ENGINEERS
2104 West Moss Ave.
Peoria, Illinois 61604
(309) 673-7511
FAX (309) 673-8128
Member AFCCE

NETCOM
STATE OF THE ART ENGINEERING
FOR AUDIO AND VIDEO
ENGINEERING DESIGN • CAD DRAFTING SERVICES
CABLE FABRICATION • PRE-WIRED PATCH PANEL RACKS
SYSTEM INSTALLATIONS • EQUIPMENT SALES
(201) 837-8424
FAX: (201) 837-8384
1465 PALISADE AVE., TEANECK, NJ 07666

*Why not run your
business card here?*
Only \$133 per insertion.
Frequency discounts available.
Call 1-800-896-9939!

CLASSIFIED

FOR SALE

Buy Consign Sell Service Trade

Broadcast Store

Non Linear
Avid
Lightworks
Digital Magic

All Equipment Warrantied!

Sony BVU-950-8,000
Sony BVE-9000-12,500
Grass Valley 200-48,500
Abekas A-53D-30,000
Sony BVM-1910-3,000
Sony PVW-2650-14,000
Sony BVW-507 w/18X-21,000
Tektronix-1750 wf/vect-3,500
Grass Valley 3400 DA-2,000

Phone LA-818-551-5858 Fax LA-818-551-0686
NY-212-268-8800 NY-212-268-1858

Want more
information
on advertised
products?



Use the
Reader
Service
Card.



TAPE ERASERS

garner

WHEN COST IS
IMPORTANT AND
QUALITY IS CRITICAL
1-800-228-0275

Erases all formats in
quantities of 1 to 1,000,000

garner industries

4200 North 48th Street • Lincoln, NE 68504

Circle (100) on Reply Card

Fix RF on Headsets, Handsets & Phones!

Our Filters are the only ones **TUNED** to the
specific band - **AM, FM, CB or Amateur...**
String two together to filter AM AND FM!

We also have the **only filters** for the **HANDSET CORD**
(either the base or handset cord is acting like the antenna) - and
50% of the filters we sell are for the Handset!

Modular Filters... One Pair: \$15.95
Two Pair or Handset: \$19.95

30 Day Money Back Guarantee!
Mike Sandman Enterprises
Unique Telecom Products
708-980-7710

Call for
4 Page
RFI Tech
Bulletin &
Catalog

Modular Handset, 1 or 2
Pair Plug / Jack

Unique Telecom Products from:
Mike Sandman...Chicago's Telecom Expert
VISA 708-980-7710

Tape Resources, Inc.
Video • Audio • Data Media
Special Pricing for FCC
Call Letter Stations
(800) 827-3462
SONY
PROFESSIONAL MEDIA

Factory Direct Cases
Our
prices
can't
be
beat.
Custom
or Stock
Sizes
Call for
Catalogue or Quote
Roadie Products, Inc.
800-645-1707
In NY 516-563-1181
Fax: 516-563-1390

Connect
Specializing in the Secondary Market for
Telecommunication Products
CATV Components & Inventory Closeouts
Call for complete list and pricing
(503) 231-5792 • Fax: (503) 232-7899

FOR SALE

BUY WHERE THE BROKERS BUY!

**WHY PAY A MIDDLEMAN? CALL THE
PEOPLE WHO HAVE IT IN STOCK!
GOOD GEAR, GREAT PRICES!**

**(WE HAVE MORE EQUIPMENT IN STOCK THAN MANY BROKERS
SELL IN AN ENTIRE YEAR!! CALL TODAY, GET IT TOMORROW.)**

U.S. BROADCAST (606) 282-1802

• **STUDIO EXCHANGE •** **BURBANK**

(818) 840-1351 • FAX (818) 840-1354

**NEW & USED
VIDEO EQUIPMENT**

BUY, SELL, CONSIGN; 25 YRS EXP

**IMPROVE YOUR STATION'S
IMAGE WITH**



MicroFlags

Are you tired of inferior quality micro-
phone flags that need to be replaced every three
or four months because of premature wear or
tear that tarnish your station's "on-air" image?

If so, we've got the solution to your
problem. The **GRAFIX MicroFlag** is virtually
indestructible. It won't scratch, flake or peel and
has the added advantage of a non-glare matte
finish which adds to your "on-air" presence.

We are so sure of our product,
we **GUARANTEE** it for one year!
Call us today!

(813) 538-2149

P.O. Box 17615
Clearwater, FL 34622-0615
Fax (813) 531-6702



EDUCATIONAL TRAINING

BETACAM™ WORLD'S MOST COMPLETE TRAINING CLASSES

**'YOUR PLACE OR OURS'
LEARN FIELD TRICKS, SHORTCUTS,
THEORY AND PRACTICE
LOTS OF 'HANDS ON'**

TENDEL® CORP.
4475 GOLDEN FOOTHILL PKWY.
EL DORADO HILLS, CA 95762
(916) 939-4005 / 800-538-6894

**Invest your advertising dollars
where your prospects invest
their time...**

**BROADCAST®
engineering**

SMART TAPES.

For video duplication, demos, audition
reels, work tapes, our recycled tapes are
technically up to any task and downright
bargains. All formats, fully guaranteed.

To order call:

(800)238-4300

CARPEL
VIDEO

EQUIPMENT WANTED

WANTED: USED VIDEO EQUIPMENT Systems or
components. PRO VIDEO & FILM EQUIPMENT
GROUP: the largest USED equipment dealer in
the U.S.A. (214)869-0011.

WANTED: For RCA TM-21 color monitor flyback
#214870 and power transformer #213987 or en-
tire monitor. J. Ballard (212) 664-3033.

EQUIPMENT FOR SALE

FOR SALE: ABEKAS A-42 STILL STORE 2 Chan-
nels, Excellent Condition, 1 Year old. Used 50
hours. \$16,500. Call Bob 919-772-8347

FOR RENT

SUB CARRIER availability now offered on a
100KW FM clear channel in the Dallas Fort Worth
area. Please call (214) 716-7829.

TRAINING

FCC GENERAL CLASS LICENSE. Cassette re-
corded lessons for home study. Our 30th year
preparing radio technicians for the license. Bob
Johnson Telecommunications. Phone (310) 379-
4461.

SERVICES

Monitor Service Center

**Varitek specializes in high resolu-
tion broadcast video monitors.**

Digital or analog.

In all formats NTSC, PAL, SECAM.

We at Varitek have been providing
quality service to our clients
throughout the United States since 1982.

**IKEGAMI, SONY,
HITACHI, MITSUBISHI
JVC, PANASONIC,
CONRAC, NEC
BARCO, TEKTRONIX,
And More...**

(800) 346-4380 Ext. (16)

VARITEK

415 W. Taft Ave., Orange, CA

Circle (101) on Reply Card

- ◆ **DIGITAL BETA, D-2,
BETACAM, VHS REPAIR**
- ◆ **COMPLETE OVERHAULS**
- ◆ **FAST IN / OUT SHIPPING**

**Professional
Communications Systems**
Tampa, FL

FL-800-447-4714 / 813-888-5353

PROMOTE YOUR SERVICES

and increase business for as low as \$119⁰⁰ per
insertion in *Broadcast Engineering Classifieds*.

Call 1-800-896-9939

**"Great article!
Can we get
copies for our
clients and
sales force?"**



**For a free price quote,
contact Chris Lotesto,
toll-free at 800-458-0479
or 312-435-2359.**

POSITION WANTED

ENGINEER WITH 19 YEARS EXPERIENCE in post, broadcast, dealer support, engineering management, system design and installation. Factory trained D1, D2, digital betacam, 1" switchers, editors, cart, studio/ENG cameras, etc, etc. Seeks stable long term engineering opportunity. Prefer Chief/Asst. Chief in Florida marketplace. Willing to relocate. For more information send inquiries to Classified Ad Coordinator, Broadcast Engineering, Dept. 766, 9800 Metcalf, Overland Park, KS 66212-2215.

HELP WANTED

MAINTENANCE ENGINEER: Immediate opening for Maintenance Engineer. Associate Degree in Electronics and 4-6 years experience TV Maintenance. FCC General Class license required-SBE certification desirable. Individual must be energetic, self-starter with experience in component level troubleshooting and maintenance of a wide variety audio, video and RF equipment. U-Matic maintenance experience required, Beta experience a plus. Must also share in driving/operating KU band SNG truck (chauffeurs license required). Some weekends and nights required, and occasional master control operating shift. Minorities and women encouraged to apply. Send resume listing references, salary requirements and any manufactures technical schools to: Chief Engineer, KOMU-TV, 5550 Hwy. 63 South, Columbia, MO 65201. An EEO, Affirmative Action Employer.

VIDEO PROJECTIONIST- National staging company seeking independent contractors on a project by project basis. Qualifications include a working knowledge of Sony 1270 video projectors interfaced with various computer systems, both doubled and triple stacked. Familiarity with Barco 8100 or GE light valves a plus. Must be able to deal effectively with client and crew. Place of residence not a factor. Travel required. Send resume and references to Classified Ad Coordinator, Broadcast Engineering, Dept. 764, 9800 Metcalf, Overland Park, KS 66212-2215.

COMPUTER/VIDEO TECHNICIAN Experience with mini computer hardware, software networking and related systems. Ability to understand and maintain various analog and digital control systems. Basic knowledge and willingness to learn high-end video and audio systems is a plus. Capable of being "on-call" for systems problems. Send resume to: Engineering Manager, P.O. Box 4800, Baltimore, MD 21211. (June issue correction: P.O. Box 4798 is incorrect.) Equal Opportunity Employer.

MASTER CONTROL OPERATORS wanted to oversee playback operations for major cable channels, New York City based. Fax resumes to (212) 941-1821. No phone calls please.

HELP WANTED

SYSTEMS DESIGN ENGINEERS SENIOR PROJECT MANAGERS

As a result of continuing growth, AFA is expanding its Project Engineering staff.

A.F. Associates is an acknowledged leader in the design, engineering and fabrication of advanced television systems and facilities for the industry's most prestigious clients.

We are seeking talented and experienced systems engineers to join our dedicated staff of professionals and become involved in a number of very visible and challenging projects.

AFA offers a dynamic, yet "small company" work environment, located in suburban Northern New Jersey. As a subsidiary of Video Services Corporation, we offer unique growth potential in the industry's fastest growing group of high-tech companies, as well as a comprehensive package of benefits.

Candidates should have a minimum of five years of broadcast systems design experience, characterized by the proven ability to perform detailed design of digital video and audio systems. Fluency in AutoCAD is a must. You must be well-versed in breaking technologies, including computer-related video disciplines such as video file servers, and demonstrate the ability to manage an intricate project where the client's satisfaction is the highest priority.

An EE degree or significant industry experience is required.

Please send resume' and salary history to:

Mr. Jim McGrath - Vice President of Engineering

No phone calls, please.



A.F. ASSOCIATES, INC.

100 Stonehurst Court, Northvale, New Jersey 07647

FAX 201-784-8637

A Video Services Corporation Company - AFA is an Equal Opportunity Employer

CHIEF ENGINEER - Dominant gulf coast affiliate seeks a chief engineer who can lead us into the digital future. The successful candidate will have excellent technical and leadership skills plus a thorough knowledge of broadcast equipment including RF transmission systems. Requirements are an FCC license, college or technical degree (or equivalent experience), plus at least 10 years broadcast engineering experience. Send letter, resume, references and salary requirements to Veronica Bilbo, EEO Coordinator, KPLC-TV, P.O. Box 1490, Lake Charles, LA 70602. EOE.

BROADCAST MAINTENANCE ENGINEER to maintain television broadcasting equipment for a large college radio-TV-film department in the Los Angeles area. Requires formal education in electronics and 2 years technical engineering work in a television broadcasting environment. Salary: \$49,120. Excellent benefit package. Call for application: (213) 891-2129. LOS ANGELES COMMUNITY COLLEGE DISTRICT. Deadline: August 25th. AA/EEO.

CHIEF TV ENGINEER Immediate opening. Large college radio-TV-film department in the Los Angeles area. Requires formal education in electronics and 5 years experience maintaining a wide variety of commercial color television equipment, including 2 years maintaining commercial broadcast quality color television systems. Salary: \$54,992. Excellent benefit package. Call for application: (213) 891-2129. LOS ANGELES COMMUNITY COLLEGE DISTRICT. Deadline: August 25th. AA/EEO.

ATLANTA CHIEF ENGINEER Trinity Broadcasting station in the Atlanta area. Experienced in maintenance of UHF transmitter, studio systems as well as personnel supervision and training. SBE certification a plus. Send resumes to Ben Miller, Mail P.O. Box C-11949, Santa Ana, CA 92711; E-mail: BMILLER614@AOL.COM; Fax: 714/665-2101. M/F EOE.

MAINTENANCE ENGINEER Black Entertainment Television Inc. Ability to troubleshoot to the component level production switchers, digital video effects systems, routing switchers, vtr's character generators, cameras, editing systems and audio equipment. This will include system interfacing to computers and compatible components, equipment installation for studio and remote productions. Must be knowledgeable of system timing theory, broadcast specifications, and electronics course study. Ability to perform fiber switches and satellite downlink. Must have 3 years experience. BET, Corporate Human Resources, 1905-E 9th Street, N.E., Washington, D.C. 20018

TELEVISION HELP WANTED, TECHNICAL Assistant Chief Engineer: Looking for well qualified Assistant CE who can eventually assume position of CE for UHF station. FCC general class license; SBE certified. Send detailed resume and salary requirements to Classified Ad Coordinator, Broadcast Engineering, Dept. 765, 9800 Metcalf, Overland Park, KS 66212-2215. EOE.

VIDEO ENGINEER- National staging company seeking independent contractors on a project by project basis. Qualifications include a working knowledge of component systems with multiple routers in a live environment. Responsibilities include set-up, operation and troubleshooting of component packages, videotape machines, cameras, routers, and interfacing various computer systems. Must be able to deal effectively with clients and crew. Place of residence not a factor. Travel required. Send resume and references to Classified Ad Coordinator, Broadcast Engineering, Dept. 763, 9800 Metcalf, Overland Park, KS 66212-2215.

TRI-STATE CHRISTIAN TV has trainee positions open in production and engineering. Some experience helpful. Must be willing to relocate. Send resume to P.O. Box 1010; Marion, Illinois 62959. An EEO employer.

Video Service/Maintenance Technician

Swiderski Electronics, Inc. a leader in the Audio/Video/Telecommunications field, has an immediate opening for a qualified Audio/Video Service/Maintenance Technician. 2 yrs. exp. Position works with Broadcast/Industrial 1/2', 3/4' and 1' VTR's & related equip't.

Send resume & salary history to:
H/R Dept., 1200 Greenleaf Ave.
Elk Grove Village, IL 60007
Fax resume (708) 364-5019

STATION MANAGER

with television engineering background needed immediately for KSKN-TV in Spokane, Washington. Individual responsible to operating full power, 24-hour, UHF home shopping network station. Must be experienced in transmitter, studio, and microwave maintenance. Knowledge of FCC regulations and compliance mandatory. Management experience a plus but not required. Good people and community relations skills necessary. FCC license required. Send resume to KSKN-TV, Inc., Corporate Office, 408 Paseo Companeros, Chico, CA 95928. KSKN-TV is an equal opportunity employer.

Television Maintenance Engineer/Television Engineer: State of the art television and radio broadcast facility with satellite uplink is accepting applications for the following positions:
Television Maintenance Engineer-Three to five years experience in the installation and maintenance of television and radio production/broadcast equipment. Experience in RF troubleshooting, performance measurements for television, radio and satellite systems required. FCC license and/or SBE certification with two year degree required, four year degree preferred. Ability to design systems and circuits. Knowledge of computer operating systems. Ability to work under pressure and willingness to work any shift, weekends, holidays and overtime.
Television Engineer II-One year minimum of experience in RF troubleshooting, operation and maintenance of television and radio production/broadcast equipment. FCC license and/or SBE certification with two year degree required, four year degree preferred. Knowledge of computer operating systems. Knowledge of FCC rules and industry standards. Ability to work under pressure. Willingness to work any shift, weekend, holidays and overtime. Apply at Human Resources, Grand Valley State University, 158 AuSable Hall, Allendale, MI 49401. Deadline date is August 31, 1995. EEO/AA/ADA.

CLASSIFIED ADVERTISING RATES

Advertising rates in **Broadcast Engineering** Classified Section are \$119⁰⁰ per column inch, per insertion, with frequency discounts available. There is a one inch minimum and ten inches maximum.

Ads may also be purchased By-The-Word for \$1.75 per word, per insertion. Initials and abbreviations count as full words. Minimum charge is \$40 per insertion.

Blind box ads (replies sent to **Broadcast Engineering** for forwarding) are an additional \$40⁰⁰. Reader Service Numbers are available for \$50⁰⁰ per insertion. Ads four inches or larger receive a Reader Service Number free.

Spot color, determined by **Broadcast Engineering**, is available at \$95⁰⁰ per insertion.

No agency discounts are allowed for classified advertising.

Call Matt Tusken
Classified Sales Manager
at 800-896-9939
to reserve your classified ad!



TELEVISION ENGINEERS

Turner Broadcasting System, the leading News, Sports, and Entertainment system in satellite communications, has career opportunities for engineers with **broadcast maintenance** experience. These positions demand an extensive background in television engineering and at least two years of training in electronics technology. Turner Broadcasting System offers an excellent benefit and compensation program.

Send resumes to:
Mr. Jim Brown, Corp. Engineering
Turner Broadcasting System, Inc.
One CNN Center
P.O. Box 105366
Atlanta, GA 30348-5366
(404) 827-1638 office
(404) 827-1835 fax

TBS is an equal opportunity employer

RF/TRANSMISSION TECHNICIANS

Full Time-Floral Park, NY

Rainbow Network Communications, an established satellite up-link and transmission center, is seeking experienced AND entry level Technicians:

EXPERIENCED: Extensive background with microwave frequency equipment, ability to install/maintain up and downlink facilities and a thorough knowledge of video/audio transmission required; fiber optics experience and ability to troubleshoot at component level preferred.

ENTRY LEVEL: A basic knowledge of satellite communications and video/audio transmission concepts required.

All positions require the ability to work under pressure, strong communications skills and availability for flexible schedules (weekends, nights, holidays). A technical or college degree is preferred.

Please send resume and salary history/requirements to: PO Box 999-RF2, Woodbury, NY 11797. An equal opportunity employer.

TELEVISION CHIEF ENGINEER POSITIONS (2):

Group operator has two Chief Engineer openings. Both in small, second-hundred markets. These are hands-on, maintenance-intensive positions that offer the opportunity to develop management and people skills. Positions are in northern California and southwestern Texas.

The stations are being acquired by a new owner with substantial major market experience. The successful candidates will be joining a new team of broadcast professionals and play a key role in developing the stations into strong, professionally-managed competitors in their markets.

If you have excellent studio/transmitter maintenance skills and want the challenge and responsibility of managing and maintaining the technical operations of a small-market television station, please send your resume to Bachow & Associates, Inc., 3 Bala Plaza East, Suite 502, Bala Cynwyd, PA 19004 c/o Mr. Fisher or fax to 610/660-4930.

WE PLACE

(Technical Engineers-Post Production Editors, Colorists, Graphics & Animators)

• All Levels, Locations, & Disciplines •

Employer Paid Fees
Guaranteed Confidential
15 Years Service

FAX and/or Mail your Resume to Mike Kelly



KEYSTONE INT'L, INC.
16 Laffin Road, Suite 900
Pittston, PA 18640

Fax 717-654-5765 • Phone 717-655-7143

CHIEF ENGINEER:

NY 1 News, a technological leader in local news, has a challenging position for a Chief Engineer who will play a key role in moving NY 1 into a digital future. You should be self-motivated, organized and have:

- Experience in news operations.
- Strong management and budgetary experience
- Working knowledge of LMS and automated playback systems
- Experience with all tape formats, especially Hi 8
- Strong maintenance, troubleshooting and system design skills
- Knowledge of server based/digital production systems

Please send or fax your resume and salary history to:

Harlan Neugeboren
Director of Operations & Engineering
NY 1 News
460 West 42nd Street
New York, NY 10036
FAX (212) 563-7156



NY 1 IS AN EQUAL OPPORTUNITY EMPLOYER



The Manitoba Television Network has an immediate opening for a Chief Engineer based at its studio facilities in Portage la Prairie. The ideal candidate should have strong hands-on technical expertise and a minimum of 5 years experience along with strong managerial skills. You will be part of an innovative independent station and work with a team of people dedicated to quality.

If you enjoy the challenge of a major market television operation with the benefit of small community living, this challenging opportunity could be for you.

Submit resumes in confidence to:

Mr. Drew Craig
General Manager
Manitoba Television Network
P.O. Box 13000
Portage la Prairie MB R1N3V3

AD INDEX

	Page Number	Reader Service Number	Advertiser Hotline
AAVS/Div. of Sencore	3	5	800-769-AAVS
ADC Telecommunications	33	22	800-726-4266
Advanced TV Summit	77		913-967-1969
Ampex Recording Media	69	57	800-240-7042
Audio Precision	7	14	800-231-7350
Barco Inc.	23	20	404-590-7900
Belar Electronics Laboratory	48	31	610-687-5550
B & H Photo - Video	81-83	62, 63	800-947-9928
Broadcast Video Systems Ltd.	32	11	905-764-1584
BSM Systems	52	36	509-534-2499
BTS Broadcast TV Systems	17	7	800-962-48TS
Clear-Com Intercom Systems	25	21	510-527-6666
Datatek, Inc.	11	17	800-882-9100
DNF Industries	74	60	213-650-5256
D/Vision Systems Inc.	65	50	800-D-VISION
Dynatech Video Group	19	8	800-453-8782
Ensemble Designs	36	25	916-478-1830
ESE	79	64	310-322-2136
Faraday Technology	68	55	+44 782-661501
Feral Industries	22	19	800-331-2019
Fiber Options	56	45	800-342-3748
Garner Industries	84	100	800-228-0275
Gepco	36	26	312-733-9555
Grass Valley Group	72-73	59	800-343-1300
Harris Allied	1, 61	4, 37	606-282-4800
Hewlett Packard	42-43	42	800-452-4844
Hitachi Denshi America	37	39	516-921-7200
Hotronic Inc.	75	52	408-378-3883
Ikegami Electronics Inc.	41	41	201-368-9171
Interbee/Jesa	63	38	+813 3284-0165
Iptek	55	44	619-438-8362
JVC Professional Products Co.	21	18	800-JVC-5825
Leightronix Inc.	74	61	517-694-5589
Leitch Incorporated	BC	3	800-231-9673
Lighthouse Digital	47	29	214-741-5142
Lightwave Systems Inc.	47	29	214-741-5142
Miller Fluid Heads	46	28	201-857-8300
Mohawk Wire & Cable Corp.	48	30	508-537-9961
National Transcommunications	49	32	+170-349-8000
Nikon Electronic Imaging	5	13	800-52-NIKON
Odetics, Inc.	35	24	800-243-2001
Opamp Labs, Inc.	56	46	213-934-3566
PolyPhaser Corp.	50	33	800-325-7170
Prime Image Inc.	45	27	801-272-5352
Quantel	10, 71	16, 58	203-656-3100
Sachtler GMBH	9	15	+32-909-150
Seagate Technology	51	34	408-438-6550
Sealevel Systems Inc.	34	23	803-843-4343
Sierra Design Labs	66	51	702-831-7837
Snell & Wilcox Ltd.	13-15	6	730-821-1188
Snell & Wilcox Ltd.	38, 39	40	730-821-1188
Sony Business & Professional	30-31		800-635-SONY
Stainless Inc.	78	53	215-699-4871
Telex Communications, Inc.	29, 58	9, 48	800-392-3497
TFT	57	47	800-347-3383
Thomson Broadcast Systems	53	43	800-882-1824
Varitek	85	101	714-283-8980
Videotek, Inc.	IBC	2	800-800-5719
Vistek Electronics Limited	59	49	+628-531-221
Viz Technology	68	56	718-714-9873
Wheatstone Corporation	IFC	1	315-452-5000
Winsted Corporation	52	35	800-447-2257
Wohler Technologies, Inc.	32	12	415-589-5676
World Media Expo	67	54	800-342-2460

BROADCAST[®] engineering

EDITORIAL

Brad Dick, *Editor*
Skip Pizzi, *Technical Editor*
Steve Epstein, *Technical Editor*
Dawn Hightower, *Senior Associate Editor*
Deanna Rood, *Associate Editor*
Carrie Poland, *Editorial Assistant*
Tom Cook, *Senior Managing Editor*
Carl Bentz, *Directory Editor*

ART

Stephanie L. Masterson, *Associate Art Director*

BUSINESS

Raymond E. Maloney, *President*
Cameron Bishop, *Group Vice President*
Dennis Triola, *Publisher*
Tom Brick, *Marketing Director*
Stephanie Hanaway, *Group Director, Special Projects*
Kathryn Buckley, *Promotions Manager*
Sandra Tomczak, *Promotions Coordinator*
Dee Unger, *Director Advertising Services*
Nancy Hupp, *Advertising Production Manager*
Annette Hulsey, *Classified Advertising Coordinator*
Pat Eisenman, *Senior Ad Production Coordinator*
Susan Jones, *Advertising Coordinator*
Doug Coonrod, *Corporate Art Director*
Barbara Kummer, *Circulation Director*
Meghan Wright, *Circulation Manager*
Customer Service: 913-967-1711 or 800-441-0294

TECHNICAL CONSULTANTS

Jerry Whitaker, *Contributing Editor*
Richard Dean, *European Correspondent*
Eric Neil Angevine, *Broadcast Acoustics*
John H. Battison, *Antennas/Radiation*
Dennis Ciapura, *Radio Technology*
Dane E. Erickson, P.E., *Systems Design*
John Kean, *Subcarrier Technology*
Donald L. Markley, *Transmission Facilities*
Harry C. Martin, *Legal*
Curtis Chan, *Audio/Video Technology*

MEMBER ORGANIZATIONS

Sustaining Members of:

- Acoustical Society of America
- Society of Broadcast Engineers
- Society of Motion Picture and TV Engineers
- Society of Cable & Telecommunications Engineers

Affiliate Member, International Teleproduction Society

Member, American Business Press

Member, BPA International



BROADCAST ENGINEERING is edited for corporate management, engineers/technicians and other management personnel at commercial and public TV stations, post-production and recording studios, broadcast networks, cable, telephone and satellite production centers and networks. Qualified persons include consulting engineers and dealer/distributors of broadcast equipment.

SUBSCRIPTIONS: Non-qualified persons may subscribe at the following rates: United States and Canada; one year, \$50.00. Qualified and non-qualified persons in all other countries; one year, \$60.00 (surface mail); \$115.00 (air mail). Subscription information: P.O. Box 12937, Overland Park, KS 66282-2937.

Authorization to photocopy items for internal or personal use, or the internal or personal use of specific clients, is granted by Intertec Publishing, provided that the base fee of U.S. \$2.00 per copy, plus U.S. \$00.00 per page is paid directly to Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923. The fee code for users of the Transactional Reporting Service is ISSN 0361-0942/1995 \$2.00+00.00. For those organizations that have been granted a photocopy license by CCC, a separate system of payment has been arranged. Prior to photocopying items for classroom use, contact CCC at (508)750-8400. Organizations or individuals with large quantity photocopy or reprint requirements should contact Chris Lotesto, (312)435-2359. Microfilm copies of *Broadcast Engineering* magazine are available by calling or writing UMI, 300 North Zeeb Rd., P.O. Box 1346, Ann Arbor, MI 48106-1346. Phone: (313)761-4700 or (800)521-0600.

©1995 by Intertec Publishing
All rights reserved.



SALES OFFICES

NEW YORK, NY

Gordon & Associates
Josh Gordon
210 President Street
Brooklyn, NY 11231
Telephone: (718) 802-0488
FAX: (718) 522-4751

Joanne Melton

888 7th Avenue, 38th Floor
New York, NY 10106
Telephone: (212) 332-0628
FAX: (212) 332-0663

OXFORD, ENGLAND

Richard Woolley
Intertec Publishing Corporation
Unit 3, Farm Business Centre,
Clifton Road, Deddington,
Oxford OX15 4TP England
Telephone: +44 (0) 1869 338794
FAX: +44 (0) 1869 338040
Telex: 837-469 BESG

AGOURA HILLS, CA

Duane Hefner
Lianne Fairchild
5236 Colodny Ave., Suite 108
Agoura Hills, CA 91301
Telephone: (818) 707-6476
FAX: (818) 707-2313

SANTA MONICA, CA

MC² Magazine Communications
Marketing Corporation
Jason Perlman: (310) 458-9987
Sue Horwitz: (310) 458-8080
501 Santa Monica Blvd., Ste. 401
Santa Monica, CA 90401
FAX: (310) 393-2381

CHICAGO, IL

Vytas Urbonas
55 East Jackson, Suite 1100
Chicago, IL 60604
Telephone: (312) 435-2361
FAX: (312) 922-1408

TOKYO, JAPAN

Orient Echo, Inc.
Masby Yoshikawa
1101 Grand Maison
Shimomiyabi-Cho 2-18
Shinjuku-ku, Tokyo 162, Japan
Telephone: (3) 3235-5961
FAX: (3) 3235-5852
Telex: J-33376 MYORIENT

CLASSIFIED ADVERTISING

OVERLAND PARK, KS
Matt Tusken
P.O. Box 12901
Overland Park, KS 66282
(913) 967-1732 Fax: (913) 967-1735

LIST RENTAL SERVICES

REPRESENTATIVE
Lori Christie
9800 Metcalf
Overland Park, KS 66212-2215
Phone: 913-967-1928
Fax: 913-967-1872

Monitor Miser.



The money saving solution for monitoring digital.

Congratulations. You've just decided to convert your room to digital. You could replace every monitor in the suite with new digital monitors, or you could buy the award-winning VMA-10 to use your existing analog monitors for almost every viewing position:



A Digital System
Integration Product

Source monitors, monitor walls, and studio monitors. The VMA-10 converts serial digital component video to composite analog for monitors.



install up to 10 VMA-10F modules in one OMNIFRAME. Call us today for more cost-saving solutions for digital.

Any size, any make, any model, including the ones you installed last year. It's like getting a refund on your digital budget.

Use VMA-10 stand-alone, or

VIDEOTEKTM
A Zero Defects Company




243 Shoemaker Road, Pottstown, PA 19464 1 800-800-5719 (610) 327-2292 Fax: (610) 327-9295

Circle (2) on Reply Card

Rx 32x32 Routing **Used To Be Expensive**



120 MHz
2RU Frame

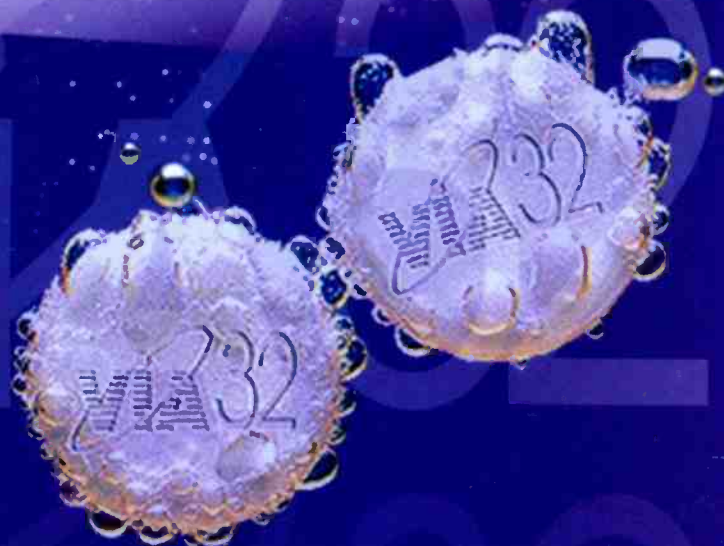

No longer! Via32, a 32x32 or 32x16 video/audio modular routing switcher in a two rack frame at prices & specifications that will give our competitors headaches. Coming Soon! The Via32 will be available in both an AES/EBU version and a serial digital version with plug in serial BNCs, Fiber, and ECL inputs & outputs. Control Via32 with your choice of dozens of panels or use our PC software "Router Works" on the built-in RS-232 port. Call Leitch For Routing Remedies.

LEITCH®



U.S.A. - (800) 231-9673 - FAX: (804) 548-4088

Los Angeles
(800) 380-1676

Indianapolis
(800) 861-9440

Dallas
(800) 401-3770

New York
(800) 653-4824

Atlanta
(800) 641-1277

Canada
(800) 387-0233

Europe
+44 (0) 1256 880088

Japan
+81 (3) 5423-3631

Brazil
+55 (11) 8188975

Circle (3) on Reply Card