BRORDED BEST

Networking video

MIN

Also Featured:

- Commercial insertion systems
- EDH: Monitoring networked video
- Interfacing digital audio
- New camera technology



SP-8 - The Console for Local News

While Wheatstone is best known for its major market clients, we have tailored this console specifically for the local facility. It has everything operators need, yet it's straightforward and easy to operate.

The SP-8's fast mix-minus system allows individual foldbacks to talent, anchors and technical crew to keep your live programming moving smoothly. Four auxiliary pre or post send controls provide even more powerful foldback options. Its channel group muting feature lets you energize and de-energize banks of channels with the push of a single button, so break/live transitions become error free. A sophisticated internal logic system has bus assignment dependent monitor mutes to prevent accidental studio interruption during live seg-

ments. The console has plenty of monitoring capability and can feed a control room system as well as multiple studio outputs—perfect for separate morning and evening setups.


The SP-8 has all the flexibility of its larger predecessors. You have a selection of moro mic/line modules, dual mic modules (for stud o one and studio two), and stereo input modules. You can even get this console with a preselector overbridge, to increase its input capacity eightfold. It's available in countertop, through counter, or furniture stand versions to fit any architectural theme.

Take advantage of Wheatstone's experience and contact our sales engineers. We've got the knowledge!



7305 Performance Drive, Syracuse, NY. 13212 USA tel 315-452-5000/fax 315-452-0160/E-mail: Wheatstone@aol.pgm

RANSM

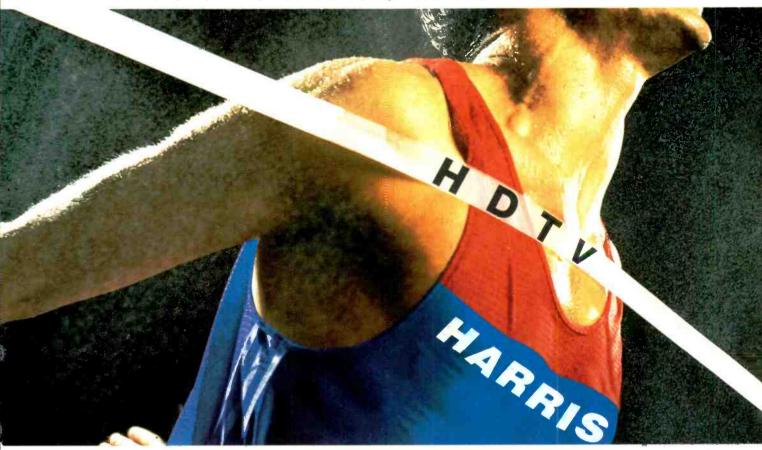

The race for the first HDTV transmitter is over!

Harris is first in HDTV transmission.

While others scramble to develop ATV/HDTV transmitters, Harris has already crossed the finish line. And that's no surprise, considering our vast experience in every type of television broadcasting.

From installing the world's first HDTV antenna, to delivering the world's first HDTV-specific exciter and Harris HDTV test signal generator, Harris has led the way for

vears. Now, with the successful demonstration of our high-power IOT ATV transmitter, we've proven once again that Harris is uniquely positioned to help you make the move to HDTV.

Grand Alliance compatibility.

With decades of sys-

tems integration experience in UHF, VHF, satellite and wireless cable technology, Harris understands the importance of compatibility with equipment from other manufacturers. That's why we've developed our equipment to meet the anticipated standards of the Grand Alliance ATV system.

In fact, since 1989, Harris technology was even used to evaluate every HDTV system proposed to the Advanced Television Test Center.

Up and running with Harris.

As with most leaders in digital-ready and full-digital broadcast systems, Harris knows that you need a top-quality signal delivered with your bottom line in mind. With literally thousands of successful

Harris-designed-and-built broadcasting systems operating worldwide, we have the know-how now — to help make your transition to HDTV as efficient and profitable as possible.

If you plan to be competitive in HDTV tomorrow, why not put the resources of the proven HDTV winner to work for you today. Call Harris to learn how you can win your race.

HARRIS CORPORATION **BROADCAST DIVISION**

US and Canada TEL: +1 217 222-8200 FAX: +1 217 224-1439 Elsewhere TEL: +1 217 222-8290

FAX: +1 217 224-2764




THIS MONTH...

The Future of Networking By Peter A. Dare Broadcast facilities are changing, and networks are integral to new facility designs.

46 **EDH: Monitoring Networked Video** By Debby Canto Use of EDH testing techniques is recommended in serial digital TV installations as an in-service qualitycheck system, and the sky's the limit on its other uses.

Commercial-Insertion Systems 64 By Charlie Goode

After years of dominance by tape-based systems, commercial-insertion tasks are now being handled





New Camera Technologies By Kenneth Hunold


Innovations abound in the latest generation of cameras.

Interfacing Digital Audio *By Kenneth Hunold* Keeping audio in the digital domain requires some

new understanding. Performing QC on Digital Audio

increasingly by disk-based systems.

92 By Jeff Noah Some specialized hardware and techniques have been developed for monitoring digital audio.



DEPARTMENTS:

8 FCC Update: Little-noticed provisions of the Telecom Act

10 EAS Update: EAS security

12 Transition to Digital: Transporting component digital video

16 Management: Power and influence 18 Production: Production on a shoestring

20 Interactive: Finding manufacturer web pages 24 ATV Update: The Grand Alliance/FCC standard 26 Broadcast 2000: Caught in the web: The who know

of new media

106 Transmission Technology: A UHF primer for VHF engineers, part 1

110 SBE Update: RFR and unattended operations

112 Field Report: BTS Saturn switcher 116 Applied Technology: C-MAC filters



112

COLUMNS:

4 News

6 Editorial

118 Industry Briefs

120 New Products

135 Classifieds

139 Advertisers' Index


140 Digital Basics



ON THE COVER: The new Philips Diamond 20 production switcher in use at Realtime Video. The switcher provides advanced digital processing. Photo courtesy of Realtime Video.

BROADCAST ENGINEERING (ISSN 0007-1994) is published monthly (except semi-monthly in June and December) and mailed free to qualified persons by Intertec Publishing, 9800 Metcalf, Overland Park, KS 66212-2215. Second-class postage paid at Shawnee Mission, KS, and additional mailing offices. POSTMASTER: Send address changes to Broadcast Engineering, P.O. Box 12902, Overland Park, KS 66282-2902. CORRESPONDENCE: Editorial and Advertising: 9800 Metcalf, Overland Park, KS 66212-2215. Phone: 913-341-1300; Edit. fax: 913-967-1905, Advert. fax: 913-967-1904. © 1996 by Intertec Publishing. All rights reserved.

The DSA309 Digital Studio Analyser

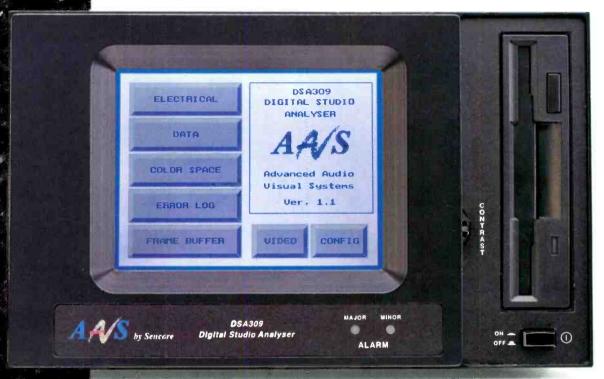

All Format Digital Video Analyser: Tests component and composite serial digital video signals in both 525 line and 625 line formats.

Real Time Measurements: Continuous real time, on-line measurements of all key parameters permits live monitoring of:

- Serial Jitter
- Signal Amplitude
- Color Levels
- Non-Recommended Value Errors
- EDH Errors
- Parity Bit Errors
- TRS Errors
- Bit Activity
- Reserved Code Errors

Real Time Color Level Monitoring: Monitors component digital video in real time for RGB or NTSC/PAL color space infractions.

Extensive Error Logging: Permits system performance monitoring and documentation by logging system errors on either the built-in LCD display, external printer, or on the built-in 3.5" disk drive.

Alarm Interface: Provides immediate notification when user defined thresholds are exceeded.

Comprehensive Digital Displays: Complemented by simulated analog waveforms, these displays help bridge the gap between analog and digital testing, creating a user friendly interface for both operations and engineering staff.

Easy To Use: The touch screen interface and easy to use menu system permits full instrument utilization while minimizing user reference to the manual.

Designing

Excellence

Circle (5) on Action Card

For a comprehensive information packet, call 1-800-769-AAVS (2287).



Advanced Audio Visual Systems by Sencore 3200 Sencore Drive, Sioux Falls, SD 57107 Direct (605) 339-0100 Fax (605) 339-0317

Tornado twists WCOV-TV tower

WCOV-TV's 800-foot broadcast tower was destroyed by a tornado on March 6. Although the tower was destroyed, there were no deaths or injuries at the station.

The good news was that in less than 12 hours WCOV was back on the air with the emergency generator for TCI Cable and Prattville Cable customers. TCI Cable worked all day and installed a direct link from the studio and



fed it to a nearby fiber-optic loop. Within 36 hours, Time-Warner Cable of Wetumpka had restored WCOV to its 16,000 subscribers.

To further accommodate central Alabama, WCOV-TV planned to have a temporary tower constructed and on-line within 10 days to two weeks.

The tower damage was so unusual that video of the wreckage was carried all day on CNN and The Weather Channel.

SBE's EAS Primer

The Society of Broadcast Engineers (SBE) EAS Committee, in cooperation with the Ennes Educational Foundation, is offering the EAS Primer as a guide to building the emergency alerting system.

The primer will explain the makeup of the mandated national/state EAS. Additional topics include: EAS basics, system requirements, operational options and procedures, technical specifications, diagrams, developing a local plan, guide for SECC chairs, Q&As, summary of the network chain, Part 11 information and EAS-related releases. To order the EAS Primer, contact the SBE by phone: (317)253-1640 or by fax: (317)253-0418.

Willi Studer passes on

Founder of the former Swiss Studer Revox Group in Regensdorf-Zurich, Willi Studer, died on March 1. He was 84 years old.

He started his career in 1948 in Zurich by building



a small electronics equipment factory. For his tape recorders, he chose the name REVOX. He also developed a big tape machine, the STUDER 27, for radio stations.

In 1960, he started the cooperation with EMT Wilhelm Franz GmbH, Wettingen/Switzerland to open the

world market for professional Studer products.

In 1978, Studer was awarded an honorary doctorate in Technical Sciences by the Swiss Federal Institute of Technology in Zurich. The gold medal of the Audio Engineering Society was bestowed on him at the 1982 AES Convention.

In 1990, Studer sold his company to the Swiss Motor Columbus Group. Today, the Studer Professional sector is owned by the American audio group Harman International Industries.

Sony joins Intercast Group

Sony Corporation of America has joined the Intercast Industry Group (IIG), which was launched last October to promote a digital medium called Intercast.

The IIG is comprised of media and cable companies, software suppliers and communications equipment suppliers. IIG was formed to support and promote the Intercast medium, a new method for delivering Internet content through TV broadcasts into the home computer market.

ATSC adopts standards for U.S. ATV system infrastructure

The U.S. Advanced Television Systems Committee (ATSC) has formally adopted two

additional standards, "Pro-Television," and "System Invision," as part of the adcasting system being stan-States. These standards sup-



gram Guide for Digital formation for Digital Televanced digital TV broaddardized in the United plement standards adopt-

ed by the ATSC in 1995 for digital television and for digital audio compression (AC-3). System Information and Program Guide information are contained in digital messages accompanying the digital video and audio in the digital TV signal. System Information defines the transmission parameters digital decoders need to acquire and process digital and analog transmissions. The System Information database includes frequencies, modulation methods, virtual channel descriptions and other data for the decoder to facilitate user-friendly navigation among the profusion of digital services that will be offered.

The Program Guide document specifies a program guide database transmission standard for broadcast TV applications. Both documents are available on the ATSC WWW home page at http://www.atsc.org.

ATSC appointments

Two recent appointments include Robert K. Graves and Mark Richer. Graves is chairman, succeeding James C. McKinney who retired last December. Since 1991, Graves has been involved in efforts to establish a U.S. standard for digital broadcast television, representing AT&T and the HDTV Grand Alliance. He has served on the FCC's Advisory Committee on Advanced Television since 1992 and on the executive committee of ATSC since 1993.

Richer is executive director. He joins the ATSC after 16 years with PBS where he was vice president of engineering and computer services. He also served as chairman of the System Subcommittee Working Party on Test and Evaluation for the FCC Advisory Committee on Advanced TV Service.

SCTE celebrates grand opening of national headquarters

The Society of Cable Telecommunications Engineers (SCTE) celebrated the grand opening of its national headquarters building on Feb. 29. The building is located at 140 Philips Road, Exton, PA 19341-1318 in the Pickering Creek Industrial Park.

Almost 100 guests had an opportunity to see the facility's on-



site cable museum, the conference room, plus the training room with a cafeteria to accommodate the technical training seminars that will be offered at the headquarters.

UCCE to sponsor digital image course

The University Consortium for Continuing Education (UCCE) is sponsoring a course on "Digital Image/Video/Audio Coding: Standards & Techniques," which will be held May 20-21 in Palo Alto, CA. It will focus on standards related to interactive image/video/audio communication and storage devices. The fee is \$945 and includes a copy of the textbook.

On Aug. 19-22, the UCCE will sponsor a 4-day course, "Error Correcting Codes with Application to Digital Storage Systems," in Boulder, CO. The cost is \$1,495 and includes a copy of the textbook. Call Joleen Packman at (818)995-6335 for more information.

We let Rick Dees use one and now he won't give it back!

"Nope. No way. Forget it. This Instant Replay is mine."

Hey, we understand. After all, Instant Replay puts 1,000 of his favorite noises right in front of him — ready for instant playback. No other audio player makes it so easy to be spontaneous and creative. It's fast, it's easy and it's fun.

Check it out. One Instant Replay can store up to 16 hours of stereo sound. That's 16 hours of sound effects, spots, promos, even entire songs — anything — and you can play any of them back instantly just by pressing one of 50 Hot-Keys!

There's no need for a computer and no need for training. It's self-contained and it works right out of the box — just push the buttons and go!

Try Instant Replay Free! Call 818-991-0360 To prove how Instant Replay can make your

station better, you can Test Drive one with no obligation! Call us now for free overnight delivery of your Test Drive unit. And like Rick Dees, once you get your hands on Instant Replay you won't want to give it back either.



Transfer one cut or one thousand between machines using the D-NET high-speed digital audio network



Print hard copy lists of all stored cuts so you always know what's where!



Store up to 16 hours of CD-quality digital audio on Instant Replay's internal hard disk.

360 Systems .

PROFESSIONAL DIGITAL AUDIO

5321 Sterling Center Drive • Westlake Village, CA 91361 • (818) 991-0360 • fax (818) 991-1360



INSTANT REPLAY

If you're a call-letter station, you can try instant Replay for 10 days with no obligation. If you decide to buy instant Replay, we'll make arrangements through one of our authorized dealers. Offer good in the continental US only. Offer expires July 1, 1996.

*Suggested retail paces: \$2995 for 4 hours of storage; \$3495 for 8 hours of storage and \$3995 for 16 hours of storage.

360 Systems Instart Replay is a registered trademark of 360 Systems. ©1996 360 Systems.


Circle (13) on Action Card

Plastic poop

he little suckers are everywhere. Evidence of their presence is seen in most offices and even homes. They're on desks, hidden under books and papers, and even in desk drawers. With their long tails, they sneak onto your desk, disrupting any organized flow of information. They command a huge amount of desk space, and people have to refocus their entire work flow around these little devils.

I hate them. With modern technology, I'd think that someone would have found a way to eradicate these nuisances from the face of the earth. Even though they have short life spans, they continue to proliferate. They often die after coughing up dust and fuzz, creating hazards for everyone around them.

They look like they would be easy to control, but their simplicity belies a narcotic effect. Once touched, users can't get rid of them. Options are few, in fact, their demonic presence has infected the entire industry.

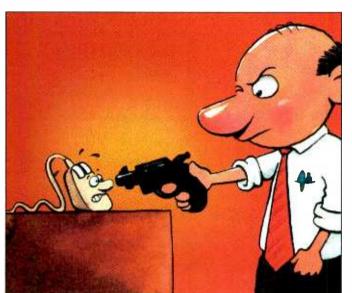

I'm, of course, talking about the computer mouse and I hate it! The guy who thought up the mouse should be strung up by his thumbs and made to type with his nose! Using a mouse is about as useful and efficient as trying to swim with a bowling ball tied to your leg.

Having to use a mouse does nothing but get in the way of productivity and speed. Don't believe me? I'll take on anyone in just about any computer task with a keyboard vs. a mouse-driven program. Give me an ALT+R command for flush right anytime. How about F12 for delete sentence or F11 for delete word. While you're still trying to get that screwy little arrow into some icon about the size of a large period, I'll have already reformatted my page and moved on to something else. I'll have left you in the (mouse) dust.

Want to move, delete or copy text? I can whack a document into shreds and put it back together again with my XyWrite program faster than Zorro can cut a "Z" in your shirt. Try that with your Word or WordPerfect programs and you'll fail miserably. Why? Not because the programs themselves are bad, but because they rely on that damn mouse to do everything. Sure, the mouse can do everything, maybe even enter the text, but it's so slow and cumbersome that even your grandmother typing with chopsticks clenched in her dentures would be faster.

Windows programs totally frustrate me when I can't access a feature without having to use the mouse. What's wrong with using a function key or ALT+ function? If I want to designate F5 to launch Quattro Pro, why can't I? The interface programmers must think those 12 function keys are simply spares to be swapped when the other keys wear out. Why don't the arrow keys work either? Spreadsheet programs seem to be able to use them, why can't Windows? No, you have to use the mouse to get from icon to icon.

Ever use CompuServe WinCIM? The program says you can "custom program your function keys." Wrong. What it means is that you can program an Alt+ number key. Why can't I program the real function keys you software dummies? Why do I have to either use an ALT+ number key or push that plastic cow patty around my desk instead of just hitting F3?

Computers can be made user friendly, but in their zeal to do so much, the interface programmers rely solely on the mouse. The result is an inefficient, time-consuming, ergonomically inefficient, carpal tunnelinducing and frustrating experience. The other day, my mouse ball was so stuffed with dust bunnies the cursor wouldn't move, or when it did, it skipped. I got so frustrated that I ripped the mouse right off of its cord and threw it across the room. That'll teach the little devil to mess with me!

I just don't understand why someone hasn't written an interface that focuses on keyboard control and eliminates as many required mouse functions as possible. Then, I could stop wasting time shoving this computer version of plastic poop around on my desk and get some work done.

Brod Drick

Brad Dick, editor



S Y S T E INTRODUCING

Audio Precision, the trusted name in audio test & measurement presents the System Two Dual Domain audio analyzer, featuring the world's most complete testing capability for the AES/EBU digital audio interface.

Audio precision

P.O. Box 2209 Beaverton, OR 97075-3070 (503) 527-0832 . 800-231-7350 FAX: 503) 641-8906



M





INTERNATIONAL DISTRIBUTORS. Australia: (RT Electronics Pty, Let., Tal; 2 439 3744 Austria: ELSINCO GmbH, Te. rt.) \$15.04.00 Belgium: Trans European Music NV, Tel; 2 ~66 5010 Brazil: INTERWAVE LTDA., Tel; (21) 325-9221 Bulgaria: ELSINCO, h.e. Streibishte. Tel; (2) 58 61 31 Canada; GERRAUDIO Distribution, Tel; (41) 696-2779 Calina, Hong Kong; A C E (Intit) Co. Ltd., Tel; 2424-0387 Zroatia: AVC Audio Gueco Consulting, Tel; (41) 664-622 Caceh Republic: ELSINCO Praha spol. s.r.o., Tel; (2) 49 66 99 Denmark: npp Elektronik aps Tel; 685 71 511 Firitand: Genelec OY, Tel; 77 13311 France: ETS Mesurett. Tel; (1) 458 86 64 1 Garnany; ETW GmbH, Tel; 221 70913-0 Greece: KEM Electronics Ltd., Tel; 01-6478514/5 Hungary: ELSINCO KFT, Tel; (1) 269 8 50 India: HINDITRON Services PVT, Tel; 22 336-4560 Iarael: Dan-El Technologies, LTd., Tel; 3-6478770 Italy; Link Engineering s.r.l., Tel; 0521/648723 Japan; T0YO Corporation, Tel; 3 (5588) 8800. Kores: B&P International Co., Ltd., Tel; 2-546-1427; B&P (Kum) Office), Tel; 0546-55-7347/8 Malayata: Test Measurement & Engineering 56n. Bho, Tel; 37 1017 Netherlands: Heyener bv., Tel; 0885-19500 New Zealands, Audio & Video Wholesalers, Tel; 474-7441 Norways; Lydconsvill, Tel; (1) 269-889333 Poland: ELSINCO Polska sp. z. o., Tel; (2) 39 69 79 Portugal: Acutron Electroacustica LDA, Tel; 19414087 (9420862 Singapors: TME Systems Ple Ltd., Tel; 747-7234 Slovakia: ELSINCO Bratislava spol. s.r.o., Tel; (7) 784 165 South Africa: SOUNDFUSION Broadcast, Tel; 11 477-1315 Spain: Tel; 0862-294-4930 United Kingdom: Thuriby Thanda Instruments, Ltd., Tel; (1480) 412451

WindCws is a trademark of Microsoft Corporation



here are many little-noticed and littlediscussed provisions in Section 403 of the 1996 Telecommunications Act, which could have substantial impact on broadcasters and other FCC licensees. Among them are the following.

Foreign officers and directors.

Prior to the enactment of the 1996 Telecommunications Act, broadcast and common carrier radio licensees were prohibited from having alien (foreign) officers or directors, and no more than one fourth of the directors of parent corporations of licensees could be aliens. The 1996 Telecommunications Act deleted these provisions. However, limitations on alien ownership of the equity of licensees were not altered in the legislation.

Deletion of silent station authorizations. The 1996 Telecommunications Act added the following provision to Section 312 of the Communications Act:

"(g) If a broadcasting station fails to transmit broadcast signals for any consecutive 12-month period, then the station license granted for the operation of that broadcast station expires at the end of that period, notwithstanding any provision, term or condition of the license to the contrary."

This could be a dangerous provision for long-dark stations and for broadcasters waiting for approval of modifications to commence operations. An FCC rulemaking to implement this statutory provision will commence shortly.

Modification of construction permit requirement for broadcast minor changes.

The 1996 Telecom Act amended Section 319(d) of the Communications Act by striking the last two sentences and inserting the following language:

"With respect to any broadcasting station, the commission shall not have any authority to waive the requirement of a permit for construction, except that the commission may by regulation determine that a permit shall not be required for minor

Little-noticed provisions of the Telecom Act

changes in the facilities of authorized broadcast station. With respect to any other station or class of station, the commission shall not waive the requirement for a construction permit unless it determines that the public interest, convenience and necessity would be served by such a waiver."

While some relaxations with respect to obtaining a construction permit for minor modifications will be a boon to broadcasters, the definition of "minor" will have to mean that the change will cause no or minimal additional prohibited interference to other licensees.

DATELINE:

MAY 31

Annual employment reports (Form 395-B) are due to be filed by all stations on or before May 31. Commercial stations in the following states must file their annual ownership reports or report certifications by June 3: Arizona, Washington, certifications by June 3: Arizona, Nevada, New DC, Idaho, Maryland, Michigan, Nevada, New Mexico, Ohio, Utah, Virginia, West Virginia and Wingming.

Wyoming.
TV stations in the following states must file their license renewal applications by June 3: Washington, DC, Maryland, Virginia, West Virginia. LPTV renewals for Idaho also are due by June 3.

It is expected that the FCC will commence a rulemaking proceeding on this matter in the near future.

Supreme Court to hear must-carry case

The Supreme Court has decided to hear an appeal of the recent decision by the U.S. District Court for the District of Columbia, which upheld the must-carry provisions of the 1992 Cable Act. However, the court rejected the request of cable TV operators for an expedited hearing, and as a result, the case will not be heard until this fall, with a decision expected in the spring of 1997.

While the District Court recently upheld the must-carry rules, that decision had weaknesses that could result in a reversal by the Supreme Court. However, the FCC's mustcarry rules will remain in effect at least until the Supreme Court issues its decision.

As a result of the continued validity of the must-carry rules, commercial TV broadcasters will have to again go through the process (first done in the summer of 1993) of notifying every cable TV operator in their

market of their station's election of either must-carry or retransmission consent status. The deadline for this election is Oct. 1, 1996. Any commercial TV station that fails to make an election will be deemed to have elected must-carry. All elections go into effect on Jan. 1, 1997. Non-commercial TV stations need not make elections since they have must-carry rights, but no retransmission consent rights. Of course, non-commercial stations, like commercial sta-

tions, will have to actively review their carriage status on local cable TV systems to ensure that they are obtaining the carriage to which they are entitled.

While commercial stations will have to provide their election to all cable TV operators in their market, the definition of TV market for the purposes of cable carriage rights may be revised as a result of a pending FCC rulemaking and language in the 1996 Telecommunications Act. Although the commission has tentatively concluded in its proceeding that it should continue to use the Arbitron 1991-92 ADIs to define such markets, it nevertheless sought comments on a proposal to use Nielsen DMAs, either in the 1996 must-carry election period, or for elections in 1999 and beyond.

Harry C. Martin and Andrew S. Kersting are attorneys with Fletcher, Heald & Hildreth, P.L.C., Rosslyn, VA.

Appointment


Harry C. Martin has been appointed by the president of the Federal Communications Bar Association as co-chair of the FCBA's FCC Performance Review Committee. He will work with FCC officials and FCBA committee heads to help streamline FCC processes.

Barrett to leave FCC post

FCC commissioner Andrew Barrett plans to leave the commission soon. His position expired at the end of June last year, but he was expected to stay until late this summer when the commission is scheduled to complete its first wave of rule changes under the new telecommunications law.

Barrett's position will not soon be filled, however, because President Clinton must nominate another Republican who will be acceptable to Senate Republicans.

If you made this many improvements, you'd want to broadcast it too.

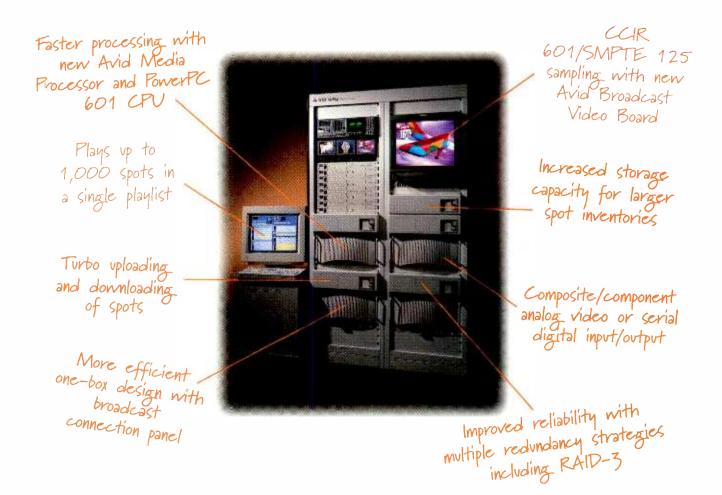

Today, hundreds of broadcasters worldwide are using the Avid AirPlay® system for news and commercial playback. That's an impressive following. Even more impressive is Avid's new AirPlay MP playback server, designed for better performance, faster operation and superb images. Learn more about AirPlay MP and the broadcasters who have already made the move to disk-based playback. To request a free Avid AirPlay Case Study Portfolio, call Avid today at 1-800-949-AVID (1-800-949-2843) PRESS 1.



EAS security

By Leonard Charles

As the industry converts from EBS to EAS, it transforms from a system based completely on operator intervention to one capable of being automated. In the automatic mode, however, the EAS creates new security concerns.

The security of the EBS was totally based on an operator authenticating the received message using specific words in a sealed envelope. This envelope was replaced on a regular basis to minimize the predictability of its contents. Though perfectly acceptable at the time of its origin, this process now seems cumbersome.

Today's world and its technology dictate that a high speed of message dissemination is a top priority, justified by the number of lives that can be saved by such speed. Unfortunately, today's technology also brings with it a challenge to the "hacker," who may find satisfaction from infiltrating the EAS for the distribution and broadcast of fallacious messages.

Alternate schemes

In the new EAS rules, the FCC provides for national-alert security by the same means used in the EBS: the authenticator lists. Yet, EAS equipment can be set to automatically relay messages without operator verification and still be in full compliance. In fact, if a station chooses unattended operation, then by mandate it must, at minimum, set the equipment on automatic relay of the national emergency code and, therefore, lose the security of verification.

The FCC's EAS office admits that the word-comparing form of security is only effective in the first link from the White House to the Primary Entry Point (PEP) stations, because these messages will be non-encoded voice-only and easily authenticated. Beyond that, the message will be EAS-encoded, so only stations opting for manual operation of the EAS equipment will have the benefit of further verification.

Though the FCC did not accept numerous suggestions of electronic security schemes in comments for rulemaking and in petitions to reconsider, it does offer some security suggestions outside of the rules for those willing to put forth the effort.

First, the FCC would consider the use of

one section of the EAS header to embed security bits. That section is required to include station call letters or other system identification and is signified in the rules as LLLLLLLL. According to the EAS office, a state, operational or local area may devise a viable scheme to use these eight characters for security instead of identification, and approval will be considered on a case-by-case basis. Because that portion of the header is now required to be automatically embedded into the EAS message by the encoder, users would need to work with manufacturers to facilitate this method of security.

Another method for local-system security that would *not* require FCC approval uses encryption external to the EAS equipment. To use this form of security, a scrambling device is installed at the output of (some or all of an area's) EAS encoders and corresponding descramblers are used at the input of each decoder that monitors those sources. The encryption used must not degrade the digital header to the point of its inability to be accurately EAS-decoded.

With the goal of creating an open architecture system, the FCC felt it could not mandate electronic security. Besides, publishing any encryption system in the rules would immediately render the coding scheme useless. In contrast, a specific region's own encryption scheme can be unique and confidential.

Leonard Charles is chief engineer at WISC-TV in Madison, WI, and he chairs the SBE National EAS Committee.

SYNC AUDIO FOR \$899?!



Pristine Digital Quality From the AVA 22 Audio/Video Alignment Delay.

The AVA 22 does only one thing: digital audio delay in one-field increments. It does it very well. And very inexpensively.

By clever application of the Dolby™ Time Link 1-bit delta-sigma circuitry, Rane brings uncompromising digital performance with a new degree of cost-effectiveness to the process of audio-to-video synchronization. Two separate channels each provide up to 9.5 NTSC frames or 8.0 PAL/SECAM

frames of audio delay. That's it.

Okay, we did add a few nice features, like two memory locations per channel, remote memory recall capability, front panel lockout, fail-safe bypass and battery-free EEPROM operation. But we didn't get carried away.

The AVA 22. Pristine. Clever. Reliable. Inexpensive. The Rane solution for audio sync.




A/V ALIGNMENT DELA

RANE CORPORATION 10802-47th Ave.W., Mukilteo, WA 98275 (206) 355-6000

Circle (17) on Action Card

IT'S THE LAW!

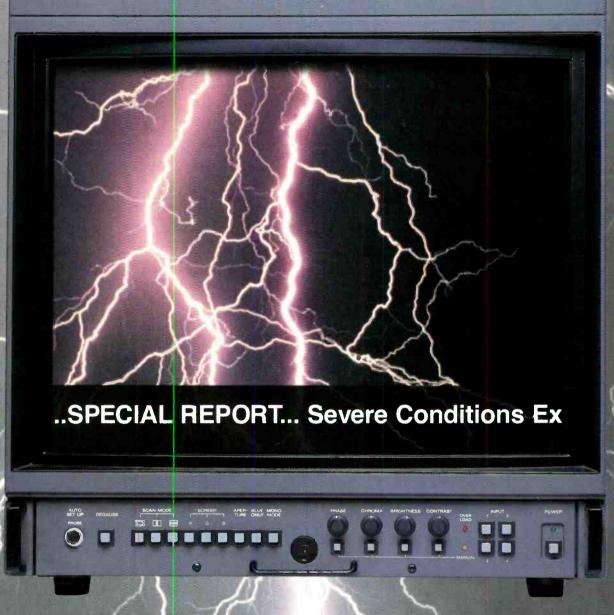

Nothing makes it simpler to comply with the FCC's emergency broadcast regulations than the CODI Emergency Alert System. Developed by industry leaders Chyron, TFT INC and Broadcast Software Solutions, the CODI EAS receives emergency alert messages required by the FCC's new EAS rules and automatically generates a high resolution video text message

CODI EAS is FCC Type Certified and meets all FCC EAS requirements. Available now to meet the compliance deadline of January 1, 1997. Call Chyron today for more information. EMERGENCY ALERT SYSTEM





in real time.



ANSI/SMPTE 125M-1992 defines an interface for System M (525/60) digital TV equipment based on CCIR Recommendation 601. This standard has applications over distances up to 1,000 feet. In April 1994, Pacific Bell introduced a service to transmit component digital signals over the telephone network. Advanced Video Service-Component Digital (AVS-CD) provides for the transport of 4:2:2 video, compressed to 45Mb/s, over unlimited distances. Video quality is excellent, even after several compression/decompression stages.

Extensive testing has taken place in Pacific Bell's research facility in San Ramon, CA, and with Sunset Post, a production facility in Hollywood, as well as ongoing testing with other research, standards and test equipment facilities to determine the suitability of the video quality. The concern has been that while 45Mb transmission was acceptable for review of work in progress, it was insufficient for transmission of the master footage. Test results conclude that it's possible to use this technology, especially when the final product is destined for TV distribution.

Background

Although early experiments with digital technology were based on sampling the

Transporting component digital video

composite NTSC signal, it was realized that for the highest-quality operation, component processing was necessary. Recommendation ITU-R BT.601 (formerly CCIR Recommendation 601) is not a video interface standard, but a sampling standard, that evolved out of a joint SMPTE/EBU task force to determine the parameters for digital component video. The sampling structure defined is known as 4:2:2 and specifies orthogonal sampling at 13.5MHz for luminance, and 6.75MHz for the two colordifference signals.

Working group T1A 1.5 multimedia coding and performance of the ANSI accredited T1 committee has an active project developing the performance criteria for the transmission of component digital component signals. The working group has reached a consensus on a general model to enable component digital video transmission over a telecommunications network. In developing this proposed standard, they needed to understand the use and interface requirements of the TV and motion picture production industry so that the system meets the needs of the potential users.

Questions regarding this model were sent to interested parties to solicit user input to the development of this model. One current standard that was considered came from the European Telecommunications Standards Institute, ETS 300 174. It constitutes a common standard for the coding and transmission of component TV signals at bit rates in the range of 34-45Mb/s in the format specified by CCIR-601. The standard embraces the coding algorithm needed for digital picture coding at about 34 and 45Mb/s, and their interface with the transmission network.

Provision is made for the transmission of audio and teletext services to accompany the video and for the application of scrambling for conditional access. ANSI has recently approved the U.S. adaptation of this standard for interoperability with the European Community. SMPTE has organized working groups to address packetized TV interconnectivity and TV compression systems.

The component codec

When transmitting digital 4:2:2/525 signals, the I/O interface provides for the separation of horizontal line synchronism from the video signal, which consists of three components Y, Cr and Cb. The original bit rate is reduced to less than 40Mb/s by first mapping the video signal with the DCT and then by coding the transformed digital signal according to run-length technique and entropy code.

DCT operation is performed in the DCT while entropy coding is performed in the buffer and processor unit, which also provides a buffer to adapt the variable coding rate to the fixed line bit rate. The bit-rate reduction is achieved by applying the DCT algorithm first on rows and then on columns of each 8x8 size block of luminance (Y) and chrominance difference signals (CrCb). Two different processors operate in parallel, one for luminance, the other for chrominance differences Cr and Cb alternately. The computational structure of DCT has different modes of operation that are selected based on the occupancy of the buffer store at the codec output. These modes include scaling of transformed data with a multiplicative coefficient adapted in relation to buffer occupancy. (See Figure 1.)

At the output of the scaler, 12 bits are

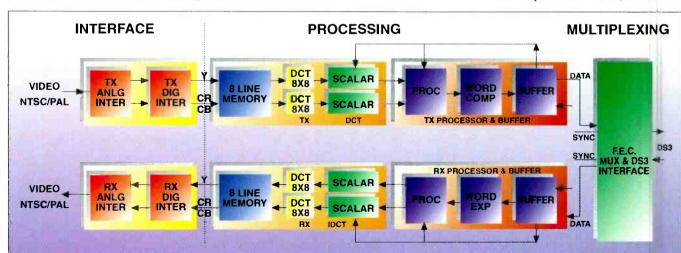


Figure 1. Basic block diagram of the video portion of the codec used by Pacific Bell to provide AVS-CD service.

retained for data to be sent to the following data processor, but only a maximum accuracy of 10.5 bits per word is used in the subsequent parts of coder. Data that are different from zero are sent transparently to the variable-word length coder (VWIC), which reduces the average rate considerably by coding runs of zeros as run-length words and by assigning shorter codes to the few most likely output values and longer codes to the many unlikely output values. The output of VWLC is smoothed to a constant bit rate for transmission in the word compactor and buffer.

In order to eliminate the effect of transmission errors, the video signal is processed according to a forward error correction (FEC) technique. It is an interleaved code that is able to correct single and double errors, as well as error bursts up to 32 bits in a 272-bit block. The encoded video signal is then multiplexed into the DS3 frame together with associated signals, like sound programs or control channels in the DS1 stream. The line interface function inserts the proper DS3 control bits and framing information.

Codec testing

The first step of the test process was to make multiple-generation recordings through the codec. Using an uncompressed compilation of test signals recorded on D-1 as test control, the tape was comprised of three different types of signals:

- Dynamic test signals;
- · Static test signals; and
- · Live action.

Many of the signals were chosen because of the dynamically changing nature of their datastream, which should put the most stress on the data-recovery portion of the unit.

Initial indications showed no serious errors in data transmission. However, the video range indicators showed numeric values outside of the recommended range, which indicated that the codec was changing the values of the signals as it passed through the compression/decompression process. Further testing was required with each subsequent revision level, and minor power consumption, heat failure and buffer capacity issues were identified and resolved. The final revision level was provided in June 1994, and after lab evaluation was released for general deployment.

Future directions


Over time, it may be possible to transport uncompressed digital video using SONET/ ATM technology. The problem with uncompressed transmission is the incompatibility with the phone network of the 270Mb stream, although tests of serial digital transmission over fiber have been conducted as part of this project. Options under evaluation include:

- Local transport over fiber;
- MPEG-2 4:2:2 Profile using Sony Serial Digital Data Interface (SDDI);
- Computer networking using transmission media, such as Fibre Channel;
- Development of 270Mb ATM/SONET user network interface.

Fiber: Manufacturers of fiber-optic transmission systems for digital video provide a solution for transmitting serial digital signals over distances of up to 10km (newer highpower lasers may increase that distance to 40km) in a point-to-point configuration. External audio channels and other data transmission are not inherently provided for, and it is not clear that existing fiber facilities will provide error-free transmission.

While this technology appears to meet the requirements of the production industry for interstudio transmission, its limitations may hamper its usefulness. It requires an "overlay network," which phone companies are reluctant to provide, and its distance limitations prevent wide area networking.

SDDI: Next, is the Sony Serial Digital Interface (SDI) protocol (standardized as SMPTE 259M to carry baseband digital 4:2:2 video and audio). To expand this network's capa-

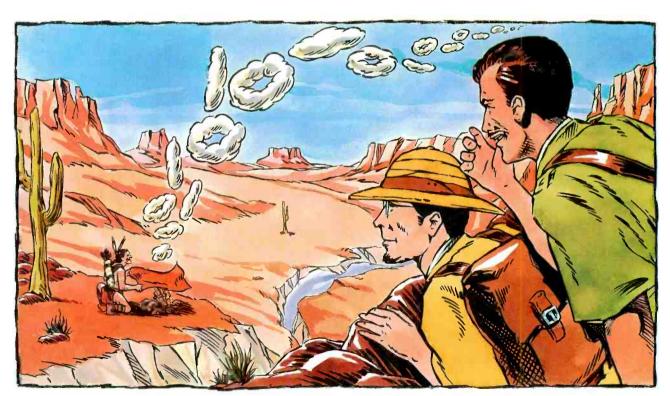

"LOOK WILCOX, THE DIGITAL COMMUNICATIONS TREND IS CATCHING ON EVERYWHERE,"WHISPERED SNELL.

bility, Sony selected SDDI, a variation of SDI that adds data communication capability, but the video signal is compressed using MPEG-2 4:2:2 profile.

Sony's SDI and SDDI provide a clear path toward LAN-based media facilities using new and traditional storage and switching equipment. The obstacle remains in the wide area networking of 270Mb traffic, where available networking options, such as ISDN, will be a bottleneck for real-time video transmission.

Fibre Channel: a general name for an integrated set of standards developed by ANSI for new protocols requiring about a gigabit per second that can run over existing optical fiber or coax cable allowing an open architecture framework for a wide variety of TV and computer equipment.

Although it can be employed in several ways, for video data applications fiber channel could be used in a configuration similar to a TV router, with a cable connecting each device to a central switch. Unfortunately, the basic speed of 800Mb/s creates even greater problems for transmission over phone networks,

ATM/Sonet: Unlike other communication technologies, ATM is designed to accommodate a variety of traffic types with differing quality of service characteristics. ATM assigns all traffic to one of four basic classes:

- 1. Class A Service the data rate is constant and a timing relationship exists between the source and destination (e.g., voice or fixed rate video);
- 2. Class B Service variable bit rate service (e.g., differentially encoded video);
- 3. Class C Service the connection between the source and the destination is asynchronous and the data rate can be variable (e.g., file transfer);
- 4. Class D Service connectionless data transport (e.g., SMDS).


ATM/SONET is best-suited for long-haul use outside of the facility and may not be optimized for an in-house studio network. However, the 155Mb/s payload limitation of STS-3/OC-3 means that the ATM cells representing a particular 270Mb/s circuit have to be interleaved across a pair of OC-3c channels.

A target scenario for tomorrow's production and post-production facilities might be the coexistence of uncompressed non-realtime video and compressed real-time video. Few compression schemes can hold up to the rigors of production. To maintain the high level of picture quality required in multigenerational TV production and postproduction applications, what is required is a sophisticated "compression engine" that operates on the 4:2:2 studio video components using only intrafield techniques with compression ratios no more than 2-4:1. MPEG has proposed the 4:2:2 Studio Profile. I-frame only (or I-B. I-P) with a group of pictures (GOP) of 1-2.


But the final consideration that must be included in the choice of technology to provide for the transmission of component digital TV signals over the telephone network is the economics. For example, R/ Greenberg Associates plans to have ATM technology become the backbone of a transparent studio with the capability to run realtime video in Los Angeles from a video disc in New York. The economics of this are compared to AVS-CD, for which a coast-tocoast link would run an estimated \$400 an hour, but which is dedicated to just one task - editing video. While ATM can also connect computer and voice resources as well, the cost of investing in the hardward, and the near-prohibitive cost of a full-time ATM link — which can run between \$20,000 and \$70,000 a month — is difficult to justify.

The goal is to achieve an improvement in connectivity at an attractive price, while being able to carry all video service variants (uncompressed, compressed, non-real-time and real-time) on the same network.

Richard Mizer is a technology consultant for Pacific Jell, San

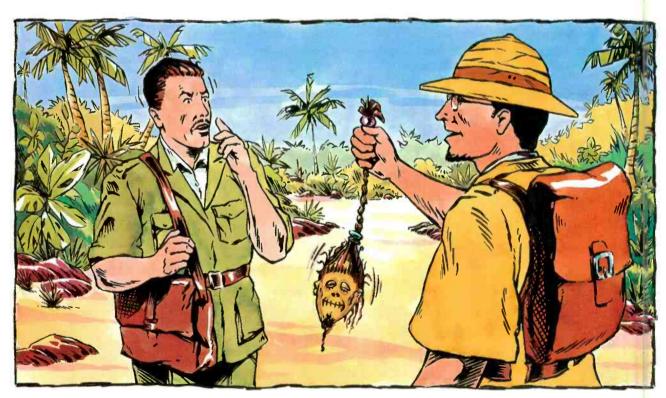

"CLEARLY THE RESULT OF AN EARLY EXPERIMENT IN COMPRESSION..." MUSED WILCOX.

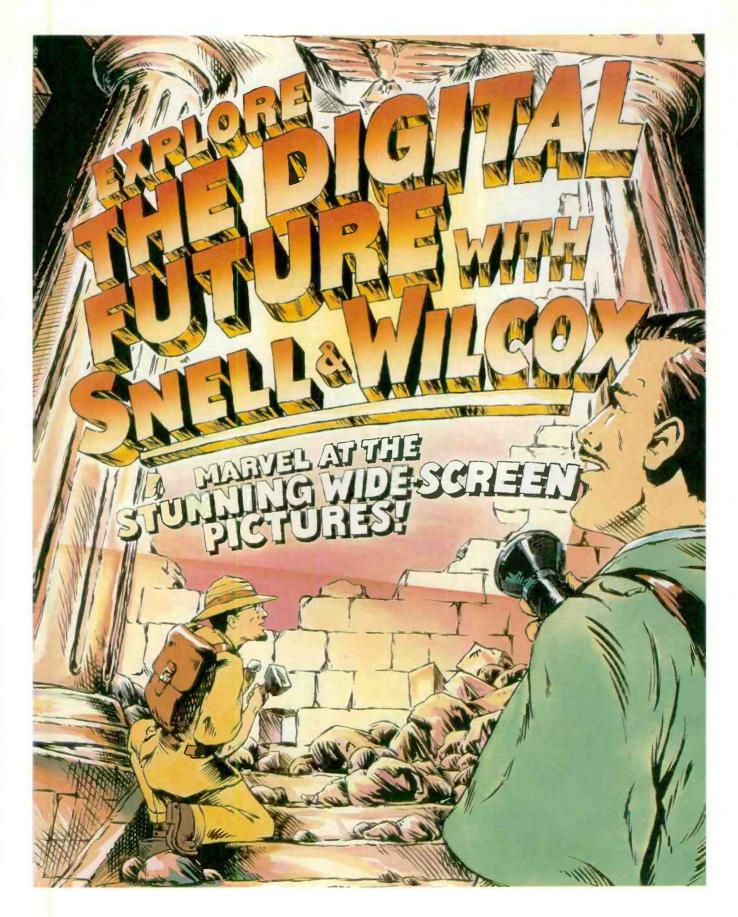





The past decade has changed the corporate landscape of broadcasting just as it has for other industries. Downsizing, restructuring and re-engineering are terms with the same bottom-line effect — company attrition. Personal power, the ability to communicate and manage information to advance a personal or business agenda, is critical to individual or business success for those who are just starting out in management and for those who are moving up the ladder.

This month, we will focus on the ability to leverage power and influence so you can make a difference. One book with impact that has come out is Robert Dilenschneider's "Power and Influence."

In his book, Dilenschneider wrote, "In order to influence opinion, you have to be an able communicator. If you can't communicate, you won't influence opinion. And if you can't influence opinion, you won't get very far in management."

Communication is the heart of management. Your ability to create clear and distinct messages from solid thinking is the first goal of a good communicator.

With good communication skills, you are apt to be more recognized, hence your influence circle grows. For the engineer turned chief engineer or engineering manager, you must focus on your communication and practice and hone your communications skills. Good communication skills are the foundation to building a power base. And one of the fundamental tools used to develop a power base is to build interpersonal relationships (and earn credits for your favor bank).

Building a favor bank

Increasing your circle of relationships can help stack winning credits in your favor bank. The concept of the favor bank is to do favors for others, so when you are in a time of need, you can "draw" favors from your bank, which will increase your influence.

The favor bank is like a savings account where the money (favors you do) you put in gains interest (influence) over time. But when you stop putting in money or pull out all of

Power and influence

your money, your bank balance (your ability to draw more favors) goes to zero. In other words, the favor bank operates similar to the sayings, "what goes around," "do unto others as..." and "I'll scratch your back if you scratch mine."

Leveraging favors

Now it's time to leverage the bank to your advantage. First, get credit for your favors, and second, advertise your favor bank balance. There's a saying in the movie business about getting ahead, "Early to bed, early to rise and advertise like hell!" Advertise your balance discretely and softly. If done properly, your influence will increase with each gesture of recognition from your peers.

The last recommendation is to keep balances abroad. Now, more than ever, leveraging your influence circle worldwide is a crucial strategy in keeping your position and perceived power base intact.



Investing in the favor bank

 Be responsive, not offensive. You never know who's going to put an obstacle in your way.

2. Support the rainmakers or the members of the favor bank when they call. No matter how inconvenient it may get, you want to maintain an active balance in the bank.

3. As in any networking community, find out whom you need and who needs you. This balance should be split between your personal account and your business account. In order to draw from the bank, you must also perform favors.

4. Plan on drawing from the bank when

change is imminent, like launching a program or fixing a large problem. In each case, choose carefully the people that can help make the change easier. Also, get authorization before you lap into the savings account...especially if you're a manager and the CEO or president holds the files where the balances are kept.

5. Look for ways to keep a good credit rating at the favor bank. Do this by performing good deeds and mixing it with the ones nobody wants to touch. This also helps build good will.

Influential leaders

More fundamental than the favor bank is identifying characteristics that are common to all influential leaders. Here is a summary:

1. Focus your energies and your objectives

with passion and a sense of urgency.

- 2. Declare victory. If you're in a position of power, look for opportunities to declare victory. If a restructuring has just occurred and you sense that morale is fading, then focus on several short-term goals that can easily be achieved; achieve them and then get the message out of the accomplishments.
- 3. Bestow honor carefully.
- 4. Make change an ally. As Frank Zappa used to say, "Change is not only necessary, it's inevitable." When change occurs, neutralize the risks, find the opportunities and make sure they come true and publicize them.
- 5. Make change positive, bold and promising. Point out how any change benefits the company and your employees.
- 6. Pin on medals for small achievements as well as big ones. Reward the rank and file as well as those on top.
- 7. Empower the company. If you're going to get things done, get away from the Ivory Tower syndrome and delegate responsibility downward.
- 8. Recognize when your influence is growing. Always be on the alert to see when your boss asks you to prove your ability or to exert influence.
- 9. Know when your influence is shrinking. Be wary when you're being taken off of the short list or when you're given impossible assignments that could add a black mark on your record.
- 10. Know when your influence status is undecided.
- 11. Use your influence as much as your authority. Insecure leaders and managers lean on their authority, while astute **leaders** and managers use motivation, persuasion and positioning to influence people, hence creating a higher perception of power.
- 12. Associate with the right people and get involved with projects that deliver impact. Set a style for your efforts and focus on issues with tenacity. Be energetic and low-key, but keep visible enough to be noticed.
- 13. Always serve your customers' values first. Remember, "service before sales."
- 14. Be heard in the right circles. Having the perception of influence also means being in the right circle, gaining recognition for your achievements and making sure that the right people know of your accomplishments.

Editor's note: Robert L. Dilenschneider is the author of "Power and Influence," Prentice Hall Press. Some excerpts in this article were taken from the book.

Curtis Chan is president of Chan & Associates, a marketing consulting service for audio, broadcast and post-production, Fullerion, CA.

The Legend Continues.

The Old Standard.

Our M267 Mixer is more than the best selling mixer of the last ten years. It's the most versatile, the most durable, and the best performing. You trust it in your rack – you trust it on the road. And while production environments have changed, your mixer remained the same. Until now.

The New Standard.

Our new M367 Portable Mixer gives you all the reliability and durability of the M267, plus a list of new features and improvements. We made it over 25 dB quieter with a low noise circuit — ideal for digital formats. We added two more mic line inputs, bringing the total to six. We added peak LEDs. And we gave it 12 and 48-volt phantom power for your condenser mics.

What we didn't change was its toughness. It's still made with a rugged all-metal chassis and manufactured in the USA with legendary Shure durability.

The New Features.

Without increasing the size, we were able to pack in dozens of new features and improvements. The M367 has all the features of the M267, plus:

- Input peak LEDs
- Detachable power cord
- Two XLR outputs
- · Easy-access side battery compartment
- · Headphone monitor circuit
- Output peak/limiter LED
- Balanced, 2-position mix bus
- Adjustable limiter threshold
- Battery/AC VU meter illumination
- Monitor input sensitivity selector
- Program/monitor input selector

With the Shure M367 mixer, we've just raised the standards. It's time you raised yours.

For The Shure Dealer Nearest You, Call 1-800-25-SHURE.







e'd all rather work with generous budgets and all of the latest toys, but "production on a shoestring" means accepting realworld limitations. You have to separate what's necessary from what would be nice from what's out of the question — and then make the project fly.

First, be prepared to say no. Often clients who are working on a shoestring haven't done TV production before, and they don't have a realistic understanding of what's required and what it costs.

A shop owner may not understand why you can't just take a few more pictures of his store. After all, your crew is there — what's a few more minutes of tape? Having a monitor along in this situation can help a lot. Show the proprietor the shot you've just set up and then turn the camera 180° and show what that looks like in comparison. If you do go ahead with the extra shooting, get written authorization for the extra work and cost overrun.

If clients call to inquire about the hourly rate to rent your studio, make sure they don't plan to rent the studio for an hour to tape a 1-hour show.

Working inexpensively is a discipline that requires you to work quick and work smart. It takes a base of solid competence, plus a lot of experience to produce good work on a limited budget. It also takes creativity and the ability to think on your feet. This is the skill that tells you to bounce light off of foamcore when there are no reflectors in your light kit, for example.

This work takes confidence, too. You have to be sure enough of what you're doing and why you're doing it to risk experimentation and the possibility of looking different on the set. Your proof will be in the tape.

Creative control

For some shoestring productions, you'll be asked to handle a job from concept through completion. When that happens, you're ahead of the game. You can write a script to be shot in one location. You can design a set that's lightweight and quick to build. But whether you've done the creative

Production on a shoestring

or not, if you're working with a small budget, some practices always apply:

- Make a plan and stick to it. Everyone says this, but when you're doing production on a shoestring, it means a lot more. Be efficient, be careful and be prepared for surprises. You can't control everything, but you can anticipate problems. Be ready to deal with them. For example, you may not be able to work with wireless mics, but you can make sure to frame your shots carefully and dress the cables well. It's a small thing that makes a big difference. Experience plays a role here, of course, but being aware of the variables is what's most important.
- Seek out a multitalented crew. If you work with an in-house staff, make sure that everyone has good fundamental skills and that they have opportunities to develop additional expertise in the area(s) of greatest interest to them. When you hire outside crew, choose specialists with a "pitch-in" attitude.

Anyone who's done production on a shoestring is familiar with writer/producer/videographers, shooter/grip/recordists, client/talent, director/TDs and CG/DVE/tape operators. The real stars in this universe know how to do lots of jobs, and how (and when) to apply that knowledge, depending on their role at each job.

When you have a good, multitalented crew, and the producer/director has made sure that everyone knows just what the job is and what their roles are, the production can rise to a higher level on creative energy alone; not to mention that this kind of teamwork can be lots of fun.

• Use the right equipment. Understand the operation of your gear and take good care of it. Know what each piece of equipment can and can't do well. Production on a shoestring will constantly attempt to stretch the limits of the equipment at your command.

You may also find it helpful to study older shows and production techniques. Lots of new equipment is created to make it easier to do something that creative people found ways to make old equipment do; but be careful here. Time is at a premium and you have to make sure the effect you're going for will serve the project's basic communication need. When time is not a factor, experiment and push the envelope to see what your equipment will do.

• Stay focused on the essentials. Remember that you're working with light and sound.

The camera is the eye of the audience. You may think it's looking at an actor, a product or the trees, but what the camera sees is light. If you understand light, you can get pleasing pictures no matter what camera you use. You may have to start with higher light levels overall or you may need to plan fewer or tighter shots. Every camera has a range of sensitivity. Know it, and use it with the proper lighting.

Don't forget sound. In editing, a well-placed sound effect has real punch. Well-chosen music is a good way to enhance pacing and create mood. Combined sounds add power to a show. When you're shooting, never record video without sound, even if you think you won't need it, and even if you're working alone. You can always choose not to use the natural sound you record, but there's rarely money for a foley stage when you're doing production on a shoestring.

A few suggestions


There are lots of ways to add to your capabilities inexpensively. Renting equipment may be an option. You can get some lighting instruments, microphones or even a doorway dolly for less than \$50 a day. Your contact at the rental house can be a valuable resource, too. Don't hesitate to ask what equipment is recommended to solve a particular problem. Get on mailing lists and ask to be notified of special seminars. These seminars may or may not be organized to promote particular equipment, but you can learn a lot, in any case.

Your collected "bag of tricks" may contain plenty of odd, inexpensive items. For instance, always carry plenty of clothespins and a selection of filters in your light kit. Even if you don't have filter hardware, filters can be pinned to barn doors, which will let you combine tungsten lamps with sunlight or fluorescent light in your shots.

Over time, you'll assemble plenty of other tools and techniques that will allow you to do great work without the high costs. But they'll all be based on these ingredients: attitude, skill, creativity, preparation and attention to the basics of light and sound. Stir well and see what happens.

Sally Heldrich is director of production for Media General Productions, Fairfax, VA.



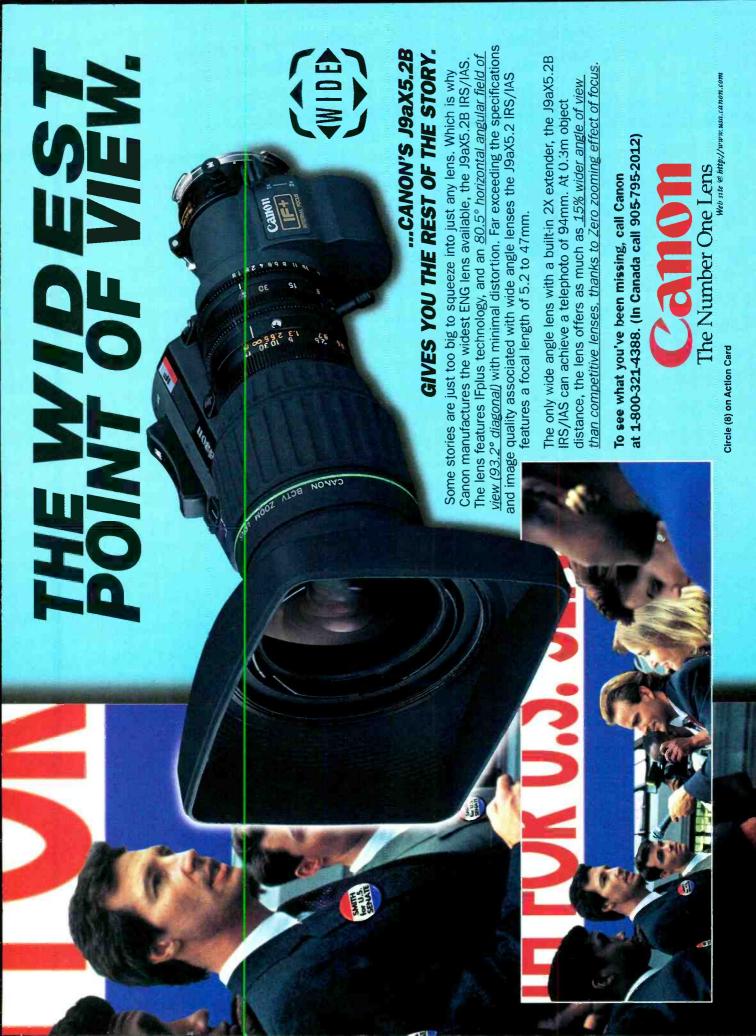



umerous new web pages appear everyday on the Internet by companies joining the rush to make information and products easily accessible to users. Unfortunately, there is no comprehensive Internet vellow pages to find or keep up with the addresses of every new and existing web site. The only way to find things on the Internet is to look for them, and that means using a web searcher.

A web searcher, such as Yahoo or Web-Crawler, works in conjunction with a web browser, such as Netscape or Spry Mosaic, to help users find web pages. A web page is a site where people can access data, such as background on the particular company running the page, its products, new information and customer comments. Through these pages, users generally will have the ability to download needed information, contact the company via E-mail and search for additional information through hypertext links.

Using one web searcher is much like using any of them — users insert the key word(s) of what they are looking for. The searcher tries to match the key words with words in the documents that it has access to and then a brief description and offers hypertext links to the web sites that had matching entries. Because some searchers catalog more information than others, the number of possible web sites listed after a search will vary.

There are three basic categories that broadcasters will likely use to search for information — a specific company name, a specific product name and a general type of product. To demonstrate what a typical search for information may yield, these categories were each given a topic and a search was run for them in four different web searchers - Yahoo (http:// www.yahoo.com), Lycos (http:// www.lycos.com), WebCrawler (http:// www.webcrawler.com) and Alta Vista (http://www.altavista.digital.com).

By company name

Looking for a specific company name is usually black-and-white; either the company has a web site or it doesn't. But even

Finding manufacturer web pages

if a company does not have its own site, a search can produce further information about the company, such as product reviews, articles or product help that may exist on other web sites.

The company name randomly selected for this search was Tektronix. The name was found in all of the web searchers, but each one came up with a different number of possible web sites. Yahoo found four, including the company's web site, as well as the sites of other companies that feature Tektronix products.

The other searchers came up with more, the most being from Digital Electronic Corporation's recently opened Alta Vista, which found more than 27,000 documents that included the name Tektronix. There were web sites for specific Tektronix products, entire catalogs, jobs with the company and a site that offered a demo of the company's Interactive Application Note.

Depending on the kind of information needed about a company, having 27,000 entries to look through could be a plus or a minus, but searchers do help users by first listing those documents that most closely match the search phrase.

By product name

Trying to find a product by name is usually a yes-or-no search, as well. If the company doesn't have a web site, the searcher may or may not be able to come up with any other documents mentioning the product. Other web sites not associated with the company may have information about the product, which could be helpful for gathering data from sources outside the company. If the manufacturer does have a web page, users will likely receive links to the site, as well as the specific product page within the web site.

For this category, Viewgraphic's Dataview SDA-21 was chosen as the search item. Three of the four searchers found matching entries (Yahoo did not find any). Lycos found four and WebCrawler found two, but the links provided by both would only link users with the manufacturer's web page and other points within that same web site.

Alta Vista, like some other searchers, lets users choose to search for the words as a complete phrase or as separate words within the same document. When using the product name as a complete phrase, it came up with two entries that gave users links to Viewgraphic's web site. Searching for Dataview SDA-21 as two separate words brought in 300 possibilities, which would link users to Viewgraphic's web site, as well as offering web sites where users could read reviews about Dataview and get help in using the product.

By product type

Searching for a type of product is sort of like watching the home shopping channel — you get to shop from the comfort of your own home (or desk), but you get to search for the products that you want when you

Users will find information that will link them to manufacturers sites, as well as catalogs, shopping sites, forums where products and usage can be discussed, articles about companies and products and product reviews. Because the topic is more general, there will be a lot more information to sift through to find manufacturer sites.


For this search, audio amplifiers was the topic used. The web searcher that came up with the least extraneous information was Yahoo with seven matches. Five of the entries it listed linked users with manufacturer's web sites, including Ashly Audio, BGW Pro Audio, Marchand Electronics and Opamp Labs. It also listed two distributors of audio amplifiers.

The other searchers came up with more matches, ranging from 181 to 400. Lycos had several links to manufacturers, but it also had a lot of entries for audio shopping and general interest sites. Alta Vista's search yielded 400 matches with many products that would link users with manufacturer pages, as well as links to sites for reviews, shopping and help.

Spelunking

There are more topics and more web searchers than the ones discussed here. With all of the information available, users shouldn't have trouble finding information. It's just that finding the needed information may take a little time, patience and exploring.



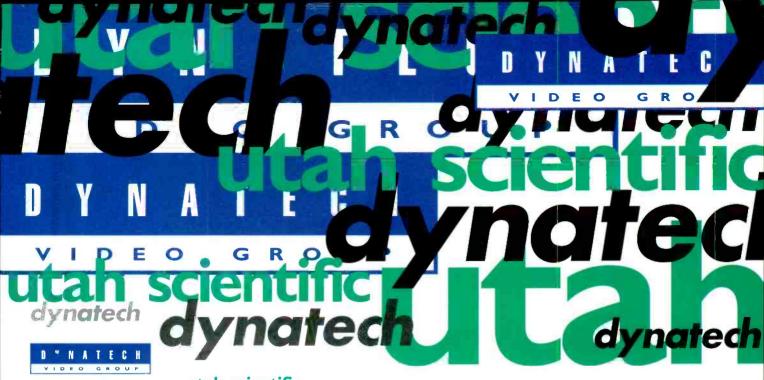

utah scientific

utah scientific

Allow us to clarify.

Utah Scientific, known briefly as Dynatech, re-asserts itself as the top name in routing technology.

Please make a note of it



Routing Systems • Master Control • Delta Character Generators • Converters

Circle (82) on Action Card

A few manufacturer sites

Abekas: http://www.abekas.com

ACE Audio Visual: http://www.avinfo.com/ace Adcom Electronics: http://www.adcom.com

Andrew Corporation: http://www.andrew.com Ashly Audio: http://www.ashly.com

Audio Broadcast Group: http://www.abg.com Audio Processing Technology: http://www.aptx.com

Avid Technology: http://member.aol.com/AvidNewMed/Avid.html

B&B Electronics: http://www.bb-elec.com Baydel Ltd: http://www.baydel.com

Bell Microproducts: http://www.bellmicro.com

BGW Systems: http://www.bgw.com Broadcast Electronics: http://www.bdcast.com Burk Technology: http://www.burk.com

BSS Audio: http://www.bssaudio.co.uk/bss Caligari Corporation: http://www.caligari.com

Canon: http://www.canon.com

Carver Corporation: http://www.carver.com Circuit Research Labs: http://www.crlsystems.com

Communications Specialties: http://www.commspecial.com

Data Translation: http://www.media100.com

Datatek: http://www.datatek.com Dialog4 System Engineering GmbH: http://www.proaudio.de/dialog4

Digital Processing Systems: http://www.dps-inc.com

Discreet Logic: http://www.discreet.qc.ca/ Dolby Labs: http://www.dolby.com Dynatech: http://www.dynatech.com

EAO Switch Corporation: http://www.eaoswitch.com

E-mu Systems: http://www.emu.com ENCO Systems: http://www.enco.com

Eventide: http://www.eventide.com Extron Electronics: http://www.extron.com

FAST Electronics: http://www.fast-multimedia.com

Fluke Corporation: http://www.fluke.com Focal Press: http://www.bh.com/bh/fp

General Instrument Corporation: http://www.gi.com

Genesis Microchip: http://www.genesisus.com

Gentner Communications: http://www.gentner.com Global Access: http://www.glblaccess.com

Hallikainen & Friends: slonet.org/~hhallika

Harris Broadcast: http://www.broadcast.harris.com

Harris Corporation: http://www.harris.com

Hewlett-Packard Corporation: http://www.hp.com International Tapetronics (ITC): http://www.ict-net.com

Intraplex: http://www.intraplex.com Jampro Antennas: http://www.jampro.com

Kintronic Laboratories: http://www.kintronic.com Knox Video: http://www.knoxvideo.com Leitch Inc.: http://www.leitch.com

Lightworks: http://www.lightworks.com Logitek Electronic Systems Inc.: http://www.broadcast.net/logitek

LPB: http://www.lpb.com

Matrox: http://www.matrox.com Microwave Filter: rway.com/mwfilter

Mobile Satellite Products Corporation: http://www.mobilesat.com

Monster Cable: http://www.monstercable.com

Navitar: http://navitar.com

Neumann/USA: http://www.neumannusa.com

Nvision: http://www.pic.net/nvision Odetics: http://www.odetics.com

Opamp: http://www.opamp.com
Opcode Systems Inc: http://www.opcode.com

Optibase: http://www.optibase.com Philips: http://www.philips.com

Philips Semiconductors: http://www.semiconductors.philips.com

Power Trends: http://www.powertrends.com

Reed Reference Publishing: http://www.reedref.com

SB Electronics: http://www.to-be.com/sbe

Scitex: http://www.scitex.com

Scott Studios: http://www.highbbs.com/scott.htm

Sennheiser Electronic Corporation: http://www.sennheiserusa.com

Silicon Graphics: http://www.sgi.com

Sony: http://www.sony.com

Svetlana Electron Devices: http://www.svetlana.com

Tektronix: http://www.tek.com


Telecast Fiber Systems: http://www.telecast+fiber.com


Telect Inc: http://www.telect.com Telos Systems: http://www.telos.com Toshiba: http://www.toshiba.com Tripp Lite: http://tripplite.com

Truevision: http://www.truevision.com Videomedia: http://www.videomedia.com Viewgraphics: http://www.viewgraphics.com

Xing: http://www.xingtech.com

ZERO Stantron: http://www.zerocorp.com/stantron.htm

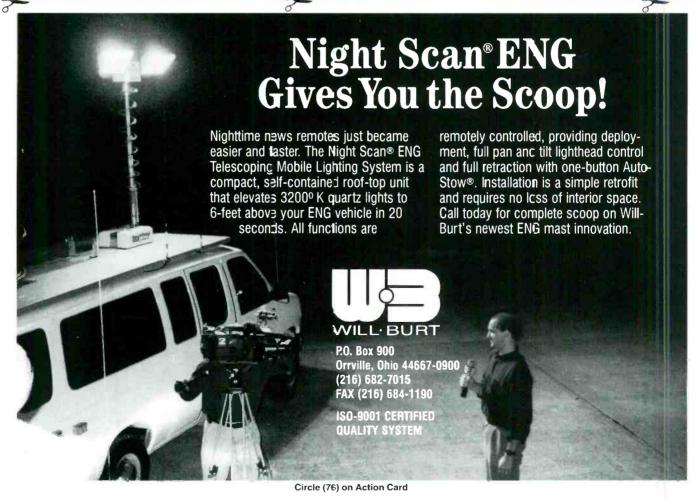

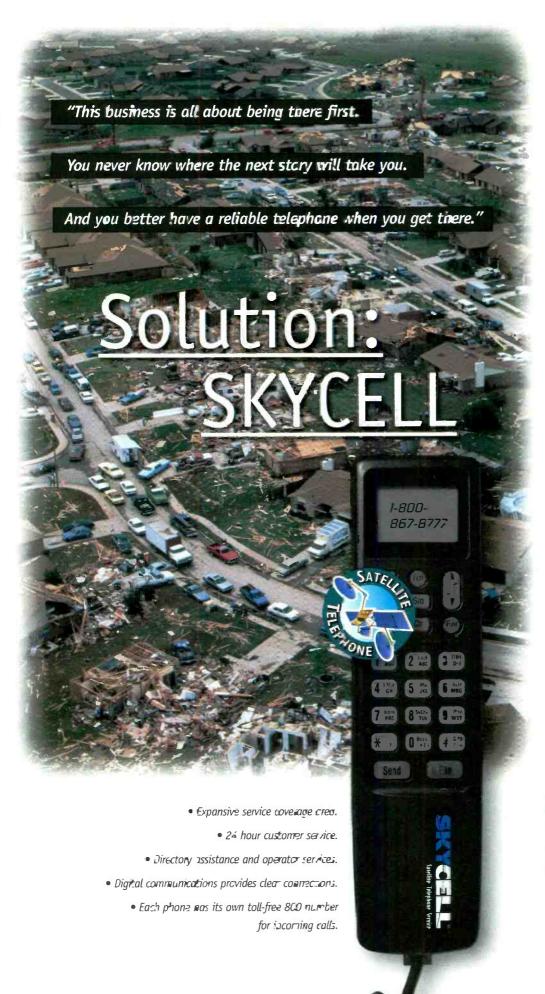

For the first time ever, a wireless telephone service is available with virtually complete North American coverage. This is not a cellular phone. This is a brand new satellite phone that works virtually everywhere you take it in North America. It can be installed in almost any

vehicle and is

easy to use -

SKYCELL Service Coverage Area Includes Virtually All North America.

make and receive calls as easily as from the phone in your home or office. And, because the satellite is 22,000 miles in space, this phone service is not affected by natural disasters like earthquakes, floods, and hurricanes. This new satellite phone enables you to access SKYCELL® Satellite Telephone Service, a product of American Mobile Satellite Corporation (AMSC). AMSC is primarily owned by telecommunications industry leaders Hughes Communications, Inc., and AT&T Wireless Services, Inc. So, you know you're getting the most advanced technology available. Are constant communications for your business a must? The solution is SKYCELL Service.



Satellite Telephone Service



American Mobile Satellite Corporation

1-800-867-8777 EXT. 1307

Circle (19) on Action Card



he Grand Alliance (GA) consortium has ceased to exist, and we are left with a terrestrial transmission standard that will soon be an FCC standard. You should note that the Grand Alliance/FCC standard is a transmission standard only; it is not a production, display or user-interface standard. The standardization is the definition of the bitstream and a technique for its digital transmission in a 6MHz RF channel.

The Grand Alliance ATV system

There is no question that the GA system will supply the home with superb images and spectacular sound, while also, as part of the National Information Infrastructure (NII), relaying digital data. The GA ATV system is based on the MPEG-2 video compression and transport protocol, and includes the ability for multiple transmission formats, Dolby AC-3 digital audio and vestigial sideband digital modulation.

The six important system functions of the system include format selection, video coding, audio coding, transport, transmission and interoperability.

Format selection

Many TV applications have different performance requirements. This fact, combined with the fact that the transmission will be digital and that there will be space available for other data, provides the appeal of multiple formats. The multiple formats allow tradeoffs specific to each family of program material. Also, the digital representation and processing in an ATV system allow the support of more than one scanning format, while facilitating interoperability among formats and different video services and applications. The GA system provides well for the different format selections.

Video coding

The GA system uses a motion-compensated discrete cosine transform (DCT) algorithm for compression of video signals. DCT exploits spatial redundancy, and motion compensation exploits temporal redundancy. DCT was chosen for its good energy-compac-

The Grand Alliance/FCC standard — What's here

tion properties, and the many fast algorithms available afford low-cost implementation.

In addition, the system employs sourceadaptive coding and other techniques for greater coding efficiency. MPEG-2 syntax from the Moving Picture Experts Group will be used, and the MPEG-2 tool kit supports most of the compression algorithms used by the system proponents. The video encoder has been designed to support 1,080-line interlaced and 720-line progressive formats. It also supports bidirectional-frame (B-frame) prediction, wide motion-estimation ranges, field and frame motion vectors, and adaptive field and frame DCT coding, as well as forward analysis with localized quantization-level control and automatic film detection for high picture quality.

By predicting the current frame from past and expected frames, B-frame prediction improves compression efficiency. The wide motion estimation ranges (up to ±127 hori-



With the approval of the Grand Alliance/FCCHDTV standard, home theaters will soon feature 16x9 widescreens, like this CinemaScreen TV G3417OAT from RCA.

zontal and 31 vertical in the prototype hardware, but fully compliant with MPEG-2 requirements) are needed for tracking fast motion. The field and frame motion vectors and the adaptive field/frame DCT coding greatly improve the compression efficiency of the 1,080-line interlaced format. The forward analysis with localized quantizationlevel control further decreases the visibility of the compression artifacts by exploiting the characteristics of the human visual system. The video decoder has been designed and

tested to support all of the encoder's features.

Audio coding

The GA system improves audio quality. Discrete multichannel digital audio works well for digital high-definition widescreen pictures resulting in sound to the home theater that is better than CD quality. The audio is supplied by Dolby Lab's AC-3 digital audio compression system. The AC-3 perceptual coding system encodes discrete multichannel sound (left, center, right, left and right surround and low-frequency enhancement channels) into a bitstream at a rate of 384kb/s.

Transport

The ATV system owes much of its power and flexibility to the packetized transport technology employed for the broadcast delivery of the multimedia service. The MPEG-2 systems standard, on which the GA HDTV system is based, encapsulates the compressed video, audio and auxiliary data bitstreams in information packets of a fixed length. These packets are well-suited for terrestrial channels, where transmission errors and data loss are likely.

Besides packetization, the transport technology provides two other important functions: multiplexing and synchronization of the services that comprise a program. The transport technology creates a stream of fixed length information packets from a variety of elementary bitstreams. Each packet contains only one type of data: video, audio or ancillary. Because there is no fixed mix of packet types, the transport mechanism can dynamically allocate the available channel bandwidth for complete flexibility.

Each transport packet consists of a 4-byte packet header followed by 184 bytes of payload. The header includes means for synchronizing packets and identifying payload service. The sync byte, always the first byte of the packet header, contains a fixed pre-assigned value. A 13-bit field called the packet identifier, also found in the packet header, affords a way of multiplexing various elementary bitstreams. Since the location of the packet identifier field is fixed, packets corresponding to a particular elementary bitstream are simple to extract once packet synchronization has been established.

Transmission

The transmission system uses a vestigial sideband (VSB) technique. Although the spectrum of VSB resembles that of other digital modulation methods, the signal has additional features that enhance it when recep-


Continued on page 134



BROADCAST 2000

Caught in the web: The who knew of new media

Who expected the phenomenal growth of the World Wide Web?

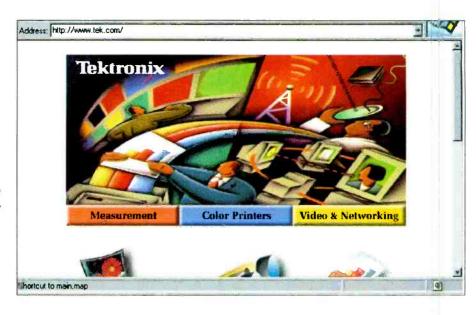

By Marjorie Costello

n the last year, the World Wide Web has taken the Internet and the headlines by storm. Although services like America Online (AOL) and CompuServe have also grown in the past year, it's the web that has become the darling of the on-line world. And the web is growing geometrically, accompanied by even more impressive multimedia offerings, thanks to the efforts of creative developers and new content-creation tools.

Until a few years ago, the web was an off-the-beaten-path research tool for physicists and computer hackers. Today, there are more than 100,000 web sites, visited by millions of people for personal and business reasons. And every two months, the number of sites is doubling, as many companies, organizations, educational institutions, government agencies and individuals "put up a home page" — or establish a site — on the web.

It often leaves many heads spinning, shoulders shrugging and people remarking: "Who knew?" Even the pace of change is changing in the world of new media. It's approaching warp-speed velocity.

1995; The web year in review

What is particularly amazing is that even the most computer-savvy did not predict the web's phenomenal growth. Take software giant Microsoft, for example. When the software company was planning its new online service, the Microsoft Network (MSN), Microsoft wanted to attract subscribers to MSN's content, chat sections, transactional services and E-mail.

At MSN's launch in August, timed with the release of Windows 95, a shift in strategy was becoming apparent. MSN started offering web access that month — through a Windows 95 web browser — several months ahead of schedule. By fall, Microsoft chairman Bill Gates and company had decided that MSN's real mission was to provide web access. The company is currently testing Windows 3.1 and Macintosh versions of its Internet Explorer web browsing software. And, Microsoft has made the Internet the centerpiece of its corporate strategy for the future.

CompuServe, AOL and Prodigy also offer web access with browsers you can download on-line. All three provide tools for creating a simple home page on the web, accessed through the services. And each is hatching plans to offer additional Internetrelated services.


During 1995, Netscape, which makes the leading web browsing software, became one of the hottest stocks on Wall Street when the company went public. Sun Microsystems's new Java technology was also a hot topic because it allows content-rich and

platform-independent "applets" to be sent over the Internet. This sets the stage for applications and data to reside in the network, rather than in the computer, reducing the need for internal or other types of storage. Companies, such as Oracle and Sony, are reportedly working on lower-cost desktop and hand-held computers that exploit the Java protocol.

Getting untangled

Whether you are familiar with the web or about to get tangled up in it for the first time, you face several challenges: typing (addresses) and waiting (for screens to fill). While most people understand that in a keyboard-bound culture typing is to be expected, most of us are not accustomed to waiting for high-tech to perform its magic.

Web addresses often have intimidating-looking names that are called Uniform Resource Locators (URLs). The first part is the protocol, which in most cases is http, for Hypertext Transfer Protocol. Next, you'll see a colon and two forward slashes followed by www. — short for World Wide Web. Then, there is the domain name or computer address, such as sony.com. When an address ends in com, that means it is a commercial or company site; edu indicates an educational institution; org is an organization site and gov is a government site. All

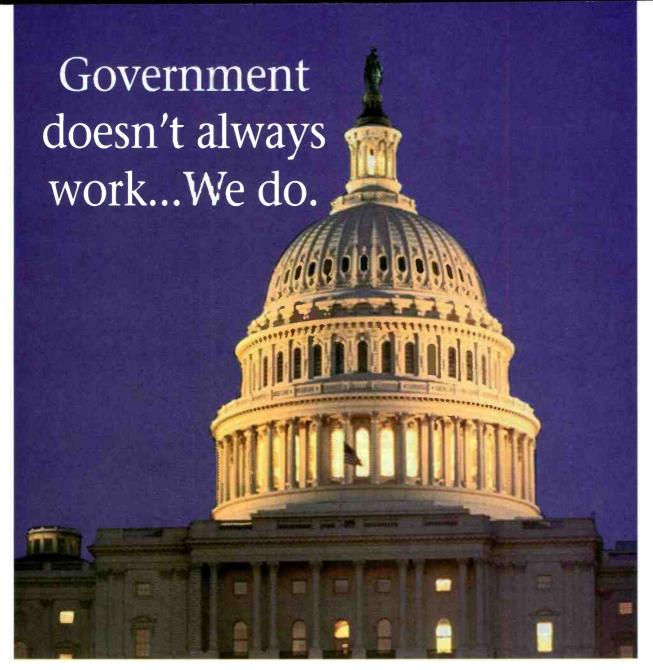

Thanks to Matrix Plus II Digital Intercoms

True leaders are made, not born. Since 1968 Clear-Com Intercom Systems has served our customers by keeping promises and delivering solutions. That's why our systems are used in more government facilities than all other

intercoms combined.

If you need to communicate between many people in a building or multiple locations on a map, our products, knowledge and expertise help you meet your goals.

Clear-Com products are not subject to term limits! We offer none of

the empty promises that are associated with other one-term intercom systems. Everything we make—even our very first product—is compatible with today's Clear-Com products.

All our products are backed with the most comprehensive warranty, factory, engineering and customer service support in the industry.

The numbers don't lie. With over 65,000 intercom systems and 250,000 belt packs in active service, Clear-Com wins by a landslide.



From the top, a 12-key LCD display station, a 9-key LED display station, a 20-key LED expansion panel, and a 5-key LED display station.



Circle (21) on Action Card

of this information gets you to the home page or starting point for an individual web site.

Once you are in a domain, you can branch to subsections by clicking on underlined text or icons, which add more words, symbols and punctuation marks to the address path. Web pages usually end in html, for Hypertext Markup Language, the scripting language of the web. Fortunately, most web browsers let you store your favorite addresses, eliminating the tedious typing each time you want to visit.



The waiting game

Perhaps the biggest challenge facing web users and developers is the waiting game: Conventional phone lines and modems are just not fast enough to keep up with the transmission speeds required to deliver the graphics, audio and video offered on the web.

Video presents the greatest challenge because of its bandwidth demands. As a result, on-line video is not only slow, it is typically confined to a portion of the screen and suffers from poor resolution.

Consequently, some of the leading companies in broadcasting, cable, consumer elec-

tronics, satellite and computers are exploring ways to deliver Internet data faster to the PC.

Cable modems tackle the bottleneck

During 1996, more cable companies will be offering web access through cable modems. Cable modems are connected to a PC through an Ethernet card or port and access data through a cable channel at speeds up to 1,000 times faster than telephony modems. Currently, cable modems are leased by cable companies to customers because of price and compatibility problems.

Cable modems — from such companies as

Zenith, Motorola, Intel and Hewlett-Packard — cost between \$400 and \$500. And, a cable modem used with one cable system may not work with another system.

Setting interoperability standards for cable modems has become a priority among cable systems and vendors for 1996. Once standards are set, prices are expected to fall to the \$300 level, and more cable companies will offer Internet access. Standards and lower prices will also make it possible for companies to sell cable modems at retail, which is


likely to occur by 1997.

Cable modems also open the door for more video on the web, a development that should be of special interest to production professionals. This past December, when NBC and Microsoft announced their joint venture to launch MSNBC Cable and MSNBC Online — two all-news services — cable-modem delivery was cited as an anticipated pathway for offering the on-line service.

Gates and NBC executives made it clear that video would be an important feature in the new on-line service. At the international videoconference announcing the venture, Gates said, "Video will become [as] impor-



A STAR IS BORN

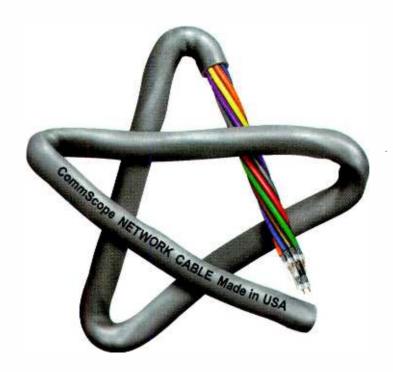

CommScope - The New Star in Quality Broadcast Cable

Cabling The World's Technology.

The new star in Broadcast Cable is reaching new heights for good reason. Already a top performer in the world's most sophisticated markets, CommScope has quickly become a leader in Broadband and Digital Transmissions. Now we're proud to be a part of your advanced technologies in the Broadcast Market. Since the early 60's, CommScope's focus has been on cables-and only cables. Today, we are one of the largest

manufacturers of quality cables designed to perform for today's applications and the next generation technologies. Furthermore, all CommScope Broadcast Cable is tested to meet *your* extremely high video and audio standards. For your special broadcast requirements, contact CommScope, today. And discover a full line of commScope star performers. General Instrument

For information call 1-800-982-1708 or 704-459-5000. Internet address-http://www.commscope.com.


tant in the future as text and audio is now."

Relying on the VBI

In addition, companies are also tapping the vertical blanking interval — and other parts of the broadcast spectrum — to send data at faster speeds. This past October, a new industry consortium, the Intercast Industry Group, was formed to begin exploiting the VBI — among other potential pathways — to link the Internet and the PC.

With charter members including Intel, NBC, Packard Bell, Gateway, CNN, QVC, Viacom, Netscape, En Technology and America Online — among others, the Intercast group predicts widespread availability of its boards and services in the second half of 1996. Intercast content will be created using HTML, the language of the World Wide Web.

A PC equipped with Intercast technology could, for example, display an actual TV broadcast — of a news show or a TV commercial — in the top left corner of a computer screen. In the bottom half of the display, consumers could read additional historical information related to the news story or the web pages corresponding to the product featured in a TV ad.

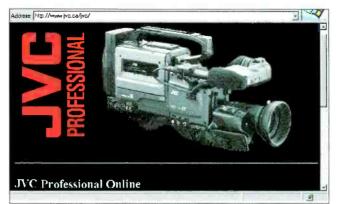

Web data descending from the sky

Another new and faster Internet connection expected in 1996 will be available from the Digital Satellite System (DSS). DSS is a particularly attractive TV technology for transmitting data because of its large channel capacity, all-digital service and technology-savvy audience. As a result, DirecTV plans to transmit data via its DBS satellites by next summer to PCs equipped with DSS integrated receiver/descrambler (IRD) boards.

Current DSS owners would install a PC IRD board and connect it to their dish provided they have more deluxe dual-output assembly. Also, computer owners who

buy the IRD package could add a DSS set-top box to also receive the TV programming packages.

DirecTV is working with computer companies, such as Compaq and Gateway, to develop the hardware for the new service. Sony and others are designing new, higher-resolution monitors that will present crisper and sharper-looking web pages.

DirecTV's sister company, Hughes Network Systems, is currently offering the DirecPC data service geared toward commer-


cial customers and high-end consumer Internet users. Customers downlink data from Hughes' Galaxy satellite with a 24-inch dish to PCs equipped with a special card.

Video resources on the web

Once you are on the web, you may start looking for familiar names from our industry that have established a presence. Among leading hardware companies, the professional divisions of Sony and JVC both post information as part of their corporate web sites. (A list of relevant web addresses is included at the end of this article.)

Other companies, such as Tektronix/Grass Valley, Abekas and Silicon Graphics are also on the web. Panasonic will be linking its



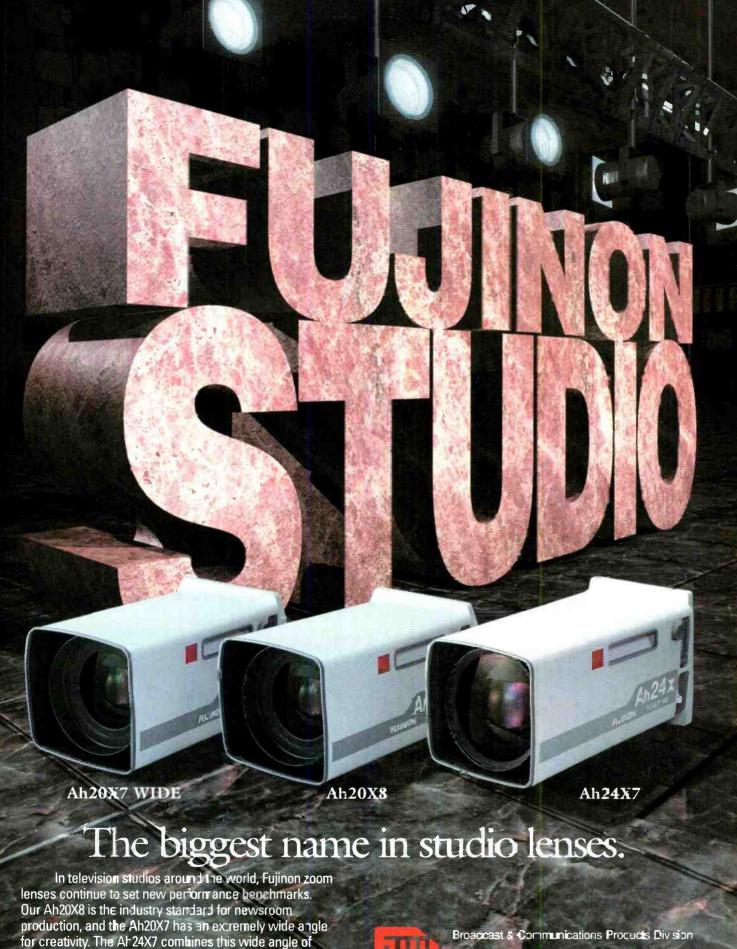

Circle (*0) on Action Carc

view with high zoom ratio to delive: unparalled flexibility. For more information about these exceptional studio enses,

contact Fujinon at 1-800-553-66 1.

FUJINON INC. 10 Fig. Point Dr., "Veyne NJ 07470-7-54 20]) 6至-5600 FUJI PHC3G OPTICAL CO., LTD 1-354 Uetake, Omya Dij., Satama 33 Phone: 048-468-2152, FAX: G48-651-8E17 TELEX: J228:5

FOCUSED ON THE FUTURE

LIGHTVVEIGHT

25L CARBON FIBER 2 STAGE TRIPOD



oconnor

100 Kalmus Drive, Costa Mesa, CA 92626

100 Kalmus Drive, Costa Mesa, CA 92626 Tel (714) 979-3993 - Fax (714) 957-8138

Circle (12) on Action Card

SpaceWorks on-line presence to the web in the near future.

Many computer hardware and software companies are on the web, including familiar desktop video names, Adobe and Macromedia. Some companies are mentioning their web address in their ads and brochures. Industry associations, such as the ITVA and the NAB, also have sites on the web; and the list is expected to grow during 1996.

In addition to video-related companies and organizations on the web, there are also innovative uses of video that you should find interesting and even a bit amusing. Professionals and amateurs are sending feeds from video cameras featuring everything from a view of Maui sunsets and a glimpse inside a college dorm, to a peek at downtown San Francisco and a view of Pike's Peak. Updated periodically, these feeds — of what amounts to video stills — are being transmitted by a growing number of TV stations and production companies.

Video producers are turning their video cameras on their cities and studios, offering the view as part of their web site. In some cases, the station's web site will show you what they are broadcasting on the air at the time.

There are web addresses with links to dozens of camera-related sites. Once you find your favorites, you can note their specific address and access them directly.

And, if you want a peek at what major dollars and talent can accomplish on the web — including dazzling graphics, audio and video delivered to your computer — check out the Paramount home page.

Marjorie Costello is a broadcast and video industry consultant and a *Broadcast Engineering* contributing, editor based in New York.

Site search engine for TV professionals

When you are on the web, you can use the various search engines or indexes — such as Yahoo, Lycos, Infoseek and WebCrawler — to find out if a company has a web site.

To keep you from getting tangled, here is a list of the web addresses of the sites mentioned in this column:

http://www.sony.com (Sony)

http://www.tek.com (Tektronix and Grass Valley)

http://www.jvc-us.com (JVC)

http://www.abekas.com (Abekas)

http://www.sgi.com (Silicon Graphics)

http://www.adobe.com (Adobe)

http://www.macromedia.com (Macromedia)

http://www.ece.ucdavis.edu/~maania/11.html (collection of — with links to — live camera feeds from all over the world, including TV stations)

http://www.columbia.edu/~ta43/looksee/html (another video camera feed collection with links)


http://www.paramount.com (Paramount)

http://www.nab.org/ (NAB)


Let us know about any web sites you have discovered that may be TV or video-related. If you are a company or organization with a home page, we would like to know about that as well. Please E-mail the web address to me at either: MACostello@aol.com or 71044,1067@compuserve.com.



Internet: be@intertec.com CompuServe: 74672,3124 FAXback: 913-967-1905

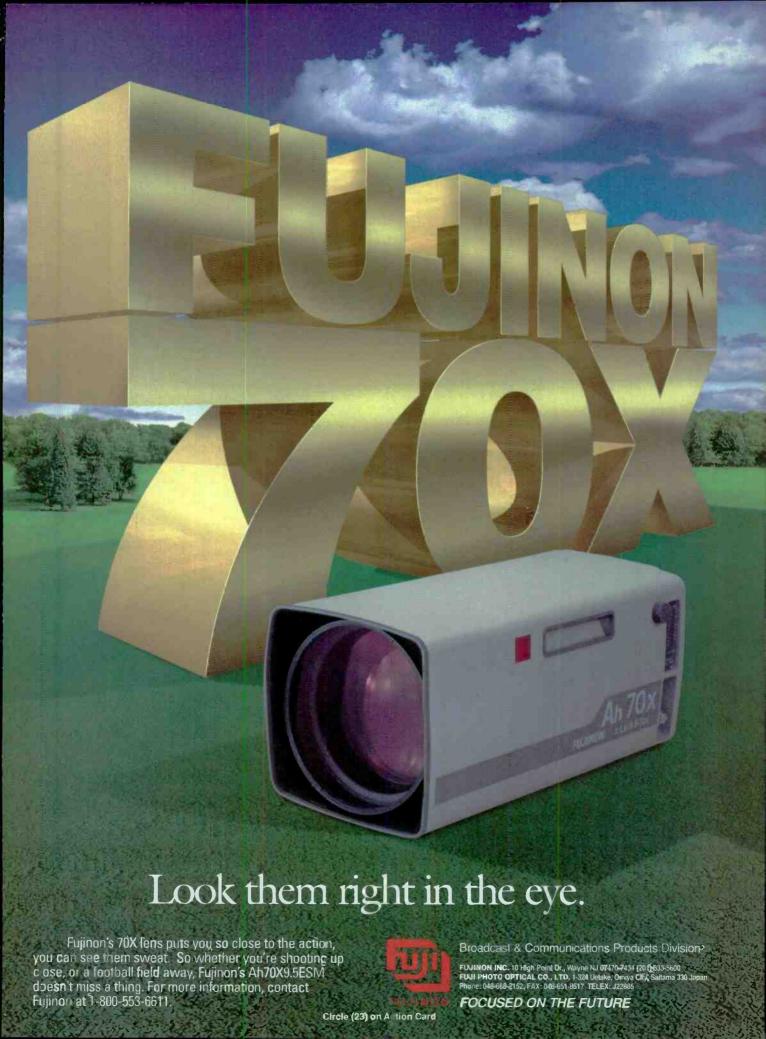



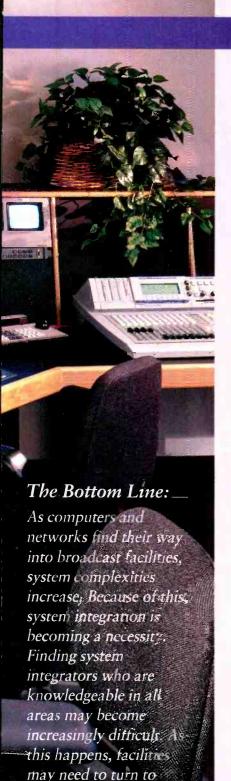

manufacturers to provide

equipment and

integration.

The future of networking

Broadcast facilities are changing, and networks are integral to new facility designs.

To many, this year's NAB was different than previous years. It is no longer possible to purchase equipment and simply assume it will automatically interface with existing systems. New buzzwords include: integrated systems, compression and signal interconnection systems. Products connected to these new video or audio networks must be configured and tested to work together in an optimal fashion. Key technological issues include networking, compression, and finally, software. All of these elements will need to be integrated into new system designs.

The different digital video topologies and the increasingly complex and confusing nature of the integration will force the broadcast or post-production user to search for the best systems provider, rather than the tlashiest product. This will not be an easy task. The broadcaster will need someone who can turn visions into reality. They must be able to provide application-specific systems integration to migrate today's investment into tomorrow's new world.

Networking

Key questions to determine if the network solution being offered is appropriate to the application include:

- 1. How is the network controlled?
- 2. What signal system is being used?
- 3. What is the physical layer transporting the signal?

Ethernet, as an example, has been chosen by many as a control network and, in some cases, pass low bit-rate video. Real-time commands used in today's broadcast facilities are typically handled by some form of point-to-point RS-422 control. In this example, the Ethernet system is used as a non-

deterministic control device, while the current RS-422 control provides real-time commands to various devices. The current RS-422 protocol can play a disc as if it is a VTR, but it cannot close a file, open a file, name a file or control the disc as a nonlinear device. A new RS-422DP protocol provides real-time commands for VTRs and disc-based systems. In this scenario, Ethernet still plays a role in downloading nonreal-time or time-line commands to be executed at a later time.

It is essential, however, in addressing file servers that respond in real-time can still be achieved. In many cases, the file server will emulate a VTR, and as such, must be capable of fast forward, reverse play, jog, program play, etc. A file server cannot be simply viewed as a set of hard disks. It has to be viewed as a product with mechanisms and circuitry that will allow it to perform functions, such as dual processing, separate manipulations of audio and video files and processing of the compressed video signal during nonreal-time playback. Functions that are resident in today's VTR, must be resident in tomorrow's file servers. In addition, material that exists on the file server may be accessed by multiple user's with different requirements.

After considering how elements on the network are controlled, the broadcaster must also think about the signal or signals that have passed over the network, and what the physical layer over which these signals have passed. Is it full bit-rate SDI or is it compressed data over SDDI, ATM, P1394 (Firewire), FDDI or Fiber Channel? In reality, each network topography has its own merits and demerits. The final decision on which network or networks are to be used will be up to the system design engineer, along with which interface manufacturer's

The future of networking

support. The criteria for choosing an appropriate network include:

- Whether it must be isochronous;
- · Whether it should be bidirectional; and
- Can it handle the required data rates?

In addition, if a network is being shared, the presence of a resource manager responsible for judication and conflict resolution must also be considered. In light of all this. Sony has chosen SDI and SDDI as the networking bridges for the future. We see this as the best solution, because SDDI is a simple mechanism for transportation that is totally isochronous and synchronous.

In addition, the SDDI platform permits transmission of the 27MHz clock, and as part of the header and descriptor, information on the format. The SDDI physical layer is capable of transporting many different types of compression schemes, handling fixed or variable block data and provides compatibility with existing digital broadcast routers. As part of the SDDI header information, there are source and destination addresses. While in the current implementation there is no use for these addresses, SDDI does act as a bridge to the possible future implementation of packet switching, such as ATM.

The issue of variable or fixed block sizes that are transmitted with compressed video images must be decided when the TV facility of the future is being designed. Blocks can be transmitted in fixed sizes containing a large amount of information, with little header information; or in variable sizes that hold smaller amounts of information with a large overhead being attached to the header and descriptor information. The knowledgeable systems integrator will be able to develop the correct total solution for the digital TV facility of the future.

In suggesting that SDDI will provide a bridge to packet switching in the future, there seems to be a lot of interest in ATM switching. I believe that there are problems still remaining that need to be resolved before high-bit-rate real-time transmission schemes are practical. However, it is true that for some applications where nonrealtime video and low bit-rate video is involved, ATM switching could be practical

In some areas of our industry, the IEEE P1394 standard is another option. It is a technology that could be developed for the professional TV industry in the future, it is isochronous and it is capable and defined up to 1.2Gb/s. Currently, the defined cable length of 5.3 meters (maybe 200 meters in the future) is a severe limitation. In addition, the number of nodes that can exist on each P1394 network feed is insufficient for

many broadcast applications and would force an additional distributor or hub to be included.

A compressed TV facility now and in the future will likely rely upon full bit-rate SDI for many applications. SDI will continue to be the backbone, with SDDI providing the future-proofing that many customers desire. The point here is that this new environment demands more than the old plug-andplay world that we lived in before.

Compression

The next key technology issue that broadcasters will be faced with will be the various compression schemes being offered. The issue is really not whether these schemes work, but whether they are suited to the specific application under consideration. When trying to answer this question, the solutions and answers will be based upon such factors as concatenation, codec costs. bit rates, latency and the ability to switch and manipulate the picture. These factors are important because television is not just a continuous video data flow; it is switched and manipulated regularly.

This calls for many steps in the process where compression and decompression could take place. Compression and decompression within the same format is not concatenation. Concatenation is where the values of the data are changed, forcing the compression technology to once again recompress the signal.

In the compressed world and in the planned TV facility of the future, it is conceivable that the signal will be subjected to at least five codecs between network acquisition and delivery to the home. (See Figure 1.) In reviewing compression technology it is important that the selected bit rate is compatible with the storage availability, transfer rates of the format and bandwidths on the network.

Data recorders with transfer rates in the 75-100Mb/s range will make it possible to record compressed audio and video files as data. Audio and video streams compressed to 20-25Mb/s could then be transferred at faster than real-time rates. The capability to record audio and video data as files and volumes within a directory structure provides additional tools to the broadcaster that are not available on traditional VTRs. These data recorders could enhance field acquisition, as well as archiving operations.

Software

What used to be hardware functionality is now software functionality. The issue here is how anyone can evaluate software. Do you evaluate it by simply looking at the GUI, or do you determine how the soft-

Continued on page 124

Realtime Video D-1suite

By Howard Sherman

Realtime Video, a post-production, editing and graphics company in San Francisco, has invested close to \$1 million in a powerful new component digital on-line editing suite.

According to Realtime Video president Will Hoover, power and flexibility are the common factors to all of the company's hardware decisions. New for newness sake isn't a sufficient reason to make a hardware purchase.

Realtime did make a recent purchase in order to provide clients with improved image quality and to provide operators with additional flexibilty. The company purchased a new Philips Diamond-digital 20 serial component production switcher. The new switcher is the first one to be installed in the Bay Area

With a switchable M/E architecture-tolayering capability, improved chromakey, sizing, positioning, wipe generator and edge-softening applications, plus a wealth of options, the investment was worthwhile to Hoover and his clients.

Realtime Video's new suite provides component digital on-line editing for any commercial or broadcast project without having to tie up the Quantel Henry suite. D-1 projects can be worked on simultaneously and independently of each other. Because the facility if fully networked, elements of projects can be moved between any of the edit suites without going to tape.

Realtime's D-1 suite also offers a dedicated Abekas A57 DVE for digital effects, an Abekas A72 text generator and a Graham-Patten digital audio board. Other new equipment includes a new digital Betacam DVW700 camera, which enables the facility to acquire field video in digital Betacam format and then edit in post without going to analog.

The new suite is fully integrated with Realtime's network that links 13 rooms, 25 desktops, 10 PCs, two Unix computers, an internet gateway and a comprehensive line of blue-chip editing and graphics technology. The result is a framework of computer power that provides clients almost limitless, yet cost-effective, creative options.

Hoover is convinced that tape-based technology will remain viable for some time to come, and is confident that the new D-1 suite will reflect the best-ofbreed profile that the company has been nurturing since its move to 60 Broadway in 1993

Howard Sherman Is an editorial consultant for Realtime Video, San Francisco.



Yet again we have come up with a winner. The new Video 90 fluid head handles any weight of carriera and accessories up to 90 kg (200 lb) with ease lt's all down to the unique damping system regarded as the best by top cameramen giving precise movements with the heaviest payloads and the smoothest operation in the worst conditions all of the time. It's so well designed there is no risk of finger and cable trapping. Combine the Video 90 with the

highly stable **OB 2000 tripod** and you have a winning combination for **outside broadcast shoots**. The **OB 2000** comes with retractable feet, levelling guage, an integrated off-ground spreader, adjustable column to reach up to 172 cm (67.8") in seconds and special anchoring device for absolute stability.

The Video 90 operates exceptionally well in the studio with the 2 stage Vario Ped 2-75 or the Vario Ped 1-90 for increased payloads. To see the versatile Video 90 in action give us a ring and have a totally new experience.

Headquarters: Sachtler AG, Gutenbergstrasse 5,

85716 Unterschleissheim bei München,

Phone (89) 32 158 200, Fax (89) 32 158 227

Eastern Europe: Sachtler Vertriebsgesellschaft m.b.H.,

Segelfliegerdamm 67, 12487 Berlin Phone (30) 6 36 43 11, Fax (30) 6 36 34 66

U.S.A.: sachtler® corporation of America, New York office:


55, North Main Street, Freeport, N.Y. 11520, Phone (5 16) 8 67-49 00

Fax (5 16) 6 23-68 44

アミック サハトラー株式会社 Japan Amic Sachtler Corp.

東京都世田谷区三軒来 1-2-21 〒1 電話 (03)3413-1212 〒3× (03)2413 0888 The Video 90
- a strong head
to take on the
heavyweights








Confidently making the transition from the editing room to the road, Sony's DVS-7000 Live Production Switcher is designed for the demanding pace and creative challenges of live production. Right from the start, operators will notice how comfortable they feel behind the wheel of the DVS-7000. Its 3.5 M/E control panel is like second nature to experienced technical directors. Its multiple downstream keyers and multiple

re-entry capabilities make it faster and simpler to layer graphics and DME moves into a show. And it shifts truck efficiency into high gear, by reducing the size and power consumption of its electronics—plus adding special mobile support features like redundant power supplies and advanced diagnostics.

Sony has also created a revolutionary link between our DME effects system and our DVS-7000. It's called DME-Wipe





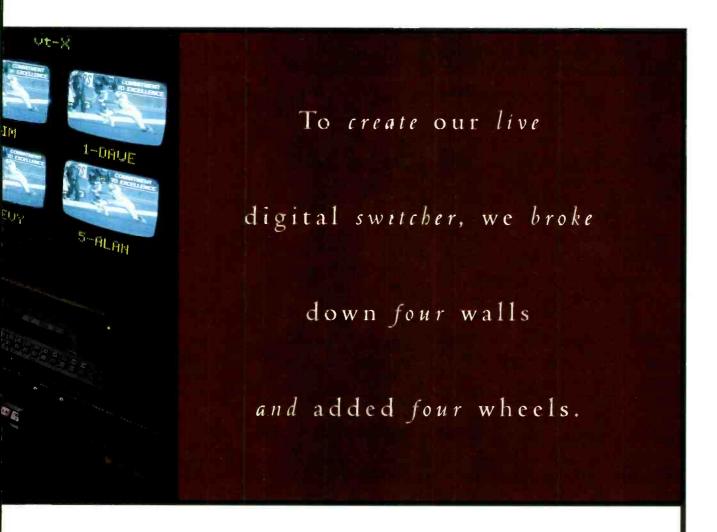

—and it adds keying power by turning DME's into additional keyers, freeing the M/E keyers for more key layers. TD's can now have a full range of powerful DME effects at their finger-tips as quickly and easily as wipe patterns. In addition, it has three memory systems: Timeline effects, Snapshot memories, and E-File registers, making it extremely effective for quick changes in live telecasts or on-line editing. The DVS-7000 is

also designed for today's fast-changing TV station environment. It can be configured for either analog or digital inputs. You can convert from digital composite to component 4:3/16:9 at the touch of a button. It handles 525/625 signals. And it's available in multiple control panel configurations. For more information, just call 1-800-635-SONY, ext. 7000. We'll help you get your show on the road.



Networking your facility

Discussions about LANs generally center on connecting a group of PCs (also called workstations or clients) to one or more shared and usually more powerful computers (called servers).

However, the broadcast and production industries have found many new uses for LAN technology, which go far beyond just shipping data and control signals around the facility. Video networking includes the storage and distribution of real-time digital video and audio signals. Video networking is a complex subject and any engineer contemplating the installation of such equipment must have more than a working knowledge of LAN technologies.

Network fundamentals

Virtually all of the network products are based partly (or entirely) on a 7-layer architecture known as the open systems interconnection

(OSI). Each layer outlines services and protocols that when combined form the framework for networking and integrating different types of networks (see Figure 1). The seven layers of the OSI are:

- 1. Application layer. The top layer in the OSI stack. It provides the interface between the network and the application. Reading and/or writing files between the server and workstation are examples of processes handled at this
- 2. Presentation layer. Translates data and formats between different platforms, (i.e., a PC and a Mac)
- 3. Session layer. Sets up the connection between communicating applications. Once connected, it maintains the integrity of that connection
- 4. Transport layer, Maintains the integrity of the data communications element, such as flow control and error recovery.
- 5. Network layer. Provides a means to reliably route data across the network.
- 6. Datalink layer. Packages the data and adds the appropriate header information needed by other computers on the network. 7. Physical layer. The physical hardware necessary to interconnect the

CATEGORY

computers in the network. This typically includes the network interface card (NIC) in each computer, the cabling and connectors.

In order to visualize how the OSI works, let's assume we have a simple 2node network. The network consists of one workstation and one server with a word processing program running on the workstation. Issuing the save command on the workstation would cause the system to save that file on the server's hard drive. The data to be saved would first flow from the

application layer down to the physical layer and then be transported to the server. When the data reaches the server, the process is reversed.

Topologies

Topology describes how the network is interconnected (see Figure 2 on p. 44). Of all the layers defined by the OSI, engineers need to be most familiar with the physical layer. The physical layer deals with the cabling, connectors and interfaces required to attach the computers to the network. The most common types of topology are:

• Bus. Typically composed of coaxial cable, twisted pair or fiber and

terminated on each end. Devices requiring access to the network tap into each section using a "tee" connector. The traditional "loopthrough"-type connector used in video is seldom used in data

By Kevin McNamara

 Ring. Similar to the bus, except the ends are joined. In practice, the ring configuration consists of dual counter-rotating concentric rings. one carrying the signal out and one returning. Devices attached to a ring network will have "in" and "out" ports, which are connected to the appropriate ring. Because this approach requires two paths (rings), media, such as twinax or composite fiber-optic assemblies consisting of two cables, are used.

• Star. More commonly referred to as a hub configuration. The signals are carried from each device on the network to a central point (the hub). These hubs can be passive or active. Passive hubs provide only a

simple termination/mixing point for the signals; an active hub electronically regenerates the signals. Systems employing active hubs can use special unshielded twisted pair (UTP) cable.

Figure 1. There are seven basic layers in the OSI stack. Engineers typically need to be concerned about only two: the physical and the application layers. Network software/hardware will usually take care of the other layers.

MAX. RATED SPEED

No performance criteria

Table 1. Specifying the performance level determines the

speed at which the network can operate and the type of

wiring needed. Obviously, as the requirement for higher

network data rates increase, so do installation costs. Be

careful about specifying a higher-speed LAN than you really

Hubs, bridges and routers

For star-type systems, additional network interfaces are typically needed. These interfaces may include hubs, bridges or routers. The network hub acts as a common terminus for star networks. Depending on a network's size, the hub can be as simple as a small box with a handful of ports or a large rack-mounted system with many ports.

The two general varieties of hubs are passive and active. A passive hub is essentially a resistive combining network for LANs using coaxial-based media. Passive hubs are seldom used today.

Active hubs electronically regenerate the signals that appear on its ports. The specific selection of a hub is based on the network protocol selected for the LAN. The hub can be

viewed as a major intersection in the network and, therefore, signifies a critical element in the delivery of traffic across the network. Hubs can support data rates up to 100Mb/s and many are available in a modular or stackable form to allow mixing and matching of data rates, protocols

TYPICAL USE

and media types. If data rates in excess of 100Mb/s are needed, switching hubs should be used

It's occasionally desirable to combine two or more individual LANs within an installation. A bridge is used to perform this interface. It reads buffers and resends information between LANS operating on different protocols. A bridge makes the two networks appear as one to the system. A router is a network device that relays network traffic between the LAN and other network peripherals.


Simple network management protocol (SNMP) is software used to simplify the

task of managing devices, such as hubs, bridges, routers and network interfaces. This application allows network managers to view, configure and troubleshoot the devices on the network.

Channel access methods

Each device on the network must be able to access the network, but only in an orderly fashion. Any one of three methods may be used to accomplish this. These are called channel access methods and they

Contention. All devices can transmit at any time. If two or more

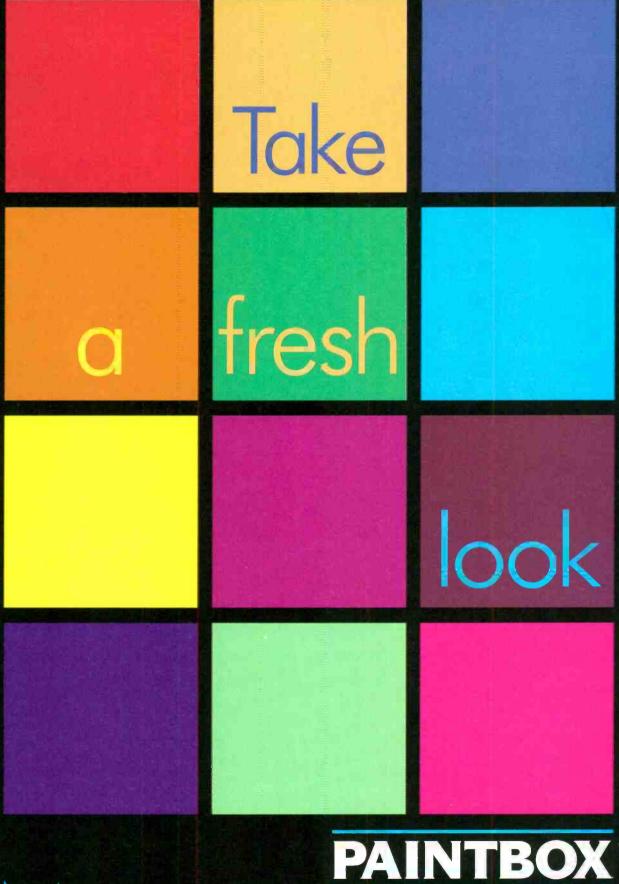




Seriously powerful graphics

KILER HARDWARE. KILER YEAR.

In the Past Year Alone, Quantel Users
Put the Domino Effect into Over 200 Feature Films.
Post-Produced Over 17,000 TV Commercials.
Picked Up 13 Effies. 17 Clios. 15 Monitor Awards. 3 Gold Lions.
Thanks to Those Users, Quantel Broke Every Previous Revenue Record.
And with 22 New Quantel Patents Registered,
It's All Mere Target Practice for 1996.

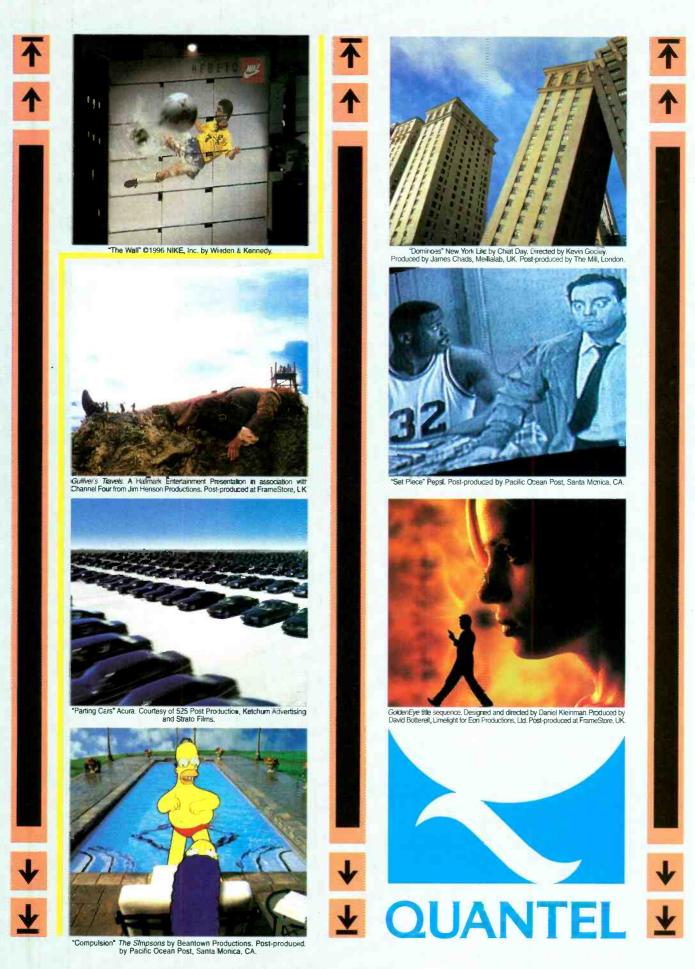

The future of networking

devices transmit at the same time, each device waits a random interval of time and tries to rebroadcast the data. This process is repeated until a reliable delivery is made. This method is used in bus and star

 Polling. The server initiates queries to other devices on the network in a predetermined order. Attached devices only respond when queried.

 Token passing. Imagine a "token" signal circulating around a ring (the cable): the token is passed around the ring in an orderly fashion. A device on the network can only transmit when it is in possession of the token; once finished, the token is released. This protocol is used exclusively in ring-type network configurations.

Because of its speed and inherent reliability, the token ring network has been the preferred choice for larger networks. In fact, it is the only method used by systems using fiber-optic backbones, such as the Fiber Data Distribution Interface (FDDI). Systems using FDDI operate at speeds in excess of 100Mb/s. In the past, most businesses found the cost to deploy FDDI prohibitive and often relied instead on copper-based Ethernet protocol, which operates at the slower speed of approximately 10Mb/s. Recent advances in Ethernet technologies have brought the speed in line with FDDI, with the advantage of using the less-expensive UTP cable.

Network protocols

Currently, the 100Mb/s Ethernet protocol has become the LAN protocol of choice for most new installations. In planning the physical layout of your system, it will be essential that you understand these standards.

Three types of media have been specified to transmit 100Mb/s Ethernet signals:

1. 100BASE-TX (Fast Ethernet). Fundamentally a faster "contention"-type access method.

2. 100BASE-T4 (100VG-AnyLAN). Uses a new approach to access the network called "Demand Priority." This system also supports "token passing." One of the advantages of this method is that it uses four pairs of telephone voice-grade (VG) cable.

3. 100BASE-FX. Fiber-based "Fast Ethernet" similar to FDDI.

Here are a few more alternative high-speed protocols you should be aware of:

 Asynchronous transfer mode (ATM). A technology based on highspeed packet switching. This is an ideal protocol for supporting multimedia and other complex applications. ATM can use UTP or fiber cabling. ATM's ability to use simpler (and cheaper) cabling allows practical delivery of high-speed data to the desktop. ATM is capable of data rates from 51 to 622Mb/s. However, at this point, ATM is primarily directed at telco-type applications. Interfacility applications are still too expensive and too complex for most video/audio needs.

 Copper data distribution interface (CDDI). FDDI using copper-based media instead of fiber.

• Fiber Channel. Developed jointly between Hewlett Packard, IBM and Sun Microsystems. Fiber Channel requires the use of fiber cabling and is capable of passing data at rates from 266Mb/s up to several Gb/ s. This protocol is becoming more popular, especially for high-speed video applications.

These are just a few of the high-performance protocols available. Although not considered a high-speed protocol, wireless Ethernet is developing into a popular media for connecting portable workstations, such as laptop computers, to a LAN or for connecting LANs between different buildings where laying a cable is impractical. The FCC has permitted unlicensed operation of these spread spectrum systems at 902-928MHz and 2.4-2.483GHz. Most will handle data rates from 2Mb/s, at distances of approximately 30 miles with directional antennas. For higher data rates, designers should consider using a standard point-to-point T-1 microwave system. The advantage is much

more channel capacity. The disadvantage is that the equipment is expensive and requires FCC licensing. If you need to carry high data rates via a wireless media, consider using a standard point- to-point T1 microwave system. This approach is commonly more

expensive and requires FCC licensing. STAR

Figure 2. There are three basic topologies for local area networks: bus, ring and star. In addition, the various configurations can be intermingled to create combinations, which allow groups of users to cooperate as independently (and efficiently) as desired, yet still share network resources.

RING

Cabling and hardware

Coaxial cables, once the de facto cabling standard, are becoming less common. Unshielded twisted pair (UTP) and fiber cables are increasingly popular. Depending on the size of the LAN and the distances involved, the cabling and installation costs will be a substantial portion of the project. Each type of cable has its own set of advantages.

The typical fiber media used for LANs consists of a graded index multimode fiber-optic cable with a 62.5 micron fiber-optic core and 125 micron outer cladding. The light source used to drive the fiber media operates at a wavelength of 1,350nm. Singlemode fiber is used in applications requiring wider bandwidths and longer distances.

Three types of connectors may be used for connecting the fiber cable to an interface:

1. FDDI media interface connector (MIC). These connectors are keyed in various ways and care should be taken to identify the proper keying arrangement. 2. Duplex SC connector. Designed for simplicity, the

connector is just pushed onto its mating section and the connection is completed.

3. ST connector. Aspring-loaded bayonet-type connector. The outer bayonet ring and inner sleeve are keyed. To

make a connection, just line up the keys to the mating receptacle, push and twist to lock.

Losses on a fiber cable should not exceed 11dB, including connectors. Expect 1dB to 2dB of loss per 1,000 feet of cable. The cabling isn't where the losses become significant—it's the connectors that add most of the loss. Connector loss will range from 0.5dB to about 2dB each depending on how well that connector was installed. Dust or skin oils on the connectors will substantially add to the system losses.

Caution must be exercised when installing either fiber or copperbased cabling. Kinks, sharp bends and incorrect connector attachment can wreak havoc on the best-planned installations. Installation errors typically express themselves as either slower than expected throughputs, data errors or poor reliability. The EIA and Telecommunications Industries of America (TIA) have produced a set of standardized installation practices known as EIA/TIA 568. This guideline covers all aspects of cabling methods, from specifying the proper cable type to connector selection and installation (see Table 1 on p. 40).

Although this has just been a review of the basics, there is a lot of information about networking and LANs in print. A search on the World Wide Web will provide a virtually unlimited source of up-to-the-minute information on the subject.

Kevin McNamara is president of Exegesis Technologies, a developer of applications for computer/ telephone integration and computer-based mapping.

DFD-U PAL/NTSC DIGITAL DECODER and D1 CONVERTER

The ideal bridge between the analog world of PAL and NTSC and the digital world of D1

- Adaptive Comb Filter Decoding
- Full Frame Synchronization
- Time Base Correction
- Y and C Bandwidth Expansion
- Analog RGB, Yuv Outputs
- D1 Parallel and Serial Outputs

An entirely digital product with 10 bit processing, delivering perfect analog and digital outputs.



Emmy Winning Technology

FAROUDJA

Faroudja Laboratories, Inc. 750 Palomar Avenue Sunnyvale, CA 94086 Telephone (408) 735-1492 FAX (408) 735-8571


Circle (24) on Action Card

EDH: Monitoring networked

video

The Bottom Line:

Now that more facilities are expanding their use of serial digital video, monitoring the networks' integrity is more important than ever. Error detection and handling is a new technology that measures errors in serial digital signals. Now, engineers have a way to measure errors and correct the situation without taking the system down.

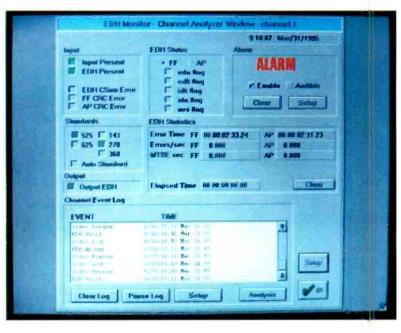

Use of EDH testing techniques is recommended in serial digital TV installations as an in-service quality-check system, and the sky's the limit on its other uses.

Error detection and handling (EDH) is a powerful new technology developed to measure errors in serial digital TV signals. It provides a precise method of reporting errors, enabling engineering personnel to take action to correct the situation.

The future of EDH is exciting. The technology can be applied to the inputs and outputs of all signal processing equipment, and EDH may eventually lead to automatic rerouting of signals around faulty paths or devices.

Digital video signals are inherently more

Photo: This screen shows a typical status monitoring view from Leitch's EDHview software.

complex than analog signals. It might be better to describe them as predominantly video, since they can contain up to four channels of audio, as well as a digital equivalent of vertical interval time code and other ancillary data.

Also, digital signals are more robust and less subject to losses, and when errors do occur, they are less catastrophic. A bit loss may not be noticeable in terms of picture, but it can cause a loud pop in monitored audio or create a time-code discontinuity.

Because these errors may not be detectable when viewed on traditional test equipment, new methods of measuring serial data validity have become necessary. This

is where EDH technology comes into play.

How EDH works

The principle of EDH is based on techniques similar to those used in other digital communications: an EDH transmitter is located at the front of the signal path and an EDH receiver is located at the end of the path.

The first EDH device performs calculations based on the digital picture bits in each picture field and inserts this information as ancillary data in the blanking interval at the beginning of the following field. This integrity checking data is then passed on through the transmission path.



Who Says It's Lonely At The Top?

Maxell is ALWAYS at the TOP with the Exacting digital performance of our D-2 and D-3. Digital BETACAM and BETACAM SP videocassettes. Using advanced magnetic tape technology, featuring Ceramic Armor Metal particles, Maxell has produced the perfect production tapes for every recording application from ENG/EFP to broadcasting. Maxell's "top tine" videocassettes feature unmatched error rate and consistant quality, even under severe operating conditions. Add an incredibly strong binder system for increased durability and lower error rates, and you'll be using the superior digital videotapes that keeps Maxell creating innovative tape technology for demanding professionals.



In Your Hands, Our Science Turns To Art

maxell

22-08 Route 208, Fair Lawn, New Jersey 07410 1-800-533-2836

Maxell Canada - 111 Stiffern Drive Concord, Ontario, Canada L4K 2R2 (905) 669-8107

Circle (25) on Action Card

EDH: Monitoring networked video

The second EDH device, located downstream, repeats the same calculations, comparing the result with the ancillary data contained in the signal. If the two numbers don't agree, then one or more errors have been detected. These calculations result in what is known as a checkword, which is calculated using the Cyclic Redundancy Code (CRC)/ International Telegraph and Telephone Consultation Committee (CCITT) polynomial generation method.

Figure 1 illustrates EDH insertion at the output of a serial digital device. The parallel data is passed through a coprocessor that counts field by field and generates a CRC per field. The CRCs are muxed or multiplexed into the parallel data and then the parallel signal is serialized and transmitted down the coaxial cable to the next device.

The serial signal is received at the input of the next serial digital device. The signal is

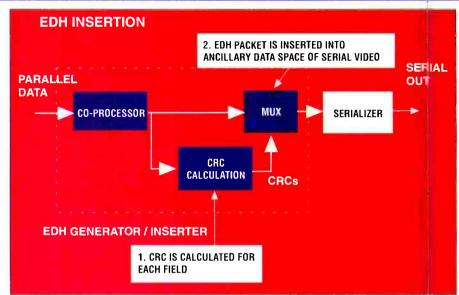


Figure 1. EDH insertion at the output of a serial digital device first involves CRC calculation for each field.

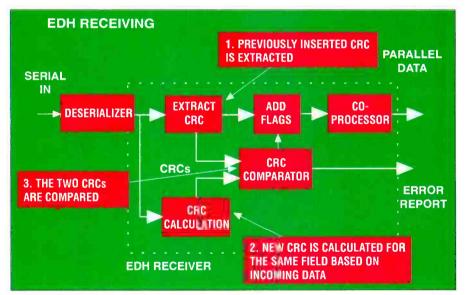


Figure 2. After the previously inserted CRC is extracted from the next serial digital device, a new CRC is calculated.

deserialized into parallel data, and the CRC from the previous device is extracted. A new CRC is calculated and compared to the CRC from the previous device. (See Figure 2.) If the comparison fails, then an error is found, and these discrepancies are inserted as flags in the outgoing parallel data. At this point, these discrepancies can be reported to the user. (See Figure 3.)

> Benefits of serial digital signal handling

The benefits of component video have been clear for some time, but the cost of installing three cables in the analog domain can be expensive, not to mention the work involved in routing and timing those cable signals. The benefits of digital circuits are also well-known, especially in communications. Therefore, a combination of component and digital makes an ideal medium for video signals.

Initially, the parallel distribution of digital video signals was time-consuming to install and suffered from bit slippage over long distances, resulting in signal losses. Thus, a new method — serial distribution

- was developed to overcome this, and it was ratified by the then International Radio Consultative Committee (CCIR), a branch of the International Telecommunications Union (ITU). The results became the SMPTE 259M and ITU-R BT601-2 standards.

Initially, the only chipset able to accomplish the results of this standard was available from Sony; more recently, Thomson Broadcast, GVG/Tektronix and Gennum have also developed alternatives. Each has its own merits and all have a common function - serialization and desertalization of component digital signals.

Testing serial video signals


Digital TV signals are powerful. Experience has shown that errors in these signals are often fleeting or transient, or they can't even be detected visually before the picture suddenly disappears completely. This sudden disappearance is commonly called the cliff effect. The phenomenon occurs when the data quality of a seemingly perfect picture deteriorates to the point where, if a few more meters of cable were to be added, the signal would become useless.

That's why trying to measure a digital TV signal with conventional test equipment,

FLAG	ERROR STATUS	INTERPRETATION
EDH	ERROR DETECTED HERE	ERROR DETECTED
EDA	ERROR DETECTED ALREADY	ERROR DETECTED UPSTREAM
ID#	INTERNAL ERROR DETECTED HERE	EQUIPMENT ERROR DETECTED
IDA	INTERNAL ERROR DETECTED ALREADY	EQUIPMENT ERROR DETECTED UPSTREAM
UES	UNKNOWN ERROR SEQUENCE	NON-EDH SIGNAL SOURCE

Table 1. For each of the three picture areas that EDH examines, SMPTE RP165 provides for the optional use of these five different flags.

We've put our best name forward

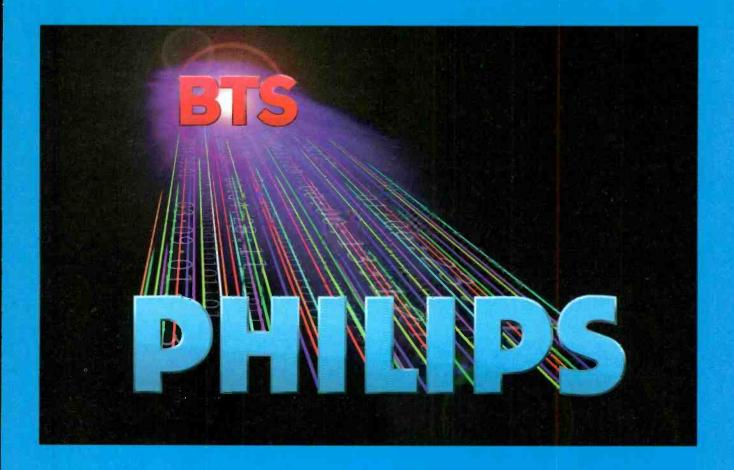

Let's make things better.

For years, you've known us as BTS, a leader in innovative broadcast and post-production systems. Yet, you may not have known that the company behind BTS is Philips Electronics. While we've shared the resources of one of the world's largest companies, we didn't fully share its name. Until now.

Welcome to Philips Broadcast Television Systems. As the legendary Philips name comes to our trusted products, we will introduce even more world-class solutions in television technologies. We still have all the great people you know. Today, more than ever, their aim is to make television even better.



PHILIPS

And we're making



DVCPRO Digital ENG



Spirit DataCine

Let's make

Philips Broadcast Television Systems introduces four product innovations that will improve your bottom line. Our new DVCPRO cameras and recorders provide compact, affordable digital acquisition; speeding-up the news gathering process. Our revolutionary Spirit DataCine captures

film images with hi-res, full 2K, real-time scans, making breath-taking film-to-tape transfers in less time. Our VDR family of video disk recorders and servers improve your existing resources by adding the reliability and instant-access of digital storage. Or consider our Diamond Digital serial

component production switchers. They're fast becoming the standard of choice for better looking, more complex, more exciting live programming. These are just a few of the ways Philips Broadcast Television Systems is making television even better. To find out more, call 1-800-962-4287.

television happen



VDR Family of Video Disk Recorders and Servers




Diamond Digital
Production Switchers

things better.



PHILIPS

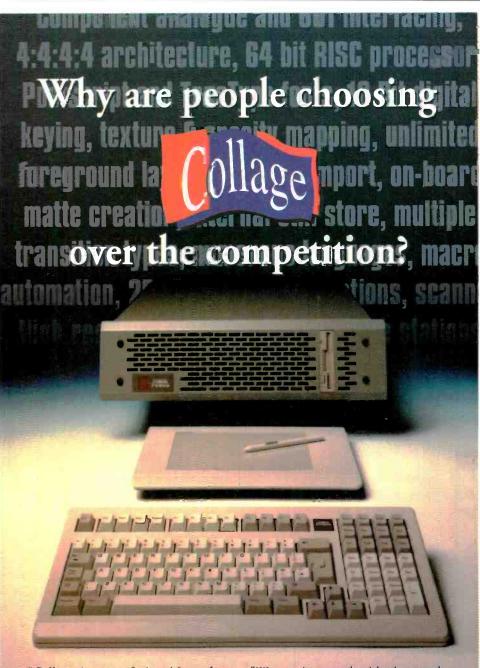

"Collage is one of the things that makes our new digital suite unique. It's more than a character generator, and in the room."

- Scott Jarobs IPA The Editing Pouse

"For our totally CCIR-601 digital environment Collage is the perfect colline digital graphics device."

- Barry Charbers
Rainmaker Digital Picture: Inc.

"We are impressed with the speed, features, quality of graphics, and ease of operation. Finally there is a graphics system that delivers all it promises."

- CITY-TV Much Music Bravo

"More than a traditional CG, Collage is a fast, high quality bridge between our edit bays, and graphic creation areas."

- Paul Chapman Unitel Video L.A.

Combining high performance CG, paint, and still store capabilities, the Collage family of workstations is redefining the role of on-line and on-air graphics systems. Call 1-800-461-7814 to arrange your demonstration today or see us in booth S.618 of the Sands Exhibition half at NAB'96.

Distribution in the Americas by

■ MAJOR ■ Technologies Inc.

Circle (28) on Action Carc

Manufactured by

Cambridge, U.K.
Phone (11 44 1223 423 399

EDH: Monitoring networked video

such as waveform monitors and vetorscopes, required the signal to first be passed through a digital-to-analog converter. Still, what must be found are bit errors in the signal, and this is where EDH technology makes its contribution to the digital world.

Digital errors

A single error is defined as one data word whose digital value is different at the destination from what it was at the source. Such errors can be caused by faulty equipment, poor installation or more commonly by excessive cable lengths. Typical errors fall into three categories: bursts of errors, processing errors and marginal errors. All digital TV systems suffer from errors.

Bursts of errors may be caused by coupling external sources of impulse noise into the serial data path. Often these errors span many picture lines and may affect more than one signal path. Generally, this is only a problem in cases where the impulses are of significant magnitude and have fast rise times. But most power-line transient sources have long rise and fall times sufficient enough to prevent an error from bit-cell to bit-cell.


Marginal errors are the most insidious type of serial digital fault.

Processing errors occur when a piece of equipment is not fully transparent to the digital data. This could be due to modification of any common picture parameter, such as gain, digital filtering or rounding errors during processing.

Marginal errors are the most insidious type of serial digital fault. These path errors are caused by the receiving device's inability to sample the data accurately. They are common in serial systems and are the most difficult to identify and solve.

Under normal circumstances, no errors whatsoever should be expected in the digital TV environment. But when an error does exist, it may be taken as a sign that the transmission path is stressed and in need of corrective action. Attention to the error is vital when the digital signal is carrying embedded audio, because noise due to bit errors is more disturbing to the ear than it is to the eye.

In communications, the goal is to reproduce the signal without modifications. Unfortunately, TV pictures are continuously undergoing change. A producer may want to add a logo or message, and sometimes it is necessary to add or delete captioning or

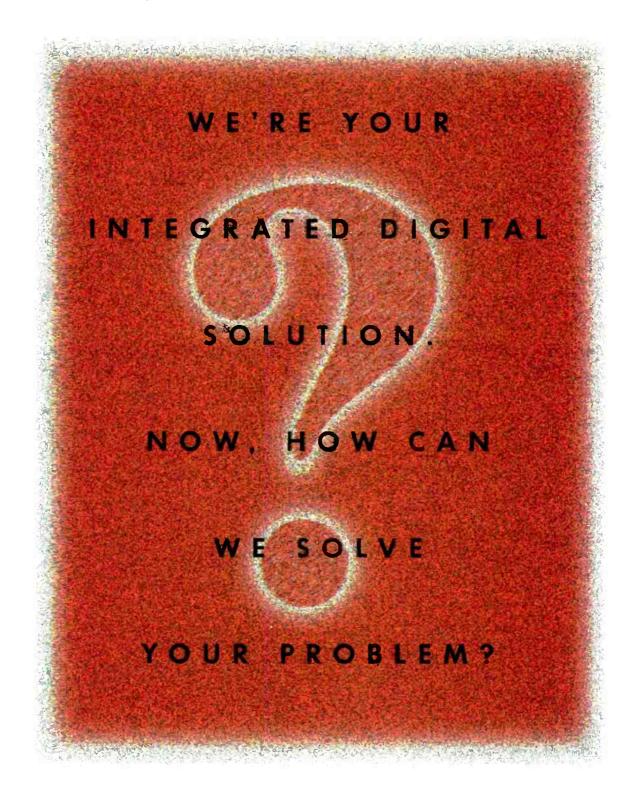




What digital ought to be.

Virtual Recorder Systems: Multi-Channel · Commercial Insertion · Network Delay · Nonlinear Editing

© 818.843,7004

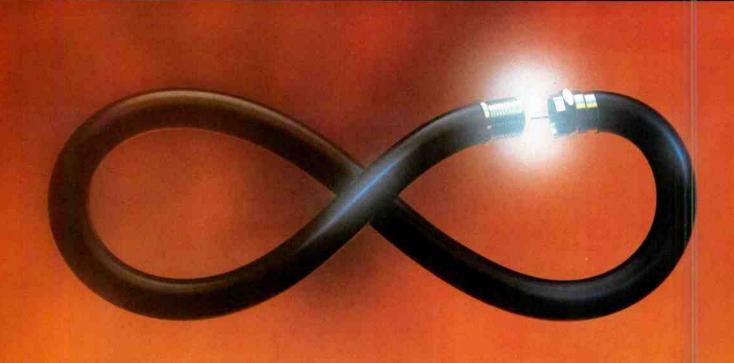

Imagine The Possibilities Of A Completely interactive Cable System.

And Motorola are registered trademarks of Motorola, Inc. CyberSURFR™ and Cable Router™ are trademarks of Motorola, Inc. ©1996 Motorola, Inc.

CyberSURFR™ Cable Modem

The CyberSURFR cable modem connects any computer system running TCP/IP protocols to a cable distribution system for extremely high speed multimedia communications.

Cable Router™

Cable Router provides the interface between a hybrid fiber/coax transmission system and local and remote TCP/IP networks. Residing in a headend or central office, it concentrates traffic from cable modems and manages all data communications bandwidth in the HFC system.

Cable Access Unit (CAU)

Located at the subscriber premises, the CAU bridges the cable and separates the telephony from video signals on the downstream and injects signals on the upstream.

Cable Control Frame (CCF)

Located at the cable headend, the CCF provides a connection between the local phone switch and the cable system, supporting both wired and wireless cable telephony.

Operations and Maintenance Center (OMC)

The OMC allows the cable operator to manage and maintain all elements and functions of the system from one centralized location.











Now You're in The Loop.

An infinite source of new revenue awaits you through Motorola's CableComm technology. Created by the inexhaustible talents of Motorola's engineers, the CableComm system will deliver the boundless potential of telephony, high-speed data and video phone services as well as the bounty of all other infobahn applications.

Employing Motorola's encyclopedic knowledge of radio frequency technology, we designed a system that overcomes the upstream noise ingress inherent in the hybrid fiber/coax infrastructure and takes full advantage of HFC's expanding capabilities. Making it possible for you to offer both wired and wireless cable telephony.

This CableComm system also possesses an endless array of additional features that make it a total system solution. These include low power dissipation, interactive high-speed data products and robust bandwidth management.

The possibilities are infinite. As are the opportunities for growth and new revenue. Now is the time for system operators to make their move and be prepared to deliver a completely interactive system to their subscribers. Call Motorola today and find out how the CableComm system can help you win the battle for the local loop.

http://www.mot.com/multimedia 3436 N. Kennicott, Arlington Heights, IL 60004 1-800-2WAY-HFC • 847-632-3409



What you never thought possible.™

other data. When this happens, how does the EDH device distinguish an error from a desired picture change? It can raise a flag to tell an operator that there has been a change, and it can tell him or her if the change is in the active picture or in the blanking interval. It can also let the operator know if an error occurred in the last link of the chain or further upstream in the transmission path.

SMPTE's RP165 describes error detection checkwords and status flags for use in serial digital interfaces for television. To provide a means for checking integrity of the serial digital transmission path, SMPTE has issued a proposal for manufacturers. The plan calls for EDH circuitry to be incorporated into serial transmitters and receivers to generate and detect checkwords. This can identify errors in the digital bit-

Interpretation of this proposal has been left to manufacturers to determine the best ways to handle error reporting. Some new products have already emerged offering EDH signal insertion and detection capabilities, and it's anticipated that as integrated circuits become available, EDH analysis techniques may be applied to most digital signal processing equipment.

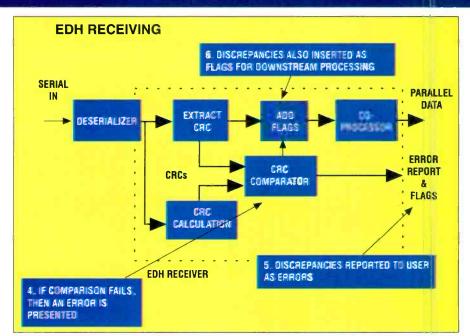


Figure 3. If an error is found at this point, the discrepancies are inserted as flags in the outgoing parallel data before they're reported to the user.

Error flags

EDH uses a series of error codes or flags located in the ancillary data portion of the signal to determine errors. Logically analyzing these flags and their respective positions in a digital system can provide an overview of a complete systems' operation.

CRCs are calculated for and EDH examines three areas of the picture: the full field (FF), active picture (AP) areas and ancillary data (ANC) for which a checksum is made. In this way, the EDH detector is able to identify if an error is in the active picture area or in the blanking interval. For each of these three areas, the SMPTE RP165 provides for the optional use of five different flags. (See Table 1.)

If an EDH device receives a clean signal with EDH information but no errors, the checkwords are entered as ancillary data on the following field, and none of the flags are set. If the signal contains no EDH information, the Unknown Error Signal (UES) flag is set.

If an error is detected in the active picture, for example, then the AP Error Detected Here (EDH) flag is set and the new checkword is recorded in the following field. The next downstream EDH device will set the AP Error Detected Already (EDA) flag, and it will reset the AP EDH flag back to zero.

At this point, someone monitoring the system would know that there were no errors in the chain but that an error did occur further upstream. An engineer could, therefore, quickly check the entire system by simply looking for the presence of an EDA flag upstream at the start of the chain. The EDA flag is never reset until the error is corrected.

The future prospects for automatic signal rerouting in event of failure are indeed promising. Imagine a routing switcher redirecting an EDH signal error around a



Circle (35) on Action Card

IKEGAMI/AVID'S DIGITAL DISK CAMERAS...

BE READY FOR ANYTHING.



Dead footage can be your worst nightmare. You anticipate, record and then discover the shot was missed... too late.

RetroLoop™ solves this dilemma. RetroLoop captures the moments before and the moments after the action begins. Simply set the record mode in continuous loops of 10 to 60 seconds. When the action begins, hit the record trigger and you've got the whole story including the "footage" contained in the loops recorded just prior to pushing the record trigger.

Ikegami's Digital Disk Cameras combine camera know-how with Avid's disk-based recording and non-linear editing software.

No dead footage, you'll get the shot and be ready to air the finished story ahead of the competition. Pictures are recorded digitally on a removable FieldPak." This revolutionary non-linear recording technique allows instant editing back at your facility, or even in the field with the built-in editing capabilities.

These remarkable tapeless cameros are available in two models. The DNS-11 with FIT CCDs, and the DNS-101 with IT CCDs.

Ikegami's Digital Disk Cameras: Be Ready For Anything. For further information contact




DIGITAL DISK CAMERAS: NEW FRONTIERS AWAI





Kudos IQ Modular

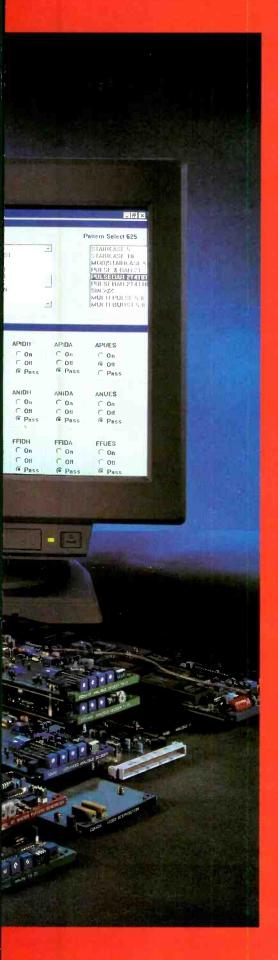

To help you go digital we've racked our brains.

The advent of digital television calls for new interface solutions. If you're going digital, this is the modular system you need to make the transition as painless as possible.

Kudos IQ provides a flexible, controllable, I 0-bit digital system, ideally suited to automated environments.

It offers all the performance of dedicated units, but in ultra-compact rack-mountable form.

For more information about Kudos IQ and our ever-expanding range

of modular functions, please contact us at: USA Tel: +1 408 734 1688

UK Tel: +44 (0)181 607 9455 Fax: +44 (0)181 607 9466 E-Mail: Info@Snell.co.UK

France Tel: +33 | 45 28 | 10 00 Germany Tel: +49 6 | 1 99 0840


India Tel: +91 11 6481740 Italy Tel: +39 6 66 38 594 Japan Tel: +81 3 3446 3996

Russia Tel: +7 095 1926992







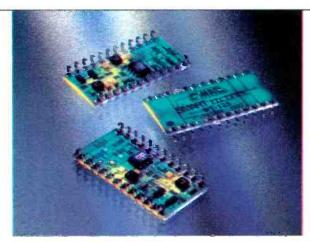

Multi-Channel Video Filter Modules

The C-MAC range of SMART active thick film modules provide a total filter and buffering solution to interface digital video encoder chips to both composite and Y/C outputs. Optimised for high quality graphical workstations or advanced PC card video output applications, they are available in SIP and height conscience DIP formats. Oversampled and non-oversampled matched channel delay variants are also available.

- Optimised for Digital encoders including those with current mode DACs.
- Video outputs centred about ground.
- Accurate Sin X/X correction for 27MHz sampling.
- · Drives 2 composite and 1 Y/C output.


C-MAC West Coast Sales Office 187 E. Wilbur Road Suite 8 Thousand Oaks

CA 91360 USA **Tel: (805) 373 1990** Fax: (805) 373 5250

C-MAC Microcircuits (UK) Ltd Tel: +44 (0) 1493 856122 Fax:+44 (0) 1493 858536



Circle (38) on Action Card

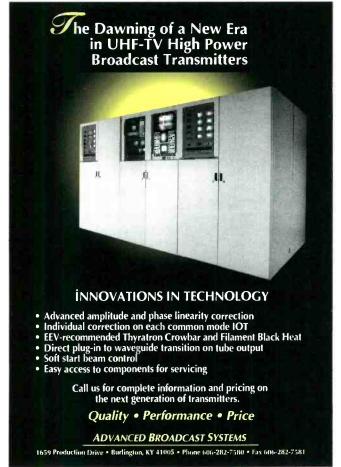

Circle (39) on Action Card

EDH: Monitoring networked video

path that has reached its fault threshold. The station's system itself could advise a centrally located operator of the exact room, rack, frame and frame position of the faulty equipment or path.

The implementation of EDH on a systemwide basis can simplify error detection, act as an in-service quality check or make the vision of a self-monitoring TV station a reality.

Debby Canto is a marketing specialist for Leitch, Chesapeake, VA. Contributing to the article were sales, marketing and engineering personnel from Leitch Technology International, Toronto Canada and Leitch Europe Ltd., United Kingdom.

A solution to EDH

Leitch Technology Corporation has developed an EDH status monitoring system called EDHview that will simplify the error monitoring and detection process. It enables a number of EDH devices, such as DACs, ADCs, routers and switchers, to operate under a common monitoring system.


With the Leitch system, the status of all EDH-equipped serial signal paths throughout a complete installation or TV station can be monitored automatically. The system will also maintain a complete log of errors — all without operator intervention.

The hub of the EDH view system is a host PC that runs simple-to-use EDHview Microsoft Windows software. The PC runs a serial communications network to all EDH-equipped devices or nodes. The status of the EDH data from every node is fed back to the PC, which will interpret it and react according to the respective node set-up. When EDH errors are reported, the PC can raise an alarm.

Every node is capable of being configured separately by the user to respond with visual, audible and/or external alarm notification to a multitude of different situations. The error-reporting characteristics of each node allows channel-by-channel determination of what class and degree of error constitutes an alarm. Higher degrees of protection monitoring can be used on critical paths, whereas occasional use and other lower-priority paths may be considered more tolerant of signal loss and configured accordingly.

Accumulated errors on a system-wide, node-by-node basis will be logged continuously with a date and time stamp. Thus, a complete log file may be viewed on the PC or routed to a printer. A complete history of errors over every signal path in an entire TV station could be available at a glance.

Leitch's high-speed DigiNet control network — which is now used with the DigiBus system and to integrate routing systems — allows random access and real-time reporting for the EDHview system and other similar programs that may be developed.




Internet:

be@intertec.com

CompuServe: 74672.3124

FAXback: 913-967-1905

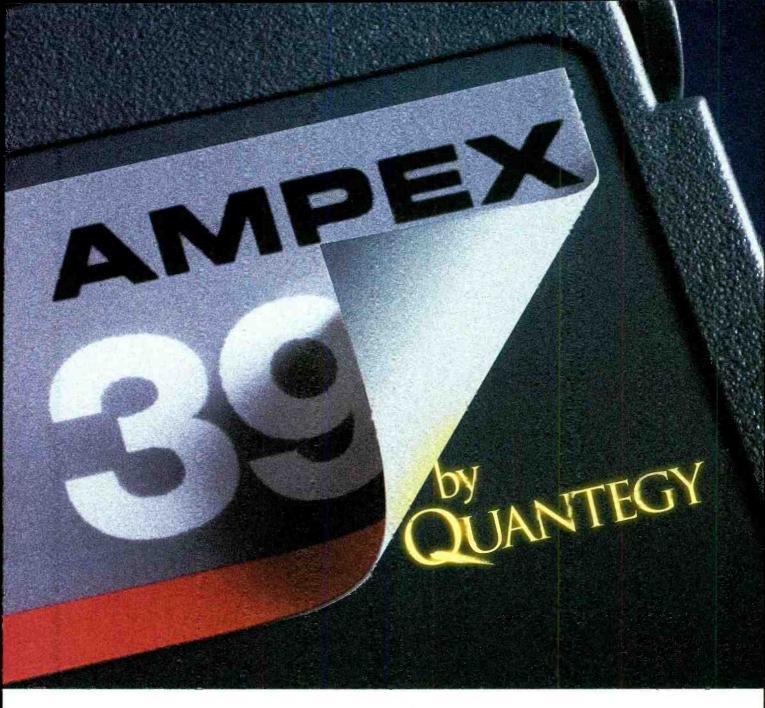

Introducing Quantegy. THE NEW COMPANY THAT'S BEEN MAKING AMPEX TAPE FOR OVER 35 YEARS.

Nothing's changed, really.

You still get the audio mastering tapes that go gold more than all other brands combined.

The same top quality video tapes used by broadcast and creative professionals around the world.

The same market-leading instrumentation tapes used by aerospace and government.

And the same manufacturing, technical support and sales people.

You even get the same Ampex™ brand name.

The difference is that we're now the only media company dedicated exclusively to you, the recording professional.

So call us today and we'll tell you more UANTEGY about Quantegy! After 35 years

After 35 years, we're just getting started.

Quantegy Worldwide Sales Offices

(201) 472-4100 (301) 530-8800 (770) 491-7112 Northeas: (New York) Mid-Atlantic (Washington, D.C.) Southeast (Atlanta) Midwest (Chicago) (708) 590-5100

South Central (Dallas) Northwest (San Francisco) Southwest (Los Angeles) France & North Africa (Paris) 33-1-4731-7171 tary & Iberia (Rome) Gerniany & Austria Certifal Europe (London)

39-6-52:-3330 -44-1-73/-3022#8 ext. 209

Mfddle Fast/Africa (London) Benelux (N. jmegen) Scandinav a (Stockholm) Canada (Toronto)

44-1-734-302238 Ext. 213 (905) 821-8840

Australia & New Zealand

(415) 903-1132 61-2-869-0600

When a television

show is a hit,


there's usually

a spin-off.

The same is now


true for

television cameras.

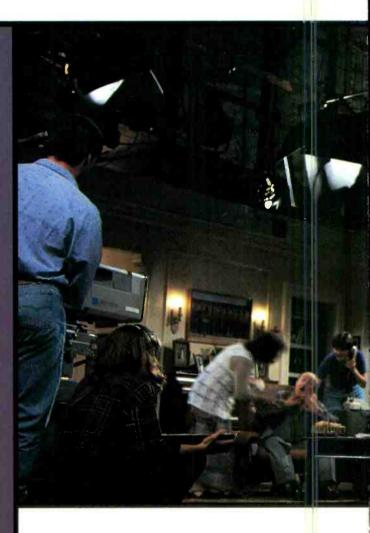

Given the popularity of the BVP-700/750, which set a new standard in high-end studio and field production, we figured it was time for a sequel.

Presenting the BVP-500/550: cost-effective cameras that spin off the advantages of Digital Signal Processing into a wide variety of new applications. But here's the real crowd-pleaser.

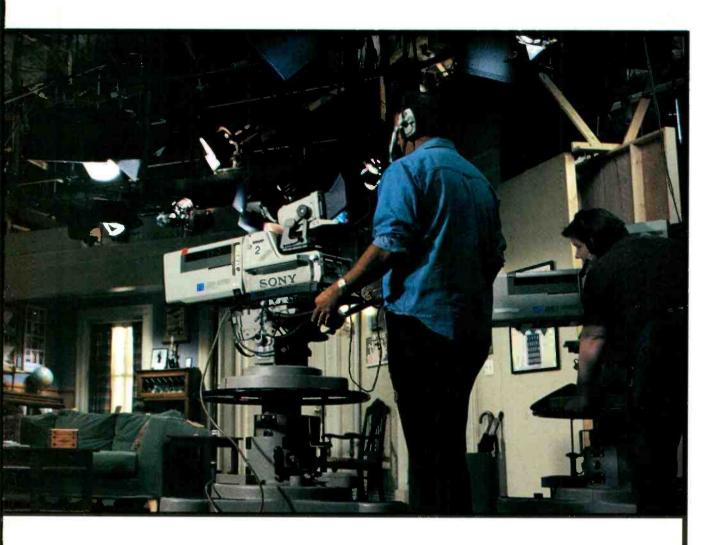

These new studio and portable cameras can be

configured with any one of

three plug-in assemblies. Each

delivers its own level of CCD quality.

That means you've got the imaging per-

formance your application needs. Our new

BVP-500/550 also maintains the benefits that

made Digital Signal Processing such a big hit.

Superior, consistent picture quality. Easier setup

and instant recall. Long-term stabil-

ity and reliability. So it's probably safe

to say this is one spin-off that won't be

canceled after the pilot. For more information, call

1-800-635-SONY, Ext. 500.

SONY

Commercialinsertion systems

After years of dominance by tape-based systems, commercial-insertion tasks are now being handled increasingly by disk-based systems.

At WWCP-TV, Johnstown, PA, an Odetics Spotbank is used to provide automated playback. The adjacent C-format and Beta-format machines provide the long-form playback needed while the video on-air caching is provided by ASC disk recorders.



The Bottom Line: _

Commercials are the lifeblood of every TV station. If mistakes occur and a spot doesn't air, that piece of time is lost forever. As the digital evolution continues, this critical task is now increasingly being handled by video disk players or servers. However, developing a reliable system involves much more than just dumping your tape to disk.

hen the first automated digital commercial-insertion systems hit the market two years ago, it may have marked the beginning of the end of videotape as the medium of choice for playing TV spots and programming to air.

Disk-based replay systems hold a number of advantages over their tape-based predecessors. They can operate continuously with little or no operator assistance, while simultaneously supporting multiple output channels. They also make it simple to broadcast any recorded material in the station's inventory on short notice — including news segments that need to be reorganized to accommodate a breaking story or commercials during a live sporting event where the frequency and duration of breaks is unpredictable.

Digital commercial-insertion systems work by compressing video data and storing it on a computer disk where it remains

cached (temporarily stored) until it is played to air. The amount of material stored on a disk varies, depending upon the system's design. A basic all-disk system might use 10 9GB disk drives to store 10 hours of material. The more advanced cache systems are often linked to a tape library and, therefore, require less disk space.


A number of developments in data storage technology helped digital commercial insertion move quickly from a pipe dream to a reality. Once video could be compressed to a manageable file size, it wasn't long before affordable JPEG and MPEG video-compression equipment became available. At the same time, the cost of hard-disk storage plummeted. By 1994, the technology was feasible for broadcast applications and the first disk-based insertion systems were unveiled.

According to industry estimates, more than 500 digital commercial-insertion sys-

You can turn to many different companies to equip your new digital studio. Luckily, you don't have to.



The new Tektronix 764's Session Statistics Display records key digital audio parameters, while the WFM601i provides extended error checking, eye pattern testing, and a traditional analog display for serial digital video.





You can shop a long list of suppliers for bits and pieces of test equipment for your new component digital studio.

Fortunately, that's an ordeal you can avoid.

Tektronix is the one place you can turn for all the test equipment to equip your entire high-end digital studio.

Plus all the expertise and assistance you need to ensure that your move to digital is fast and efficient.

Tektronix offers the industry's most advanced instruments to monitor and analyze everything, including

content, data integrity and transport layer. And to perform every essential studio function, from monitoring channel status data and accumulating session statistics during digital audio mastering, to testing the integrity of a 270 Mb/s digital video transport layer.

Why deal with a multitude of suppliers when you can turn to Tektronix, the video industry leader for more than 40 years.

For information on any of our communications test solutions, just call 800-426-2200. (When prompted, press "3" and ask for program 464.) Or, find us on the Web at http://www.tek.com/mbd/w464

TESTING THE CHANGING WORLD OF COMMUNICATIONS



Commercial-insertion systems

tems are in place throughout the world. That number will multiply as aging manually loaded equipment becomes too costly to run and maintain. With the prices of digital storage continuing to drop and storage capacities doubling every 18 months, the end is no where in sight.

Basically, two digital insertion configurations are available today: The all-disk models and disk-caching systems linked to automated tape libraries.

The disk-caching systems can typically accommodate nearly any VTR format, which makes it easy to rotate your spots onto disk for air play as they are needed.

All-disk configuration

All-disk systems are being marketed as the digital solution for stations ready to replace their sequencers or manual replay equipment.

For stations that need less than 12 hours of storage, an all-disk system is considered more practical than those linked to library management systems. At the 12-hour mark, the tape-based library management option becomes more economical because of its greater storage capacity.

All-disk system packages usually include a control computer, a digital video disk recorder, program and record/dub switchers, interfaces for additional VTRs and monitoring equipment.

Here is how they typically work: After the playlist is downloaded into the system, it prompts the operator to load the required spots on to the disk, well in advance of their scheduled air time. The spots stay on the disk after being played to air until space is needed for new material. If the disk system is sized properly for the operation, all currently needed material will be on the disk and only new material coming into the facility would need to be added each day.

All-disk systems allow the operator to preview programs and mark in and out points for entry into the database. The system also switches in and out of network feeds to provide a consistent on-air presentation.

To guard against errors that can occur with paper logs (and manual data entry), most systems include a traffic and scheduling interface. Schedules can be transferred to the system via disk, serial interface or network connection. The system software also manages the recording and identification of new material and tracks all of the spots and programs in the system database.

Because video disks are the heart of the system, a disk-drive failure could spell disaster. To prevent this, most all-disk systems have a built-in hard-disk redundancy feature that allows the system to continue

to operate with no loss of data even if a drive fails. The most common solution is called Redundant Array of Independent Disks (RAID). At least five levels of RAID protection are available through this technology. For more information, see "RAID Storage Technology," August 1995.

Digital commercialinsertion systems work by compressing video data and storing it on a computer disk where it remains cached until it is played to air.

RAID level 0 indicates no protection for the data from disk failure. If a single disk fails, the system will not be able to perform the task. RAID level 5, on the other hand, allows even the parity drive to fail, and the system can still recover without loss of data or interruption of the operation. A RAID

(VDR) is used for the actual on-air playback. However, the long-term storage of the material remains on tape. Because this approach is integrated with a cart machine or library system, the disk-cache approach provides more flexibility than its all-disk counterpart. Commercials and programming are archived on videotapes stored in the cart machine. Depending on how the system is configured, as many as 7,000 spots and 30 programs can be stored in a cart machine library and accessed by a disk-cache system.

An important key is to know what material to store on the disk and how long to leave it there. This is important so that the tapes don't have to be repeatedly dubbed into the system, which causes wear and takes time. Also, there is the need to minimize needed disk storage space, even if it is relatively inexpensive.

Using a storage scheme adapted from the computer industry (see sidebar, "Borrowing Techniques from the Computer Industry," on p. 70), archived spots are transferred by the system to the digital cache, where they are played directly to air. Only one copy of a spot is dubbed to the cache; no matter how often it is scheduled, it doesn't have to be downloaded again. These



Shown in the mid-construction phase, the Spotbank system at KIMO-TV, Anchorage, AK, is tied to Beta decks for long-form playback.

level 3 or above will provide continuous output even if a data drive fails. The missing data will then be rebuilt onto the replacement drive in the background.

Disk-caching systems

Stations with extensive spot inventories and those wishing to automate the presentation of programming and commercials from disk will use a disk-caching approach. In this configuration, a video disk recorder

systems use smaller capacity disks than the all-disk models, because the automated tape library moves material from tape to disk, as needed.

With material played to air from disk rather than tape, only one VTR is needed. That leaves the remaining VTRs to be put to work for additional on-air channels or recording program material. Furthermore, with less reliance on videotape, the tape library can now be used solely for ar-

AS YOU MOVE INTO THE DIGITAL FUTURE, WILL THE TECHNOLOGY YOU NEED BE DISK-BASED OR TAPE-BASED? YES.

Evolution is a process, not a place.

There is no final destination. The goal is always to make the most of changing conditions. Take advantage of emerging opportunities. And get the jump on your competitors. So allow us to suggest a strategy that makes use of the advantages of all the technologies at your command.

The issue – and your ultimate goal – is system flexibility. The flexibility to use any technology that fits the function it performs best by maximizing performance and cost-efficiency for the requirements of the application at hand.

Server gurus may claim that disk technology is the answer to every need. In other words, that one size fits all. But does it?

For immediate access to video clips of relatively short duration, the best storage technology is a hard disk drive. So non-linear, disk-based server systems are indispensable, particularly in multiple editing operations.

But for acquisition, no technology beats tape. The cost is very low. The recording capacity is enormous. Camcorder

size, power consumption - in sum - overall system performance is superb. And the convenience is persuasive.

For off-line, long-form, and archival storage, a tape-based system is more cost-efficient: just pennies per megabyte, instead of dollars. The media is removable. The access time is acceptable. And the system

configuration is expandable.

And as we move ahead into the digital future, there's one more skill that video servers haven't mastered. Maintaining compatibility to the analog past.

That means you don't leave behind your installed base of

Betacam* equipment. Or your valuable, even irreplaceable archive of Betacam tape.

So "tape-based or disk-based" is a baseless dilemma.

What you really need is the best of both worlds: a flexible

Sony solution, combining elements with proven fitness to

solve the complex problems of the ongoing digital revolution.

Sony explores digital issues in depth with a new series of technical papers. If you'd like a complete set, call 1-800-635-SONY, Ext. 33.



ACR-225 'gets a life!'



"FloriCal made our on-air date for our second channel, caching from the Ampex ACR-225 to a Tektronix Profile."

John Augustine, Chief Engineer WIS, Columbia, SC

- Cache announcements to digital disk well in advance of the on-air schedule.
- Reduce the use of your cart machine by as much as 80%.
- Use one cart machine for multiple channels.
- Increase reliability of airing spots.
- Call FloriCal for details.



Tel. 352.372.8326 Fax. 352.375.0859 Gainesville, Florida

Commercial-insertion systems

chiving, allowing a station to consolidate numerous spots on one tape, if desired.

The reliable nature of these systems is one of their major selling points. However, to protect against catastrophic events that may interrupt a broadcast, most video disk-cache systems include a second disk recorder that receives duplicate material. If the first disk fails, the output is switched to the backup disk.

Multichannel capabilities

A client-server network can be built around a disk-based insertion system to manage multiple channels from a single location. The most powerful systems on the market support up to 30 output channels with 10 disk recorders all linked to one library.

An example installation is at station KIMO-TV in Anchorage, AK. The station uses an all-disk configuration arranged in a network where the operators also program for stations in Fairbanks and Juneau. All material originates from Anchorage, including each of the stations' individual station IDs, promotions and spots. The feeds are satellite fed to the sister stations for on-air playback. The system includes a

According to industry estimates, more than 500 digital commercial-insertion systems are in place throughout the world.

network delay to capture downlinked network programming, store it on the video disk in Anchorage and broadcast it four hours later. In a similar arrangement, WWCP in Johnstown, PA, controls spot insertion for WATM in Altoona, PA.

One major advantage of such centralized operations is lower operating costs. This will become an even more important element as stations need to originate multiple channels of programming under the new ATV rules. For group stations, the caching system means there is no need to record a composite dub reel. Just one video disk recorder supports one record input and as many as three independent output channels. Because the storage media is common to all output channels, spots and other material need be downloaded only once, but can be used by all three channels, even simultaneously.

Multi-output channel systems are ideal for stations with local market agreements or for cable applications, such as pay-perview movies. The technical requirements

POWER UL

ou can achieve powerful results with the Vinten Vision Series of fluid heads and tripods.

Featuring our exclusive infinitely Adjustable Counter-Balance System, users can enjoy absolutely perfect balance over a full 180° range of illi. The competition's step adjustments fall short.

Another Vinten advantage, the LF (lubricated friction) Drag System, provides infinite drag adjustment that can be set even while of early for rough terrain, stadium steps and uneven surfaces, Vinten has a Mid-Level Spreader which allows the user to adjust one leg at a time. Other innovations include our patented Torque-Sate Leg Locks featuring one turn for maximum clamping efficiency every time

To meet and exceed even the toughest requirements, Vinten uses composite graphite, reducing weight even further, while enhancing durability.

Discover what our ENG/EFP, Film, industrial and corporate customers already know: For Powerful Vision and benefitoriented technology, nothing measures up to a Vinten

For the Vinten TSM dealer in your area, call today.





5 LF | 10 LF | SD 12 VISION







Vinten TSM

Vinten TSM Inc. 709 E>ecutive Blvd. Valley Cottage, NY 10989 Phore: 914 - 268 - 0100 Fax: 914 - 268 - 0113

Sales offices in UK, USA, Japan, France, Germany, Singapore, plus Worldwide distrubution.

Circle (47) on Action Card

Commercial-insertion systems

for on-air broadcast and cable pay movies are different so systems are tailored for the specific application. With cable, multiple output channels are more important than image quality. For broadcast, the ability to provide high-quality images and shuttle in and out of commercials as needed is more important. This is clearly a case of where one size doesn't fit all.

The news department can also benefit from a dual-channel system. In such a configuration, one channel runs programs while the other handles spot insertion, leaving some transports free for automating tape replay during the newscast.

Labor and maintenance savings

Can this technology save you money? In a word — yes. Typically, by playing spots from disks, stations see a dramatic drop in videotape and VTR purchases (and maintenance). In fact, stations that upgrade from direct tape-to-air playback systems to digital commercial-insertion systems can expect to see a 50% to 80% drop in VTR maintenance costs. At the same time, the material played off of a video disk is consistent in quality because, unlike tape, disks don't degrade with every play.

Also, because these systems can operate with little or no attention from an opera-

tor, stations in smaller markets have saved \$200,000 a year in labor costs after implementing a single-channel commercial-insertion system.

Finally, thanks to the system's inherent reliability, there are typically few makegoods. If a spot does need to be re-cued or replaced at the last minute, the system will access and cue the right spot within a few seconds. Try that with your 1-inch machine or library system.

The future

Today's digital commercial-insertion systems foreshadow major changes in the way we will be handling spots and programming in the near future. As the cost per megabyte continues to drop and more broadcasters switch from tape to disk for air purposes, videotape will shift to primarily an archival medium. Note that archival doesn't necessarily mean "old stuff." Shipping tapes around is still the most convenient way to get spots across town or to capture that satellite feed. So, don't throw away that tape machine yet. It's still not ready for the junk pile.

Charlie Goode is vice president of engineering for Smith Broadcasting, Miami



Borrowing techniques from the computer industry

he hierarchical storage system that gives advanced digital insertion systems their multichannel rancom-access power got its start in the computer lab.

Some 30 years ago, randomaccess cisk drives redefined the way computers archived data. Rather than backing up data on miles of unwieldy magnetic tape, users could store vast amounts of information on digital disks and later access that data instantaneously. When the disk drives reached their capacity, more drives were added. The problem was that eventually there was a limit to the practical number of drives that could be purchased — or housed by any facility.

The new approach involved something called hierarchical storage management (HSM). HSM provides virtually unlimited storage capacity and requires little or no operator intervention. With HSM, the information used most frequently is kept in cache on the disk drive. Meanwhile, the information used least often is stored on the more cost-effective medium tape, which is managed by an auto na ed tabe library.

Manutacturers of disk-based insertion systems for broadcast use the HSM "caching" concept to hardle frequently used material. In these systems, the software analyzes the need for each element and determines if it would be more effic ent to leave it stored on disk or to retrieve it from tape when needed. If the material is needed repeatedly, then it is kept on the disk for playback. Other, less-often used elements are left on tape and then dubbed to disk only when they are needed. Other long-form material, like programming, plays direct to air from videotape. The software has the ability to search playlists for cacheable material we I in advance of air time. All o these functions take place in the background without operator intervention.

Strongest link.

Your satellite receiver is the most important link in your reception chain. And the one thing you can always count on - the signal never gets better than it is at the receiver. It creates the most important link to video and audio technical performance and initial S/N ratio.

Which is a very good reason to specify Standard Communications Corp.'s new rebroadcast *Intercontinental* satellite TV receiver - but it's not the only reason.

It has all the features professional operators need most: total flexibility in both C/Ku-band operation, rebroadcast quality certified video on NTSC, PAL and SECAM signals, and a universal power supply built for the rigorous demands of 24-hour-a-day operation.

Never before has one receiver worked so well from INTELSAT to all DOMSAT formats in C, Ku and S-band frequencies. The 800 MHz or optional 1 GHz input will work with all known LNBs on all worldwide ITU regions. And our synthesized PLL tuning circuit provides direct frequency selection with crystal tolerance - 100 KHz accuracy in a continuous, self-monitoring control loop. The new digital AFC circuit improves performance in low threshold, severe interference, and multiple carrier per transponder operation.

A unique 70 MHz I.F. spectrum inversion circuit allows Ku-band to C-band or vice versa I.F. uplink or downlink turnarounds.

The Intercontinental is built for knowledgeable and discriminating engineers and offers proof of performance RS250C and CCIR567 certification. It features six I.F. bandpass filters, from 36 MHz to 16 MHz, five audio filter selections from 880 to 75 KHz, and six audio de-emphasis circuits.

There is much more you should know about the *Intercontinental* - and Standard Communications - than we can tell you in a single ad. Call us or fax us. We'll send you more information showing you how to get the best performance and peace of mind. Link up with our new *Intercontinental*.



SATELLITE

P.O. Box 92151 • Los Angeles, CA 90009-2151 310/532-5300 ext. 280 • Tbll Free 800/745-2445 Fax: 800/722-2329 (Toll Free) • 310/532-0397 (CA & Int] Only)





New camera technologies

Innovations abound in the latest generation of cameras.

V cameras are often considered the most visible, and therefore, perhaps the most important tools of the TV industry. Sub-woofers notwithstanding, television is still considered primarily a visual medium. As such, the TV camera is often placed at the apex of the production technology pyramid. While fancy, whiz-bang effects have gotten a good portion of the recent press, live TV events still need to be seen by the TV camera before they can be seen in the home. Like the proverbial tortoise, camera technology has been moving at an evolu-

Above photos: The Hitachi Z-2000 uses single LSI processing and features a fuel battery gauge in the viewfinder and a streamlined menu system.

Sony's DNW-7 digital camcorder uses the Betacam SX format, and can be used for high-speed transfers into a nonlinear system.

Panasonic's AJ-D700 camcorder is one of several units that incorporates DVCPRO recording.

tionary pace with advances coming slowly, but surely. This does not mean that camera technology is standing still. It only has the appearance of lagging behind the rest of the production process in the race for the latest and greatest innovation on the block.


Digital processing

Studio cameras already exceed the maximum resolution that our transmission system can provide. Hand-held cameras have become so lightweight that they no longer counterbalance the weight of the lens when placed on an operator's shoulder. Does this mean that there is no need for improvement in camera technology? Is there truly nothing new under the TV sun? Hardly! Thankfully, no upper limit for luminance resolution was specified when the production portion of the NTSC system was developed. Even so, while the picture quality (resolution, colorimetry, etc.) of TV camer-

The Bottom Line:

From the outside, cameras appear to have changed little over the last few years. However, internally it's another story. Today's cameras are lighter, smaller and capable of taking pictures under a wider range of conditions. These innovations are possible through the use of sophisticated DSP circuitry. Lower cost and improved picture quality, combined with a wide range of features, may mean now is a good time to upgrade.____\$

Grass Valley

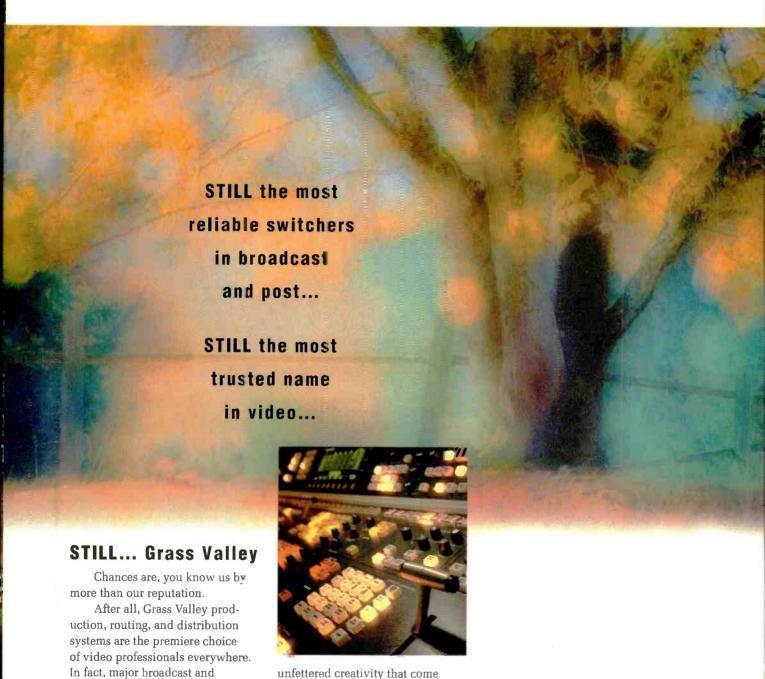

Call us at 1-800-395-9478 ext. 901



production facilities around the

world use Grass Valley products.

So more than likely, you know

first hand what it's like to work with

Grass Valley equipment. The superb

fit and finish. The precision and

control. The perfect assurance and

from using tools that are so well

Grass Valley...still the most

trusted name in video because the

we're pleased to say, that puts you

trust we've earned is yours. And,

designed, so reliable.

in pretty good company.

New camera technologies

as has probably reached its peak for the majority of NTSC applications, new features and new methods of controlling those features continue to be developed and included in new camera models every year.

The push toward processing TV signals in the digital domain has worked its way from its digital recording and playback roots out to the extreme ends of the production process. There it meets its greatest challenge — converting our primarily ana-



The Ikegami DNS-11 camcorder features hard-drive-based recording and editing.

log world into an electrical representation, then delivering it to our primarily analog senses. It is at these human interface points where digital processing is most difficult to implement. The CCD devices used in today's cameras, while considered solid-state digital devices, still process signals in the analog domain. Even though the images are sampled and scanned in a digital device, they are usually not quantized (or digitized) at this point. As is the case with audio signals, the video signal must first be amplified considerably before it can be quantized with sufficient resolution to avoid distortion.

Where digital technology has been widely used is in the control and processing of signals after they have been amplified, preprocessed and quantized. Numerous automatic circuits, scene files (or memories) and setup cards abound in today's high-end cameras. Auto-knee circuits can extract meaningful visual detail from scenes that have contrast ratios much greater than what normally can be displayed on TV monitors. Properly adjusted, they can work with an automatic iris circuit to give the illusion that the TV system (camera and monitor) actually have the dynamic range of our eyes and our brain. Setup cards can customize a generic camera for use in special situations or on special programs. Parameters stored on the setup card can give the camera (and by extension, the show it

is used on) its special look. Setup cards can even store operator preferences for how the camera should look and feel while it is being operated.

Skin-detail enhancement has become almost as necessary today as auto iris and auto white balance were a decade ago. The primary use of these circuits has evolved into wrinkle reducers for on-camera talent, but don't lose sight of the original intent of all detail enhancement circuits. Originally.

detail enhancement (often referred to as aperture or contour enhancement) was intended to make the image appear sharper. Skin-detail circuits can be used just as effectively to enhance an attribute of a product on a commercial shoot by highlighting a part of a product or its packaging.

Getting the picture

The 700- to 900-TV line resolution capability of the newest camera heads is being relayed to the camera control unit with higher resolution (read that "wider bandwidth")

camera cable systems. Wideband triax systems are increasing the amount of detail

that gets to the camera control unit and, ultimately, the video output BNC connector. Digital triax systems and fiber-optic camera cables are being deployed to reduce the losses associated with transmitting a camera image over miles of camera cable, as is the case in some remote EFP applications.

Today, in our transition to widescreen ATV, a camera needs to be able to make the transition from today's 4:3 aspect ratio to tomorrow's

16:9 widescreen aspect ratio. Various schemes of managing the allocation of picture elements on the CCD that are literally etched in silicon have been developed. New cameras can now switch aspect ratios onthe-fly to accommodate 4:3 scanning today, while supporting the new 16:9 widescreen format when desired. Different cameras go about this task in different ways, and dealing with different aspect ratios

demands that some compromises be made. Some cameras deal with this challenge by adding another CCD sensor to the green channel. This increases the resolution capacity of the system at the expense of adding another light-splitting port to the optical prism. Other cameras re-map the CCD pixels to maximize resolution for each aspect ratio.

TV lenses, although primarily optical devices, have also been affected by digital processing technology. New technology is allowing greater flexibility and repeatability of control over many of the optical and mechanical elements and electrical parameters that go in to a modern TV lens. The precision with which the optical elements are moved determines, to a large degree, the resolving power of the lens.

Onboard storage

In many ways, some of the new technology in today's cameras is blurring the distinction between imaging device and production device. It is tempting to think of a one-piece camcorder as an extension of the camera itself. Advances in compression technology have allowed digital recording to be implemented on the camera operator's shoulder, either through a compressed digital videotape format or a hard-disk-based recording media.


New, as well as existing, videotape formats using compressed digital video are



The LDK 10P offers Dynamic Pixel Management (DPM), which provides quick switching between aspect ratios. An automatic dual skin contour system provides precise control over flesh tones and skin quality.

opening up new applications for compression technology. The original use of compression technology was to allow high bit rate video information to either be recorded on a lower bit rate recording system or transmitted through a lower bit rate transmission system. Data compression can also be used to compress the time it takes to transfer video data between two points when a high-speed data link is available.

LIGHTWORKS

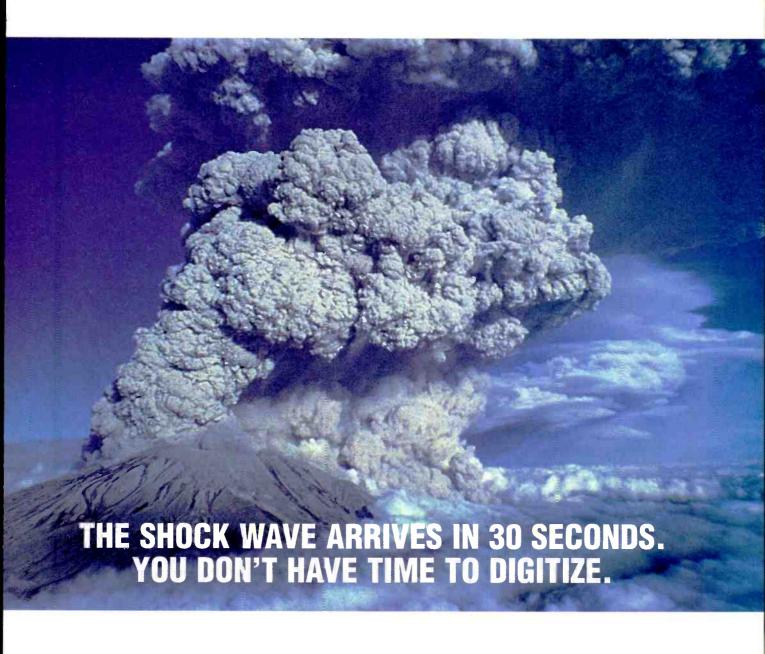

Events wait for no one. And when that hot tape comes screaming in during a broadcast, wouldn't

it be nice to be able to pop it right on the air before your competitor even gets

wind of it? The amazing Newsworks™ non-linear editing system from Lightworks lets you do just that. You can mix and match material from tape

footage of late breaking news with material already on disk. So you don't waste vital minutes

digitizing. And the editor-friendly design of Newsworks user interface makes

putting together a newscast a thing of ease. To find out more about this revolutionary new editing system, call 1-800-395-9478, ext. 801. 1-800-395-9478, EXT 801



Newsworks^{**}

The Editor's Friend

New camera technologies

Many transmission protocols are being submitted to standardization organizations. These systems will stand alongside standard transmission protocols, such as ATM, Firewire and others. Off-the-shelf computer hardware is being incorporated into some new cameras to allow faster than realtime transfer of recorded images from the remote site to the station or between video file servers.



JVC's GY-X2B is an advanced version of the GY-X2. The 3CCD S-VHS camcorder features excellent low-light performance.

Incorporating non-linear recording media into a camera will certainly change the way that cameras are used in the future. Also, do not forget that every year at NAB, new videotape formats are introduced. The principle technology that linear and nonlinear recording share is that they are digital. Clearly, there are enough applications for both types of recording in the industry.

On the technological horizon, the coming of ATV will bring a whole new generation of technological developments. The many different scanning formats that will be supported in the Grand Alliance system will allow the development of higher-definition cameras using new constructions of CCD imaging devices. These cameras will operate in many different scanning standards, anywhere from the existing 720H x 480V pixels up to 1,920H x 1,080V pixels and may operate in either interlaced or progressive scan. Actually, the CCD structure is similar for interlaced and progressive scanning. The difference is the order in which the charges corresponding to the image are clocked out of the device and is also constrained by the speed at which the device can operate. New digital systems

will have to handle these higher data rates, and routing systems will need to be able to keep up with these high data rates and distribute them throughout the facility. New compression algorithms will allow transmission of more of this information and other data to the end-user.

Digital computer technology has been adapted for use in the video production and post-production industries, and microprocessors control many of the functions in today's cameras. New camera technology may not grab the headlines, but these new implementations of digital processing and control continue to push the envelope of camera technology. Camera technology is where it all starts, and the needs and desires for improved and sharper images drive the development of the equipment to which it is connected.

Kenneth Hunold is an audio/video project engineer at the ABC Engineering Laboratory, New York



Light sensitivity in 1-CCD vs. 3-CCD cameras

By Bob Eather

There are inherent differences in the light sensitivity, resolution and color reproduction between 1-CCD and 3-CCD cameras, especially at low light levels. 1-CCD cameras use filters deposited on the CCD chip over individual pixels in a mosaic or striped pattern. Only one-third of the light entering a camera with an RGB on-chip filter actually reaches the light-sensitive elements on the CCD. Each filter only passes a single color, blocking the other two. In the 3-CCD camera prism separation

system, all of the incident light is directed to one of the three CCDs. Depending on the spectral distribution of the incident light, this more efficient use of available photons translates to some combination of better sensitivity, resolution and S/N.

To increase sensitivity of 1-CCD cameras, complementary color filters (yellow, cyan and magenta) with twice the spectral bandwidth or RGB filters are used. This increases sensitivity by a factor of two, but seriously compromises color reproduction at low light levels. This is because the RGB signals are derived by arithmetic operations on the signals from the complementary filters. At low light levels, the subtraction of two small numbers with significant noise attached gives poor accuracy and high noise. The 1-CCD cameras that use RGB filters (usually only industrial models) give better color reproduction, but less sensitivity.

These limitations are reflected in the specifications for 1-CCD cameras, where minimum illumination (rather than sensitivity) is normally quoted. At first glance, quoted numbers of two to three lux seem to be better than 3-CCD professional cameras

BLUE IMAGING CCD В G 1-CCD COLOR SEPARATION RED IMAGING CCD 3-CCD COLOR SEPARATION (Prism-dichroic system)

Color separation used for single-CCD systems allows only one-third the light to reach the CCD. However, virtually all of the available light reaches the CCDs in the prism-dichroic systems used with 3-CCD

that cost many times more. However, you must realize that the associated S/N is typically only 45dB to 50dB, some 15dB less than professional cameras (60dB to 62dB) and the 1-CCD cameras are generally specified at lower IRE levels. For more information, see "Evaluating Low Light Camera Performance," July 1995.

Bob Eather is president of Keo Consultants, Brookline, MA.

Profile

WE CAN THINK OF A THOUSAND USES FOR TAPE.

(EDITING VIDEO ISN'T ONE OF THEM.)

You know, of course, that tape is dying. At least for video editing it is. One reason is the Profile™ PDR 100, the world's first practical disk recorder.

The Profile PDR 100 is the machine the editing world has been waiting for. You can simultaneously play or record any of four channels. For just a little more than the price of a single VTR, one Profile PDR 100 can make it seem as if you're editing in a three-machine session. So when you're ready to make the leap to

nonlinear on-line the PDR will make it a short one.

And installation is a cinch. Just plug a PDR 100 into your existing VTR rack and get to work. With the Profile PDR 100 you also avoid the maintenance and wear that comes from head-to-media friction. You'll save on precious tape, too. So you can use it for a thousand other things.

To find out more about the Profile PDR 100, call 1-800-395-9478, ext.701. Tape this ad to your wall so you won't forget. 1-800-395-9478, EXT 701





From the very beginning, our broadcast video servers have enjoyed a unique reputation.

They're the only servers reliable enough to be called Hewlett-Packard.

Our video servers have been on-air from stations in Arizona to South Africa without missing a beat. Which should come as no surprise, considering our bullet-proof system architecture, our engineering track record and HP's 24-hour worldwide service and support.

HP servers are also designed to work for you well into the future. They provide up to 6 channels and 50 hours of storage – and since they can be easily networked, you can add even more channels and storage as you grow. And our open systems approach ensures compatibility with a wide variety of third-party hardware

Our position in the video server industry since 1994.

and software vendors. That way you don't have to try to predict the future. You can simply adopt it when it arrives.

Maybe the most surprising piece of engineering is the price tag. HP's newest servers start at \$100,000. Which makes the HP Broadcast Video Server one of the few that truly serve your bottom line.

As broadcasting turns to digital, more and more broadcasters are looking to Hewlett-Packard. After all, who knows more about computing and networking solutions than we do?

For more information and free product literature about HP Broadcast Video Servers, stop by booth #9177 at NAB. Or call us at 1-800-FOR-HPTV, Ext. 1444. We'll show you how easy it is to get your server on-air and stay on. And on. And on. And on...


There is a better way.



Award-winning video quality in one powerful package. Starting at \$100,000.

Interfacing digital audio

Keeping audio in the digital domain requires some new understanding.

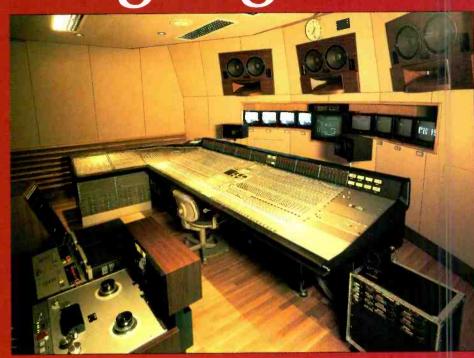

The Bottom Line:

Digital audio is moving into TV facilities, bringing with it new advantages and new challenges. Alongside it, a significant amount of analog audio equipment will continue to be used for some time. Broadcasters need to familiarize themselves with new interconnection practices between these systems in order to maximize digital audio's potential assets.

Fifteen years ago, the standard interface to digital audio equipment was an analog connection. Digital interconnections were often proprietary, and usually were provided only as a means for the manufacturer to test the digital inner workings of the box. Any digital I/O was planned for future development or needed a cumbersome adapter to talk with any other digital device.

In 1985, the Audio Engineering Society (AES) and the European Broadcasting Union (EBU) agreed on an RS-422-based transmission standard for digital audio that has become known as the AES/EBU digital audio interface. AES3-1985 (as the AES standard is officially known) and its update, AES3-1992, describe the inter-

Photo: Today's TV audio production requires substantial interfacing between the analog and digital domains, as in this facility at NHK, Tokyo. (Courtesy of Solid State Logic.)

face. (See Figure 1.)

Although AES/EBU is the most commonly used digital audio interface today, a few other systems developed in the 1980s are still around. These were developed by manufacturers for interconnecting consumer (and some professional) equipment. Sony and Philips together developed the Sony Philips Digital Interface (SPDIF) for consumer use. Except for electrical levels and some status-byte protocols, the AES/EBU and SPDIF standards are identical, and often both interfaces are provided on digital equipment.

Reference levels

As audio operators are well aware, the concept of a standard operating level in the analog domain is, to put it kindly, a moving target. If not addressed properly, the same problem can exist in the digital domain. The definition of what analog level will correspond to the maximum digital level (meaning that its peak voltage will just reach the maximum numeric code allowed) is known as the full-scale digital value. This is specified as 0dBrs (0dB referenced to full scale).

Different international broadcasting organizations have developed their own definitions of what analog level will equal 0dBrs. The only SMPTE recommendation published to date that deals with this issue is RP155, which recommends that the operating level in a digital VTR (the nominal or "line-up" level) be set 20dB below the fullscale level or -20dBis. This allows 20dB of headroom and, more importantly, also allows for the proper interchange of program material between facilities - even those that have different definitions for their analog reference level.

Therefore, one of the core decisions that must be made in the design and implementation of a digital system is what analog

Brontostore. The Still Store with the Real Time Attitude.



Imagine real time access of stills, video, and audio clips. The ability to record, edit, and recall them in an instant. All from a single system.

Think what that will do for managing station graphics, trailers, bumpers, and promos — not to mention last minute news and sports reports!

Think Big. Start Small.

Brontostore's basic configuration includes an intuitive On-Air Control Panel and digital storage for 1,000 still frames at a price you can afford.

From there, the sky's the limit. You can network up to 32 Brontostore nodes throughout your entire facility, add an Extended Control Panel with image browse and library management, and increase storage to dozens of hours of uncompressed 601 video on-line — or hundreds of hours when utilizing Brontostore's compression!

The Total Digital Solution

Brontostore fits right into your current environment. You can get video/audio inputs/outputs for all standard formats. Brontostore easily interfaces with paint and graphics programs via Ethernet. There's even a Virtual Control Panel for Silicon Graphics platforms.


Cue up Brontostore!

For more information or a demonstration, contact your Accom representative today.







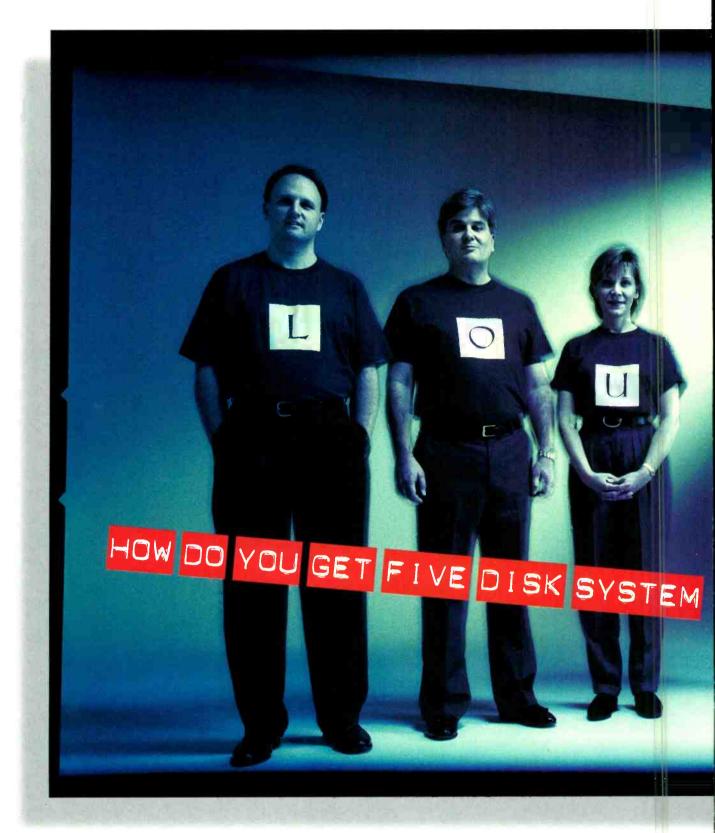

Main Office: Louth Automation, 1731 Embarcadero Road, Palo Alto, California 94303,



ctually, when it came time to standardize on one disk interface protocol, it wasn't that hard. The top ten manufacturers of disk systems overwhelmingly chose the Louth Protocol.

We'd like to tell you it was our impressive track record in broadcast automation that did it. Or our repu-

tation for pioneering object oriented programming to make automation faster, easier and more flexible. But the truth is, disk manufacturers chose the Louth Protocol because it works. It's open. And



it's free. 100% public domain.

Now, whether you call it enlightened self-interest or investment spending, the fact is we didn't give the Louth Protocol away for nothing. We were looking ahead.

It has not only simplified applications such as Ad Insertion, Caching, Program Acquisition, Time Delay and Multi-Channel Management, it has made the future easier for everyone. By opening a pathway that is free of gatekeepers, toll takers, and proprietary

potholes.

That's why we agreed to make the protocol available to our competitors in automation, as well.

We believe in working with anything. Even when it's hard.

WORKS WITH ANYTHING

415-843-3665, [FAX] 415-843-3666, [E-MAIL] SALES@LOUTH.COM

Interfacing digital audio

level should correspond to 0dBis. This definition must be applied consistently throughout the facility. If the analog operating level is +4dBu, then the 0dBrs level should be +24dBu, according to SMPTE RP155. All A/D converters in the facility should be set so that the +4dBu reference signal will be converted to -20dBrs in the digital domain. Conversely, all D/A converters should be set so that a -20dBFS digital signal is converted back to the +4dBu analog reference level. Without such conCD-originated material in their productions, requiring them to deal with 44.1kHz audio as well (if they wish to avoid unnecessary A/D and D/A conversions).

These problems require the use of a sampling rate converter to convert audio samples made at one sampling rate to a different quantity of samples at another rate. Even though this process operates in the digital domain, it is not a completely transparent process and can have an audible impact on the signal. An alternate method involves and clicks) or worse, the destination device may not be able to recognize the incoming audio datastream at all. One solution to this problem involves locking all of the audio equipment to a common reference, as all of the video gear already is. Most digital video equipment derives its video and audio clock and sample rates from the same oscillator or time base. Because most digital video equipment is already referenced to a common source (either sync or composite black burst), and because the audio sampling rates on these devices are counted down from this common source, the sampling rates of these gen-locked devices are identical.

However, there are problems with extending this gen-lock philosophy to the rest of the facility. The first is that most digital audio gear will not accept a video signal as a reference. The reference input (if any) on digital audio equipment would more likely be an AES/EBU or SPDIF audio signal or a word clock signal (a square wave at the sampling frequency) from another digital audio device. The second problem is that video equipment will not accept any of the audio reference signals for its video reference, either.

Therefore, merely locking the aud o and video signals to a common reference will not always prevent AES frame discontinuities when mixing or switching digital audio signals. (Frame discontinuities are the most common causes of those mysterious pops and clicks.) In order for switches to be popfree, they must be made on AES frame boundaries, with the source and the destination devices having coincident frame boundaries and identical sampling frequencies. This is described as synchronous operation. (See Figure 2.)

All previous references to sampling rates in this article have only addressed their frequency. No mention has been made of the relative phase of these sample clocks or any other aspect of the AES bitstream. The analogous (no pun intended) situation in video occurs when the subcarrier frequency is the same, but the vertical and horizontal sync pulses are not coincident. The term isochronous is used to describe this "locked but not phased" condition, while the term synchronous is reserved for signals that have their timing references coincident. This is similar to switching video during the vertical interval to avoid a roll or a glitch. For glitch-free video switches to occur, the vertical interval (and hopefully horizontal interval, as well) of both signals must be coincident. This is not guaranteed, however, even in facilities that are all locked to the same frequency standard.

START OF CHANNEL STATUS BLOCK **SUBFRAME** ► SUBFRAME Y CHANNEL B Z CHANNEL A Y CHANNEL B X CHANNEL A **PREAMBLES** 27 28 29 30 31 BIT PREAMBLE AUX DATA **AUDIO DATA** VALIDITY **USER DATA CHANNEL STATUS DATA** PARITY

Figure 1. The framing structure of AES/EBU audio signals. Frames are composed of two 32-bit subframes (one for each audio channel of a stereo pair), each identified by its preamble. Channel status blocks are assembled over 192 frames. (Source: AES3-1992.)

sistency, level errors can occur at any A/D or D/A conversion, and the errors could accumulate as the signal passes through the facility.

Sampling rates

Although the AES/EBU interface is capable of supporting sampling rate frequencies ranging from approximately 25kHz to 54kHz, most equipment will only operate at specific sampling rates. Some standard sampling rates have evolved over time, the most common ones being 32kHz, 44.1kHz and 48kHz. The 32kHz rate is used sparingly in professional broadcast circles, while the 44.1kHz rate is the compact disc (or consumer) standard. The 48kHz rate is the professional standard used by most broadcasters for original recordings and transmissions.

Therefore, digital video equipment almost always uses 48kHz, but TV stations and post-production facilities often use a lot of conversion back to analog and reconversion to digital at the different sampling rate. This also risks degradation of the signal, but it may be a less problematic approach. The basic rule is to keep either type of conversion (A/D-D/A or sampling rate) applied to an audio signal to a minimum.

Synchronization


Adjunct to the issue of sampling rate conversion is the larger point of sampling rate synchronization. Digital devices (audio and video) have their sampling rates determined by an internal clock oscillator. While the nominal sampling rate of two DAT machines, for example, may be 48kHz, it is highly unlikely that their sampling rates will be identical. Over time, any two oscillators will drift out of (and perhaps back through) synchronization.

Loss of synchronization between devices can cause audible artifacts (typically pops

AES vs. NTSC

This problem of switching audio on AES frame boundaries is especially difficult for

DIGITAL STUDIO SYSTEMS

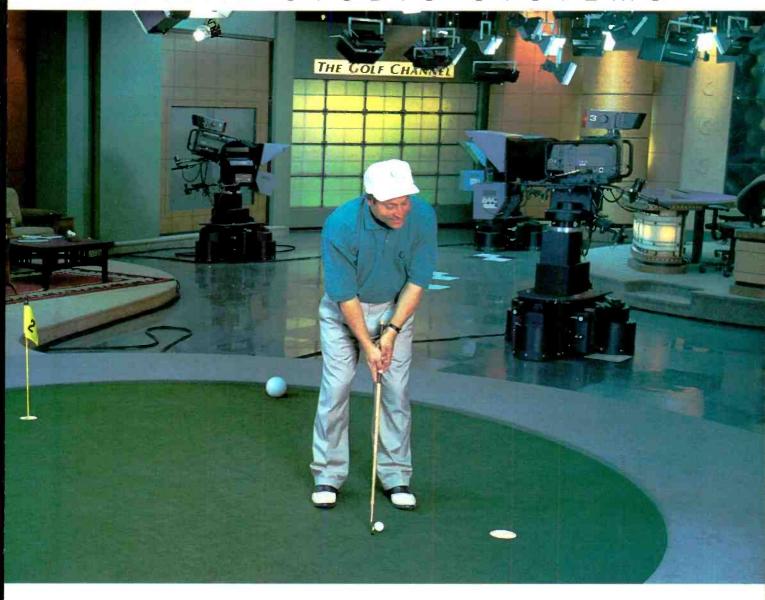

The Golf Channel wanted the world's best all-digital television network facility to be designed and built in perfect form.

At Harris, that's par for the course.

When The Golf Channel asked Harris to create an all-digital television network facility, we responded with a turnkey solution that included design, construction and unique system integration.

Our solution used the latest serial-digital and fiber optic technologies, and integrated one of the most advanced automation and machine control systems of any broadcast facility in the world.

Here's what The Golf Channel

VP of Operations, Matt Scalici, had to say:

"Harris provided a complete and thorough solution to a complex challenge . . . the innovation of our plant's design lies more in the system integration than in the individual components. And innovative thinking is what the Systems Group of Harris is known for."

Harris also integrated a digitalready C- and Ku-band teleport facility for The Golf Channel. Whatever your facility requirements, from a re-build to the design and implementation of a complex network, you'll love our follow through.

HARRIS CORPORATION BROADCAST DIVISION

7920 Kentucky Drive Florence, KY 41042 USA TEL: 606 282-4800 FAX: 606 283-2818



HIGH QUALITY DIGITAL EDITING IS FINALLY WITHIN YOUR GRASP.



INTRODUCING DIGITAL-S FROM JVC.

DIGITALS

In the race to satisfy the demancs of the digital age, JVC finishes

first with Digital-S — the first affordable, high-quality, digital video recording and editing system.

How affordable is Digital-S? It's comparably priced to the lowest cost component analog system. But that's where

the similarities end. Because when it comes to high-end performance,
Digital-S produces an image that is far superior to any analog system,
any 4:1:1 digital format, and rivals the

highest priced digital systems. It achieves and sustains this astounding picture quality even through multi-generation dubbing by utilizing 4:2:2 8-bit component processing, and

Completing the line is the BR-D50 Player, and flexible BR-D51 Player with S-VHS playback.

When it comes to flexibility, Digital-S reins supreme. For stanters, Digital-S is the first and only system in its price range to offer video pre-read*, an incredible feature which enables layering and A/B roll editing with only two VTRs

instead of three. Equipped with RS-422A control interface, it provides seamless integration with computer editing, graphic tools, plus S-VH5 or Betacam systems. The systems

BR-D51 Player boasts S-VHS playback capability so you can utilize your present tape library. Plus, the Digital-S system is also applicable to disk-based, non-linear editing systems

of the future. Complete with analog inputs/outputs: composite, Y/C, Y, R-Y, B-Y and XLR audio, as well as digital inputs/outputs: SMPTE 259M and AES/EBU, Digital-S lets you take acvantage of maximum performance with the minimum amount of cegradation in either digital or analog environments.

Whether it's a high-end broadcast environment or a budget-conscious corporate setting, the picture quality and affordable price of Digital-S make it the perfect

choice for any application. The revolutionary Digital-S from JVC. Today's most aggressively-priced, high-quality, dig.tal recording and editing system. For more information, visit our Internet web site at http://www.jvc.ca/jvc/ or call 1-800-JVC-5825 and mention

Product Code 187 O

(* Pre-read is only available on the BR-D85.)



a very mild 3.3:1 compression ratio that yields a 50Mbps data rate. And these technological advancements have been applied equally to both acquisition and editing. For acquisition, Digital-S introduces the extremely versatile BR-D40 Dockable Recorder. For super high-end editing of tapes, you have a choice of two powerful Editing Recorders, the ER-D85 with pre-read and digital I/O, and the very economical BR-D80.

Interfacing digital audio

NTSC video systems, because there is not an integer number of AES frames in an NTSC video frame. In NTSC systems, there are 1,601.6 AES frames per video frame. (There are an even 1,920 AES frames per PAL video frame.) This means that an AES frame boundary and an NTSC video frame boundary will only coincide every five video frames. Further complicating matters is the random video-to-audio phase upon power-up that some equipment exhibits.

While operating video and audio equipment referenced to a common oscillator will go a long way toward eliminating pops and clicks, the only way to guarantee a clean transition is to break the AES bitstream down to the subframe level, perform the switch and then reformat the data maintaining an uninterrupted AES frame sequence.

Another possible solution is to distribute audio and video reference signals throughout the facility, allowing each piece of equipment access to the proper reference source (composite blackburst, AES digital audio reference, word clock or audio black). By placing the most stable (and perhaps most accurate) time base at the top of the timing chain, all other references can be counted down from this common reference, ensuring the most consistent, jitter-free reference network possible.

Embedded audio

Another way to distribute digital audio through a video facility is by multiplexing it into the digital video signal. SMPTE digital video standards refer to this as embedded audio, in which AES-formatted digital audio signals are carried in the ancillary data space of serial digital video signals. (See "Transition to Digital," July 1995.) This allows routing of video and multichannel audio signals through a single wire and a single level of a routing switcher. This is a particular advantage for facilities (or portions of a facility) that only route or pass signals through without modifying the content in any way.

Embedded audio loses its appeal in facilities where a break-away switch is required. Break-away switching occurs when either the video or audio of a combined digital audio/video datastream needs to be changed. In these cases, the video and audio must be separated with a device called a demultiplexer or disembedder. The desired changes can then be made, after which the video and audio are recombined.

The disembed/re-embed process introduces additional delay into the signal, with the greater delay applied to the audio. This defies the conventional wisdom that the video signal is subject to greater throughput delays due to processing, frame synchronization and the like. Therefore, facilities using serial digital video with embedded audio must have the capability of delaying either video or audio with respect to each

These elements necessitate additional expenses and complexity that need to be balanced against the cost of additional audio levels in the routing matrix. Note also that neither embedded audio nor separate routing levels for AES signals can guarantee glitch-free switches.

Putting AES audio in the video facility

The electrical requirements of AES3-1992 specified the transmission of data over a balanced, twisted-pair cable with a characteristic impedance of 110Ω and terminated in an XLR-3 connector. As the AES standard was developed by the audio engineering community, it made sense to use a cable and connector type that was familiar, reliable and readily available. Now that digital audio is being widely implemented in video facilities, there is a desire to use a cable and ities have become familiar with cabling, routing and distribution procedures for coaxial cables. Transmitting AES/EBU signals via these coaxial cables is a simple and costeffective means of their distribution over distances greater than the 100m, often specified as the maximum recommended distance for 1100 balanced twisted-pair. Acceptable performance has been reported using coaxial cable on lengths greater than 1,500 feet and even up to 4,000 feet depending on the type of cable used.

If longer lengths are desired, equalization networks are available for coaxial receivers (just as they are for twisted-pair distribution). Automatically equalizing and reclocking distribution amplifiers are now becoming available for AES/EBU signals, which are similar in operation to their serial digital video cousins. Although you won't be able to use your old analog video DAs for this, you can use the same distribution, routing and patching schemes via coaxial cable.

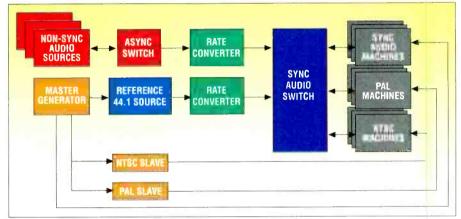


Figure 2. A conceptual block diagram for one method of facility-wide digital audio/video synchronization. (Courtesy of N-VISION.)

connector type that is familiar, reliable and readily available in these installations.


Using 75Ω coaxial cables with BNC connectors would satisfy these needs. It would also allow the re-use of analog video cables, DAs and routing systems left behind as the facility converted to digital video distribution. Both SMPTE and AES have drafted mutually compatible documents describing the transmission of AES/EBU digital audio over coaxial cables. The transmission format of the signal is identical for either 75Ω unbalanced coax or 110Ω balanced twisted-pair cable and the two formats can be interconnected with either passive or transformer-coupled matching networks.

The data rate of an AES/EBU signal generates frequencies with fundamentals below 6MHz (similar to analog video), well within the bandpass of standard, non-clamping analog video DAs. Engineers at video facil-

All of this must be balanced against the cost of coax-to-twisted-pair baluns and attenuation networks, where needed. Also note that AES3-1992 allows a peak-topeak voltage range of 2V to 7V, while the specification for signal voltage levels over coaxial cable is 1V.

Interface issues, such as the items discussed in this article, must be recognized and clearly understood. Only then can digital audio systems make good on the promise of being a reliable, efficient and high-quality means of production and delivery.

Kenneth Hunold is an audio/video project engineer at the ABC Engineering Laboratory, New York



Save Lives! Save Money! Switch to EAS-Today!



Practice/Help

These keys allow training and practice without interrupting the broadcast in progress.

"User-definable 'Event' and 'Location' keys"

These keys guide the operator through the encoding process and allow fast and easy required weekly tests.

User-friendly programmable front panel

Large, easy-to-use lighted keys are as easy to use as your familiar bank ATM.

Digital Voice Recorder

Allows unattended operation that plays back the audio portion of messages received for either manual or automatic forwarding.

24-column printer

Logs every EAS and SAME message received and transmitted and prints comprehensive Help Menus and instructions.



- · Amended FCC Rules
- Installation Guide
- · Products & Pricing





Sound Quality for Over 25 Years!

3090 Oakmead Village Drive Santa Clara, CA 95051-0862 Phone: (408) 727-7272 Fax: (408) 727-5942 E-Mail: eas911@aof.com


TFT EAS 911 EAS Encoder/Decoder Now FCC Type Certified

After 4 years of development & testing, TFT leads again with a new EAS Encoder/Decoder that will <u>save lives</u> and <u>protect property</u> by speeding emergency messages to the public at risk in seconds. At the same time TFT could save the industry over \$60-million annually in EBS operating costs and reduce EBS test tune-out by more than 88%.

All the details are in a new comprehensive EAS Handbook, the only complete reference. **Yours FREE for the asking**. In it we show you the low cost, easy solution to EAS.

For your FREE new TFT EAS Handbook (A \$29 value)

Call: 1-800-347-3383

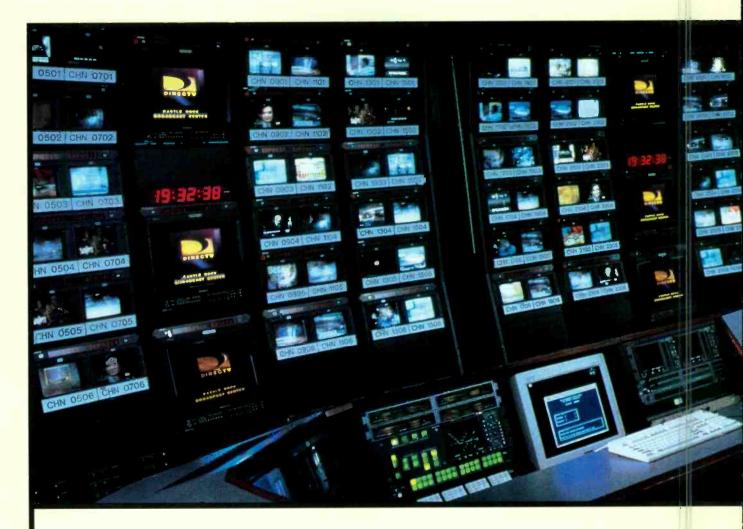

Nothing like it had ever been done before. In just fourteen months, Sony created an entire 200-channel direct-to-home satellite broadcast center for DIRECTV,® America's largest direct broadcasting service. One of our toughest problems was the automation and transmission of commercials, promos and programs over all those channels. Highly complex interactions of constantly changing schedules, resource and material availability complicated our job. But we solved the problem, and we put everything we learned into our new 8100 Multichannel Transmission System, especially designed for today's—and tomorrow's—multichannel and multiple storage environment.

You can start by buying only the size you need now because expansion is simple and incremental. The 8100 system facilitates the integration of new and existing technologies, allowing you to mix tape (your Library Management System™ multicassette system, for example) and HDD storage for a more cost-effective solution. Dynamic allocation of resources provides automated, cost-effective redundancy. Spares automatically switch into any failed channel. You can program predetermined fallback plans for automated replacement of missing material. You even have the option of telling the system to protect your



primary channels at the expense of a secondary channel.

Purpose-built User Interface tools simplify the presentation of complex multichannel information to the operator.

Highly configurable GUI's give unprecedented control of the information flow. And our on-line help will even offer suggested corrective actions.

Whether you start with one channel or hundreds, let Sony make your migration into the multichannel environment as easy as possible. Call us at I-800-635-SONY, extension 8100 to learn more. We'll simplify at least one part of your complex world.

What we did was

take a 14-month

crash course

in 200-channel

commercial


What we learned was how to make your job easier.

Performing

ligital audio

The Bottom Line:

To properly troubleshoot today's digital audio systems, an understanding of how digital audio works is essential, but so are some new analytical tools made especially for this purpose. Armed with such knowledge and hardware, quality control (QC) ultimately becomes easier and more predictable in the digital audio world._

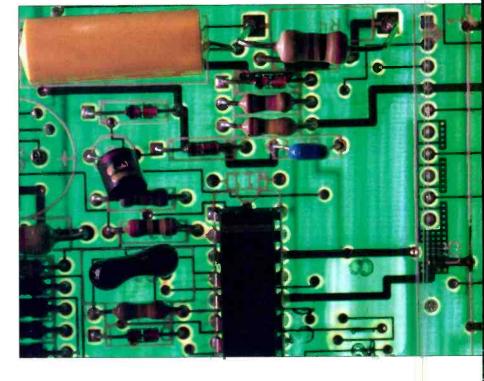

Some specialized hardware and techniques have been developed for monitoring digital audio.

If you've upgraded some or all of your facility to digital audio gear, you're probably finding that only a few of the traditional, day-to-day maintenance and monitoring tasks apply to your new equipment. In fact, aside from phase and level monitoring, most of the duties you'll perform or problems you'll encounter are unique to the digital domain.

One category of problems relates to interfacing. These issues are most often thought of as occurring during equipment installation, but they can crop up any time you put a digital tape into a player.

Another class of problems includes difficulties in signal transport. These can turn up at any time, and their solution requires analysis of the high-frequency datastream carrying the digital audio signal.

AES format review

Before discussing interface problems, a

brief review of the AES/EBU subframe structure is in order. (See "Interfacing Digital Audio," p. 80.) A 32-bit subframe is the basic data unit of the AES/EBU format. Two subframes make a frame (each subframe contains an audio sample from one audio channel of a stereo pair) and 192 frames make a block. Each subframe has its own preamble, audio sample data, validity bit, user and channel status bits and parity bit. (See Figure 1 on p. 84.)

The preamble marks the beginning of the subframe. It's followed by an audio sample of up to 24 bits. The next bit, the validity bit, should be low in most cases. If it's high, it indicates that the audio sample is not suitable for conversion to analog. One condition where the validity should be expected to be high is when consumer digital audio devices, like CD players and laserdisk players, are in the pause mode.

User bits are loosely defined and not used often. When they are used, they're often applied in unique ways to specific applications. Their use, or lack of use, rarely causes a problem. Channel status bits, however, are tightly defined and are almost always


At the end of each AES/EBU block, 192 channel status bits for each audio channel will have accumulated in a buffer at the receiver. Those are broken down into 24 8-bit words. All of this data describes various aspects of the signal contained in the block. (More on this later.)

Last is the parity bit. It sets the parity for the subframe in which it's included. The AES/EBU standard uses even parity.

Channel status incompatibilities

One of the main problems with channel status data is its great flexibility. While the You never get a second chance to make a first

Compression

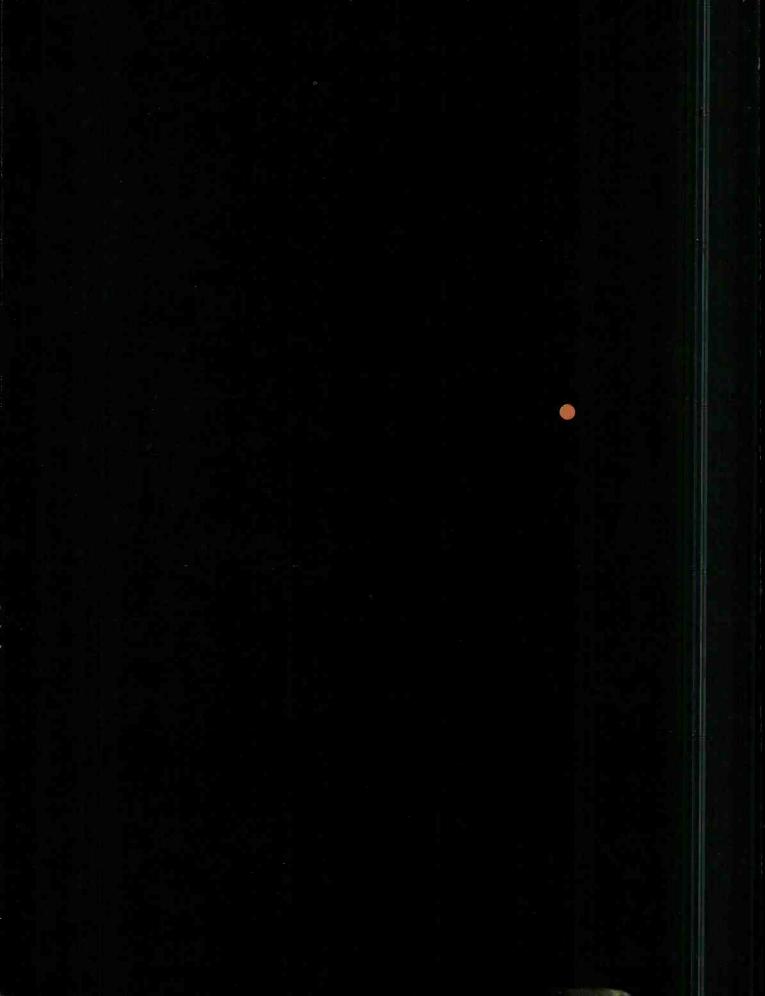

First compressions count - in more ways than one.

If your source material is not as clean as it could be, then valuable bancwidth will be wasted compressing noise, spankle and other imperfections.

And if the compression system itself is not performing to specification, how can you be sure of finding out - before the viewer does?

Now a new range of powerful compression products from Snell & Wilcox provides the solution to both these problems.

High-performance compression pre-processing equipment guarantees input pictures as perfect as they can be.

And to troubleshoot MPEG2 video compression systems in real time as well as off-line there's a unique series of test and measurement tools.

If you want to make the best possible compression, whether you're a broadcaster, post-production house, program maker, teleport operator or equipment manufacturer, don't miss the launch of this exciting new range at NAB on booth number 8849.

First Compressors Count



Engineering with Vision

Performing QC on digital audio

decoding of this data is welldefined, different manufacturers' equipment reacts to the decoded data in different ways.

A common problem occurs when you connect a consumer device to a professional recorder. Because 16-bit CD audio sounds quite good and there's a wide selection of music libraries available in that format, its use in professional environments is widespread. However, attempts to do a digital-to-digital transfer are sometimes thwarted by a professional recorder that refuses to accept consumer-formatted digital data. The only difference is that the first bit of the first 8-bit word is a 0, indicating consumer digital audio, instead of a 1, which indicates professional.

Solving this problem requires analysis of the digital audio datastream. A number of purpose-built analyzers for this purpose have recently become available, greatly simplifying the troubleshooting of digital audio systems.

Sometimes, devices are incorrectly programmed such that they send audio data at a particular sample rate, but indicate a different rate in their channel status data. Some receiving devices don't pay any attention to the indicated sample rate in channel-status data, looking only at the incoming signal for sample rate information. Other devices always assume that the channel status data is accurate, and when it's not, they may receive the data improperly. The result could be as minor as an occasional pop or click or as bad as no sound transfer at all.

Another fairly common situation that can cause serious problems is trying to record a consumer-formatted signal that has the Serial Copy Management System (SCMS) copy-inhibit bit enabled when it shouldn't.

Fortunately, there are at least three solutions to these incompatibility problems. The best solution is to reprogram one of the two devices to remove the conflict. If that's not possible, you can temporarily use a specialized digital audio troubleshooting tool — a sort of breakout box for digital audio that enables real-time editing of the channel status bits. As a last resort, you can always connect the two devices analog to analog.

Figure 1 shows one of the currently available AES/EBU channel status decoders. You can see from this figure the amount of detailed information carried in the 192 channel status bits. Having a monitoring tool at hand with these capabilities is essential for

Channel 4 CHANNEL STATUS Channel 3 professional professional Channel use audio audio Data use not indicated not indicated **Emphasis** FORMA locked Locking of source locked Text 44.1 kHz 44.1 kHz Sample frequency stereo stereo Channel mode User bits mode not indicated not indicated not indicated not indicated **AUX** bits use Binary 18 bits 18 bits Audio word length not a ref. not a ref. Reference signal DAT3 DAT3 Origin Xmsn **Fdit** Edit Destination Order 239787 239787 Sample number Binary 00:00:00 00:00:00 Time of day is wrong Block CRC is wrong Hex

Figure 1. Decoding channel status into English simplifies troubleshooting of interface problems.

quickly uncovering and eliminating channel status incompatibilities.

Signal transport problems

Signal transport problems are caused by degradations in the signal path or related difficulties. These problems prevent two pieces of digital audio equipment from "locking up" (i.e., synchronizing themselves) or otherwise threatening the reliable transfer of data between devices. Unlike interface problems, where data exchange does not take place due to coding incompatibilities, transport problems are generally caused by electrical and physical shortcomings. The ability to monitor and distinguish transport problems is helpful in sorting out any bumps in the otherwise smooth operation of your

The AES/EBU standard uses a bi-phase mark coding system, which includes a transition (either low-to-high or high-to-low) at the beginning of each bit interval. This allows clocking to be extracted from the received signal, keeping two channels of audio and synchronization data all on a single electrical path. This "self-clocking" scheme places an additional transition in the middle of the bit interval to indicate a "1" and no additional transition to indicate a "0."

The AES/EBU signal is, therefore, polarity independent, and it is also tolerant of a wide range of electrical levels (2V to 7V), so it is fairly immune to problems in the

amplitude domain. The frequency domain is a different story, however. Because of its reliance on data timing of the received signal, AES/EBU is quite dependent on frequency stability and adequate bandwidth across transmission paths. Bit-interval transitions must remain identifiable to the receiver. For this reason, whenever coding errors occur in the signal, the possibility of losing lock increases. This type of error is detected by the AES/EBU receiver chip and is flagged by the display of some monitors.

Moving into the digital realm exponentially increases the number of parameters that an engineer must monitor.

Other types of errors, such as cyclic redundancy checking (CRCC) errors and parity errors, indicate that some portion of the signal wasn't received in the same way it was sent. In AES/EBU audio, a CRCC checksum is generated only for the channel status data. By contrast, each subframe of audio data contains a parity bit. Monitoring CRCC and parity provides greater as-

BRIDGE HAR Gap

OEMs, Systems Integrators and Developers...

It's no secret. The video industry is in the midst of a mass migration to digital technology. PC-based open systems are the wave of the future. You can make the transition quick and painless for your product by building it an Matrox DigiSuite — a solid foundation of digital video hardware and software development tools that you put together in myriad canfigurations to meet your exact requirements.

Move from expensive black boxes to competitively-priced, PC-based open systems.

What do you need to build?

- Monlinear Editing Systems (NLE)
- · Digital Disk Recorders (DDR)
- Virtual VTRs
- Video-on-Demand Servers (VOD)
- Near Video-on-Demand Servers (NVOD)
- Interactive TV
- Live Video Switchers
- M-JPEG to MPEG Transcoders
- Commercial Insertion Systems
- Instant Replay Systems
- Time Delay Systems
- CATV Barker Channels
- 2D and 3D Animation Stations
- Animation Recorders
- Graphics/Paint Workstations
- Character Generators (CG)
- Closed Captioning and Teletext Systems
- Digital Audio Workstations (DAW)
- Visual Effects/Compositing Systems

Use only the best materials.

Choose the building blocks you need for your application from the extensive Matrox collection, the growing list of board-level components from third parties or design your own digital video hardware around the open standard Movie-2 bus.



DigiSuite components are modular, highly-integrated, true 10-bit CCIR-601 and take full advantage of the PCI-bus.

- Matrox DigiMix[™] digital video/graphics mixer and 2D DVE unit
- Matrox DigiMotion[™] dual channel motion-JPEG codec/digital audio mixer/Fast-20 SCSI controller
- Matrox DigiVid[™] multi-channel analog video
 I/O and serial communication interface
- Matrox QMPEG-2[™] four channel MPEG-2 audio/video decoder
- Matrox Marvel Millennium[™] video-in-a-window console display controller
- Matrox Genesis[™] DSP-based application accelerator
- Serial digital (D1) I/O interface, realtime 3D DVE, MPEG encoders, and other third party Movie-2 bus compotible products

And the best tools for the job.


Matrox DigiTools™ are based on the new Microsoft multimedia software architecture with OpenDML extensions. A comprehensive selection of proven software modules from Matrox and third parties speeds your application development.

- Matrox DigiSDK™ Component Object Model (COM) software development kit for Windows NT 3.51 and Windows 95
- Matrox DigiSequencer¹¹ infinite-layer audio/video/graphics compositing and sequencing engine
- Matrox DigiVTR™ VTR control software
- Image North Technologies DigiCG, DigiPaint, DigiDVE and DigiStill — application modules

Our solid foundation of state-of-the-art boards, advanced software development tools and world-renowned OEM engineering support lets you make a smooth transition to the digital domain and get your PC-based product to market quickly.








For more information, please call: 1-800-361-4903 or (514) 685-2630

Matrox Electronic Systems Ltd.

1025 St-Regis Blvc., Dorval Quebec, Canada, H9P 2T4 Fax: (514) 685-2853




Matrox is a registerec trademark and the Matrox DigSuite component are trademarks of Marrox Electronic Systems Ltd. All other trademarks are the property of their respective owners.

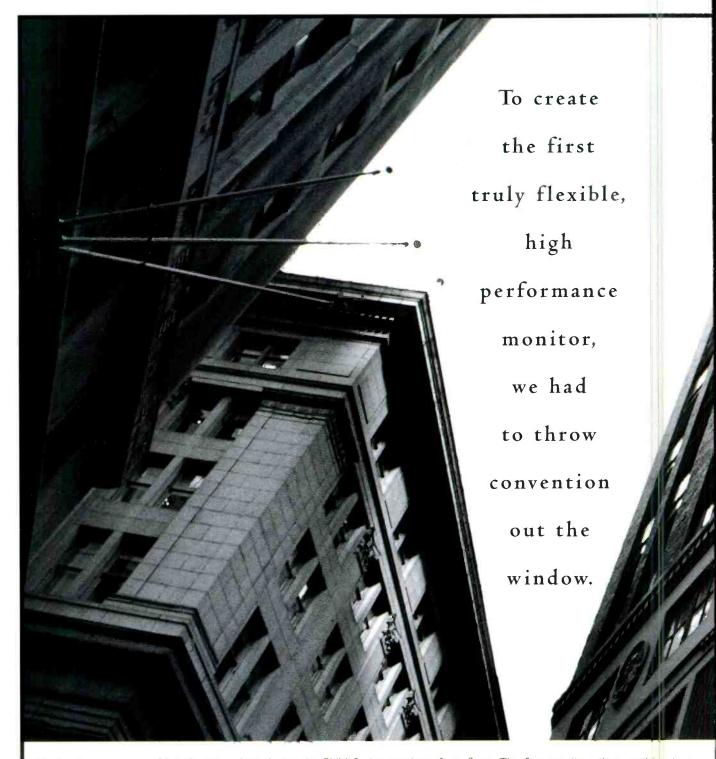

You've never seen anything like them. Introducing the BVM Series monitors from Sony. The first monitors that combine true flexibility with the legendary quality and performance that is synonymous with the Sony name. Not a bad combination, especially when you consider that the new BVM monitors offer more and are priced lower than the eminent previous BVM lineup. For example, the new BVM Series delivers unprecedented flexibility with easy-to-install rear panel input boards. You can use various combinations of decoders and inputs, as well as a wide

variety of digital and analog signal formats from 4:2:2 and 4fsc to NTSC, PAL, PAL-M, and SECAM standards, and signal types from

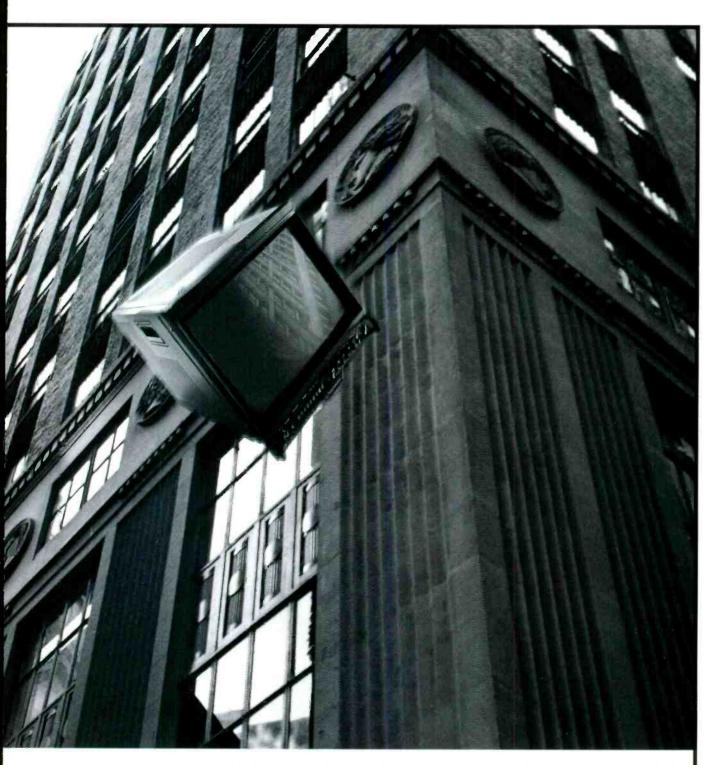

composite to component. The new and improved CRT delivers performance that's even superior to our own previous high resolution monitors. New standard features include: auto white balance compatibility using industry standard color



analyzers, VITC reader, safe area display, closed caption, an internal test pattern generator

and on-screen EDH for the display of digital signal error codes. New options include an

IC memory card which can store and transfer monitor set-up and configuration information. Call I-800-472-SONY, ext. BVM for information on the new standard in monitor technology, and get ready to throw convention out the window. **SONY**

Performing QC on digital audio

surance of a cleanly transmitted signal.

Sample slipping is another transport-related problem. This is rarely a problem between two signals of a left/right pair.

Using a DSP-based correlation meter to monitor phase lets you see the phasing of any signals at any amplitude.

More often, synchronization problems occur between a reference signal and a program signal, or between two program pairs, when the phase of two supposedly locked pairs is drifting relative to each other. Identifying and resolving this problem without a digital monitor borders on the impossible.

Having too long of a cable run reduces AES/EBU signal level and induces jitter in the electrical signal. This combination of

degradations reduces the signal's eye-pattern opening. If the degradation is severe enough, you'll lose synchronization. From a certain level of eye closure up to the point where you lose lock, the AES/EBU receiver chip sets a low-confidence flag. This indicates a marginal transmission path that can't be trusted to faithfully or reliably transfer the signal.

Incidentally, the low-confidence error flag can be raised by any condition that either reduces the signal's amplitude sufficiently or causes a large amount of jitter. It doesn't require both conditions simultaneously, such as the effect of an overly long cable run generally produces.

Finally, besides total loss of signal, excessive signal attenuation or excessive jitter, there is one other condition that can cause transport problems: a sample rate that's beyond the range of the receiver.

All of these causes produce the same effect — loss of lock. Figur-

ing out which one is the culprit is a challenge to the troubleshooter. An AES/EBU monitoring device is helpful in sorting

this out. Alerting the user in a timely fashion to the occurrence of these errors is also a priority, regardless of the source of the error flag. One way such messages can be indicated is alongside a level display for the channel that's having the problem, as shown in Figure 2.

Unattended OC

In the past, the engineer keeping an eye on the level meters had to do just that look at the level meters (and maybe a phase meter, as well). Moving into the digital realm exponentially increases the number of parameters that an engineer must monitor. Keeping track of measurements also is more important in digital audio, because it may be the only way of knowing that a catastrophic failure is on the way. The audio quality of the signal itself may never indicate that something's about to crash. Unlike the analog domain, digital audio's "cliff effect" often dictates that evervthing will sound just fine

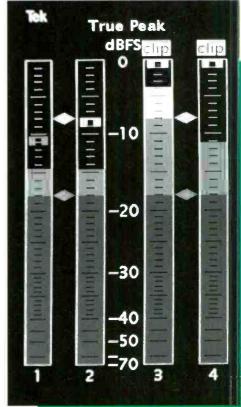


Figure 3. One implementation of a digital level meter, featuring a CLIP flasher above the bar where a clip occurred.

until the signal suddenly starts dropping out or mutes completely.

One method of freeing the operator's

One method of freeing the operator's attention from tracking all of these important empirical details is to log important events and errors for the duration of a session. Not only does this reduce the number of parameters an operator must

Controlling quality in a digital audio facility requires a few additions to the well-established practices.

monitor, but the same batch of session statistics can double as a quality-control report. Include that report with your finished work and you've documented, in a quantifiable way, the technical quality of your product. If you add the capability to time-stamp those logged events with time code, you can use the report to locate spots in a program needing subsequent technical correction.


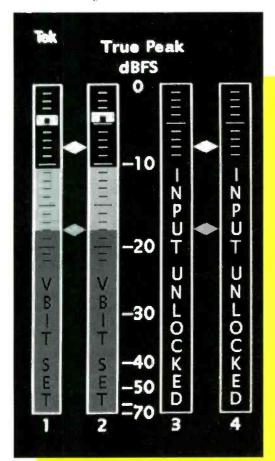


Figure 2. Problems such as Input Unlocked and Validity Bit Set are readily seen when placed inside the level bar for the affected channel(s).




Making the change to digital is easier than you think, thanks to the people and products from NVISION. Our new book, (the one with the catchy title), will guide you through the most frequently asked questions and concerns regarding the analog to digital transition. Full of valuable information and ideas, THE BOOK will also introduce you to NVISION's line of affordable audio and video products. It's an offer you can't afford to let fly by. For your copy call 1.800.719.1900, fax 916.265.1010 or call the distributor nearest you.

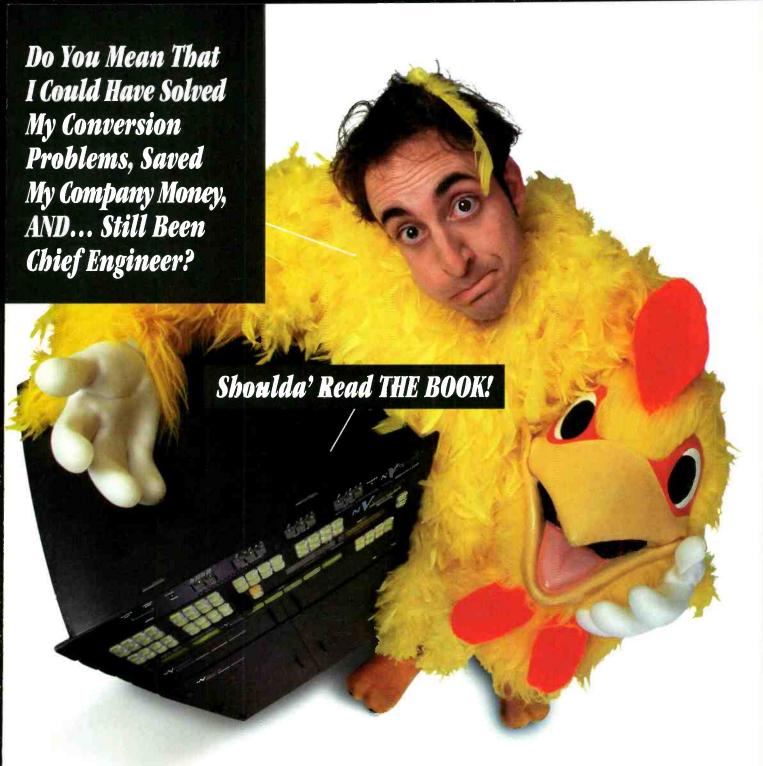


Don't Be a Chicken - Read THE BOOK.

Circle (63) on Action Card





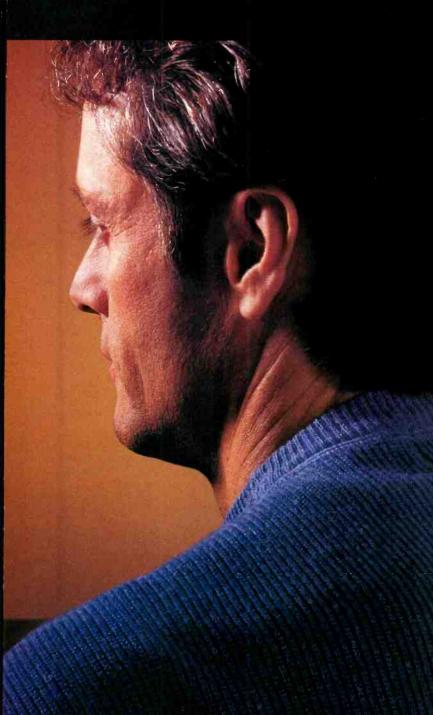

Digital video is changing our world, and DVCPRO is already changing news, production and professional video operations across the country. Lightweight, low cost ENG cameras and full-featured studio decks integrated in today's news systems are just the beginning.

Products that are uniquely DVCPRO, like the laptop portable edit system, a four-times player, integrated video workstations, and affordable news server systems will change the way we work.

Component digital video and CDquality audio on pocket-sized digital cassettes; Icwer equipment costs, lower media costs, and lower operating and maintenance costs are

revolutionizing breadcasting and newsgathering by

33 Turns

creating products that otherwise wculdn't be possible.

DVCPRO is the promise of the digital era realized.

Official Broadcast Equipment Supplier of the 1996 Olympic Gaines
















Level monitoring — with a twist

There are two different requirements to level monitoring in digital audio: checking program audio or line-up levels and detecting clips or mutes. It's widely acknowledged that clipping in the digital domain is a more serious event than it is in the analog domain. Digital clipping results in immediately audible and unpleasant distortion, so occurrences of clipping in a digital signal must be flagged in a highly visible manner. Any losses of signal (mutes) should also be detected and flagged in the same manner. Digitally based monitoring equipment

utive full-scale samples can be specified before the operator is notified. On the other hand, some purists won't tolerate a single full-scale sample in their recordings, claiming that you'll only lose about 0.001dB of dynamic range by scaling back the loudness to one bit below full scale. (See Figure 3.)

With the inherent accuracy of digital systems, you might assume that all digital level meters always indicate the exact amplitude of the audio signal by simply reading the sample level and indicating that on the display. Unfortunately, this is not the case. Peaks in the analog signal represented

cause audio is often recorded at lower levels than it might be in the analog domain. This means that these quieter passages are often below the range of the AGC circuits used in traditional Lissajous displays. Monitoring their phase remains important nonetheless. Using a DSP-based correlation meter (such as the example in Figure 4) to monitor phase lets you see the phasing of any signal at any amplitude. Again, if the signal level was small enough, for example, -50 dBFS, a standard Lissajous pattern would show just a small dot, too small to read any phase information from. A correlation meter, on the other

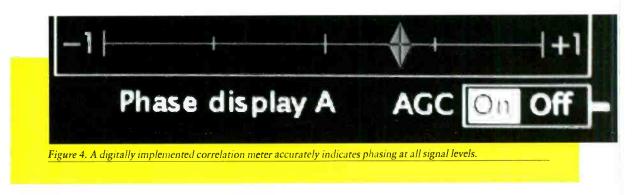

can easily enable clip and mute indication by flagging any samples containing all ones (full-scale) or all zeros (no signal) respectively. But a single full-scale sample doesn't necessarily indicate signal clipping; it could simply be a loud point in the program using the full dynamic range of the system. Whenever *two* or more consecutive samples are full scale, then it is likely that the audio signal carried in the digital domain exceeds the digital system's dynamic range. Engineers have differing opinions about

by digital data rarely fall precisely at sample points. The effect on a monitor that simply reads sample values is an underestimation of the actual audio level. To reduce this effect, a level meter must perform *interpolation* via an oversampling filter. By using four-times oversampling, a monitor can virtually eliminate this underestimation of peak levels.

Another problem you'll run into if your monitor does not use interpolation is that steady-state tones at submultiples of the sampling frequency often fluctuate in amplitude. It's relatively common to see this effect on line-up tones. Again, interpolation dramatically reduces this effect.

The sophistication built into today's latest monitors can do a lot of your work for you.

the number of consecutive full-scale samples (if any) that they'll allow.

Clip indicators must demand an operator's attention, but ideally there should be some way to accommodate different standards of acceptability. If some engineers don't mind an occasional full-scale sample in their material and don't consider that a true instance of clipping, there should be an adjustable threshold on their clipping indicators so a variable number of consec-

Phase monitoring


Monitoring digital audio phase is, for the most part, a similar process to phase-monitoring an analog audio signal. A Lissajous display of left vs. right will show you the balance of your signal and most phase-error problems. In today's digital audio for television, however, you're likely to find yourself working with a pair of stereo signals (four channels), or perhaps even more channels, and you'll need to check the phase between all of them. Comparing the phase of channels within a pair (1 vs. 2, 3 vs. 4, etc.) presents no challenge, but comparing between stereo pairs does require a monitor with that special capability.

Digital audio's wide dynamic range complicates the phase monitoring task behand, still accurately indicates the phase relationship between the left and right channels. Also, rotating a pan-pot on a stereo signal can't fool a digitally implemented correlation meter.

Controlling quality in a digital audio facility requires a few additions to the well-established practices of level and phase monitoring. Beyond that, the sophistication built into today's latest monitors can do a lot of your work for you. This helps smooth the transition to digital systems without extensive staff training. It can also give you immediate confidence in the technical quality of your digital sound.

Jeff Noah is an applications engineer for the audio product line at Tektronix, Beaverton, OR.

For more information on digital audio monitoring, circle (201) on Action Card. See also "Analyzers, Audio System," p. 85 of the 1996 BE Buyers Guide.



"With FLINT there is

retouching or replacement job that I'm afraid of anymore."

Bob Wiatr, Post Effects, Chicago

♦ FLINT™

FLINT is the industry's only desktop production system optimized for the Indigc2™ workstation. It's an affordable solution that offers post houses, broadcasters, games developers and multimedia producers all the functionality and non-compressed image quality of FLAME™, the leading cn-line system for special effects and compositing.

DISCREET LOGIC


FLINT is format independent and can be used as a standalone on-line finishing tool. The system supports standard EDLs, importing of 3D models, and D1 I/O. FLINT can also function as a satellite workstation to traditional on-line suites or can be connected via high-speed networks to FLAME or FIRE - Discreet Logic's new on-line non-linear editing system.

5 FLAME, FLINT, and FIRE are trademarks of Discreet Logic Inc. 10 Indian 2 is a trademark of Citizen Grankier Inc.

CORPORATE and SALES HEADQUARTERS Discreet Logic Inc. 5505. boul. St-Laurent Montréal. Québec. Canada H2T 1S6 Tel: 514.272.0525 Fax: 514.272.0585 e-mail: info@discreet.com

Circle (64) on Action Card

TRANSMISSION TECHNOLOGY



he change to ATV is primarily going to use UHF channels — at least according to current FCC thought. As a result, many transmitter operators are going to have to rethink the way in which they construct and operate RF facilities. This article is primarily intended for those who have been living the good life up to now. That is, those technicians who have been working only in the quiet world of VHF.

Proceed with caution

First, be careful not to make foolish statements when visiting your first UHF facility. This author has experienced the initial visit to the transmitter site by a VHF chief engineer who supposedly was competent and experienced. His first comment, while gazing happily on the waveguide combining network, was "What's all of the ductwork for — the cooling system?" This immediately established his bona fides with the station staff, one of whom was hyperventilating in the corner.

The degree to which techno-shock will be experienced will primarily be controlled by the transmitter power involved. Again, this is going to be controlled by the final manner in which the ATV conversion takes place. While the average power apparently will be much less than for NTSC, the peak power may not be significantly lower, which would



A combiner network using waveguide is common in UHF transmitter installations.

A UHF primer for VHF engineers, part 1

result in the continued use of some of the existing high-power UHF devices. The low-er-powered UHF transmitters more closely resemble VHF equipment, because they are essentially all solid-state.

All UHF transmitters of any power level start off with an exciter, just as is found in current VHF systems. The complete signal, visual and aural, is developed in the exciter, and all necessary correction is usually introduced at this level. The correction is primarily for correcting non-linearities found in the driver and final amplifier stages. Other than the frequency of the final upconverter, the exciter should be familiar to VHF technicians.

The normal amplifier chain will include a

driver stage, followed by one or more high-power stages. The driver may be a separate design or may be the same as the solid-state output stages, depending on the overall system design. In most modern designs, the driver will be a wideband amplifier that will not need tuning over the UHF band.

Remember, the system configuration is not the same for all manufacturers any more than it is for VHF systems. The design of a modern transmitter still involves trade-offs between engineering choice and fiscal reality. As a result, significant differences exist from manufacturer to manufacturer.

For the beginner in the UHF field, purchasing new equipment should

include an in-depth study of the transmitter design and careful discussions with manufacturer reps and with the station's consulting engineer. Design differences simply reflect how each manufacturer decided to put together a complete system. There are no bad

transmitters on the market. However, differences between manufacturers' products may be significant in particular systems, just as is the case in all parts of the station.

Final amplifiers

Some UHF transmitters use separate amplifier chains for aural and visual signals, just as in VHF. In those cases, the two signals are diplexed at the output, usually in a waveguide-based device. Normally, the outputs of the separate amplifiers are routed to the combiner/diplexer system in coaxial cable.

For larger amplifiers, more than one visual amplifier may be used with their outputs combined prior to diplexing with the aural signal. The actual combiners/diplexers use waveguide for simplicity and power-handling capacity. Their output may go back down to coaxial cable or stay in waveguide, depending on the power levels involved and the system design.

The final amplifiers run a wide gamut of devices. The smaller solid-state amplifiers usually run a few hundred watts per module with multiple modules combined to reach the final power. In many cases, multiple amplifier modules drive one or more final amplifier devices. In those cases, provision is usually made to bring out the driver signal




Klystron removal and installation can be considerably more involved than working with tetrodes.

and take it directly to the antenna in case of failure of the final amplifier.

The final amplifier stage(s) may be a tetrode or one of a wide family of klystron-based devices. Tetrodes are popular from the lower power levels up to around 30kW peak visual power. One manufacturer, Acrodyne, is marketing a 60kW transmitter using a tetrode-type device called a Diacrode. Traditionally, tetrodes have the advantage of high efficiency, but they have required much higher drive power than klystron-type devices and have had significantly shorter life spans. Again, that may now be considered old technology. That determination is left up to the buyer and manufacturer to discuss.

In the klystron field, older transmitters primarily used either a 4-cavity klystron with external cavities or 5-cavity devices with internal cavities. Again, the type preferred varies with manufacturers and users. The choice is much akin to arguing whether MS-DOS-based machines are better than Macs.

The World Leader in UHF TV Transmitters.

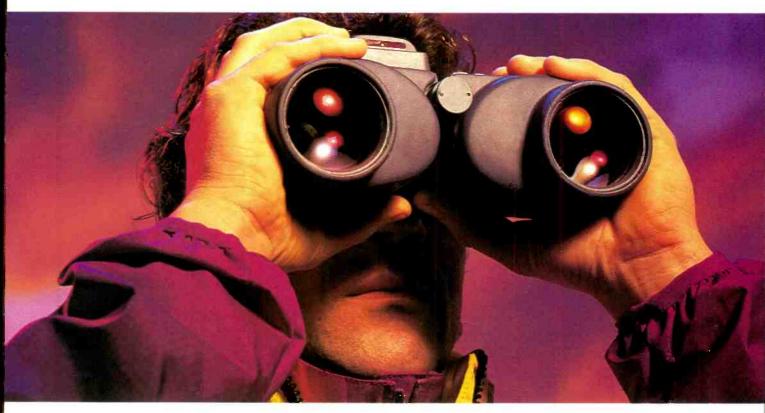

Yesterday. Today. And especially tomorrow.

As ATV approaches, who's setting the pace in UHF transmitters? The same company that's led the way for the past 10 years—Comark.

In 1986, we invented the first IOT amplifier. In 1988, we placed the first IOT into full-time service. And over the past three years, we've supplied the overwhelming majority of IOT transmitters worldwide.

We've also been at the center of ATV research and development from the very beginning. In 1992, Comark had the first digital ATV transmitter on the air at WETA in Washington, DC and was selected to provide the transmitter to the Grand Alliance for full system field testing.

But it's just the beginning. Comark is the first manufacturer to introduce a transmitter designed specifically around the requirements of the Grand Alliance digital standard. A system engineered from the ground up, it will set new technical standards as well as provide ease of use, simple maintenance and no-hassle installation.

So before you plan your ATV strategy, team up with the company that's set the standard for transmitter innovation and excellence for over a decade—Comark.

For more information, call us today at (215) 822-0777.





Route 309 & Advance Lane • Colmar. PA 18915 TEL: (215) 822-0777 • FAX: (215) 822-9129

If You Have Bottom Line Responsibility for a TV News Operation...

Slash your cellular phone charges by 200% to 400%!

Most news related cellular costs are for cueing (IFB). The FCC authorized a one-way channel for every TV station's private use. No usage charges - you already own the channel! This technology has been slow to develop because no one could make it work right. Where others failed, Modulation Sciences succeeded.

The industry leader in TV stereo technology has just introduced a second generation PRO channel system, PROceiver II and PRO Channel Generator II. With features like extended fringe area coverage, selective calling and a unique three year warranty.

Stations have reported savings so great that they have amortized the cost of the PRO equipment in less than three months!

You don't need to be stereo or have a new transmitter to use the PRO channel and start saving money today.

Call us toll-free at (800) 826-2603 for full details!

modulation sciences

12A World's Fair Drive Somerset, NJ 08873 Voice (908) 302-3090 Fax (908) 302-0206

Circle (66) on Action Card



A portion of the heat exchanger along with the pumps and tank used for a water/vapor cooling system for klystrons. (Photos courtesy of David Birdsong, KSMO-TV.)

In any case, most new transmitters have moved on to such devices as Klystrodes, multiple stage-depressed collector (MSDC) klystrons or inductive output tubes (IOT). These are essentially all variations on the basic klystron with the exception of the Klystrode, which is a marriage of tetrode and klystron technologies.

The nicest thing about all of these devices is that they are stable as a rock. Once properly tuned on channel, minimal if any adjustment will be needed during the life of the device. Speaking of device life, the klystron family devices can normally be expected to run in excess of 25,000 hours. It is not unusual to experience usable lifetimes in excess of 40,000 hours even in visual service. Modern tetrodes are not expected to last that long, but may be expected to meet full specifications for up to 20,000 hours.

As to the tuning, it is preferred to use a sweep-type device, such as the Tektronix sideband adapter, to solve the gain vs. bandwidth problem. Do not, under any circumstances, simply tune for maximum power.

Cooling and power systems

Cooling is normally handled in one of three ways. Smaller transmitters need only a filtered source of air, and that air must either be cooled itself or exchanged with outside air as necessary. For larger powers, liquid cooling is used. This can be either direct cooling by liquid or vapor phase cooling where water is allowed to boil off the collector of the device with the steam being subsequently cooled. In any case, the cooling water must be cooled in a heat exchanger.

In many cases, the direct coolant is distilled water that can touch components where high voltages are present. If the coolant does not contact high voltages, it can be mixed with chemicals to prevent freezing


and the heat exchanger can be placed outdoors with protection from falling ice. Otherwise, the heat exchanger must be protected to prevent it from freezing during cold weather. The purity of the distilled water must be watched to prevent embarrassing off-the-air periods.

The power supply for the transmitter will usually be broken into two major pieces. All low-power equipment, like the driver, exciter and control systems, will be powered by conventional systems located in the main cabinet. For higher-power transmitters, the power supply is usually a packaged system that is separate from the transmitter cabinet. Some modern designs, one by Comark in particular, control the high-voltage magnitude, which is claimed to improve amplifier performance.

The thing to remember about a UHF transmitter is that it is just another big box to be learned. It will be more sensitive to the changing of components than a VHF transmitter because of the shorter wavelengths involved. You will be using a waveguide combiner/diplexer rather than the old coaxial distillery reject on the back wall. On the good side, the new transmitters are as stable and as easy to operate as their VHF relatives.

Next month, we will look at transmission lines and antennas for UHF.

Don Markley is president of D. L. Markley and Associates, Peoria, IL.




Inter BEE '96



32nd International Broadcast Equipment Exhibition

Period: November 13-15, 1996 Place: Nippon Convention Center (Makuhari Messe)

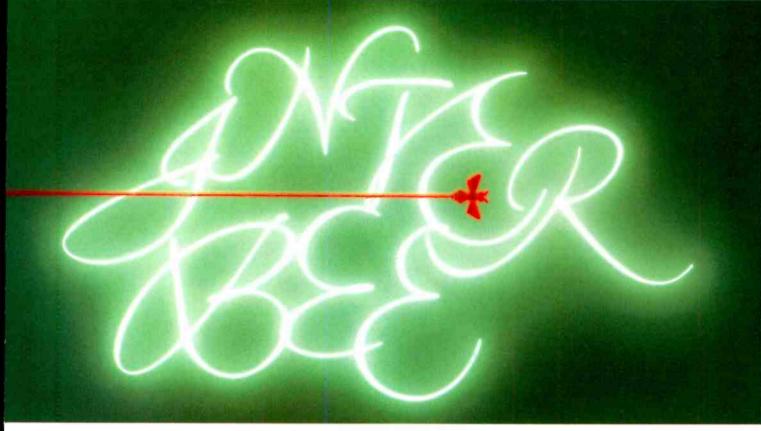

Major Categories

◆ Audio Equipment

◆ Camera

◆ VCR, Disc Recorder

BEEing is Believing

You'll never know what you have missed if you pass up the opportunity to participate in the 32nd International Broadcast Equipment Exhibition (Inter BEE '96)

— a showcase for the latest professional broadcast, video, and audio technologies.

As the largest event of its kind in Asia and one of the world's top three, Inter BEE '96 will draw more than 450 manufacturers and around 26,000 broadcast professionals from around the world.

But that's not all. We've done a lot to make this year's event better than ever.

There'll be symposiums, forums, and seminars hosted by some of the world's leading broadcasting, audio, and video software developers.

Inter BEE '96 will be held on November 13-15, 1996, at the Nippon Convention Center (Makuhari Messe). So, be part of the Inter BEE '96. It will be an unBEElievable experience.

For more information on Inter BEE '96, contact:

Japan Electronics Show Association

Tokyo Chamber of Commerce and Industry Building, 3-2-2, Marunouchi, Chiyoda-ku, Tokyo 100, Japan Fax:81-3-3284-0165

SBE

wo SBE panels at the spring 1996 National Association of Broadcasters' Engineering Convention in Las Vegas explored recent (for unattended operation) and expected (for radio-frequency radiation) FCC regulatory changes. The Unattended Operation

ation panel addressed the Dec. 1, 1995, deregulation that now allows broadcasters to operate their stations using unlicensed operators or, subject to minimal automation requirements, without any operators or unattended, if they wish. The new rules allow any combination of direct (manual) control, remote control or automated operation. Of course, licensed duty operators may still be used, if the station wishes.

The RFR panel discussed the long-awaited Report and Order (R&O) to ET Docket 93-62. This R&O proposes to update the commission's current guideline, the ANSI C95.1-1982 standard, to the new ANSI/IEEE C95.1-1992 standard.

dard. Comments to this rulemaking exceeded 4,000 pages, with the initial comment deadline extended twice, and the reply comment deadline extended an unprecedented three times.

The FCC has been mulling over the comments and reply comments since April 25, 1994. A Report and Order, or possibly an Order and Further Notice of Proposed Rulemaking, was expected in March. If a combination Order and Further Notice is adopted, the commission is under a 6-month deadline imposed by Section 108(b) of the 1995 Telecommunications Bill to complete action in ET Docket 93-62.

More on RFR

Because of critical comments filed by the Environmental Protection Agency (EPA) incorrectly alleging that the ANSI/IEEE C95.1-1992 standard is a thermally based standard (see Editor's note), the commission

RFR and unattended operations

may instead end up adopting the guidelines of the National Council for Radiation Protection and Measurements (NCRP), which the EPA comments favored.

Like ANSI 92, NCRP is a 2-tiered standard, occupational and public, with the public portion of the standard five times more stringent than the occupational portion. The rationale for a 2-tiered standard is that for occupational exposures, it is presumed that workers are in reasonably good health and can be instructed to take safety precautions to ensure that excessive exposures do not occur. However, for public exposures, these assumptions cannot be justified.

Furthermore, since the primary known harmful effect of RF exposure to living tissue

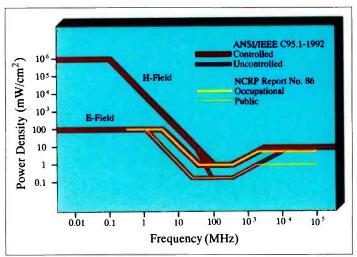


Figure 1. The current radio-frequency radiation standard.

is thermally based, then persons with health problems that impair their ability to tolerate a thermal load, for example, diabetics with poor circulation in their extremities, might be at greater risk than the general population. Therefore, like ANSI 92, the NCRP standard lowers the allowable power density limit to 200µW/cm² at VHF frequencies.

If adopted by the FCC, the NCRP standard would, like the ANSI 92 standard, regulate contact currents for the first time. However, unlike the ANSI 92 standard, the NCRP standard has no limits for induced body currents.

There is also the possibility that the FCC will "cherry pick" and adopt portions from both standards for an RFR regulatory smorgasbord, if you will. One thing is sure: both of the new standards are significantly more complex than the current standard, as demonstrated by Figure 1.

Other major RFR regulatory issues are the

acceptability of protective clothing, such as suits made from the German-manufactured Naptex material, and federal pre-emption of RFR standards that are more restrictive than those ultimately adopted by the FCC. Indeed, Section 108(a) of the Telecommunications Bill contains a clause granting such pre-emption, but only to Personal Communication Services (PCS) licensees.

Why such a narrowly focused pre-emption? Two reasons: 1) the PCS proponents "paid" for such favorable legislation, fair and square, and apparently saw no reason to share the benefit of this sorely needed federal pre-emption with other radio services; and 2) Congress appears to be in love with the revenues generated by spectrum auctions,


for which PCS has been a major contributor. However, the adage "A rising tide raises all ships" is appropriate here. Even the narrowly focused RFR pre-emption clause in the Telecom Bill will establish a precedent that hopefully the FCC will run with, and issue a companion rulemaking that would extend federal pre-emption to all other non-categorically exempted radio services.

Regardless of which standard ends up being adopted, it is clear that life is going to become more difficult for broadcasters when it comes time to certify compliance with the applicable RFR standard at their next license renewal, or sooner, if a facility's change


triggers an earlier evaluation under a new standard.

Editor's note: The developers of the ANSI RFR standard made no presumption that the only effect of radio-frequency energy was thermal. Instead, the criteria used in developing the standard was "work stoppage" in animals. It was then found that the only identifiable mechanism was the thermal effects, so the standard then became based on the concept of Specific Absorption Rate (SAR). The unlimited-time (continuous exposure) SAR limit for humans is 0.4W/kg of body mass for controlled (occupational) exposures and 0.08W/kg of body mass for uncontrolled (public) exposures and 0.08W/kg of body mass for sometime of uncontrolled in the proposures of 1.000µW/cm² and 200µW/cm², respectively.

Dane E. Ericksen is chairman, SBE FCC Liaison Committee.



A Star Performer Destined To Become A Legend.

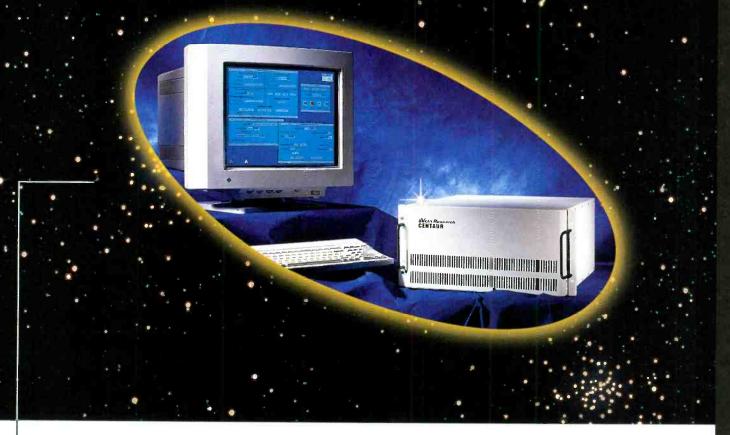

If your destiny as a multimedia professional is tied to the products that serve you, let Centaur help you become a rising star.

Centaur is a full-featured MPEG encoding solution for the b-oadcast and production professional desiring an easter approach to digital video compression. Its highly efficient batch encoding system

The Solution & works through a Graphical User Interface (GUI). allowing material to run locally on the encoder, or remotely across a metwork. Ethernet, Fast Ethernet, FD[1], CDDI, and ATM...Centaur supports them all. And movie encoding is a most effortless thanks to Centaur's support of long form encodes and its pause & resume features. In addition to supporting video resolutions from SIF (320 x 240 pixels) to ITU-R-501 (704 x 480 mixels), Centaur transparently supports closed captioning for the hearing impaired.

raybe it's time for you to reach for that next level. The Centaur vPEG Encoding System from Vela Research. A star performer testined to become a legend in the proper hands...like yours.



10813057201230

http://www.vela.com 2501 118th Avenue North • St. Petersburg, Florida 33716

Circle (57) on Action Card

FIELD REPORT



Performance at a glance:

- Redundant router options as a backup
- Parallel and serial control of various equipment
- Expansion capabilities to 16 individual playback channels
- Flexibility in routing source assignments to air
- Intensive audio metering front control panel

When building The Home & Garden Television (HGTV) network facility, we were looking for a master control switcher that would complement our Network Operations Department. With the need to provide the highest quality of video, component digital switching was the only direction for us to go.

At that time, one of the few companies with a proven digital master control switcher that approached us was BTS. After researching the market and talking to those who were using the Saturn switcher, we decided to purchase the BTS 601 and AES master control processors.

Related equipment

One major criteria we kept in mind was the related equipment that would interface with the switcher. We opted to purchase the BTS Venus router and Jupiter control system. We also added the BTS Mars router as a backup device and the Media Pool file server for commercial and promotional spots.

The Saturn master control system has two options for routing sources through the switcher. It can be used as a router control panel for the Venus router matrix, and the Saturn comes equipped with an internal 16x5 matrix router mezzanine board. We chose to use both. The Saturn communicates to our 64x64 router by

BTS Saturn switcher

selecting sources to air. We also use secondary outputs of the essential on-air sources for the smaller matrix as a backup router. This gives us the redundancy needed in our system.

The Jupiter system and its *Pathfind* function, increases our flexibility to access any routable source through the Venus router. The Jupiter control system's MC 3000 panel will also provide serial or parallel control over multiple videotape recorders

or a disk-based file server system.

The Mars routing system acts as a backup switcher to the Saturn switcher. Mars uses an MPK panel that mounts within the Saturn control panel, but acts mechanically as a separate device, giving us more rack and console space. This provision makes training more convenient for those operators who are new to the Saturn switcher.

The Media Pool is an expandable multichannel digital video storage device with variable compression that network control and post-production can access simultaneously. The Saturn switcher can access the Media Pool

either via the GPI or via serial control interface.

Saturn features

Saturn uses parallel control for the Odetics TCS-90 cart machine, which houses six digital Beta decks. Future plans will use the Saturn to trigger the Media Pool for commercial breaks and the cart machine for program material.

After researching the market and talking to those who were using the Saturn, we decided to purchase the BTS 601 and AES master control processors.

The Saturn can be configured to operate up to 16 individual channels. An additional switcher processor and current control panel would enable us to broadcast another feed as our network demands grow.


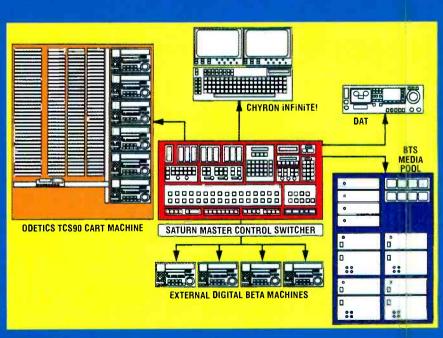


Figure 1. The BTS Saturn switcher provides flexible control over a variety of external devices.



We're Not
Just Promising
a Revolution
in Digital
Video Editing
and Storage,
We Can
Back It Up.

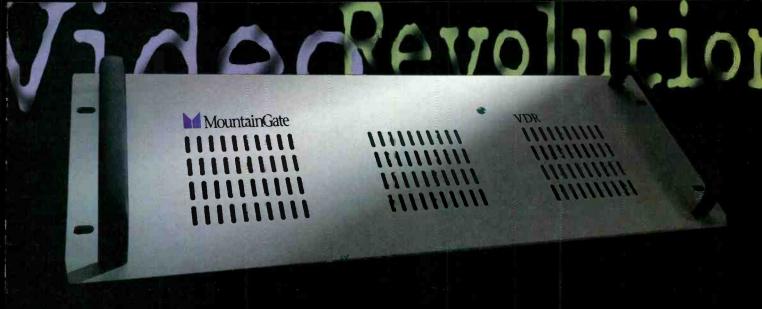

Introducing, a mind-altering line of **uncompressed** digital video disk recorders from MountainGate, the world leader in high-end storage.

Unlike other digital disk recorders, which typically hold just 30 to 120 seconds of uncompressed storage, the MountainGate VDR holds over 50 minutes of uncompressed D-1 and over 100 minutes of D-2 video. Now you can preview long-form programs such as music viceos and television shows without first converting them to tape. And, you can search through tens of thousands of frames quickly and easily. No more pre-rolls or shuttling VTRs. No more tape degeneration. And that means faster and more cost-effective sessions.

Thanks to a direct high-speed SCSI interface, the MountainGate VDR is fast enough to eliminate the bottlenecks commonly associated with post-production work. And, you can use the VDR's network interface to send source material digitally to any number of workstations. Another time, and cost, saving measure.

Our new VDR handles multi-video formats, including D1, D2, RGB, and HDTV. Plus, you can choose from many extras, such as independent 4- or 8-channel AES/E3U digital audio.

The videc revolution is happening, and it's coming from a company that can back it up.

For information or a demonstration of the new MountainGate VDR line, call 1-800-556-0222 or visit our web site at http://www.mountaingate.com.

Circle (58) on Action Card



DataShuttleTM
features portability and
patented shock-isolation
technology with
capacities up to 18 GB.





PassPort^{IM} our

1 GB removable hard

drive resists shock up

to 150Gs.



Chapanal™ our versatile family of mass storage library systems offer, up to 74 T8 of storage.



IncreMegTM the ultimate in removable hard drive storage, offers up to 4 GB of storage and 8ms access times.



StampedeTM line of disk arrays accepts multiple ±trive form factors with total capacity in excess of 400 GB.

iditaBack TtII

With the aid of Jupiter, A/V monitoring on the switching control panel allows the selection of any desired feed. The ability to delegate various feeds to one panel also can reduce the future expense of setting up multiple control rooms.

Additional features for our operation include serial control (through Jupiter) and transition control of external sources. Transition modes make switching look studio produced and variable preroll transition time gives us the flexibility needed for live applications.

The switcher provides two independent linear keying channels that support our 2channel Chyron iNFiNiT! with Transform.

Included with the keying features are clip, gain and matte controls.

The Saturn's flexible key assignments of the program and preview bus make this device user- and engineer-friendly. The key caps can be electronically labeled with up to eight alphanumeric characters. This eliminates making new labels for key caps if we want to rearrange the inputs.

Adding or changing source assignments to the router is simple. While running on the backup switcher, the Jupiter configuration software can be used to edit changes in the router. The changes are then downloaded to the Saturn switcher via the LAN, eliminating the need to burn PROMS and

avoiding any on-air error when rebooting.

The source and assign memory panel will allow internal routing control from Venus to the program and preset bus. This makes it simple for operators to arrange key assignments and provide another level of redundancy should a deck or a key source

The Saturn's flexible key assignments of the program and preview bus make this device user- and engineerfriendly.

The audio metering control panel makes it easy for the operator to monitor VU or PPM left and right channels. Indicator lights will warn the operator if the audio is out of phase. A preset audio ratio can be set on the Saturn control panel for voice-over insertions. Saturn can trigger either the Media Pool or the DAT machine as a backup audio source for these needs.

Individual audio balance phase reversal and channel swap controls make it easy for the operators to correct errors before they air. Audio gain for each channel can be adjusted individually, which gives operators the ability to adjust the levels on the preset bus before a spot goes to air. Included in the audio display is the ability to monitor preset, program and off-air audio channels.

Fitting our needs

When we first purchased the BTS Saturn master control switcher it was an evolving product and not all of the features were operational. The support and software upgrades to this product have been truly an enhancement. The functions we use on this switcher have been flawless. The flexibility and reliability make the Saturn the only switcher on the market that fits our needs.

John Ajamie is director of network operations & duplications, Home & Garden Television Network (HGTV), Knoxville, TN

Editor's note: Headquartered in Knoxville, TN, with offices in New York, Los Angeles, Chicago and Detroit, HGTV reaches more than 10 million TV households, including DirecTv and C-band satellite subscribers nationwide.

Editor's note: Field Reports are an exclusive Broadcast Engineer ing feature for broadcasters. Each report is prepared by wellqualified staff at a broadcast station, production facility or consulting company.

The reports are performed by the industry, for the industry Manufacturer's support is limited to providing loan equipment and to aiding the author if requested.

It is the responsibility of Broadcast Engineering magazine to publish the result of any device tested, positive or negative. No report should be considered an endorsement or disapproval by Broadcast Engineering magazine



► The Vision Fund of America

An association of visual industry professionals to promote research and resources for visually impaired people

1996 Annual Awards Banquet Monday, May 13, 1996 at the Grand Hyatt, NYC

Join your colleagues in honoring:



Charles A. Steinberg, President. Sony, Bus. & Prof. Group



Ann Daly, President, Buena Vista Home Video



Eddy W. Hartenstein, President. DIRECTV, Inc.


Proceeds from the Vision Fund Banquet benefit The Lighthouse National Center for Vision and Aging, an internationally known center dedicated to educating and helping individuals, their families and health care professionals solve the problems associated with vision impairment.

For banquet table reservations and journal advertising information contact:

Marjorie Dybec, Vision Fund Headquarters, c/o The Lighthouse, Inc. 111 East 59th Street • New York, NY 10022 • Tel: 212-821-9557



The BTS Saturn master control switcher in its all-component digital environn ent at the Home & Garden Television facility in Knoxville, TN.



Internet:

be@intertec.com

CompuServe: 74672.3124

FAXback:

913-967-1905

Now you can link together readers of any of Intertec's magazines to create the most powerful network for your sales message.

And give your ad budget a power boost, too. Your network buy qualifies for our all-way combination rate. That can result in more ad insertions for basically the same dollar investment.

LINKING YOUR CUSTOMERS ADDS POWER TO YOUR SALES MESSAGE AND TO YOUR BUDGET

Talk to any of our publishers or your Intertec marketing manager about how a custommade network can add power to your message, and your budget.



LIGHTHOUSE DIGITAL SYSTEMS

Lighthouse "Navigator" Control System Supports All Industry Routers

- Matrix Mapping &
 Destination Blocking
- Multiple GPI Interface Support
- · System Wide Messaging
- Individual I/O Switching
- System Wide Viewing
- TCP/IP Novel Backbone Support
- Drag & Drop Graphics
- Tie Line Configurations

- Device Lockouts
- Configuration Printing
- Exportable SQL Format Database
- Salvos
- Rack Mount Panels or **CRT Touch Screen**
- Multi Table Data Based Management
- Distributed Switching Networks

Lighthouse Also Manufactures...


Fiber Optic & Coaxial Serial Digital Routers


- Speeds To 1.5 Gpbs Mix Coax & Fiber Within The Same Chassis
 - Multiple Speeds Within The Same Chassis
- Video, Audio, Time Code & Data/Machine Control Sizes: 8X-1000X



Lighthouse Digital Systems Grass Valley, California 800-577-9562

Circle (59) on Action Card

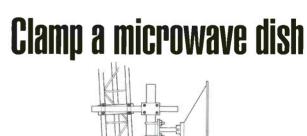



Good ideas and thousands of parts you can use right now.






FREE cataloa

Circle (60) on Action Card

APPLIED TECHNOLOGY



Although digital signal processing has largely replaced analog processing, it's still necessary to use analog buffering, filtering and DC control before and after digitization.

In an effort to integrate these functions and reduce engineering and manufacturing costs of video hardware equipment, C-MAC manufactures and markets a line of active video modules for these purposes. This article details the reasons for and advantages of these new approaches.

The importance of video filtering

The analog real-time video filter is a key element in clean video processing. The input, or anti-aliasing filter, is required prior to digitization, while the output, or reconstruction filter, is needed after the digitized signal is converted to analog.

The digital sampling process can introduce aliasing (or moiré) components, noise and distortion that cannot be removed by later processing. The minimization of these artifacts is important when video compression is applied to the signals.

Digitized artifacts add to the complexity of video signals, causing the compression process to become less efficient. This results in lower levels of achievable compression. Because video compression techniques are rapidly becoming standard in all video processing and transmission systems, the importance of proper filtering will increase.

Oversampling techniques are now common for sampling and reconstructing analog video signals, and allow the use of clock frequencies that are multiples of the pixel clocks. They use sharp cutoff, digital finite impulse response (FIN) filters to reduce the analog filtering requirements.

Current technology only doubles the pixel clock rates so the filtering process is still not trivial, especially for higher-quality systems that require flat response and mini-

Above photo: C-MAC produces a wide range of monolithic filters for analog and digital applications. Shown above is a C-MAC ST-12S Smart Filter, designed for multichannel video workstations.

C-MAC filters

mum group delay. Oversampling digital filters requires a lot of silicon and can be expensive.

Anti-aliasing filtering

Aliasing is an artifact added when a video signal is not properly filtered before being digitized by an A/D converter. The resulting moiré effect cannot be removed by later processing. The A/D conversion process produces upper and lower sideband replicas of the input signal at harmonics of the sample rate. A properly designed filter will remove most signal and noise components above one-half the sampling frequency (Fs/2).

For example, if you sample at 10MHz, the Nyquist bandwidth is 5MHz. If you input 5.5MHz, the moiré will be at 4.5MHz. Furthermore, if you input 9MHz, the moiré is at 1MHz (a lower frequency and, therefore, more visible).

The amplitude of the moiré will be equal to that of the input frequency causing it, modified by the slope of the filter. High-frequency moiré, allowed by a sharp cutoff filter, is less apparent than the lower-frequency moiré allowed by an inadequately sharp filter, or worse, no filter at all.

Tests have shown that there are definite trade-offs between the visual effects of brick-wall filters vs. less gradual filters that allow some aliasing. It is now common to see large amounts of low-frequency moiré when digitizing unfiltered signals from com-

puter graphics devices and PC video cards, which contain modern high-speed D/A converters.

Because video
compression techniques
are rapidly becoming
standard in all
video processing
and transmission
systems, the importance
of proper filtering
will increase.

Reconstruction or post-filters

The function of a post-filter is similar to that of the prefilter. The output of a video D/A converter (DAC) has double sideband replicas of the desired output signal at harmonics of the clock frequency. Severe moiré (aliasing) results if these sidebands are not removed.

Post-filters have the additional requirement of providing an SinX/X characteristic to compensate for the aperture colloff of

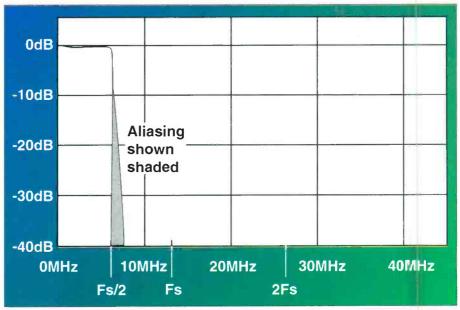


Figure 1. The output of a properly input-filtered D/A converter. Note the significant reduction is aliased signals.

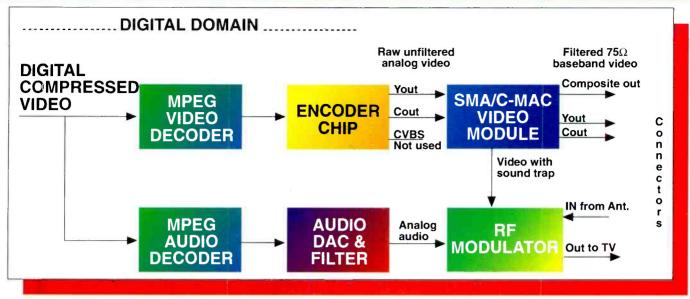


Figure 2. Partial diagram of a set-top box. The need for proper filtering will become even greater as manufacturers need to interface older-type analog devices to the new range of digital sources, like DBS, ATV and multimedia signals.

the DAC, which depends on the clock frequency. These sidebands produce the steps that are visible in the waveforms at the output of the DAC. The steps indicate that the DAC has a "sample-and-hold" characteristic that produces a frequency response rolloff dependent upon the clock frequency (Fs).

In Figure 1, a properly filtered signal shows a great reduction in aliasing and a flat passband response due to SinX/X compensation in the filter.

Practical considerations

Low-impedance passive filters require high Q inductors to minimize losses, which can be significant (1dB or more). Passive reconstruction filters must also have at least 2.5dB of additional loss to allow for SinX/X boosting.

Buffered hybrid filter modules contain high-impedance filters with extremely high output impedance so that there are no losses within the filter, even with SinX/X compensation.

Gains are inherently unity, and grounding a precision internal voltage divider can provide an exact gain of two, often needed when driving 75Ω loads.

Resistor tolerances in thick film versions can exceed 0.25%, allowing the gain to be precisely controlled.

The form factor of thick film module packaging can be either that of a SIP package, which uses minimum board area or that of J-lead packaging that has a short mounting height.

One advantage of combining the entire filtering and buffering functions in a single factory-tested module is minimal crosstalk and digital noise pickup when compared

with discrete circuitry. This is important when circuit boards contain a large number of high-speed digital VLSI parts. The C-MAC filters provide inherent power supply noise rejection and contain onboard decoupling for high stability.

Multichannel analog video modules

The latest generation of monolithic video encoders and decoders have created the need for low-cost multichannel video modules. An important example, shown in Figure 2, is the high bandwidth video obtainable from the new digital set-top boxes.

Composite video from the digital encoder sent to the internal RF modulator can create an annoying audible buzz if the video contains 4.5MHz (NTSC) or 5.5/ 6MHz (PAL) frequencies at a vertical rate.

This condition is particularly likely when graphics and menus are displayed. The solution is to incorporate a high-Q trap in only the video sent to the RF modulator. The trap is delay equalized for optimal transient response. The same module also provides wideband, SinX/X-equalized 75Ω composite and Y/C baseband outputs.

Even higher performance, multichannel video modules are available without the trap and equalizer to provide optimum performance for computer graphic workstations and PC cards. The 750 Y/C and two composite video channels are generated by resistively adding Y and C after filtering and buffering so that there are no differential phase or gain errors.

All digital encoder outputs have DC offsets due to their single power supply. Rather than using large AC coupling capacitors, the video filter modules provide level

shifting with DC coupling to remove offsets, eliminate tilt, improve reliability and reduce cost. Delay differences between the channels are typically less than 10ns.


Future trends


Eventually, standard digital consumer video interfaces will remove the need for most analog interfaces. In the meantime, the trend in VLSI chips will be toward analog interfaces with 4x oversampling and built-in analog filtering.

Newer generations of video modules will contain lower-cost, lower-power opamps and more precise components. Also, the cost and size of hybrid video modules will continue to fall and new applications will be found.

C-MAC provides a broad line of filters for analog and digital applications.

Keith Watts is senior applications engineer for C-MAC Microcircuits, United Kingdom





INDUSTRY BRIEFS

BUSINESS

Leitch, Chesapeake, VA, installed StillFile Systems in state-of-the-art hockey arenas for the Ottawa Senators and the Montreal Canadians. The systems will store stills of the hockey players, their stats and commercial advertisements for instantaneous playback during games.

Tektronix Video and Networking Division, Beaverton, OR, announced the formation of Tektronix Video and Networking Systems. Turnkey system services will be offered for the integration of Tektronix, Grass Valley and Lightworks Editing Systems products, as well as other manufacturers' products.

Thomson Broadcast Systems, a subsidiary of Thomson multimedia, Paris, has signed a distribution agreement with Getris Images. Under the terms of the agreement, Thomson Broadcast Systems will be the sole distributor for Getris Images graphics systems.

Chyron, Melville, NY, has joined Silicon Graphics as one of the certified application vendors for the SGI IndyStudio program. The Chyron Liberty Paint digital paint graphics package has been bundled together with the Chyron Cindy video board for Indy workstations. When used with the SGI IndyStudio program, the package provides an affordable broadcast paint system for SGI platforms.

CBS News chose Discreet Logic and Silicon Graphics systems for the development of real-time virtual set-style graphics for CBS News primary and election night broadcasts.

Sony, Park Ridge, NJ, has sold DVW-700 digital Betacam camcorders to ProVideo, Madison, WI; Spectrum Productions, Milwaukee; Beachwood Studios, Beachwood, OH and Pacific Coast Productions, West Los Angeles.

Sony Electronics Systems Integration is designing and implementing studio equipment and an OB truck for LIN Productions, Arlington, TX, a company formed by LIN Television Corporation to produce regional baseball telecasts.

A flagship PBS station, WGBH/Boston, purchased Sony's VideoStore system to further its automated insertion capabilities for on-air promos, bumpers and interstitials.

Solid State Logic, United Kingdom, has sold digital production and/or post systems to KCPQ-113 Fox, Tacoma, WA; Walt Disney Imagineering, Glendale, CA; Video Post & Transfer, Dallas; Fox Animation Studios,

Phoenix; Post Audio, Prairie, MN; Audio Recording Unlimited, Chicago and Cresent Moon, Miami.

Technical Industries, Atlanta, GA, was selected by Panasonic/MEI to perform all detailed engineering and installation of the International Broadcast Center for the 1996 Summer Olympics.

Discreet Logic opened a sales office in the New York Information Technology Center, located in lower Manhattan at 55 Broad Street. The office will house a full state-of-the-art demo facility showcasing Discreet Logic technology, including a demo center for VAPOUR, the company's virtual set technology. For more information, contact Discreet Logic headquarters; telephone (514)272-0525; fax (514)272-0585; E-mail infodiscreet.com.

C-Cube Microsystems, Milpitas, CA, announced that Data Translation selected C-Cube's CLM4100 encoder family as the core digital video engine for Data Translation's new Broadway MPEG-1 authoring solution.

Panasonic, Secaucus, NJ, sold 25 AG-EZ1U DV camcorders to Video News International (VNI), Philadelphia. In addition, VNI purchased eight AJ-D750 DVCPRO studio editing decks for playback of DV videotapes.

Walters-Storyk Design Group is involved in more than 40 projects in the United States, Latin America and Southeast Asia. The architectural and design assignments total more than \$25 million in construction and range in size and location from an expansion for the Howard Schwartz studio complex in New York to a 700-seat performing arts center in Kuala Lumpur, Malaysia.

Quantegy, Mountain View, CA, announced that the Canadian Broadcasting Corporation (CBC) selected Quantegy's Ampex 208 Betacam videotape to use for its 1996 Summer Olympic broadcast coverage.

Philips Electronics North American Corporation, New York, has completed its acquisition of Alamar Electronics USA. Alamar will continue to operate within its existing management structure.

A nonprofit organization, the Citizens Democracy Corps (CDC), Washington, DC, is recruiting U.S. volunteers with senior-level experience in production and general management in the TV, cable TV and radio

industries. The CDC's Enterprise and Economic Development Program provides assistance in these areas of specialization to small and medium-sized companies in newly democratic countries. For more information, contact: CDC, 1400 Eye St. NW, Suite 1125, Washington DC 20005; telephone (202)872-0933 or (800)394-1945.

PEOPLE

Bruce Williams was appointed vice president, manufacturing and operations for Alamar USA, Campbell, CA.

Also, Tom Zades was promoted to chief financial officer for Alamar USA.

Charles Goodwin was promoted to vice president, manufacturing for Leitch, Chesapeake, VA.

Also, Steve Hathaway was appointed to director of European operations for Leitch.

Stephen A. Savitt joined Telemetrics, Mahwah, NJ, as assistant sales managet.

Michael Creamer joined Telecast Fiber Systems, Worchester, MA, as senior sales engineer.

Joe Cirincione has been placed in a newly created position for Leitch, Chesapeake, VA, as product manager for StillFile, MediaPort and the Client workstation. Cirincione will divide his time between the Chesapeake manufacturing facility and the Toronto facility in Canada.

John Knapton was promoted to sales director for Audio Processing Technology, Belfast, Ireland.

Fred Scott was named vice president in charge of broadcast and professional video product/sales for Fiber Options, Bohemia, NY.

Mark S. Podesla was appointed director, marketing and sales for Nova Systems Canton, CT.

Jeffrey Gottlieb was appointed product specialist for nonlinear video editing equipment for the Panasonic Broadcast & Television Systems Company, Secaucus, N.

Clarification

In the "Video servers" article featured in the 1996 February issue of *BE*, the author for the section on Hewlett-Packard's video server (p. 60) should read "By Mary Louise Bucher."

Why Settle For Less Than 100% Digital?

The Hitachi SK-2600 is the only *fully digital triaxial camera system* in the world.

Fire, floods, world upheavals — whatever the year 2000 brings, the "2600" is the camera you'll want to shoot it with. This is the camera that will not only make you look good today, but will keep on making you look good 10 to 12 years into your buying cycle — well into the new millennium.

We start with a completely digital triaxial system and add such advanced technologies as a 4:3 aspect ratio, easily switchable to 16:9. Of course we offer flesh tone detail that keeps your talent as youthful as your system. Our six-vector color corrector allows you to paint and fine tune individual colors to make matching extremely easy. The unique LSI processor processes RGB in a single wafer, eliminating cross talk and noise. And only with digital technology can you set up one camera the way you like and transfer the information precisely to all other cameras for an exact match.

These ahead-of-their-time features are just part of the reason that, whatever the next millennium brings, if you own a 2600, the one thing it won't bring you is regrets.

For and Wh

Not just digital, Hitachi digital. For the full story and a free copy of our white paper, "Advanced Digital Camera Technology For The New Millenmunt," call 800-762-6405.

HITACHI

Hitachi Denshi America, Ltd. Hitachi Denshi, Ltd.

New York (516) 921-7200 Atlanta 770) 242-3636 Dallas (817) 488-4528 Chicago (708) 250-8050

Los Angeles (310) 328-6116 Canada (416) 299-5900

Circle (83) on Action Card

Hitachi's SK-2600 Offers You All These Breakthrough Technological Advantages:

Full digital transmission system

4:3 aspect ratio, easily switchable to 16:9

Flesh tone detail for a softer, more youthful look

Six-vector color corrector and true linear matrix operating simultaneously

Single LSI does RGB processing for ultra-pristine image

13 t<mark>o</mark> 18 bit digital wocessing

Presision digital file transfers


Extreine range of detail in viewfinder, even in low-level lighting


Router control system



• SC-3: an advanced router control system designed to complement the UTAH-300 router; the SC-3 is compatible with all Utah Scientific, Alpha Image and Dynatech routers; a new control panel bus runs at 2MHz and provides the faster switching time that will be necessary for products of the future; 2-level tie line management allows facilities to incorporate existing matrices and makes multiformat switching transparent to the user (for instance, the system will automatically handle the connections between analog and digital routers); the SC-3 incorporates Utah Scientific's RealTime switch allowing the UTAH-300 router to switch in real time.

Circle (350) on Action Card

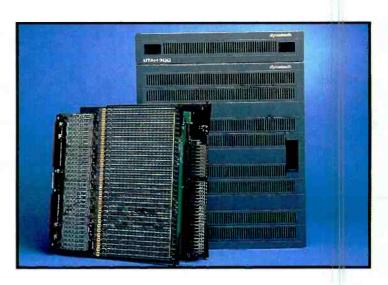

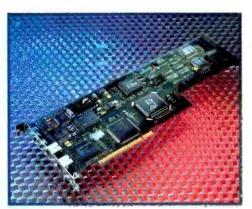

Nonlinear editing and video capture boards

Fast Electronics

• AV Master/AV Master Pro: nonlinear editing and video capture boards that use nextgeneration Philips PCI chips to combine high-quality 60 fields/s Motion JPEG capture, onboard CD-quality digital audio recording and Windows NT/95 compatibility; high resolution S-Video

throughput and bus mastering technology deliver superb picture quality with video data rates of 5MB/s (4:1 compression); the AV Master Pro meets CCIR 601 specifications (720x525 lines of resolution).


Circle (353) on Action Card

Single-channel digital transport system ADC Video Systems

• DV6300: a single-channel universal digital transport system designed to support the greatest variety of video and telephony channels available today; the flexible reconfigurable design of the DV6300 offers unlimited potential for any single-channel video or digital application; single channels can be economically inserted into or dropped from a high-speed DV6300 2,4Gb/s digital multichannel stream to support point-topoint single-channel applications, local video transport, studio to production house or transmitter interconnects and interfaces between live events and long-distance networks; in addition, the DV6300 can be used to implement standalone single-channel optical links.

Circle (351) on Action Card

Video DAs Leitch



outputs.
• VDA-683: a general-purpose video distribution amplifier that features excellent linearity and gain stability for solving common mode errors; this 8-output DA can handle any-

thing from .7V peak-to-peak noncomposite video to 2V peak-to-peak subcarrier; used with FR-680 analog frames, these units provide differential input when equalization and clamping are not required; units feature low power consumption and high temperature stability.

• VDA-6830: a video distribution amplifier that helps make the transition from analog to digital a less expensive process; using these DAs in FR-6800 digital frames allows analog and digital to coexist simultaneously until the analog device is eventually replaced; once the analog device is replaced, the DAs are removed from the frames and replaced by digital DAs; this amplifier can also serve as a distribution

for unbalanced or single-ended AES/EBU transmission; features include differential input, AC coupling and a 30MHz bandwidth.

• VRG-683: a video remote gain amplifier designed for remote-control adjustment of video and chroma signal amplitude; the units have a continuous adjustment of video gain over a range of ±6dB and a chroma gain over a ±3dB; features include differential input, six outputs, cable equalization of up to 300 meters and a bandwidth of 30MHz.

Circle (352) on Action Card



3rd Montreux International Radio Symposium and Technical Exhibition

In association with

European Broadcasting Union

Association of European Radios

National Association of Broadcasters

Radio Advertising Bureau



Radio

3rd International Symposium 4-5 June, 1996 on DAB



Following the first two editions in Montreux in 1992 and Toronto in 1994, the 3rd International Symposium on DAB will take place in Montreux on **June 4-5**, preceding Radio Montreux.

Organised and coordinated by the EBU, the Symposium will focus on the latest developments of this technology.



The First Montreux Interactive Media Services Symposium and Technical Exhibition will be launched concurrently with the Radio event, from June 6-9, 1996, bringing together under one roof all the players of the broadcasters' world active in the field of multimedia and interactive services.

P.O. Box 1451, Rue du Théâtre 5, 1820 Montreux, Switzerland

For further details:

Fax +41 21 963 88 51

or call +41 21 963 32 20

E-Mail: r.crawford@tvsympo.mcnet.ch

NEW JUNE 6-9, 1996

June 6-8, 1996

DigiMedia, organised by the four founding institutions - International Telecommunication Union, the European



Philippe Coeytaux Tel. +41 22 320 90 33 Fax +41 22 320 90 75 E-mail: 100724.114@compuserve.com

Broadcasting Union, Audiovisual Eureka and the University of Geneva together with the Montreux Symposium Office is moving from Geneva to Montreux in June 1996. Circle (77) on Action Card

OVER BUILT GrassValley

FAST



About 200 lbs. of electronics will fit into this Winsted rack. But we built it strong enough to support up to 2800 lbs. We welded the front and rear frames adding our interlocking tie-bar system for maximum strength. The modular parts connect with heavy-duty bolts for maximum versatility. So a Winsted console system will expand as you need it and hold all the electronics you can load into it ... and then some!

> **Call or write for your FREE catalog** 800-559-6691



10901 Hampshire Ave. So., Minneapolis, MN 55438-2385 • Fax 612-944-1546

Preferred by Professionals Worldwide.

Circle (72) on Action Card

Network adapters/loop hubs Prisa Networks

· NetFX-HIO64 network adapters and NetFX loop hubs: a 2-pronged solution that, when coupled with the NetFX workstation cards, allows the movement of large blocks of data at more than a gigabit per second between Silicon Graphics servers and workstations, RAIDs and other peripheral devices; the networking hardware and software system is designed to solve the information bottleneck in computer-generated motion picture and TV production. Circle (354) on Action Card





MPEG encoding system **Optibase**



• MPEG Forge: a high-quality MPEG-1 and MPEG-2 encoding system that not only creates MPEG-1 SIF, but also MPEG-2 half D-1 streams; the system allows users to create high-quality video at reasonable data rates; the 2-board plug-and-play solution includes a PCI video encoder and an ISA audio encoder and features component input, onboard video filtering, VTR device control and batch encoding; for users that start with MPEG-1 and MPEG-2 Half D-1, and then plan to move into MPEG-2 Full D-1 later, the option to upgrade to MPEG Fusion is available.

Circle (356) on Action Card

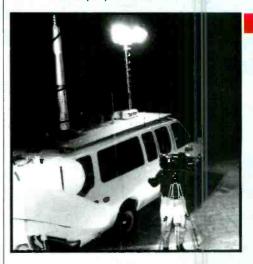



Quartz implemented in DigiSuite



· Quartz architecture in DigiSuite: DigiSuite, Matrox's new generation of digital video products, features software development tools based on Microsoft's new multimedia architecture code-named Quartz; the DigiSuite implementation of Quartz overcomes the wellknown limitations of Video for Windows (VFW) and delivers a standard, reliable software development framework robust enough to meet the demand of the professional video industry.

Circle (355) on Action Card

Broadcast VideoStore system

· VideoStore insertion system: a hard-diskbased ad insertion and program delivery system that provides greater on-line storage capacity and lower maintenance costs while significantly improving the quality of a station's on-air look; based on Redundant Array of Inexpensive Disks (RAID) technology, the VideoStore system combines quick random access, large storage capacity, and high-quality compressed video in an integrated, multichannel video transmission system; features include Sony software, flexible and expandable open architecture and media units comprised of six hard-disk drives with either two or four GB of storage.

Circle (357) on Action Card

Mobile lighting system for nighttime remotes

Will-Burt Company

• Night Scan ENG: an ENG telescoping mobile lighting system in a compact, self-contained roof-top unit; Night Scan ENG elevates 3,200°K quartz lights to six feet above an ENG vehicle in 20 seconds; all functions are remotely controlled, including deployment, full pan and tilt lighthead control and Auto-Stow, a 1-button command that automatically retracts and stows the unit to a lowprofile travel position.

Circle (358) on Action Card

LOOKS DON'T COUNT



The best digital equipment deserves more than just a table. It deserves Digital Desk™.



You invest a lot in digital equipment to give your graphics the right look. For a little more you can put it on a good-looking Digital Desk designed specifically for multimedia equipment. But there's more than just good looks. It's ergonomically designed for operator comfort and efficiency, ideal for both linear and nonlinear systems. If you're serious about your work, get a serious workstation with a Winsted Digital Desk. Choose from a wide range of multimedia models in our. ...

FREE CATALOG . . . CALL OR WRITE



10901 Hampshire Ave. So., Minneapolis, MN 55438-2385 • Fax 612-944-1546

Preferred by Professionals Worldwide.

Circle (73) on Action Card

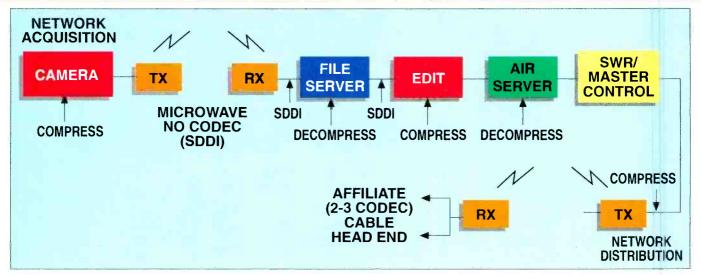


Figure 1. The path from network acquisition to the viewer may involve five or more compression/decompression cycles. Local acquisition to the viewer could include two or three cycles.

ware being offered handles fault tolerance, plug-and-play, gateway user configurations or whether the software has peer-to-peer relationships or client/server relationships? In addition, in some areas there will be the issue of how to license the software, whether the software is per seat, per person or per bits of bandwidth.

Certainly, there will be a mix of all of these possible configurations. Then, there is the perennial question of how reliable the software is. If the software is controlling a revenue stream, it has to be superreliable at the time when it is installed. I am not convinced that there is any magical way to evaluate software without extensive demonstration at the manufacturers' sites. In this short review of technology issues facing the broadcaster, I believe that the software issue is one of the most predominant aspects that has yet to find a quantitative way of evaluating the real performance of the software.

Conclusions

Customers will be faced with the challenge of vendors providing complete solutions to their problems. The key to their success is to provide a formula, a product strategy and a system design that's flexible and compatible with existing technology. yet also provides a migration path to the vision of a complete digital system. The marketplace wants to make the best use of digital hardware and software, using it to optimize performance for greater ease of

MASTERKEY 6

Fax: (905) 764-7438

use, with enhanced functionality within individual application and between sys-

Using advanced technology to develop new revenue streams and new business opportunities --- especially in the area of true multimedia production --- in today's multichannel distribution broadcast model is absolutely key to the broadcast industry's future success. We cannot afford to take too many steps backward in our rush to embrace compressed TV facilities. We must seriously look at all of the implications and the solutions being offered with a long-term vision rather than a short solution.

Peter A. Dare is senior vice president, technology, for Sony Electronics Inc., San Jose, CA.

Editors note: This article was adapted from a pre-NAB speech given by Peter Dare. It has been edited and reformatted to fit this

Internet:

FAXback: 913-967-1905

be@intertec.com CompuServe: 74672,3124





Circle (75) on Action Card

<u>broadcast video systems</u> 40 West Wilmot Street, Richmond Hill, Ontario L4B 1H8

• 525/625 line 110/220VAC operation

Telephone: (905) 764-1584



"THE PROFESSIONAL'S SOURCE"

FOR ORDERS CALL: 800-947-9928 212-444-5028

OR FAX (24 HOURS): 800-947-9003 212-444-5001

OVERNIGHT AND RUSH SERVICE AVAILABLE

E-Mail at 76623.570@compuserve.com

See Us at NAB in Las Vegas at the Sands Expo Center April 15-18 at Booths #\$1414-\$1421



VIDEO 14/100 FLUID HEAD

- Sachtler Touch and Go System
 Integrated sliding battery plate
 Strengthened dynamic counterbalance in 2 steps
- Frictionless leak proof fluid damping with three levels of drag

 Vibrationless vertical and horizontal brakes

 Built in bubble for horizontal leveling

Especially developed for use in ENG, the Hot Pod tri pod is the fastest in the world. The central locking system is activated on all three legs at the same time, while the pneumatic center column easily makes it possible to have the lens at a height of over 7 feet. The elevation force of the center column factory set and doesn't require any setup. Whe moving to another location it can be carried by handle located at the center of gravity.



ENG TWO-STAGE TRIPOD SERIES

Sachtler two-stage tripods have an enlarged height range (lower bottom and higher top position) so they are more universal. Legs can be locked in seconds with Sachtler's quick clamping. There are also heavy duty versions for extra stability. The heavy duty aluminum has a 20mm diameter tube vs. 16mm and the heavy duty carbon fiber has a 24mm diameter tube vs. 22mm. All heavy duty two-stage tripods have a folding tripod handle.

NEW! Sachtler **CADDY** Systems

Now Sachtler quality is available to low budget users. The price of a CADDY system includes the new 7-step dampened CADDY fluid head, ultralight but rugged carbon fiber tripod, lightweight spreader and either a soft bag or cover. The CADDY fluid head leatures an adjustable pan arm, 7 step adjustment for quick counter balance and the selflocking Sachtler Touch and Go System

Single-Stage ENG Carbon Fiber System:

- · CADDY Fluid Head
- ENG Single-Stage Carbon Fiber Tripod
 SP 100 Lightweight Spreader
- . Transport Cover 100

- 2-Stage ENG Carbon Fiber System CADDY Fluid Head
- ENG 2-Stage Carbon Fiber Tripod
 SP 100 Lightweight Spreader
 Soft padded ENG Bag

anton_{bauer}

Logic Series DIGITAL Gold Mount Batteries

The Logic Series DIGITAL batteries are acknowledged to be the most advanced in the rechargeable battery industry. In addition to the comprehensive sensors integral to all Logic Series batteries, each DIGITAL battery has a built-in microprocessor that communicates directly with Anton/Bauer InterActive chargers, creating significant new benchmarks for reliability, performance, and life. They also complete the communications network between battery, charger and camera. With the network in place, DIGITAL batteries deliver the feature most requested by cameramen: a reliable and accurate indication of remaining battery



DIGITAL PRO PACS

The Digital Pro Pac is the ultimate professional video battery and is recommended for all applications. The premium heavy duty Digital Pro Pac cell is designed to deliver long life and high performance even under high current loads and adverse conditions. The size and weight of the Digital Pro Pac creates perfect shoulder balance with all cameras/camcorders

- DIGITAL PRO PAC 14 LOGIC SERIES NICAD BATTERY
 14.4v 60 Watt Hours 5 1/8 lbs. Run time: 2 hours @ 27
- DIGITAL PRO PAC 13 LOGIC SERIES NICAD BATTERY 13.2v 55 Watt Hours, 4 3/4 lbs. Run time, 2 hours @ 25 watts, 3 hours @ 17 watts

GOLD MOUNT BATTERIES

Logic Series Gold Mount batteries are identical to the respective DIGITAL versions with respect to size, weight, capacity, IMPAC case construction, and application. They are similarly equipped with micro-code logic circuits and comprehensive ACS sensors with micro-code logic circuits and comprehensive ACS sensors They do not include DIGITAL microprocessor, features such as the integral diagnostic program "Fuel Computer", LCD/LED display and interActive view/inder fuel gauge circuit. • PRO PAC 14 NICAB BATTERY (14.4 v 60 WAIT Hours) • PRO PAC 13 NICAB BATTERY (13.2 v 55 WAIT Hours)

- . TRIMPAC 14 NICAD BATTERY (14 4v 40 Watt Hours)
- TRIMPAC 13 NICAD BATTERY (13.2 v 36 Watt Hours)
 COMPAC 14 NICAD BATTERY (14.4v 40 Watt Hours)
- . COMPAC 13 NICAD RATTERY(13 2v 36 Watt Hours)

Vinten

THE ADVANCED RANGE OF VISION LIGHTWEIGHT **HEADS AND** TRIPODS



Vision SD 12 and SD 22

Pan and Tilt Heads with Serial Drag

The Vision SD 12 and SD 22 are the first heads with the "Serial Drag" pan and till system. The system consists of a unique, per manently-sealed fluid drag and an advanced lubricated friction manethy-sealed fluid orag and an advanced indiricated inction drag. So for the first time, one head gives you all the advantages of both fluid (viscous) and lubricated (LF) drag systems – and none of their disadvantages. Achieve the smoothest pans and tills regardless of speed, drag setting and ambient temperature. The Serial Drag system provides the widest range of infinitely variable precise settings with repeatable, consistent drag in each pan and tilt direction. tilt direction

Features.

- Features:

 Simple, easy-to-use external control for perfect balance

 Patiented Spring-assisted counter-balance system permits perfect "ands off "camera balance over full 180" of hit.

 Instant drag system breakaway and recovery overcome inertia
 and friction for excellent "whip pans"

 Consistent drag levels in both pan and titt axis

 Redesigned lick on flick of the pan and titt dailpier disc brakes

 Greater control, precision, flexibility and "touch" than any other
 head on the market

 Touch activated, time delayed illuminated level bubble

 Environmental working conditions from as low as 40" to as
- nvironmental working conditions from as low as -40° to as
- SD 12 weighs 6.6 lbs and supports up to 35 lbs SD 22 weighs 12.7 lbs and supports up to 55 lbs

Vision Two Stage ENG and LT Carbon Fibre ENG Tripods

LI CARDON FIDTE ENGLIFICATION

The ultimate in lightweight and innovative tripods, they are available with durable lubular alloy (Model #3513) or the stronger and lighter, awaily and spirally wound carbon fiber construction (Model #5523). They each incorporate the new torque safe clamps to provide fast, safe and self-adjusting leg clamps that never let you down. Two stage operation gives them more flexibility when in use as well as greater operating range.

"Torque Safe" requires no adjustment. Its unique design adjusts itself as and when required, eliminating the need for manual adjustment and maintenance and making for a much more reliable Clamphia system.

New hip joint eliminates play and adds rigiding.

New hip joint eliminates play and adds rigiding.

They both feature 100mm levelling bowl. fold down to a compact 28°, and support 45 lbs.

The #3513 weighs 65 lbs and the #3523 CF (Carbon Fibre) weighs 5.2 lbs.

Vision 12 Systems

All Vision 12 systems include #33643 SD 12 dual fluid and lubricated friction drag pantiit head, single telescoping pan bar and clamp with 100mm ball base.

SD-12A System

- 3364-3 SC-12 Pan and tilt head
 3518-3 Single stage ENG tripod with 100mm bowl
 3363-3 Lightweight calibrated floor spreader.

SD-12D System

- 3364-3 SD-12 Pan and till head
 3513-3 Two-stage ENG tripod with 100mm bowl
 3314-3 Heavy-duty calibrated floor spreader

SD-12LT System

- 3364-3 SD-12 Pan and tilt head
 3523-3 Two-stage carbon fibre ENG tripod w/100mm bowl
 3363-3 Lightweight calibrated floor spreader
 3425-3A Carry strap
- 3340-3 Soft case

Vision 22 Systems

All Vision 22 systems include #3386-3 SD-22 dual fluid and lubricated friction drag pan and tilt head, single telescoping pan and clamp with dual 100mm/150mm ball base.

SD-22E System

- 3386-3 SD-22 Pan and till head
 3219-52 Second telescoping pan bar and clamp
 3516-3 Two-stage EFP tripod with 150mm bowl
 3314-3 Heavy-duty calibrated floor spreader

SD-22 LT System

- 3386-3 SD-22 Pan and till head
 3219-52 Second telescoping pan bar and clamp
 3529-3 Two-stage carbon fibre ENG tripod w/100mm bowl
 3314-3 Heavy-duly callbrated floor spreader
 3425-3A Carrying strap
 3341-3 Strict case

SD-22 ELT System

- 3386-3 SD-22 Pan and filt head
 3219-52 Second telescoping pan bar and clamp
 3383-3 Two-stage carbon fiber EFP tripod w/150mm bowl
 3314-3 Heavy-duty calibrated floor spreader

WE BUY, SELL AND TRADE USED VIDEO EQUIPMENT

enlury precision optics

WIDE ANGLE ADAPTERS

Tools For Creative Videographers

Century Precision's wide angle adapters open new possibilities for videographers. By providing a wider angle of view they let you capture more of the action from close up-especially crucial when shooting in tight quarters. Using a wide angle adapter also yields increased depth of field and shorter MDD (minimum object distance), enabling you to move closer to the subject and to arrange subjects within a shot over a greater range of distance relative to the lens. Century's wide angle adapters are down down to consider the subject of t wide angle fixed focal length lens. (Focus is done by using the lens' macro function.) For zoom-through applications, the .8X Wide Converter is perfect for shooting situations which require wide angle and the ability to zoom.

WA-7X5X WIDE ANGLE ADAPTER SET

Compact, lightweight and economical, the Wide Angle Adapter Set is the industry standard. The set consists of two lenses; the .7X Wide Angle and .5X Super Wide Angle. The .7X attaches to the front of a zoom lens. increasing coverage by 30%.



For example, when attached to a lens that zooms to 9mm, the 7X W/A adapter shortens the effective focal length to 6.3mm. Adding this 5X Super Wide further aiters the wide end of the lens to just 4.5mm. Thus producing coverage nearly double that captured by the lens alone.

WA-7X93 .7x Wide Angle Adapter...... WA-5X45 .5X Super Wide Angle Adapter .445.00 WA-7X5X Wide Angle Adapter Set (WA -7X93 and WA -5X45)895.00895.00 FA-6X Step-up Ring (specify 75mm, 80mm, 85mm, 90mm) ..ea. 104.95

SUPER FISHEYE ADAPTER

- When you need the widest possible angle of view, the Super Fisheye Adapter produces an extraordinary degree of barrel distortion for a magnification factor of approximately 55x. For example, adding the Super Fisheye to a modern 15x 8 tens results in a 116* horizontal angle of view—a remarkable 145* when measured diagonally.

 Due to the Super Fisheye's characteristic barrel distortion.
- Due to the Super risiney's scharacteristic partel distortion, extreme low and high angle shots are also made more dramatic. An artic Grawlspace can induce heightened claustrophobia or a forest of tall styscapers made to bead menacingly over the audience. And since the Super Fisheye takes in a much wider angle of view than the human eye, it can also be used to plunge the audience into a scene—surrounding then with a noisy crowd or exiling them to a lonely beach.
- E ADATTER
 * The Super Fisheye's tremendously wide field of view suggests a myriad of creative possibilities—from panoramic vistas that seem to stretch to the edge of the earth, to comical forced perspective close-ups, in which an actor's distorted features seem to pop through the video screen. While extreme telephoto shots tend to flatten the subjects against the background, the Super Fisheye exaggerates depth: pulling nearby objects closer and causing distant objects to recede into the background. recede into the background
- receive into the Super Fisheye (designed for the newest generation of internal focus zooms) Century Precision also offers the Fisheye Adapter for industrial video zoom lenses with 75mm lens fronts.

WA-FESU Super Fisheye Adapter (specify lens front diameter) Fisheye Adapter for industrial zoom lenses with 75mm fronts Step-up Ring (specify 75mm, 80mm, 85mm, 90mm) 445 00

.8X ZOOM-THRU WIDE ANGLE CONVERTER

The 8X Wide Converter offers the high quality, economical way to expand a lens' angle of view when the shot requires a zoom—as well as situations which require both a wider angle of view and the ability to zoom.

well as situations which require both a wider angle of winner and the street of the street of a zoom lens, effectively shortening its local length while maintaining full zoom capabilities. With the converter attached, 20% more coverage is realized when the lens is set to wide angle, telephoto or anywhere in between. For example, when added to an 8,5-119mm lens, the .8X Wide Converter laters the focal range to 7-98mm. This can be especially advantageous when shooting in confined quarters. fined quarters



 The .8X not only expands field of view but also reduces minimum object distance (MOD). The camera can therefore move Considerably closer to the subject while maintaining focus. And because there is no light loss with the .8X, there is no need to change exposure or lighting

WA-8XCV .BX Wide Zoom-Thru Converter 1479.00 138mm Filter Adapter

.6X DOUBLE ASPHERE WIDE ANGLE ADAPTER

 Unequivocally superior to every other wide angle adapter, the .6x Double Asphere utilizes a single ele-ment with two aspheric surfaces. This design ensures a performance that is not possible with conventional single element adapters. The adapter mini mizes distortion and reduces chromatic aberration while dramatically increasing edge resolution.

Remarkably lightweight and compact, the 6X was created especially for use with the latest internal locus lenses like Canon and Fujinon's 15x8. The .6X increases their coverage 40%, effectively changing a15x8 into a super-sharp 4.8mm fixed local length lens.

 The .6X fits most lenses via interchangeable adapter rings. An accessor ry Lens Shade/Filter Holder accepts either a single 4x5 or Panavision-size filter holder.

ept one 4x5 or 4x5.65 filter in a holder 95 FH-4565 4x5.65 Filter Holder



"THE PROFESSIONAL'S SOURCE

FOR ORDERS CALL: 800-947-9928

212-444-5028

OR FAX (24 HOURS):

800-947-9003 212-444-5001

OVERNIGHT AND RUSH SERVICE AVAILABLE

E-Mail at 76623,570@compuserve.com

SONY DFS-300 DME Switcher

The world of video has changed, simple wipes and transitions are no longer the norm. Tod producer and the client expect a bien of draz/ing special effects and sophistaction. Many desktop systems can deliver these elaborate visuals, but sacrifice ease of use and dependability. The DFS-300 has both desktop versatility and hardware reliability. It features basic transitions such as wipes and mixes, as well as complex DMEs, or digital multi-effects. The DFS-300 allows you to insert sophisticated patterns like picture-in-picture, missale, mirror, slidle and mafrix wipe designs. And with the optional BKDF-301 3D Effects board installed, you can perform three dimensional rotations, page turns, image twists, multi-splits and 3D spherical effects—in real time. No string around waiting for loading or rendering. With it's digital multi-effects, numerous keying options, 3D transitions and user-friendiness, the DFS-300 is in a league of its own.

POWERFUL MULTIPLE EFFECTS

re are 330 factory preset 2D effects and wines stored in the There are 330 factory presel 2D effects and wipes stored in the DFS-300 for immediate use. These include wipe, compression, rotation, slide, split, mirror, stream, etc. as standard.
 With the optional BDKF-301 30 board installed, 130 additional preset effects such as tiwst, page turn, sphere, etc. can be memorized and recalled whenever required.

Powerful User Program

 The DES-300 provides powerful, yet easy to operate effects The DFS-300 provides powerful, yet easy to operate effect programming using the positioner and other controls to build your own effects. Cut, mix, wipe, slide, rotation and many other 2D effects and optional 3D linear and digital effects such as page turn, roll and sphere can be created with the unit's programming function. Up to 20 created effects can be stored for instant recall and that is doubled for the programming function of the control o when the 3D board is installed

and the Downstream Key transitions HIGH PERFORMANCE SWITCHER

Multi-Format Inputs/Outputs

Has four primary video inputs. The first three accept composite S-video and component signals. The fourth input accepts either component, R/G/B/Sync or a computer generated RGB signal Independent color correction can be applied to any of the four inputs. There are two program outputs that likewise provide composite, S-video and component signals.

composite, S-video and component signals.

Bull-in Matte Generator

Most digital video switchers have only one built-in matte color
grounds, which can be a solid color or one of 31 different textured patterns, border matte and effect matte signals. Also
instantly-selectable color bars, grid pattern and solid black, With
the optional BKDF-504 Downstream Key installed, you get two
more independent matte generators for Downstream Key (DSK
matte), and border colors (DSK border matte) with independent
adultations of the jumpagne, saturation and hisp parameters.

Transitions

press of the keypad.

Angshot Function

The DFS-300 can store up to 99 control panel settings in it's "Snagshot" amony for instant recall of a specific combination of effects and parameter settings. Every parameter such as background color hue, border width, shadow density, etc. can be stored and recalled at any time.

Effects Modification

To sult individual tastes in creative program production, effects modification is provided for some of the preset effects such as mosaic, posterization, solarization, wave; multi-picture, strobe, frosted glass, clinema mode etc.

Fine control over various parameters such as size, density and amplitude further enhances effects editing

111 of the most frequently used wipes are available from the

preset patterns and 13 of them are directly accessed with a

Mixes wines as well as digital effects transitions can be per

formed manually or automatically with the fader lever. The automatic transitions can be varied from 0 to 999 frames in duration for both foreground and background bus transitions

Diptional Own Stream Keyer

An optional 8-bit linear DSK (Down Stream Keyer), the BDKF-504 lets you introduce captions, characters, etc. with clear edge quality, after mix/deflects processing.

DSK key input accepts composite, component or RGB signals
Position and type of the DSK are selectable and a box mask is provided to mask unwanted areas of the picture.

as size, density and

Built-in Color Corrector

For white balance adjustment or to give some special tonal effect, color correction of foreground or background source rol while balance adjustment of to give some special total effect, color correction of foreground or background sources can be applied. Hue, offset and chroma gain of the selected signal can be controlled independently.

Other Features

Four different title modes ofter the ability to perform effects suchas luminance key, chroma key external key or downstream key from a variety of input sources. • Equipped withthree black-burst outputs to provide synchro

nization to VCRs, cameras and other equipmenta requiring sync signals. A genlock input allows the DFS-300 to be syn

 When used with a compatible editing controller, the DFS-300 when used with a companion earth of the control of

13" Production Monitor

Has all the features of the PVM-1350 PLUS - is also a multisystem monitor. It accepts NTSC, PAL and NTSC video signals. NTSC 4.43 can also be reproduced.

NTSC 4.43 can also be reproduced.

• Equipped with a SMPTE 259M Serial Digital Interface. By inserting the

for audio the PVM-1351Q can accept SMPTE 259M component for audio the PVM-13510 can accept SMPTE 259M component serial digital signals. Equipped with RS-422 serial interface With optional BKM-103 serial remote control kit all of the monitor's func-

tions can be remotely controlled with

Equipped with input terminals such as component (Y/R-Y/B-Y), analog RGB.

With underscan, entire active picture

greater confidence and precision

optional serial digital interface kit BKM-101C for video and the BKM-102

Why pay \$10,000 to \$15,000 for a **BROADCAST QUALITY CHARACTER GENERATOR**

when you can get it for only \$2995?

Introducing the new.....



Animated Postscript Character & Graphics Generator

A technological and engineering breakthrough, the PowerScript sets new price/performance Standards for broadcast video production, multimedia and industrial applications. It delivers the huge range of titles and graphics supported by PostScript display technology, plus animation, effects, transparency and keying. It features anti-aliased 17.5 ns. (nannsecond) pixet resolution and features anti-atiased, 17.5 ns (nanosecond) pixel resolution and 4:2:2 broadcast-quality video, plus high-speed RISC processing to provide real-time Level 2 PostScript imaging and fast render ing—even with the most complex images. The PowerScript works stand-alone or with a computer, has a built-in TBC, offers a powerful and intuitive interface, and is suitable for the desktop or can be rackmounted

Powerful Character Generator

- Choose from 35 built-in fonts or download hundreds of PostScript fonts from your computer. With its high-speed RISC processor, it provides real-time PostScript Level 2 imaging—the full power of the PostScript language is at
- your command.

 Characters can be rotated at any angle, scaled to any size. stretched horizontally or vertically
- Styles include variable bold and italic, underline and shadow drop shadow, variable displacement and opacity). Each character can be adjusted separately.

 Text can be positioned anywhere on the screen or automati-
- cally centered, vertically or horizontally
- Lett, right, top, bottom & center justification is provided as well.

 Characters are automatically kerned, using the font's standard kerning information.
- Spacing is highly flexible with variable word and letter space ing and line spacing (leading).

Intuitive User Interface

- The user interface is fast and intuitive, easily supporting the
- rapid pace of real life video production.

 Bulti-in real-time object-based drawing tool and text editor no external computer or software required. Design can be done ahead of time and displayed later, or can be done on the fly. Display is real time. . Supplied keyboard and mouse are used with easy on-screen
- menus to place and modify graphics and text.

 Customizable function keys let you change fonts
- colors, and other characters instantly.
- Separate preview output allows you to create and edit titles while another set of titles is being displayed.

Transparency and Colors

- Characters can be made transparent (0-100%) over video, other characters and graphics with 64 levels of transparency.
 Opaque characters can use over 4.000,000 colors; transparent characters can use over 4.000,000 colors.
 Transparent characters can use over 4.000,000 colors.

 Different colors can be used for fill and outline (variable
- width), and each letter and each graphic can use different colors

Roll, Crawl, Animation, Effects

- Variable speed roll, crawl and push (slide) in all directions— plus extensive animation capabilities as well.

 Every text object, graphic, and logo can be separately ani-mated. Complex animations include ability to have elements
- follow paths, bounce, etc. Elements can change outline and/or fill color, transparency, position as they move and results are displayed in real time
 Move individual characters in different directions; make col ors change; flash words; make letters and words bounce;
- spin a letter across the screen Use effects like fades and wipes to transition between titles and video or between two pages of titles

Two GPI Inputs

The GPI automatically plays a sequence of titles when a pulse appears at one of the two inputs.



- Internal linear keyer superimposes characters and graphics on S-video or composite sources
- · Also provides anti-aliased down-stream keying via a separate linear KEY nutnut

Backgrounds and Graphics

- Titles can be placed on solid color, patterned or graduated backgrounds, or they can be genlocked to incom-
- Lines, squares, rectangles, ovals and circles can be created
- and placed anywhere on the screen
 Each graphic object can use a different color transparency, rotation, size, fill and outline.

Imported Logos and Graphics

- Can import and display complex graphics created with standard Macintosh, Windows, DDS, Amiga and UNIX-based programs, such as Photoshop, Corel Draw and Adobe Illustrator, Accents most PostScript or EPS format graphics mostrator. Accepts most Postscript of EPS format graphics without modification.

 Imported images can be any size and can be scaled, skewed, and rotated when placed on screen.

 Transparency and anti-aliasing can be defined when graphic
- is generated

Built-in TBC

The PowerScript has a built-in full-frame (dual field) time base corrector that constantly locks the signal to a reference input. If no reference is connected, the signal is synced to an internally-generated RS-170A time base.

Expansion Capabilities

Although the PowerScript operates on its own, you can still add peripherals and connect to a computer or network. Two PCMCIA (accepts Type I, II and III cards) slots allow Two PCMCIA (accepts Type I, II and III cards) slots allow the addition of non-volatile flash-RAM and Ethernet (file transfer protocol using TCP/IP) cards and an RS-232 serial port allows simple connection to desktop computers. This allows you to add storage capability and to ownload forst and graphics from a computer. This means you can save titles to your computers hard or floppy disk, or download fonts and graphics files from a desktop publishing system.

Clock/Calendar

The PowerScript has a built-in clock/calendar that displays current date, time, or elapsed time(stopwatch) counter in a wide range of formats, using any color or font. Clock/ calendar can also activate selected titles at predefined times.

Built-in Test Generator

The PowerScript can generate standard video test patterns including color bars, crosshatch, ramp, gray wedge, multiburst and blackburst. Titles can be placed atop any of the

- Other Features
 Split screen titling allows definition of two titling windows with separate rolls and crawls defined in each.
 Small footprint makes it ideal for the desktop, or it can be
- rackmounted with optional rack kit.

Still not convinced. then call us for a free PowerScript demo tape and see for vourself.



adjustment of luminance, saturation and hue parameters

- Augustries of informations studied and the parameters.

 Luminance Keyer

 Foreground sources such as titles, captions or figures can be self-keyed over a background source and rotated, compressed and positioned optionally in 3D space.

 Any of the preset effects can be applied to the keyed picture.

 External key input also provided to accept a key source signal.

 A box mask is provided for masking an unwanted portion of the foreground include.

foreground picture. Chroma Kever

- e video from a foreground source onto a back Superimpose video from a foreground source onto a background source.
 Clip and Hue can be controlled for clear and sharp key edges
 Any preset effect can be applied to the chroma keyed picture

SONY COLOR MONITORS PVM-1351Q

PVM-1350

13 Presentation Monitor

Employs a P-22 phosphor fine pitch CRT to deliver stunning hizortal resolution of 450 horizontal lines.
 Equipped with beam current feedback circuit which eliminates white balance drift for long term stability of color bal-

white palance orth for long term stability and earner.

Has analog RGB, S-video and two composite video (BNC) Inputs as well as 4 audio inputs.

Automatic Chroma/Phase setup mode facilitates the complex, delicate procedure of monitor adjustment. Using hypograph standard. ment. Using broadcast standard

tion automatically calibrates chroma and phase. Chroma/Phase adjustments can

O'hroma/Phase adjustments can aiso be easily performed with the monochrome Blue Only display. In Blue Only mode video noise can be precisely evaluated.

- Factory set to broadcast standard 6500X color temperature

- On power up, auto deguassing is performed. There is also a manual deguass to demagnetize the screen. Provides a non-screen menu display can be selected in English. French, German, Spanish or Italian.

- Sub control mode allows fine adjustments to be made on the knob control for contrast, brightness, chroma and phase. The desired level can be set to the click position at the center allowing for multiple monitors to all be controlled at the same reter-



area is displayed. Allows you to view entire image and check the picture edges. H/V delay allows viewing of the

check the platiate edges. Five dealy allows releaving or the blanking area & sync/burst timing by displaying the horizontal and vertical intervals in the center of the screen Color temperature switchable between 6500K/9300K/User preset, 6500K is factory preset, 6500K is factory preset, 6300K is a factory preset, 9300K is a more pleasing picture. User preset is 3200K to 10,000K.

PVM-1354Q/PVM-1954Q 13" and 19" Production Monitors All the features of the PVM-1351Q PLUS SMPTE C standard phosphor CRT is incorporated in the PVM-1354Q/1954Q. SMPTE C phosphors permit the most critical evalua SMPT IC Visualization prospector (Visualization Interview 13-401-13-401-13-401) in the most symbol specime in the most visualization of any color subject. Provides over 600 films of horizontal resolution.

The PVM-13540 maints into a 19-inch EIA standard rack with the optional MB-502B rack mount bracket and SLR-102 side rail kit same as PVM-13540. The PVM-13540 mounts into a 19-inch EIA rack with the optional SLR-103 slide rail kit.

Sony BPPG products are not available for sale outside continental USA

MOST ORDERS SHIPPED WITHIN 24 HOURS

FOR PHOTO & VIDEO" 🚾 🦭 🜌









PHOTO - VIDEO - PRO AUDIO

TO INQUIRE ABOUT YOUR ORDER:

800 221-5743 • 212 807-7479 Circle (62) on Action Card OR FAX 24 HOURS: 212 366-3738

119 WEST 17TH STREET, NEW YORK, N.Y. 10011

Store & Mail Order Hours:

Sun 10-4:45 • Mon & Tues 9-6 • Wed & Thurs 9-7:15 • Fri 9-1 • Sat Closed

EQUIPMENT LEASING AVAILABLE

PROCESSING SYSTEMS INC

PVR-2500 Digital Video Recorder

The PVR-2500 offers powerful features for awesome animation, morphing and rotoscoping capabilities. With features like 720 x 480 resolution, 10-bit 2x oversampled video encoding, better than D1 scaling, component and S-Video outputs, multi-processor support and integrated FAST SCSI-2 controller, it empowers your computer to rival the finest professional productinn studios

- The PVR-2500 is a full-length PCI card with a SCSI-2 interface that connects up to seven dedicated hard drives. Because the SCSI controller is integrated with the PVR-2500, video data never has to move
- troller is integrated with the PVH-2500, video data never has to move over the PCI bus during playback This avoids the bottlenecks found in systems which use the computer's hard drive for video storage. Designed to run under Windows NT 3.51 on computers employing Pentium. DEC ALPHA or MIPS processors. Perception's software utilizes NT 3.55 in alive support for multitasking and multiple processors, allowing use with-in the most powerful computers. December 1.55 in a pure support of the multitasking and multiple processors, allowing use with-in the most powerful computers.
- Perception's multi-format virtual file system ensures complete integration with your existing Windows N1 applications. Any acquired video or computer generated Perception video clips appear simultaneously in many different file formats including TARGA, SGI, BMP and TIFF. Also compatible with new N1 versions of Lightwave 3D. 3D Studio. TOPAS 5.1. Softimage and Elastic Reality.
 Video original section villizes 10-bit 2x oversampled encoding and provides broadcast quality CCIR-601 (720 x480) resolution. Its dynamic range is in excess of D1 scaling so that images are brighter, have more color and greater spatial resolution. Dulputs component. composite and S-Video via the included breakout cables.
 Use with any compatible sound card while synchronization of audio and video is maintained by the PVR software Captured audio is Perception's multi-format virtual file system ensures complete inte-
- and video is maintained by the PVR software. Captured audio is stored on the computer's system hard drive, not on the dedicated drives. This approach provides maximum flexibility for manipulating audio and video during editing

- Can perform real-time interpolation of 30 fps video to 24 fos film rates or vica versa
- VCR-like controls on the Perception's GUI simplifies the
- VCR-like controls on the Perception's GUI simplifies the task of batch digitizing and recording. In this mode, it reads SMPTE time code from the source deck. Drivers for Windows 3.1 are supplied as well, so third party editing software like Adobe Premier can be used in fact, the PVR-2500 bundled with the AD-2500 capture card, a sound card, editing software and one or more SCSI hard drives becomes a non-linear editor of unpar AD-2500 CAPTURE CARD

 • The optional AD-2500 is a video capture daughtercard.
- that transforms the Perception into a digital video recorder. It has component, composite and S-Video recorder. It has component, composite and 5-Video imputs for real-time recording, and storage capacity is limited only by the size and number of your hard drives. Captured video can also be exported as sequential RGB files for rotoscoping and other compositing applications. The AD-2500 incorporates a sophisticated automatic
- entropy prediction circuit that analyzes the content of incoming video and dynamically calculates the optimum amount of compression on a field-by-field basis—even during real-time recording. You also have complete manual control over compression level/quality settings

in:sync

Digital Video Editor for Windows N1

The ultimate digital video editing software, Speed-Razor MACH III allows you to edit full screen, 60 fields per second, CCIR 601 broad-cast-quality video. Designed for the DPS PAR DR-2100/ Perception PVR-2500 and Truevision's TARGA 1000/2000 video capture cards Speed-Razor MACH III is the fastest and most powerful fool for editing and compositing video (tips, animations, stills, music and sound effects. Experience straight cut editing in real time and effects which if you the fastest machines out there. Alpha, Intel, MIPs-based and PowerIPC-based workstations, making this the fastest, most flexible software you've ever seen. Running under Windows NT, it offers three times faster than Windows 3.1 on the same machine and up to ten faster when used on Alpha-based systems.

Speed-Razor features infant windows of the same manned offects tracks and comes with Razor Blades—transition and effects to enhance your production. There are preset turnbles, fades and wipes which you can easily customize and save as new presets. In addition, there are special image save as new presests. In addition, there are special image effects which are unquestionably the highest quality of any system—analog or dightal. Speed-Razor sports anti-ahased 30 DVEs, an infinite channel chormal keyer and an excellent character generator. Use the effects or transitions which come with the package, layer them to create new ones, make your own grayscale bit maps to use as transitions, or use that other than the create in the package layer them to create new ones, make your own grayscale bit maps to use as transitions, or use hird party plug-in effects—the flexibility is yours.

EDITING FEATURES

- Peal-time straight cut editing (this does NOT require a new to be made and requires less space on the hard drive to edit) The only video editor with the ability to cut to the field
- Work in Thumbrail or Final Output resolution mode (you set the resolution for each)

COMPOSITING

- COMPOSITING:

 Infinite number of layers of video clips, still and animations can be composited together.

 Handles any resolution from Betacam (720 X 480) up to Ominimax film (4000 X 4000).

 Video clips can be combined using an alpha channel, key color transparency, still or traviling mattes.

FILE FORMATS:

- Reads and writes ANI files (created by DPS' PAR), PVD files (Perception), DVM files (TARGA 1000 and 2000) and equences of TARGA files
- sequences of LANGA files
 Convert files between any of the following formats. ANI, PVD.
 DVM, AVI, BMP, TGA, FLC, FLI, WAV
- Project-based Library for org

There are two user definable resolution modes (thumbnail and final) to facilitate editing. The thumbnail mode allows you to use Speed Razor in the field on a laptop computer then transfer the project fife back at the edit suite and autothen transfer the project file back at the edit suite and automatically recapture and re-render the entire project at final
resolution. Speed-Razor also features RS-422 control and
even does batch capture (new batch capture module allows
you to automate video capture via SMPTE time code).
digitizing video and audio is simple and painless. In fact, with
the innovative "Virtual Editing" function you can actually edit
your project, complete with effects and transitions—before
when definitions. on've digitized a single frame of video

Handles audio up to DAT (48 kHz) quality
Infinite number of audio tracks for multi-layer audio mixing

EFFECTS:

Blur (Circular, gaussian, fast), tint, brightness adjustment, chroma key, crop, disphacement, emboss, freeze frame, glass texture, greyscale, invert, loop, matte, pixelate, repeat fields, scale, fransparency, strobe, turn red/greenfoly.

3D DVE (translates and/or rotates an image in three dimen-

- 3D DVC (translates and/or rotates an image in three dimensions on the X, Y and Z axis)
 Sets a color channel to an assignable value)
 Titles (full blown CG using any Windows tont in any color with automatic drop shadow)
 Sub-pixel rendering for incredibly smooth motion
- Effects can be applied to infinite sources

TRANSITIONS:

- includes over 100 grayscale image transitions, crossfades. luminance fades, fade to/from black, fade to/from white, push, wirl, twist in/out tumbles, filp, turn, scale (zoom)

 Transitions can be applied between infinite inputs.

Real Impact

Windows NT-based Video Editor for TARGA 1000 and 2000

With the introduction of Real Impact. Avid provides Windows users with the same professional image quality, intuitive cut/copy/paste editing, and instant random access capabilities that have won 2 Emmy awards—for thousands of dollars less than outsourcing an average video. Designed exclusively for Trevision's TARGA 2000, Real Impact lets you create professional-quality video with sively for Truewision's TAHSA QUOU, Heal Impact lets you create professional-quanty video with audio, organics, animations, special effects and titles—with the speed. (lekolity) and creative freedom you need. Create sales, training and product videos right on your PC quickly and easily—without compromising quality. Produce video in 24-bit color, with CD-quality sound and perfect lip sync. Easy to Use. A true 32-bit application (Windows NT 3.51), Real. Add Audio: Polish your audio limpact's intuitive interface and extensive on-line help get you with music and narration. Adjust

impact's fluthive interface and extensive ori-line neigh get you productive right away. It's powerful editing features let you work with video, audio, graphics, animations and titles with the sim-plicity of cut, copy and paste. Video Capture: Digitize video and audio—without dropping a

frame. Your video is full-screen, full-motion, 60 fields-per-sec-ond and your audio in sync. With its Dial-a-Quality image feature, Real Impact allows you to adjust image quality for differing system, storage and delivery requirements

Create a Storyboard: Extensive media management with built-in nedla library and database let you easily find the video and audio clips that you want, instant access makes previewing edits simple and immediate. And, with timeline editing, you just click and drag to experiment with different cuts, rearrange clips and assemble your story. There are 32 levels of undo/redo.

Add Graphics, Titles and Special Effects: Create and seamless y incorporate audio, graphics and animations into your video using popular Windows-based applications. Real Impact sup-ports AIV video files, WAV audio files, FLC animation files as well as BMP. JPEG. PCX. TGA and TIFF graphics files.

with music and narration. Adjust pan and volume in real time

par and volunte in real time Simultaneous playback of four audio tracks makes audio editing quick and easy. View your four audio tracks in sync with the video immediately, no waiting for tracks to compile. Digital Media Interchange: Compatible with the Open Media

Digital Media Interchange: Compatible with the Open Media Framework (DMP) Interchange, a file format for the seamless integration of digital data among applications and across plat-forms. Through OMF, you can import video and audio files from other OMF-compatible applications like Avid's Media Composer. Output to Tape, CD-ROM or Over a Network Gives complete contacts are video distribution. Therefore became produced in the Company of the Company control over video distribution. There's no long rendering control over video distribution. These's no long rendering process, creating professional quality tape is a snap. Embedding video in multimedia presentations for distribution on disk or CO-ROM is as simple as the click of a monse. Supports third-parry MPEG tools to create MPEG files for network distribution. Avid's Support Advantage: Real Impact is backed by Avid's

world-class customer service. Toll-free telephone support and hulletin board service are just some of the henefits

FFATURES:

- Video Video

 Real-time JPEG compression /
 decompression and playback at 60
 fields per second

 Supports RS-422 control protocol
 and SMPTE time code.
- Edit two tracks of video for lavered
- Edit up to four tracks of 44.1 KHz, 16-bit CD-quality audio.
 Real-time pan and volume adjust-
- ments, digital audio scrub. Waveform for precise audio editing.
- Import/Export
- AVI video files, WAV audio files, FLC animation files.
 OMF interchange files.
 BMP, JPEG, PCX, TGA and Tiff

graphics files.

- Special Effects
- Filter effects with previews and adjustable parameters.
 Transition effects include wipes, dissolves, zooms, pushes and squeezes
- · Lavered effects include picture-in picture. luminance and chroma key

Avid Real Impact

- Integrated Title Generator

 32-bit processing (24-bit color and
 8-bit alpha channel).

 Support for TrueType fonts and
 international character sets.
- Drop shadows, transparency and color blends.
- NTSC and PAL-safe color palettes.
- Media Management

 Media library for organizing digital
- clips

 Database with search capabilities.

 Customized views for easy clip access and retrieval.

A note about our turnkey systems:

In addition to the systems listed on this page, we can further customize any system to fit particular needs. We carry a large variety of 2X and 4X CD-ROM recorders (HP SureStore 4020I, Sony Spressa, FWB Hammer CD-Rs), RAID subsystems (ATTO, FWB) and portable storage devices (Iomega, Syquest) to name a few. Tell us what you need and our salespeople will custom design a system for you. And if you happen to be in NewYork, please come and

Visit our newly expanded Video Store & Digital Video Showroom

PCI-based Digital Video Capture Boards for Windows

The TARGA 1000 and 2000 is an easy and affordable way to transform your computer into a powerful digital editing system. Along with their high speed PCI interface, both the TARGA 1000/2000 incorporate all the functions you need to create spectacular multimedia content. They support NTSC and PAL video standards and let you capture, edit and playback full-motion, full-resolution digital video with fully sychronized CD or DAT quality audio. Designed for high performance IBM compatibles, their advanced architecture provides incredible processing speed for video and audio effects, titling and compositing capabilities.

IRUEVISION TARGA1000/2000

- · Allows recording and playback of video directly to/from hard drive at full motion, full frame rates (50 fields/sec - PAL, 60 fields/sec-NTSC). Video is stored and played back at the highest resolution for each format (768 x 576 x 24 bit - PAL, 640 x 480 x 24 bit - NTSC). Compression can be adjusted on the fly
- to optimize for image quality and/or minimum storage space Genlock using separate sync input for working in professional
- •Equipped with composite and S-video inputs/outputs Also available with component input/output (TARGA 2000 PR0) Accelerated Windows 3.11 and Windows NT display dri vers offer integrated, true-color (24-bit), non-interlaced desktop up to 1152 x 870 pixels.

TARGA 2000 Additional Features:

Substitutions

- . Equipped with composite and S-video inputs and outputs available with component input/output (TARGA 1000 PRO).

 The audio is digitized at 16-bit resolution (at 44 1KHz or 48KHz).
- sampling rates), yielding professional quality stereo sounds.

 Since all audio and video processing is done by on-board DSPs,
 you are assured of perfectly synchronized sound and images.

 Optimized to work with Winsows NT-based software (Adobe
- Premiere 4.2, in sviic Speed-Razor MACH (II)
- · Provides a large work area for displaying video, as well as editing application controls. Any part of the display (or even the whole image) can be recorded to tape (video-out-of-a-window). View your desktop and video-in-a-window on your non-interlaced
- high resolution desktop display while the processed video is out-put at NTSC or PAL resolutions to a video monitor and/or a VCR. Turnkey TARGA 1000/2000 and PVR-2500 Perception Systems: Video capture board (specify) • 220-watt, 6-bay midtower case
 • PCI motherboard with 256K pipelined burst cache • Pentium 133 MHz processor • Diamond Stealth64 Video 2MB VRAM PCI display card
 • 32MB of EDO (Extended Data Out) RAM • Quantum 1,28GB IDE
- system drive Seagate (Barracuda) 4.2GB SCSI-2 FAST/Wide hard drive Adaptec AHA-2940UW FAST/Wide SCSI-2 controller card
- 3.5" floppy drive Teac CD-56e 6X EIDE internal CD-ROM drive
 Altec-Lansing 300.1 three-piece deluxe speaker system
 Princeton Ultra 17+high resolution 17-inch multiscan monitor
- Focus 2001A keyboard Microsoft MS mouse MS-DOS 6.22 and Windows 3.11 or Windows NT 3.51 operating system software.
- *PVR-2500/AD-2500 Windows System with Adobe Premiere 4.0a \$7295 *PVR-2500/AD-2500 Windows NT System with In:sync Speed-Razor MACH III \$8495 TARGA 1000 Windows System with Adobe Premiere 4.0a. \$7795 TARGA 1000 PRO Windows System with Adobe Premiere 4.0a \$8705 .\$9150 TARGA 2000 Windows NT System with AVID Real Impact ... TARGA 2000 Windows NT System with in:sync Speed-Razor MACH III \$11,250 TARGA 2000 PRO Windows NT System with in:sync Speed-Razor MACH III......
- *PVR-2500 System Notes: 1) Does not include Adaptec SCSI-2 controller card (has built-in SCSI-2 port)
 - 2) Includes Seagate Barracuda 4.2GB Narrow hard drive (doesn't accept Wide drives)
 - 3) Includes Stealth64 Video 2MB DRAM PCI display card (Add \$100 for 2MB VRAM card) 4) Requires sound card (DSP-equipped card preferably)-see "Expansions and Upgrades"
 - Expansions and Upgrades for all Systems:

Ganatitations		
Full Tower Case (10-bay)add 100.00	Super Tower Case (12-bay).	add 200.00
Pentium 150 MHz processor add 150.00	166 MHz processor	add 400.00
Seagate Elite 9.1GB Narrow drive (for PVR-2500)add1000.00	Seagate Elite 9.1GB Wide drive	add 1000.00
Matrox Millenium 4MB VRAM PCI Display Cardadd 250.00	Matrox Millenium 8MB VRAM PCI Display Card	add 400.00
MAG Innovision MXP-17F 17" multiscan monitoradd 225.00	MAG MXP-21F 21-inch multiscan monitor	
Altec Lansing ACS-500 three-piece surround sound stereo system.		add 140.00
Add-Ons		
APC Smart Ups 650 power backup		
Ensonig SoundScape Elite DSP-equipped 16-bit audio card (for PVF	I-2500 systems only)	199.00
MediaTrix Audio Trix Pro DSP-equipped 16-bit audio card (for PVR-2500 systems only)		
Elastic Reality for Windows/Windows NT (Includes Transjammer-30 transitions)		
Transjammer Vol 1 (with 100 transitions)		89.00

The GALLE



ADVERTISE IN THE GALLERY FREE reader service number 32,000 TV-only circulation Frequency discounts Agency discounts For more information, call Matt Tusken at (800) 896-9939



Circle (68) on Action Card


Slo-Mo 8 VTRs For Under \$3,000



- Designed for demanding sports production
 -100 to +200% of variable play speed
- . Up to 100 cue points
- Powerful setup menu
 System: ST200-S/SM Universal Slo-mo Controller, SW1x8 RS422 switcher

Circle (69) on Action Card



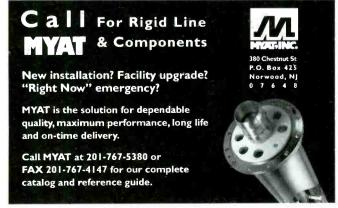

Circle (70) on Action Card

H I G HIN FIBER




IOW IN FAT

FTX-95 / FRX-95 FIBER OPTIC SYSTEM

- Exceeds RS-250C Short-haul specifications.
- Video S/N > 75 dBs, Diff. Gain < 0.5 %, Diff. Phase < 0.5°.
- 10 MHz BW for HDTV, NTSC, PAL and SECAM.
- 1000 feet video cable Equalizer and Clamp.
- 20 bit Digital Stereo Audio & AES/EBU data interface.
- Up to two 10 Hz 5 KHz Audio auxiliary channels.
- Up to two RS-232C, RS422, or CMOS channels.
- Portable and Rack-mount units available with Singlemode and Multimode optics.



In the U.S. and Canada call 1-(800)-4TV-TEST 191 Forest Avenue, NY 11560-2117 USA 1-(516)-671-7278, FAX 1-(516)-671-3362 Circle (71) on Action Card

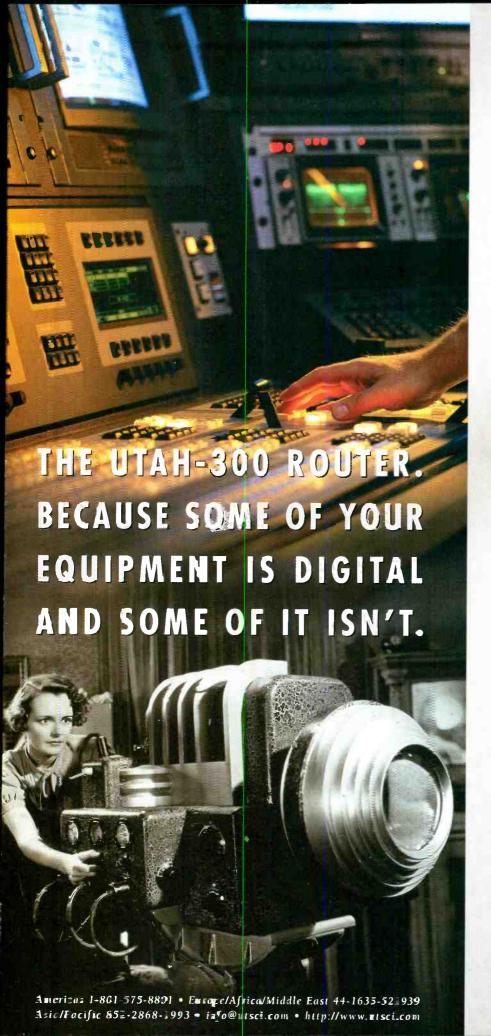


At Utah Scientific, we recognize that you need to approach the digital future one step at a time. That's why we designed the UTAH-300 routing switcher. The UTAH-300 handles analog, digital or both in the same frame. Combine this with our new SC-3 Control System and you have a routing system that's powerful and flexible enough to take on today's realities while preparing you for tomorrow's challenges. That means you can upgrade to a digital routing system without retiring your equipment prematurely. It means you have the assurance the UTAH-300 solution will be there to provide the switching and control requirements of the future.



Utah SC-3 Control System

- · Analog and digital in the same frame
- Backward compatibility
- Windows programming screens
- · Open control protocols
- Ethernet control port
- Third party control capability
- Two level tie line option
- · Real Time Switch TM

Call your Utah Scientific representative at 1-800-246-6744 ext. 5016 for your free UTAH-300 Planning Book. The UTAH-300. So advanced it actually works with your old stuff.



Circle (18) on Action Card
© 1996 Utah Seientific, Inc.

tion is difficult. For broadcast, the system uses a signal designated 8-VSB, comprising a 4-level AM vestigial sideband signal, plus trellis coding that turns its 4-level input into 8-level output signals. The basis data transmission spectrum is flat over most of the channel, with a rolloff region at either edge, like a quadrature amplitude-modulated (QAM) spectrum. But unlike QAM, where the suppressed carrier is in the center of the band, VSB's suppressed carrier frequency is at the rolloff of the lower band edge.

Constant value data would ordinarily produce a non-uniform spectrum, increasing the interference into existing NTSC stations. For this reason, input data is modified by a known pseudo-random scrambling sequence, which flattens the spectrum on average. Because the MPEG-compliant data generated by the GA video compression system is segmented into 188-byte packets, including a sync byte, data is transmitted in similar segments. Each contains 187 databytes, 20 Reed-Solomon parity bytes for forward error correction, and one segment sync byte, which can be re-inserted as required at the receiver.

Over cable, where the signal-to-noise ratio is controlled, a 16-level VSB modulation suffices without trellis coding. The increase in the number of levels does not alter the signal's spectrum, but does double the available data rate vis-à-vis 8-VSB.

The special features added to the VSB signal assist the receiver in acquiring and locking onto that input, even under the occasionally extreme conditions of terrestrial broadcasting. The idea is to provide a known and stable reference for the various carrier and clock recovery functions. The receiver is then sure to acquire the signal whenever the data itself is usable. A small pilot carrier is included instead of the totally suppressed carrier usual in QAM. The pilot is placed so that it falls on the Nyquist slope of NTSC receivers, minimizing co-channel interference into existing service. If there are no other channel impairments, this pilot can even be acquired down, including low signal-to-noise conditions.

Interoperability

Because of the proliferation of standards in some industries and the lack of standards in other related industries, merging a disparate collection of TV, imaging and information systems together is difficult. Therefore, interoperability was an important design goal for a U.S. ATV system. These systems, which might include broadcasting, cable television and consumer electronics, as well as computing and telecommunications, are not especially interoperable with one another, yet there are good reasons for making them interoperable with HDTV. The GA systems seems to provide good interoperability.

Louis Libin is director of technology for NBC, New York

Still some unfinished business

The basis for the Grand Alliance/FCC standard has been established, but there are many unanswered questions. Many issues remain open that need to be tested and standardized prior to going on the air with ATV. For instance, the receivers must be able to demodulate the transmitted signal and interpret the bitstream to recreate the high-quality picture, sound and data. These issues are being defined and will be prioritized by the various broadcast organizations that will be performing the work. The following are examples of some of the activities that will be required.

Terrestrial transmission

Though the terrestrial transmission standard has been forwarded to the FCC for approval, there are still open issues related to the broadcasting of over-the-air signals. For example:

- 1) The ATV broadcast transmitter performance needs to be ascertained.
- 2) The emission mask that establishes the limits of out-of-band signals for the ATV transmission system needs to be specified. It is necessary to allow ATV adjacent-channel operation with NTSC stations without significant degradation to the NTSC received signal.
- 3) The input signal interfaces of the system components and equipment to be used in broadcast transmission facilities must be compatible. This includes signal sources, such as test equipment, microwave and satellite facilities.

Receiver specifications

A set of recommended practices must be developed to be used in the design and implementation of ATV receiving systems. For example:

- 1) The tuner performance and immunity from interference must be ascertained to meet industry requirements.
- 2) The true extent of coverage must be determined by matching prediction models with actual coverage through field measurements and studies.
- 3) Margins need to be specified and documented. This is necessary because reception margins or signals in excess of that needed to achieve error rates that no longer produce artifacts on the broadcast signal require evaluation.

Performance and compliance

The first-generation ATV equipment must meet initial performance requirements. Encoder equipment, including pre-processors, video and audio compression, the transport system and modulation, must be evaluated to ensure compliance with industry standards. The receiving systems performance must be identified including the tuner, adaptive channel equalizer, transport, video, audio and ancillary data decoding equipment.

Resources: Hardware and standardization

Various organizations will be needed to perform all of the required activities. The organizations are divided into two categories. *Hardware Development & Evaluation* and *Standards & Documentation*. The standard-setting organizations involved with this phase of ATV development are the ATSC, the EIA, the IEEE and SMPTE. Some of the organizations that may be involved with the hardware development and evaluation include:

- Equipment manufacturers:
- NIST/ATP program (a group of companies that are developing critical technologies needed to enable production and delivery of ATV);
- Experimental ATV station (a transmission facility strategically located and operating at full power to enable propagation, equipment and receiving testing).

Needed: Broadcaster support

There is a need to get these projects done! Your role will be to provide support for the projects. Station groups and networks will participate in various parts of the projects, and one of the goals is to have an experimental broadcast station where these tests and developments will be performed.

PROFESSIONAL SERVICES

JOHN H. BATTISON P.E. CONSULTING BROADCAST ENGINEER. FCC APPLICATIONS AM, FM, TV, LPTV Antenna Design, Proofs, Fieldwork 2684 State Route 60 RD #1 Loudonville, OH 44842 419-994-3849

D.L. MARKLEY

& Associates, Inc **CONSULTING ENGINEERS**

2104 West Moss Ave.

Peoria, Illinois 61604 (309) 673-7511 FAX (309) 673-8128 Member AFCCE

NETCOM

FOR AUDIO AND VIDEO ENGINEERING DESIGN • CAD DRAFTING SERVICES
CABLE FABRICATION • PRE-WIRED PATCH PANEL RACKS
SYSTEM INSTALLATIONS • EQUIPMENT SALES

(201) 837-8424

FAX: (201) 837-8384 1465 PALISADE AVE., TEANECK, NJ 07666

CHAN & ASSOCIATES

BUSINESS DEVELOPMENT . STRATEGIC MARKETING . PUBLIC RELATIONS

CURTIS J. CHAN PRESIDENT

2212 HERITAGE WAY FULLERTON, CA 92633 PHONE: (714) 447-4993 FAX: (714) 578-0284 PAGER: (714) 506-1357

RICH BISIGNANO

East Coast Video Systems

consultants • engineers • systems integrators

52 Ralph Street Belleville, NJ: 07109 201.751.5655 Fax: 201.751 8731 102466 25@compuserve.com

on line in time



HAMMETT & EDISON, INC.

CONSULTING ENGINEERS
RADIO AND TELEVISION

DANE E. ERICKSEN, P.E.

Box 280068 San Francisco, CA 94128 707/996-5200 707/996-5280 Fax

CLASSIFIED

FOR SALE



NEW CATALOG

Audio / Video / Data Cable, Accessories, Tape

1-800-999-HAVE

HAVE, INC., Dept. BE Hudson, New York 12534

STOCK ANSWERS.

For video duplication, demos, audition reels, work tapes, our recycled tapes are technically up to any task and downright bargains. All formats fully guaranteed. To order call:

(800)238-4300

Want more

information

on advertised

products?

Use the

Reader

Service

Card.

60

61

62

63

65

68

69

70

Factory Direct Cases Our

prices can't be beat



Custom or Stock Sizes

800-645-1707 In NY 516-563-1181 Fax: 516-563-1390

VIDEO PROJECTOR WAREHOUSE

Super price! Super offer! 4-color Standard Projector.

Multiscan Projector. LCD Video Projector. PAL. NTSC. SECAM. 110V ~ 240V.

All brand new in stock. Please call:

Fax: 415-731-0903 Tel: 415-759-3668

Broadcast Store





Thousands of New& Used Items in Stock! **BCS BUYS Video Equipment Also!**







Broadcast Store

Turn Your UVW or PVW Betacam into a 4 Channel Machine with the AFM-216

The AfM-216 Upgrade kit is easy to install and compatible with all recordings made on a BVW series machine. Record and playback 4 channel audio at a fraction of the cost of a BVW

BCS-LA Ph:818-551-5858 BCS-NY Ph:212-268-8800

BECK BROADCAST PRODUCTS

TBC-RMT (TBC Remote Control Unit) Remote control of up to 3 TBC's. For use

with internal TBC's on BVW, DVW, PVW, UVW, and BVH Beta machines or any machine using Sony BVR-50 controller. M. Purchased with 1, 2, or 3 modules. With 3 modules. \$960

....

SCR-4X8 (Serial Machine Control Router) Input/Output: Twelve rear mounted DB9-F connectors (four controllers, eight devices). EIA RS-422 send and receive. Controls: Twelve lighted pushbuttons for channel assignment. \$980



SCP-10 (Serial 422 Patch Panel) I 10x 10

passive non-normalling serial data patch panel. E Two rack units high. Legend strips and 10 patch cords included. \$350



VU2-P (VU/Peak Meter with Phase Indicator) Simultaneous peak and VU display. Solid state phase indication. Highly readable LED arrays. Adjustable headphone output. Ili-impedance looping inputs. \$890



SPK-2 (Two Channel Audio Monitor)

Two channel audio confidence monitoring Accepts both balanced and unbalanced inputs. Five switchable listening modes. Headphone output with speaker mute. \$650

LM 2+2 (Audio Level Matcher) Provides a complete interface between an unbalanced audio device and a balanced environment. Two channels of halanced to unbalanced

conversion complement two channels of unbalanced to balanced. Independent gain trims. \$212

LM VCA (Audio Level Matcher w/Remote

Gain) Two channels of independent voltage controlled gain with gain trims. Balanced or unbalanced inputs and outputs. 100 dB range with 0 to +5V control. True logarithmic response. Used for remote gain riding, remote monitor gain. \$255

STG (Stereo Tone Generator) With simultaneous, unbalanced and balanced outputs, digital precision and crystal controlled accuracy. Provides a source of digitally generated 400 Hz and 1kHz tone for any consumer or professional input. \$305

Beck Associates Inc 1-800-728-3725

2403 Howard Lane Mastin, TX 78728 Phone 512-388-9777 Fax 512-388-1833

Circle (100) on Action Card

FOR SALE

CHINESE SUBTITLE SYSTEM

PC based CG system
PAL or NTSC
Time code option
Analog or Digital O/P
Big5 or GB code

PANDA ENGINEERING INT'L LTD. Tel. (852) 2566 8162 Fax (852) 2512 8517



- · AFFORDABLE ATOMIC CLOCK STABILITY
- SMPTE MASTER CLOCK GEN μSEC ACCURACY

CALL FOR BROCHURE OR FAX-BACK \$995.

TEL: 800-940-2248 · FAX: 309-833-5175
W CLARK & ASSOCIATES, MACOMB, IL

SATELLITE COMPRESSION EQUIPMENT FOR

SALE General Instrument Digicipher Compression Encryption System for sale by authorized reseller. Encoders and Consumer IRDs. Also for sale, C-band and Ku Band uplink trucks and C-band satellite time. Call Kevin Mulhare, 212-753-6024.

SATELLITE EQUIPMENT FOR SALE Scientific Atlanta B-Mac Encryption System for sale. Decoders and Encoders (MBE and Level 1). Good Condition. Price Negotiable. Call: Kevin Mulhare, (212) 753-6024.

FIX RF ON HEADSETS, HANDSETS & PHONES. Filters Tuned for AM, FM & CB. Modular, for Handset or Base Cords. Even if you've tried others...Ours WILL Work! 30 Day Moneyback Guarantee. Call for 4 Page RFI Tech Bulletin & Catalog, or on the web at http://www.sandman.com. Mike Sandman...Chicago's Telecom Expert. 708-980-7710.

FOR LEASE

TOWER SPACE AVAILABLE, Oklahoma City market. Construction begins April, 1996. Call Brad Ferguson at KCSC. (405) 460-5272. FAX (405) 330-3844. E-mail KCSCFM@aol.com.

SERVICES



HELP WANTED

MAINTENANCE ENGINEERS

Our new state of the art facility is looking for dynamic individuals to perform electronic construction and maintenance.

Systems Maintenance:

Design and debug broadcast systems, interpret systems drawings and maintain plant at system level.

VTR Maintenance:

Trained individual to maintain Sony 1" BVH-1100A. 2000, 3100.

Candidates must be able to diagnose equipment to component level, including: digital, analog and RF circuitry. Requires degree or certificate in electronics technology and 3 to 5 years experience at a television station.



220 East 42 Street New York, New York 10017 Employment E

A Tribune Broadcasting Station
An Equal Opportunity Employer

CHIEF ENGINEER: This opportunity is to work for a progressive company that embraces new technology. RAMAR Communications, Inc. owns & operates 3 TV and 2 radio stations in Lubbock and 2 TV and 1 FM station in Albuquerque. RAMAR is seeking a motivated professional with proven ability in supervising an engineering staff & multiple projects. Position specifications: 7+ vears combined broadcast experience TV & Radio; EE or EET degree preferred; Studio & RF experience; SBE certification and/or General Class (formerly FCC First Class) license preferred. This position requires project management skills, good written & verbal skills, and experience in budget preparation & implementation. Send resume to: RAMAR Communications, Inc. POB 3757, Lubbock, TV 79452. EOE.

EQUIPMENT WANTED

WANTED: USED VIDEO EQUIPMENT Systems or components. PRO VIDEO & FILM EQUIPMENT GROUP: the largest USED equipment dealer in the U.S.A. (214)869-0011.

BUSINESS OPPORTUNITIES

MAKE MONEY WITH YOUR OWN Digital Satellite System Business. Sell systems in all 50 states with customer financing. System uses the new AT&T 402R Satellite. Ground floor opportunity. Call 24 hours for free information packet 803-750-3540.

MAINTENANCE ENGINEER: Top 50 market television station seeking a qualified maintenance person with added emphasis on computer skills. This person must have a strong background in computers, digital electronics, lan systems, Unix, PBX systems, Graphics computers, and Windows. Must have the ability to administer, troubleshoot, and solve problems with several different operating systems. A good working knowledge of video and audio systems a must. Send resume to the following address: WSMV-TV, Att. Mike Nichols, 5700 Knob Rd., Nashville, TN 37209. EOE.

VACATION RELIEF-STUDIO ENGINEER: Position requires experience as an audio operator and/or Infinit operator in a live production environment. A thorough knowledge of TV studio operations and standards required. Completion of accredited college or technical school desirable. Professional experience required. Please send resume to: Bill Kirkpatrick, WABC-TV, 7 Lincoln Square-6th Floor, New York, NY 10023-0217. No telephone calls or faxes please. We are an Equal Opportunity Employer.

CHIEF ENGINEER Beautiful west coast market leader seeking a highly motivated CE qualified in all areas of television broadcast engineering. Hands on problem solver with maintenance experience in VHF transmitters and studio equipment. Knowledge of computers. Leadership, planning and organizational skills a must. Send resume to: Classified Ad Coordinator, Broadcast Engineering, Dept. 776, 9800 Metcalf Ave., Overland Park, KS 66212-2215. EOF.

TV OPERATIONS TECHNICIAN KPLR-TV, St. Louis. This growing facility needs a goal-oriented team player with at least 5 years experience in TV operations. Responsible for operation of broadcast equipment including MC switcher, satellite receiving equipment, videotape and PC based automations and remote control. Good pay and benefits. Send resume to KPLR-TV, Attn: Dept. 116E, 4935 Lindell Boulevard, St. Louis, MO 63108 EEO Employer. No phone calls please.

MAINTENANCE ENGINEER/TV. Repair and adjustment TV broadcast equipment, assist in construction of new equipment or modifications to existing facilities; assist remote production team by driving remote truck, deployment and operation of equipment, and solutions to field equipment failure. FCC Radiotelephone operator license and background in analog and digital trouble shooting required, and UHF and FM Radio transmitter experience desired. Possess or be eligible for Florida CDL. Resume to: Personnel, WMFE, 11510 East Colonial Drive, Orlando, FL 32817. Deadline April 26, 1996. EOE.

VACATION RELIEF-MEDIA CENTER ENGINEER Position requires an operating knowledge of AMPEX VPR 2's, SONY BETA-CAM Studio Tape Machines. Knowledge of/experience with studio operating positions and/or tape library helpful. Ability to adjust all associated equipment to required standards necessary. Previous professional experience required, completion of accredited college or technical school helpful. Please send resume to: Bill Kirkpatrick, WABC-TV, 7 Lincoln Square-6th Floor, New York, NY 10023-0217. No telephone calls or faxes please.

We are an Equal Opportunity Employer

SENIOR LEVEL MAINTENANCE ENGINEER

High end S.F. facility has immediate opening for senior level maintenance engineer. Min. 10 years of hands on maintenance, repair & operations skills on post production video and audio equipment, ENG/EFP equipment, system troubleshooting, and computer systems. Experience in D1, D2, Analog & digital Beta, Avid, Quantel, PC and Mac required. Fax or e-mail to: 415-705-0171 or employment@rtv.com.

TECHNICAL DIRECTOR - KCAL9 has a challenging opportunity for an individual with 3+ years experience, preferably in a Top 10 market, technical directing of live programming, including news, talk shows or theatrical productions. Must have a background in crew management and familiarity with Grass Valley 300 switchers, Kaleidoscope, Abekas A53-D and Quantel PictureBox. Excellent interpersonal skills are essential. Prefer a background in editing, knowledge of communication electronics and digital expertise. We offer a salary commensurate with experience and outstanding benefits. Please mail/FAX your resume to: KCAL9, Attn: Human Resources, Dept. # BE/TD, 5515 Melrose Avenue, Los Angeles, CA 90038. FAX (213) 460-5019. NO FOLLOW-UP PHONE CALLS WILL BE ACCEPTED. Principals only. EOE.

CHIEF ENGINEER KCRA-TV, one of America's most dominant NBC affiliations, is seeking a Chief Engineer to lead it and its UHF, LMA independent, KQCA, through the technical and operational challenges of the future. This top management position requires a working knowledge of VHF and UHF transmission systems, digital multi-channel automation, ENG and weather technologies, studio, and overall technical operations. The ideal candidate will have previous Chief Engineer experience, including: personnel, budgeting and strategic planning. This is a challenging, exciting and rewarding position that reports directly to the General Manager and is key to the management team. Send confidential resumes to: Julie Bohne, KCRA/KOCA-TV, 3 Television Circle, Sacramento, CA 95814. No phone calls please. EOE; M/F/ADA.

VACATION RELIEF-TECHNICAL DIRECTOR Position requires a working knowledge of Television Master Control Operations, including SONY BETA-CART and Flexi-Cart, Television Transmitter, and Grass Valley 1600 switchers. Experience at an ABC Affiliate Master Control and/or with Columbine Master Control automation systems helpful. Experience doing Live News on a Grass 300 Switcher a definite plus. Position involves overnight and weekend shifts. Completion of accredited college or technical school helpful. Please send resume to: Bill Kirkpatrick, WABC-TV, 7 Lincoln Square-6th Floor, New York, NY 10023-0217. No telephone calls or faxes please. We are an Equal Opportunity Employer.

CHIEF ENGINEER A Northeast radio station is looking for an organized & detailed-oriented engineering manager. Salary commensurate with experience. Requirements: Radio engineer SBE certification. 3 years experience as assistant or chief engineer. Ability to work on AM & FM transmitters & equipment. Computer literate. Knowledge of digital & telecommunications technology. We are an EOE. Send resume to G.M., P.O. Box 5941, Trenton, NJ 08638.

Setting Standards Worldwide... SONY.

To be recognized worldwide, you have to continually set the standard, worldwide. And that's what Sony has consistently accomplished for decades. We've built a reputation for product and technological quality and reliability that is still the benchmark for other competitors, even today. Consider joining the team as a:

Manager of Field Engineering

Manage a technical staff of highly skilled Field Engineers throughout the western region. You'll take responsibility for developing alternative solutions. making recommendations and implementing processes which improve customer service in the field. Developing/managing a departmental budget and acting as a central point of contact for field engineers experiencing problems in solving technical customer service issues are additional efforts.

Ideal candidates will possess extensive experience in analog and digital business/professional television broadcasting production systems and equipment, especially in the areas of diagnosis and troubleshooting. A related Electronic Engineering degree or equivalent, 7+ years of experience managing a large force of Field Service Engineers and expertise in developing/managing budgets are essential.

Sony offers an excellent salary and benefits package. Please send resumes to Sony Electronics, Inc., Attn: HR Dept., 10833 Valley View Street, Cypress, CA 90630. EOE.

SONY

TECHNICAL SUPPORT ENGINEER- Successful candidate must have a strong technical background with minimum 3 years extensive handson experience in the maintenance and installation of broadcast audio consoles and peripherals. Front line responsibility which includes directly communicating from console manufacturer to end users of sophisticated audio equipment. The ability to read and interpret schematics, logic and flow charts as well an ability to communicate this knowledge clearly, pleasantly and concisely over the telephone are central to responsibilities of this position. Troubleshooting to the component level, comprehensive knowledge of the radio and television industry, and an understanding of broadcast studios at the system level a must. SBE certification, FCC General Class license or equivalent workplace experience are also required to qualify for this position. Please send resume with cover letter and salary history to: Wheatstone Corporation, Attn: Yvette Sullivan, 7305 Performance Drive, Syracuse, NY 13212. EOE.

THE WEATHER CHANNEL® in Atlanta, GA has immediate openings for four broadcast Maintenance Engineers. Successful candidates must have a minimum of two years broadcasting experience. Knowledge of Sony Betacam/SP's, personal computers, Odetics, Utah Scientific or Grass Valley equipment is a plus. Must work well in a team environment. Good work ethic and a positive attitude are a must. Send resume to: The Weather Channel, 2600 Cumberland Parkway, Atlanta, GA 30339 or Fax: (770) 801-2522 Attn: Engineering Department. Competitive salary and benefits package offered. EOE/M/V/D.

Maintenance Engineer

Swiderski Electronics, Inc., a leader in the Audio/Video/Telecommunications field, has an immediate opening for a qualified Audio/Video Component Level Maintenance Engineer. 2 yrs. exp. Position works with Broadcast/Industrial 1/2", 3/4" and 1" VTRs & related equipment.

Send resume & salary history to: H/R Dept., 1200 Greenleaf Ave. Elk Grove Village, IL 60007 Fax resume (847) 364-5019

WE PLACE PROFESSIONALS

(Placement Limited to Technical Engineers, Post Production Editors, Colorists, Graphics & Animators)

Employer Paid Fees • Guaranteed Confidential 17 Years of Coast to Coast Service

> Before calling please FAX or Mail your Resume to Mark Kelly



KEYSTONE INT'L, INC. 16 Laflin Road, Suite 900 Pittston, PA 18640

Fax 717-654-5765 • Phone 717-655-7143 E-Mail:keyjobs@keystone.microserve.com



system enhancements, assisting with Networks Operations facility design, working with vendors to debug software, establishing technical operating procedures, writing manuals and assisting with ongoing training. Global knowledge of industry developments in compression, encryption, conditional access systems and ATV/HDTV is required as well as good system management skills for SCO UNIX and TCP/IP.

USA NETWORKS offers a comprehensive benefits package, including health coverage, 401(k) savings, pension and profit sharing plans. For confidential consideration, please forward a cover letter, resume and salary history/ requirements (only resumes with salary requirements will be considered) to:

USANETWORKS

Human Resources Department DE 1230 Ave. of the Americas, New York, NY 10020 FAX: (212) 262-5343

MAINTENANCE **ENGINEERS**

CNBC and MSNBC, 2 cable divisions of NBC, have important and visible opportunities for skilled Maintenance Technicians to help maintain two state-of-the-art facilities (troubleshooting and repairing individual equipment AND systems).

To qualify, you must be familiar with Ikegami and Sony Cameras, GVG switchers, Quantel Devices, Chyron Devices and Odetics Cart Machines. Strong tape background, including M-II, Beta and 1" VTRs, is required. Computer proficiency is a plus; availability for rotating night shifts and weekends is a must.

For confidential consideration, please mail or fax resume to: Employee Relations-TT, CNBC/MSNBC, 2200 Fletcher Avenue, Fort Lee, NJ 07024; fax (201) 585-6275. An equal opportunity employer

CNBC/MSNBC

Make your *Broadcast Engineering* classified ad stand out ... use color!



TELEVISION ENGINEERS

Turner Broadcasting System, the leading News, Sports, and Entertainment system in satellite communications, has career opportunities for engineers with broadcast maintenance experience. These positions demand an extensive background in television engineering and at least two years of training in electronics technology. Turner Broadcasting System offers an excellent benefit and compensation program.

> Send resumes to: Mr. Jim Brown, Corp. Engineering Turner Broadcasting System, Inc. One CNN Center P.O. Box 105366 Atlanta, GA 30348-5366 (404) 827-1638 office (404) 827-1835 fax

TBS is an equal opportunity employer

ENGINEER III RF RADIO WABE-FM/90.1 Atlanta, Public Radio station seeks qualified RF Engineer. Maintenance, inspection adjustments and satisfactory technical operation of a 24 hours 100,000 watt educational radio station. Responsible for satellite up/link down/link feeds. Requires 5 years experience, college degree, general FCC license and SBE certification desirable. Send resumes to H.R. Dept., WABE-FM 90.1, 740 Bismark Rd., N.E., Atlanta, GA 30324, Fax (404) 827-8956. Respond by 5/3/96.

ENGINEER III/VIDEO WPBA-TV 30-Atlanta, Public TV station seeks qualified Video Maintenance Engineer. Responsible for maintenance of component television equipment, including routing switches, television monitoring equipment, Video tape recorder/players, character generators and studio EFP/ENG television cameras. Send resumes to H.R. Department, WPBA/TV 30, 740 Bismark Rd., N.E., Atlanta, GA 30324, Fax (404) 827-8956. Respond by 5/3/96.

SALES ENGINEERING/SUPPORT Quantel is seeking Product Managers and Assistant Product Managers for its Product Support Department based in Connecticut. It is preferable that the successful candidate have engineering experience in the Broadcast and Post Production industry. Please forward resume and salary history to Vice President Product Support, Quantel, 28 Thorndal Circle, Darien, CT 06820 or fax to 203-656-3459

MAINTENANCE ENGINEER Hollywood Post Production Facility seeking engineer for day/ evening shift. Min. 5 yrs post/graphics/telecine experience. Sony dig/analog VTR's, GVG, Abekas, Quantel, Avid, SGI, PC. Fax resume to CCI at 213-466-2392

CLASSIFIED ADVERTISING RATES

Advertising rates in **Broadcast Engineering** Classified Section are \$ 123^{so} per column inch, per insertion, with frequency discounts available. There is a one inch minimum and ten inches maximum.

and ten inches maximum.

Ads may also be purchased By-The-Word for \$1.80 per word, per insertion. Initials and abbreviations count as full words. Minimum charge is \$40 per insertion. Call Matt Tusken, Classified Sales Manager at 1-800-896-9939. or fax 913-967-1735.

AD INDEX

Page Number	Reader Service Number	Advertisei Hotline	Page Number	Reader Service Advertiser Number Hotline
AAVS/Div. of Sencore3	5 8	00-769-AAVS	Myat	70 201-767-538()
Accom, Inc 81	44	415-328-3818	NVision Inc 101	63 916-265-1000
Advanced Broadcast Systems 60	39	606-282-7580	O Conner Engineering 32	12, 714-979-3993
ASC Audio Video Corporation53	33 8	818-843-7004	Opamp Labs, Inc	75 213-934-3566
Audio Precision 7	14 8	800-231-7350	Panasonic Broadcast & TV 102-103	800-524-0864
Avid Technology9	15 8	300-949-2843	Philips Broadcast	
Beck Associates	100 5	512-388-9777	Television Systems Company 49-51	27 800-962-4287
B & H Photo - Video 125-127	61-62 8	300-947-9928	Pirod, Inc115	60 219-936-4221
Bird Electronic Corp 70	49 2	216-248-1200	Pixel Power Limited 52	28 +1223-423-399
Broadcast Video Systems Ltd 124	74 9	905-764-1584	Quantegy 61	29 415-903-1134
Canon USA Broadcast Lens 19	8 2	201-816-2900	Quantel	32 203-656-3100
Chyron Graphics 11	16 5	16-845-2000	Rane Corporation 10	17 206-355-6000
Clear-Com Intercom Systems 27	21 5	510-527-6666	Sachtler Corp. of America	20 516-867-4900
C-Mac Microcircuits 60	38 8	305-373-1990	Satcher GMBH 37	30 +893-215-8200
Comark Communications, Inc	65 2	215-822-0777	Shure Brothers Inc	7 800-25-SHURE
Comn\scope Inc	9 8	300-982-1708	Skycell Satelfite Telephone Service 23	19 800-867-8777
Discreet Logic105	64 5	14-948-0660	Snell & Wilcox Ltd	6 +730-821-1188
DNF Industries128	69 2	13-650-5256	Sneil & Wilcox Ltd 58-59	37 +730-821-1188
Faroudja Laboratories	24 4	()8-735-1492	Snell & Wilcox Ltd 93-95	46 +730-821-1188
Florical Systems Inc 68	41 3	52-372-8326	Sony Business & Professional 38-39	800-635-SONY
Fujinon, Inc	10 2	01-633-5600	Sony Business & Professional 62-63	800-635-SONY
Fujinon, Inc 33	23 2	01-633-5600	Sony Business & Professional 67	800-635-SONY
Harris Corp/Broadcast Div 1	4 6	06-282-4800	Sony Business & Professional 90-91	800-635-SONY
Harris Corp/Broadcast Div 85	52 6	06-282-4800	Sony Business & Professional 98-99	800-635-SONY
Hewlett Packard 78-79	43 8	00-452-4844	Standard Communications	48 310-532-5300
Hitachi Denshi America 119	81 5	16-921-72 0 0	Steadi Systems 30	11 800-451-6920
Ikegami Electronics Inc 57	36 2	01-368-9171	Tektronix Inc. Vnd	50 800-998-3588
Interbee/jesa	56 +81-	3-3284-0165	Tektronix Inc. Vnd	51 800-998-3588
International TV Symposium 121			Tektronix Inc. Vnd	42 800-998-3588
JVC Professional Products Co 86-87	53 8	00-JV C-582 5	Tektronix Inc Measurement Bus 65	40 503-627-2830
Leader Instruments Corp 129	80 8	00-645-5104	TFT 89	54 800-347-3383
Leightronix Inc			Trompeter Electronics 56	35 818-707-2020
Leitch IncorporatedBC	3 8	00-231-9673	Television Systems Ltd 28	22 801-977-9553
Lighthouse Digital	59 8	00-577-9562	Utah Scientific	82, 18 800-453-8782
Louth Automation 82-83	45 4	15-843-3665	Vela Research Inc	57 813-572-1230
Matrox Electronic Systems 97	55 8	00-361-4903	Videotek, Inc	2 800-800-5719
Maxell Corp. of America 47	25 8	00-533-2836	Vinten TSM 69	47 9 14-268-0100
Modulation Sciences 108			Wheatstone Corporation IFC	1 315-452-5000
Motorola-Multimedia Group 54-55			Will Burt Company 22	76 216-682-7015
Mountaingate Data Systems			Winsted Corporation 122, 123	72, 73 800-447-2257
Multidyne Electronics			360 Systems 5	13 818-991-()360
Musimatic	68 72	70-484-8434		

SALES OFFICES

NEW YORK, NY

Gordon & Associates Josh Gordon 335 Court Street, Suite #9 Brooklyn, NY 11231 Telephone: (718) 802-0488 Fax: (718) 522-4751

Ioanne Melton 1775 Broadway, Suite 730 New York, NY 10019 Telephone: (212) 641-5270 Fax: (212) 459-0395

OXFORD, ENGLAND Richard Woolley Intertec Publishing Corporation Unit 3, Farm Business Centre. Clifton Road, Deddington, Oxford OX154TP England

Telephone: +44 (0) 1869 338794 Fax: +44 (0) 1869 338040 Telex: 837-469 BES G

Fax: (310) 393-2381 CHICAGO, IL Bill Wendling 55 East Jackson, Suite 1100 Chicago, IL 60604 Telephone: (312) 435-2361 Fax: (312) 922-1408

AGOURA HILLS, CA

Agoura Hills, CA 91301

Fax: (818) 707-2313

SANTA MONICA, CA

Marketing Corporation

Telephone: (818) 707-6476

5236 Colodny Ave., Suite 108

E-Mail address: dnhefner@aol.com

MC² Magazine Communications

Jason Perlman: (310) 458-9987

501 Santa Monica Blvd., Ste. 401

Sue Horwitz: (310) 458-8080

Santa Monica, CA 90401

Duane Hefner

Lianne Fairchild

TOKYO, JAPAN

Orient Echo, Inc. Mashy Yoshikawa 1101 Grand Maison Shimomiyabi-Cho 2-18 Shinjuku-ku, Tokyo 162, Japan Telephone: (3) 3235-5961 Fax: (3) 3235-5852 Telex: J-33376 MYORIENT

CLASSIFIED ADVERTISING OVERLAND PARK, KS

Matt Tusken P.O. Box 12901 Overland Park, KS 66282 (913) 967-1732 Fax: (913) 967-1735

LIST RENTAL SERVICES REPRESENTATIVE Lori Christie 9800 Metcalf Overland Park, KS 66212-2215 Phone: 913-967-1875

Fax: 913-967-1872

BROADCAS'

EDITORIAL

Brad Dick, Editor Skip Pizzi, Technical Editor Steve Epstein, Technical Editor Dawn Hightower, Senior Associate Editor Deanna Rood, Associate Editor Carrie Poland, Associate Editor Tom Cook, Senior Managing Editor Carl Bentz, Directories Manager

Stephanie L. Masterson, Associate Art Director

BUSINESS

Raymond E. Maloney, President Cameron Bishop, Senior Vice President Dennis Triola, Publisher Judson Alford, Marketing Director Annette Hulsey, Classified Advertising Coordinator Susan Jones, Advertising Coordinator Doug Coonrod, Corporate Art Director Barbara Kummer, Circulation Director Meghan Wright, Circulation Manager Customer Service: 913-967-1711 or 800-441-0294

TECHNICAL CONSULTANTS

Jerry Whitaker, Contributing Editor Richard Dean, European Correspondent Eric Neil Angevine, Broadcast Acoustics John H. Battison, Antennas/Radiation Dennis Ciapura, Radio Technology Dane E. Ericksen, P.E., Systems Design John Kean, Subcarrier Technology Donald L. Markley, Transmission Facilities Harry C. Martin, Legal Curtis Chan, Audio/Video Technology

MEMBER ORGANIZATIONS

Sustaining Members of:

- Acoustical Society of America
- Society of Broadcast Engineers Society of Motion Picture and TV Engineers
- Society of Cable & Telecommunications Engineers

Member, American Business Press



Member, BPA International

BPA.

Affiliate Member. International Teleproduction Society



BROADCAST ENGINEERING is edited for corporate management, engineers/technicians and other management personnel at commercial and public TV stations, post-production and recording studios, broadcast networks, cable, telephone and satellite production centers and networks. Qualified persons include consulting engineers and dealer/distributors of broadcast equipment.

SUBSCRIPTIONS: Non-qualified persons may subscribe at the following rates: United States and Canada; one year, \$55.00. Qualified and non-qualified persons in all other countries; one year, \$70.00 (surface mail); \$130.00 (air mail). Subscription information: P.O. Box 12937, Overland Park, KS 66282-2937.

Authorization to photocopy items for internal or personal use, or the internal or personal use of specific clients, is granted by Intertec Publishing, provided that the base fee of U.S. \$2.25 per copy, plus U.S. \$00.00 per page is paid directly to Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923. The fee code for users of the Transactional Reporting Service is ISSN 0361-0942/1996 \$2.25+00.00. For those organizations that have been granted a photocopy license by CCC, a separate system of payment has been arranged. Prior to photocopying items for classroom use, contact CCC at (508)750-8400. Organizations or individuals with large quantity photocopy or reprint requirements should contact Chris Lotesto, (312)435-2359. Microfilm copies of Broadcast Engineering magazine are available by calling or writing UMI, 300 North Zeeb Rd., P.O. Box 1346, Ann Arbor, MI 48106-1346. Phone: (313)761-4700 or (800)521-0600.

©1996 by Intertec Publishing All rights reserved.



DIGITAL BASICS



ast month's article described the mechanical difficulties associated with handling parallel digital video, both at the equipment and in the nature of the multicore cable required. The reliable transmission distance is also so short as to raise considerable concerns about its viability in anything except a small digital island. The answer to these problems is to handle the digital signal in a serial stream.

The serial digital interface (SDI) was developed by Sony, but is not considered proprietary. Converting the 10-bit digital component parallel stream (with 27MHz clock) into serial requires a data rate of 270Mb/s. Figure 1 shows the complete path from parallel to serial receiver and we will refer to parts of this here. The transmission medium is 75Ω coaxial cable, and a number of fundamentals need to be considered. First, however, the co-located samples of the parallel system need to have a transmission order defined for serial. That is done as CB, then Y, then CR.

A 270Mb/s signal (actually higher with the overhead needed) on a coaxial cable is no longer video: it is RF. The handling of the serial signal is a great deal easier thinking as an RF engineer. The video engineer can easily find some pitfalls or "illogical" happenings if the signal is thought of as baseband. Coaxial cable is funny stuff: it

SERIAL

270MHz

REGISTERS

270MHz CLOCK TYPICALLY

FROM 27MHz CLOCK

PARALLEL

DATA

SOURCE

Converting parallel to serial

doesn't like low frequencies; its characteristic impedance isn't the same at all frequencies, and connectors need to be dressed correctly for wideband performance.

The choice of 75Ω with BNC connectors was not one that most RF engineers would have made for a wideband transmission system — better cables and connectors are available for 50Ω . Given that there is no choice, care should be taken over the coaxial cable specified, route cable with generous loop radii, and take great care over the BNC connectors. Use solder in preference to crimp, and make absolutely sure that the vendor's equipment and your connectors are 75Ω , not 50Ω . Also, manufacturers have had considerable difficulties achieving the return loss specification. If in doubt, measure it.

Transmission standards

Transmission standards for the serial datastream are such that the drive level is +10dBm into 75Ω , which corresponds to about 866mV. With output circuit and connector losses, this is quoted as 800mV ± 10%. For most receive-end equipment, the lowest raw level that can be safely considered is -20dBm (i.e., a total circuit loss of 30dB) which corresponds to 27.4mV — usually quoted at 30mV. With 1dB loss in the sender, 0.5dB in each connector and 0.5dB loss in the receive-input circuits, 27.5dB loss in the cable can be considered. This could be up to 300 meters. (1,000 feet) of really good cable and perhaps 200 meters of average cable.

The ability to receive a usable datastream is not, however, simply raw amplitude. The signal itself must be reasonably undistorted (and better definitions will hopefully fall out of work being done on serial data test equipment, not just in the video indus-

TRANSMISSION PATH

(75Q COAX)

BUFFER

try), and reflections must be of an amplitude that does not confuse the receive circuits. This is the reason why return loss is significant. It is important to recognize that in marginal return loss situations, a few inches difference in cable length can cause completely different reflections, and thus, either a recoverable or non-recoverable output.

At the transmission end, the parallel data is shift registered at 270MHz to produce a 1-bit-wide stream. This serial stream is then scrambled by an algorithm that minimizes the DC content of the signal (coax limitations, again), and the signal is subsequently encoded by a non-return to zero inverter (NRZI), which removes DC content even further. The resultant signal is then available for transmission to the coaxial cable.

At the receive end, it is standard for reclocking to take place (to remove jitter) after automatic equalization and amplification. The signal may be almost sinoidal at the receiver point. That is totally recoverable provided there are little or no distortions or additional signals added.


For example, there have been reports of some difficulties at sites where a VHF transmitter is co-located. Because the nature of recovery of the signal is either a yes/no situation, the condition of connectors and cables should be regularly checked.

The serial digital interface is also applicable to composite digital signals. A 14.3MHz NTSC digital composite signal of 10 bits requires a serial stream of 143MHz. A similar PAL signal would need 177MHz (both plus overhead).

Higher data rates are already being discussed for advanced TV systems, and we should expect to see higher than 900Mb/s systems. Although cable losses may be higher at such frequencies, there is no reason why good engineering practices will not result in excellent distance results.

Next month, we will look at interface and codec questions.

Paul McGoldrick is a free-lance writer and consultant based on the West Coast.



Internet:
be@intertec.com
CompuServe:
74672.3124
FAXback:
913-967-1905

DESTINATION RECORDING

BUFFER

Figure 1. Signal path used to convert parallel component digital to a serial datastream for transmission.

Digitally Correct.



The unique Videotek digital corrector can even fool Mother Nature.

Quick, easy, and with total control. Videotek's new SDC-101 defeats any threat to your video images. It lets you correct picture errors and alter video levels in serial component digital video inexpensively, with controls and functions familiar in the analog world. 10-bit digital processing guarantees optimum signal quality. And, it does it all without relying on expensive outside services.

Unsuspecting picture variations fall prey to frame by frame correction. Changes in light and shadows are transformed before your very eyes.



The more you work with the SDC-101, the more of its many faces you'll see. Its versatility and ease of operation means cost-effective and timely performance. That's what Videotek's products are all about.

Call us today. The SDC-101 will make your video creations digitally correct.



A Digital System Integration Product



Circle (2) on Action Card



R 32x32 Routing Used To Be Expensive



120 MHz 2RU Frame

AES/EBU and Serial Digital Video models now available!



No longer! Via32, a 32x32 or 32x16 video/audio modular routing switcher in a two rack frame at prices & specifications that will give our competitors headaches. Coming Soon! The Via32 will be available in both an AES/EBU version and a serial digital version with plug in serial BNCs, Fiber, and ECL inputs & outputs. Control Via32 with your choice of dozens of panels or use our PC software "Router Works" on the built-in RS-232 port. Call Leitch For Routing Remedies.

LEITCH_®

U.S.A. - (800) 231-9673 - FAX: (804) 548-4088

Los Angeles (800) 380-1676 Indianapolis (800) 861-9440 Dallas (800) 401-3770 New York (800) 653-4824 Atlanta (800) 641-1277

Canada (800) 387-0233

Europe 44 (0) 1256 880088 Japan +81 (3) 542<u>3-3631</u> Brazil +55 (11) 8188975