

# Broadcast<sup>®</sup> engineering

An INTERTEC<sup>®</sup>/K-III Publication

February 1997/\$10.00

## VIDEO SERVERS

Bigger and faster

*CNNfn*

THE FINANCIAL NETWORK

## SDI HEADROOM & THE DIGITAL CLIFF

If you bump your  
head, you're dead

## EFFECTS SYSTEMS

DVEs are better than ever

## NEW CAMERA TECHNOLOGY

DSP improves images

# Some Countries Have It ALL!



## WSIX - Nashville, Tennessee "Country Music Station of the Year"

A-500 Studio Furniture delivered March 1993  
A-500 Console S/N 20789 delivered April 1993  
A-500 Console S/N 20792 delivered April 1993  
A-6000 Studio Furniture delivered March 1995  
A-6000 Console S/N 22536 delivered March 1995  
R-16 Console S/N 22557 delivered March 1995  
SP-5 Console S/N 22593 delivered April 1995


1995 Academy of Country Music Award  
1995 Marconi Country Music Award  
1995 Billboard Country Music Award  
1995 Country Music Association Award  
1995 Country Music Association SRO Award  
1995 Gavin Country Music Award  
1996 Gavin Country Music Award  
1996 Academy of Country Music Award

*Wheatstone Model A-6000 Audio Console shown*

 **Wheatstone Corporation**  
tel 315-452-5000 / Syracuse, NY.

Circle (1) on Free Info Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

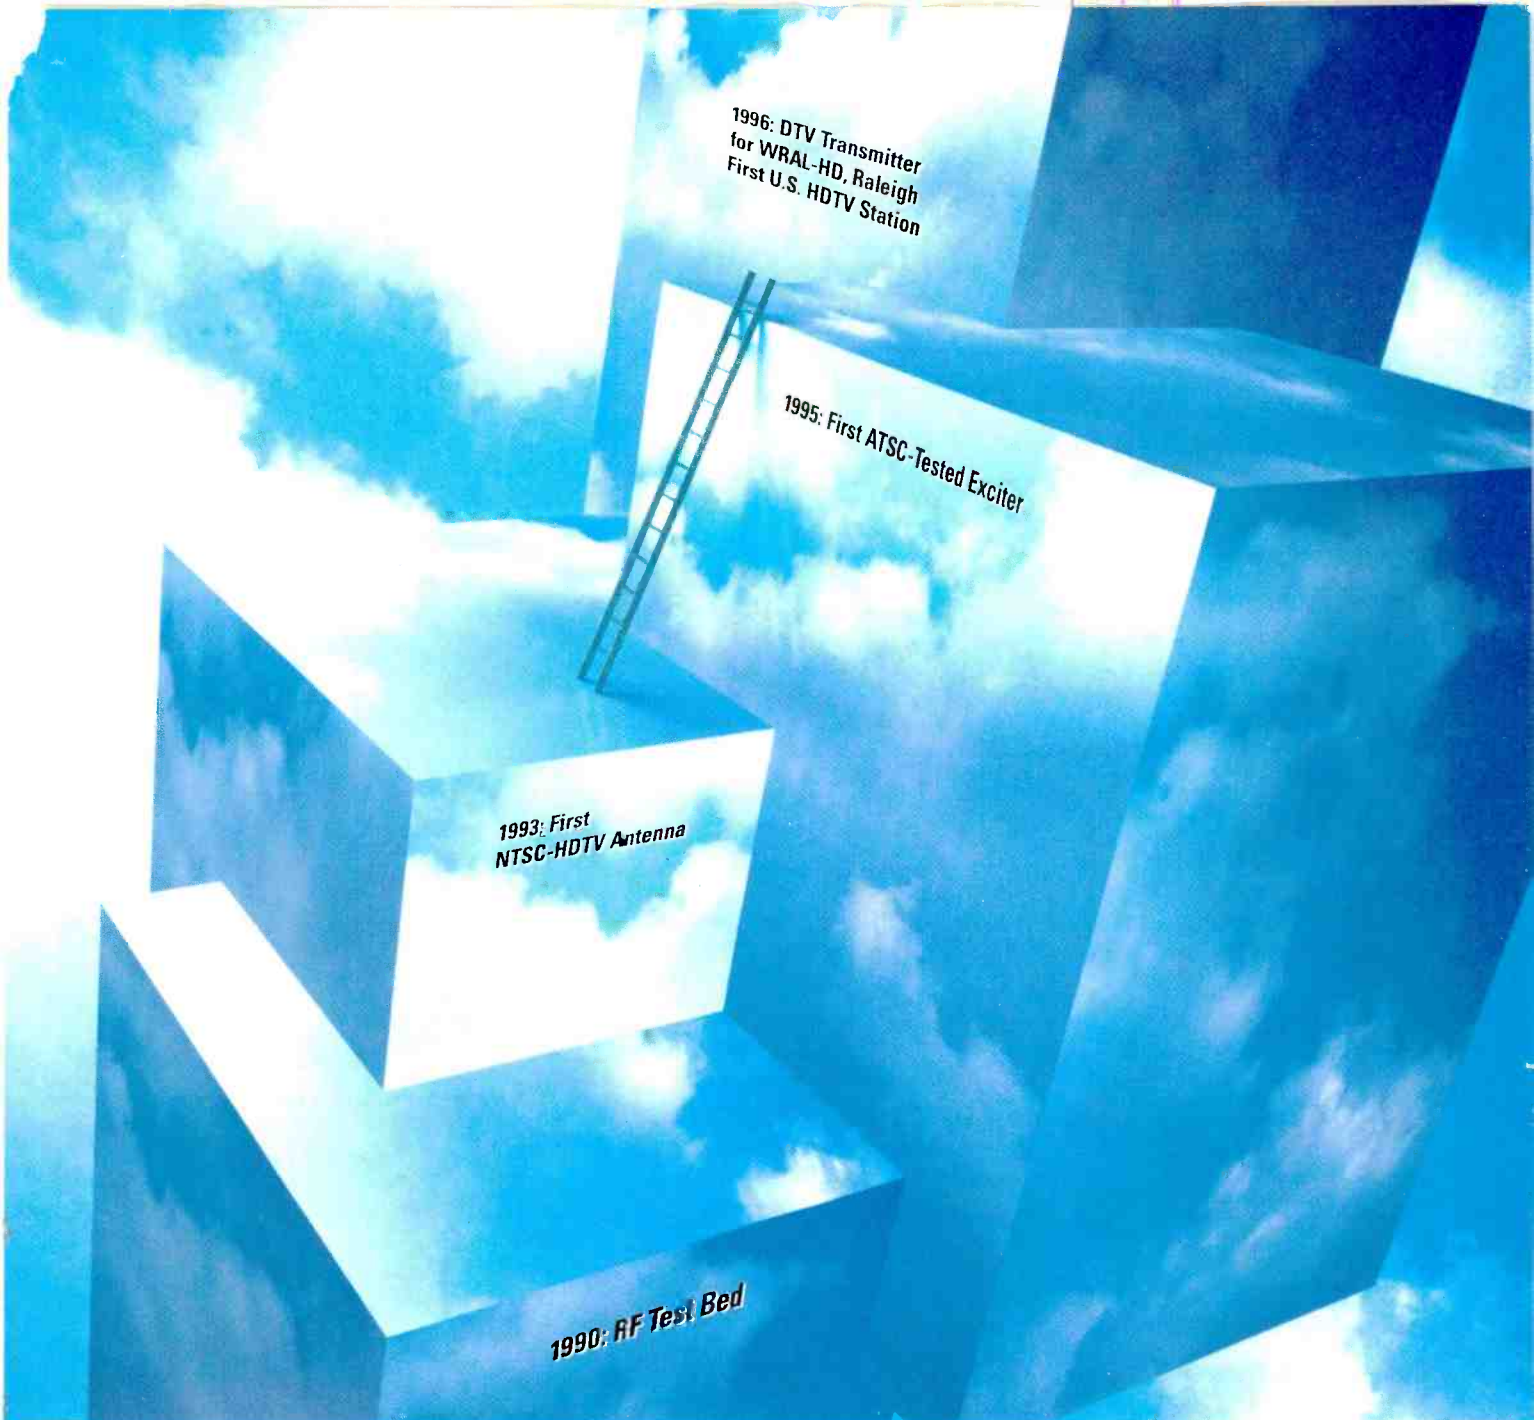

1996: DTV Transmitter  
for WRAL-HD, Raleigh  
First U.S. HDTV Station

1995: First ATSC-Tested Exciter

1993: First  
NTSC-HDTV Antenna

1990: RF Test Bed

## We took a few remarkable steps to give you the smoothest path to DTV.

As you begin planning your move to digital television (DTV), you'll want a partner who can give you the quickest, easiest and safest path possible. Harris would like to be your partner.

From the start of the revolution leading to DTV, we have had only one goal—to give you the smoothest path. So we've been willing to take the hardest steps ourselves, from developing the RF test bed used by the ATTC to evaluate every HDTV system proposed for the U.S., to delivering

the proven DTV transmitters operating on the air today.

The list of Harris' "firsts" is long. But they all add up to one simple benefit for you. No matter where DTV technology takes us, you can count on Harris for proven solutions. To learn what numerous major groups who have DTV Transmitter Equipment Agreements with Harris have discovered, please call. Find out how you can count on Harris to help you make the leap to tomorrow. Today.

### **Harris Corporation Broadcast Division**

US and Canada  
Phone: 1 217 222-8200  
FAX: 1 217 224-1439  
Elsewhere  
Phone: 1 217 222-8290  
FAX: 1 217 224-2764



# **HARRIS**

*A new world of broadcast solutions*

©1997 Harris Corp.

Circle (4) on Free Info Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

## features

### Video Servers ..... 38

By Brad Dick

Video HD storage gets faster, better and cheaper.

### SDI Headroom and the Digital Cliff ..... 80

By Jim Boston and Jim Kraenzel

Digital systems operate in two ways: perfectly or not at all.

### Digital Effects Systems ..... 88

By David Hopkins

Dedicated hardware is still the fastest, but software solutions are becoming more flexible.

### New Camera Technology ..... 94

By Ken Freed

Ready to see the 21st century?

### The Advantages of Tape ..... 100

By Steve Epstein

Videotape has been around for more than 40 years; another 40 is not out of the question.

## columns

### FCC Update ..... 12

Deadline for compliance with RF standards extended

### Transition to Digital ... 14

Transform coding

### Management ..... 18

Tips for effective communication

### Computers & Networks... 20

Networks within networks

### Production Clips ..... 24

Portable power

### Interactive ..... 28

Spinning your own web (site)

### ATV Update ..... 30

Stop throwing stones, we all live in glass houses

### Cabletec ..... 34

QAM delivery

### Transmission ..... 104

New antenna technology

### Field Report ..... 108

Acrodyne's dual Diacode transmitter

### New Products ..... 110

### Digital Basics ..... 130

NAB '97 is on the horizon

## departments


### Editorial ..... 06

### Letters to Editor ..... 08

### News ..... 10

### Classifieds ..... 125

### Advertisers' Index ... 129

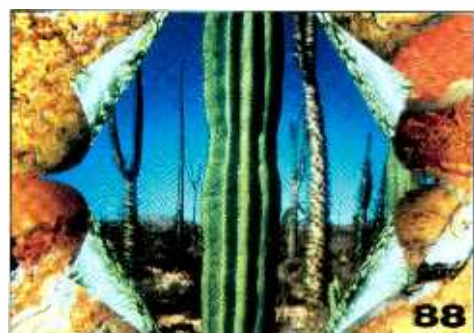


**ON THE COVER:** The new CNNfn control room provides a tightly integrated control system in a small space. Note that the studio set in the upper left corner is but a few feet away. Cover photography courtesy CNNfn, Doug Schwartz photography.

BROADCAST ENGINEERING (ISSN 0007-1994) is published monthly (except semi-monthly in June and December) and mailed free to qualified persons by Intertec Publishing, 9800 Metcalf, Overland Park, KS 66212-2215. Periodicals postage paid at Shawnee Mission, KS, and additional mailing offices. Canada Post International Publications Mail (Canadian Distribution) Sales Agreement No. 0956295. POSTMASTER: Send address changes to *Broadcast Engineering*, P.O. Box 12902, Overland Park, KS 66282-2902. CORRESPONDENCE: Editorial and Advertising: 9800 Metcalf, Overland Park, KS 66212-2215. Phone: 913-341-1300; Edit. fax: 913-967-1905. Advert. fax: 913-967-1904. © 1997 by Intertec Publishing. All rights reserved.

# Are You Testing Digital Video?



## If Not, Can You Afford The Gamble?



**For complete information on how AAVS can help simplify your digital video testing needs, call us today at **1-800-769-AAVS(2287).****

**AAVS** by Sencore

The Name To Know In Digital Video Testing

Advanced Audio Visual Systems by Sencore  
3200 Sencore Drive, Sioux Falls, SD 57107  
Direct (605) 339-0100 Fax (605) 339-0317

*They say digital video either works, or it doesn't – are you willing to risk the loss by not testing digital video?*

**AAVS** can help. We offer proven and reliable answers for your digital video testing needs. Whether you need the ability to test digital video in post production, broadcast, or manufacturing – AAVS can provide the solutions.

AAVS has simplified the process of testing and analyzing digital video with innovative products like the S310 Digital Video Analyser, DSA309 Digital Studio Analyser, and the new DVA320QC Digital Video Quality Control Analyser. Each instrument offers easy-to-use, automated tests including: Serial Jitter, Time Reference Signal (TRS), Gamut Levels, EDH Errors, and Data Formatting. Plus the new DVA320QC offers you the ability to produce hard-copy reports referencing to Time Code (LTC) for future documentation or analyzing.

Circle (5) on Free Info Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

## I'll see you there

It's about this time of year that the humongous task of preparing the March pre-NAB edition really gets under way. Although most readers probably haven't even booked hotel rooms yet, the editors at *BE* are already hard at work on our largest issue of the year.

This year's edition will have several surprises (they're surprises, so I can't tell you about them now) designed to make your travel to the bright lights of the gambling city even more fun and profitable. Heck, you might even win a prize.

Some companies have already held their pre-NAB press conferences to announce some of their new products and services that will be unveiled at the show. During my travels around the country to visit clients, there was real excitement about this year's event. Last year saw the second round of introductions of some new technology. The products were basically second versions of their original incantations. So far, it looks like some of the companies have skipped versions 3.11 to 6.0 of some products and are going to be able to deliver

completely new technology, but with a tried-and-true history.

One advantage of being an editor is that I get to learn about these products before they're released to the public. Because I no longer work in a TV station, getting a one-on-one demonstration is about as close as I get to my old hardware days. It's great getting to see and touch some of the equipment. And trust me on this one, there is going to be some really neat stuff at this year's show.

It's not too early to make plans to attend the 1997 NAB.

With two exhibition halls, more conferences than you could attend in a month and lots of new technology, it's going to be a hit. So get your act together and I'll see you there.



Brad Dick, editor



At press time, the Clinton administration and some members of Congress have again proposed that broadcasters be charged for spectrum usage. I needn't remind *BE* readers of the importance that such "short-term," political-minded suggestions are not in the best interest of the American public.


While the NAB has already weighed in on the issue, stations shouldn't assume that will resolve the matter.

With a lame-duck president, you might wonder how far the administration will go to look for quick money solutions to budget issues. It seems one of the first places both President Clinton and Congress have previously looked for money has been from broadcasters.

The transition to ATV will be expensive enough (more than enough) without having to also "buy a ticket" to spend that money. Contact your congressional representative now and let them know how a spectrum fee would impact your business — and their voters.

**READER  
FEEDBACK**

CompuServe: 74672,3124  
Internet: be@intertec.com  
FAXback: 913/967-1905



*Toshiba Introduces*

# The World's First...



## 3 Chip, 10-Bit, Remote Head, Digital P.O.V. Camera.

*The New IK-TU40A Makes All Other P.O.V. Cameras Obsolete!*

Toshiba's new IK-TU40A is 3 chips off the old block. It makes any other P.O.V. camera obsolete by utilizing Toshiba's revolutionary ten-bit DSP architecture, combined with three 410,000-pixel CCDs. The result is a breathtaking 750 horizontal lines of resolution and 62dB signal-to-noise ratio for the brightest, sharpest color video in the industry.

This ice-cube size camera head delivers broadcast and industrial quality performance in a lightweight, compact package. Plus, its remote head design allows it to be mounted virtually any-where for an entirely new perspective.

With the addition of a wireless transmitter, you can capture all the excitement of world-class skiing or Indy car racing from almost any angle. The IK-TU40A also provides you with a critical edge in industrial applications like pattern recognition, mechanical manipulation and measurement, or any other application where weight and size count.

The IK-TU40A camera accepts C-mount lenses and has video outputs for NTSC, S-VHS, R-Y/B-Y and RGB. A 10, 20, or 30 ft. detachable cable, RS-232C personal computer interface for total control of all camera functions. To get the whole picture, call Toshiba at 1-800-344-8446.



In Touch with Tomorrow  
**TOSHIBA**

**Toshiba America Information Systems, Inc.**

Imaging Systems Division • Imaging Video Products Group  
9740 Irvine Boulevard • Irvine, CA 92618-1697 • 1-800-550-8674

Circle (10) on Free Info Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

# letters to the editor



## Regarding "Frankenstein TV"

**F**rom the point-of-view of the consumer (being an AV tech in a college for 22+ years, buying TV's for the classroom), I can't see educational institutions making any investment in digital TVs for a long time.

I find it highly unlikely that the broadcasters in our area will go digital for quite some time, seeing that they don't even want to go stereo while the market for stereo TVs must be booming. I don't see a lot of new 19-inch and larger TVs on the market today that are still mono, and still, we have stereo holdouts.

If a digital TV is going to cost \$5,000, the public won't be going out to buy them too quick. Sheesh, don't the manufacturers of these things read the papers? With the average Joe having to work two or three part-time jobs just to get by (because his factory job was 'downsized') who's going to have the money?

Sure, there are those people who have to have the latest and greatest, but there aren't that many of them around. In the same vein, if the broadcasters go digital and no one buys an expensive digital TV, who loses?

PETER J. HOUGHTON,  
SENIOR TECHNICAL ASSISTANT  
BEGLEY LIBRARY  
SCHENECTADY, NY

### Editor responds:

If no one buys those expensive digital HDTV sets you mention, a LOT of people stand to lose. Billions — yes, billions, will be lost by set makers and broadcasters if the viewers don't quickly embrace ATV with their dollars.

What the set manufacturers don't want Congress, the FCC and broadcasters to remember is that new set technology has a history of being adopted v-e-r-y s-l-o-w-l-y by viewers.

For instance, once color TV was introduced, it took eight years for it to reach the minuscule 1% penetration level; even after 10 years, color TV-set penetration had barely reached 3%; and it took almost 20 years before 50% of the American homes had color TV sets!

Where's the proof that says HDTV will be any different? At these historical rates, if the FCC held to a 15-

year cut-off point for NTSC, two-thirds of America's viewers would be without any over-the-air broadcast service when NTSC went dark!

## Regarding "Choosing Batteries for Field Production"

**Y**our article, "Choosing Batteries for Field Production," by Bennett Liles in December's issue was interesting, even if a bit misleading, particularly in Lithium Ion.

The chart you used, which was obtained I believe from Cadex Electronics, is actually incorrect when it states that Lithium Ion has a high self-discharge rate. We at IDX Technology verified this with Isidor Buch-

mann of Cadex. Mr. Buchmann E-mailed us on Jan. 3 and said, "You are correct in assuming that the self-discharge of the Li-Ion is low. We apologize for the error and we will correct it shortly." At a self-discharge rate of approximately 10% per month, it is probably one of the lowest.

The data on cycle life is also not correct. The point is not how many cycles the battery can withstand, but how many cycles the battery goes through before it loses its effectiveness as an energy source. This figure is usually around 80% of initial

capacity for broadcast applications. In theory, both Lithium and NiCd cycle to 80% level after approximately 500 cycles. NiMH, on the other hand, levels at about 300 cycles. I say in theory, because unlike NiCd or NiMH, Li-Ion does not have memory effect. Consequently, as it does not require periodic deep discharge to prolong its life, Li-Ion should keep its effectiveness much longer. For more information on Lithium Ion and specifically the new IDX-NP-1 format Lithium Ion battery (NP-L40), we recommend that your readers check out our web site at [www.idxtek.com](http://www.idxtek.com).

PAT O'ROURKE  
IDX TECHNOLOGY

*Editor's note: For a more complete table listing these and other battery performance characteristics, see p. 62 of the January issue, the article "Preparing for Disaster," discusses the selection of batteries.*



# The Cost Of MPEG-2 AFF Encoding Is Taking A

So before you go off the deep end and pay for something you may not be getting, consider this: Argus... Vela's MPEG-2 encoding workstation ...answers the need for affordable clip encoding and storage for the broadcast professional. And at a cost that won't have you gasping for air. Look at the enhancements Argus supports:

Real-time encode, monitoring, multiplex and transfer to video file servers in one pass.

Simple and easy-to-use Graphical User Interface (GUI) built on Windows® NT 4.0.

Optional support for the MPEG-2 4:2:2 Studio Profile.

On screen VGA real-time confidence monitoring.

Rack mount or desktop solutions.

Louth automation interface support.

Expandable clip storage.

Random access to stored material for playback.

Support for multiple output channels.

GPI support.

Support for NTSC and PAL.


## Dive.

To see world-class performance at NAB, watch Argus execute every day at Sands Expo Booth S5426.



813 • 572 • 1230  
<http://www.vela.com>  
2501 118th Avenue North  
St. Petersburg, Florida • 33716

Circle (11) on Free Info Card

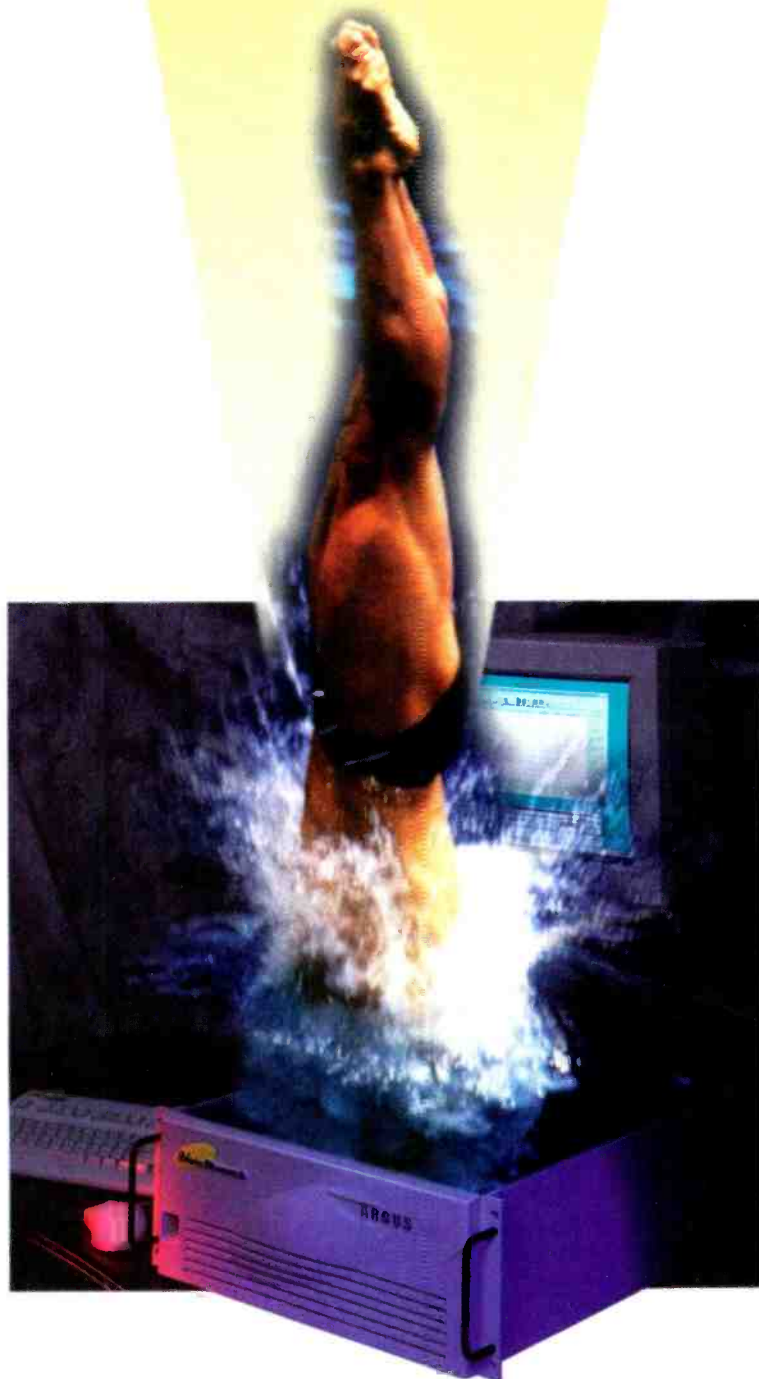

## NAB '97

### NAB '97 expands technical conferences

This year's NAB will feature expanded technical sessions and events for Multimedia World and the 51st Broadcast Engineering Conference. An all-new NAB Communications and Connectivity Event and the NAB/Broadcast Designers Association (BDA) Designer's Conference will be added this year.

For up-to-date comprehensive information about NAB '97, use the fax-on-demand service at 301-216-1847; or browse the web site at [www.nab.org](http://www.nab.org).

### ATSC DTV standard demo of HDTV to be featured

A special technology demo of the Advanced Television Systems Committee (ATSC) Digital TV standard based on the HDTV system will take place at the convention. It is an inter-industry effort sponsored by NAB, broadcast networks and equipment manufacturers under the aegis of the ATSC. The demo will feature over-the-air broadcasts from a local Las Vegas TV station with some of the broadcasts originating from WHD-TV, the Model HDTV Station in Washington,

DC. The broadcasts from WHD-TV will be linked to Las Vegas via satellite.

### Barbara Walters to receive NAB Distinguished Service Award

Barbara Walters, ABC News correspondent and anchor, will receive the NAB 1997 Distinguished Service Award April 7 at the conference's All-Industry Opening. The award recognizes a broadcaster who has made a significant and lasting contribution to the American system of broadcasting.

Walters recently marked her 20th anniversary at ABC, which she joined in 1976 as the first woman to co-anchor the network news.

### Ellen Hancock keynotes NAB Multimedia World

Ellen Hancock, executive vice president of research and development and chief technology officer, Apple Computer, will keynote the 1997 NAB Multimedia World Conference on April 8 from 9 a.m. to 10 a.m. at the Sands Expo center.

### Two international SCTE meeting groups formed

Two international meeting groups of the Society of Cable Telecommunications Engineers (SCTE) have formed, one in St. John's, Newfoundland in Canada and the other in Panama City, Panama.

Meeting groups are local organizations in the process of meeting all of the requirements necessary for full SCTE chapter status. This marks the first time in the society's 27-year history that SCTE meeting groups have been formed outside of the United States.

reception of satisfactory NTSC images.

The technical work of the committee, along with a final report, will be sent to the FCC for inclusion in its technical record on data broadcasting systems. The committee's work is now complete, and it is hoped that it will contribute to fostering new markets for disseminating data-based information services for business and consumer uses.

### NDBC completes evaluation of DBS

In December, the National Data Broadcasting Committee (NDBC) completed its evaluation of high-speed data broadcasting systems. Digideck's system was found to be a viable candidate system for a data broadcasting service.

The NDBC conducted a comprehensive field test program on the Digideck system last fall. Tests were conducted in the Washington, DC, area and data was collected at 90 receiving sites, under several reception configurations. The test program used the facilities of WJLA-TV Channel 7 and WETA-TV Channel 26 for transmission. Data was gathered at distances up to 45 miles from the transmitter sites. On Channel 7, satisfactory reception of the Digideck system was found at 93% of the locations visited, compared to 82% for reception of satisfactory NTSC images. On Channel 26, satisfactory reception of the Digideck system was found at 74% of the locations compared to 62% for

### Course offered on error correcting codes

The University Consortium for Continuing Education (UCCE) is sponsoring a four-day course on error correcting codes with application to digital storage systems, in San Jose, CA. The course will feature PRML recording and Reed-Solomon Code error correction for DVD disks and next-generation hard disks. For more information, call Joleen Packman at 818-995-6335 or fax at 818-995-2932 or E-mail at [info@ucce.edu](mailto:info@ucce.edu).

### A training course on fiber-optics

A training course for installers, maintenance personnel and engineer designers who want to learn how to install, test and design fiber-optic systems for voice, data and video applications is being offered by The Light Brigade. Classroom and workstations are set up for hands-on training in connectorization, splicing, cable preparation, OTDR and optical loss testing. Call 1-800-451-7128 for the 1997 training catalog and for dates and locations of the training course. ■



Graphics

**MEDAL TABLE**

|         | G  | S  | B |
|---------|----|----|---|
| USA     | 15 | 10 | 8 |
| GERMANY | 10 | 8  | 8 |
| RUSSIA  | 7  | 6  | 6 |
| FRANCE  | 6  | 4  | 7 |
| CHINA   | 6  | 3  | 5 |
| ITALY   | 3  | 3  | 2 |




at

the



speed



of

news

# PAINTBOX® & PICTUREBOX®

## The graphics team

In a world dominated by deadlines and ratings, the ability to create great news graphics fast, is vital. The united forces of Paintbox®, Picturebox® and Picturenet® Plus gives you all the creative power, assured stills handling performance and efficient networking you need. It's the team you can count on.



Call our 24 hour Graphics Hotline now: 1 800 218 0051 Ext.481

Quintel Inc., 28 Thorndal Circle, Darien, CT 06820 Tel: (203) 656 3100 Fax: (203) 656 3459 <http://www.quintel.com>

Circle (12) on Free Info Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

## Deadline for compliance with RF standards extended

**T**he commission has extended to Sept. 1, 1997, the transition period for broadcast applicants and station licensees to comply with the new requirements for evaluating the environmental effects of radio-frequency (RF) electromagnetic fields from FCC-regulated transmitters.

Last August, the commission amended its rules governing such effects by establishing new guidelines and methods, and setting a transition period until Jan. 1, 1997, for applicants and stations to comply with the new requirements. Various industry groups sought extensions of the transition period, arguing that affected parties could not achieve compliance with the new rules by Jan. 1.

The commission stated that, based on the petitions and comments it received, it is clear that most stations and applicants will need more time to determine that they comply with the new requirements. The commission noted that an extension of the transition period to Sept. 1 would:

1. Eliminate the need for the filing and granting of individual waiver requests;
2. Allow time for applicants and licensees to review the results of the decisions that will be taken in the near future addressing other issues raised in the petitions; and
3. Permit applicants to review the FCC's revised information bulletin and make the necessary measurements or calculations to determine that they are in compliance.

### License terms extended

Section 203 of the Telecommunications Act of 1996 has been implemented by adopting rules, which extend the license terms for TV stations to eight years. The exception is for experimental broadcast station license terms, which will remain at one year.

### Air-safety obligations reminder

The FCC has issued a notice reminding all licensees and tower owners of the importance of conforming with FCC-issued lighting and marking specifications for communications towers. The commission has re-

ceived reports of aircraft collisions with unmarked or improperly lighted communications towers.

Reports on these accidents indicate that tower owners and FCC licensees need to be more aware of conforming to FCC obstruction marking and lighting specifications. Whenever a tower is greater than 200 feet in height and/or is located near an airport, the licensee using the tower or the owner must apply for FCC-issued obstruction marking and lighting specifications, in addition to any determination of no hazard obtained from the FAA. During construction of the structure, temporary warning lights must be installed at the top and at each level where permanent lights will be installed.

Licensees must make sure that their towers are marked and lighted according to the specifications listed on their permits. Licensees also must make daily inspections to ensure that the lights are on and operating properly. Any variance must be approved by the FCC.

If a light outage cannot be corrected within 30 minutes after it occurs, the licensee must immediately contact the local FAA Flight Service Station (FSS), which will issue a warning to pilots. The FSS must also be notified when the lights return to operation.

The FCC intends to continue its close scrutiny of radio towers. It will take appropriate action, including issuing fines and/or revoking the station license, against the user or owner of any unauthorized or improperly marked radio tower. ■

*Harry Martin is an attorney with Fletcher, Heald & Hildreth, PLC, Rosslyn, VA.*



Harry Martin

### DATELINE

TV stations in Indiana, Kentucky and Tennessee must file their renewal applications on or before April 1. Commercial TV stations in the following states must file their annual ownership reports on or before April 1: Delaware, Indiana, Kentucky, Pennsylvania, Tennessee and Texas.

Tower owners in Iowa and Virginia must register their towers between March 1 and March 31, 1997.



# Beat it.

You deliver the story at the top of the hour. Period. The story is everything—and the tools you use to deliver it must be proven. Flexible. And fast.

Avid can help you beat the clock. Letting you air consistently high-quality broadcasts while the competition's still running around with tapes.

Our disk-based editing system, NewsCutter®, is, quite simply, a better way to edit news. Just like word processing for video. Cut and paste. Pinpoint shots frame by frame. Make copies without degradation. And no predigitizing. No other technology allows the control and flexibility that digital-on-disk does.

Avid's newsroom computer systems, Avid NetStation™ and NewsView™, let your entire team share wires, scripts, rundowns and assignments. The latest graphical interface makes it fast and easy. Imagine the impact on productivity and efficiency.

And our unique Digital News Gathering (DNG) system integrates our news editing and playback products into a complete server-based production

system. No more waiting. No more missing the deadline.

Avid's field-tested systems are scalable, modular and open. They can be integrated into your existing analog or digital facility and will grow with you.

Sci-fi? Look again. Avid's systems are in use in more than 900 broadcast facilities worldwide. Today. That's a lot of broadcasters who can react to late-breaking news faster—and better—than you can, if you're relying just on tape.

For more information on Avid disk-based news editing, newsroom computer systems or Digital News Gathering, call 800 949 AVID. You can't control time. But you can make better use of it.



NEWS SOLUTIONS

Circle (13) on Free Info Card

## Transform coding

**A**s discussed in last month's column, virtually all applications of video and visual communication deal with enormous amounts of data. Because of this, compression is an integral part of many modern digital video applications. We examined the motion-JPEG (M-JPEG) format and introduced the concept of *transform coding* (TC). This month, we examine picture coding in detail, with an eye toward how it's used in M-JPEG and MPEG applications.



Jerry Whitaker

### Transform coding

In technical literature, countless versions of different coding techniques can be found. One that crops up regularly during discussions about transmission standards is *transform coding* (TC).

Transform coding is a universal bit-rate reduction method well-suited for large and small bit rates. Furthermore, the subjective impression given by the resulting picture is frequently better

than with other methods, because of several possibilities that it offers for exploiting human visual inadequacies. If the intended bit rate is insufficient, the effect is seen as a lack of sharpness, typically less disturbing (subjectively) than other coding errors, such as frayed edges or structured noise. Only at low bit rates does TC produce a particularly noticeable artifact: the *blocking effect*.

Because not all pictures have the same statistical characteristics, the optimum transform isn't constant, but depends on the momentary picture contents that have to be coded. We could, for example, recalculate the optimum transform matrix for every new frame to be transmitted, as is performed in the *Karhunen-Loeve transform* (KLT). Although the KLT is efficient in terms of ultimate performance, it isn't typically used in practice because it demands investigating each new picture and finding the best transform matrix. Furthermore, the matrix must be indicated to the receiver for each frame, because this must be used in decoding of the relevant inverse transform. A compromise is made with

the *discrete cosine transform* (DCT). This transform matrix is constant, is suitable for a variety of pictures and is sometimes referred to as "quick KLT."

The DCT is a near relative of the *discrete Fourier transform* (DFT), which is widely used in signal analysis. Similar to DFT techniques, DCT offers a reliable algorithm for quick execution of matrix multiplication. The main advantage of DCT is that it *decorrelates* the pixels efficiently; put another way, it efficiently converts statistically dependent pixel values into independent coefficients. In so doing, DCT packs the signal energy of the image block onto a small number of coefficients. Another significant advantage of using DCT is that a number of fast implementations are available. A block diagram of a DCT-based codec is shown in Figure 1.

### Planar transform

The similarities of neighboring pixels in a video image aren't only line- or column-oriented, but also area-oriented. To make use of these neighborhood relationships, it's understandable that we would not only like to transform in lines and columns, but also in areas. This can be achieved by a *planar transform*. In practice, *separable transforms* are used almost exclusively. A separable planar transform is nothing more than the repeated application of a simple transform. It's almost always applied to square picture segments of size  $N \times N$ , and progresses in two steps, as illustrated in Figure 2. First, all lines of the picture segments are transformed in succession, and then all rows of the segments calcu-

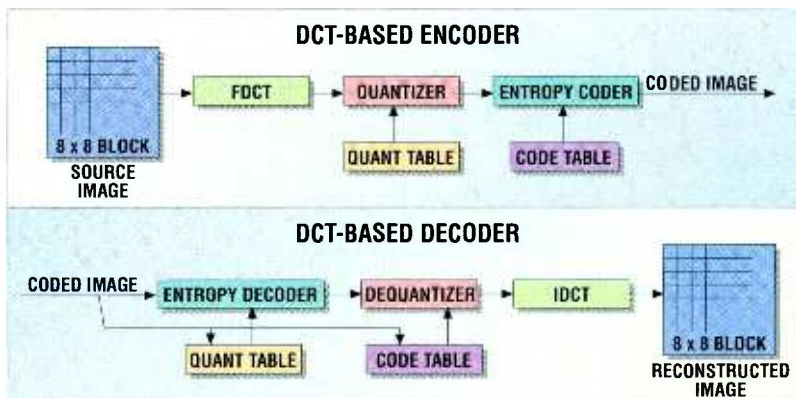


Figure 1. A block diagram of a DCT-based image compression system. Note how the 8x8 source image is processed through a *forward-DCT* encoder and related systems to the *inverse-DCT* decoder and reconstructed into an 8x8 image.

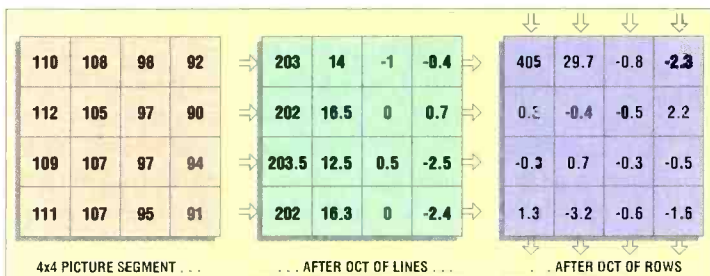


Figure 2. Processing of a planar DCT. Note how the information content decreases markedly after row and column processing.

lated in the first step are transformed.

In text books, the planar transform is frequently called a *2D transform*. The transform is — in principle — possible for any segment forms and not just for square ones. For a segment of the size  $N \times N$ , we consequently use  $2N$  transforms. The coefficients are now no longer arranged as vectors, but as a matrix. The coefficients of the  $i$  lines and the  $j$  columns are called  $C_{ij}$  ( $i, j = 1 \dots N$ ). Each of these coefficients no longer represents a basic vector, but a *basic picture*. In this way, each  $N \times N$  picture segment is composed of  $N \times N$  different basic pictures, in which each coefficient gives the weighting of a particular basic picture. Figure 3 shows the basic pictures of the coefficients  $C_{11}$  and  $C_{23}$  for a planar  $4 \times 4$  DCT. As we can see,  $C_{11}$  represents the DC part. We, therefore, call it the *DC coefficient*; the others


are appropriately called the *AC coefficients*.

The planar transform of interlaced video is somewhat problematic. In moving regions of the picture, depending on the speed of motion, the similarities of vertically neighboring pixels of a frame are lost, because changes have occurred between the sampling of the two different picture halves. For this reason, the performance of the system (or *output concentration*) can be greatly weakened compared to progressively

scanned pictures. Well-tuned algorithms, therefore, try to detect stronger movements and switch to a transform in one picture half (i.e., field) for these picture regions. But the coding in one picture half is less efficient due to the correlation of vertically neighboring pixels being weaker than in the full picture of a static scene. Simply stated, if the picture sequences are interlaced, the picture quality can be influenced by the motion content of the scene to be coded.

#### Interframe transform coding

With common algorithms, compression factors of approximately eight can be achieved, while maintaining good picture quality. Achieving higher factors requires exploiting similarities between successive frames. The nearest approach to this is the extension of

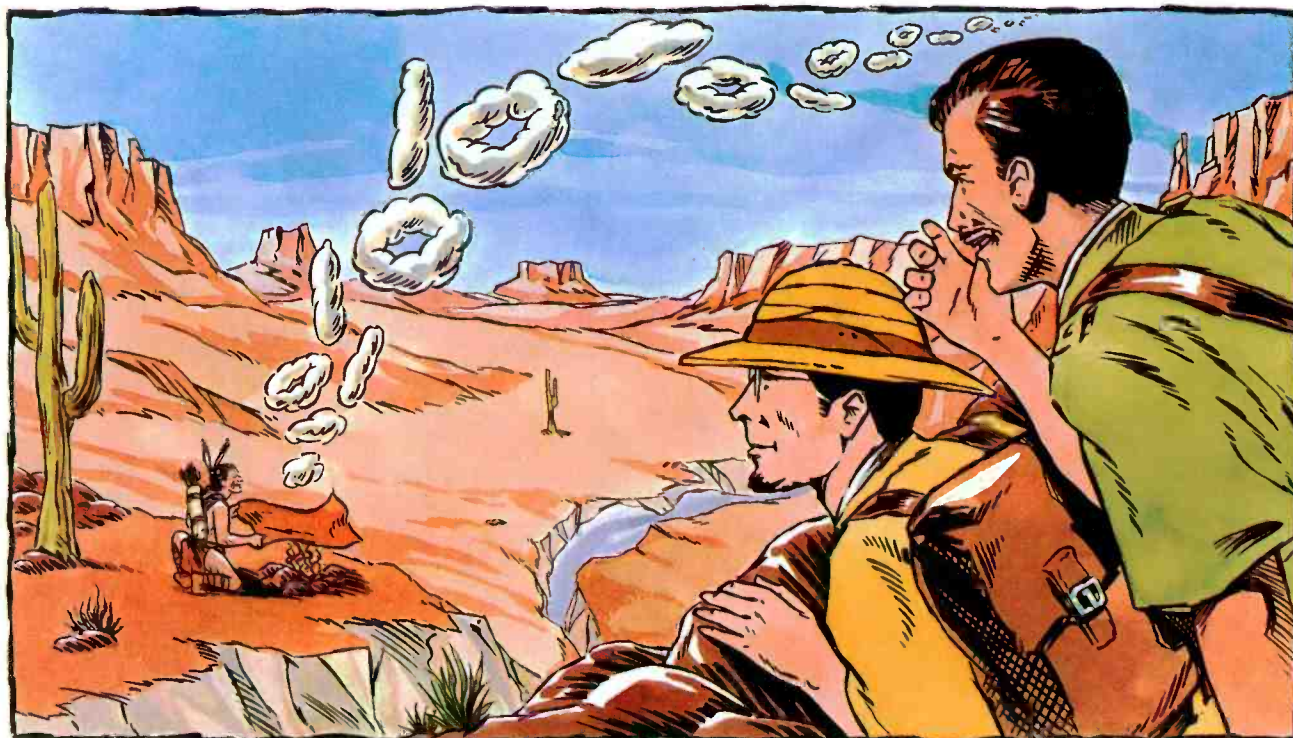

“LOOK WILCOX, THE DIGITAL COMMUNICATIONS TREND IS CATCHING ON EVERYWHERE,” WHISPERED SNELL.

| INVERSE DCT |   |   |   |                   |       |       |       |
|-------------|---|---|---|-------------------|-------|-------|-------|
| 1           | 0 | 0 | 0 | 0.25              | 0.25  | 0.25  | 0.25  |
| 0           | 0 | 0 | 0 | 0.25              | 0.25  | 0.25  | 0.25  |
| 0           | 0 | 0 | 0 | 0.25              | 0.25  | 0.25  | 0.25  |
| 0           | 0 | 0 | 0 | 0.25              | 0.25  | 0.25  | 0.25  |
|             |   |   |   | BASIC PICTURE     |       |       |       |
|             |   |   |   | $C_{11}$          |       |       |       |
| 0           | 0 | 0 | 0 | 0.14              | -0.14 | -0.14 | 0.14  |
| 0           | 0 | 1 | 0 | 0.33              | -0.33 | -0.33 | 0.33  |
| 0           | 0 | 0 | 0 | -0.33             | 0.33  | 0.33  | -0.33 |
| 0           | 0 | 0 | 0 | -0.14             | 0.14  | 0.14  | -0.14 |
|             |   |   |   | BASIC PICTURE     |       |       |       |
|             |   |   |   | $C_{23}$          |       |       |       |
| 1           | 0 | 0 | 0 | .39               | .11   | .11   | .39   |
| 0           | 0 | 1 | 0 | .58               | -.08  | -.08  | .58   |
| 0           | 0 | 0 | 0 | -.08              | .58   | .58   | -.08  |
| 0           | 0 | 0 | 0 | .11               | .39   | .39   | .11   |
|             |   |   |   | BASIC PICTURE     |       |       |       |
|             |   |   |   | $C_{11} + C_{23}$ |       |       |       |

Figure 3. The pictures for a planar 4x4 DCT. Element  $C_{11}$  is located at row 1, column 1; element  $C_{23}$  is located at row 2, column 3. Note that picture  $C_{11}$  values are constant, referred to as *DC coefficients*. The changing values shown in picture  $C_{23}$  are known as *AC coefficients*.

the DCT in the time dimension. One disadvantage of such *cubic* transforms is the increase in calculation effort. For video, the biggest disadvantage is the in-

creased memory requirement: for an 8x8x8 DCT, at least seven frame memories are needed. Much simpler is the *hybrid DCT*, which also efficiently codes pictures with moving objects. This method comprises — almost exclusively — a motion-compensated *difference-pulse-code modulation* (DPCM) technique; instead of transferring each picture individually, the motion-compensated difference of two successive frames is coded.


DPCM is, in essence, predictive coding of sample differences. DPCM can be applied for *interframe coding*, which exploits the temporal redundancy of the input image and *intraframe coding*, which exploits the spatial redundancy of the image. In the intraframe mode, the difference is calculated using the values of two neighboring pixels of the same frame. In the interframe mode, the difference is calculated using the value of the same pixel on two consecutive frames. In either mode of operation, the value of the target pixel is predicted using the reconstructed values of the previously coded neighboring pixels, and this value is then subtracted from the original value to form the differential image value.

Having laid a basic foundation for compression technologies, next month we will examine MPEG-1 in detail. ■

*Jerry Whitaker is a consulting editor for Broadcast Engineering magazine.*



“CLEARLY THE RESULT OF AN EARLY EXPERIMENT IN COMPRESSION...” MUSED WILCOX.

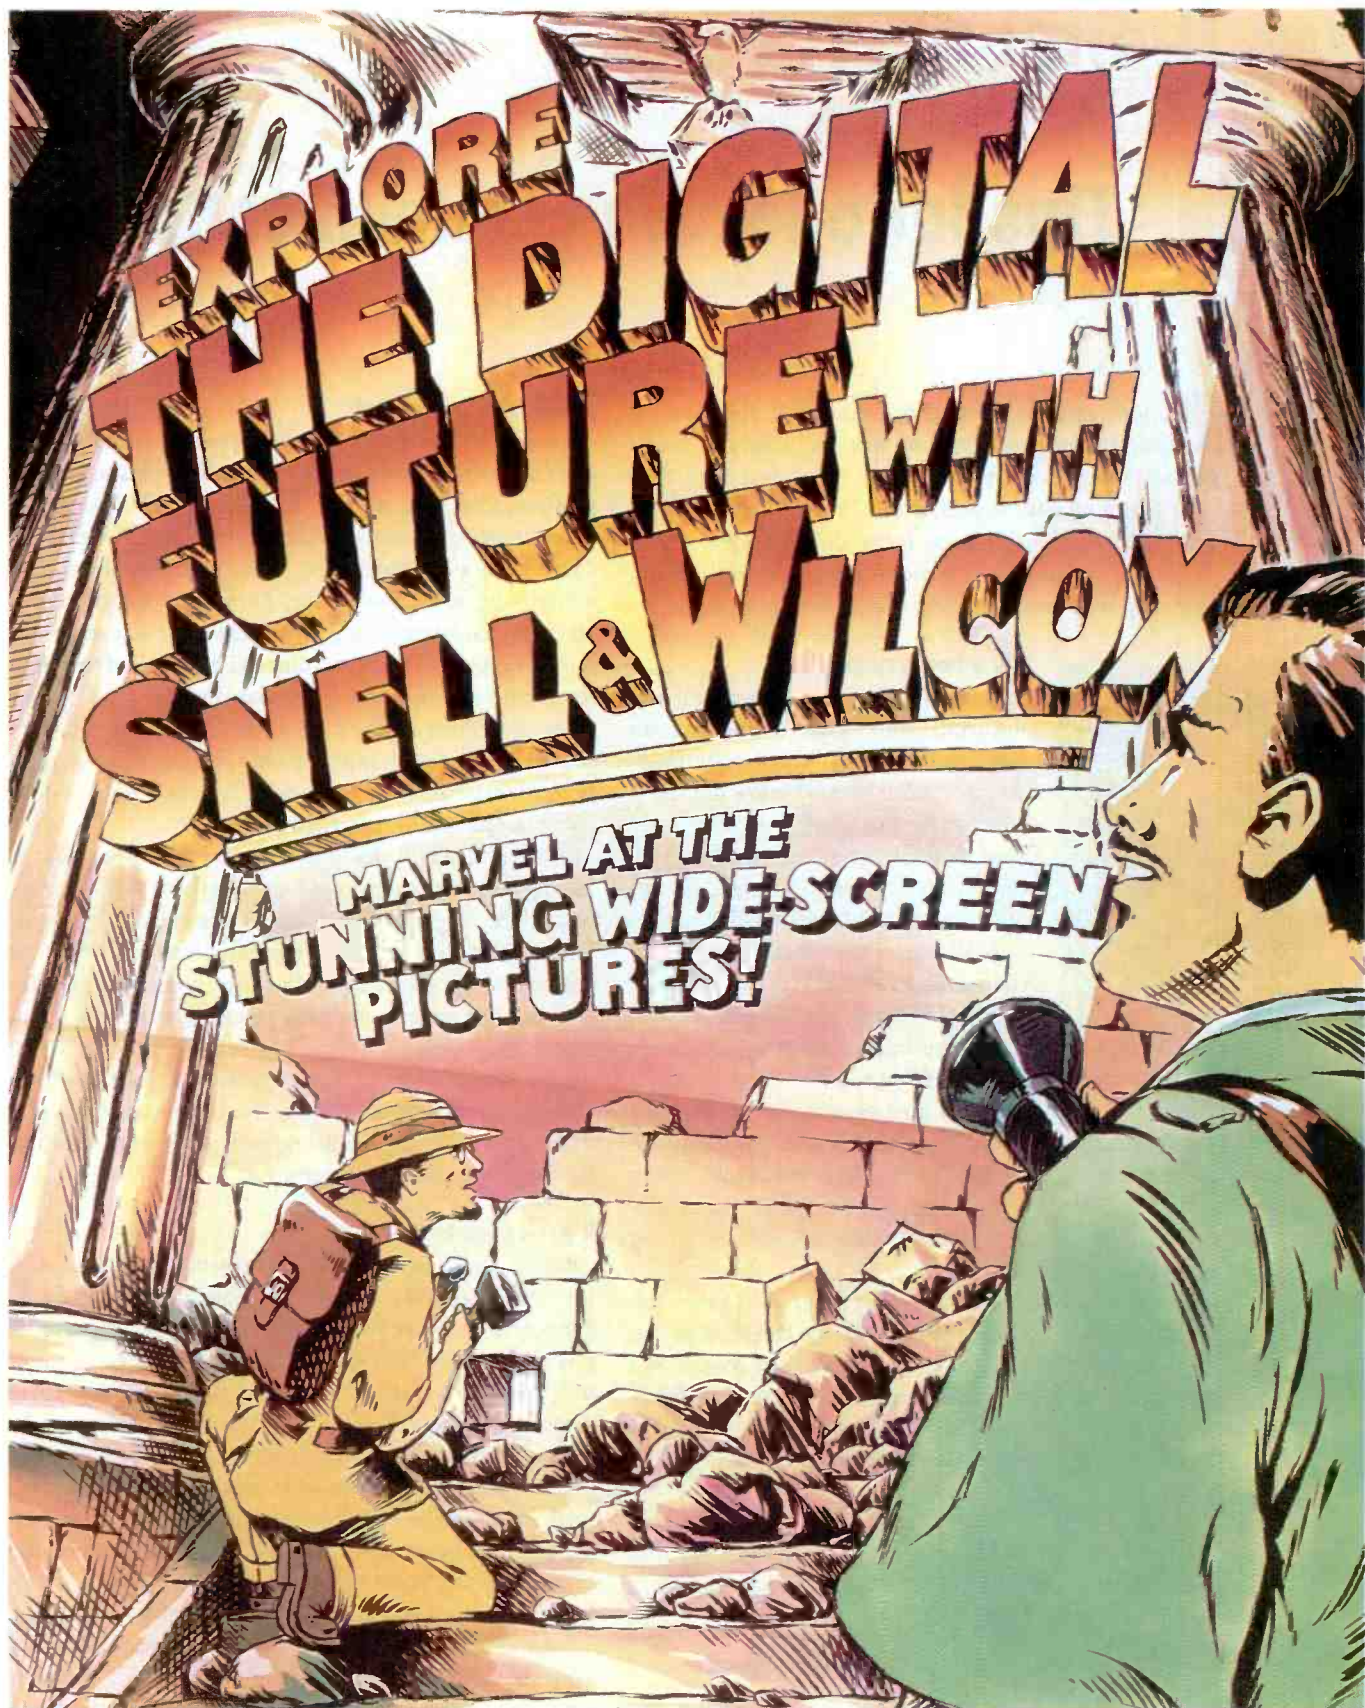

 **SNELL & WILCOX**   
Engineering with Vision

Circle (6) on Free Info Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

## Tips for effective communication

**D**o you get frustrated about how well your staff is doing their job? Do you wonder why you aren't getting better performance from them and why they aren't meeting your expectations? Frustrations like these can make supervising even more difficult. Before you pack it up and move to the mountains, there is one thing that may help you improve your staff's performance.



### It's a two-way street

**Communication.** It's more than telling your staff what to do. It's an ongoing two-way process between you and your staff. Following are a few tips that can help you effectively communicate your expectations, reduce your frustration, ease tensions and improve your staff's performance.

Make sure that what you're communicating, whether in speaking or writing, is being understood. It's essential that you have a feedback mechanism to verify that what you've said is understood.

The goal is to establish an ongoing dialogue about your expectations and your staff's understanding of your expectations. Be patient and persistent when communicating. Many obstacles can block communication, but recognizing what they are can help you neutralize them.

Recognize and deal with cultural differences in the use of language. You don't need to change the way people think or speak, but you do need to make sure that it's not getting in the way of communication. Cultural differences aren't an excuse for poor performance, they're merely potential blocks to effective communication.

### The communication loop

1. Think about what you want to say. Does it make sense? Is it thoroughly stated?
2. Initiate the communication.
3. Have your staff explain to you what they feel is expected of them.
4. If there is any misunderstanding, clarify your points and have your staff explain to you what they feel is expected from them.
5. Follow up by checking back with your staff to see how things are going and if they need clarification or support to accomplish a task or goal.

### Personal crisis crunch

If a staff member is experiencing personal difficulties, such as a divorce or a death in the family, his or her job performance may suffer. This is natural. Individual reactions to personal problems will vary, however.

During a personal crisis, some staff members may actually be more productive. They may be looking for an escape from pain, anger or frustration and may find it in their work. The important thing you need to watch for is burnout or depression that may hit days, weeks or even months after an incident.

Other staff members may have a moderate dip in their performance during a personal crisis and may just need some support and empathy.

Be careful when dealing with the employee that is having a severe reaction to a personal crisis. What may seem to be a desire for support can turn into a crisis for you as the supervisor. Don't get involved in drawn-out conversations about your staff's problems, 20 minutes is about the longest you can be effective in this situation.

If the depression and lack of performance goes on for several days, recommend that the employee take a few days of leave. If the situation persists, then refer him or her to professional counseling.

### A pat on the back

People need positive reinforcement. Tell your staff they're doing well and when possible, do so publicly. Be consistent and give feedback often. Just because you're giving positive feedback doesn't mean that you cannot tell people what you don't want or what they need to do over or change.

If you're reviewing an employee's performance, give positive feedback for those tasks that have been done well. However, when an employee hasn't done a satisfactory job, be straightforward. If you have a solution that you want your employee to implement or if you know what you want him or her to change, just say so.

On the other hand, if don't have a solution, admit it and say that you need to think about it. Ask the employee to think of other possible options. By working together, the two of you may be able to solve a problem and do so without hurt feelings or conflict. ■

*Michael Erbschloe is a management consultant, author and technical editor and teaches management courses at Oklahoma State University.*

You can turn to many different  
companies to equip your new digital studio.  
Luckily, you don't have to.



*The new Tektronix 764's Session Statistics Display records key digital audio parameters, while the WFM601i provides extended error checking, eye pattern testing, and a traditional analog display for serial digital video.*

*The SPG 422 Component Digital Sync Pulse Generator is fast becoming the new industry standard, providing master digital timing references plus serial digital video and AES digital audio test signal sources.*



You can shop a long list of suppliers for bits and pieces of test equipment for your new component digital studio. Fortunately, that's an ordeal you can avoid.

Tektronix is the one place you can turn for all the test equipment to equip your entire high-end digital studio. Plus all the expertise and assistance you need to ensure that your move to digital is fast and efficient.

Tektronix offers the industry's most advanced instruments to monitor and analyze everything, including

content, data integrity and transport layer. And to perform every essential studio function, from monitoring channel status data and accumulating session statistics during digital audio mastering, to testing the integrity of a 270 Mb/s digital video transport layer.

Why deal with a multitude of suppliers when you can turn to Tektronix, the video industry leader for more than 40 years.

For information on any of our communications test solutions, just call 800-426-2200. (When prompted, press "3" and ask for program 464.) Or, find us on the Web at <http://www.tek.com/mbd/w464>

TESTING THE CHANGING WORLD OF COMMUNICATIONS

**Tektronix**

## Networks within networks

**T**his month, I want to talk about one of our newest networks, Cartoon Brazil. This facility is all-digital and uses automation and file server technology.

When we built a previous network, Cartoon Latin America, we selected Louth Automation and Tektronix Profile video servers. With Cartoon Brazil, we expanded our knowledge of vendors and technology by selecting Pro-Bel automation and Hewlett-Packard video servers (BVS). We may be nuts to mix vendors, however, we hope to gain valuable experience working with multiple vendors in an environment where the systems have to talk together anyway.



### The three networks behind the Network

There are three computer networks involved at Cartoon Brazil. The first is a Thinnet Ethernet network used exclusively for communications in the Pro-Bel automation system. The second is a 10-BaseT/FDDI unshielded twisted pair/fiber network used for our business systems. These business systems are used for log generation, E-mail and Internet

access. The third is an FDDI fiber-optic network used to exchange files between the two H-P servers. (The FDDI network will be changed to Fibre Channel sometime this spring.)

The Pro-Bel Thinnet network is the primary means of communications between different parts of the automation system. It uses a Windows NT 4.0 server and a client-server database application to support the collection and display of information about our commercial inventory. The network allows communications between all elements of the Pro-Bel system using Ethernet IEEE 802.3 protocol.

We chose Thinnet (RG-58) cabling to make it more difficult for someone to inadvertently connect a cable from our house network to the automation network. It's important that the automation network be constructed in functional segments that are isolated from the house network. This prevents having to explain to the boss how someone downloading a huge file from the Internet could keep a spot from playing on the air. We chose the Ethernet protocol because it works well in the PC environment. It's widely accepted and fits well with


the other protocols in use at our facility.

The second network is our business systems network. It's comprised of 10Base-T twisted pair and FDDI backbone. This network carries our regular business traffic, including log systems, E-mail and other services, all communicating with desktop computers over this network. The network is connected to the Pro-Bel automation network through a separate Ethernet card in the Windows NT server. This is how the automation system gets logs from and returns "as run" logs to the traffic system.

As Kevin Binette, one of our network gurus explained, our building network is designed so that concentrators communicate between desktops within a work area using 10Mb twisted pair. When the traffic travels from one work area to another, we use 100Mb FDDI fiber-optic lines. This allows us to control costs to the desktop, while using high-speed communications between work groups to handle the load. The protocol on the desktop is Ethernet and the protocol on the fiber is FDDI. There are network switches in our system that perform the translation between the two protocols automatically. The protocols are designed so that the translation from one to another isn't difficult.

One thing is for sure — when it comes to networks and broadcasting, always leave yourself an out. If something can go wrong, it will, so sneakernet is worth considering. It's always connected, it's reasonably fast and the price is right. If the building network goes down, you can always get someone to make a log on diskette in the traffic system and carry it over to the automation system. Segment isolation is another tool you can use when things go wrong. If your network is designed properly, you should be able to isolate parts of the network so that a network problem in one area doesn't take down the whole operation.

The third network is an FDDI 100Mb dedicated link

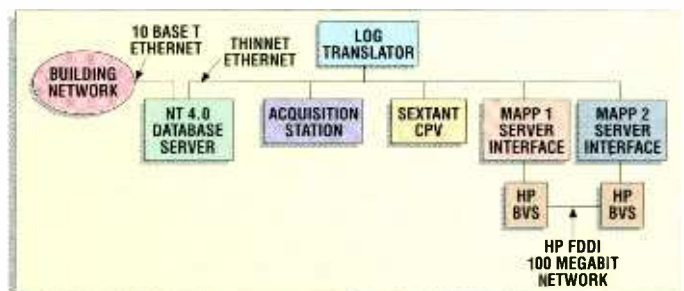

The Pro-Bel Thinnet Network.

**NEW  
PRODUCT**

# ADAPT TO STABLE IMAGES



## **...CANON'S IS-20B, OPTICAL IMAGE STABILIZER ADAPTER.**

The IS-20B Image Stabilizer Adapter, designed to be front mounted on Canon's J20aX8B and H20aX6 ENG zoom lenses, incorporates Canon's Vari-angle Prism technology virtually eliminating shaking and vibration.

Users can now enjoy 8mm wide angle to 160mm telephoto (16mm-320mm with 2X extender), and maximum relative aperture of 1:1.7 with no additional f-drop, while using the IS-20B Image Stabilizer Adapter. These specifications were not previously available with other image stabilizer lenses.

For more information on the IS-20B, please call 1-800-321-4388. (In Canada call 905-795-2012.)

**Canon**  
The Number One Lens

Web site @ <http://www.usa.canon.com>

Circle (7) on Free Info Card

between our two H-P BVS units. We run two BVS units in parallel — one as a main, the other as backup. We dub spots into the main and then they are copied to the backup over the FDDI connection. Our BVS servers are due to be changed out for the new Media Stream servers sometime early this year. The new servers will support Fibre Channel networking with data rates approaching 1Gb/s. This speed, combined with video compression technology, will allow groups of servers to be connected using a Fibre Channel network. Our hope is to interconnect H-P, Tektronix and other products using what I believe will become our video network of the future — Fibre Channel. If you're not up to speed on Fibre Channel, take a look at the Fibre Channel Association web page at <http://amdahl.com/ext/CARP/FCA/FCA.html>.

### Let's talk terms

Before we get too far into the world of computers and networks, it would be a good time to talk terms — and I'm not talking automobile financing.

Every industry has its own buzz words. (I can remember when someone asked me to go clean an ACR-25, and I had no idea what it was.) As the computer and broadcast worlds come together, the chance for miscommunications is high. Sometimes, you can run into problems with terms you would not expect to cause



**Cartoon Network Brazil is exploring the limits of computers and networking technology. This operation employs traditional 10BaseT networks and FDDI fiber, moving video packets according to commands sent over the slower network. Photo by Mark Hill, TBS, Inc.**

trouble. An example is automation. If you say automation to a group of broadcasters, most would probably say it refers to the station automation that puts spots on the air. If you asked someone involved in the computer world, they might think you are referring to computer programs that make it easier to work in an office. I have found that it pays to ask questions any time you hear a new word or acronym you don't recognize. ■

*Brad Gilmer is director of advanced network operations & technology for Turner Entertainment Networks.*

6. RS-232 remote control

1. 24-60 kHz true multi-scanning at resolutions up to 1600 x 1280

4. Broadcast quality MTSC/PAL composite, S-video, RGB and YUV outputs

3. Genlock inputs

2. Dual computer inputs

5. Down converted VGA/SVGA/MAC outputs

7. Digital video processing controls

8. 50-200% variable image sizing controls

9. Multiple levels of flicker reduction/image enhancement

10. Just one rack-unit high

## THE NEW **Scan Do** ULTRA

### WHAT PUTS IT OUT IN FRONT? THE FEATURES BEHIND IT.

Introducing a giant step forward in broadcast quality images. Scan Do® Ultra is everything you asked for in a workstation to video scan converter/down converter: powerful features you want, higher resolutions you need, the superior quality of the Scan Do family, and a price that's incredibly affordable. In fact, at just **\$6,495**, Scan Do Ultra offers the industry's best balance of performance and value.

So now you can create true broadcast quality video from your high-res workstation, PC or Mac® — without creating problems for your budget!

But don't take our word for it. Call for a free demo, and we'll put a Scan Do Ultra in front of you. Then you can discover for yourself all the features behind our most powerful scan converter ever!

 **Communications  
Specialties, Inc.**  
*...For high-performance computer video interfaces.*

Phone: 516-273-0404 / Fax: 516-273-1638  
E-mail: [info@commspecial.com](mailto:info@commspecial.com)  
Internet: <http://www.commspecial.com>

**FaxNOW**

Call 1-888-4-FAX NOW or  
1-516-273-1710 to retrieve information

Scan Do is a registered trademark and FaxNOW is a trademark of Communications Specialties, Inc.  
All other trademarks are property of their owners. ©1996 Communications Specialties, Inc.

Circle (8) on Free Info Card

See us at NAB booth #M7455



**THE UTAH-300 ROUTER.  
BECAUSE SOME OF YOUR  
EQUIPMENT IS DIGITAL  
AND SOME OF IT ISN'T.**

At Utah Scientific, we recognize that you need to approach the digital future one step at a time. That's why we designed the UTAH-300 routing switcher. The UTAH-300 handles analog, digital or both in the same frame. Combine this with our new SC-3 Control System and you have a routing system that's powerful and flexible enough to take on today's realities while preparing you for tomorrow's challenges. That means you can upgrade to a digital routing system without retiring your equipment prematurely. It means you have the assurance the UTAH-300 solution will be there to provide the switching and control requirements of the future.



***Utah SC-3 Control System***

- Analog and digital in the same frame
- Backward compatibility
- Windows programming screens
- Open control protocols
- Ethernet control port
- Third party control capability
- Two level tie line option
- *RealTime Switch™*

Call your Utah Scientific representative at 1-800-246-6744 ext. 5016 for your free UTAH-300 Planning Book. The UTAH-300. So advanced it actually works with your old stuff.



**UTAH SCIENTIFIC**

Americas 1-800-575-8801 • Europe/Africa/Middle East ++1635-521939  
Asia/Pacific 352-2862-1993 • [info@utsci.com](mailto:info@utsci.com) • <http://www.utsci.com>

Circle (14) on Free Info Card  
© 1996 Utah Scientific, Inc.

## Portable power

**P**ower generators come in an endless assortment of types, sizes and capacities, but those designed for remote broadcasts have certain distinguishing characteristics. First, they are generally insulated for acoustical noise reduction. In some cases, these generators are enclosed and insulated with heavy foil and foam, but the best noise reduction is provided by a thick layer of felt. Such insulation can double or even triple the cost of a portable generator, but exposed-engine generators are generally not welcome at remotes.



The capacity of this portable, diesel-powered generator is 166A, three-phase (500A total, single-phase). Its housing is felt-lined for quiet operation.

Second, broadcast generators are crystal-controlled for frequency and voltage. Power frequency is a function of engine speed (most generator engines run at 1,800rpm), which is maintained by sensing a spot on the flywheel, comparing it to the crystal oscillator and throttling the engine in minute increments to govern the rotation. This is particularly vital with HMI lighting for film and TV work. It requires the power frequency to be maintained within two-tenths of a cycle.

The third key parameter for broadcast generators is reliability. The better units have oversized fuel-filter/water separators, which are helpful in cases of extended, continuous use. Transparent sumps allow water and other heavier-than-fuel contaminants to sink to the bottom of the sump, where they can be detected and drained off before causing rough running or a shutdown.

### Rules of the road

Another significant characteristic of most broadcast

generators is the diesel engine. Diesels run slower and are generally quieter and more stable than gasoline engines. Diesel fuel is more prone to water contamination through condensation inside the tank, however, so generator operators tend to keep their tanks topped off, thereby limiting the amount of space for air in the tank. In either case, it's recommended to run the engine at least once per week.

Built-in metering on most generators will at least indicate volts, amps and frequency, although these are more accurately measured with a hand-held multimeter. The most fragile part of a mobile power unit is the gauges. After miles of bumps and vibration, these indicators typically become less accurate and eventually fail completely.

Camlock connectors are standard fare on all broadcast portable power units. It's a good idea to have camlock turnaround adapters with you at the remote site because some generators will have the neutral connector reversed.

When contracting for a generator, specify cable amount and type because the units don't always include power cable. The National Electrical Code now requires replacement of older welding cable. Its neoprene insulation is subject to cracking and damage by diesel fuel and ultraviolet light. Today's *entertainment cable* has a double layer of Hypalon insulation and is tougher and more flexible than welding cable.

All remote equipment should be grounded to one point. Multiple grounding usually means ground loops and hum. When arranging for power, always know the capacity and phase needed by the job. A 200A three-phase unit will provide 600A at 120V (split phase). Some companies will advertise their units' capacity in amps-per-phase, while others state total output current at 120V.

### Don't learn the hard way

Although often violated, local codes usually require a licensed electrician to be present when a generator is used. An extinguisher for all types of fire is also essential.

Working with a reliable and experienced generator operator allows the broadcaster to worry about one less thing at the remote site. ■

*Bennett Liles is an audio engineer at Georgia Public Television, Atlanta.*



# THEY DON'T CARE WHO MAKES THE MOST RELIABLE VIDEO LIBRARIES. YOU SHOULD.

Reliability is the most important benefit of any on-air presentation system. Since its introduction, our TCS45 automated video library has proven to be one of the most reliable presentation systems on the market. Our fault tolerant design includes important features like built-in error detection and recovery, integral backup systems, and a design that provides 100% duty-cycle operation. Add our CacheMachine™ option to the TCS45 and you get all the synergistic benefits of video tape and digital disk cache storage. We're delivering the best value from both tape and disk technologies right now. Your viewers still won't care about the video library you're using, but now you have several important reasons to give us a call.



## **TCS45: A compact video library with field-proven results.**

The TCS45 is a turnkey solution for a wide range of broadcast, satellite, and cable applications. It's ideal for automated on-air presentation and may include digital disk cache to increase productivity, reliability, and reduce maintenance. With our CacheMachine™ software, the TCS45 provides archive storage for more than 5,000 spots *and* can still provide program playback. For added flexibility, we offer the XR800 external device controller, allowing control of two external tape machines of different formats. The TCS45 with CacheMachine is like a television station in a box.



*The Automated Storage Management Company*

USA Tel (714) 774-2200 EUROPE Tel +44 (0) 118 927-4600 ASIA Tel +65 324-0636


WWW <http://www.odetics.com/> E-mail [broadcast\\_sales@odetics.com](mailto:broadcast_sales@odetics.com)

© ODETICS INC 1996 11206


Circle (15) on Free Info Card  
[www.americanradiohistory.com](http://www.americanradiohistory.com)


*Braving extreme  
conditions and  
ravenous packs of  
wild hyenas, the  
African Wildebeest  
endures the second  
most difficult migration  
known to man.*

*The broadcasters  
journey to digital  
being slightly  
more treacherous.*

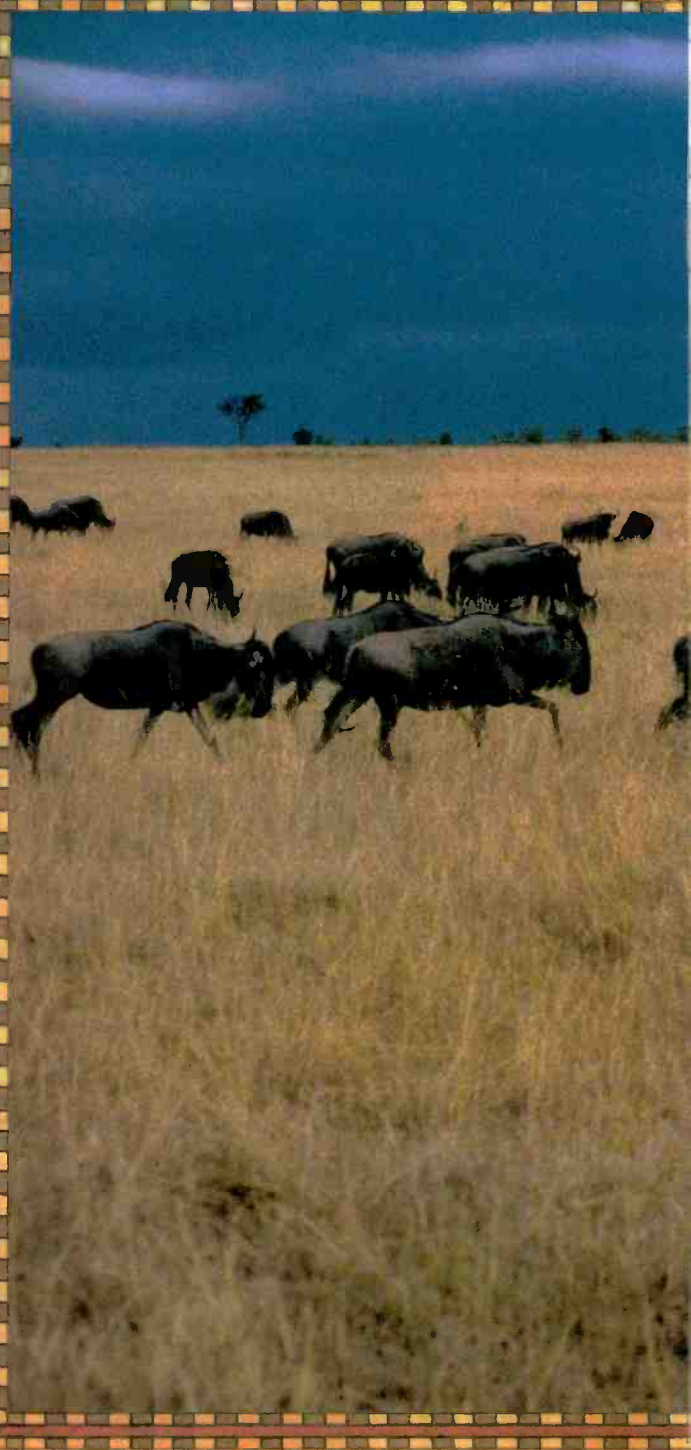

*The trek toward disk-based broadcast  
transmission is on. And Sony is beside you  
every step of the way with the new FlexSys™ transmission control  
system. By integrating tape and disk storage, the FlexSys system  
provides the flexible and cost-effective migration path you've*

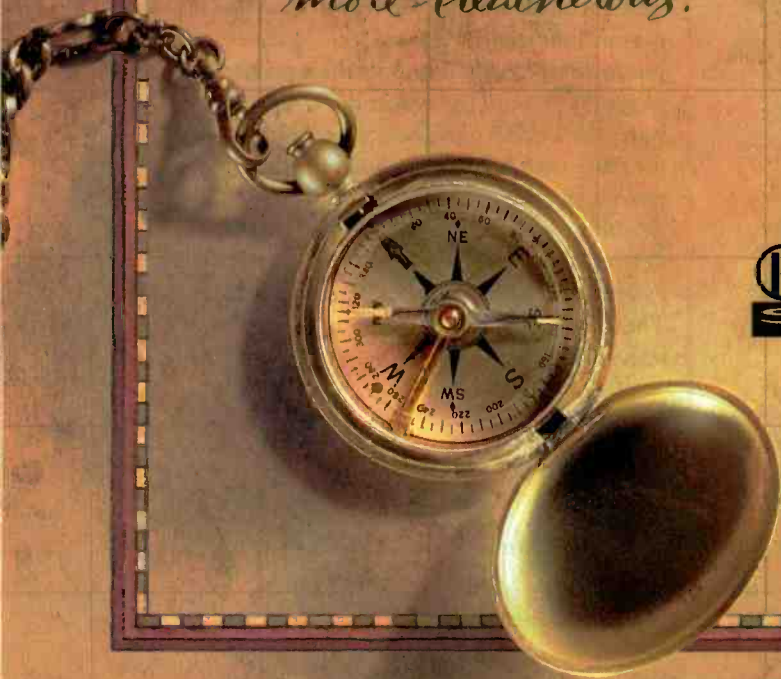

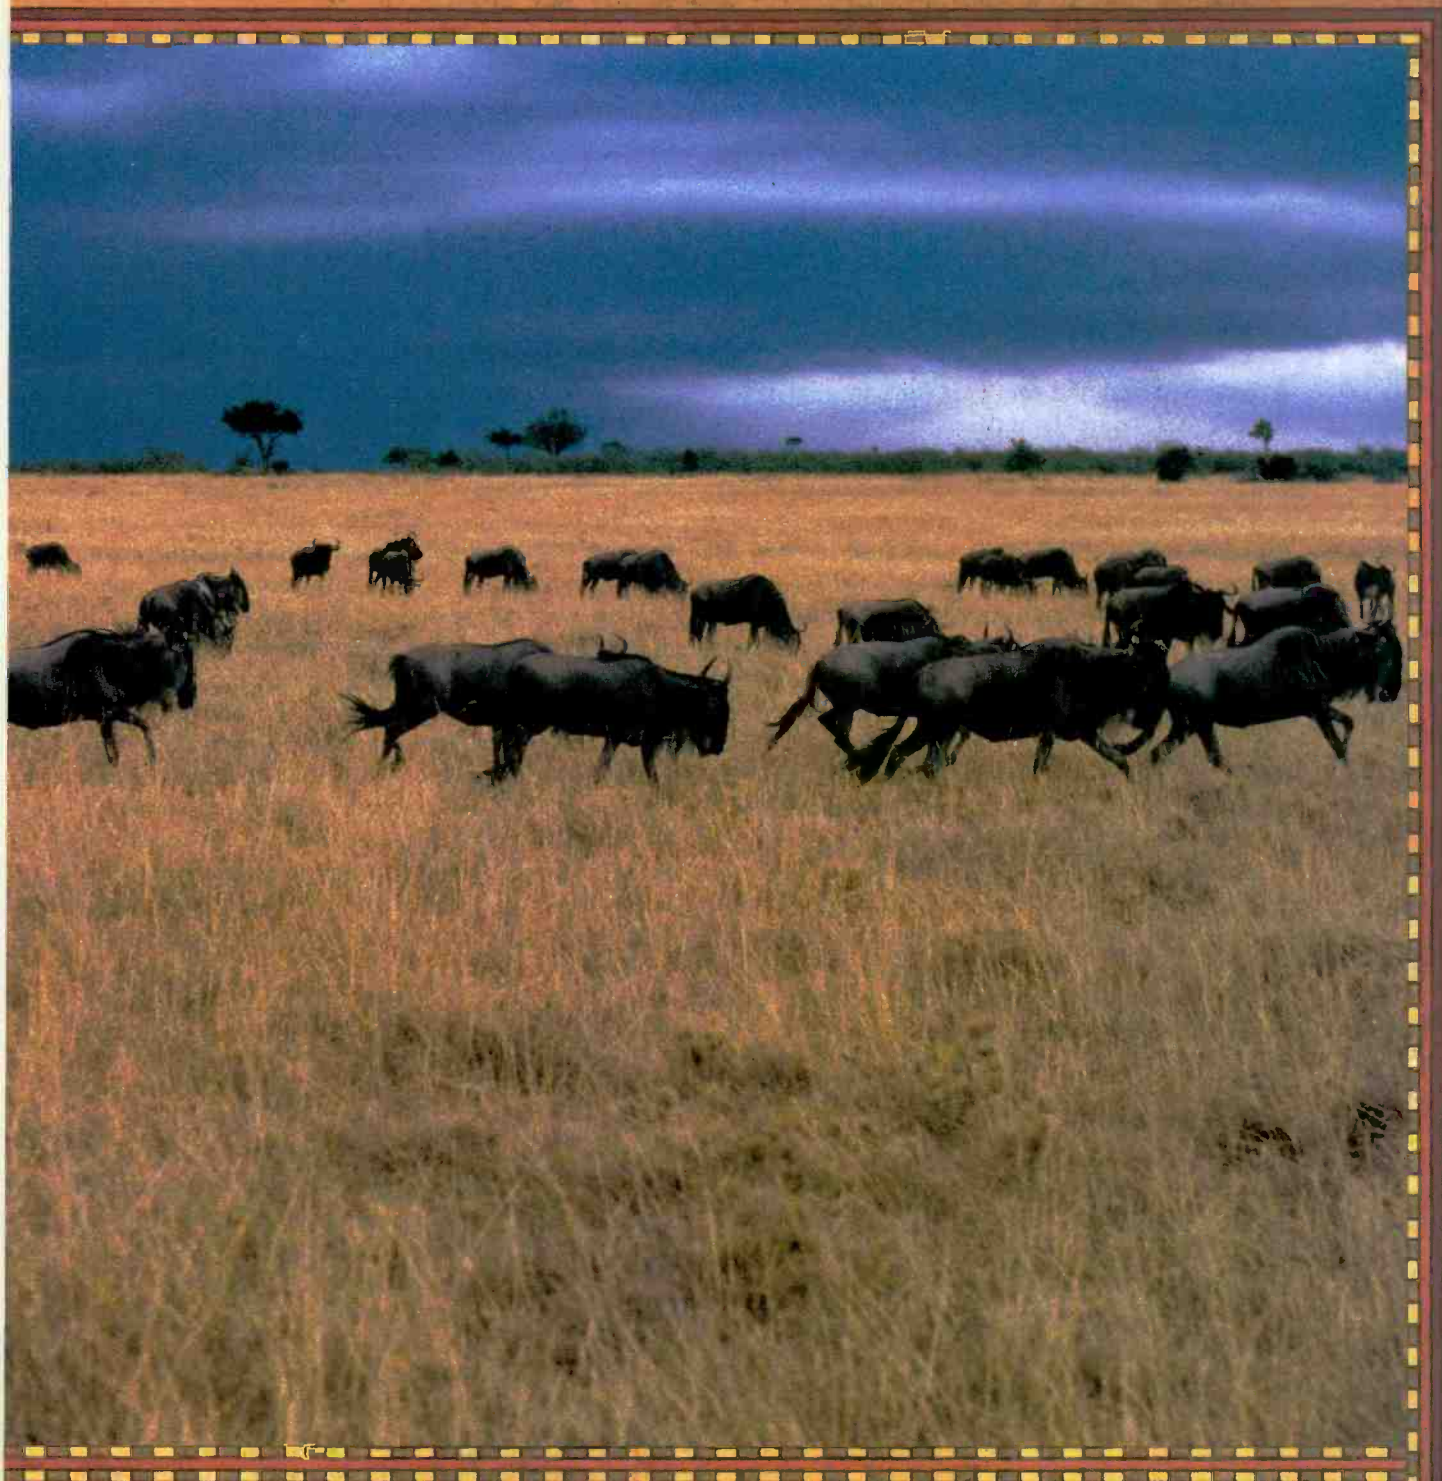

been looking for. The FlexSys system combines high quality MPEG-2 4:2:2 P @ ML compression and RAID disk storage with Sony's leading VTR and Flexicart® technology. And the familiar user interface ensures your transition will be as painless as possible. To find out what FlexSys system configuration is best for your transmission needs, just call 1-800-635-SONY, ext. FLEXSYS. We'll put you on the one path to digital transmission that leads to success.



**SONY**

## Spinning your own web (site)

**I**t's the new year and your boss stops by your desk to make sure you will be at the staff meeting. He says he has had a brainstorm over the holiday. So you show up and take your place as he starts on his new idea. He says that over his vacation, he spent some time watching television and everywhere he turned all he saw was "www.www.www.www." So he exclaims it's time to move onto the Internet. As a matter of fact, he has put together a whole marketing and advertising plan that

incorporates your new URL, and it will start in 30 days.

Your face begins to turn red as he explains his grand plan and you remember the proposal you submitted last year. Remember the one where you asked for a budget for servers, a T-1 connection and additional support personnel?

His answer had been a resounding no; why would anyone need to be on the Internet?

So now it's your responsibility to get your company on-line. You dig out the proposal from last year and reread it. The information in it still seems to be valid, but you decide to check on the assumptions you made on the costs and procedures for going on-line. It has been a year (at least four web years), and things change so rapidly that there might be a more cost-effective solution than the one you came up with a year ago. Remember, last year you proposed adding staff to manage your site — a network administrator and a web artist/HTML editor. You were going to retain the title of web master and add it to your many responsibilities — also to your resume.

**For a fee, your ISP will allow you to store your data and/or even create a whole site for you.**

Let's start by looking at the cost associated with servers and connections. The proposal talks about three to four Unix-based servers, each costing about \$20,000 and an \$1,800-per-month T-1 line. That's more than \$100,000. Today, you actually have a number of options. First, you can buy the Unix servers and all the software you need to get it running, as well as making sure you have a

competent administrator to run the system, or you can go with a Windows NT system. The hardware is less expensive and the software is somewhat easier to use, but it still requires a competent administrator.

Other options include a Mac-based system. I'm told not only is this alternative less expensive, it's also easier to maintain and is intrinsically secure. While these options give you a good start, they also require a lot of work on your part to get this whole thing going.

With 30 days to get it up and running, there is another option now available — you can purchase "hosting" services from your Internet Service Provider (ISP). For a fee, your ISP will allow you to store your data and/or even create a whole site for you. This is a good alternative to hiring and maintaining your own site. As a matter of fact, I recommend this as a way to get started on the cheap. If you later decide to purchase the equipment, you will have already learned a lot and your purchases can be more informed.

### What to look for

The hosting service does not have to be in your local vicinity, although a local group might offer you a more personalized service. It's more important to look for a group that knows about your business.

Recently, when GTE redesigned its corporate web site ([www.gte.com](http://www.gte.com)), the company turned to a small group of Internet web/multimedia/interactive experts — that happens to be our group. We won out over other outside groups because of our knowledge of the GTE business environment and its specific needs. Another example is when Carnegie Hall ([www.carnegiehall.org](http://www.carnegiehall.org)) chose Avalanche Productions because of the group's knowledge of the web and music.

Find a web "hosting and creative service" that you feel comfortable with. Show them your advertising and marketing plans and have them come up with storyboards and prototype pages. Get every content owner in your company involved because the Internet is a living and breathing entity. Remember, if you put up a site, then let it sit idle, it can get stale and may do more harm than good. ■


*Steven Blumenfeld is vice president of technology and studio operations, and Mark Dillon is vice president, on-line services, with GTE, Carlsbad, CA.*

**Stay tuned next month for . . .**

helpful information on the care and feeding of your web site.



Mark Dillon and Steven M. Blumenfeld

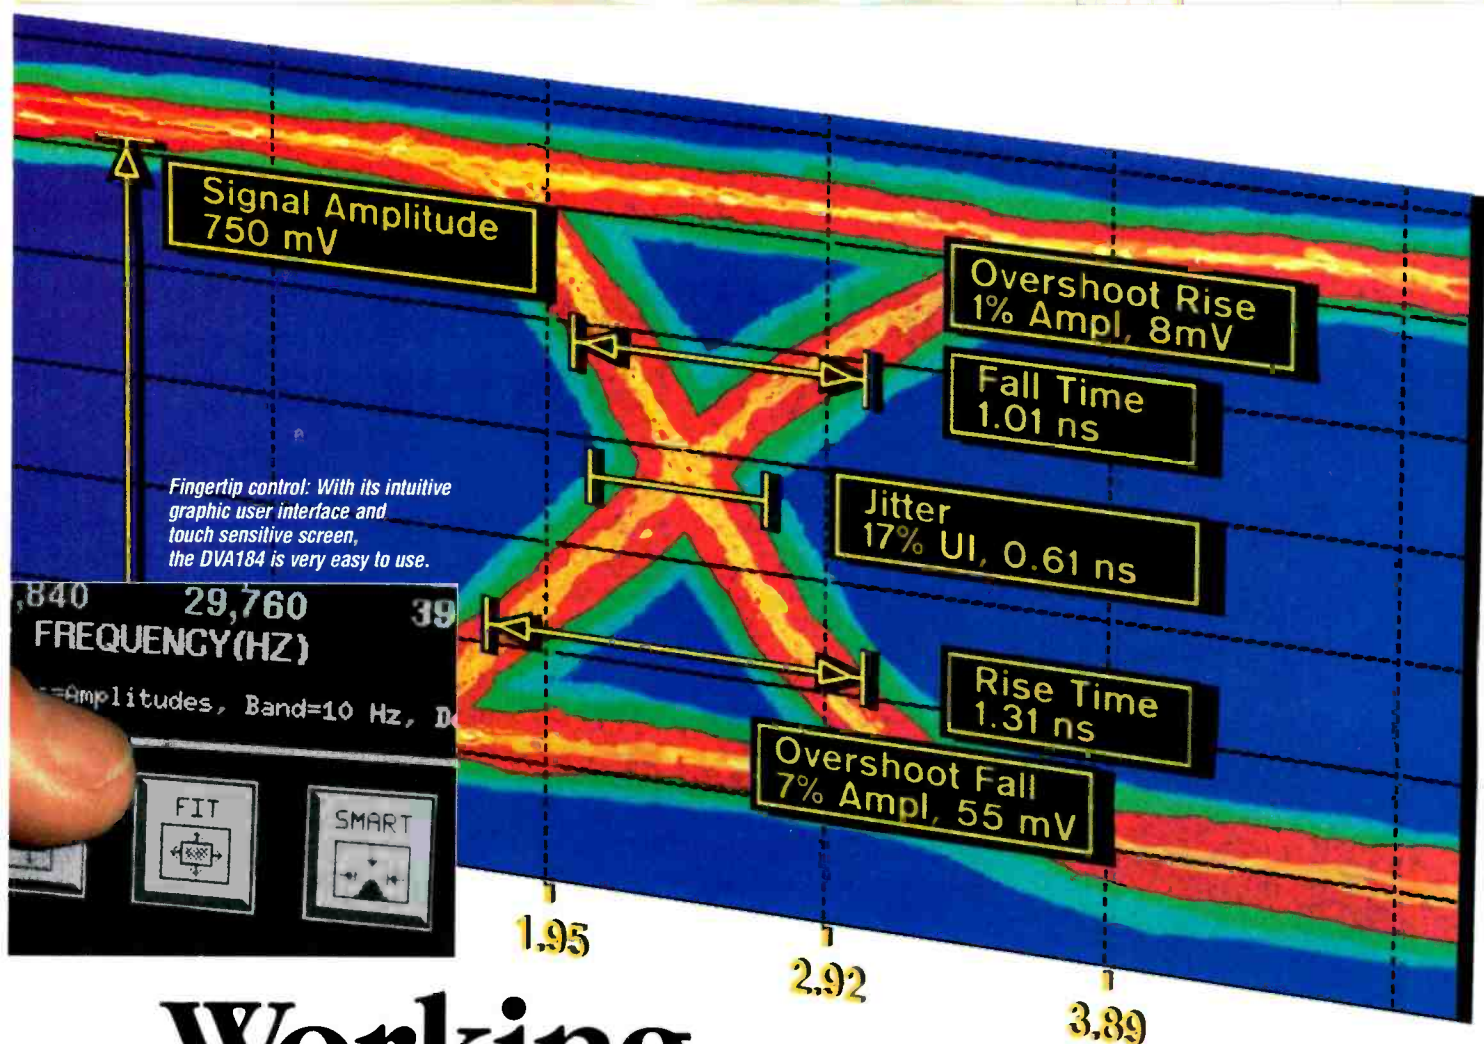





# Working on the Edge

## The DVA184 Video BitAnalyzer™ is the digital video engineer's toolbox

Introducing the first all in one digital video analyzer. Offering in one great product features of an oscilloscope, waveform monitor, jitter spectrum analyzer, logic analyzer, Error Detection and Handling (EDH) monitor, format analyzer, and test pattern generator that will perform complete serial link and format tests. For use in designing, manufacturing, and maintenance of digital video equipment.

### DVA184 Video BitAnalyzer Features

- Jitter FFT and Histogram
- Multi-format Compatibility:
  - 360 Mb/sec - 525 and 625 4:2:2, 16x9
  - 270 Mb/sec - 525 and 625 4:2:2
  - 143 Mb/sec - 525 4:4:4
- Automatic Edge Measurements
- Test Pattern Generator (up to 100 Frames)
- EDH Monitoring and Insertion
- Bit Error Insertion
- Jitter Insertion



Jitter has frequency components which spectrum analysis can identify. Monitor displays give you complete link status.

We offer the Digital Video Engineer a comprehensive "tool box:" the DVA184. Contact SyntheSys Research today and find out how the DVA184 can give you the edge in digital video analysis.

**SyntheSys Research Incorporated**  
3475-D Edison Way Menlo Park, CA 94025  
415-364-1853 Fax: 415-364-5716

- In-service Error Identification
- Automatic Grab of Errored Frames
- Laser Quality Hard Copy Print
- Remote Control (IEEE-488, RS-232C)

See us at NAB Booth #S6134

Circle (16) on Free Info Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

**SYNTHESYS**  
**RESEARCH, INC.**

Patent Pending

## Stop throwing stones, we all live in glass houses

A group of broadcasters, including ALTV, Sinclair and Viacom, are disgruntled by the specific station assignments from the Broadcasters Caucus plan and the FCC's assignment choice for their station. These broadcasters believe that "certain second-channel assignments, particularly those assigned to today's UHF stations, will be seriously disadvantaged in tomorrow's DTV world by their new assignments." They are not too concerned with the concept and the implementation of the "replication principle;" they are concerned with the disparities in powers between certain stations. Further, they believe that "in some cases, the disadvantages are so great that an argument can be made as to the future economic viability of the affected stations."



### Assignment basics

In each area of the country, the new DTV channels will be found among those TV channels that are not used for NTSC broadcasting in that area. The broadcast channels for NTSC were allotted to cities across the country by a complex set of rules based on providing for minimum separation distances between the use of certain pairs of channels. For instance, a UHF transmitter at maximum antenna height and power should not be located within 248.6km of another transmitter on that same channel. The intent was to minimize the potential for the broadcasts of a distant station to interfere with the reception of a local station. Possible channels for DTV in each area were found among the NTSC allotments that were never constructed and among the channels whose use for NTSC would cause objectionable interference to existing NTSC stations.

Generally, the FCC will allocate only UHF channels for DTV. Nationwide, this will not be entirely possible, but most of the new DTV assignments will be in the UHF band, except for in high-population urban areas where there is a scarcity of available UHF channels for DTV. The DTV system has been designed to minimize interference into NTSC broadcasts, and in turn, to be relatively immune to interference from other stations. However, the geographic distribution of NTSC channels across the country and the potential for interference between stations make it difficult to devise a

nationwide set of DTV channel assignments that avoids all inequities among the channels assigned. The channel assignments have been carefully crafted for the major markets and for the nation as a whole.

### The process today

A study of the 10-year process tells us that there is not, and never was, a conspiracy between any of the allotment/assignment program designers to skew the process and provide "better" assignments for certain stations. Enough safeguards were built into the system of channel allotment and assignment to preclude this. Additionally, the FCC has been developing its own assignment software, in parallel with the Broadcasters Caucus effort, and each development plan has been using the other plan's integrity and results.

The goal of the FCC and the Broadcasters Caucus allotment/assignment software is to replicate today's station coverage, by providing a second channel assignment that has a service area with the equivalent of today's Grade B service contour. Neither of the programs attempts to *correct disparities* between service areas. If, for whatever reason, a station has a Grade B service area that only covers a diameter of 15 miles, both the FCC program, as well as the Broadcasters Caucus program replicate today's actual contour. The broadcasters, as well as the FCC, have bought into the principle of "maximization." This means that a DTV contour is in parity with other stations in the market so long as the expanded, maximized station does not interfere with other stations in the market.

In addition, the FCC program, as well as the Broadcasters Caucus program, does not measure and assign stations based on relative power ratios of one station in the market vs. another station in the same market. Even in the NTSC-only world of today, UHF stations in the same market can have *service* areas of different *surface* areas.

### The allotment table

An allotment table was formed by considering each city or area in turn across the country. A list of channels that are candidates for DTV assignment is prepared for each area. Channels that are used in this market or nearby cities are eliminated because their use for DTV would cause unacceptable interference to the reception

*Continued on page 118*

You never get a second chance to make a first

# Compression





# Compression Pre-processing & Real-time Test and Measurement

First compressions count - in more ways than one.

If your source material is not as clean as it could be, then valuable bandwidth will be wasted compressing noise sparkle and other imperfections.

And if the compression system itself is not performing to specification, how can you be sure of finding out - before the viewer does?

Now a new range of powerful compression products from Snell & Wilcox provides the solution to both these problems.

High-performance compression pre-processing equipment guarantees input pictures as perfect as they can be.

And to troubleshoot MPEG2 video compression systems in *real time* as well as off-line there's a unique series of test and measurement tools.

If you want to make the best possible compression, whether you're a broadcaster, post-production house, program maker, teleport operator or equipment manufacturer, find out more about this exciting new range by calling one of our offices below.

USA Tel: +1 408 260 1000

UK Tel: +44 (0)181 607 9455 Fax: +44 (0)181 607 9466 E-Mail: [info@snell.co.uk](mailto:info@snell.co.uk)

France Tel: +33 1 45 28 1000 Germany Tel: +49 611 99 08 40 India Tel: +91 11641 2609 / 622 8014

Japan Tel: +81 3 3446 3996 Russia Tel: +7 095 248 3443 Web <http://www.snellwilcox.com>

## First Compressions Count



Engineering with Vision

Circle (9) on Free Info Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

## QAM delivery

**A**s broadcasters prepare to comply with the new digital TV standard promulgated by the Federal Communications Commission, the cable industry has other plans that may not be fully compatible. At the Western Cable Show in December, the cable industry announced plans to go with quadrature amplitude modulation (QAM), rather than adopt the Advanced Television Systems Committee (ATSC) plan for using digital vestigial sideband (DVSb). This may have long-range implications for broadcasters.



Ken Freed

### QAM

QAM is a scheme for delivering digital signals in an RF channel by modulating the carrier wave with amplitude modulation and phase-shift keying for increased carriage capacity. Whether transmitted through a cable amplifier or a terrestrial antenna, the standard 64 QAM handles 27Mb/s with eight levels in quadrature ( $8 \times 8 = 3D64$ ), while 256 QAM operates at 40Mb/s in a 6MHz cable channel. The International Telecommunications Union (ITU) standard ITU-T J. 83 Annex B calls for 64 QAM and 256 QAM, with concatenated trellis coding and variable interleaving for delay-sensitive applications.

In contrast, the standard 8VSB approved for terrestrial HDTV broadcast is slower, around 19Mb/s, yet offers less risk of signal degradation. Vestigial sideband modulation will be implemented by all the major broadcast networks as they go digital. NBC in New York, for instance, will use VSB when it starts digital broadcasts next year from the tower atop the Empire State Building. (One can only hope no big ape comes along to monkey with the antenna.)

### Deploying QAM

Deployment of QAM technologies in the cable industry, meanwhile, is moving ahead at an accelerating pace. According to Tom Williams, a senior member of the technical staff at CableLabs in Colorado, "Cable operators are starting to ramp up QAM in earnest. MCNS (Multimedia Cable Network System is a joint project of TCI, Time Warner Cable, Cox and Comcast)

supports 64 QAM. In Canada, Rogers is testing 256 QAM with positive results and Shaw is talking about deploying 64 QAM on all their systems.

"Essentially, everybody in the cable industry plans to deploy QAM as quickly as possible for digital set-top boxes and cable modems. Most of the consumer electronics vendors also are adopting QAM for digital delivery."

"We'll deploy QAM in our top 100 cable systems this year," says Tom Elliot, senior vice president for engineering at TCI, "and we already have it in place at our system in Hartford, CT. We're basing our entire strategy on QPSK satellite delivery from HITS [the Head-end In The Sky facility in Colorado on the 105th meridian], with translation into QAM at the local head-end for QAM delivery to homes."

Why not go with DVSb like the broadcasters? "From our perspective," Elliot replies, "nothing has happened around VSB that's particularly persuasive technically. Another very important factor, in our view, is the general ubiquitousness of QAM since it's available in the public domain rather than being a proprietary process like VSB [owned by Zenith]. To the best of my knowledge, everybody in the world is adopting QAM except for the anomaly of ATSC."

Elliot voices disapproval of the recent FCC rule requiring VSB modulation in the digital TV specification, which essentially locks in licensing fees to Zenith. How did this happen? "I think they made a decision a long time ago to go with VSB and got

stuck with it. They never found a way to gracefully exit from that commitment, and the result is that digital broadcasting with DVSb modulation will be the only island in the entire world that's not QAM. I think it's important for us to establish a scheme that is totally ubiquitous."

The viewpoint of TCI apparently is shared by most others in the cable industry. Will this division over modulation schemes be yet one more rift widening the schism between cable and broadcast? As with so many of the uncertainties as we move into digital services, only time will tell.

*Ken Freed is a media trade journalist specializing in cable and interactive television, and is based in Denver.*

**Deployment of QAM technologies in the cable industry is moving ahead at an accelerating pace.**

# Leader Bridges the Digital/Analog Gap!



Model LV-5100D


**ANALOG**

**DIGITAL**

## Combination Waveform Monitor/Vectorscope for Analog & Digital Component Video Testing

This micro-processor controlled multifunctional instrument is ideal for use with mixed digital and analog component video systems. Two serial inputs facilitate digital monitoring while a 3-wire input covers analog. Stereo analog audio monitoring is included. Key features are:


- 525 and 625 line compatibility for added flexibility.
- Waveform monitoring, digital and analog simplifies testing
- Waveform display includes overlay, parade and timing with full line select on.
- Component vector display mode facilitates color space testing.
- Unsurpassed digital video testing abilities.
- User selected alarms facilitate automated warnings of signal failure.
- Monochrome picture display for quick program identification.
- Detailed digital video signal analysis.
- Stereo-audio monitoring with electronic graticule.
- Cursors facilitate easy, error-free waveform readings.



User Selected Alarms



HEX Data Reader



Multi-System Menu

**Call toll-free 1 800 645-5104**

**See us at NAB  
Booth #8760**

**LEADER**  
FOR PROFESSIONALS WHO KNOW  
THE DIFFERENCE

Leader Instruments Corporation, 350 Osar Avenue, Hauppauge, New York 11788  
Regional Offices: Chicago, Dallas, Los Angeles, Atlanta. In Canada call Crntronix Ltd., 905 828-6221

Circle (17) for Product Information Only Circle (18) for Product Information & Demonstration

[www.americanradiohistory.com](http://www.americanradiohistory.com)

# Video servers

If you think the topic of servers was hot last year at NAB, just wait a few weeks. Early discussions with many of the companies reveal that the technology is developing fast, with new features and performance improvements taking place almost daily.

For a peek at what's available, *Broadcast Engineering* magazine issued a request for information on server products to major manufacturers of the technology. This comprehensive article was developed based on these responses. The article will provide detailed information on not only specific server products, but in many cases, the design and application philosophy practiced by the manufacturer. There is no single way to integrate servers within video facilities. Therefore, knowing how a server manufacturer views networking, file storage formats, media management and compression are integral in helping you make the right decision on a server for your facility. Looking behind the mere "specs" will go a long way toward better understanding how a particular company's product might integrate with your current and future plans.

So read on. The answers to your questions on video servers for broadcast, production and pay-per-view applications may be just a page turn away.

*Brad Dick*


Brad Dick, editor



# TABLE OF CONTENTS

|                                                       |    |
|-------------------------------------------------------|----|
| IBM MediaStreamer Solutions .....                     | 40 |
| EMC Corporation Symmetrix Network Media Storage ..... | 40 |
| Sierra Design Labs Quickframe .....                   | 44 |
| Avid MediaServer .....                                | 48 |
| Sony Electronics BitStream and VideoStore .....       | 50 |
| Hewlett Packard MediaStream .....                     | 54 |
| Tektronix Profile .....                               | 56 |
| Quantel Clipbox .....                                 | 58 |
| Pioneer DiscBrowser .....                             | 60 |
| Sun MediaCenter .....                                 | 64 |
| Storage Concepts VideoStar and FibreRAID .....        | 66 |
| Philips BTS Media Pool .....                          | 68 |
| ASC VR300 .....                                       | 71 |
| Silicon Graphics StreamCaster .....                   | 73 |



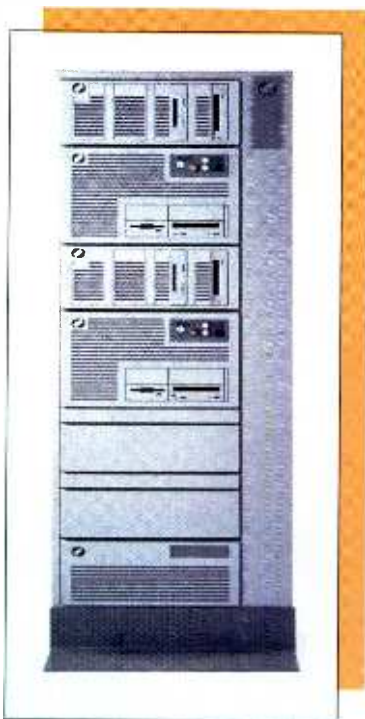

IBM Risc System 6000 R30 rack with R10, R20 drawer.

## IBM MediaStreamer Solutions

By Teresa Golden

IBM recently introduced a set of tailored broadcast solutions focused on the storage, management and distribution of video. IBM's MediaStreamer Solutions provide broadcast-quality distribution of video and audio streams for television, cable, direct broadcast satellite and business environments.

These solutions can be used for on-air play of news, weather and sports information; for video distribution on demand; as a replacement for cartridge management systems and for spot insertion of advertisements and programs.

### IBM options

Based on industry standards, the flexible MediaStreamer Solutions provide multi-stream playout of video content to analog or digital networks. Four standard models are available that can be expanded to deliver from one to 42 streams of MPEG-decompressed video over NTSC and PAL interfaces or from one to 75 streams of MPEG-compressed video over ATM-OC3 fiber-optic interfaces. MPEG compression enables the cost-effective use of computer disks for video storage, providing rapid access to video data and high-quality video output. These servers can also be configured for analog and digital delivery. Video data files can be loaded in or staged out of a MediaStreamer without disrupting active streams.

A key design feature of IBM's MediaStreamer is its reliable RISC-based platform, the RS/6000, which allows the system to grow in hours of disk content and number of video streams. More than 1.2 terabytes of content (over 400 hours at 6Mb/s) can be stored. Leveraging its Serial Storage Architecture and RAID-5 hot-pluggable disks, the MediaStreamer is designed to minimize the disruption of real-time delivery or loss of video content in the event of a single disk failure. For broadcasters managing a large library of video assets, the MediaStreamer Archive provides up to six terabytes of automated non-helical tape storage.

### System components

At the core of each MediaStreamer is an advanced media file system designed to move

audio/video data between a storage pool and one or more input/output ports. The file system is architected into three basic components: a Control Server, a Data Exporter and a File/Storage Manager.

The Control Server is the control "bridge" between external clients/applications and the other components in the MediaStreamer Solutions' architecture. It manages sessions and helps ensure that one client doesn't disturb the activities of another.

The Data Exporter isolates and manages streaming and associated ports. It sets up and provides data to analog decoder ports and ATM virtual circuit ports. The Data Exporter ensures constant rate stream delivery and allows play, record and pipe (ATM to analog decoder) operations simultaneously.

The File/Storage Manager is the component responsible for distributing data throughout the disk pool in a way that allows scalable output streaming without data file replication. The File/Storage Manager supports file sizes greater than 2GB, and allows playout while the file is being loaded. Stored files may have a variety of MPEG attributes and formats, up to 12Mb/s, and may be played individually or as part of a concatenated sequence.

With its highly scalable RS/6000 video server platform and its open solutions design based on existing and emerging industry standards, IBM MediaStreamer Solutions are flexible offerings for broadcast and cross-industry applications. For more information, visit the IBM web site at <http://www.rs6000.ibm.com/solutions/videoservers>.

*Teresa Golden is program director, Multimedia Server Offerings IBM RS/6000 Division, Somers, NY.*



EMC Corporation Symmetrix Network Media Storage.

## EMC Corporation Symmetrix Network Media Storage

By Gil Press

The market for video servers is dominated by suppliers who approach the unique challenges and issues faced by broadcasters and other video professionals from a CPU-centric tradition and who are trying to solve a serious I/O bottleneck by simply adding more CPU power. In contrast, EMC Corporation has developed its network storage-based solution from the ground up for this market, with superior I/O performance as the focal point.

### New approach to storage

EMC's Symmetrix Network Media Storage (SNMS) presents an approach

# NETWORKABLE

# EXPANDABLE

# BULLETPROOF



Looking for a broadcast server to get you on air today — and keep you there? You should give the HP MediaStream broadcast server a shot.

Our bulletproof architecture is engineered to maximize dependability today. And minimize problems adapting to a changing industry. A single server provides 6 channels and nearly 50 hours of storage. And HP servers can be easily networked — allowing you to add even more channels and storage as you go. Plus, our open-systems approach ensures compatibility with a wide variety of third-party hardware and software vendors.

Combine all that with HP's 24-hour service and support, and you're looking at the most reliable server money can buy.

But don't just take our word for it. Ask the

engineers at KCRA in Sacramento. Or MTV Europe in the U.K. Because from Arizona to South Africa, broadcasters around the world count on HP's broadcast server every day. And it hasn't let them down.

It's engineered to meet your broadcast needs well into the future. But at \$100,000, it's priced to fit your budget today.

For free product literature with more information, call 1-800-FOR-HPTV, Ext. 1632 today. You'll find out what HP's broadcast server can bring to your station, both now and in the future.

If you're looking to invest in a server you can count on, take a look at the HP MediaStream broadcast server. Then give it your best shot.

There is a better way.



*MediaStream Server*  
broadcast series

*Starting at*  
**\$100 K**

©1996 Hewlett-Packard Co. TMV1D617/BE



Circle (26) on Free Info Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

# EVERYBODY'S TALKING UP THE BENEFITS OF BUT WITH TAPE CAPABILITIES? TAKE




There's never been  
a piece of equipment like  
this before.

digital cuts and a/v split capa-  
bilities simple enough to handle from  
the front panel.

**DNW-A100/A50/A45/A30/30/A22  
Video Hybrid Recorders**  
*The industry's first hybrids: hard drive  
editors with tape capabilities.*

## Hard drive and 1/2" tape in the very same box.



Now all the benefits of non-linear editing  
and tape are at your finger-  
tips at the same time.  
That's tape and disk  
in a single unit that slides  
into the rack space

**BETACAM SX**

you already have for your Betacams.

## On-line, non-linear editing from the front panel.

The Hybrid Recorder has the look and feel  
of the tape machine you're using now, but with

## Convenient drag-and-drop Graphic User

## Interface (GUI) editing with the DNE-50.

Add the DNE-50 Field  
Editor to the Hybrid Recorder  
for easy GUI drag-and-drop  
editing in a small, light  
package with features like



**DNE-50 Field Editor**  
*The world's only laptop  
that can edit video.*

time line edit-  
ing with independent control of 4 channels of audio.

## Simultaneous live action editing and video

## transfer with the DLE-110 Editor.

With instant tape archiving there's always

**A HARD DRIVE.  
A LOOK.**



**DLE-110 Live Edit Controller**  
*Start editing before you finish recording.*

access to a complete  
copy of your original  
footage. While  
you're in the  
digital edit, you

can mark highlights and output faster than real  
time. What's more, you can play back while  
you're still recording.

**On-air playout from an extended RAID.**

For increased functionality and capacity,  
add an external drive for an additional 6.4  
hours of recording time.

**Record MPEG-2 4:2:2 P@ML for faster than  
real time upload and download.**

Now you can transmit from field-to-station

at twice real time. Tape-to-hard-  
drive at up to 4x real time.  
And machine-to-machine  
at up to 4x real time. With  
outstanding 4:2:2 broad-  
cast quality.



**DNV-7/90/90WS Betacam SX™**  
**One-Piece Camcorders**  
*Full bandwidth digital 4:2:2 acquisition.*



**DNV-5 Dockable VTR**  
*Extends high quality component  
digital recording to the field.*

**Betacam compatibility.**

With existing analog  
Betacam oxide or metal tape  
playback compatibility, SX  
makes the changeover to

digital hassle-free.

Don't be left behind as the Betacam SX  
system goes on air. Call 1-800-635-SONY, ext. SX  
for more information.

**SONY**



to multimedia system design that overcomes many of the limitations of conventional servers for general-purpose applications, such as the inability to support sustained, high data transfer rates, poor tolerance for variance in signal quality, inability to ensure variable signal service levels and the ability to handle interactive and continuous data transfer requirements in the same subsystem.

SNMS is an open, highly scalable solution, easily adaptable to a range of video environments and applications. To buyers of video servers in a market characterized by constant change, evolving standards and rapid technological advances, flexibility becomes the paramount consideration. Their requirements include reliable high performance; high capacity; support for the bandwidth and video standards necessary for those services and applications.

The foundation of the SNMS is the Symme-

trix Integrated Cached Disk Array. Its capacity scales from 72 to nearly 3,000GB, providing hundreds of hours of storage, and it incorporates significant amounts of cache memory — up to 4GB — for scalable performance. Symmetrix offers multiple levels of availability and reliability features to ensure delivery of video streams. Concurrent RAID levels of 0 and 1, plus EMC's exclusive RAID-5 and combinations of these provide the most appropriate and cost-effective level of protection for the user's video application. RAID-5 offers all the benefits of the traditional RAID levels 3, 4 and 5, but without their performance penalties.

To bring flexibility and a range of capacity, availability and performance options to network video services, EMC has developed a software/hardware system extension, the Symmetrix Network Storage Director (SNSD), which includes Data Movers and

EMC's Data Access in Real Time (DART) operating system.

As an open system, based on industry standards, SNMS can be easily integrated into different environments, serving a variety of applications, such as video asset management, tapeless broadcasting, digital post-production and video-on-the-desktop.

In the emerging market for video servers, EMC's Symmetrix Network Media Storage provides users with a range of options that ensures their ability to adapt quickly to rapidly changing market requirements. The focus of SNMS on high-performance delivery of video and its flexibility provides broadcasters and video professionals with a high return on their investment in a solution that's tailored to their present and future needs. ■

*Gil Press is manager, network storage marketing for EMC Corporation, Hopkinton, MA.*



Sierra Design Labs' Quickframe.

## Sierra Design Labs Quickframe

By Chris Romine

In developing high-quality content, whether for broadcast, film, video or multimedia distribution, it can be crucial to work in an uncompressed digital environment. With compression degrading images in the distribution process, it's often necessary to keep the initial production and post-production video processing in its pristine uncompressed state to maintain the integrity of the material. Developing an economical uncompressed video server for the production and post-production environment is the niche that Sierra Design

Labs has been successfully addressing for more than three years.

### Quickframe

Sierra's founders introduced Quickframe in 1993 as the building block for its complete video server solution. With up to 120 minutes of CCIR-601 video per storage unit, this digital disk recorder is the foundation of a well-developed server network.

Facilities don't operate solely in a video environment or a computer environment. They operate in both. Sierra Design Labs'

server technology is fully integrated with computer interfaces that have direct device driver support from the major application vendors (including Discreet Logic, SoftImage, Parallax, Alias/Wavefront, Adobe, etc.) while simultaneously serving up uncompressed video and audio using industry-standard CCIR-601 video and RS-422 control protocol. What this means is that the server network can be understood by, and bridge, the computer and video worlds. Cross applications are managed transparently. Colorists and editors feel just as comfortable in Sierra's server world as do Flame and other computer graphics and effects professionals.


### Networking flexibility

Because there is no single network fabric standard, today's facilities need flexibility in supporting the various fabrics. Ethernet, SCSI and ATM are addressed by Sierra, with Fibre Channel (FC-AL) support being added in mid-1997. For traditional video applications, CCIR-601 video, four channels of AES/EBU audio and RS-422 control are included so video professionals can plug and play with all leading edit controllers, telecines and color correction equipment. VITC is also supported, and Sierra offers the only server to include the presentation of source time code to editing environments.

The server has the ability to handle resolution-independent video images. Film resolution material can be stored on the server. By using Sierra's unique color space converter, these resolution-independent images can be served over the network and viewed on studio-grade video monitors.

Although the industry is not yet tapeless, Sierra Design Labs is prepared to help it make the jump, offering five to 120 minutes

**WHILE SOMEONE IN  
YOUR OFFICE IS  
ADDING UP THE  
COSTS OF MIGRATING  
TO DIGITAL, WE'RE  
REDUCING THEM.**

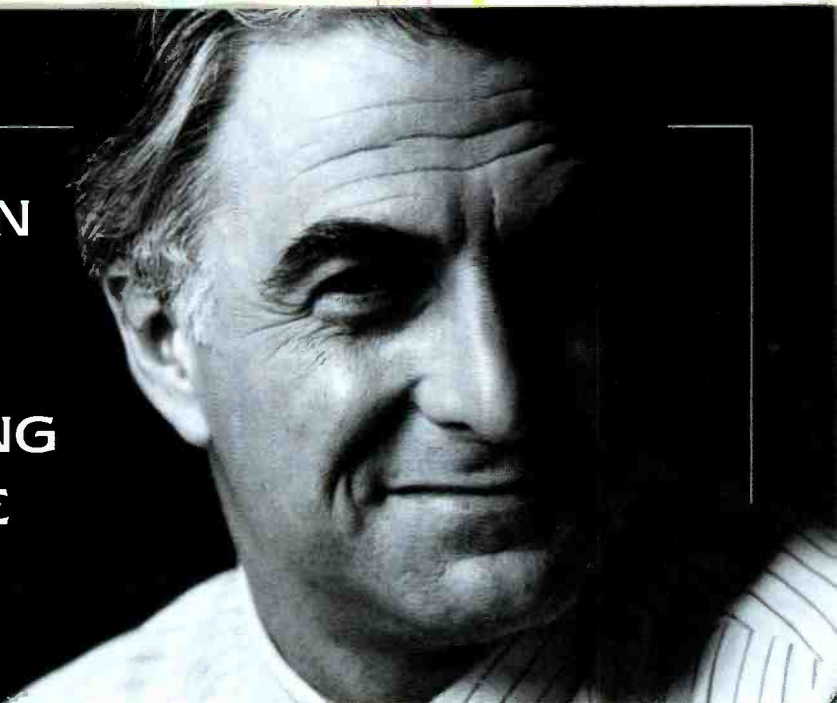

The robust algorithm  
MPEG-2 4:2:2 P@ML  
helps you do things faster  
and reduce operating costs,  
making Betacam SX™ the  
most cost efficient product that Sony has made for  
broadcast systems.



**DNW-A100/A50/A45/A30/30/A22  
Video Hybrid Recorders**  
*The industry's first hybrids: hard drive  
editors with tape capabilities.*

**Mix and match SP and SX for as  
long as you want.**

Add digital SX to your existing SP  
operation or go fully digital while maintain-  
ing established analog acquisition and

archives. What's more, metal digital SX tape costs  
about the same as analog oxide.



**DNW-7/90/90WS Betacam SX  
One-Piece Camcorders**  
*Full bandwidth digital 4:2:2 acquisition.*

**Merge digital with the  
tape world without  
paying a  
penalty.**

To begin  
with, SX

camcorders are almost half the cost of the last  
camcorder you bought. They have better video,  
better audio and record 60 minutes on your  
current 30 minute tapes.

**Cost of tape, parts and maintenance drastically  
reduced.**



In the Hybrid Recorder, that tape travels less  
distance at a slower speed. Causing less friction  
and breakdown on heads. And parts are less  
expensive as well. The upper drum in the recorder,  
for instance, is half the cost of your current drum.  
Don't be left behind as the Betacam SX system  
goes on air. Call 1-800-635-SONY, ext. SX for  
more information.

**SONY**



©1996 Sony Electronics Inc. All rights reserved. Reproduction in whole or in part without written permission is prohibited. Sony and Betacam SX are trademarks of Sony.

# Bandwidth Gave Cable Operators the Pole Position.



# But in The Race For Cyberspace Only Motorola Can Put You in The Winner's Circle.

**Take The Checkered Flag.** The race for cyberspace has reached the final lap and the stands are filled with subscribers anxiously waiting at the finish line. They won't notice who finishes second, so it's essential that you choose a vehicle that is second to none, Motorola's CyberSURFR™ cable modem.

An exciting product of Motorola's CableComm technologies, the CyberSURFR modem drives data downstream at remarkably high speeds. Turning to the upstream path, it successfully outmaneuvers the inherent noise ingress in HFC networks, accelerating information through at lightning-fast speeds. Thus connecting personal computers to a transmission system that races multimedia communications to your speed-hungry subscribers. And as these new speeds enable the next generation of applications and content, the protocol adapts to meet the needs.



**CyberSURFR™  
Cable Modem**

But speed alone is not enough. Unique technologies that economize precious cable spectrum, use of proven frequency agility techniques, forward error correction, and dynamic load balancing, provide your subscribers with ample bandwidth on demand. While standards based encryption protects their sensitive information.

Innovation, reliability, quality and attention to detail will allow the winners to pull away from the rest of the pack. And since these characteristics are the hallmark of all Motorola products, no one else is more capable of helping you lap the competition.

It's time to make your move from the pole position. Let Motorola fuel your race for cyberspace. Pull over and make a pit stop with us at the NCTA, Booth #4845. See how Motorola's CableComm technology can become your system's new driving force, propelling your team into the final straightaway.

**NCTA  
Booth #4845**



See the Motorola sponsored Indy Car  
and meet driver Mark Blundell while  
you're cruising the NCTA.



**MOTOROLA**  
Multimedia Group

*Get Your Modems Running.*

<http://www.mot.com/multimedia> • 800-2WAY-HFC • 847-632-3409

(M) and Motorola are registered trademarks of Motorola, Inc. CyberSURFR™ is a trademark of Motorola, Inc. ©1997 Motorola, Inc.  
Circle (27) on Free Info Card

of uncompressed video per unit. Whether a facility uses disk or tape, digital or analog technology, Sierra's server building blocks accommodate all facility configurations and can be distributed around the facility. Material can be worked on in one suite while simultaneously remaining a part of the server architecture.

As video industry demands increase, real-time can be too slow. Although all of Sierra's equipment can be run at video rates (30f/s), the architecture is designed for internal rates of up to 80MB/s. With real-time uncompressed rates being approximately 22MB. By exceeding the speed requirements, Sierra provides non-linear capabilities including seamlessly concatenating randomly accessed single frames. Depending on the network fabric, transferring material around the facility will be handled through the server at much faster than real-time rates. For example, using Fibre Channel, a one-hour program could be copied in less than 20 minutes.

With the enormous capital expenditure demands on production and post-production facilities, Sierra believes in removing the issue of obsolescence. Users don't have

to trade in the old to get the new. The company's server products rely on industry-standard interfaces and are designed with a true open architecture. Customers who have been using Sierra's products for the past three years can use those same products in implementing newly introduced and future interfaces. Because the Sierra line is designed in a modular fashion, everything is field-upgradable for changing user requirements or new industry developments.

Sierra's technology is based on RAID level 0. Few of today's applications require complete fault tolerance with the associated expense of unnecessary redundancy. Because current disk drives are approximately 50 times more reliable than when RAID was first introduced, the majority of requirements for total redundancy have been eliminated. In the future, Sierra plans to add RAID level 3.

#### Real-world solutions

Built into the design of the server are quality assurances for data security. If a flaw should occur or a disk fail, Sierra's server is designed to recover the material in virtually all circum-

stances. The technology allows users to play through the bad spot so all the unflawed material is retrieved.

Because equipment is not always kept in a pristine machine room, Sierra's equipment is built to withstand real-world applications. Over the past three years, Sierra's products have been flung from truck to truck in remote locations by networks and broadcasters around the world without breakdown. If service is necessary, the modular design allows for easy maintenance right in the field.

Sierra's production and post-production server is here and now. Prominent broadcasters and facilities in 42 countries have already successfully embraced Sierra's technology. Facilities including R/Greenberg, ILM (Industrial Light & Magic) and Pixar have developed distributed server environments with Sierra as their foundation, and broadcasters are working on applying Sierra's building blocks to distribute signals via satellite to download images in field operations. ■

*Chris Romine is president of Sierra Design Labs, Incline Village, NV.*



**Avid MediaServer.**

## Avid MediaServer

**By Stevan Vigneaux**

In all the discussions about server-centered production systems a key point is often lost, what the user wants is an integrated production system and not just a server.

#### It's a system, not just a server

That distinction is a critical one. A news production system requires more than just a

server, it also requires companion workstations for recording, playback, editing, database management, journalist script writing and media archiving.

Most broadcasters describe server-centered production as providing shared simultaneous multi-user access to a digital audio/video library. Multiple recorders concurrently store

incoming feeds onto the server's RAID drives. Nonlinear editors simultaneously access that material and edit new material from tape directly onto those arrays. Playback systems have access to the finished stories and the database provides catalog and search capabilities. These market needs are what guided the development of Avid's Digital News Gathering (DNG) system.

#### Intelligent client workstations

The intelligent self-contained client workstations of Avid's DNG system use the existing NewsCutter, AirPlay MP and Media Recorders; allow individual client upgrades without disrupting the entire system; and provide continued operation in the unlikely event of a server failure.

Each workstation contains audio/video I/O and a compression system. Avid added server connectivity using an internal ATM network card for media data traffic. Avid-Net software manages the workstation's end of the network and provides the network interface. The workstation views the server as another read/write logical volume. The client's Avid Media Stream Manager software directs the read/write requests either to local SCSI storage or the ATM network interface.

#### Networking

Two separate networks connect the workstations to the server: fiber-optic ATM for media transfer and Ethernet for database

**“Philips cameras give us the best pictures under the sun... or snow... or humidity...”**



*Let's make things better.*

“Our mobile production company covers some of the hot television sports—NFL games of the week for Fox, college football, hockey and baseball for ESPN ...We're on the road 250 days a year: a new venue every few days.

“Our clients demand the best pictures whatever conditions: today, in Alabama, with 95 degree temperatures and 90 percent humidity, or tomorrow in Green Bay, in 14 degrees and snow.

“We can't have cameras that require constant tweaking. They have to function perfectly every time.

“That's why our Mother Series MU's are equipped with Philips cameras. They deliver the finest, sharpest pictures thanks to Philips' phenomenal FT-SR CCD sensors.

Our clients tell us about the unbelievably good pictures we

get — more proof that we've got the right cameras. Some have bought Philips cameras for their own trucks, based on their experience with ours.

“We're so satisfied that we're on our third generation of Philips cameras. On our newest truck, 'Nother Mother, we bought both Philips LDK 10 full size cameras and 10P companion cameras.

“In mobile production, there's no time for second-best performance. That's why we're such strong supporters of Philips cameras.”

Call Philips at **1-800-962-4287** or ask your local Philips representative.



**Philips  
Broadcast Television  
Systems Company**



**PHILIPS**

Circle (19) on Free Info Card

© 1996 Philips Electronics North America Corporation

and communications transactions. ATM guarantees 155Mb/s (~20MB/s) bandwidth to each workstation. Avid uses a high-speed, lightweight protocol to guarantee media data delivery with extremely low latency. The Ethernet database network handles media file information (bin) transfers between the workstations and the server. The use of two networks reduces data traffic on the fiber network and ensures that the media datastream will not be disrupted by contention on the network.

### The server itself

While the term "server" has been applied to products that are little more than disk recorders sharing common storage, Avid's MediaServer provides shared simultaneous access to media for up to 12 users. The MediaServer stores, organizes, catalogs and retrieves the media data and the composition information, called bins, for real-time playback of edited material.

A Silicon Graphics (SGI) UNIX-based server was selected because its architecture allowed scaling up to 12 clients using as many as eight 250MHz CPUs. Furthermore, the

multiprocessor design allows segregation of computational tasks to optimize performance. The server receives record/play requests from the production workstations. It maps these requests into the system and the file system calls and delivers the data to and from disk over the ATM network. JPEG-compressed video and up to four channels of 48kHz are delivered to and from each of the clients at real-time rates of 3.5 to 4MB/s through the 155Mb/s ATM network channel.

### The database

Avid selected a standard Informix relational database whose architecture supports multiple CPU platforms. The MediaServer database allows users to catalog and retrieve media based on date, time, name, key words and other common classifications. All media recorded to the server is automatically cataloged into the database. All workstations have immediate access to the media as it's being cataloged. The database operates on a separate UNIX or Windows-NT CPU. Because Informix supports standard query language (SQL) interfaces, system managers can create their own applications.

The market requirement for simultaneous access to shared storage defined the architecture for Avid's DNG system — independent workstations networked to a production server. The DNG architecture provides productivity, scalability and flexibility and accommodates future advancements, while working today with existing systems. Avid's DNG system is also designed as part of a Digital News Production process that connects newsroom computing with digital video production. Using Avid's NewsView, NetStation and forthcoming AvidNews newsroom computer systems and Avid's DNG system, editors and journalists can share information on wires, scripts and rundowns, and producers can control show playback electronically. Ultimately, journalists and editors will share access to the same library of digital media, where journalists will be able to view and edit low-resolution video prior to finishing in high-resolution edit bays. ■

*Stevan Vigneaux is director of broadcast industry marketing for the Broadcast Group within Avid Technology, Inc. of Tewksbury, MA.*



The Sony Videostore.

## Sony Electronics BitStream and VideoStore multichannel video file server system

By Jerry Berger

In response to the shift from analog to digital video distribution, Sony has applied its expertise and technology to the MPEG-2 format in the high-performance BitStream MPEG-2 encoding unit and VideoStore multichannel video file server system.

Designed for digital ad insertion use in broadcast and cable markets, as well as a host of other applications, Sony's BitStream and VideoStore multichannel video file serv-

er system delivers outstanding video quality, scalable system architecture and reliability.

The BitStream and VideoStore systems combine to form a multichannel video file server system that can provide up to 60 hours of on-line audio or video clips, and can non-linearly feed 12 independent simultaneous output channels at 5Mb/s. The system also allows six independent gen-locked channels at five or 10Mb/s with individual clip

durations ranging from four seconds to eight hours and 40 minutes.

VideoStore systems may also be linked to build systems that can output hundreds of channels with thousands of hours of storage. When linked, all systems operate as one unit, giving the user quick random access to data on any channel. The ultimate benefit of HD storage for video is quick random access enabling any clip to be output at any time to any channel, regardless of the amount of storage or the number of channels. Access to any clip is less than one second when scheduled and less than four seconds when unscheduled, such as in a video-on-demand application. The VideoStore system also enables the user to change video program segments at random, as well as make last-minute changes in output order without tape dubbing or recording.

Another feature of the VideoStore system's virtually instant recall is the ability to perform back-to-back playback of programs without black in between by performing full switching operations in the MPEG-2 format. This is a distinct advantage for broadcast television and other multichannel applications.

### MPEG-2 encoding

The Sony BitStream MPEG-2 encoding unit (VST-1000) incorporates Sony's MPEG-2 chips (Main Profile at Main Level) to deliver the full-performance capability of

# Video 18 Plus. Video 20 Plus.

A meeting of the  
cleverest heads ...



## ... to cover every angle.

Whatever your point of view, showing people it can be done without friction or tension is in your daily work. And it is the strength of the famous Sachtler fluid heads **Video 18 Plus and Video 20 Plus**. As they are the best heads around you can, of course, control how much you want to drag things out. With Video 18 Plus and Video 20 Plus you do that in **seven easy steps** giving you the best and sharpest shots from any angle. And that means coping with the

unexpected – like turning the world upside down, taking on **heavyweight cameras!** In fact it takes clever heads of the Video 18 Plus and Video 20 Plus to give you the **right smooth setting**.

You want to go one better? Go sensitive! Our sensor versions **Video 18 Sensor** and the even stronger **Video 20 Sensor** measure the settings electronically – so you get true sensitivity.

**Sachtler. Heads the way.**  
**Smooth drag for tough shots.**

**Sachtler AG, Germany,**  
Gutenbergstr. 5, 85716 Unterschleissheim,  
Tel.: (0 89) 32 15 82 00, Fax: (0 89) 32 15 82 27

**U.S.A.: sachtler® corporation of America,**  
**New York office:**  
55, North Main Street, Freeport N.Y. 11520,  
Phone: (5 16) 8 67-49 00, Fax: (5 16) 6 23-68 44

アマミック サハトラー株式会社  
**Japan Amic Sachtler Corp.**  
東京都世田谷区三軒茶屋  
1-2-21 〒154  
電話 (03)3413-1212  
Fax: (03)3413-0888



**sachtler**  
Support & Lighting

Circle (20) on Free Info Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

# The next gen

*Dual speakers,  
built in*

*LED displays  
for time code,  
audio levels  
and VTR status*

*12V DC powered*

AJ-LT75 BACK PANEL

• Mic and line level inputs • Video in/out and monitor out  
• RS-422 control ports • Line audio and monitor outputs

*100 Event  
memory*

*Carry handle*

*Headphone jack*

**DVCPRO**

For more information call: 1-800-528-8601 (Upon request enter product code 08)  
The DVCPRO logo is a registered trademark of Time Warner Entertainment Company, L.P. © 1996

# eration of video.

*High quality TFT  
LCD monitors*



DVCPRO 63-min. cassette, DVCPRO 2-hr. cassette  
Mini DV Cassette in adapter

*Tilt down  
monitor bridge*

*2 Independent  
DVCPRO recorders*

*Auto or manual punch  
in/out editing*

*Audio out level controls*

AJ-L775  
DVCPRO  
laptop editor



25 lbs, battery powered, frame accurate,  
DV compatible, Digital editing. Here. Now.

**Panasonic**  
Broadcast & Television Systems Company

the MPEG-2 compression standard. This feature, along with the VST-1000's wide window of motion estimation and compensation, as well as advanced discrete cosine transformation (DCT) and variable length coding (VLC), produces an extremely high video reproduction capability, even with highly active program material.

A built-in frame synchronizer assures compatibility with a wide array of video input sources, including U-matic and S-VHS without external time base correctors. A built-in machine control feature controls the video source device. Additionally, the system's built-in decoder board eliminates the need to occupy one channel of the VideoStore system just to monitor the encoding process.

Outstanding image quality is produced during 5Mb/s operation with an MPEG-2 compression ratio of approximately 36:1. Compression at approximately 18:1 for a 10Mb/s output rate is also available for even higher image quality. Verification of ad insertion is aided through the VST-1000's embedded Clip ID feature, which allows the user to identify each encoded clip through the application software.

### VideoStore Media Control Unit

Once encoded, data is sent from the Bit-Stream MPEG-2 encoding unit to the VSR-1000 Media Control Unit, which performs all of the control functions of the VideoStore system. Up to 12 discrete output channels may be installed in each Media Control Unit for 5Mb/s operation, with simultaneous two-channel loading possible. Up to six discrete channels may be installed with single-channel loading at 10Mb/s.

### Predictive Maintenance/fault-tolerant architecture

The VSR-1000 Media Control Unit is designed with Sony's Predictive Maintenance system, which continuously monitors fan speed, power supply, voltages and all hard-disk drives. When a given statistical threshold has been exceeded, the user is warned through the Windows-based software interface. The VideoStore system is also designed with "hot swappability," the ability to replace key systems with no downtime. The VSR-1000's automatic data rebuild feature allows the user to maintain full operation in the event of a total system failure. Even if

systems, including fans, power supply and HDDs fail simultaneously, data is automatically rebuilt, without operator intervention, as a background task with no interruption to system performance. If diagnostics are required, the VideoStore system can be remotely or locally accessed for a complete system check down to the board and block level. Even during operation, the VideoStore system can be remotely or locally accessed for a system status check through an RS-232C or RS-422A remote interface port.

### Media Unit

Users can expand the capacity of their systems by connecting up to seven Media Units (VSH1000) to each Media Control Unit (VSR-1000). In this configuration, up to 60 hours of video programming can be stored with the use of optional 4GB HDD units. Each Media Unit is made up of six standard hard-disk drives in a RAID-3 configuration. ■

*Jerry Berger is manager of video server technology for Sony Electronics Business and Professional Group, Montvale, NJ.*



Hewlett-Packard  
MediaStream.

## Hewlett-Packard MediaStream broadcast server

By Chris Bennett

**V**ideo servers are the new fundamental building block for broadcast facilities. Not long ago, these devices didn't even exist. In

the near future, they will be as commonplace as tape machines, but servers are more than just a replacement for tape decks.

These devices open up many new revenue and productivity opportunities for broadcasters. For example, the seemingly contradictory feat of streamlining operations while adding on-air channels is now increasingly common.

Broadcasters should assess servers along at least four dimensions: functionality (channels, storage, etc.), reliability, interoperability and scalability. The latter two are less obvious, but still crucial. Designed specifically for broadcasters, Hewlett-Packard's MediaStream broadcast server architecture excels in each of these areas.


### Server architecture

The H-P server features two to six independent video channels, seven to 50 hours of on-line storage, 5x file transfers via Fibre Channel, award-winning video quality and unsurpassed reliability. The underlying architecture features independent elements with common databus access. The I/O interfaces convert all video into 'generic' data. This building block approach makes enhancement and expansion easy for H-P and our customers.

### System control

A streamlined, dedicated CPU handles system control. I/O data doesn't pass through the CPU, which functions solely as a 'traffic cop.' The controller sets up transactions between the I/O cards, which then independently handles transactions with a single

# The BEST DAMN Video DISK Recorder On the PLANET.

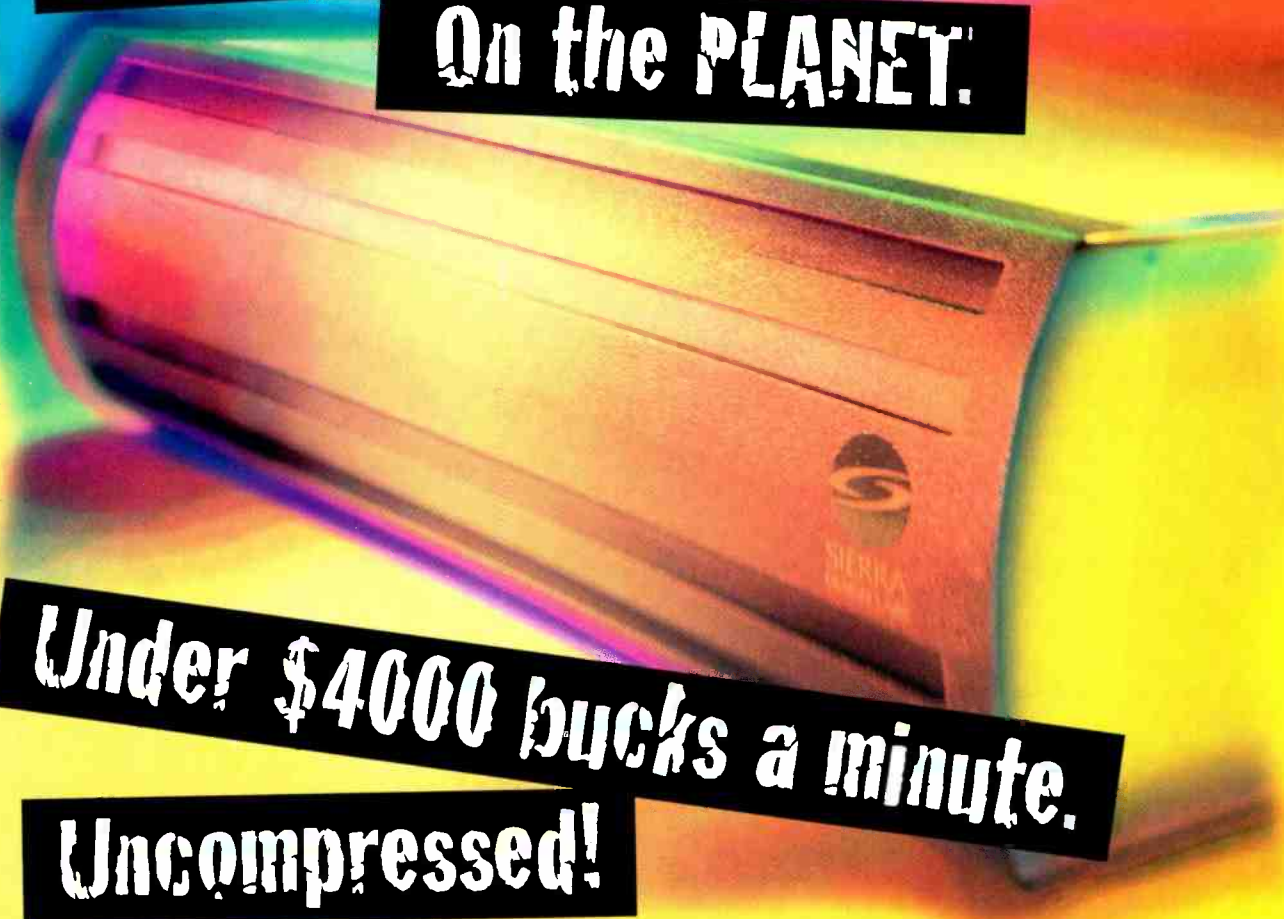

Under \$4000 bucks a minute.  
Uncompressed!

**IF WE SOUND PROUD OF OUR NEW DISK RECORDER, IT'S BECAUSE WE ARE.**

*It wasn't easy combining the power you need for your latest dream creations with reliability and price. Our new Diskcovery™ D1-compatible storage solution gives you 3 to 8 minutes recording time, 800,000-hour MTBF off-the-shelf disk drives, and supports all leading SGI-based applications.*

*And Diskcovery is quieter, smaller and lighter than its legendary big brother, Quickframe™. Put it on your desk! Just think; uncompromised, uncompressed 4:2:2 video for the same price as compressed video.*

Circle (22) on Free Info Card



SIERRA DESIGN LABS Telephone: 800-400-8002

HIGHER THINKING

pass over the bus. This arrangement provides high channel capacity and extremely reliable performance: the controller is not overstressed, and the bus is far from saturation. The controller runs a real-time operating system with no-compromise multitasking capabilities. This provides guaranteed frame-accurate control, no pic freezes (hiccups in video), and also offers independent channel operation. Unlike Windows-based systems, any problems in one channel have no effect on the other channels. This is crucial for reliable on-air performance.

### Video transfer engine

A streamlined file system, designed by H-P specifically for video I/O, handles the data flow. With a low-overhead protocol and hardware implementation, this video transfer engine manages direct data transfers between all devices on the bus. Looking to the future, the file system is also completely format-independent. This will enable straightforward migration to new video formats. This high-performance file system enables the H-P server to simultaneously play/record all video channels; transfer files to/from another server over a Fibre Channel link; transfer files to/from an archive; and recover from a failed disk drive — all without a single pic freeze.

The file system also features As Fast As Possible (AFAP) file transfers. AFAP transfers capitalize on intermittent idle bandwidth to greatly accelerate file movement between servers (or to archives), without impacting on-air performance.

### MPEG-2

While other suppliers continue to talk about delivering MPEG, H-P has been delivering reliable MPEG-based broadcast servers for three years. MPEG-2 offers many benefits: increased server I/O capacity, significantly reduced storage costs, higher-speed networking and better archive access. Equally important, MPEG-2 is the only open, interoperable video standard. This enables H-P's servers to offer lossless (no re-encoding) file transfers with non-H-P equipment, something not available with JPEG or quasi-MPEG implementations.

### Reliability

Hewlett-Packard takes a multipronged approach to hardware reliability. Starting with an extremely robust system design (offering >9,000-hour MTBF), H-P adds integrated RAID with hot-swappable drives, power supplies, redundant fans and transparent re-build. Clustered networking provides 100% reliability more cost-effectively than brute-force mirroring. With readily accessible file content and transparent operation, the high-performance bidirectional Fibre Channel transfers ensure file access and redundancy at all times. Networked systems also offer the ability to easily scale-up a facility to handle virtually any channel expansion requirements. ■

*Chris Bennett is product planning manager for Hewlett-Packard, Santa Clara, CA.*

Your complete resource for all the newest Consoles, Vertical Racks, Tape Storage Systems and Desks for video production.

## FREE CATALOG

New! 148  
Pages



Full details including prices on:

- Multimedia Desks
- Vertical Equipment Racks
- Editing and Video Consoles
- Tape Storage Systems

Also! Full technical details and valuable system planning tips.

Call Toll Free  
**1-800-559-6691**

Fax: 612-944-1546 • Web site: [www.winsted.com](http://www.winsted.com) • email: [racks@winsted.com](mailto:racks@winsted.com)

**Winsted**

Preferred by Professionals Worldwide®

10901 Hampshire Ave. So., Minneapolis, MN USA 55438

Circle (21) on Free Info Card



The Tektronix Profile disk recorder.

## Tektronix Profile

By Steven Craig Bilow

Typically, the term "server" implies a centralized device, shared by many users. There are several excellent applications of such devices in video. Yet, there are also a myriad of compelling reasons for choosing a distributed, virtual server architecture rather than centralizing. The topology enables multivendor interoperability, extensibility, expandability and the capacity to build effective media management systems encompassing on-, near- and off-line storage. Ultimately, resources exist where needed and are allowed to interoperate as appropriate. In effect, the network itself becomes the server.

# "Today, TV Stations Have To Be Future-Proof"

Full digital  
transmission  
system

4:3 aspect ratio  
easily switchable  
to 16:9 at the  
touch of a button

Single  
LSI processor

13 to 18 bit  
digital processing

**Tom Bohn**  
VP, Engineering and Production Operations  
Maryland Public Television  
On The Set Of *Wall Street Week with Louis Rukeyser*

## Hitachi Digital Cameras Help Maryland Public Television "Stay Ahead Of The Curve."

Tom Bohn feels the change from 4:3 analog to 16:9 digital technology "will be a revolution every bit as big as black-and-white to color. And since we don't know what the standards will ultimately be, we must start to future-proof now."

As he invests in new technology, Bohn looks for upgradeability on each piece of equipment. That's one reason he purchased eight Hitachi digital cameras. The SK-2000 Series has four built-in upgrade paths, from the single LSI processor, and A/D converter, to the newest CCD block technology.

"As the fourth largest producer of PBS shows, MPT creates programs with very long shelf lives—which makes 16:9 digital capability crucial. So we needed a camera that was digital from the head all the way through the CCU. I personally visited all the factories and trade shows, and I found Hitachi to be two years ahead of the competition."

"Today, we use Hitachi digital cameras for all our studio productions. We're very pleased—we believe this is the best purchase for MPT today and well into the next century."



Built-in upgrade  
paths

Precision digital  
fine transfers

Six-vector color  
corrector and  
true linear  
matrix operating  
simultaneously

Not just digital.  
Hitachi digital.

# HITACHI

Hitachi Denso America, Ltd.  
Hitachi Denso, Ltd.

New York (516) 921-7200 Atlanta (770) 242-3636 Los Angeles (310) 323-6116  
Dallas (817) 488-4528 Chicago (708) 250-8050 Canada (416) 299-5900

Circle (25) on Free Info Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

## Distributed video networks

Centralized servers provide large amounts of storage, but have obvious limits on the granularity and extent of their scalability. They don't discriminate between functions requiring many resources and those requiring few. Failures may have a widespread impact because one point of failure can affect many users. These traits imply a potential for indeterminacy when a single system is employed in multiple uses. For example, it would be extremely unwise to risk the integrity of a commercial spot playlist system by employing its play-to-air cache device in other simultaneous uses. Furthermore, regardless of capacity, a central server does not provide infinite storage. Off-line devices and tape vaults are still required, so centralization does not alleviate the need for adequate media management.

## The storage pyramid

Optimally, a video storage architecture should be tiered. It *could* include central servers, but *must* be constructed from a heterogeneous array of distributed storage devices; preferably interconnected via some high-speed network. The operative word is *network*, because only through networking can we achieve heterogeneous interoperability, extensibility and the possibility of interfacing over long distances using traditional telecommunications infrastructure.

To understand the fundamental necessity for a networked architecture we must fully comprehend this storage hierarchy. In selecting the mechanism used for storing a

given video segment, the cost of storage, the capacity of the storage device and the frequency of access must be considered. In a broadcast facility there are essentially four levels of storage. On-line storage is used for the few hours of video that must be immediately played to air; it's relatively expensive and requires high-performance disk arrays. Near-line storage involves media servers, which also use fixed disk devices, but have neither the access time requirements nor the level of redundancy. Off-line storage uses video or datatapes to provide greater cost efficiency at the expense of access time. Archival storage is what we typically refer to as the "vault," or a room where tapes are stored. This is the least-expensive storage method.

This model suggests that when a system is not limited to a central device there is a far greater level of flexibility in balancing access requirements and cost. This alone is a compelling argument in favor of distributed architectures.

## The video network

A Fibre Channel Arbitrated Loop network is used to perform high-speed video transfers while an Ethernet network provides transaction control. A network topology is used instead of a bus-oriented one because it simplifies extensibility, provides greater flexibility and allows reasonably straightforward interconnection over long distances via worldwide telecommunications infrastructures like ATM. In essence, this choice allows Fibre Channel to serve as the method

for interconnection within a facility, while making possible the movement of video between facilities using established networks with standardized protocols. In this scenario, Fibre Channel runs network-oriented protocols and gateways can be easily built to move video between it and various other network topologies. The enabling technology is not just Fibre Channel, but *Networked Fibre Channel*.

## Balancing parameters

System performance, storage cost, load balance, reliability, expandability and interoperability can all be optimized by understanding storage and access time requirements. Centralized servers provide adequate storage, but limit flexibility. They are, thus, expensive and difficult to expand. Alternately, the Fibre Channel networking of small- to medium-sized storage devices has the potential to provide highly flexible, distributed architectures. Networking provides the means to construct virtual servers, which allow distribution, ease of expansion, low cost and the potential of interoperating with other networks. In the broadcast environment, this allows the optimum balance between cost and capacity. It provides an easily expandable architecture with the flexibility to rapidly change according to the facility requirements. ■

*Steven Craig Bilow is a marketing manager in the video and networking division at Tektronix, Inc., Beaverton, OR.*

The Quantel Clipbox.



## Quantel Clipbox video server


By Bob Pank

**A**pplying computer disks to video storage presents many challenges far beyond those

of normal computer operation. The non-compressed signal requires a continuous data

rate of 21Mb/s or 75Gb/h. While the vital cost-per-megabyte factor allows the economic grouping of disks to provide stores of several hours, multichannel TV operation has yet more demands. Protection against loss of data, speed of access and ease of system integration are also important and were all factors in the design of Quantel's Clipbox video server.

Dylan disks provide the storage blocks for Clipbox. These provide an hour's capacity from 19 individual disk drives — plus one used for error checking and correction, so that full operation is maintained should any disk fail. The configuration is arranged for handling large files, which pictures are, rather than the small files normally associated with general data processing. Each Dylan provides a continuous data rate well in excess of 21Mb/s and can continuously randomly access stored frames in any order at video rate. Known as true random access, this makes a tremendous contribution to system performance. For example, unlike any other store,

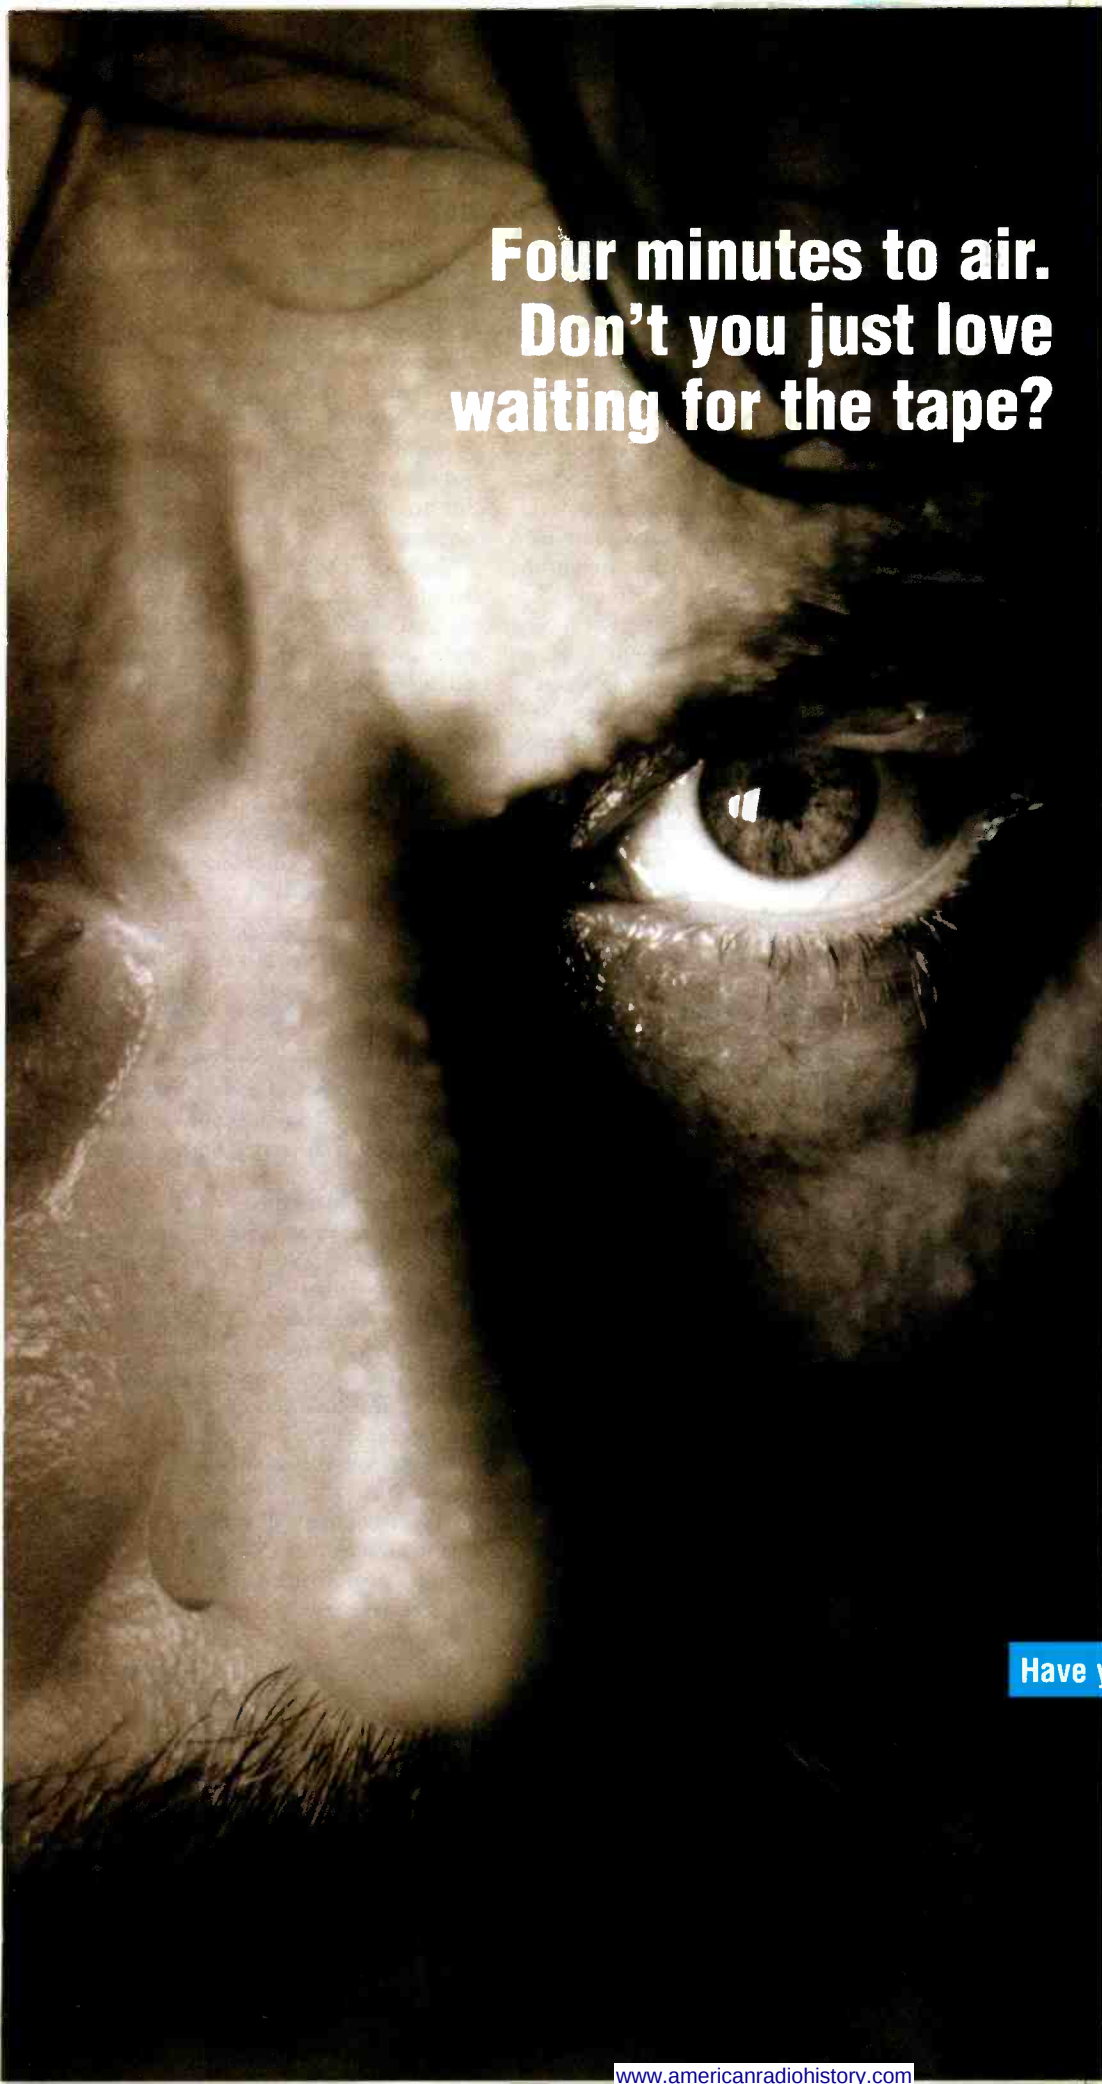

**Four minutes to air.  
Don't you just love  
waiting for the tape?**



digital storage

**Profile® Solutions**



Now would be a good time to talk to us about the Profile® PDR Digital Video Disk Recorder.

It has complete Fibre Channel network capability; up to nine hours of native digital storage; a new interface that makes editing, scheduling and managing source files as easy as click and drag; an awesome RAID option with as much as 96 hours of instant digital access; or a Profile Library System on the order of 1.5 Terabytes.

What this means is that the ulcer-inducing days of waiting for someone to finish with a vital source tape – or even trying to locate it – are finally gone. Everybody can share the same source, at the same time. Instantly.

Talk to us about the PDR and other digital storage solutions. Call 1-800-998-3588 ext. 704, or visit our web site at <http://www.tek.com/VND>

**Have you talked to Tektronix?**

**Tektronix**

Circle (29) on Free Info Card

defragmentation is never required, allowing uninterrupted full operation.

It's the job of Clipbox management system to pass on the benefits of true random access to the users while keeping the interface simple and easy to use. Internally, the filing system directly addresses every stored frame. Because any degree of fragmentation is allowed, the frames of a clip may be scattered anywhere around the store. Although this gives great flexibility, it severely complicates play and record operations. So, rather than asking each system using the server to address individual frames, Clipbox reduces their interface complexity by resolving access to far more manageable whole video clips.

Our aim has always been to make maximum use of servers — a target that has only been accomplished through more specialized engineering. While today huge capacities and high data rates are relatively easy to achieve, enabling any server port to access any frame in any order at video rate, regardless of the activities of other ports (simultaneous true random access) is a technical breakthrough that greatly extends server applications.

So Clipbox has the basic benefits of continuous operation, (no defragmentation or moving of material), as well as instant availability of all recording space. Also, every port can access any frame at any time — even the same frame can be read onto all ports simultaneously. For transmission this eliminates the huge overheads usually involved with guaranteeing access. Output can be cut together live according to the playlist — accepting updates to within a heartbeat of air time. Thus, one port can totally support one transmission channel.

Every port is independent and has its own remote control and each may be supporting a different application, which allows Clipbox to be at the center of operations. New material can be recorded via a port operating as a virtual VTR while another serves as a virtual disk store for an on-line non-linear edit station, such as Editbox or Newsbox directly editing on the server. At the same time, finished pieces can play direct to air or play out to tape. Or, a port can interface to a newsroom computer allowing journalists to edit video and audio alongside their text. The result can go straight to air, via Clipbox, at broadcast quality.

Much of the design has centered on the need for ease of interface. The many post-production, transmission and news applications already implemented point to the effectiveness of this policy. Each port provides direct I/O connections for video (no interface box required) and audio via industry-standard serial digital interfaces (SDI), as well as an RS-422 serial interface operating with Quantel's published remote-control protocol. For exchange with CGI systems fast Ethernet TCP/IP interfaces are available directly on Quantel graphics and editing systems.

Clipbox can be configured with from two to eight Dylans, giving up to eight users true random access to a shared store of up to eight hours of full-quality non-compressed video. Furthermore, Dylans store audio. Using Grid compression extends storage time by five-, 10- or 20-fold — to suit application, and increases the maximum number of on-line users (or ports) to 14. For those seeking further expansion, Clipboxes can be networked. In practice, installations range from four ports upwards. ■

*Bob Pank is the technical communications manager for Quantel, Newbury, UK.*



The Pioneer DiscBrowser video browse server.

## Pioneer DiscBrowser video server

By Rich Bauarschi

The secret behind a successfully exploited archive is access. Pioneer's new DiscBrowser video browse server allows facilities to capitalize on their existing libraries by permitting them to efficiently preview archived clips and images on a networked basis.

Using Pioneer's leadership in compact disc-

recordable (CD-R) technology, the DiscBrowser video browse server allows users to call up and preview decision-quality copies of archive materials. Next, using network tools, they can create a shopping list for the precise reel or reels they need. Finally, they can generate an edit decision list whereby, in


future versions, an editing system can shuttle directly to the reel in question, and pull the desired material without hunting and shuttling, thus preserving time.

### System architecture

Material to be archived is encoded to a CD-Recorder (CD-R) in a Supervisor Plus Encoding station. The Supervisor station doubles as the encoder and CD-ROM writer. This system, a Pentium computer operated under Windows 95, works by encoding video from real-time sources, such as videotape, and storing the encoded files on a hard drive. When the drive is filled to the capacity of the CD-ROM, or a subset of that capacity used for recording (called a session), a CD-R is written. When the CD-R is full, it's inserted into a robotics disc changer connected to the network server.

The network server consists of a fast Pentium tower, operating under Windows NT, and one or more DRM-5004X CD-ROM autochangers. Each of these towers contains five CD magazines, each holding 100 discs. The tower also contains up to four CD-ROM readers or reader/writers, depending on configuration. The combination of four drives, plus a library of 500 discs with MPEG encoding means the system can store and access randomly more than 500 hours of full-frame-rate video.

Of course, via the network, a large number

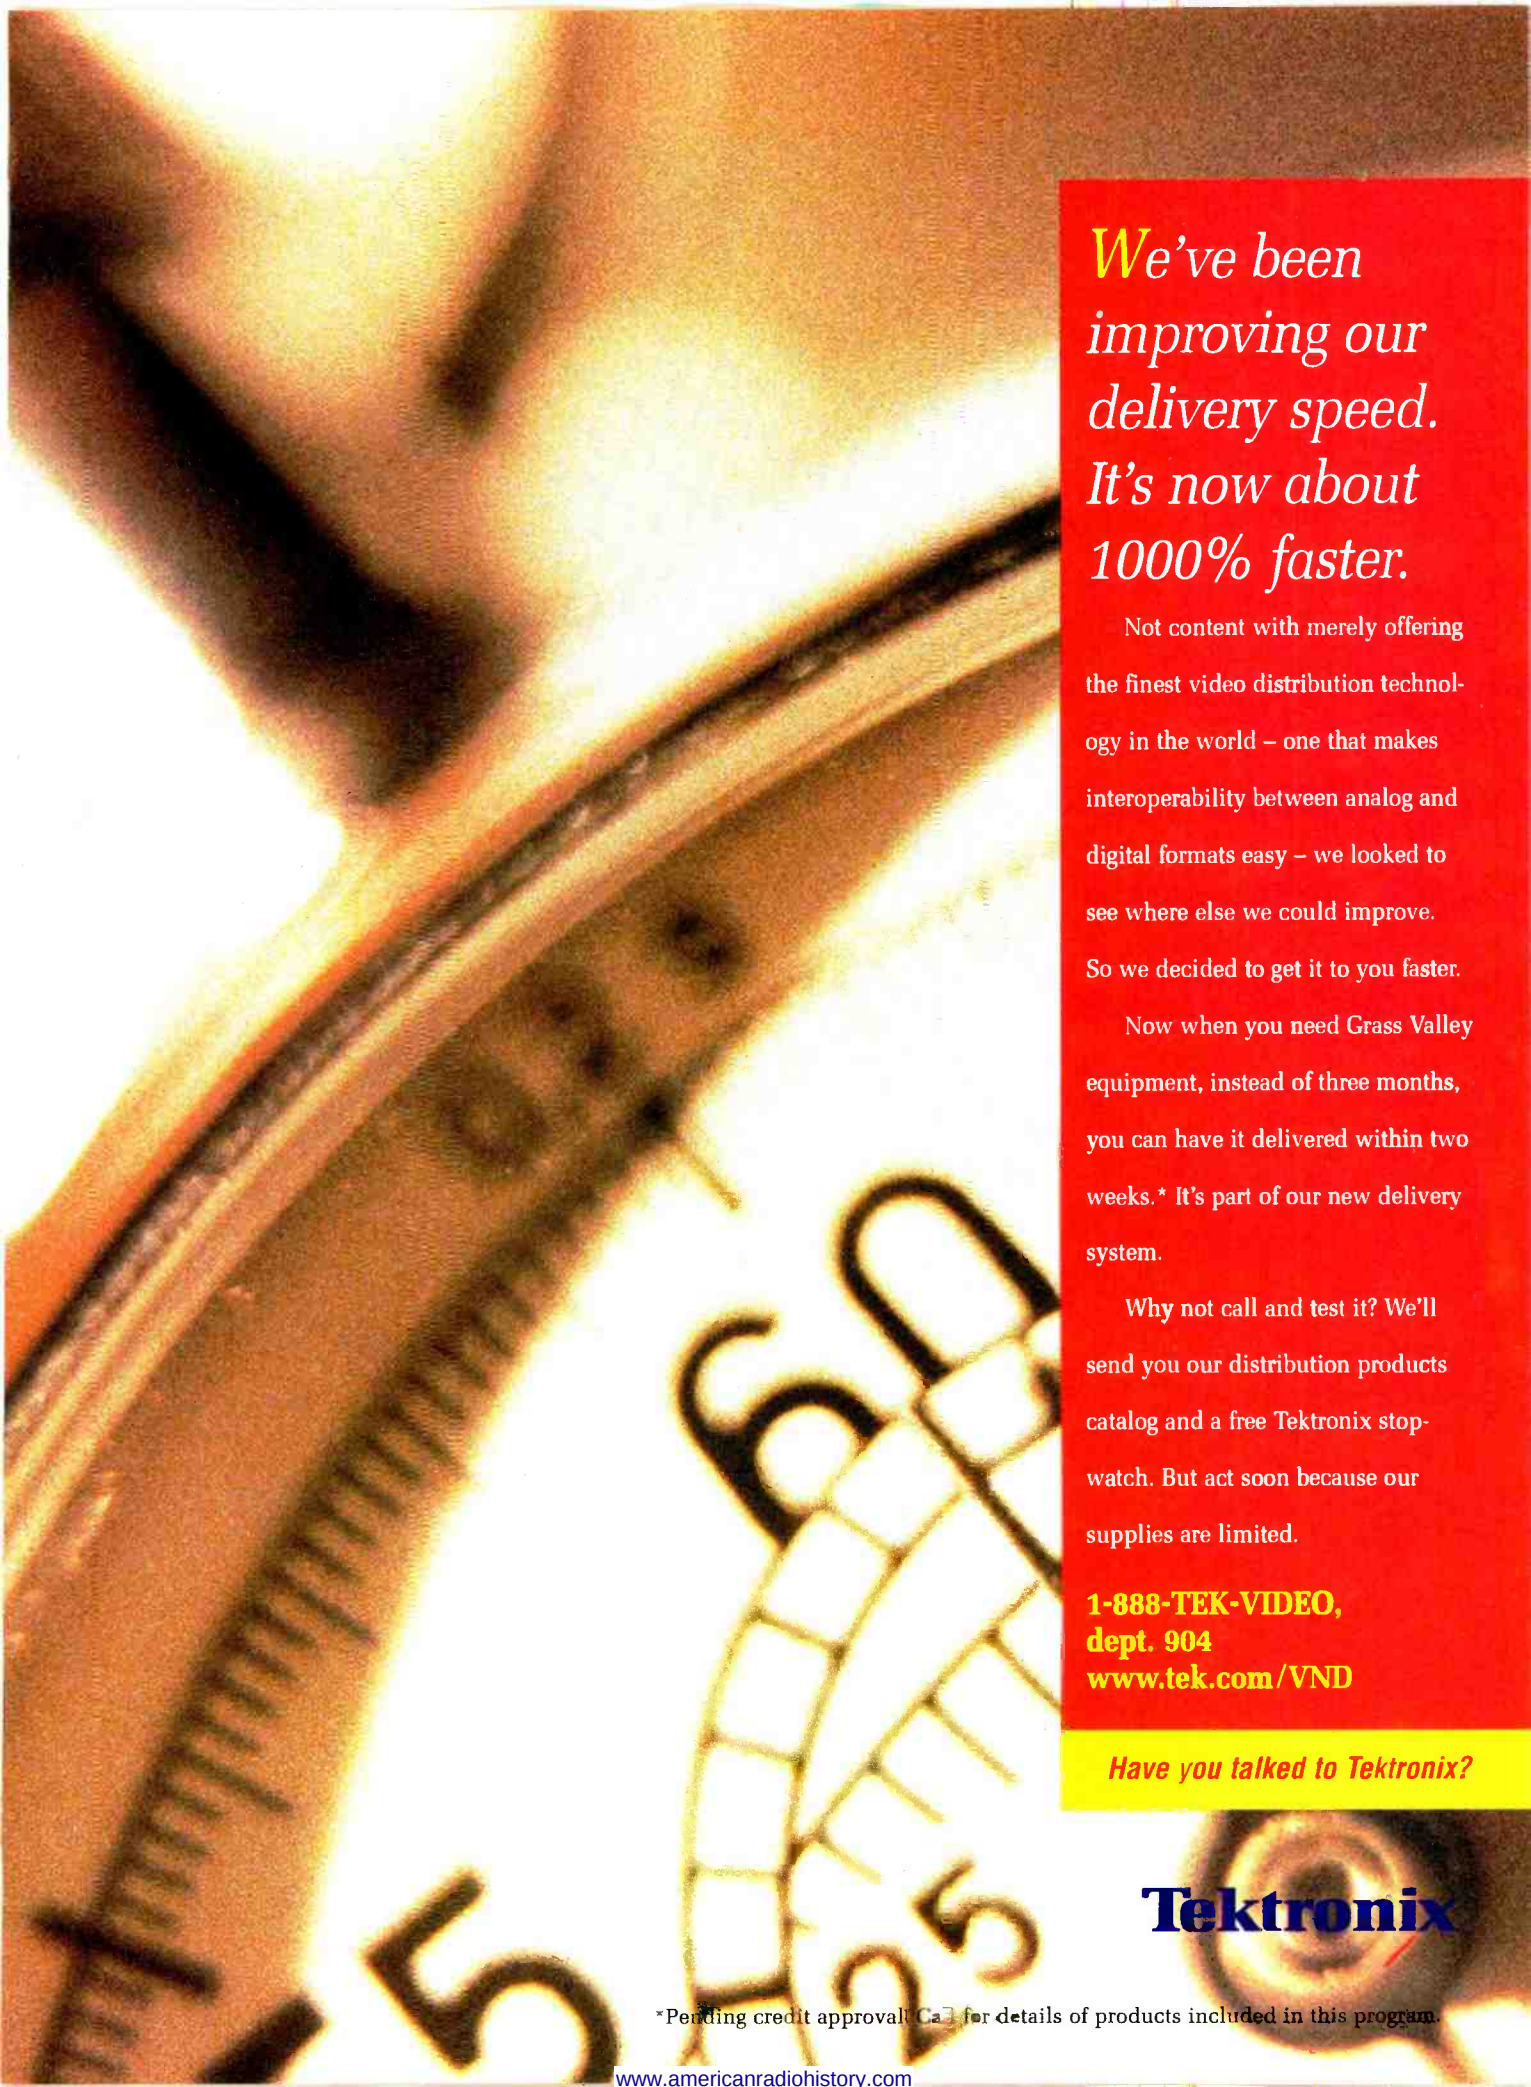

*We've been  
improving our  
delivery speed.  
It's now about  
1000% faster.*

Not content with merely offering the finest video distribution technology in the world – one that makes interoperability between analog and digital formats easy – we looked to see where else we could improve.

So we decided to get it to you faster.

Now when you need Grass Valley equipment, instead of three months, you can have it delivered within two weeks.\* It's part of our new delivery system.

Why not call and test it? We'll send you our distribution products catalog and a free Tektronix stopwatch. But act soon because our supplies are limited.

**1-888-TEK-VIDEO,  
dept. 904  
[www.tek.com/VND](http://www.tek.com/VND)**

*Have you talked to Tektronix?*

**Tektronix**

\*Pending credit approval. Call for details of products included in this program.

[www.americanradiohistory.com](http://www.americanradiohistory.com)



Kudos IQ Modular

# To help you go digital we've racked our brains.

The advent of digital television calls for new interface solutions. If you're going digital, this is the modular system you need to make the transition as painless as possible.

Kudos IQ provides a flexible, controllable, 10-bit digital system, ideally suited to automated environments.

It offers all the performance of dedicated units, but in ultra-compact rack-mountable form.

**For more information about Kudos IQ and our ever-expanding range of modular functions, please contact us at: USA Tel: +1 408 734 1688**

**UK Tel: +44 (0)181 607 9455 Fax: +44 (0)181 607 9466 E-Mail: [Info@Snell.co.UK](mailto:Info@Snell.co.UK)**

**France Tel: +33 1 45 28 10 00 Germany Tel: +49 614 99 0840**

**India Tel: +91 11 6481740 Italy Tel: +39 6 66 38 594 Japan Tel: +81 3 3446 3996**

**Russia Tel: +7 095 1926992**



Circle (30) on Free Info Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

of users have access to the material in the archive. Although four transports per autochanger will greatly speed access, efficiency is improved further by use of an intelligent caching system. In the DiscBrowser, MPEG-compressed material is called off of the disc library, which serves as near-term storage and written to a system of hard drives for play on the network. This cache allows users to view a piece in VTR fashion, while leaving the disc transports free for other users. Items expire from the cache according to user-defined rules regarding the frequency and last date of access. This makes the cache self-purging, but in a manner that is user-determinable.

PCs accessing the network are called retrieve terminals. The powerful retrieve terminal software allows users to view archive material using an interface resembling a videotape recorder. Users can mark I/O points based on their needs and paste the reel information to a clip list that is similar to an EDL. Elements on the clip list can be ordered and previewed by a single click of a mouse.

The advantages of CD-R, such as low operating costs and relatively low media costs combined with the nearly indestructible nature of optical as opposed to hard drive or tape media, make adoption of systems such as we've described here inevitable. In the meantime, coupling the advantag-

es of text-based databases with actual video clips forms a search tool that is hard to beat. Also featured is the ability of multiple-user access at the desktop via a network, and the nearly unlimited expansion offered by multiple CD autochanger towers. All of this makes the Pioneer DiscBrowser video browse server a powerful solution for getting an archive out of the dark ages, and transforming it into an efficient resource for production tasks. ■

*Rich Bauarschi is director of marketing for Pioneer New Media Technologies, Long Beach, CA.*



The Sun MediaCenter.

## Sun MediaCenter

By Jack Androvich

It just got a lot easier to answer the need for rapid access of stored video programs. No longer is it necessary to fidget with a host of architectures and languages to get a media server to talk to a digital network that includes equipment ranging from TV sets to workstations. Finally, a media server is a painless way to provide time-sensitive streams of digitized visual information to clients connected to a local or wide area network.

Sun Microsystems Computer Company has introduced the Sun MediaCenter based on its UltraSPARC platform that uses standardized hardware, a 64-bit file system and software packages to build the media server configuration dictated by almost any application.

### Incorporation and integration

The Sun MediaCenter starts as a basic

package (either off-the-shelf or customized) with the hardware and software needed for easy incorporation into new or existing digital networks. The architecture of the new system is open for expansion and for access by a variety of equipment. Integration with other equipment on the network is simplified, regardless of manufacturer.

The MediaCenter software provides the drivers and hardware management necessary for the development of advanced applications requiring digital video. The software comes ready for full VOD applications with video playlist editing and control (audio track selection, play, pause, stop with fast forward and rewind optionally supported), as well as providing system resource information.

Compressed digital video programs can

be recorded into the MediaCenter at the same time that the server is being used for playback. A "playthrough" feature enables titles to be played approximately five seconds after beginning to be recorded. (The incoming digital video is compressed by an external encoder that is not a part of the server system.)

The storage system starts out with a net capacity in multiples of 42GB, enough to store 21 hours of MPEG-2 programming (at 4Mb/s) or 62 hours of MPEG-1 programming, and can optionally be expanded to 84GB. Applications that require an even larger storage area or expanded data throughput can be addressed by clustering media servers or by using other storage devices available from Sun. (The RAID-4 storage system uses the remainder of the 50.4GB of disk storage in the standard storage system for parity and other overhead.) The MediaCenter software also supports conventional video storage media in addition to hard disks for near video on demand (NVOD) applications that allow slower and less-expensive access to video programs that are not frequently needed.

The Sun MediaCenter simultaneously plays back any combination of MPEG-1 and MPEG-2 compressed video datastreams, up to a 100Mb/s sustained total output rate.

### Connectivity

The Sun MediaCenter output interface can be interconnected with ATM (AAL-5), 100BASE-T Fast Ethernet or 10BASE-T Ethernet networks.

Reliability and maintenance issues have been addressed by design, diagnostics and the comprehensive SunSpectrum customer support program. In case of failure, individual disks can be "hot-swapped" without rebooting the system, in most cases without clients ever noticing. Enhanced backup and

# IN THE PROFESSIONAL MINIDISC MARKET, THERE ARE THE HAVES. AND THE HAVE-MORES.



Allow us to state the obvious. The new MDS-B5 Digital Pro MiniDisc Recorder/Player has more high-end features than any other MiniDisc cart available today. And they all come standard, not as costly options. The MDS-B5 is the smart choice for radio, television, theater, and other applications requiring professional sound quality. Its

flexibility and easy operation make it ideal for sound effects, commercial messages and station promos. And high speed disc cloning is perfect for program distribution or safety back-ups. To learn more, call 1-800-635-SONY, ext. MDS. And remember, the MDS-B5 doesn't just have what you need. It has more.

THE MDS-B5 DIGITAL PRO MINIDISC RECORDER/PLAYER



© 1997 Sony Electronics Inc. Reproduction in whole or in part without written permission is prohibited. All rights reserved. Sony is a trademark of Sony.

SONY

transfer utilities for video programs are included in the standard package.

The Sun MediaCenter UltraSPARC system offers cutting-edge video storage and retrieval in a package that's easy to install and expand. Effective incorporation of a

MediaCenter into a digital network is virtually assured by the open architecture and adherence to worldwide interface standards. With operational reliability and customer support that exceeds the needs of any foreseeable application, the Sun MediaCenter

is becoming a cornerstone in supporting visual communications needs. ■

*Jack Androvich is product marketing manager, Interactive Services Group, Sun Microsystems, Inc., Mountain View, CA.*



Storage Concepts FibreRAID with Silicon Graphics Indigo.

## Storage Concepts' VideoStar and FibreRAID

**Roger Budris and Martin Bock**

**S**torage Concepts, a leader in high-performance RAID storage since 1984 has unveiled two distinct video server architectures. The VideoStar MPEG-2 video server is aimed at the high-quality VOD and commercial insertion markets, while the FibreRAID disk server array targets mid-to-high-end uncompressed video storage applications for the broadcast and video post communities.

### VideoStar system architecture

The VideoStar video server offers broadcast-quality video, accurate timing of program insertion, low overhead cost and high system reliability. The overall system architecture of the VideoStar video server consists of three major system components: video storage, an MPEG-2 decoder unit and a computer that controls system operation.

The three system components are interconnected via a fast-and-wide SCSI bus for data inputting to the video storage device and transfer of video content from the video data storage device to the video de-

coder unit. The computer is connected to the MPEG-2 decoder unit via an RS-232 link to pass control commands and obtain status information. Each VideoStar decoder unit has eight internal MPEG-2 decoder chips and can run up to eight video streams concurrently.

The VideoStar architecture is flexible in that the computer can be a PC, workstation or even a mid-range computer and video storage can either be disk drives or a RAID system. To support various computers, the VideoStar application software is written in C language and runs under Microsoft NT or Windows 95 and can be ported easily to various versions of UNIX.

System operation is controlled by the VideoStar application software. The application software provides a GUI for manual control by an operator. When integrated into a TV or cable head-end computer system, automated operation is supported through the application software API. With third-party commercial insertion software and multiple decoder units, VideoStar be-

comes a viable insertion system and will interface to popular traffic and automation systems. In a VOD server application, up to 32 simultaneous video streams and 32 audio stereo pairs can be supported. In a multiple operator environment, such as news, sports and program store-and-forward applications, catalogued program segments and clips can be viewed, EDLs created and stored in list/clip bins.

To guarantee uninterrupted service, the VideoStar servers are available with "fault-tolerant" disk array architectures and channel protection.

### FibreRAID video server

In addition to VideoStar, Storage Concepts has developed FibreRAID. It's a fully functional RAID server storage solution designed to provide continuous, sustained data rate storage for high-performance video storage and server applications.

Based on a new real-time controller platform using fourth-generation design topologies, the system features redundant pluggable disk and power supply modules, dual Fibre Channel host connectivity, extensive error logging and RAID functionality control, cableless system chassis design, up to 72GB of storage per chassis and up to six additional satellite chassis for high-capacity storage, equaling more than 500GB per controller. In addition, the system touts a dual-channel design with separate command and internal databuses for efficient high-performance data handling, 4MB of buffering to ensure continuous data transfers, 66 MIPS disc processor for fast command handling and a full 1Gb Fibre Channel interface with a sustained rate in excess of 80MB/s.

Also, FibreRAID can be connected to the Silicon Graphics computers. Adapters are available for the GIO interface in the Indigo and Impact lines, an HIO interface for the Onyx and Challenge lines and a PCI adapter for the new PC-based systems. ■

*Roger Budris is vice president of marketing of the video interactive division, and Martin Bock is vice president of marketing for the real-time division for FibreRAID at Storage Concepts, Irvine, CA.*

**Rack Mountable and Rugged**  
Use it in the studio, in the field or in your rack.

**Balanced Inputs and Outputs**  
Running lots of cable? Using pro equipment? You'll need these. (Unbalanced, too!)

**Double Reinforced Ground**  
Part of TASCAM's low noise circuitry that promises transparency and hum free operation.

**12 Total Inputs**  
4 stereo, and 4 mono.  
The world's best utility mixer.

**Channel Inserts (CH 1-4)**  
A TASCAM exclusive in this price range. Just like larger consoles, these handy inputs are great for compressor/limiters or using even more effects.

**60mm Master Fader**  
What's a mixer without a master fader? Greater visual reference of your mix.

**Precision 12-Segment Display**  
Bright LEDs so you know what's going on.

**Stereo Buss/AUX SUB Inputs**  
Signal routing designed for flexibility and expansion.

**Dedicated Stereo Tape Input**  
No need to waste a precious stereo channel for your master recorder. Assignable to L/R buss or monitor.

**EQ on Every Input**  
Hi (12kHz) and Low (60Hz)  $\pm 16\text{dB}$  on each.

**2 AUX Sends**  
Take your signals Pre or Post

**4 Effects Returns**  
Use your imagination.

**Overload/Peak Indicators**  
No guess work here. You get them on every channel and for PFL.

**4 XLR Mic Inputs**  
Complete with 48V phantom power for using the highest quality condenser microphones.

**Mute & PFL**  
Switches on every channel. PFL overload indicator too!

## THE LAPTOP YOU CAN GET FOR UNDER \$350\*

No more excuses for not having a compact, full-featured utility mixer. A mixer you can plug in anywhere. Need more inputs? How about a submixer? What about audio for video or multimedia? Get a TASCAM M08. It's the perfect mixer for these applications and more. Part of the new breed of next-generation mixers from the leader in recording, TASCAM's new M08 will surprise you. You'll scratch your head trying to figure out how we can give you so much



mixer for so little cash. No tricks. Just value.

Look at all those features! It's the mixer that goes anywhere to do almost anything. Use it every day — or when you're in a crunch. So whatever you do, don't scramble for more inputs, or schlep that big mixer, pull out your M08 instead. It's the world's best and hardest working compact utility mixer. And it comes with TASCAM quality and durability at no extra cost. Everybody needs one. Best part is, at \$349 anyone can have one. They're at your dealer. Get yours today.

**TASCAM®**  
Take advantage of our experience.

Circle (24) on Free Info Card

©1996 TEAC America, Inc. 7733 Telegraph Road, Montebello, CA 90640 (213) 726-0303  
TEAC Canada LTD., 340 Brunel Road, Mississauga, Ontario L4Z 2C2 Canada (905) 890-8008  
\*Actual MSRP is \$349.00. Actual prices may vary by dealer.



INFORMATION+SPECs VIA FAX  
800 • 827 • 2268  
DOCUMENT #6280

**UTILITY  
M08  
MIXER**



Philips BTS Media Pool.

## Philips BTS Media Pool

By Charlie Bernstein

The Philips BTS Media Pool video server combines off-the-shelf components and dedicated hardware that makes it an effective solution for broadcasters. It's a scalable multi-channel system that provides the highest-quality video and audio in a facility. Each channel in a Media Pool system is capable of supporting a full-bandwidth CCIR-601 uncompressed video stream, along with up to two AES/EBU 48kHz pairs of audio. In addition, the server can compress the video stream to leverage economies of scale in storage and bandwidth. The Media Pool is a modular system that can be built in various configurations to meet specific broadcasters' needs. The modular architecture offers increased flexibility in video channels, storage capacity, system bandwidth, integrated applications, simultaneous multi-user access and control alternatives.

The server architecture uses multiple arrays of hard-disk technology to provide high bandwidth and high storage capacity. Each array provides up to a full bandwidth stream of video. The system supports from one to eight storage arrays per system. Each array can contain from 10 to 42 drives. This allows for terabytes of on-line data storage that translates into hundreds of hours of compressed video on a single server. A Media Pool system can be configured starting with a single I/O module up to 12 I/Os in a single system. A system purchased with fewer than 12 channels can be upgraded with additional channels in the future. Additional drives and arrays can be added to the system to increase system storage. Additional workstations can be added to run Media Pool's integrated applications in a real multi-user environment.

### Scalability

The key to the Media Pool's storage subsystem is its scalability. Multiple drives and multiple arrays allow for storage and bandwidth management. Using compression, storage capacity can be increased and bandwidth shared. Flexible storage capacity and flexible system bandwidth are the result of the scalable architecture of the storage subsystem.

### I/O subsystem

The Media Pool video server has dedicated hardware developed for the task of playing and recording video into the server. The server's I/O subsystem provides serial digital component video output on all channels. As all video information is stored digitally in the server, and the industry is migrating to the digital domain, it makes sense to provide a digital signal to a broadcast facility from a server.

### Video transfer subsystem

This subsystem is comprised of a gigabit matrix switch called the data transport commutator. Signals between the array subsystem and I/O subsystem are switched rapidly over a matrix fiber channel switch to allow the system to provide up to full-bandwidth digital serial component video for each I/O simultaneously. The timing of the switch is regulated by system software in the I/O subsystem and the control subsystem, allowing for flexible bandwidth allocation and support for multiple data formats.

### Control subsystem

The control subsystem in the Media Pool is comprised of one or more workstations. The Media Pool system controller is responsible

for initiating system booting, system configurations, compression level setting, system monitoring, media file database administration and running the server's integrated applications.

The system controller contains software applications for system administration, commercial insertion and record/payout. Additional workstations can be added to allow for simultaneous multi-user access.

### Media Pool integrated applications

There are currently four integrated applications and three integrated protocols available for the server. The applications provide integrated functionality that take advantage of tightly coupled control and high-end features. The protocols provide the server with an open system approach, so the system can be integrated into the facility with other devices and also to allow for custom application development by broadcasters and other vendors.

The applications are SPLASH, System Administration Application, Stream, VTR Emulation Application, DiskCart Cart Emulation Application and DiskCache Broadcast Facility Application. The protocols supported are BVW-75 serial control protocol, Video Disk Communications Protocol and PoolNet native Media Pool Protocol.

### Archiving and compressed file transfer

Any media file stored on the Media Pool can be archived to a robotics datatape library and retrieved. Automatic archiving and retrieval based on playlist requirements is supported. Faster than real-time transfer is possible when compression is used.

Another feature is the ability to transfer compressed files from one server to another. The Media Pool Pool2Pool functionality allows for faster than real-time transfer of compressed files via a compressed serial digital interface (SDI). Files can be transferred using existing digital routers and switchers or via direct connections between two servers.

The Media Pool video server architecture uses independent subsystems, variable compression and integrated applications to provide a flexible solution for storing and serving professional video. The system offers flexible configurations, system scalability and support for multiple full-bandwidth video streams. A Media Pool system configured today can be upgraded in the future with additional storage, bandwidth, channels and users. ■

*Charlie Bernstein is senior product manager, storage and retrieval products, Philips Broadcast Television System Company, Salt Lake City.*



ASC VR300.

## ASC VR300 advanced broadcast video server

By Todd S. Roth

The VR300 advanced broadcast video server is the only disk-based, news and commercial insertion system to unleash the full power of Fibre Channel (FC) technology. By coupling the performance of a PCI/Pentium Pro video server with ASC's FCR300 Fibre Channel RAID video storage, VR systems can provide up to 24 simultaneous channels with up to 96 hours of on-line video storage for a host of real-time broadcast applications, including commercial insertion and network delay.

### Building block approach

The VR300 video server is the central building block of a VR disk-based broadcast system. The VR300 is based on a PCI/Pentium Pro configuration running Windows NT. Each VR300 provides two channels of video for either dual simultaneous recording, dual simultaneous playback or simultaneous recording and playback.

The FCR300 is an ultrahigh bandwidth disk-based storage configuration using the latest Fibre Channel storage and networking technologies. FC is a serial interface with a net bandwidth of 1Gb/s. When combined with RAID technology, FC eliminates the bottlenecks that complicate high-bandwidth broadcasting applications.

### Integrated disk-based broadcast system

By using the VR300 video server and FCR300 storage system as building blocks,

broadcasters can make the transition to an integrated disk-based environment. They

can start with a single VR300 — performing a specific broadcasting application, such as commercial insertion or network delay — and grow to a fully automated, integrated broadcast environment with multiple servers and shared RAID storage for news, spots and programming.

### VR system features

The VR system includes one to 24 simultaneous record/playback channels, each with four channels of CD-quality digital audio; maximum on-line Fibre Channel RAID storage of 1.1 terabytes (1,100 GB); ultrahigh bandwidth Fibre Channel storage technology; ASC's Brilliant Image Compression is user-selectable from 1.6:1 (mathematically lossless) to 20:1; ASC's exclusive Virtual Access Architecture for concurrent access to the central media bank; RAID technology for failure-free security; full control by external devices via RS-422, GPI or TCP/IP protocol; fully compatible with Alamar, Louth, NewsMaker, Odetics, Sundance and automation/news systems.

### Server and storage implementation


Virtual access architecture is ASC's exclusive storage topology that allows multiple VR300 video servers to share a Fibre Channel RAID array, making all video

## Normal-through Dual Patch Jack Finally...with Separate 20dB Monitor Jack!

Increasing frequencies and data rates have created a need for a monitor patch jack to assure clean signals with no loss of data. To meet this need, Trompeter has introduced a new member to its J24W 75 ohm line of Patch Jacks, offering a 20dB monitor with an uninterrupted signal.

While the J24WMST-75 will handle data rates up to 75Mb (150MHz), the new High Frequency J24WMSTHF-75 will handle serial digital data rates up to 300Mb (600MHz).

- ▲ Separate 20dB monitor Jack without interruption
- ▲ Self-terminating
- ▲ Rated at 30,000 cycles

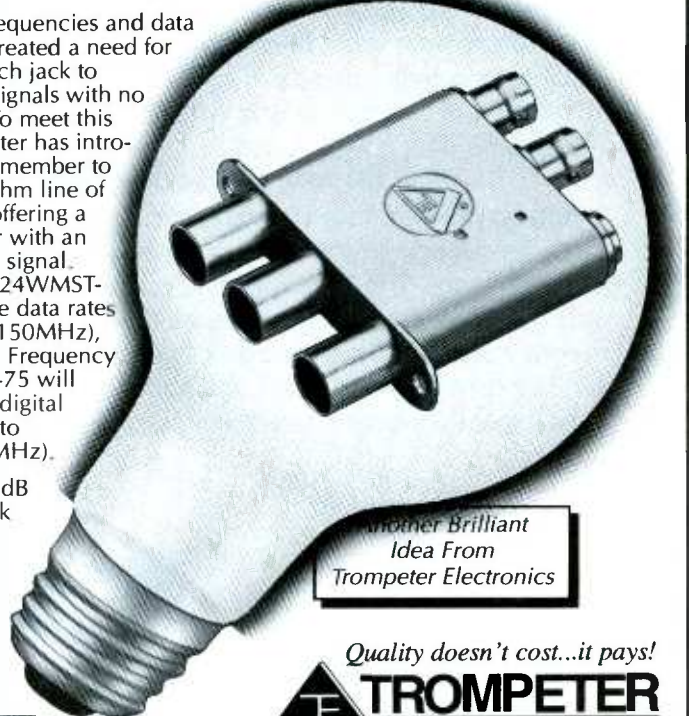

Another Brilliant Idea From Trompeter Electronics

Quality doesn't cost...it pays!

**TROMPETER**  
ELECTRONICS, INC.

ISO 9001 Certified


31186 LaBaya Drive, Westlake Village, CA, U.S.A. 91362 • (800) 982-COAX  
(818) 707-2020 • Fax (818) 706-1040 • E-mail: trompeter@worldnet.att.net • <http://www.trompeter.electronics.industry.net>

Circle Free Info Card (67) Send Literature (68) Please Call

Add  
\$50,000  
Per Month  
Income

# "the TIME MACHINE"<sup>TM</sup>

## Create Commercial Time

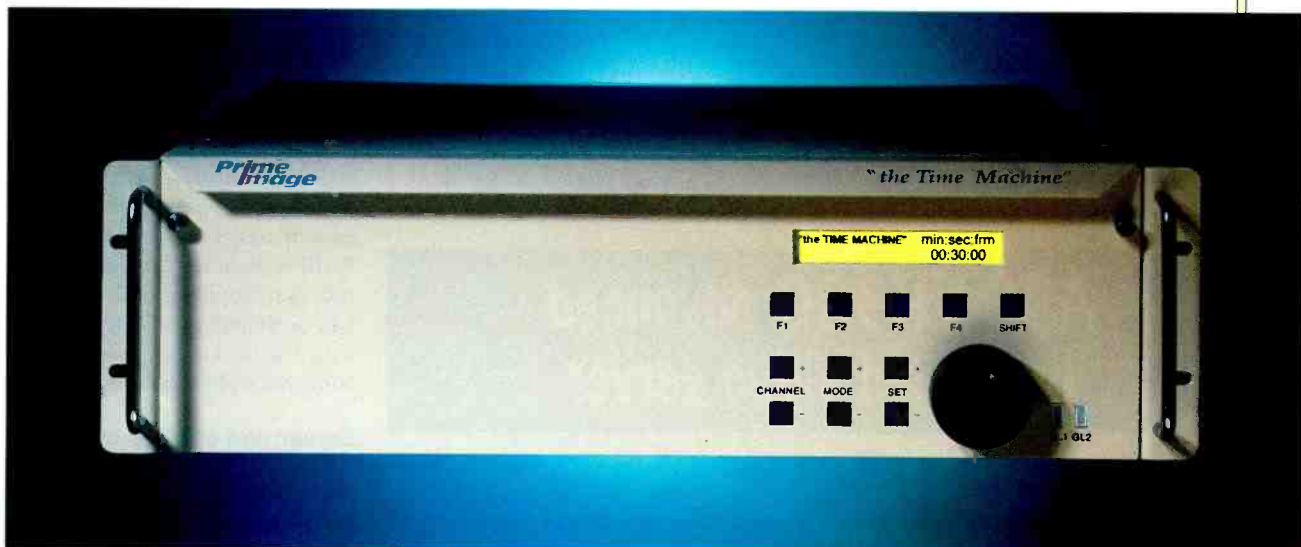

The Time Machine is a new, technological break through product, which reduces program time, to create commercial insertion time. it is a self contained, small 3U rack mountable unit which requires no data compression.

The Time Machine is capable of changing time without changing the pitch (frequency) of the video or audio programming. The Time Machine consists of a main frame which houses the memory and all of the electronics necessary for control of the video and audio-Time Machine storage. A maximum of

30 seconds of video and two channels of time reduction audio is available.

### **"the TIME MACHINE"** **features include:**

- Edit down long programs
- Emergency news break with no program loss
- Adjustable time reduction
- No data compression
- Fully digital
- Solid State

**Prime  
Image<sup>®</sup>**

The Digital Video People

Prime Image, inc., 19943 Via Escuela, Saratoga, California 95070  
(408) 867-6519, Fax:(408) 926-7294, Service: (408) 926-5177

Circle (32) on Free Info Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

material instantly and simultaneously accessible to every user in the facility. The technology eliminates the need for local buffers or data transfers from one set of disk drives to another.

The VR300 features ASC's Brilliant Image Compression, allowing each video segment to be digitized at a compression rate independent of the compression used for other video segments. Compression rates from 1.6:1 (mathematically lossless) all the way to 20:1 are selectable. By taking advantage of FC's high-bandwidth capabilities, the VR300 can support unprecedented channel and on-line storage capacities.


#### RAIDsoft

RAIDsoft is ASC's patent-pending software that manages the VR300's fault-tolerance mechanism. RAIDsoft eliminates the need for a RAID hardware controller, a

single point of failure found in traditional SCSI-based RAID systems. The software can even rebuild individual drive segments, as opposed to entire failed drives, dramatically reducing the time needed to repair a degraded RAID array.

The VR300 video server with all-Fibre Channel technology provides the unparalleled flexibility and reliability broadcasters need to make the transition to an integrated disk-based system. The VR300's innovative technology, advanced architecture and high bandwidth storage capabilities allow broadcasters to design a system that meets their needs — now and in the future. ■

*Todd Roth is vice president, research & development for ASC Audio Video, Burbank, CA.*

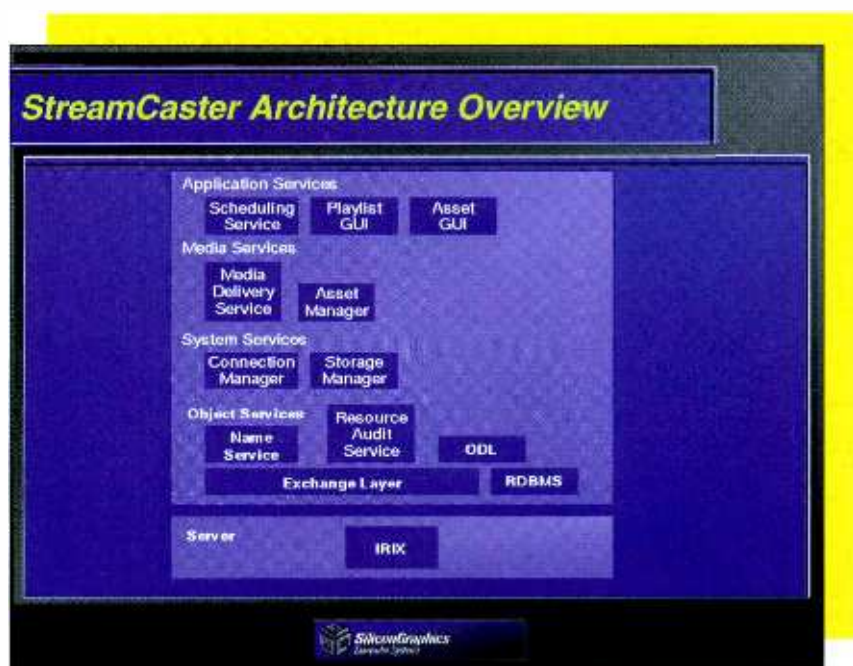

Silicon Graphics StreamCaster.

## Silicon Graphics StreamCaster

By Karl May

StreamCaster is one of several Silicon Graphics video server technologies developed for distribution of MPEG-2 video over digital satellite and digital terrestrial transmission systems. StreamCaster is a scaleable, multichannel playback video serv-

ing solution that enables the scheduled play-out of from 10 to more than 300 MPEG-2 streams. The server can store more than 1,000 hours of compressed media assets and has I/O bandwidth performance of 320Mb/s per controller.

## CONVERT COMPUTER GRAPHICS



## TO VIDEO



## RGB/Videolink® VIDEO SCAN CONVERTERS

Up to 1600 x 1280 pixel input

Analog output / NTSC, PAL,  
S-Video, CAV

Digital output / CCIR 601

Flicker filter

Autosync

Video overlay

Pan & zoom

Simple external connections



**SPECTRUM®**

A visual communications company™

950 Marina Village Parkway  
Alameda, CA 94501

Tel: (510) 814-7000

Fax: (510) 814-7026

E-mail: sales@rgb.com

<http://www.rgb.com>

Circle (36) on Free Info Card


Pro Football.

Hockey.

Big League Baseball.

Digital-S.

FOX picks another big winner.

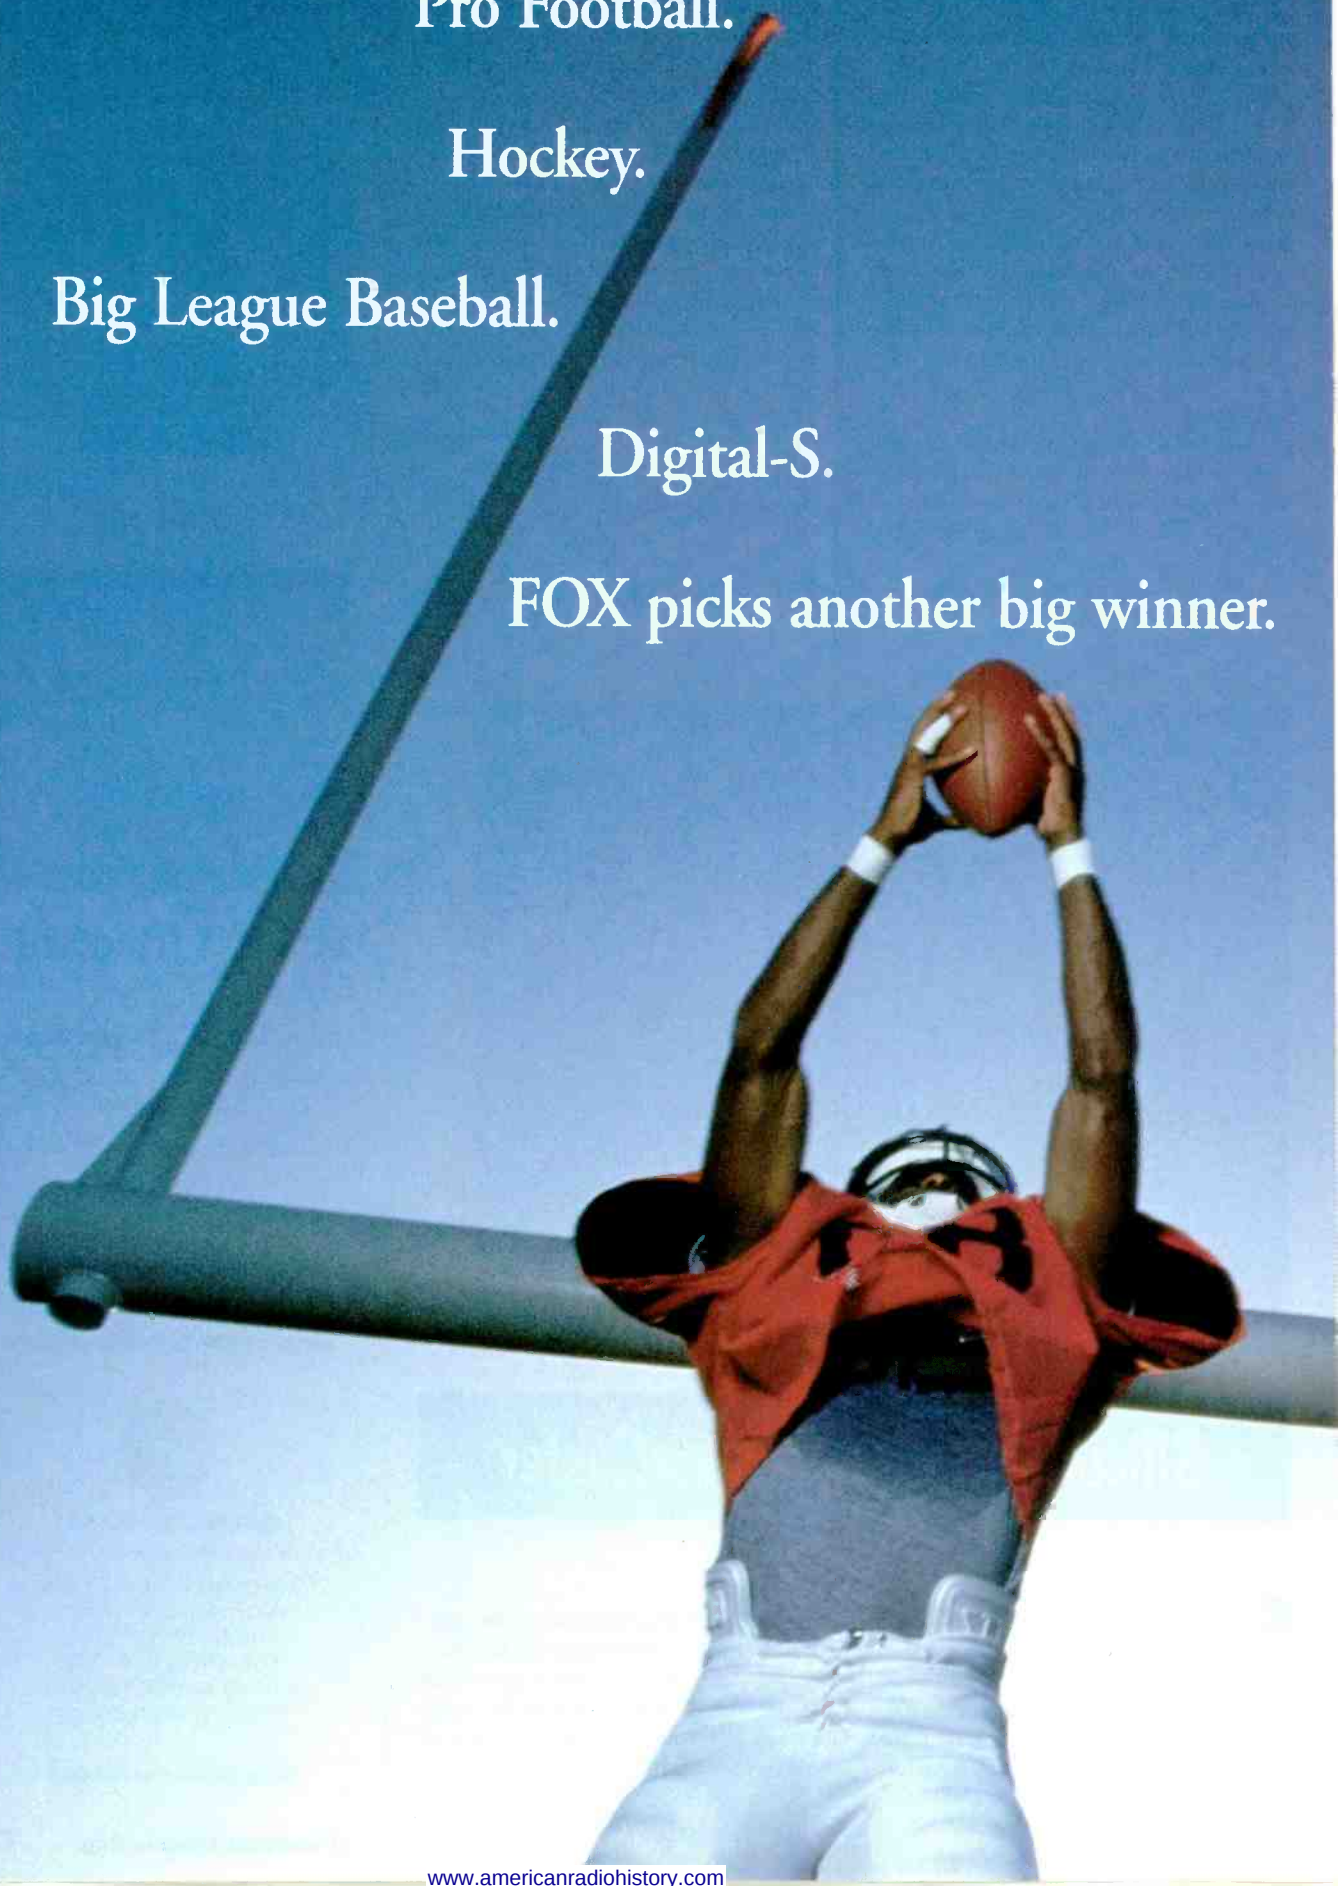



Fox has a history of picking winners. And, when it came to selecting a primary format for their in-house recording and post-production, they knew they had to select another star

performer. So, for their new 24-hour cable service, FOX NEWS Channel, they chose JVC's Digital-S. And the reasons are clear.

**PICTURE QUALITY.** Fox found the picture quality of Digital-S to be superior, even through multi-generation editing. Better than any analog system, better than any 4:1:1 digital system — it even rivals the quality of the most expensive 4:2:2 digital systems.

**AFFORDABLE PRICE.** Linking up to big time winners like Digital-S usually costs a lot of money. So Fox was pleasantly surprised when they learned how reasonably priced it was. Nowhere else can you find such exceptional picture quality and affordability. And, that's always a winning combination.



**AMAZING FLEXIBILITY.** Producers everywhere, prefer equipment that enhances their creativity. The same is true at Fox. The 4:2:2 digital signal processing of Digital-S is extremely flexible, and delivers the kinds of layering effects and keying that producers demand.

After considering all of the alternatives, only Digital-S satisfied Fox's most stringent requirements, making it the obvious choice. And, the affordability puts it in a class of its own. To learn why Digital-S should be your editing format of choice, visit our Internet web site at [www.jvc.ca](http://www.jvc.ca) or call 1-800-JVC-5825 and mention **Product Code 188 0**.



**JVC**  
PROFESSIONAL

Circle (37) on Free Info Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

The StreamCaster solution consists of a server platform, disk drives to store digital media content and output interfaces and the StreamCaster application software. Several hardware configurations are possible to support a range of reliability and price/performance goals. The servers are connected to disk drives that are used to store the digital media streams and can be arranged into striped volumes or RAID configurations.

### System architecture

The server is built on a layered architecture. On top of the hardware resides the IRIX real-time operating system and IRIS FailSafe high-availability software. The file system technology used is XFS, a 64-bit journaled file system that allows guaranteed specific transfer rates and durations for video files.

IRIS FailSafe connects two servers, designating one as active and the other as "hot" standby. FailSafe allows the two machines to share a common disk system, such as RAID, and will switch over to the standby server in case of the failure of the

active server's hardware or operating system.

XFS scales in performance with the server architecture and supports file sizes to nine million terabytes, file systems to 18 million terabytes and parallel dump and restore. XFS supports contiguous data through file system extents, allowing the creation of block sizes from 512B to 1GB.

### System components

The StreamCaster application software drives broadcast network applications, such as digital satellite services or terrestrial services, such as multichannel multipoint distribution services (MMDS), fiber to the curb (FTTC) or hybrid-fiber coax (HFC). StreamCaster has four primary components: asset manager, playlist manager, scheduler and operator administration. The friendly, easy-to-use user interface is Java-based, enabling the application to run on an intranet from any workstation or PC.

Asset manager installs MPEG-2 assets into the server, as well as displays, adds, deletes, edits and searches for catalog entries in the database.

Playlist manager creates, edits and deletes the scheduling information for the assets. The playlist may be generated locally on the server through a graphical users interface (GUI) or downloaded to the server from an external system.

Scheduler takes input from the playlist and executes the events, playing MPEG-2 media streams from the storage system to the output system. During playback, the MPEG-2 transport streams are transmitted via an asynchronous transfer mode (ATM) 155Mb/s OC-3c interface.

Operator administration facilitates a range of system administration functions, from monitoring service messages to network bandwidth. The server can be managed via the standard Simple Network Management Protocol (SNMP). Interfaces enable the interoperability with legacy or new external systems. ■

*Karl May is group manager for digital video systems, Silicon Graphics Inc., Mountain View, CA.*



## D100 NTSC DECODER



**A HIGH END DECODER  
WITHOUT THE HIGH END  
PRICE TAG**

**\$4950<sup>00</sup>**

- 5 MHz bandwidth
- 36 db subcarrier rejection
- 8 bit digital, adaptive comb filter
- NTSC and YC inputs
- RGBS, Y/R-Y/B-Y, YC outputs
- Pinnable sync on RGB outputs
- Digital control with recall
- Programmable filter weighting
- Optional remote control panel

**broadcast video systems ltd.**

40 West Wilmot St., Richmond Hill, Ontario L4B 1H8  
Telephone: (905) 764-1584 Fax: (905) 764-7438

Circle (52) on Free Info Card

#### ASC

Phone: 818-843-7004 Fax: 818-842-8945

#### AVID

Phone: 1-800-949-AVID Fax: 508-640-1366 [www.avid.com](http://www.avid.com)

#### EMC

Phone: 800-424-EMC2 (ext. 3622) [www.emc.com](http://www.emc.com)

#### HEWLETT-PACKARD

Phone: 800-FOR-HPTV Fax: 408-553-3001  
E-mail: [forhptv@vid.hp.com](mailto:forhptv@vid.hp.com) [www.tmo.hp.com](http://www.tmo.hp.com)

#### IBM

Phone: 914-766-3275 Fax: 914-766-3013  
[www.rs600.ibm.com/solutions/videoservers](http://www.rs600.ibm.com/solutions/videoservers)

#### PHILIPS BTS

Phone: 805-584-4700 Fax: 805-584-4710 [www.phillips.com](http://www.phillips.com)

#### PIONEER NEW MEDIA TECHNOLOGIES

Phone: 310-952-3065 Fax: 310-952-2990 [www.pioneerusa.com](http://www.pioneerusa.com)

#### QUANTEL

Phone: 203-656-3100 Fax: 203-656-3459  
E-mail: [quantel@quantel.com](mailto:quantel@quantel.com) [www.quantel.com](http://www.quantel.com)

#### SIERRA DESIGN LABS

Phone: 800-400-8002 Fax: 702-831-5710  
E-mail: [steve@sd.labs.com](mailto:steve@sd.labs.com) [www.sdlabs.com](http://www.sdlabs.com)

#### SILICON GRAPHICS

Phone: 800-800-7441 [www.sgi.com](http://www.sgi.com)

#### SONY

Phone: 1-800-472-SONY Fax: 1-800-SONY-022  
[www.sel.sony.com/sel/bppg/videostore/index.html](http://www.sel.sony.com/sel/bppg/videostore/index.html)

#### STORAGE CONCEPTS

Phone: 714-852-8511 Fax: 714-841-5201  
[www.storageconcepts.com](http://www.storageconcepts.com)

#### SUN MICROSYSTEMS

Phone: 415-969-1300 Fax: 415-473-7101 [www.sun.com](http://www.sun.com)

#### TEKTRONIX

Phone: 1-800-547-8949 Fax: 503-627-7275  
E-mail: [TekXpress@vnd.tek.com](mailto:TekXpress@vnd.tek.com) [www.tek.com/vnd](http://www.tek.com/vnd)

# MODULAR, EXPANDABLE PRO A/V SYSTEMS!

## Telect's Series 2000 Modular Frame\*

### 8-Watt Stereo Power Amplifier

- Volume & equalization control for stereo monitoring
- Balanced stereo input




### Audio & Video Distribution Amplifiers

- Stereo 1x6 or mono 1x12 configurations per module
- Video DA available with differential inputs & EQ
- Individual output gain control on front panel



### Composite D-to-A & A-to-D Converters

- Input 143 Mb/s (NTSC) or 177 Mb/s (PAL) analog or digital signal
- Monitoring, equalization, video gain & genlock included



**\*Compatible with most  
Software Controller Systems**


### Video Routing Switchers

- Single & multi-level switching systems
- Multiple configurations available
- Expandable systems up to 72x128
- YC, RGB, RGB/S, RGB/HV, YUV, NTSC and PAL signals
- User gain control from front panel



### IMMI Bus Converter & Memory Backup

- Provides computer access to IMMI Bus for command & monitoring communication
- Automatic updating of selected systems
- Maps routing configurations up to 256x256 interface
- RS-232 & RS-422 interface



<http://www.telect.com>



For more information & FREE product literature  
on our entire PRO A/V line call us at  
800.551.4567 • 509.926.6000 • FAX 509.926.8915  
E-mail: [pro-a/v@telect.com](mailto:pro-a/v@telect.com)

**Telect**  
CONNECTING THE FUTURE<sup>SM</sup>

# Video servers crossing the bridge to tomorrow

By Ken Freed

The progress of server development and deployment is like the advance of a humble servant struggling to carry a great burden across a rope bridge in the pale light of dawn. More than a heavy workload vexes the carrier. Too many masters drive him, and their conflicting visions constantly joggle the bridge with new demands. These masters may not be sure where they're going, the server sighs, but they sure are in a big hurry to get there!

Digital server technologies are being developed for every application from television to radio to the Internet. Each usage has different architectural requirements. Channel capacity, bandwidth and scalability may grow with declining costs under Moore's Law, but the standards still vary for video acquisition, production and distribution.

## Vendors speak out

The path of server evolution remains undecided, agree those speaking for a dozen server vendors, yet they identify trends and they articulate the issues that may decide which vision of the road ahead will command the video server left standing at the end of the bridge.

"The initial trend," says Jonathan Pannaman, vice president of engineering for Quantel, "was to see broadcast video servers as simple devices, like cache carts, but a number of facilities like CNN have started to break through this philosophical barrier by seeing the revolution that integrated server networks can bring to television."

"As broadcasters start to deploy video servers," says Alanna Dwyer, director of strategic planning for new media solutions at Digital Equipment Corporation, "they're asking for more features and more functionality, more ease-of-use. They're asking for scalability across the board, which means more channels, more output streams, all backed by more storage and faster access to more content."

"A strong trend I'm seeing this year," says Gil Press, manager of network storage marketing for EMC, "is the convergence of media servers and web servers with a graphical interface, like on the web, as the bridge to help with assets management in any facility with a growing digital library."

"The trend everybody is watching pretty carefully is having a more distributed architecture with video servers in high-speed loops," adds Jack Androvich, marketing manager for enterprise servers at Sun Microsystems. He's referring to Fibre Channel, the architecture positioned to compete with the large-server topology favored by IBM and its partners.

"People want a lot more channels than they can get from any single server," says Dan McGee, broadcast products research and development manager for Hewlett-Packard, "and Fibre Channel allows you to have tomorrow's channel capacity with today's technology."

"The real issue is the amount of on-line storage and the amount of near-on-line cache storage," say Don Lefebvre, a broadcast solution executive in the media and entertainment division of IBM. "With the rapid growth from two or four output streams to hundreds of output streams, a gigantic server can offer more storage in less space than a bunch of smaller servers linked together."

The stakes are enormous, says Tim Slate, storage products marketing manager at Tektronix. "Centralized storage may be right for some situations, yet a distributed topology will be easier and less expensive to scale up as time passes on. Even the smallest servers soon will have more channel and bandwidth capacity than today's largest servers as the line between them starts to blur."

"My big concern is server reliability," says Press. "You hear the talk about RAID, for instance, since you need to know

what to expect in case of failure, but you also need to know how to match a server's reliability to given applications."

"If you think about the whole video server market in terms of the three main functions of acquisition, production and distribution," says Richard Bauarschi, director of marketing for new media technologies at Pioneer, "the video servers' biggest inroad is in distribution. There are fewer servers available for production, and there's still no standard format for acquiring video and putting it straight into a server where it resides as a file folder that can be transported into an edit suit and worked on immediately."

And once the video is acquired, says Greg Estes, director of marketing for advanced entertainment systems at Silicon Graphics, "What we really need is asset management middleware, so a producer or news director can seamlessly browse assets created by different applications."

The key is to have customized video server solutions, Press says, "but this requires developing a set of common standards that support different types of video formats and compression schemes within the same server."

"Is there one server that can do it all?" asks Jerry Berger, manager of video server technology for the Sony professional products group. "If a total end-to-end solution for acquisition and production and distribution is what you want, MPEG-2 4:2:2 compression can support an integrated, interoperable system, but even here you have to remember that not all MPEG is created alike."

"Eventually," Slate says, "we need a server standard as universal as NTSC for all this technology to be accepted into the mainstream." Says Bauarschi, "I'm convinced market forces will cause all this to sort itself out."

"The question for anybody looking at buying a video server is whether they're looking at an isolated server or a full production system," says Stevan Vigneaux, director of broadcast industry marketing for Avid. "A video server with connections for the workstation may be exciting, but how does it integrate with the entire production system?"

"Customers are looking at consolidating operations to create cost efficiencies and improve effectiveness within their organizations, as always," Berger says. "Yet now they're looking at generating new revenue streams by offering new services. Interactive television in the home is the striving goal of the future, and servers are a key enabling technology for the interactive programming services."

"The expectation today is to deliver interactivity by integrating the Internet into video services as soon as the infrastructure allows," says Dwyer, "yet we still need the digital set-top boxes to deliver true video-on-demand and other ITV services."

The overriding deployment issue, claims Androvich, is the rate of adoption for new server technologies. "We need to work together and be patient. After all, we only just got FCC approval for DTV, which was like waiting for Godot, so we need to accept that it's not going to happen overnight. We also need to know it's going to happen."

"There's still a lot of shaking out required in server technologies and applications," says Pannaman, "and I'm concerned that the wrong choices could leave broadcasters with a bad taste. I'm hearing one of two attitudes toward servers at TV operations. 'I'm doing it this way, and I want to keep doing it this way,' or 'I've always done it this way, and now I want to do it differently.' So, when it comes to servers, a lot depends on how far broadcasters are willing to go and how fast they can let go of the past." ■

*Ken Freed is a technical writer specializing in cable and interactive television, and is based in Denver.*



# FUJINON ASPHERIC TECHNOLOGY




Our **AT** lineup: the lightest, sharpest zoom lenses in the field.


Even our toughest critics agree: Fujinon's proprietary AT has advanced the TV zoom lens state of the art more than any other breakthrough in the last 20 years. And now we've integrated AT throughout our line of hand-held and ENG-style lenses.

Lenses with AT are lighter, smaller, and better balanced than their conventional counterparts because they require fewer lens elements to deliver optimum performance. They are also optically superior, and deliver greater corner resolution, reduced distortion, and closer minimum focus distance.

You'll find AT only on Fujinon hand-held and ENG-style TV zoom lenses, because only Fujinon has developed the technology




*Spherical aberration causes a soft image, and requires multiple spherical elements to correct.*

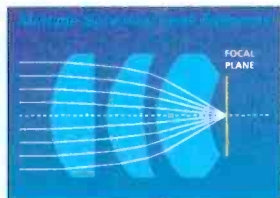

to manufacture the large AT optics that these lenses require.

There's an AT-equipped Fujinon lens for every application, from the A8.5X5.5 with its ultra-short MOD and extremely wide angle, to the ultra-long telephoto of the A36X14.5, and 11 other exceptional performers in between. Each one is rugged, and built to take the punishment of the field.

So whether you're shooting the news or capturing an endangered species, AT gets you a closer shot, with greater detail and in greater comfort than ever before. For more information, contact Fujinon at 1-800-553-6611.



*Aspheric Technology corrects for spherical aberration in a single element.*



FUJINON

Broadcast & Communications Products Division

FUJINON INC. 10 High Point Dr., Wayne NJ 07470-7434 (201) 633-5600  
FUJI PHOTO OPTICAL CO., LTD. 1-324 Uetake, Omiya City, Saitama 330 Japan;  
Phone: 048-668-2152, FAX: 048-651-8517, TELEX: J22885

**FOCUSED ON THE FUTURE**

Circle (39) on Free Info Card

# SDI headroom and THE DIGITAL CLIFF

**Digital systems  
operate in two ways:  
perfectly or not at all.**

**BY JIM BOSTON AND  
JIM KRAENZEL**

## THE BOTTOM LINE:

Digital systems' consistently high performance under a wide range of operating conditions may seem a panacea, but it can become a troubleshooter's nightmare. Digital paths give no indication of gradual degradation, so complete failure often comes with little warning. Growing experience has recently yielded some new methods of determining how "close to the edge" a digital signal path is running. \$



It is well-known today that digital signals are non-linear. To state the obvious, it is the "high" or "low" state of a serial digital signal along with its transition time that determines the state of a data bit cell in a serial digital bitstream. The transition area between the high and low states is undefined when determining the value of an individual bit. To maximize the chances of reliable detection, sufficient signal amplitude is required so noise or receiver inaccuracies don't cause errors, and small amounts of attenuation (e.g., 200 feet of cable loss) do not cause the high and low values to fall into the undefined middle area.

The transitions or "edges" between states are just as important. These transitions enable clock recovery from the bitstream in a self-

**Photo: Large digital routing systems such as this one are meticulously designed and, when properly installed, will provide years of trouble-free operation. (Courtesy of Sony and DIRECTV.)**

*Simultaneous on-air channels*

*Hours of online storage*

*Single points of failure*

*System has it all*



## ASC's **VR 300™** Broadcast Video Server

**ASC**

**See it working at NAB booth #9258 or call 818-843-7004.**

©1997, VR is a registered trademark and VR 300 is a trademark of ASC Audio Video Corporation.

**Circle (33) on Free Info Card**

[www.americanradiohistory.com](http://www.americanradiohistory.com)

# SDI headroom and THE DIGITAL CLIFF

clocking signal, such as SMPTE 259M. Without a clock at the receiving end, there is no way to know when to check the status of an arriving bit. An algorithm is used to scramble data before it leaves the transmitter to create as many edges as possible. This assists the receiver's PLL circuitry in generating a local clock synchronized to the transmit clock.

Error correction and error masking in modern digital equipment ensures that digital signals don't gradually degrade with increasing attenuation in the signal path as analog signals do. Instead, a digital transmission path continues to work perfectly up to the point where it suddenly doesn't work at all. This is the well-known "cliff effect." (See Figure 1.)

Serial digital interface (SDI) signals that are experiencing few or no errors are somewhere on the operational plateau shown in Figure 1. Operation remains uneventful until you reach the knee of this cliff, errors go rapidly from non-existent to enough to swamp recovery efforts, making the path unusable. As little as three extra feet of coax can be enough to send a signal over the cliff.

Many things determine where you are on that operational plateau. This article describes how to determine where you are on the plateau and how to stay away from the cliff. Although almost all the information presented can be applied to 4fsc composite signals (or most other bitstreams), this study centers on 4:2:2 component SMPTE 259M signals.

Although the SDI signal is used in a "digital" way, many "analog" attributes of the signal can be used to predict how close to the error cliff a particular path is. Figure 2 shows a typical SDI signal. The portion shown here is of three successive "1"s in a SMPTE 259M datastream.

## Bandwidth and signal requirements

The SMPTE 259M datastream changes state at the start of each bit cell if the

example create a true square wave (50% duty cycle), but the typical SDI signal with a variety of "1"s and "0"s will actually create *rectangular* waves (<50% duty cycles), which require a denser spectrum of harmonics to properly define. This means that a considerable amount of low- and high-frequency harmonics will be present in the SDI signal.

Consider also that many elements in the SDI signal still happen at traditional TV rates. Pairs of *start of active video* (SAV) and *end of active video* (EAV) timing reference signals occur at the horizontal line rate. The patterns encountered during the vertical interval still occur at the field rate. All of this ensures that considerable energy will occur at fairly low frequencies.

**Spectral analysis**

While a 6MHz bandwidth sufficed for analog video, serial digital video requires more than 50 times that spectrum. In short data paths, SDI harmonic content can approach 1.5GHz. Figure 3A shows the spectrum of a typical SMPTE 259M datastream.

## Spectral analysis

The weak link in most serial digital systems is the path from the transmitter in one device to the receiver in the next device. The physical layer used to transport the data between devices is comprised mostly of coax (although some connectors and perhaps a jackfield might also be included). Coax provides the greatest exposure to problems for a video datastream. It can be thought of as an infinite network of inductive and resistive components in series, with distributed shunt capacitance. This works out to be a low-pass filter whose poles increase in number and move closer to zero with length. Therefore, the longer

Moreover, the successive "1"s in that

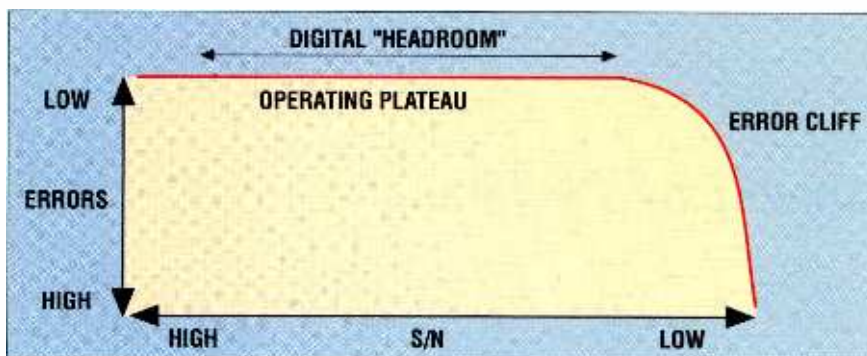


Figure 1. All digital systems experience the "cliff effect," in which performance remains optimal until S/N degrades beyond a certain limit.

bit cell has a data value of "1." This coding scheme is known as *non-return-to-zero inverted* (NRZI), which implies that the receiver needn't worry about the polarity (high or low) of the incoming bitstream. NRZI yields a constant high or low if a string of zeros is encountered, however, so a bit-scrambling algorithm is added.

The peak-to-peak value of SMPTE 259M should be 0.8V, and the *rise time* (or transition time) should be between 0.75ns and 1.5ns. If the signal's transmission path had infinite bandwidth and no group delay, it would appear as a perfect square wave — but no transmission path is ideal.

Figure 2 shows a typical SDI signal.

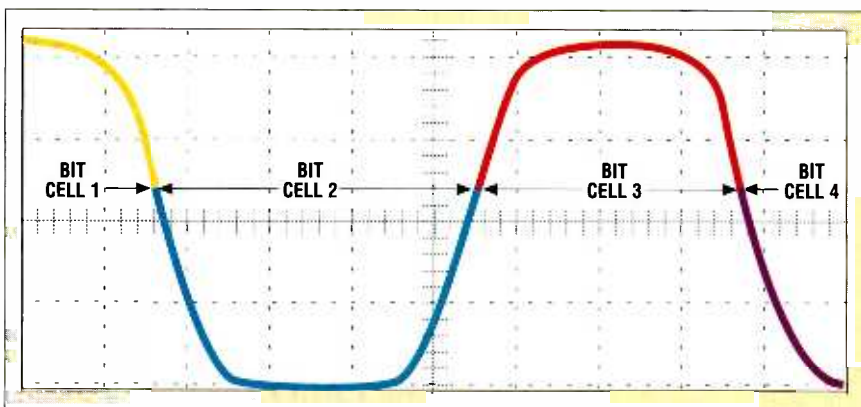


Figure 2. A portion of a SMPTE 259M datastream showing three successive "1"s.



Push **DV** to the max without maxing out your budget.

## The **DV10** dockable recorder.

Achieving maximum DV performance from your camera is now both easy and affordable with JVC's new DV10 — the industry's first dockable recorder based on and conforming to the DV standard.

Getting the best DV has to offer is as simple as docking the DV10 to JVC's KY-19 KY-27 series or to other professional cameras. With 4:2:1 digital quality, the DV10 is compatible with all professional DV derivatives, and is a sensible alternative if your budget prohibits you from considering JVC's higher performance Digital-S with its 4:2:2 digital processing.

The DV10 weighs in at a mere 2.2 pounds, and uses economical, widely available mini cassettes with 60 minutes of recording time. Its LCD readout displays VTR status, and it comes complete with composite and Y/C video outputs along with two XLR audio inputs. And, you can dock to almost any professional camera via an adapter available from the camera manufacturer. Most importantly, once docked, you have a perfectly balanced camera with easy-to-reach controls that's user friendly and ideal for field acquisition!

For affordability, just compare it to the other ways of going DV. And you'll clearly see how the JVC DV10 offers maximum DV performance at a minimum price. For more information on the DV10 and JVC's industry leading line-up of professional cameras, visit our web site at [www.jvc.ca](http://www.jvc.ca) or call 1-800-JVC-5825 and mention

**Product Code 138 O.**

**JVC**  
PROFESSIONAL

# SDI headroom and THE DIGITAL CLIFF

the cable, the greater the attenuation of all frequencies, with the rolloff increasing as a function of frequency.

Such attenuation with increasing frequency creates losses in the upper harmonics of the SDI signal, while its substantial low-frequency energy remains relatively strong. This causes the signal's square waves to look more like sine waves. Adding 1,000 feet of coax to the SMPTE 259M signal shown in

stant, which can lead to center conductor migration. This, in turn, can cause changes in the impedance along the length of the cable, especially at sharp bends, leading to reflections.

## Signal-to-noise measurements

One of the best ways to tell how far away a given path is from the error cliff is to determine the S/N ratio of one of the principle spectral elements in the SDI bitstream. The SMPTE 259M document states in its preamble that the standard applies until the fundamental frequency of the signal (135MHz for

4:2:2 component) has dropped 30dB in value. (Note that 135MHz is the fundamental of the SDI's square wave form, because each half-wavelength carries one bit of the 270Mb/s SDI [component] data rate. Each bit cell in Figure 2 represents one half of that square wave. The fundamental of a 135MHz square wave is a sine wave of the same frequency.)

Experience indicates that there are two spectral components whose S/N values are

useful in determining SDI signal health. These are the SDI's fundamental frequency and its third harmonic (405MHz).

Using a spectrum analyzer, the third harmonic band is easy to observe. (See Figure 3[A].) The second harmonic component should not be used to determine an S/N value even though it is easily identifiable, because its initial value can vary from one piece of equipment to the next. Some users focus on the 270MHz second harmonic, and mistakenly believe it's a carrier. Bit scrambling ensures that SDI pulse trains are rich in odd harmonics, and even harmonics (like 270MHz) are not well-represented.

At the output of most SDI drivers, the third harmonic starts approximately 35dB above the noise floor (vs. 45 to 50dB above noise for the fundamen-


tal). After approximately 1,000 feet of high-grade coax, the third harmonic is approximately eight to 10dB above the noise floor. As this signal approaches some 6dB above the noise floor, clock recovery becomes unreliable and errors start occurring.

As this lower limit (the error cliff) is approached, the error rate will rapidly increase from one per day to one per frame over a range of only 3dB. Actual tests have shown the SDI signal going from low error rates to unusable due to a signal level drop of only 2dB. This is equivalent to adding a little less than 80 feet of coax to the path. Therefore, any passive path segment that indicates a third-harmonic S/N value of less than 10dB should be re-engineered.

Remembering that the overall level at low frequencies will not be significantly affected, a time-domain display of the SDI signal will show reduced amplitude on short-duration pulses, but normal levels on longer (i.e., lower-frequency) pulses. (See Figure 4.) Note that the signal also will float away from ground, dependent on pulse duty cycles because of the large low frequency and DC components that aren't rolled off as quickly.

## Pathological testing

Another indication that you are near, but not yet at, the error cliff can be obtained through the use of so-called *pathological test signals*. As described earlier, an SDI receiver's circuitry must regenerate the clock signal. To help it do that, most ASICs devoted to receiving

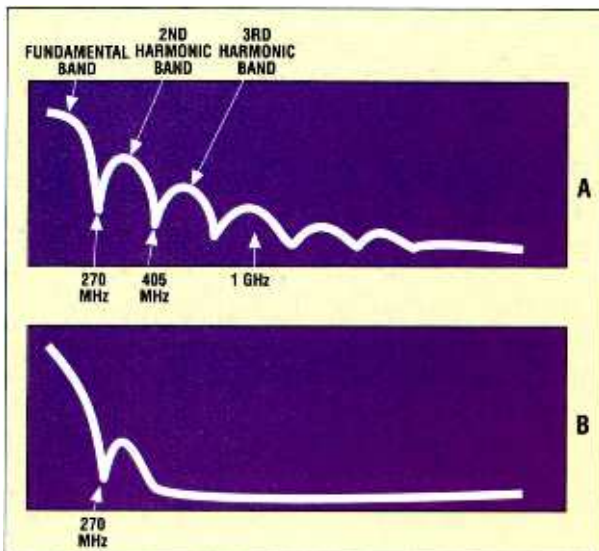

**Figure 3.** The spectrum shown in (A) represents a healthy SMPTE 259M (component) signal, while (B) shows the same signal after passing through 1,000 feet of coax.

Figure 3(A) makes its spectrum look like Figure 3(B). The signal in the latter graph is just about at the error cliff.

## Cable recommendations

To minimize this problem, coax that is robust at high frequencies is required in a digital facility. The center conductor should be solid copper (which offers better skin effect than stranded types), the shield should be braided (with a coverage figure near 100%), and the shield should also include a layer of foil (again for better skin effect at higher frequencies).

The dielectric should produce as low a shunt capacitance value as possible, which will also serve to decrease the high-end rolloff and increase the velocity of propagation. However, note that some dielectrics achieve this by using air pockets to lower the dielectric con-

Tests show the SDI signal goes from low error rates to unusable from a signal-level drop of only 2dB.

SDI signals equalize the incoming signal to boost the high frequencies, allowing easier clock regeneration and data-value determination. Pathological signals produce bitstreams that stress these circuits. Many devices produce these test signals,

# An Evolution In UHF Television Transmitters!



Now, Acrodyne delivers the benefits of tetrode technology for all UHF power requirements.

In 1980, Acrodyne pioneered UHF transmission by putting the first full service common amplification 5kW UHF TV Transmitter on the air. Since then, Acrodyne's tetrode-equipped UHF television transmitter product line has evolved to higher and higher power outputs. In 1995, we designed, introduced, and sold the first transmitter using the Diacrode®, a 60kW common amplification (80kW peak visual) double-ended tetrode device – the most powerful single-tube UHF transmitter available. Over the years, our users have logged over 2 million hours on these transmitters.

Acrodyne tetrode transmitters are high efficiency, high performance systems. The simple designs, combined with the tube efficiencies, long life (20,000 hours typical), and low costs, result in the lowest predictable transmitter operating costs compared to other technologies. And, the linearity of tetrodes also makes them ideal choices for future digital transmissions.

*Evolutionary UHF television transmitters... transmitters whose time has come.*

For complete details, contact Acrodyne today.

**ACRODYNE**  
*More Power To You.*

© 1995 Acrodyne Industries, Inc. All rights reserved.

Acrodyne Industries, Inc. 516 Township Line Road, Blue Bell, Pennsylvania 19422 • Phone: 800-523-2596 / (215) 542-7000 Fax: (215) 540-5837

Circle (40) on Free Info Card  
[www.americanradiohistory.com](http://www.americanradiohistory.com)

# SDI headroom and THE DIGITAL CLIFF

including some digital VTRs.

One common pathological signal stresses the clock regeneration and the equalizing circuitry by producing values for C and Y that force SDI bit-scrambling circuits to produce a run of 19 zeros and a single one approximately every frame. With NRZI coding, the single one ensures a polarity reversal for the next run of 19 zeroes. This stresses the equalizer circuitry in the receiver by providing a large DC component "blast" every so often. The fundamental of this signal is at 13.5MHz, which adds to the low-frequency energy component.

Other common types of pathological signals have C and Y values that produce runs of 20 ones, followed by 20 zeroes periodically. This produces edges at only a 13.5MHz rate, which is  $\frac{1}{20}$  of the optimum zero-crossing rate. This stresses a receiver's clock recovery circuits by making the PLL "coast" for long periods of time. It should be understood that there are literally thousands of possible Y and C combinations that can produce pathological bitstreams.

Experimentally, results show that a path will fail with a pathological signal at received levels 2dB higher than where a non-pathological signal will fail. Therefore, pathological signals can help determine whether an SDI path is near the error cliff.

## Jitter

Jitter is the time difference between

when the next transition in the data-stream *should* occur and when it *actually* occurs. SMPTE RP-184 is the document that covers the suggested method for measuring jitter in a 259M bitstream. The location of appropriate crossover points can either be determined by the previous crossover (PLL internal closed-loop control) or by an external reference signal. Jitter is caused mainly by a transmitter's crosstalk, signal saturation characteristics and its power supply, plus any

Patchfields and mismatched connections are common causes of serious reflection problems.

jitter that was present in the parallel data before it was serialized. (Most digital circuits process digital video as parallel data and only serialize it immediately before transmission.)

The PLL clock circuit in the transmitter should also have a critically damped transient response so that it slews to a corrected frequency quickly without any overshoots (called *overdamping*). Invariably, the PLL will be underdamped at certain frequencies of jitter, and thus, the PLL response will ring at those component frequencies.

If an oscilloscope is used to measure

the signal in the time domain by looking at zero crossings, incorrect conclusions will be gathered about the amount of jitter present. The time base (scope sweep rate) will act as a comb filter to cull out certain frequency components of the jitter. This is because various jitter frequency components are only happening at certain rates, and the scope is not looking at all bit cells. If we have a scope triggering on every 10th bit cell, we will not see the  $\frac{1}{10}$ th jitter component at all. Conversely, some jitter components will be seen at double their actual amplitude.

One accurate way of measuring jitter is to extract the clock and phase-demodulate (or discriminate) it. This is the only time that part of the SDI signal should be considered as a carrier. Once the clock — and its jitter — have been regenerated, the clock can be thought of as an FM signal with the jitter information as its payload. The baseband amplitude of this demodulated signal is the relative jitter. Some test equipment claims to take this approach, which allows a bar graph or gas gauge-type display that's easy to read.

Other test equipment uses the approach recommended in RP-184, which extracts a clock that is divided by some amount and used to trigger an "eye pattern" display. The divisor is typically the same value as the word size (usually 10 bits). This method will mask any word-related jitter, which is usually quite small.

The jitter components of frequencies above 10Hz should have less than 0.5ns of time-base jitter. The jitter components with low frequencies (generally called *wander*) could have errors as large as 6ns. Therefore, trying to deduce the jitter while looking at the total aggregate jitter is meaningless.

## Reflections

Because it takes  $1.24\mu\text{s}$  for a bit to propagate down 1,000 feet of Belden 1694 coax (velocity of propagation 82%), and a 3.70ns-long bit cell occupies approximately three feet of coax, there are 335 bit cells in 1,000 feet of coax at any given time. The same length of Belden 8281 (velocity of prop-

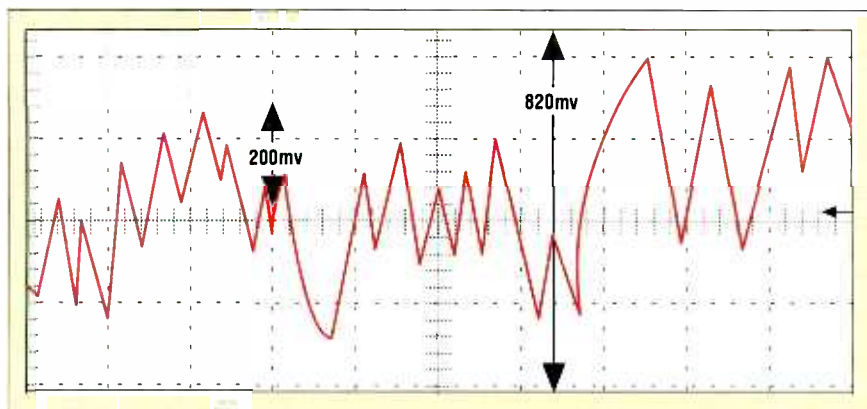


Figure 4. Time-domain display of an SDI signal that has passed through 1,000 feet of coax. Note lower amplitudes on shorter-duration pulses due to high-frequency attenuation by cable.

Continued on page 119



" MOSES PARTS THE RED SEA. TONIGHT AT 10. "

**DIGICART/II. THE VOICE OF MASTER CONTROL.** No wonder it's used by virtually every major television network in the world. Fact is, DigiCart®/II is the industry standard for playback of bumpers, voice-overs, stingers, and effects. Nothing else organizes, archives, and instantly retrieves more than 10,000 sounds with digital quality and precision. It's networkable, uses both hard disks and removable media, and supports both fully linear digital audio and Dolby® compression. With programmable playlists, full GPI, and serial control, DigiCart/II is your best insurance against dead

air, missed cues, and make-goods. So test drive a DigiCart/II in your facility at our expense. Call today and we'll send you one tomorrow.

DigiCart/II

*360 Systems*  
PROFESSIONAL DIGITAL AUDIO



If you're a call-letter station, you can try DigiCart/II for 10 days with no obligation. If you decide to buy it, we'll arrange your purchase through one of our authorized dealers. Call (818) 991-0360 or fax (818) 991-1360 today.

e-mail: [info@360systems.com](mailto:info@360systems.com) • web: [www.360systems.com](http://www.360systems.com)

Test offer good in the continental US and Canada only. Test offer expires March 31, 1997. 360 Systems and DigiCart/II are registered trademarks of 360 Systems. ©1996 360 Systems

Circle (41) on Free Info Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

# Digital effects SYSTEMS:

Moving to software-based open systems



**Dedicated hardware is still the fastest,  
but software is becoming more flexible.**

#### THE BOTTOM LINE:

The ability to do digital video effects within a production is no longer an option. Whether the effects are accomplished using dedicated hardware or software within a standard platform is no longer an issue. The issue is the ability to accomplish a range of effects in a cost-effective manner within a variety of production environments from desktop to on-line to off-line. \$

BY DAVID HOPKINS

**F**or nearly 20 years, the digital video effects seen on television have had a major impact on the video production process. As digital effects technology has grown, so have the appetites of producers to create the latest and greatest digital magic.

Early digital video effect systems (DVEs) required entire racks of equipment and provided simple 2-D re-sizing. During the '80s, the first 3-D DVEs were introduced. Now, they have become fixtures in virtually every edit suite and production room. Many have even found their way into master control. Whether it's a subtle adjustment of color tint or a dynamic quad page peel, digital processing of video data is universally used to correct "mistakes" and add creative impact to video images.

**Photo:** Four-way real-time page peel with live video on both sides by Pinnacle DVE.

**Telex®**

**B** E H E A R D I N T H E C R O W D

# UHF Diversity Portable Wireless 2-Channel Tone-Coded Squelch

## **The Telex® ENG-500**

Coming through loud & clear.

We heard you wanted premium audio quality and superior performance without interference. Okay, you've got it. In one rugged, portable system. The new Pro® ENG-500 from Telex. The first wireless microphone system that combines the benefits of a crystal-controlled system with the flexibility of real 2-channel frequency agility. This UHF true-diversity receiver features Telex's patented Posi-Phase™ Auto-Diversity and Posi-Squelch™ Tone-Code plus Auto-Suppression and is compatible with the Anton Bauer® Gold Mount system.

To order or for more information, contact your Telex dealer today, or call (612) 887-5550.

Web page: [www.telex.com](http://www.telex.com), E-mail: [pro.sound@telex.com](mailto:pro.sound@telex.com)

Circle (42) on Free Info Card



# Digital effects SYSTEMS:

Moving to software-based open systems

## The beginning

Digital special effects got started in the late 1970s with the Vital Squeeze and was followed by NEC's DVE and the Quantel 5000. These were all 2-D boxes able to compress (some could also expand) and position live video. By 1980, special effects were essential to post-production, and the Quantel 5000 was the device of choice.

In the early '80s, 3-D rotation with perspective was introduced by Ampex in the ADO. Soon, the ADO had replaced the Quantel 5000 as the most popular DVE, despite the fact that it cost close to \$200,000. By 1986, 3-D manipulation was essential for high-end post-production, while 2-D effects remained popular with the mid-level broadcast, business and industrial markets.

After 3-D manipulation, new innovations became possible: recursive effects,

drop shadows, warps and the page turn. By the end of the decade, these capabilities had become de rigueur for high-end post. Mapping a 2-D video signal onto a 3-D object followed soon after. Systems like Sony's System G, Microtime's Impact and Pinnacle's DVEator brought users a new level of creativity by allowing video to be mapped onto 3-D objects in real-time.

Today, the buzz words for broadcast-level DVEs are 10-bit processing and multichannel effects. The number of bits and sampling points define the "approximation" of the video signal in its digital form. An eight-bit video signal resolves the video component to 256 discrete steps, while a system using 10-bits provides 1,024 discrete levels of resolution.

The use of multichannel DVEs is widespread. Most sports and news programs have segments that require two or more channels of digital effects. In post-production work, these can be created in a single-channel system, using multiple passes — something that isn't possible in a live environment.

Until now, it's been expensive to in-

corporate multiple channels of 10-bit processing capability into a DVE. It's now possible to get a full-blown, broadcast-quality 3-D DVE on a single PCI card at a small fraction of the price of earlier systems. Performance that costs more than \$50,000 10 years ago can be had for less than \$10,000 today.

In the mid-'80s, the move from task-specific dedicated electronic boxes began. Rather than using specific processors and operating systems, manufacturers turned to standard PC platforms to run dedicated 3-D hardware. The advantages of a common and affordable platform, coupled with standard software development tools, brought enormous cost savings. As an added benefit, the ability to upgrade features and functionality through software-only updates made this approach attractive.

## Software effects

While digital effects hardware technology has advanced, so has the use of software-only DVEs. Typically used for still images or rendered effects, the features of software-only systems are impressive.

# Put SHOT Director™ In Your Studio



Using animation software, it's possible to map video onto complex 3-D shapes. The disadvantage is the rendering time. Each frame must be individually rendered and recorded. The results can be stunning, but once recorded, any changes require re-rendering the entire animation. As PCs and Macs became faster, these effects were quicker to create, but could still not be applied to "live" video feeds in real-time.

Discounting the time involved, the software approach is the least-expensive way to manipulate video. Digital video data is read from disk, decompressed and then processed by the unit's CPU. Because programs can be written to manipulate video pixels in infinite ways, there is no limit to the type of effects that can be generated.

The key drawback to software effects is speed. A single frame of video consists of almost 400,000 pixels. With each pixel being two bytes, the processor needs to manipulate almost 1MB of

data per frame of video, and the numbers rapidly add up. A single second of video consists of 30 such frames, with the total data rate ranging from 21MB/s for NTSC to 25MB/s for PAL. Because many effects involve two video images

requiring the processing of many pixels just to produce one output pixel. Without them, the resulting effect will look blocky and can have aliasing artifacts.

Generating 3-D shapes from a video signal that is inherently 2-D requires highly sophisticated processing. To make matters worse, real-time requirements mandate unusually powerful processing with extremely high bandwidth. It's not unusual for a 3-D DVE to perform in excess of 20 billion operations per second, while accessing data at rates up to a GB/s.

Although CPUs have made great strides, the limit is bus and system bandwidth. As a result, a page turn effect can be 100 to 200 times slower than real-time.

In other words, a one-second transition will take two minutes or more to produce. This rendering time may seem small, but it can add up over the course of an editing session. Moreover, the non-interactive nature of the process can limit creativity.

Because processing doesn't occur in



**Editor Mike Dennis, seated at one of Realtime Video's post-production suites, considers digital effects equipment required tools when he's responsible for the results.**

the problem becomes doubly difficult.

Picture quality can also be a problem for software-based effects. Producing top-quality effects requires signal processing techniques, such as subpixel positioning, interpolation and filtering. These are time-consuming algorithms,

# And Get A Grip On Camera Control.

CameraMan® SHOT Director, from ParkerVision, puts control of the studio environment right in your hands. One fully integrated unit gives you everything you need to operate and adjust up to 16 CameraMan



*One SHOT Director™ allows you to control up to 16 1-chip or 3-chip CameraMan® cameras.*

cameras. Joystick, LCD display, CCU control, and more – it's all there. Now with less equipment and manpower, you can run a fully functional, multi-camera studio. SHOT Director is the beginning of ParkerVision's CameraManSTUDIO™ product line and is fully upgradeable to meet

your future needs. Get a handle on all that SHOT Director can do. Call

1-800-532-8034 or 1-904-737-1367 to schedule a test drive today.

CameraMan® **SHOT Director**

#### Features:

- Menu-driven LCD display with real-time status indicators
- Speed-adjustable joystick pan, tilt, and zoom
- On-the-fly CCU control for up to 16 cameras
- Patented *autoTRACK*™ technology\*
- Up to 15 *autoTRACK* Views™ \*
- Auto iris
- Focus control
- Store and recall location presets
- Serial RS-485 system communications
- Inter-camera distances of up to 2500 feet

\*On *autoTRACK* models.

® Registered Marks of ParkerVision, Inc. ™ Trademarks of ParkerVision, Inc.

**PARKERVISION®**  
Visibly Better.™

Circle (43) on Free Info Card

Visit our website at <http://www.parkervision.com>

[www.americanradiohistory.com](http://www.americanradiohistory.com)

# Digital effects SYSTEMS!

Moving to software-based open systems

real-time, software effects must be recorded back to disk before they can be played back. This also increases the total processing time, while taking up more disk space.

Non-linear editing systems make use of these software DVEs. However, because most users prefer not to pause during the creative process, many systems offer the option of hardware DVE for real-time effects.

## The hardware approach

One solution to the slow processing of software effects is using dedicated hardware. Unlike the CPU, these devices don't need to be general-purpose, and can be made as fast as desired. They can keep up with the input video data and process pixels in real-time allowing direct recording to tape.

The traditional drawback to the hardware solution has been the cost of the additional circuitry needed to process video. However, with the advent of low-cost, high-density custom ICs and ASICs, the premium has come down substantially. Today, clever implementation and large-scale integration has allowed these systems to shrink in size and cost.

## The open systems approach

As PC software has evolved, the advantages of an open systems approach also have increased. Standard Windows-style interfaces provide a familiar operating environment. Easy connectivity brings versatility to users, with the ability to copy sequences and graphics from one DVE to another and interface seamlessly between DVEs and still-stores or other graphics devices. Standard networking is useful for integrating different hardware tools. The interconnection of different devices through a standard protocol allows transfer of data digitally.

Although video is still the main source

for images, the ability to incorporate material created on a diverse range of systems adds to creative flexibility. BMP, TGA and TIFF file formats, for example, can all be imported into open systems. Even the web can be used as a transmission means for bringing images from around the world into a live broadcast.

## Design issues for open systems

When designing an open system, the first step is to choose a software and hardware platform. The PC has become a powerful and cost-effective production platform. In addition, the strength and acceptance of the various Windows operating systems makes them an obvious choice on which to run a DVE control system.

The main issues then revolve around



Pinnacle Genie, a 3-D digital effects system on a single PCI card.

incorporating the necessary hardware into the PC platform. Hardware can be connected externally to the control system, although this can result in the loss of some of the PC's speed benefits. This isn't a problem on the control side, even a slow 386 computer is capable of running a user interface and computing spline points. It is a problem in the transfer of graphic elements within the system. These graphics may be used as part of special wipes or simply recalled as part of an effect.

If hardware is incorporated into a PC environment, there are design issues regarding size and power consumption. Also, PC buses aren't inherently fast enough to process video at the resolution and frame rates required for real-time 3-D manipulation of multiple channels of full-bandwidth, uncompressed video.

The adoption of the Movie2Bus (de-

veloped by Matrox) provides a standard means to pass video between boards in a PC environment without using the PC bus. The PC bus can then be left to deal with the control issues for which it's ideal. ASICs and large field-programmable gate arrays have helped reduce the size and increase the processing power of hardware systems. This allows the latest generation of DVEs to incorporate multiple channels of video within a single system.

Another element in designing an open systems platform is the customization for the particular requirements of a broadcast DVE. The unit must be able to integrate into existing facilities and it should be rugged in construction to meet the needs of the user. DVEs need to be rack-mountable and resilient to

withstand bouncing around in OB vehicles. Standard connectors (BNCs for video, RS-422 for control, GPI connection and peripheral control ports) have to be added to make installation and integration easy.

Once the hardware is designed, the control element requires careful attention. The PC environment relies on its GUI, mouse and keyboard. However, traditional video users still want the availability of a dedicated

control panel. Even with the PC, it's possible to bring together the best elements from both approaches. The GUI provides a fast and convenient way of seeing the DVE's status, while a dedicated control panel provides fast access to controls for adjustments. With multichannel DVEs, the amount of information required is substantial. Using small, limited displays can hinder efficient use, but a GUI allows the information to be displayed in a variety of formats.

As DVE systems move from dedicated hardware to a more software-based and open systems approach, the benefits of higher quality, more flexibility and less-expensive DVE technology can be enjoyed by all. ■

*David Hopkins is DVE business manager for Pinnacle Systems, Inc., Mountain View, CA.*




## **CBS USA**

*equipped two new remote units with CS2000 systems to broadcast live sports and entertainment programs.*



## **Lin Productions USA**

*provide exclusive live remote broadcast for a major league baseball team, and other independent broadcast projects.*

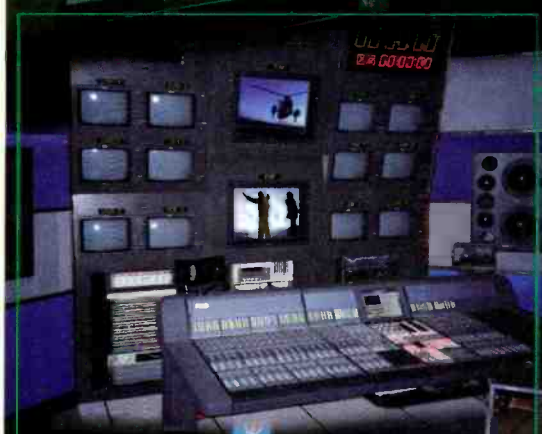

## **CCTV China**

*uses Euphonix consoles in five studios across China for music recording and live broadcasting.*



## **Channel 7 Australia**

*uses eight Euphonix systems throughout their network for studio and remote, broadcasting and production.*

# **Q: Why Are Euphonix Consoles the Choice of More Broadcasters Worldwide?**

# **A: Because they...**

## **...eliminate down time.**

The Euphonix CS2000 Digital Control Audio Mixing System is the only broadcast audio console that can be completely reset in less than 1/30 of a second with the push of a button. Use it directly On-Air for multiple sets, as presets for back-to-back live or taped shows, or to instantly reset for a recurring show.

## **...require less space.**

The CS2000's compact digital control surface fits into the tightest control rooms and remote trucks. A 40 fader console with full facilities is less than 5 ft. / 1.5 m. long! The audio electronics can be remotely located to keep the audio control booth cool and quiet.

## **...are prepared for the future.**

Ready to meet the audio demands that HDTV will create, Euphonix HyperSurround™ provides stereo and surround panning from every channel for all surround sound formats - which can be added even after installation, "future proofing" your investment.

## **...deliver the best sound quality and highest reliability.**

The CS2000 has superior sound quality with its analog signal paths, and complete reliability with the combination of analog circuitry, mature software and modular hardware.

**For more information on Euphonix digital-control audio mixing systems for On-Air, Remote, Production, and Post Production, contact the Euphonix sales office nearest you.**

Circle (35) on Free Info Card

## **Broadcast On-Air and Production mixing with the CS2000**



**Headquarters**  
(Palo Alto, West US)  
220 Portage Avenue  
Palo Alto CA 94306  
Tel: (415) 855 0400  
Fax (415) 855 0410

**Los Angeles**  
(West US & Int'l)  
11112 Ventura Blvd  
Studio City CA 91604  
Tel: (818) 766 1666  
Fax (818) 766 3401

**New York**  
(East US)  
2 West 45th St Suite 605  
New York NY 10036  
Tel: (212) 302 0696  
Fax: (212) 302 0797

**Nashville**  
(Central US)  
1102 17th Ave Suite 202  
Nashville TN 37212  
Tel: (615) 327 2933  
Fax: (615) 327 3306

**London**  
(Europe)  
6 Berghem Mews, Blythe Rd  
London W14 0HN  
Tel: (171) 602 4575  
Fax: (171) 603 6775

**Euphonix**  
digital control audio systems  
Web site: <http://www.euphonix.com>

**SPECTRAL**  
A EUPHONIX COMPANY

Suppliers of digital audio workstations

Toll Free: 800 407 5832 Web site: <http://www.spectralinc.com>

# The new digital CAMERAS



Ready to see the 21st century?

BY KEN FREED

## THE BOTTOM LINE:

The future direction and pace of digital camera development will determine the variety and quality of video acquisition. That's logical, yet the process may not be a smooth dolly zoom shot. The digital cameras we'll use in 2001 to broadcast the fireworks on New Year's Eve, will offer performance capabilities rivaling analog video at least, even if not yet capturing the look and feel of motion picture film emulsion. \$

**T**he portable cameras available in the next two to four years, according to manufacturers, will be more flexible and reliable. The familiar camcorder may give way to dockable portable and studio cameras. And the digital cameras of tomorrow will be switchable on-the-fly from 4:3 to 16:9. Sound like a tempting way to capture images?

Key technology issues remain unresolved. Tomorrow's portable cameras will be dockable for adapting to competing image recording formats because of the variety of recording formats.

Says Larry Thorpe, vice president of acquisition systems for the Sony Business and Professional Group, "Broadcasters are still looking to make this transition to high-definition digital television. When they decide to acquire DTV cameras, what cameras will they choose? What we're hearing from our customers is that they already get terrific performance from the

**Photo:** New studio lighting, like this modular lighting system from Videssence, is often a good reason to replace old studio cameras.

# Video necessity ... not "accessory"

## INTERACTIVE 2000™



### POWERCHARGER

The **NEW** Anton/Bauer InterActive 2000 PowerCharger system redefines performance and value in video power. This totally new *modular power system* can be economically expanded with a wide range of options never before available. Each PowerCharger is an advanced charging system and a DC power supply for camera power from any AC mains source.

InterActive 2000 PowerChargers are fully compatible with all Anton/Bauer Logic Series batteries utilizing an enhanced program of InterActive charge technology. Both the two and four position base PowerChargers can be expanded to charge up to six or eight batteries. An LCD display, standard on all models, provides instant access to all critical battery data. The modular design provides for addition of an internal battery diagnostic module as well as the selection of a 40 or 70 watt power supply.

The PowerCharger can perform the functions of up to *three* conventional devices at a fraction of the cost. Its sleek, lightweight design makes it possible to carry a PowerCharger and batteries in a notebook computer case. And upgrades are easy as adding a peripheral or memory to a computer.

Today a portable power source is not an accessory. Its selection requires the same careful evaluation of operational features, performance and value as every other primary equipment investment.

***Anton/Bauer InterActive 2000 PowerChargers. Necessities for video power.***

**antonbauer**

***The worldwide standard***

For information call (203) 929-1100 or fax (203) 929-9935

Circle (44) on Free Info Card

# The new digital CAMERAS

existing cameras.

"They're always asking for more and more sophisticated signal processing along with more control over creativity. Users also want support for multicamera operations, with high-speed distributed microcomputer controls, so fewer people can operate more cameras."

"The biggest problem in the conver-

sion to digital TV," contends Bill Sturcke, digital camera product manager for Panasonic Broadcast and Television Systems, "is that the infrastructure has to change so radically broadcasters are not sure how long it will take to get caught up. A new studio camera now sells for up to \$100,000. But what will be the final cost of new HDTV cameras? And what will be the total cost of studio implementation to take full advantage of the HDTV cameras? This is a difficult time for broadcasters. If they buy a digital camera today, when will it become obsolete?"



Hitachi PW2000.

## Performance capabilities

"As digital camera technology progresses," says Greg Pine, vice president in charge of cameras for Philips BTS, "many people feel that more is better. The bigger question is how much is enough?" "The market cry has been for digital because of the assumption that digital is better," says Jerry Cohen, camera products marketing manager for JVC Professional Products Company. (JVC cameras with remote-control heads, linked by triax cables, broadcast the Super Bowl.) "But the challenge for digital cameras has been trying to make their raw performance equal to analog or even film. In terms of characteristics, such as artifacts and noise and drift, until recently, the performance of digital cameras has been below that of their analog cousins.

---

"But the difficulty with digital cameras has been trying to make their raw performance equal to analog or even film."

---


"Today, however, it's possible to have digital cameras with the same performance as analog or perhaps slightly better. And we still can't capture the dynamic range of film. Even with these improvements, we need to take giant steps, not the baby steps taken so far."

More details are offered by Alan Keil, vice president of engineering for Ikegami USA. "The wide availability of improved detail enhancement, color matrixing, gamma correction and oth-



## Get it done fast with Hannay cable reels.


- One or Two Person Transport • Custom XLR & DNC Connector Patterns
- Fast Manual Rewind • Lightweight & Stackable



**Hannay Reels**  
The reel leader.

553 State Route 143, P.O. Box 159, Westerlo, NY, USA 12193-0159 • Phone 1-518-797-3791 • Fax 1-800-REELING • www.hannay.com

Circle (45) on Free Info Card

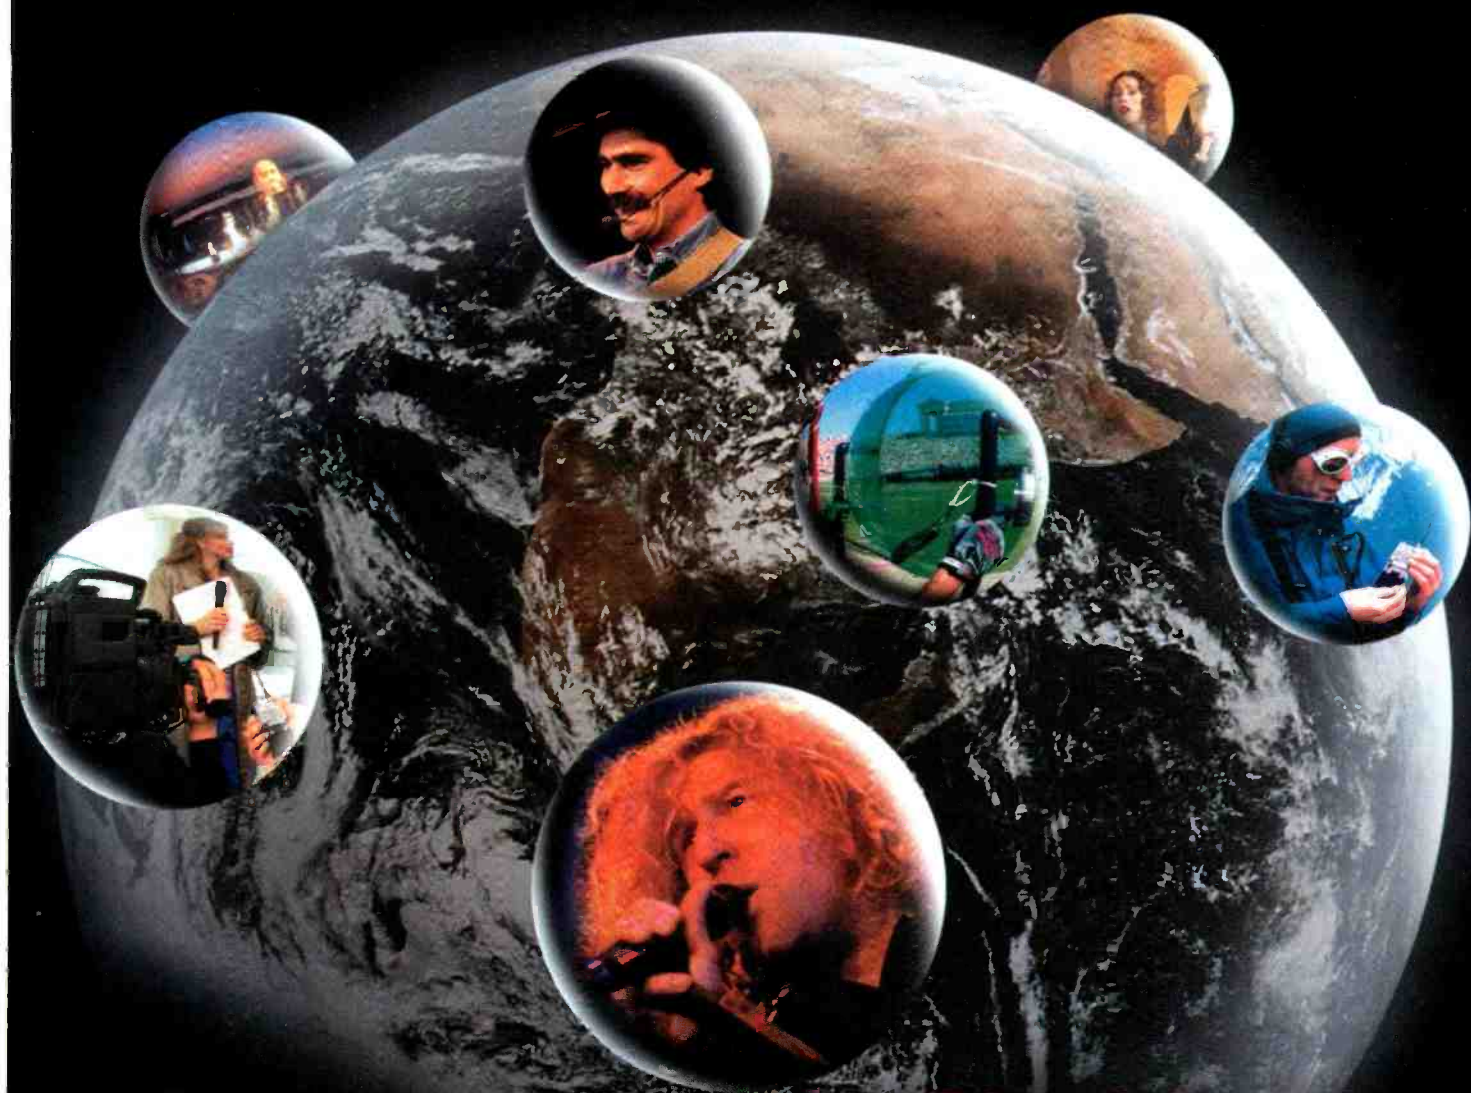

# Freedom, Around The World

No matter where you are on earth or what you do, there is one thing you can count on: Sennheiser Wireless. It delivers the most natural and transparent sound ever transmitted. Phase-locked loop (PLL) frequency synthesis provides frequency agility and stability, so that you can easily adjust your equipment to local RF conditions. Advanced transmitter battery management systems even allow remote status indication. And, our HiDynPlus™ noise reduction system yields tremendous signal-to-noise ratios. Only Sennheiser offers real-time computer monitoring and remote control of all receiver functions.

Only Sennheiser provides service facilities worldwide. Free yourself with confidence. Count on Sennheiser.

Visit us at NAB Booth #6760

## RF Wireless Systems



SENNHEISER ELECTRONIC CORPORATION

67 STA DRIVE, P.O. BOX 987, OLD WYME, CT 06371 • TEL: 203-434-9190 FAX: 203-434-1759  
 CALIFORNIA: 4116 WEST MARGOLIA BLVD., SUITE 100, BURBANK, CA 91505 • TEL: 818-845-7366 FAX: 818-845-7140  
 MEXICO: PALENQUE NO. 663, COL. NARVARTE, C3600 MEXICO, D.F. MEXICO • TEL: (5)-605-7686 FAX: (5)-605-6473  
 CANADA: 221 LABROSSE AVE., PTE-CLAIKE, QUEBEC Q1A 1A3 • TEL: 514-426-3013 FAX: 514-426-3953

Manufacturing Plant: Am Labor, 30900 Wedemark, Germany

Circle (46) or Free Info Card



# The new digital CAMERAS

er performance features is a result of lower-cost DSP and ASIC devices, and another important element has been development of better CCDs.

"Right now, most cameras are limited to 10-bit signal processing, but we're moving rapidly to 12-bit signal pro-



Sony DNW-90W5.

cessing. I believe the latest CCD technology puts today's cameras right up there with the capability of the best 35mm film," says Keil.

"A/D conversion soon will move beyond 10 bit and 12 bit to 14 bit," says Michael Rosner, North American camera support engineer for Thomson Broadcast Systems. "Every camera manufacturer wants to have at least 12 bit for broadcast.

"I think we're going to see 14-bit cameras within the next two to four years," he predicts, "but the 14-bit process is not yet implemented because of available technology and product pricing. The 14-bit A/D converters are still too expensive to put into broadcast cameras."

## Format flexibility

Pine offers an example of Philips on-the-fly switching between image formats. "At the Italian ski finales in early February, daytime activities are being shot in 16:9 for Italian TV, and at night, after the press-of-a-button, they were shooting 4:3 for live transmission to the U.S. They used aspect ratio converters for playback of the daytime events." According to Rosner, "We expect to see 16:9 cameras move from Europe to the United States by 1998."

"Camera manufacturers are seriously thinking about how to meet the re-

quirements of DTV," says Sturcke. "We're developing cameras that can acquire video at 525-lines interlaced, and we're thinking about more advanced products that can handle 525 progressive, 720 and ultimately, 1,080 lines, interlaced and progressive. Yet, the real issue is the choice between 4:3 and 16:9." "The near-term solution," says Ikegami's Keil, "is for us to manufacture cameras that are switchable between 4:3 and 16:9. We've now reached the place of being able to process digital signals at either image format."

"For a switchable 16:9 camera to do 4:3," says Pine, "you have to turn off the left and right side of the picture for a 25% drop in picture size. Doing this may require an 0.8 diopter or else the camera may have to back away from the subject. In a side-by-side comparison, I think it's a shell game of whether you really do have to switch in a diopter."

"More and more cameras are al-



JVC KY D29.

ready starting to include switching capability as an option." Panasonic's Sturcke says, "The ability to switch between 4:3 and 16:9 soon will be a common feature. The problem still will be building the infrastructure. It's expensive to convert to HDTV."

## ENG camera flexibility

"When it comes to ENG operations, flexibility is the key," says Pine. "For instance, as the world goes more to digital recording and 60i output, digital news-gathering will evolve so it becomes normal on a fast-breaking story to do a live lead-in and then roll an event from the camera with no time to pre-feed, and then cut back to live again. Cameras must



BTS/Philips LDK 10P.

be flexible enough to meet these needs."

Keil says Ikegami customers want flexibility in their digital ENG cameras. Yet, he points out a downside of using that camera in the studio. "You compromise serviceability for portability. The average studio camera doesn't need the flexibility of a field camera, and the benefit of a full-size camera hard-wired into the studio is that it's virtually always easier to service than a portable camera in the field. Plus, the studio camera is more reliable."

Thorpe comments that studio and ENG cameras increasingly are being built into the same basic housing with the same optical lens interface. "This will help ease the transition to HD by reducing the size of the up-front investment required for digital acquisition."

## Camcorder or dockability?

We've now considered the camera itself, but that's not the whole story. "When you say camera," says Dave Walton, marketing manager for JVC professional products, "this means only the thing that holds the lens, a prism, a sensor and a processor to create the best possible signal to record. The thing that makes the image is not the recording device."

Blurring the distinction between cam-



Ikegami HL-59.

TAPE IS TAPE IS TAPE IS TAPE IS TAPE.  
TAPE IS TAPE IS TAPE IS TAPE IS TAPE.  
TAPE IS TAPE IS TAPE IS TAPE IS TAPE.  
TAPE IS TAPE IS TAPE IS TAPE IS TAPE.  
TAPE IS TAPE IS TAPE IS TAPE IS TAPE.  
TAPE IS TAPE IS TAPE IS TAPE IS TAPE.  
TAPE IS TAPE IS TAPE IS TAPE IS TAPE.  
TAPE IS TAPE IS TAPE IS TAPE IS TAPE.

# GET SERIOUS.



Engineered to Reflect Your Moment



**QUANTEGY**

Circle (54) on Free Info Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

# The advantages OF TAPE

**Videotape has been  
around for more  
than 40 years;  
another 40 is not  
out of the question.**

**BY STEVE EPSTEIN,  
TECHNICAL EDITOR**



## **THE BOTTOM LINE:**

With all the hoopla surrounding hard drives and video servers, it's easy to believe that tape, if not dead, is dying. Nothing could be further from the truth. Videotape sales are still increasing and for field acquisition, tape is still the best bet. With millions of VCRs in daily use, it will be a long time before videotape joins the LP on museum shelves. \$

# M

agnetic tape, from one-inch to minicassette and DLT, provides the most cost-effective re-recordable storage available. Whether the recorded information is audio or video, analog or digital, the cost in terms of dollars-per-megabyte can be as little as one-tenth the cost of hard-disk storage. At first glance, it's hard to believe that anyone would switch from tape to disk. However, everywhere you turn it seems there is a new video-on-hard-disk application. Is everyone turning to hard drives or is it just smoke and mirrors — like the PR about the web's blazing speed?

For the last few years, we have heard nearly endless arguments promoting the advantages of disk drives and the disadvantages of using tape. Unfortunately, those promoting the advantages of tape have been overwhelmed by the disk proponents. So, what are tape's advantages, and are they relevant in today's business climate?

## **Dollars and sense**

Video applications using hard drives are increasing, but so are tape sales. Getting an accurate picture of the tape markets is not easy with the variety of factors involved. Overall revenues from tape sales can be misleading, because unit prices have dropped

**Photo: State-of-the-art slitting equipment is used in the tape manufacturing process at the Fuji facility in Greenwood, SC.**

# serious tape.



**QUANTEGY**

Engineered to Reflect Your Moment



tel. 800/752-0732 • fax 800/628-0535

[www.quantegy.com](http://www.quantegy.com)

Circle (55) on Free Info Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

# The advantages OF TAPE

over the last few years. Unit sales for older formats also fail to portray a truly accurate picture, as buyers are switching from older formats, such as one-inch and U-matic to newer (mostly) digital component formats. However, despite the switch to newer formats, it's estimated that U-matic sales in 1995 were in the \$50 million range, second only to Betacam tape sales.

The most accurate indicator may be tape sales of the newer metal-based formats, which have increased more than 40% over the last two years. Much of the reason for the acceptance of these new formats is due to the higher recording densities offered by improved formulations. These higher densities permit compact, lightweight digital camcorders to be used for field acquisition.

With tape sales for new formats growing rapidly, there is little doubt that recorder sales are significant. For smaller operations without a staff engineer, tape machine maintenance can be a problem, but it's no worse than other types of equipment. For the non-

technical, head replacement isn't that different from hard-drive replacement — both are done by someone else.

For those versed in technical matters, either task can be accomplished relatively easily, although the head replacement does require access to test equipment. However, most of the equipment required is standard in any reasonably equipped shop. Only a small percentage of the tools needed are specialized for specific tape machine models. Additionally, newer formats have benefited from years of experience, and manufacturers have gone to great lengths to reduce the cost of replacement parts and the amount of maintenance required.

In terms of sheer numbers and MTBF, tape machines are costlier than hard drives, but when was the last time you lost all of your programming because

your tape machines contracted a virus that spread throughout the facility? As independent dedicated devices, VTRs can provide years of service without requiring constant software and hardware upgrades. Rarely do tape machines have to be reset after a "crash" due to software bugs. For the most part, tape equipment is there, day after day, doing what it's expected to do.

A fair amount of maintenance is required, especially cleaning the tape path. However, the more tape machines you have, the easier it is to assign one person the task of maintaining them all. An equal number of computers will also require someone to watch over them. Between installing upgrades, locating lost files and simply dealing with day-to-day incompatibility issues, computer systems

camcorder, the unit remains in beta test with the first shipments scheduled for early this year. Tape-based field equipment is proven technology. It is robust and compact enough to go to the bottom of the Atlantic to record the final resting place of the Titanic, to the top of Mt. Everest, and to make numerous trips into space aboard shuttle missions.

Where tape really shines is in archiving applications. Even the computer folks agree. A 1994 article from *LAN Times* titled "Tape is Here to Stay," states, among other things, that tape backup systems are deeply entrenched in data-protection schemes, and that tape will continue to play an integral role in backup and archiving, especially as part of hierarchical storage schemes. The relative simplicity of tape machines ensures that a 20-year-old tape, if properly recorded, will playback today.

Tape is so stable that the hard part is finding a working tape machine of the proper format.


## So what?

Tape provides low-cost, high-volume storage that is stable over the long term if cared for properly. Disk technology provides quick random access. Carefully examining the intended application will reveal which of these technologies is the

best fit. Facilities with tape-based equipment will continue to find it useful and are likely to continue to place a heavy emphasis on tape for years to come.

Future upgrades will come in the form of tape and disk equipment. Newer units on the market combine tape and disk systems within the same device giving users even more flexibility.

Tape and disk technology are different, and comparing the two is much like comparing apples and oranges. Having one doesn't necessarily render the other useless. As we move into the 21st century, tape and disk systems are likely to co-exist in a complementary, rather than competitive, relationship. Both are based on the principles of magnetic recording and both will benefit from future advances in magnetic technology. ■

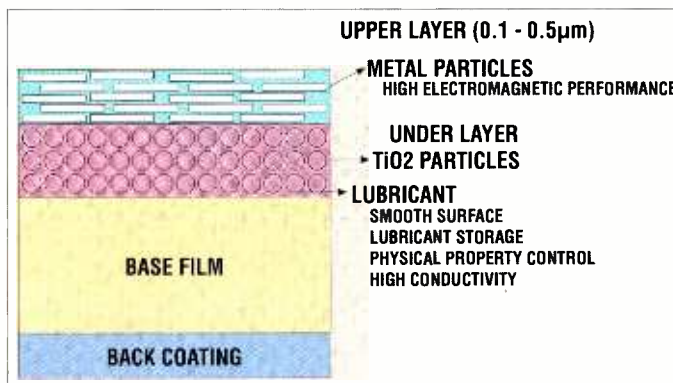

**Figure 1. New tape formulations, such as ATOMM from Fujifilm, have made possible new recording formats, such as Iomega's ZIP disk, Panasonic's DVCPRO and JVC's W-VHS.**

require a nearly equivalent amount of maintenance and upkeep. Additionally, in most cases, a top-notch computer maintenance person is likely to cost more than a highly qualified VTR tech — especially if you intend to support multiple platform types or tape formats.

On another front, well-maintained tape equipment has proved to be far more useful at the end of a seven-year depreciation cycle than most computers after only two or three years. The cost of migrating from one system to another must be considered, especially when tape equipment can easily outlast three, maybe even four, computer systems. For field acquisition, tape wins hands down.

Despite the announcement more than a year and a half ago of a disk-based

SHARED VISUAL STORAGE SOLUTIONS FOR THE POST ENVIRONMENT

# SHARE THE VISION



Las Vegas

**NAB'97**

APRIL 7-10

**BOOTH #11914**



**MountainGate**

A Lockheed Martin Company

702-851-9393 • 800-556-0222



Circle (56) on Free Info Card

VISIT [WWW.MOUNTAINGATE.COM](http://WWW.MOUNTAINGATE.COM)



**BRINGING CREATIVE MINDS TOGETHER**

[www.americanradiohistory.com](http://www.americanradiohistory.com)

## New antenna technology

**T**he problem for transmitting antennas is not really what's available now, but what will be needed in the future. The major changes that have occurred in the past couple of years have been involved with the low-power TV industry. The huge number of stations in that service spurred rapid development of lower-cost antennas to operate at the lower power level. Those antennas have been modified to operate at intermediate power levels and still keep the cost down.

The big manufacturers have been competitive in developing good antennas capable of handling up to 30kW input power, depending upon the manufacturer and the channel. These antennas are available as either non-directional or with a wide range of directional antenna patterns. When equipped with fine matching sections on the input, they can be tuned to provide excellent VSWR across a channel. Readers of this column will remember that a maximum value of 1.05 or less at visual carrier, 1.08 at aural and color frequencies and 1.1 over the entire channel has been highly recommended for NTSC systems. But the new specter of DTV will change those numbers slightly.

As discussed in previous columns, some manufacturers have suggested a maximum return loss of 30dB across the entire 6MHz channel for DTV operation.

---

The real problem will be trying to combine the NTSC signal and the DTV signal into a common antenna, especially on adjacent channels.

---

This corresponds to a maximum VSWR of 1.065 across the channel. This should be attainable with careful construction and field tuning after installation. Remember, this VSWR value is for the entire transmission system including the coaxial cable or waveguide. Higher values of VSWR may result in an increase in the bit error rate, which would contribute to limiting the service area of the station.

### Combined operation

The real problem will be trying to combine the NTSC signal and the DTV signal into a common antenna, especially on adjacent channels. As has been widely publicized, the commission is proposing to allot first-adjacent DTV channels for many existing stations. This applies to high-band VHF channels, as well as UHF. Low-band VHF channels are not proposed for use in the DTV world. The stated reason for this is that they are too noisy. Interesting. The real reason appears to be so the commission can auction off those channels as soon as possible.

The problem is making an antenna flat over 12MHz to accommodate the NTSC and DTV signals. First, the same old numbers are still desirable for the NTSC channel. After all, that's where the station revenues are coming from now and until DTV receiver penetration becomes really significant. So it's necessary to maintain the old 1.05 and less than 1.1 VSWR numbers while



Don Markley



Andrew Corporation's TRASAR broadcast antennas can be engineered to be suitable for NTSC and DTV transmission.

# SETTING THE PACE OF CONVERGENCE

When it comes to NAB'97,  
one word says it all. **Hot**

You can feel the energy. The air is crackling with excitement. As more than 1,200 exhibitors converge on Las Vegas. To show off the hottest new technologies, products and services for broadcasting, audio/video production, post-production, satellite communication, telecommunications, multimedia and the Internet. Everything you need to compete in the world of convergence. Plus 200 sessions in 11 conferences. Unlimited opportunities to network — and do business — with industry movers and shakers from around the world. It's all here at NAB'97, the most exciting show in town.

## And it's getting hotter!

Just as the convergence marketplace is growing by leaps and bounds, so is NAB'97 — with new features and programs. So if you want to stay one step ahead of your competition, NAB'97 is the place to get a head start. Check out these new features:

- ▼ 5 new conferences
  - NAB Communications and Connectivity'97
  - Uplink'97: International Satellite Conference
  - Electronic Distribution Conference
  - NAB MultiMedia World
  - Internet Business Conference
  - New Media Professional Conference
  - Broadcast Designers Conference
- ▼ Hundreds of new exhibits for television/video/film, radio/audio, multimedia and the Internet and intranets. And if connectivity is important to you, there's plenty of it in the new Satellite and Telecommunications Pavilion.
- ▼ Plus, you can explore the world of cyberspace in the bigger and better Internet Theater and new Intranet Business Theater.

# NAB'97

## NAB MultiMedia World

*Conferences: April 5 & 6-10, 1997*

*Exhibits: April 7-10, 1997*

*Las Vegas, Nevada USA*

## Bring Your Whole Team!

With so much going on — so much to see, hear, demo, learn and experience, you can't possibly be everywhere at once. Don't miss a beat — bring your whole team so you can make the most of everything NAB'97 has to offer.

### Register on the Web!

Check our website at [www.nab.org/conventions/](http://www.nab.org/conventions/) for all the latest information on conferences, exhibitors, registration and housing. Interactive search tools make it easy to find the sessions and exhibitors that will benefit you, and plan your visit to NAB'97.

For more information, complete this form and fax to: (202)429-5343

Please send me information on NAB'97 ☐ Attending ☐ Exhibiting

Areas of Interest (Check all that apply):

☐ Radio/Audio ☐ Television/Video/Film ☐ Multimedia ☐ Internet/Intranet ☐ Telecommunications ☐ Satellite

Name \_\_\_\_\_ Title \_\_\_\_\_

Company \_\_\_\_\_ Call Letters     ☐ AM ☐ FM ☐ TV

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip (Postal Code) \_\_\_\_\_ Country \_\_\_\_\_

Phone \_\_\_\_\_ Fax \_\_\_\_\_ E-Mail Address \_\_\_\_\_

For up-to-the-minute registration, exhibitor and program details:

- Visit the NAB Website at [www.nab.org/conventions/](http://www.nab.org/conventions/)
- Call the NAB Fax-On-Demand Service at (301)216-1847 from the touch-tone handset of your fax machine and follow the voice instructions.
- Or for information on attending, call (800)342-2460 or (202)775-4970. For information on exhibiting call (800)NAB-EXPO or (202)775-4988.

BE



The TUP panel antenna from Dielectric provides UHF operation over any of the assigned UHF channels.

holding the additional 6MHz to 1.065. That should be fun.

Recent tests performed by Harris Corporation indicate that first-adjacent channel DTV operation may not be quite as simple as hoped. The commission has established a radiation mask for the new DTV service. However, systems that fully comply with that mask may still cause an increase in noise in first-adjacent channel operation. Additional correction or filtering at the transmitter may be necessary to fully eliminate that in-

terference. Extra filtering may also be necessary on the output of the NTSC transmitter to eliminate any lower sideband that may have been reinserted into the output signal by non-linearity in the final amplifier stages.

The primary problem with the new antennas will be the requirement to radiate the two adjacent channels while maintaining the appropriate VSWR. Next, the transmission line system will have to have minimal reflections to avoid all sorts of new problems between the two signals. Finally, the NTSC and DTV radiation patterns need to be similar. Operation in a DTV null area that isn't in an NTSC null opens the door to

---

The final problems that will be faced are not really known and will not be known until a number of first-adjacent channel systems are constructed.


---

significant interference even when both transmitters are well-filtered. The same will apply to the opposite condition, which will increase the apparent noise level in the NTSC channel.

The old problem of beam steering obviously exists to further increase the antenna designer's headaches. Simply put, the vertical angle to the tip of the main lobe needs to be essentially constant over the entire bandwidth. If a beam tilt of  $-1^\circ$  is to be used, that same beam tilt must be maintained over not 6MHz, but 12MHz. Depending on the antenna feed system de-

sign, this may be difficult to do, but is essential if pockets of interference between the services are to be avoided.

In review, the final problems that will be faced are not really known and will not be known until a number of first-adjacent channel systems are constructed. Unfortunately, the commission seems to be committed to tearing away as much of the TV spectrum as possible before the industry has a chance to find out how the real world reacts to the new service. There seems to be a frightening tendency to brush concerns to one side with the assurance that it can all be worked out. Maybe it can — we certainly hope so — but it's going to take a lot of work to not only make the new systems work, but to clean up many of the old antenna and transmission line systems so that they can peacefully coexist with DTV.

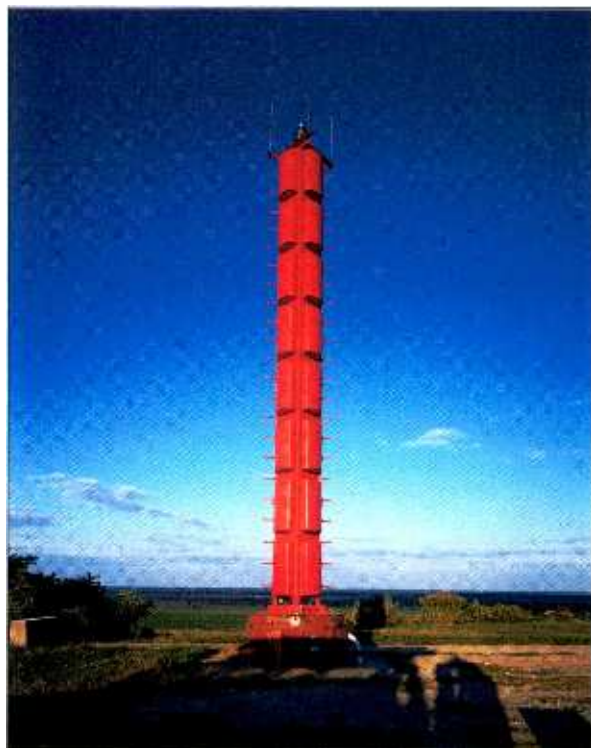

This Harris TAD-16UDA UHF Deltawing antenna is shown on the company's test range near Palmyra, MO.

This is sort of like figuring out how to obtain 5,000kW ERP DTV operation so that the VHF station moving over to UHF will maintain the same service area. Unfortunately, the commission's computer doesn't understand that such an operation will require a peak transmitter power output of more than 750kW unless highly directional. Maybe that will work out as well. Sure. I think that I just saw some pigs fly by. ■

---

*Don Markley is president of D.L. Markley and Associates, Peoria, IL.*



Thomson Broadcast Systems 1657D.

era and recorder has been done for marketing reasons, confides Cohen. "Some companies in the past may have built a camcorder to force people to buy a camera and recorder at the same time, but now the trend is reverting to dockable cameras and recorders."

"Even if the camera and recorder look like one unit," says Walton, "dockability means the camera head can be physically attached to any recorder you want."

Cohen sees the chief obstacle to widespread adoption of dockable cameras as the failure of the industry

to establish some kind of universal docking format. "If cameras could easily dock to various VTRs without the need for an adapter, think what a tremendous benefit that would be to the whole industry. Unfortunately, I do not see that happening yet. Even within some manufacturers' own product lines, VTRs

don't always share the same docking format."

### Choosing a camera

"When it comes to buying any new camera," says Cohen, "it all boils down to two simple questions: What does the picture look like, and how much does it cost?"

"Broadcasters now have to decide if and when they want to get into advanced digital cameras," says Jack Breitenbucher, vice president of the broadcast and professional division of Hitachi Denshi America. "They need to declare themselves, and not just with

## The new digital CAMERAS



Panasonic AQ-23W.

HD cameras, but with routing, switching and transmission. A lot of these products aren't even made yet, so there's a big growth curve ahead.

"Assuming it takes off," he says, "this will change the way we look at television and open a whole new doorway for digital products." ■

*Ken Freed is a technical writer specializing in cable and interactive television, and is based in Denver.*

## There's no reason to miss the NAB Convention this year.



In fact, invite your whole crew to attend the 1997 NAB Convention on *Broadcast Engineering's* ground breaking Internet Show Daily site. Be there all four days beginning April 6, hearing the buzz, getting news as it occurs, and learning about new products as they're announced. All this with a click of your mouse.

Now all of your staff will have the latest show information at their desks while they're keeping your signal on the air and productions on time.

The industry's first Internet Daily features *Broadcast Engineering's* editorial staff and includes topical updates from the editorial teams of *BE Radio*, *Lighting Dimensions*, *Millimeter*, *Satellite Communications*, *TCL*, *Video Systems*, and *World Broadcast News*. Cover all the NAB '97 hot buttons with the industry's leading group of communications magazines.

Be a part of the NAB Convention with the best at <http://www.broadcastengineering.com> April 6 through September 12, 1997.

For Internet Daily advertising opportunities, contact The Eidolon Group Inc., 800-901-8202 or e-mail [robt@eidolongroup.com](mailto:robt@eidolongroup.com).

**EIDOLON™**  
The stuff that dreams are made of...

**BROADCAST**  
engineering

Circle (47) on Free Info Card

## Acrodyne's dual Diacrode transmitter

**A**t CTN we had the opportunity to update our network from low-power transmitters to high-power UHF systems. As part of this rebuild project, I selected Acrodyne Diacrode transmitters for the Nashville, Tampa Bay and Fort Meyers locations.

In the past, CTN went through a stage of sending our signal by satellite to low-power stations in various locations, but now we've advanced to full-power UHF operations in five major urban areas.

Our flagship station is WCLF-TV, Channel 22, serving Clearwater and Tampa Bay, FL. The other four stations are WHTN, Channel 39, serving Nashville; WHBR, Channel 33, serving Pensacola, FL, and Mobile, AL; WFCG, Channel 61, serving West Palm Beach, FL; and our newest station, WRXY, Channel 49, serving Fort Meyers and Naples, FL.

For the Nashville station, we installed an Acrodyne Au120D dual-tube 60kW Diacrode transmitter with 120kW total output. This dual Diacrode transmitter is one of the first in the country.

At the Fort Meyers station, a single-tube Au60D — its 60kW Diacrode transmitter — is already in place, although we're still completing the electrical hookup. And soon, we expect Acrodyne to ship another single-tube transmitter to the station in Tampa Bay. We'll replace the West Palm Beach transmitter in about a year, but we won't replace the Pensacola transmitter anytime soon because it's less than 10 years old. For the record, the only Acrodyne product we had previously was one exciter in Clearwater.

The dual Diacrode transmitter already in operation is housed at the old transmitter site in the flatlands about 15 miles outside of Nashville. The surrounding terrain has deep valleys and high ridges, but nothing rises more than 100 feet above sea level except for our Dielectric antenna on an 820-foot stick.

In evaluating the decision to go

with the Diacrode transmitter, the determining factor was the lower operating cost of the Diacrode tube and the smaller footprint of the transmitter.

### Dual system operation

The most unique feature of the dual transmitter is the two 60kW systems running in parallel with an automatic impedance switching device. Each tube produces 60kW in combined mode, aural and visual or 80kW in visual mode alone. And the dual exciter system means each transmitter tube can operate independently. If the Diacrode amplifier system goes down or is taken out of service, the station can stay on the air just by using the driver section of the transmitter for direct-to-air operations at about 15kW output. The driver section is sufficient as a standby backup. For instance, when changing tubes, there's a trickle RF charge that goes to the tube so we can tune the tube off-line and then put it on at full power to complete minor adjustments. I like this kind of user-friendly operation.

The transmitter also has good automatic shutdown



An Acrodyne Au60D single-tube 60kW Diacrode transmitter.



CTN's new Acrodyne transmitter, the Au120D dual-tube 60kW Diacrode transmitter with 120kW output.

features with higher-power turn-off in case of a power surge or a lightning strike. The transmitter turn-off power is 19ns, faster than the rise time of lightning, and it automatically turns the tube off, so it doesn't blow out in case of a surge.

Something else I like is the lower plate voltage of the Diacrode — about 8,000V as opposed to 32,000V to 34,000V for an IOT or a klystron. I believe that there will be fewer problems with an 8,000V system than a 30,000V system.

This brings up another reason for the dual transmitter. The size of Nashville requires 100kW output, and two 60kW Diacrode tubes together provide 120kW. If we went with an IOT, the capacity of the units available now would have required a three-tube transmitter.

The economics of the Diacrode also mean lower replacement costs. Each Diacrode tube costs about \$25,000 with a minimal life expectancy, based on estimates by Thomson Tube Electronics and others, of 20,000 hours, which means about \$1.25 per hour for tube re-

placement.

We had in an initial problem setting the high-voltage trip point without creating a false trip. The transmitter did have a couple click offs while we were getting that adjusted. In this regard and several other

instances, Acrodyne has been good with field support by phone or in person. They've flown someone in about three times so far, more at their insistence than ours.

Overall, I can report that the one Diacrode transmitter installed so far is operating well. I'm now looking forward to getting the other two transmitters on-line so that I can sleep better at night. ■

*Phil Scott is director of engineering for the Christian Television Network, Clearwater, FL.*

*Editor's note: Field Reports are an exclusive Broadcast Engineering feature for broadcasters. Each report is prepared by well-qualified staff at a broadcast, production or consulting company.*


*The reports are performed by the industry, for the industry. Manufacturer's support is limited to providing loan equipment and to aiding the author if requested.*

*It is the responsibility of Broadcast Engineering to publish the results of any device tested, positive or negative. No report should be considered an endorsement or disapproval by Broadcast Engineering magazine.*

## Don't just buy a brand name... buy Quality



SpeechPrompter



WinPrompt



Genesis

Before you make your next teleprompter purchase, make sure you've seen ALL your choices. Camera-mount or podium-style prompter heads, computer prompters or complete turn-key systems, Tekskil Industries' precision made products will exceed your expectations... not your budget.

**For more information or to arrange a demonstration, contact  
Tekskil Industries Inc. (604) 589-1100 Fax: (604) 589-1185  
Website <http://www.tekskil.com> E-mail: [inquiries@tekskil.com](mailto:inquiries@tekskil.com)**

**FREE 44pg Catalog & 80 Audio/Video Applc.**  
PWR SUPP. EQ. TSS PRODUCTS

PHONO, MIC, TRANS, AGN, TAPE, VIDEO, LINE, OSC, PRESS BOXES

1-line-out Video/Audio  
1-line16-out Video/Audio  
2-line16-out Audio Only  
4-line32-out Video/Audio

Video & Audio Dist. Amps  
RGB-Sync Dist. Amps  
Routing Switchers

**OPAMP LABS INC (213) 934-3566**  
1033 N Sycamore Av LOS ANGELES CA, 90038  
<http://www.opamplabs.com>

Circle (48) on Free Info Card

Circle (49) on Free Info Card

# new products

By Deanna Rood

## UPL audio analyzer

**Tektronix**

• UPL audio analyzer: a high-speed, low-distortion, dual-domain audio measurement tool developed by Rohde & Schwarz; the analyzer performs an array of audio measurements at high speeds; features options for flexible digital interface testing, including jitter analysis and generation; the special analog signal pre-processing extends the dynamic range beyond that of the internal 20-bit converter so the UPL can easily verify the performance of tomorrow's 20+bit converter designs.

Tektronix Measurement Business Div., Literature Distribution Center, PO Box 1520, Pittsfield, MA 01202; 800-426-2200 (press 3, code 568); fax 413-448-8033; [www.tek.com/measurement](http://www.tek.com/measurement)

Circle (250) on Free Info Card



## Integrated stills and clips system

**Pioneer New Media Technologies**

• Digital FastFile: an integrated stills and clips system ideally suited for broadcast applications demanding real-time performance for the retrieval and playback of video segments; using scalable M-JPEG compression and hard-disk technology, users can record up to two hours of material on a standard system (an optional disk storage array can be added to increase recording time).

Pioneer New Media Technologies, 2265 E. 220th St., Long Beach, CA 90810; 310-952-2111; fax 310-952-2990; [www.pioneerusa.com](http://www.pioneerusa.com)

Circle (267) on Free Info Card

## AES/EBU digital interface

**Intraplex**

• High-fidelity audio modules for AES/EBU digital transport capability: a line of audio modules that can feed AES/EBU digital audio over Intraplex's TDM-160 T1 multiplexer systems and TDM-260 2Mb/s multiplexer systems and stay all digital end to end; the AES/EBU provides transmission of audio sampled at 32, 44.1 or 48kHz, providing interface support to all common digital studio and transmitter equipment.

Intraplex, 3 Lyberty Way, Westford, MA 01886-3636; 508-692-9000; fax 508-692-2200

Circle (268) on Free Info Card



## ENG broadcast lens

**Fujinon**

• A10X4.8EVM/ERD: a wide-angle lens that provides an 85° horizontal range of view; the lens features Fujinon's Aspheric Technology, electron beam coating and a new internal focusing system allowing it to be used in extremely tight settings; in addition, the internal focusing system eliminates pumping effects, providing a constant picture size during focusing.

Fujinon, 10 High Point Dr., Wayne, NJ 07470; 201-633-5600; fax 201-533-5216

Circle (269) on Free Info Card



## Logo generator and keyer/insert

**Leitch**

• LGI-6801: a serial logo generator and keyer/insert built as a plug-in module for the 6800 series of frames; it accepts standard computer gif, tif or targa images downloaded through an RS-232 port; logos are stored in uncompressed 4:2:2:4 digital format providing full linear key storage; the LGI generates a logo with linear key and inserts pictures into any area of a serial program video signal; Leitch products that fit in these frames may be used in conjunction with the Digi-Bus digital conversion system or used as independent products to resolve conversion needs.

Leitch, 920 Corporate Ln., Chesapeake, VA 23320; 800-231-9673; fax 757-548-4088

Circle (266) on Free Info Card



## DVCPRO camcorder

**Panasonic**

• AJ-D200: a digital DVCPRO camcorder that is able to use the large DVCPRO cassette with 123 minutes of recording time; with three 1/3-inch CCDs, it incorporates a new high-density interline transfer CCD giving a resolution of 480,000 pixels, due to double density pixel distribution; the AJ-D200 comes fully equipped including lens, viewfinder and tape and battery.

Panasonic, +44(0)-1344-853870; 100427.1536@compuserve.com

Circle (259) on Free Info Card

## new products

### Adjacent-channel antenna

#### Dielectric Communications

• DC-10JSC cardioid: an adjacent-channel slot-type antenna that is more than just a two-channel antenna; Dielectric's center feed design and custom illumination provide excellent amplitude and phase response across two channels.

Dielectric, 22 Tower Rd., Raymond, ME 04071;  
800-341-9678 or 207-655-4555; fax 207-655-7120;  
dielectric@main.com; www.dielectric.com

Circle (254) on Free Info Card

### Miniature three-CCD camera

#### JVC

• KY-F32: a highly sensitive 1/2-inch three-CCD color camera featuring high picture quality and wider lens interchangeability; this multipurpose camera weighs 1.9 pounds and has a 1/2-inch standard bayonet lens mount that enhances versatility; in addition, negative video output capability allows the camera to be used for photographic and film applications; the KY-F32 offers 750 lines of horizontal resolution and a high signal-to-noise ratio of 60dB for broadcast picture quality.

JVC, 41 Slater Dr., Elmwood Park, NJ 07407;  
201-794-3900; fax 201-523-2077

Circle (253) on Free Info Card



### Programmable audio/video controllers

#### Telect

• Programmable controls for audio/video equipment: programmable button controllers that allow users to remotely program any input, output or level configuration to a single button; with a hand-held keypad programmer, users can quickly set routing controls for eight to 32 different pieces of equipment; the controllers operate up to 600 feet from their routing switchers.

Telect, 2111 N. Molter Rd., Liberty Lake, WA 99019-0665; 800-551-4567 or 509-926-6000; fax 509-926-8915; www.telect.com; getinfo@telect.com

Circle (262) on Free Info Card

### Portable time-code DAT recorder

#### Fostex Corporation of America

• PD-4 (version two): a second-generation portable time-code DAT recorder that incorporates Fostex's unique four-head design in order to provide off-tape confidence monitoring; version two comes with a built-in 3x2 channel mixer with three-position pan functions allowing users to send input from one channel to either or both channels; selectable 48V phantom powering and variable low-cut filters are also available.

Fostex, 15431 Blackburn Ave., Norwalk, CA 90650; phone 310-921-1112; fax 310-802-1964; www.fostex.com; info@fostex.com

Circle (260) on Free Info Card



# PRECISION TIMING



Designed for "Precision Timing", ESE Master Clocks & Accessories have been meeting industry needs for more than 25 years. Whether using GPS, WWV, Modem, internal crystal or line frequency accuracy, all ESE Master Clocks can drive digital or analog slave clocks, as well as interface with video or computer based systems.



PRACTICAL SOLUTIONS SINCE 1971

142 SIERRA ST., EL SEGUNDO, CA 90245 USA • 310-322-2136 • FAX 310-322-8127

Circle (50) on Free Info Card

See us at NAB Booth # 7227

February 1997

Broadcast Engineering

115



## Spectrum analyzer RO.VE.R. S.p.A.

- TS1: a compact, robust 1GHz spectrum analyzer that carries out EMC precompliance, scalar network analysis and spectrum analysis; features include coarse and fine tuning, white peak hold to measure modulation depth with high accuracy and universal AM/FM audio demodulator with a built-in loudspeaker.

RO.VE.R. S.p.A., Via Parini 2-4, 25010 Colombaro di Sirmione (BS), Italy; +39 30 91981; fax +39 30 9906894

Circle (255) on Free Info Card

## Digital intercom Trilogy Broadcast Ltd.

- Commander 2: the latest version of this digital intercom has been revised with new hardware and new software; the panels have improved ergonomics and some additional facilities including four assignable level controls and local logic functions.

Trilogy Broadcast, 25 Focus 303, Walworth Estate Endover, Hampshire SP10 5NY, United Kingdom; +44 (0)1264 384000; fax +44 (0) 1264 334806; www.pro-bel.com

Circle (263) on Free Info Card

## Digital editing system

### Pixel Power

- Collage EDit: a non-compressed, non-linear digital editing system that incorporates real-time text and graphics capability; the fully featured Collage ED, including a Mediapack, is capable of storing 36 minutes of non-compressed 4:2:2 video and six mono track hours of 24-bit digital audio.

Pixel Power, #1 Trinity Hall/Nuffield Rd., Cambridge CB4 1TG England; +44 (0) 1223-423399; fax +44 (0) 1223-423868; 100424.1514@compuserve.com

Circle (270) on Free Info Card



## D1 video transport product

### Video Products Group

- VPG8000: a serial digital interface transport system that provides a way to embed digital or analog program audio and machine controls into a SMPTE 259M-compliant or ITU-R 601-compliant 270Mb/s bitstream; the VPG8000 systems can be chained to support metropolitan-area, regional or countrywide

270Mb/s SDI transport network between studios, broadcasters and post-production houses providing pristine, uncompressed, real-time D1 video, audio and data transport.

Video Products Group, 1125-B Business Center Circle, Newbury Park, CA 91320; 805-375-2855; fax 805-375-2851

Circle (264) on Free Info Card

## Universal power-line conditioner

### Constant Power

- Global power line conditioners series: universal, wide-range input for Constant Powers' 1-3kVa global power line conditioners; the GPLCs provide pure sine wave output which is regulated to  $\pm 2\%$ ; any user can select their own AC voltage and frequency output because the GPLC series is independent of its wide-range input (80-300Vac/45-75Hz) ensuring adaptability into the multitude of worldwide power voltages and frequencies; the models are available in pedestal and 19-inch rack-mounted configurations.

Constant Power, 14 Commerce Dr., Danbury, CT 06810; 203-748-7001; fax 203-797-9285

Circle (261) on Free Info Card



## Educational video series

### Sony

- Media Forum: a videotape series that shares more than 40 years experience in simultaneous development of media and hardware; the five-part series covers troubleshooting, tape handling, a step-by-step look at the manufacturing process, the fundamentals of magnetism and a guide to understanding tape specification sheets.

Sony Electronics/Recording Media, 680 Kinderkamack Rd., Oradell, NJ 07645; 201-476-8000; fax 201-476-8072

Circle (257) on Free Info Card

## Transmission system

### Harmonic Lightwaves

- MAXLink: a 1,550nm transmission system for broadband networks; the system incorporates a unique SBS suppression and performance doubling technology for the highest launch power and performance available at 1,550nm in the cable and TV industries — users can launch 17dBm into a single fiber with no SBS; the MAXLink is ideally suited for long-distance transmission and a variety of evolving applications, such as interconnecting cable system headends and telecommunications sites.

Harmonic Lightwaves, 549 Baltic Way, Sunnyvale, CA 94089; 408-542-2500; fax 408-542-2511

Circle (258) on Free Info Card

# **nova nixes noise**

**Improve your image  
eliminate Video Impulse and Transmission Noise with Nova's  
Median Noise Reducer**

**Protect against  
digital wraparound errors**

**Fill in codec and  
time-base-corrected  
tape dropouts**

**Clean up  
"sparklies",  
those black/white  
spurious dots  
on remote  
video feeds**

**Enhance MPEG/JPEG encoding!**

- **Single Board Design**
- **Uncompressed 10-bit Processing**
- **3D Digital Median Filter**
- **Noise Sensitivity Control**
- **Standalone, Rack Mount or PC Configurations**
- **NTSC, PAL and PAL-M Versions**

Circle (51) on Free Info Card

**nova**  
**SYSTEMS**  
A VIDEONICS COMPANY

**INNOVATORS IN SIGNAL PROCESSING**

50 Albany Turnpike, Canton, CT 06019  
860-693-0238 FAX 860-693-1497

© Copyright 1996, Nova Systems

Photos from Corel CD

[www.americanradiohistory.com](http://www.americanradiohistory.com)

*Continued from page 30*

of an existing NTSC station. Other channels are eliminated because they would be susceptible to interference from NTSC stations or DTV-to-DTV interference would result if both were used.

In this way, the channel allotted to one city restricts the channels that can be allotted in nearby cities, and this effect spreads like a daisy chain across the United States. When a list of candidates has been prepared for each area, the service areas of the DTV channels are calculated and matched to the existing NTSC service areas. Adjustments are then made to better satisfy certain optimizing criteria and the process is continued until the results appear satisfactory.

### The next step: Full-power testing

Full-power testing of experimental DTV stations is the next logical step. In fact, it may take more than one-station-in-a-market to convince all the broadcasters that the allotment/assignment is valid for all stations. Indoor testing needs to be done at different distance radials and varied "effective radiated powers" from the transmitter. Two transmitters in the same market will need to be transmitting at large power differences and measurements must be made accordingly. Data channels of varied widths may be tested to prove viability of data broadcasting in different reception scenarios.

There are already experimental stations broadcasting digital signals. These stations will certainly be involved in this next phase of propagation testing. For example, the model station at WRC, Washington, DC, has

## The importance of agreement in the industry



Representatives of the broadcasting, consumer electronics and computer industries reached an agreement on technical standards for advanced television. As with any new technology, the digital TV system needs to be fully implemented before all of its characteristics can be fully documented and the set of rules finalized. Until the industry has developed experience in dealing with the parameters of the system under different environmental conditions, the system would not be fully characterized and spectrum would never be fully optimized. If there had been delays in embracing the DTV standard, the marketplace would have been confused, and station implementation would have been at risk. An agreement and consensus on a technical broadcast standard was needed to prevent technical and market chaos. ■

already served as a source of encoded digital TV signals to aid equipment manufacturers in the development of new lines of electronic equipment. Auxiliary data transmission, interactive video services and satellite, optical fiber and microwave feeds will be evaluated.

This will be the next phase of testing at the model station. It is a natural progression because the Grand Alliance has loaned two sets of Grand Alliance DTV hardware for use prior to the availability of prototype or commercial equipment. The project involves the collaboration of respective organizations to design, install and operate an experimental high-definition TV terrestrial broadcast station. The main transmitter will be upgraded to a system with much higher power.


### The danger and how to avoid it

Generating a good assignment table is a lengthy and complex process, but one that is finally nearing completion. In the draft assignment tables, DTV channels have been assigned so that the DTV service areas closely replicate existing NTSC service areas. Terrain mapping data (Longley-Rice) has been used to predict signal propagation, coverage and interference. The lower power of some of the new UHF stations will save the stations from high power bills. The higher power of some of the new UHF stations will surely provide extra robust signals in urban areas.

We broadcasters have high expectations, as well we should; soon the digital signal will be our primary business! Each channel in every market will have its pros and cons; some may work out better than others. The purpose behind the FCC assigning the second channel is to allow broadcasters to jump-start the DTV market. Should there be too many broadcaster complaints, all broadcasters will lose. There will be no early start, and even worse, the FCC could release the unused spectrum to industries that will not respect or appreciate broadcasters' issues. ■

*Louis Libin is director of technology for NBC, New York.*

## Clamp a microwave dish

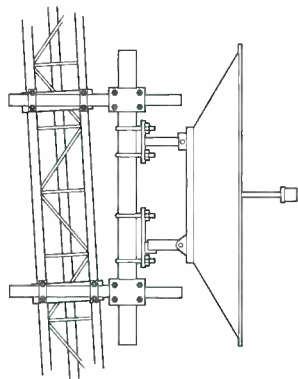

## to any tower.

Good ideas and thousands of parts you can use right now.



**PIROD INC.**

P.O. Box 128, Plymouth, Indiana 46563-0128  
Telephone (219) 936-4221, FAX (219) 936-6796



Call for our  
FREE catalog.

Circle (53) on Free Info Card


Broadcast Engineering February 1997

Continued from page 86

agation 66%) has 416 bit cells (2.4 feet long each) within it at any given time. Conversely, a color subcarrier cycle in 8281 is 175 feet long (only 5.70 of those in 1,000 feet of Belden 8281 at any given time).

Any impedance mismatches that oc-

ethylene or Teflon dielectric was reduced to increase the characteristic impedance to 75Ω. Early 75Ω connectors were manufactured by reducing the diameter of the center conductor pin, making them unable to mate properly with 50Ω connectors. But newer 75Ω connectors ("reduced dielectric") will mate reliably with the 50Ω connector,

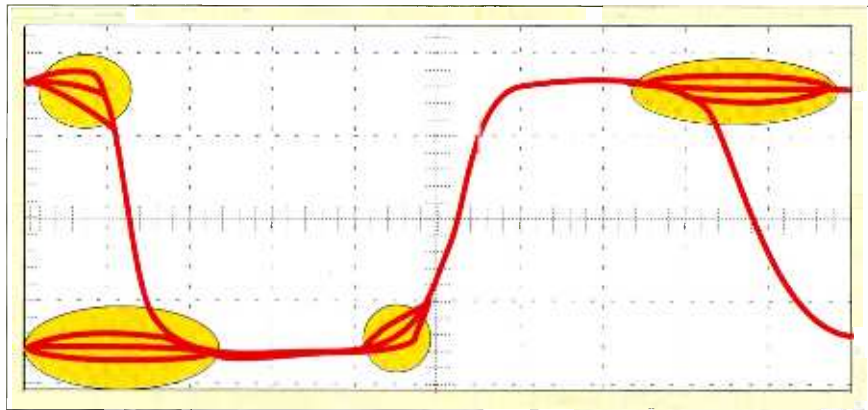

**Figure 5. A digital oscilloscope's display of an SDI signal on a double-terminated path. Highlighted areas indicate ringing at transitions caused by reflected signals.**

cur along the path cause reflections. In the analog video world, only long paths with impedance mismatches had the possibility of causing reflections that were bothersome. Reflections caused by improper impedance matches in cable were hard to discern. They showed up as nearly imperceptible ringing during transitions, providing unintentional enhancement or cancellation (in addition to the obvious incorrect level caused by non-terminated or double-terminated lines).

In the digital domain, however, a path that's only a few feet long with reflections could prove disastrous. In this case, it's not the incorrect level that usually draws attention when incorrect terminations are applied to a path. Rather, it's the *total* loss of recovered video because reflections have made recovery of the embedded clock impossible. Impedance mismatches as small as 20% can cause errors. Even tees with short lengths of unterminated cable can cause complete loss of signal. Patches, connectors or barrels can increase errors or cause signal loss, as well.

Problems can develop particularly in older installations, because until a few years ago, most BNC connectors had a characteristic impedance of only 50Ω. Subsequently, the amount of poly-

allowing them to keep turning up at older facilities.

Although a time-domain reflectometer (TDR) is the best tool for finding impedance mismatches along a path, a digital oscilloscope set to a long persistence will give hints that reflections are occurring. Figure 5 shows a path that is double terminated. The receiver looking at this datastream will probably report many errors, if it is able to recov-

**Reflections can totally shut down a digital path, even when all its other attributes are normal.**

er data at all. Reflected energy, not only out of phase, but possibly many bit cells behind the current data, is creating a ringing effect at transitions.

Also consider that impedance is not constant with frequency. The value of an impedance is represented by a complex number, which has not only magnitude, but also direction (or phase). It is the ratio of resistance and inductive plus capacitive reactance that deter-

## SDI headroom and THE DIGITAL CLIFF

mine the magnitude and direction (or phase angle) of the resulting impedance. When impedance in one segment of a digital path is not equal to impedance of the next segment of that path, reflections result. Reflections cause power to be reflected back to the source, lowering the transmitted power and causing transmission loss.

Patchfields and mismatched connections are common causes of serious reflection problems. These can greatly reduce the distance a digital signal can travel without errors. Note that reflections can totally shut down a digital path, even when all the other attributes of the path are normal and healthy. Casual observation of the eye pattern generated by the data passing through a mismatched path might not indicate any serious problems. This is where network analyzers or TDRs are more helpful, but lacking these, you should remain critical of the analog attributes of the eye pattern. Just because a system is now "digital" doesn't mean that its group delay, ringing and pre/post overshoots are no longer important and need not be monitored.

Good engineering during the design and implementation portions of a digital video project should ensure that your data paths are some distance from the error cliff. In addition, determining the signal's amplitude above the noise floor (especially at higher frequencies), ensuring that jitter is as low as possible and that there are no reflections along your paths should provide proof that you have a well-engineered and trouble-free digital system. ■

*Jim Boston is senior product support engineer at Sony Automation and Transmission Systems Engineering, San Jose, CA. Jim Kraenzel is senior systems engineer for Sony Systems Integration Center, San Jose, CA.*

*Editor's note: The authors wish to acknowledge the following people for their technical support and advice: Dave Tansek of Sony Automation and Transmission Systems Application Development; Peter Hargreaves, Louis Brown, Bill Glenn, Mark Brown and David Lingenfelter of Sony Systems Integration Center; Dan Keenan of Sony Automation and Transmission Systems Distribution and Processing; and Peter Dare, Sony's chief technology officer.*



# "THE PROFESSIONAL'S SOURCE . . .

FOR ORDERS CALL:

**800-947-9928**  
**212-444-5028**

OR FAX (24 HOURS):

**800-947-9003**  
**212-444-5001**

**ALL ORDERS SHIPPED  
WITHIN 24 HOURS**

**OVERNIGHT SERVICE AVAILABLE**

On the Web: <http://www.bhphotovideo.com>



## MILLER Fluid Heads and Tripods

The silky, smooth action of each Miller Fluid Head is the product of the finest quality cast and machined parts functioning together in a fluid environment. They are engineering masterpieces, built to operate under extreme conditions. They're engineered to exceptionally fine tolerances and their mechanisms are protected effectively against ambient moisture and dust.

### Miller 20-Series II Fluid Head

- Dynamic fluid drag control
- Sliding/quick release camera platform
- Weighs 4 lbs.—handles up to 22 lbs
- Counterbalance system compensates for nose heavy or tail heavy camera configurations and permits fingertip control of the camera throughout the tilt range
- Includes independent pan and tilt locks, bubble level, dual pan handle carriers and integrated 75mm ball levelling

### Miller 25-Series II Fluid Head

- 100mm ball level fluid head
- Robust, lightweight, low profile design
- Quick release camera platform
- Weighs 7lbs.—handles up to 25 lbs
- Multi-step fluid drag system and integrated counterbalance system provide ultra-smooth, repeatable pan-and-tilt fluid control and fingertip-center balance for ENG camcorders, industrial CCD cameras or small studio cameras



### #601-Lightweight Tripod

- Weighs 4.5 lbs., supports up to 30 lbs.
- Minimum height down to 24"
- Maximum height to 57"
- Extremely portable, folds down to 33"
- Engineered from thermoplastic moldings, diecast alloy and hard anodized tubular alloy.
- Fast, one turn, captive leg locks
- Includes 75mm (3") ball levelling bowl

### #649-2-Stage Tripod

- Two extension sections on each leg. Operates at low levels as well as normal heights without the use of mini legs
- High torsional rigidity, no pan backlash
- Weighs 6.6lbs., supports 50 lbs
- Very portable, folds to 27"
- Includes 75mm (3") ball levelling bowl

**System 20 #338**—Miller 20 Head, 601 Lightweight Tripod, On Ground Spreader  
**System 20 #339**—Miller 20 Head, 649 2-Stage Aluminum, On Ground Spreader  
**System 25 #500**—Miller 25 Head, 611 Lightweight Tripod, On Ground Spreader  
**System 25 #502**—Miller 25 Head, 641 2-Stage Aluminum, On Ground Spreader



## sachtler

### VIDEO 14/100 FLUID HEAD

- Sachtler Touch and Go System
- Integrated sliding battery plate
- Strengthened dynamic counterbalance in 2 steps
- Frictionless leak proof fluid damping with three levels of drag
- Vibrationless vertical and horizontal brakes
- Built in bubble for horizontal leveling

### HOT POD TRIPOD SERIES

Especially developed for use in ENG, the Hot Pod tripod is the fastest in the world. The central locking system is activated on all three legs at the same time, while the pneumatic center column easily makes it possible to have the lens at a height of over 7 feet. The elevation force of the center column is factory set and doesn't require any setup. When moving to another location it can be carried by its handle located at the center of gravity.



### ENG TWO-STAGE TRIPOD SERIES

Sachtler two-stage tripods have an enlarged height range (lower bottom and higher top position) so they are more universal. Legs can be locked in seconds with Sachtler's quick clamping. There are also heavy duty versions for extra stability. The heavy duty aluminum has a 20mm diameter tube vs. 16mm and the heavy duty carbon fiber has a 24mm diameter tube vs. 22mm. All heavy duty two-stage tripods have a folding tripod handle.

### NEW! Sachtler CADDY Systems

Now Sachtler quality is available to low budget users. The price of a CADDY system includes the new 7-step dampened CADDY fluid head, ultra-light but rugged carbon fiber tripod, lightweight spreader and either a soft bag or cover. The CADDY fluid head features an adjustable pan arm, 7 step adjustment for quick counter balance and the self-locking Sachtler Touch and Go System.

#### CAD 01

- Single-Stage ENG Carbon Fiber System:**
- CADDY Fluid Head
  - ENG Single-Stage Carbon Fiber Tripod
  - SP 100 Lightweight Spreader
  - Transport Cover 100

#### CAD 2A

- 2-Stage ENG Carbon Fiber System:**
- CADDY Fluid Head
  - ENG 2-Stage Carbon Fiber Tripod
  - SP 100 Lightweight Spreader
  - Soft padded ENG Bag

## Vinten

### Vision SD 12 and SD 22 Pan and Tilt Heads with Serial Drag

- The Vision SD 12 and SD 22 are the first heads with the "Serial Drag" pan and tilt system. The system consists of a unique, permanently-sealed fluid drag and an advanced lubricated friction drag. Now you can achieve the smoothest pans and tilts regardless of speed, drag setting and ambient temperature
- Patented spring-assisted counter-balance system permits perfect "hands-off" camera balance over full 180° of tilt
- Instant drag system breakdown and recovery overcome inertia and friction for excellent "whip pans"
- Consistent drag levels in both pan and tilt axis
- Flick on, flick off pan and tilt caliper disc brakes
- Greater control, precision, flexibility and "touch"
- Touch activated, time delayed illuminated level bubble
- Working conditions from as low as -40° up to +60°C
- SD 12 weighs 6.6 lbs and supports up to 35 lbs
- SD 22 weighs 12.7 lbs and supports up to 55 lbs.

### Vision Two Stage ENG and LT Carbon Fibre ENG Tripods

- The ultimate in lightweight and innovative tripods, they are available with durable tubular alloy (Model #3513) or the stronger and lighter, axially and spirally wound carbon fiber construction (Model #3523). They incorporate torque safe clamps to provide fast, safe and self-adjusting leg clamps
- "Torque Safe" requires no adjustment. Its unique design adjusts itself when required, eliminating manual adjustment and maintenance and making for a much more reliable clamping system
- New hip joint eliminates play and adds rigidity
- They both feature 100mm levelling bowl, fold down to a compact 28", and support 45 lbs.
- #3513 weighs 6.5 lbs • #3523 CF (Carbon Fibre) weighs 5.2 lbs.



### Vision 12 Systems

All Vision 12 systems include #33643 SD 12 dual fluid and lubricated friction drag pan/tilt head, single telescoping pan bar and clamp with 100mm ball base.

#### SD-12A System

- 3364-3 SD-12 Pan and tilt head
- 3518-3 Single stage ENG tripod with 100mm bowl
- 3363-3 Lightweight calibrated floor spreader.

#### SD-12D System

- 3364-3 SD-12 Pan and tilt head
- 3513-3 Two-stage ENG tripod with 100mm bowl
- 3314-3 Heavy-duty calibrated floor spreader

### Vision 22 Systems

All Vision 22 systems include #3366-3 SD-22 dual fluid and lubricated friction drag pan and tilt head, single telescoping pan and clamp with dual 100mm/150mm ball base.

#### SD-22E System

- 3366-3 SD-22 Pan and tilt head
- 3219-52 Second telescoping pan bar and clamp
- 3516-3 Two-stage EFP tripod with 150mm bowl
- 3314-3 Heavy-duty calibrated floor spreader



## JVC DIGITAL S BR-D80/BR-D85

### Digital Editing Recorder / Digital Editing Recorder with Pre-Read

Affordable, broadcast quality digital video is here. Digital-S reproduces images that not only are superior to any analog or digital 4:1:1 format but rival even the highest priced digital systems. It combines the robustness and reliability of a 1/2-inch format with 4:2:2 component processing and very mild compression to achieve and sustain excellent quality through multi-generation dubbing.

#### Broadcast Quality Digital Video

- 4:2:2 digital component processing adds richness and warmth unobtainable with lesser systems. Plus only 4:2:2 stands up to the rigors of sophisticated chroma-keying, multi-generational editing, special effects, blue-screen compositing, matting, ATUW/down conversion, and multiple transconversion between compression systems.
- Mild 3.3:1 compression reproduces the finest colored details while minimizing artifacts. Digital S pumps out horizontal resolution of 540 TV lines. S/N ratio is 55dB
- Audio is recorded by 2-channel, 16-bit PCM signals with a sampling frequency of 48kHz. PCM audio channels can be edited independently.
- Standard analog inputs/outputs provide outstanding performance for most applications. When virtually perfect dubs are required, the BR-D85 offers a serial digital interface. The one true digital video standard today, SMPTE 259M permits long cable runs and is used for direct connection to digital switchers, disk-based recorders and digital tape recorders. (Optional with the BR-D80).



#### Robust 1/2-inch Format

- They achieve super-high image quality using a robust, 1/2-inch metal particle cassette tape. The cassette housing has a dust-proof structure to increase tape life as well as your images. 1/2-inch format also offers an extra wide track-width of 20 microns for improved stability and reliability.
- Has powerful error correction circuitry that not only replaces data in the unlikely event of a tape dropout but continues to play back a picture even with a clogged head.

#### Digital Editing

- Equipped with variable slow motion which can be accessed by standard editing commands. Smooth and noiseless, the image quality of slow motion is equal to regular playback and is available within a range of  $\pm 1/3X$ .
- Longitudinal tracks include two auxiliary audio (cue) tracks and a control track for tracking purposes. Cue tracks provide easy location of edit points which can be heard at any tape speed.
- Because of its linear control track, Digital-S has a short look-up time which eliminates long pre-rolls. This feature achieves a stable picture faster, saving precious editing time.
- Auxiliary video (sub-code) area stores two selectable compressed lines of video. Suitable for recording closed caption or other information located in the vertical blanking interval.

**PRE-READ EDITING (BR-D85 Only)** Previously an exclusive feature of very high-end digital systems, video pre-read enables the recorder to first play back the digital signal on the tape, before recording a new signal in its place. Operable with either digital or analog signals, pre-read lets you perform layering and A/B roll editing with only two VCRs, instead of three.

## GY-X2B 3-CCD S-VHS Camcorder



- Newly designed three 1/2" CCD image sensors deliver 750 lines of horizontal resolution and superb signal-to-noise ratio of 60dB
- Micro-lens technology provides exceptional sensitivity of F8.0 at 2000 lux and LoLux mode lets you shoot with almost no light! Shoot superb footage with excellent color balance at a mere 1.5 lux
- Variable Scan allows flicker-free shooting of a computer screen
- Full Time Auto White circuit lets you move from incandescent to fluorescent to outdoor lighting without changing white balance or the filter wheel
- Quick Record Mode - when turned on the camera is set to the auto iris even if it is set at manual. Also activates Automatic Level Control and Extended Electronic Iris which provides both variable gain and variable shutter.

Shoot continuously from dark room to bright outdoors without having to adjust gain, iris or ND filter.

• Dual output system allows camera output to be connected directly to an external recorder

## KY-27C 3-CCD Color Video Camera



- New 2/3-inch broadcast-quality 380,000 pixel CCDs with advanced electronics deliver resolution of 800 horizontal lines and reduced smear
- High sensitivity of F9.0 at 2000 lux allows a truly usable minimum illumination of 1 lux with JVC's exclusive LoLux dual pixel readout sampling technique
- LoLux mode allows shooting scenes that were previously impossible due to insufficient lighting. CCDs are maximized for low light sensitivity equivalent to an electronic gain of 24dB. Then the dual pixel readout system is added which provides an additional 6dB. Together they provide -30dB without the noise and picture degradation normally associated with this much gain.
- Signal-to-Noise ratio of 63dB assures virtually "noise free" images
- Auto knee circuitry extends a scene's light to dark dynamic range reproduction by up to five times without overexposure.
- Has large 1.5-inch viewfinder with 600 lines of resolution and SMPTE color bars. Status system provides audio levels, accumulated or remaining recording time, VTR operation, battery voltage and camera status. Zebra pattern indication and safety zones with a center marker are also provided.
- Variable scan function enables a precise shutter speed from 1/60 to 1/196.7 of a second in 256 increments to be set, matching a computer's scan rate. Almost any computer display can be clearly recorded.
- Camera head allows direct input of genlock signal and timing adjustment. A wide range optional remote controls, RS-232C interface.
- Docks directly to the JVC BR-S422U, BR-S411UB and BR-S420CU professional S-VHS recorders. Optional adapters for docking to Hi-8 and Betacam SP are also available.

## Panasonic Broadcast & Television Systems



## AG-DP800H SUPERCAM S-VHS 3-CCD Digital Signal Processing Camcorder



- Three high-density 380,000 pixel CCDs with half-pitch pixel offset achieves over 750 lines of horizontal resolution, a S/N ratio of 60dB and remarkable sensitivity of f8 at 2000 lux. Additionally the Frame Interline Transfer (FIT) CCDs minimize vertical smear, so you maintain impressive picture quality even in very bright illumination.
- Digital Signal Processing circuitry provides four valuable benefits
  - 1) Consistently reliable up-to-spec performance
  - 2) Fine adjustment of a wide range of parameters
  - 3) Memory storage and instant recall of specific settings
  - 4) More flexible and highly quality image processing, as well as easier maintenance
- Six Scene File modes. There are two user modes for custom digital parameter settings including Horizontal Detail, Vertical Detail, Chroma and Dark Detail, and Color Correction. The four preset modes are normal, fluorescent, special and sparkling.
- In addition to regular AGC (Automatic Gain Control), Supercam has a Super High Gain mode. At F1.4 this enables shooting under illumination as low as 2 lux while retaining detail and color balance.
- Synchro Scan function allows flicker-free shooting of computer monitors. Electronic shutter increments can be set variably from 1/61 seconds to 1/253 of a second
- Built-in internal time code generator lets you record with SMPTE LTC/LTC (Longitudinal/Vertical Interval) time code
- Two hi-fi stereo audio channels with a dynamic range of 80 dB, as well as two linear audio channels with Dolby NR. Normal/Hi-Fi recording is selectable. Uses XLR connectors to further ensure high-quality sound
- Has a 26-pin connector on the back that outputs a composite or component video signal. This enables convenient backup recordings using an additional VCR equipped with a 26 or 14-pin connector
- Phantom power can be supplied to an optional microphone. Power can be switched off to prevent battery drain when not in use.

**Purchase a Panasonic AG-DP800H SUPERCAM  
and receive a \$1000 Rebate directly from Panasonic.  
thru 3-31-97**

**WE BUY, SELL AND TRADE USED VIDEO EQUIPMENT**

SEVEN-DAY CUSTOMER SATISFACTION GUARANTEE

# ... FOR PHOTO & VIDEO"



TO INQUIRE ABOUT YOUR ORDER:  
800 221-5743 • 212 807-7479

OR FAX 24 HOURS:  
800 947-2215 • 212 366-3738

119 WEST 17TH STREET, NEW YORK, N.Y. 10011

Store & Mail Order Hours:

Sun 10-4:45 • Mon & Tues 9-6 • Wed & Thurs 9-7:15 • Fri 9-1 • Sat Closed

BUSINESS LEASING AVAILABLE



## NRG

### POWER VEST SYSTEM

The Power Vest combines the comfort and convenience of a photo-journalist style vest with the power of NRG's highest capacity power belt. Available in two styles, the **Field** model is designed for use in a field production environment, while the **Event** model is for shooting events where style is everything. The Field model is ruggedly constructed from black high density weatherized ballistic nylon and has an open-cut style that makes it comfortable to wear in a variety of climates. Also has a highly adjustable design to fit almost any physical proportion.

- Internal and external pockets for blank tapes and accessories, a clear insert window for a press pass or business card, D-rings for cables and microphones, and an integral padded camera rest on the right shoulder.
- Cleverly concealed inside the vest is your choice of 12-volt 86 watt hour or 13.2-volt 95 watt hour nicad cell packs.
- A control box on the front features dual power outputs (dual cigarette, dual XLR or mixed).
- 7-stage "fuel-gauge" charge status indication and auto-reset short-circuit protection.

The **Event** model is very similar to the Field except in place of rugged fabric and pockets it features shoulder to sternum black satin tuxedo fabric. Worn under a suit coat, the **Event** model is indistinguishable from a formal dress vest and it still retains interior and exterior pockets. Both vests include 300-series charger (12 hrs.) and can be used with the optional Intelliquick Fast Charger (2 hrs.).

### POWER CAN SERIES

For powering single or multiple pieces of 12V DC equipment for extended periods of time, nothing beats the power and convenience of NRG's Power-Can series. It integrates an ultra-high capacity, high-discharge-capable UPS type lead acid power cell, a worldwide fast charger, and computer-controlled monitoring system with display—in a single, rugged package. Connect up to four pieces of equipment simultaneously. From a midnight emergency scene to a wedding reception in the park, the Power-Can delivers ample power for extended running time.

- Recharge in 8-10 hours by simply plugging the Power-Can into any source of AC power (90-250V AC).
- LCD display shows discharge/charge status, voltage etc.
- An optional "Power Dolly" allows the Power-Can to be rolled for easy transport.

Available in 18, 28 and 40 amp versions, each Power-Can has either four cigarette lighter connectors, four 4-pin XLR connectors or two of each.

## HORITA

### BSG-50

#### Blackburst/Sync/Tone Generator

The BSG-50 provides an economical means for generating the most common RS-170A video timing signals used to operate various video switchers, effects generators, TBCs, VCRs, cameras and video edit controllers.

- 6 BNC video/pulse outputs
- Now available: 6 blackburst, 4 sync, 2 subcarrier
- Each sync output independently settable for composite sync, composite blanking, H-drive, or V-drive.
- Separate buffer for each output—maximum signal isolation
- 1KHz, 0dB sinewave audio tone output, locked to video
- Outputs can easily be configured to meet specific user and equipment needs

\$269

### CSG-50

#### Color Bar/Sync/Tone Generator

- Generates full-SMPTE color bars, blackburst and composite sync signals
- Built-in timer can automatically switch video output from color bars to color black after 30 or 60 seconds. Easy and convenient for producing tape leaders and stripping tapes with color bars and black.
- Front panel selection of full-field or SMPTE color bar patterns or colorblack (blackburst) video output.
- Includes crystal-controlled, 1KHz, 0dB audio tone output.
- Outputs: video, sync, ref frame, 1 KHz, 0dB
- Audio tone switches to silence and color bars change to black when using 30/60 second timer.
- Fully RS-170A SDI phased and always correct.
- No adjustment required.

\$349

#### WE STOCK THE FULL LINE OF HORITA PRODUCTS INCLUDING:

- WG-50 - Window Dub Insert Generator/Insert
- TRQ-50 - Generator/Insert/Search Speed Reader
- TRQ-50PC - VTC Generator, LTC-VTC Translator
- VG-50 - VTC-To-LTC Translator
- VLT-50 - VTC-To-LTC Translator / RS-232 Control
- VLT-50PC - VTC-To-LTC Translator / RS-232 Control
- RLT-50 - Hi8 (EVO-9800/9850) LTC To LTC Translator
- TSG-50 - NTSC Test Signal Generator
- SCT-50 - Serial Control Titler "Industrial" CG Time-Data Stamp, Time Code Captioning
- SAQ-50 - Safe Area, Convergence Pattern and Oscilloscope Line Trigger and Generator



## Canon

### IF+ Series 1/2-inch and 2/3-inch Zoom Lenses


Canon's IF+ family of lenses are engineered to meet the needs of the next generation of broadcasting while meeting the standards of today. Besides having the widest wide angle lens available, the IF+ lens series have wider angles at shorter M.O.D. (Minimum Object Distance) provide higher MTF performance and incorporate Hi-UD glass for reduced chromatic aberration. In addition to superb optics, they're all designed with Canon's "Ergonomic Grip" for fatigue-free shooting over an extended time. IF+ lenses are your assurance of unsurpassed quality and performance for today and tomorrow.

#### J15ax8B

A next generation internal focusing lens with the shortest MDD and widest angle of any standard lens, the J15ax8B IRS/IAS is a standard ENG lens that lets you shoot in tight or restricted areas at the closest minimum object distance ever possible and capture more of the subject. It incorporates all the great features of IF+ lenses including a built-in 2X extender, high MTF performance, Hi-UD glass, square lens hood and Canon's "Ergonomic Grip".

#### J20ax8B IRS/IAS

Excellent for ENG, sports and production, the J20ax8B IRS/IAS lets you squeeze in shots from 8mm and still take you all the way out to 320mm with its built-in extender. Incorporates all IF+ features, plus is the only lens (besides the J9ax5 28 IRS/IAS) with a Vari-Polar lens hood, enabling rotation of attached filters.



## Anton/Bauer

### Logic Series DIGITAL Gold Mount Batteries

The Logic Series DIGITAL batteries are acknowledged to be the most advanced in the rechargeable battery industry. In addition to the comprehensive sensors integral to all Logic Series batteries, each DIGITAL battery has a built-in microprocessor that communicates directly with Anton/Bauer InterActive chargers, creating significant new benchmarks for reliability, performance, and life. They also complete the communications network between battery, charger and camera. With the network in place, DIGITAL batteries deliver the feature most requested by cameramen: a reliable and accurate indication of remaining battery power.

#### DIGITAL PRO PACS

The Digital Pro Pac is the ultimate professional video battery and is recommended for all applications. The premium heavy duty Digital Pro Pac cell is designed to deliver long life and high performance even under high current loads and adverse conditions. The size and weight of the Digital Pro Pac creates perfect shoulder balance with all cameras/camcorders.

- DIGITAL PRO PAC 14 LOGIC SERIES NICAD BATTERY  
14.4V 60 Watt Hours. 5 1/8 lbs. Run time: 2 hours @ 27 watts, 3 hrs. @ 18 watts
- DIGITAL PRO PAC 13 LOGIC SERIES NICAD BATTERY  
13.2V 55 Watt Hours. 4 3/4 lbs. Run time: 2 hours @ 25 watts, 3 hours @ 17 watts

#### GOLD MOUNT BATTERIES

Logic Series Gold Mount batteries are identical to the respective DIGITAL versions with respect to size, weight, capacity, IMPAC case construction, and application. They are similarly equipped with micro code logic circuits and comprehensive ACS sensors. They do not include DIGITAL microprocessor features such as the integral diagnostic program "Fuel Computer", LCD/LED display and InterActive vintender fuel gauge circuit.

- PRO PAC 14 NICAD BATTERY (14.4V 60 Watt Hours)
- PRO PAC 13 NICAD BATTERY (13.2V 55 Watt Hours)
- TRIMPAC 14 NICAD BATTERY (14.4V 40 Watt Hours)
- TRIMPAC 13 NICAD BATTERY (13.2V 36 Watt Hours)
- COMPAC 14 NICAD BATTERY (14.4V 40 Watt Hours)
- COMPAC 13 NICAD BATTERY (13.2V 36 Watt Hours)

## InterActive 2000 Power/Chargers


A new generation of portable power systems, the InterActive 2000 Power/Charger series was designed from the ground up to offer unprecedented flexibility and economic expansion capabilities. Fully compatible with all current and future Gold Mount batteries, the InterActive 2000 Power/Chargers deliver all the advancements and proven reliability of interactive charging plus the ability to power a camera from AC mains. They also offer a unique, totally modular design that allows economic expansion to meet future needs. Starting with a base model, upgrades can be easily added at any time. With an unparalleled combination of value and features, the InterActive 2000 Power/Charger system: redefines the standard of power for video applications.

#### Standard Features on all InterActive 2000 Power/Chargers

- Two or four position models each with the full complement of InterActive technologies (see previous page) including: Automatic balance and rejuvenation, Lifesaver Maintenance, Cold battery safety and Power Loss Memory modes.
- They have a slim, lightweight design for easy portability. The 2702 and 2401 Quad Power/Chargers fit easily in a notebook computer carrying case and the 2701 and 2401 Dual Power/Chargers weigh just 2.3 pounds. Plus, they include power supplies, so you can leave your AC supply behind!
- Built in regulated DC power supply output powers cameras from AC mains worldwide. Wide range (90-260 volts AC, 50/60 Hz) input automatically adapts to any worldwide source.
- Standard serial output for printer and PC interface.
- Two power choices for optimized performance and economy.
- LCD automatically displays critical battery and charger data.
- Expanded communications with Digital Batteries and new charging protocols improve charge times and performance.
- Modular design allows addition or upgrades after purchase:
  - A charge position expansion port allows the addition of expansion charge modules to increase charge capability to four, six or eight batteries, including NP and BP-90 types.
  - Optional Diagnostic/discharge module featuring automatic calibration of digital batteries is available for each model. (standard on Quad 2702)
  - Power supply upgrade allows 40 Watt (2400 series) to be upgraded to 70 Watt (2700 series) capability.

## QUAD 2702/2401 Four-Position Power/Chargers

The 2401 and 2702 are the lightest (and slimmest) full featured four position chargers ever available. Designed for the rigors of professional use, they can fast charge four Gold Mount batteries and can be expanded to charge up to eight. They also power any camera/camcorders from any AC main: all in a package the size of a notebook computer and weighing a mere 4 lbs (1.8 kg)! The 40 watt (upgradeable to 70 watts) 2401 will charge ProPac batteries in two hours and Trimpac batteries in one hour. Add the Diagnostic/Discharge module and the QUAD 2401 becomes an all purpose power and test system with its standard LCD providing instant access to battery status. The 70 watt QUAD 2702 bundles the complete package of all the Power/Charger features in the ultimate professional power system.



## Dual 2702/2401 Two-Position Power/Chargers

The DUAL 2701 (70 watt) and 2401 (40 watt) are sleek, rugged and economical two position Power/Chargers that have all the features of Anton/Bauer InterActive 2000 technology including DC camera output and an LCD display that shows the status of each battery as well as the internal battery data communicated from Digital Batteries. The high performance DUAL 2701 will charge any Gold Mount battery in one hour, the DUAL 2401 charges ProPac batteries in two hours and Trimpacs in one hour. Their compact, lightweight package design makes them the ultimate travel Power/Chargers. They can also be upgraded with the Diagnostic/Discharge Module and/or with the Expansion Charge Modules to charge up to six batteries of any type.



## PROFESSIONAL VIDEO TAPE



|                                  |       |                  |       |
|----------------------------------|-------|------------------|-------|
| Professional Grade VHS           |       |                  |       |
| PG-30                            | 2.29  | PG-60            | 2.49  |
| SG-30                            | 3.39  | SG-60            | 3.99  |
| Superior Grade Double Coated VHS |       |                  |       |
| ST-30                            | 6.99  | ST-60            | 7.49  |
| H471S S-VHS Double Coated        |       |                  |       |
| ST-30                            | 6.99  | ST-60            | 7.49  |
| M221 Hi 8 Double Coated          |       |                  |       |
| Metal Particles                  |       | Metal Evaporated |       |
| P630HMP                          | 4.99  | E630HME          | 8.39  |
| P660HMP                          | 5.49  | E660HME          | 10.49 |
| P6120HMP                         | 8.49  | E6120HME         | 13.99 |
| M321SP Metal Betacam (Box)       |       |                  |       |
| 05S                              | 17.95 | 10S              | 18.49 |
| 20S                              | 19.95 | 30S              | 22.95 |
| 60L                              | 31.95 | 90L              | 49.95 |

## maxell

|                                           |       |               |       |
|-------------------------------------------|-------|---------------|-------|
| P/PLUS Expitaxial VHS                     |       |               |       |
| T-30 Plus                                 | 1.69  | T-60 Plus     | 1.99  |
| T-120 Plus                                | 2.19  | T-160 Plus    | 2.69  |
| HGX-PLUS Expitaxial VHS (Box)             |       |               |       |
| HGXT-60 Plus                              | 2.69  | HGXT-120 Plus | 2.99  |
| HGXT-160 Plus                             | 3.99  |               |       |
| BQ Broadcast Quality Expitaxial VHS (Box) |       |               |       |
| T-30 BQ                                   | 5.49  | T-60 BQ       | 6.19  |
| T-120 BQ                                  | 7.39  |               |       |
| BQ Certified Professional S-VHS (In Box)  |       |               |       |
| ST-31 BQ                                  | 7.19  | ST-62 BQ      | 8.09  |
| ST-126 BQ                                 | 8.39  | ST-182 BQ     | 14.99 |
| Betacam SP                                |       |               |       |
| B5MSP                                     | 15.75 | B10MSP        | 17.75 |
| B30MSP                                    | 20.50 | B60MSP        | 29.75 |
| B90MSP                                    | 46.49 |               |       |

## SONY

|                                                   |       |                   |       |
|---------------------------------------------------|-------|-------------------|-------|
| Hi-8 Professional Metal Video Cassettes           |       |                   |       |
| P6-30 HMPX                                        | 4.59  | P6-30 HME         | 7.99  |
| P6-60 HMPX                                        | 5.59  | P6-60 HME         | 11.49 |
| P6-120HMPX                                        | 8.89  | P6-120HME         | 15.49 |
| Hi-8 Metal Evaporated Editor (HMEAD)              |       |                   |       |
| E6-30 HMEAD                                       | 10.49 | E6-60 HMEAD       | 14.89 |
| E6-120 HMEAD                                      | 20.19 |                   |       |
| PR Series Professional Grade VHS                  |       |                   |       |
| T-30PR                                            | 2.39  | T-60PR            | 2.59  |
| T-120PR                                           | 2.79  |                   |       |
| PM Series Premier Grade Professional VHS          |       |                   |       |
| T-30PM                                            | 3.49  | T-60PM            | 3.99  |
| T-120PM                                           | 4.79  |                   |       |
| BA Series Premier Hi-Grade Broadcast VHS (In Box) |       |                   |       |
| T-30BA                                            | 3.59  | T-60BA            | 3.99  |
| T-120BA                                           | 4.79  |                   |       |
| MQ Master Quality S-VHS (In Box)                  |       |                   |       |
| MQST-60                                           | 7.99  | MQST-120          | 8.39  |
| BRS 3/4" U-matic Broadcast Standard (In Box)      |       |                   |       |
| KCS-10 BRS (mini)                                 | 8.29  | KCS-20 BRS (mini) | 8.99  |
| KCA-10 BRS                                        | 8.19  | KCA-20 BRS        | 8.69  |
| KCA-30 BRS                                        | 9.69  | KCA-60 BRS        | 13.39 |
| XBR 3/4" U-matic Broadcast Master (In Box)        |       |                   |       |
| KCS-10 XBR (mini)                                 | 8.79  | KCS-20 XBR (mini) | 10.19 |
| KCA-10 XBR                                        | 8.29  | KCA-20 XBR        | 10.69 |
| KCA-30 XBR                                        | 11.99 | KCA-60 XBR        | 15.69 |
| KSP 3/4" U-matic SP Broadcast (In Box)            |       |                   |       |
| KSP-S10 (mini)                                    | 9.59  | KSP-S20 (mini)    | 11.09 |
| KSP-10                                            | 10.09 | KSP-20            | 11.59 |
| KSP-30                                            | 12.99 | KSP-60            | 16.99 |
| BCT Metal Betacam SP Broadcast Master (Box)       |       |                   |       |
| BCT-5M (small)                                    | 14.99 | BCT-10M (small)   | 15.99 |
| BCT-20M (small)                                   | 17.99 | BCT-30M (small)   | 18.99 |
| BCT-30ML                                          | 21.49 | BCT-60ML          | 27.99 |
| BCT-90ML                                          | 41.99 |                   |       |
| BCT Metal Professional Series                     |       |                   |       |
| UVW-30MLA                                         | 18.95 | UVW-60MLA         | 24.99 |
| UVW-90MLA                                         | 39.95 |                   |       |

## Quick-Draw Professional FOR CAMCORDERS OR STAND ALONE CAMERAS

Designed for working from the back of a van or the trunk of your car. The top loading case has a wide open "fold back" top that stays neatly out of the way. It's lighter and more compact than shipping cases, thus saving valuable storage space. With other equipment crowded around it the sturdy built-in frame provides added protection.

- Heavy duty shoulder strap & comfortable leather hand grip.
- Carry it in crowds - crush proof aluminum guard protects viewfinder.
- Fits into back seat and fastens securely with seat belt.
- Holds camera with on-board battery attached.
- Lid closes with Velcro for quick-opening or secure with full-length zippers.
- Dual purpose rear pouch is an expandable battery chamber or all-purpose pocket.
- Two trim exterior pockets and clip board pocket.



ALL ORDERS SHIPPED WITHIN 24 HOURS

Circle (58) on Free Info Card  
www.americanradiohistory.com



# "THE PROFESSIONAL'S SOURCE . . ."

FOR ORDERS CALL:

800-947-9928

212-444-5028

OR FAX (24 HOURS):

800-947-9003

212-444-5001

**ALL ORDERS SHIPPED  
WITHIN 24 HOURS**  
**OVERNIGHT SERVICE AVAILABLE**

On the Web: <http://www.bhphotovideo.com>



## DIGITAL PROCESSING SYSTEMS INC.

### PVR-2500 'Perception' Digital Video Recorder

*The Heart of an Advanced Digital Audio/Video Workstation*

The PVR-2500 offers powerful features for awesome animation, morphing and rotoscoping capabilities. With features like 720 x 480 resolution, 10-bit 2x oversampled video encoding, better than D1 scaling, component and S-Video outputs, multi-processor support and integrated FAST SCSI-2 controller, it empowers your computer to rival the finest professional production studios.

- The PVR-2500 is a full-length PCI card with a FAST SCSI-2 controller which connects to one or up to seven dedicated hard drives. Because the SCSI controller is integrated with the PVR-2500, video data never has to go over the PCI bus during playback. This avoids the bottlenecks found in systems which use the computer's hard drive for video storage.
- Perception gets animations out of your computer fast and easy. Its exclusive multi-format virtual file system ensures complete integration with your Windows NT applications. Any acquired video or computer generated Perception video clips appear simultaneously in many different file formats including TARGA, SGI, BMP and IFF. Perception is compatible with Lightwave 3D, Autodesk 3D Studio Max, Crystal Graphics TOPAS 5.1 PRO, Microsoft Softimage, Elastic Reality and others.
- Runs under Windows NT 3.5 on computers with Pentium, DEC Alpha or MIPS processors. Perception's software utilizes NT's native support for multitasking and multiple processors, allowing use with the most powerful computers.
- Perception performs real-time interpolation of 30 fps video to 24 fps film rates or vice versa. This means that it is also at home on the Hollywood movie set as well.
- Video output section utilizes 10-bit 2x oversampled encoding and provides broadcast quality CCIR-601 (720 x 480) resolution. Dynamic range is in excess of D1 scaling so images are brighter, have more color and greater spatial resolution than ever before. Component, composite and S-Video outputs are provided via the included breakout cables.
- Also control BVU protocol VCRs for video acquisition. VCR-like controls on the Perception's GUI simplifies the task of batch digitizing and recording. In this mode, the PVR-2500 can read SMPTE time code from the source deck.
- Can be used with any Windows NT compatible sound card while synchronization of audio and video is maintained by the PVR software. Captured audio is stored on the computer's system hard drive, not on the dedicated drives. This approach provides maximum flexibility for manipulating audio and video during editing.
- Can be used with third party editing software such as Adobe Premier or iSync Speed Razor MACH III. In fact, a system equipped with the PVR-2500, AD-2500 capture card, a sound card, editing software & one or more SCSI drives becomes a non-linear editor of unparalleled performance—at an unbeatable price.

#### AD-2500 Component Video Capture Card


Coupled with the AD-2500 live video capture daughter card, the PVR-2500 becomes a broadcast-quality digital disk recorder. It delivers unsurpassed picture quality and storage capacity is limited only by the size/number of attached SCSI hard drives.

Has component, composite and S-Video inputs for real-time recording. Captured video can also be exported as sequential RGB files for rotoscoping and other compositing applications. Incorporates a sophisticated automatic entropy prediction circuit that analyzes the content of incoming video and dynamically calculates the optimum amount of compression on a field-by-field basis—even during real-time recording. You also have complete manual control over compression level/quality settings.

#### FX-2500 Perception Effects Accelerator

The FX-2500 significantly reduces the time required to render complex non-linear transitions. Although it doesn't deliver real-time transitions, it significantly improves the productivity of non-linear editing systems by dramatically speeding up the rendering time for many effects and transitions.

A stand-alone PVR-2500 provides real-time cuts between video clips, but other transitions such as dissolves and wipes, substantial delay can occur. A 30 frame dissolve can take minutes to render, even with the fastest PC, because the host CPU processes source frames on a pixel-by-pixel basis. The Perception FX reduces the waiting time to under 10 seconds.



#### DAR-2500 Digital A/V Recorder

Featuring comprehensive audio post-production capabilities, the A4V (Audio for Video) board provides perfect video/audio synchronization when used with the PVR-2500. A full-length PCI card, the A4V's input and output connections are made via the supplied breakout cables while digital audio is stored on the system hard drive. And to ensure compatibility with third-party audio editing software, it plays and records standard uncompressed WAV files. It can also be controlled directly by video editing software like iSync's Speed Razor Mach III.

- Non-linear, non-destructive audio editing. No waiting for edits to compile.
- True audio scrub.
- Simultaneous record/playback. Play up to three stereo tracks while recording one stereo track.
- Mix four stereo source tracks down to two output channels in real-time.
- Four-band Parametric EQ for each channel (assignable by stereo pair).
- Real-time reverb and compressor/limiter. Additional effects can be easily added via software upgrades.
- Built-in LTC/VITC time code generator/reader/inserters lets you create window dubs with time code information superimposed over composite or S-Video signals.
- Unlimited audio editing capabilities with third party software.



## FAST The Art of Digital Video

### Video Machine

Video Machine is an edit controller for A/B roll, A/X roll and audio/video split editing. It controls any VCR with Control-L or Panasonic 5-pin edit protocol. With optional interface it provides RS-232C/RS-422 machine control as well. Controls 3 VCRs with no other hardware. It also features EDL export, alpha wipes, test pattern generator, Editing Panel, and more than 400 digital effects.

- Bundled VM-Studio software uses a graphical timeline interface for editing. You can work with all available material at the same time, and all objects in the timeline can be edited and moved to any position, any time.
- During previews and recording uses time code (VITC, RC, Control Track) to accurately cue the VCRs to the in/out points of individual clips. Graphics, titles, and effects are automatically inserted at the point specified.
- Over 400 digital video effects (dissolves, wipes, tumblers, flips, picture-in-picture, fly-ins, fly-outs, zoom etc.) With the DVE Editor, create an unlimited number of 2D effects. All effects are performed in real time.
- Supports composite and S-Video signals in PAL and NTSC. Up to six video inputs (two of which are controllable) can be connected, and any two can be assigned to the two video channels. Video standards can be mixed in real time.
- Two integrated frame synchronizers eliminate the need for TBCs (Time Base Correctors). Also provides two 32-bit framestores and a built-in background color generator.
- VM-Titlet lets you create titles, logos and graphics in Windows application such as Corel DRAW or Photoshop. Use any font, size and color. Graphics produced in standard word processing or graphics applications are imported via the VM-Titlet software module. Scanned pictures or images can even be imported from Photo CDs. Titles and graphics can be manipulated with any of the effects available. Functions such as scroll and crawl titling are off and running within a matter of seconds. Has complex filters for anti-flickering, scaling etc. Produces text without "stair-stepped" effects.



## VIDEO MACHINE + DPR = HYBRID EDITING

**Linear and Non-Linear Editing in a Single System for Maximum Flexibility**

Video Machine with DPR (Digital Player/Recorder) is the only system which offers real-time mixing of analog and digital sources. Video Machine with DPR integrates two complete editing systems under one interface, thus ensuring the optimum balance of cost, performance, training, and maintenance. It executes both tape- and hard disk-based edits effortlessly, and it's simply a matter of preference whether you work in analog or digital, or both—all on the same system. Only the FAST hybrid system gives you the best of both worlds. Instead of being stuck with an inflexible system, you can select your method to suit your circumstances. For example, viewing and logging your tape footage can be tedious enough without having to take the next step. But imagine instructing the system to copy selected scenes onto the hard disk, while you take a coffee break. When you come back, you're ready to enjoy the creative freedom of non-linear. And once the creative decisions are made, you can either have the system perform the on-line edit for you, from tape or hard disk, or you can choose to go with an EDL export. No other system gives you this much flexibility.

#### DPR (Digital Player/Recorder):

- With DPR Video Machine becomes a state-of-the-art digital editing system. In addition DPR executes effects and transitions in real time. True MJPEG compression enables every frame or field to be accessed individually.
- Compresses and decompresses digital (software-selectable) from 200:1 to 2:1. At 2:1 DPR delivers broadcast, on-line quality allowing for mastering directly from the hard disk.
- Video Machine system treats the DPR just like any other "normal" video source. The DPR is enabled by a single mouse-click in the VM-Studio software. The edit suite instantly converts to nonlinear and allows you for example, to execute an offline edit in real time. A second click changes the editing suite back to analog. You can now edit the project using tape source material from your VCRs. Whether working on- or off-line, linear or non-linear—all four editing modes are available on one complete system.
- Integrated digital eight-channel mixer allows audio to be edited in real time in standard WAVE format. The audio is synced to video and recorded in full 16-bit, 48 kHz sampling. It is easy to split the digital audio and video signals, and the waveform display helps to precisely position edits. All eight online tracks can be monitored simultaneously.
- DPR is an ideal solution for animation. It offers broadcast quality while reducing recording time to a fraction of what is required with single-frame capable VCRs. Scene logging and batch digitizing are also automatically integrated via the connection of the edit control functions of Video Machine.
- Video Machine is based on an open architecture design and is almost infinitely expandable as far as storage. Up to 29 hard disks can be daisy-chained directly to the DPR. Using 9 GB drives, up to 260 GB is available on the system—enough for 15 hours of 5:1 or 300 hours of 100:1 video.

#### OPTIONAL ACCESSORIES:

Video Machine is designed to interface perfectly with traditional broadcast equipment. These rack-mountable accessories integrate Video Machine into a professional video studio environment.

#### Studio Control (SC):

Connects video, audio, sync, machine control and TC cables from VCRs to Video Machine. With built-in LTC reader/generator, additional preview outputs, balanced XLR audio and reference in/out, the SC Box offers a simple way to interface with studio equipment.

#### YUV Interface:

19-inch terminal box connects to the internal YUV board. Enhanced analog bandwidth, 2X oversampling and a balanced signal filter guarantee excellent quality. Included calibration software lets you adjust volume and timing. Digital signal passes directly without generation loss.

#### GPI Box:

The GPI box provides control of external DAT recorders, CD players, video mixers and effect generators. As a master, Video Machine can sync control of up to four cameras with pulse signals and has tally support for live devices. In slave mode, Video Machine serves as the player for titles, graphics and digital video effects.

#### Jog/Shuttle Wheel:

An alternative to the mouse and keyboard, the physical Jog/Shuttle wheel offers a better "feel" for the edit and during preview.

## TRUEVISION

### TARGA2000 DTX/RTX



The **TARGA 2000 DTX** (data throughput enhanced) is a next generation digital video solution that delivers unmatched performance on the desktop, as well as offering a secure, flexible upgrade path to real-time digital video effects. The 2000 DTX offers an open systems architecture and an industry best data rate of up to 12 MB/second to deliver the most pristine video quality available on the desktop today—at any price. A single code configuration of the award-winning TARGA 2000 RTX, the 2000 DTX is a perfect mate for professional non-linear editing, compositing, animation, and 3D applications.

- Motion-JPEG codec. DVR architecture delivers near lossless quality video. Supports data rates up to 12MB/second (400 KBC/Frame NTSC).
- CCIR 601 720 x 486 NTSC and 720 x 576 PAL resolution support. Square pixel 640 x 480, 648 x 486 NTSC or 768 x 576 PAL resolution support.
- Synchronized audio and video in hardware.
- Balanced CD and DAT quality audio via XLR connectors with optional Breakout Box. The box can be utilized as a desktop device or rack mounted in a standard 19" rack.
- Drives both RGB and NTSC/PAL monitors simultaneously.
- On-board acceleration up to 600% of 19 popular Adobe Premiere transitions.
- Cross platform support for Mac QT and Windows NT.
- Video-for-Windows native file formats.
- Supports component YUV, RGB, S-Video and composite input and output.
- For those that will come to need non-linear A/B roll editing capability, there is also an upgrade path to the real-time effects processing of the TARGA 2000 RTX.

The **TARGA 2000 RTX** brings real-time processing and the highest I/O throughput to the desktop. It delivers real-time DVE, broadcast quality video, and professional I/O connections with support for industry standard video file formats under Mac/Windows NT operating systems. The system is designed to meet the needs of video professionals who are looking for an open-system solution for non-linear editing and desktop multimedia production.

- Processes digital video effects such as wipes, fades and dissolves in real-time. These common transition effects now require long render times using the host CPU for many computer-intensive tasks. On the RTX, these frames are created in real-time at full quality. Once frames are created by the RTX, they can be instantly output to tape at the high quality level demanded in professional broadcast applications—full motion 60 field NTSC and 50 field PAL broadcast quality video (300 KB/frame). Supports CCIR 601 as well as square pixel resolutions.
- Fully video-for-windows and QuickTime native, so all your current authoring applications supporting these standards will fly with TARGA.
- Drives both the video monitor and the RGB screen up to 21 inches at 24-bit color and supports full-motion previewing on both RGB and video displays for optimal video editing.
- Designed for easy integration into broadcast and post-production facilities, the 2000 RTX includes a breakout box which can be rack mounted or used as a stand alone device on the desktop. The box allows easy connection to Composite, S-Video or Component input/outputs as well as XLR balanced audio, genlock and alpha channel connections.

## ANTEX ELECTRONICS

### StudioCard

#### 4-Channel Digital Audio Card for Windows

The next generation in digital audio for the desktop, StudioCard is a premium-quality digital audio adapter with advanced features, studio-quality specs and professional connections. Unmatched in quality, flexibility and expandability, it features 4 tracks of audio sound and real-time digital mixing capability, making it the ideal board for musicians who want digital multitracking and mixing on their PC, or producers looking for a versatile board for post-production digital audio editing and uncompromised audio quality. StudioCard is Windows 95 plug and play compatible plus includes drivers for Windows NT as well.

- Key to StudioCard's amazing sound is the marriage of a low noise analog I/O section and high quality A/D and D/A converters. A PCI-based 32-bit memory mapped board, it delivers less than 0.003% total harmonic distortion and 92dB dynamic range. Plus, a PLL-based sample clock generator that can be locked to an assortment of clock sources.
- Incorporates a programmable 32-bit 40 MHz DSP and pro connections like 4 independent balanced analog I/Os (+4dBu or -10 dBV) and AES/EBU or S/PDIF digital I/O. It also offers a MIDI port with deep buffers and time stamping. No matter which type of equipment you have, StudioCard will integrate into standard studio environments.
- Compatible with film, video or MIDI. StudioCard offers synchronization via SMPTE, LTC, word and pixel clocks, and composite video. Plus, the StudioCard not only reads SMPTE timecode, but generates it as well.
- Unique to the Antex design is StudioCard's multiple adapter capability. This means you can install multiple StudioCards in a single computer for up to 16-track recording. Start with one StudioCard today - add more StudioCards tomorrow. Also included is an on-board SPX expansion connector for plugging in optional daughterboards for compression or enhanced DSP operations.

# ... FOR PHOTO & VIDEO"



TO INQUIRE ABOUT YOUR ORDER:  
800 221-5743 • 212 807-7479

OR FAX 24 HOURS:  
800 947-2215 • 212 366-3738

119 WEST 17TH STREET, NEW YORK, N.Y. 10011

Store & Mail Order Hours:  
Sun 10-4:45 • Mon & Tues 9-6 • Wed & Thurs 9-7:15 • Fri 9-1 • Sat Closed

BUSINESS LEASING AVAILABLE



## StudioFrame Modular Video Processing System

The Nova StudioFrame Series is a modular, flexible, digital/analog signal processing system. It is designed to efficiently and effectively combine a wide variety of individual function (or processor) boards such as A-D and D-A converters, video signal encoders and decoders, audio and video distribution amplifiers and frame synchronizers into more complex functional groups, all in one equipment mainframe. The scalable nature of the StudioFrame design allows it to be easily reconfigured and/or upgraded as today's video standards and requirements continue to evolve. The system is based on two rackmount frame models (the SF-3 and SF-1) allowing up to thirteen front loading processor boards and thirteen rear mounted passive interface cards to be accommodated in a single chassis. Both the StudioFrame SF-1 and SF-3 chassis are designed to meet the most stringent broadcast requirements. The SF-3 is a thirteen slot, 3RU chassis while the SF-1 is a 4 slot, 1RU chassis. All studio cards as well as the two chassis are backed by a two year warranty on parts and labor with guaranteed 24-hour turnaround service. The units are ruggedly constructed to endure studio rackmount, production van and DB (Outside Broadcast) mobile applications. A universal power supply operates at either 110 or 240 VAC, 50/60 cycle. DC operation is optionally available as is a redundant supply with automatic switchover. Dual exhaust fans maintain proper airflow and cooling. "Hot swappable" front card loading allows power-on removal/insertion of individual processing modules without disturbing others in the system. All cabling can remain in place while you service" any module. An intelligent "centerplane" provides power, sync, timing and data distribution, facilitating expansion to more complex, more cost-effective signal processing functions.



## NovaASD/NovaSDA Analog to Serial Digital & Serial Digital to Analog Converters

Components of the Nova StudioFrame series, the NovaASD and the NovaSDA incorporate the latest digital video processing techniques for high speed A-D and D-A signal conversion. They are designed to meet the most stringent broadcast requirements and their "hot swappable" front card loading facilitates servicing without disturbing other cards in the system. The NovaASD is ideal for interfacing analog video signals with digital video formats and the NovaSDA for interfacing serial digital signals with existing analog video systems as well as for signal monitoring applications.



### SDA-1 Serial Digital Component to Analog Converter

- SMPTE 259M 4:2:2 Serial Digital Component (D1) input.
- Equalized and reclocked serial digital component output.
- Analog component video (Y, R-Y, B-Y/VU), RGB or RGB/S outputs
- 10-bit D/A converters
- Output level control
- NTSC and PAL compatible

### SDA-2 Serial Digital Component to Composite and S-Video Converter

- SMPTE 259M 4:2:2 Serial Digital Component (D1) input.
- Equalized and reclocked serial digital component output
- Dual composite & dual S-Video outputs
- Color bar output selectable
- 10-bit D/A converters
- Output level control
- NTSC and PAL compatible

### ASD-1 Analog Component to Serial Digital Component Converter

- Analog component video (Y, R-Y, B-Y/VU), RGB or RGB/S inputs
- Dual SMPTE 259M 4:2:2 Serial Digital Component (D1) outputs
- 10-bit D/A converters
- Picture positioning control
- NTSC and PAL compatible

### ASD-2 Analog Component and S-Video to Serial Digital Component Converter

- Analog component and S-Video input
- Dual SMPTE 259M 4:2:2 Serial Digital Component (D1) outputs
- 10-bit D/A converters
- NTSC and PAL compatible

### SDA-3 Serial Digital Component to Analog Video Converter

- SMPTE 259M Serial Digital Composite (D2/D3) input.
- Equalized and reclocked serial digital component output
- Four analog composite video outputs
- Color bar output selectable • 10-bit D/A converters

### ASD-3 Analog Component to Serial Digital Component Converter

- Analog composite video input
- Dual SMPTE 259M 4:2:2 Serial Digital Composite (D2/D3) outputs
- 10-bit D/A converters
- Input gain adjustment

## NOVAMNR Median Noise Reducer

The NovaMNR is a StudioFrame card that eliminates impulse and transmission noise, cleans up satellite, microwave and fiber feeds and fills in CODEC and time-based corrected videotape drop-outs. It features full bandwidth, uncompressed 10-bit digital processing for ultimate video transparency as well as analog composite inputs and outputs.

- Eliminates "sparkles," those black and white dots that sometimes appear on remote video feeds. The NovaMNR incorporates a proprietary adaptive three-dimensional median filter that analyzes pixels from several fields of video and replaces the impulse noise with uncontaminated, clean video.
- Universal drop-out compensation replaces missing video information, whether it is from a time-base-corrected VCR source or the decoded output of a CODEC feed. The NovaMNR effectively fills in drop-outs with replacement video from the surrounding pixels and previous video field.

- Control's are accessible locally or remotely. A three position threshold switch (off/low/high) adjusts system noise sensitivity while a bypass/operate switch is also included. Both switches are remotely via RJ-11 jack.
- Also available in PAL and PAL-M versions.

## NC-8 RGB/Component to Composite/S-Video Encoder

The NC-8 processor module is a 10-bit digital encoder that converts analog RGB or component video input sources into Y/C and composite video. Designed to facilitate multi-format interface requirements, the module incorporates the latest digital video processing techniques along with luminance and chrominance pre-comb filtering to assure the highest quality encoding. A frame of memory is utilized to provide an effective zero insertion delay.

- 10-bit processing, 8-bit D/A conversion
- Zero insertion delay, frame of memory
- Two composite and one S-Video output.
- Analog RGB (Sync on Green or all three), RGB/Sync and YUV (Betacam) inputs. Also available with looping inputs.
- Variable luminance notch filter
- Y and C pre-comb filtering for maximum encoding performance

- Remote serial control
- Output level control
- Color bar output selectable
- Designed to meet the most stringent broadcast requirements.
- "Hot swappable" front card loading facilitates servicing without disturbing other cards
- Available in PAL and PAL-M versions

## NOVAROUTER Intelligent Matrix Routers


NovaRouter is a series of serially controlled audio and video matrix routing switches. These intelligent routers are available in 8x8, 16x16 and 32x32 matrices. They are capable of up to five switching levels to support unlimited combinations of Stereo Audio, Composite Video, Y/C Video, Component Video (Beta or MII), RGB/S and VGA Graphics. Audio follow video or breakaway routing is controlled by very intuitive computer software or optional XY control panels.

- The computer software and VGA display provides quick visualization of all crosspoints and facilitates routing operations. An unlimited number of switching configurations may be stored and recalled at the click of a mouse. User defined labels for all sources and destinations provide positive identification of the matrix status. One computer can control several NovaRouter Systems for multiple studio or large presentation system applications.
- The optional, easy to use, XY control panels provide routing functions for basic systems without the use of a computer interface. All video, audio and audio follow video switching functions are controlled by source select and destination select switches. Changing and verifying the matrix configuration is simple and clear. The XY controls may be front panel mounted or are available as a remote control unit.
- Broadcast quality audio and video processing and microprocessor control ensure superior quality and performance. Yet, the simplicity and modular configurations of NovaRouter™ make them economical for broadcast, production, cable TV, graphics, presentation, teleconferencing and educational applications.
- 8x8, 16x16 and 32x32 switching matrices
- Stereo audio, composite video, Y/C, component video, RGB/S and VGA
- Up to five (5) levels of switching
- Audio follow video and audio break-away
- Serial control via intuitive computer software or optional XY control units
- Computer VGA monitor display provides quick visualization of all crosspoints
- Easy single "click" mouse switching control
- User labelling of sources & destinations
- Store system configurations in memories
- Multiple locations can be controlled from one computer
- Push-button XY control options, front panel mount or remote control units
- Audio and video modules provide easy system upgrade



## VIDEOCONICS POWERScript

The most advanced character generator ever designed for video production, multimedia and industrial applications, PowerScript delivers the huge range of titles and graphics supported by PostScript display technology, plus animation, effects, transparency and color keying. It features two GPI inputs, anti-aliased, 17.5 ns (nanosecond) pixel resolution and 4:2:2 broadcast-quality video. It also offers high-speed RISC processing to provide real-time Level 2 PostScript imaging and fast rendering—even with the most complex images. The PowerScript works stand-alone or with a computer, has a built-in TBC, offers a powerful and intuitive interface, and is suitable for the desktop or can be rackmounted.



### Powerful Character Generator

- Choose from 35 built-in fonts or download PostScript fonts from your PC. PowerScript's high-speed RISC processor provides real-time PostScript imaging.
- Characters can be rotated at any angle, scaled to any size, stretched horizontally or vertically.
- Styles include variable bold and italic, underline and shadow (drop shadow, variable displacement and opacity). Each character can be adjusted separately.
- Text can be positioned anywhere on the screen or automatically centered, vertically or horizontally. Left, right, top, bottom and center justification is also provided.
- Characters are automatically kerned, using the font's standard kerning information. Spacing is highly flexible with variable word and letter spacing and line spacing (leading).

### Intuitive User Interface

- Built-in real-time object-based drawing tool and text editor—no computer or software required. Design can be done ahead of time and displayed later, or can be done on the fly.
- Supplied keyboard and mouse are used with easy on-screen menus to place and modify graphics and text.
- Change fonts, colors, and other characters instantly.

### Transparency and Colors

- Characters can be made transparent (0-100%) over video, other characters and graphics with 64 levels of transparency.
- Opaque characters can use over 4,000,000 colors • transparent characters can use over 8,000.
- Different colors can be used for fill and outline (variable width) as well as each letter and each graphic

### Roll, Scrawl, Animation, Effects

- Variable speed roll, crawl and push (slide) in all directions.
- Every text object, graphic and logo can be animated. Complex animations include having elements follow paths, bounce, etc.
- Elements can change outline and/or fill color, transparency, position as they move and results are displayed in real time.
- Move individual characters in different directions: make colors change, flash words, make letters and words bounce, spin a letter across the screen. Use fades and wipes to transition between titles and video or between two pages of titles.

### Backgrounds and Graphics

- Titles can be placed on solid color, patterned or graduated backgrounds, or they can be genlocked to incoming video.
- Lines, squares, rectangles, ovals and circles can be created and placed anywhere on the screen. Each graphic object can use a different color, transparency, rotation, size, fill and outline.

### Imported Logos and Graphics

- Accepts most PostScript or PCL format graphics without modification. Imported images can be any size and can be scaled, skewed, and rotated when placed on screen. Transparency and anti-aliasing can be defined when graphic is generated.

### Expansion Capabilities

Although PowerScript operates on its own, you can still add peripherals and connect to a computer or network. Two PC-card slots allow the addition of non-volatile flash-RAM and Ethernet cards. RS-232 port allows connection to desktop computers for added storage and downloading of fonts or graphics from a PC.



## LEADER

Manufacturing test and measurement equipment for over 40 years, Leader Instruments is the standard which others are measured against for reliability, performance, and most important—cost effectiveness. Before a product is brought to market, an exceptional degree of energy and effort go into its design. Prototypes are built and tested to withstand environmental and other factors far exceeding actual operating conditions. These include high humidity, extremes of heat, cold, shock and vibration. Manufacturing quality is built in every step of the way and only the finest parts are used. At each production run, subassemblies are separately tested before they are integrated into the finished product, then each product is tested again. This is why less than half of 1% of all Leader products are ever returned for warranty repair or adjustment.



### 5860C WAVEFORM MONITOR

A two-input waveform monitor, the 5860C features 1H, 1V, 2H, 2V, 1 s/div and 2V mag time bases as well as vertical amplifier response choices of flat, IRE (low pass), chroma and DIF-STEP. The latter facilitates easy checks of luminance linearity using the staircase pattern. A PIX MON output jack feeds observed (A or B) signals to a picture monitor, and the unit accepts an external sync reference. Built-in calibrator and on-off control of the DC restorer is also provided.

### 5850C VECTORSCOPE

The ideal companion for the 5860C Waveform Monitor, the 5850C adds simultaneous side-by-side waveform and vector monitoring. Featured is an electronically-generated vector scale that precludes the need for fussy centering adjustments and eases phase adjustments from relatively long viewing distances. Provision is made for selecting the phase reference from either A or B inputs or a separate external timing reference.

### 5100 4-Channel Component / Composite WAVEFORM

The 5100 handles three channels of component signals, plus a fourth channel for composite signals, in mixed component / composite facilities. Features are overlaid and parade waveform displays, component vector displays, and automatic bow-tie or "shark fin" displays for timing checks. Menu-driven options select format (525/60, 625/50, and 1125/60 HDTV), full line-select, vector calibration, preset front-panel setup and more. On-screen readout of scan rates, line-select, preset numbers, trigger source, cursor time and volts.

### 5870 Waveform/Vectorscope w/SCH and Line Select

A two-channel Waveform/Vectorscope, the microprocessor-run 5870 permits overlaid waveform and vector displays, as well as overlaid A and B inputs for precision amplitude and timing/phase matching. Use of decoded R-Y allows relatively high-resolution DG and DP measurements. The 5870 adds a precision SCH measurement with on-screen numerical readout of error with an analog display of SCH error over field and line times. Full-raster line select is also featured with on-screen readout of selected lines, a strobe on the PIX MON output signal to highlight the selected line, and presets for up to nine lines for routine checks.

### 5872A Combination Waveform/Vectorscope

Models 5872A offers all the operating advantages of the 5870, except for the following: SCH is deleted from the 5872A (line select retained), making it ideal for satellite work.

### 5864A Waveform Monitor

A two-input waveform monitor that offers full monitoring facilities for cameras, VCRs and video transmission links. The 5864A offers front panel selection of A or B inputs, the choice of 2H or 2V display with sweep magnification, and flat frequency response or the insertion of an IRE filter. In addition, a switchable gain boost of X4 magnifies setup to 30 IRE units, and a dashed graticule line at 30 units on screen facilitates easy setting of master pedestal. Intensity and focus are fixed and automatic for optimum display. Supplied with an instruction manual and DC power cable.

### 5854 Vectorscope

A dual channel compact vectorscope, the 5854 provides precision checkout of camera encoders and camera balance, as well as the means for precise genlock adjustments for two or more video sources. Front panel controls choose between A and B inputs for display and between A and B for decoder reference. Gain is fixed or variable, with front panel controls for gain and phase adjustments. A gain boost of 5X facilitates precise camera balance adjustments in the field. Supplied with a DC power cable.



ALL ORDERS SHIPPED WITHIN 24 HOURS

Circle (59) on Free Info Card

www.americanradiohistory.com

# The GALLERY

## Can you afford to be off the air ?

Discover **VideoALERT**, a PC signal monitor and response system that triggers an alarm when you lose video or audio. It's your low cost solution for Master Control, off-site, remote sites or anywhere you need to monitor signal activity.

- ◆ VGA graphics warn of pending problems ◆ Software triggers a GPI or dials a beeper
- ◆ Signal activity log cuts trouble-shooting time & cost ◆ Single or multi-channel operation



### DUBNER

INTERNATIONAL, Inc.

13 Westervelt Place Westwood, NJ 07675

fax: 201 358-9377 <http://www.dubner.com>

call  
201 664-6434

Circle (62) on Free Info Card

**Matthey** Serial Digital Video

**INTERFACE PRODUCTS**

- ☐ Serial Digital A-to-D and D-to-A
- ☐ NTSC/PAL Decoders/Encoders
- ☐ Digital DA's
- ☐ Monitoring D/A's
- ☐ Audio embedders/extractors

**Television Equipment Associates, NY**  
914.763.8893 Fax: 914.763.9158

**Matthey Electronics, UK**  
+44 1782 524918 Fax: +44 1782 524977  
E Mail: [sales@matthey.demon.co.uk](mailto:sales@matthey.demon.co.uk)

Circle (60) on Free Info Card

**PUT THE POWER OF NUCOMM INC. IN YOUR HAND**

**with our HTG4 Hand Held Test Generator**

- SMPTE/EBU Color Bars, Multi-Burst, NTSC, Ramp & Black Burst
- 16 Character ID Display
- Small size — 4.5" x 2.75" x 1.0"
- Stereo 1 kHz Test Tone
- 12 Hours of Battery Operation

**ONLY \$575**


**JUST CALL 1-800-9-NUCOMM X3030**

Credit Cards Accepted

**NUCOMM INC.**  
MICROWAVE COMMUNICATION PRODUCTS  
101 Bilby Rd., Hackensack, NJ 07840  
Tel: 908-852-3700 Fax: 908-813-0399  
<http://www.nucomm.com>

Circle (61) on Free Info Card

## New Viewer Information made easy



### Audio OnLine™

is ideal for... Concert info... Sports scores...  
Weather/ski/surf reports...  
School closings... Traffic updates...  
Voting lines... Public Service info...

- Answers 2-16 phone lines
- Hundreds of messages
- Hours of recording time
- On screen call counter
- Installs in any 386+ PC in minutes

#### HENRY ENGINEERING

503 Key Vista Drive, Sierra Madre, CA 91024 USA  
TEL (818) 355-3656 FAX (818) 355-0077

FAX-on-Demand Doc #124 (818) 355-4210  
Internet: <http://www.henryeng.com>



Circle (63) on Free Info Card

# The GALLERY

CLIP AND SAVE! 

## BAF SATELLITE SPACE

**BAF Satellite Space** ..... (800) 966-3822  
Best price & service, domestic & international • KU & C-Band, SNG & long-term rates  
LOCAL (804) 221-0544 FAX (804) 221-0818 E-MAIL 2059198.mcimail.com

**SNV, ENG, EFP, Radio ENG/SNV Vehicles** ..... (800) 633-8223  
ADDRESS 314-316 Northstar Ct., Sanford FL 32771 LOCAL (407) 324-8250  
FAX (407) 324-7860 E-MAIL baf@gate.net WEB <http://www.bafcom.com>

**European Sales** ..... +44 1789 765 850  
ADDRESS Unit 2, Tything Park; Arden Forest Industrial Estate; Alcester,  
Warwickshire, B49 6ES UK FAX +44 1789 765 855



Circle (64) on Free Info Card



**VIDEO  
FILTERS AND  
DELAY LINES**  
  
**ISO 9001  
CERTIFIED**

### FILTERS:

Active Antialiasing  
Passive Antialiasing  
Reconstruction  
Low Pass  
Band Pass  
Video Band Limiting  
Brickwall  
HDTV Filters  
Pulse Shaping Filters

### DELAY LINES:

Bandwidth to 30MHz  
Fixed or  
Programmable  
Pulse Delays  
Active Delays

**STERLING TECHNOLOGY, INC.**  
Phone 203-272-7728 • Fax 203-272-9860  
Email: patb@nai.net

Circle (66) on Free Info Card

## Slow Motion Controllers for Demanding Sports Production



### ST300-S/SM Slow Motion Controller

**NEW!**

- All the features and functions you would expect to find on an \$8,000 to \$10,000 slow motion controller for less than \$3500!
- Simple and easy to use with a small space-saving footprint.
- Powerful set-up menu—configure the slow motion controller for the way you work.
- Quickly and easily store and recall up to 100 cue points. Cue points are retained when power is turned off.
- Slow motion from -100% to +200% of play speed.
- Can be customized for your specific application.
- T-Bar or detented wheel provide fast & easy slow motion control

**PHONE:  
(818)  
252-0198**

**FAX:  
(818)  
252-0199**

Another Control  
Solution From ...

**DNF  
INDUSTRIES**

Circle (65) on Free Info Card

## ADVERTISE IN The Gallery

- 32,000 TV-only circulation
- Free reader service number
- Frequency discounts
- Agency discounts

**Call Jeff Utter at 800/896-9939**

## professional services

**RICH BISIGNANO**  
President

### East Coast Video Systems

consultants • engineers • systems integrators  
52 Ralph Street  
Belleville, NJ • 07109  
201.751.5655  
Fax: 201.751.8731  
102466.25@compuserve.com

on line in time

**JOHN H. BATTISON P.E.**  
**CONSULTING BROADCAST ENGINEER,**  
FCC APPLICATIONS AM, FM, TV, LPTV  
Antenna Design, Proofs, Fieldwork  
2684 State Route 60 RD #1  
Loudonville, OH 44842  
419-994-3849

### NETCOM

STATE OF THE ART ENGINEERING  
FOR AUDIO AND VIDEO  
ENGINEERING DESIGN • CAD DRAFTING SERVICES  
CABLE FABRICATION • PRE-WIRED PATCH PANEL RACKS  
SYSTEM INSTALLATIONS • EQUIPMENT SALES  
**(201) 837-8424**  
FAX: (201) 837-8384  
1465 PALISADE AVE., TEANECK, NJ 07666

**D.L. MARKLEY  
& Associates, Inc.**  
**CONSULTING ENGINEERS**  
2104 West Moss Ave.  
Peoria, Illinois 61604  
(309) 673-7511  
FAX (309) 673-8128  
Member AFCCE

### CHAN ASSOCIATES

Strategic Marketing • Public Relations • Advertising  
1307 Shadow Lane, Suite C  
P.O. Box 5509  
Fullerton, CA 92838-0509  
Phone: (714) 447-4993  
Fax: (714) 578-0284  
Pager: (714) 506-1357  
Email: cchan@ix.netcom.com  
CompuServe: 74601,2707

**Curtis Chan**  
President

**H&E HAMMETT & EDISON, INC.**  
CONSULTING ENGINEERS  
RADIO AND TELEVISION

**DANE E. ERICKSEN, P.E.**  
Box 280068  
San Francisco, CA 94128  
707/996-5200 707/996-5280 Fax

**BROADCAST PRODUCTS**

**BECK ASSOCIATES**

2403 HOWARD LANE  
AUSTIN • TX • 78728  
**1-800-728-3725**  
FAX: (512) 388-1833

**NEW!!**

**SDV 4-4 - Serial Digital and Analog Video Monitoring DA - 4-2-2/270 mbps.**  
Four relocked SDV outputs, plus four CVBS or RGB outputs. 10 bit DACs. Fits GVG 8500/8800 DA frames. **\$895**

**TBC-RMT - TBC Remote Control Unit**  
Remote control of up to 3 TBC's. For use with internal TBC's on BVW, DVW, PVW, UVW, and BVH Beta machines or any machine using Sony BVR-50 controller. Purchased with 1, 2, or 3 modules. With 3 modules. Now available for JVC machines - Series 22, 80, 85. **\$960**

**SCR-4X8 - Serial Machine Control Router** - Input/Output Twelve rear mounted DB9-F connectors (four controllers, eight devices). EIA RS-422 send and receive. Controls: Twelve lighted pushbuttons for channel assignment. **\$980**

**SCP-10 - Serial 422 Patch Panel**  
10x10 passive non-normalizing serial data patch panel. Two rack units high. Legend strips and 10 patch cords included. **\$350**

**VU2-P - VU/Peak Meter with Phase Indicator** - Simultaneous peak and VU display. Solid state phase indication. Highly readable LED arrays. Adjustable headphone output. Hi-impedance looping inputs. **\$890**

**SPK-2 - Two Channel Audio Monitor**  
Two channel audio confidence monitoring. Accepts both balanced and unbalanced inputs. Five switchable listening modes. Headphone output with speaker mute. **\$650.**

# classified

## FOR SALE

### \* Studio Exchange \* Burbank

\*\*\*

(818) 840-1351 Fax (818) 840-1354

*New and Used Video Equipment*

**Audio/Video Dealer**

**Starring**

**Panasonic & Sony**

**CALL NOW FOR CURRENT**

**SPECIALS**

**BUY, SELL, TRADE & CONSIGN**

*816 N. Victory Blvd.*

*Burbank, CA 91502*


## CLEARLY PRUDENT.

For video duplication, demos, audition reels, work tapes, our recycled tapes are technically up to any task and downright bargains. All formats, fully guaranteed. To order call:

**(800)238-4300**

**CARPEL**  
VIDEO

## Model 191 Fiber Optic Video Link

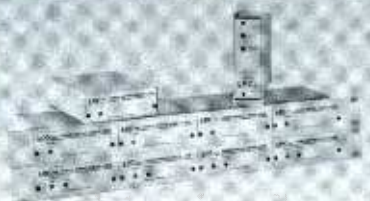

- Celebrating our 10th anniversary.
- Meets RS250C short-haul requirements.
- Link performance certified with VM700A.
- Singlemode laser video link at \$1400/ pair.

In US and Canada call: 1-800-DATA-LEE

**Lee Data Communications**

2501 Technology Dr., Hayward, CA 94545

## ANTENNA STRUCTURE REGISTRATION SIGNS



Mail us your F.C.C.  
Registration number

12"x18" Sign \$75.00

610-458-8418  
Call for information Voice or Fax

**ID-ER Antenna Products**  
Thomas Moyer 22 Bryan Wynd Glenmoore, PA  
19343

**UHF TRANSMITTER** Harris TVE-60S Channel 18. Complete transmitter with upgraded Visual Exciter, S Tube modification, Variable Coupler, and Mod Anode Pulser. Spare parts include magnet assembly, GE Voltage Regulator and Dielectric transfer switch, 6 1/8", 75 ohm, 4 port. Available now. Contact Bill Welty, KSCI-TV, 12401 W. Olympic Blvd., Los Angeles, CA 90064. (310) 442-2303.

**LINEAR KEYSER MODIFICATION** for video production switchers. Convert your switcher and handle transparencies and glows through the entire range of your Character Generator. The modification is a precision preset linear key processor. Make the most of your CG, DVE or Paint System. \$795.00 Please call L&L Creative at 770/918-1886 or Fax 770/918-1885.

**FACTORY NEW EQUIPMENT AT WHOLESALE!** All items sealed new with warranty! Bogen-Cartoni-DPS-Extron-Frezzolini-Fuji-IDX-Leightronix-Mackie-Maxell-Panasonic-Ramsa-Ross-Shure-Tascam-Technics-Videonics. Advanced Video Systems 800-233-2430.

## EQUIPMENT WANTED

**WANTED: USED VIDEO EQUIPMENT** Systems or components. PRO VIDEO & FILM EQUIPMENT GROUP: the largest USED equipment dealer in the U.S.A. (972)869-0011.

## SERVICES

### FULL-TIME TRANSPONDER SPACE AVAILABLE ON CABLE SATELLITE

located in the premiere cable neighborhood on SATCOM C-3 at 131 W, using General Instruments DigiCipher II (MPEG-2) video compression system. Your network could be seen using the new digital set-top technology, improving your network's chance of cable carriage. In addition to transponder space, uplinking, playback, editing, and duplication services are also available from our new digital uplink facility located in Englewood, CO.

Call Doug Greene @ 303-784-8809 or  
E-Mail at dougreene@aol.com

## HELP WANTED

**CUSTOMER SERVICE MANAGER** A well established and internationally respected manufacturer of television broadcast equipment is seeking an experienced professional to manage its nationwide Customer Service Department. Based in Chesapeake, Virginia, this person will direct and coordinate all customer service activities including customer training, delivery and installation of equipment, technical support, and the resolution of all customer service concerns. The preferred candidate will have several years of experience in customer service in the broadcast or related industries. Sales and marketing experience in the broadcast industry a plus. Demonstrated leadership and interpersonal skills are essential. Mail or fax (757-548-0247) resume with salary history in confidence to: Leitch Incorporated, Attn: HR Manager, 920 Corporate Lane, Chesapeake, VA 23320. An Equal Opportunity Employer.

# classified

## HELP WANTED

### WE PLACE CHIEF ENGINEERS



#### KEYSTONE INT'L, INC.

16 Laffin Road, Suite 900  
Pittston, PA 18640. USA

Fax 717-654-5765 • Phone 717-655-7143

E-Mail: keyjobs@keystone.microserve.com

**WYZZ-TV, A SINCLAIR COMMUNICATIONS INC.** station, is seeking an Assistant Chief Engineer. Television studio maintenance or electronics troubleshooting background is required. Prior television experience and UHF Transmitter knowledge is a plus. Top notch maintenance engineer with an ambition to grow are encouraged to apply. Great benefit package. Pre-employment drug screening required. EOE, Women and minorities are encouraged to apply. Fax resume to 309-663-4374. WYZZ-TV, 2714 East Lincoln, Bloomington, IL 61704.

**UHF BROADCAST ENGINEER** for Tribune owned ABC affiliate - experienced in installation, maintenance and repair of UHF TV transmitters, microwave links, satellite systems, ENG/SNG trucks, master control, production studio and news equipment. Must be self-starter who can work successfully with minimal supervision, meeting deadlines with high quality results. FCC General Class or SBE TV Certification and 5 years experience preferred. Good interpersonal skills are essential. EOE. Cover letter, resume and salary requirements to Keith Cibulski, WGNO, 2 Canal St. - Ste. 2800, New Orleans, LA 70130; FAX (504)581-2182; e-mail: KCibulski@tribune.com

**CHIEF ENGINEER** Possible future opening in the Tucson area for a Radio Chief Engineer. General Class license and a minimum of 5 years AM/FM transmitter and studio maintenance experience required. Strong organizational, computer and people skills. Demonstrated ability to troubleshoot complex digital workstation systems. Novell LAN and/or Dalet Radio Automation system experience a plus. Proven experience working effectively in a team environment. Send resumes to Randy Price, Journal Broadcast Group, 720 E. Capitol Dr., Milwaukee, WI 53201-0693. No phone calls, please. EOE

**WYZZ-TV, A SINCLAIR COMMUNICATIONS INC.** station, is seeking a Chief Engineer. Applicants should possess UHF Transmitter knowledge as well as a studio maintenance background. Organizational and people skills are a must. A minimum of five years television experience is preferred. Top notch maintenance engineers with computer knowledge and management abilities will be considered. Great benefit package. Pre-employment drug screening required. EOE, Women and minorities are encouraged to apply. Fax resume to 309-663-4374. WYZZ-TV, 2714 East Lincoln, Bloomington, IL 61704.

**TV CHIEF ENGINEER** KETA-TV, Oklahoma City, is seeking a hands on leader with strong broadcast maintenance background. Supervisory and organizational skills will be essential in guiding our technical team in planning and implementing projects. 5 years broadcast experience required. Salary range \$40,000-\$45,000. Send resume to Personnel, Oklahoma Educational Television Authority, P.O. Box 14190, Oklahoma City, OK 73113. AA/EEO

# Tektronix

## A picture perfect opportunity!

Tektronix in Grass Valley, California, and suburban Portland, Oregon, offers you an unmatched opportunity, from both a career and lifestyle perspective. Our mission is to bring the highest quality video broadcast/transmission to our customers, which means that we're pioneering the way in areas such as digital television and video. In fact we were recently awarded an Emmy Award for leading the television industry into the 10-bit world! That's Emmy #7 for Tektronix! If you're a creative, talented professional looking to join the top team in digital video and television, look no further.

### Training Engineers

You will originate and present training classes and design educational tools for our Grass Valley, Video Transport, Disk Recorder, and Network Display products. Additionally, you'll execute the training strategy to ensure our customers receive high quality, timely training on product applications, operation and maintenance. Position requires 3-5 years' technical training design and instruction experience with video technologies. Excellent presentation skills and a proven track record as a technical instructor required. Good computer skills a necessity.

To become part of our winning team, mail your resume to: Tektronix, Inc., P.O. Box 1114, Dept. BE/0297/RM, MS N4-2H, Grass Valley, CA 95945, Attn: Ron Marengo; Fax to (916) 478-3808; or E-mail to internet address: ron.marengo@tek.com For more information, visit us on the WWW at <http://www.tek.com> Principals only, please. All employment offers are contingent upon successful completion of our pre-employment drug test. Tektronix is an equal opportunity/affirmative action employer.

# Tektronix

It's all happening here! [www.tek.com](http://www.tek.com)



# HARRIS

**Harris Broadcast**, a division of the \$3.5 billion Fortune Harris Corporation, is seeking a World-Class candidate for the position of Systems Engineer with its Systems operation located in Florence, Kentucky. Harris Broadcast Systems is a worldwide supplier of mobile radio and TV and production studio systems.

In this High-profile role, you will be responsible for project management, system design, customer liaison as well as interfacing with project architects and consultants. The design element of this position will utilize your ability to create detailed Audio Video, RF system flows. A working knowledge of both analog and digital system concepts is necessary. We are looking for a team player who can plan, prioritize, meet project goals and communicate effectively.

Candidates must have a 4 year college degree and 3-5 years Broadcast Systems experience.

Harris Corporation offers a competitive starting salary with a comprehensive benefits package.

If you qualify and are interested in working with state-of-the-art equipment in a professional and challenging environment, please send resume (including salary history/requirements) in confidence to:

**Shawn Oberreiter, Supervisor, Human Resources, Harris Corporation - Broadcast Division**  
P.O. Box 4290, Quincy, IL 62305

Equal Opportunity Employer

**KBMT-TV ENGINEERING:** ABC affiliate in Southeast Texas is looking for a studio engineer with a minimum 3 years experience with Sony Betacart, Beta SP, 3/4" and Sony Betacam. Ampex AVC Switcher, ESS 5 Still Store, ADO 100, and DCT 500 Editor. Harris transmitter experience is a plus. Send resume to EEOC Officer, KBMT-TV, P.O. Box 1550, Beaumont, Texas 77706. EOE.

**MAINTENANCE ENGINEER:** Seasoned professional desired for component level troubleshooting and repair of all broadcast and industrial video recorders; special emphasis on D-2, Beta, SP, and Hi-8. Some field work required. Must be motivated, self-starter for this excellent opportunity in sunny southern California. Resume to: Personal/Confidential, Classified Ad Coordinator, Broadcast Engineering, Dept. 783, 9800 Metcalf, Overland Park, KS 66212-2215.

# FOLLOW THE LEADER

Sony's Business and Professional Group is seeking the following broadcast professionals:

### Senior Video Systems Design Engineers

We are looking for seasoned engineers to design large-scale digital audio/video facilities, including floor plans, equipment rack layouts and detailed signal flow diagrams. Candidates must have 5+ years' experience with state-of-the-art analog and digital A/V, production and broadcast facilities and be especially strong in system level engineering design and technical problem-solving. Fluency in MS Excel for Windows is required; AutoCAD, Word and Access knowledge is a plus. Team building, communication skills and the ability to work with minimal supervision are also key. We have both regular and contract positions available, but all require full-time presence at our San Jose facility. Some travel during installation/testing will be required. (Job # CY-BE1)

### Software Project Support Engineer

Work closely with software designers and interface with domestic and international support groups to provide guidance in their support plan development. Your focus will be providing technical and management support for new software products from design through deployment. Position requires a BS or equivalent with 6+ years of industry experience. Must have strong troubleshooting capabilities relating to software-based systems. Programming experience in C/C++ and knowledge of Windows/NT are highly desirable. (Job # LG-BE1)

### Software Systems Engineers

Perform system engineering design for complex video system control software product. You will work with a software development team to implement the next generation of Sony professional broadcast systems consisting of both hardware and software components. Position requires 5+ years of systems engineering, with experience in design and development of complex hardware and software systems. Solid disciplined systems design and architecture background required. A background in video hardware is preferred, as is an understanding of object-oriented programming. (Job # LG-BE2)

### Software Product Support Engineer

Manage all technical support for products such as Sony's Integrated Duplication Operation, Video Store and Edit Station. You will review all technical documentation, actively problem-solve and act as a liaison between factory design and support, and marketing, field service and product sales. Position requires a BS in EE or CS with 7+ years of experience developing and supporting software-based products and 2+ years with servicing or designing Sony products. (Job # CY-BE2)

### Project Managers

Responsible for the management of resources to execute fully-integrated broadcast systems. Must be able to complete projects on time and within budget. The ideal candidate will bring 5+ years of project management in broadcast or production systems. (Job # CY-BE3)

### Senior Instructor

Present training courses focusing on the television industry's standard production techniques and technologies. This involves developing and implementing courses associated with the introduction of new technologies, products and services intended for the video industry. Position requires a BA/BS or MFA in TV production, broadcast journalism or communications with 5+ years' experience in broadcast or industrial production. (Job # CY-BE4)

### Senior Marketing Manager

Develop and direct marketing strategy for the broadcast industry. This includes video file server-based automation systems, master control routing switches and related products. Position requires 10+ years of extensive marketing experience in broadcast or other closely related industry. (Job # CY-BE5)

Please send your resume, INDICATING CODE OF INTEREST, to: Sony Electronics Inc., Attn: Professional Staffing, MS SJ-2C2, 3300 Zanker Road, San Jose, CA 95134-1901. FAX: (408) 955-5166. E-mail (in ASCII text): sj\_jobs@mail.sel.sony.com. For more information, visit our Web site at: <http://www.sel.sony.com/HR/> EOE.

# SONY®

**MAINTENANCE ENGINEER** WBFF-TV is expanding its engineering department and is seeking an additional broadcast maintenance engineer. Experience maintaining MII a must, as well as knowledge of studio, production and master control equipment. Two years broadcast experience is required. Send resume to: WBFF-TV, Engineering Manager, P.O. Box 4800, Baltimore, MD 21211. Equal Opportunity Employer.

**CHIEF ENGINEER** The successful candidate will have superior knowledge of UHF transmitters as well as a strong maintenance background. Organizational skills will be necessary for planning and rebuilding our facilities to meet future needs. Computer skills are a must. Send your resume and salary history to Chief Engineer. KSHV-TV, 3519 Jewella Avenue, Shreveport, LA 71109 or fax to 318-631-4195. EOE.



### TELEVISION ENGINEERS

Turner Broadcasting System, the leading News, Sports, and Entertainment system in satellite communications, has career opportunities for engineers with **broadcast maintenance** experience. These positions demand an extensive background in television engineering and at least two years of training in electronics technology. Turner Broadcasting System offers an excellent benefit and compensation program.

Send resumes to:

Mr. Jim Brown, Corp. Engineering  
Turner Broadcasting System, Inc.  
One CNN Center  
P.O. Box 105366  
Atlanta, GA 30348-5366  
(404) 827-1638 office  
(404) 827-1835 fax

TBS is an equal opportunity employer

**SYSTEMS INTEGRATION TECHNICIAN** Wolf Coach, Inc., a leader in the mobile communications industry for 30 years, is currently expanding its system integration department. Three to five years experience with RF, KU band & terrestrial microwave (up to 14Ghz) as well as audio-video system installation required. Supervisory or management experience preferred. Electronics-communications degree a plus. Send resume with salary goals to: Wolf Coach Inc., Attn: Human Resources, 7 "B" St., Auburn Industrial Park, Auburn, MA 01501.

**MAINTENANCE TECHNICIAN** Skilled technician position available requiring an in-depth knowledge of RF systems and TV transmitters along with ENG equipment, maintenance and operations experience plus TV production experience. General Radiotelephone license and ENG equipment maintenance experience preferred. Please send resumes to KCNC-Human Resources, 1044 Lincoln St., Denver, CO 80203. EOE/MF.

**TECHNICIAN ENGINEER** Two years experience as broadcast TV bench technician. Must be familiar with 1/2 inch broadcast video tape machines and small cameras (CCD and tube types). Some knowledge of microwave and satellite operation. Should possess or qualify for a state driver's license in order to operate company vehicles. (Some auto mechanics ability preferred, but not mandatory). Apply at KOB-TV, c/o Sam Tikkanen, KOB-TV, 4 Broadcast Plaza, SW, Albuquerque, NM 87104 EOE/MF.

**HANDS-ON EXPERIENCED TELEVISION** studio engineer. Repair of video tape & studio equipment to component level. Resume to Jerrell Kautz, WCBI-TV, Box 271, Columbus, MS 39701, FAX: 601-329-1004, Email: [jkautz@wcbi.com](mailto:jkautz@wcbi.com).

Post a job opening and  
promote your company!

Fax your By-the-Word ad message  
to Jeff Utter at 913-967-1735

# ad index

|                                    | Page<br>Number | Reader<br>Service<br>Number | Advertiser<br>Hotline |                                    | Page<br>Number | Reader<br>Service<br>Number | Advertiser<br>Hotline |
|------------------------------------|----------------|-----------------------------|-----------------------|------------------------------------|----------------|-----------------------------|-----------------------|
| AAVS/Div of Sencore .....          | 5              | 5                           | 800-769-AAVS          | Philips Broadcast Television ..... | 49             | 19                          | 800-962-4287          |
| Acrodyne Communications Inc. ...   | 85             | 40                          | 800-523-2596          | PIRod, Inc. ....                   | 118            | 53                          | 219-936-4221          |
| Anton/Bauer .....                  | 95             | 44                          | 800-422-3473          | Prime Image Inc. ....              | 69-70          | 25                          | 801-272-5352          |
| ASC Audio Video Corporation .....  | 81             | 33                          | 818-843-7004          | Prime Image Inc. ....              | 72             | 32                          | 801-272-5352          |
| Avid Technology .....              | 13             | 13                          | 800-949-2843          | Quantegy .....                     | 99             | 54                          | 770-486-2800          |
| BAF Communications Corp. ....      | 125            | 64                          | 407-324-8250          | Quantegy .....                     | 101            | 55                          | 770-486-2800          |
| Beck Associates .....              | 126            | 100                         | 512-388-9777          | Quantel .....                      | 11             | 12                          | 203-656-3100          |
| B&H Photo - Video .....            | 120-123        | 58, 59                      | 800-947-9928          | RGB Spectrum .....                 | 73             | 36                          | 510-814-7000          |
| Broadcast Video Systems Ltd. ....  | 76             | 52                          | 905-764-1584          | Sachtler GMBH .....                | 51             | 20                          | 893-215-8200          |
| Canon USA Broadcast Lens .....     | 21             | 7                           | 201-816-2900          | Sennheiser Electronics Corp. ....  | 97             | 46                          | 203-434-9190          |
| Communications Specialties .....   | 22             | 8                           | 516-273-0404          | Sierra Design Labs .....           | 55             | 22                          | 702-831-7837          |
| DNF Industries .....               | 125            | 65                          | 818-252-0198          | Snell & Wilcox Ltd. ....           | 15-17          | 6                           | 408-260-1000          |
| Dubner International Inc. ....     | 124            | 62                          | 201-664-6434          | Snell & Wilcox Ltd. ....           | 31-33          | 9                           | 408-260-1000          |
| ESE .....                          | 115            | 50                          | 310-322-2136          | Snell & Wilcox Ltd. ....           | 62-63          | 30                          | 408-260-1000          |
| Euphonix .....                     | 93             | 35                          | 415-855-0400          | Sony Business & Professional ...   | 42-43          |                             | 800-635-SONY          |
| Fujinon, Inc. ....                 | 79             | 39                          | 201-633-5600          | Sony Business & Professional ..... | 45             |                             | 800-635-SONY          |
| Hannay Reels .....                 | 96             | 45                          | 518-797-3791          | Sony Business & Professional ..... | 65             |                             | 800-635-SONY          |
| Hamis Corp/Broadcast Div. ....     | 3              | 4                           | 606-282-4800          | Sony Electronics Inc. ....         | 26-27          |                             | 408-955-5493          |
| Henry Engineering .....            | 124            | 63                          | 818-355-3656          | Sterling Technology Inc. ....      | 125            | 66                          | 203-272-7728          |
| Hewlett Packard .....              | 41             | 26                          | 800-452-4844          | SyntheSys Research Inc. ....       | 29             | 16                          | 415-364-1853          |
| Hitachi Denshi America .....       | 57             | 28                          | 800-762-6405          | Tascam/Teac America, Inc. ....     | 67             | 24                          | 213-726-0303          |
| Internet NAB Show Daily .....      | 107            | 47                          | 800-288-8606          | Tekskil Industries Inc. ....       | 109            | 49                          | 604-589-1100          |
| JVC Professional Products Co. .... | 83             | 34                          | 800-JVC-5825          | Tektronix Inc./Measurement .....   | 19             |                             | 503-627-2830          |
| JVC Professional Products Co. .    | 74-75          | 37                          | 800-JVC-5825          | Tektronix Inc./Profile .....       | 59             | 29                          | 503-627-2695          |
| Leader Instruments Corp. ....      | 35-37          | 17, 18                      | 800-645-5104          | Tektronix Inc./GVG .....           | 61             |                             | 503-627-2695          |
| Leitch Incorporated .....          | 132            | 3                           | 800-231-9673          | Telect Inc. ....                   | 77             | 38                          | 509-926-6000          |
| Matthey Electronics Ltd. ....      | 124            | 60                          | 914-763-8893          | Telex Communications, Inc. ....    | 89             | 42                          | 800-392-3497          |
| Motorola-Multimedia Group ....     | 46-47          | 27                          |                       | Toshiba America Info Systems ..... | 7              | 10                          | 800-550-8674          |
| Mountaingate Data Systems .....    | 103            | 56                          | 800-556-0222          | Trompeter Electronics .....        | 71             | 67, 68                      | 818-707-2020          |
| NAB Broadcasters .....             | 105            | 57                          | 202-429-5350          | Utah Scientific .....              | 23             | 14                          | 800-453-8782          |
| Nova Systems Inc. ....             | 117            | 51                          | 860-693-0238          | Vela Research Inc. ....            | 9              | 11                          | 813-572-1230          |
| Nucomm Inc. ....                   | 124            | 61                          | 908-852-3700          | Videotek, Inc. ....                | 131            | 2                           | 800-800-5719          |
| Odetics, Inc. ....                 | 25             | 15                          | 800-243-2001          | Wheatstone Corporation .....       | 2              | 1                           | 315-452-5000          |
| Opamp Labs, Inc. ....              | 109            | 48                          | 213-934-3566          | Winsted Corporation .....          | 56             | 21                          | 800-447-2257          |
| Panasonic Broadcast & TV .....     | 52-53          |                             | 800-524-0864          | 360 Systems .....                  | 87             | 41                          | 818-991-0360          |
| Parkervision .....                 | 90-91          | 43                          | 800-532-8034          |                                    |                |                             |                       |

# sales offices

## WEST

**Duane Hefner**  
5236 Colodny Ave., Suite 108  
Agoura Hills, CA 91301  
(818) 707-6476  
Fax: (818) 707-2313  
E-Mail address:  
dnhefner@aol.com

**Susan Simon**  
3046-3 Lakemont Drive  
San Ramon, CA 94583  
(510) 735-7616  
Fax: (510) 735-7626  
E-Mail address:  
ssimon@pacbell.net

**Sue Horwitz**  
809 South Orange Drive  
Los Angeles, CA 90036  
(213) 933-9485  
Fax: (213) 965-1059  
E-Mail address:  
76345,2624@compuserve.com

## EAST

**Josh Gordon**  
210 President Street, Suite #4  
Brooklyn, NY 11231  
(718) 802-0488  
Fax: (718) 522-4751

## EAST/MIDWEST

**Joanne Melton**  
1775 Broadway, Suite 730  
New York, NY 10019  
(212) 641-5270  
Fax: (212) 459-0395

## INTERNATIONAL

**Richard Woolley**  
**Tony Chapman**  
P.O. Box 250  
Banbury, Oxon OX16 8YJ U.K.  
+44 (0) 1295 278407  
Fax: +44 (0) 1295 278408

## JAPAN

**Orient Echo, Inc.**  
**Masby Yoshikawa**  
1101 Grand Maison  
Shimomiyabi-Cho 2-18  
Shinjuku-ku, Tokyo 162, Japan  
(3) +81 3235-5961  
Fax: (3) +81 3235-5852

## CLASSIFIED ADVERTISING

**OVERLAND PARK, KS**  
**Jeff Uter**  
P.O. Box 12901  
Overland Park, KS 66282  
(800) 896-9939 (913) 967-1732  
Fax: (913) 967-1735

## LIST RENTAL SERVICES

**Lori Christie**  
9800 Metcalf  
Overland Park, KS 66212-2215  
(913) 967-1875  
Fax: (913) 967-1897

# BROADCAST engineering

## EDITORIAL

**Brad Duck, Editor**  
**Skip Pizzi, Technical Editor**  
**Steve Epstein, Technical Editor**  
**Dawn Hightower, Senior Associate Editor**  
**Deanna Rood, Associate Editor**  
**Jim Saladin, Editorial Assistant**  
**Tom Cook, Senior Managing Editor**  
**Carl Bentz, Directories Manager**

## ART

**Stephanie L. Masterson, Art Director**

## BUSINESS

**Raymond E. Maloney, President**  
**Cameron Bishop, Senior Vice President**  
**Dennis Triola, Publisher**  
**Judson Alford, Associate Publisher**  
**Eric Proffitt, Marketing Coordinator**  
**Kathy Volkland, Advertising Coordinator**  
**Annette Hulsey, Classified Advertising Coordinator**  
**Doug Coonrod, Corporate Art Director**  
**Barbara Kummer, Circulation Director**  
**Leann Sandifar, Circulation Manager**  
Customer Service: 913-967-1711 or 800-441-0294

## TECHNICAL CONSULTANTS

**Jerry Whitaker, Contributing Editor**  
**Eric Neil Angevine, Broadcast Acoustics**  
**John H. Battison, P.E., Antennas/Radiation**  
**Dane E. Erickson, P.E., Systems Design**  
**Donald L. Markley, Transmission Facilities**  
**Harry C. Martin, Legal**  
**Curtis Chan, Audio/Video Technology**  
**Marjorie Costello, Contributing Editor, New Media**

## MEMBER ORGANIZATIONS

Sustaining Members of:

- Acoustical Society of America
- Society of Broadcast Engineers
- Society of Motion Picture and TV Engineers
- Society of Cable & Telecommunications Engineers

Member, American Business Press



Member, BPA International



Affiliate Member,  
International Teleproduction Society



**BROADCAST ENGINEERING** is edited for corporate management, engineers/technicians and other management personnel at commercial and public TV stations, post-production and recording studios, broadcast networks, cable, telephone and satellite production centers and networks. Qualified persons include consulting engineers and dealer/distributors of broadcast equipment.

**SUBSCRIPTIONS:** Non-qualified persons may subscribe at the following rates: United States and Canada; one year, \$55.00. Qualified and non-qualified persons in all other countries; one year, \$70.00 (surface mail); \$130.00 (air mail). Subscription information: P.O. Box 12937, Overland Park, KS 66282-2937.

Authorization to photocopy items for internal or personal use, or the internal or personal use of specific clients, is granted by Intertec Publishing, provided that the base fee of U.S. \$2.25 per copy, plus U.S. \$0.00 per page is paid directly to Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923. The fee code for users of the Transactional Reporting Service is ISSN 0361-0942/1997 \$2.25+0.00. For those organizations that have been granted a photocopy license by CCC, a separate system of payment has been arranged. Prior to photocopying items for classroom use, contact CCC at (508) 750-8400. Organizations or individuals with large quantity photocopy or reprint requirements should contact Chris Lonetto, (312) 840-8407. Microfilm copies of *Broadcast Engineering* magazine are available by calling or writing UMI, 300 North Zeeb Rd., P.O. Box 1346, Ann Arbor, MI 48106-1346. Phone: (313) 761-4700 or (800) 521-0600.

©1997 by Intertec Publishing  
All rights reserved.



## NAB '97 is on the horizon

**N**AB is about a week earlier this year. Not a big deal, but for engineering groups in the broadcast equipment companies, that week could make or break many planned demos. It's the little things that can botch projects. We all know to "measure twice, cut once," but what about projects that can't be completed?

It happened to me in a country in the Middle East. One site that was supposed to receive my TLC in the installation of three medium-wave transmitters (three frequencies, two towers) was built upside down by the local contractors. After trying every possible combination with models, we had to give up, the equipment wouldn't fit. That build-it-again disaster was compounded by an opinion from a soils engineer that the antenna field was actually a 100-year flood plain.

Things panned out better when building a high-power TV transmitter on a beach in the same country. We were using ducting to get what amounted to a religious propaganda signal across

50 miles of water — nasty ERPs at a low antenna height, not something for suburbia. Our problem was that we didn't know which country we were in and selected a likely part of beach at around the right coordinates. We weren't the only ones who didn't know who owned the beach. After being visited by patrol boats from three nations it became obvious they didn't care either, as long as the hospitality tea kept coming. With the desalinization plant being the first thing we had to build, we were also the only source of drinking water for quite a distance.

### Gaming or fun?

Gambling in that sort of way could have been expensive. There are other gambles that bear watching. The first is something to be observed and, maybe, precautions taken for our line of work. We are entering the next peak of solar-flare activity, which should be highest in mid-1998. During the last cycle, all sorts of amusing things happened to communications across the frequency bands. Dependence on RF communica-

tions, both direct and point-to-point for common carriers, has increased so dramatically that last time's amusements might have some terrible consequences.

The second gamble is directly relevant to *Broadcast Engineering*. In the NAB 1996 "Pick Hits," editor Brad Dick included the QuVis data recorder. To qualify, the product had to ship during 1996. It did, in December. (Good call, Brad!) The principals of QuVis are rather gutsy to challenge the compression monopolies of the broadcast industry. Its wavelet-like compression system works on the assumption that at higher image resolutions it's more advantageous to store image information rather than samples.

The QuBit can store up to 80 times higher pixel rates than composite video systems. The flexibility of the structure allows the format to be composite, component or serial, all at up to 12-bits per component resolution and with up to four channels. It should be capable of handling high-definition video and high-definition film recording. QuVis could stay out of the video market and be successful in other industries without undergoing the scourges of corporate interest in MPEG-2.

### Waiting for decades

There hasn't been a significant high-performance TV demodulator introduced for some years. Tektronix launched the DS1000 series at The Western Cable Show in December. The units are intended for the cable market

where the quality is high enough for operational demodulation for processing and re-modulation. It's also a high enough quality for off-air measurements for cable. But that's selling it short. The specs show the unit is suitable for rebroadcast reception uses and is also so close to broadcast

measurement quality as to make it a probably-should-be used product. The DS1000 is the NTSC unit for \$3,900 and features 47.25 to 860.25MHz tuning, BTSC stereo, separate intercarrier output, depth of modulation zero-carrier pulse and ICPM quadrature output. ■

*Paul McGoldrick is a free-lance writer and consultant based on the West Coast.*




Paul McGoldrick



The DS1000 series of TV demodulators assesses the quality of analog TV modulated RF transmission systems.

# Multiple Choice.

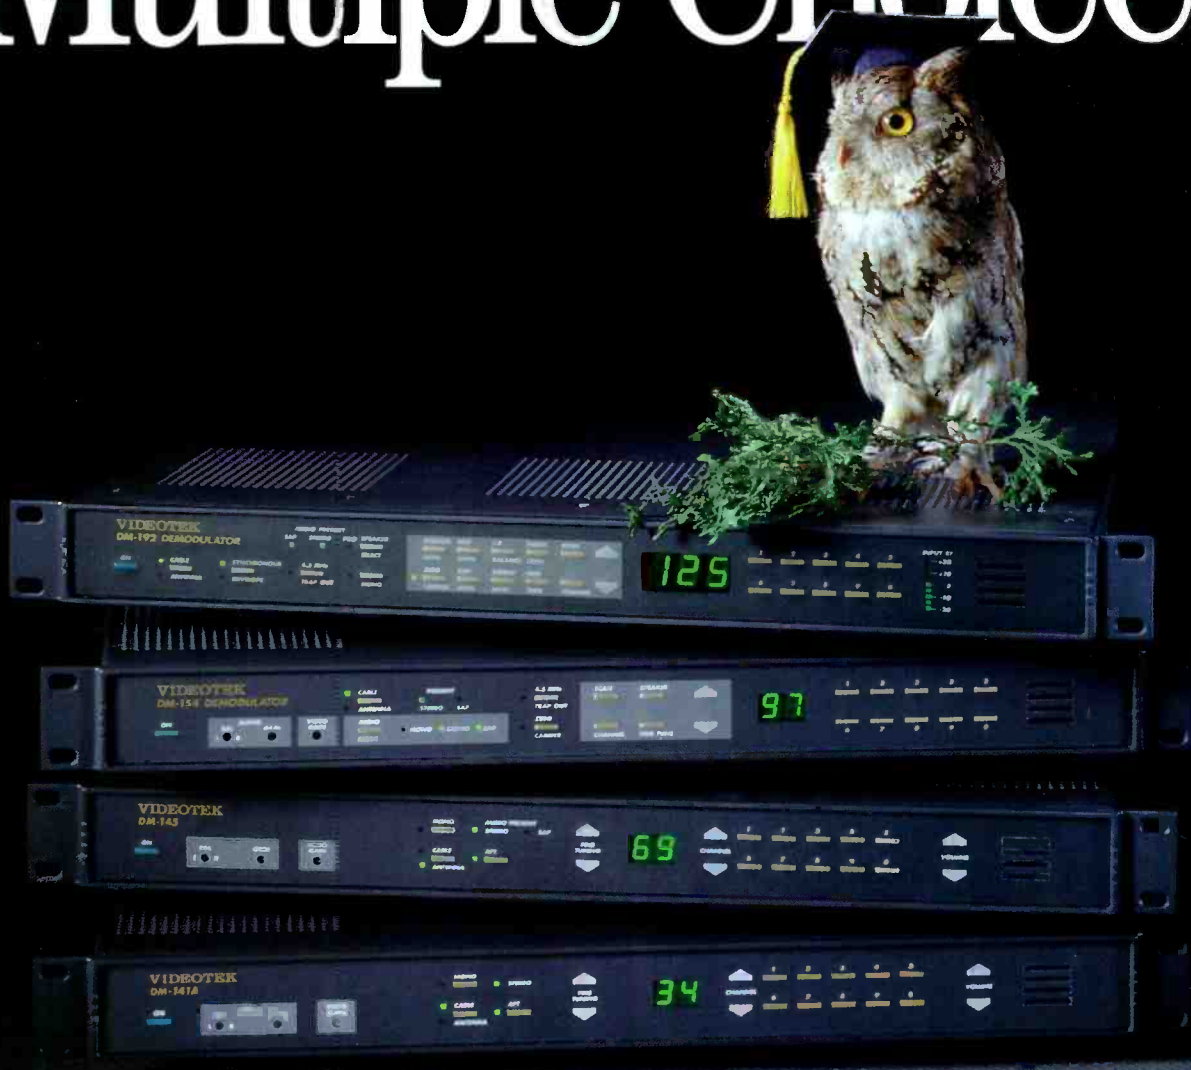

## Agile Demodulators

Be wise... and choose from our family of agile demods.



WHO offers the greatest selection of agile demodulators in the industry?

VIDEOTEK



WHO is the largest agile demod supplier in North America?

VIDEOTEK



WHO offers a full range of versatile features?

VIDEOTEK



WHO combines premium quality & intelligent design with smart prices?

VIDEOTEK



WHO offers a FREE 30-day trial?

VIDEOTEK

With two new choices in agile demodulators, you have more reasons than ever to choose Videotek. At half the price of our competition, this foursome of demods with full front panel control, brings in up to 192 channels and has features that include Pro channel, zero carrier pulse, synchronous and envelope detection, simultaneous stereo and SAP capabilities, plus two baseband outputs.

Two of the models, the DM-192 and DM-154 have been **specifically designed** for FCC compliance testing. For other applications, the DM-145 and DM-141A round out our product family.

Innovation in agile demodulators has been our specialty for two decades, making Videotek the wise choice.

**Premium Quality, Intelligent Design, Smart Prices... That's Videotek.**

Call today to take advantage of our FREE 30-day trial or to receive a copy of the white paper report "Agile Demodulators in the Cable TV Industry." Contact Joy Bozeman at 1-800-800-5719 or e-mail your request to 104472.577@compuserve.com.




**VIDEOTEK™**  
A Zero Defects Company



243 Shoemaker Road, Pottstown, PA 19464 1 800-800-5719 (610) 327-2292 Fax: (610) 327-9295

Circle (2) on Free Info Card  
[www.americanradiohistory.com](http://www.americanradiohistory.com)

# CENTS & SENSIBILITY

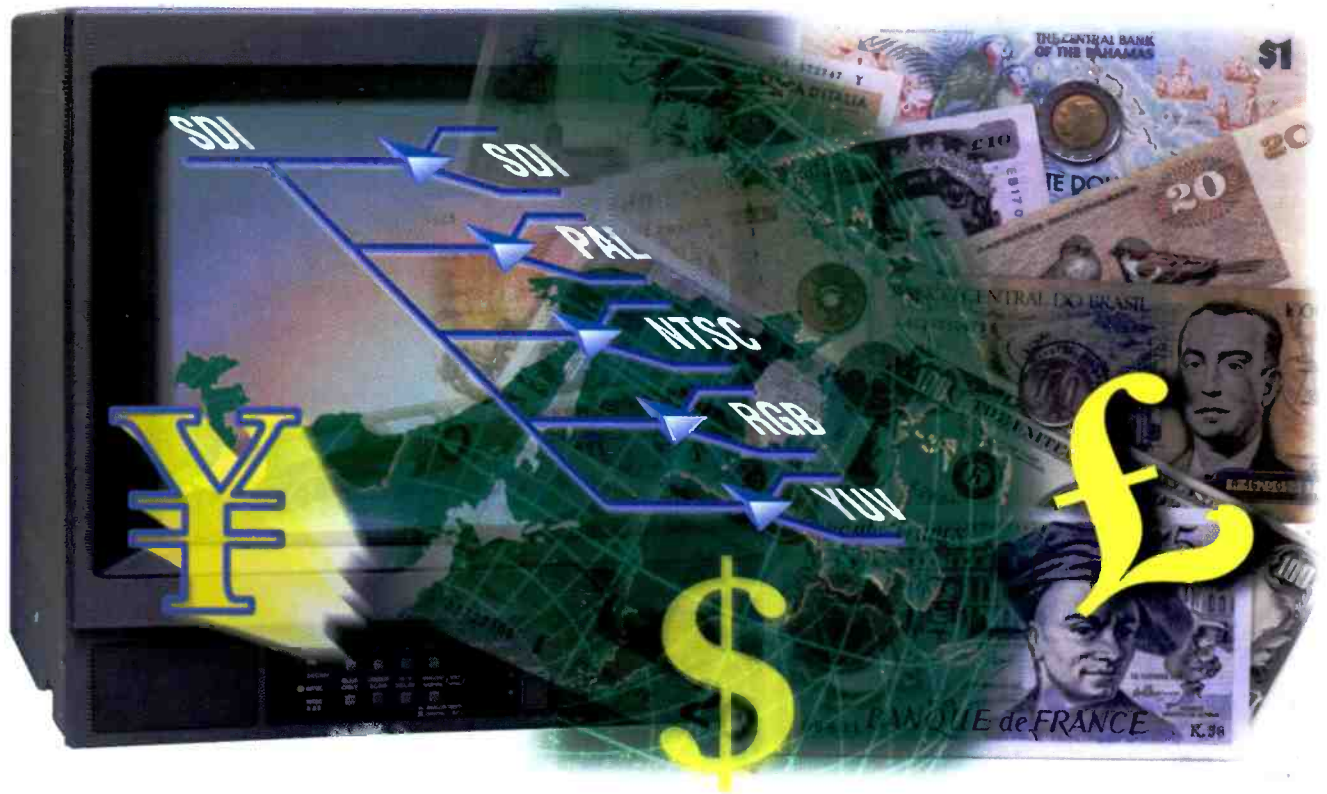

## Digital Monitoring for Less

# LEITCH®

Why change monitors just because you switch to digital? Leitch allows you to use the monitors you already have, while offering a choice of three plug-in DA cards, each having 4 serial outputs. The new USM-6800 Universal Signal Monitor offers component *and* composite monitoring simultaneously! For highest quality analog component monitoring, choose the

dedicated VCM-6801 converter and for PAL or NTSC monitoring use the VSM-6801 encoder. These are just three of 20 different cards in the 6800 series of DAs, equalizers, EDH inserters, test generators, routers, audio A/D and D/A converters, and other plug-in digital products.

Leitch Digital Glue. The sensible choice!



Circle (3) on Free Info Card

**International / Canada**  
Tel : + 1 (416) 445-9640  
Fax: + 1 (416) 445-0595

**U.S.A**  
Tel : + 1 (800) 231-9673  
Fax: + 1 (757) 548-4088

**Europe**  
Tel : +44 (0) 1256 880088  
Fax: +44 (0) 1256 880428

**Eastern Europe**  
Tel : +49 (89) 4900-2042  
Fax: +49 (89) 4900-2043

**Japan**  
Tel : +81 (3) 5423-3631  
Fax: +81 (3) 5423-3632

**Australia**  
Tel : +61-2-9999-2355  
Fax: +61-2-9999-2366

**Brazil**  
Tel : +55 (11) 867-0218  
Fax: +55 (11) 867-0408

<http://www.leitch.com>

[www.americanradiohistory.com](http://www.americanradiohistory.com)