

THE JOURNAL OF DIGITAL TELEVISION®

Making the right choice

Handling multiple formats

New tools for audio suites

#BXNCFHL AUTO ***** 3-DIGIT 331
#02291789# 9999 39 02 BE Q 0526
J R MEYERS PRES
UNITED RADIO NETWORK
4700 SW 75TH AVE
MIAMI FL 33155-4473





DON'T BE FOOLED.

DON'T LET THE TRADITIONAL CONTROL FACE FOOL YOU—this new audio console from Wheatstone sports some of the most advanced DIGITAL FEATURES available on the market today. How about serial port control of all switch, fader and 8-character source display settings for true integration with routers and automation systems? Four stereo mix busses with simultaneous digital and balanced analog outputs? Dedicated phone modules with DSP generated mix-minus for easy control of two to four callers?

But don't stop: optional DSP-equipped modules allow programmable ducking with gain reduction and master/slave selection, digital input attenuation, pan/balance, 4-band sweep EQ (plus sweep high pass), compressor/limiter with threshold, ratio, attack, release and makeup gain—all on each input!



A meterbridge router controller panel can run our new Wheatstone rackmount switcher for hundreds of additional inputs. Add simultaneous VU and digital peak metering, analog *and* digital input modules, totally modular hot-swap design, plus a PC-based setup program that allows quick configuration of all displays, mutes, tallies, machine starts and mix-minus assigns (once set the PC is removed for console stand-alone operation) and you begin to see the *power* that lies behind this intuitively simple control surface.

SOUND LIKE SOMETHING YOU'RE LOOKING FOR? Give us a call here at **Wheatstone** and ask about the brand new **D-600 DIGITAL AUDIO CONSOLE**—our sales engineers would love to tell you more!

 **Wheatstone Corporation**

600 Industrial Drive, New Bern, North Carolina 28562 (tel 252-638-7000/fax 252-637-1285/email: sales@wheatstone.com)

Circle (1) on Free Info Card

www.americanradiohistory.com

***Our encoders have the one feature
you've been waiting for. A future.***



*Self-contained UniCoders are factory upgradeable. ©1999 Harris Corporation.

And now, your DTV future holds even more flexibility. Introducing Harris' expanded family of ATSC MPEG-2 encoding systems--the 2-rack unit UniCoder SD and UniCoder HD, and the 5-rack unit FlexiCoder VS5--all joining the original, top-capacity FlexiCoder VS21. These encoding solutions are available in 24 configurations--from basic, single-channel standard definition or high definition encoding to fully redundant, multi-channel HD encoding. And their flexible, modular designs allow for easy plug-in upgrades and expansions*. We're also introducing next-generation software for our entire encoder line, with video-enhancing HD Compression Management, SD Statistical Management, Closed Caption and PSIP solutions. The Harris encoding family. A future of flexibility.



next level solutions

WIRELESS

BROADCAST

COMMUNICATIONS
PRODUCTS

1-800-4-HARRIS ext. 3083 • www.harris.com/communications

HARRIS
Communications

Circle (4) on Free Info Card

www.americanradiohistory.com

IN THIS ISSUE



Features

92 Video servers

By Jim Boston

A look at the role of video servers in DTV facilities.

98 Posting digital audio

By Rob Fritts

A primer on digital audio in a post-production environment.

102 Routing for digital facilities

By John Luff

Routing systems are an overlooked but critical part of a facility.



Beyond the Headlines

NEWS


- 14 FCC under fire
- 16 Modulation battle brewing?
- 18 New scanner rules
- 23 New digital consumer format
- 24 Panasonic builds DTV center

FCC UPDATE

- 30 Satellite home viewing creates hot issues

EXPERT'S CORNER/VENDOR VIEWS

- 26 Avoiding buyer's remorse

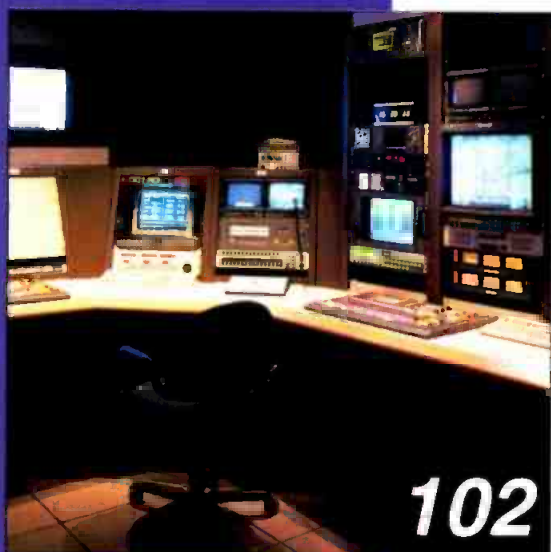

Digital Handbook

TRANSITION TO DIGITAL

- 34 Ancillary data multiplexing

COMPUTERS AND NETWORKS

- 48 The EBU/SMPTE Task Force - Part V, Networks and Protocols

ASK DR. DIGITAL

- 62 CAV standards

(continued on page 6)

THE NEW GOLD STANDARD

FOR HD PRODUCTION,
YOUR CLIENTS WON'T
SETTLE FOR LESS THAN
THE BEST, AND NEITHER
CAN YOU.

And for no-compromise HD production tools,
there can only be one source: Panasonic.

Panasonic's Gold Standard solutions include
the AK-HC800 series, the first true 1080i studio
and field production cameras; the industry
standard AJ-HD2700 multi-format D-5-HD
10 bit 4:2:2 tape recorder; AV-HS3000 series
digital compositing switchers, with unique
integrated 3D digital effects option, and the
ultimate in ATSC inter-format compatibility,
the AJ-UFC1800 Universal Format Converter.

Networks, production houses, and video industry
leaders have come to rely on Panasonic to
provide the very best High Definition solutions
available. So, if your vision includes HD, you
know that "good enough" simply isn't. In HD,
there can be only one standard: Gold.

AK-HC880



AV-HS3100



AJ-UFC1800



AJ-HD2700



Panasonic

For more information on the latest Panasonic products, call: 1-800-528-8601 (Upon request enter product code 8)



ON THE COVER: Home Shopping Network in St. Petersburg, FL showing the Vela RapidAccess video server.
Photo by: Jason Marsh Photography, Tampa, FL.

Systems Design & Integration

SYSTEMS DESIGN SHOWCASE

68 WRAZ/WNOL

TRANSMISSION & DISTRIBUTION

78 Building a tower

PRODUCTION CLIPS

86 Video production software

New Products & Reviews

APPLIED TECHNOLOGY

110 Matrox DigiSuite and DigiServer DTV products

116 Pro-Bel automated master control

TECHNOLOGY IN TRANSITION

122 HD conversion products

NEW PRODUCTS

128 The Panasonic AJ-HD3000 VTR, plus other new products

BUSINESS WIRE

142 Business highlights from broadcast and production

Departments

08 Editorial

10 Reader Feedback

126 Management

144 Classifieds

149 Advertisers' index

150 EOM

WEB SITE DIRECTORY

www.broadcastengineering.com

Feature Articles

Departments

New Products & Reviews

Classifieds/Jobs

Marketing/
Advertising

Reader Resources

- Editorial calendar
- Article archives

Contact the Editors

Questions? Contact:

Jim Saladin
jim_saladin@intertec.com
913/967-1905 fax

FREEZE FRAME


A look at the technology that shaped this industry.

Do you remember?

This January, 1984 issue focused on ENG cameras. Selected readers who can name at least three of the cameras (including company and model) covered in the article can win Broadcast Engineering T-Shirts. Hint: there were 13 companies manufacturing cameras at that time. Today, there are seven. Send responses to: brad_dick@intertec.com.



We're bringing tomorrow together.

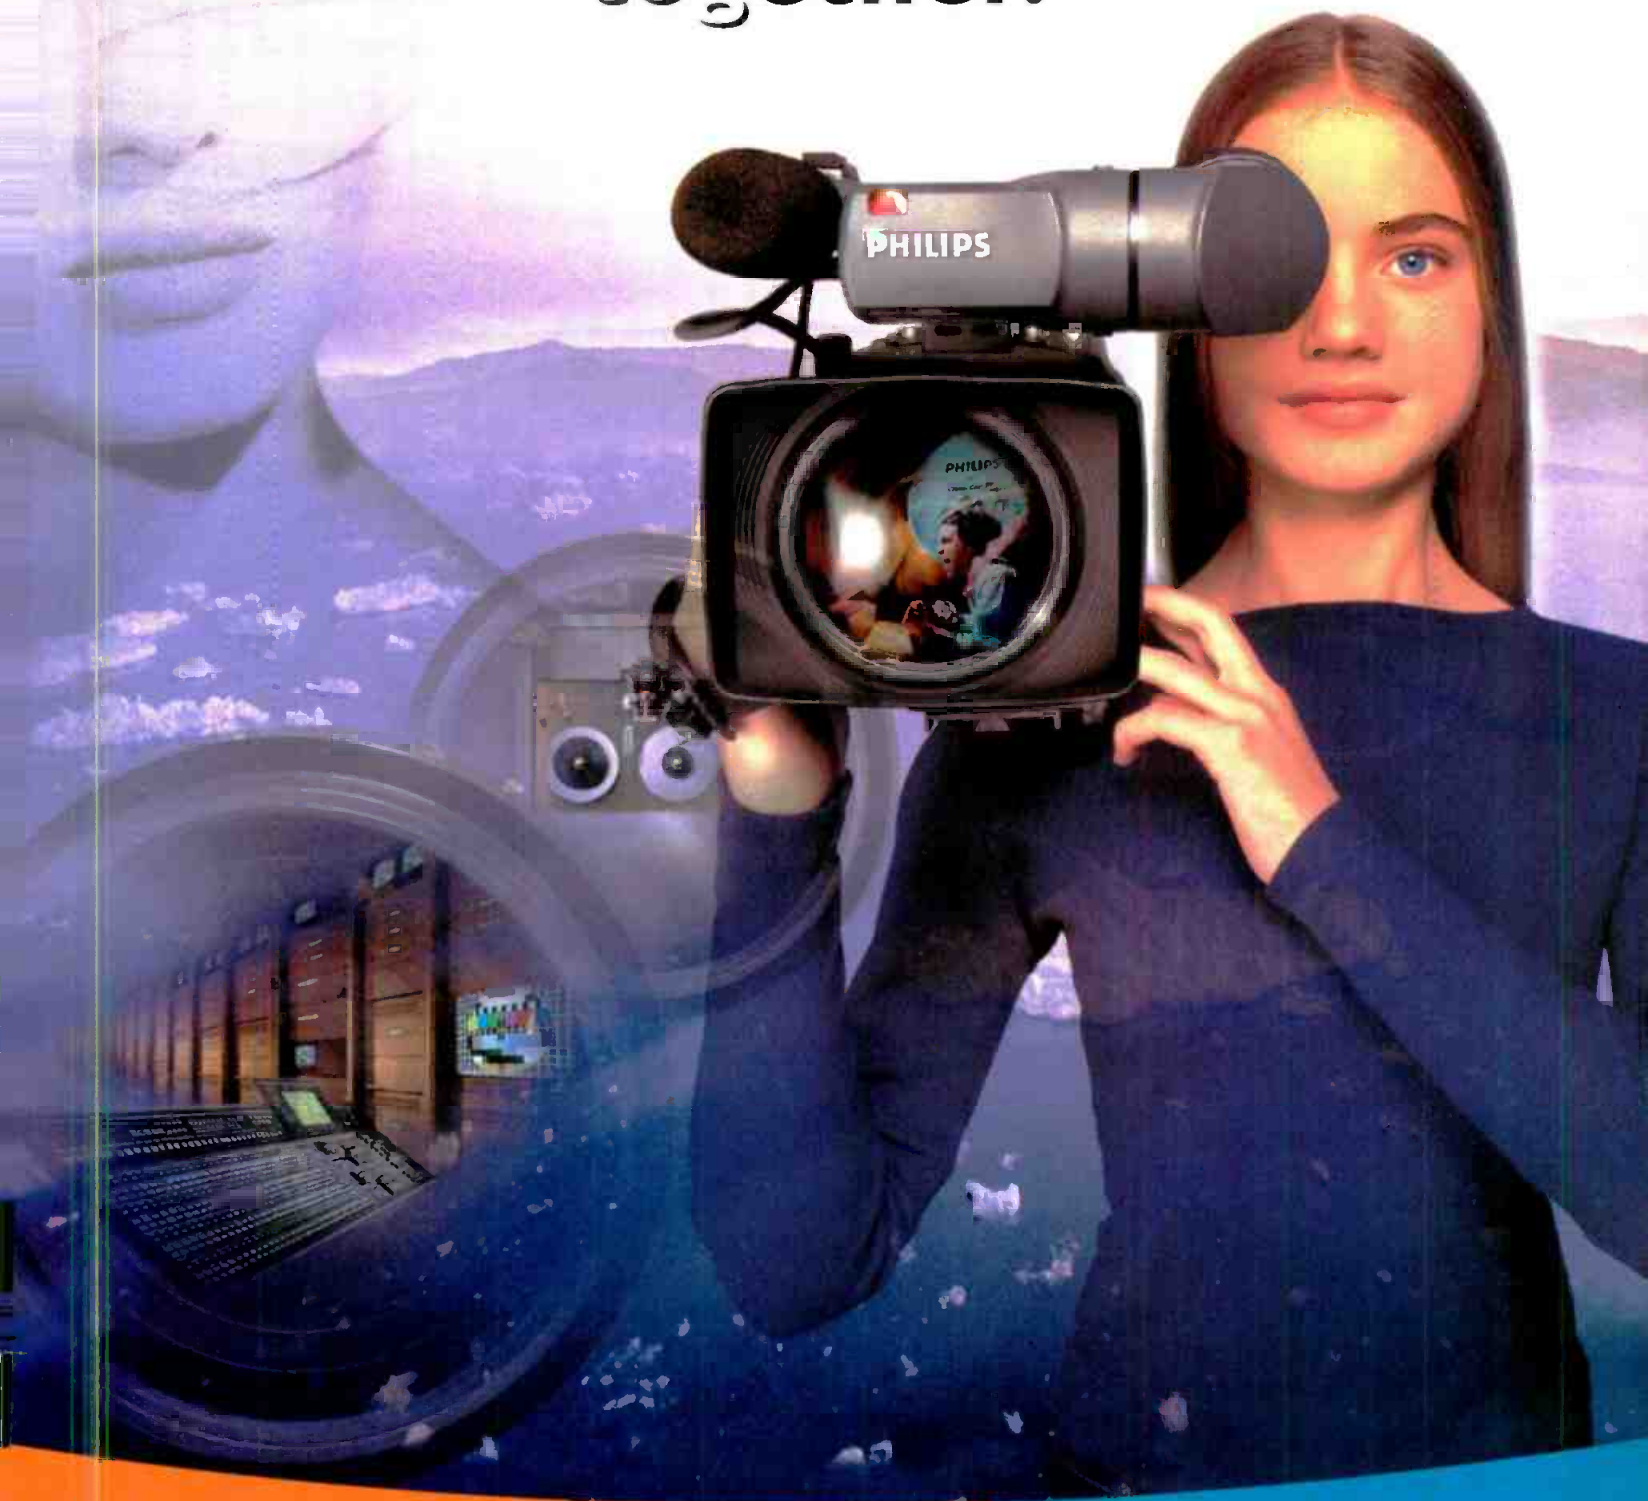

From products that capture the imagination to the technology that brings it home, Philips has the solutions for the digital television age. Visit us at NAB '99 and see how we can put the power of the future to work for you. To learn more, call us toll free at 1-800-962-4287 or see us on the Internet at www.broadcast.phillips.com

Circle (11) on Free Info Card



PHILIPS

Let's make things better.

www.americanradiohistory.com

Kennard's army of lawyers

Did you hear about the guy who killed radio? While scanning some recent news sources, I ran across an article about FCC Chairman William Kennard. In the story, he was called, "The Man Who Killed Radio." The story was about the FCC's recent proposal for *micro radio* whereby just about anyone who can sign their name can have their own radio station. The article was theorizing that Kennard's zeal to promote minority radio station ownership would, instead, kill the entire radio industry. I wonder if he now has TV in his sights.

While speaking at a recent media conference, Kennard described how wise the FCC had been in (not) defining new rules for digital TV. *"When it came time to finalize digital TV standards...many broadcasters and manufacturers were focused on providing clear, sharper and prettier pictures for their audiences...But we at the FCC said that DTV is not only about prettier pictures. So, we left it (standards) open...(giving) broadcasters flexibility in how they use DTV,"* he said.

He then went on to threaten TV broadcasters, warning them away from any attempt to slow the digital process by saying, *"You don't want me and an army of FCC lawyers coming in and telling you what to do."*

How dare you threaten us Mr. Kennard! What we really have are 1400 TV stations and 85 million TV homes looking for direction, not threats. Secluded in your Potomac tower, you've promoted a system where stations are now required to spend millions for a new tower, transmitter and antenna. Yet after we've made this investment, the 70 percent of our audience which is hooked to cable can't even get the new signal.

The real reason more stations haven't jumped to digital is precisely because the FCC has not adopted standards – especially with respect to reception equipment. Why don't the new TV sets have built-in tuners? It's because there's no standard. Right now, a consumer would need three set-top boxes (all of which don't exist) just to get local TV, cable and satellite. Recording these signals is a whole other set of incompatibility problems.

The FCC didn't used have a problem in setting standards. I recall when the FCC first required UHF tuners in TV sets. Later, the FCC demanded that TV sets include stereo decoding and then closed captioning. What we now have is the Hundt/Kennard philosophy of *no standards are the best standards*.

So, while Kennard doesn't seem to have a problem imposing new taxes on us, when it comes to guaranteeing that our new TV sets will work with both cable and local broadcast signals, he's quick to deny culpability. Kennard and his pack of legal dogs have done little to resolve the remaining issues of digital transmission except blame others. His recent offer to *"facilitate rather than regulate"* is nothing but rhetoric, and really means lack of leadership.

May I suggest, Mr. Kennard, that you fire that "army of FCC lawyers" you've threatened us with and replace them with engineers who will solve the remaining technical problems. Then maybe, just maybe, you won't become known as The Man Who Killed TV, too.

Brad Dick

Brad Dick, editor

Send comments to:

direct: brad_dick@compuserve.com

website: www.broadcastengineering.com

Introducing Next Generation **Upconversion**

AQUILA

When Our Space Meets Your Space...



AQUILA
UPCONVERTER

SPACE
TO GROW

AQUILA

More than you'd expect from a DTV/HDTV Upconverter. For a lot less than you'd expect !

AQUILA

Next-generation 3D-adaptive interpolation technology - Conceived in the Stellar Series frame - For a universe of possibilities...

THE STELLAR SERIES FRAME

A highly modular, 4RU housing frame built to accommodate multiple Aquilas (up to 4 Aquilas in 1 frame)

AQUILA



- ▲ Up to 4 Aquila Upconverters in one Stellar Series frame
- ▲ Standards: 480p/720p
1035i/1080i/1080p
- ▲ 4 :2 :2 (601) and/or NTSC inputs
- ▲ HD serial digital and/or component analog output
- ▲ Advanced adaptive 3D interpolation
- ▲ Full cropping, zoom and aspect ratio control
- ▲ Full power supply redundancy
- ▲ Modular architecture provides maximum flexibility and expandability

www.miranda.com

1-800-224-7882

Tel. 514.333.1772

Fax. 514.333.9828

Saint-Laurent, (Qc)

Canada

Miranda

Miranda Technologies inc.

Circle (12) on Free Info Card

www.americanradiohistory.com

Reader Feedback



Peanut protest

Editor:

I just read your editorial on peanuts in airplanes (*BE*, September 98) and had to respond. Perhaps understanding this strain of allergy and its effects could illuminate you as to the deeper issue, as opposed to "peanut haters" you condemned in your article. I have a friend that is allergic to peanuts.

When I first met him about 10 years ago, he ate a cookie that was supposed to be free of peanuts. His throat started closing down like a video camera iris. He had to be driven to the hospital to have his stomach pumped and he was unconscious when he arrived. The chopped peanuts in the cookie in combination with his allergy almost killed him.

You were in error when condemning "peanut haters." If you think 4:1:1 video sampling is an unforgivable compromise, or thought BetaMax should have proliferated instead of VHS, I can understand. But ranting and raving about being denied a couple ounces of peanuts on a plane ride is over the top.

Now if you want to talk about plane passengers with carry-on bags that won't fit in the overhead compartments. ...


GREG HERTFELDER
AUDIO-VISUAL PROJECT MANAGER
CERNER CORP.

GREG:

Thanks for following up on the peanut controversy. Your description of what happened to your friend is precisely what can be expected when one has an allergic reaction to any of a multitude of chemicals. It's not just

peanuts. People can have similar allergic reactions to everything from perfume to cat hair. Adults can carry an eppi-pen, but children aren't so fortunate. For those with allergies, it must be an ongoing challenge to avoid what the rest of us never notice. From that standpoint, banning peanuts would be only a start. But then where would we stop?

BRAD DICK
EDITOR

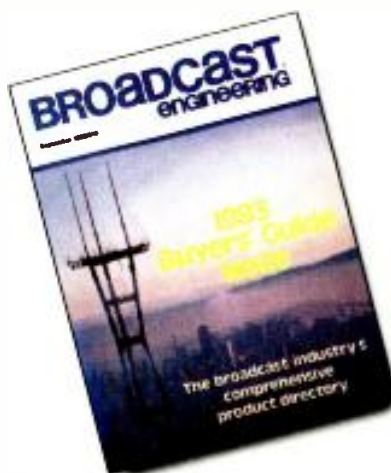

Towering winners

February's FreezeFrame contest generated more responses – and correct answers – than I expected. The question concerned the September 1983 cover showing the famous San Francisco tower on Mt. Sutro.

Here are a few of the responses from those who not only knew the key date but also had personal experience in the tower's history.

Some of the winners:

The *FreezeFrame* in the February 1999 issue of *Broadcast Engineering* is a picture of the Sutro Tower in San Francisco. Excavation for the tower footings began on Feb. 23, 1971, and the construction of the transmitter building began in June. Broadcast transmissions began in July of 1973.

The tower was fabricated by Kline Iron and Steel of Columbia, SC. It is 977 feet high and 1811 feet above sea level. Harry Jacobs was the director of engineering for Sutro Tower Inc. during the construc-

tion and for a number of years after.

Thanks for the trip down memory lane. There were lots of good times.

LARRY POZZI
DIRECTOR OF ENGINEERING
WCPO-TV
CINCINNATI

Dear Brad,

I believe actual preliminary construction began in 1971, but due to the L.A. earthquake there was a redesign to upgrade the tower to a 7.0 or 7.5 or so.

I was privileged to have worked at the tower in the 1980s. The elevator used to be quite a trip up and down, as it leans forward to the midsection, and then leans backward going on up. It had a nasty habit of quitting, as the interlocks would shift and give in at that mid point. I always carried a couple of clip leads to jump them out, and had to use them a couple of times.

I took a full-around set of pictures when I knew I was leaving S.F. It was a beautiful, sunny day, and there was even a blimp in the air. Unfortunately, the film processor scratched the negatives when it was developed, and I have never had the good fortune to be in San Francisco on a perfect day with enough time to repeat the shoot.

BEST REGARDS,
ERNIE HOPSEKER

Other readers with the correct answers:

Bill Struth Palm Bay, FL	Fred Stetler Don Boehert Madison, WI
Dennis Heymans C.O.O. Micro Comm. Manchester, NH	Rod Levell KCPT-TV Kansas City, MO
Joe Del Giudice	Dan Roberts Andrew Corp. Orland Park, IL
Kevin Novak Gresham, OR	

Each correct entry wins their choice of a *BE* T-shirt or reprint of the original tower article. See next month's FreezeFrame for your chance to win a *Broadcast Engineering* prize. ■

To see where digital editing is going...

look no further than Quantel. We've got everything you'll need to take your editing into the DTV age and beyond. And we can show you stunning developments that will massively increase your editing productivity in everything from commercials to longform drama.

NEW Background load - if you haven't got it, your edit suite simply isn't working as hard as it should be.

NEW Dedicated plug-in power - hundreds off-the-shelf and the infinite potential to create your own.

NEW More storage - so you can take on any job.

NEW More power - get more work done in less time, win time for those all-important finesses.

NEW DTV ready - future-proof technology that opens new business opportunities now.

It all adds up to more productivity, more clients, more creative edge, and more revenue, so....

take a look at Quantel

... and you'll get one more pleasant surprise too - the world's most versatile and productive editing systems are also more affordable than you ever imagined.



EDITBOX®
the seriously powerful on-line editor

Call our 24 hour Editbox Hotline now: 1 800 218 0051 Ext. 820

Quantel Inc., 28 Thorndal Circle, Darien, CT 06820 Tel: +1 203 656 3100 Fax: +1 203 656 3459 <http://www.quantel.com>

Circle (13) on Free Info Card

www.americanradiohistory.com

July 20, 1969 - Sea of Tranquility



One man took a small step and made a giant leap.

Digital BETACAM

- Digital Betacam
- New PowerHAD™ widescreen CCDs
- 12-bit DSP
- New cinematography features

BETACAM SX

- Betacam SX
- Extraordinary sensitivity
- Widescreen switchable
- Robust digital acquisition



With a single step the world entered a new era in space

exploration. Just as a single step with Sony takes your news operation into a new

digital era. That's because Sony gives you the most extensive line of SDTV-Ready camcorders



Digital Betacam Family

today to meet your needs. BETACAM SX[®], for example, originates the MPEG 4:2:2 algorithm directly in the camcorder

so you can transmit signals at twice real-time and ensure high server storage efficiency. Plus, you can use it directly in

One small step with our DTV-Ready camcorders
lets you take one giant leap into the digital world.

editing and maintain the highest digital quality through to the Play to Air server via this global MPEG standard.

Digital BETACAM[®] now expanded with three new camcorders, supports the highest quality 4:2:2 digital format making



Betacam SX Family

it perfect for special events, documentaries and magazine shows. And for

more budget-conscious news acquisition, there's now widescreen DVCAM[™]

Evolved from Sony's 15-years of development, you'll find this entire SDTV line

familiar in functionality with the features and performance you've been asking for.



DVCAM Family

To take that step into the widescreen DTV future, call 1-800-635-SONY, ext. NA or visit www.sony.com/production.

We're ready. Are you?™

DVCAM

- Range of camcorders for all tasks and budgets
- New high-end widescreen DSR-500WS
- New low-end switchable 16:9/4:3 DSR-PD100



SONY

act more independently of the White House. He wants the FCC to submit its annual budget directly to Congress. It is currently included in the Office of Management and Budget's request. Furcht-gott-Roth said, "The FCC does not need any intermediaries to communicate with Congress." He also has been known to call the administration's plan to impose spectrum-use taxes "irresponsible."

Commissioner Susan Ness says that the FCC could eliminate rule-making delays by boosting the agency's engineering staff. To keep the various rules from getting mired in court fights, she



FCC Commissioner Susan Ness

opening measures by challenging an FCC decision, or even a provision of the [law] itself, first in one court and then

says Congress should require challenges to FCC rulings to be filed with the federal appeals court in the District of Columbia. Ness says that, "Too often we see industry players delay market-

another."

Taking a different tack, Commissioner Gloria Tristani praises many of the initiatives that tend to really provoke lawmakers. Her "E-rate" charge included in telephone bills to pay for wiring schools to the Internet is one good example. She says that it will "generate enormous social and economic benefits."

For additional information, see a summary of Chairman Kennard's testimony before a House Subcommittee at: www.fcc.gov/Daily_Releases/Daily_Business/1999/db990317/nrmc9011.html

Modulation battle brewing?

By Brad Dick, editor

The intensifying battle over modulation schemes raised its head at NAB99. It shouldn't have come as a surprise that the convention offered fertile ground for both sides of the issue to issue statements on the technologies.

The ATSC issued a written brief summarizing the organization's position on 8-VSB modulation, especially with respect to how it compares to COFDM. The document, *Digital Television—FAQ*, is available at the organization's website, www.atsc.org.

It didn't take long for the folks at Sinclair Broadcasting to get a copy and come up with their own response. In


order to better understand some of the issues, be sure you download a copy of the brief. Here's what Nat Ostroff, vice president of new technology at Sinclair Broadcasting provided *Broadcast Engineering* in response to the ATSC paper:

The need for more tests

Sinclair finds itself at the center of a heated debate concerning its published findings regarding ATSC indoor recep-

tion tests recently conducted in Philadelphia, PA. Perhaps this is to be expected based upon the content of these findings. The broadcast industry is ill served by the inflammatory nature of the current debate.

We wish to state as broadcasters the reasons for our concern and reduce the debate to an open discussion and evaluation of the key issue — real world replication of service. After all, it is our sincere belief that the survival of free over-the-air broadcasting is at stake.

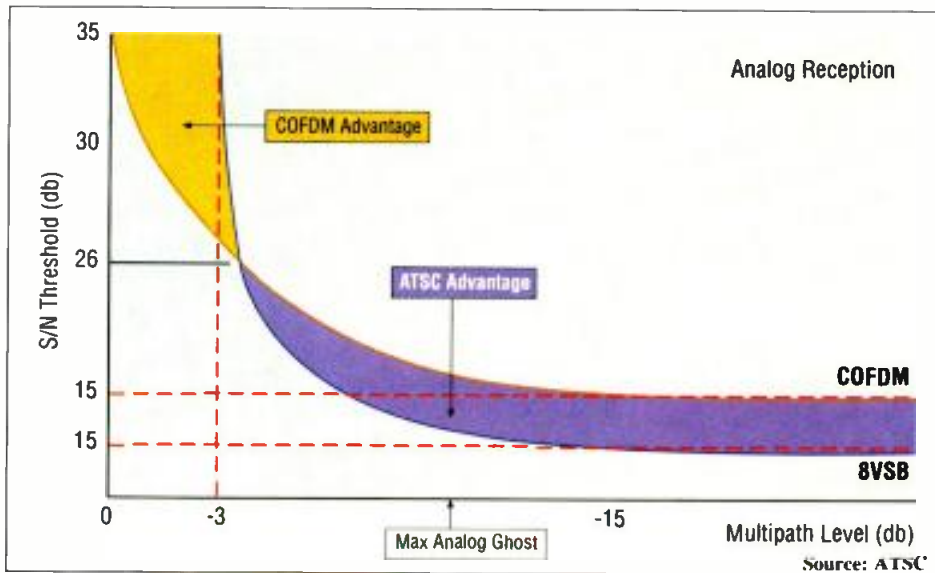

Sinclair was interested in how the reception of multiple ATSC signals would compare to the reception of analog stations indoors. The "criteria for success" of the multiple sites was established. If analog signals could be received with good quality indoors, then DTV would be expected to be received without extraordinary efforts or oversized antennas. This is in keeping with the published Consumer Electronics Manufacturers Association (CEMA)

position.

Sinclair Broadcast Group conducted a series of tests in Philadelphia, PA, during the month of March, 1999. These tests were intended to be a "sanity check" on the real world receivability of the ATSC standard as compared to today's analog NTSC standard. The Philadelphia market was chosen because it has four high-power UHF DTV stations on the air, along with a number of analog NTSC stations, all radiating from the same antenna farm. The tests

were designed to ascertain the ease of reception of DTV as compared to that of the co-located analog stations. Reception, inside of the City Grade and Grade A contours was the principle area of investigation. Numerous tests and reports have been published on outdoor antenna reception of the ATSC standard

signals, but little has been mentioned regarding indoor reception.

Coverage is the key

Sinclair decided to run reception tests because we believe the assumptions which have guided the ATSC scientific testing method can lead to inappropriate conclusions regarding coverage and a broadcaster's notion of service replication. The assumption that good coverage is sufficiently defined only by

Tiernan produces the most comprehensive range of products for HDTV and SDTV:

- ✓ Modular, full-featured, MPEG-2 and ATSC-compliant encoders for 1080i, 720p, 480p and 480i

- ✓ "Plug-and play" multi-slot architecture supporting up to 160 Mbps digital payload
- ✓ Economical ATSC-compliant HDTV encoders with video rates from 10 to 20 Mbps
- ✓ Modular HDTV and SDTV receiver decoders that provide flexibility to network operations

Tiernan products *are* the leading edge in digital television technology.

Contact us for digital television solutions that eliminate the brick walls of other systems.

NO BRICK WALLS WITH TIERNAN DIGITAL TELEVISION **HDTV & SDTV**



**CHOSEN BY THE
LEADING
TELEVISION
NETWORKS**

**FUTURE-PROOF
PLUG-AND-PLAY
ARCHITECTURE FOR
HDTV
& MULTI-CHANNEL
SDTV**

TIERNAN
Communications

5751 Copley Drive, San Diego, CA 92111 USA
TEL: +1 619 587-0252 • FAX: +1 619 587-0257
EMAIL: info@tiernan.com • WEB: <http://www.tiernan.com>

Leaders in Digital Television

Tiernan Communications Limited
8 Oriel Court, Omega Park
Wilson Road
Alton GU34 2YT England
TEL: +011-44-1420-544-200
FAX: +011-44-1420-88999
EMAIL: info@tiernan.com

Circle (6) on Free Info Card

receivability at the perimeter of the Grade B service area ignores market realities. It is the ease of reception by the consumer of a TV signal inside a station's principal area of economic interest, which is the City and Grade A regions of the station's coverage area, which is of major importance to broadcasters.

If outdoor antennas and rotators are required to receive DTV where simple indoor antennas can receive analog television within these high signal regions, then DTV does not replicate today's coverage. Furthermore, the bright hope of using the DTV signal as a means to support a ubiquitous and wireless data delivery service to personal portable devices, a service that could offer a new economic model to help support the roll out of DTV, may be lost.

It is the very replication of a station's coverage area that was the principal promise made to broadcasters by the ATSC when the FCC presented the standard for adoption. It is a dangerous and foolish oversight if broadcasters concentrate only on reaching out to the fringes of our Grade B and ignore the performance of the DTV standard in our most economically important regions. For this reason, Sinclair set out to determine how the ATSC 8-VSB transmission standard performed, inside the Grade A coverage contour. The initial results have given rise to serious concerns.

Unfortunately, the results of the Sinclair tests were very disturbing. At all of the indoor sites where analog signals could be received, there was little or no reliable DTV reception, even with oversized antennas. The multiple receivers used included consumer products from three different manufacturers and were available to the public.



Nat Ostroff

Look at the numbers

At NAB99 convention, the ATSC published and distributed a document (Digital Television-Frequently Asked Questions) attacking Sinclair's efforts as

New scanner rules

Many news departments at radio and television stations use scanners. They also mount them in their mobile units so field crews can listen for breaking stories. But scanners aren't restricted to news bureaus. Are you, or do you know anyone who is, a scanner buff? Well, fundamentally there's nothing wrong with scanners except when it comes to being a listener. The FCC has recently imposed some restrictions on what a scanner is permitted to receive. With the adoption of docket number ET-98-76, Parts 2 and 15, the Commission's rules were amended to "strengthen, improve and clarify regulations prohibiting scanning receivers from receiving transmission from the Cellular Radiotelephone Service."

This document encompasses everything from existing scanners to scanners that might be made in the very distant future. It addresses not only the manufacture of these devices, but any would-be perpetrator who might wish to modify the internal circuitry and/or programming so a scanner can receive cellular calls. They even addressed test equipment that might be needed in the manufacture of cellular equipment that could be used to listen to cellular calls.

The bottom line is not only does the FCC not want you listening to cellular telephone calls, but Congress had directed the action, which includes permanently affixed labels reading: "WARNING: Modification of this device to receive cellular radiotelephone service signals is prohibited under FCC rules and Federal law."

As the station engineer, check your scanners to ensure that they can't receive cellular calls. The Commission didn't make any suggestions on how to disable this function, but then maybe they were leaving that to your creative judgement. In any case, it wouldn't look good if the next time the FCC drops by they cite you for having one of these illegal devices.

"based on a handful of unscientific and probably inappropriate comparisons of analog and digital reception."

In the ATSC response, the organization published a chart from the extensive Australian dTTb report to demonstrate the documented 4dB S/N ratio difference of 8-VSB (for the full reports, see www.comnslab.gov.au/lab/lectures/dttbsnmpc/sld001.htm). There is no dispute over this figure. However, there is disagreement over the relevance of this figure to the implementation of any practical system. Further examination of this chart within its full intended

At S/N ratios greater than 26db, according to the ATSC provided data, 8-VSB can require greater than 10dB more S/N than COFDM for equivalent multipath levels. In fact the chart shows that, if the ghost is greater than -3dB, the 8-VSB system cannot be received at all, no matter how great the S/N ratio of the 8-VSB signal.

It's how you read the numbers

Let's look at the relevance of this 4dB S/N difference (19dB-15dB S/N, see chart). There are those who believe that this is a significant advantage for

The 8-VSB standard is at a great disadvantage in precisely those areas which provide for the greatest value to broadcasters.

context (refer to the above URL) shows that, contrary to the ATSC conclusions, the COFDM system is far superior in those reception areas where indoor antennas are most likely to be employed.

8-VSB. We disagree. It must be understood that this difference applies only to a limited set of conditions, namely those areas of low signal strength. The 4dB S/N difference for 8-VSB only comes into play in those reception ar-



*Put long-range
vision into your
digital management
system.*

Conceived with a vision, the **Roswell™ Facility Management System** puts you in complete control of your digital future. Designed specifically for multichannel digital TV, the Roswell system provides complete workflow automation; from traffic scheduling to on-air operations.

The Roswell system will manage your metadata and electronic program guides, along with the material, media, and playback resources in your facility. And Roswell tightly integrates with our new **Bowser™ Visual Asset Manager** to let you see and hear digital material from the convenience of any PC workstation.

To see the benefits of perfect vision, contact your nearest Odetics Broadcast representative today.




Digital Management Solutions

The Americas (714) 774-2200 Europe +44 (0) 118 927-4600 Asia +65 324-0636

www.odetics.com/broadcast/ Email: broadcast-sales@odetics.com

© Odetics, Inc. 1998 2003

Circle (7) on Free Info Card
www.americanradiohistory.com

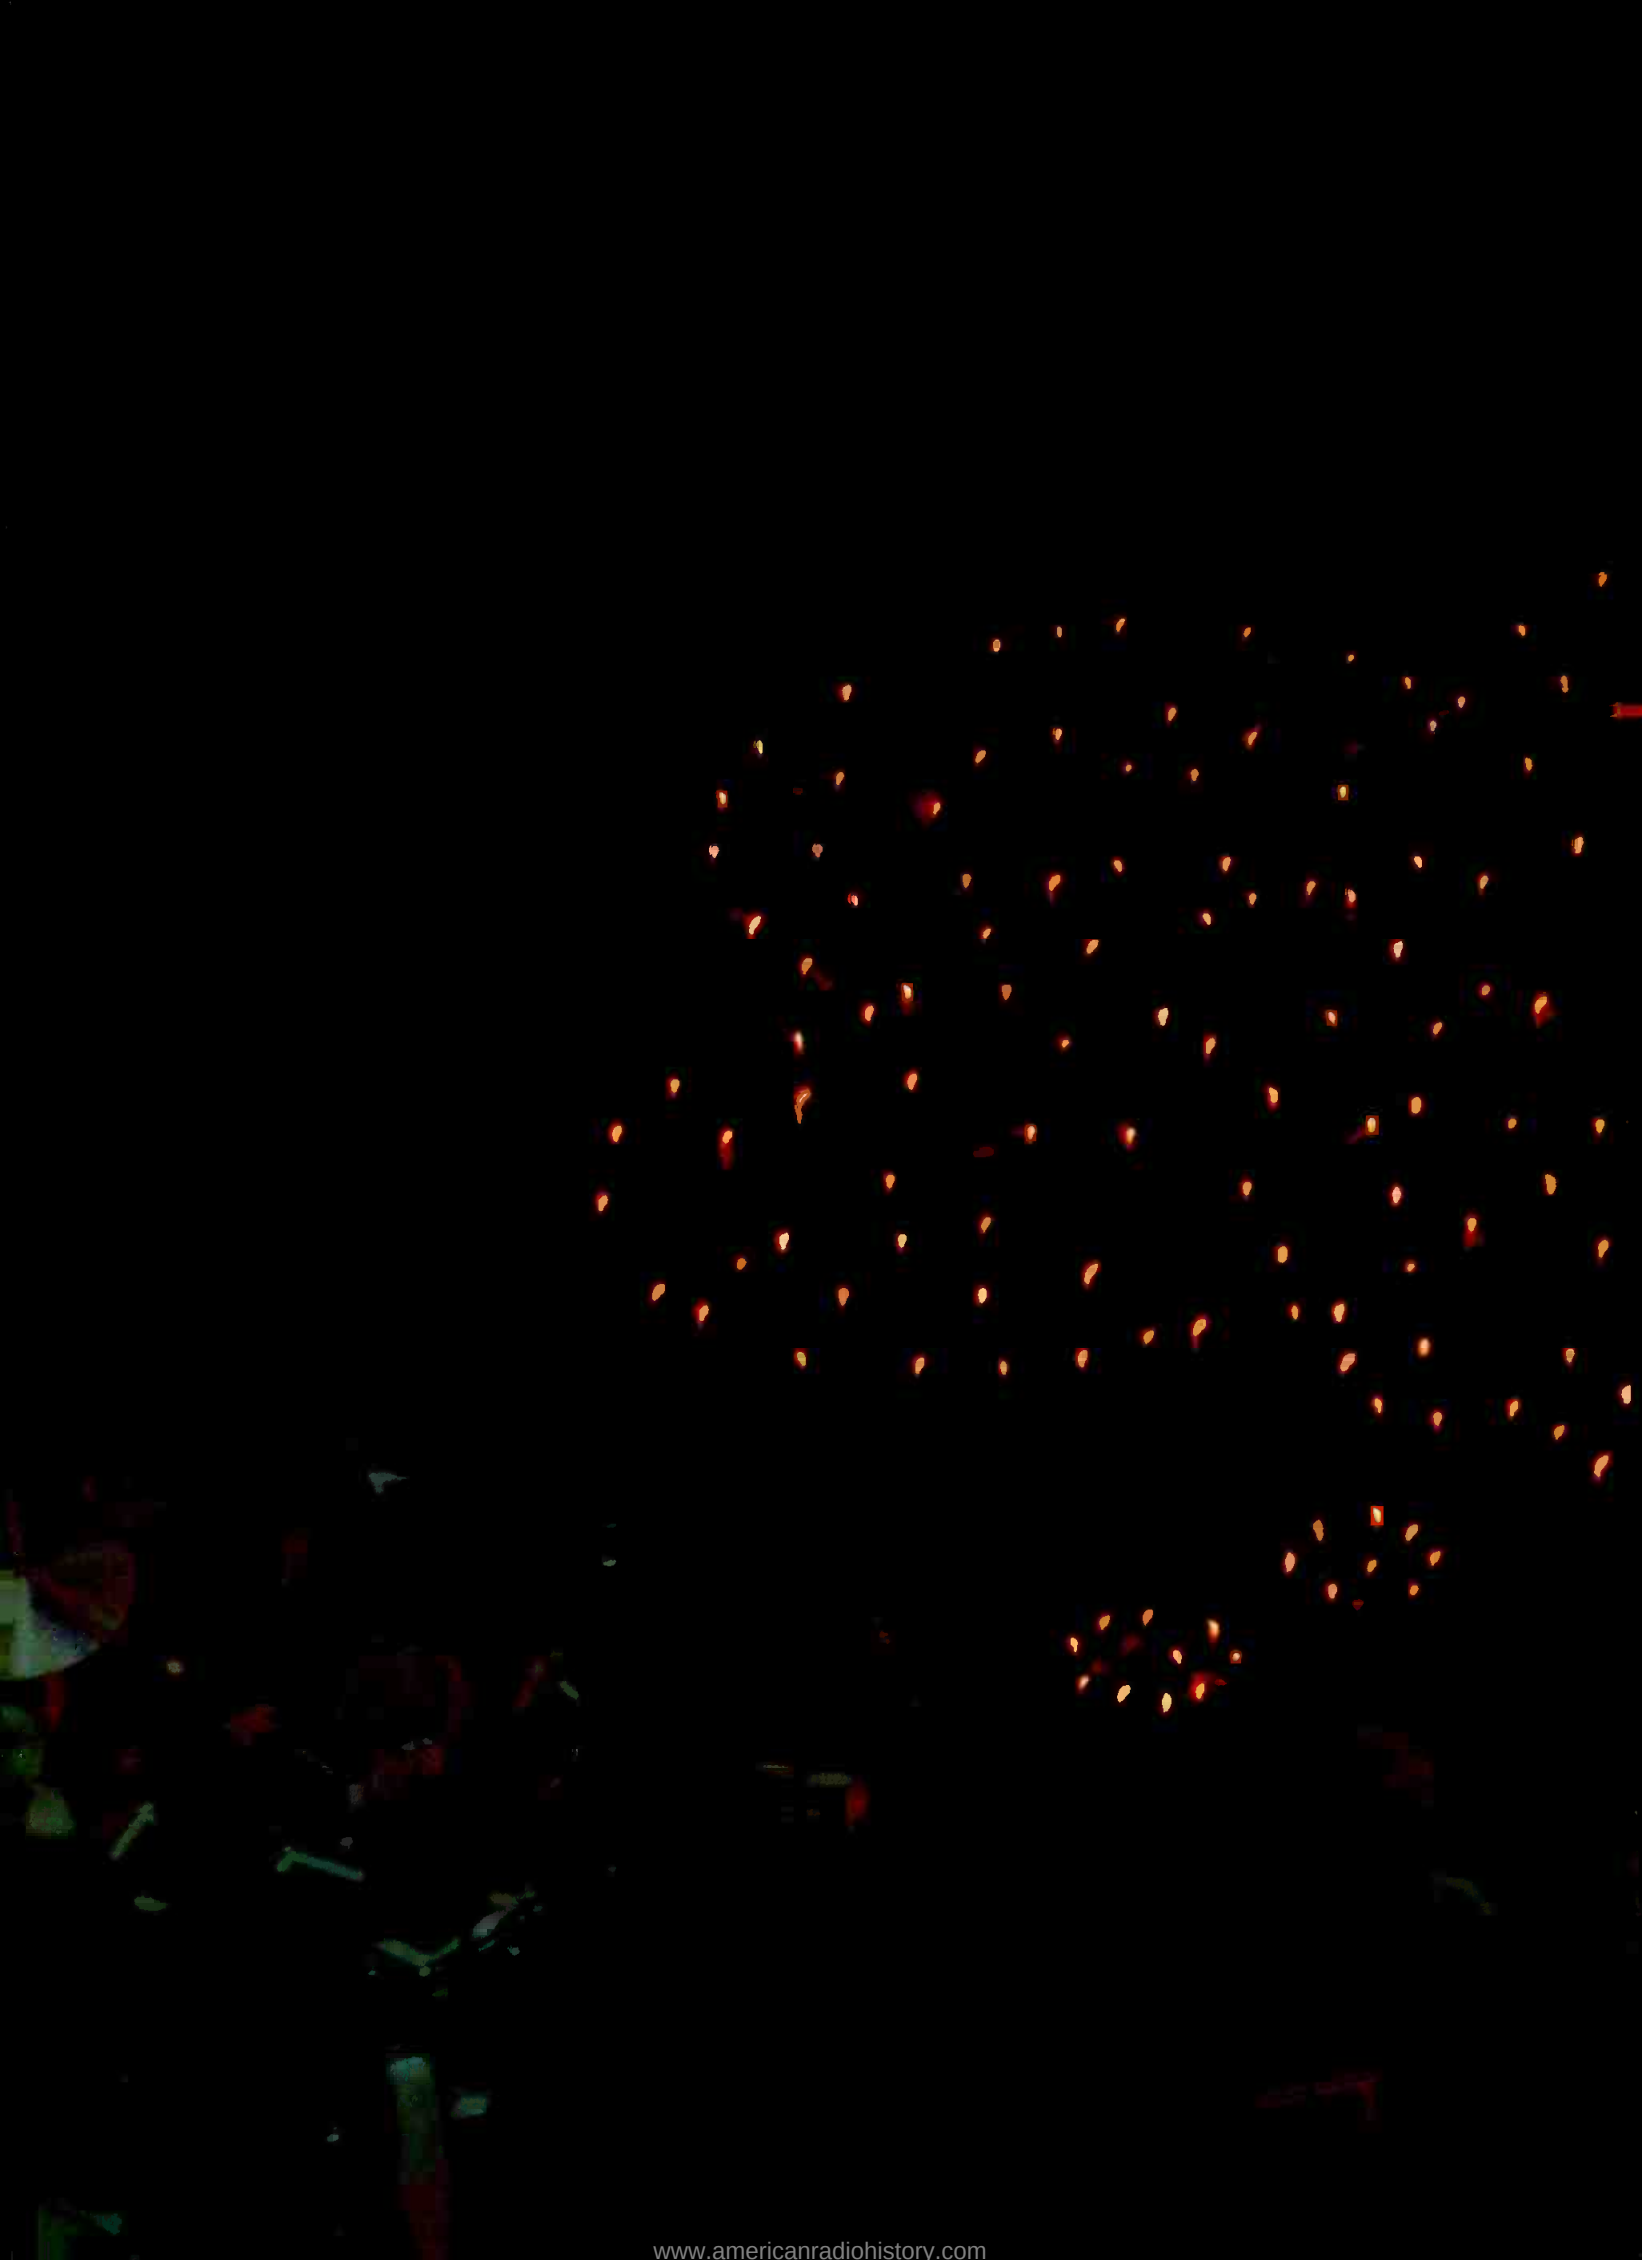

IT'S TIME
FOR A
GRASS VALLEY
REUNION
TOUR.

Grass Valley fans are loyal. They're dedicated. And a few are slightly obsessed. But for good reason. It's music to our ears, hearing how many broadcast professionals learned their craft on our switchers and routers. How they prefer the look and feel of our production systems. And, most important, how they trust our technology. Our modular units are the roots of Grass Valley. Take a look at the latest Tektronix Grass Valley Products. You'll see designs that are functional, durable, and easily integrated. Just like we've been making them for the past 40 years. Some things never go out of style.

This show is definitely going to sell out. Get your tickets quickly. Call 1-800-TEK-VIDEO dept. 9943. Or visit www.Tektronix.com/VND/40

Tektronix®

LET THE GRASS VALLEY MODULAR PRODUCTS ROLL.

Grass Valley's line up includes: Distribution amplifiers. Format conversion products. Digital synchronizers and delays. Analog sync pulse generators. And analog processing amplifiers. Our new offerings share the same proven performance and impeccable reliability that you have come to expect from Tektronix Grass Valley modular products. They're easily integrated into multi-format

environments. They're an affordable solution for your move to digital. They're hot pluggable modules for uninterrupted operations. And for convenient serviceability, our new line also features front removable modules. Grass Valley is expanding the functionality of the high value, high density 8900 Series frame to accommodate needs for both analog and digital products.



NEW FOR '99:

- 8980TLS HDTV Tri-level Sync Converter
- 8960DEC Adaptive Decoder
- 8914 Dual AES Audio Delay DA
- 8911 AES Audio Reclocking DA
- 8900FSS Frame Sync Submodule
- 8960ENC Encoder
- 8981FS 4:2:2 Frame Synchronizer
- 8916 Dual AES Audio Tracking Delay DA
- 8950ADC Component A-to-D Converter
- 8950DAC Component D-to-A Converter
- 8920ADC Audio A-to-D Converter
- 8920DAC Audio D-to-A Converter

To get your backstage pass, visit tektronix.com/VND/Modular

Grass Valley Products brought to you by **Tektronix**

areas where outdoor antennae would most likely be used. In such situations it is likely that these antennae would be directional, high gain units inherently resistant to multipath conditions. Therefore, there is no advantage in the City and Grade A coverage area. In fact, the 8-VSB standard is at a great disadvantage in precisely those areas which provide for the greatest value to broadcasters.

We believe that the primary emphasis that has been placed by the ATSC on reception at the fringes is misguided and has led to a selection that is a poor choice for DTV. When the entirety of the Australian tests are read, and the published results are interpreted within the context of relevant requirements for broadcasters, it is clear why the Australians chose COFDM.

Let us be clear, we do not discount the value of good reception in any coverage area. It has been stated that to achieve equivalent coverage with COFDM in the fringe area, significantly greater transmitted powers will be required. However, in the context of the Australian reporting of real world conditions and performance, there is no relevant difference in the transmitted power requirements for 8-VSB or COFDM providing equivalent coverage.

Sinclair is not promoting any standard. We are promoting the concept that any successful standard must fulfill the promise made to us. That promise is the complete replication of today's coverage. We do not underestimate the magnitude of the tasks at hand in re-characterizing the transmission system. We are, however, concerned with the performance of the present system. Do we risk proceeding down the road of 8-VSB with the promise of future implementation gains, a promise that we are asked to take on blind faith? A failure of 8-VSB will, without question, relegate the over-the-air broadcaster to becoming just another cable program provider.

Sinclair has called for a real consumer-based comparative test. We will proceed and may the best standard win.

Look for a complete discussion of DTV reception results in one station's tests, which will be carried in the July issue of *Broadcast Engineering* magazine. ■

New digital consumer format

Don't ever tell a broadcaster that this or that is for home use only, especially if they are a small market station trying to save a few bucks. Many stations across the country still use S-VHS machines in on-the-air service, and you can bet that when the consumer version of a digital videotape machine is available, many broadcasters will take a very close look.

That time is not too far away. JVC and Sony have joined forces for a D-VHS/1394 VCR. Sony, who is promoting its i-Link (IEEE-1394 related technologies), will combine forces with JVC's D-VHS format in a strategy aimed at positioning the D-VHS recorder as the most practical digital video recorder for home networks that use the 1394 serial interface.

To help avoid any copy-protection problems, the D-VHS format features



JVC's D-VHS with IEEE 1394 interface is aimed at becoming a new prosumer standard. Thirteen major VCR manufacturers have lined up in support.

bitstream recording, in which the input signal and output are stored as scrambled data. In addition, Hitachi, Intel, Panasonic, Sony and Toshiba have proposed a digital transmission content protection scheme for 1394 to prohibit illegal duplication. They believe a 1394-equipped

D-VHS deck will have ample copy protection. Other copyright protection measures will be employed as well.

With the ability to bring in signals via the i-Link 1394 technology, there is no reason this machine can not be used for most any application. The limiting factor in the older S-VHS was the quality due to a number of analog factors including signal-to-noise. In digital, signal-to-noise is not as big of an issue as it is in analog, so don't be surprised to see these units in commercial applications. That may not be limited to smaller markets either.

IEEE-1394 has already been adopted in the consumer realm for output of DV camcorders. But JVC and Sony plan to devise technology to send MPEG-2 data through the 1394 link, making it possible to connect D-VHS decks to set-top boxes for recording digital broadcasts.

Although JVC licenses the D-VHS and Sony the 1394 i-Link, a total of 13 major VCR manufacturers have lined up behind D-VHS, with three companies — Hitachi, Panasonic and Philips Electronics — serving as technical advisors. That kind of support should remove any question as to what will show up in the marketplace.

Several consumer manufacturers, including Sony and JVC, are working on the next generation disc system, which is reported to have a capacity of around 15GB. This is expected to be suitable for a home videodisc recording.

Despite the advances in disc systems, it is expected that tape will be around for a while. Cost will be the major contributing factor in this area, as D-VHS will utilize the huge supply of VHS tape that has already accumulated. ■

Panasonic builds DTV center

Panasonic, recently announced that it will strengthen its digital television development efforts around the world by substantially expanding its U.S. digital TV R&D center, Panasonic AVC American Laboratories Inc. (PAVCAL). In addition to plans to expand in the U.S., it has also opened a new European digital TV lab in Langen, Germany.

PAVCAL, will expand by nearly 30 percent, bring its engineering staff up to 100 engineers. The Burlington, NJ, location has been the center of the company's development of digital and high-definition TV products since 1982. To accommodate the new talent pool, the lab will break ground shortly on a new, substantially larger facility also located in the Burlington area. This expansion is expected to reduce the time required for development of digital television products for both consumers and broadcasters here in the U.S. and other parts of the world.

"Panasonic is playing a key role in creating a whole new entertainment and information industry made possible by the switch to digital and high definition television," said Jukka Hamalainen, president of PAVCAL. "We will continue to be leaders in making this happen."

The new advanced television laboratory in Europe, Panasonic AVC European Laboratory, was established last month and will add 80 engineers to the ranks of Panasonic's quarter of a million plus employees. Both the U.S. and the new European lab will work in close coordination with Panasonic's laboratories and industrial



Jukka Hamalainen, president of PAVCAL, and Sai Naimpally, vice president, shown with the digital set-top tuner/decoder developed by their laboratories in Burlington, NJ.

resources in Japan.

For more information on Panasonic, visit www.panasonic.com.



Send questions and comments to: larry_bloomfield@intertec.com

Why Choose A CORIOscan Computer-to-Video Converter?

Four Good Reasons!

#1. Performance. Check the performance specs listed in this ad, or better yet, compare a CORIOscan side-by-side with any other product in its class. We challenge you to find more performance for the money.

#2. Ease of Use. CORIOscan eliminates the setup hassles you've found when using other Scan Converters. Our exclusive *AutoSet* feature makes setup a breeze - Just push a button and the image from the computer automatically fits exactly onto the TV screen. The settings are retained, even when the power is switched off, for dozens of different computers and resolutions.

#3. Flexibility. Laptops to Workstations, and everything in between - PC, Mac, SGI, HP, SUN, IBM, DEC, etc. Choose the model that best meets your needs: CORIOscan Connect, CORIOscan Select or CORIOscan Pro.

#4. Price. SRP \$295-\$1,395. Enough said!

Visit our Web Site for all the details

www.tvone.com
or call 800-721-4044



Up to 1600x1200 Resolution • Any Vertical Refresh Rate • Up to 6-Line Flicker Elimination • Mouse Emulation via Remote • Automatic Image Size & Position • On-Screen Display • Digital Processing and Filtering • Composite, S-Video, RGB, YUV Out • IR Remote Control • Overscan and Underscan • 2X Image Zoom and Pan • RS232 Remote Control • NTSC & PAL Switchable

SPECIAL BONUS
Free Scala MM200SE
Presentation Software
With Each CORIOscan

TVOne

Multimedia
Solutions

1445 Jamike Dr #8
Erlanger, KY 41018

sales@tvone.com
Fax 606-282-8225

Circle (14) on Free Info Card

DV 8. DV 12.

Perfect balance despite the ups and downs ...



...of electronic reporting.

Compact digital cameras have become hugely popular. They are fast, light and highly versatile. But do they ensure a smooth take? How do you prevent vibration? What about fast panning? Special applications? Or shooting in dreadful weather conditions? You'll find that Sachtler provides the support you never had before for a digital camera. And including all the things you

expect from Sachtler: fluid damping in five steps, touch and go for speedy changes of location, and highly sensitive counterbalance – also in five steps.

You need to use a heavy lens? Or a lighting system? DV 8 and DV 12 have a carrying capacity of up to 10 kg/22 lb and 12 kg/26 lb. Even fast panning won't spoil your report.

DV 8. DV 12. Because you have so much to report.

sachtler
corporation of america

55, North Main Street, Freeport NY 11520
Phone: (516) 867-4900
Fax: (516) 623-6844

3316, West Victory Blvd., Burbank, CA 91505
Phone: (818) 845-4446



Every scene is seen better
with a Sachtler.

Circle (15) on Free Info Card

www.americanradiohistory.com

Avoiding buyer's remorse

JERRY WHITAKER, BE CONFERENCE CONSULTANT



As you are reading this issue of *Broadcast Engineering*, you most likely have recovered from the gigantic NAB99 show and have probably managed to clear your desk of the most immediate fires. Now comes the challenge of putting the equipment displays, sales pitches, product brochures and general convention hype into some type of perspective. After all, you went to NAB99 for two reasons: to learn

what's new in the industry and to gather information for necessary equipment purchases.

The selection process for hardware and/or software is not a trivial task, of course. Competing and conflicting claims, laundry lists of features and benefits; and — always — really good sales pitches often are difficult to sort out. So, where do you go from here? This month, we offer two perspectives

on equipment selection, one from Tom Weber of WISH-TV in Indianapolis and the other from Richard Farquhar of RAF Associates. Tom approaches the question from the end-user standpoint, and Richard offers a perspective from both sides of the fence. ■



Send questions and comments to:
jerry_whitaker@intertec.com

One of the most useful processes I've used in my broadcast engineering career has been that of checking references. Certainly this is true of personnel, but I've had some real fun doing



EXPERT

Thomas P. Weber,
WISH-TV

this for equipment. The results have always been worthwhile. Like anything worthwhile, it took a little time and effort but greatly improved my odds in buying the right product. When preparing to purchase a major piece of software a few years ago, we asked the competing vendors for some references. Manufacturer Y's references said that the software was quite good. It did almost everything it was expected to do, except for one function that the purchasers had wanted. One other function was noted as existing, but didn't really work.

Manufacturer Z's references uniformly replied that the software did everything it was supposed to do, and offered some additional functions that the purchasers really liked.

We had entered the process with an assumption because Y was considered a leading firm and Z was not known as well. However, after we did the legwork, making the right decision was simple and we've been happy.

Let's look at some of the questions you

should be asking, adding whatever is most important to you into the process:

- How long have you been using the product and has it performed as promised or expected?
- Has your opinion changed?
- What research did you do before making your purchase?
- Why did you eventually choose this product and would you choose it again?
- How has it changed the way your station operates, good or bad?
- Were there any major surprises, good or bad?
- Did it work out of the box or were there startup problems?
- What is its maintenance history?
- How would you rate service/parts support? Do they offer loaners or fast turnaround on repairs?

Don't forget that you ought to be asking all of these questions of more than just one person. A chief engineer may give you one opinion and a bench engineer may have a different outlook. When we bought a new transmitter, I talked to the chief and the transmitter supervisor.

A lot of the answers will surprise you. I've had one person tell me that he bought product Y because product Z's salesperson was a jerk. Maybe it shouldn't have surprised me; I've wanted to do that a couple of times myself.

Get aggressive about finding your own references. Besides the stations in your group, or your market, go borrow a Yearbook or Factbook from the GM's office and call some other stations out of

the blue. I've made good contacts this way, and have been able to trade information on gear that my counterpart was considering, so the help was mutual. If your new friend isn't using any of your alternatives, ask why; you may get a really good suggestion. A side benefit is that you'll build up an enviable network of industry contacts, which will pay off in other ways.

We were recently choosing between three different vendors for a piece of hardware. None of the first vendor's references could speak of their experiences without using the word "flames." Users of the other two vendors were happy with their products.

Between those remaining, one vendor appeared to have a more robust design, and that's the unit we purchased. Unfortunately, we seem to have a lemon — three different significant problems in about a year. That gear is now out of service. It's important to note that checking references and doing your homework is not a guarantee of happiness; it just vastly improves the odds.

With equipment increasingly doing the work that people used to do, wise equipment choices are more crucial than ever. Do the research on what it can and can't do well, and tap the experiences — good and bad — of your colleagues. You and your facility will reap the benefits.

Thomas P. Weber is engineering maintenance supervisor at WISH-TV, Indianapolis, IN.

Servo Zoom Override: Our 16X "Technology-First" Puts You In Complete Control.



IFxs



The J16ax8B IRS/IAS Lens Features Enhanced Operation And Better Specs.

The newest IFxs lens incorporates a breakthrough technology that allows the user to manually override the servo zoom control. Unlike conventional zoom lenses which "lock-out" the manual controls while "power zooming", Canon's 16X lens maximizes operational freedom.

This unique feature, means that when the servo zoom is operating, you can manually override it at any point during the zoom, without disengaging the

servo control. That's total production flexibility and only Canon's 16X has it.

As a member of the exclusive IFxs family of smaller lighter weight lenses, the 16X combines Canon's X-Element with their revolutionary Power Optical System design to refract light in more directions than previously possible. This reduces a wider range of chromatic aberrations, resulting in an optically superior lens, with enhanced specs and a smaller size.

For more info: Call 1-800-321-4388

(In Canada: 905-795-2012)

<http://www.usa.canon.com>

Maximize Your Camera's Performance.

Canon

Circle (16) on Free Info Card

www.americanradiohistory.com

Purchasing broadcast equipment or services is not an easy task for anyone today. With all the hype about functions and features, the process can be confusing. The goal of any engineering department is to build systems in which products will



VENDOR

Richard A. Farquhar,
RAF Associates

perform to the manufacturers specifications and work seamlessly with the equipment of other manufacturers. What follows is the procedure I have employed in the purchasing process:

- Determine what you want to do. What is your application? I do a conceptual drawing of the proposed system or equipment installation. (Like they say, a picture is worth a thousand words.)

- Determine what parts and pieces will go into the system. This would include, equipment, mounting hardware, redundancy components, cabling, connectors, converters and other necessary elements.

- Identify the preferred vendor(s) of the required equipment.

- Determine the equipment and services budget. This can be most difficult. You want to obtain the best equipment at the lowest price and the vendor wants to deliver the best equipment at a price that allows the company to stay in business and service the account.

- Realize that there will always be someone with a lower price, but realize also that a lower price may translate to a lower quality of product or support.

As a chief engineer in three large markets, it was my responsibility to go through the basic steps outlined above. What I found worked best for me was to look for an outside resource or an independent representative — someone who took a personal interest in my project and my company. Because this person represented various products and service, and had developed a considerable body of knowledge on most broadcast/production equipment and its application, I viewed these independent representatives as a valuable

resource. An analogy would be that of a real estate agent who represents several different properties and can assist you in finding the home that best suits your needs.

Many engineers today believe they can get a better deal by working directly with a manufacturer or signing a long-term contract with the manufacturer guaranteeing a pre-determined pricing structure. This might look good to the accounting department, but it also could deter other vendors from calling on you and passing along the latest industry developments and news. If you bought a new home and signed a long-term contract with the one manufacturer to supply all of the electrical outlets, why would other outlet manufacturers want to call on you? They would focus their efforts where they have a greater chance of success. This affects you as the customer, because you have eliminated a business resource. I personally do not believe the current trend of con-

ly discussed. The rep brings these solutions to you, the customer. The rep's loyalty is to you, rather than a specific manufacturer.

I am sure you have heard the following true story, but for those that have not, it is worth repeating. In 1947, the transistor was invented at Bell Labs. Almost immediately, it could be seen that the transistor would replace the bulkier, more expensive and less reliable vacuum tubes that were the key components in every radio and TV. However, nobody did anything about it, at least in the U.S. American manufacturers were proud of their super-heterodyne radio sets, which were the ultimate in craftsmanship and quality.

Sony was practically unknown outside Japan at that time and was not involved in consumer electronics. Sony saw the potential of the transistor and quietly bought a license from Bell Laboratories. Within two years, Sony produced the first portable transistor radio. With prices that were

Your rep can spot new trends, tomorrow's transistor technology, and share them with you.

tractual obligations by big and small broadcast groups, networks and, in some cases, system integrators is usually in the buyer's long-term best interests.

For example, an independent representative, one that represents many manufacturers, will reside in the territory in which he or she sells and usually will remain there throughout their professional career. Like any other professional — doctor, lawyer or accountant — they understand all of your requirements, constraints and budgeting process, and will be in a good position to offer you additional services or products that will make your job much easier. They have industry knowledge that goes beyond what many engineers see on a day-to-day basis. The independent rep is actively involved in professional conventions and organizations on a local and national level. Here, he or she associates with other professionals where broadcast solutions are open-

only one third that of vacuum tube radios, Sony captured the entire U.S. market for inexpensive radios by the early 1950s.

Your representative, because of his or her professional industry involvement, can spot new trends, tomorrow's transistor technology, and share them with you. The independent rep will know most of the up-and-coming small companies that are making great cost-effective products. As you know from your own experience, manufacturers will tell you about the bright side of their products and how they work, but the professional independent representative will always be representing you and your company foremost. Their job depends on it.

Remember that if you always do what you have always done, you will always get what you have always gotten. ■

Richard A. Farquhar is RAF Associates, Canal Winchester, OH

Tiger

144x144 Routing Switcher

We Eat the Competition

Alive!

The PESA Tiger is quickly becoming the router of choice for studio and mobile broadcasting around the world. It's no wonder the competition is nervous!

The PESA Tiger size advantage is undeniable - a 144x144 video switcher requires only 12RU, while the audio switcher packs two channels of analog or AES audio into a scant 8RU. And there's plenty of muscle behind those good looks. Both Tiger switchers support mixed analog and digital matrices in the same frame.

The Tiger delivers absolutely unbeatable packaging, bullet-proof performance, and the flexibility to take on new challenges. It's a killer combination.

It's a jungle out there...and it's full of Tigers. Anything less is just lunch.

PESA
Switching
Systems

Corporate Sales Office • 35 Pine Lawn Rd • Suite 99E • Melville, NY 11747
1-800-328-1008 • Tel: 516-845-5020 • Fax: 516-845-5023 • www.pesa.com



Circle (17) on Free Info Card

www.americanradiohistory.com



Satellite home viewing creates hot issues

BY HARRY MARTIN

Four of the major television networks and their affiliates recently entered into an agreement with satellite TV operator DirecTV that would slowly phase out the delivery of distant network signals to subscribers who are able to receive signals over the air from their local affiliates. This agreement should relieve some of the political pressure in Washington to liberalize the rules that limit satellite TV operators. Legislation is still pending that would allow the satellite operators to continue distributing distant network signals, at least until the FCC reviews the impact on local stations. This legislation would give at least some stations must-carry rights on the satellite systems.

What is Grade B?

It has been the practice of satellite TV operators such as DirecTV, EchoStar

(Dish Network) and Primetime 24 to deliver distant network television feeds to subscribers who are able to receive a Grade B signal from their local network affiliates. Delivery of such satellite signals is a violation of the Satellite Home Viewer Act (SHVA). The satellite operators attempted to avoid the SHVA requirements by asking the FCC to change the definition of Grade B for SHVA purposes, but the FCC did not do so. While the operators did not get the relief they sought from the FCC, the battle is far from over.

Petition filed with FCC

EchoStar filed a petition asking the FCC to reconsider its recent decision. Among other things, EchoStar requested that the Commission rule that ghosting in a signal is evidence that a home is unserved and therefore a satellite oper-

ator may deliver network signals to that home. In addition, EchoStar asked the Commission to simplify the methodology recently created for measurement of signal strength at a subscriber's home, and to reconsider its decision to adopt a 50 percent confidence factor as part of its model for predicting the presence of a Grade B signal in an individual household. Previously, EchoStar suggested a 99 percent confidence factor that was rejected by the Commission. Now, EchoStar suggests a 90 percent confidence factor.

Partial settlement

When recent court actions were about to force DirecTV and Primetime 24 to stop delivering distant network signals in a manner that violated SHVA, DirecTV attempted to do an end-run around the court by using a different

DTV99: The Digital Future is Now

Brought to you by the experts at *Broadcast Engineering: The Journal of Digital Television*, DTV99 brings together the engineers and strategists who are leading the digital television revolution, and the decision-makers who are making it happen.

New in 1999! A special high-end production track has been added to this dynamite program. Production managers, directors and technical advisors... don't miss a minute of the innovation, as you step into the digital future of production. Brought to you by *Video Systems* and *Millimeter* magazines.

December 1-3, 1999 • Hyatt Regency
Chicago O'Hare • Chicago, Illinois USA
www.dtvconference.com

Brought to you by the experts at
**Broadcast
ENGINEERING**

Together with
*Video Systems, Millimeter
and World Broadcast News*

You don't have to face the challenges of change alone. For five consecutive years, broadcast professionals have gathered at *Broadcast Engineering's* annual DTV conference to find out exactly how to design and build the digital facilities they need — now.

DIGITAL TELEVISION 99

DTV99 is a unique forum covering the latest developments in the DTV arena, including implementation issues that will affect each and every digital receiver. You'll gain critical insight on how to make this transition a smooth and profitable one.

It's three days that will change the way you face the digital future. You'll take home the knowledge you need to survive and prosper as digital television comes of age.

Want to know more? Call Intertec Exhibitions at +1-303-741-2901. Or check out our Web site: www.dtvconference.com

Should've gone with ADC Superjacks.



Future-proof yourself and your network with the only video jacks for uncompressed HDTV.

Broadcasting has never experienced greater uncertainties than its move to digital. Even relatively minor components like video jacks could have major repercussions down the road if you pick the wrong ones: shutdown costs, recabling, lost time. ■ That's why we developed ADC Superjacks—the only video jacks with enough bandwidth for any digital format. ■ How much is that? As the formula below shows, you'll need at least 2.228 GHz to comfortably handle HDTV. Easily accommodated by both our SVJ-2 and our MVJ-3 Super Video Jacks, the only jacks to surpass SMPTE® 292M standards. And both function at true 75 ohm impedance over the entire bandwidth. Is it worth it to take a chance with cut-price jacks? ■ ADC Telecommunications. We've got answers before you have questions.

$$\text{Min. bandwidth for HDTV} = \frac{D_k}{2} (x 3) = \frac{1.485}{2} = 742.5 \text{ MHz } (x 3) = 2.228 \text{ GHz}$$

3rd Harmonic = 2.228 GHz

D_k = data rate®

Do the math: the equation for figuring out the bandwidth you'll need to broadcast HDTV. No matter how you figure it, it adds up to ADC Superjacks.

ADC Superjacks

Why take chances?



Call us at
1-800-726-4266

for more information and a free booklet,
"How to Build Your Digital Infrastructure."

Or visit us at
www.adc.com/Products/AVproducts/index.html



ADC Telecommunications

feed for its imported distant signals. Four networks sued DirecTV again, and the parties recently settled that litigation. DirecTV agreed to use the predicted signal model recommend by the FCC for determining which subscribers may receive network signals. In addition, on June 30, DirecTV subscribers predicted to receive Grade A intensity signals from network affiliates will lose receipt of satellite-delivered CBS, Fox, NBC and ABC signals. On Dec. 31, subscribers who can receive a predicted Grade B signal will lose access to those same satellite-delivered network signals. Subscribers who will lose DirecTV network signal service are to be notified in advance and will receive discounts on over-the-air antennas.

New towers subject to new painting/lighting rules

The FCC modified its rules regarding tower painting and lighting. All new and altered towers registered with the FCC are now required to conform to painting and lighting specifications listed in the most recent FAA Advisory Circulars: AC 70/7460-1J, Obstruction

Marking and Lighting (January 1, 1996), and AC 150/5345-43E, Specification for Obstruction Lighting Equipment (October 19, 1995). The circulars are available on the FCC's website at www.fcc.gov/wtb/antenna/faainfo.html or from the FAA. This updates the FCC's rules, which previously referenced outdated FAA Advisory Circulars.

Important changes in the new circulars include the requirements that all coaxial, conduits, and cables attached to the face of a tower be painted and all flashing red obstruction lights on a tower flash concurrently.

It was not intended that antenna structure owners previously assigned painting/lighting specifications by the FCC be required to update their structures to comply with the new circulars.

If a tower you own has circular AC 70/7460-1J specified on its registration authorization and you do not wish to comply with the new cable painting and concurrent flashing requirements, you may request that the tower registration be modified to specify the circular in effect at the time the FAA approved the tower. To do so, you must submit FCC

Form 854, Application for Antenna Structure Registration, indicating on item 12B that you wish to change the existing obstruction marking and lighting requirements. Be sure to attach a copy of the tower's current FAA Determination Of No Hazard specifying the prior circular. There is no FCC filing fee required with Form 854. ■

Harry C. Martin is an attorney with Fletcher, Heald & Hildreth, P.L.C., Rosslyn, VA.



Send questions and comments to:
harry_martin@intertec.com

Dateline

Television stations (commercial and noncommercial) in the following states (or district) must file their biannual ownership reports by June 1, 1999: Arizona, District of Columbia, Idaho, Maryland, Michigan, Nevada, New Mexico, Ohio, Utah, Virginia, West Virginia and Wyoming.

Things we wish worked as well as Pro Patch™ Audio Bays.

Batteries
Hard Drives
The Stock Market
Meteorologists
Y2K
Congress
Cell Phones
New Year's Resolutions

This list, of course, could go on and on. Because, quite frankly, few things are as reliable as Pro Patch™ Audio Bays. Engineered to the most exacting standards of anything in your network, they simply won't fail. They also feature unique technologies found nowhere else. Like our reliable long-frame and bantam jacks, which feature self-cleaning crossbar contacts. And our all-new time-saving QCP IV punchdown system. See, we know more about audio and video jacks than anyone. After all, we invented the bantam jack in 1961. Call us at 1-800-726-4266 for more information. Or visit us at www.adc.com/Products/AVproducts/index.html

**Pro Patch™ Mark IV
Audio Bays**
Precision without fail



ADC Telecommunications

Circle (10) on Free Info Card
www.americanradiohistory.com

Born to Broadcast ...

and On Air Around the World.



"WRC is in the final stages of its digital rebuild project. When it came time to choose between an analog or digital audio console, the decision was made to go with Aysis Air. It was important to have a multi-input board which takes advantage of layering to present a more efficient, compact, operating desk to

the audio engineers. Because the console is used for multiple productions, the file recall setup attribute became an important feature to help to ensure consistency in our product."

Jerry Agresti, Director of Engineering
NBC 4, WRC TV, Washington, DC

Solid State Logic

International Headquarters

Begbroke Oxford OX5 1RU England

Tel: +44 (0)1865 842300

Fax: +44 (0)1865 842118

Email: sales@solid-state-logic.com

<http://www.solid-state-logic.com>

New York

Los Angeles

Tokyo

Paris

Milan

Toronto

Singapore

(1) 212 315 1111

+1 (1) 323 463 4444

+81 (0) 3 5474 1144

+33 (0) 1 3460 4666

Tel +39 02 2622 4956

+1 (1) 416 431 9131

+65 (0) 438 2272

Circle (9) on Free Info Card
www.americanradiohistory.com



Ancillary data multiplexing

BY MICHAEL ROBIN

Figure 1 is a simplified view of the 4:2:2 525/60 scan line. It includes the location of video words during the active line interval as well as the horizontal blanking interval. The combined (multiplexed) number of luminance (Y) and chrominance (C_B and C_R) samples per total line (words per total line) is 1716 (numbered 0-1715). The digital active line accommodates 720 Y samples, 360 C_B samples and 360 C_R samples for a total number of 1440 words per active line (numbered 0-1439). The result is 276 words in the digital-blanking interval (numbered 1440-1715).

The component digital standards do not provide for the sampling of the analog sync pulses. Two timing reference signals (TRS) are multiplexed into the data stream on every line immediately preceding the start of the active line data and following the end of the active line. Of the 276 data words in the horizontal blanking interval, eight are reserved for the transmission of the

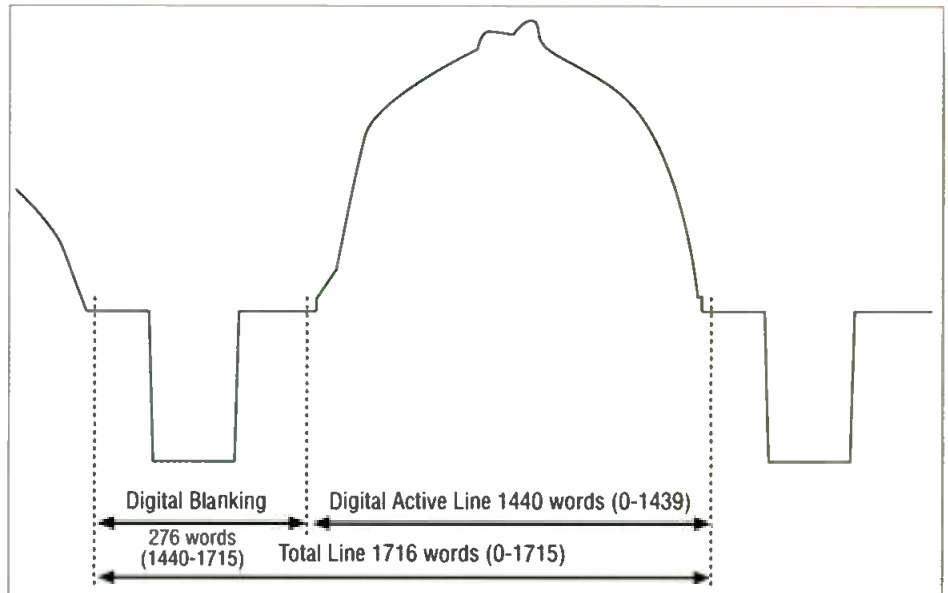


Figure 1: There are 1716 digital words per active line in the 525/60 standard, of these, 276 are used for digital blanking and 1440 are used for the digital active line.

TRS. Words 1440-1443 are used to transmit the end of active line (EAV) TRS message and words 1712-1715 are used to transmit the start of active

line (SAV) TRS message.

Each TRS consists of a four-word sequence. Using a 10-bit hexadecimal notation these words are represented as follows:

3FF 000 000 XYZ

The first three words are a fixed preamble and unambiguously identify the SAV and EAV information. XYZ represents a variable word and defines the field identification, the state of vertical blanking and the state of horizontal blanking.


The remaining 268 words (1444-1711) can be used to transmit ancillary data. During the vertical blanking duration, large blocks of data, up to 1440 words, can be transmitted within the interval starting with the end of SAV and the start of EAV. Only eight-bit words can be used in the vertical-blanking interval. Restrictions only allow the use of lines 1-19 and 265-282. Line 10 (vertical interval switching instant) and the following line 11 are not used

FRAME GRAB

A look at tomorrow's technology.


Users pick networking technology

While 601 is the most popular networking scheme, Fibre Channel and Megabit Ethernet are also favored.

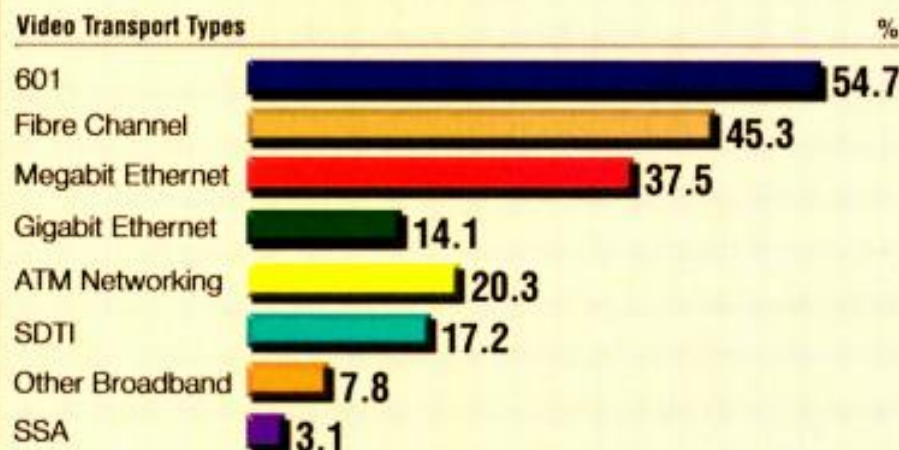

Source: SCRI www.SCRI.com

THE NEXT INNOVATION IS JUST A STEP AWAY.

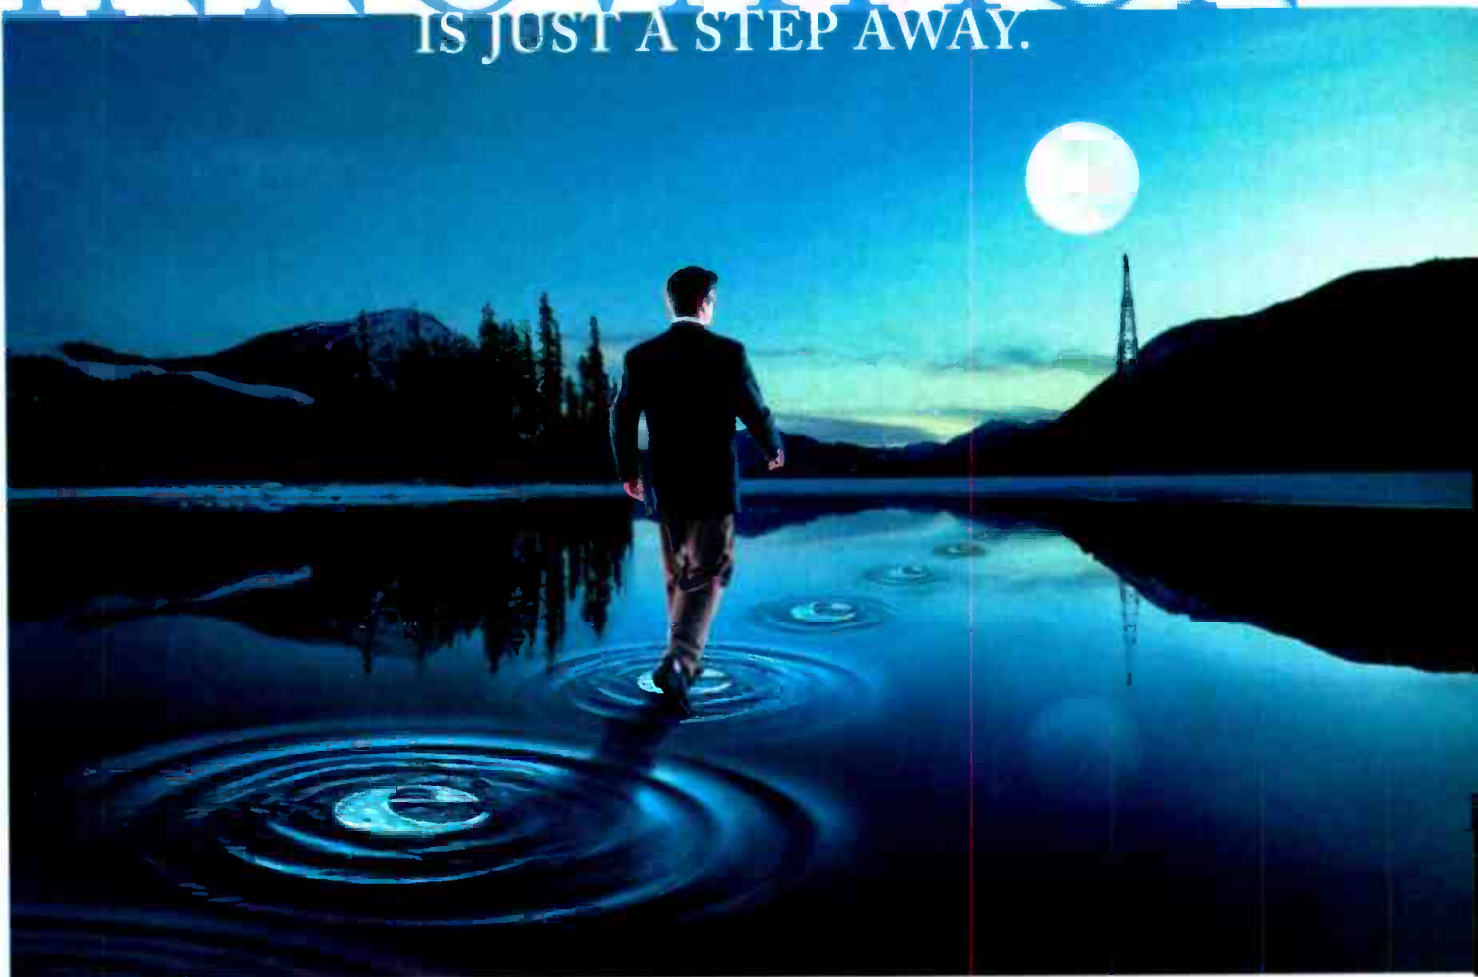

Ever tried to walk on water? Producing and distributing multichannel audio for DTV can be just as difficult. But now up to eight audio channels can be carried through the existing two-channel broadcast infrastructure with the latest innovation from Dolby Laboratories...Dolby E. With the Dolby E Encoder and Decoder, programs created for DTV broadcast can be decoded, processed, re-encoded, and edited many times without sacrificing sound quality. And Dolby E allows metadata to be carried throughout the entire production and broadcast distribution stages, which means programs sound just the way they were originally intended all the way down the line. Take the first step...visit our website for more information.

www.dolby.com/tvaudio



BREAKING SOUND BARRIERS


Dolby Laboratories Inc. • 100 Potrero Avenue, San Francisco, CA 94103-4813 • Telephone 415-558-0200 • Fax 415-863-1373
Wootton Bassett, Wiltshire SN4 8QJ, England • Telephone (44) 1793-842100 • Fax (44) 1793-842101 • www.dolby.com

Dolby and the double-D symbol are trademarks of Dolby Laboratories © 1999 Dolby Laboratories Inc. S99/12378

Circle (18) on Free Info Card

www.americanradiohistory.com

OUR BIG ROUTER SELLS FOR

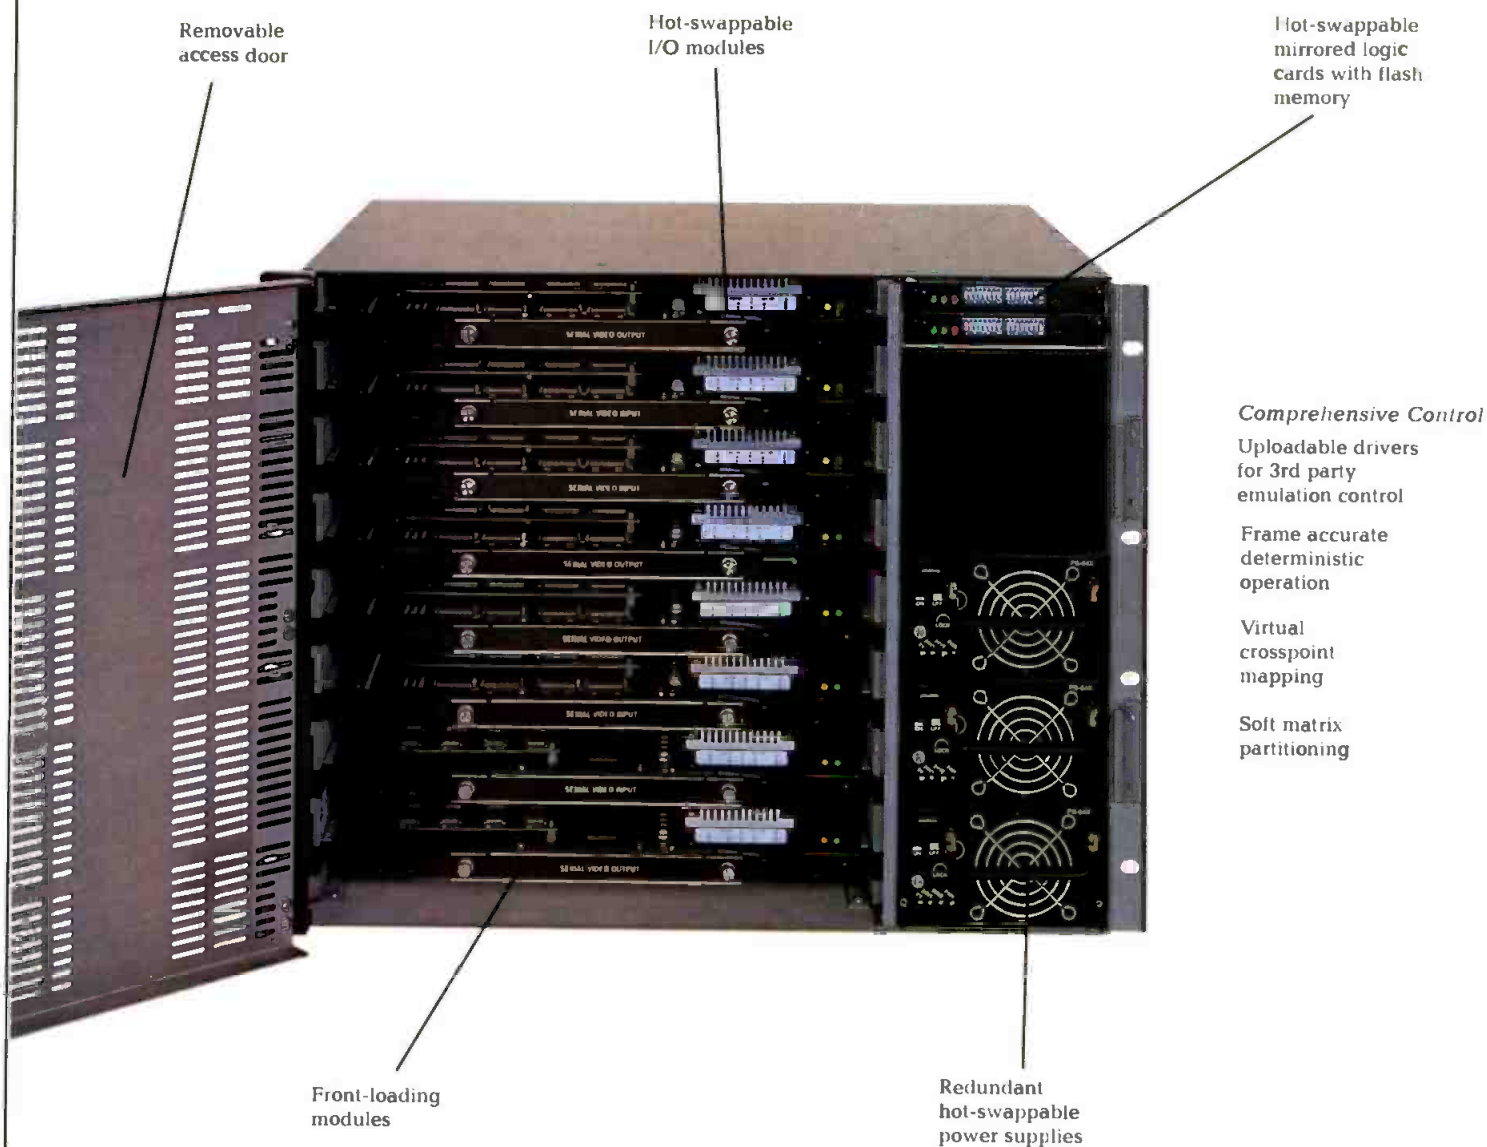

HDTV • SDI • ANALOG AUDIO • PAL • NTSC •



ENGINEERING THE BIG PICTURE™

LOTS OF LITTLE REASONS

Dual RS232/422
ports for control &
diagnostics

Ethernet port
for control &
diagnostics


Future support
for S.N.M.P.

Dual outputs

GPI alarms
via GPI
software

True output
monitoring for
digital and
analog video
and audio

Mixed
signal format
configurations

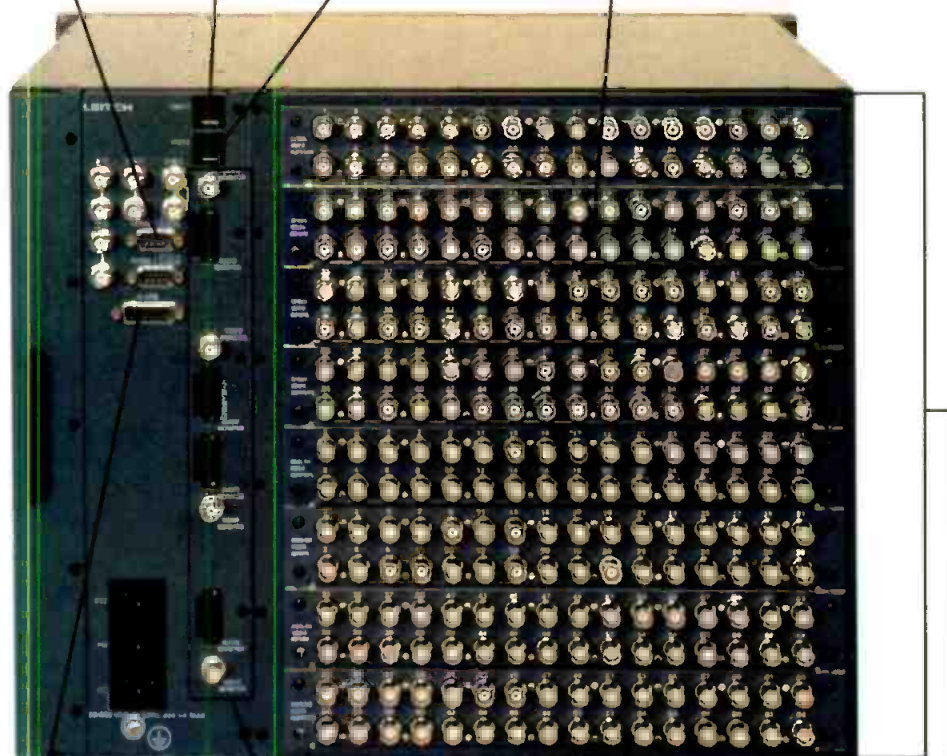

You get great value...

...when you combine Leitch's service with the Integrator's™ capabilities:

Flexible, Expandable Architecture

- Combines multiple analog and digital formats in 4, 6 or 8 RUs
- Expands to 128x64 in a single unit and 128x128 in multiple frames
- Prepares your broadcast, post or telco facility to switch today's and tomorrow's formats, including HDTV and ASI

Phenomenal Feature Set

- Protects your operation with redundant hot-swappable logic cards and power supplies
- Simplifies maintenance through hot-swappable, front-loading I/O modules
- Eliminates need for monitoring DAs and routers, with "true" output monitoring and separate analog and digital video outputs
- Accommodates both RS232/422 and Ethernet connections

Comprehensive Control

- Frees you from hardware constraints with virtual crosspoint mapping and soft matrix partitioning
- Enhances control with 3rd party up-loadable drivers and software reconfigurable control panels
- Permits on-air control from automation systems or PC-based control using Leitch's RouterWorks™ software



BIG router. BIG benefits. HUGE value. Make the BIG move! Call Leitch or visit www.leitch.com.

SECAM • ASI • AES • E3 • DS3



ROUTER CONTROL PANELS



RCP-32x1p



RCP-32x8p



RCP-64x1p



RCP-ABA-XYp



RCP-ABA2-XYp



Europe +44 (0) 1483-591000 • Australia +61 (2) 9939-3355 • Japan +81 (3) 5423-3631 • Hong Kong +(852) 2776-0628 • Brazil +55 (11) 867-0218

Circle (19) on Free Info Card

www.americanradiohistory.com

Horizontal ancillary data space (HANC)	268 Words/line x 525 lines/frame = 140,700 Words/frame 140,700 Words/frame x 29.97 frames/s = 4.216779 MWords/s 4.216779 MWords/s x 10 bits/Word = 42.16779 Mb/s
Vertical ancillary data space (VANC)	1440 Words/line x 38 vertical interval lines = 54,720 Words/frame 54,720 Words/frame x 29.97 frames/s = 1.6399584 MWords/s 1.6399584 MWords/s x 8 bits/Word = 13.1196672 Mb/s
Total ancillary data space	42.16779 Mb/s (HANC) + 13.1196672 Mb/s (VANC) = 55.3 Mb/s Data formatting and exclusions may reduce this value by 10% to 20%
Total bit-rate	1716 Words/total line x 525 lines/frame x 29.97 frames/s x 10 bits/Word = 270 Mb/s
Essential bit-rate	270 Mb/s - 55.3 Mb/s = 214.7 Mb/s

Table 1: Of the 270Mb/s in the SMPTE 259M signal, approximately 42.17Mb/s are available for ancillary data within the 4:2:2 525/60 format.

to prevent switching clicks. Lines 9 (fields I and III) and 272 (fields II and IV) are reserved for error detection and

space available within the ITU-R601 4:2:2 format. The horizontal ancillary (HANC) capability, listed in the upper

Ancillary data may include digital audio, time code and EDH, as well as user and control data.

handling (EDH) signals.

Table 1 summarizes the ancillary data

row of the table, indicates the bit-rate available for insertion of ancillary data

in the horizontal-blanking interval. The vertical ancillary (VANC) capability is listed in row 2. It indicates the bit rate available for insertion of ancillary data in the vertical-blanking interval. The total ancillary data space, listed in row 3, represents the sum of the HANC and VANC capability of the system. This value may be reduced by 10 percent to 20 percent by

the data formatting used.

The essential bit rate required by the standard is shown in row 4 of the table. It results from the elimination of non-essential samples in the horizontal and vertical blanking intervals. Ancillary data may include digital audio, time code and EDH, as well as user and control data.

Audio data multiplexing

One of the most important uses of the

Got a problem?

Questions?

Comments?

Consult the Doctor.

drdigital@compuserve.com



ATSC Power Play.



When your goal is to get on air with the highest picture quality possible, you need the power of NDS' new compact ATSC encoder.



Designed to operate alone or as part of a complete HD/SD system solution, NDS' E5820 ATSC encoder provides you with the perfect broadcast power play.

Configurable for 480i30, 480p60, 720p60 or 1080i operation, the unit also provides NDS' patented noise reduction, closed captioning, and automatic switching.

Decades of experience developing end-to-end MPEG, DVB, and ATSC systems is why leading broadcasters around the world depend on NDS. Innovative and reliable solutions backed by extensive service and support — that's the NDS difference.

Don't end up in the penalty box by making the wrong move. Call NDS today, or visit our web site for more information.



NDS Americas Inc.
3501 Jamboree Road Suite 200, Newport Beach, CA 92660
949.725.2542
www.ndsworld.com

©1999 NDS Americas Inc. NDS is a trademark of NDS. All other trademarks are the property of their respective owners. All rights reserved.

Circle (27) on Free Info Card

ancillary data space is for the insertion of audio signals accompanying the video signal. The 4:2:2 component digital standards have a considerable amount of overhead. They can easily accommodate eight AES/EBU signals (eight

stereo pairs or sixteen individual audio channels) and still leave quite a bit of space for other uses.

The ANSI/SMPTE 272M document defines the manner in which AES/EBU digital audio data, AES/EBU auxiliary

data and associated control information is embedded into the ancillary data space. The 4:2:2 525/60 component digital signal can accommodate 268 ancillary data words in the unused data space between the end of active video (EAV) timing reference and start of active video (SAV) timing reference. Figure 2 shows the ancillary data packet structure for the 4:2:2 component digital interface. Each packet can carry a maximum of 262 10-bit parallel words. A six-word header precedes the ancillary data and contains:

- A three-word ancillary data flag (ADF) marking the beginning of the ancillary data packet. The values of these three words are 000, 3FF and 3FF respectively.

- An optional data identification (DID) word identifying the user data.

- An optional data block number (DBN) word

- A data count (DC) word

The header is followed by not more than 255 data words and the packet is closed by a checksum (CS) word, which allows the receiver to determine the

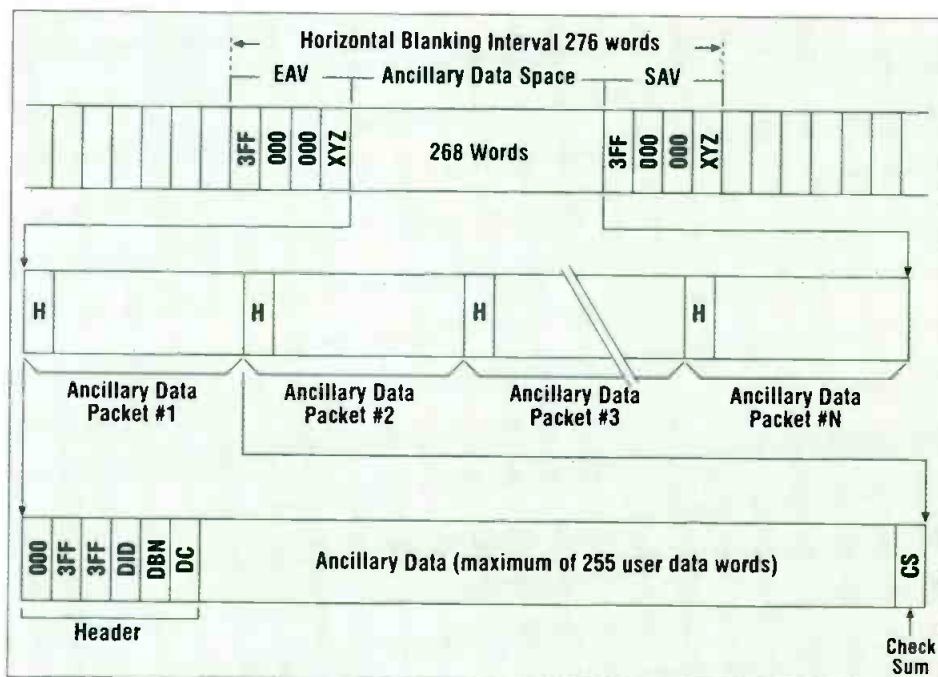



Figure 2: Ancillary data packets within the horizontal blanking interval consist of a 6 byte header, up to 255 user data words and a checksum word.

Axon.

Casting new light on digital optical fibre transmission

Digital fibre optic transmitter and receiver cards

If you've ever experienced optical fibres accidentally breaking where they emerge from the front panel of your router or transmission system, you'll appreciate the Axon FOT-100 transmitter and FOR-100 receiver



cards. Because they feature an innovative contact block that puts the optical connectors at the rear where they really belong. Out of potential danger yet able to perform in accordance with proposed SMPTE standards for digital fibre transmission. These cards are designed to handle even difficult pathological test patterns without problems.

Reach out for this and all the other Axon digital broadcasting solutions on stand no. 8.251 at IBC, 11 to 15 September 1998.



THE MARK OF DIGITAL ACHIEVEMENT

AXON DIGITAL DESIGN BV


THE NETHERLANDS. PHONE: +31 (0)13 511 6666.

UNITED KINGDOM. PHONE: +44 11 89 26 08 72.

U.S.A. PHONE: (212) 265 6865.

<http://www.axon.nl>

Circle (28) on Free Info Card

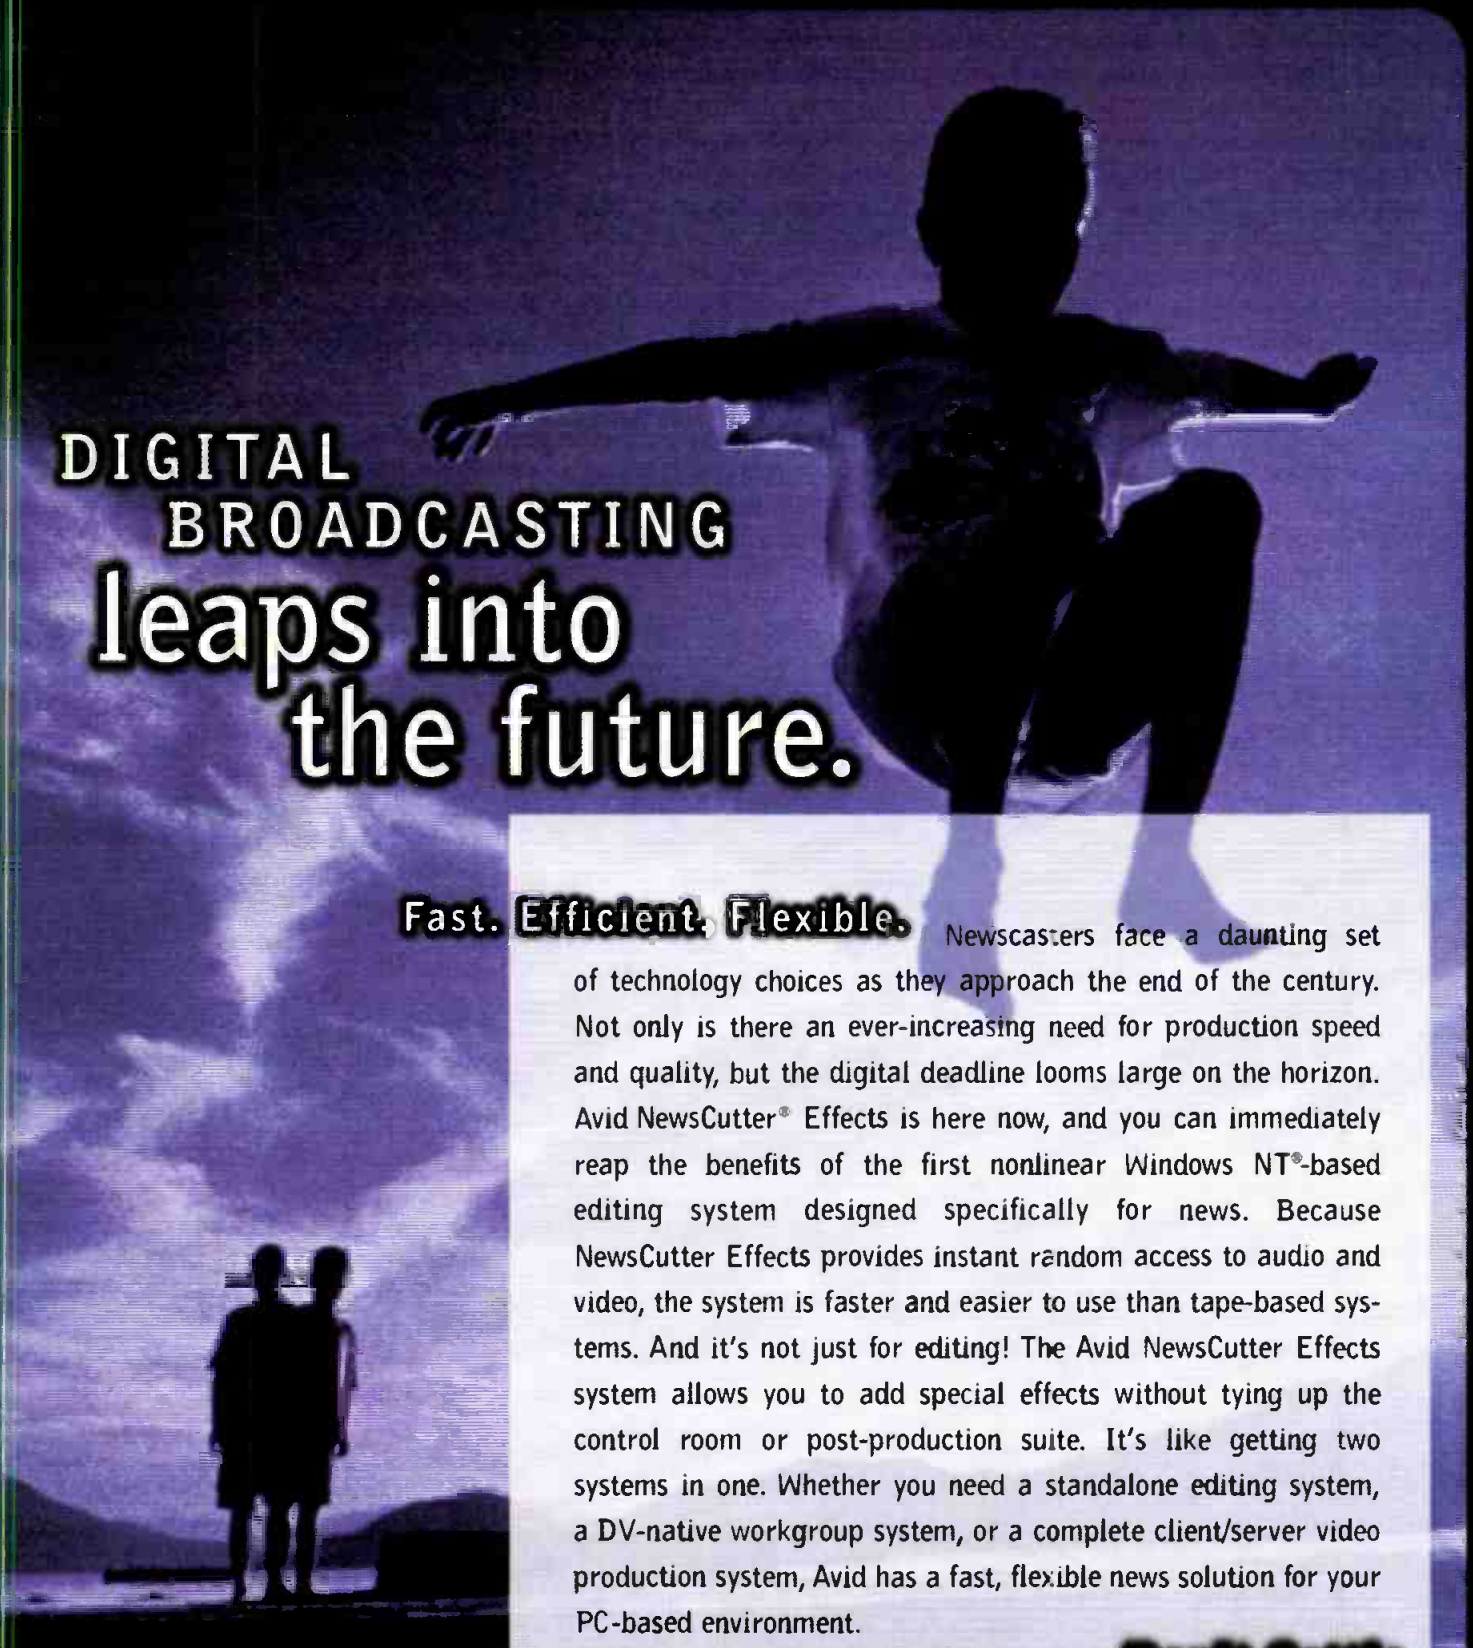

DIGITAL BROADCASTING leaps into the future.

Fast. Efficient. Flexible.

Newscasters face a daunting set of technology choices as they approach the end of the century. Not only is there an ever-increasing need for production speed and quality, but the digital deadline looms large on the horizon. Avid NewsCutter® Effects is here now, and you can immediately reap the benefits of the first nonlinear Windows NT®-based editing system designed specifically for news. Because NewsCutter Effects provides instant random access to audio and video, the system is faster and easier to use than tape-based systems. And it's not just for editing! The Avid NewsCutter Effects system allows you to add special effects without tying up the control room or post-production suite. It's like getting two systems in one. Whether you need a standalone editing system, a DV-native workgroup system, or a complete client/server video production system, Avid has a fast, flexible news solution for your PC-based environment.

Don't Settle.

The **NewsCutter Effects** model is now shipping to broadcasters everywhere!
Call 800 949 AVID
www.avid.com/newscutterfx

Avid
tools for storytellers™

Tektronix is the exclusive distributor of Avid broadcast products.

© 1999 Avid Technology, Inc. All Rights Reserved. Product specifications subject to change without prior notice. Avid and NewsCutter are registered trademarks and tools for storytellers is a trademark of Avid Technology, Inc. All other trademarks contained herein are the property of their respective owners.

Priority Code: NCBE199

Circle (29) on Free Info Card

www.americanradiohistory.com

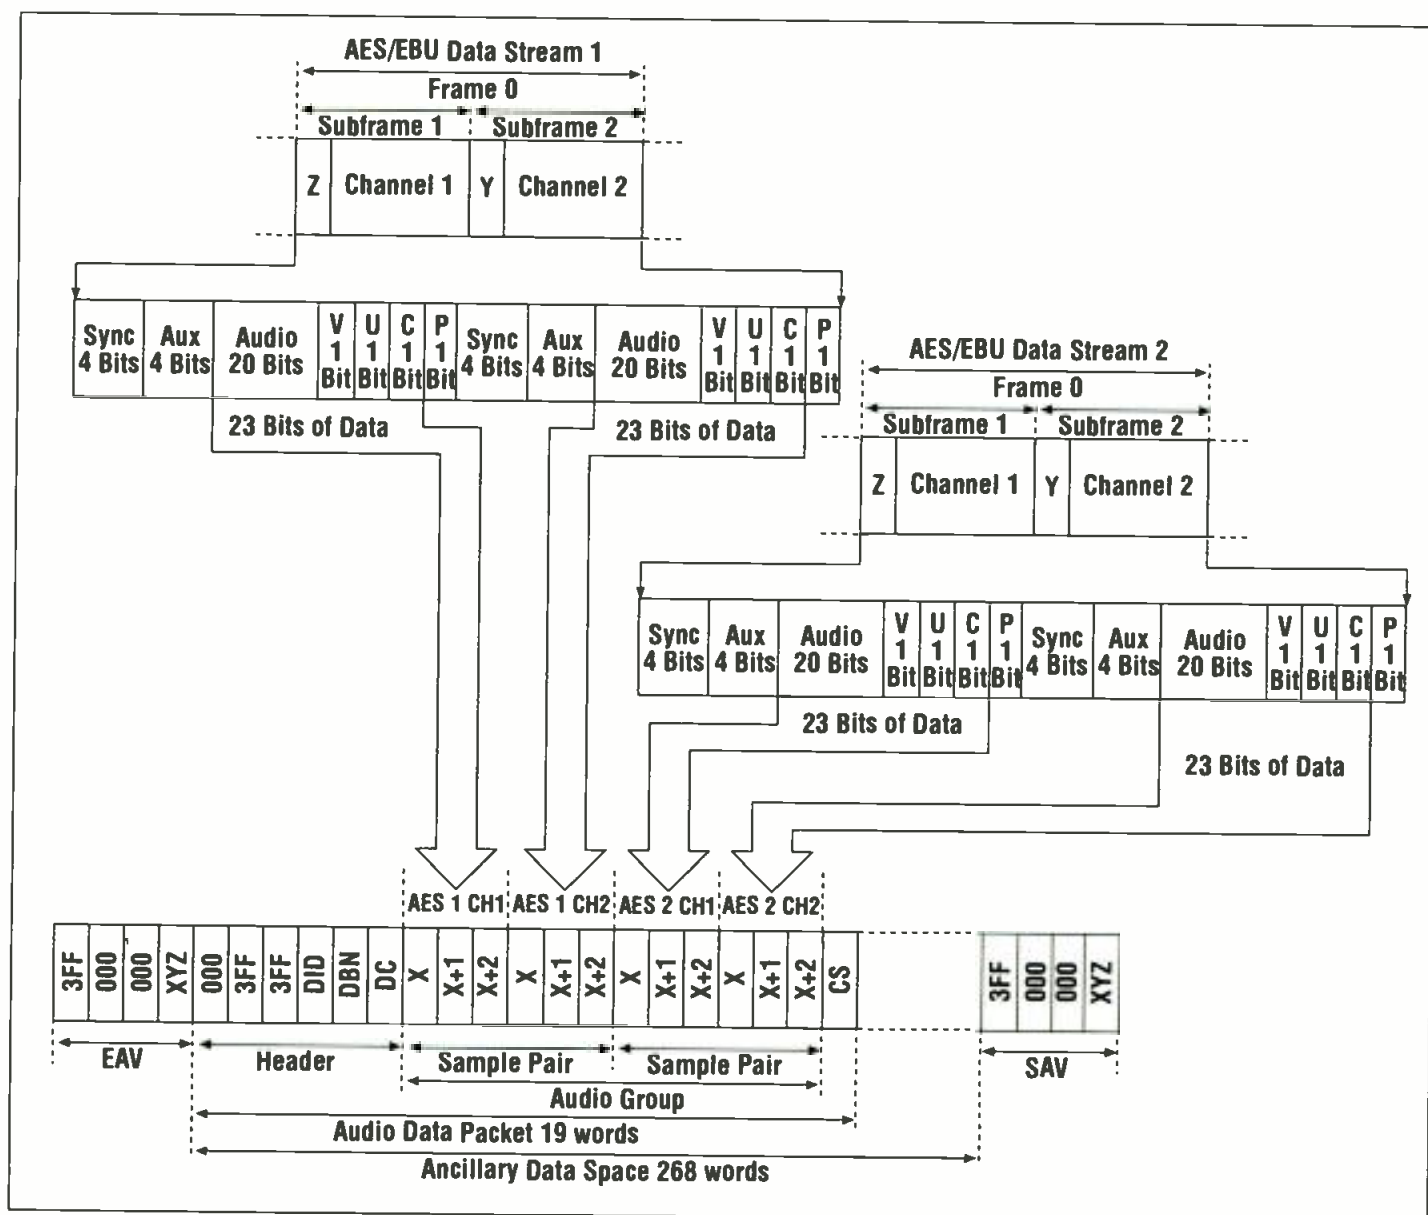


Figure 3: Several AES/EBU datastreams can be embedded within a video signal. To do this properly, 23 bits are used from each subframe and mapped into three consecutive 10 bit words. Bits from subframe 1 and 2 of a datastream form a sample pair. Sample pairs from all of the datastreams form an audio group.

packet's validity. Multiple, contiguous ancillary data packets may be inserted in any ancillary data space. They must follow immediately after the EAV, for the HANC, or the SAV, for the VANC, to indicate the presence of the auxiliary data and the start of a packet. If there is no ADF in the first three words of an ancillary data space it is assumed that no ancillary data packets are present.

SMPTE standard 272M proposes two modes of operation for embedding digital audio into a video digital data stream. The minimum implementation is characterized by 20-bit resolution, 48kHz sampling, audio synchronous with video, only one group of four audio channels and a receiver buffer size of 48 audio samples. The full implementation is characterized by 24-bit resolution, sampling frequencies of

32kHz, 44.1kHz or 48kHz, audio synchronous or asynchronous with video, up to four groups of four audio channels, a receiver buffer size of 64 audio samples and the indication of relative time delay between any audio channel and the video data signal.

Figure 3 shows an example of the minimum implementation in which two data streams (AES/EBU data stream 1 and 2) are formatted for embedding into a 4:2:2 525/60 component digital signal. The packets are inserted in the follow-

ing manner:

- A six-word header starts the audio data packet.
- The embedding sequence begins with subframe 1 and 2 of frame 0 of AES/EBU data stream 1 being stripped of the four sync bits, the four auxiliary bits and the P bit. The remaining 20

BIT ADDRESS	WORD X	WORD X+1	WORD X+2
b9	not b8	not b8	not b8
b8	audio 5	audio 14	P
b7	audio 4	audio 13	C
b6	audio 3	audio 12	U
b5	audio 2	audio 11	V
b4	audio 1	audio 10	audio 19 (MSB)
b3	audio 0 (LSB)	audio 9	audio 18
b2	channel 1	audio 8	audio 17
b1	channel 0	audio 7	audio 16
b0	Z	audio 6	audio 15

Table 2: The mapping sequence used to place bits from each audio subframe into three consecutive 10 bit words.

ONCE YOU CHOOSE A "CLOSED"
DTV SYSTEM, IT CAN BE DIFFICULT TO
GET OUT!

DIVICOM DTV SOLUTIONS FOR ATSC
ARE TRULY OPEN AND FLEXIBLE.

DTV is in its infancy. As the market matures, you're going to want the flexibility to grow with it. Choose a rigid, proprietary solution and you're stuck. However, with our open MPEG-2 solutions, you'll remain free to evolve your systems and services by integrating best-of-breed elements to meet your future needs.

The powerful hardware architecture of our MediaView™ family of SD and HD encoders enables you to meet future requirements through software upgrades. Should you later offer new services to generate additional revenues, our high-performance MPEG-2 compression technology enables you to better utilize existing bandwidth while maintaining optimum signal quality.

As the leaders in open solutions for digital television, we offer a robust portfolio of encoders, multiplexers, data broadcasting products, network management systems, DSNG/ENG solutions, and flexible integration and support services. If you're ready to get into DTV and know you're going to need the freedom to move with the market, call your DiviCom representative today or visit our web site.

www.divi.com

North America +1 408 944 6700
Europe/France +33 1 4862 9212
Europe/UK +44 1753 714 367
Latin America +1 561 692 1131
Asia Pacific/HK +852 21921799

 **DIVICOM™**
Open Solutions for Digital Television

DVB • ATSC • HDTV • SDTV • 4:2:0 • 4:2:2

WHY SYNC




UNDER ALL THAT CABLE?

 In conventional systems, every frame synchronizer needs a physical link to its tracking audio delay unit.

But use your IQ and you won't get tangled up with all those cable-runs between audio and video modules.

RollTrack™ is exclusive to our IQ Modular™ system. It's a connection-free automatic tracking delay that sorts out the sync process automatically without the mess and configuring problems of external cabling.



Just one wire links all boxes in **SIMPLY MORE INTELLIGENT** the network to our RollCall™ remote control system. So now you can place audio and video modules as far apart as you choose.

So uncomplicated. But then this is just one of the many intelligent ways that our unique IQ Modular™ system unravels the complex demands of the digital era. 



IQ MODULAR

by



SNELL & WILCOX



For more information on the IQ MODULAR System contact:

Tel: (408) 260 1000, Fax: (408) 260 2800, e-mail: info@snellusa.com website: www.snellwilcox.com

Circle (31) on Free Info Card

bits of audio and the V, U and C bits, a total of 23 bits of subframe 1 are mapped into three consecutive 10-bit words identified as X, X+1 and X+2 of AES1/CH1.

- The 23 bits of subframe 2 are similarly mapped into three consecutive 10-bit words identified as X, X+1 and X+2 of AES1/CH2.

- AES1/CH1 and AES1/CH2 form a sample pair.

- Continuing the embedding sequence, subframes 1 and 2 of frame 0

- Subsequent horizontal blanking intervals will accommodate frame 1 of AES/EBU data streams 1 and 2, frame 2 of AES/EBU data streams 1 and 2 and so on until the 192 frames (each constituting one AES/EBU block) of each of the two AES/EBU data streams are embedded.

- From then on, a new block of 192 frames from the two AES/EBU data streams are embedded and the process continues.

- At the receiving end, the packets are

by two bits and parity is calculated on the 26 bits, excluding all b9 address bits.

Distributing digital audio and video signals in a single coaxial cable is very advantageous if the multiplexed signal does not have to be processed separately. Or, in other words, if the product is ready for distribution or transmission. However, if the video signal has to feed a production switcher for further processing, the audio has to be demultiplexed and processed separately which may prove to be awkward and costly. To embed or not to embed is a decision that requires a clear understanding of the predictable and unpredictable operational requirements. ■

Michael Robin, former engineer with the Canadian Broadcasting Corporation engineering headquarters, is an independent broadcast consultant located in Montreal, Canada. He is co-author of Digital Television Fundamentals, published by McGraw-Hill.



Send questions and comments to:
michael_robin@intertec.com

Michael Robin's book may be ordered directly from the publisher by calling 800-262-4729. It is also available from several booksellers.



Distributing digital audio and video signals in a single coaxial cable is advantageous if the multiplexed signal does not have to be processed separately.

of AES/EBU data stream 2 are similarly reduced to 23 bits and result in sample pair AES2/CH1 and AES2/CH2.

- The two consecutive sample pairs form an audio group.

- The 19-word audio data packet closes with a CS word.

extracted and fill a 64 sample buffer from which the original data are extracted at a constant bit-rate and reformat.

Table 2 shows the audio data structure represented by the three 10-bit data words. The channel number is indicated

SWITCH TO NETWORK! Routers, Amplifiers and Converters

Ultra-compact, proven Broadcast quality.
Flexible, expandable system architecture.
Low power, heat & radiation.



Established in 1996, Network Electronics has enjoyed remarkable international success with a unique line of over 150 Broadcast Routers, Distribution Amplifiers, and A/D & D/A Converters. Network Routers; audio, video, and telecom, both digital and analog. Unique expandable configurations: 8x8, 16x2, 16x16, 32x32. All with user-friendly control panels and/or concise, programmable computer control.

Routers may be integrated to meet your precise requirements. All products are covered by a three year warranty and are available for immediate delivery.

Visit the Network website today for more detailed technical information about any of our products and learn why our many repeat customers have made the decision to:
"Switch to Network."

United States Representative:
Tobin Productions, Inc.
133 West 19th St., New York, NY 10011
(212) 727-1500 (800) 877-8273
E-Mail: TobinVideo@aol.com
www.TobinProductions.com

Network Electronics A.S., P.O. Box 1020, N-3204 Sandefjord, Norway
Tel: +47-334 899 99 Fax: +47-334 899 98 - E-Mail: network@online.no

Web: www.network-electronics.no

Circle (32) on Free Info Card

network[®]
e l e c t r o n i c s . a . s





HP'S NEW MEDIASTREAM SERVER: A more reliable predictor of the future.



server available. It's HP's way of anticipating the future: a server so adaptable, it will grow to meet any configuration or expansion requirements. And we're delivering today.

MPEG five years before the competition. Here's what's next. HP first delivered MPEG servers five years before anyone else. Now we're anticipating the future again with more channels, more storage and more comprehensive networking in the new MediaStream 700 and 1600 servers:

- Up to 16 channels of broadcast-quality MPEG-2 video with unlimited expansion over a fibre channel network—all with HP's frame-accurate MPEG-2 editing. Fully interoperable with HP's installed base of over 2,000 server channels.
- Over 1,000 hours of Online Storage. Add storage easily and cost-effectively as technology and requirements change.

- **DVB and HDTV ready.** HP's MPEG-2 technology and extensive bandwidth provide a seamless transition to digital video broadcasting and high definition television, as competition and viewer demand require.
- **Wide Area Networking (WAN) connectivity.** Asset sharing has never been faster or easier. Send and receive files immediately, no matter how distant the server, without waiting for conventional media to be delivered. Reduce costs, increase quality and—most importantly—guarantee delivery.

HP's new MediaStream servers show that no other broadcast product manufacturer has a better understanding of the trends in broadcast technology than HP. To receive a copy of HP's white paper, *Five Hot Trends That Will Impact Your Broadcast Business*, and to get a head start on the future of broadcasting, call us at 1-800-452-4844,* Ext. 6309. Or visit our Web site:

<http://www.hp.com/go/broadcast>

THINK TOMORROW TODAY

 **HEWLETT®
PACKARD**
Expanding Possibilities

©1999 Hewlett-Packard Co. TMVID911/BE *In Canada call 1-877-894-4414, Ext. 6309.

Circle (20) on Free Info Card
www.americanradiohistory.com



The EBU/SMPTE Task Force – Part V, Networks and Protocols

BY BRAD GILMER

In the fall of 1998 at the International Broadcasting Convention in Amsterdam, the EBU/SMPTE Task Force published a report on the future of television technology. This article is the fifth in a series that explores the report and its impact on the industry at large. The Task Force report is divided into four sections – Systems, Compression, Wrappers and Metadata, and Networks and Transfer Protocols. This month's article will focus on Networks and Protocols.

Networking video – a whole new world

For many years, files have been shared across computer networks. Because they can be moved back and forth with ease, we rarely think about the work that makes it possible. Almost everyone agrees that it would be great to transfer and share program content (video, audio, data and metadata) in the same way. Yet, with some notable exceptions, this goal has remained elusive. Much of the reason is the difference between the attributes of program content and attributes of a typical data file. Program content files have three critical attributes.

Program content is:

- very large compared to files generated by typical computer applications.
- isochronous – they must be delivered continuously. Viewers easily perceive any interruptions.
- usually comprised of multiple entities: video, audio and metadata, all of which may have to be delivered at the same time.

These attributes have made it difficult to apply typical network solutions to program content. For example, file transfer protocol (FTP) is a tool used to move files from one computer to another with the re-

striction of point-to-point transfers only. But universal FTP will not allow the transfer of files larger than 2GB and does not support partial file transfers. These problems are among the hurdles designers face as they seek to employ existing networking technology for our industry.

What does it take?

Interoperability, or seamlessly transferring and sharing files between program content users, is a complex task. Interoperability can be addressed on many different levels. Is a system interoperable if program content files can be exchanged between two systems, but the files cannot be opened by the applications involved? Or, is interoperability achieved only

when a user on one system can open and manipulate files created on another system using different software?

Figure 1 illustrates some of what must take place behind the scenes before such interoperability is possible as well as the level of interoperability the Task Force sought to address. Shown are a number of interoperability domains that follow the famous ISO seven-layer model.

To achieve the highest level of interoperability, the industry would have to agree to:

- adopt a limited set of physical interfaces. This makes the physical media compatible (not shown).
- adopt a limited set of electrical interfaces. This makes the electrical


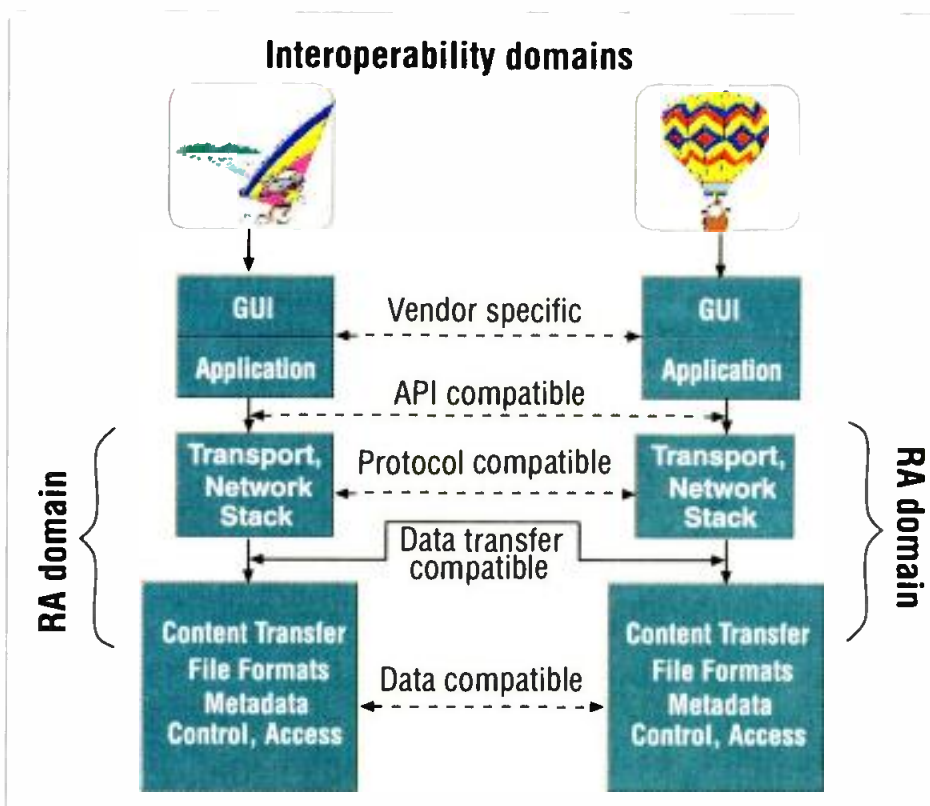


Figure 1. Interoperability can be defined several ways. For program content, the Task Force has recommended a reference architecture(RA). The RA recommends interfaces as well as protocols for access.

Newsworthy.

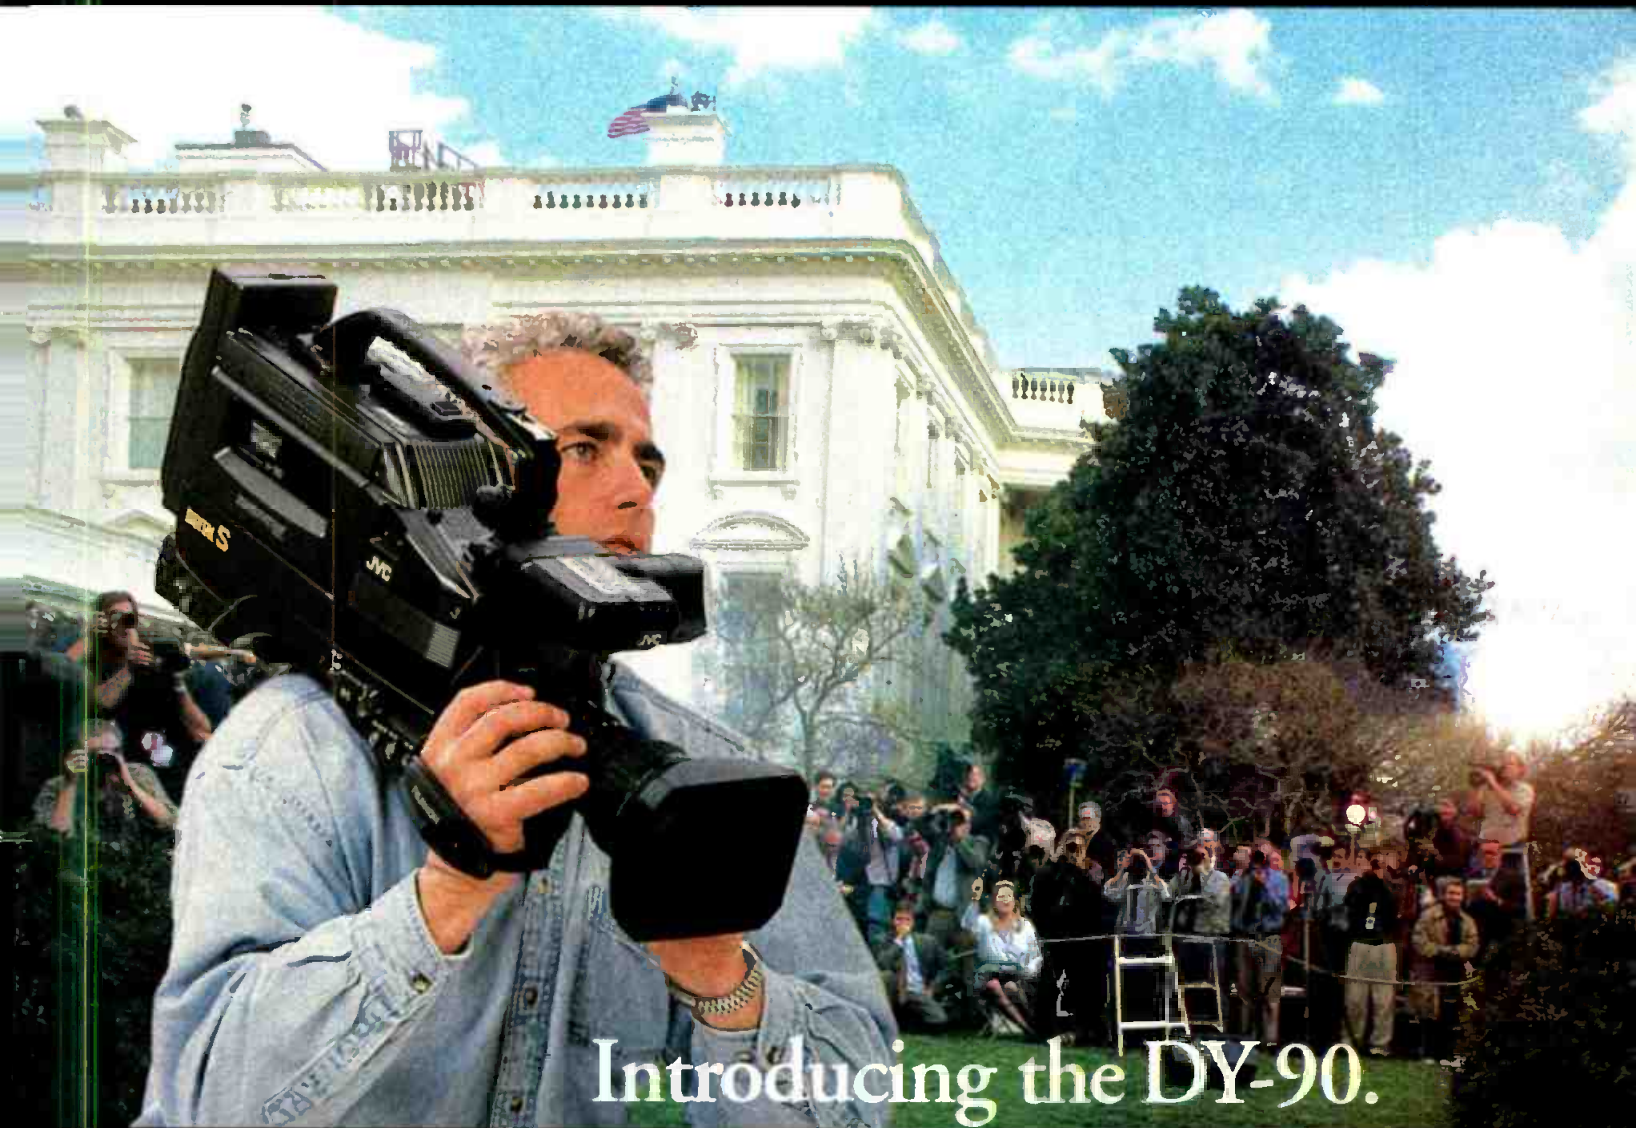

Introducing the DY-90.

Uncompromising EFP performance, in a lightweight, low-lux ENG camcorder.

Even in the fast paced world of ENG, the new DY-90 Camcorder from JVC means you'll never need to compromise quality...for convenience.

For starters, the DY-90 is extremely user-friendly, with full-auto shooting in a comfortable design where switches and controls are conveniently placed exactly where you'd expect them. Packed into this ergonomic camcorder that only weighs around 15 pounds, you'll also find 0.75 lux capability, four-channel audio and extremely low power consumption for outstanding convenience in the field.

The exceptional 4:2:2 and 50Mbps standards of DIGITAL-S allow you to capture amazing digital footage on the format's robust half-inch metal particle tape that allows a full two hours of recording time and is good for 100 passes! The quality of this footage becomes even more apparent in the studio, allowing transparent reproduction for editing, effects and multi-generation dubbing.

Add in a surprisingly affordable price, and you've got a news item that's worthy of a lead story.

The DIGITAL-S DY-90 Camcorder.
The reasons are becoming clearer than ever.

Call 1-800-JVC-5825 or visit our Web site for more information.



JVC
DIGITAL BROADCAST
SYSTEMS GROUP
www.digital-s.com

Circle (21) on Free Info Card

www.americanradiohistory.com

components on either end of the wire (or fiber) compatible (also not shown).

- adopt a common set of content transfer file formats. This makes the data compatible.

- adopt a common set of transport protocols. This makes the exchange dialog compatible.

- adopt a common set of API interfaces to the transport stack. This makes the connection to the applications compatible.

For the ultimate in compatibility, the end-user environment should have the same look and feel. The Graphical User Interfaces (GUIs) should be compatible as well.

Providing standards all the way up to the GUI level would be impractical. In fact, achieving such a high level of compatibility might stifle creativity and cause more harm than good. In the end, the report recommends focusing on achieving data and protocol compatibility. (This is

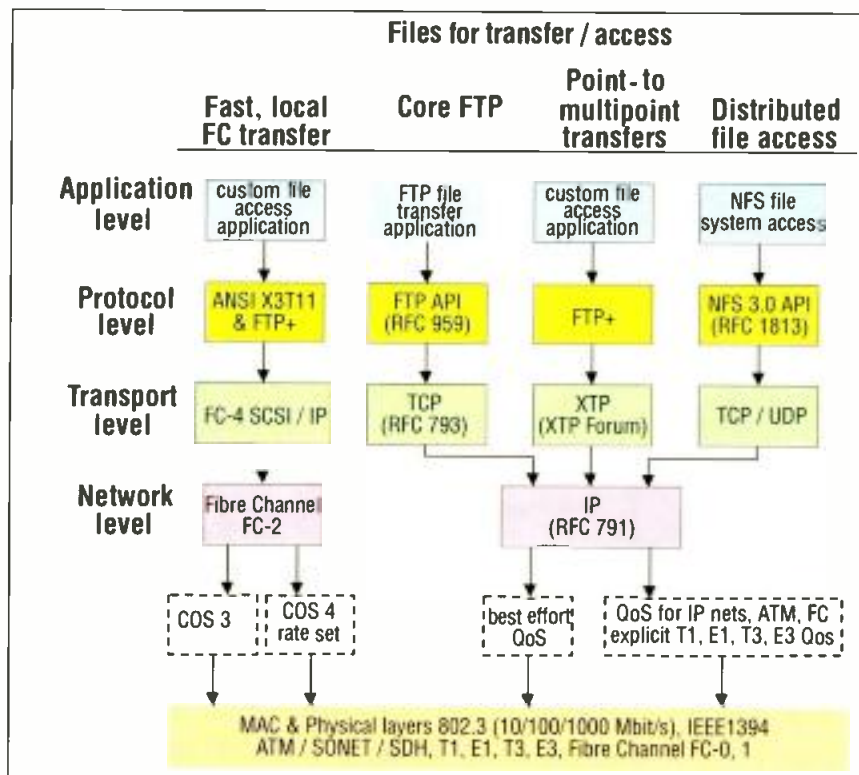


Figure 2. There are several protocols to choose from when transferring files. Shown are some of these protocols as well as appropriate applications.

the area indicated by the RA Domain) This work, coupled with the work of the Wrappers and Metadata area of the Task Force, will allow users to transfer files using a known set of protocols and file formats across networks with known characteristics.

Two ways to transfer material

There are two common ways to transfer program content – streaming and file transfer. These methods have very

ple users can view the stream at the same time. For streaming applications, the path is usually unidirectional.

File transfer is a point-to-point (push or pull, in some cases point-to-multipoint) method of transferring program content. It involves establishing a connection between two systems, and then sending a piece of content from one system to the other. One of the biggest advantages of file transfer is *guaranteed* delivery. If something disturbs the transfer, the corrupted bits are re-

sent until they are received correctly. Furthermore, the file can be sent at any speed – faster than real-time, real-time, or slower than real-time. Table 1 provides a quick comparison between streaming and file transfer.

One item in the table that bears some discussion is Quality of Service (QoS). QoS is a telecom term that refers to the quality of the link between two points. It is essentially a contract or guarantee of the performance the customer will receive us-

Obtaining a copy of the Task Force report

The Final Report is published jointly by the EBU and SMPTE. Contact the EBU or SMPTE and ask to be sent a paper copy (the EBU can supply a Special Supplement, SMPTE can supply a Journal) or download the .pdf document from the EBU website (www.ebu.ch/pmc_es_tf.html) or from the SMPTE website (www.smppte.org/engr/ebumeet1.html)

With file transfer, the QoS may or may not be related to what you see at the other end of the pipe.

different characteristics and require very different protocols and, perhaps, networks.

Streaming follows the typical broadcast model. A piece of program content is fed down a pipe (push transfer), and the end user can receive this content at will. The frame rate for display at the receiver(s) is set by the transmitting source. Users can join the stream at any time and multi-

ing a particular link. The following elements are typically specified by QoS

- bandwidth (which may be expressed as peak and average bit-rates).
- bit error rate.
- jitter and delay (latency).
- access set-up time.

In streaming applications, the QoS directly determines what the pro-

ANALOG? DIGITAL? HYBRID?

Whatever The Future Holds, You'll Be Ready!

The DPS-470 Serial Digital AV Synchronizer

The DPS-470 serial digital component AV synchronizer is the ideal choice for broadcasters transitioning to DTV. Available in video and audio/video configurations, the DPS-470 bridges the gap between analog and digital production facilities. 10 bit ITU-R 601 component processing and adaptive comb filter decoding provide maximum signal transparency. A built-in auto sense TBC and digital test pattern generator round out the features.

For combined video and dual stereo audio synchronization, add the DPS AS-470 internal digital audio synchronizer option. Because all outputs are active, analog and digital devices can be connected at the same time.

As you move to DTV, the DPS-470 is your insurance against obsolescence. And you won't pay a premium!

EVERYTHING IN

VIDEO:

SDI Serial Digital
Composite
Y/C
Component

AUDIO:

SDI Embedded
AES/EBU Digital
Analog Balanced

EVERYTHING OUT

VIDEO:

SDI Serial Digital
Composite
Y/C
Component

AUDIO:

SDI Embedded
AES/EBU Digital
Analog Balanced



DPS

www.dps.com
800-775-3314

Circle (22) on Free Info Card

Available in Any Color

**The Best of the Best
Now Costs Less!**



The NV3512, used by all of the major broadcasting networks and post houses, is a large-scale, expandable routing switch for synchronous and asynchronous switching of digital audio as well as time code. It can be controlled by most of the current router control systems, so it is easily integrated into existing as well as new facilities. It can be purchased in sizes of 8 x 32 all the way up to 2048 x 2048. (One customer has a synchronous NV3512 that is 2048 x 512.)

Higher NV3512 sales volume has resulted in recent increases in manufacturing efficiency, significantly reducing product cost. NVISION is able to pass on these substantial cost reductions to our customers, making our market-leading AES routing system not only the best but now the most affordable, with savings of up to 40%, depending on configuration.

Recently, customers have been heard to say, "Your products really work well, they solve engineering problems and fit easily into my budget. But I thought you only made routing switches!" Apparently, we manufacture more products than most people realize. Yes, we do build award-winning, trail-blazing and market-leading routing systems, but we also produce a huge range of modular products that are designed with the same exacting standards.

We have obviously been so concerned with developing the very best product designs for the most affordable prices, that we have forgotten to tell you about it!

Here is a complete list of all of our modular products, and if you don't see what you want here, call us, we might have forgotten to include it!

I Didn't Know They Did That

AES/EBU Distribution Amplifiers, AES/EBU Distribution Amplifiers, SDI Reclocking Distribution Amplifiers, SDI

NVISION

HD-SDI Reclocking Distribution Amplifiers with EQ, HD-SDI Triple D
Digital Audio Coders, Analog to Digital Converters, TRU Equipm
Embedder Expansion Modules, Disembedders, Disembedder Exp
Fiber Optic Transceivers, HD-SDI Fiber Optic O/E Converters, HD-SI
tars, Sample Rate Converters, Mixing and Subframe Routing Modu
Digital Audio Sync Generators, Transmission Protection Switches Al
and EQ, AES/EBU Jitter Removing Distribution Amplifiers, SDI Dis
Distribution Amplifiers with EQ, HD-SDI Distribution Amplifiers, HD
fiers, HD-SDI Triple Distribution Amplifiers with Reclocking and EQ,
Equipment Frames, and PSUs Digital to Analog Converters, Emb
Modules, SDI Fiber Optic O/E Converter
Optic E/O Converters, HD-SDI Fiber Optic
Code Delay Modules, AES/EBU Four-C
Distribution Amplifiers, AES/EBU Dist
Amplifiers, SDI Reclocking Distrib
Reclocking Distribution Amplifiers with
Audio Coders, Analog to Digital Converters, TRU Equipm
Expansion Modules, Disembedders, Disembedder Expansion Modules
Transceivers, HD-SDI Fiber Optic O/E Converters, HD-SDI Fiber Optic
Rate Converters, Mixing and Subframe Routing Modules, Time Code D
Sync Generators, Transmission Protection Switches AES/EBU Distrib
Embedder Expansion Modules, Disembedders, Disembedder Expansion Amp
AES/EBU Jitter Removing Distribution Amplifiers, SDI Distribution Amplifiers
Triple Distribution Amplifiers with Reclocking and EQ, Digital Audio
Frames, Digital to Analog Converters, Embedders, Embedder Exp



A photograph of a large, industrial-grade electronic device, likely a power supply or amplifier, with a metal front panel featuring a grid of ventilation holes and several control knobs and switches. The device is shown from a three-quarter perspective, highlighting its depth and the side panel. The front panel has a prominent upper section with a dense grid of circular ventilation holes. Below this, there are two large, rectangular control panels or meters. The lower section of the front panel also features a grid of ventilation holes. The device is mounted on a dark, possibly black, base or enclosure. The overall appearance is that of a robust, professional-grade piece of equipment.

www.americanradiohistory.com

Broadcast Solutions

for broadcast professionals.

"My job is to make sure our listeners hear a seamless, interactive broadcast—and fortunately, that's Gentner's job too."

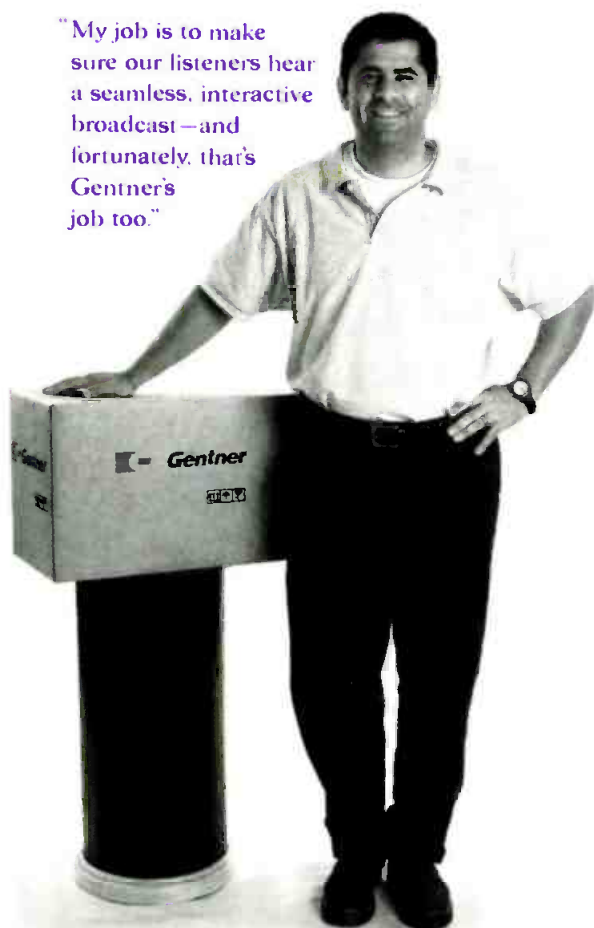

Introducing our **NEW** state-of-the-art 24 bit digital hybrid—**DH30**


Gentner offers telephone interface products for any broadcast setting—from live remote, to broadcasts, to listener call-ins. We have the right solution for you.



Perfect Communication through Technology, Service, and Education.™

1.800.568.9239 • 1.801.975.7200 • www.gentner.com
Fax-On-Demand: 1.800.695.8110 DH30 Doc. #3014

Circle (24) on Free Info Card



A perspective on networks and transfer protocols

BY HANS HOFFMANN

The Networks and Transfer Protocols subgroup of the Task Force had the responsibility of finding the best technologies to enable different data types to be moved around a networked production environment. It also had the task of identifying

If every manufacturer and system designer follows just one or two parts of this RA, interoperability is guaranteed

the best methods for audio/video streaming in real-time (and faster than real-time), file transfer (also at different speeds) and file access.

The chosen methods should guarantee the interoperable

transfer of program content between devices, and these transfers should meet the high-end requirements of the broadcast world. An additional part of the subgroups' work was to identify and define the further work that needs to be carried out by standardization organizations.

We have defined a Reference Architecture (RA) which allows the movement of digital content between the devices of different manufacturers. We have made some choices for general-purpose streaming and for file transfer. We have identified special technologies to meet high-end television broadcast requirements. We have also identified the follow-up work that is necessary to standardize all these new technologies and to expand on the ideas we have already generated. And finally, if every manufacturer and system designer follows just one or two parts of this RA, *interoperability*, (at least in the physical area, the data-link area and the network area) is guaranteed.

Hans Hoffmann is Chairman of the Networks and Transfer Protocols subgroup.

To impress broadcast engineers,
we had to **a** make a **quantum leap**
in video server performance,

or **b** offer an **incredible price.**

We decided to **do both.**

Introducing the SeaChange
Broadcast MediaCluster™ 800

\$112,500*



Welcome to the leading edge of performance and value. The SeaChange Broadcast MediaCluster 800 delivers fault resilient reliability with single video copy storage, 4:2:2/4:2:0 MPEG-2 video, 1 input/3 outputs, and 11 hours of storage at 24 Mb/s.

All for just \$112,500*.

No one else can offer you a video server with better fault resilience. Or bring it to you in a single system, like we can. But don't take our word for it. Test the newest member of the SeaChange Broadcast MediaCluster family. And get ready for a quantum leap in performance.

Call us today: 1-978-897-0100



Visit us on the web @ www.schange.com

©1999 SeaChange International, Inc. 124 Acton St. Maynard, MA 01754 1-978-897-0100 fax 1-978-897-0132 www.schange.com *no strings attached.

Circle (33) on Free Info Card

gram content looks like at the far end of the pipe. If you take a hit during a video feed, you will see it. With file transfer, the QoS may or may not be related to what you see at the other end of the pipe. Since a file transfer usually involves a bidirectional link, any disruption of the signal at the receive end causes the receiver to request a re-send of the affected material.

File transfer methods

For each of the transfer methods there are appropriate protocols to be used. To achieve the goal of interoperability, these protocols must be standardized. Fortunately, or unfortunately, there are a large number of technologies to choose from. For interoperability, the number of possible choices has to be constrained. Specific recommendations can be found in Table 2, but some of the leading technologies for file transfer are:

- Universal FTP (based on TCP/IP).
- Point-to-multipoint transfers using the eXtended Transfer Protocol (XTP).

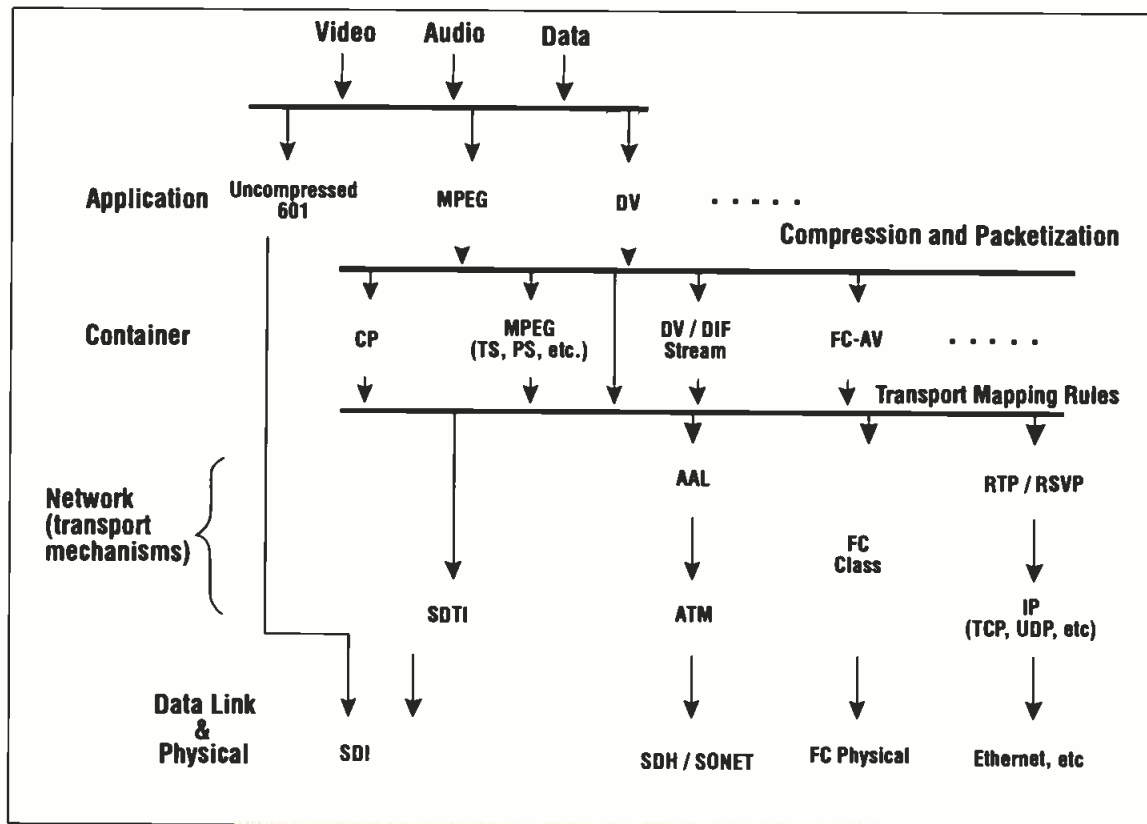


Figure 4. Mapping video audio and data into various types of transports streams is done using specific rules depending upon the application and the network transport mechanisms.

- Fast File Transfer (methods which use hardware or lightweight software protocols over Fibre Channel, ATM (and other IP based transports).

- An enhanced version of FTP called FTP+.

To complete the picture, let's look at how the networks and protocols discussed are stacked together to make a complete transport system. Figure 2 shows various protocol stacks that can be used in different applications. (A protocol stack is

usually a series of software applications and hardware that are combined to enable communications across networks.)

Figure 2 shows that, for fast local Fibre Channel transfer, FTP+ might be used over Fibre Channel. Universal FTP

would be carried across an IP network using the standard FTP client and TCP. FTP and TCP/IP have some limitations that may make it unsuitable for program content transfer. It is also important to note that point-to-multipoint is also not supported in Universal FTP and TCP/IP. To get around these restrictions, FTP+ is used on top of XTP. FTP+ enables point-to-multipoint communications along with a number of other features including partial file transfers which may be especially useful for broadcast applications.

Streaming over a network is different from streaming using traditional broadcast methods. In the broadcast world, delay through a given system, whether it is terrestrial or satellite based, is relatively fixed. Jitter, or change in the system delay, is small. The same cannot be said for computer networks. When program content is streamed, it is isochronous – that is, it is a continuous flow of data. If the network induces significant delay, the effects on the program content can be disastrous.

Traditional computer networks were built without much regard for latency. For example, Ethernet has indeterminate delay due to the way it

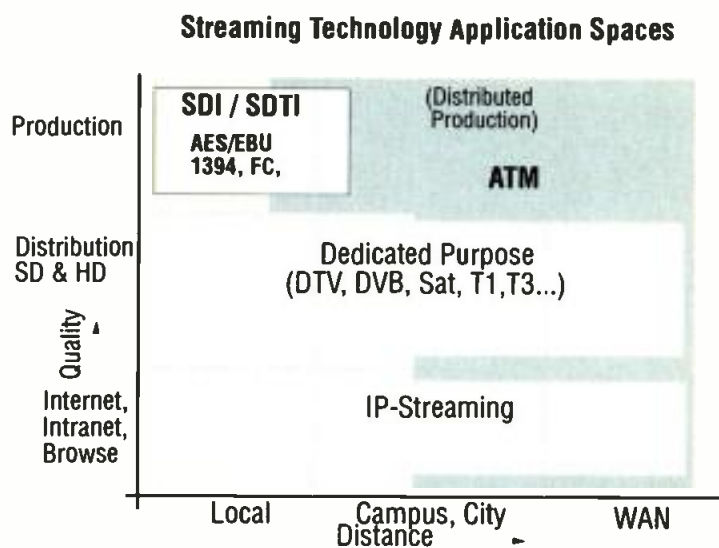


Figure 3. Different streaming technologies need to be employed based on quality and distance parameters.

Getting Good Audio Shouldn't Be A Leap Of Faith

Field-proven UHF performance
and professional sound quality
that won't let you down!

U100 Series Wireless Microphone Systems
deliver high-flying features: 100 PLL-

synthesized switchable channels •

True Diversity operation • Rugged
metal construction • Helical filter

receiver design • Balanced
audio output with level

control • Headphone
jack with volume

control • Removable
receiver antennas •

And more! "Drop in"
to your A-T dealer, or
check out the U100 Series at:

www.audio-technica.com



audio-technica®

Audio-Technica U.S., Inc.

1221 Commerce Drive, Stow, Ohio 44224

330/686-2600 Fax: 330/686-0719

E-mail: pro@aatus.com



U100 Series Available as:
ATW-U101 Body-pack System
ATW-U102 Plug-on System

Circle (34) on Free Info Card

www.americanradiohistory.com

handles collisions. If a streaming application does not anticipate this, a disruption of the program content will result. Jitter and timing issues such as these can be handled with proper buffering techniques as long as the jitter or change in network delay is known. Other parameters are also critical.

To specify a network connection so that it may be used for streaming, it is important to establish the appropriate QoS. The following parameters are used to define network performance for streaming applications.

- Peak bit-rate (bit/s) – the bit-rate which the source may never exceed.
- Minimum bit-rate (bit/s) – the bit-rate which the source is always allowed to send.
- Sustained bit-rate (bit/s) – the mean bit-rate at which the source transmits.
- Jitter (or Delay Variation).
- End-to-end delay (seconds) – i.e. propagation delay.
- Bit Error Rate (errors/bit) – the average number of errors per bit.
- Set-up delay (seconds) – the maximum delay between requesting a connection and receiving it.

Once the appropriate network has been defined, the next step is to decide how content will be sent across the network.

There are a number of methods that can be employed to stream program

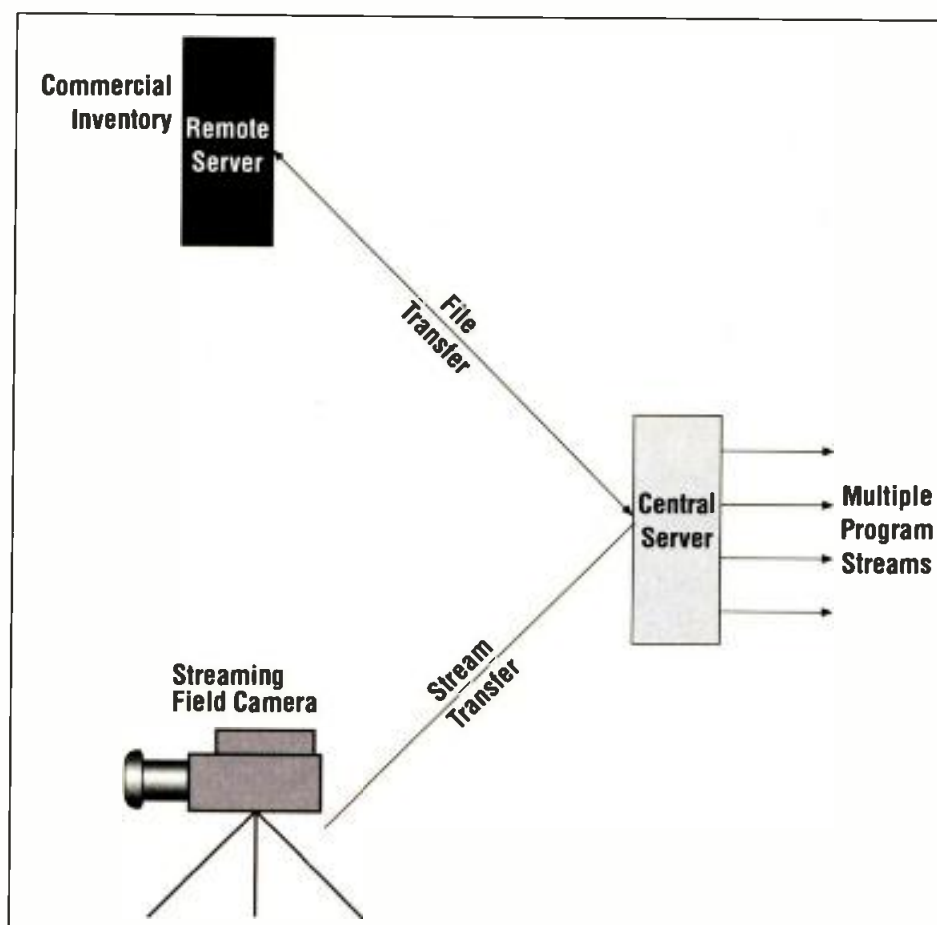


Figure 5. With interoperable systems, commercials and feeds from a streaming camera could be sent to a central server and played out as needed.

content, including:

- Serial Digital Interface (SDI).
- Serial Data Transport Interface (SDTI).
- Dedicated purpose transports such as DVB and DTV.
- IP.

- ATM.
- Fibre Channel.
- IEEE 1394 (Firewire).

Figure 3 shows how these transports may be affected by quality and distance. As you might expect, SDI, and SDTI work well in the local environment, and ATM is well suited for use over longer distances. IP streaming can be employed across a wide range of distances, but it is an unlikely candidate for high-quality streams. From this information, it can be seen that there is no clear single network or protocol to use for all applications. In fact, it is more likely that a range of tools will be used depending on the application.

Mapping – putting program content into the stream

In a number of applications, file servers and

Task Force Recommendations

Streaming File Transfer

SDTI is currently the choice for internal studio interconnects. This means that to transmit compressed signals without re-encoding within the studio, SDTI is the right choice – if you have to do it in real-time and at faster-than-real-time. **Fibre Channel** for high-performance local area networks. The development of disk drives with Fibre Channel interfaces was part of the decision.

Fibre Channel is a high-performance file transfer mechanism. The FC A/V project is working on a streaming implementation, but it is only on paper. The Task Force felt that if a Fibre Channel streaming implementation can be realized, it would be a suitable network candidate. **ATM** is the choice for wide-area networks.

ATM is the choice for WAN streaming. However, wander and jitter issues remain to be resolved. **IP**-based interfaces can be used, because IP provides a standardized interface on which our file transfer protocols can sit.

XTP is the current choice to meet the requirement for point-to-multipoint transfer

Table 2. After much deliberation, the Task Force offered these recommendations for streaming and file transfer.



Matrix Switching for HDTV Signals

Extron's **Matrix 50 series** delivers broadcast quality HDTV performance with 150 MHz (-3dB) video bandwidth. The Matrix 50 has the flexibility to route HDTV, composite video, S-video, component video, RGsB, and stereo audio in 8x4, 8x8, 12x4, and 12x8 I/O configurations.

The Matrix 50 includes one audio plane for mono or stereo, balanced or unbalanced audio inputs and outputs. Three video planes are available per input and output and can be configured to suit the requirements of any application.

With 28 models available, the Matrix 50 comes in a 2U high, rack-mountable enclosure, with list prices starting at \$1,240.

The Matrix 50 series provides these advantages:

- Four I/O sizes: 8x4, 8x8, 12x4, and 12x8; 28 different models
- Capable of routing HDTV, composite video, S-video, component video, RGsB, and stereo audio signals
- Fully buffered inputs/outputs to eliminate crosstalk
- QuickSwitch™ Front Panel Controller for easy input/output selection
- RS-232/422 control for third-party control, Extron's Windows®-based control program, or Simple Instruction Set (SIS™)
- 12 memory presets
- Audio gain and audio breakaway
- Video bandwidth: 150 MHz (-3dB), fully loaded
- Auto-switchable internal power supply (100-240v, 50/60 Hz)

For complete details, visit our website at
<http://www.extron.com/product/matrix50.stm>

Extron Electronics

800.633.9876



EXTRON ELECTRONICS/RGB SYSTEMS, INC.
1230 South Lewis Street, Anaheim, CA 92805
800.633.9876 T 714.491.1500 FAX 714.491.1511
U.S.A.

EXTRON ELECTRONICS, EUROPE
Beeldschermweg 6C, 3821 AH Amersfoort
+31 33.453.4040 FAX +31.33.453.4050
The Netherlands

EXTRON ELECTRONICS, ASIA
41B Kreta Ayer Road, Singapore 089003
+65.226.0015 FAX +65.226.0019
Singapore

EXTRON ELECTRONIC INFORMATION
EXTRONWEB™: www.extron.com
EXTRONFAX™: 714.491.0192
24-hour access—worldwide!

Circle (35) on Free Info Card

www.americanradiohistory.com

other storage devices in particular, it is vital to know how the various components of the program content (video, audio, and metadata) are mapped into the stream. This is because many storage devices sort program content into its component parts and then store these elements separately. Figure 4 shows how program content is mapped onto various streams.

The various components of program content are usually first compressed (video) and packetized. They are then inserted into various unique and standardized containers/wrappers (MPEG, DV, etc.) and then put onto the network (Fibre Channel, ATM, etc.). Some of these containers or wrappers are universally able to transport different types of content such as FC A/V which can transport DV, MPEG and 601, while others are designed to for one content type only (DIF for DV, CP for MPEG-ES). The video, audio, data and metadata can be thought of as boxes being continuously loaded into a semi-truck trailer – the container. When one container is full, it gets on the highway, the network, and the next one pulls up to be loaded. The point is that each container must be loaded in a standardized way. Otherwise, at the receiving point, each individual box

A networks and protocols glossary

ANSI	American National Standards Institute
ASF	(Microsoft) Advanced Streaming Format
ATM	Asynchronous transfer mode
A/V	Audio/video
EBU	European Broadcast Union
FTP	File transfer protocol
FTP+	File transfer protocol plus
IEEE	(US) Institute of Electrical and Electronics Engineers
IP	Internet protocol
ISO	International Organization for Standardization
FC	Fibre Channel
LAN	Local area network
MPEG	(ISO/IEC) Moving Picture Experts Group
NFS	Network File System
QoS	Quality of service
RA	Reference architecture
RFT	Request for technology
SDI	Serial digital interface
SDTI	Serial data transport interface
SMPTE	(US) Society of Motion Picture and Television Engineers
TCP/IP	Transmission control protocol/Internet protocol
WAN	Wide-area network
XTP	eXtended Transfer Protocol

to interoperability.

Figure 5 shows a simplified diagram of how such technology might be employed. Commercials could be sent via file transfer (guaranteed delivery) to a central server. A stream-

about centralized facility operations. USA Network just announced that they will be operating all of their facilities from a central master control operation. Other networks are sure to follow.

The video, audio, data and metadata can be thought of as boxes being continuously loaded into a semi-truck trailer – the container.

must be opened and inspected before being processed (decompressed). This costs both time and money.

Practical application

The Task Force was faced with some difficult decisions, their recommendations for streaming and file transfer are listed in Table 2. So what is the practical application of these technologies? What are the consequences of adopting the report? If the recommendations are adopted, it will be possible to exchange files and send streams from one system to another—a big step down the path

ing camera connected to a public network could deliver images and sound for immediate broadcast or later playback. The central server allows the interspersing of streaming material and stored files, all of which can be combined to make up a complete program stream. Because the server can generate multiple streams from the same piece of stored content, multi-channel applications are possible without dramatic increases in storage size.

As the work on networks and file transfers progresses, you will be hearing more and more announcements

Acknowledgement


I would like to acknowledge two persons for their contributions in the area of Networks and Protocols. Many of the ideas in the report came from Al Kovalick of Hewlett Packard. Al developed the Reference Architecture (RA) that describes a basic implementation of networks and protocols. The RA is serving as the blueprint for development of standards in this area. Hans Hoffmann was the chairman of the Networks and Protocols sub-group. He did an outstanding job in leading the group to reach the conclusions that are published in the Final Report.

Brad Gilmer is president of Gilmer and Associates, a management and technology consulting firm.



Send questions and comments to:
brad_gilmer@intertec.com

For Maximum High-Def Performance

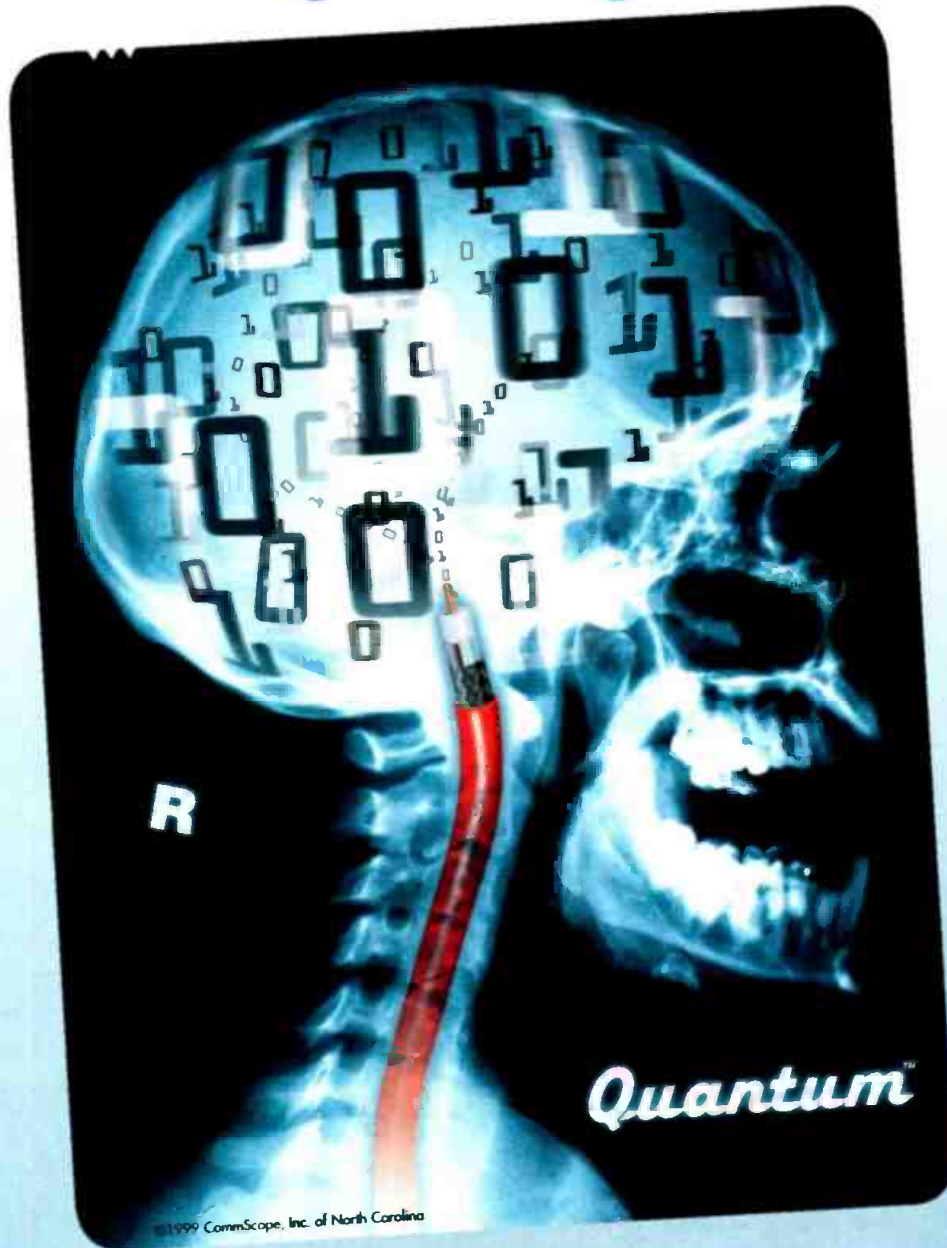

Quantum™

STOCKING DISTRIBUTORS (Broadcast Products)

Bi-Tronics
(800) 666-0996
www.bi-tronics.com

Liberty Wire and Cable
(800) 530-8998
www.libertycable.com

Network and Cable Products
(800) 886-0069
www.network-cable.com

URS Electronics
(800) 955-4877
www.ursele.com

Yale Electronics
(888) 776-9253
www.proyale.com

Only One Cable Line Comes To Mind.

CommScope's latest brainchild gives you a new generation of coax cables to choose from for optimal HDTV performance. 100 percent sweep tested for HDTV bandwidths (out to 2.4 GHz) Quantum™



CommScope®

How Intelligence Travels.™

redefines the standard for speed, reliability and performance. For the ultimate in all your High-Def applications, think

Quantum from CommScope. It's how High-Def intelligence travels!



For information call 1-800-982-1708 or 828-324-2200 / www.commscope.com

Circle (36) on Free Info Card

www.americanradiohistory.com

CAV standards

BY STEVE EPSTEIN, TECHNICAL EDITOR



Regarding component analog video, how does MII component video differ from Betacam component video?

*Greg Hertfelder
Audio-Visual Project
Manager
Cerner Corporation*

ly, Betacam 100 percent luminance is 714mV, while MII luminance is 700mV. For 100 percent chrominance, Betacam is +/- 467mV (934mV p-p), MII is +/- 324mV (648mVp-p). Changing the signal amplitude affects the signal-to-noise ratio, which can make one product appear better than another from a specifications point of view.

In addition to problems between Betacams and MIIs, integrating these decks into digital component environments can be problematic. These applications require deserializers feeding EBU N-10 signals to the deck's CAV inputs. The CAV outputs feed a serializer. The result is signal level transparent in the analog domain. Problems occur when the tapes are played back using the composite outputs. The resulting signals do not have setup and reduced chrominance (-25%). The opposite situation occurs when the composite inputs and

component outputs are used, Signals then have setup and excessive chrominance (+33%).

In BE's May 98 "Transition to Digital" column, Michael Robin suggests that facilities standardize on the EBU format. However, without the equipment in front of you, it can be difficult to determine the factory settings. Within facilities, the simplest method is to standardize on a single format and use DAs to adjust levels accordingly. If you only have one or two MII decks and numerous Betacams, run everything Betacam and vice versa.

For a more complete discussion of the issue, see May 1998's "Transition to Digital."



Dr. Digital responds:

Yes they are different, the signals used are the same (Y, R-Y, B-Y) but the amplitudes are different.

This issue is a real political football. Despite numerous efforts, SMPTE has never been able to adopt a component analog video standard. The specifications of the various standards are shown in Figure 1. Basic-

WAVEFORM		NTSC	EBU N10	BETACAM	M II
	PEAK WHITE	714.3mV	700mV	714.3mV	700mV
	SETUP	53.57mV	0mV	53.57mV	0mV
	BLKG	0mV	0mV	0mV	0mV
	SYNC	-285.7mV	-300mV	-285.7mV	-300mV
	SCALING FACTOR	.493	.564	.75	.522
	POSITIVE PEAK	+313.54mV	+350mV	+466.65mV	+324mV
	NEGATIVE PEAK	-313.54mV	-350mV	-466.65mV	-324mV
	0mV	0mV	0mV	0mV	0mV
	SCALING FACTOR	.877	.713	.95	.66
	POSITIVE PEAK	+438.5mV	+350mV	+466.65mV	+324mV
	NEGATIVE PEAK	-438.5mV	-350mV	-466.65mV	-324mV
	0mV	0mV	0mV	0mV	0mV

Figure 1. Component analog signal characteristics for 100 percent color bars in the various CAV standards.

Keeping those miniature lamps lit



I'm changing, or trying to change, the two scale illumination lights on a Tektronix 1720 vectorscope. It's horrible! I have found several ways of doing this, but none of them are easy. Is there some trick or modification that I am missing? These bulbs need to be replaced fairly often and an easier method would be welcome. Is there a trick, a solution or a modification for this problem?

*Dany Marquis
Engineering technician
Le Réseau Des Sports
Montréal, Canada*



Dr. Digital responds:

Been there, done that. Maybe you know a surgeon friend interested in that task. Keeping those little

THE NEXT GENERATION OF DIGITAL AUDIO RECORDERS STARTED WITH SOME VERY GOOD IDEAS: YOURS.



INTRODUCING THE TCR™ FAMILY OF SYNCHRONOUS DIGITAL RECORDERS.

We started with solid engineering and some innovative ideas from real hands-on engineers and editors like you. Then molded that thinking into the TCR8™ and TCR4™. Two professional production recorders, ideally suited for the edit bay, the studio or the field. Not just a designer's dream, but yours.

- 8-track and 4-track models
- Perfect for broadcast and video production
- 24-bit audio quality
- High density removable disks
- Massive hard disk storage
- Complete timecode implementation
- True VTR emulation

Just one of many Digital Audio Solutions from 360 Systems.

360 Systems®

PROFESSIONAL DIGITAL AUDIO

For more information call (818) 991-0360 / Fax: (818) 991-1360 / e-mail: Info@360systems.com / website: www.360systems.com



WHAT IF A SERVER COULD TAKE THE RISK OUT OF GOING DIGITAL?

That's exactly what Tektronix® designed its Profile family of video servers to do. Unlike most video servers, Tektronix doesn't limit your use of compression formats. JPEG, MPEG and DVCPRO can all be incorporated into your facility, where you decide they make the most sense. Profile servers also offer an open architecture that allows you to choose from over 100 applications created by 50 of the best developers. So no matter what your vision is for going digital, choosing Tektronix Profile servers is a very safe bet.

To find out more about our risk-free servers and receive an Application Developer Directory, call toll-free 1-800-TEK-VIDEO dept. 9918, or visit www.tektronix.com/Profile/safe



Tektronix®

© 1999 Tektronix, Inc. Tektronix is a registered trademark of Tektronix, Inc.

incandescent bulbs lit is a constant chore. Unfortunately it is also expensive, in terms of both time and money. Luckily, today most situations where incandescent bulbs were employed have become the stomping ground of long lasting LEDs. There are some incandescent lamp replacements on the market that are actually LEDs, but they may not be appropriate for this application. In any event, I contacted Tektronix to see what they suggested. Here is their reply:

To replace the scale illumination lamps in a Tektronix 1720 Vectorscope, first take the bezel off the instrument by removing the two bezel screws on the front panel below the display, grasp the bottom of the bezel and pull straight out and upward. Use a tweezers with curved, serrated tips to remove the bulb by positioning the tweezer tips on the thin, flat portion of the bulb (close to the plastic socket) and pulling the bulb straight out. Install the new bulb holding it in the same way with the tweezers, positioning it in front of the socket and pushing the bulb with your finger until it snaps into place. Finally, replace the bezel. There are a few safety tips to keep in mind when changing the light. First, of course, unplug the power cord before removing the bezel. Also, don't re-insert the screws in the rear panel when the instrument is removed from the cabinet.

Tom Winroth
Technical support specialist
Tektronix Measurement
Business Division

Paying for software bug fixes

According to TechWeb News, (www.techweb.com) Microsoft has announced its plans to charge \$89 for the Windows 98 service pack. Let me see if I have this straight — I (we) paid approximately \$180 for the original version of Windows 98 complete with bugs (I'm sorry, *features*). Now, for an additional \$89 Microsoft will fix those features?

If I had purchased a new car that did not run right I don't think I'd be willing to pay an additional 50 percent — a year later — to get it running correctly. I don't think I'll pay for this upgrade either. If Microsoft wanted to sell this they should have changed the opening graphic to read "Windows 99" and called it an upgrade. People would likely line up to buy it.

Computers are a fact of life, and trying to get things done without them can be very difficult. It is unfortunate that much of today's consumer level software is poorly implemented (read: *bloated*) and full of bugs. Many users simply accept computer crashes as SOP. For those in broadcast and professional video applications this is unacceptable. The truth is, downtime is expensive in any industry. Having to live with the bugs and then pay for the fixes is a double whammy. I would much rather pay \$270 for a bug-free version than have to live with the bugs for a year and then pay for the fix.

Software, by its very nature, is a work in progress. A fix in one area can cause problems in another. With the myriad of hardware available, it is amazing it works at all. However, the computer industry has not done

a good job of preventing/correcting integration problems. They have been so busy reinventing their market that quality and robustness have been forgotten. Thankfully today there are two robust alternatives. The new Mac operating system is polished and ready to go. If you are not a Mac fan, Linux is available free. Getting it up and running might be frustrating, but then again Win 98 and NT have not been without problems. The choice is yours. ■

If you need help or have any comments or questions, drop me a note at drdigital@compuserve.com.



Dr. Digital is in and waiting to help you.

Got a problem?

Let the Dr. know about it!

drdigital@compuserve.com



What's the difference between automation systems?
The people behind them.

COLUMBINE JDS 
World Wide Media Solutions

303.237.4000 **www.cjds.com/automation.htm**

Circle (26) on Free Info Card



You don't work
a five-day week.
You work a
120-hour-day.

Deadlines. Dramatic stories. Endless pressure. One day can lead right into the next when you deliver the news. At Quantegy, we realize that it's not just the story you're sending out with every broadcast. It's your reputation. That's why each Quantegy tape offers superior video performance, providing higher levels of

chroma and color as well as greatly enhanced clarity and definition. Ultimately, all our attention to detail is designed to help keep you working smoothly. Which is a whole lot more than we can say for the coffee.



Call 1.800.752.0732

Fax 1.800.628.0535

www.quantegy.com


MORE than MEETS the EYE.

Circle (37) on Free Info Card
www.americanradiohistory.com

SYSTEMS
DESIGN
SHOWCASE

WRAL WNOL

Fox 50's news set at WRAL, Raleigh-Durham, NC.
Photography courtesy Rees Associates. Photo © Andrew Lautman.

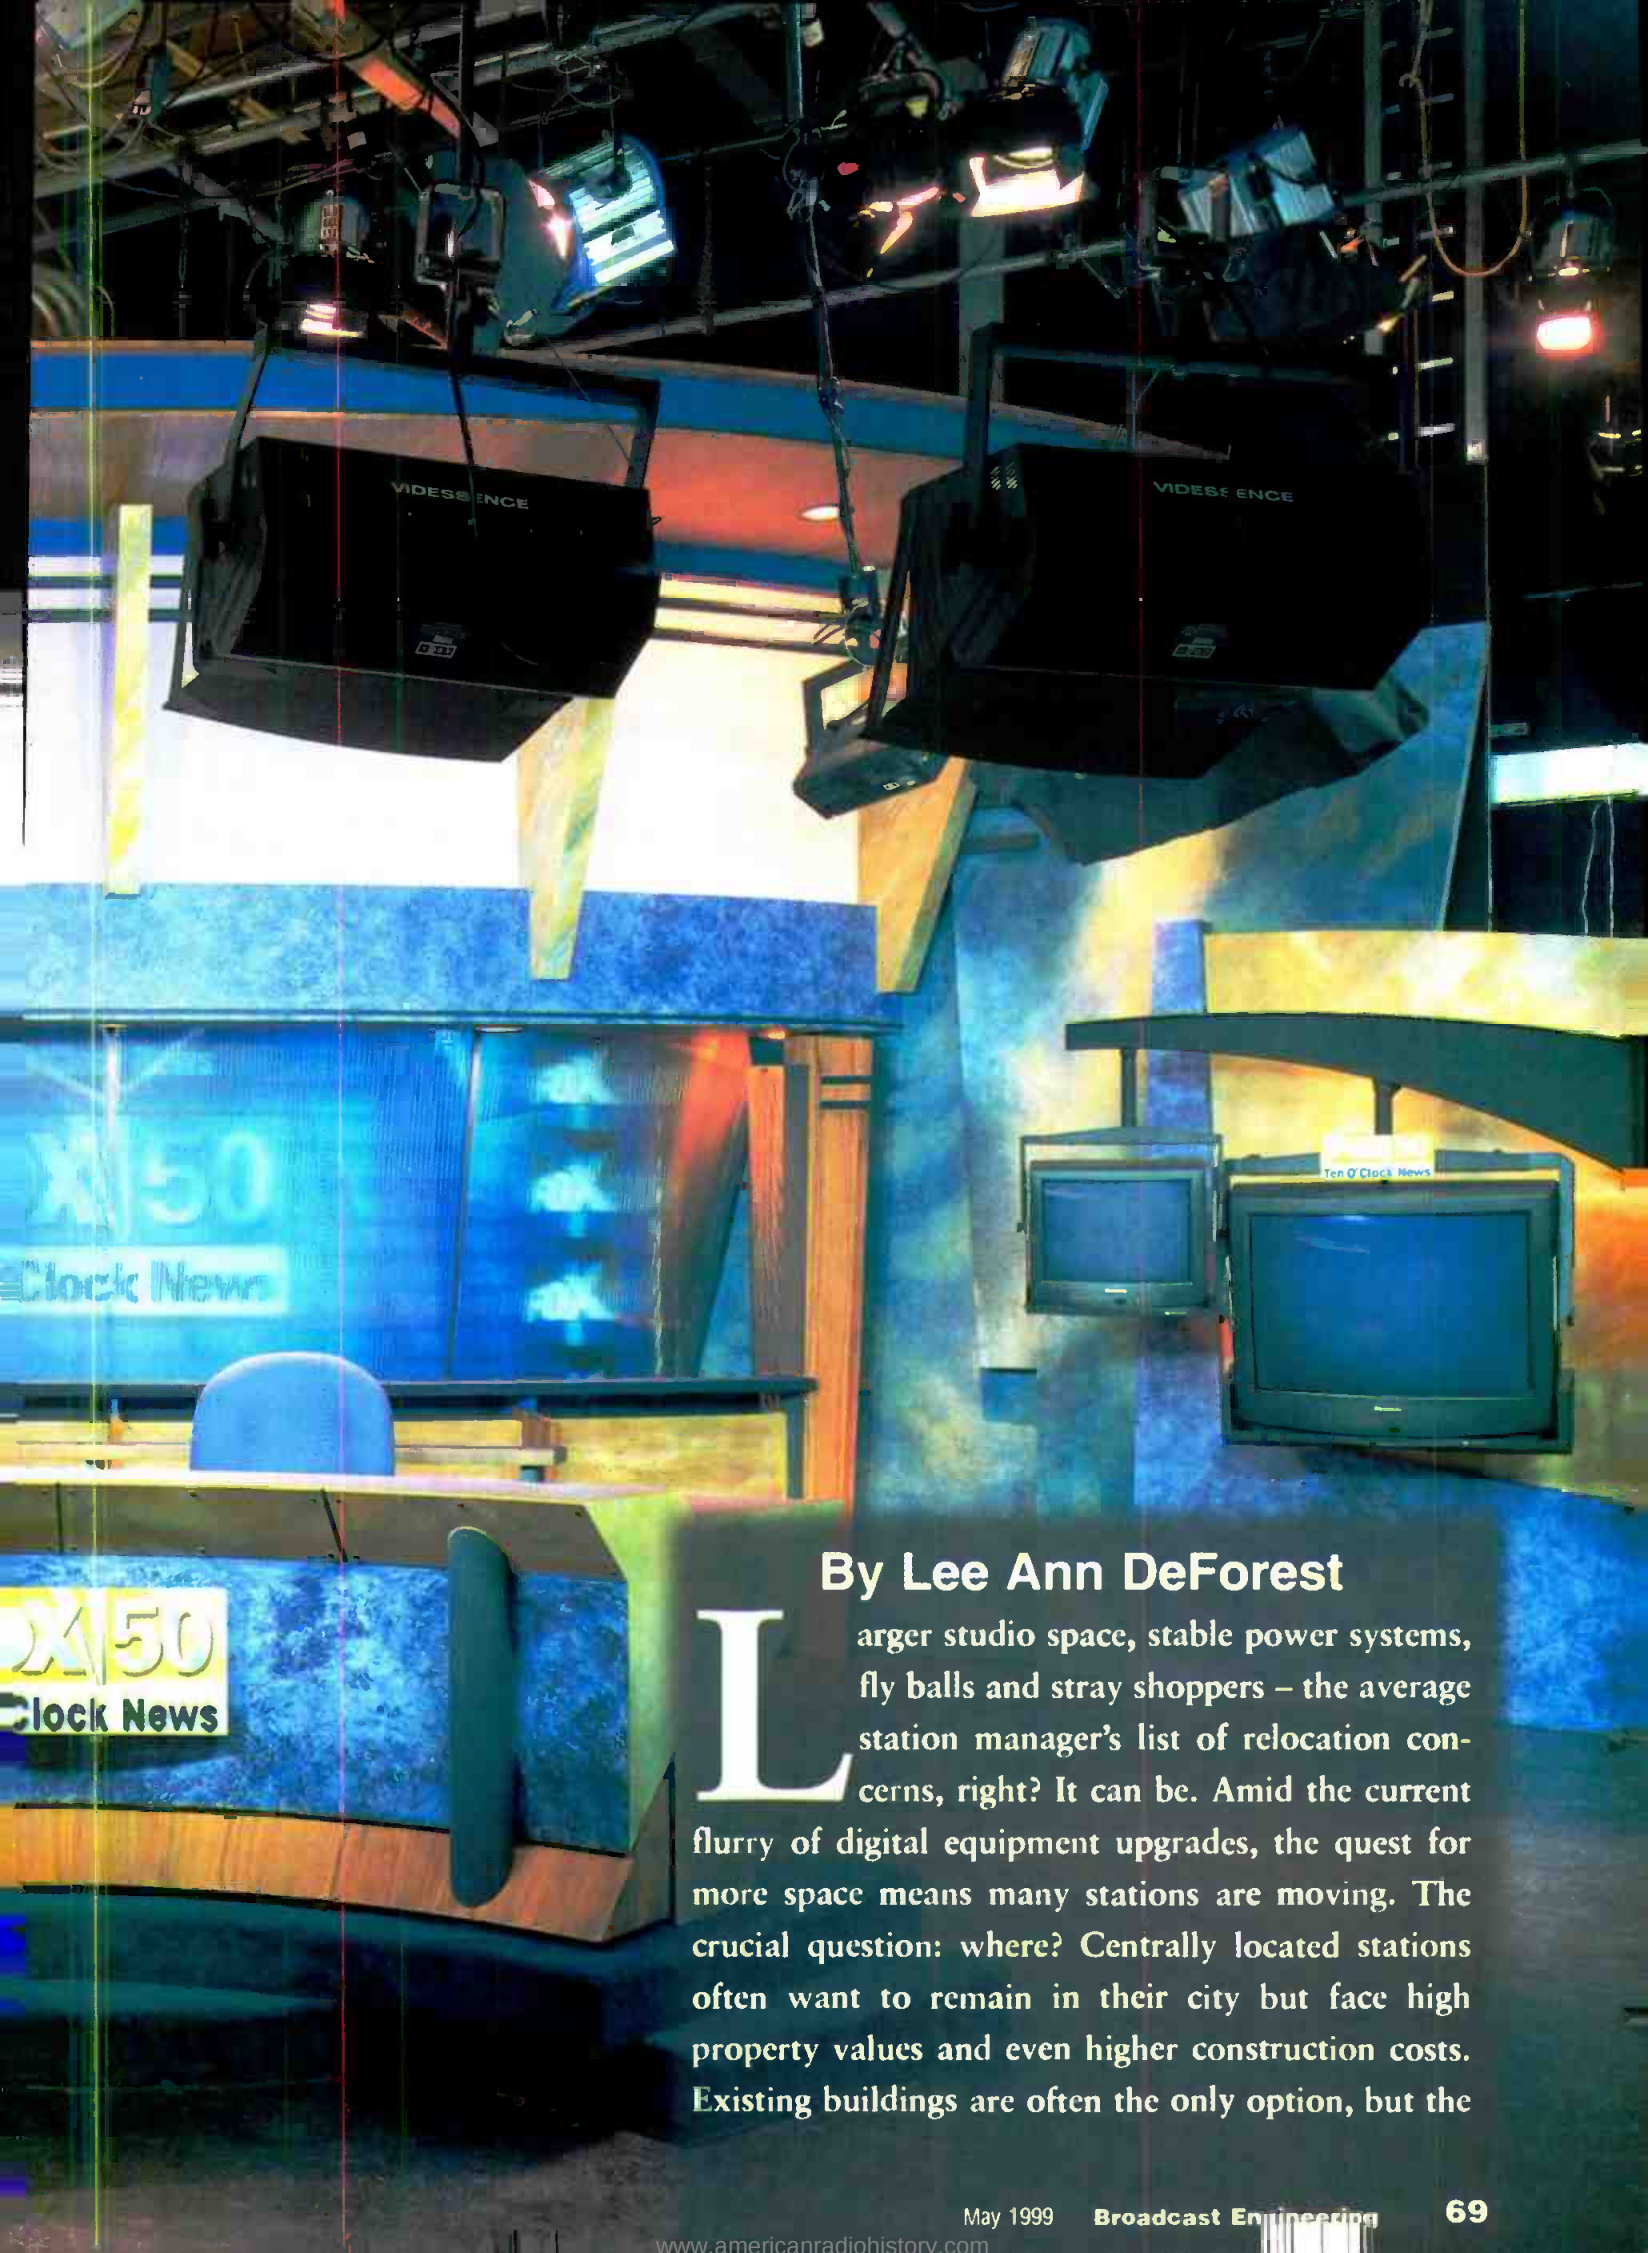

By Lee Ann DeForest

Larger studio space, stable power systems, fly balls and stray shoppers – the average station manager's list of relocation concerns, right? It can be. Amid the current flurry of digital equipment upgrades, the quest for more space means many stations are moving. The crucial question: where? Centrally located stations often want to remain in their city but face high property values and even higher construction costs. Existing buildings are often the only option, but the

WRAZ WNOL

challenge is to find a place with enough space.

Two stations, WRAZ in Durham, NC, and WNOL in New Orleans selected existing, but unusual, new homes with the help of Rees Associates Inc., a leading architectural, interiors and facilities planning firm that specializes in broadcast building design. WRAZ moved into an office building overlooking right field at the Durham Bulls

Founded in 1995 as part of a local marketing agreement owned by Capitol Broadcasting, WRAZ aired WB programming, its own local public service programming, and news from WRAL. The two stations shared equipment, studios and staff. When the FOX network granted Capitol Broadcasting's petition for affiliation in 1996, Capitol decided it was time for WRAZ to establish its own public presence.

Space in the current building was tight. Several spots in and around Raleigh were recommended, but the station had other ideas.

Construction was already underway on the \$9.6 million Diamond View building overlooking the Durham Bulls

plete. WRAZ now faced the daunting task of adapting its original ideas for the new station to the physical constraints of the long, narrow space available. Station engineers planned the facility design with Rees Associates. System integrator The Whitlock Group was then brought in to finish the equipment planning. Due to the time constraints of the fast-track project and WRAZ's small staff size, Whitlock was also chosen to complete the wiring and installation.

The lack of open space around the park hindered placement of five satellite dishes, a key initial decision. The four steerable 4.5 meter Andrews KU/C-Band dishes, one Fox dish and their

accompanying racks were positioned 700 feet away from WRAZ's technical center in the corner of the left field parking lot. The receivers for the five satellite antennae are connected back to the facility by single-mode multifiber link because of the extensive distance.

WRAZ elected to continue using the news program from WRAL, taking advantage of WRAL's established credibility and number one position in the market. This required WRAZ to position a strong microwave relay antenna to receive the signal from Raleigh. The station was able to place the eight-foot-diameter Andrew High Performance antenna amid the right field light bridges, which are attached to the Diamond View building. WRAZ also added a four-wire intercom circuit between the two facilities to allow live coordination for the news show. The system is installed

over the STL and intercity microwave subcarriers.

Diamond View was designed as corporate office space, which made wiring of the facility a challenge. The floor was already set, forcing station engineers to choose overhead wiring. Space above the ceiling was minimal and not easily accessible. Although full size racks were used, routing was difficult. The Whitlock Group staff ran numerous spare wires — in some cases, up to an extra 25 percent more — to each location in the station to limit future



Rack room showing distribution amps, patch panels and a Liebert computer room air conditioning unit in the background.

Athletic Park, while WNOL's new facility is under construction inside the upscale New Orleans Centre mall. Moving into pre-existing buildings not meant for television stations has required extensive planning and design creativity. The WRAZ and WNOL teams have used both to implement the latest in digital technology into these nontraditional new locations.

A relative newcomer to the broadcasting world, WRAZ began life as a WB affiliate inside the studios of its sister station WRAL in Raleigh, NC.

Athletic Park. Owned by Capitol Broadcasting, Diamond View kept the deal within the company, while allowing continued support of Durham revitalization efforts. The 18,000 square foot first floor of Diamond View offered WRAZ both an exciting scenic view and the chance to bring business and visitors to downtown Durham.

Technical hurdles

The Diamond View space created a variety of technical challenges. The shell of the building was already com-



Unsure of the path to digital transition,

we'll take you there.

While digital technology is the mandated future of the television industry, the path to digital transition is a confusing journey for many broadcasters.

Professional Communications Systems brings the expertise and experience necessary for planning and managing the many tasks involved in the digital transition process. We design this process for *your* station, in *your* market, addressing *your* specific needs.

We have the resources; financial, technical and human. We have the experience, including transitions involving relocation. We have the relationships; architects, contractors, manufacturers. And we have the training systems to get your people up to speed in a hurry.

The deadline is rapidly approaching. If you're unsure of the path to digital transition, let us take you there.

Technology Evolves. We Take You There.SM



PROFESSIONAL COMMUNICATIONS SYSTEMS
A DIVISION OF MEDIA GENERAL, INC.

5426 Beaumont Center Blvd.
Tampa, FL 33634 • (800) 447-4714
www.pcomsys.com

Circle (45) on Free Info Card

WRAZ / WNOL

trips back into the ceiling.

The separation from WRAL meant that WRAZ had to purchase new equipment for all areas of station operation. The decision to use WRAL's news facility meant that WRAZ was not required to have a news room or studio, news editing facilities, or multiple sets of field gear, saving the station time, space, and money. Although the new facility does have a small studio for limited local production, it is not currently outfitted for broadcasting.

Purchasing new equipment allowed station engineers to take advantage of the latest in digital technology. Obtaining this technology, however, posed

yet all of it arrived in time for installation.

Station engineers creatively handled the short time allotted to upfit the Diamond View building. Because all of the equipment was new, every piece and wire had to be tested for possible bugs. While walls were placed in the space, the entire technical facility was prewired and powered up in a warehouse. Due to the sensitivity of the digital equipment, a professional moving company was hired to transfer the filled racks to the station for installation and system tests as space became available.

The new WRAZ has been designed with a strong eye to the future of the digital industry. Every piece of equipment was chosen to create a fully digital WRAZ, ready for adaptability to DTV. Anchored by a GVG 7000 series 128 X 128 routing switcher (currently populated to 64 X 64), a serial digital

sion remaining analog. The plant will handle multiple master controls and has a digital-ready microwave. A new digital transmitter and tower are currently under construction. WRAZ-TV FOX 50 will be ready to meet its FCC-mandated deadline of Nov. 1, 1999, for DTV. The WRAZ team was successful in adapting the unusual Diamond View building space to accommodate all of their current and future digital broadcast needs.

WNOL

The architects at Rees Associates faced a similar spatial challenge with the design of the new facility for WNOL-TV, WB 38 in New Orleans owned by Quincy Jones Broadcasting, LLC. WNOL is accustomed to inhabiting unusual spaces: the station's current home previously housed an auto dealership. Facing limited space and the impending expiration of their lease, WNOL's leadership began the search for a new home over two years ago.

Station management set a list of goals for the new location. WNOL needed expanded studio and office space to accommodate a growing operation, both on-air as one of the top-rated Warner Bros. affiliates in the U.S. and as a production house. Studio 38, WNOL's production arm, handles a constant flow of commercials and music videos, is the home of a local syndicated cooking show, and rents the studios and suites for editing and production. Additional production space was greatly needed.

The price of real estate in New Orleans also influenced the search of nontraditional sites. While costs have always been high, revitalization projects throughout the city, particularly in the Central Business District, have driven land and construction costs even higher.

After months of searching, they settled on The New Orleans Centre, an upscale business, hotel and shopping complex located adjacent to the Louisiana Superdome, Hyatt Hotel, and the new 18,000-seat New Orleans Sports Arena. This area is the hub for special events in the city, including the



Rack room showing a news ASC server, a Grass Valley Group routing switcher, and the station's ASC server.

its own problem. WRAZ engineers began ordering equipment at the end of April and early May of 1998, with building occupancy tentatively scheduled for July. WRAZ had to pressure vendors and manufacturers to meet tight delivery times. Much of the equipment was delivered at the last minute,

601 routing infrastructure was selected to ensure an easy transition to a variety of formats. Another example is the Leitch DES-6801, which now converts all analog video sent to the satellite receivers to serial digital format.

Everything produced by WRAZ is digital, with only the actual transmis-



You know our focus,
now meet our depth of field.

Careful, this is no time to blink.

We're about to show you exactly what vision is all about. In a big way. The fact is there's nothing in today's broadcast enterprise we don't already have our eyes on – much less our engineers. DTV. Multi-channel. Global media transfers. The ultimate in automation solutions and beyond. We saw it coming and are answering it with new products. New technologies. New solutions. It's a new Louth. And how this benefits you is about to become very clear.



Louth

Broadcast Enterprise Automation Solutions

USA +1 (650) 843.3665 UK +44 (0) 171 531 9800 France +33 130 380804 Latin America +1 (954) 753.5116

Circle (46) on Free Info Card

www.americanradiohistory.com

WRAZ WNOL

NFL Saints, Tulane University football, professional hockey, and future Super Bowls. The Centre itself hosts approximately 30-40,000 visitors each week, offering excellent access to the community. However, like WRAZ, the space itself was long, narrow, and not as large as originally planned. Rees Associates and WNOL's planners worked together to devise several creative solutions to meet all of the station's needs.

Taking shape

The shape of the space is unique, wrapping around the mall's glass and steel atrium. To take advantage of WNOL's new storefront location, station executives elected to make the on-air operation visible to the public. Operation and control areas were placed around the semi-circular atrium, bringing major studio functions front and center.

The narrowest part of the space was the center, a semicircular area only 35 feet deep. The designers placed master control in this focal point, which led to a traffic flow problem in the operational area. The master control room would become the only corridor between the edit suites and tape room, creating a busy distraction in an ordinarily calm space.

Rees Associates' solution was to create a hallway behind the master control racks, taking advantage of a typically "dead" space used to access equipment. By mounting the seven custom-built racks through the wall, the space behind the racks became the major passageway connecting the production area with operations, leaving master control isolated and quiet.

Carving a large, open studio out of property originally designed as retail space was a major concern. Station management wanted the new studio to be a minimum of 60 feet by 60 feet. The unusual shape of the space dictated that the studio be placed at one end of the facility. With the building's support columns approximately 30 feet



Tape room showing two Sony one-inch machines, JVC Digital S tape machines and a Panasonic M-2 tape machine.

apart, one column supporting the roof must be removed to open up a clear 60-foot studio space. A large steel truss installed on the roof will support the ceiling and studio lighting grid and

will also serve as the mount for the studio's four 4.5-meter satellite dishes.


With several basic design problems solved, focus shifted to the creation of

WRAZ equipment list

- JVC Digital S videotape format
- GVG 7000 series 128 X 128 routing switcher (currently populated to 64 X 64)
- GVG M-2100 master control system
- GVG model 2200 production switcher
- Chyron Liberty Paint System
- Chyron Aprisa Still Store System
- Chyron Max! Character Generator (Production Control)
- Chyron Maxine Character Generator (Master Control)
- Two Avid Media Composer 1000 edit suites
- ASC/Leitch VR-300 system for commercial playback
- Four Andrew 4.5M steerable antennas feeding 12 CKU receivers (three per dish).
- Leitch DES-6801 A/D converters
- Leitch equipment for audio and digital video distribution
- Ikegami HL-45 W digital camera with switchable aspect ratio (studio camera)
- Microwave Radio Corporation microwave equipment

WNOL Equipment list:

- Sony DVS-7250 digital production switcher, with two channels of DME 7000
- Wheatstone audio board
- Philips Jupiter / Venus video routing
- Nvision AES digital audio routing
- Sony 9100 production editor
- Graham-Patten audio board
- Sony Digital Betacam and SX VTRs
- RTS Adam intercom / IFB system
- Avid 1000 with 3-D
- Philips LDK-9 studio cameras with digital output upgrade
- Sony DVW-700WS field cameras
- Odetics system automation with Hewlett-Packard MediaStream servers
- Philips Saturn master control switcher
- DigiCart and Short/cut audio systems (360 Systems)
- Tektronix test scopes
- Ikegami & Sony monitors
- Tektronix, Sony & Leitch A-D converters
- Nu/Comm digital STL/TSL microwave system
- Patriot 4.5 mm. KU / C-band downlinks

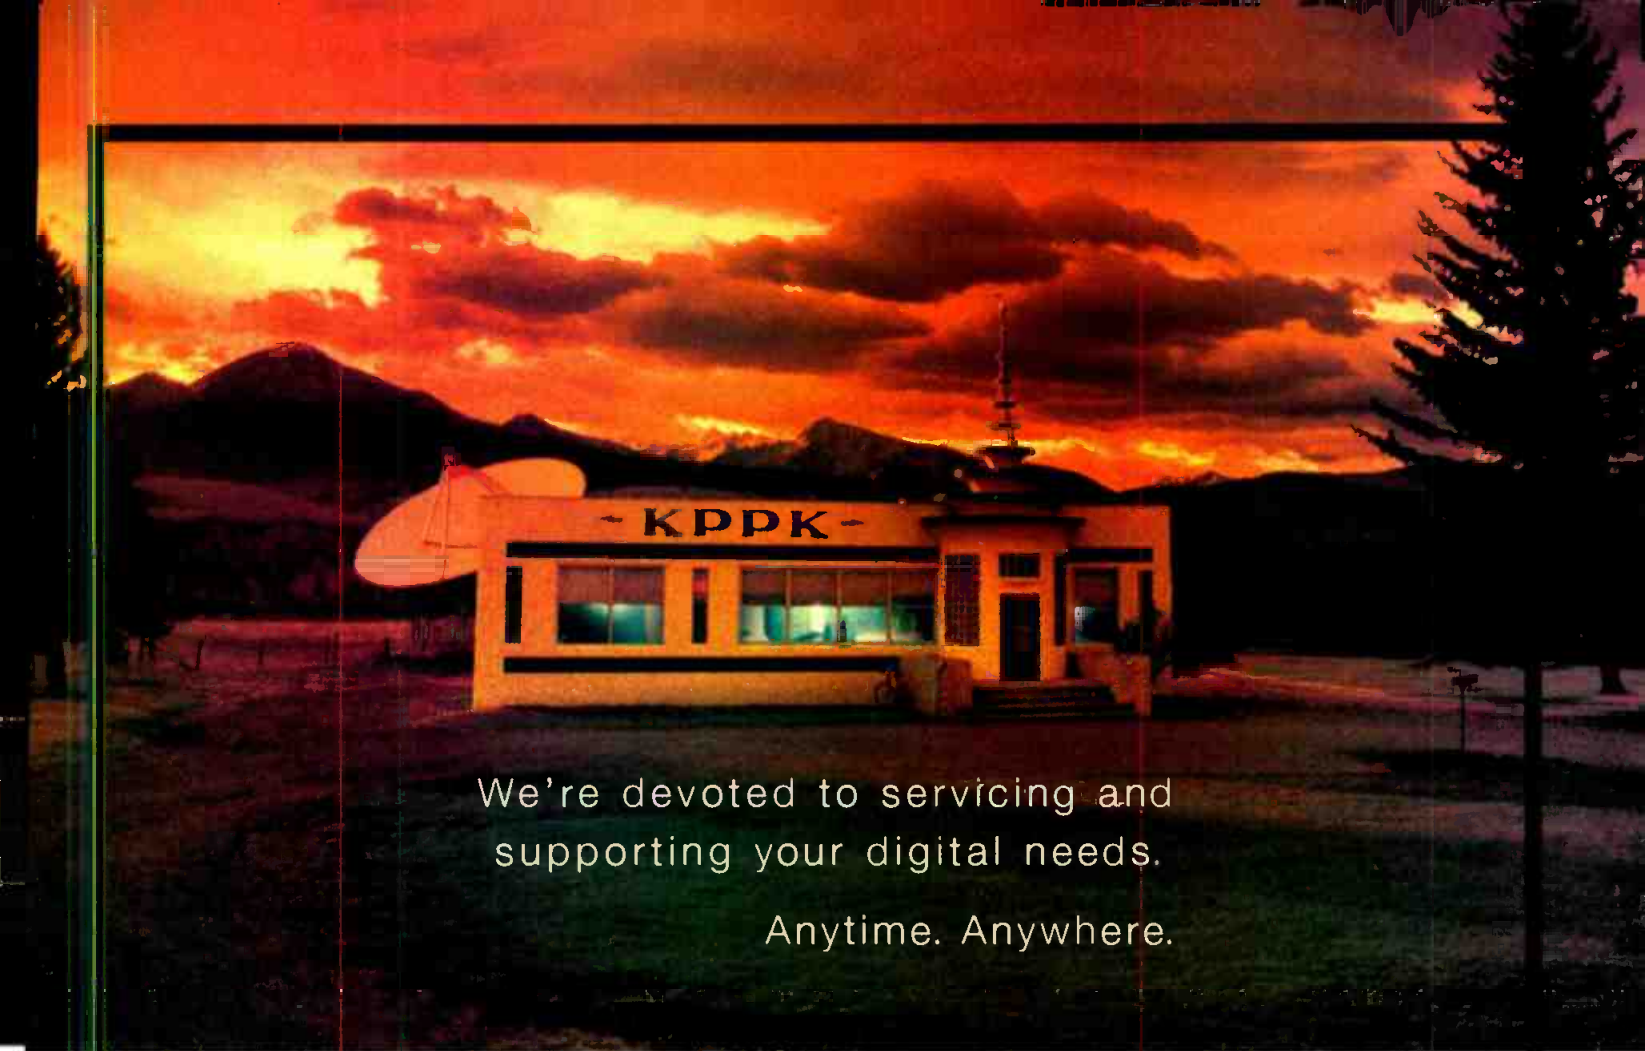

We're devoted to servicing and
supporting your digital needs.
Anytime. Anywhere.

Going digital with Sony means getting the most comprehensive service and support in the industry whether your requirements are global or local. In fact, it's the kind of commitment to your success that only Sony can offer—no matter how big or small your operation. All from the company with a long history of broadcast expertise that already includes years of experience with on-air multi-channel digital television system maintenance. To see what we can do for you, visit us at www.sony.com/professional or call 1-800-635-SONY, ext. SRV.

We're ready. Are you?™

SONY

WRAZ WNOL

a digital production center containing multiple-format edit suites and a large two-tiered control room. Over the past two years WB38 has been slowly retiring its analog equipment and upgrading its digital capability. WNOL's engineers are using the move as the deadline to complete the transformation.

WNOL's engineers worked with system integrator Beck Associates of Austin, TX, to evaluate the station's equipment. The process began with the selection of an Odetics/Hewlett-Packard disk-based commercial playback system. One HP MediaStream drive was put on the air in March, 1998, replacing a variety of 11 Betacam BVW-40, 10, and PVW-2800 tape machines that had been running for over ten years.

When the facility is ready this spring, a second MediaStream will be installed and interfaced with the new Phillips Saturn Master Control switcher. This will allow the new system to be completely tested and the staff trained prior to putting the new studio on the air. Once the switch is made, the Odetics system from the old location will be moved and mated with the new system.

Additional analog tape machines and the station's extensive program library, containing thousands of BetaSP-formatted movies and programs, were also concerns. Digital BetaCam was initially considered for the station-wide digital format and then rejected due to prohibitive costs. Instead, WNOL became one of the first station to employ the new Sony digital SX format, which plays all older Betacam formats and is more cost-effective.

Although all audio and video routing will be digital, WNOL will accommodate its lingering analog needs by keeping two BetaSP machines in operation. The station will also place several frames of analog-to-digital and digital-to-analog converters, both audio and video, at key points in the station. These will be dedicated to specific analog machines to seamlessly meld these islands into the routing for any operator.

Like WRAZ, WNOL anticipated the transitional future of digital broadcasting. The output of both the Master Control and backup switchers will be multiplexed into one data stream with various control data for the studio-transmitter link (STL), main, and backup transmitters. This signal will then travel over a pair of fiber optic links to the top of an adjacent 26-story office tower and into a 7GHz digital microwave transmitter. The digital microwave system being installed can transmit multiple signals of various combination, both standard TV and HDTV.

On the edge of a salt marsh nine miles away, the digital signal will be converted to analog again and fed to the Channel 38 main transmitter. Control and other transmitter data will then be multiplexed and sent to a transmitter-studio link (TSL), returning to the New Orleans Centre studio up the same pathway. The STL/TSL is also ready for future multicasting and digital broadcasts, allowing WNOL to grow with the evolution of the digital television industry. While New Orleans is not slated to offer DTV until 2003, WNOL currently plans to begin DTV

transmission in late 2001.

The placement of a television station in an unconventional and unprepared space can be done, and it is often a viable and economic option available to station management. Drawing on the experience of Rees Associates' and systems integrators The Whitlock Group and Beck Associates, WRAZ and WNOL have made the most of their space, whether it's next to a ballpark or inside a mall. They have shown that with creativity and careful planning a non-traditional space can provide great aesthetic and operational opportunities. Both stations are ready to make a smooth transition to the ever-changing future of digital broadcasting. ■

Lee Ann DeForest is a freelance writer for Ballas & Partners, Richmond, VA.

WNOL Design Team

Client: Quincy Jones Broadcasting, LLC

Gary Furlow, Director of Production & Operations

Architect: Rees Associates (Oklahoma City, OK)
Bill Howell, Project Designer
Kyle Lombardo, Project Manager
Karen Bishop, Project Architect
Angela Mayer, Interiors

Contractor: Broadcast Building Company (Jacksonville, FL)

Broadcast Systems Consultant: Beck Associates (Austin, TX)

Mechanical Engineer: Davenport & Associates (Oklahoma City, OK)

Electrical Engineer: EE Systems Engineering (Oklahoma City, OK)

Interior Design Consultants: Crestia & Staub (New Orleans, LA)

WRAZ design team:

Client: Capitol Broadcasting (Raleigh, NC)

Jim Goodman, President
Paul Pope, Station Manager of WRAZ

Tommy Schenck, General Manager of WRAZ
Tom Beauchamp, Corporate Chief Engineer for Capitol
Jim Gamble, Chief Engineering Manager of WRAL

Architect: Rees Associates (Oklahoma City, OK)
Bill Howell, Project Designer
Kyle Lombardo, Project Manager
Steve Stovall, Project Architect

Contractor: Bovis Construction

Broadcast Systems Consultant: The Whitlock Group (Virginia Beach, VA)

Mechanical Engineer: Davenport Associates (Oklahoma City, OK)
Steve Davenport

Electrical Engineer: EE Systems Engineering (Oklahoma City, OK)
Roger Edwards

Interior Design Consultant: Van Stavern Design Group (Oklahoma City, OK)



World-Class Intercoms



All over the world, Matrix Plus® digital intercoms are working in today's most demanding communications environments.

You'll find them linking news production teams from Argentina to Zimbabwe. Bringing you

financial news from Wall Street, Olympics coverage from Nagano, and fast-breaking election coverage from Washington DC to Warsaw.

We're helping NASA track the Space Shuttle and Globalstar launch satellites. We're there, producing the worship service at Crystal Cathedral and in post production at Universal Studios.

Worldwide, production teams choose Matrix Plus digital intercoms for their performance, their flexibility, and their reliability. And for the support they receive – from a company that has pioneered intercommunications technology for 30 years.

To learn more about Matrix Plus and our broad range of communications products, please call or visit us on the web.

Clear-Com
Intercom Systems



Transmission & Distribution


Building a tower

BY DON MARKLEY

Congratulations! You are going to be involved in building a tower. This can be one of the more enjoyable times for a station engineer, especially if we are talking about a major structure, not one of those little STL towers. You will get to watch big machines at work, massive pieces of steel fly through the air and, if you are lucky, giant helicopters dangling hardware worth a small fortune high over your site. This will be fun — maybe.

Horizontal vs. vertical space

For the purposes of this article, let it be assumed that all of the necessary permits are in place and you think that you are ready to place the order for the tower. That would mean that the site has been obtained and surveyed to determine that you have ade-

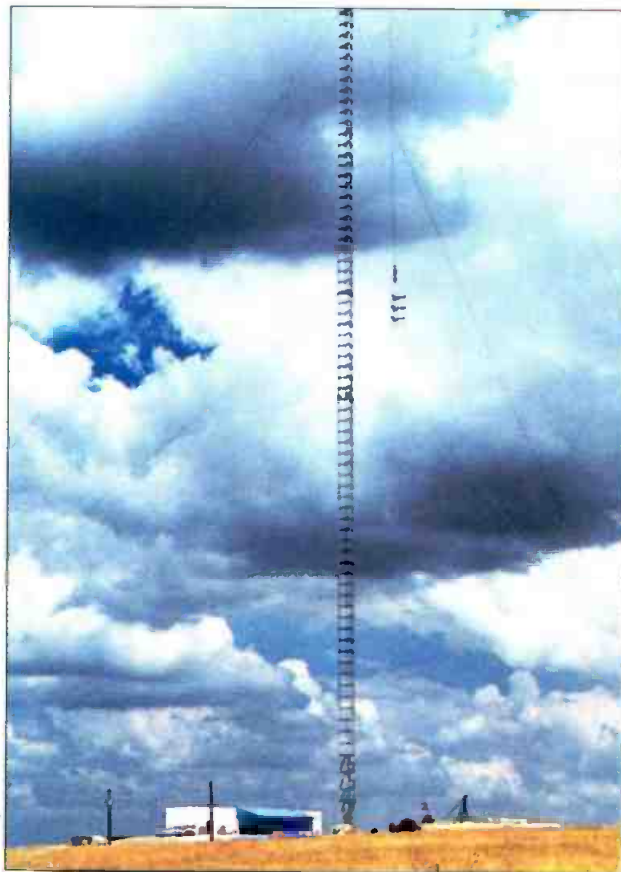

When building a tower, broadcasters should consider potential demand for tower space and plan equipment purchases accordingly.

quate guy space. The default value for guy distance is usually 80% of the tower height. Remember that the tower height isn't to the top of a top-mounted antenna and beacon for anything other than filing purposes. The tower height is usually to the bottom of a top-mounted antenna for guying purposes. The 80% number is nice, but not necessary. Depending on the available site, it may be necessary to reduce the distance to the outer set of guy points. Many towers have been built with 50% guying; most range between 50% and 80%. Shorter guyed towers are just as safe as those with longer radii but may be more expensive.

As the distance to the guy points is reduced, the angle for the guy wires obviously becomes steeper. Remember, the horizontal forces required to hold the tower remain nearly the same, varying only if a heavier tower is needed due to the shorter guying. Applying simple trigonometry to the horizontal loads indicates that the downward force for a fixed horizontal force increases as the distance to the guy point is shortened. That increases the loading on the tower and the stress on the guy cables. This is all included in the tower design and may cause some increase in the cost of the project. The increased loads on the cables also means increased loads on the guy points which may result in larger anchors than for a longer guyed tower. If a choice is available, the tower will probably cost less if 70% to 80% space is available. The facts of life are that you may not have that luxury. In any case, the tower design will still provide you with adequate


FRAME GRAB

A look at the consumer side of DTV.

There's value in TV's local news.

TV stations could profit from packaging their news for on-line consumers.

Percent of respondents who rate on-line access to these topics as very valuable

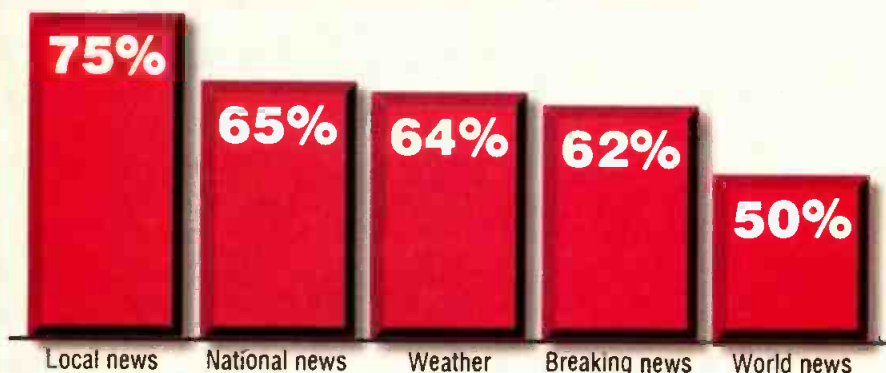

Source: Forrester Research www.forrester.com





ANALOG - DIGITAL

*make an easy shift
to DTV transmission.*

When you choose DTV transmission solutions from Itelco, shifting to digital television gets a lot smoother. We're the only manufacturer that can supply a fully loaded range of state-of-the-art transmission solutions, including SS, IOT, tetrode, and diacode transmitters. And our dual-purpose DTV/NTSC microwave systems ensure that driving your signal to the transmitter will be as easy as coasting on cruise control.

Itelco has four decades of experience serving the most demanding broadcasters in the world. And with our new manufacturing facility in Denver, Colorado and our service and support locations in Denver and Miami, our round-the-clock customer care is better than ever.

The first commercial DTV station in the USA is transmitting ATSC digital television using Itelco's digital television transmitters.

*For a test drive, call us at (303) 464-8000
or visit our web site at www.itelco-usa.com/ba*

 **itelco®**

Circle (38) on Free Info Card

www.americanradiohistory.com

safety margins based on the current standard.

How many antennas?

Once you have determined the guy distance to go with the desired height, you need to decide just how much capacity should be designed into the structure. In other words, how many antennas and transmission lines will be on the tower? You should assume future demands for tower space providing a good source of income. History indicates your tower will eventually be loaded up to its

capacity with antennas for two-way systems, cellular equipment, microwave dishes and even cameras. Make a list of your current needs and add a couple more broadcast antennas, some microwave dishes at various levels and 20 or so two-way antennas along with anticipated transmission lines. Remember that the transmission lines will often add more windload than the antennas themselves. This has to be done with some element of reasonableness. Obviously, don't plan on a large television antenna when you are simply trying to


build a tower for a six-bay FM antenna. Be aware that rental space can eventually pay for the tower, especially in urban areas.

Sample the soil

Now a new problem comes up. Unless you specify otherwise, the tower design will be for standard soil conditions. If other than standard soil is encountered when the guy points are dug, the price and design of the anchors will have to be altered significantly. For large towers, at least one soil boring should be made at the base of the tower. Other than for the outermost guy points, you don't know exactly where the other points will be until the tower is designed. Therefore, test borings at those locations should probably be delayed until a manufacturer is selected and the initial design is completed. Soil borings are rather straightforward, check the phone book for Drilling and Boring Contractors or Laboratories, Testing.

Soil boring services will usually have a good idea of the conditions in your area and will be able to make recommendations on just what is needed. Your main concerns are the load bearing characteristics of the soil, the level at which you may hit rock and any problems that might be anticipated with water. Water can be a problem. The author has experienced one site that presented good soil when first used, but the second time a tower was erected it followed a wet season and the guy points filled with water. In fact, a Cat D-6 became stuck at the high-ground site. In any case, obtain an analysis of the soil conditions and furnish it to the tower companies along with your request for bids. If the tower is relatively short and you are confident that the soil conditions are good, the tower can simply be designed for normal soil avoiding the cost of the borings. The choice is up to you, but it is a bit like not practicing safe sex. It may seem fine initially, but the payback is terrible if you are wrong.

All tower designs will be to the current standard; ANSI/EIA/TIA 222F. The only variable you may wish to include is a bit of extra ice loading. For Northern areas, adding an extra 1/2" ice load is advisable. The tower companies are all aware of special requirements that some states may have and will include that in their design calculations. Be sure to

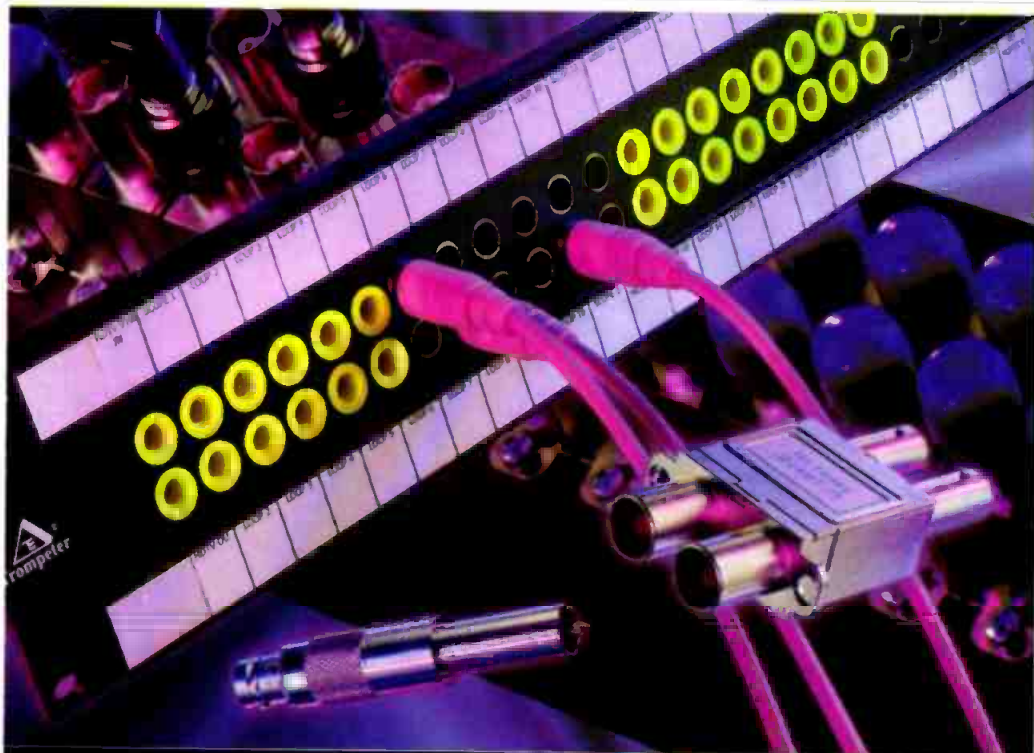

Plug & Play

HDTV Transmission Line Network Product Solutions

Your HDTV upgrade can be smooth and simple with Trompeter's just-released coax wireline package for video signal management. The package includes patch panels featuring the J214W and/or J214WT-75 serial digital jack, the MP20W monitor plug, and the new UPL2000 "true 75ohm" digital BNC connectors (straight, 45° and 90° versions). These component were all specially developed for high frequency, digital broadcast applications and meet the SMPTE 292M spec for full bandwidth uncompressed signal transport at 1.485 Gbps data rates. We've got your digital covered!



GET QUOTES FAST... VISIT OUR WEBSITE TODAY!
www.trompeter.com or call: 800 982-2629

Circle (39) on Free Info Card

Is the video jack you're using today designed for the signal standards of tomorrow? If not, it's time you started thinking about Switchcraft's video jack.

Engineered to be ahead of its time, our video jack *already meets the SMPTE 292M specification*. Our new HD Series delivers consistent characteristics across the bandwidth, offering you the reliability you need now...and the required performance for tomorrow.

The capable HD Series is available in our complete line of video patchbays, both

one and two rack units, 24 or 26 jacks. No matter what your needs are, we're prepared to deliver.

The future will be here before you know it. So why not be prepared? Call us today for more information about our complete line of video and audio products.

Meets the
SMPTE 292M
Specification



VJHD75T

**WILL YOUR
CURRENT VIDEO
JACK TAKE YOU
INTO THE FUTURE?
OURS WILL.**

Switchcraft, Inc.
5555 North Elston Avenue
Chicago, IL 60630
Phone: 773-792-2700
Fax: 773-792-2129
sales@switchcraft.com
www.switchcraft.com

Switchcraft®
www.switchcraft.com

Circle (40) on Free Info Card

advise the companies prior to bidding as to exactly where the tower will be located as opposed to just the location of your office.

Hiring a crew

The project can now proceed down one of two paths. First, you can request a quote on a full turnkey solution from the tower manufacturer. That is, they include the foundations and the erection. The other option is to simply buy the materials from the manufacturer and arrange for the foundations and erection separately. Some money

may be saved by such separate negotiations, but you now are in the position of general contractor with all of the responsibilities attendant thereto. If this is your first tower project, it is probably advisable to let the manufacturer worry about the coordination. Otherwise, if anything goes wrong, everyone will be pointing their fingers at each other and you will have nowhere to turn. One possible alternative is to use your consulting engineers to coordinate the project. That normally brings the experience of constructing several such structures to the

project and can result in significant savings.

As to the erectors, many tower erectors now belong to the National Association of Tower Erectors (NATE). This group has been working with OSHA to develop accepted standards for the manner in which towers should be built and the equipment and methods for use on the site. The operative term here is "working with OSHA." Everyone is in favor of a safe workplace, and OSHA is definitely the controlling agency on projects of this type. It only makes sense to deal with someone familiar with the OSHA requirements and is attempting to meet them. Any erector that you choose for your project must be familiar with the OSHA requirements. Furthermore, you should insist that the crew be experienced with towers of the type and height proposed. A 2000' tower is *not* simply four 500' towers stacked. It is a totally different type of animal.

As the station engineer, insist on two things. First, in the contract documents, the tower erector must clearly be identified as responsible for OSHA compliance and hazard assessment. This should include providing you with a list of all employees and the dates when their safety training for your project was completed. Second, require that the tower manufacturer provide you with a complete set of all tower loading and design calculations sealed by a Registered Structural Engineer licensed in the state where the tower is to be located. A set of those calculations should be furnished to your insurance carrier for their approval to assure that your station's interests will be protected. The original set should be locked in a safe place in your files for future reference.

You now are ready for the backhoes, bulldozers, winch trucks and cranes to roll. Enjoy the project and make sure that the temporary lights are on at night.

One more thing: While all of those fascinating big machines are at work — stay the hell out of the way. ■

Don Markley is president of Markley and Associates, Peoria, IL.

Gentner



DH20

Digital Hybrid

800-433-7668

The DH20 is the most affordable digital hybrid from Gentner. It includes several features only available in more expensive units such as selectable caller control, auto answer/disconnect, and selectable call progress decoder.

5700 E. Loop 820 South
Fort Worth, Texas 76119-7099
Phone: 817-483-7474
Fax: 817-483-9952
pas@lights-audio.com
www.lights-audio.com



Circle (42) on Free Info Card

ON TOP OF THE WORLD

Allied Tower is the vehicle our customers choose for support in their communication travel. Reaching their specific height destination with custom designed towers for FM and TV Broadcast requiring heights up to 2000'.

Our fuel is the energy of custom design and certified engineering, specific to our customers every tower need.

Quality and durability are the solid rod materials used at our fabrication facility that bring comfort and confidence for the extended tour.

Integrity and reliability is our foundation crafted over four decades that allows Allied Tower Company to stand on "top of the World" in the communication industry.

If your vehicle has a Cadillac price tag and the service department is always on break, call our full service sales and engineering staff for a turnkey quotation without the sticker shock.



2525 South Shore Blvd.
Suite 420
League City, Texas 77573

800.332.0025

Circle (41) on Free Info Card

 Send questions and comments to:
don_markley@intertec.com

Finally a digital news solution tuned for hard news.



We won't tell you how fast you need to be. You know. But you may not know about Vibrint's digital news production system which combines the speed of your current tape-based system with the power, flexibility and openness of computer technology.

The fastest turnaround you've ever seen. With Vibrint FeedClip™, you can record news feeds to disk and play trimmed clips directly to air. No tapes. No sprinting to the edit bay. You don't even have to baby sit the feed to catch all of the action.

As easy as tape-to-tape.

You can also edit your clips into stories with Vibrint NewsEdit™, the only editor designed to replace the record deck in cuts-only edit bays. NewsEdit provides the speed and functionality of deck-to-deck editing, with the flexibility of non-linear. When the edit is done, play back stories instantly from the Vibrint server platform under local control or linked to your Newsroom Automation System.

Integrated. Open. Standards-based.

For a complete system, tie FeedClip, NewsEdit and the Server Platform together.

Vibrint takes advantage of Pentium II processors, the Microsoft Windows™ NT file system, off-the-shelf networking and storage, and MPEG2 media.

Priced like a tape deck.

The best part. Vibrint's digital news production platform is modular and priced right. In fact, the cost of one server and application is about the same as a record deck. Buy one now. Add more whenever you like.

Visit www.vibrint.com and request a copy of our free white paper: *Cost-Effective Alternatives for Workgroup Centered News Production*



Isn't this what you've been waiting for?

1 - 8 7 7 - 8 4 2 - 7 4 6 8

vibrint
Tuned for news.

Circle (43) on Free Info Card

IT'S A CATASTR



OPHE - BUT IT'S NOT A PROBLEM.

Aaaargh! – You've lost a signal – So what do you do?

Don't panic. Use your IQ and you can sort it out
automatically. RollCall™ is our intelligent remote control
and monitoring system. Whether a plug has been
pulled out or a module has failed, it will help
you identify what the cause is and where –
instantly, on screen.



And if it's a module that needs

SIMPLY MORE INTELLIGENT

replacing, the unique design of our IQ Modular™ system
enables it to be 'hot-plugged' in seconds, without powering
down the box.

So reassuring. But then protecting you from catastrophe is just
one of the intelligent ideas that make our IQ Modular system the
problem-free solution for the digital era.

Circle (44) on Free Info Card



IQ MODULAR

by



SNELL & WILCOX



For more information on the IQ MODULAR System contact:

Tel: (408) 260 1000, Fax: (408) 260 2800, e-mail: info@snellusa.com website: www.snellwilcox.com

Video production software

BY MARC BOEDDEKER

Video production software and the computer hardware that supports it have been evolving at an incredible pace. Prices are headed down and feature sets are expanding. Multipurpose workstations and applications are becoming the norm, and even dedicated boxes are offering enhanced capabilities. Some are actually learning to play well with others. Software solutions for editing, paint, animation and compositing have begun to blur the distinction of where one application leaves off and another begins or where one program becomes a plug-in of the other.

The basics of editing and the features that facilitate it are pretty well established, as are the "expected" feature sets for paint programs. After that the ability of a system comes down to the person running it. The human element is even more important when it comes to creating animation, composites, etc. where the requisite paint and graphics skills must be integrated with basic editing ability and production aptitude.

For the most part, any program that has survived the marketplace is good to go in the hands of a competent artist or editor. For the rest of us, ease of use, plug-ins and support for advanced systems are the key factors.

When considering which of the competing applications is right for you and your operation, one of the first questions should be "What am I going to do with it? How is this combination of software and hardware going to pay for itself and hopefully make me some money? Quite often a new client or the need for some specific new capability

drives a purchase. This is often a chance to upgrade existing systems and to think of what else the same gear might be used for. For example, most edit software includes a minimal CG application. This is sufficient for offline and some industrial uses, but with an upgraded CG option or the addition of a paint or DVE/effects plug-in you suddenly have a much more capable box, lending itself to the pursuit of new business.

It is always nice to get more than you need, but you should not pay for stuff you know you will never use. Unless an option or enhancement has a potential

impact your workflow (more RAM, better I/O, etc.).

It's gotten a little bit cheaper to make mistakes these days, but the wrong call still hurts. Deal with a reputable integrator who can tell you what kind of motherboard, processors, SCSI, etc. you are buying and why.

Another consideration is which operating system will you choose to be the heart of your environment? Many of the installed editing and graphics workstations are Mac based, so operator familiarity can be a factor, although many of the "old favorite" graphics,

compositing and even editing products have been ported over to familiar GUIs (graphical user interface) on NT-based platforms. Unix-based products tend to offer high capability with a higher price, usually with a steeper learning curve for the uninitiated. However, for top echelon work these products continue to be well accepted.

The question to ask when consider-

ing specific software and hardware combinations is whether or not the application was written for the operating system you plan to run it on. You should not assume an application will behave exactly the same running on unique hardware or on a different operating system than you are used to.

The video board you choose for your system in some ways influences all subsequent decisions. The level of product that you produce will be dependent on the quality of your I/O. First, get the best board you can afford. A video board may be capable of higher resolution capture than you can initially af-



Editor Marc Boeddeker in a Producers Post edit suite. The facility uses a variety of hardware platforms to support the many video software programs that clients and staff depend upon to produce content.

use or commercial payoff, the extra expense should be diverted to bigger, faster storage or dual processors instead of dual monitors. Aesthetics are important but so is speed when deadlines are involved. If you're trying to crank out product, choose applications that support multiple processors and get hardware to match. For example, I would choose dual 450s over a single faster, probably more expensive processor. On the other hand, if you are committed to using a product that does not yet support multiprocessing, or perhaps never will, spend your computer budget on the aspect that will most

The image shows a black microwave radio unit. On its top surface, there are two large, curved arrows: a red one labeled 'NTSC' and a green one labeled 'ATSC'. A small inset in the upper left corner displays a waveform on a grid. The unit has 'TWINSTREAM' printed on its side, along with a logo for 'CALIFORNIA MICROWAVE' and the text 'MICROWAVE RADIO COMMUNICATIONS'. The main headline reads 'The Easiest Path to a Two-Channel STL Just Got Easier'. At the bottom of the unit, 'MRC TwinStream™ Series' is prominently displayed.

From Adaptive Broadband. We have changed our name, and raised our commitment—look no further than our leadership offerings.

Now, the radio that made it easy to put ATSC and NTSC on the same path, offers even more. The new MRC TwinStream Series offers digital and digital-ready systems with various functional configurations, so it's easy to adjust to changing video microwave requirements. With the new MRC CodeRunner™ Series, you can respond to changing news gathering requirements. MRC TwinStream and MRC CodeRunner. The microwave systems that help keep you ahead, from the MRC Product Group of Adaptive Broadband Corporation. Call us today for more information.

MRC Product Group

20 Alpha Road, Chelmsford, MA 01824-4168 USA

Tel, U.S. & Canada:

Telephone:

Facsimile:

Email:

Web:

1.800.490.5700

+1.978.250.1110

+1.978.256.6225

mrc@adaptivebroadband.com

www.adaptivebroadband.com



ADAPTIVE BROADBAND™

Broadband Access | Digital Video | On-Line Transactions | Internet Satellite

Circle (48) on Free Info Card

RTS TW

PROFESSIONAL INTERCOMS



One tough performer you can count on.

The Telex® RTS™ TW intercom system. The performance you need day in and day out. The flexibility you need to meet changing conditions. More than 25 different components give you an almost infinite variety of configurations. The RTS TW operates in full duplex mode for up to 50 user stations. Solid state circuitry enables dual channels through a standard 3-pin XLR. The system's high quality equipment is broadcast standard for production with IFB and camera ISO. For solid performance and thick-skinned durability, depend on the RTS TW by Telex.

Telex®

© 1999 Telex Communications, Inc.

Circle (49) on Free Info Card

ford to support in terms of drive capacity and bandwidth, but as you add storage capacity, multiple drives can be striped for higher bandwidth and better resolution. Analog I/O is fine for many applications, as is Firewire for a DV production environment. On the more expensive side, serial digital I/O provides the bridge between the various "lossless" compression schemes available and delivery in the real world of digital betacam post and broadcast. Speaking of that "real world," looking at your graphics, composite, etc. on some form of NTSC monitor (perhaps even a waveform monitor) is very useful in avoiding some of the problems that can be involved when delivering computer output to an NTSC post or broadcast operation.

Board manufacturers and software developers generally have a list of preferred or "authorized" partners that are supposed to be compatible with each other. This is a good list to check. Most boards are bundled with some kind of basic editing application. On a basic level each is as good as the next, and usually offer an upgrade path based on plug-ins or alternative software.

Networking and shared assets are an important part of today's production environment. Even the smallest shop will want to choose applications that are compatible, running on platforms that can communicate with each other.

Ethernet comes for free with most new computers and other network solutions are becoming more "user friendly" all the time, so it's no longer mandatory to stay within one operating system. Bear in mind, however, that some applications have mutually exclusive requirements when it comes to networking, so deal with specifics when discussing implementation with your VAR or product representative.

In closing, let me mention a preference for using "external devices." CDRs, MOs, and hard drives all generate heat and require additional power supply, either of which can stress out your computer. The extra expense of an external device is an investment in reliability, and, if you must work on a piece or reconfigure, it's much easier to repair or replace a unit that is outside the box. ■

Marc Boeddeker is Director/DVD Author with Producers Post, Burbank, CA

Applications
THEATER, INDUSTRIAL, BROADCAST

Usage
PROFESSIONAL INTERCOMS

Product
TWO WIRE

Brand
RTS

Name
TELEX

11:59:54 PM
11:59:55 PM
11:59:56 PM
11:59:57 PM
11:59:58 PM
11:59:59 PM

DECEMBER 31ST, 1999. SOMETIMES ANALOG IS GOOD.

This is promising to be the biggest year ever for live sound. Multiple major artist tours, regional tours, one-offs and industrials are getting a chance that only comes along every thousand years or so. Choose the console that provides you and your clients the best return on investment, operator familiarity, reliability and legendary Yamaha quality and customer support. Do your first gigs of the next thousand years with the biggest selling large frame sound reinforcement console of this millennium. Call your Yamaha Commercial Audio dealer today or call us at 714-522-9000 and we'll refer you to one. Time is running out.




Yamaha PA Web Site — www.yamaha.com/proaudio

©1999 Yamaha Corporation of America • 6600 Orangethorpe Avenue, Buena Park, CA 90620 • Yamaha is a registered trademark of Yamaha Corporation.

Circle (50) on Free Info Card

www.americanradiohistory.com

Digital Solutions

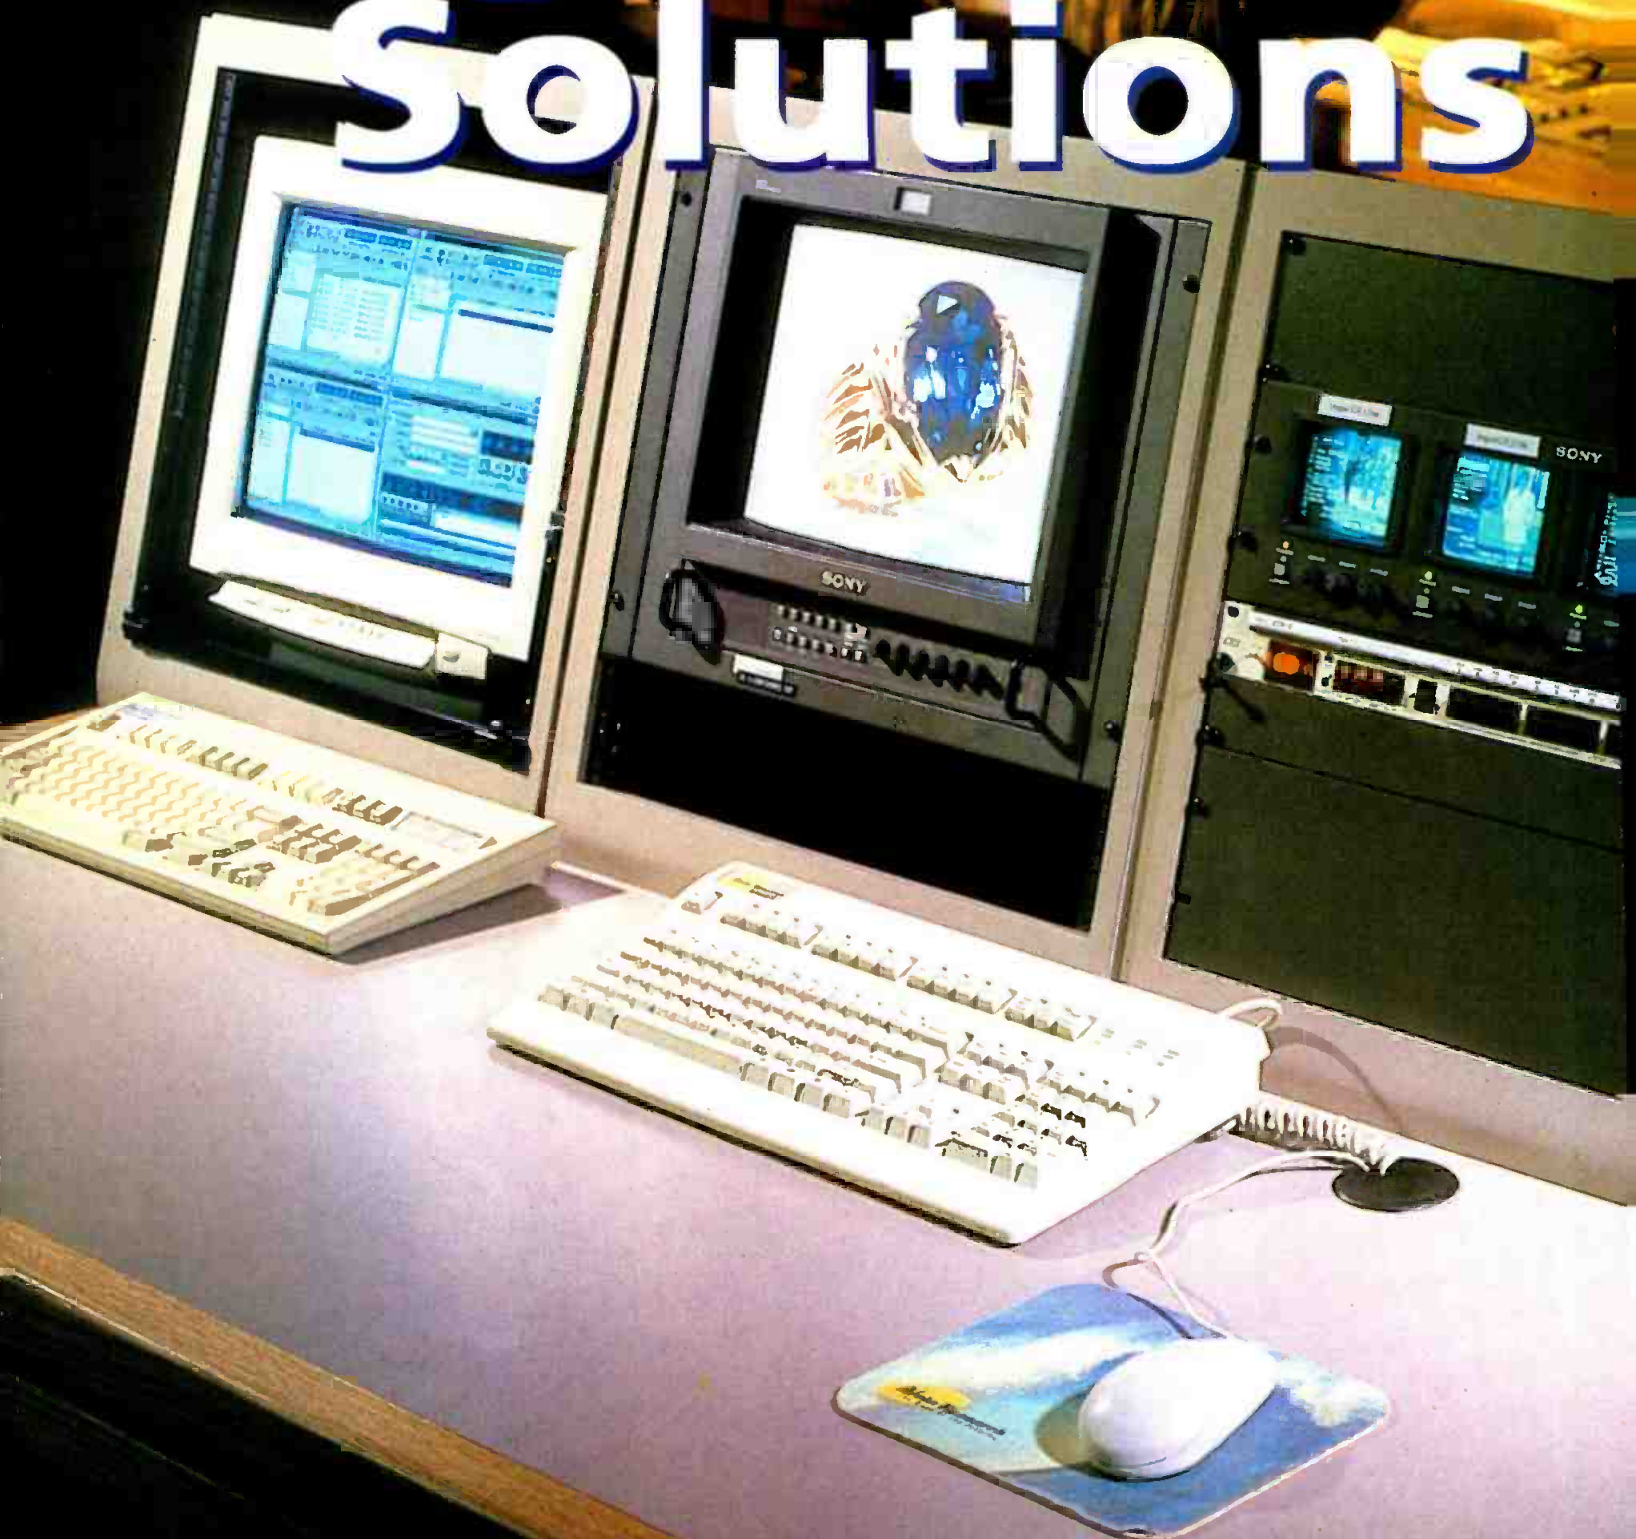

Home Shopping Network in St. Petersburg, FL, showing the Vela RapidAccess video server.
Photo by: Jason Marsh Photography.



Video servers..... page 92


Posting digital audio page 98

Routing for digital facilities..... page 102



VIDEO SERVERS

Britain's BSKYB is currently using two different Tektronix Profile systems. The first part utilizes, per Profile, one SDI record and three SDI outputs, encompassing 48 channels with 100% redundancy. The second, NVOD system, uses Fibre Channel and currently utilizes four channels of output per Profile. It has 48 channels working with Fibre Channel, 12 each main and reserve channels with 100% redundancy.

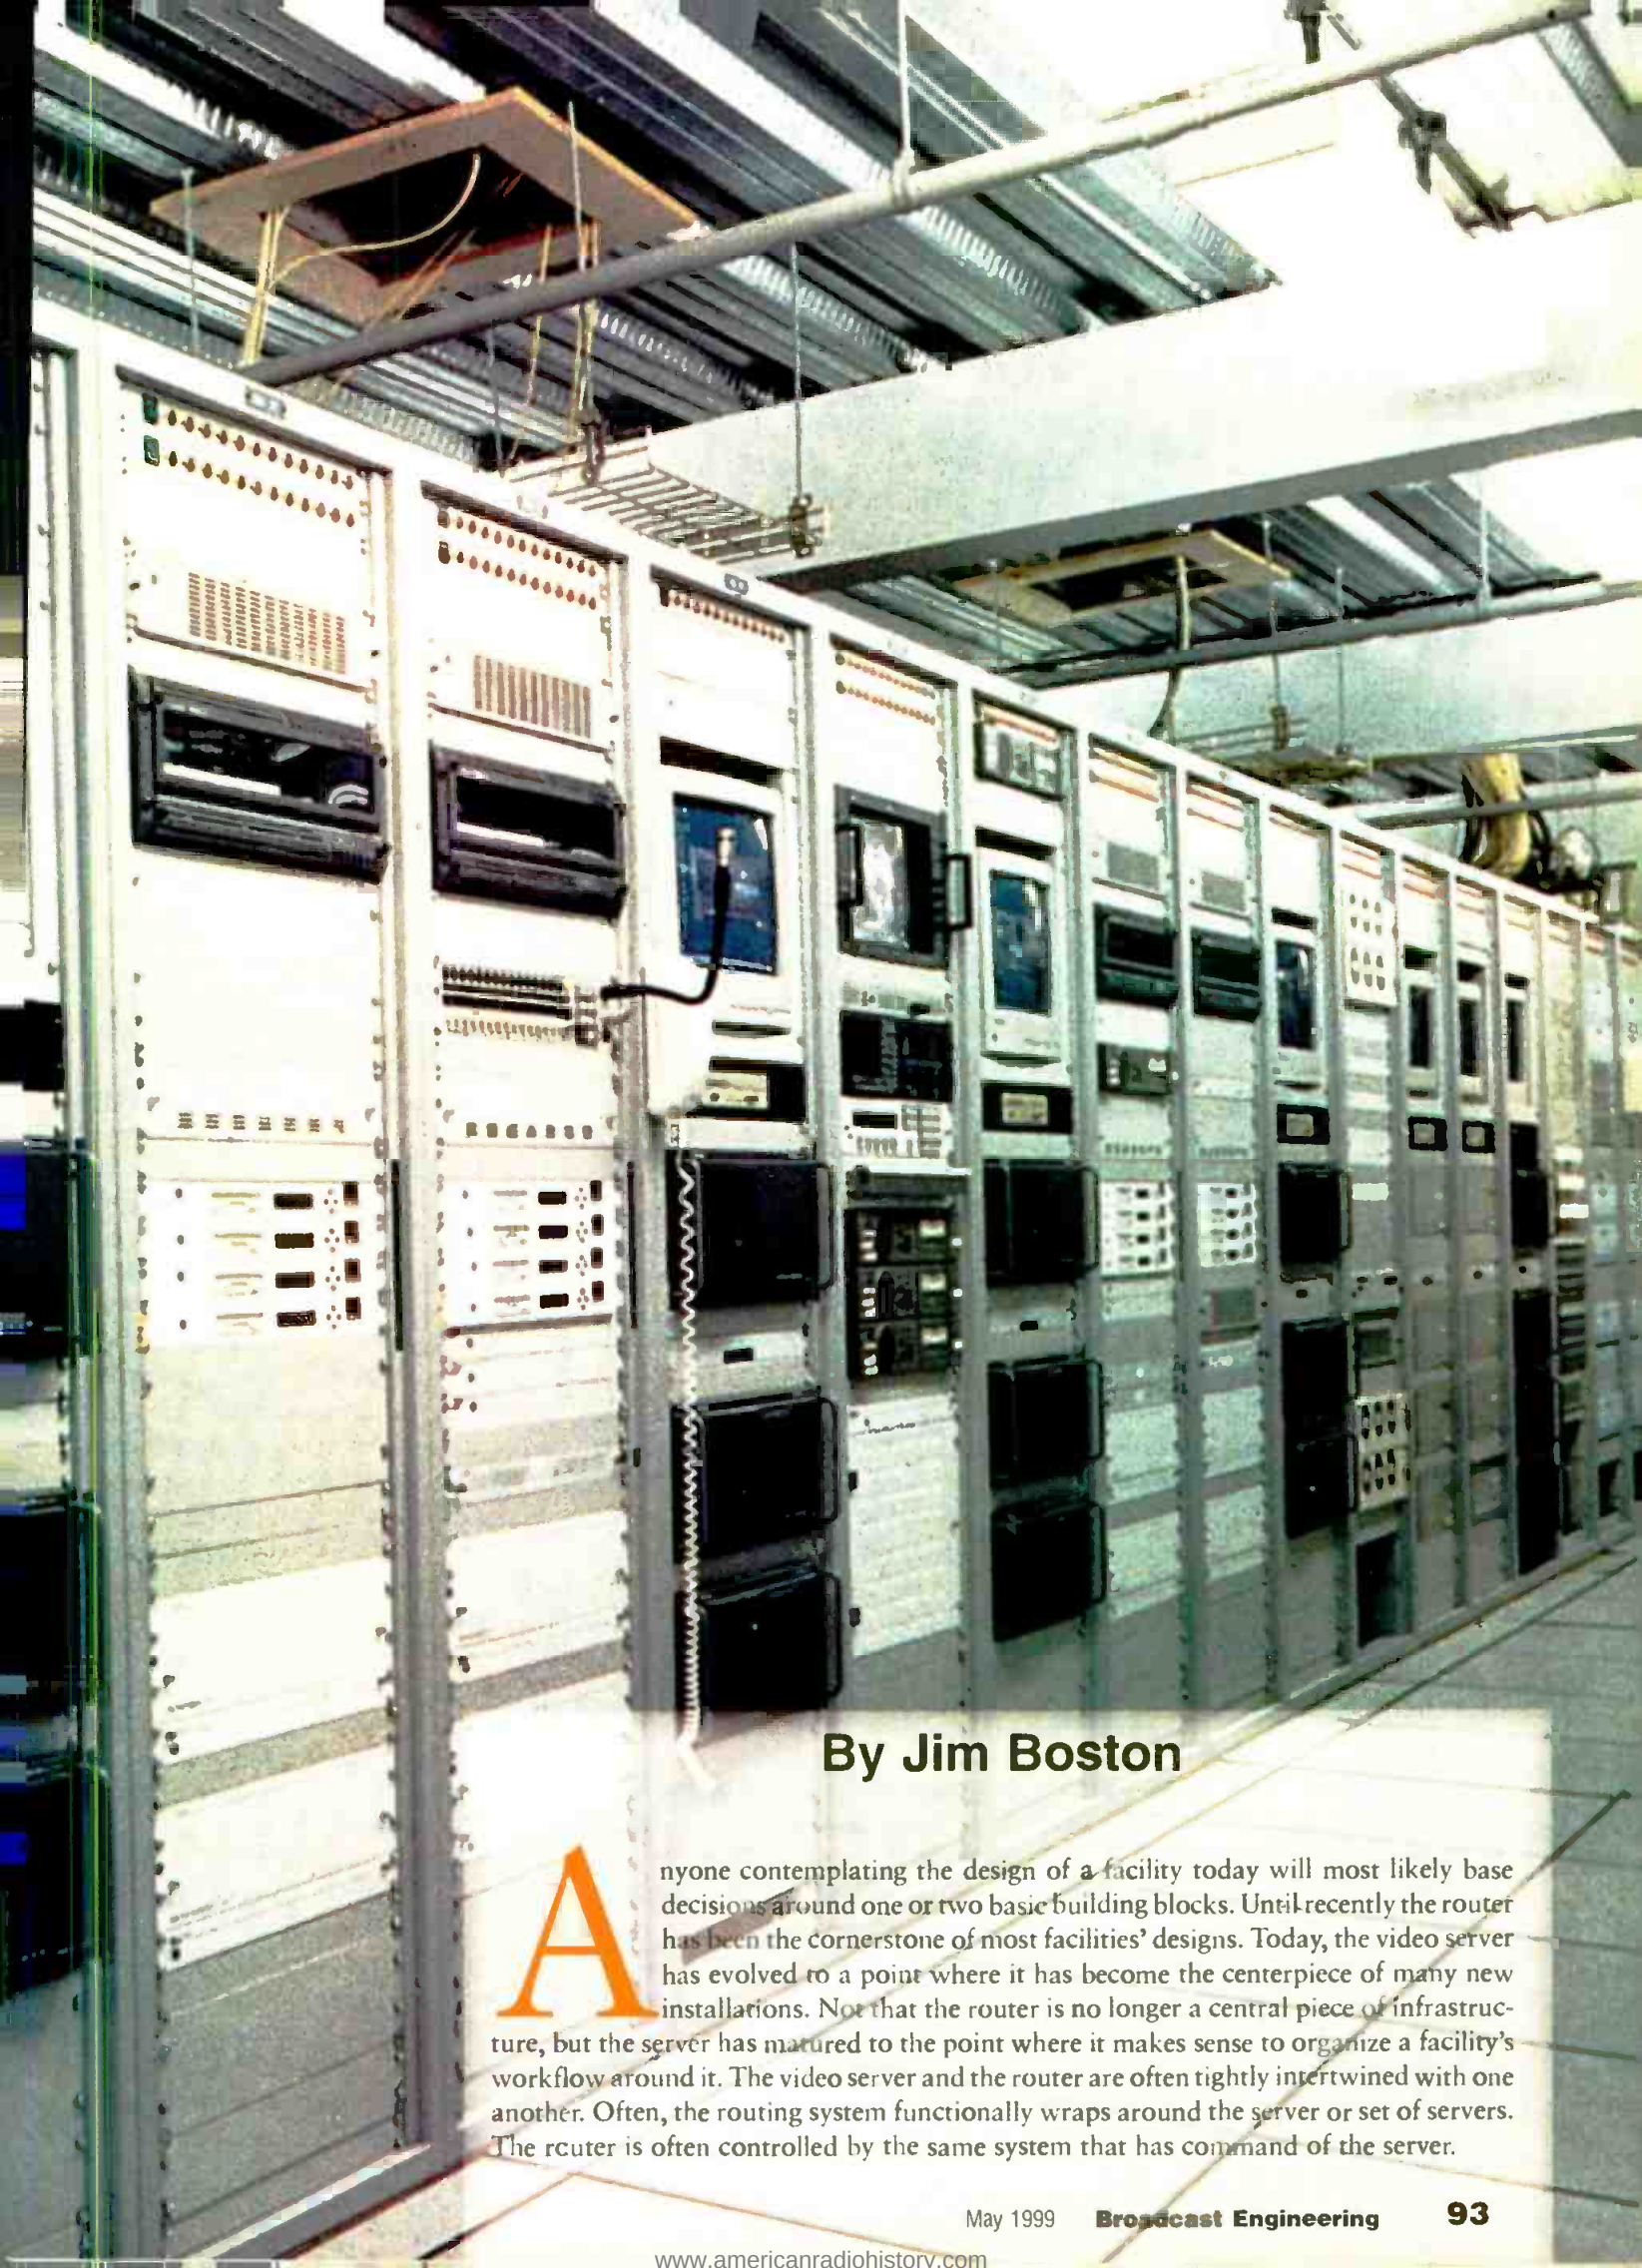

By Jim Boston

Anyone contemplating the design of a facility today will most likely base decisions around one or two basic building blocks. Until recently the router has been the cornerstone of most facilities' designs. Today, the video server has evolved to a point where it has become the centerpiece of many new installations. Not that the router is no longer a central piece of infrastructure, but the server has matured to the point where it makes sense to organize a facility's workflow around it. The video server and the router are often tightly intertwined with one another. Often, the routing system functionally wraps around the server or set of servers. The router is often controlled by the same system that has command of the server.

A man in a red shirt is seated at a large, complex digital audio mixing console. He is looking towards a computer monitor that displays a waveform. The console is filled with numerous buttons, knobs, and sliders. The scene is dimly lit, with a warm, orange glow from the monitor and the console's lights. The title "Posting digital audio" is overlaid in large, bold, yellow letters across the center of the image.

Posting digital audio

Audio mixer Rob Fritts puts an AMS Neve Logic 2 console with 24-track AudioFile through its paces in Henninger Video's Mix One suite.



By Rob Fritts

Revolutionary advancements often turn out to have little long-term impact on the way business is conducted in the audio field. Quad sound, for one, seemed liked an interesting concept, but it failed to attract the attention of a buying public that was satisfied with stereo.

CD quality

Coined in the early days of the compact disc, it was a nice phrase. If the poor standard of these early recordings had not been surpassed, the long-term viability of this medium may have been jeopardized as well. Nonetheless, digital technology has continued to develop, and it is fair to say that the proliferation of tools now available to the audio engineer and his or her clients constitutes a revolutionary departure from previous work methods. These changes apply equally to the recording and audio post industries.

As an audio mixer with Henninger Digital Audio, I have had the opportunity to witness the changes in professional audio. Most post facility clients have a fairly sophisticated knowledge of the tools that are now available, and yet there are times when a clear understanding of exactly what they are, and how they might best be used would help producers in their preproduction planning. In this article we will lay out, in simple and easy-to-understand terms, the areas where digital technology has changed the rules of the game. Armed with this information, you should be able to get the best audio possible and stay within your budget.

There are three essential areas: digital audio workstations (DAWs), digital consoles and surround sound mixing. Strictly speaking, surround sound is not functionally dependent on digital technology. In the real world, however, multispeaker mixing nearly always incorporates digital technology, and therefore, it makes sense to discuss the topic within the context of this article.

In many ways digital audio posting is identical to working in the analog realm. Rule #1 is simple: Get the cleanest field sound possible. Although digital processes can be applied to scrub unwanted noise from source material, nothing matches source audio recorded with care. Most field work still comes to us on analog tape, but if you're working in the field with digital equipment, make sure to stay below 0dB. Analog media are forgiving as far as levels go, but once you top the 0dB level in a digital recording your sound will clip, and the result isn't pretty.

Digital audio workstations

What is a DAW? At its most basic level, a DAW combines a multitrack recorder and an editor. There are two distinct markets for DAWs. One is musicians who need access to software that lets them record performance data on a piano-like keyboard and send

digital audio

it out to synthesizer and sampler modules that are part of the system. Those of us working in the audio post field may like working on a keyboard as well, but you'll find less need for sequencing software in our area of the business.

The other market, audio posting, relies more on software that relates the placement of audio events to picture using SMPTE location markings. The good news for clients is that the price

effects, plus a stereo music bed that requires limited massaging, you might be best served by posting at a facility that can capably handle limited requirements only and which charges less.

Let's take a look at a real-world situation, one that leans heavily on the speed and power of a DAW. Henninger posts "Ravens Report," which is broadcast weekly on the Fox affiliate in the Baltimore area. A producer for the NFL Baltimore Ravens shoots footage of a game on Sunday, and then heads into an offline suite on Monday, where he compiles highlights on an Avid system. On Thursday the producer online the project while a narrator is in our studio

started the ball rolling when they introduced the O2R several years ago. This console brought automation and on-board DSP to a much broader base of users, and the unit's success has brought heated competition to the field. Panasonic, Mackie, Tascam and others now offer new digital consoles that carry lower list prices. Should you post your project in studios that rely on boards like these, or do you need to pop for the higher-priced spread? Let's take a look at the issues involved.

As I mentioned, one of the nice things about the affordable boards is the fact that they're making automation available to more engineers and their clients.



Henninger Digital Audio's Capitol Facility is equipped with AMS Neve' Logic 3 post-production systems and Audiofile DAWs.

barrier on DAWs has dropped. Initially, this technology relied exclusively on proprietary hard-drive recorders. These days many DAWs piggyback onto off-the-shelf PCs and Macs, reducing the prices of the systems drastically. Personal computers are getting faster all the time, and greater speed translates into more tracks and digital signal processing power (DSP) as well.

Some studios continue to rely on stand-alone editing systems; Henninger uses AMS Audiofile DAWs. The decisions you make regarding where to work, and how much to spend on the audio post process should be made with an understanding of how complex your audio needs are. Do you anticipate eight tracks or so of sound effects, another eight for dialog, plus multiple music tracks? If so, be sure you're posting at a facility that can handle multiple sources on the input and output sides of the DAW. On the other hand, if you expect only one or two tracks of dialog and

recording the script. This recording goes straight into our Audiofile. Having lots of recording time available on hard disk is critical. Recording to tape, and transferring preferred takes to a DAW later would be possible, but slow.

On Friday we get four online audio tracks, sync sound from the camera, a single feed of the stadium announcers calling the game, plus a couple of tracks of in-studio voiceover material. While loading this material into the system and preparing to add sound effects, music and the narration we've recorded, the producer is creating a virtual set in his online mix. We hand off the final audio tracks to him on Friday evening, and the show airs on Saturday. Without an extremely flexible and powerful DAW and automated mixer this kind of audio post work could not be done.

Digital consoles

Recent advancements in digital mixing boards have been exciting. Yamaha

Once a dream, automation — of levels, EQ changes, effects inserts and dynamics — is now an indispensable part of the audio post process. Suppose, for example, that you have a natural soundtrack that is unobtrusive. In the middle of it, an explosion occurs, and you want to highlight that with EQ and effects. In the old days you'd try to find an open track and bounce the explosion to it. Assuming you had the track

(don't take it for granted), you'd then have to dedicate an effects device to the explosion.

Using most any of the digital consoles on the market today, you'd be able to create a snapshot setting for the explosion and have it kick in at a point — down to the subframe level, that you want. Once the moment has passed, your settings could go right back to where they had been, saving you the hassle of dedicating a track and an effects device permanently to the explosion.

What do you get when you work on a higher-end digital console? Generally speaking, much better A/D, D/A converters. Real-world sounds come into our systems as analog sources. They need to be translated into digital streams. The real shell game behind the CD quality catchphrase was the sale of the notion that all digital audio is the same. Not only are the sampling rate (the number of audio pictures taken per

second) and the bit depth (levels of volume distinctions captured) critically important, but there is also a quality distinction among the convertors that are on the market. Some of the newer, lower-priced digital consoles will argue that their convertors are equal to those in the more expensive ones. You be the judge. Keep a 30- or 60-second piece of your favorite audio — preferably one that contains soft and loud passages and complex waveforms — with you when you go into different studios. Have this piece recorded to various systems and begin to make your own judgements.

One clear advantage of the larger boards is their busing and routing schemes, which are much larger than anything found on their smaller siblings. Again, knowing your needs is critical. You will not be able to take in as many sources and route them to as many destinations with the smaller consoles. Maybe you don't need the kind of power that the larger boards offer, in which case why pay for it?

Now is a good time to talk about data storage. There is a distinction between the way smaller consoles handle back-up and the methods used by the larger boards. Some of the smaller boards back up to 3.5-inch floppy disks, but only the automation moves are being stored, and so you'll need to separately store the audio. This can be OK, but if you need to make changes to a show three months down the road, you might not want the hassle of having to scrounge around for your audio tracks. Our systems back up an entire project — including the audio itself, to an 8mm Exabyte drive. Knowing that they can grab a single tape, load it into our system and be back where they were the last time they worked on a project is a source of comfort to many Henninger clients.

Surround sound mixing

5.1 audio refers to mixes that have a pair of front stereo images, another pair in the rear, and a sub-woofer, the .1 to carry all that sexy low-end stuff. Very often there's another speaker dedicated to dialog as well. More and more material is being mixed in surround sound mode, which differs from the Dolby Pro Logic concept in one significant area: Dolby carries the same information to the rears that's going to the front speak-



The price benefits offered by PC and Mac-based piggyback DAWs make them attractive alternatives to some facilities. Henninger has chosen the AMS Audiofile, a stand-alone system, for its post needs.

ers, whereas true Surround yields a quad-like, four-way imaging (plus the sub-woofer).

Be careful when you use a mixer that claims to be a surround sound board. In one carefully delimited sense, any board that has six or more speaker buses can claim to be a Surround board, but unless the console lets the mixer monitor each output against source, its usefulness in Surround mixing sessions is limited. Again, the more expensive consoles will allow you to study your surround sound mixes in a more detailed fashion.


As HDTV and DVD become reality, the opportunities for audio mixers to do better work will expand, because we will be shucking off the current bandwidth limitations that we operate within. Let's say you have a scene where a mouse is walking across the room. We won't have to compress the sound, and so we'll be able to get that sonic image in much more accurate detail. You'll need to know just how that sounds, and what the imaging is like, so choose your post facility accordingly. Expect viewers to become more demanding in the quality of audio they expect as the quality of visual imagery they experience at home gets better and better.

Be sure that your facility knows how to handle DVD mastering. We master to Tascam DA-88 tape at Henninger, using six tracks for our DVD projects. A DVD authorer will want tracks that have been properly laid out, with maximal signal on each one. Your mixer must know how to create a sphere of audio within these tracks, so that the imaging flows naturally from one speaker to another.

One final topic needs to be addressed before we close. The cost of offline edit systems, primarily Avids, has dropped drastically. That means that more producers are able to work at home on picture and sound. However, we're seeing some problems that come when producers who are not experienced audio engineers prep audio tracks. The Avid OMF (open media file) protocol has really caught on, and that's a very positive development. OMF lets different systems work on the same files, but be aware of the sample rates of digital sources in relationship to the Avid sync reference. For example, if you're loading music from a CD with a sample rate of 44.1kHz and your Avid is sync referenced to 48kHz, you will hear clicks in the music. Also, note your pan pot settings on the console and if the Avid is set for stereo or mono when loading in sources. If you create any fades in the audio, make sure each one is rendered. Making the right adjustments and proper sample rate conversion is key to a successful OMF conversion.

Notwithstanding these problem areas, the proliferation of affordable offline editing systems is another indication of how exciting digital technology has made the post field. In the audio world there have been many changes in the last several years, and more are on the way. Stay abreast of them and you're sure to make the wisest decisions when it comes time to choose an audio post facility. ■

Rob Fritts is an audio mixer for Henninger Digital Audio, Arlington, VA.

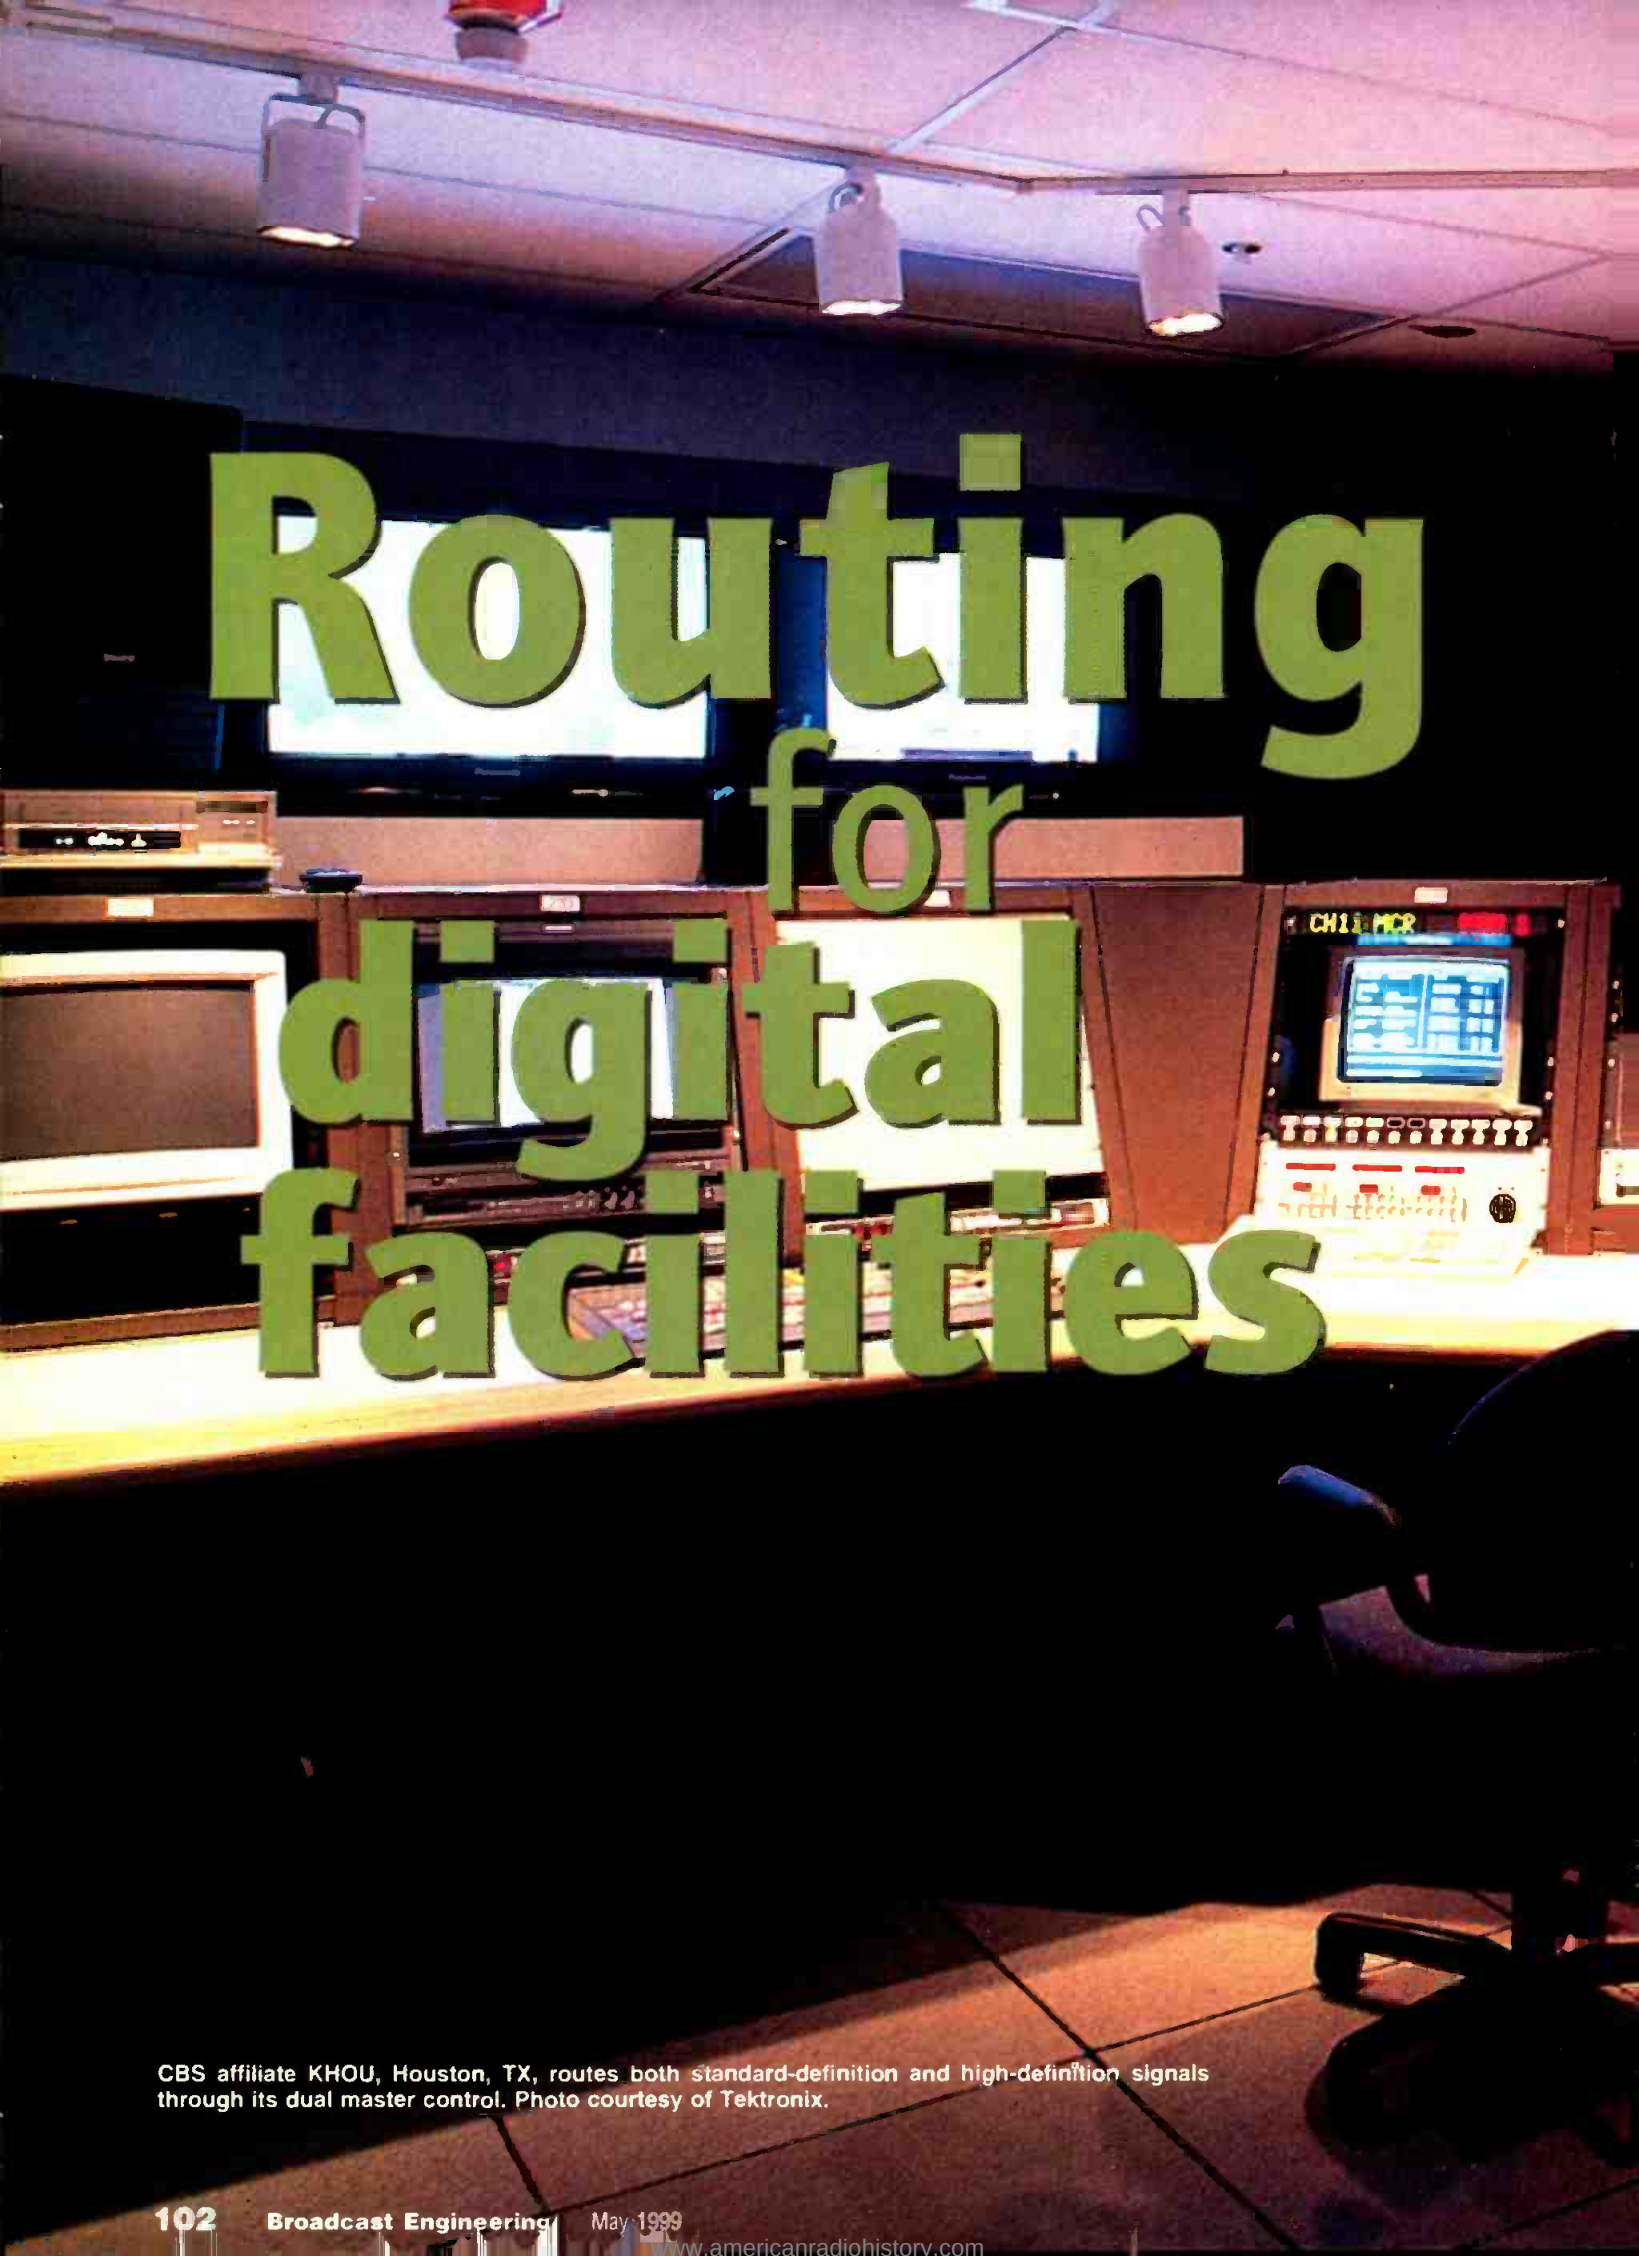

Routing for digital facilities

CBS affiliate KHOU, Houston, TX, routes both standard-definition and high-definition signals through its dual master control. Photo courtesy of Tektronix.



By John Luff

Among the least glamorous of purchases in the television and video production industries is routing equipment. It is hard to explain to clients, or financial managers, just what a routing switcher adds, whether the end result is a broadcast signal or the product of a production company. Effective and carefully integrated routing systems can help obtain the most from hardware in ways that increase the utility of all connected assets. Let's look

lets, often running as windows NT 4.0 processes. As with anything in your facility, be conscious of Y2K issues when choosing routing. For the most

the desire to interconnect the islands digitally becomes important, the question of how to manage the signals rises to the top of the "to do" list for the

covers both composite and component digital video). But HDTV and DTV have added new flavors that must be interconnected inside and between is-



New Products & Reviews

Applied Technology

Matrox DigiSuite and DigiServer DTV products

BY ALAIN LEGAULT AND MARCO LOPEZ

One of the goals of EBU/SMPTE Task Force for Harmonized Standards for the Exchange of Program Material as Bitstreams (for more information see Computers and Networks, January through June 1999) is to guide development of new TV production technology. Two products that incorporate technology choices in line with the Task Force recommendations are the Matrox DigiSuite DTV digital video editing platform, and the Matrox DigiServer DTV dual-channel multistandard audio/video codec card.

Matrox Video Products Group designs and manufactures a complete line of open-architecture, PC-based, broadcast-quality digital video hardware and Windows NT development tools for OEMs, systems integrators and end users in the broadcast, cable and post-production industries. DigiSuite prod-

time delays and multilayer effects compositing workstations.

To meet the needs of these customers and help them take advantage of cost-effective PC-based tools as they move toward DTV, Matrox analyzed the available technologies and made new product implementation choices in the following areas:

- Audio and video I/O;
- Compression formats;
- Connectivity interfaces;
- Software APIs;
- Interchange file formats.

Audio and video I/O

In the foreseeable future there will continue to be a huge installed base of analog equipment in TV stations, so Matrox DTV products support all the legacy analog and digital video and audio I/O formats. Composite, Y/C, and analog

component I/O channels are standard. SDI is the clear choice for digital I/O. Because most new professional gear supports SDI, it is becoming less expensive to implement. The infrastructure exists in facilities and SDI coexists with SDTI.

Line-level, balanced and AES/EBU audio continue to be supported. In keeping with the EBU/SMPTE recom-


mands. Conventional stereo requires two I/O channels. To support both simultaneously requires eight I/O channels.

Compression formats

The EBU/SMPTE report recommends the use of DV and MPEG-2 compression formats. The Matrox DTV products support DV, DV50, and MPEG-2 4:2:2 I-frame compression formats for editing. Analog video can be digitized in any one of these compression formats. In addition, MPEG-2 4:2:2P@ML and MPEG-2 MP@ML output are provided for distribution purposes.

Editing Formats: Currently, the interface between camcorders/VTRs and nonlinear editing systems is via uncompressed video (analog or SDI) regardless of the compression technology used in each individual device. The exchange of compressed video between devices using a common compression scheme offers significant benefits. Quality is preserved by avoiding multiple decompression/compression passes and faster-than-real-time transfers of video material are possible. DV native editing systems are required to fully realize these benefits. The DV formats include Digital-S, DVCPRO and DVCPRO 50, DVCAM, and the DV "Blue Book" specification used by several vendors. EBU/SMPTE tests have shown that DV and Betacam SP are comparable in terms of video quality. DV50, with its 4:2:2 pixel structure, can be used for more intense post-production work such as multilayer compositing and chroma keying. EBU/SMPTE tests have shown DV50 and Digital Betacam to be similar in terms of video quality.

DV25 and DV50 have bit rates fixed at 25Mbps and 50Mbps respectively. To achieve a greater range of video quality vs. storage space flexibility in the editing station, DigiSuite DTV supports the MPEG-2 4:2:2 I-frame format between 10- and 50Mbps

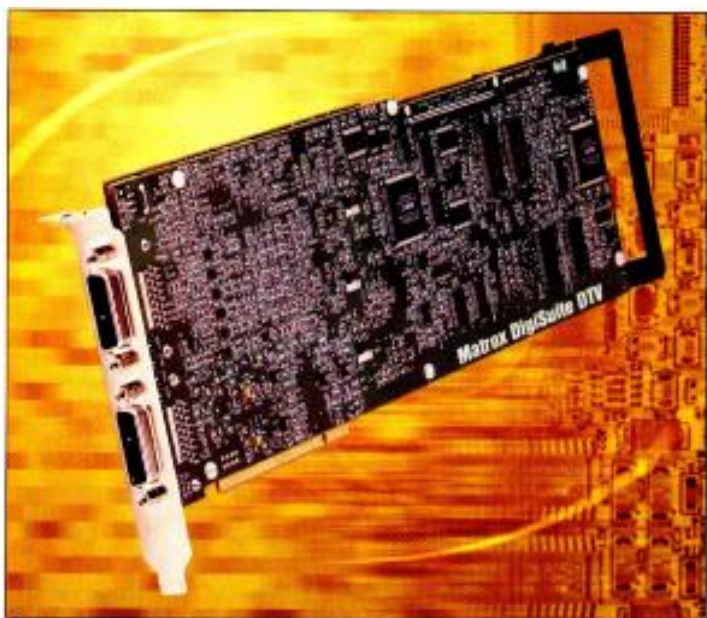

Matrox DigiSuite DTV digital video editing platform incorporates technology choices in line with recommendations from the EBU/SMPTE Task Force as they apply to editing and server systems.

ucts are currently being used in nonlinear editing systems, video servers, DDRs, character generators, commercial insertion systems, instant replay systems,

recommendations, Matrox DTV products provide eight audio I/O channels. DTV surround-sound (also known as the 5.1 format) requires six audio I/O chan-

Step up to **HIGH DENSITY**

with Datatek's new D-2800 series of High Density
Digital Video Routing Switchers

256 x
256



256 x 256 Digital Video in 44 RU
192 x 192 Digital Video in 22 RU
128 x 128 Digital Video in 11 RU

192 x
192



128 x
128



Datatek
offers the
perfect solution
for Digital Video and
Digital Audio. The D-2800
and D-2600 series of routing
switchers are also capable of routing
Analog Video, Analog Audio, RS-422
Bi-Directional Data, and Time Code.

Also ask about our new D-2600 Digital
Video Switcher for 48 x 32 in 2RU.

Every Datatek routing switcher is
delivered with twenty-eight years of
experience and a tradition of service.



For additional information contact
Datatek at 1121 Bristol Road,
Mountainside, NJ 07092
Tel: 908-654-8100 • 800-882-9100
Fax: 908-232-6381

Circle (51) on Free Info
www.americanradiohistory.com

What do we really need in a video server?

Shared Central Storage is the key.

let's **connect everything**

through a fast Fibre Channel network,

then we can add storage when we need it.

but, what about transfer rates?

there is **no transfer rate**

we go **direct to air**

from shared storage.

how many **channels?**

unlimited. we start with five playback channels
and one record channel per unit.

then tie the units together on a network.


we can build it as big as we want.

Right. A **modular design** with
no restrictions.

Brilliant

we gain the **flexibility**
of distributed processing using a
network-centric

What we

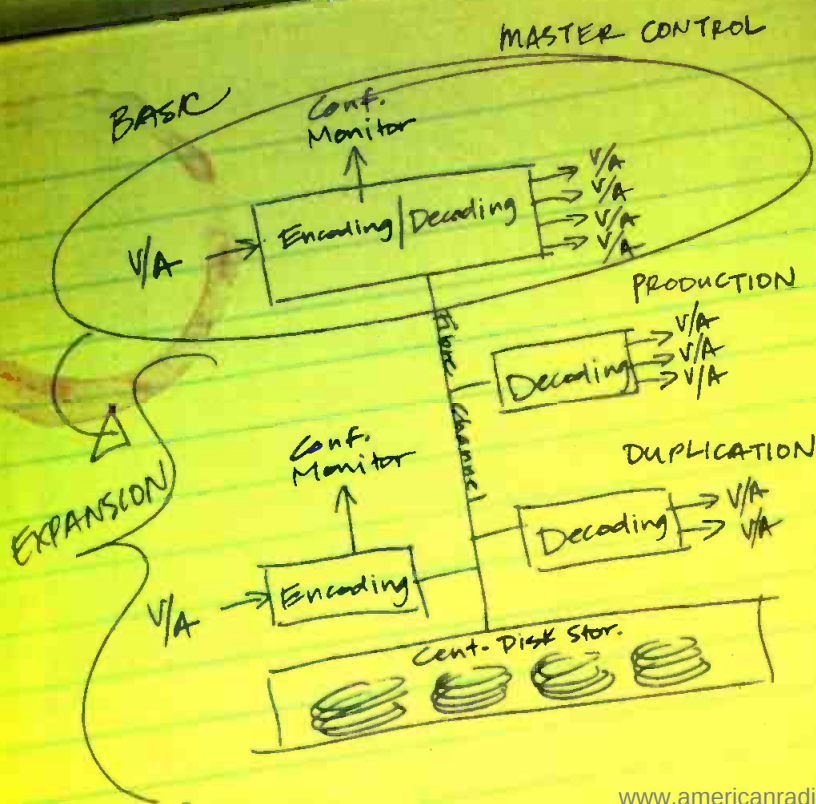

now,
how do we ensure recording quality?

let's build in a decoder for confidence monitoring.

Great. and a full-resolution
media browser

to instantly view any media we want.

Okay, what format?

MPEG

of course. It's the DTV standard.

It's government mandated.

but,
what about our budget?

It will cost thousands less
just by using off-the-shelf storage and
standard computer industry technologies.

so how do we make it happen?

call Vela Broadcast

architecture.


need is RapidAccessTM

Rapid Access from Vela Broadcast is everything you need in a video server. From the quality of high-performance MPEG to the scalability and flexibility of a network-centric architecture. Now your server can grow with you, and at a cost that will be pleasantly surprising. For more information, contact Vela Broadcast at 1.800.231.1349 (outside the US, 1.801.464.1600) or visit us on the web at www.vela.com.



Circle (52) on Free Info Card
www.americanradiohistory.com

**I WANT THAT CLIP AND
I WANT IT NOW!**

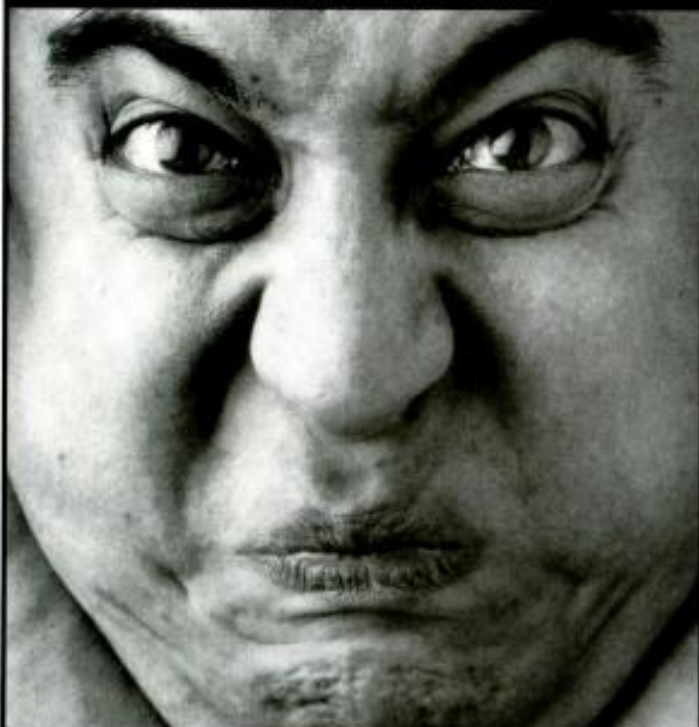

INSTANTLY LOAD A FULL CLIP & KEY CLIP
AT THE PRESS OF ONE BUTTON. THEN
PLAY OUT BOTH CHANNELS, IN SYNC. **DNF**
CONTROLS
Visit us at NAB booth #L34085, at (818) 252-0198 or on the web: www.dnfcontrols.com

Circle (53) on Free Info Card



MASTERKEY 1
SERIAL DIGITAL LINEAR KEYSER



The Most Versatile SDI Keyer in the Industry

- SMPTE 259M, ITU-R 601, 525/625 line
- 10 bit in and out, 12 bit processing
- 100% linear keying with adjustable transparency
- Full preview output
- Frame accurate mixes, wipes and fade to black
- Flawless chroma key
- Key area masking
- Failsafe program out
- Adjustable graticule generator
- 300 meters auto cable equalization
- ± 1.2 lines auto timing
- Remoteable front control panel

broadcast video systems corp.

40 West Wilmot St., Richmond Hill, Ontario L4B 1H8
Ph(905)764-1584 Fax(905)764-7438 E-mail: bvs@bvs.on.ca
Website: www.bvs.on.ca

Circle (54) on Free Info Card

for offline work. Batch digitizing of final clips and auto conforming can be done using DV or DV50 formats for finishing.

Distribution Formats: DigiSuite DTV provides transcoding from the DV formats to MPEG-2 4:2:2P@ML and MPEG-2 MP@ML for applications such as broadcast transmission, video server storage, archiving, DVD authoring and web video streaming.

Connectivity interfaces

The EBU/SMPTE report recognizes that multiple connectivity technologies must be used in a facility depending on the distance between devices, the nature of the material to be transferred, and the bandwidth required. Various interconnect technologies are needed for storage access, file transfers and media streaming. The Matrox DTV products implement on-board SCSI or Fibre Channel for high-speed access to storage devices. In addition to its use as a storage interconnect, Fibre Channel can also be used as the basis for a LAN to support fast file transfers. For media streaming, the Matrox DTV products implement IEEE-1394 and SDTI interfaces to provide real-time or faster-than-real-time streaming of digital media. Matrox's use of open file systems and networking architectures allows third-party hardware such as ATM and Ethernet adapters to be used.

Software API

The DigiSuite DTV products are based on the Windows NT operating system and DirectShow multimedia architecture. They use standard Windows NT I/O services such as the NTFS file system and NT network sockets to provide an open environment for a wide variety of third-party hardware and software. Abstraction of the DigiSuite DTV hardware through the DirectShow API significantly eases the process of porting applications from one hardware platform to the next.

Interchange file formats

DigiSuite DTV products employ the enhanced AVI video and WAV audio file formats. DV, DV50, and MPEG-2 I-frame data types are supported by Microsoft in the AVI file format. The Matrox enhancements support a 12TB AVI file size limit. Interoperability among various applications using AVI, such as NLE, CG, compositing, paint, and 3D animation, provides an attractive total solution for the user. Applications based on the Matrox DigiSuite SDK can interchange video files among applications without cumbersome file format conversions.

The use of standard file formats enables the interchange of media. However, users desire a higher level of interoperability that includes not only media interchange but also the platform-independent interchange of all types of project information. Advanced Authoring Format (AAF) is an industry-driven, cross-platform, multimedia file format that will allow interchange of media and compositional information between AAF-compliant applications. Matrox is one of seven AAF promoter companies.

The EBU/SMPTE report is an important effort that will help to determine the direction of our industry for years to come. It is the groundwork for the emergence of standards, but it also contains recommendations that can be implemented in products now. Matrox's DTV products incorporate many of these recommendations as they apply to editing and server systems. ■

For more information about Matrox's DigiSuite DTV products, circle (250) on the Free Info Card.

Alain Legault is vice president of product development and Marco Lopez is product manager of Matrox Video Product Group, Dorval, Quebec, Canada.



So reliable, you just plug it in and forget about it.

{Well, you could if people would quit asking
how you found something so reliable.}

It's no wonder more and more people are choosing CEC. Over the years, we've built a reputation for quality products that are simple to use and work from day one without a glitch. But that's just the beginning. Our customers also know us for utilizing leading edge technology, especially into the digital age. It all stems from our goal of providing you with a superior product. When you choose CEC, you'll notice the difference. In a good way.

1-800-733-5011 www.contelec.com
P.O. Box 270879 Dallas, Texas 75227



Applied Technology

Pro-Bel automated master control

BY KATHY BIENZ

Automated master control operations have traditionally been the domain of the larger broadcast facilities or of multichannel providers. Mainstream broadcasters have managed very well with the tried-and-true master control operator. However, with the advent of video servers and their popularity in providing spot playout, automated master control has become a requirement for virtually all TV stations. But more than just automating server playout, TV stations also need to plan for future moves into multichannel, multi-format operations, and determine how to best provide for seamless integration between the master control switcher and automation system.

This is maximally achieved by systems designed to work together by virtue of

video heads-up display (HUD) of the schedule, and special use of under-monitor displays in the master control monitor wall, give the operator the capability to monitor, augment and intervene in the automation schedule. The built-in automation buttons in the TX master control panel provide immediate and direct control of the schedule and, in conjunction with the HUD, allow easy and seamless interaction with the automation, including allowing the user to scroll the cursor up and down through the automation events, take or skip the next event, preview an event and hold automation.

The HUD output, provided by the automation controller frame, displays seven lines of the automation schedule. It is best connected to a video monitor

schedule editing, the operator can focus on the transmission operation in front of him/her, interacting with automation directly from the master control panel to accommodate late-breaking news items or schedule timing adjustments. This arrangement greatly minimizes the risk of error during high-pressure situations.

The HUD seven-line schedule is displayed in full-color, double-height teletext type characters and includes the time of day, date, schedule name and file name, total number of events in the schedule, operational error messages and warnings, and messages and warnings from the automation controller, device interface units and attached devices.

To complete a streamlined master control/automation work area, the master control monitor wall can be fully integrated into the operation. Up to seven under-monitor displays can be connected to the automation controller to provide large, easy-to-read automation status and labeling of the appropriate video monitor. Each under-monitor display is configured by a switch setting to display time-of-day and countdown duration of on-air event, title of on-air event, title of preset event, start time of preset event, video and audio source of on-air event and video and audio source of preset event.

The use of the built-in automation buttons in the master control panel combined with the automation system's HUD and under-monitor display interfaces provide important advantages. This tight coupling between the master control switcher and automation system yields a powerful and effective operating environment that is an excellent foundation from which to expand.

Multiformat, multichannel

Moving into a multiformat, multichannel transmission operation impacts



Pro-Bel automated master control goes beyond a serial link with rudimentary controls by offering built-in automation buttons in the master control, video HUD of schedule and under-monitor displays in the master control monitor walls, among other features.

having been developed and manufactured by a single company.

Beyond serial interfaces

The integration of Pro-Bel's TX Series of master control switchers and automation systems, including the new Meridian automation system, goes far beyond a serial link with rudimentary controls. Built-in automation control buttons in the master control panel, a

centered over the master control panel, such as between the PST and PGM monitors, thereby displaying the schedule directly in front of the operator. Thus, the operator's attention is not forced away from the master control panel and video monitors just to perform a simple automation change on the schedule editing workstation. This workstation can be set to the side and, while still readily available for major

Our Family already has HDTV.

www.sgi.com/go/hdtv

THE SMOOTH TRANSITION TO HDTV

Silicon Graphics® workstations and servers are already HDTV compliant. Whether you decide on 480P, 720P, 1080i, or simply stick with standard resolution, we have you covered. Silicon Graphics workstation-based solutions are at the heart of today's live broadcast graphics for news, sports and special events. Many of our customers are already editing HDTV content. Let our Origin™ video computing platform solve your media streaming needs, from thousands of MPEG streams to DVCPRO™ and uncompressed HDTV. No other open platform has as many media management and distribution applications. To find out more about Silicon Graphics broadcast, cable, and satellite solutions, check out our Web site at www.sgi.com/broadcast.

© 1998 Silicon Graphics, Inc. All rights reserved. Silicon Graphics is a registered trademark, and Origin and the Silicon Graphics logo are trademarks of Silicon Graphics, Inc. DVCPRO is a trademark of Matsushita Electric Corporation of America.

at the core of

entertainment



SiliconGraphics

Circle (56) on Free Info Card

www.americanradiohistory.com

SIERRA VIDEO SYSTEMS

Go to: <http://www.sierravideo.com>



ROUTERS

AUDIO

VIDEO

ANALOG

DIGITAL

4x4 to 128²

DAs

Put a Router on Your Desktop... OVERNIGHT

We've provided high-performance routing switchers to critical customers like NBC, CBS, and the U.S. military for 15 years.



Compact module design
7 year warranty

Exceptional value

Unique Trade-up/Trade-in program expands with your needs.



Contact us for free catalog and
"How to Buy a Router" brochure

info@sierravideo.com

530.478.1000

Circle (57) on Free Info Card

ATTENTION TOWER SPECIFIERS!

• WIRELESS • BROADCAST • COMMUNICATION


FREE

TOWER SPECIFICATION GUIDE

Call Today!
800 748-3817

Engineering Factbook
on Site Analysis and
Tower Planning

PiRod's Tower Specification Guide is packed with the technical information you need to evaluate tower sites and identify critical tower performance guidelines. It's indispensable for wireless, broadcast and communication tower specifiers.

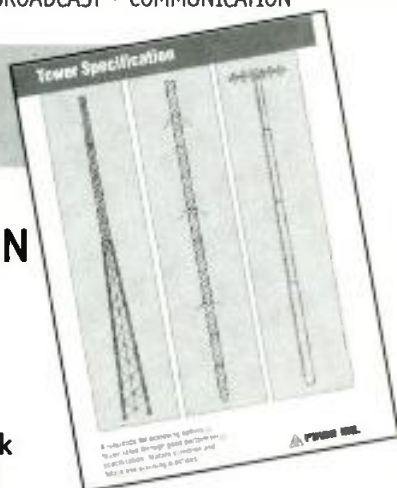

Call for Your Free Copy Today!



1545 Pidco Drive P.O. Box 128 Plymouth, Indiana 46563-0128
(219) 936-4221 Fax (219) 936-6796
E-mail us at pirod@pirod.com Visit our website at www.pirod.com

Circle (58) on Free Info Card

both the master control and automation functions. The key is to ensure that master control and automation channels can gracefully expand once, twice and more without doubling or tripling the workload. Exploring multiformat, multichannel issues goes beyond the space available here, but the mechanisms described above for a well-integrated master control/automation system carry over into multiformat, multichannel operations.

There are several ways in which Pro-Bel solutions accomplish this:

a) Two choices of master control switcher panels to provide the appropriate functionality and physical size for the operation.

b) One-button selection of the channel(s) to be controlled, with any mix of standard-definition or high-definition electronics.

c) Automation controllers comprised of real-time, frame-accurate electronics units with main and back-up processor

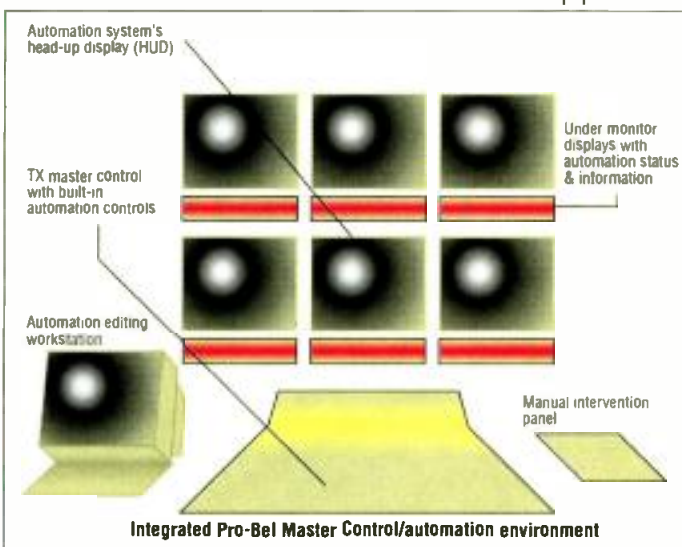


Figure 1. An integrated Pro-Bel master control environment provides the major components of the complex infrastructure necessary for full operations support.

boards and PSUs that eliminate single points of failure which could affect all channels.

d) Schedules held in battery-backed-up memory in the automation controllers which are not impacted by fickle PC workstations, operating systems or operator learning curves.

e) External hardware-based manual intervention panels that can be integrated into the system, providing for automation control/interaction should any (or every) user PC workstation fail.

Multichannel systems must be streamlined and self-reliant, and selecting systems that best support this architecturally and operationally paves the way for effective transmission operations. Pro-Bel's integrated master control and automation systems provide major components of the complex infrastructure necessary for supporting operations in a rapidly changing and increasingly demanding broadcast environment.

For more information about Pro-Bel's integrated master control and automation systems, circle (251) on the Free Info Card.

Kathy Bienz is product manager for Pro-Bel, Melville, NY.

THE NEW AZDEN 400UDR BROADCAST UHF AT REAL WORLD PRICES

- 63 User-selectable Frequencies (794-806Mhz)
- Crystal-controlled and PLL-Synthesized
- Tone code squelch
- Dual antennas with BNC connectors
- XLR output with volume control
- Headphone Output with volume control
- Operates on 4 AA or +2V DC
- LED indicators for A or B antenna status, AF peak, Power On/Reception status
- Available microphone/transmitters with 63 User-selectable frequencies:
 - 41HT Uni-directional handheld
 - 41BT Bodypack (available with omni (EX-503M) or uni-directional (EX-505UM) lavaliers, or headset microphone)

**COMPLETE SYSTEM PRICES
START AT \$700**

AZDEN®

147 New Hyde Park Rd., Franklin Sq., NY 11010
(516) 328-7500 • FAX (516) 328-7506
E-Mail - AZDENUS@AOL.COM
Azden Home Page: <http://www.azdencorp.com>



24 vs 16 - NOW THAT'S UNFAIR

🏆 Get Maxim on your side. As the world's first 10-bit compact digital standards converter with a 24 point aperture it brings a new level of performance to the 1RU standards conversion league.

Now you've got the advantage of 50% more filtering precision than any other player in the game.

The result, on pictures with rapid motion content, is a perfect combination of sharp picture quality and signal transparency with the minimum of blur and judder.

Maxim builds on the winning strategy of Alchemist, the world-leader in standards conversion quality.



With an unbeatable line-up of features it's the top scorer for high-end use wherever space is at a premium.

MAXIM CVR500

For more information on MAXIM and the other standards converters in our range:

WHAT YOU'D CALL AN ADVANTAGE



Maxim CVR500

The world's first compact digital standards converter with a 24 point aperture, featuring integral fixed mode aspect ratio conversion, sample rate conversion for embedded audio delay and Rolltrack™.

COMPACT DIGITAL STANDARDS CONVERTER by



SNELL & WILCOX



Tel: (408) 260 1000, Fax: (408) 260 2800, e-mail: info@snellusa.com website: www.snellwilcox.com

Circle (64) on Free Info Card

www.americanradiohistory.com

HD conversion equipment

BY KENNETH HUNOLD

If your station will be starting from scratch—creating a brand-new digital facility dedicated solely to digital high-definition (HD) broadcasting—then you may not need any DTV conversion equipment. But for everyone else, simultaneous DTV and NTSC transmission will be a reality for the next decade, or so. Many broadcasters have stated that much of the programming on their DTV stations will consist of signals digitized and converted from their current 525-line programming schedule. For the purpose of this discussion, and perhaps at the expense of accuracy, current broadcasting formats will be referred to by their total number of scanning lines (e.g., 525- and 625-line systems) while new DTV formats will be referred to by the number of active lines (e.g., 480, 720, 1035, or 1080) with a notation for scanning mode where appropriate (480p, 1080i, etc.)

The need to change

Broadcasters and program producers will need to convert their signals between, or even among, the various production formats that will be available. Decisions must be made at the network, group, or station level as to which format(s) your station will need to support. Hopefully your viewers will be insulated from this confusion, as most receivers and accessories will receive any of the formats in the original ATSC Table 3 and display them all (although perhaps not in their original format.)

All analog standard-definition (SD) TV programs will need to be converted to DTV formats for transmission. This is commonly referred to as up-conversion, where 525-line signals are converted to 480p, 1080i, or 720p signals. This is not a trivial process. Anytime you are trying to make more out of less the challenge is to make the resulting high line rate signal look as if it has more information than it had with fewer lines. 525 to 480i conversions are a relatively straightforward case of A/D

conversion, often including composite (NTSC) to component decoding, if the conversion has not already been performed elsewhere in the system.

Can these images be enhanced, or be made to look better than they actually are? Within reason, yes. Processes similar to SD image enhancement can be performed, but there are often more choices of parameters. You must remember that any SD enhancement will be magnified on a larger display, along with the magnified image. This might also explain why overly enhanced SD images do not convert well to HD. What was thought to be subtle enhancement on a SD image might become objectionable in an HD image.

Motion and frame rate

Many of the standards converter/up-converter manufacturers have proprietary processes for motion compensation. These processes attempt to mimic the eye's response and reduce the visibility of *judder* in the converted image. Film originated material is usually shot at 24fps. The process of converting from 24- to 30fps is usually done in the telecine. The process involves repeating film frames over consecutive TV fields in a prescribed sequence. This results in each film frame being scanned at least twice. In our interlaced TV system, this results in a complete TV frame for each film frame (and then some). (Editor's note. For a detailed description of how this is accomplished, see Ken's article, "Understanding HD/SD conversion," July 1998.)

The relationship between 24Hz and 60Hz frame rates is such that odd-numbered film frames result in two 60Hz fields and even-numbered film frames result in three 60 Hz fields. An upconverter that can recognize this distinctive "3:2 pulldown" process can reconstruct the original film frame and upconvert the complete frame without introducing any temporal artifacts. These frames can be re-interlaced for display, if necessary. This process is also

useful in video compression systems, where repeated frames can be identified and recognized as redundant, saving bits.

Down and cross-conversion issues

Downconversion has its own set of problems. Whereas upconversion has the unique problem of trying to create more than what was originally there, down-conversion attempts to display an HD image using fewer lines. Downconversion takes advantage of a HD image being essentially an oversampled SD image.

In theory it is possible to create a better SD image from a HD master than you could obtain by using a SD camera originally. There are studios that are first transferring film to HD videotape, then downconverting the HD version to 525- and 625-line SD formats for distribution. In addition to creating a better SD product, this reduces the number of times a film has to be put up on a telecine to be transferred.

One special HD conversion tool that will find use in HD plants in the near future is one that converts between (or among) the various HD standards. This device could be called either a cross converter, or simply a converter. The primary function of a 1080i to 720p converter is to de-interlace the image and filter the line structure to 720 lines. The 720p to 1080i converter must interpolate between lines and output the displayed frame as interlaced fields. In light of the legacy material available, conversion between 59.94- and 60.00Hz frame rates could also be supported.

HD and SD sources will be coexisting for quite some time. Therefore, HD and SD conversion devices will be an operational necessity. Just as 525- and 625-line programs must be accommodated on a worldwide basis, HD and SD conversions will be a necessary part of television operations into the next century. ■

Ken Humold is project engineer with of audio/video systems at the ABC Engineering Laboratory, New York.

Acquire

& Deliver.

Multi-channel, Multi-format Video Storage Solutions from Drastic Technologies

Introducing the Media Reactor. The Innovative System for Cross-Format Simultaneous Shared Access on a Fibre Channel Backbone.



Drastic Technologies
12 Drummond St. Toronto Ontario Canada M8V 1Y8
Voice: (416) 255-5636 Toll free: (877) 725-0611 Fax: (416) 255-8780
www.drastictech.com E-mail: sales@drastictech.com

Circle (65) on Free Info Card

New Products

24p mastering recorder PANASONIC BROADCAST AJ-HD3000

switchable between 1080i and progressive modes, it is also capable of recording and playback at various frame rates including 60i, 50i, 24p, 25p and 30p.

800-528-8601; 323-436-3500; fax: 323-436-3660;
www.panasonic.com/PBDS
Circle (300) on Free Info Card



Digital video/audio routing switcher ISIS GROUP S8400

consists of a digital video/audio 8x4 routing switcher, a digital sync generator, color bar generator with source ID, AES tone generator, and intercom facilities capable of interfacing to the outside world.


888-622-4747; 530-477-2984; fax: 530-447-2986;
www.isis-group.com
Circle (301) on Free Info Card



Digital console SOLID STATE LOGIC AVANT

offers automation of all functions with write operations possible at any speed, on or offline; frame sizes range from 24 to 96 channels; all sizes offer control surface layering, allowing up to four inputs to be controlled from each physical channel.

+44(0)1865 842300; fax: +44(0)1865 842118; www.solid-state-logic.com
Circle (302) on Free Info Card

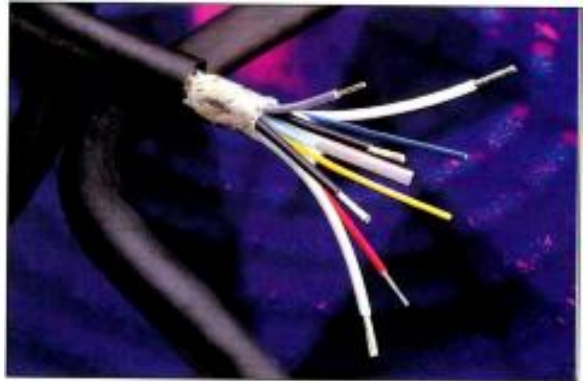

Fiber optic and copper composite camera cable

BELDEN WIRE & CABLE BRILLANCE SMPTE 311 CABLE

consists of two single-mode optical fibers, two 24AWG copper signal conductors and four 20AWG copper auxiliary conductors; stainless steel length member at the cable's core ensures ruggedness, flexibility and extended life.

800-BELDEN1; 765-983-5200; fax: 765-983-5294; www.belden.com
Circle (313) on Free Info Card

MPEG-2 encoder TIERNAN COMMUNICATIONS TE300A

4:2:0 MPEG-2 DSNQ encoder has a built-in QPSK satellite modulator for broadcast applications; unit is available with a remote control function (using ASCII commands) via the EIA-232 remote control port.

800-323-0252; 619-587-0252; fax: 619-587-0257; www.tiernan.com
Circle (304) on Free Info Card

PSIP system manager THOMCAST PEARL

ATSC-compliant PSIP (Program System Information Protocol) system manager is capable of creating and editing PSIP tables in the Electronic Program Guide; unit meets the requirements of the ATSC A/65 standard, and is a stand-alone system that can be implemented in a variety of configurations, independent of the encoder manufacturer.

+33 1 3490-3100; fax: +33 1 3490-3000; thomcast.thomson-csf.com
Circle (305) on Free Info Card

Got Gear?

Mark Brooks

Vice President of Engineering
East Coast
National Mobile Television
does.

RossGear

Terminal Equipment



"My first installation of Ross distribution and conversion gear was based on their features, specs, and Ross' reputation for quality engineering."

Subsequent installations have been based on the outstanding performance of the Ross products and my reputation for quality engineering."

"You see, National Mobile Television supplies trucks for major network's coverage of sports events. Our continued relationship with our customers is based on the quality and reliability of our trucks."

Ross' RossGear line has proven to be a factor in our success."

Mark Brooks

Vice President of Engineering - East Coast
National Mobile Television

The RossGear line includes audio distribution products, analog and digital video distribution products, encoders, decoders, analog and digital video keyers, telecine switchers, a frame synchronizer, a frame store, a video capture card, and a mini master control switcher.

Ross also manufactures the established line of analog production switchers and the new Synergy Series of digital production switchers "The DTV Switcher".



Switchers, Keyers,
& Terminal Gear



Tel: (613) 652-4886
Fax: (613) 652-4425
Email: solutions@rossvideo.com

www.rossvideo.com



Booth L20931

Circle (60) on Free Info Card
www.americanradiohistory.com

HD VTR

PANASONIC BROADCAST AJ-HD150

studio VTR supports 1080i standard for HD recording and playback; offers a variety of requirements of ENG, CCIR-601 and HD resolution EFP applications.

800-528-8601; 323-436-3500; fax: 323-436-3660;

www.panasonic.com/PBDS

Circle (306) on Free Info Card

Automated record/playback system

PANASONIC BROADCAST AJ-CM32

compact, half-rack width system accommodates an internal AJ-D230H DVCPRO VTR and offers internal tape storage of 32 large DVCPRO cassettes, representing up to 96 hours of broadcast quality program material.

800-528-8601; 323-436-3500; fax: 323-436-3660;

www.panasonic.com/PBDS

Circle (309) on Free Info Card

Plug-in card

LG ELECTRONICS RESEARCH CENTER OF AMERICA DTVCARD A1000

plug-in card turns a Windows PC into a DTV working environment; standard-size PCI-bus card features a DTV receiver with an ATSC decoder; signals are demodulated with LG's one chip VSB demodulator and then fed to the audio/video decoder for decoding and subsequent display on a standard PC monitor or an NTSC display; decodes all 18 ATSC DTV formats.

609-716-3505; fax: 609-716-3503; www.lgerca.com

Circle (307) on Free Info Card

Integrated clips and stills transmission

QUANTEL INC MOVING PICTUREBOX

provides features for live on-air presentations, including dual video outputs with dual moving keys, on-the-fly resizing of stills and clips, concurrent independent recording and clip-to-clip dissolves; standard storage is 30 minutes of DVCPRO50 video storage/10,000 frames of non-compressed stills.

800-218-0051; 203-656-3100; fax: 203-656-3459; www.quantel.com

Circle (308) on Free Info Card

4-port MPEG-2 decoders

- decode multiple MPEG streams over the PCI bus or ultra-wide SCSI interface
- single-slot PCI solution for NT-based workstations
- 4 analog video/audio outputs per card – drive up to 32 NTSC or PAL displays with multiple Quartet™ cards installed

CHOOSE THE QUARTET™ SERIES FOR:

- video-on-demand
- ad insertion
- kiosk applications
- video servers

Quartet™
4-port MPEG-2 or -1 decode

Quartet GL™
with single genlock input

Quartet GLi™
with 4 genlock inputs



SPECIALIZED TECHNOLOGY GROUP
A DIVISION OF STB SYSTEMS, INC.

1.888.478.2687
www.stbstg.com

© 1999, STB Systems, Inc. Windows NT is a registered trademark of Microsoft Corporation. ® (D)

Circle (61) on Free Info Card



Antenna line

GABRIEL ELECTRONICS INC. 5GHZ DIRECTIONAL FLAT PANEL ANTENNA LINE

wideband and 5GHz directional, flat panel antenna line for point-to-point applications is available for 24-hour shipping; units operate in the National Information Infrastructure (NII) band and spread spectrum band which is covered in the 5.25- to 5.850GHz operational bandwidth.

207-883-5161; fax: 207-883-4469; www.gabrielnet.com

Circle (310) on Free Info Card

THEY'LL NEVER KNOW WE EXIST. YOU'LL BE GLAD WE DO.

With a range of DVB, ATSC and MPEG-2 test and broadcast infrastructure equipment, Adherent is committed to providing the systems solution for broadcasters and developers.



Adherent ATSC DVB
Digital Video Broadcasting

AD953-II Stream Station II

- Real time monitoring of MPEG-2, DVB and ATSC transport stream parameters.
- Stream multiplexing.
- Simultaneous playback and recording.
- Picture and audio analysis at elementary stream levels.
- Seamless playout at up to 90Mbit/s.
- Powerful off line analysis.

AD991 Stream Source

- Seamless looped playout.
- Recording.
- Remote Control.
- DVB and ATSC formats.
- Large storage capacity.
- Bit rates up to 90Mbit/s.
- Extensive range of interfaces.

For more information contact Sencore,
tel: 1-800-SENCORE or (605) 339-0100
www.sencore.com or www.adherent.com

www.adherent.com

Circle (68) on Free Info Card



Waveform monitor

LEADER INSTRUMENTS CORP LV 5152D

digital/analog waveform monitor operates in both 720p and 1080i systems; monitoring functions include waveform (YCbCr or GBR), vector (choice of electronic or external graticule), picture and stereo monitoring.

800-645-5104; 516-231-6900; fax: 516-231-5295; www.leaderusa.com
Circle (311) on Free Info Card

Nonlinear editing system

AVID TECHNOLOGY INC NEWSCUTTER CUTS

DV-native digital nonlinear editing system is aimed at replacing traditional two-tape deck editing suites and includes a number of motion effects and advanced audio capabilities.

800-949-AVID; 978-640-6789; fax: 978-851-0418; www.avid.com
Circle (312) on Free Info Card

Updated software

PANASONIC BROADCAST VER. 2.0 SOFTWARE FOR DVEDIT

version 2.0 software for DVEDIT, Panasonic's DVCPRO nonlinear editing system, is now available; update offers a user interface running under Windows NT, DVCPRO component digital recording, and more than 110 real-time transition effects.

800-528-8601; 323-436-3500; fax: 323-436-3660;
www.panasonic.com/PBDS
Circle (303) on Free Info Card

Windows to the Web




www.pinnaclesys.com

Pinnacle Systems: Pinnacle Systems' broadcast products give professionals the cutting edge tools needed to create dazzling productions faster and more affordably than ever before. These innovative digital video manipulation tools perform a variety of on-air, production, and post-production functions such as the addition of special effects, image management, capture, storage, and play-out, as well as graphics and title creation.




www.midasconsoles.com

Midas have been manufacturing high-quality, flexible and sonically superior audio mixing consoles for nearly 30 years. They also offer instant service backup and an amazing three year warranty on all products.

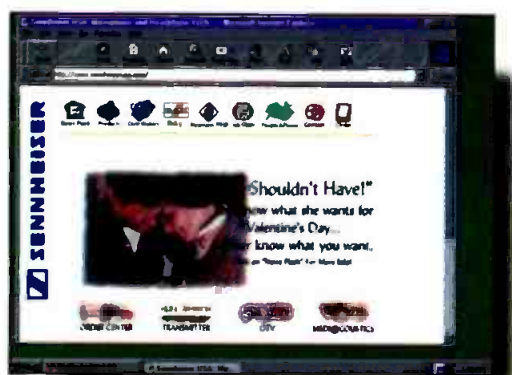


www.sennheiserusa.com

Sennheiser: Established in 1945 in Wedemark, Germany, Sennheiser is an Oscar and Emmy award-winning leader in microphone technology, RF-wireless and infrared sound transmission, headphone transducer technology, and most recently in the development of active noise-cancellation. The company is driven by an innovative and pioneering spirit and is committed to ongoing research, precision engineering and meticulous manufacturing standards.

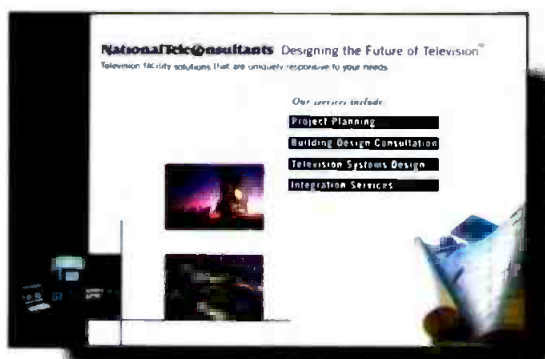

info@ntc.com

National TeleConsultants: National TeleConsultants is the largest independent television facility design and system integration company in the world. NTC is known for building creative and cost effective multichannel network facilities, production studios and television stations. Call us at 818-265-4400 and let us put our 19 years of experience to work for you.

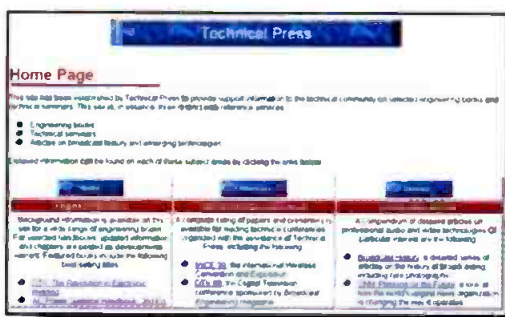


www.technicalpress.com

Technical Press is a web-based reference site that supports more than a dozen video engineering books, including *DTV: The Revolution in Electronic Imaging*. Also available are articles on digital video technologies and applications, and a detailed series on the history of broadcast engineering.



www.winsted.com

Winsted Corporation: Winsted offers a full line of modular consoles, rack cabinets, file server workstations, tape storage, and editing desks. The most complete line of accessories in the industry complement this extensive offering. Winsted's 164-page fully illustrated catalog includes an easy-to-understand modular components section that allows you to design your own console, or you can receive a free consultation with a Winsted's system design engineer. To receive a free catalog or learn more about Winsted at their website www.winsted.com or call toll free at 800-447-2257.

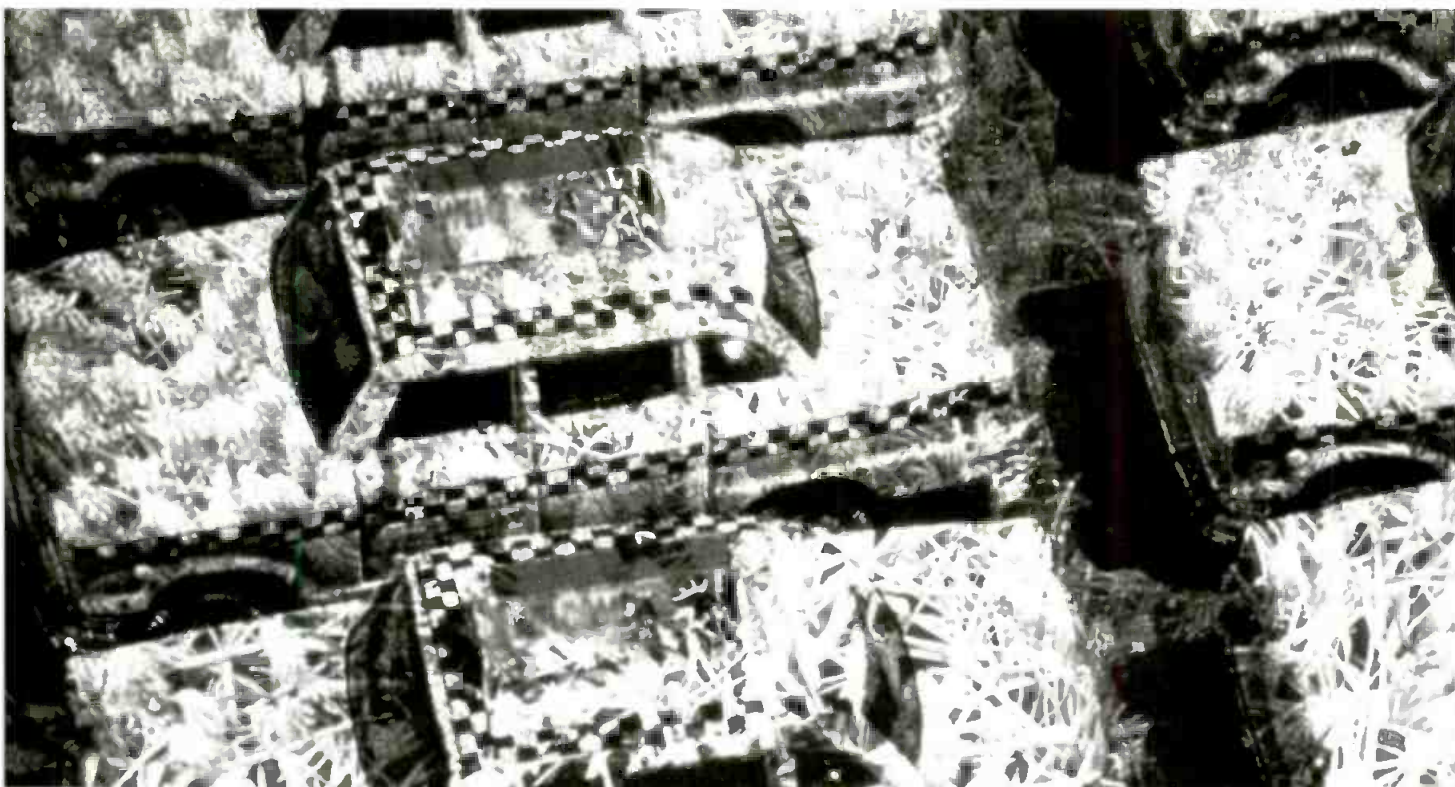

MARK YOUR CALENDAR NOW!

**1999 ITS Annual Forum
July 21-24, 1999
Waldorf-Astoria Hotel ■ New York City**

Look to ITS to provide you with the answers you need to position your company for the millennium and beyond. Share information with your peers, discuss your needs and concerns with your vendors and learn from the wide variety of programs at your disposal. ■ Now, more than ever, is the time to let ITS be your industry leader in education and information opportunities. ■ Don't forget the 20th anniversary of the International Monitor Awards will be held in the Grand Ballroom on Saturday, July 24th! ■

Come join us in New York! We have a rate of \$185 for single and doubles at the legendary Waldorf-Astoria and all types of activities planned for your stay. Make reservations now at 212-355-3000 and ask for the ITS rate.

■ Make your plans now! This will be the best ITS Forum yet!



ITS, the Association of Imaging Technology and Sound

527 Maple Avenue East, Suite 204, Vienna, VA 22180 ■ 703-319-0800 ■ Fax 703-319-1120 ■ www.itsnet.org



THE PROFESSIONAL'S SOURCE FOR PHOTO,

FOR ORDERS CALL:

800-947-9928

212-444-5028

OR FAX (24 HOURS):

800-947-9003

212-444-5001

Store & Mail Order Hours:

Sunday 10-5

Monday thru Thursday 9-7

Friday 9-1 • Saturday Closed

On the Web: <http://www.bhphotovideo.com>

**OUR NEW
EXPANDED
LOCATION**



THE
**PROFESSIONAL'S
SOURCE**



**For All Your Photo, Video,
Digital Photography
and Pro-Audio Needs**

FOR A FREE MONTHLY CATALOG, CALL 800-947-6933, 212-444-6633 OR WRITE

www.americanradiohistory.com

VIDEO and PRO AUDIO



TO INQUIRE ABOUT YOUR ORDER:
800 221-5743 • 212 239-7765
OR FAX 24 HOURS:
800 947-2215 • 212 239-7549

New Address:
420 Ninth Ave. (Bet. 33rd & 34th St.)
New York, N.Y. 10001

SONY

DSR-200A 3-CCD Digital (DVCAM) Camcorder

Combining a compact and lightweight body with the superior picture quality of DSP (Digital Signal Processing) and the DVCAM format, the DSR-200A is the ideal acquisition tool for video journalists, event and wedding videographers, stringers and production houses. 500 lines of horizontal resolution, 48kHz or 32kHz digital audio, three hour record time, and minimum illumination of 3 lux is only the beginning. Other features include 16:9/4:3 capability, Steady Shot, high resolution 1-inch viewfinder, time code operation, time/date superimposition and an IEEE-1394 interface for direct digital output. Offers full automatic as well as manual control of focus, iris, gain, white balance and shutter speed.

- Variable servo 10X optical power zoom lens goes from 5.9 to 59mm at 1.7 to 24 seconds. The manual zoom rocker is continuously variable right up to where the digital 20X zoom kicks in.
- Sony's Super Steady Shot reduces high frequency camera shake without compromising image quality. SteadyShot uses horizontal and vertical motion sensors that allow it to work accurately while zooming, moving (even shooting from a car), and shooting in low light conditions.
- Has digital effects including audio and video fade, overlap and Slow Shutter.
- Automatic and manual focus, iris, shutter, gain and white balance. Iris is adjustable in 12 levels from F1.6 to F11, shutter from 1.4 to 1/10,000 of a second in 12 steps. Gain from -3dB to +18dB in 8 steps.
- Zebra Pattern Indicator, built-in ND filter.
- Custom Preset function lets you preset, store and recall custom settings for color intensity, white balance (bluish or reddish), sharpness and brightness.
- Stores Photo, Date/Time, Shutter Speed, Iris, Gain and F-stop for every frame. So if you have to re-shoot, you know your original settings for every scene and frame.



- Records Drop/Non-Drop frame time code. Time code can be read either as RC time code or as SMPTE time code.
- Has a large 1-inch B&W viewfinder with 550 lines of resolution for easy focusing even in low contrast lighting situations. Separate information sub panel displays time code, battery time, tape remaining and other camcorder functions without cluttering up the viewfinder.
- Records 16-bit/48kHz audio on one stereo track or 12-bit/32kHz with two pairs of stereo tracks (L1/R1, L2/R2), so you can add stereo music or narration.
- One-point stereo electret condenser mic for clear stereo separation. Directivity can be selected from 0°, 90° & 120°.
- Automatic & manual (20-step) audio level record controls. Monitor audio with headphones or from the LCD panel which has an active VU meter.
- XLR input connectors for mics and audio equipment.

DSR-200A Field Package:

- DSR-200A Camcorder • NPA-1000/B Battery Case Adapter
- 3 NP-F930/B 7.2V 4000 mAh Batteries
- AC-V900/B AC Adapter, Triple Battery Charger
- VCT-U14 Tripod Adapter • LC-2000CP System Case

DSR-20 DVCAM Player/Recorder

The DSR-20 is a versatile DVCAM VCR with a very compact chassis and a variety of convenient functions for recording, playback and simple editing. It features auto repeat playback, power-on recording/playback, multiple machine control interfaces, AC/DC capability and i-Link (IEEE1394) input and output. And of course, it offers the stunning image and sound quality inherent to the DVCAM format.

DVCAM Duality

- Utilizing the DVCAM format, the DSR-20 provides the recording/playback quality and reliability required for professional use. It can also play back consumer DV format tapes without any special adapter.
- Provides two selectable audio modes: a two channel mode with 48 kHz/16-bit recording and a four channel mode with 32 kHz/12-bit recording.
- Dual-size cassette mechanism accepts both mini size (up to 40 minutes) and standard size DVCAM tapes (up to 184 minutes) without an adapter.

Editing Capability

- Equipped with Control L interface, the DSR-20 can perform simple time code based editing when connected to another DSR-20 or other similarly equipped VCRs/cameras like the DSR-30, DSR-200A or DSR-PD1. When using the FXE-120 or ES-3 EditStation System, the DSR-20 can serve as a leader player.
- Has DV (IEEE1394) input and output. When connected to other DV equipped machines, the DSR-20 offers digital dubbing of video, audio and data, without any deterioration of image and sound quality. In addition, in the "Digital Dubbing including TC copy" mode, full information of video, audio and time code of the original tape can be copied to another tape. Especially useful when making working copies of the original.

Record/Playback Functions

- Automatic repeat function for repeated playback. After reaching either the end of the tape, the first blank portion or the first Index point, the DSR-20 automatically rewinds the tape then starts playing back the segment again.

- Power-on recording/playback capability for unattended automatic VCR operation. When connected to an external timer and the VCR's TIMER switch is set to REC, the DSR-20 starts recording as soon as power is turned on. Likewise, when the TIMER is set to REPEAT, the VCR goes into Auto Repeat mode and starts playing back the moment power is turned on.
- In addition to Control L, the DSR-20 also incorporates a Control S and RS-232 interface for remote control operation. Basic VCR functions can be controlled from a PC via RS-232, while Control S allows control via the optional DSRM-10 Remote Control. In addition, with the Control S input/output connector, two or more (up to 50) DSR-20's can be daisy-chained and controlled from one DSRM-10 Remote Control.
- External sync input enables synchronized playback with other VCRs. Especially important in A/B roll configurations.

Convenience

- The DSR-20 is powered by AC or DC. Ideal for mobile applications, the DSR-20 can be connected to a 12V power supply like a car battery or battery belt & powered via the 4-pin XLR DC input.
- Can perform searches for Index Points, which are recorded on the tape as "in-point" marks everytime a recording starts. The DSR-20 can also search for photo data recorded on a DVCAM cassette by the DSR-PD100/200A/300, or where the recording date has been changed.
- Supplied with the RMT-DS20 Wireless Remote for control of basic VCR functions. And again, when two or more VCRs are connected via Control S, they can be simultaneously controlled from one wireless remote by simply sending one command to the master deck.

PVM-14N5U/14N6U & 20N5U/20N6U 13-inch and 19-inch Presentation Monitors

With high quality performance and flexibility, Sony's presentation monitors are ideal for any environment. They use Sony's legendary Trinitron CRT and Beam Current Feedback Circuit for high resolution of 500 lines as well as stable color reproduction. They also accept worldwide video signals, have a built-in speaker and are rack mountable. The PVM-14N5U/20N5U are designed for simple picture viewing, the PVM-14N6U and 20N6U add RGB input and switchable aspect ratio.

They Feature:

- 500 lines of horizontal resolution
- They handle NTSC, NTSC 4.43, PAL, and SECAM.



- Picture (chrome, phase, contrast, brightness) and setup adjustments (volume, aspect ratio) are displayed as easy-to-read on screen menus.
- Closed captioning is available with the optional BKM-104 Caption Vision Board.

PVM-14N6U/20N6U Only:

- (Last Input Switch) - Contact closure remote control allows you to wire a remote to an existing system so that the monitor's input can be remotely controlled to switch between the last previously selected input and the current input.
- 4:3/16:9 switchable aspect ratio

PVM-14M2U/14M4U & 20M2U/20M4U 13-inch and 19-inch Production Monitors

Sony's best production monitors ever, the PVM-M Series provide stunning picture quality, ease of use and a range of optional functions. They are identical except that the "M4" models incorporate Sony's state-of-the-art HR Trinitron CRT display technology and have SMPTE C phosphors instead of P22.

- HR Trinitron CRT enables the PVM-14M4U and 20M4U to display an incredible 800 lines of horizontal resolution. The PVM-14M2U and 20M2U offer 600 lines of resolution. M4 models also use SMPTE C phosphors for the most critical evaluation of any color subject.
- Dark tint for a higher contrast ratio (black to white) and crisp, sharper looking edges.
- Each has two composite, S-Video and component input (R-Y-B), analog RGB, for more accurate color reproduction. The component level can be adjusted according to the input system. Optional BKM-101C (video) and BKM-102 (audio) for SMPTE 259M Serial digital input.

- Beam Current Feedback Circuit
- 4:3/16:9 switchable aspect ratio.
- True multi-system monitors they handle four color system signals: NTSC, NTSC 4.43, PAL, and SECAM.
- External sync input and output can be set so that it will automatically switch according to the input selected.
- Switchable color temp: 6500K (broadcast), 9300K (pleasing picture). User preset (3200K to 10000K).
- Blue gun, underscan and H/V delay capability.
- On-screen menus for monitor adjustment/operation.
- Parallel remote control and Tally via 20-pin connector.

SONY

UVW-100B 3-CCD Betacam SP Camcorder

More affordable than ever, the UVW-100B offers 700 lines of horizontal resolution, 60dB S/N ratio, 26-pin VTR interface, compact design and ease of operation—making it ideal for field shooting applications.

- 1/2-inch Power HAD CCDs attain sensitivity of F11 at 2000 lux (4 lux low light), 700 lines of resolution & 60dB S/N ratio.
- Gain-up can be preset in 1dB steps from 1dB to 18dB.
- Auto Iris detects the lighting conditions and adjusts for the proper exposure.
- Clear Scan records computer monitors without horizontal bands across the screen. Shutter speed can be set from 60.4 to 200.3 Hz in 183 steps. Also has a variable high speed shutter from 1/100 to 1/2000 of a second.
- SMPTE LTC time code and U8 generator/reader. Rec Run/Free Run, Preset/Regen are easily set. For multi-camera operation, genlock to an external time code is provided.
- Genlock input and built-in color bar generator.
- 26-pin VTR interface for feeding component, composite and S-Video signals to another VTR for simultaneous recording. Start/stop are controlled and external VTR status such as Rec and Tally are shown in the viewfinder.
- 8-digit LCD display indicates time data, warning indications and video status. Battery status audio level are also shown in a bar graph meter.



- Diecast aluminum, 1.5-inch DXF-601 viewfinder is rugged yet comfortable while providing 600 lines of resolution.
- Large diameter eye cup reduces eye strain and simplifies focusing. Diopter adjustments (-3 to 0) compensates for differences in eye sight.
- Zebra level indicators, safety zone and center marker generator. Shows tape remaining and audio levels.
- With Anton/Bauer Digital Batteries remaining battery power is displayed on the LCD panel and through the viewfinder.
- Weighs 15lb. with viewfinder, battery, tape and lens. Shoulder pad is adjustable, so you maintain optimum balance when using different lenses and batteries.

DXC-637 3-Chip Color Video Camera

- PVW-637 - Perfect camcorder operation with the PVW-3.
- Compact size, lightweight and low power consumption.
- High density three 2/3-inch IT Hyper HAD sensors.
- 800 TV lines of horizontal resolution.
- HAD sensor structure.
- 2 dimensional optical low pass filter.
- Clear scan function for shooting computer displays.
- Hyper Gain mode.
- EZ mode and EZ Focus functions enable cameramen to get ready for shooting swiftly.

- Dual Pixel Readout technology.
- Can be coupled directly with the DSR-1/PVW-3 for high quality component acquisition or with the EVV-9000 for handy operation.
- Can be combined with the recorders from Panasonic or JVC.
- Can be connected with computer equipment via CA-325A/325B camera adapter.



DXC-637 with Fujinon 16:1 zoom lens, tripod plate and hard case **\$7495**

Also available in Betacam or DV-CAM packages, call for prices.

UVW-1600/UVW-1800 Betacam SP Editing Player • Betacam SP Editing Recorder

The UVW-1600 and UVW-1800 are the other half of the UVW series. They offer the superiority of Betacam SP with sophisticated editing features. They feature an RS-422 9-pin interface, built-in TBCs and Time Code operation. Inputs/outputs include component, composite and S-Video.

All the features of the UVW-1200/1400A PLUS—

- Optional BVR-50 allows remote TBC adjustment.
- RS-422 interface for editing system expansion.
- Two types of component output: via three BNC connectors or a Betacam 12-pin dub connector.
- Frame accurate editing is assured, thanks to sophisticated servo control and built-in time code operation. In the insert mode of the UVW-1800, video, audio Ch-1/2 and time code can be inserted independently or in any combination.



PVW-2600/PVW-2650/PVW-2800 BETACAM SP PRO SERIES

Whenever versatility and no compromise performance is needed, there is only one choice. Legendary reliability and comprehensive support for its many users has established the PVW series as the standard in broadcast and post production. The PVW Series includes the PVW-2600 Player, PVW-2650 Player with Dynamic Tracking and the PVW-2800 Editing Recorder. They feature built-in TBCs, LTC/VITC time code operation and RS-422 serial interface. They also offer composite, S-Video and component video inputs and outputs. Most important they are built for heavy, every day duty.

- Built-in TBCs and digital dropout compensation assure consistent picture performance. Remote TBC adjustment can be done using the optional BVR-50 TBC Remote Control.
- The PVW-2600, PVW-2650 and PVW-2800 (generates as well) read VITC, LTC time code as well as User Bits. Edit/Int time code, Regen/Preset, or Rec-Run/Free-Run selections.
- Built-in character generator displays time code or CTL data.
- Set-up menu for presetting many functional parameters.
- Two longitudinal audio channels with Dolby C-type NR.
- Recognizable monochrome pictures at up to 24X normal speed in forward and reverse. Color at speeds up to 10X.

- Two types of component connection; three BNC connectors or a Betacam 12-pin dub connector. They have composite and S-Video signals as well.

PVW-2650 Only

- Dynamic Tracking (DT) playback from -1 to +3 times normal speed.

PVW-2800 Only

- Built-in comprehensive editing facilities.
- Dynamic Motion Control with memory provides slow motion editing capability.



800 SERIES UHF WIRELESS MICROPHONE SYSTEMS



Consisting of 5 handheld and bodypack transmitters and 6 different receivers, Sony's UHF is recognized as the outstanding wireless mic system for professional applications. Operating in the 800 MHz band range, they are barely affected by external noise and interference. They incorporate a PLL (Phase Locked Loop) synthesized control system that makes it easy to choose from up to 282 operating frequencies, and with the use of Sony's pre-programmed channel plan, it is simple to choose the correct operating frequencies for simultaneous multi-channel operation. Additional features, like space diversity reception, LCD indicators, reliable and sophisticated circuit technology ensure low noise, wide dynamic range, and extremely stable signal transmission and reception. Ideal for broadcasting stations, film production facilities, and ENG work.

SEVEN DAY CUSTOMER SATISFACTION GUARANTEE

Circle (69) on Free Info Card

www.americanradiohistory.com

FOR ORDERS CALL:

800-947-9928

212-444-5028

OR FAX (24 HOURS):

800-947-9003

212-444-5001

**MOST ORDERS SHIPPED
WITHIN 24 HOURS**

OVERNIGHT SERVICE AVAILABLE

On the Web: <http://www.bhphotovideo.com>

Panasonic

WJ-MX50 Digital A/V Mixer



- Four input switcher and any two sources can be routed to the program buses. Two-channel digital frame synchronization permits special effects in each A/B bus.
- Combination of 7 basic patterns and other effects creates 287 wipe patterns. External edit control input for RS-232 or RS-422 serial controls. Also has GPI input.
- Wipe boundary effects: soft/border (bold, eight background colors available). Digital effects: freeze, still, mosaic, negative, positive, paint, B&W, strobe, trail, and AV synchro.
- Real-time compression - entire source image is compressed inside a wipe pattern.
- Fade-in and fade-out video, audio, titles individually or synchronously faded. Down stream keyer with selectable sources from character generator or external camera.
- Scene Grabber - moves a pattern while upholding the initially trimmed-in picture integrity.
- Eight separate memories enable instant recall of frequently used effects. 8 preset effects including: Mosaic Mix, Position Stream, Crowscree, Bounce, Flip, Shutter, Vibrate, and Satellite. Audio mixing capability of 5 sources with 5 audio level adjustments.

FUJINON ENG LENSES

While ENG camera technology evolves faster and faster, delivering ever higher performance in ever smaller bodies, it has been increasingly difficult for lens manufacturers to improve quality while keeping size and weight to a minimum until recently. With Aspheric Technology (AT2) Fujinon has succeeded in manufacturing superior quality lenses that are both smaller and lighter than lenses of conventional spherical design. From the widest angle to the highest telephoto, Fujinon's broadcast hand-held style lenses offer unparalleled features and performance. In fact, they are so advanced and so optically superb they will reshape your thinking about how well a lens can perform.



Fujinon's broadcast hand-held lenses feature the very latest in optical and mechanical design, and manufacturing techniques. New EBC (Electron Beam Coating) reduces flare and improves contrast, while AT2 Aspheric Technology improves corner resolution and reduces chromatic aberration. And all except the 36:1 Super Telephoto offer the exclusive "V-Grip" and Quick Zoom.

A15X8EVM Standard Zoom Lens

A versatile performer in a compact package, offers AT2, inner focus, Quick Zoom and the "V-Grip".

A20X8EVM Standard/Telephoto Zoom Lens

Combines additional focal length with AT2, inner focus, Quick Zoom and the "V-Grip".

A36X14.5ERD Super Telephoto Zoom Lens

The longest focal length hand-held style lens to offer AT2 and inner focus.

GLIDECAM INDUSTRIES

V-16 AND V-20 Camera Stabilization Systems

The V-16 and V-20 allow you to walk, run, go up and down stairs, shoot from moving vehicles and travel over uneven terrain without any camera instability or shake. The V-16 stabilizes cameras weighing from 10 to 20 pounds and the V-20 from 15 to 26 pounds. They are both perfect for shooting the type of ultra-smooth tracking shots that take your audience's and client's breath away - instantly adding high production value to every scene. Whether you are shooting commercials, industrials, documentaries, music videos, news, or full length motion pictures, the Glidecam "V" series will take you where few others have traveled.



sachtler

Tripods & Fluid Heads DV Systems—Digital Support for Every Budget

Today's compact digital cameras require light, fast and highly versatile camera support systems. Starting from the DV2 all the way up to the DV12, Sachtler has a solution tailored for just about every conceivable digital camera package available today. All feature Sachtler's patented counterbalance system and Touch and Go wedge plates. And all except the DV2 feature sliding camera platform to ease in the balancing of your camera.

DV2 System

- The smallest head of the Sachtler's line.
- Sachtler Touch and Go quick release with automatic camera lock and safety lever/drop protection.
- One step of dynamic counterbalance.
- Frictionless leak proof fluid damping with one level of drag.
- Vibrationless vertical/horizontal brakes.
- Built in bubble for horizontal leveling.
- Single Stage 75mm tripod DA 75 Long.
- Lightweight floor spreader SP 75.

This system (0210) consists of:

Fluid Head (DV-2), Long Tripod (DA 75), floor spreader (SP 75)

DV6 System

Same as the DV4 PLUS —

- Five step of dynamic counterbalance.
- Five step of vertical and horizontal drag.

DV6 System (0610) consists of:

Fluid Head (DV-6), Long Tripod (DA 75), floor spreader (SP 75)

DV4 System

- Sliding balance plate.
- Touch and Go quick release with automatic camera lock and safety lever/drop protection.
- One step of dynamic counterbalance.
- Frictionless leak proof fluid damping with one level of drag.
- Vibrationless vertical/horizontal brakes.
- Built in bubble for horizontal leveling.
- Single stage 75mm long tripod DA 75.
- Lightweight floor spreader SP 75.

DV4 System (0410) consists of:

Fluid Head (DV-4), Long Tripod (DA 75), floor spreader (SP 75)

DV8 System

Same as DV6 PLUS —

- Greater load capacity.
- DV8 System (0810) consists of:

Fluid Head (DV-8), Long Tripod (DA 75), floor spreader (SP 75)

DV12 Same as DV8 PLUS — Great Load Capacity • Fits 100mm tripods



Vinten PRO-130 SYSTEMS

The Pro-130 tripod systems are perfect for today's on the move ENG cameramen. Lightweight, these systems have been specifically designed to provide a wide balance range to suit the latest DV, DVCPR, DVCCAM camcorder and camera/recorder combinations. All systems come complete with the PH-130 fluid pan & tilt head, choice of single or 2-stage ENG tripod, floor spreader and soft carrying case for easy transportation.

The PH-130 pan & tilt head incorporates Vinten's continuously variable LF drag system to provide smooth movement and easy transition into whip pan, together with a factory set balancing mechanism. Both the single-stage and two-stage legs are toggle clamp tripods are made from strong, durable aluminum with excellent height range capabilities.

VISION 8 AND 11 Lightweight Heads For The Future

Superbly engineered and designed for use in professional broadcast, educational and corporate productions, the Vision 8 and Vision 11 simultaneously provide the ultimate in lightweight support with exceptional robustness - even in the toughest shooting conditions.

Vision 8 Pan & Tilt Head

The incredibly lightweight Vision 8 provides smooth shots, whip pan action and quick set-up while supporting up to 23 lbs. Add the single-stage carbon fiber tripod and you have the lightest combination possible for that all important event - without sacrificing the reliability and robustness that you require.

- Simple external adjustment for perfect balance over the full 180° of tilt.
- Infinitely variable drag with proven LF technology.
- Calibrated drag knobs.
- Click on/off Pan and Tilt brakes.
- Single rotation counterbalance.
- Leveling bubble standard.
- Standard 100mm leveling ball • Lightweight, only 5.9 lbs

Vision 11 Pan & Tilt Head

Slightly heavier the Vision 11 offers additional capacity (up to 29 lbs.) plus it has illuminated controls to allow fast camera balancing and leveling even in poor lighting. Combine with a two-stage carbon fiber or aluminum tripod and you have a package with the biggest height adjustment yet the smallest to carry. Ideal for all ENG assignments.

- Simple external adjustment for perfect balance over the full 180° of tilt.
- Infinitely variable drag with proven LF technology.
- Back-lit and calibrated drag knobs.
- Click on/off Pan and Tilt brakes.
- Digital counterbalance readout.
- Illuminated leveling bubble • Standard 100mm leveling ball.
- High load to weight ratio • Lightweight - only 6.2 lbs

antonbauer

DIGITAL PRO PACS

The ultimate professional video battery and recommended for all applications. The premium heavy duty Digital Pro Pac cell is designed to deliver long life and high performance even under high current loads and adverse conditions. It's size and weight creates perfect shoulder balance with all camcorders.

- DIGITAL PRO PAC 14 LOGIC SERIES NICAD BATTERY
14.4v 60 Watt Hours, 5 1/8 lbs. Run time: 2 hours @ 27 watts, 3 hrs. @ 18 watts.
- DIGITAL PRO PAC 13 LOGIC SERIES NICAD BATTERY
13.2v 55 Watt Hours, 4 3/4 lbs. Run time: 2 hours @ 25 watts, 3 hours @ 17 watts.

DIGITAL TRIMPAC

Extremely small and light weight, the Digital Trimpac still has more effective energy than two NP style slide-in batteries. High voltage design and Logic Series technology eliminate the problems that cripple conventional 12 volt slide-in type batteries. The professional choice for applications drawing less than 24 watts.

- DIGITAL TRIMPAC 14 LOGIC SERIES NICAD BATTERY
14.4 v 43 Watt Hours, 2 3/4 lbs.
Run time: 2 hours @ 23 watts, 3 hours @ 13 watts.

QUAD 2702/2401 Four-Position Power/Chargers

The lightest and slimmest full featured four position chargers ever they can fast charge four Gold Mount batteries and can be expanded to charge up to eight. They also offer power from any AC main in a package the size of a notebook computer and weighing a mere four lbs! The 40 watt 2401 can charge ProPacs in two hours and Trimpacs in one. Add the Diagnostic/Discharge module and the QUAD 2401 becomes an all purpose power and test system. The 70 watt QUAD 2702 has the module and is the ultimate professional power system.



HyTRON 50 Battery

Weighing a mere 31oz (880 grams) and packing 50 Watt-hours of energy - enough to operate a typical ENG camcorder for two hours, the HyTRON 50 is the most advanced lightweight battery in the industry.

- Make possible by recent advancements in a cell technology originally designed for the mobile computing industry, it incorporates nickel metal hydride cells that provide the highest energy density of any rechargeable cylindrical cell available. High performance is further assured through the integration of Anton/Bauer InterActive digital technology.
- Equipped with an on-board fuel computer which monitors energy input and output as well as critical operating characteristics and conditions. This data is communicated to the InterActive charger to ensure safety and optimize reliability.
- In addition, remaining battery capacity information is available by means of an LCD display on each battery and in the viewfinder of the most popular broadcast & professional camcorders.
- Special low voltage limiter prevents potentially damaging overdischarge.

Specifications: 14.4 V, 50 WH (Watt Hours)
5-3/4" x 3-1/2" x 2-1/4" 1.9 lbs (880g)
Typical runtime: 2 hours @ 25 Watts 3 hours @ 17 Watts

Dual 2702/2401 Two-Position Power/Chargers

The DUAL 2701 (70 watt) and 2401 (40 watt) are sleek, rugged, economical two position Power/Chargers that have all the features of InterActive 2000 technology including DC camera output and LCD display. The DUAL 2701 will charge any Gold Mount battery in one hour, the DUAL 2401 charges ProPac batteries in two hours and Trimpacs in one. Compact, lightweight design makes them the ideal for travel. They can also be upgraded with the Diagnostic/Discharge Module and/or with Expansion Modules to charge up to 6 batteries of any type.

PROFESSIONAL VIDEO TAPES



Professional Grade VHS		
PG-30	2.39	PG-60 2.59 PG-120 2.79
Broadcast Grade VHS Box		
BGR-30	3.29	BGR-60 3.99 BGR-120 4.49
ST-30	6.79	ST-60 7.49 ST-120 7.69
M221 Hi 8 Double Coated		
M221	17.95	10S 18.49 20S 19.95
30S	22.95	60L 31.95 90L 49.95
Metal Particles Metal Evaporated		
P630HMP	4.99	E630HME 7.69
P660HMP	6.29	E660HME 10.29
P6120HMP	8.29	E6120HME 13.59
M321SP Metal Betacam (Box)		
05S	17.95	10S 18.49 20S 19.95
30S	22.95	60L 31.95 90L 49.95
DP121 DVC PRO		
12M (Med.)	7.49	23M 8.79 33M 10.99
63M	19.99	64L (Lg.) 21.99
94L	31.99	123L 39.99

maxell

Hi8 Metal Particle (XRM)

Broadcast Quality Hi8 Metal Particle		
P6-30 HM BQ	5.39	P6-60 HM BQ 6.09
P6-120 HM BQ		7.99
P/1 PLUS VHS		
T-30 Plus	1.79	T-60 Plus 1.99 T-90 Plus 2.09
P-120 Plus		2.19 T-160 Plus 2.69
MGX-PLUS VHS (Box)		
HGXT-60 Plus	2.69	HGXT-120 Plus 2.99
HGXT-160 Plus		3.99
BQ Broadcast Quality VHS (Box)		
T-30 BQ	4.29	T-60 BQ 3.99 T-120 BQ 5.99
BQ Professional S-VHS (In Box)		
ST-31 BQ	6.79	ST-62 BQ 6.99
ST-126 BQ	8.49	ST-182 BQ 13.99
Betacam SP		
B5MSP	10.99	B10MSP 11.99 B20MSP 12.99
B30MSP	14.49	B60MSP 21.99 B90MSP 31.99

Panasonic

Mini DV Tape		
AY DVM-30	6.49	AY DVM-30 (10 Pack) ea. 5.99
AY DVM-60	8.49	AY DVM-60 (10 Pack) ea. 7.99
AY DVM80		16.99
DVCPRD		
AJ-P12M (Medium)	6.99	AJ-P23M 9.99
AJ-P33M	11.19	AJ-P66M 19.49
AJ-P64L (Large)	20.99	AJ-P94L 30.99
AJ-P126L		44.99

SONY

Hi-8 Professional Metal Video Cassettes		
P6-30 HMPX	4.59	P6-60 HMPX 7.99
P6-60 HMPX	6.69	P6-120 HMPX 10.99
P6-120 HMPX	8.99	P6-120 HMPX 14.99
PR Series Professional Grade VHS		
T-30PR	2.39	T-60PR 2.59 T-120PR 2.79
T-60PR		3.99
PM Series Premier Grade Professional VHS		
T-30BA	3.79	T-60BA 4.19 T-120BA 4.99
MOST-30	7.49	MOST-60 7.79 MOST-120 7.99
BR3 3/4" U-matic Broadcast Standard (In Box)		
KCS-10 BRS (mini)	8.69	KCS-20 BRS (mini) 9.49
KCA-10 BRS	8.59	KCA-20 BRS 9.09
KCA-30 BRS	10.19	KCA-60 BRS 13.99
XBR 3/4" U-matic Broadcast Master (In Box)		
KCS-10 XBR (mini)	9.29	KCS-20 XBR (mini) 10.69
KCA-10 XBR	9.69	KCA-20 XBR 11.19
KCA-30 XBR	12.59	KCA-60 XBR 16.49
KSP 3/4" U-matic SP Broadcast (In Box)		
KSP-S10 (mini)	9.99	KSP S20 (mini) 11.59
KSP-10	10.49	KSP 20 11.99
KSP-30	13.49	KSP 60 17.69
BCT Metal Betacam SP Broadcast Master (Box)		
BCT-5M (small)	12.29	BCT-10M (small) 13.29
BCT-20M (small)	13.99	BCT-30M (small) 14.99
BCT-30M (small) (50 Pack)		ea. 13.99
BCT-30ML	21.49	BCT-60ML 23.49
BCT-90ML		34.99
Mini DV Tape		
DVM-30EXM w/Chip	15.99	DVM-60EXM w/Chip 17.99
DVM-30EX "No Chip"	12.99	DVM-60EX "No Chip" 14.99
DVM-30PR "No Chip"	9.99	DVM-60PR "No Chip" 10.49
Full Size DV Tape with Memory Chip		
DV-120MEM	25.89	DV-180MEM 29.99
PDV Series Professional DVCAM Tape		
PDVM-12ME (Mini)	19.50	PDVM-22ME (Mini) 19.99
PDVM-32ME (Mini)	16.99	PDVM-40ME (Mini) 18.99
PDV-94ME (Standard)	33.99	PDV-124ME (Standard) 38.99
PDV-184ME (Standard)	44.95	PDV-64N 24.95
PDVN-124N	32.95	PDVN-184N 39.95

VIDEO and PRO AUDIO



TO INQUIRE ABOUT YOUR ORDER:
800 221-5743 • 212 239-7765
OR FAX 24 HOURS:
800 947-2215 • 212 239-7549

New Address:
420 Ninth Ave. (Bet. 33rd & 34th St.)
New York, N.Y. 10001



NewTek

Calibar 3-Oz. Pocket-Sized Test Generator

The size of a ball point pen and running on a single battery, Calibar is an NTSC test signal generator that packs a rack mount's worth of test equipment into a battery operated instrument. Calibar is the fastest, easiest and most portable way ever to calibrate video equipment. No patch bay racks. Just one cable. So besides giving you fast accurate readings in the studio, it's perfect for off-site events or trouble-shooting in the field.

- Designed for studio and field operation, it produces 24 test pattern functions at the touch of a button. 10-bit precision digital-to-analog conversion assures highly accurate signals.
- Calibar's combination of low cost, portability and full-featured operation makes it ideal for broadcast engineers, television production facilities and video post houses.

- Tuck Calibar in your pocket and you're ready to go. Touch the button to generate SMPTE color bars, touch it again to calibrate convergence and so on.
- With the supplied AC adapter, it also functions as a black burst generator.

\$349



CHYRON PC-CODI & PC Scribe

Text and Graphics Generator and Video Titling Software

PC-CODI incorporates a broadcast quality encoder and a wide bandwidth linear filter for the highest quality, real-time video character generation and graphics display. A video graphics software engine running under Windows 95/NT, PC Scribe offers a new approach and cost effective solution for composing titles and graphics that is ideal for video production and display applications. Combined, they're a total solution for real-time character generation with the quality you expect from Chyron.

PC-CODI Hardware:

- Fully initialized displays • Display and non-display buffers
- Less than 10 nanosecond effective pixel resolution
- 16.7 million color selections • Fast, real-time operations
- Character, Logo and PCX Image transparency
- Variable edges, border, drop shadow and offset
- Full position and justify control of character and row
- User definable inter-character spacing (squeeze & expand)
- Multiple roll/crawl speeds • Automatic character kerning
- User definable tab/template fields
- Shaded backgrounds of variable sizes and transparency
- Software controlled video timing

PC-Scribe Software:

- Number of fonts is virtually unlimited. Also supports most international language character sets. Fonts load instantly and the level of anti-aliasing applied is selectable.
- Adjust a wide range of character attributes. Wide choice of composition tools.
- Characters, words, rows and fields can color flash
- Character rolls, crawls and reveal modes. Speed is selectable and can be auto timed with pauses. Messages can be manually advanced or put into sequences along with page transitions.

PC-CODI and PC-Scribe Bundle.....2995.00



- User definable read effects playback: wipes, pushes, fades
- NTSC or PAL sync generator with genlock
- Board addressability for multi-channel applications
- Auto display sequencing • Local message/page memory
- Preview output with safe-title/cursor/menu overlay
- Composite and S-video input with auto-genlock select
- Multiple preview windows can be displayed simultaneously
- Transitions effects include: cut, fade, push, wipe, reveal, peel, zoom, matrix, wipe, spiral, split, weave and jitter
- Import elements to build graphics. This includes OLE objects, INFINITI! RGBA and TGA with alpha channel. Scribe also imports and exports TIFF, JPEG, PCX, TGA, BMP, GIF, CLP, ASCII, IMG, SGI, PICT and EPS formats.

TRUEVISION/Avid

TARGA 1000/MCXpress NT

Professional Video Production Workstation

Incorporating the award-winning TARGA 1000 video card and Avid MCXpress NT non-linear editing software, this fully-configured workstation meets the needs of production professionals, corporate communicators, educators and Internet authors.

TARGA 1000 Features:

- The TARGA 1000 delivers high processing speed for video and audio effects, titling and compositing. Capture, edit and playback full-motion, full-resolution 60 fields per second digital video with fully synchronized CD-quality audio.
- Compression can be adjusted on the fly to optimize for image quality and/or minimum storage space. Has composite and S-video inputs/outputs. Also available with component input/output (TARGA 1000 PRD).
- Genlock using separate sync input for working in professional video suites
- Audio is digitized at 44.1KHz or 48KHz sampling rates, for professional quality stereo sound. Delivers perfectly synchronized audio and video.

MCXpress Features:

The ideal tool for video and multimedia producers who require predictable project throughput and high-quality results when creating video and digital media for training, promotional/marketing material, local television and cable commercials, CD-ROM and Internet/intranet distribution. Based on Avid's industry-leading technology, it combines a robust editing functionality with a streamlined interface. Offers integration with third-party Windows applications, professional editing features, powerful media management, title tool and a plug-in effects architecture. It also features multiple output options including so you save time and money by reusing media assets across a range of video and multimedia projects.

TARGA 1000/MCXpress Turnkey Systems:

- 300 watt, 6-Bay Full Tower ATX Chassis
- Pentium ATX Motherboard with 512K Cache
- Pentium II- 300 MHz Processor
- Matrox Millennium II AGP 4MB VRAM Display Card
- 64MB 10ns 168-Pin (DIMM) S-DRAM
- Quantum Fireball 6.4GB IDE System Drive
- Seagate Barracuda External 9.1GB SCSI-3 Ultra Wide Capture Drive
- Adaptec AHA-2940UW Ultra Wide SCSI-3 Controller Card
- Teac CD-532e 32X EIDE Internal CD-ROM Drive • 3.5" Floppy Drive
- Altec Lansing ACS-48 3-Piece Deluxe Speaker System
- Viewsonic G771 17-inch (1280 x 1024) Monitor (0.27mm dot pitch)
- Focal 2001A Keyboard • Microsoft MS Mouse
- Windows NT 4.0 Operating System Software
- Avid MCXpress for Windows NT
- Truevision TARGA 1000 or 1000 Pro Video Capture Card

With TARGA 1000.....\$5995.00
With TARGA 1000 Pro (component input/output).....\$6495.00




KNOX VIDEO

RS4x4/8x8/16x16/16x8/12x2

Video/Audio Matrix Routing Switchers

Knox's family of high performance, 3-channel routing switchers are extremely versatile, easy-to-use and very affordable. Housed in an ultra-thin rack-mount chassis they accept and route (on the vertical interval) virtually any video signal. Including off-the-air and non-timebase corrected video. They also route balanced or unbalanced stereo audio. The audio follows the video or you can route the audio separately (breakaway audio). Each of the switchers offers manual control via front panel operation. They can also be controlled remotely by a PC, a Knox RS Remote Controller, or by a Knox Remote Keypad via their RS-232 port. Front panel LEDs indicate the current routed pattern at all times. Knox switchers are ideal for applications such as studio-feed control and switcher input control, plus they have an internal timer allowing timed sequence of patterns for surveillance applications as well.

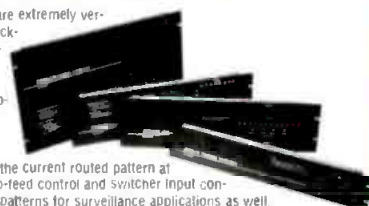

- Accept and routes virtually any one-volt NTSC or PAL video signal input to any or all video outputs.
- Accept and route two-volt mono or stereo unbalanced audio inputs to any or all audio outputs.
- Video and audio inputs can be routed independently, they don't need to have the same destination.
- Can store and recall preset cross-point patterns. (Not available on RS12x2.)
- Front panel key-pad operation for easy manual operation.
- Can also be controlled via RS-232 interface with optional RS Remote Controller or Remote Keypad.
- Front panel LED indicators display the present routing patterns at all times.
- An internal battery remembers and restores the current pattern in case of power failure.
- Internal vertical interval switching firmware allows on-air switching.
- Housed in a thin profile rackmount 1" chassis.
- Also except the RS12x2 are available in S-Video versions with/without audio.
- Models RS16x8 and RS16x16 are also available in RGB/component version.
- With optional Remote Video Readout, the RS16x8 and RS16x16 can display active routes on a monitor at remote locations, via a composite signal from a BNC connector on the rear panel.
- The RS4x4, RS8x8 and RS16x16 are also available with balanced stereo audio. They operate at 660 ohms and handle the full range of balanced audio up to +4 dB with professional quick-connect, self-locking, bare-wire connectors.

LEADER

Manufacturing test and measurement equipment for over 40 years, Leader Instruments is the standard which others are measured against for reliability, performance, and most important—cost effectiveness.

5860C

WAVEFORM MONITOR

A two-input waveform monitor, the 5860C features 1M, 1V, 2V, 1 s/div and 2V mag time bases as well as vertical amplifier response choices of flat, IRE (low pass), chroma and DIF-STEP. The latter facilitates easy checks of luminance linearity using the staircase signal. A PIX MON output jack feeds observed (A or B) signals to a picture monitor, and the unit accepts an external sync reference. Built-in calibrator and on-off control of the DC restorer is also provided.

5850C

VECTORSCOPE

The ideal companion for the 5860C, the 5850C adds simultaneous side-by-side waveform and vector monitoring. Featured is an electronically-generated vector scale that precludes the need for fussy centering adjustments and eases phase adjustments from relatively long viewing distances. Provision is made for selecting the phase reference from either A or B inputs or a separate external timing reference.



5100 4-Channel Component / Composite WAVEFORM

The 5100 handles three channels of component signals, plus a fourth channel for composite signals, in mixed component / composite facilities. Features are overlaid and parade waveform displays, component vector displays, and automatic bow-tie or "shark fin" displays for timing checks. Menu-driven options select format (525/60, 625/50, and 1125/60 HDTV), full line-select, vector calibration, preset front-panel setups and more. On-screen readout of scan rates, line-select, preset numbers, trigger source, cursor time and volts.

5100D Digital Waveform/Vectorscope

The 5100D can work in component digital as well as component analog facilities (and mixed operations). It provides comprehensive waveform, vector, timing and picture monitoring capabilities. Menu driven control functions extend familiar waveform observations into highly specialized areas and include local calibration control, the ability to show or blank SAV/EAV signals in both the waveform and picture, the ability to monitor digital signals in GBR or YCbCr form, line select (with an adjustable window), memory storage of test setups with the ability to provide on-screen labels, flexible cursor measurements, automatic 525/60 and 625/50 operation and much much more.

5870 Waveform/Vectorscope w/SCH and Line Select

A two-channel Waveform/Vector monitor, the microprocessor-run 5870 permits overlaid waveform and vector displays, as well as overlaid A and B inputs for precision amplitude and timing/phase matching. Use of decoded R-Y allows relatively high-resolution DG and DP measurements. The 5870 adds a precision SCH measurement with on-screen numerical readout of error with an analog display of SCH error over field and line times. Full-raster line select is also featured with on-screen readout of selected lines, a strobe on the PIX MDN output signal to highlight the selected line, and presets for up to nine lines for routine checks.

5872A Combination Waveform/Vectorscope

All the operating advantages of the 5870, except SCH is deleted (line select retained), making it ideal for satellite work.

5864A Waveform Monitor

A two-input waveform monitor that offers full monitoring facilities for cameras, VCRs and video transmission links. The 5864A offers front panel selection of A or B inputs, the choice of 2H or 2V display with sweep magnification, and flat frequency response or the insertion of an IRE filter. In addition, a switchable gain boost of X4 magnifies setup to 30 IRE units, and a dashed graticule line at 30 units on screen facilitates easy setting of master pedestal. Intensity and focus are fixed and automatic for optimum display. Supplied with an instruction manual and DC power cable.

5854 Vectorscope

A dual channel compact vectorscope, the 5854 provides precision checkout of camera encoders and camera balance, as well as the means for precise genlock adjustments for two or more video sources. Front panel controls choose between A and B inputs for display and between A and B for decoder reference. Gain is fixed or variable, with front panel controls for gain and phase adjustments. A gain boost of 5X facilitates precise camera balance adjustments in the field. Supplied with a DC power cable.

Designed for EFP and ENG (electronic field production and electronic news gathering) operations, they feature compact size, light weight and 12 V DC power operation. Thus full monitoring facilities can be carried into the field and powered from NP-1 batteries, battery belts and vehicle power. Careful thought has been given to the reduction of operating controls to facilitate the maximum in monitoring options with the operating simplicity demanded in field work.

CORPORATE ACCOUNTS WELCOME

Circle (70) on Free Info Card

www.americanradiohistory.com

Business highlights from broadcast and production

BY SANDRA FERGUSON, EDITORIAL ASSISTANT

Panasonic announced the following: The company recently delivered its one-unit DVD Authoring System, which runs Windows NT. Two 1080i HD cameras, the AK-HC880 full-size studio camera and its portable companion, the AK-HC830, are now available for delivery. Panasonic also announced the availability of the AJ-UFC1800 universal video format converter.

Pluto began shipping SPACESHift HD, its high-definition digital time delay system. Also, AirSPACE HD, its HD version of AirSPACE play-to-air server, is now available.

Avid is now shipping version 5.1 of Avid Media Illusion software, a digital effects and compositing system for film and television.

Discreet is now shipping flint* version 6.0, its visual effects and broadcast graphics system.

Chyron recently made the following announcements: The company sold five Pro-Bel automation/media management packages and a master control system to Turner Entertainment Networks. Chyron now has a joint marketing agreement with **Peak Systems Inc.** Peak is Chyron's first partner developer to create 3D graphics software for its DUET open video platform. **Business Technology Inc.** announced that it is developing a transmission interface between its multi-application Attendant Solutions platform and Chyron's DUET real-time video platform with the CAL API. Chyron also announced a joint marketing relationship with the **Nexus ASA Group** and its subsidiaries, Nexus-Informatics GmbH and NewsMaker Systems Inc. Under the agreement, both companies will market the integrated Nexus OpenMedia/StarDrive and Chyron DUET solution.

Canon's full line of HDTV Prime lens-

es ranges from 6mm to 35mm and features an iris T stop, gear rings for film-style accessories and focus scale calibrated so that it is measured 48mm to the rear of the lens/camera interface.

Gerling made the following announcements: Southwest Television (SWTV) of Phoenix gave the go-ahead for Gerling to construct SWTV's newest 53-foot Expandable Production Trailer. The Canadian Broadcasting Corporation awarded the first of a multi-SNG contract to Gerling. The first two SNGs will be delivered to the Canadian network this spring.

Interra's MProbe family of MPEG bitstream analysis software, a set of test, measurement and quality analysis tools for digital television and other MPEG applications, received official certification by Dolby Laboratories. The Dolby certification applies to Dolby Digital audio format support in the newly released version 3.2 of the MProbe 200 and the MProbe 110.

Broadcast Video Inc. recently purchased **Abekas** 8150 Digital Switchers for the company's film-to-tape transfer suites in Miami Beach, North Miami and Coconut Grove, FL.



Avica announced the sale of 10 Vecta DTV still stores to post production facility FotoKem, located in Burbank, CA.

WB affiliate KKYK-TV of Little Rock, AR, will use **Orad's** CyberSet O virtual

set system for its live newscasts. KKYK will be one of the first local stations in the U.S. to put a virtual set into daily operation for a live newscast.

People

CEI, a broadcast engineering firm, recently announced the addition of four engineers to its staff. They include: **Lachlan Murdoch MacNeil**, senior design engineer; **Bob Bieberdorf**, senior design engineer; **Jefferey Steele**, senior design engineer; and **Phillip Reiners**, assistant design engineer.



Bob Metzler, chairman of Audio Precision Inc., received the 1999 John Fluke Sr. Memorial Award for Management Excellence and Leadership at the recent NEPCON convention.

Telex/EVI Audio announced the appointment of **Alan B. Shirley** as vice president of marketing for its Speakers and Microphone Group.

Telex appointed **Lisa Hankins** as sales administration manager.

Vibrant Technologies recently hired two new regional sales managers. They are **Ken Sargent**, who will manage central U.S. sales activities and **Tom Craigin**, who will manage the company's East Coast sales.

Radamec named **Bret Lukezic** as general manager, effective April 1. ■

SPLIT IT!

HENRY ENGINEERING

503 Key Vista Drive
Sierra Madre, CA 91024 USA
TEL (626) 355-3656 FAX (626) 355-0077
FAX-on-Demand Doc #103 (626) 355-4210
<http://www.henryeng.com>



USDA is a handy 2-in, 4-out stereo "mini-DA" that can *combine* or split audio signals for distribution. Mix stereo to mono, get *both* stereo and mono outputs from a stereo source. Gain trims for each output. Great specs with lots of headroom. *Keep one on hand!*



We Build Solutions.

Circle (71) on Free Info Card

The Internet for Broadcasters

This book covers the effects of the Internet on broadcasting. The content includes technology and management articles, case studies, and a directory of Internet resources, which lists Web sites and e-mail addresses for equipment suppliers, services, information sources and organizations, as well as newsgroups and search facilities of interest to broadcast, video, and audio professionals. Paperback, 92 pp. ISBN #0-95178-267-3.



Order #2673
\$29.95

Broadcast ENGINEERING

Call 800-543-7771 to order!

www.internettelephony.com

INTERTEC PUBLISHING
A PRIMEDIA COMPANY

2673B

8-VSB MODULATOR

- For HDTV Terrestrial Broadcast System
- Conforms to ATSC Specs
- All Solid State Construction for High Reliability
- Digital Implementation for High Performance
- Indications for Lock and Error Conditions
- Options for
 - Non-Linear & Linear Pre-correction
 - External / Internal 10MHz Reference
 - SMPTE-310M Input
 - Remote Control
 - SNR Quality Indicator
 - Demod / Remod



KTech Telecommunications, Inc.

15501 San Fernando Mission Blvd.
Suite 100
Mission Hills CA 91345
PH (818) 361-2248 FAX (818) 270-2010
INTERNET: www.ktechtelecom.com
Email: skuh@ktechtelecom.com

Circle (72) on Free Info Card

A Digital Audio Masterpiece



The ADA2008

The Perfect Digital Audio Interface

Interfacing an analog VTR to a digital plant or a new digital recorder to an analog plant? The low cost ADA2008 is the perfect choice!

It features the award winning AD2004 A-to-D converter and the 20-bit brother, the DAC2004. Performance is uncompromising with THD+N of -107 dB. Power the system from the internal international supply or power up to 9 of the ADA2008s from the cost effective PS-202D external redundant supply. Call Rory Rall today.

- Affordable - No Compromise Performance
- 20-bit, 4-channel A-to-D, 4-channel D-to-A
- Ideal for digital consoles and routers
- THD+N: -107 dB (0.00045%) 20 Hz - 20 kHz
- 9 pSec intrinsic jitter
- AES lock with >50 dB jitter reduction
- 9 segment true digital level meters
- BNC/XLR Digital, XLR Analog connect
- External redundant power is available

Benchmark

www.benchmarkmedia.com
sales@benchmarkmedia.com

BENCHMARK MEDIA SYSTEMS, INC.
Phone 800-262-4675, FAX 315-437-8119

Circle (73) on Free Info Card

The GALLERY

The GALLERY

MightyCoder d/a

Digital to Analog
Portable Converter

CCIR 601 to Composite
YC, YUV, RGB
PAL or NTSC

4.5" x 3" x 1.2" **\$ 595.00**



Serial 601 Input with 2 Redlocked 601 Outputs

3 Selectable Output Formats
Composite plus YUV Composite plus RGB
Two Composite plus YC Color Bar Generator
6 Watt / 6VDC Plug in power supply

FOR-A Corporation of America
Phone (352)371-1505 Fax (352)378-5320



Manufactured in the United States of America

Circle (74) on Free Info Card


ENG  **Microwave**
Video Equipment

2.0 & 2.5 GHz Bands

FCC Type Accepted

Fixed Frequency Tunable Remotely Tunable Tower Cams Repeaters	Sel Output Pwr 1 MHz Steps Via RF or Tel Various Configs In-Band Avail
---	--

Call 888-819-4877 for Free Catalog




6570-B East 51st St., Tulsa, OK 74145
visit <http://www.tron-tek.com> or
email at tron@ionet.net

Circle (75) on Free Info Card

★ Featuring... ★

VIDEO COMPRESSION



Order
#3444,
\$55

Call 800-543-7771
to order!

ENGINEERING 3444B 

INTERTEC PUBLISHING
A B.L. MULL COMPANY



<http://www.intertec.com>
9800 Metcalf Avenue
Overland Park, KS 66212
Ph: (913) 341-1300
Fax: (913) 967-1898

Professional Services

Video2Net, Inc.

Streaming Video Solutions for Broadcasters

Robert J. Gordon President bgordon@video2net.com www.video2net.com	624 W. Main St. Louisville, KY 40202 502-584-4100 502-568-2501 fax
---	---

Want to become a more convincing
communicator? Ask about
Kare Anderson's fun and idea-packed
"Say It Better Bootcamps"
(and tapes) for the Technologically
Savvy? at kareand@aol.com.

Turnkey Tower Specialists



SWAGER
Communications, Inc.

Call 1-800-968-5601 or
Fax 1-800-882-3414 for details.

D.L. MARKLEY & Associates, Inc. CONSULTING ENGINEERS

2104 West Moss Ave.
Peoria, Illinois 61604
Phone (309) 673-7511 • FAX (309) 673-8128
www.dlmarkley.com
Member AFCEE

JOHN H. BATTISON P.E.
CONSULTING BROADCAST ENGINEER,
FCC APPLICATIONS AM, FM, TV, LPTV
Antenna Design, Proofs, Fieldwork
2684 State Route 60 RD #1
Loudonville, OH 44842
419-994-3849 FAX 419-994-5419

NETCOM

STATE OF THE ART ENGINEERING
FOR AUDIO AND VIDEO
ENGINEERING DESIGN • CAD DRAFTING SERVICES
CABLE FABRICATION • PRE-WIRED PATCH PANEL RACKS
SYSTEM INSTALLATIONS • EQUIPMENT SALES
(201) 837-8424
FAX: (201) 837-8384
1465 PALISADE AVE. THANECK, NJ 07066

Your Best Source for FCC Rules!

Pike & Fischer, Inc.
Available in loose-leaf print,
disk, and CD-ROM.
Call 800-255-8131.

Rules
covered:
1, 11,
17, 25,
26, 27,
73, 74,
79, 101

GILMER & ASSOCIATES, INC.
TECHNOLOGY / MANAGEMENT CONSULTANTS

BRAD GILMER
PRESIDENT

2207 RINGSMITH DR
ATLANTA, GA 30345
TEL (770) 414 9952
FAX (770) 493-7421
EMAIL bgilmer@allnet.com

Professional Patching Systems

Audio/ Video/ Data Patchbays/ Patch Cords
Harnesses/ Panels/ Cable Assemblies & Accessories
Leading manufacturer... Finest Quality... Superior Service

Toll Free: (877) 500-8142
Fax: (818) 500-7062

Bittree

Web: <http://www.bittree.com>
PO Box 3764 Glendale, CA 91221-0764

Professional Services

**Stretch your
Advertising Dollars!**
**Contact: Brian Huber at
800-896-9939 Today!**

Bill Ferster's NewsWire

Summarizes the important news events in the worlds of multimedia, video, animation, chips, mass storage and computers. The NewsWire is sent via email weekly for \$49 per quarter. Please check out the web site for sample issues. www.stageitools.com/bill

"NAME YOUR OWN PRICE ON DUPLICATIONS"

AUDIO • VIDEO • CD-ROM • DVD • DISK
Any Quantity

WWW.QUOTEIT.COM

"The First On-Line
Name Your Own Price Web Site"
A division of QuikBIZ Internet Group, a publicly traded company.

Classifieds Services

WE'VE GOT SERVICE DOWN TO A SCIENCE.

Technical Operations will keep you in-production and on-air with comprehensive equipment service capabilities that are fast, reliable and economical. We provide the service that you need - the way you want it: Off-site at one of our professionally staffed service centers, or at a dedicated service shop set-up at your facility. We are the reason the nation's leading broadcast and cable networks, Independent TV stations and production facilities depend on us everyday. *Get your service down to a science* with Technical Operations. For more information call 212-465-1318, outside of NY or NJ call toll free 1-877-420-1600.

TECHNICAL OPERATIONS, INC.

Circle (150) on Free Info Card

Are You Exposed?

Premium Cable Satellite Space Fully Protected

GE SATCOM C-3 • Full time DigiCipher-II digital channels
• Fully protected & non-preemptable
• Located at 131 W.L.
• E.O.L. 2004

Uplinking, playback, editing, and duplication services available

Call Doug Greene at 303-784-8809
or E-Mail at dgreene@jic.com



Circle (151) on Free Info Card

PTL TEST EQUIPMENT, INC.

Save 30% - 70% on quality
reconditioned test equipment.

Tektronix - Hewlett Packard -
MSI - Videotek, etc.

Video - RF - Microwave - Fiberoptics

Phone (561) 747-3647

Fax (561) 575-4635

BUY-SELL-LEASE-TRADE

Unlock the secret
to successful
advertising
continuity is the
key. Inquire today
about frequency
discounts.

Classifieds

Station for Sale

Miami TV Station - For Sale

Channel 21 LPTV Licensed to
City of Miami. 3rd Largest His-
panic Market. Excellent Oppor-
tunity \$2,750,000 Serious in-
quires only. Contact: Eddie
Sixto 305-261-0212 or email
edsixto@yahoo.com

Broadcast ENGINEERING

THE JOURNAL OF DIGITAL TELEVISION

reaches 33,013 qualified industry professionals
with your classified advertising message every month!
Call Brian Huber at 800-896-9939
to place your ad today!

CONSULTING • ENGINEERING



BECK ASSOCIATES

INSTALLATION • FURNITURE

**16024 Central Commerce Dr.,
Austin, TX 78660
1-888-422-8600
FAX: (512) 670-4390**

AESIO Digital/Audio Converter Panel
Provides simple conversion between 110 ohm and 75 ohm audio signals transformer coupled. BNC connectors for 75 ohm coax connections. Removeable terminal block connectors for 110 ohm paired audio cable. 32 positions. Two rack units (3.5"). **\$1,245**

TBC-RMT - TBC Remote Control Unit
Remote control of up to 3 TBC's. For use with JVC, Panasonic and Sony. Purchased with 1, 2, or 3 modules. With 3 modules. **\$960**

SCR-4X8-Serial Machine Control Router
Input/Output Twelve rear mounted DB9-F connectors (four controllers, eight devices). EIA RS-422 send and receive. Controls: Twelve lighted pushbuttons for channel assignment. **\$1,080**

SCP-10-Serial 422 Patch Panel 10 x 10
passive non-normalizing serial data patch panel. Two rack units high. Legend strips and 10 patch cords included. **\$400**

Circle (152) on Free Info Card

www.broadcastengineering.com

SMART TAPES.
For video duplication, demos, audition reels, work tapes, our recycled tapes are technically up to any task and downright bargains. All formats, fully guaranteed. To order call:
(800)238-4300

CARPEL VIDEO



AcousticsFirst
Toll-Free Number: **888-765-2900**

Full product line for sound control and noise elimination.
Web: <http://www.acousticsfirst.com>

WE SELL
Up to 90 Day Warranty Labor, One Year on Parts

**NEW & USED
All Major Brands,
Featuring:**

Sony
Pinnacle
Panasonic
Leitch
JVC
FAST
Avid

WE BUY

Over \$10 million of merchandise in stock - 1000's of items

Systems Equipment Businesses

BCS
BROADCAST STORE

LA 818-551-5858 / NY 212-268-8800
Fax 818-551-0686 Fax 212-268-1858
www.broadcaststore.com

Circle (153) on Free Info Card

**N.H. Primary
Studio facility
for Rent**

Call: 603-622-6604
Write: Molloy Sound & Video
155 Front St.
Manchester, N.H. 03102

Unique Ways To Interface Audio
GMZ Electronics

*PC Boards For Modifications & Stand Alone Hook Up
Your Idea's Work Better with GMZ!!*

- Talk Back-Mic Mixer
- Semi-Pro to Pro Buffer
- IFB Intercom Card
- 48VDC Phantom Supply
- 48VDC Splitter (4 Feds)
- Mixer Insert-send Buffer
- D-A 1 In 6 Out (or 6 In Buffer)
- Adaptive Cable EQ. www.gmez.com

gmz@mac.com
(732) 516-1500

Drop by the Web Site: www.gmezelectronics.com

<http://www.broadcastexchange.com>

The new way to buy and sell preowned broadcast video gear. Free listings. Online database.

1-888-FAX-GEAR Toll-free 24-hour
Fax-on-Demand

Dial toll-free or call +1.310.442.8491 to have the latest hot list sent to your fax!



Broadcast Exchange, Inc.
tel. 310.442.8488
fax 310.442.8490
email: broadex@aol.com

**Want more information
on advertised products?
Use the reader Service Card.**

WhisperRoom INC.
SOUND ISOLATION ENCLOSURES

PH: 423-585-5827
FAX: 423-585-5831

E-MAIL: whisper@lcs.com
WEB SITE: www.whisperroom.com

Vocal Booths
Broadcast Booths
etc...

116 S. Sugar Hollow Road
Morrison, Tennessee 37813

FREE 44pg Catalog & 80 Audio/Video Applic.

PWR SUPP. EQ. LAB PRODUCTS
PHONO. MIC.
TRANS. A.C.N.
TAPE VIDEO / PRESS
LINE. OSC

1 out 10 out Video/Audio
1 out 10 out Video/Audio
1 out 10 out Audio Only
1 out 10 out Video/Audio

Video & Audio Dist. Amps. Routing Switchers

OPAMP LABS INC (323) 934-3566
1033 N Sycamore Av LOS ANGELES CA. 90038
www.opamlabs.com

Used Equipment

AVID MC OFFLINE PCI (2) 21" MON. 9500 192/2G/CD.....\$2350C
AVID 1000 2D/36G PCI (2) 21" MON. 9500 192/2G/CD.....\$3950C
AVID 9000 (2) 21" MON. 9500 192/4G/CD.....\$CALL
AVID XPRESS DELUXE.....\$1600 OBO
ACCOM STRATOSPHERE/MICROSPHERE.....\$CALL
AVID DS TURNKEY \$128,000 **949-574-3939**

WHOLESALE PRICES ON NEW EQUIPMENT!
Prices on our web site at: <http://www.advancedvideosystems.com> Factory Authorized for 60 Makes! Advanced Video Systems (800) 233-2430.



Come to WETA in Arlington, VA... here's why: We are leading the way into the digital broadcasting future, already operating a full power digital transmitter and constructing a state of the art multi-channel all-digital master control facility. WETA is recruiting for a **Maintenance Technician** who has *vision*, a *passion* for new technology, and the *skills* to work in a highly intensive production operation with people who have fun working on incredibly challenging assignments. Send cover letter, resume, and salary requirements to WETA, 2775 S. Quincy St., Arlington VA 22206, or fax to 703/998-2034. EOE/D/M/H/V. Visit our website: <http://www.weta.org> for more information.

MAINTENANCE/REMOTE ENGINEER: Live and work in a wonderful climate with entertainment, sports, and cultural activities for all ages. Repair and adjust TV/Radio equipment in a leading Florida joint community station. Assist in construction of new equipment or modification of existing facilities. Assist remote production team. FCC general radiotelephone operator license, background in analog and digital troubleshooting required. Resume to: Human Resources, WMFE, 11510 East Colonial Drive, Orlando, FL 32817. Don't miss this great opportunity!

ASSISTANT CHIEF ENGINEER: WFFT FOX fort Wayne, a Quorum Broadcasting Co. station, is seeking a hands on assistant chief engineer. 5 years experience in repair and maintenance of broadcast equipment. Computer skills a plus. FCC or SBA certification desired. Send resume and salary requirements to Personnel Dept., WFFT TV, PO Box 8656, Fort Wayne, IN 46898-8655. EOE.


MASTER CONTROL OPERATORS Needed for 7 X 24 international news/broadcast company in Washington, DC. Three plus years Master Control experience required. Must be dependable, responsible, and available for any shift. Position responsibilities include: quality control for domestic/international signals via satellite and fiber plus limited studio production and editing. Competitive salary and benefits. Please indicate position applied for and submit resume to Director of Master Control, PVS/Speer International, 2030 M. Street N.W. Suite 400, Washington, DC 20036. EOE FAX: 202-775-1288.

Target your marketing. Aim your advertising at the right audience!

CHIEF ENGINEER: 3-5 years television experience. Computer skills/knowledge. Familiar with RF signal/Digital technology. Broadcast transmitters-Harris-Non-Smoker salary open\$. Fees paid. Excellent benefits!! Growth. G. Boren Services, Inc. 6413-University Avenue. 806.797.4161-Office/806.797.2620 - Fax. www.goboren.com

TV MAINTENANCE ENGINEER - You can live in one of the most beautiful oceanfront cities, work for the dominate number one station and be a part of one of the largest broadcast groups in the nation. WTOC-TV, a Raycom Media station, is seeking a hands-on engineer with a significant transmitter, ENG and master control background. Five years of broadcast TV maintenance, including transmitters, and IS experience is preferred. There will be work on some nights and weekends, but the days in Savannah are worth it! Qualified applicants are encouraged to send cover letter and resume to: Ms. Stacey DeLoach, Business MANAGER, WTOC-TV, P.O. Box 8086, Savannah, GA 31412. Raycom Media is an equal opportunity employer. Women and minorities are encouraged to apply. No phone calls, please.

BROADCAST MAINTENANCE SUPERVISOR: KBWB-TV, the San Francisco W3 affiliate is seeking a hands-on maintenance supervisor. You would be responsible for supervising the maintenance of studio and transmitter equipment, and our maintenance staff. WB-20 is in the early stages of transforming to digital broadcasting and you will be an integral part of this change. Experience working with Digital Beta, Beta-SX, 1", SNG and TVRO satellite systems, Townsend MSDC UHF transmitters, and microwave systems is desired. The ideal candidate will have 5 or more years analog and digital television broadcast maintenance experience, SBE certification is a plus and FCC license is required. WB-20 is a division of Granite Broadcasting Corporation. We are offering an excellent benefit package and competitive salary. Please submit your resume to us by mail: Director of Engineering, KBWB-TV, 2500 Marin Street, San Francisco, Ca. 94124 or by FAX to: 415-642-0571. KBWB-TV is an Equal opportunity employer.

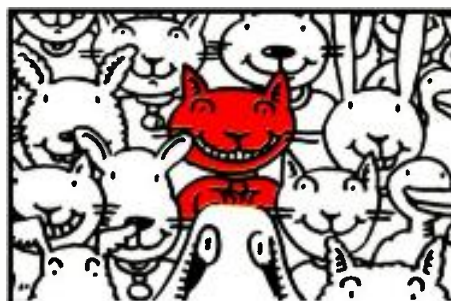

Make your ad stand out! Try color!

Call Brian at 800-896-9939 for more information.

EXPERIENCED SNG TRUCK OPERATOR: 2 years broadcast experience, satellite uplink and microwave operations. Lots of travel for aggressive news dept. Send resume to: Sam Tikkanen, KOB-TV, Job #15-99, 4 Broadcast Plaza, SW, Albuquerque, NM 87104. EOE/M-F.

CHIEF ENGINEER: Trinity Broadcasting station-Upstate New York. Experienced in maintenance of UHF transmitter, studio systems as well as personnel supervision and training. SBE certification a plus. Send resumes to Ben Miller, Mail: P.O. Box C-11949, Santa Ana, CA 92711; E-mail: Bmiller@TBN.ORG Fax: 714/665-2101. M/F EOE.

Check out the Broadcast Engineering web site for career opportunities!
www.broadcastengineering.com

WE PLACE ENGINEERS & Mfg. Sales/Marketing

Employer Paid Fees
20 Years personalized & confidential service.
All locations nationwide.



MAIL & FAX:

KEYSTONE INT'L, INC.

Dime Bank Bldg., 49 S. Main St., Pittston, PA 18640
Phone (570) 655-7143 • Fax (570) 654-5765

website: keystoneintl.com

We respond to all Employee & Employer inquiries
Alan Cornish / Mark Kelly



TURNER STUDIOS ENGINEERING/MAINTENANCE

Turner Studios is building a world-class digital post/production facility and has the following positions available:

MANAGER OF STUDIO ENGINEERING
Min. 5 years exp. in managing live television production events.

MAINTENANCE ENGINEER - EDITORIAL
Maintenance in an edit-support role. Tape maintenance exp. desired. Troubleshooting to component level. Min. 5 years exp.

MAINTENANCE ENGINEER-GRAPHICS/EFFECTS
Maintenance exp. in graphics-related television environments. Computer networking exp. a plus. Troubleshooting to component level. Min. 5 years exp.

Come be a part of our team!
Kevin B. Shorter
Vice President of Engineering
Turner Studios
1050 TechWood Drive NW
Atlanta, GA 30318

SONY

Contract/Consultant Opportunities

Always wanted to work with an undisputed World Leader? Here's a chance to work with the best in the business. Opportunities available immediately for state-of-the-art turnkey broadcast production and play-out projects. Requires full time presence at Sony's facilities in San Jose, CA. to start. Travel to job site will be required, especially during the installation and testing stages of the project.

Sr. Level Video Systems Design Engineer

Job Code: BEM-LM-7704233

Job requires 5+ years' professional exp in the design, operation, testing and maintenance of large scale digital video and audio production and broadcast facilities. Job duties focus on the design of floor plans, equipment rack and patch bay elevations; and signal flow diagrams. Must be computer savvy, have in-depth knowledge of MS Windows and Excel, and have a strong electronics background. AutoCAD, LAN/WAN, ATSC, MPEG-2, AC-3 and video server experience a plus.

Project Managers

Job Code: BEM-DO-7704233

Job duties focus on the management of resources to execute fully-integrated broadcast systems. Must complete projects on time and within budget using your 5+ years' exp in project management in broadcast/production systems.

Please forward your resume, indicating job code, to: Sony Electronics Inc., 3300 Zanker Road, MD #5J2C2, San Jose, CA 95134-1901. Fax 408/955-5166 or e-mail sj_jobs@mail.sel.sony.com. EOE/M/F/D/V

www.sony.com/jobs

We can create a custom reprint for any marketing effort without breaking your budget.

For a quote call:
Jenny Eisele
INTERTEC Publishing
Phone: (913) 967-1966
Fax: (913) 967-1898

Invest Your
Advertising Dollars
Where Your Prospects
Invest Their Time.....



ENGINEERS

Turner Broadcasting System has career opportunities for experienced television engineers. These career positions demand an extensive background in equipment maintenance, digital video and audio, and knowledge of computer systems and networks. Please mail or fax your resume and cover letter to:

Jim Brown, Assistant Vice President of Engineering Services
Turner Broadcasting System, Inc.
One CNN Center • P.O. Box 105366
Atlanta, GA 30348-5366
Fax: 404-827-1835 • Phone: 404-827-1638
TBS is an equal opportunity employer

MAINTENANCE ENGINEER: Multi-channel broadcast operation seeks qualified technician with Associates Degree and three to five years experience repairing and installing broadcast equipment. Candidate must have a solid electronics background with component level repair skills, including analog and digital equipment and all aspects of ENG maintenance. Candidate must also be skilled in computer systems and networks. Panasonic DVCAM experience a plus. KXAN-TV / LIN Television is an Equal Opportunity Employer. Send resume to: Engineering Supervisor * KXAN-TV * PO box 490 * Austin, TX * 78767 * Fax (512) 482-0330.

TELEVISION ENGINEER: KLKN-TV, an ABC affiliate, is seeking an individual with a strong broadcasting background. This position requires complete knowledge of satellite systems, transmitters, computers, and control room and studio equipment. Excellent salary with benefits including insurance and 401(k). Please send resume to KLKN-TV, Attn.: PBM, 3240 So. 10th St., Lincoln, NE 68502. EOE.

AdIndex

	Page Number	Reader Service Number	Advertiser Hotline
Adaptive Broadband	87	48	800-490-5700
ADC Telecommunications	31	8	612-403-8886
ADC Telecommunications	32	10	612-403-8886
Adherent Ltd.	135	68	
Allied Tower	82	41	281-535-0501
Audio Precision	15	5	800-231-7350
Audio Technica U.S.	57	34	330-686-2600
Avid Technology	41	29	800-949-2843
Axon Digital Design	40	28	314-241-4500
Azden Corporation	119	63	516-328-7500
Beck Associates	146	152	888-422-8600
Benchmark Media Systems	143	73	800-262-4675
B&H Photo-Video	138-141	69,70	800-947-9928
The Broadcast Store	146	153	818-551-5858
Broadcast Video Systems	114	54	905-764-1584
Canon USA	27	16	800-321-4388
ClearCom Intercom Sys.	77	47	510-496-6666
Column Systems	66	26	303-237-4000
CommScope	61	36	800-982-1708
Continental Electronics	115	55	214-381-7161
Datatek, Inc.	111	51	800-882-9100
DiviCom	43	30	877-DIVCOM
DINF Industries	114	53	818-252-0198
Dolby Labs Inc.	35	18	415-558-0200
DPS	51	22	606-371-5533
Drastic Technologies	123	65	416-255-5636
DTV91	30		800-288-8606
Extron Electronics	59	35	714-491-1500
For A Video	144	74	352-372-0270
General Instrument Corp.	127	59	215-956-6505
Centra Communications	54	24	800-945-7730
Harris Corp./Broadcast Div.	3	4	606-282-4800
Henry Engineering	143	71	626-355-3656
Hewlett Packard	47	20	800-452-4844
Itelco	79	38	303-464-8000
ITS '99	137		703-319-0800
Jones Earth Segment, Inc.	145	151	303-784-8809
JVC Professional Products	49	21	800-JVC-5825
KTech Telecommunications	143	72	818-361-2248
Leitch Incorporated	36-37	19	800-231-9673
Leitch Incorporated	152	3	800-231-9673
Louth Automation	73	46	415-843-3665
Miracola Technologies Inc.	9	12	514-333-1772

	Page Number	Reader Service Number	Advertiser Hotline
NDS America	39	27	714-725-2500
Network Electronics	46	32	800-877-TAPE
NVision Inc.	52-53	23	530-265-1000
Odetics, Inc.	19	7	800-243-2001
Orban	125	67	510-297-2774
Panasonic Broadcast	5		800-528-8601
Pesa Switching	29	17	800-328-1008
Philips Digital Video	7	11	800-962-4287
Pinnacle Systems Inc.	109	62	650-526-1600
Pirol, Inc.	118	58	219-936-4221
Prof. Communication Sys.	71	45	811-888-5353
Prof. Audio Supply	82	42	903-737-8478
Quantegy Inc.	67	37	770-486-2800
Quantel Ltd.	11	13	446-354-8222
Ross Video	129	60	613-652-4886
Sachtler Corp.	25	15	516-867-4900
SeaChange	55	33	508-897-0100
Sierra Video Systems	118	57	530-478-1000
Silicon Graphics	117	56	800-636-8184
Snell & Wilcox	44-45	31	408-260-1000
Snell & Wilcox	84-85	44	408-260-1000
Snell & Wilcox	120-121	64	408-260-1000
Solid State Logic	33	9	800-343-0101
Sony Electronics	12-13		800-635-SONY
Sony Electronics	75		800-635-SONY
STB Systems	130	61	972-234-8750
Switchcraft Inc.	81	40	773-792-2700
Technical Operations	145	150	212-465-1318
Tektronix Inc.	20-22		800-998-3588
Tektronix Inc.	64-65		800-998-3588
Telecast Fiber Systems	124	66	508-754-4858
Telex Communications	88	49	800-392-3497
Tieman Communications	17	6	619-587-0252
Trompeter Electronics	80	39	818-707-2020
Tru-Tek	144	75	918-663-4877
TVOne	24	14	606-282-7303
Vela Broadcast	112-113	52	801-464-1600
Vibrant Technologies	83	43	781-275-4088
Videotek, Inc.	151	2	800-800-5719
Wheatstone Corporation	2	1	252-638-7000
Windows to the Web	136		
Yamaha Corporation	89	50	800-937-7171
360 Systems	63	25	818-991-0360

Broadcast ENGINEERING

EDITORIAL

Brad Dick, *Editor*
 Steve Epstein, *Technical Editor*
 Jim Saladin, *Senior Associate Editor*
 Patrick Murphy, *Associate Editor*
 Sandra Ferguson, *Editorial Assistant*
 Tom Cook, *Dir., Editorial Development*

ART

Andrew Brown, *Art Director*

TECHNICAL CONSULTANTS

Jerry Whitaker, *Conference Consultant*
 Brad Gilmer, *Computers & Networking*
 John H. Battison, P.E., *Antennas/Radiation*
 Michael Robin, *Digital Video*
 Donald L. Markley, *Transmission Facilities*
 Harry C. Martin, *Legal*
 Larry Bloomfield, *News Technology Editor*
 Paul McGoldrick, *Industry Watcher*

BUSINESS

John Torrey, *V.P. Entertainment Division*
 Dennis Triola, *Group Publisher*
 Kathy Lewis, *Advertising Coordinator*
 Mary Mitchell, *Classified Adv. Coordinator*
 Barbara Kummer, *Circulation Director*
 Leann Sandifar, *Circulation Manager*
 INTERTEC Publishing
 Raymond E. Maloney, *Chairman*
 Cameron Bishop, *President and CEO*
 Ron Wall, *Chief Operating Officer*
 Stephanie Hanaway, *Div. Dir. of Marketing*
 Doug Conrad, *Corporate Art Director*

PRIMEDIA Information Group

Curtis Thompson, *President/CEO*

PRIMEDIA Inc.

William F. Reilly, *Chairman and CEO*
 Charles McCurdy, *President*
 Beverly C. Chell, *Vice Chairman*

MEMBER ORGANIZATIONS

Sustaining Members of:

- Acoustical Society of America
- Society of Broadcast Engineers
- Society of Motion Picture and TV Engineers
- Society of Cable & Telecommunications Engineers

Member, American Business Press

Member, BPA International

Affiliate Member,

International Teleproduction Society



BROADCAST ENGINEERING is edited for corporate management, engineers/technicians and other management personnel at commercial and public TV stations, post-production and recording studios, broadcast networks, cable, telephone and satellite production centers and networks.

SUBSCRIPTIONS: Non-qualified persons may subscribe at the following rates: United States and Canada; one year, \$55.00. Qualified and non-qualified persons in all other countries; one year, \$70.00 (surface mail); \$130.00 (air mail). Subscription information: P.O. Box 12937, Overland Park, KS 66282-2937.

Photocopy authorization for internal or personal use is granted by PRIMEDIA Intertec, provided that the base fee of U.S. \$2.25 per copy, plus U.S. \$0.00 per page is paid directly to Copyright Clearance Center, 222 Rosewood Dr., Danvers, MA 01923. The fee code for users of the Transactional Reporting Service is ISSN 0361-0942/1999\$2.25+.00.00. For those organizations that have been granted a photocopy license by CCC, a separate system of payment has been arranged. Prior to photocopying items for classroom use, contact CCC at (978) 750-8400. For large quantity photocopy or reprint requirements contact Jenny Eisele, (913) 967-1966. For microfilm copies call or write UMI, 300 N. Zeeb Rd., P.O. Box 1346, Ann Arbor, MI 48106-1346. Phone: (313) 761-4700 or (800) 521-0600.

©1999 by Intertec Publishing
 All rights reserved.



Sales Offices

WEST
 Duane Hefner
 5236 Colodny Ave., Suite 108
 Agoura Hills, CA 91301
 (818) 737-6476
 Fax: (818) 707-2313
 dhhefner@worldnet.att.net

Sue Hefner
 809 South Orange Drive
 Los Angeles, CA 90036
 (323) 933-9485
 Fax: (323) 965-1059
 audier@mediaone.net

EAST
 Josh Gordon
 335 Court Street, Suite #9
 Brooklyn, NY 11231
 (718) 832-0488
 Fax: (718) 522-4751

EAST/MIDWEST
 Joanne Melton
 1775 Broadway, Suite 730
 New York, NY 10019
 (212) 333-4655
 Fax: (212) 459-0395
 joanne_melton@intertec.com

INTERNATIONAL
 Richard Woolley
 Tony Chapman
 P.O. Box 250
 Banbury, Oxon OX16 8YJ U.K.
 +44(0) 1295 278407
 Fax: +44(0) 1295 278408
 richardwoolley@compuserve.com

JAPAN
 Orient Echo, Inc.
 Masahiro Yoshikawa
 1101 Grand Maison
 Shimomiyabi-Cho-2-18
 Shinjuku-ku, Tokyo 162, Japan
 (3)+81 3235-5961
 Fax: (3)+81 3235-5852

CLASSIFIED ADVERTISING
OVERLAND PARK, KS
 Brian Huber
 P.O. Box 12901
 Overland Park, KS 66282
 (800) 896-9939 (913) 967-1732
 Fax: (913) 967-1735

LISTRENTAL SERVICES
 Lori Christie
 9800 Metcalf
 Overland Park, KS 66212-2215
 (913) 967-1875
 Fax: (913) 967-1897

CUSTOMER SERVICE: 913-967-1711 OR 800-441-0294

BROADCAST ENGINEERING (ISSN 0007-1994) is published monthly (except semi-monthly in May and December) and mailed free to qualified persons by PRIMEDIA Intertec, 9800 Metcalf, Overland Park, KS 66212-2216. Periodicals postage paid at Shawnee Mission, KS, and additional mailing offices. Canada Post International Publications Mail (Canadian Distribution) Sales Agreement No. 0956235. POSTMASTER: Send address changes to *Broadcast Engineering*, P.O. Box 12902, Overland Park, KS 66282-2902. CORRESPONDENCE: Editorial and Advertising: 9800 Metcalf, Overland Park, KS 66212-2216 Phone: 913-341-1300; Edit. fax: 913-967-1905; Advert. fax: 913-967-1904. ©1999 by Intertec Publishing. All rights reserved.

Good maintenance is not an accident

BY PAUL MCGOLDRICK



When I was a lot younger I wrote a monthly column answering pleas for help about TV receiver repair. Because of this, I knew the ins and outs of just about every TV chassis made. The same faults were recorded in letters again and again. About 90 percent of the problems could be diagnosed without even pulling out the circuit diagram. Because I got paid for every letter answered, including the more interesting ones that were published, the more the merrier. When a really unusual fault symptom was offered, most turned out to be situations where the reader had done things wrong or overlooked something more obvious. You could nearly always pinpoint the problem to within a couple of possible parts — which just added more to my own information database.

It was completely different working with broadcast transmitters: AM, HF, FM, as well as television transmitters across the spectrum. An efficiency expert visited a transmitter station where I worked, complete with his stopwatch, clipboard and pencil. He was horrified that when a transmitter went down we read meters, observed status monitors and then pulled out plywood-mounted circuit diagrams to start isolating the fault. He completely failed to understand that we were not smart (or psychic?) enough to walk directly to the faulty part, yank it, replace it and get the thing back on the air.

Around the same time I remember a supervisor deciding that a telecine channel was producing too much noise, and he concluded that it needed to be completely retubed. This innocent (or lunatic, I've never been too sure) was kind enough to do the hard work of pulling every tube out of this Cintel channel and tossing all of them. I was left with the job of retubing the whole thing. It did not, of course, turn out the way that my supervisor expected. It took nearly

a week to get the channel operational and up to spec.

Times have changed

Today, maintenance is even more difficult, especially if performed down to the component level. Indeed, in a lot of equipment, manufacturers do not really expect that level of expertise. With the interaction of the various modules of just about any camera, VTR or transmitter, there is still a lot of pulling and replacing of modules and feeling around before many maintenance efforts are successful. It is interesting that when you compare electronic servicing and the servicing of automobiles, they seem to be astonishingly alike. Then you realize that the complications in auto repair are mostly due to the electronic content. I have known a number of extremely well-paid auto technicians who admit that repairing vehicles is no longer the fun it used to be.

Fault diagnosis using the data made available by testers can also be confusing. Fault codes are often caused by a fault in another location, a cascade effect that confuses and delays repairs. Simply replacing pieces until something relative to the problem changes is an expensive, and unfortunate, fact of life.

For us in the electronics world, this situation should be different. Unlike most auto technicians, we are supposed to understand the nuts and bolts of the operation of the products; we should be able to identify the faulty module the first time and then replace it. But, of course, that is not life as we know it. The module we believe we need is the only one we don't have a replacement for or it's well outside the time that the manufacturer has its help line open. If it's not, "We've never seen that problem before," it's "Are you sure you've checked the XX?"

When I worked for a company that

provided emergency help lines for 24 hours — a regimen that a number of us cycled through — it was astonishing how many calls we received for problems that had nothing to do with our equipment. We were a phone number — a hope in the middle of the night for the desperate. Like a good suicide hotline, we always tried to help.

Many service manuals are not the complete tools they once were. Often, they seem to have been put together at the lowest price possible rather than with the customer's maintenance needs in mind. Products are getting to the market much quicker than ever before, leaving less time for service material to be produced. There really is no substitute for attending a manufacturer's training course for the essential pieces of equipment in your operation. If such a course is not offered, maybe you should think twice about whether you want to buy that particular piece of equipment. If management doesn't want to cover the costs of getting you to a training course, then maybe you need to think again about accepting responsibility for the equipment. Besides, training costs are usually negotiable with the vendor.

An understanding of maintenance doesn't come automatically; it requires training and reinforcement in every situation. With the incredibly tight connections between microprocessor and signal circuitry in modern equipment it is almost impossible to understand how a complex piece operates without a detailed, hand-held explanation. Unfortunately, in many situations today, getting that explanation seems harder than ever. ■

Paul McGoldrick is an industry consultant based on the West Coast.



Send questions and comments to:
paul_mcgoldrick@intertec.com

Stay Tuned...



DM-200

With Videotek's High Performance Demodulator.

The DM-200 is the industry leader for high-performance agile demodulators. With a signal-to-noise ratio better than 60dB and differential gain and phase less than 1% and 1°, the DM-200 is a unique engineering feat packaged in a half-rack one RU size. Nearly 25 years of agile demodulator experience has enabled Videotek to design the demod you have been asking for — a replacement for the long discontinued TEK 1450. The challenge has been met and, in the process, features such as BTSC stereo, SAP, and total computer control were engineered in to meet today's requirements—at about one fourth the price.

Only Videotek offers all the performance, all the features, and all the controls in a single, compact, affordable package. Stay tuned with the new benchmark DM-200.

For more information and (or) a free 30-day trial, see our web site at www.videotek.com or call and talk with one of our expert sales engineers at 1-800-800-5719.

**Premium Quality, Intelligent Design,
Smart Price...That's Videotek.**

VIDEOTEK™
A Zero Defects Company

Five Year Warranty
ISO-9001 Certified

243 Shoemaker Road, Pottstown, PA 19464 Toll Free: (800) 800-5719 (610) 327-2292 Fax: (610) 327-9295
Visit us on the Worldwide Web: www.videotek.com

Circle (2) on Free Info Card

www.americanradiohistory.com

Experience Juno's Picture Perfect Upconversion



 **HDTV GLUE™**

The Art of Upconversion

If upconversion is an art form, Leitch's Juno™ is a masterpiece. We've spent nearly three decades refining techniques that, combined with technology's latest advances, have produced one of our industry's finest works of art.

Leitch's Juno upconverter uses award-winning, motion-adaptive interpolation to convert your standard-definition digital signals to high-definition, wide-screen format—with virtually no artifacts. Just as great paintings are crafted with many brushes, masterful upconversion requires various processing filters. Juno analyzes your signal pixel-by-pixel and, for every image, dynamically selects the filter that will maximize detail to enhance the beauty of your high-definition output.

For even greater aesthetic quality, Juno takes advantage of matching input fields by auto-detecting 3:2 film sequences in the input signal and adjusting the processing aperture accordingly.

With powerful built-in noise reduction, audio delay, and both SDI and analog I/Os, Juno requires no external frames, so it consumes just 2 RU of your precious space. Its colorimetry accurately converts SD color space to HD color space, and sophisticated processing gives you dynamic and variable aspect ratio conversion.

Commission the fine upconversion artists at Leitch. Entrust your high-definition canvas to Juno.



www.leitch.com

Call **1-800-231-9673** for more information.



 **LEITCH**

ENGINEERING THE BIG PICTURE™

International/Canada +1 (416) 445-9640, (800) 387-0233 • USA, East +1 (800) 231-9673, USA, West +1 (888) 843-7004 • Latin America +1 (305) 591-0611
Europe +44 (0) 1483-591000 • Australia +61 (2) 9939-3355 • Japan +81 (3) 5423-3631 • Hong Kong +852 2776-0628 • Brazil +55 (11) 867-0218

Circle (3) on Free Info Card

www.americanradiohistory.com