

ranging from 0.5 to 2.0 μ s. The turn-on time of the pump was adjusted so that its leading edge corresponded smoothly with the leading edge of the signal pulse. The pump power was held constant at 1.5-watts peak for all cases. It will be noted that regardless of the pump pulse width the parametric coupling apparently occurs only during the initial turn-on time of the pump.

The character of the leading and trailing edges of this "spike gain" phenomenon can be seen more clearly in the expanded oscilloscope photograph shown in Fig. 2. Although the true response time of the magnetoelastic interaction process is probably masked by the relatively narrow-band (10 Mc/s) IF amplifier employed in the experimental arrangement, the observed transient suggests a very rapid initial buildup, followed by an exponential relaxation. Noise fluctuations on the tail of the decay inhibited any detailed observations of a ringing effect, which is suggested by the slight undershoot in the amplified pulses of Fig. 1.

It should also be pointed out that by using a suitably narrow signal pulse, the amplification can be made to take place for the entire pulse duration. As can be seen from Fig. 2, the width of the amplified portion of the signal pulse at the half-power points is about 0.5 μ s. If superimposed on a signal pulse less than 1- μ s wide, amplification effectively occurs over the entire pulse. Amplification of elastic waves by means of the "spike gain" phenomenon have resulted in electronic gains of 55 dB at room temperature, thus far.

One further experiment that was performed is illustrated by the series of oscilloscope photos shown in Fig. 3. In this case, the pump pulse width was held constant at 0.5 μ s and the pump turn-on time, as represented by the upper trace in each photo, was smoothly varied across the width of the signal pulse. In Fig. 3(a) the leading edge of the pump pulse corresponds with the leading edge of the signal pulse. Figures 3(b), (c), and (d) select out successively later portions of the signal pulse including the trailing edge. Finally, in Fig. 3(e) only the elastic wave noise pulse³ is visible in the absence of any interaction with a coherent signal.

This latter experiment demonstrates the feasibility of achieving a coherent variable delay that is electronically controllable through the turn-on time of the pump. By maintaining the input signal power just below the output level of detectability, the leading edge of the pump pulse might be used as a sensitive probe to raise the desired portion of the signal pulse out of the noise level. It is to be noted that the process described differs from the variable time delay of microwave pulse echoes reported by Damon and van de Vaart⁴ for spin waves.

R. A. SPARKS
E. L. HIGGINS
Amecon Div.

Litton Systems, Inc.
Silver Spring, Md.

³ H. Matthews, "Elastic wave amplification in yttrium iron garnet at microwave frequencies," *Phys. Rev. Letters*, vol. 12, pp. 325-327, March 23, 1964.

⁴ R. W. Damon and H. van de Vaart, "Microwave pulse echoes with variable time delay by parametric pumping of traveling spin waves," *Appl. Phys. Letters*, vol. 6, pp. 194-196, May 15, 1965.

Linear Tuning of a Microwave Cavity

The usual tuning devices used with microwave cavities have pronounced nonlinear (frequency vs. probe position) characteristics because of their operation in non-uniform fields. The arrangement¹ described here encloses a small tuning probe with a dielectric sleeve of such shape as to improve

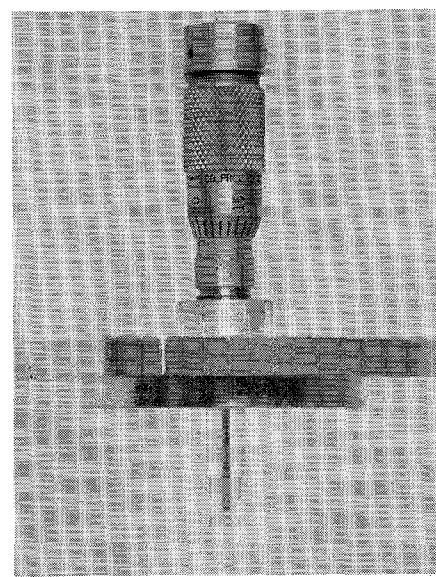


Fig. 1. Tuning probe enclosed in specially-shaped dielectric sleeve.

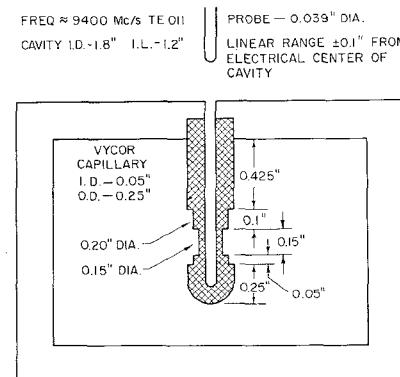


Fig. 2. Dimensional drawing of sleeve.

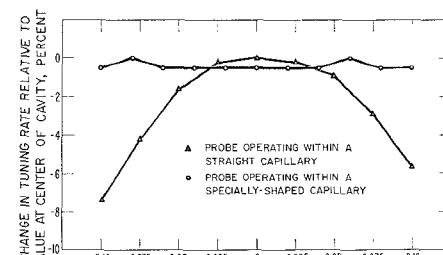


Fig. 3. Improvement in linearity of tuning rate over a range of ± 0.1 inch, expressed in per cent of tuning rate at center of cavity.

Manuscript received July 23, 1965.

¹ M. J. Vetter, "Movable resonant cavity tuning probe in dielectric sleeve having nonuniform outer surface," U. S. Patent 3 158 825, November 24, 1964.

the uniformity of the field around the probe and consequently the linearity of tuning over a useful range of operation.

General physical characteristics are shown in Figs. 1 and 2. The Vycor capillary has characteristics similar to fused quartz with a dielectric constant of approximately 3.8 and a very low dissipation factor.

Basically, the tuning probe is enclosed by more of the dielectric material in regions where the electric field would tend to be lower. This material concentrates the field in these regions and results in a uniform field over the desired range.

The choice of dimensions was arrived at empirically, and the effects are shown in Fig. 3.

A number of factors determine the optimum shape for the sleeve and effectiveness of the system. These include the dielectric constant of the sleeve, the diameter of the probe, the dimensions and configuration of the cavity, and the monomial field distribution in the region of the probe. The same concept could be used on cavities operating in other than the TE011 mode that was used here.

M. J. VETTER
Tropospheric Physics Section
Central Radio Propagation Lab.
National Bureau of Standards
Boulder, Colo.

Experimental Results in Groove Guide

This correspondence is concerned with the following developments in low-loss groove guide:

- 1) development of a transducer [1] from rectangular H_{10} mode to groove guide H_{11} (low-loss) mode,
- 2) experimental determination of transducer performance,
- 3) experimental verification of the dispersion relation and the attenuation constant obtained from the approximate theory developed by Ruddy [2]-[4] and Griemsmann [5] at the Polytechnic Institute of Brooklyn (PIB).

The mode transducer configuration is shown in Fig. 1. The inset shows a side view. The design is based, in some degree, on experience gained in the development of a mode transducer for low-loss H -guide [6] at PIB.

The transition is accomplished in two distinct steps. The first step is a transformation from rectangular waveguide to a special groove guide in which the plate separation b' in the extra-groove region is smaller than normal design value. This dimension is chosen such that the H_{10} parallel plate mode will be below cutoff for the highest frequency

Manuscript received April 23, 1965. The work reported here was sponsored by the Air Force Office of Scientific Research of the Office of Aerospace Research, under Contract AF 49(638)-1402.