

Finally, the only possibility to meet a generalized function, i.e., the only case in which (8) fails, is when the tangential component of the perturbed field is not zero on the contour while the unperturbed guide has perfect metallic walls.

Now let us consider the electric analog of (8):

$$i\omega\epsilon\mathcal{E}_z + \mathcal{J}_z = i\omega\epsilon\sum C_k E_{zk}. \quad (12)$$

This expansion will be valid or not accordingly as

$$\nabla_T \cdot (u_z \times \mathcal{J}_T') = \frac{\partial \mathcal{J}_s'}{\partial n} - \frac{\partial \mathcal{J}_n'}{\partial s} \quad (13)$$

contains a Dirac function. This time, neither the separation lines, nor the contour have any effect, since for instance on the contour this is the normal component and not the tangential one which is identically zero with only a step discontinuity. Thus expansion (12) is always valid.

III. GENERALIZATION

In the preceding discussion we have assumed that the unperturbed waveguide has perfect metallic walls. In the case of perfect magnetic walls, we must invert our conclusions on expansions (8) and (12): (8) is always valid, while (12) fails when the perturbed transverse magnetic field has a nonzero tangential component on the contour. If in the unperturbed state, the walls have some finite, nonzero surface impedance, none of the sets $\{E_{sk}\}$ or $\{H_{sk}\}$ may be identically zero on the contour, no Dirac function may occur by the above mechanism, and the two expansions are simultaneously valid.

Let us point out that we have assumed the perturbed field has no singularity, which is sufficient for a number of practical cases. However, some perturbations such as dielectric or metallic wedges or metallic strips introduce singularities and are not covered by our theory. For instance, in the case of a microstrip line shielded in a rectangular waveguide, one may attempt to expand the field in terms of normal modes of the rectangular waveguide: then one easily finds that the expansion (12) fails.

IV. CONCLUSION

In conclusion when the perturbed field has no singularity, expansions (8) and (12) would always be valid unless the perturbed field does not respect some nullity condition imposed on the contour to the transverse tangential electric or magnetic field in the unperturbed waveguide. The possible nullity conditions on axial components would have no importance. Especially the expansions would always be valid in the case of open waveguides which have no contour. Let us recall that we have not rigorously established our proposition; we have only suggested that a suitable extension of the theory of generalized Fourier series might likely make it firmer, but such a purely mathematical work is largely beyond the scope of this letter.

REFERENCES

- [1] G. J. Gabriel and M. E. Brodwin, "The solution of guided waves in inhomogeneous anisotropic media by perturbation and variational methods," *IEEE Trans. Microwave Theory Tech.*, vol. MTT-13, pp. 364-370, May 1965.
- [2] —, "Perturbation analysis of rectangular waveguide containing transversely magnetized semiconductor," *IEEE Trans. Microwave Theory Tech.*, vol. MTT-14, pp. 258-264, June 1966.
- [3] I. C. Chang, "Note on perturbation analysis of guided waves in inhomogeneous media," *IEEE Trans. Microwave Theory Tech.* (Corresp.), vol. MTT-16, p. 260, Apr. 1968.
- [4] R. E. Collin, *Can. J. Phys.*, vol. 51, p. 1135, 1973.
- [5] H. G. Unger, *Bell Syst. Tech. J.*, vol. 37, p. 1599, 1958.
- [6] R. E. Collin, *Field Theory of Guided Waves*. New York: McGraw-Hill, 1960.
- [7] L. Schwartz, *Méthodes Mathématiques pour les Sciences Physiques*. Paris: Hermann & Cie, 1965.
- [8] V. I. Smirnov, *A Course of Higher Mathematics*, vol. 2. New York: Pergamon, 1964. (Actually the generalized Fourier series mentioned in this book ought to be further generalized in order to contain our four-vectors expansions in terms of modes.)

Correction to "Power Deposition in a Spherical Model of Man Exposed to 1-20 MHz Electromagnetic Fields"

JAMES C. LIN

In the above paper,¹ Fig. 5 on page 794 should be as shown here in Fig. 1. An error occurred in translating the tabulated data into graphic form. The corrected figure is consistent with the results shown in Fig. 3 of the above paper.¹

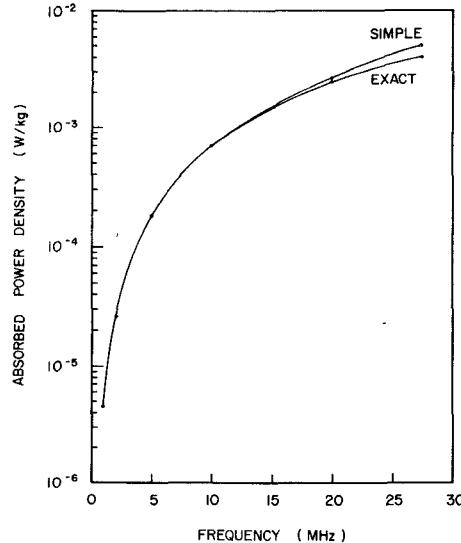


Fig. 1. Maximum absorbed power densities in a man-size sphere given by exact Mie solution and the simplified solution. Incident power density is 1 mW/cm².

Manuscript received July 31, 1974.
The author is with the Department of Rehabilitation Medicine, University of Washington School of Medicine, Seattle, Wash. 98195.
¹ J. C. Lin, A. W. Guy, and C. C. Johnson, *IEEE Trans. Microwave Theory Tech.*, vol. MTT-21, pp. 791-797, Dec. 1973.

Correction to "Variational Solution of Integral Equations"

BRUCE H. McDONALD, MENAHEM FRIEDMAN, AND ALVIN WEXLER

In the above paper,¹ two errors have been noted. First, the proof of positive-definiteness of the integral operator on page 239 requires that the potential vanish at infinity. This condition should have been stated just before (19b). By virtue of mirror image symmetries, all the examples presented satisfy this condition.

Difficulties may arise in certain two-dimensional problems because of the logarithmic Green's function. For example, if S is a circle of a radius a and the charge σ is constant:

$$\langle K\sigma, \sigma \rangle \propto -\sigma^2 \ln a.$$

Positive-definiteness holds only for $a < 1$; the form vanishes at a

Manuscript received August 16, 1974.

B. H. McDonald and A. Wexler are with the Department of Electrical Engineering, University of Manitoba, Winnipeg, Man., Canada. M. Friedman was on leave at the Department of Electrical Engineering, University of Manitoba, Winnipeg, Man., Canada. He is now with the Nuclear Research Centre, Beersheba, Israel.

¹ B. H. McDonald, M. Friedman, and A. Wexler, *IEEE Trans. Microwave Theory Tech.*, vol. MTT-22, pp. 237-248, Mar. 1974.

= 1 and is negative for $a > 1$. This is because the potential does not vanish at infinity.

Suppose that a constant is added to the logarithm as follows:

$$\begin{aligned} G(s | s') &= \frac{1}{2\pi} \ln |s - s'| + C = -\frac{1}{2\pi} \ln |s - s'| + \frac{1}{2\pi} \ln k \\ &= -\frac{1}{2\pi} \ln \left\{ \frac{|s - s'|}{k} \right\}. \end{aligned}$$

Then if $|s - s'| < k$

$$G(s | s') \geq M > 0$$

and

$$\int_S \int_S \sigma(s) \sigma(s') G(s | s') ds' ds \geq M \left\{ \int_S \sigma(s) ds \right\}^2 \geq 0$$

and $\langle K\sigma, \sigma \rangle$ is strictly positive. It is sufficient that k be greater than the distance between any two points on S .

The other error involves (32) on page 241. The limit actually involves R , the radius of curvature of S at s' . For the two-dimensional problem

$$\lim_{s \rightarrow s'} \frac{\partial G(s | s')}{\partial n} \propto 1/R.$$

If S is a straight line at s' , $R \rightarrow \infty$, and the limit vanishes. This is

the situation intended at (32) and is correct for the pulse functions used in the examples.

Correction to "Surface Electromagnetic Modes of a Ferrite Slab"

THOMAS J. GERSON AND JOSEPH S. NADAN

In the above paper,¹ (23) is incorrectly referenced. The correct reference should be [4]. A second error appears on page 760 in the second sentence of the paragraph beginning immediately above Fig. 2. In this sentence the words "dynamic" and "magnetostatic" should be interchanged. The authors wish to thank J. Sethares of the Air Force Cambridge Research Laboratories for bringing the latter error to their attention.

Manuscript received August 29, 1974.

T. J. Gerson is with the Department of Electrical Technology, Queensborough Community College, The City University of New York, Bayside, N. Y. 11364.

J. S. Nadan is with the Department of Electrical Engineering, The City College, City University of New York, N. Y. 10031.

¹T. J. Gerson and J. S. Nadan, *IEEE Trans. Microwave Theory Tech.*, vol. MTT-22, pp. 757-763, Aug. 1974.