

A Miniaturized K- Band Balanced Frequency Doubler Using InGaP HBT Technology

Dong-Woo Kang, Dong-Hyun Baek, Sang-Hoon Jeon¹, Jae-Woo Park¹ and Songcheol Hong

Dept. EECS , Korea Advanced Institute of Science and Technology (KAIST)
373-1 ,Guseong-dong ,Yuseong-gu, Daejeon, 305-701, Republic of Korea

¹Knowledge*on Inc. , 513-37 Eoyang-dong ,Iksan, 570-210,Republic of Korea

Abstract —A K band balanced frequency doubler using InGaP HBTs is presented, which features high conversion gain, wide bandwidth and high rejection of fundamental signal. To obtain the balanced signal, a differential amplifier with a base-collector feedback resistor is utilized. The push-pull doubler operates in a near class B region for good efficiency. This circuit has a conversion gain of 6dB over the output frequencies from 14Ghz to 24Ghz. The fundamental frequency suppression is better than 17dB. The MMIC chip size is 0.6 X 0.7 mm².

I. INTRODUCTION

Frequency doublers are widely used to achieve high frequency sources with low phase noise. Active frequency doublers provide conversion gain over broadband frequencies and require small input power. The high frequency doublers have been realized using GaAs MESFET or HEMT. FET doublers have good isolation between input and output terminals. Due to the square law relation, the FET doublers are an attractive feature for generating second harmonic signal.[1] However, HBT devices exhibit lower phase noise and higher order harmonic generation than FET devices.[2] The balanced frequency doublers using FET have provided conversion loss or small gain. [3,4]. To enhance conversion gain, it is necessary to use high f_T device. Recently, GaAs HBTs are popular microwave or millimeter MMIC circuits. HBT frequency doubler can be integrated with VCOs or frequency synthesizer, which is based on HBT technology. The frequency multipliers using HBT were recently reported.[2,5,6] . But most of the circuits operate low frequency range. The X band doubler did not have good fundamental suppressions and existed some resonances. [7]

This paper presents balanced frequency doubler using InGaP HBT which has high conversion gain at K band, wide bandwidth, and high fundamental suppression. The InGaP HBT has a measured f_T of approximately 60GHz. The Circuit measures 0.6 x 0.7 mm².

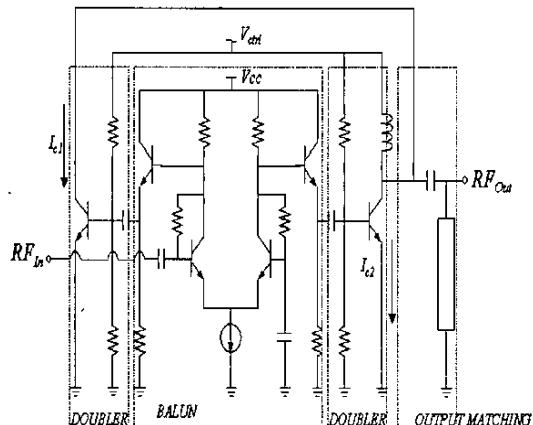


Fig. 1. Frequency doubler circuit schematic

II. CIRCUIT DESIGN

The frequency doubler is based on Knowledge*on InGaP HBT Technology with an f_T of 60GHz and fmax of 75Ghz. As shown in the schematic of the MMIC doubler in Fig. 1, The circuit comprises a differential amplifier which provides 180 phase shift, buffer amplifiers, and push - pull doubler cores which operate at near class B region. It is analyzed and designed using harmonic balance simulator:

The differential amplifier with base-collector feedback resistor provides broadband amplification and easy biasing and can avoid stability problems. The doubler cores are accomplished by setting the bias of the class B mode. This stage generates as much power at the second harmonic as possible and low dc currents. Their biasing is controlled by adjustable dc power supply to find optimum bias point. At the output load, the odd harmonics are 180 degrees out of phase and cancelled at the output port. The even harmonics at the output load are in phase and added in power. The currents from each device at the output load are similar to the equation given by (1) and (2) [8]

$$I_{C1} = \frac{I_{\max}}{\pi} + \frac{I_{\max}}{2} \cos(\omega t) + \frac{2I_{\max}}{3\pi} \cos(2\omega t) + \dots \quad (1)$$

$$I_{C2} = \frac{I_{\max}}{\pi} + \frac{I_{\max}}{2} \cos(\omega t + \pi) + \frac{2I_{\max}}{3\pi} \cos(2\omega t + 2\pi) + \dots \quad (2)$$

It is difficult to show the each collector current because each collector is tied to output load. The collector current waveform is similar to the emitter current wave form. Figure 2 shows the each emitter current wave of the doubler core transistor. A 180 degree phase shift between each waveform is seen. Therefore one can obtain full-wave rectifier.

A short circuit at the fundamental frequency provides maximum conversion gain. It is necessary to find the

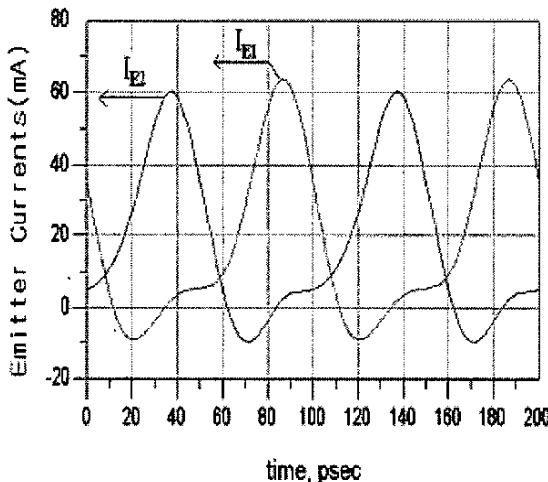


Fig. 2. . Simulated emitter currents of the double stage

optimum load impedance at the second harmonic frequency for the high conversion gain and to guarantee the stability of the doubler. The stability of the doubler was analyzed by means of studying input impedance Z_{in} . The resistor part of Z_{in} has to be positive. The harmonic load impedance Z_n is then calculated from

$$Z_n = \frac{U_n}{I_n}$$

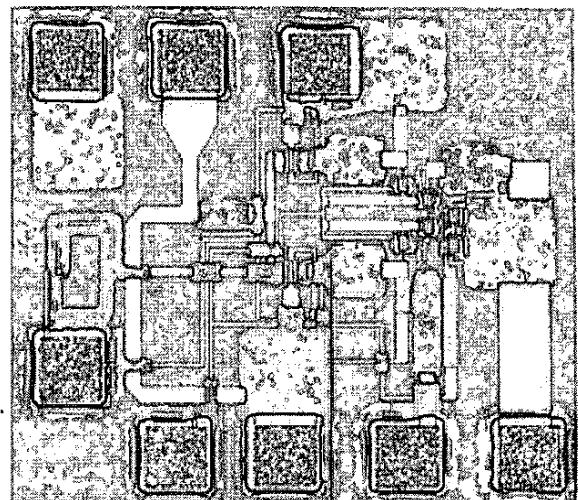


Fig. 3. Microphotograph of the balanced frequency doubler .

Where U_n is the n_{th} harmonic load voltage and I_n is the n_{th} harmonic load current. [9,10]

Input matching networks consist of MIM series capacitor and differential amplifier feedback resistors. These resistors can control input impedance of the differential amplifier. The input impedance is controlled by series capacitor and feedback resistors. The output matching networks consist of MIM series capacitor and short-circuited stub. They have a high pass filter characteristic and the optimum load impedance.

III. EXPERIMENTAL RESULTS

The doubler chip size is $0.6 \times 0.7 \text{ mm}^2$ and shown in Figure 3. The doubler is measured using on-wafer probing system. 8 bonding pads are used for on-wafer probing and bias lines. The circuit is biased with 5V collector-to-emitter voltage on the both differential amplifier and buffer amplifier. The optimum base voltage of the doubler stage is found be 1.2V. The optimum bias point is sensitive to the base bias voltage. The total DC power consumption was approximately 200mW. The input CW signal was provided by an HP83712B signal generator. The fundamental and second harmonic was measured using HP 8564E spectrum analyzer. The losses of cables and probes are measured by a power meter.

In Figure 4, measured spectrum indicates the doubler exhibits 7.5 dB conversion gain and 17 dB fundamental suppression with -5dBm input power at 12 GHz. The

fundamental frequency suppression at 10GHz input is approximately 20dB.

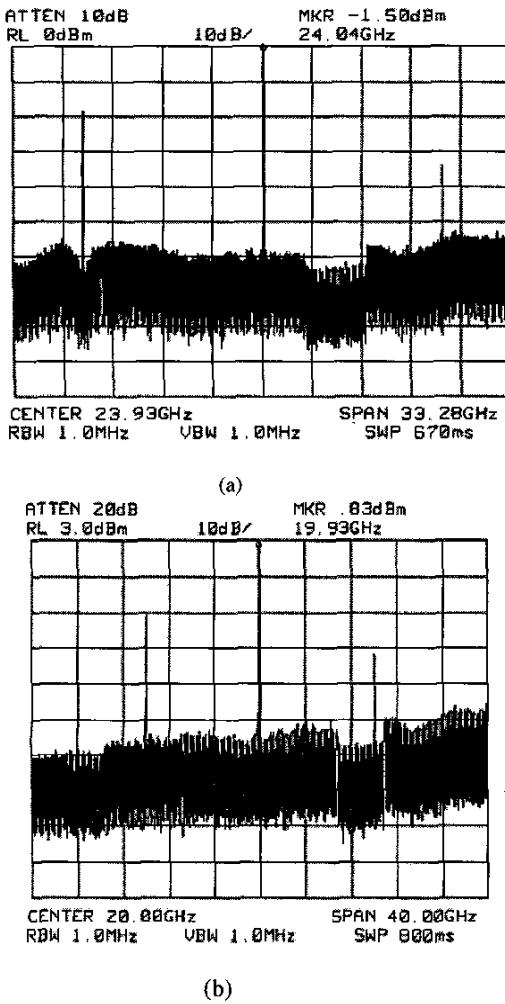


Fig 4. The harmonic characteristics of frequency doubler with (a) 24GHz output (b) 20GHz output frequency , input power is -5dBm

The figure 5 shows the measured and simulated output power as a function of input frequency for -5dBm input power. There are some differences between simulation and measured data due to cable and probe tip loss. The averaged conversion gain is 10dB and the suppression of fundamental frequency is better than 17dB from 7Ghz to 14Ghz input frequencies.

The figure 6 shows the measured conversion gain versus frequency with various input powers. The conversion gain is 6 to 9 dB with the -3dBm input power. As the input power increases, the conversion gain

decreases because of output power saturations. So, over 6dBm input power, the conversion loss increases.

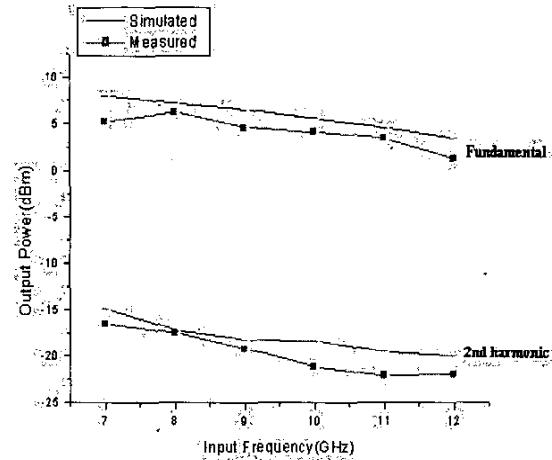


Fig. 5 Measured and simulated doubler output power versus frequency. Input power is -5dBm

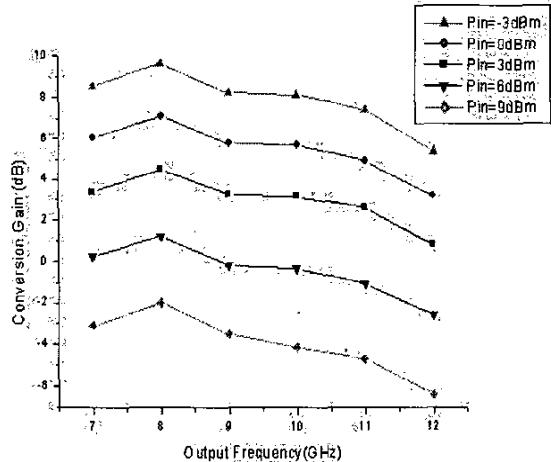


Fig. 6. Measured doubler conversion gain versus frequency with different input powers

IV. CONCLUSIONS

The miniaturized K band frequency doubler using InGaP HBT was designed and tested . The circuit size is as small as 0.6×0.7 mm 2 . Despite of the small area, the doubler has over 6dB conversion gain and the 3-dB bandwidth is between 14GHz and 24GHz output. The fundamental frequency suppression is better than 17dB.

IV. ACKNOWLEDGEMENT

The authors wish to acknowledge Knowledge*on Inc. for providing an opportunity of the chip fabrication. This work was partly supported by KOSEF under the ERC program through the MINT research center at Dongguk University.

REFERENCES

- [1] S.A.Maas, *Nonlinear Microwave Circuits*, Artech House, Dedham, 1987, pp 398-404
- [2] C.B.Perry,K.T.Ip,K.Z.Claxton,B.R.Allen,A.E.Farris , " A CLASS OF MONOLITHIC HBT MULTIPLIERS", IEEE MTT-S Digest, pp 251- 254 , 1991
- [3] F.van Raay, G.Kompa , "DESIGN AND STEABILITY TEST OF A 2-40GHZ FREQUENCY DOUBLER WITH ACTIVE BALUN" , IEEE MTT-S Digest,pp1573-1576,2000
- [4] TETSUO HIROTA, HIROYO OGAWA," Uniplanar Monolithic Frequency Doublers " , *IEEE trans. Microwave Theory Tech* , vol 37,No8 , pp1249-1989,AUGUST 1989
- [5] Daniel F.Filipovic," A MIC X7 DHBT Frequency Multiplier With Low Suprious Harmoines", IEEE MTT-S Digest,pp1325-1328,1995
- [6] Hector J.De Los Satos, Daniel D. Nardi, Kevin L. Hargrove, Madiid Hafizi , and Wiliam E . Stanchina, " High- Efficiency InP-based DHBT Active Frequency Multipliers for Wireless Communications", *IEEE trans. Microwave Theory Tech ,VOL.44 NO.7,July 1996.*
- [7] Xiangdong Zhang, and Yong-Hoon Yun,"A DC to X-Band Frequency doubler Using GaAs HBT MMIC.",IEEE MTT-S Digest,1997
- [8] Edmar Camargo, Design of FET Frequency multipliers and Harmonic Oscillators., Artech House,Boston,1998,pp154-155
- [9] Christian Fager, Lars Landen and Herbert Zirath " HIGH OUTPUT POWER, BROADBAND 28-56GHZ MMIC FREQUENCY DOUBLER" IEEE MTT-S Digest, pp1589-1591, 2000
- [10] Pekka Kangaslahti, Petteri Alinikula, Veikko Porra, "Miniatuerized Artificial – Transmission-Line Monolithic Millimeter-Wave Frequency doubler", *IEEE trans. Microwave Theory Tech ,VOL.48 NO.4,APRIL 2000*