

Biokinetics on simultaneous biofiltration of H_2S , NH_3 , and toluene in waste air

Byoung-Gi Park[†] and Jong Shik Chung

Department of Chemical Engineering, POSTECH, Pohang 790-784, Korea

(Received 29 December 2005 • accepted 23 January 2006)

Abstract—In order to investigate inhibitory effects in the biofiltration system during simultaneous removal of ternary mixtures of NH_3 - H_2S -toluene contaminants in air, a system modeling has been performed encompassing an inhibition biokinetic expression. Experimental data for removing the three contaminant gases were collected during a long term operation of two biofiltration systems that utilized mixtures of microorganisms fixed on zeocarbon and cork as microbial fixing carriers. Results of regression analyses of experimental data using suggested kinetic models reveal that there are no particular evidences or clues of interactions or inhibitions among microorganisms, and the three reactions are taken place independently within a finite area of biofilm that have been developed on the surface of packing materials.

Key words: Biofiltration, Deodorization, Biokinetics, Inhibition, Biofilm Process

INTRODUCTION

Biofiltration has been considered as the most suitable alternative process for high temperature incineration, i.e. thermal or catalytic, for treating low-level airborne pollutants. Typical application areas are deodorization and detoxification of the contaminated air. It has many fascinating advantages; avoiding emissions of secondary pollutants, low cost for maintenance or operation, and reduced running cost and so on. Nowadays, numbers of malodorous or volatile organic compounds (VOCs) that are emitted from various industrial or residential sources have been treated by means of the biofiltration system in commercial scale [Lim, 2005; Lim and Park, 2004; Acuna et al., 2002; Kim et al., 2000; Park et al., 1993; Wani et al., 1998; Zilli et al., 2003].

Generally, major sources of smell encountered in industrial or residential areas are H_2S and NH_3 [Acuna et al., 2002; Kim et al., 2000; Park et al., 1993; Wani et al., 1998; Zilli et al., 2003]. H_2S and NH_3 are colorless, corrosive, toxic, and malodorous nuisances meanwhile toluene has been classified as a carcinogen and explosive. It is also noted that toluene is the Title III toxic compound of the 1990 Clean Air Act Amendment proposed by US Environmental Protection Agency [Zilli et al., 2003]. The lowest value of smelt level for H_2S is 0.00047 ppmv [Oyarzun et al., 2003]. It is also well known that H_2S is highly dangerous chemicals for breakdown of the central nervous system near concentration level of 100 ppmv. It can be a deadly toxic over the 100 ppmv [Shojaosadati and Elyasi, 1999]. The threshold value of smelt level for NH_3 is 50 ppmv in the open air [Busca and Pistarino, 2003]. In addition, NH_3 irritates eyes and throat.

Traditionally, fundamental research works in these areas of biofiltration technologies have been dealt with the removal of single or binary gas, which seems impractical for real industrial applications since most of waste gases contain multiple contaminants including malodorous sulfur compounds, nitrogen compounds as well as VOCs, and rarely include single or binary contaminants [Delhomanie et al.,

2003; Elias et al., 2002; Kim et al., 2002a; Shinabe et al., 2002; Yoon et al., 2002; Hirai et al., 2001; Cho et al., 2000]. In this point of view, it is obvious that there is a need of developing biofiltration systems on the removals for multiple pollutants in contaminated waste air, and of understanding interactions among the different gases or microorganisms involved in the biofiltration systems for practical purpose. Recently, Cox and Deshusses [2002] have reported results on the co-treatment of H_2S and toluene mixture using a biotrickling filter. According to him, there was neither competitive nor cross inhibitions. An inhibitory behavior has been observed by Chung et al. [2000, 2001] in biofiltration system for the H_2S and NH_3 removal in the range of relatively high gas concentrations. The biofiltration system for the binary H_2S and NH_3 removal has also been studied by Malhautier et al. [2003]. He assumes that there is a negative effect on activity of nitrifying bacteria when a high amount of H_2S involved in the system. Similar results for the H_2S and NH_3 removal have been reported by Kim et al. [2002b]. According to him, over H_2S concentration of 200 ppmv, the activity of nitrifying bacteria is hindered by the presence of H_2S . Inhibition between ethyl acetate and toluene has been studied by Liu et al. [2002]. They reported that the elimination activity of toluene is inhibited by the presence of ethyl acetate.

Expanding to the previous investigations on the removal of the binary gas systems, we have performed a mathematical modeling in order to describe the biofiltration system for the simultaneous removal on ternary NH_3 - H_2S -toluene contaminants in waste air using an inhibition biokinetic expression. Apparent biokinetic parameters have been obtained on a packed bed biofiltration system utilizing various microbial fixing carriers with a mixture of microorganisms fixed on the carrier surface in order to understand interactions and/or influences among the different gas components and/or microorganisms, to provide a guideline for the system design, and to assess feasibility of removing the multiple contaminants.

MATERIALS AND METHODS

1. Modeling of the Biofiltration System Utilizing Inhibition Biokinetics

[†]To whom correspondence should be addressed.

E-mail: byounggi@petro.lg.co.kr

The flow of bulk waste air inside the packed bed biofiltration column was assumed to be in the plug-flow regime. When the biofiltration system reached steady state, the system can be described by the following equations [Chung et al., 2001]:

$$\frac{dF_i^G}{dV^{BF}} = -R_i^{BF} \quad (1)$$

where, F_i^G (g/hr) is the mass flow rate of gas components in the waste air stream, V^{BF} (m³) is the volume of biofilm and R_i^{BF} (g/m³/hr) is the removal rate of the gas components in the biofilm. The superscripts G, BF indicate gas-phase, biofilm-phase, respectively. The subscript i mean NH₃, H₂S or toluene.

If the thickness of the biofilm is very thin, volume of the biofilm can be estimated by the following approximation:

$$V^{BF} \approx \eta(A_s \cdot \delta)(1 - \varepsilon)(A_{CS} \cdot z) \quad (2)$$

where, A_s (m²/m³) is the wetted area of microbial fixing carriers, η (dimensionless) is the fraction of active biofilm, δ (m) is the thickness of the biofilm, ε (dimensionless) is the bed porosity of the biofilter column, A_{CS} (m²) is the cross-sectional area of the biofilter column, z (m) is the length of the biofilter column. In this work, we were not able to measure effective thickness of the biofilm, and η is assumed to be unity. Some errors suppose to be involved due to this assumption.

Since it was not able to directly measure concentrations of the gas components in the biofilm-phase, we measured the concentrations in the gas-phase and estimated the concentrations in the biofilm-phase utilizing Henry's law [NIST, 2005] as follows:

$$H_i \equiv \frac{C_i^G}{C_i^B} \quad (3)$$

where, C (g/m³) and H (dimensionless) are the concentration of the gas components and Henry's law constant, respectively. Values of the Henry's law constants [NIST, 2005] are summarized in Table 1.

Through combining Eq. (1), Eq. (2) and Eq. (3), and subsequently setting $F_i^G = q \cdot C_i^G$, Eq. (1) can be transferred in Eq. (4):

$$\frac{dC_i^G}{dz} = -(R_i^{BF}) \frac{H_i \cdot (A_s \cdot \delta) \cdot (1 - \varepsilon) \cdot A_{CS}}{q} \quad (4)$$

where q (m³/hr) is the volumetric flow rate of waste air introduced into the biofilter column.

When the entire surface of the microbial fixing carrier is colonized by microorganisms after the column is being fully acclimated, presumably, in the macroscopic point of view, microorganism populations are linearly proportional to the surface area of the biofilm. Thus the biofilm area is nearly the same as that of overall wetted surface area of the microbial fixing carriers, and is assumed to be constant. It is also noted that, in the biofilter column, usually the

Table 1. Henry's law constant for gas components in pure water at 298.15 K and 1 atm

Component	Molecular weight	Henry's law constant, H_i (dimensionless)
NH ₃	17.03	1,387
H ₂ S	34.08	2.43
toluene	92.14	3.96

effective thickness of biofilm is as difficult to measure as determine the depth of gas diffusion through the biofilm-phase. During the operation of the biofiltration system, the change of effective volume or effective area of the biofilm seems to be negligible. As a result, hereby, we are assuming that there is no significant change of the microorganism populations after the biofilm is being fully developed. Upon this assumption, biokinetic expressions, such as Monod for no inhibition case, or Andrews-Haldane for competitive inhibition case, can possibly be simplified [Chung et al., 2001; Edwards, 1970; Lallai and Mura, 1989; Hill and Robinson, 1975]. If the apparent removal rates for each component are inhibited, meanwhile are not influenced by the amount of oxygen, e.g. using a large excess of air, this system can be interpreted by using simplified Andrews-Haldane biokinetic expression as follows:

$$R_i^{BF} = \frac{\mu_{M,i}^{BF} C_i^{BF}}{K_{S,i}^{BF} + C_i^{BF} + \frac{(C_i^{BF})^2}{K_{I,i}^{BF}}} \quad (5)$$

or

$$\frac{1}{R_i^{BF}} = \left[\frac{K_{S,i}^{BF}}{\mu_{M,i}^{BF}} \right] \left(\frac{1}{C_i^{BF}} \right) + \frac{1}{\mu_{M,i}^{BF}} + \left[\frac{1}{K_{I,i}^{BF} \cdot \mu_{M,i}^{BF}} \right] (C_i^{BF}) \quad (6)$$

where $\mu_{M,i}^{BF}$ (g/m³/hr) is the maximum removal rate of a pollutant component, i , $K_{S,i}^{BF}$ (g/m³) is the half saturation coefficient for removal of i , and $K_{I,i}^{BF}$ (g/m³) is the inhibition coefficient of i in the biofilm. When inhibition in the system is not significant, the third term in the denominator of Eq. (5) becomes zero. In such circumstance, Eq. (5) can be reduced into Michelis-Menten or Monod biokinetic equation [Chung et al., 2001; Edwards, 1970; Lallai and Mura, 1989; Hill and Robinson, 1975].

Adding Eq. (6) into Eq. (4) and integrating the resulting equation over the effective packing height, L (m), under the condition of $C_i^{BF} = C_{IN,i}^{BF}$ at $z=0$, and $C_i^{BF} = C_{OUT,i}^{BF}$ at $z=L$ as Eq. (7), successively dividing all terms in the both sides of Eq. (7) by $C_{OUT,i}^{BF} - C_{IN,i}^{BF}$, finally Eq. (8) or more simplified Eq. (9) can be obtained:

$$\int_{C_{IN,i}^{BF}}^{C_{OUT,i}^{BF}} \left\{ \left[\frac{K_{S,i}^{BF}}{\mu_{M,i}^{BF}} \right] \left(\frac{1}{C_i^{BF}} \right) + \frac{1}{\mu_{M,i}^{BF}} + \left[\frac{1}{K_{I,i}^{BF} \cdot \mu_{M,i}^{BF}} \right] (C_i^{BF}) \right\} dC_i^{BF} = - \int_0^L \left[\frac{H_i \cdot (A_s \cdot \delta) \cdot (1 - \varepsilon) \cdot A_{CS}}{q} \right] dz \quad (7)$$

$$\left[\frac{K_{S,i}^{BF}}{H_i} \left[\frac{1}{\mu_{M,i}^{BF}} \right] \left(\frac{1}{C_{IN,i}^{BF}} \right) + \frac{1}{\mu_{M,i}^{BF}} + \left[\frac{1}{2} \prod_{i=1}^L \frac{H_i}{K_{I,i}^{BF}} \prod_{i=1}^L \frac{1}{\mu_{M,i}^{BF}} \right] (C_{IN,i}^{BF} + C_{OUT,i}^{BF}) \right] = \frac{(A_s \cdot \delta) \cdot (1 - \varepsilon) \cdot V}{(C_{IN,i}^{BF} - C_{OUT,i}^{BF}) \cdot q} \quad (8)$$

or

$$\frac{A_s \cdot (1 - \varepsilon)}{EC_i^G} = \left[\frac{\bar{K}_{S,i}^{BF}}{\delta \cdot H_i} \prod_{i=1}^L \frac{1}{\mu_{M,i}^{BF}} \right] \left(\frac{1}{C_{IN,i}^{BF}} \right) + \frac{1}{\mu_{M,i}^{BF}} + \left[\frac{1}{2} \prod_{i=1}^L \frac{\delta \cdot H_i}{\bar{K}_{I,i}^{BF}} \prod_{i=1}^L \frac{1}{\mu_{M,i}^{BF}} \right] (C_{IN,i}^{BF} + C_{OUT,i}^{BF}) \quad (9)$$

with

$$\langle C_{IN,i}^{BF} \rangle = \frac{(C_{OUT,i}^{BF} - C_{IN,i}^{BF})}{\ln(C_{OUT,i}^{BF}/C_{IN,i}^{BF})} \quad (10)$$

$$EC_i^G \equiv \frac{q \cdot (C_{i,IN}^G - C_{i,OUT}^G)}{V} \quad (11)$$

$$\bar{\mu}_{M,i}^{BF} \equiv (\delta \cdot \mu_{M,i}^{BF}) \quad (12)$$

$$\bar{K}_{S,i}^{BF} \equiv (\delta \cdot K_{S,i}^{BF}) \quad (13)$$

$$\bar{K}_{I,i}^{BF} \equiv (\delta \cdot K_{I,i}^{BF}) \quad (14)$$

where EC_i^G is elimination capacity observed in the gas-phase. $\bar{\mu}_{M,i}^{BF}$ ($\text{g/m}^2/\text{hr}$), $\bar{K}_{S,i}^{BF}$ (g/m^2), $\bar{K}_{I,i}^{BF}$ (g/m^2) are the biofilm area based maximum apparent removal rate, the apparent half saturation coefficient, the apparent inhibition coefficient, correspondingly.

Chung et al. [2001] has pointed out if the inlet concentrations of the gas components in the waste air stream are relatively low in which the concentrations are near the half saturation coefficient and the system does not show inhibitory behavior, Eq. (9) becomes Eq. (15). This equation also can be directly derived using Michaelis-Menten or Monod biokinetic expression. In the case of the inlet concentration is relatively high and the inhibition level is not negligible, e.g. the removal rate stays constant or decreases upon the concentration increases, the Eq. (9) can be reduced into Eq. (16):

$$\frac{A_s \cdot (1 - \varepsilon)}{EC_i^G} = \left[\frac{\bar{K}_{S,i}^{BF}}{\delta \cdot H_i} \prod_i \frac{1}{\bar{\mu}_{M,i}^{BF}} \right] \left(\frac{1}{C_{i,IN,i}^G} \right) + \frac{1}{\bar{\mu}_{M,i}^{BF}} \quad (15)$$

$$\frac{A_s \cdot (1 - \varepsilon)}{EC_i^G} = \left[\frac{1}{2} \prod_i \frac{\delta \cdot H_i}{\bar{K}_{I,i}^{BF}} \prod_i \frac{1}{\bar{\mu}_{M,i}^{BF}} \right] (C_{i,IN,i}^G + C_{i,OUT,i}^G) + \frac{1}{\bar{\mu}_{M,i}^{BF}} \quad (16)$$

Where the range of the concentration is relatively high but the system does not show inhibitory behavior, the maximum apparent removal rate in the biofilm-phase can be estimated by the maximum elimination capacity, vice versa, as in the Eq. (17):

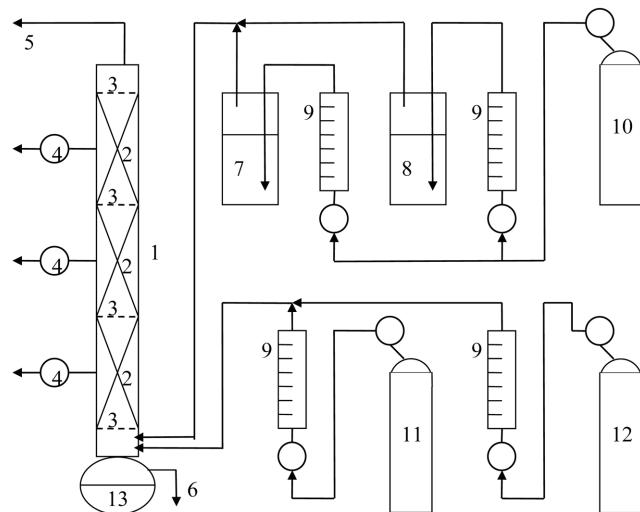


Fig. 1. A schematic represent of a biofiltration system.

1. Biofilter column	8. Saturator for toluene
2. Packing	9. Rota-meter
3. Stainless steel separator	10. Air
4. Sampling port	11. H_2S gas
5. Purified air	12. HN_3 gas
6. Drain	13. Water reservoir
7. Saturator for water	

$$\frac{A_s \cdot (1 - \varepsilon)}{EC_{M,i}^G} = \frac{1}{\bar{\mu}_{M,i}^{BF}} \quad (17)$$

2. Conditions for the Biofiltration Systems

Two identical bench-scale biofiltration systems were installed in order to measure the biokinetic parameters. Fig. 1 shows one of the experimental settings for the bench-scale biofiltration system used for the simultaneous removal of ternary $\text{NH}_3\text{-H}_2\text{S}$ -toluene mixtures in air stream. The two biofilter columns were made of transparent Pyrex glass, and had an inside diameter of 0.04 m and a total length of 1.10 m each. One column was packed with a commercial zeo-carbon granule (ZC-100, Zeobuilder Co., Republic of Korea), and another column was packed with cork chips as microbial fixing carriers. Particle size, d_p , specific wetted surface area, A_s and bed porosity, ε , of the zeo-carbon granules are 1.18×10^{-3} m, $2,500 \text{ m}^2/\text{m}^3$ and $0.66 \text{ m}^3/\text{m}^3$, correspondingly, while for the cork chips 3.30×10^{-3} m, $900 \text{ m}^2/\text{m}^3$ and $0.53 \text{ m}^3/\text{m}^3$, correspondingly. The actual packing length of the microbial fixing carriers was 0.80 m each, and was evenly divided into three sections. Between sections inserted was a spacer (5 cm long) to prevent gradual compacting by gravity, to improve the distribution of air stream, and to support microbial fixing carrier. The spacer was made of a mesh screen of stainless steel. The total bed volume of the microbial fixing carrier packing was kept at 1.0 liter. A sampling port was installed at the middle point of the each section in order to allow sampling of the microbial supporting materials and measuring the concentrations of each pollutant gas. At the bottom of the biofilter column, retained was a 100 cc water reservoir. Any water collected and remaining excess was continuously drained out of the reservoir. Some portion of the feed air was passed through a water saturator containing double distilled water for moisturizing, and some portion through a toluene (J. T. Baker, 99.7%) saturator, and then the two streams were mixed together before being introduced into the bottom of the biofilter columns. The relative humidity was maintained over 95%. H_2S (Doekyang Energen Co., 1 mol% balanced with N_2) and NH_3 (Doekyang Energen Co., 1 mol% balanced with N_2) gases were separately fed into the biofiltration columns from the gas cylinders. The volumetric flow rates of all gas streams herein were controlled by means of pressure regulators and rotameters. Finally, the treated clean air was released from the top of the biofilter column.

The biofiltration systems were continuously operated for 215 days at room temperature and atmospheric pressure. During the course of the biofiltration experiments, the microbial fixing carriers were washed using a nutrient solution from time to time as soon as the column showed a pressure drop, which was caused by the accumulation of the elemental sulfur and/or ammonium sulphate across the biofilter column. Total volumetric airflow rates were fixed 0.030, 0.060 and 0.090 m^3/hr (corresponding empty bed residence time, $EBRT$, from 40, 60 and 120 sec). The ranges of the feed concentrations in the zeo-carbon packed column for NH_3 , H_2S and toluene gases were about $0.020\text{-}0.11 \text{ g/m}^3$, $0.050\text{-}0.23 \text{ g/m}^3$ and $0.15\text{-}0.21 \text{ g/m}^3$, correspondingly and the ranges of the feed concentrations in the cork packed column for NH_3 , H_2S and toluene gases were about $0.035\text{-}0.13 \text{ g/m}^3$, $0.042\text{-}0.23 \text{ g/m}^3$ and $0.011\text{-}0.497 \text{ g/m}^3$, correspondingly. The pH was maintained 7.0 controlled by NaOH and HNO_3 .

3. Characterizations

Both the inlet and outlet concentrations for NH_3 , H_2S and tolu-

ene gases were measured by using gas detection tubes (Model 3La, 4L and 122L, respectively, Gastec Co., Japan). Thickness of the microbial fixing carriers was measured using an optical video microscope system (Model CamscopeTM, ICS-305B, Baestech Industrial Vision System Co., Republic of Korea). The residuals, these were pale yellow colored cakes, accumulated on the surface of the microbial fixing carriers and in the drain water were characterized using XRD (MAC Science Co., Model M18XHF, CuK α) and elemental analysis (LECO Co., Model CHNS 932). The bed porosity of the microbial fixing carriers was measured by water. The BET surface area was measured by nitrogen adsorption using Micromeritics (model ASAP 2021C).

4. Microorganisms

Three different kinds of microorganisms were independently prepared using different mineral culture mediums. Following the cultivation, these were then mixed together just before performing the inoculation. The mixed microorganism consortiums were sprayed over the microbial fixing carriers in an open vessel with aeration for several hours. The inoculated microbial fixing carriers were then packed into the biofiltration columns. Subsequently, the biofilter columns were acclimated for the next two weeks by circulating the microorganism mixture. During the acclimation period of time, the amount of NH_3 , H_2S and toluene introduced into the biofilter columns were kept at quarter of those used at the normal operating conditions.

Followings were the prescriptions for the cultivations of the different kinds of microorganisms. All of the microorganisms were cultured and enriched in solutions containing aqueous minerals at 30°C using a shaking incubator (Jeio Tech, SI-900R) vibrating at 100 rpm. First, the nitrifying bacteria, presumably *Nitrosomonas* and *Nitrobacter*, were isolated from the activated sludge in a sewage water treatment facility located in the Pohang University of Science and Technology, Pohang, Republic of Korea. It was incubated in a mineral nutrient medium containing 0.2357 g $(\text{NH}_4)_2\text{SO}_4$, 0.080 g KH_2PO_4 , 0.020 g MgSO_4 and 0.0085 g $\text{Fe}_2(\text{SO}_4)_2 \cdot \text{H}_2\text{O}$ dissolved in 1.0 liter double distilled water. Second, *Thiobacillus thioparus* (ATCC 23645, KCTC 2753), a H_2S oxidation bacterium, was obtained from the Korean Collection for Type Cultures (KCTC). It was cultivated in a mineral medium dissolved in 1.0 liter double distilled water: 1.2 g Na_2HPO_4 , 1.8 g KH_2PO_4 , 0.1 g $\text{MgSO}_4 \cdot 7\text{H}_2\text{O}$, 0.1 g $(\text{NH}_4)_2\text{SO}_4$, 0.03 g CaCl_2 , 0.02 g FeCl_3 , 0.02 g MnSO_4 , 10.0 g $\text{Na}_2\text{S}_2\text{O}_3$. Finally, for the toluene elimination, *Pseudomonas aeruginosa* (ATCC 15692, KCTC 1637), *Pseudomonas putida* (ATCC 17484, KCTC 1641) and *Pseudomonas putida* (ATCC 23973, KCTC 1643) were purchased from the Korean Collection for Type Cultures (KCTC). The *Pseudomonas aeruginosa* was grown in KCTC 105, i.e., nutrient agar with 0.5% NaCl having composition of 3.0 g beef extract and 5.0 g peptone. The *Pseudomonas putida* (ATCC 17484, KCTC 1641) was incubated in KCTC 1, i.e. nutrient agar at pH 6.8 having composition of 3.0 g beef extract, 5.0 g peptone and 15.0 g agar in 1.0 liter distilled water. The *Pseudomonas putida* (ATCC 23973, KCTC 1643) was cultivated in KCTC 106, i.e. a benzoate nutrient medium having composition of 3.0 g $(\text{NH}_4)_2\text{PO}_4$, 1.20 g KH_2PO_4 , 5.0 g NaCl, 0.20 g $\text{MgSO}_4 \cdot 7\text{H}_2\text{O}$, 0.50 g yeast extract, 3.0 g sodium benzoate (filter-sterilized) and 20 g agar noble (Difco 0142) in 1.0 liter double distilled water.

RESULTS AND DISCUSSION

In order to obtain system parameters and to understand interactions among the gas components or microorganisms, linear regressions were performed using experimentally measured values for the NH_3 and toluene gas components on both zeocarbon and cork microbial fixing carriers in gas-phase of the biofiltration system. In order to see the influence of H_2S on the other two gas components, the concentration for H_2S was maintained as high as possible if the systems show constant 100% removal efficiency for H_2S . For the other two components of ammonia and toluene, experimental data were plotted using Eq. (15) and (16). Using Eq. (15), measured val-

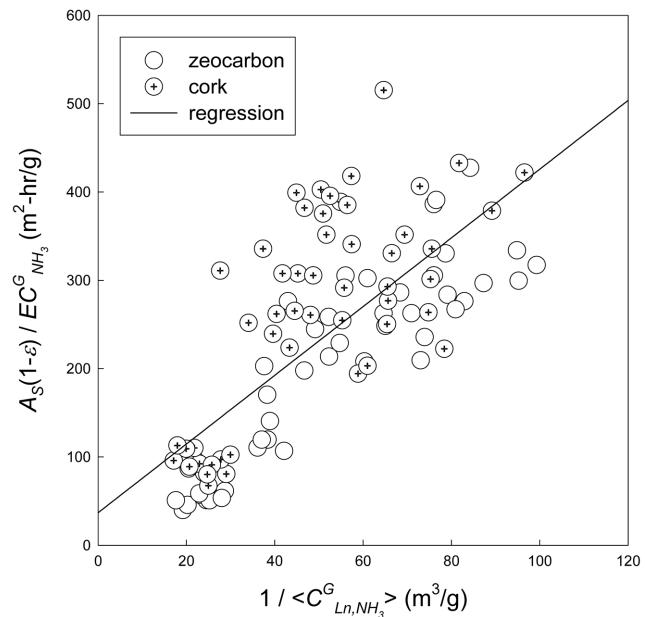


Fig. 2. A plot of $A_s(1-\varepsilon)/EC_{\text{NH}_3}^G$ against $1/\langle C_{\text{Ln},\text{NH}_3}^G \rangle$ for the NH_3 removal in the biofiltration system using Eq. (15).

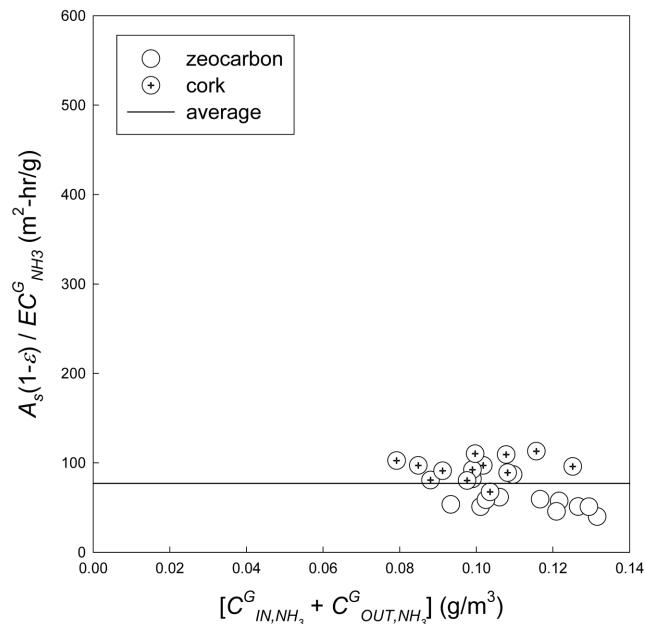


Fig. 3. A plot of $A_s(1-\varepsilon)/EC_{\text{NH}_3}^G$ against $[C_{\text{IN},\text{NH}_3}^G + C_{\text{OUT},\text{NH}_3}^G]$ for the NH_3 removal in the biofiltration system using Eq. (17).

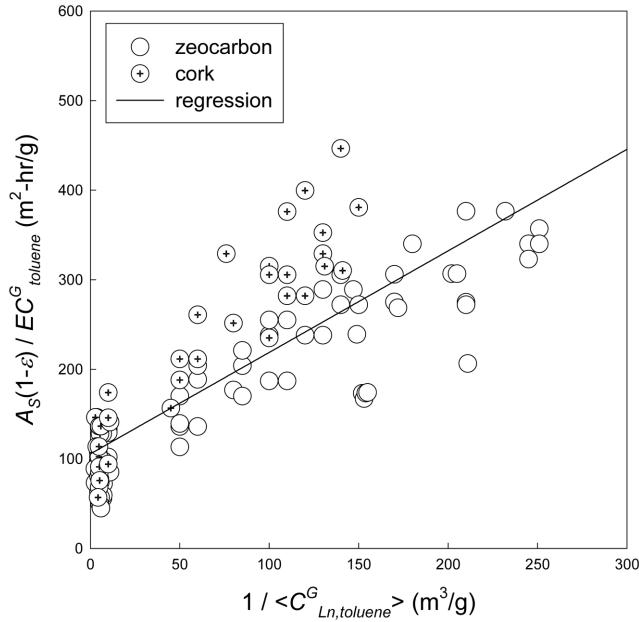


Fig. 4. A plot of $A_s(1-\varepsilon)/EC_{toluene}^G$ against $1/\langle C_{ln,toluene}^G \rangle$ for the toluene removal in the biofiltration system using Eq. (15).

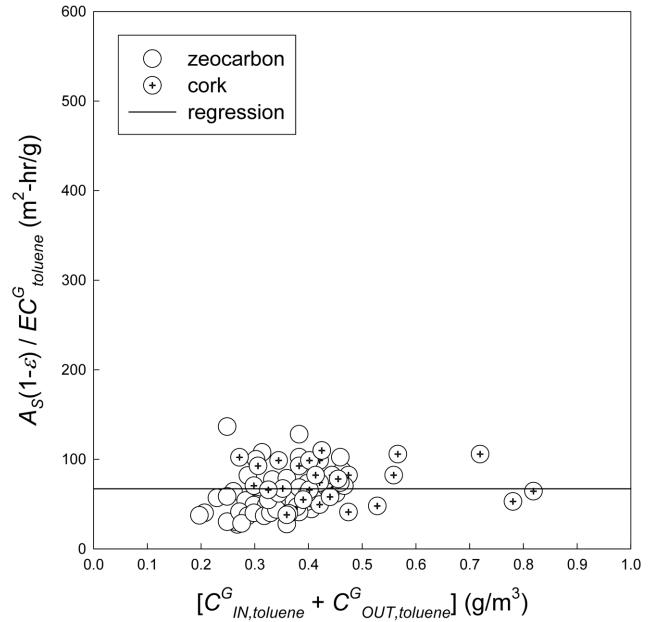


Fig. 5. A plot of $A_s(1-\varepsilon)/EC_{toluene}^G$ against $[C_{IN,toluene}^G + C_{OUT,toluene}^G]$ for the toluene removal in the biofiltration system using Eq. (17).

ues of the area divided by elimination capacity, $A_s(1-\varepsilon)/EC_{M,i}^G$ ($m^2\text{-hr/g}$), were plotted against reciprocal values of the logarithmic average concentrations, $1/\langle C_{ln,i}^G \rangle$ (m^3/g), to obtain values for apparent half saturation coefficient, $\bar{K}_{S,i}^{BF}/\delta$, and the maximum apparent removal rate, $\bar{\mu}_{M,i}^{BF}$. In the range of conditions where inhibitory behavior assumes to be taken-place, the values of $A_s(1-\varepsilon)/EC_{M,i}^G$ were plotted against those of the sum of the inlet and the outlet concentrations, $[C_{IN,i}^G + C_{OUT,i}^G]$ (g/m^3) in Eq. (13). The measured values for the thickness of the biofilm were somewhere around 1×10^{-4} m. In Fig. 2, Fig. 3, Fig. 4 and Fig. 5, the circles indicate experimentally measured values on zeocarbon granules, while the x-hair circles indicate the values measured on cork chips as microbial fixing carriers. The solid lines represent the estimated values using the biokinetic regression parameters.

Experimental results on the NH_3 removal have been presented on Fig. 2 and Fig. 3 using Eq. (15), Eq. (16), respectively. It can be seen in Fig. 3 that, for the values of $[C_{IN,i}^G + C_{OUT,i}^G]$ higher than 0.08 g/m^3 (which corresponds to the reciprocal of the logarithmic average concentrations around $20 \text{ m}^3/\text{g}$ in Fig. 2, the values of $A_s(1-\varepsilon)/EC_{M,i}^G$ remain more or less constant, which is presumably corre-

spondent to the value of the maximum apparent removal rate. For the values of $[C_{IN,i}^G + C_{OUT,i}^G]$ below the 0.08 g/m^3 (where the systems were in the 1st order regime), the value of $A_s(1-\varepsilon)/EC_{M,i}^G$ was decreased with decreased value of $[C_{IN,i}^G + C_{OUT,i}^G]$ (data are not shown herein). Hence, it is concluded that there is no measurable level of inhibitory behavior between H_2S and NH_3 oxidation in the present range of experiment conditions even though the H_2S oxidation products, i.e. elemental sulfur and/or ammonium sulphate, have been accumulated on the surface of packing materials that were observed by means of XRD and elemental analysis. This result was obviously different from what observed by others [Chung et al., 2000, 2001; Kim et al., 2002a; Malhautier et al., 2003]. This difference was tentatively due by the different ranges of experimental conditions, system types, or even microorganism mixtures.

As summarized in Table 2, the obtained values of the regression parameters on the NH_3 removal using Eq. (15) for the apparent half saturation coefficient, $\bar{K}_{S,NH_3}^{BF}/\delta$, and the maximum apparent removal rate, $\bar{\mu}_{M,NH_3}^{BF}$, in the biofilm-phase were $146 \pm 13 \text{ g/m}^3$, $0.0271 \pm 0.0146 \text{ g/m}^2\text{-hr}$, respectively, and those calculated in the gas-phase utilizing

Table 2. Biokinetic parameters for simultaneous removals on ternary NH_3 , H_2S and toluene gases in air using biofiltration systems

Components	by Eq. (15)			by Eq. (16) and/or Eq. (17)					
	$\bar{K}_{S,i}^{BF}/\delta$ (g/m^3)	$\bar{\mu}_{M,i}^{BF}$ ($\text{g/m}^2\text{-hr}$)	$K_{S,i}^G$ (g/m^3)	$EC_{M,i}^G$ ($\text{g/m}^3/\text{hr}$)		$\bar{K}_{I,i}^{BF}/\delta\bar{\mu}_{M,i}^{BF,a}$ (g/m^3)		$EC_{M,i}^G$ ($\text{g/m}^3/\text{hr}$)	
				ZC ^b	cork	(g/m^3)	($\text{g/m}^2\text{-hr}$)	ZC ^b	cork
NH_3	146 ± 13	0.0271 ± 0.0146	0.105 ± 0.0094	23 ± 12	11 ± 6	infinite	0.0130	11	5
H_2S	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
toluene	0.0425 ± 0.0025	0.0095 ± 0.0006	0.0107 ± 0.0006	8 ± 0.5	4 ± 0.3	infinite	0.015	13	6

Note: Superscript 'a' indicates average value

Superscript 'b' indicates zeocarbon

Henry's law for the half saturation coefficient, K_{M,NH_3}^G , the maximum elimination capacities, EC_{M,NH_3}^G observed on the zeocarbon granules and EC_{M,NH_3}^G on the cork chips as microbial fixing carriers were $0.105 \pm 0.0094 \text{ g/m}^3$, $23 \pm 12 \text{ g/m}^3/\text{hr}$, $11 \pm 6 \text{ g/m}^3/\text{hr}$, correspondingly. Alternatively, using the Eq. (17) instead of Eq. (16) since there were no system inhibition, average values were taken into account for $\overline{\mu}_{M,NH_3}^{BF}$, EC_{M,NH_3}^G on zeocarbon and EC_{M,NH_3}^G on cork, and the values were $0.0130 \text{ g/m}^2/\text{hr}$, $11 \text{ g/m}^2/\text{hr}$, $5 \text{ g/m}^2/\text{hr}$, correspondingly. Differences between the values obtained using the Eq. (15) and the Eq. (17) were tentatively considered to be within uncertainty error ranges.

For the toluene removal, the linear regressions were also performed again using Eq. (15), Eq. (16) or Eq. (17). The results were summarized in Fig. 4 and Fig. 5 together with Table 2. The trends of the experimentally observed values for the toluene removal were as same as what we observed for the NH₃ removal. According to Table 2, the experimentally measured values for the apparent half saturation coefficient, $\overline{K}_{S,toluene}^{BF}/\delta$ and the maximum apparent removal rate, $\overline{\mu}_{M,toluene}^{BF}$, in the biofilm-phase were $0.0425 \pm 0.0025 \text{ g/m}^3$, $0.0095 \pm 0.0006 \text{ g/m}^2/\text{hr}$, respectively, and those in the gas-phase of observed $K_{S,toluene}^G$, $EC_{M,toluene}^G$ on zeocarbon and $EC_{M,toluene}^G$ on cork were $0.0107 \pm 0.0006 \text{ g/m}^3$, $8 \pm 0.5 \text{ g/m}^3/\text{hr}$, $4 \pm 0.3 \text{ g/m}^3/\text{hr}$, correspondingly. The average values using Eq. (17) for the $\overline{\mu}_{M,toluene}^{BF}$, $EC_{M,toluene}^G$ measured on zeocarbon and $EC_{M,toluene}^G$ on cork were $0.015 \text{ g/m}^2/\text{hr}$, $13 \text{ g/m}^2/\text{hr}$, $6 \text{ g/m}^2/\text{hr}$, correspondingly. The results are similar to those for the aforementioned NH₃ removal and to the results that were reported by Cox and Deshusses [2002] for the toluene removal in the presence of H₂S, letting us conclude that there is no influence of H₂S on the toluene removal.

Through the biokinetic studies using the well-known inhibition biokinetic expression, we were not able to observe interactions or inhibitions among the three different kinds of microorganisms, i.e. *Thiobacillus thioparus*, *Nitrosomonas* and *Nitrobacter* and *Pseudomonas putida*, or even between H₂S gas and other gases. It was a parallel process where many different reactions are simultaneously occurring in a finite area (at the same sites) of the microbial fixing carrier materials. Although there are a lot of chances for involving the competitive or cross-inhibitions among the three different kinds of microorganisms in terms of nutrients, byproducts for the metabolisms, etc., it was assumed that the simultaneous biodegradations for the ternary NH₃, H₂S and toluene substrates were indifferently taken place, in contrast with the results reported by others [Chung et al., 2000, 2001; Kim et al., 2002a; Malhautier et al., 2003] for the removal on the binary NH₃, H₂S. Furthermore, Cox and Deshusses [2002] have reported no interactions between two microorganisms during the simultaneous removal of the binary H₂S and toluene. In the range of experiments in this work, there was no clear evidence of the inhibition on toluene removal influenced by the presence of H₂S.

CONCLUSIONS

Through the biokinetic study associated with three different substrate gases, i.e. NH₃, H₂S and toluene, using an inhibition biokinetic expression occurring in a mixture of microorganisms fixed on zeocarbon granules or cork chips, it is confirmed that there is no particular evidence or clue of interaction or inhibition among three different kinds of microorganisms. In a view of system interrup-

tions due to the inhibitory behavior, it is, therefore, feasible to establish the development of a single-stage biofiltration system for the simultaneous removal for low concentration levels of ternary NH₃, H₂S and toluene gas mixtures in waste air.

ACKNOWLEDGEMENT

Authors are grateful for the research fund provided by Korean Ministry of Science and Technology (MOST).

REFERENCES

Acuna, M. E., Villanueva, C., Cardenas, B., Christen, P. and Revah, S., "The effect of nutrient concentration on biofilm formation on peat and gas phase toluene biodegradation under biofiltration conditions," *Proc. Biochem.*, **38**, 7 (2002).

Busca, C. and Pistarino, C., "Abatement of ammonia and amines from waste gases: A summary," *J. Loss Prev. in the Proc. Ind.*, **16**, 157 (2003).

Cho, K., Ryu, H. W. and Lee, N. Y., "Biological deodorization of hydrogen sulfide using porous lava as a carrier of *Thiobacillus thiooxidans*," *J. Biosci. Bioeng.*, **90**, 25 (2000).

Chung, Y., Huang, C. and Tseng, C., "Biological elimination of H₂S and NH₃ from wastegases by biofilter packed with immobilized heterotrophic bacteria," *Chemosphere*, **43**, 1043 (2001).

Chung, Y., Huang, C., Tseng, C. and Pan, J. R., "Biotreatment of H₂S- and NH₃-containing waste gases by co-immobilized cells biofilter," *Chemosphere*, **41**, 329 (2000).

Cox, H. H. J. and Deshusses, M. A., "Co-treatment of H₂S and toluene in a biotrickling filter," *Chem. Eng. J.*, **87**, 101 (2002).

Delhomenie, M., Bibeau, L., Gendron, J., Brzezinski, R. and Heitz, M. A., "Study of clogging in a biofilter treating toluene vapors," *Chem. Eng. J.*, **94**, 211 (2003).

Edwards, V. H., "The influence of high substrate concentrations on microbial kinetics," *Biotechnol. Bioeng.*, **7**, 679 (1970).

Elias, A., Barona, A., Arreguy, A., Rios, J., Aranguiz, I. and Penas, J., "Evaluation of a packing material for the biodegradation of H₂S and product analysis," *Proc. Biochem.*, **37**, 813 (2002).

Hill, M. G. and Robinson, C. W., "Substrate inhibition kinetics: phenol degradation by *pseudomonas putida*," *Biotechnol. Bioeng.*, **17**, 1599 (1975).

Hirai, M., Kamatomo, M., Yani, M. and Shoda, M., "Comparison of biological H₂S removal characteristics among four inorganic packing materials," *J. Biosci. Bioeng.*, **91**, 396 (2001).

Kim, H., Xie, Q., Kim, Y. J. and Chung, J. S., "Biofiltration of ammonia gas with sponge cube coated with mixtures of activated carbon and zeolite," *Environ. Technol.*, **23**, 839 (2002a).

Kim, H. S., Kim, Y. J., Chung, J. S. and Xie, Q., "Long-term operation of a biofilter for simultaneous removal of hydrogen sulfide and ammonia," *JAWMA*, **52**, 1389 (2002b).

Kim, S. H., Oh, K. J., Moon, J. H. and Kim, D., "Simultaneous removal of H₂S and NH₃ using *Thiobacillus* sp. IW in a three-phase fluidized-bed bioreactor," *Micorbiol. Biotech.*, **10**, 419 (2000).

Lallai, A. and Mura, G., "Kinetics of growth for mixed cultures of microorganisms growing on phenol," *Chem. Eng. J.*, **41**, B55 (1989).

Lim, K. H., "The treatment of waste-air containing mixed solvent using a biofilter 2. Treatment of waster-air containing ethanol in a biofil-

ter," *Korean J. Chem. Eng.*, **22**, 228 (2005).

Lim, K. H. and Park, S. W., "The treatment of waste-air containing mixed solvent using a biofilter 1. Transient behavior of biofilter to treat waste-air containing ethanol," *Korean J. Chem. Eng.*, **21**, 1161 (2004).

Liu, Y., Xie, Q., Sun, Y., Chen, J., Xue, D. and Chung, J. S., "Simultaneous removal of ethyl acetate and toluene in air stream using compost-based biofilters," *J. Hazard. Mat.*, **B95**, 199 (2002).

Malhautier, L., Gracian, C., Roux, J., Fanlo, J. and Cloirec, P. L., "Biological treatment process of air loaded with an ammonia and hydrogen sulfide mixture," *Chemosphere*, **50**, 145 (2003).

NIST, NIST Standard Reference Database, U. S. Commerce Department (2005).

Oyarzun, P., Arancibia, F., Canales, C. and Aroca, G E., "Biofiltration of high concentration of hydrogen sulphide using *Thiobacillus thioparus*," *Proc. Biochem.*, **39**, 165 (2003).

Park, S., Cho, K., Hirai, M. and Shoda, M., "Removability of malodorous gases from a night soil treatment by a pilot-scale peat biofilter inoculated with *Thiobacillus thioparus* DW44," *J. Ferment. Bioeng.*, **76**, 55 (1993).

Shinabe, K., Oketani, S., Ochi, T., Kanchanatawee, S. and Matsumura, M., "Characteristics of hydrogen sulfide removal in a carrier-packed biological deodorization system," *Biochem. Eng. J.*, **5**, 209 (2002).

Shojaosadati, S. A. and Elyasi, S., "Removal of hydrogen sulfide by the compost biofilter with sludge of leather industry," *Res. Conserv. Recycl.*, **27**, 139 (1999).

Wani, A. H., Branion, R. M. R. and Lau, A. K., "Effects of periods of starvation and fluctuating hydrogen sulfide concentration on biofilter dynamics and performance," *J. Hazard. Mat.*, **60**, 287 (1998).

Yoon, I. K., Kim, C. N. and Park, C. H., "Optimum operating conditions for the removal of volatile organic compounds in a compost-packed biofilter," *Korean J. Chem. Eng.*, **19**, 954 (2002).

Zilli, M., Palazzi, E., Sene, L., Converti, A. and Borghi, M. D., "Toluene and styrene removal from air in biofilter," *Proc. Biochem.*, **37**, 423 (2003).