

This article was downloaded by: [Tomsk State University of Control Systems and Radio]
On: 21 February 2013, At: 12:42
Publisher: Taylor & Francis
Informa Ltd Registered in England and Wales Registered Number: 1072954 Registered office: Mortimer House, 37-41 Mortimer Street, London W1T 3JH, UK



Molecular Crystals and Liquid Crystals

Publication details, including instructions for authors and subscription information:

<http://www.tandfonline.com/loi/gmcl16>

Erratum

Version of record first published: 14 Oct 2011.

To cite this article: (1981): Erratum, Molecular Crystals and Liquid Crystals, 78:1, 327-327

To link to this article: <http://dx.doi.org/10.1080/00268948108082169>

PLEASE SCROLL DOWN FOR ARTICLE

Full terms and conditions of use: <http://www.tandfonline.com/page/terms-and-conditions>

This article may be used for research, teaching, and private study purposes. Any substantial or systematic reproduction, redistribution, reselling, loan, sub-licensing, systematic supply, or distribution in any form to anyone is expressly forbidden.

The publisher does not give any warranty express or implied or make any representation that the contents will be complete or accurate or up to date. The accuracy of any instructions, formulae, and drug doses should be independently verified with primary sources. The publisher shall not be liable for any loss, actions, claims, proceedings, demand, or costs or damages whatsoever or howsoever caused arising directly or indirectly in connection with or arising out of the use of this material.

Erratum

Molecular Crystals and Liquid Crystals, Volume 65, Numbers 3 and 4, page 253.

Figure 7 in the article "Dielectric, Electro-Optical and Phase-Change Properties of Liquid Crystal Guest-Host Displays" by M. Schadt and P. Gerber should have appeared in color.

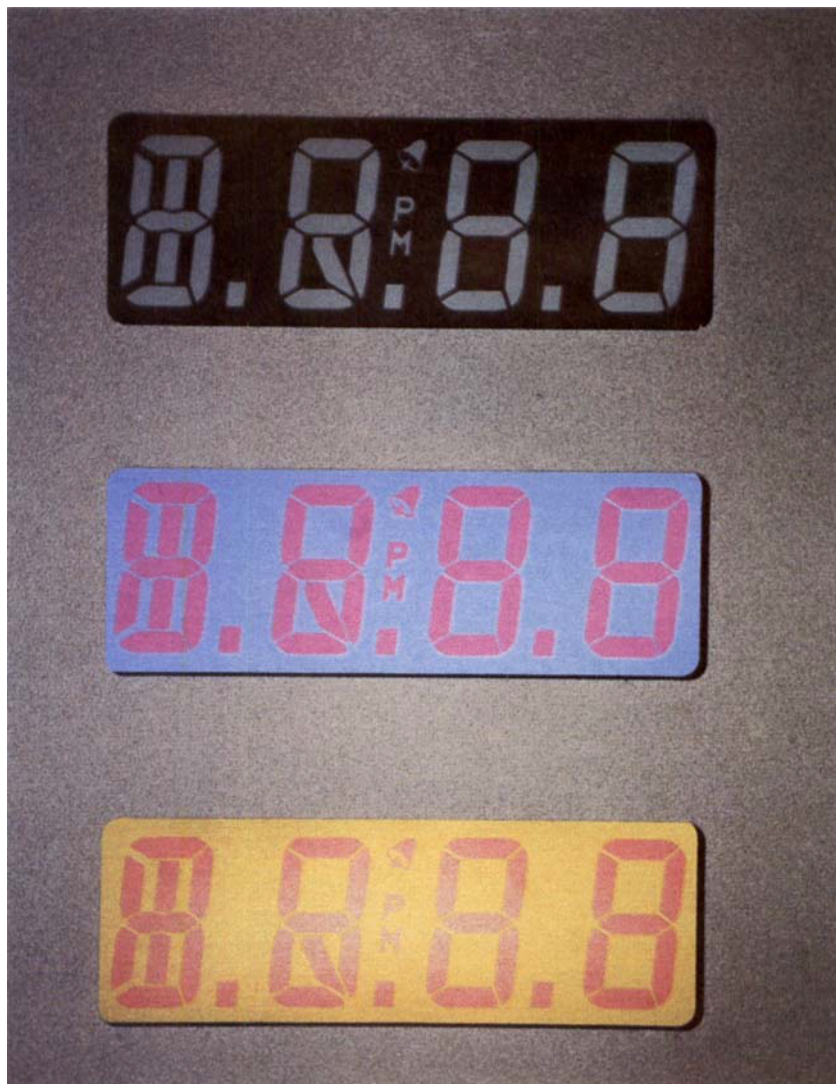


FIGURE 7 Reflective phase-change guest-host display operated at 5.5 volts containing black-white mixture G; no polarizers used (first display from the top). Reflective nematic L/T-displays with parallel wall alignment operated at 4.5 volts containing RO-TN-605 as a host (second and third display from the top). One polarizer aligned parallel to the back wall alignment was used in front of the reflector of the L/T-displays.