



Behaviour of a Shear-Wave at a Solid-Smectic Interface

B. C. Snow & I. W. Stewart

To cite this article: B. C. Snow & I. W. Stewart (2015) Behaviour of a Shear-Wave at a Solid-Smectic Interface, Molecular Crystals and Liquid Crystals, 612:1, 98-109, DOI: [10.1080/15421406.2015.1030578](https://doi.org/10.1080/15421406.2015.1030578)

To link to this article: <http://dx.doi.org/10.1080/15421406.2015.1030578>



Published online: 06 Jul 2015.



Submit your article to this journal [↗](#)



Article views: 114



View related articles [↗](#)



View Crossmark data [↗](#)

Behaviour of a Shear-Wave at a Solid-Smectic Interface

B. C. SNOW* AND I. W. STEWART

Department of Mathematics and Statistics, University of Strathclyde, Glasgow,
Scotland, United Kingdom

Results of theoretical investigations into the behaviour of a shear wave at the boundary between an isotropic solid and a smectic A liquid crystal are presented. These results track the subsequent response of the smectic to the refracted wave. Using the techniques of Landau and Lifshitz for sound in isotropic fluids [1], we extend the results for smectic C by Gill and Leslie [2] and perform the analogous calculations for a sample of smectic A using the dynamic theory of Stewart [3]. These calculations enable a comparison between the results for smectic A and an extension, by the present authors, to the known results for smectic C. Motivated by the work of Auernhammer, Brand, and Pleiner [4, 5], mechanisms for determining the impact of perturbations upon the modes of response behaviour will be analysed, with plots demonstrating the amplitudes of these waves relative to that of the incident wave displayed for a range of typical physical parameters characteristic to smectic C and smectic A.

1. Introduction

It is well known that smectic liquid crystals have the potential for much faster switching than their nematic counterparts. As was remarked by Gill and Leslie [2], induced flow can play a major role in the dynamics of such switching, and it is therefore of great interest to develop a comprehensive understanding of how smectics behave when subjected to a variety of perturbations and induced flow profiles.

The analysis presented herein will consider a perturbation to a sample of bookshelf aligned smectic A (SmA) induced by a shear wave incident at the plane interface between the smectic and an isotropic elastic solid such that the wave first propagates through the solid then undergoes a reflection and refraction on contact with the interface, as shown in Fig. 1.

Section 2 will provide a brief outline of Stewart's dynamic theory for SmA [3]. Section 3 will provide, in an analogous manner to that adopted by Gill and Leslie [2] for smectic C (SmC), derivations of the dispersion relations for the reflected and refracted waves, together with the consequent interfacial conditions to be utilised in the analysis. A brief summary of the results from [2] will be presented in Section 4, before deriving, in Section 5, expressions that relate the amplitudes of the reflected and refracted waves in terms of the incident wave amplitude and material parameters that characterise SmA and SmC, the latter being a novel extension to the work in [2]. Section 5 concludes with plots which demonstrate how the

*Address correspondence to B. C. Snow, Department of Mathematics and Statistics, University of Strathclyde, Glasgow G1 1XH, Scotland, United Kingdom. Email: ben.snow@strath.ac.uk

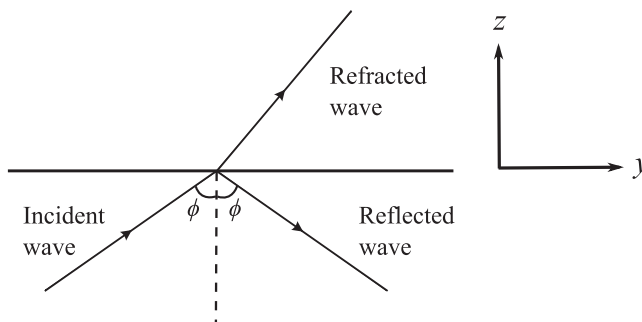


Figure 1. On contact with the interface, the incident wave is both reflected and refracted. The region $z < 0$ is occupied by an isotropic elastic solid, while the region $z > 0$ contains bookshelf aligned SmA.

amplitudes of the refracted waves vary with the incident angular frequency of the incident wave. The paper will close with a summary and discussion of the main results and the potential influence on further work.

2. Continuum Theory for Smectic A Liquid Crystals

It is known that nematic liquid crystals consist of rod-like molecules that tend to align parallel to each other along some common preferred direction indicated by the unit vector \mathbf{n} , called the director. The SmA liquid crystal phase occurs when the constituent molecules are arranged in layers, where the director is, on average, generally aligned perpendicular to the local layer structure and is parallel to the local layer normal. In SmC liquid crystals the director is tilted at an angle θ relative to the layer normal; θ is usually temperature dependent and is called the smectic cone angle. The director \mathbf{n} continues to be defined as the average direction of the molecular alignment and, from the physical point of view, \mathbf{n} and $-\mathbf{n}$ are indistinguishable. It is the SmA phase that is the main concern here, although a comparison with results for SmC will also be made.

We now summarise the continuum theory in [3], in which \mathbf{n} and \mathbf{a} are allowed to separate, as considered by Ribotta and Durand [6]. The standard suffix notation for Cartesian vectors and tensors [7] is employed. SmA is described by two unit vectors: the layer normal \mathbf{a} and the director \mathbf{n} . The layer normal is perpendicular to the plane of the smectic layers, and it is conveniently defined via a scalar function $\Phi(x, y, z, t)$ such that

$$\mathbf{a} = \frac{\nabla \Phi}{|\nabla \Phi|}, \quad \text{i.e.,} \quad a_i = \frac{\Phi_{,i}}{|\nabla \Phi|}, \quad (2.1)$$

from which is it clear that \mathbf{a} is a unit vector by its definition. As mentioned, \mathbf{n} is also constrained to be a unit vector, so that

$$\mathbf{n} \cdot \mathbf{n} = n_i n_i = 1. \quad (2.2)$$

We will be concerned with samples which are both isothermal and incompressible (in the classical sense); the latter of these requires that the velocity \mathbf{v} at any point in the smectic

satisfies

$$v_{i,i} = 0. \quad (2.3)$$

The balance of linear momentum takes the form

$$\rho \dot{v}_i = \rho f_i - \tilde{p}_{,i} + \tilde{g}_j n_{j,i} + G_j n_{j,i} + |\nabla \Phi| a_i J_{j,j} + \tilde{t}_{ij,j}, \quad (2.4)$$

with ρ denoting the density, f_i the external body force per unit mass, $\tilde{p} = p + w_A$, where p is the pressure and w_A is the elastic energy density given by [8]

$$\begin{aligned} w_A = & \frac{1}{2} K_1^a (\nabla \cdot \mathbf{a})^2 + \frac{1}{2} K_1^n (\nabla \cdot \mathbf{n} - s_0)^2 + \frac{1}{2} K_2 \nabla \cdot [(\mathbf{n} \cdot \nabla) \mathbf{n} - (\nabla \cdot \mathbf{n}) \mathbf{n}] \\ & + \frac{1}{2} B_0 |\nabla \Phi|^{-2} (1 - |\nabla \Phi|)^2 + \frac{1}{2} B_1 [1 - (\mathbf{n} \cdot \mathbf{a})^2] \\ & + B_2 (\nabla \cdot \mathbf{n}) (1 - |\nabla \Phi|^{-1}), \end{aligned} \quad (2.5)$$

where K_1^a , K_1^n , and K_2 are elastic constants characterising, respectively, the deformation due to bending of the smectic layers, the director splay (with s_0 denoting the spontaneous splay), and the director saddle-splay; B_0 is the layer compression constant, B_1 is the constant attributed to coupling between \mathbf{n} and \mathbf{a} , and B_2 characterises the energy due to the coupling between splay and layer compression. The superposed dot represents the usual material time derivative. The term \tilde{t}_{ij} is the viscous stress with components

$$\begin{aligned} \tilde{t}_{ij} = & \alpha_1 (n_k A_{kl} n_l) n_i n_j + \alpha_2 N_i n_j + \alpha_3 n_i N_j + \alpha_4 A_{ij} \\ & + \alpha_5 (n_j A_{ik} n_k + n_i A_{jk} n_k) + (\alpha_2 + \alpha_3) n_i A_{jk} n_k \\ & + \tau_1 (a_k A_{kl} a_l) a_i a_j + \tau_2 (a_i A_{jk} a_k + a_j A_{ik} a_k) \\ & + \kappa_1 (a_i N_j + N_i a_j + n_i A_{jk} a_k - n_j A_{ik} a_k) \\ & + \kappa_2 (n_k A_{kl} n_l) (n_i a_j + a_i n_j) \\ & + \kappa_3 [(n_k A_{kl} n_l) a_i a_j + (a_k A_{kl} a_l) n_i n_j] \\ & + \kappa_4 [2(n_k A_{kl} a_l) n_i n_j + (n_k A_{kl} n_l) (a_i n_j + n_i a_j)] \\ & + \kappa_5 [2(n_k A_{kl} a_l) a_i a_j + (a_k A_{kl} a_l) (n_i a_j + a_i n_j)] \\ & + \kappa_6 (n_j A_{ik} a_k + n_i A_{jk} a_k + a_i A_{jk} n_k + a_j A_{ik} n_k). \end{aligned} \quad (2.6)$$

The coefficients on the right-hand side of (2.6) are dynamic viscosities, while A_{ij} denotes the usual rate of strain tensor, with components

$$A_{ij} = \frac{1}{2} (v_{i,j} + v_{j,i}),$$

and N is the co-rotational time flux, defined as $N_i = \dot{n}_i - W_{ij} n_j$, where W_{ij} is the vorticity tensor whose components are given by

$$W_{ij} = \frac{1}{2} (v_{i,j} - v_{j,i}).$$

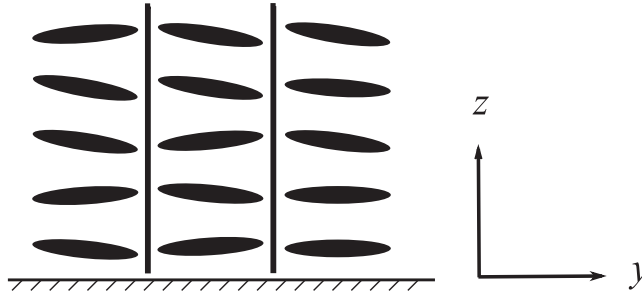


Figure 2. Problem set-up for “bookshelf” SmA.

The term \tilde{g}_i is a dynamic contribution given by

$$\tilde{g}_i = -(\alpha_3 - \alpha_2)N_i - (\alpha_2 + \alpha_3)A_{ij}n_j - 2\kappa_1 A_{ij}a_j, \quad (2.7)$$

and G_i is the generalised external body force, which is related to the external body moment K_i per unit mass via

$$\rho K_i = \epsilon_{ijk}n_j G_k. \quad (2.8)$$

The vector \mathbf{J} is the negative of the permeative force $\boldsymbol{\tau}$, and has components as

$$J_i = -\frac{\partial w_A}{\partial \Phi_{,i}} + \frac{1}{|\nabla \Phi|} \left[\left(\frac{\partial w_A}{\partial a_{j,k}} \right)_{,k} - \frac{\partial w_A}{\partial a_j} \right] (\delta_{ji} - a_j a_i), \quad (2.9)$$

The balance of angular momentum may be expressed in the form

$$\left(\frac{\partial w_A}{\partial n_{i,j}} \right)_{,j} - \frac{\partial w_A}{\partial n_i} + \tilde{g}_i + G_i = \lambda n_i, \quad (2.10)$$

where λ is a Lagrange multiplier arising from the unit vector constraint on \mathbf{n} as given in equation (2.2), which can generally be either evaluated or eliminated on taking the scalar product of (2.10) with \mathbf{n} . The permeation equation, which describes permeative flow between the smectic layers, is

$$\dot{\Phi} = -\lambda_p J_{i,i}, \quad (2.11)$$

where $\lambda_p \geq 0$ is the permeation coefficient.

3. Reflection and Refraction of the Shear Wave at the Solid-Smectic A Interface

Consider Fig. 2, which depicts a plane interface between an isotropic elastic solid and a sample of bookshelf aligned SmA. We may take the interface to lie parallel to the xy -plane and, following [2], assume the solid and smectic to be unbounded in space. Referred to the geometry of Fig. 1, the initially undistorted sample of bookshelf aligned SmA will have its configuration described by

$$\mathbf{n} = \mathbf{n}_0 = (0, 1, 0), \quad \Phi = \Phi_0 = y. \quad (3.1)$$

This initial configuration will be perturbed by an incident shear wave with displacement $\mathbf{u} = (u_x, u_y, u_z)$ whose components are

$$u_x = A \exp\{i[\omega t - k(y \sin \phi + z \cos \phi)]\}, \quad u_y = u_z = 0, \quad (3.2)$$

where A is the constant (real, without loss of generality) amplitude of the wave and ϕ is the constant angle of incidence (to the interface's normal); ω and k denote the constant incident frequency and wave number, respectively. This displacement is required to satisfy the wave equation for an isotropic solid [9, p. 87]. For the displacement as given in (3.2), this leads to the relation

$$\rho_s \omega^2 = \mu_s k^2, \quad (3.3)$$

where μ_s and ρ_s denote, respectively, the shear modulus (or bulk modulus) and density of the solid. It is natural to suppose that the displacement of the reflected wave $\mathbf{u}^r = (u_x^r, u_y^r, u_z^r)$ takes the form

$$u_x^r = B \exp\{i[\omega t - k(y \sin \phi - z \cos \phi)]\}, \quad u_y^r = u_z^r = 0, \quad (3.4)$$

with B a constant complex amplitude which will be determined below.

It is expected that the incident wave will induce a perturbation to the smectic. It will be assumed that this disturbance may cause small changes to the alignment of the constituent molecules (that is, to the director) and to the layer normal. The refracted wave velocity in the smectic is assumed to be of the form

$$v_x = v \exp\{i[\omega t - k(y \sin \phi + qz)]\}, \quad v_y = v_z = 0, \quad (3.5)$$

with $v, q \in \mathbb{C}$ to be determined below. Note that this form of \mathbf{v} automatically satisfies the incompressibility condition $v_{i,i} = 0$. The perturbed scalar Φ will be given by

$$\Phi = y - u(y, z, t), \quad (3.6)$$

for small perturbations $u = \hat{u} \exp\{i[\omega t - k(y \sin \phi + qz)]\}$ such that $|\hat{u}| \ll 1$. Then, to first order in u and derivatives thereof,

$$\mathbf{a} = \frac{\nabla \Phi}{|\nabla \Phi|} = (0, 1, -u_z). \quad (3.7)$$

Finally, the director $\mathbf{n} = (n_x, n_y, n_z)$ is perturbed so that

$$n_x = n \exp\{i[\omega t - k(y \sin \phi + qz)]\}, \quad n_y = 1, \quad n_z = 0. \quad (3.8)$$

Substitution of (3.5) to (3.8) into the balance laws for linear and angular momentum (2.4) and (2.10) as well as the permeation equation (2.11) leads to the requirement $\hat{u} \equiv 0$. Therefore $\mathbf{a} \equiv (0, 1, 0)$ to first order. Further, two dispersion relations are identified:

$$[2i\rho\omega + k^2(\alpha_4 q^2 - \eta \sin^2 \phi)]v - 2\omega k(\alpha_2 + \kappa_1)n \sin \phi = 0, \quad (3.9)$$

$$(\alpha_2 + \kappa_1)kv \sin \phi + [(\alpha_2 - \alpha_3)\omega - B_1]n = 0, \quad (3.10)$$

where

$$\eta = \alpha_2 - \alpha_4 - \alpha_5 - \tau_2 + 2(\kappa_1 - \kappa_6), \quad (3.11)$$

upon identification of λ as B_1 and with the pressure reducing to an arbitrary function of time t . Equations (3.9) and (3.10) furnish us with non-trivial solutions for v and n provided the relation

$$\begin{aligned} & [2i\rho\omega + k^2(\alpha_4 q^2 - \eta \sin^2 \phi)] [(\alpha_2 - \alpha_3)\omega - B_1] \\ & + 2\omega k^2(\alpha_2 + \kappa_1)^2 \sin^2 \phi = 0 \end{aligned} \quad (3.12)$$

is satisfied. Rearranging this for q^2 yields

$$q^2 = \beta_1 - 2i\beta_2, \quad (3.13)$$

where β_1 and $-2\beta_2$ are the real and imaginary parts of q^2 , respectively, given by

$$\beta_1 = \left[\eta + \frac{2\omega(\alpha_2 + \kappa_1)^2}{B_1 + \gamma_1\omega} \right] \sin^2 \phi, \quad \beta_2 = \frac{\rho\xi}{\alpha_4}, \quad (3.14)$$

and we have introduced the notation

$$\xi = \omega/k^2, \quad (3.15)$$

for later comparison with [2]. Equation (3.13) yields two solutions for q . To ensure bounded solutions, it is clear from the forms of the perturbed quantities that the root with negative imaginary part is required here. One therefore finds

$$q = \chi - i\psi, \quad \psi > 0, \quad (3.16)$$

where

$$\chi = \frac{\beta_2}{\psi}, \quad \psi = \sqrt{\frac{1}{2} \left(\sqrt{\beta_1^2 + 4\beta_2^2} - \beta_1 \right)}. \quad (3.17)$$

Note that normal incidence gives

$$q|_{\phi=0} = (1 - i)\sqrt{\frac{\rho\xi}{\alpha_4}}. \quad (3.18)$$

Boundary Conditions

Continuity of velocity and surface traction are imposed at the interface. Using the above expressions for displacement in the solid of the incident and reflected waves in (3.2) and (3.4), respectively, combined with equation (3.5), continuity of velocity leads to the relation

$$i\omega(A + B) = v. \quad (3.19)$$

In the solid, the surface traction is required to satisfy the constitutive equations for isotropic elasticity [10, p. 115], so that continuity of surface traction at the interface imposes the requirement

$$2\mu_s(A - B)\cos\phi = \alpha_4 qv. \quad (3.20)$$

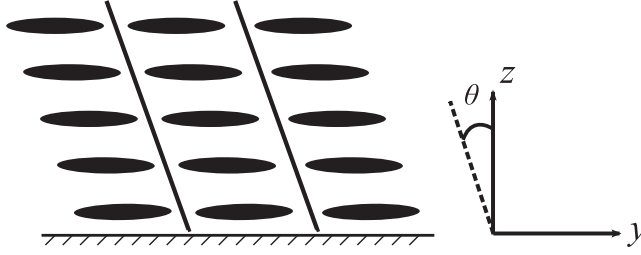


Figure 3. The analogous problem for SmC.

4. The Smectic C Case

Figure 3 depicts a set-up analogous to that considered above, but with a sample of SmC in place of the SmA. This is the geometry of Gill and Leslie's problem [2]. For an incident wave of the form given in (3.2), we obtain (3.3) as before and anticipate a reflected wave displacement identical to that given in (3.4) with B now dependent on certain SmC material parameters, as established below.

Following the Leslie-Stewart-Nakagawa (LSN) description of SmC [11], Gill and Leslie allowed for perturbations to the c -director $\mathbf{c} = (c_x, c_y, c_z)$ of the form

$$c_x = c \exp i[\omega t - k(y \sin \phi + qz)], \quad c_y = \sin \theta, \quad c_z = -\cos \theta, \quad (4.1)$$

where θ denotes the usual smectic cone angle (see Fig. 3). (Note that setting $c_x = 0$ in equation (4.1) yields the undistorted initial configuration as depicted in Fig. 3.) Substitution of (4.1) along with a velocity vector of the form given in (3.5) into the balance of linear and angular momentum equations for SmC (see [12, p. 295]) gives [2]

$$[2i\rho\omega + k^2\eta(q)]v - 2\omega k v(q)c = 0, \quad (4.2)$$

$$ikv(q)v - [2i\lambda_5\omega + k^2\sigma(q)]c = 0, \quad (4.3)$$

leading to the analogue of condition (3.12) for non-trivial solutions:

$$[\eta(q) + 2i\rho\xi][\sigma(q) + 2i\lambda_5\xi] - 2i\xi v^2(q) = 0. \quad (4.4)$$

In the above, $\eta(q)$ and $v(q)$ denote the somewhat unwieldy combinations of SmC viscosities

$$\eta(q) = \eta_1 q^2 + \eta_2 q \sin \phi + \eta_3 \sin^2 \phi, \quad (4.5)$$

where

$$\begin{aligned} \eta_1 &= \eta_{11} \sin^2 \theta + \eta_{12} \sin(2\theta) + \eta_{13} \cos^2 \theta, \\ \eta_2 &= 2\eta_{12} \cos(2\theta) + (\eta_{11} - \eta_{13}) \sin(2\theta), \\ \eta_3 &= \eta_{11} \cos^2 \theta - \eta_{12} \sin(2\theta) + \eta_{13} \sin^2 \theta, \end{aligned} \quad (4.6)$$

with

$$\begin{aligned} \eta_{11} &= \mu_0 + \mu_2 - 2\lambda_1 + \lambda_4, \\ \eta_{12} &= \tau_1 + \tau_2 - \tau_5 - \kappa_1, \\ \eta_{13} &= \mu_0 + \mu_4 - 2\lambda_2 + \lambda_5, \end{aligned} \quad (4.7)$$

and

$$v(q) = v_1 q + v_2 \sin \phi, \quad (4.8)$$

where

$$\begin{aligned} v_1 &= (\tau_1 - \tau_5) \sin \theta - (\lambda_2 - \lambda_5) \cos \theta, \\ v_2 &= (\tau_1 - \tau_5) \cos \theta + (\lambda_2 - \lambda_5) \sin \theta. \end{aligned} \quad (4.9)$$

Also, the term $\sigma(q)$ denotes a combination of SmC elastic constants, and is given by

$$\sigma(q) = \sigma_1 q^2 + \sigma_2 q \sin \phi + \sigma_3 \sin^2 \phi, \quad (4.10)$$

where (in the notation of Stewart [12, equations (6.15), (6.34), and (6.25)]),

$$\begin{aligned} \sigma_1 &= K_4 \sin^2 \theta + K_7 \sin(2\theta) + K_3 \cos^2 \theta, \\ \sigma_2 &= 2K_7 \cos(2\theta) + (K_4 - K_3) \sin(2\theta), \\ \sigma_3 &= K_4 \cos^2 \theta - K_7 \sin(2\theta) + K_3 \sin^2 \theta. \end{aligned} \quad (4.11)$$

Equation (4.4) is quartic in q , so that there are four solutions, two of which are of physical relevance. These are [13]

$$q_1 = (1 - i) \sqrt{\frac{\xi \Gamma_1}{\eta_1 \sigma_1}}, \quad \text{and} \quad q_2 = \epsilon - i \zeta, \quad \zeta > 0 \quad (4.12)$$

where

$$\epsilon = \frac{b_2}{\zeta} - \frac{\Gamma_2 \sin \phi}{2\Gamma_1}, \quad \zeta = \sqrt{\frac{1}{2} \left(\sqrt{b_1^2 + 4b_2^2} - b_1 \right)}, \quad (4.13)$$

with

$$b_1 = \left(\frac{\Gamma_2^2}{4\Gamma_1^2} - \frac{\Gamma_3}{\Gamma_1} \right) \sin^2 \phi, \quad b_2 = \frac{\rho \xi \lambda_5}{\Gamma_1}, \quad (4.14)$$

on setting

$$\Gamma_1 = \lambda_5 \eta_1 - v_1^2, \quad \Gamma_2 = \lambda_5 \eta_2 - 2v_1 v_2, \quad \Gamma_3 = \lambda_5 \eta_3 - v_2^2, \quad (4.15)$$

upon making use of certain approximations, for instance $\rho \sigma_1 \ll \Gamma_1$ [2]. Note that, at normal incidence, q_2 reduces to

$$q_2|_{\phi=0} = (1 - i) \sqrt{\frac{\rho \xi \lambda_5}{\Gamma_1}}, \quad (4.16)$$

while q_1 shows no dependence upon the angle of incidence to first order. In this case, the Stokes layers [1, p. 84] for mode 1 and mode 2 are, respectively,

$$\delta_1 = \sqrt{\frac{\eta_1 \sigma_1}{\omega \Gamma_1}}, \quad \delta_2 = \frac{1}{k \zeta}, \quad (4.17)$$

the second of these reducing at normal incidence to

$$\delta_2|_{\phi=0} = \sqrt{\frac{\Gamma_1}{\rho\omega\lambda_5}}. \quad (4.18)$$

As remarked by Gill [13], the dependence of q_1 on the elastic constants leads it to being regarded as an orientational mode relating to attenuation of reorientation of the c -director, while mode 2 is a hydrodynamic mode, characterising attenuation due to the diffusion of a vorticity. Note that the corresponding dependence of δ_1 on σ_1 leads to the conclusion that $\delta_1 \ll \delta_2$, and thus mode 2 will be dominant after a depth $\sim \delta_1$ into the smectic.

In what follows, it is the behaviour of mode 2 which will be of interest as it is this mode which is analogous to the SmA solution for q at (3.16) in SmA. In this case, the depth of the Stokes layer is $\delta_A = 1/k\psi$, which reduces at normal incidence to

$$\delta_A|_{\phi=0} = \sqrt{\frac{\alpha_4}{\rho\omega}}. \quad (4.19)$$

This is identical to the Stokes layer that occurs in oscillatory flow of SmA [14], and is analogous to that for isotropic fluids [1, p.84]. From this, it is clear that viscous behaviour is dominant in characterising the propagation of this disturbance.

It is worth remarking here that if one were to perform an analysis of a SmA sample whose layers were tilted relative to the interface, one would expect to find a second mode of propagation analogous to mode one in the case of SmC. While such an investigation is beyond the scope of the present paper, it is the intention of the present authors to consider this at a later date.

Interfacial Conditions

As in Section 3, we require continuity of velocity, leading to the condition [2]

$$i\omega(A + B) = v_1 + v_2, \quad (4.20)$$

where v_1 and v_2 denote the velocity contributions to the refracted wave of mode 1 and mode 2, respectively. Continuity of surface traction imposes the requirement

$$2\mu_s(A - B)\cos\phi = \eta_1(q_1v_1 + q_2v_2) + \frac{1}{2}\eta_2(v_1 + v_2)\sin\phi, \quad (4.21)$$

the latter reducing at normal incidence to

$$2\mu_s(A - B) = \eta_1(q_1v_1 + q_2v_2). \quad (4.22)$$

Imposing strong anchoring at the boundary requires that

$$c_1 + c_2 = 0, \quad (4.23)$$

where c_1 and c_2 are the distortions of the c -director corresponding to mode 1 and mode 2, respectively.

5. Solutions for the Amplitudes: Comparison at Normal Incidence

We now present a comparison of the anticipated response behaviour of each of the smectics. For brevity, we will only outline the case of normal incidence ($\phi \equiv 0$); a full account of the more general oblique incidence case is currently in preparation.

Smectic A

Equation (3.20) reduces at normal incidence to

$$2\mu_s(A - B) = \alpha_4 q v, \quad (5.1)$$

which, on combining with equation (3.20), leads to

$$|B|_{\text{SmA}} = \frac{A\sqrt{4\rho_s^4\xi^2 + \rho^2\alpha_4^2}}{2\rho_s^2\xi + \rho\alpha_4 + 2\rho_s\sqrt{\rho\xi\alpha_4}}, \quad (5.2)$$

as well as the displacement of the refracted wave, taken in the form

$$\mathbf{u}^{\text{SmA}} = (C_{\text{SmA}} \exp\{i[\omega t - k(y \sin \phi + qz)]\}, 0, 0),$$

which, by appeal to equations (3.18) and (5.1), yields

$$|C|_{\text{SmA}} = \frac{2A\rho_s\sqrt{2\xi}}{\sqrt{2\rho_s^2\xi + \rho\alpha_4 + 2\rho_s\sqrt{\rho\xi\alpha_4}}}. \quad (5.3)$$

This, combined with (3.18) and (5.3), provides a full description of the refracted wave in the SmA in terms of the prescribed parameters A , ω , k and ϕ along with the SmA material parameters ρ and α_4 .

Smectic C

In a similar manner, the analogous quantities in the SmC are

$$|B|_{\text{SmC}} = \frac{A\sqrt{4\rho_s^4\xi^2\lambda_5^2 + \rho^2\Gamma_1^2}}{2\rho_s^2\xi\lambda_5 + \rho\Gamma_1 + 2\rho_s\sqrt{\rho\xi\lambda_5\Gamma_1}}, \quad (5.4)$$

$$|C|_{\text{SmC}} = \frac{2A\rho_s\sqrt{2\xi\lambda_5}}{\sqrt{2\rho_s^2\xi\lambda_5 + \rho\Gamma_1 + 2\rho_s\sqrt{\rho\xi\lambda_5\Gamma_1}}}, \quad (5.5)$$

recalling that, in (5.5), we are displaying the behaviour of mode 2 for the reasons outlined above in Section 4.

Figure 4 displays the behaviour of the amplitudes in both the SmA and SmC, i.e. $|C|_{\text{SmA}}$ and $|C|_{\text{SmC}}$, as functions of the incident angular frequency ω . Parameter values for SmC were taken from [12, p. 301] where we have set $\tau_5 - \tau_1 > 0$, $\lambda_5 - \lambda_2 > 0$ and $\theta = \pi/6$. The values for SmA were obtained from Table 1 in reference [15]; for the solid, we chose $\rho_s = 2400 \text{ kgm}^{-3}$ and $\mu_s = 2.62 \times 10^{10} \text{ Pa}$. Clearly the behaviour of each of these expressions in (5.3) and (5.5) is qualitatively the same, and we observe that, until

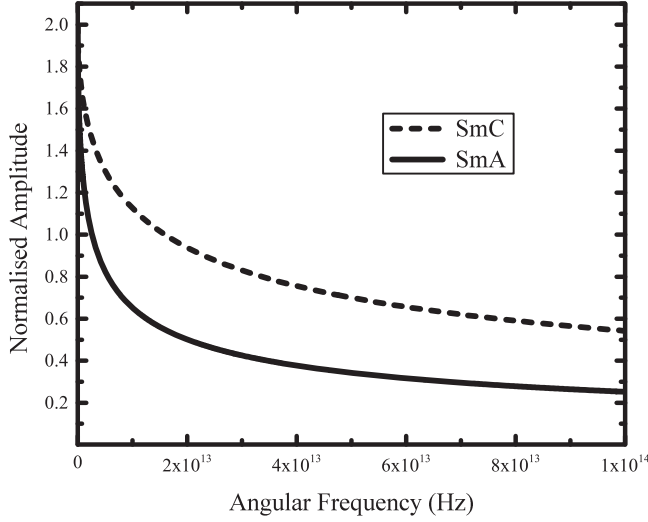


Figure 4. The amplitudes $|C|_{\text{SmA}}$ and $|C|_{\text{SmC}}$ of the refracted waves, normalised with respect to A . Note that both continuum theories predict the same qualitative behaviour.

$$\omega \sim 10^{10}\text{Hz},$$

$$|C|_{\text{SmA}} \sim (2 - 1.01 \times 10^{-6} \sqrt{\omega}) A, \quad (5.6)$$

$$|C|_{\text{SmC}} \sim (2 - 4.12 \times 10^{-7} \sqrt{\omega}) A, \quad (5.7)$$

from which it is evident that $|C|_{\text{SmA}} \doteq 1.9A$ and $|C|_{\text{SmC}} \doteq 1.96A$ when $\omega = 10^{10}\text{Hz}$, both showing comparatively little change over the range $0 \leq \omega \lesssim 10^{10}\text{Hz}$. Thereafter, the refracted wave amplitudes begin to fall off more noticeably, and by $\omega = 10^{14}\text{Hz}$, $|C|_{\text{SmA}}$ is just over one tenth of its initial value, while $|C|_{\text{SmC}}$ is somewhat below thirty percent of its initial value.

6. Discussion

Results have been presented regarding the behaviour of a shear wave at the interface between a solid and an unbounded sample of SmA liquid crystal, fully establishing the behaviour of the reflected and refracted waves in terms of the problem's physical parameters. In particular, the refracted wave number q , which characterises the attenuation of the wave in the SmA case, was provided in terms of the parameters characterising the solid and the smectic by equation (3.16). Further, expressions for the amplitudes of these at normal incidence were derived in terms of the incident wave amplitude and these parameters, with (5.2) and (5.3), lead to expressions for the reflected and refracted waves, respectively. For the purpose of a qualitative comparison, we derived analogous terms via the results of Gill and Leslie [2], who performed calculations for the identical experiment for a sample of SmC, utilising the LSN theory for SmC. It is readily seen that, at normal incidence, the behaviour of the two phases is qualitatively the same, with the refracted wave amplitudes showing a departure in behaviour from the approximate expressions given in equations (5.6) and (5.7) as ω increases beyond the critical value 10^{10}Hz . Before ω attains this value,

the aforementioned expressions provide a very accurate approximation to the respective exact expressions for the refracted wave amplitudes given in (5.3) and (5.5).

The assumption of spatially semi-infinite samples is valid for samples whose depth is greater than that of the penetration depth given in either (4.18) for SmC or (4.19) for SmA in the case of normal incidence. It may prove instructive to consider a smectic confined to a region whose depth is less than that of these penetration depths and investigate the effects of the boundaries in this case. Further, the linear stability of the layered structure to perturbations will presumably be valid for sufficiently small amplitudes of incident wave; just how sensitive the smectic sample is to higher magnitude disturbances is a matter for further investigation.

References

- [1] Landau, L. D., & Lifshitz, E. M. (1987). *Fluid Mechanics, Landau and Lifshitz: Course of Theoretical Physics, Vol. 6*, 2nd Ed., Butterworth-Heinemann: Oxford, UK.
- [2] Gill, S. P. A., & Leslie, F. M. (1992). *J. Mech. Phys. Solids*, 40, 1485.
- [3] Stewart, I. W. (2007). *Continuum Mech. Thermodyn.*, 18, 343.
- [4] Auernhammer, G. K., Brand, H. R., & Pleiner, H. (2000). *Rheol Acta*, 39, 215.
- [5] Auernhammer, G. K., Brand, H. R., & Pleiner, H. (2002). *Phys. Rev. E*, 66, 061707.
- [6] Ribotta, R., & Durand, G. (1977). *J. Physique*, 38, 179.
- [7] Aris, R. (1989). *Vectors, Tensors, and the Basic Equations of Fluid Mechanics*, Dover: New York, USA.
- [8] De Vita, R., & Stewart, I. W. (2013). *Soft Matter*, 9, 2056.
- [9] Landau, L. D., & Lifshitz, E. M. (1986). *Theory of Elasticity, Landau and Lifshitz: Course of Theoretical Physics, Vol. 7*, 3rd Ed., Butterworth-Heinemann: Oxford, UK.
- [10] Spencer, A. J. M. (2004). *Continuum Mechanics*, Dover: New York, USA.
- [11] Leslie, F. M., Stewart, I. W., & Nakagawa, M. (1991). *Mol. Cryst. Liq. Cryst.*, 198, 443.
- [12] Stewart, I. W. (2004). *The Static and Dynamic Continuum Theory of Liquid Crystals*, Taylor & Francis: London, UK.
- [13] Gill, S. P. A. (1992). *Ph.D. Thesis*, Department of Mathematics, University of Strathclyde, Glasgow.
- [14] Miscandlon, J., & Stewart, I. W. In preparation.
- [15] Stewart, I. W., & Stewart, F. (2009). *J. Phys. Condens. Matter*, 465, 101.