


RF design

engineering principles and practices

April 1993

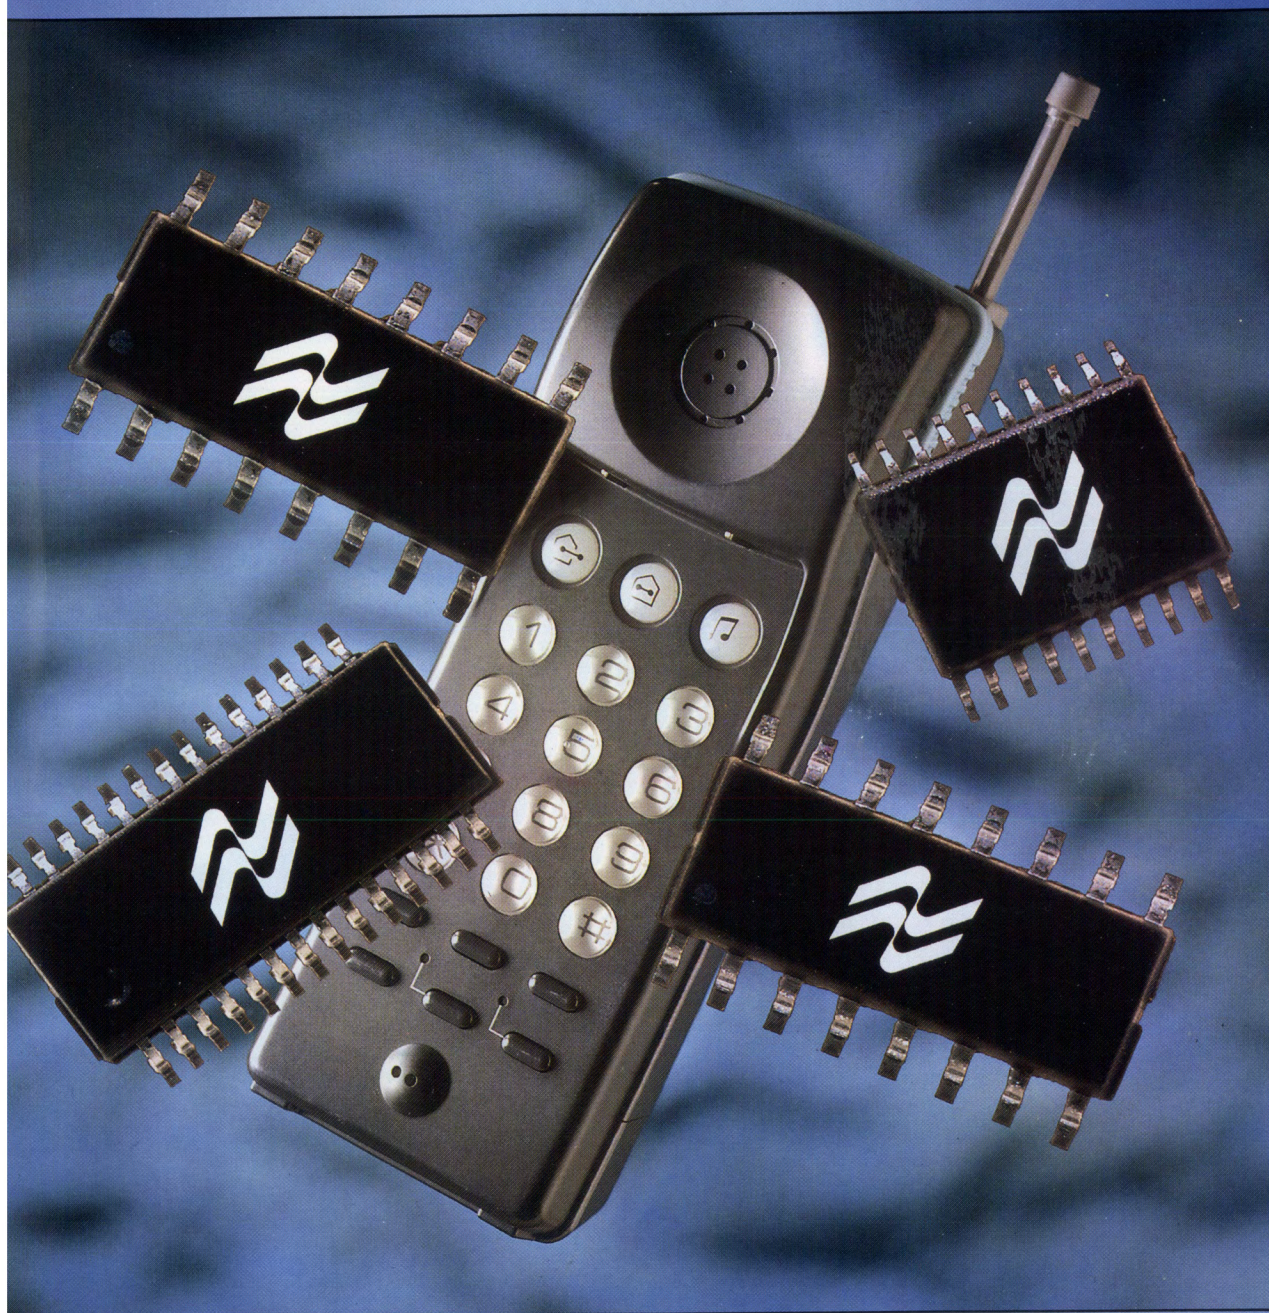

Cover Story
**New Chipset Aids
Designs for DECT**

Featured Technology
Spread Spectrum

Low Cost Schottkys

High-Volume Commercial Applications to 6GHz.

Alpha's high-volume, low-cost Schottkys are available in configurations ranging from base monolithic chips or surface-mount packages to chip-on-board architectures.


Featuring the same advanced technology that goes into our high-rel military devices, Alpha's Schottkys offer the highest levels of repeatability, together with proven design and the latest automated production equipment.

Specific functions involve mixing, detection and high-power switching. Applications include...

- Wireless Communications
- PCNs
- Cellular Handset & Base Stations
- Identification & Security Tags
- Bar Codes

Take advantage of traditional Alpha high-frequency performance at competitive prices with the industry's largest selection of high volume, low-cost Schottky diodes. Call us today!

Alpha High Volume SOTs

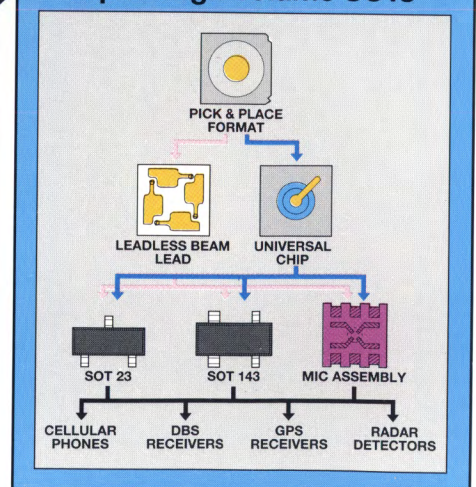


Alpha

ALPHA Industries, Inc.

20 Sylvan Road, Woburn, MA 01801

Tel (617) 935-5150 • FAX (617) 935-4939

INFO/CARD 1

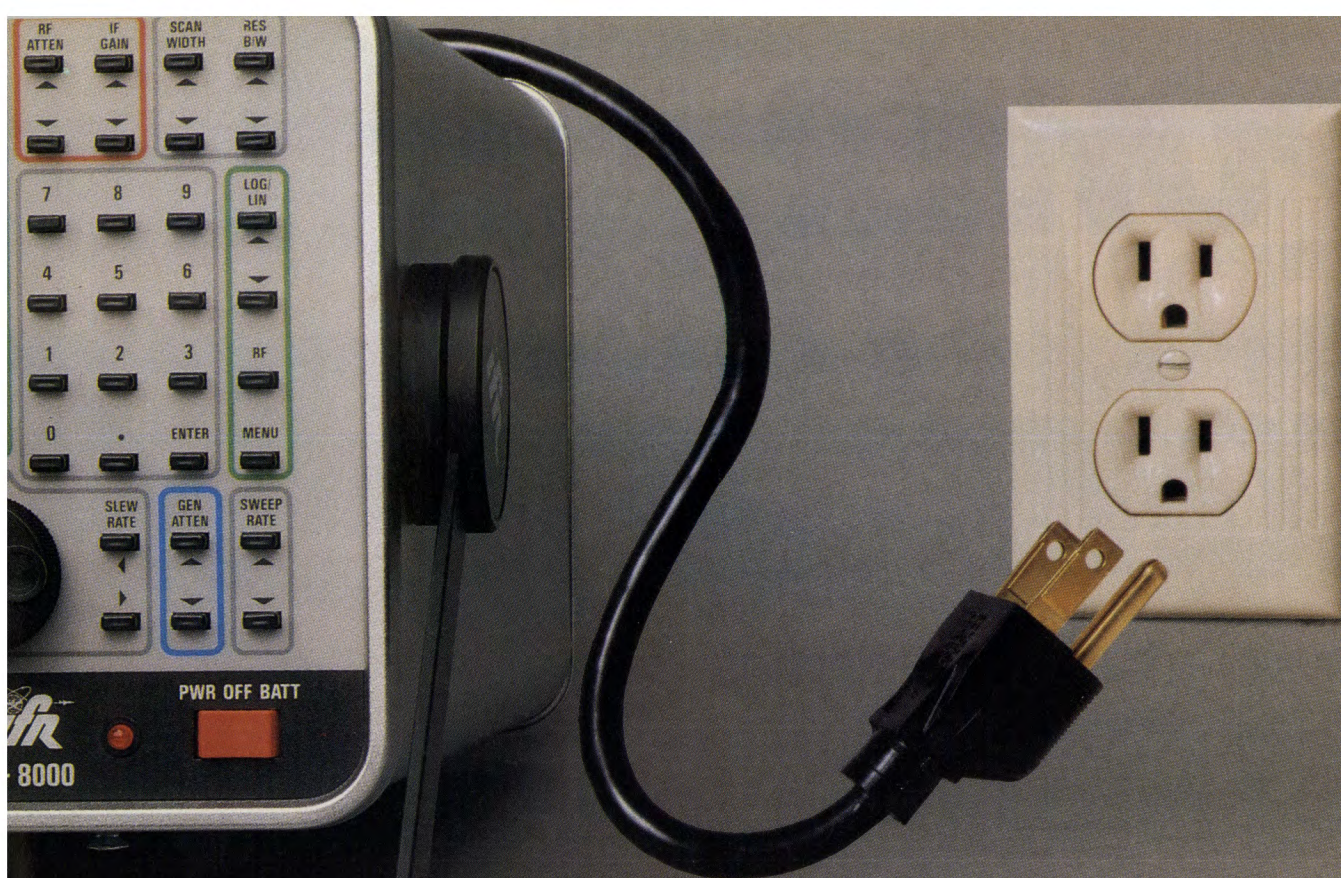

The fastest response to in-the-field service calls:

PULL THE PLUG

...and you're on the way.


RENT directly
from IFR.
Call 316/522-4981,
Ext. 207 for details.

■ Operate your IFR Spectrum Analyzer from any available 12 to 30 volt DC power source or from its optional built-in rechargeable battery pack. Of course, either analyzer may also be powered from any 106 to 266 volt 50 to 400 Hz AC source. ■ If your


RF testing needs call for a digital, synthesized spectrum analyzer that performs equally well in the laboratory or in the field, specify a **true** portable, an IFR A-7550 or A-8000.

For even greater flexibility add these built-in options:

- Tracking Generator
- AM/FM/SSB Receiver
- Quasi-Peak Detector
- IEEE-488 or RS-232 Interface



A-7550 10 kHz to 1 GHz

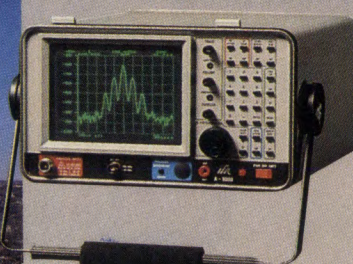

A-8000 10 kHz to 2.6 GHz



IFR SYSTEMS, INC.

10200 West York Street
Wichita, Kansas 67215-8935 U.S.A.
Phone 316/522-4981
TWX 910-741-6952
FAX 316/524-2623



INFO/CARD 2


POWER SPLITTERS/ COMBINERS

the world's largest selection
2KHz to 10GHz from \$2⁹⁵

With over 300 standard models, from 2-way to 48-way, 0°, 90° and 180°, 50- and 75-ohms, covering 2KHz to 10GHz, Mini-Circuits offers the world's largest selection of off-the-shelf power splitter/combiners. And, with rapid turnaround time, we'll also supply "special" needs, such as wider bandwidth, higher isolation, lower insertion loss and phase matched ports.

Available for use in military and commercial requirements, models include plug-in, flat-pack, surface-mount, connectorized standard and custom designs. New ultra-miniature surface mount units provide excellent solutions in cellular communications, GPS receivers, Satcom receivers, wireless communications, and cable systems.

All units come with a one-year guarantee and unprecedented "skinny" sigma unit-to-unit and production run-to-production run repeatability. All catalog models guaranteed to ship in one week. Mini-Circuits...dedicated to exceed our customers' expectations.

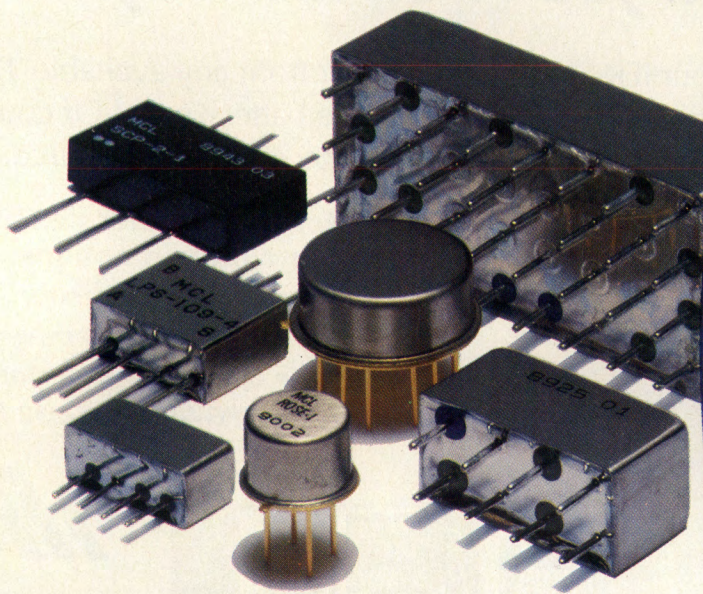

finding new ways ...
setting higher standards




Mini-Circuits™


WE ACCEPT AMERICAN EXPRESS AND VISA


P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers/NORTH AMERICA 800-654-7949 • 417-335-5935 Fax 417-335-5945 EUROPE 44-252-835094 Fax 44-252-837010

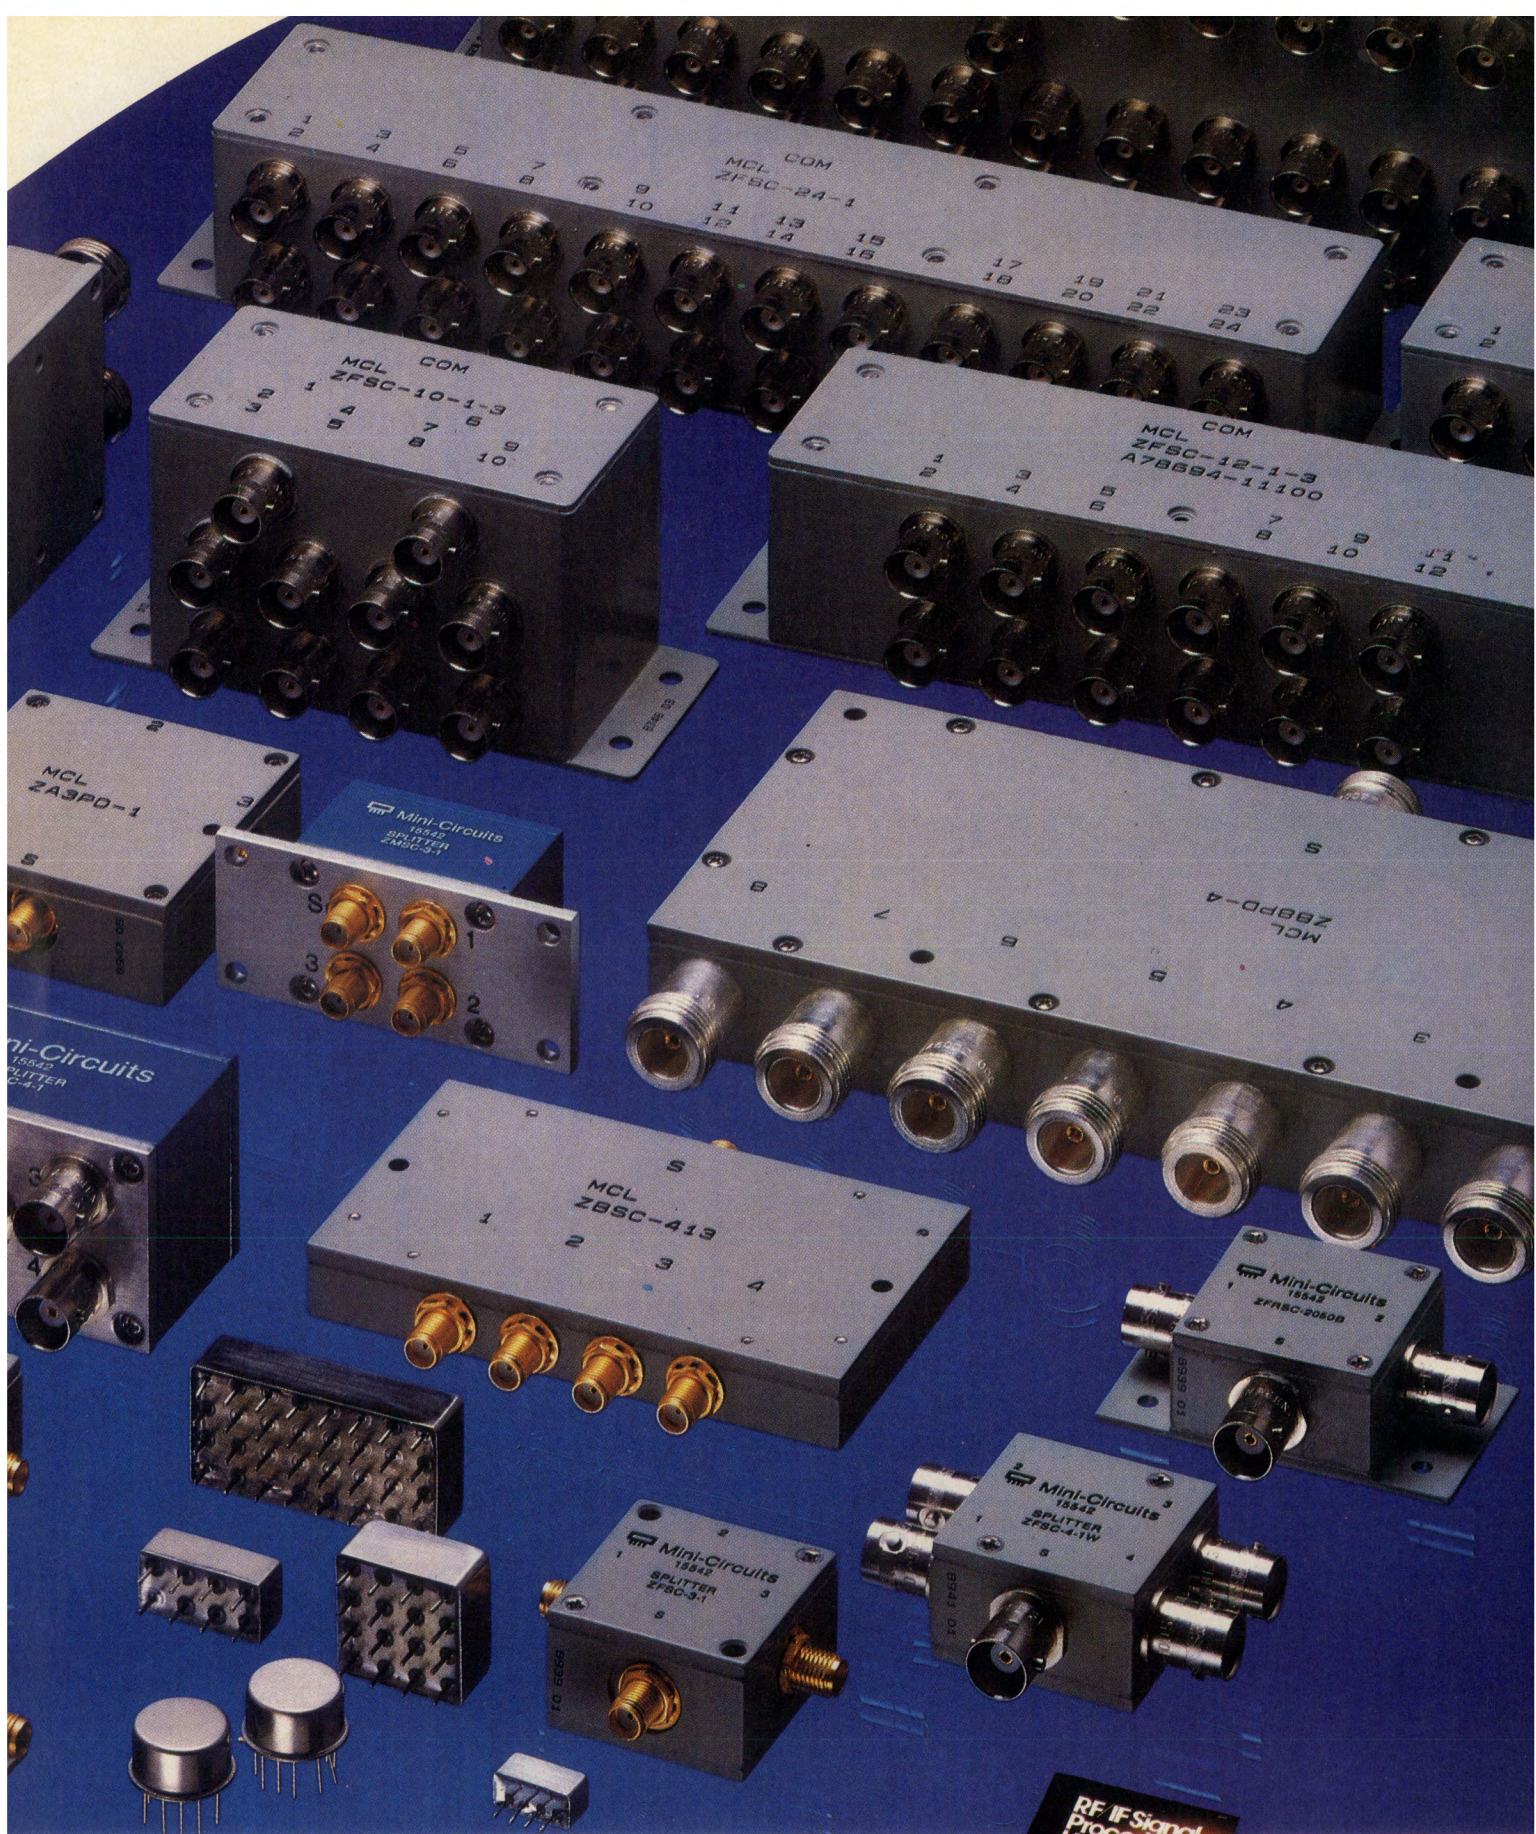

For detailed specs on all Mini-Circuits products refer to
 • THOMAS REGISTER Vol. 23 • MICROWAVES PRODUCT DIRECTORY
 • EEM • MINI-CIRCUITS' 740-pg HANDBOOK.



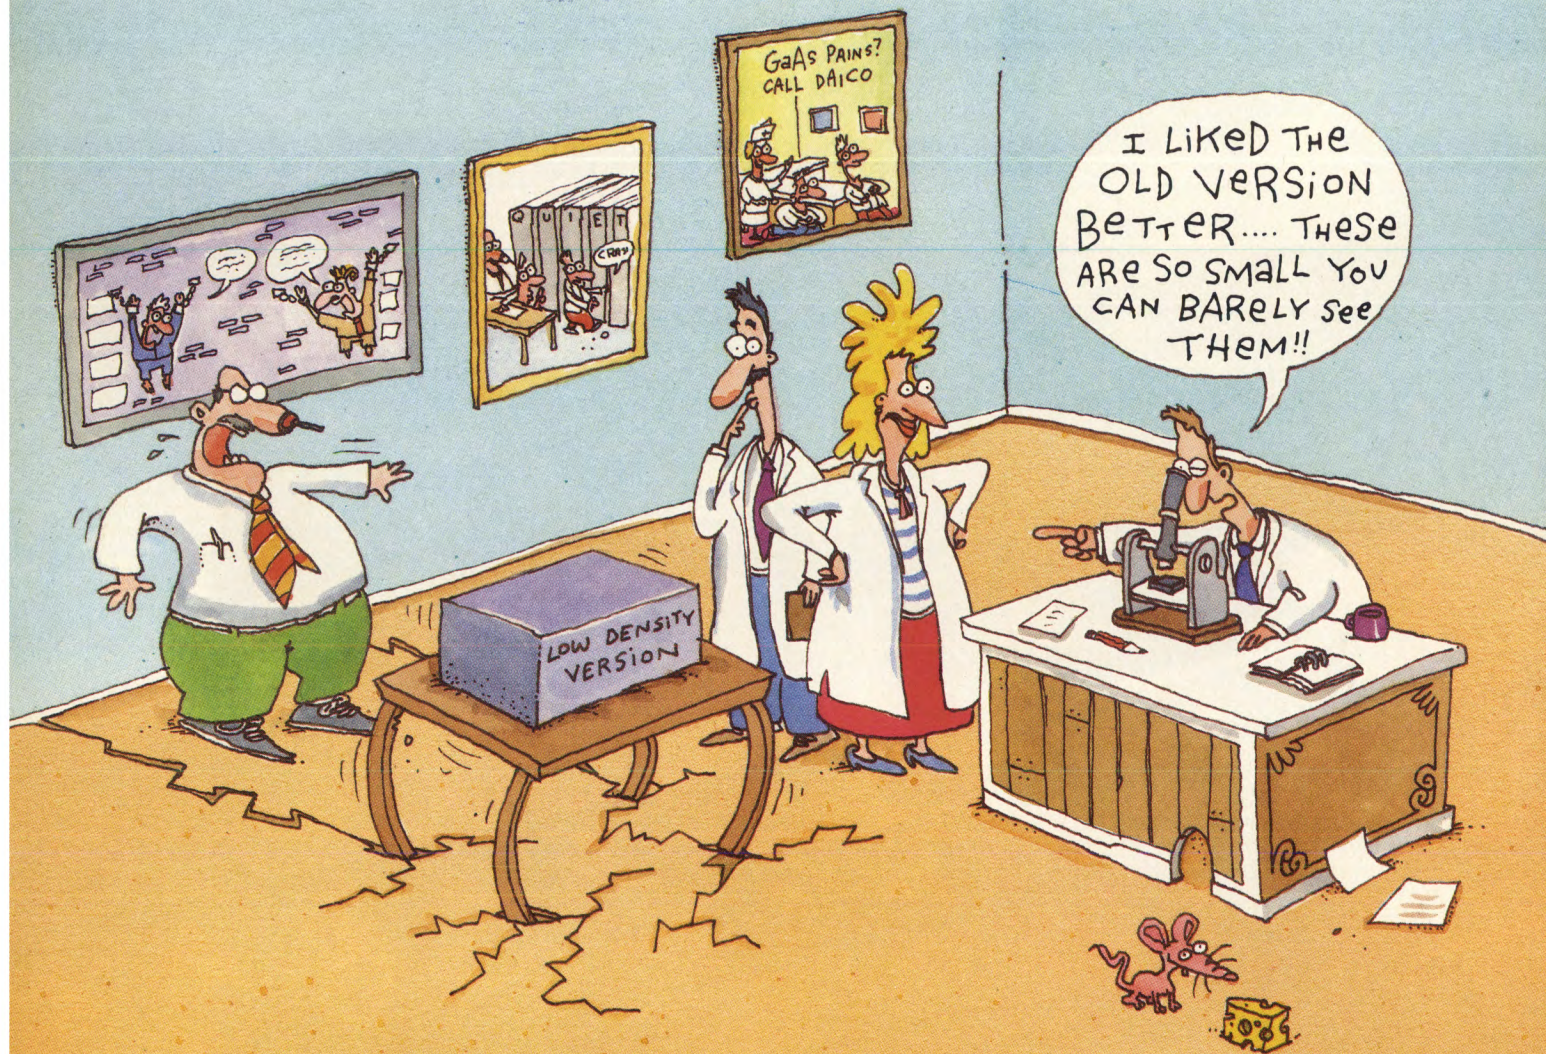

DAICO High Density MICS (HDMICS) are thin film hermetically sealed hybrids consisting of any one of a number of switches, attenuators, phase shifters, MMICS, threshold detectors, couplers or amplifiers.

ADVANTAGES:

- Cost
- Component count
- Size
- (Customers) Reduced materials handling

DISADVANTAGE:

- Can't be used to keep lab door open on hot days.

WE ACCEPT VISA AND MASTERCARD



DAICO INDUSTRIES, INC.

2453 E. Del Amo Blvd., Rancho Dominguez, CA 90220
Telephone 310/631-1143 • FAX 310/631-8078

SWITCHES

ATTENUATORS

PHASE SHIFTERS

MMICS

BIT DETECTORS

COUPLERS

MODULATORS

AMPLIFIERS

featured technology

29 **A Robust Signaling Technique for Part 15 RF Control Network Applications**

A signaling technique based on direct sequence spreading features very fast synchronization for rapid channel access and relaxed carrier frequency accuracy requirements. — *Greg Magini*

41 **Frequency Translation of a Baseband Signal**

Upconverted broadband signals present difficult filtering problems due to the proximity of both the LO and undesired sideband, particularly if amplitude and phase distortion are to be minimized. This article describes a technique for upconverting a broadband signal (15 to 45 MHz chirp signal) to an IF centered at 180 MHz.

— *Eric A. Adler, Edward A. Viveiros and John T. Clark*

cover story

48 **Radios for the Future: Designing for DECT**

A new 2 GHz radio architecture which complies with the Digital European Cordless Telecommunications (DECT) standard can be implemented with a new chipset from National Semiconductor. The applicability of DECT-like systems under U.S. standards is also discussed.

— *Benny Madsen and Daniel E. Fague*

tutorial

62 **A Basic Review of Feedback**

By employing feedback, a designer can make his circuit less sensitive to changes in gain. Feedback can also result in oscillation, both wanted and unwanted. This tutorial explains basic feedback principles. — *Gary A. Breed*


design awards

65 **An RF Swept Filter for Medical Ultrasound Systems**

A swept filter in which signal and control signals are kept isolated is presented in this 1992 RF Design Awards Contest entry. — *Alexander Pummer*

70 **A Resistive Attenuator Calculation Program**

Pi- and T-type resistive attenuators are synthesized and analyzed in this program, as is a minimum attenuation L-pad. — *Jouni Verronen*

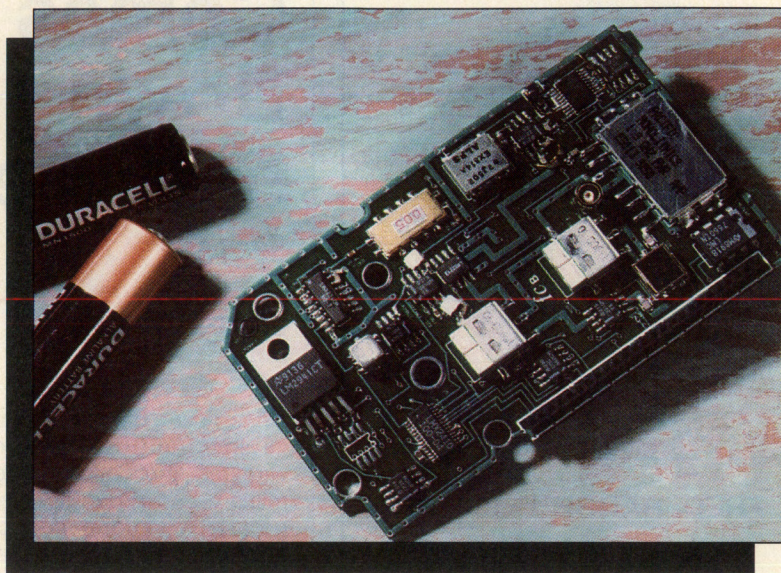

departments


- 8 Editorial
- 11 Letters
- 13 Calendar
- 14 Courses
- 16 News
- 26 Industry Insight
- 54 New Products
- 79 New Software
- 82 New Literature
- 76 Product Report
- 80 Marketplace
- 81 Advertiser Index
- 87 Info/Card
- 89 Reader Survey

R.F. DESIGN (ISSN:0163-321X USPS: 453-490) is published monthly and semi-monthly in October, April 1993. Vol.16, No. 4. Copyright 1992 by Cardiff Publishing Company, a subsidiary of Argus Press Holdings, Inc., 6300 S. Syracuse Way, Suite 650, Englewood, CO 80111 (303) 220-0600. Contents may not be reproduced in any form without written permission. Second-Class Postage paid at Englewood, CO and at additional mailing offices. Subscription office: *RF Design*, P.O. Box 1077, Skokie, IL 60076. Subscriptions are: \$39 per year in the United States; \$49 per year for foreign countries. Additional cost for first class mailing. Payment must be made in U.S. funds and accompany request. If available, single copies and back issues are \$5.00 each (in the U.S.). This publication is available on microfilm/fiche from University Microfilms International, 300 Zeeb Road, Ann Arbor, MI 48106 USA (313) 761-4700.

SUBSCRIPTION INQUIRIES: (708) 647-0756.

POSTMASTER & SUBSCRIBERS: Please send address changes to R.F. Design, P.O. Box 1077, Skokie, IL 60076.

HIGH POWER COUPLERS

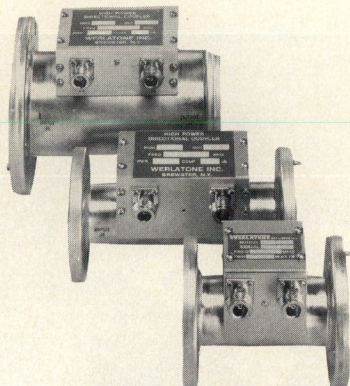

MULTI-OCTAVE BANDWIDTH

FREQ. RANGE 1 - 1000 MHz

POWER TO 100 Kw

TYPICAL SPECIFICATIONS

MODEL C2838

FREQUENCY RANGE.....30 - 100 MHz
COUPLING60 db NOM
FLATNESS±0.5 db MAX
DIRECTIVITY20 db MIN
VSWR (ML).....1.15:1 MAX
POWER50 Kw MAX
CONNECTOR.....3-1/8 EIA

Couplers within this series are available in three standard EIA sizes: 1-5/8, 3-1/8 and 6-1/8 in.

Bandwidths are available in narrow band (to an octave) or multi-octave units to suit customer applications.

WERLATONE INC.

DECADES AHEAD

P.O. Box 47

Brewster, NY 10509


Tel. (914) 279 6187

FAX. (914) 279 7404

RF editorial

It All Comes Down to Price

By Gary A. Breed
Editor

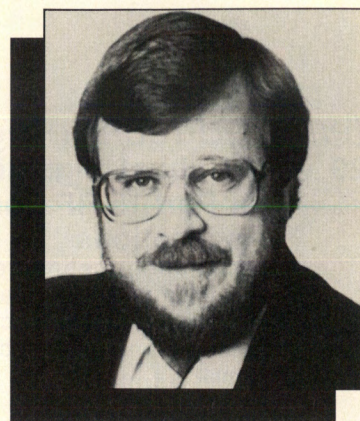

This issue has an emphasis on spread spectrum (SS) systems and other wireless applications. Engineers with a military background will consider SS to be a high performance, complex transmission method that is jamming-resistant and secure. Researchers investigating commercial applications will be concerned with error-correction algorithms and interfaces with existing analog and digital systems.

However, design engineers are working on a very different problem — making such communications systems fit cost goals! Everyone in the industry has spent plenty of time examining the huge new markets for RF-based devices. The result is a classic case of “Catch 22” — many markets won’t materialize unless the prices are low enough, and the prices can’t be lowered without the economy of scale offered by a large market.

I believe that many companies looking for a piece of these new RF markets have not yet realized how overwhelming the issue of cost really is!

For example, let’s look specifically at remote utility meter reading. Here is a promising application that could result in the manufacturing of tens, or hundreds, of millions of transponders. Fewer employees are needed for meter reading, and bills can be sent (and collected) on a shorter turn-around, improving cash flow. But for the utilities to justify the investment, a certain cost-per-unit threshold must be crossed. At present, however, it is not possible to make these transponders at the right price.

So, how does a design team get the cost cut down to the right size? A little bit can come from elegant design, creative manufacturing methods, and efficient management — but that’s not

enough. The real cost savings will come from reducing the component count; integrating the RF, baseband and digital functions into as few devices as possible. The first steps of this process are underway, as manufacturers reduce the size of devices, and offer new devices addressing front-end, signal processing and local oscillator design with higher levels of integration. But a big step is yet to be taken before we reach the \$15 remote meter reader or the \$99 pocket-sized personal communicator.

Designing circuits to be directly built on silicon (or other substrates) is the focus of major efforts in ASIC design, analog/RF/digital modeling software and passive component design (e.g., filters). An optimist will say that the road is clear, it’s just a matter of the speed that we can muster. A more cautious observer could easily point out that the necessary commitment to specific markets and technology has not yet been made.


I’ll take the optimist’s view. Enough visionary entrepreneurs in companies large and small are ready to make a commitment — the rewards are too big to let them go by. Let’s encourage them to go ahead at full speed; assuring that the RF boom continues.

DROP-IN · CASELESS · HYBRIDS AND COUPLERS

From 25 MHz to 18,000 MHz

Miniature 0.050 Dia. Wireline™ Hybrids · New 10 dB Wirepac™ Couplers

Wireline™ and Wirepac™ are 90° hybrid and coupler product lines which use Sage Laboratories, Inc. patented, balanced, twin conductor technology. These caseless products provide unequaled design and layout flexibility at an affordable price. Coil it to reduce coupling length, shape it to

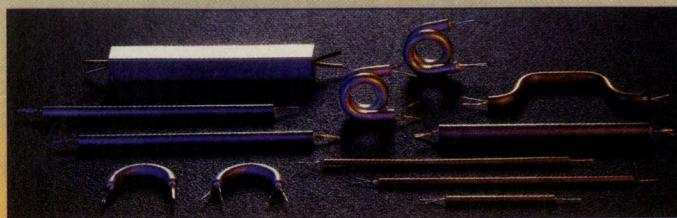


fit around layout obstacles and even loop it to jump over circuit traces.

Couplers by the foot, a great design tool for engineers. HC and JC Wireline™ may be purchased in bulk 5 foot lengths, then cut and trimmed to the

correct quarter wavelength for optimum frequency response. Need a second iteration, just cut another length. The coupling curves are virtually text book.

100,000 unit Production quantities, no problem. Sage has developed a state of the art laser trimming process which precisely cuts the length and trims the leads. Thousands per week are being delivered for Cellular and PCN applications.

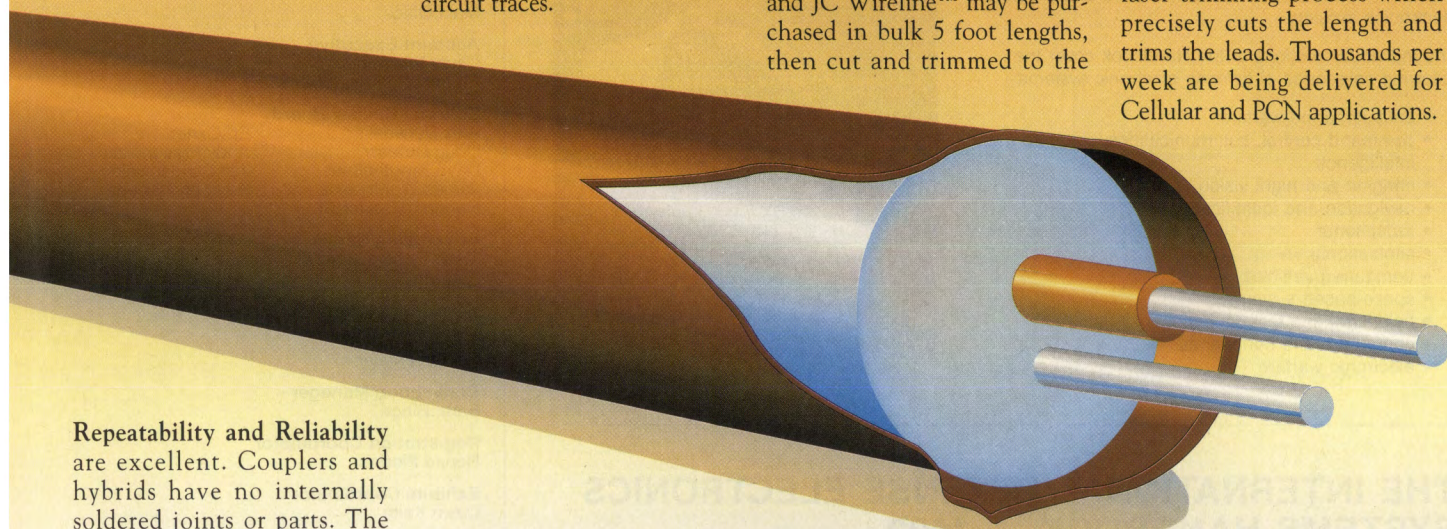

Repeatability and Reliability are excellent. Couplers and hybrids have no internally soldered joints or parts. The manufacturing processes have been qualified for space environments. Wireline™ and Wirepac™ are performing demanding hybrid functions on such space programs as SCS Superbird and TIROS. The quality is designed in, so commercial programs run without delays or failures.

Average Power ratings from 60 to 500 WATTS, strictly a function of outline diameter.

MC	HC	JC	KC	LC
⊖	⊙	⊙	⊙	⊙
.050 DIA.	.105 DIA.	.145 DIA.	.25 DIA.	.25 DIA.
60 WATTS	100 WATTS	200 WATTS	500 WATTS	500 WATTS
ACTUAL SIZE				

DROP-IN QUADRATURE COUPLERS AND HYBRIDS					
PART NUMBER	FREQ MHz	MID BAND COUPLING	INSERTION LOSS	ISOL.	VSWR
HCB2-5.93	225-400	2.7 dB	0.3 dB	20 dB	1.2:1
JCB2-2.80	440-880	2.7 dB	0.3 dB	20 dB	1.2:1
LCB2-2.63	500-1000	2.7 dB	0.2 dB	30 dB	1.1:1
MCB3-2.06	810-990	2.8 dB	0.3 dB	20 dB	1.2:1
GCB6-2.06	810-990	10.25 dB	0.1 dB	30 dB	1.2:1
KCB2-1.31	1000-2000	2.7 dB	0.2 dB	30 dB	1.1:1
HCB1-1.00	1710-1990	3.0 dB	0.2 dB	20 dB	1.2:1
GCB6-1.00	1710-1990	10.25 dB	0.1 dB	30 dB	1.2:1
MCB3-0.14	9000-18000	2.8 dB	0.3 dB	20 dB	1.2:1

Many Wireline™ family standard products are available. Octave and narrow band products with three form/power factors. The new miniature MC Wireline™ hybrids offer significant size reduction without sacrifice of reliability or performance. The new GCB6

10 dB coupler provides octave performance with 20 dB directivity. Above are just a few of our product offerings.

For PCN, CELLULAR, SAT-COM and RADAR applications, choose WIRELINE™ and WIREPAC™ DROP-INS.

To learn more about the popular alternative to flatpak, caseless and printed circuit components, call or FAX today for your FREE Samples, Designers Guide and handy Coupling Slide Rule. Tell us your frequency, we'll cut you a coupler. Also, ask about our other telecommunication and radar products.

sage
LABORATORIES, INC.

11 Huron Drive
Natick, MA 01760
Tel: (508) 653-0844
FAX: (508) 653-5671

ELECTROMECHANICAL – SWITCHES, ROTARY JOINTS AND PHASE SHIFTERS
CONNECTORIZED – PASSIVE RF AND MICROWAVE COMPONENTS
CASELESS DROP-INS – WIRELINE™, WIREPAC™, HYBRIDS AND COUPLERS

INTRODUCING . . .

1992 Edition


THE INTERNATIONAL DEFENSE ELECTRONICS SYSTEMS HANDBOOK

(incorporating The International Countermeasures Handbook)

The First Edition of the International Defense Electronics Systems Handbook (IDESH) is a concise, yet comprehensive guide to the electronics systems deployed worldwide in the full-spectrum of applications — from submarine to satellite-based systems. Split into twelve system-specific sections, the Handbook also includes a Foreword by renowned authority, Dr. Robert Costello, on the current state and the possible future of the defense electronics industry.

The individual sections of the Handbook cover the following categories of defense electronic systems:

- antisubmarine warfare
- command control, communications, computers and intelligence
- imagine and night vision
- navigation and identification
- radar/sonar
- simulation/training
- unmanned vehicles
- space-based systems
- field/flight line test equipment
- computers and peripherals
- electronic warfare

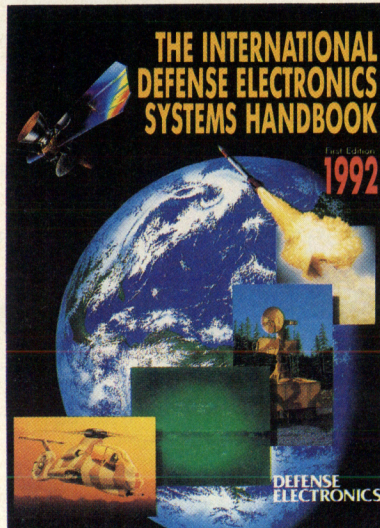

THE INTERNATIONAL DEFENSE ELECTRONICS SYSTEMS HANDBOOK — 1992

YES! Please send me _____ copies of the IDESH 1992 edition at \$195 each.

[] Bill my company (PO enclosed) _____ Number of Copies
[] Payment enclosed
[] Charge my: [] MC [] Visa [] AE _____ \$ 3.00 ea. U.S. postage

Card No. _____ EXP _____ \$18.00 ea. Int'l Air Mail

Signature _____ \$ _____ Total Enclosed

Name: _____

Title: _____ Phone: _____

Address: _____

City: _____ State: _____ Zip: _____

Country: _____

Cardiff Publishing Company, 6300 S. Syracuse Way, Suite 650, Englewood, CO 80111,
(303) 220-0600, FAX (303) 773-9716

RFdesign

a Cardiff publication Established 1978

Main Office:
6300 S. Syracuse Way, Suite 650
Englewood, CO 80111 • (303) 220-0600
Fax: (303) 773-9716

Vice President — Group Publisher
Kathryn Walsh

Editor
Gary A. Breed

Associate Editor
Liane Pomfret

Technical Editor
Andrew M. Kellett

Consulting Editor
Andy Przedpelski

National Sales Manager
Bill Pettit
Main Office

Account Executive
Maryanne Averill
Main Office

Account Executive
Cindy Wieland
Phone and Fax: (602) 955-7115

Editorial Review Board
Alex Burwasser
Doug DeMaw
Dave Krautheimer
James W. Mize, Jr.
Robert J. Zavrel, Jr.
Ed Oxner
Andy Przedpelski
Jeff Schoenwald
Raymond Sicotte

Advertising Services
Tisha Boberschmidt Hill

Reprints Manager
Vivian Peterson

Secretary
Theresa Maier

Convention Manager
Barb Binge

Registration Coordinator
Renae Fierros

Exhibits Coordinator
Dawn Keith

Trade Show Account Executive
Steffanie Engel

Associate Production Managers
Matt Park
Maurice Lydick

Artists
Kim Austin
Joyce Fields
Brad Fuller
Paul Rivera
Sheri Culmer

Composition
Mike C. Moore
Marcie Tichenor

Art Director
Bob Stewart

Published by

CARDIFF
PUBLISHING COMPANY, INC.

VBPA

President
Robert A. Searle

Vice President — Production
Cherryl Greenman

Vice President — Convention Management
Kathy Kriner

Vice President — Finance
Jennifer Burger

Vice President — Circulation
Patricia Shapiro

Credit Manager
Christine Kloack

Please address subscription inquiries to:
RF Design
P.O. Box 1077, Skokie, IL 60076-9931
Postmaster: send form 3576
to the above address.

RF 4/93

RF letters

Letters should be addressed to: Editor, RF Design, 6300 S. Syracuse Way, Suite 650, Englewood, CO 80111.

We received many letters responding to the questions raised by Robert Orban concerning EMI rejection by consumer equipment and the power level of amateur radio transmitters ("Letters," February 1993 issue). Excerpts of several letters are included here.

— Editor

Who's to Blame?

Editor:

...It's easy to blame the messenger for the bad news, and the "news" is that the consumer is often victimized by poorly engineered, shoddily manufactured electronic equipment that works great on the showroom floor but fails in short order when exposed to the real world environment. Blaming ham radio operators for this problem is akin to American automakers blaming their loss in consumer confidence on the Japanese auto industry, and not the least bit on themselves.

W.J. Kleronomos
Lyons, CO

Editor:

...The situation is not as simple as Mr. Orban suggests. A recent study done by the FCC Field Operations Bureau concluded that "Operating power of 100 watts or less can cause interference," and "Simply reducing the transmitter power does not alleviate interference in most cases." The problem is not one of excess power overwhelming an otherwise well designed device, but rather it is the situation where a poorly designed device collapses in the face of an RF field.

To limit amateur operations to a power level of 10 watts would be contrary to the FCC's stated intentions, impractical and punitive to the amateurs, and the 20 dB reduction in near-field levels would not guarantee elimination of interference problems.

Stephen J. Root
South St. Paul, MN

The Cost of EMI Performance

Editor:

...Low EMI susceptibility, like quality, is free when it is an initial design consideration. It is quite expensive when it is an afterthought implemented with multi-

ple layers of cut and try band-aids.

James Long
Consulting Engineer
Sunnyvale, CA

Editor:

...I am appalled by the dominant concern about increasing costs for manufacturers, when they make little effort to design their products with anything other than minimum parts count and minimum cost as their goals. I have, on numerous occasions, solved both amateur and commercial broadcasting interference problems to consumer equipment with the addition of parts that would cost a manufacturer no more than two dollars to incorporate in their designs...

The real issue is not whether we should "tax" consumers to "permit a few amateurs to indulge in their hobby," but rather, why should all of us be subjected to inferior designs which not only increase susceptibility to interference from all sources, but give consumers products which perform marginally! These same products routinely cause interference to licensed services, both amateur and commercial.

Jack Parker
KOZZ AM and FM
Reno, NV

Editor:

...I recall one experience designing automotive electronics, where company policy was more "leave it out" than "minimize cost sensibly." This led to numerous design cycles when the real world intruded into the wide open receiver front end. It also led to a half-million dollar loss; all because materials cost was "God." Spend the lousy few bucks up front, and you will save big later on by having a conservative design that will be producible.

Harold Chase
VVH Electronics Co.
Pepperell, MA

How Do You Get 9 V/m?

Editor:

...I calculated that 9 V/m could only be obtained by approaching the driven element of a 20-meter antenna to within three feet. I thought my answer must be off so I took my field strength meter to the local 1 kW broadcast station on 920 kHz and had to approach the antenna within three feet to obtain the same 9 V/m. The 9 V/m came from some stupid

statement made by the FCC in *RF Design* for August 1992. [Actually, it is a worst-case measurement, as noted in Robert Weller's August article — *Editor*]

As for the cost of such a product, Mr. Orban is way off base here. I agree with his eight-to-one cost of component to retail price ratio, but in one of my designs the prototype RFI components cost seven dollars, for which the production cost was fourteen cents. If a manufactured product cannot be engineered to FCC Class B standards for less than that, get a new design engineer who understands RF protection!

Cliff Buttschart
Estero Systems
Morro Bay, CA

Photo Credit

The photo accompanying March's "Product Report" should have been credited to AVX Corporation. The photo depicts the ACCU-F chip capacitor from AVX.

QUARTZTEK

**Quartz Crystals:
Precision AT Cut from
1.0 to 275.0 Mhz**

**Crystal Filters:
Discrete and Monolithic
from 3.0 to 120.0 Mhz**

THE SOLUTION


- Patented Tuning Process
- Complete Clean Room Capability
- Standard and Custom Specifications
- Through Hole and Surface Mount

Quartztek, Inc.

20 S. 48th Avenue
Phoenix, AZ 85043
602-272-7944 Fax 233-2440

INFO/CARD 7

SIEMENS

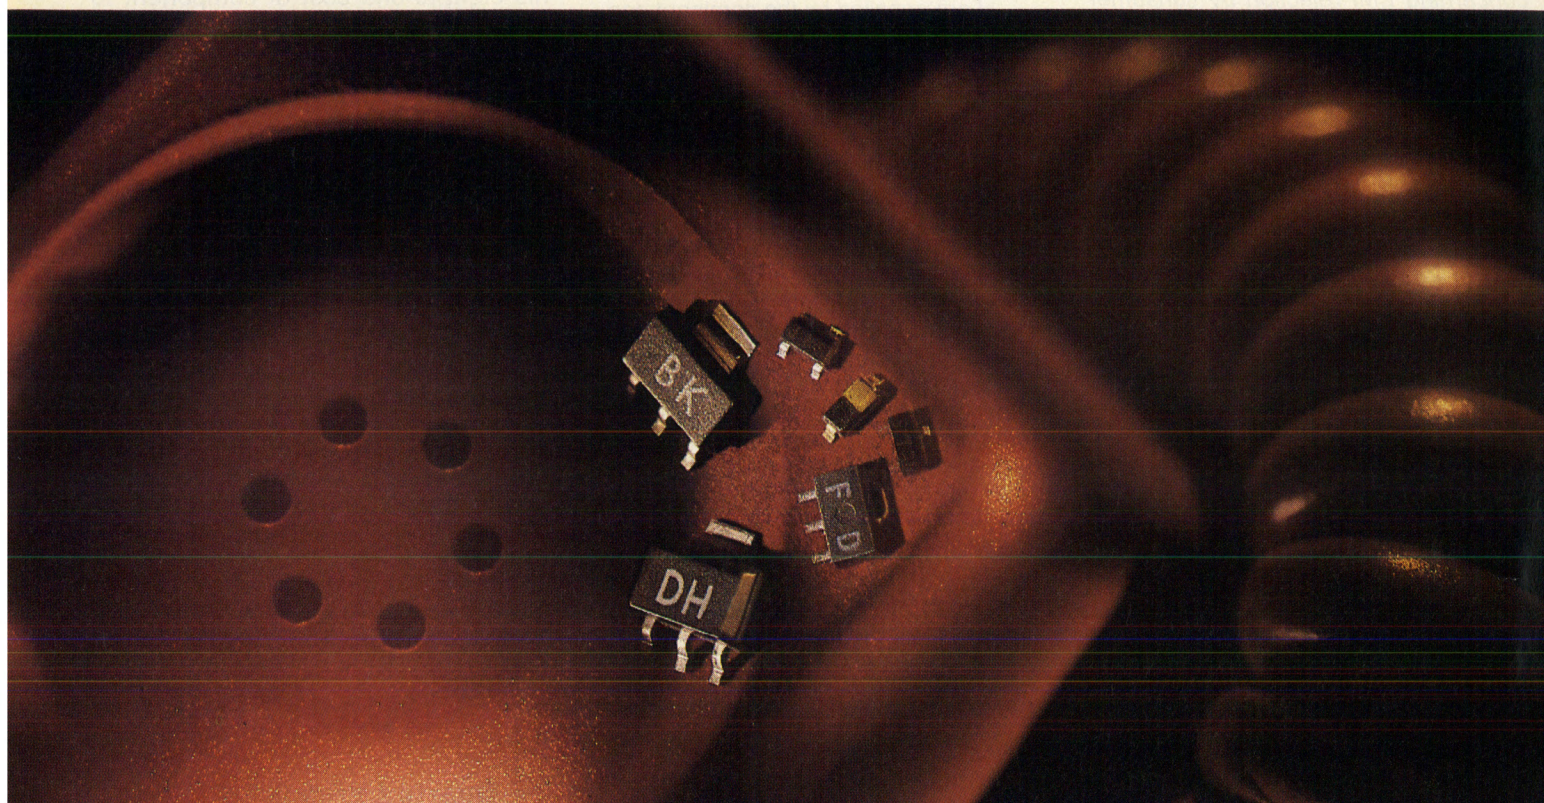


RF Performers

**Announcing
the most advanced
RF transistors for
mobile communications.**

Siemens announces a full range of high-performance RF transistors offering increased gain, reduced noise, and lower power consumption. Best of all, these advanced devices *cost less*

than devices you may currently be using. **Call 1-800-77-SIEMENS, ext. 310** for a complete data kit on mobile communications devices (including a data sheet about Siemens surface mount GaAs MMIC).

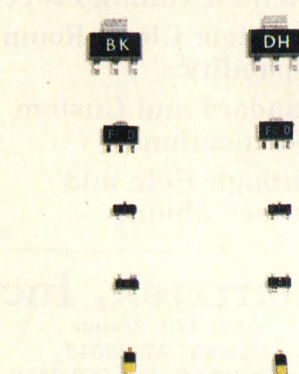

Type	Max Ratings		Characteristics		Application
	U_{CE0} V	I_C mA	F 900 MHz 8 V dB	G_{pe} 900 MHz 8 V dB	
NPN					U_{CE}/I_C $f = 0$ to above 3 GHz V/mA
BFP 180	8	3	1.9	15	1 to 3/0.2 to 2.5 paging system
BFP 280	8	10	1.4	18	1 to 5/0.2 to 8 low-noise pager
BFP 181	12	20	1.3	19	1 to 8/0.5 to 10 low-noise pre-amplifier
BFP 182	12	35	1.2	19	1 to 8/1 to 20 low-noise amplifier
BFP 183	12	65	1.2	19	1 to 8/2 to 28 low-noise amplifier
BFP 193	12	80	1.2	19	3 to 8/5 to 40 low-distortion output stage
BFP 196	12	120	1.4	18	3 to 8/30 to 100 low-distortion output stage

Our tightly graded range of devices ensures matching your application as closely as possible to the optimum operating point. (This data is for the SOT143 package. However, devices are available in all packages pictured.)

RF calendar


April

- 18-21** **The 4th IEE Conference on Telecommunications**
Manchester, UK
Information: ICT 93 Secretariat, Conference Services, IEE, Savoy Place, London, WC2R 0BL, United Kingdom. Tel: 071-240 1871. Fax: 071-497 3633.
- 18-22** **Symposium on Ceramics for Wireless Communication**
Cincinnati, OH
Information: Henry O'Bryan, AT&T Bell Laboratories. Tel: (908) 582-6980. Fax: (908) 582-2521.
- 18-22** **The NAB Multimedia World Conference and Exhibition**
Las Vegas, NV
Information: NAB, 1771 N Street, NW, Washington, DC 20036-2891. Tel: (202) 429-5350. Fax: (301) 216-1847.
- 19-22** **SUPERCOMM '93 International Conference and Exhibition**
Atlanta, GA
Information: Henry Weinland, United States Telephone Association (USTA), 900 19th Street NW, Suite 800, Washington, DC 20006-2190. Tel: (202) 835-3100. Fax: (202) 835-3248.
- 26-28** **41st International Relay Conference**
Newport Beach, CA
Information: Pete Walsh, (202) 457-4932 or National Association of Relay Manufacturers (NARM) Headquarters, (414) 351-4548.
- 27-29** **Electro**
Edison, NJ
Information: Electronic Conventions Management, PO Box 92275, Los Angeles, CA 90009-2275. Tel: (800) 877-2668. Fax: (310) 641-5117.
- 27-30** **IEEE 1993 International Conference on Acoustics, Speech and Signal Processing**
Minneapolis, MN
Information: Professor A.K. Katsaggelos. Tel: (708) 491-7164. Fax: (708) 491-4455.
- 28-30** **EMC/ESD International 1993**
Denver, CO
Information: Renae Fierros, Cardiff Publishing Company, 6300 S. Syracuse Way, Suite 650, Englewood, CO 80111. Tel: (303) 220-0600, (800) 525-9154. Fax: (303) 773-9716.

May

- 2-6** **IEEE Circuits and Systems Symposium**
Chicago, IL
Information: Electronic Industries Association, EIA Components Group, 2001 Pennsylvania, Avenue N.W., Washington, DC 20006-1813. Tel: (202) 457-4930.
- 3-6** **1993 Annual Assembly Meeting of the Radio Technical Commission for Maritime Services**
San Diego, CA
Information: Katy Ackland, RTCM Assembly Publicity Chairperson, COMSTAT Mobile Communications, 950 L'Enfant Plaza SW, Washington, DC 20024. Tel: (202) 863-6097. Fax: (202) 488-3814.

Sprague-Goodman



Glass and Quartz Pistoncaps®

- Designed to meet MIL-C-14409D
- QPL models
- Extremely stable over temperature, frequency, voltage, etc.
- Cap ranges: 0.5-3.0 pF to 1.0-120 pF
- Zero backlash multiturn adjust mechanism
- Operating temp: -55° to +125°C (models to + 200°C)
- Q to 1500 at 20 MHz
- Wide variety of configurations for PC and panel mounting
- Voltage ratings from 500 to 5000 V


Phone, fax or write today for Engineering Bulletin SG-205A.

**SPRAGUE
GOODMAN**

134 Fulton Ave., Garden City Park, NY 11040
Phone: 516-746-1385 • Fax: 516-746-1396

INFO/CARD 9

Sprague-Goodman

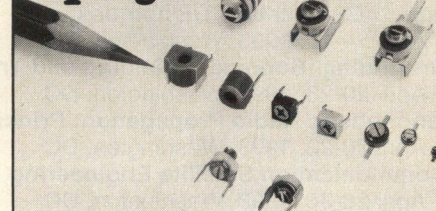

Ceramic Dielectric Trimmer Capacitors

Rugged 5 & 7 mm types

Operating temp: -55° to +125°C
Cap ranges: 1.3-2.0 pF to 12-160 pF

Miniature types suitable for hybrids

Operating temp: -25° to +85°C
3 series: 2.0 x 1.2 mm; 3.0 x 1.5 mm;
5.0 x 2.0 mm
Cap ranges: 2.5-10 pF to 5.5-40 pF

Microwave types

Operating temp: -55° to 85°C
Cap ranges: 0.5-2.0 pF; 1-4.0 pF; 2.0-10 pF
Q > 500 at 100 MHz

Plastic encased 4 x 4.5 mm and 5 mm types

Designed for volume applications
Surface mount and printed-thru-hole models
Cap ranges: 1.7-3.0 pF to 10-50 pF

Phone, fax or write today for Engineering Bulletin SG-305B.

**SPRAGUE
GOODMAN**

134 Fulton Ave., Garden City Park, NY 11040
Phone: 516-746-1385 • Fax: 516-746-1396

INFO/CARD 10

13

Digital Switching

April 29-30, 1993, Madison, WI

Cellular Radio

May 11-14, 1993, Madison, WI

Information: The University of Wisconsin-Madison, Engineering Information. Tel: (800) 462-0876.

Phased-Array Radar System Design

April 13-16, 1993, Atlanta, GA

Infrared/Visible Signature Suppression

May 18-21, 1993, Atlanta, GA

Information: Georgia Institute of Technology, Continuing Education. Tel: (404) 894-2547.

Synthetic Aperture Radar: Design, Processing, and Applications

April 26-30, 1993, Los Angeles, CA

Advanced Communication Systems Using Digital Signal Processing

April 26-30, 1993, Los Angeles, CA

Microwave/Millimeter-Wave Monolithic Integrated Circuits

May 11-14, 1993, Los Angeles, CA

Integrated Services Telecommunications Networking: High-Speed, Local, Metropolitan, and Wide-Area Networks

May 17-21, 1993, Los Angeles, CA

Information: UCLA Short Course Program Office. Tel: (310) 825- 1047. Fax: (310) 206-2815.

Microwave System Engineering

April 26-30, 1993, Washington, DC

Simulation Modeling

April 13-16, 1993, Washington, DC

Communication and Radar Systems: Detection, Estimation, & Geolocation Techniques

April 14-16, 1993, Washington, DC

Grounding, Bonding, Shielding and Transient Protection

April 20-23, 1993, Washington, DC

Ionospheric Radio Propagation: Principles and Application

April 20-23, 1993, Washington, DC

Communication Satellite Engineering

April 26-30, 1993, Washington, DC

Satellite Communication Engineering Principles

May 5-7, 1993, Washington, DC

New HF Communication Technology: Advanced Techniques

May 10-14, 1993, San Diego, CA

Modern Radar Technology: Monopulse Tracking Techniques and Other High-Performance Developments

May 24-28, 1993, Washington, DC

Analog/RF Fiber Optic Communications

May 26-28, 1993, Washington, DC

Information: The George Washington University, Continuing Engineering Education, Merril A. Ferber. Tel: (202) 994-8522 or (800) 424-9773.

Chemical Vapor Deposition for Microelectronics

April 21-23, 1993, Princeton, NJ

Modern RF & Microwave Techniques

April 20-23, 1993, Phoenix, AZ

Navstar/GPS

June 2-4, 1993, Monterey, CA

Information: University Consortium for Continuing Education, 16161 Ventura Boulevard, M/S C-752, Encino, CA 91436. Tel: (818) 995-6335. Fax: (818) 995-2932.

Vacation School on Digital Techniques in Radio Systems

April 18-22, 1993, Leeds, UK

Sixth Vacation School on Microwave Measurements

May 2-7, 1993, Malvern, UK

Information: The Institution of Electrical Engineers, Savoy Place, London WC2R 0BL, United Kingdom. Tel: 071-240 1871. Fax: 071-497 3633.

Satellite Communication Systems: Techniques and Technology for Communications and Broadcasting

April 19-23, 1993, Cambridge, United Kingdom

Combined Coding and Modulation Techniques

April 20-21, 1993, Cambridge, United Kingdom

Mobile Telecom Systems: Switching, Fixed Network Interconnections

April 20-23, 1993, Cambridge, United Kingdom

Aspects of Modern Military and Commercial Radar

May 10-14, 1993, Cambridge, United Kingdom

Low Sidelobe Antennas

May 10-14, 1993, Cambridge, United Kingdom

Modern Microwave Techniques: Measurements, Signal and Network Analysis, Microwave Products and Systems Characterization

May 10-14, 1993, Cambridge, United Kingdom

Information: CEI-Europe/Elsevier, Mrs. Tina Persson. Tel: (46) 122-175-70. Fax: (46) 122-143-47.

Radar Simplified EW Receivers

May 4-6, 1993, Washington, DC

ELINT Analysis, Adaptive ECCM Signal Processing for Radars, Electromagnetic Propagation

May 11-13, 1993, Washington, DC

ELINT Interception, Elint/EW Applications of Digital Signal Processing, Radar Vulnerability to Jamming

May 18-20, 1993, Syracuse, NY

ELINT/EW Data Bases

June 1-3, 1993, Washington, DC

Information: Research Associates of Syracuse, Incorporated, Hancock Army Complex, 510 Stewart Drive, N. Syracuse, NY 13212. Tel: (315) 455-7157.

1993 High-Speed Digital Symposium

April 22, 1993, Los Angeles, CA

April 27, 1993, San Diego, CA

April 29, 1993, Phoenix, AZ

May 25, 1993, Dallas, TX

May 27, 1993, Austin, TX

June 2, 1993, Burlington, MA

June 4, 1993, Washington, DC

June 8, 1993, Boca Raton, FL

Information: Hewlett-Packard Company, Microwave Instruments Division (MID). Tel: (800) 765-9200.

DSP Without Tears

June 7-9, 1993, Norcross, GA

June 16-18, 1993, San Jose, CA

June 23-25, 1993, Chicago, IL

Advanced DSP With a Few Tears

June 10-11, 1993, Norcross, GA

Information: Z Domain Technologies, Inc., 325 Pine Isle Court, Alpharetta, GA 30202. Tel: (800) 967-5034, (404) 664-6738. Fax: (404) 442-1210.

PENSTOCK^{RF/MICROWAVE} "WIRELESS" DESIGN CONTEST

WIN THE GRAND PRIZE...

\$2000 GIFT CERTIFICATE or BIG SCREEN T.V.

Ten 2nd place winners will receive \$100 CASH each.

PENSTOCK is looking for the most unique RF and MICROWAVE wireless application using **TOKO** parts. Your design should be laid out in Block Diagram form.

The design should show where PENSTOCK TOKO AMERICA components fit in. A brief description (under 500 words) of the product and application (along with a color photo of a working prototype) should be included.


Your design will be judged on its application to any of the following technologies: COMMUNICATIONS/TELECOM, INSTRUMENTATION, MEDICAL, COMPUTER & NETWORKING, CONSUMER APPLICATIONS, DATA SYSTEMS, AUDIO, VIDEO & IMAGING SYSTEMS.

Your entry should include the coupon below (photocopy OK). PENSTOCK reserves the right to exclude any company and/or person from this contest due to conflict of interest.

Once the Grand Prize and 2nd Place Winners are chosen, PENSTOCK may publish the Design/Applications in journal form to be used as training and promotional materials.

Prototyping/Sample Kits— Priced from \$59.00 Design Using

TOKO TOKO AMERICA, INC.

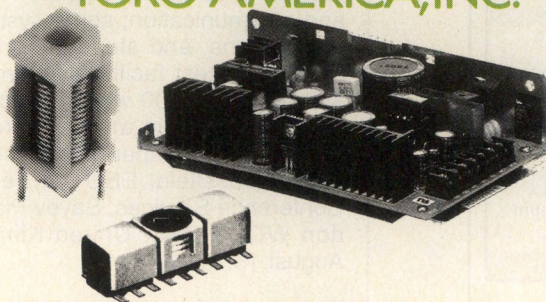

Offices Nationwide.

Phone:

1-800-PENSTOCK



Contest will be judged on: Originality, Technical Content, Marketability and Ease of Manufacturing.
JUDGED BY: PENSTOCK—Dr. Bob Craig • RF DESIGN—Gary Breed • MICROWAVE JOURNAL—Harlan Howe, Jr. • MICROWAVES & RF—Jack Browne • TOKO AMERICA—Steve Skiest



ENTRY COUPON

CONTEST DEADLINE—JUNE 1, 1993. Winners will be announced by SEPTEMBER 1, 1993. © 1992 PENSTOCK, INC. All rights reserved.

Name _____

Company _____

Address _____

City _____ State _____ Zip _____

Phone _____ FAX _____

Design/Product/Application _____

I agree to all the terms of the Design Contest and have not worked for any Penstock distributed companies past or present. I am including a description & photo of a working prototype. I agree to allow Penstock to publish my work.

Signature _____ Date _____

Send To: **PENSTOCK DESIGN CONTEST** 520 Mercury Drive, Sunnyvale, CA 94086

RFID Used to Track Ostriches and Emus

Texas Instruments RFID technology is now being used by breeders of ostriches and emus to track and identify the valuable birds, without putting either handler or bird at risk. The Texas Instruments Registration and Identification System (TIRIS) is being used to identify the birds, which can sell for as much as \$40,000 for a breeding pair of ostriches,

for medical, genetic and insurance purposes. Traditional methods of restraint and identification can not only be harmful to the animal, but also places breeders themselves at risk of the bird's powerful kick.

A small transponder, 32.5 x 3.85 mm, is implanted under the skin beneath the bird's wing when it is as young as three



Dr. Brent Robbins of Folsom Animal Hospital identifies an emu using TIRIS™ radio frequency technology from Texas Instruments.

months old. The transponder transmits an unalterable identification number back to a hand-held reader when interrogated. A specially designed long-reaching antenna on the reader, combined with a read range in excess of two feet, allows the breeder to accurately identify the bird from several feet away. Dr. Robbins of the Folsom Animal Hospital, who is training breeders to use the RFID technology, notes that while the bird must initially be restrained when the transponder is inserted, it feels no pain because the transponder is injected into an unsensitive part of the skin.

Ostrich breeding is becoming a rapid growth industry in the U.S., and the TIRIS technology allows serious breeders to protect their investment.

Call for Papers — The Sixth International Conference on Electronic Engineering in Oceanography has issued a call for papers for their conference to be held July 19-21, 1994 in Cambridge, United Kingdom. Some of the suggested topics for papers include: monitoring networks; remote sensing, satellite, radio and acoustic; satellite navigation and communication; sonar systems and applications; and standards, measurements and test facilities. A synopsis of approximately 500 words, indicating the appropriate topic area and key novel aspects of the paper, should be sent to Louise Bousfield, EEO '94 Secretariat, Conference Services, Savoy Place, London WC2R 0BL, United Kingdom by August 15, 1993.

Search and Rescue Effort Aided by Satellite System — The lives of eleven fishermen were saved when the 406 MHz Emergency Radio Beacon on board their vessel, *Cape Aspy*, was triggered, and began transmitting an emer-

CELLULAR SOLUTIONS

For cellular base station applications, these amplifiers offer unchallenged performance, with guaranteed specifications over temperature (call for complete data sheets). The QBS-141 and -142 also offer *soft-fail* designs, with **completely redundant power supplies and RF circuits**. Fault detection circuitry indicates (by increased current and/or LED indicators) if a failure has occurred.

Typical Specifications (25 °C)

Specification	QBS-133	QBS-141	QBS-142
Gain (dB)	33	40	33
Frequency (MHz)	824-849	824-849	824-849
Noise Figure (dB)	0.8	1.2	1.2
3rd Order OIP (dBm)	+38	+45	+42
VSWR Input/Output	1.5:1/1.5:1	1.2:1/1.2:1	1.2:1/1.2:1
DC Voltage (Vdc)	15	19-31	19-31
DC Current (mA)	220	800	425
DC Power Connector	Solder Pin	Filtered 9-pin D-sub	Filtered 9-pin D-sub
RF Connectors	SMA (J)	SMA (J)	SMA (J)



Q-bit Corporation

2575 Pacific Avenue NE, Palm Bay, Florida 32905

☎ 407/727-1838 • 📠 407/727-3729

Wireless Communication at Your Finger Tips

Low Cost Convolutional Encoder/Viterbi Decoder

With a 9 Mbps data rate, the STEL-2030A operates at code rate 1/2 and also with punctured codes at code rates 2/3 and 3/4. It also includes a V.35 Scrambler and BER Monitor.

Digital Downconverter and Carrier Tracker

The STEL-2130 can be used to convert signals digitized at up to 40 Msamples/sec at I.F. directly to baseband.

Low Cost and Low Power Digital Matched Filter (nonscascadable)

The STEL-3340 can be used in many of the same application as the STEL-3310 with a limit of 64 chips/symbol, with lower cost and power consumption.

Highest Speed Accumulator/ Correlator

At a 70 Msamples/sec accumulation rate, and up to 32K samples without overflow, the STEL-2410 is the industry's highest speed signal accumulator/correlator for spread spectrum applications.

Differential BPSK/QPSK Demodulator

The STEL-2120 can be used for differential demodulation of signals up to 8 Mbps BPSK and 16 Mbps QPSK in both spread spectrum and clear channel applications.

Highest Flexibility PN Coder

At 30 Mcps and up to 32 taps per coder the STEL-1032 Triple PN Coder has the flexibility to generate a wide variety of codes for many spread spectrum applications.

Highest Performance Digital Matched Filter (cascadable)

The STEL-3310 64-Tap Cascadable Complex Matched Filter provides fast acquisition of PN sequences up to 256 chips/symbol at up to 22 Msamples/sec.

Phase Modulated NCO

The STEL-1175 Numerically Controlled Oscillator offers 32-bit resolution and 80 MHz clock frequency. It can be phase modulated at up to 20 MHz.

Bit Synchronizer and BPSK/QPSK Demodulator

The STEL-2110A can be used for coherent and differential demodulation of signals up to 6 Mbps BPSK and 12 Mbps QPSK. The STEL-2110A includes a symbol timing NCO and phase or frequency discriminator for carrier tracking.

Fastest Burst Data Acquisition

The STEL-2210 Block Phase Estimator allows fast acquisition of burst data. It can be used for coherent demodulation of signals at up to 8 Mbps BPSK and 16 Mbps QPSK without a carrier tracking PLL.

For further information on these or any other product offered by Stanford Telecom, please contact us today.

**STANFORD
TELECOM**

ASIC
Custom
Products
Division

2421 Mission College Blvd.
Santa Clara, CA 95056-0968
Phone: 408/980-5684 • Fax: 408/727-1482

For sales support outside the continental United States, please contact your International Sales Representatives.

UNITED KINGDOM:
BFI - IBEXSA Electronics Ltd.
Mr. Mick Mercer
Phone: +44 622 882467
FAX: +44 622 882469

GERMANY:
Electronic 2000
Mr. Christian Streicher
Phone: +49 89 45 110 250
FAX: +49 89 45 110 129

FRANCE:
P2M
Mr. Philippe Resnier
Phone: +33 1 30 62 64 64
FAX: +33 1 30 62 40 10

ITALY (NORTH):
MicroElit S.p.A.
Mr. Franco Cugusi
Phone: +39 2 481-7900
FAX: +39 2 481-3594

ITALY (SOUTH):
MicroElit S.p.A.
Dr. Massimo Martinuzzi
Phone: +39 6 868-94-326
FAX: +39 6 827-5270

SPAIN:
Tekelee España
Mr. Moises Gracia
Phone: +34 1 320-4160
FAX: +34 1 320-1018

DENMARK:
Valentin Elektronik ApS
Mr. Lars Vallentin
Phone: +45 42 17 24 17
FAX: +45 42 17 15 18

JAPAN:
Marubun Corporation
Mr. Toshi Ishizawa
Phone: +81 3 3639-9821
FAX: +81 3 3661-7433

INDIA:
Accutrol Systems, Pvt., Ltd.
Mr. Vivek Raghavan
Phone: +91 22 204-1787
FAX: +91 22 202-9403

ISRAEL:
Regev Aviation
Mr. Zeev Regev
Phone: +972 3 533-4359
FAX: +972 3 533-9302

SWEDEN:
I. E. K.
Mr. Bill Osterlund
Phone: +46 8 80 46 85
FAX: +46 8 26 22 86

AUSTRALIA:
Sabtek Electronics
Mr. Grant Amor
Phone: +61 8 373-0233
FAX: +61 8 373-0206

SWITZERLAND:
Dimos AG
Mr. Urs Oggenfuss
Phone: +41 1 730-4088
FAX: +41 1 730-5133

agency signal on January 31, 1993 when the ship sank. The signal was detected by a geostationary satellite and transmitted to the ground station STARLUT, developed and manufactured by CAL Corporation and owned by the Department of National Defence. The information was decoded and the identity of the ship confirmed. Another Local User Terminal manufactured by CAL was able to further assist the rescue efforts by

informing rescue personnel of the location of the vessel within two kilometers. The search and rescue team, using the beacon information, were able to locate and pull the survivors to safety from a life raft.

New Commercial GPS System On-Line — Pinpoint, a nationwide high-accuracy satellite positioning and location network was recently

announced. The new service will permit a user to determine his geographic position within a few feet using signals from U.S. navigational satellites and transmissions from local FM radio stations. Pinpoint is the result of a strategic alliance between Magnavox Electronic Systems Company and CUE Network Corporation. Magnavox and CUE have developed techniques to enhance the accuracy of GPS for high-precision applications, by measuring errors in the satellite signals and transmitting correction data through FM radio subcarriers. Subcarriers are unused frequencies within a station's licensed bandwidth. This technique is called "differential GPS" and it improves positioning accuracy from about 300 feet to 15 feet or better. Following the initial introduction in Los Angeles, the service will be expanded to as many as 50 additional cities across North America.


ICC Approved by ITI — International Compliance Corp recently received their Certificate of Assessment from Interference Technology International, Ltd. to provide EMC testing services for specifications implemented by the EC Directive on EMC.

Scientific Atlanta Division To Receive ISO 9001 Certification — Scientific Atlanta's Electronic Systems Division has passed the final assessment audit for certification to ISO 9001. ISO 9001 is a stringent international quality standard initially designated as a requirement for suppliers to meet in order to do business in the European Economic Community.

TRM Awarded Million Dollar Contract — Technical Research and Manufacturing, Inc. has been awarded a million dollar contract from Allied Signal Aerospace Company, Bendix Communications Division, for the design, development and manufacture of RF and microwave components in the RF Distribution Unit for the E-Scan Secondary Surveillance Radar. The first field use of the ESSR system is for precision runway monitoring at U.S. airports.

Park Air To Supply FAA with Emergency Transceivers — The Federal Aviation Administration recently

You Know What Your Wireless Communication System Needs to Succeed...

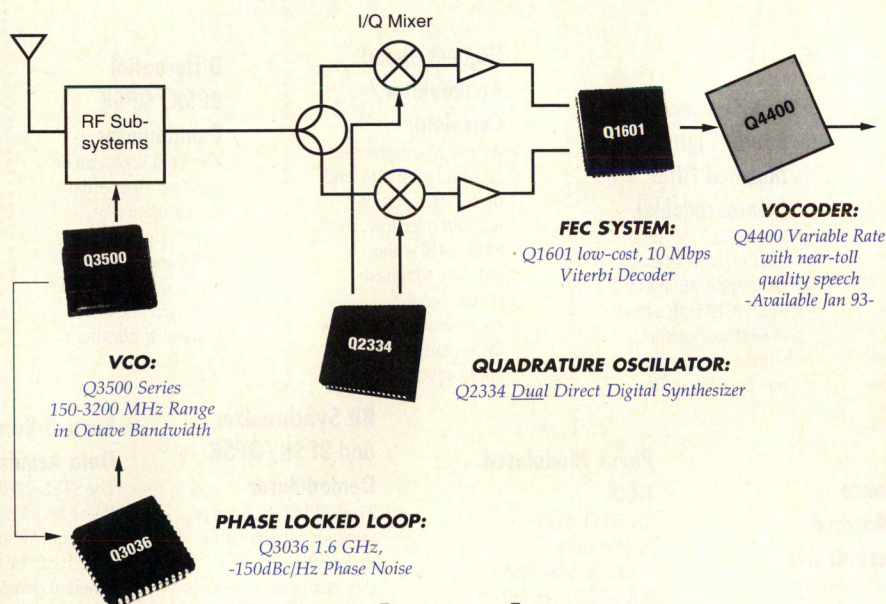

...and so do we!

Today's wireless communication systems require high performance, low power, small size, quick time-to-market, and affordable pricing.

QUALCOMM answers your tough needs with complete VLSI sub-systems on a single chip.

With QUALCOMM, your communications design can take advantage of the world's most advanced VLSI devices including: Viterbi and Trellis Codec Systems, Variable Rate Vocoders, Voltage Controlled Oscillators (VCO), Phase-Locked Loop (PLL) and Direct Digital (DDS) frequency synthesizers.

And, you can expect complete applications engineering and system-level support from the engineers behind the QUALITY COMMUNICATIONS name.

To learn how your design can succeed with QUALCOMM's VLSI solutions, please call or FAX:

QUALCOMM

VLSI Products Division

10555 Sorrento Valley Road
San Diego, CA 92121 USA
TEL# 619-597-5005
FAX# 619-452-9096

For More Information On Giga-tronics Products Circle INFO/CARD #15

chose Park Air to supply the new Denver International Airport with UHF and VHF transceivers and specially designed remote control units. The units will provide the air/ground emergency communications for the airport in the event of a primary communications failure.

Scientific-Atlantic Receives Contracts — Scientific-Atlanta recently received two contracts. The first contract was for \$3.2 million from NASA to modify one of three transportable ground stations currently being produced for NASA. The modified equipment will be deployed by NASA as a participant in the Canadian Government's Radarsat microwave radar earth imaging program and will be used to receive microwave radar image data from polar orbiting satellites.

The second contract, with CEMEX calls for the initial installation of a Very Small Aperture Terminal network to link CEMEX's headquarters with 50 of its cement and concrete distribution centers and manufacturing facilities throughout Mexico. CEMEX will operate a private satellite master station at its Monterrey headquarters. Installation of the private hub and the 50 VSATs will be completed by June.

Micro-Coax Awarded Follow On Contract — Micro-Coax has been awarded a follow-on contract for In-A-Cable filters by the Defense Systems and Electronics Group of Texas Instruments. The contract award is an extension of a long-standing contract with TI for the High-speed Anti-Radiation Missile (HARM) program. The filters are designed into the missile's guidance system. The amount of the contract award was not released.


Radian Receives DOE Contract — Radian Corporation recently completed negotiations with a U.S. Department of Energy laboratory to supply a 50 MHz radar wind profiler system. This is the first radar profiler that DOE has purchased for use at Atmospheric Radiation Measurement Program (ARM) sites. ARM is a segment of the DOE Global Change Research Program. Multiple 50 MHz and 915 MHz profilers will be required at each ARM Cloud and Radiation Testbed (CART) site. The CART sites, located worldwide, will be developed at the nominal rate of approximately one every 18 months.

Flam & Russell Delivers System to Sandia — Flam & Russell, Inc. recently delivered a turnkey Antenna and Radar Cross Section (RCS) Measurement System to Sandia National Laboratories. The system, an advanced version of the FR959, makes use of the new HP 85330 Multiple Channel Controller to perform fully polarimetric RCS measurements and multiple port antenna measurements.

KW Microwave Relocates — KW Microwave has announced the relocation of their facility to Carlsbad, California. The new address is 1985 Palomar Oaks Way, Carlsbad, CA 92009. Tel: (619) 929-9800. Fax: (619) 929-9899.

Lucas Awarded Contracts — Lucas Aerospace was recently awarded two contracts. The first was from Hughes

Application Specific Bipolars



Need quality, reliability and performance for your specific application? Start here and save yourself a search.

We offer a wide selection of NEC

Bipolar Transistors with screening for Commercial through Space applications. They're available in chip form and a variety of packages including Micro-X and tape and reel.

CEL can also provide


the support and characterization data you need to accurately determine your circuit's performance using NEC parts.

FREE DATA FOR DESIGNERS

For a *Product Selection Guide*, call, write or circle the number below.

NEW!!

Part Series	Description
NE461	Medium Power, Low Noise for UHF/L-Band
NE647/648	K-Band oscillators over MIL Temp ranges
NE645/681	Low Noise, Cost Effective for L/S Bands
NE683	Low Power Consumption, Low Noise
NE856	High Gain, Low Cost, Low Noise for L-band
NE243	630mW for high C-Band oscillators



NEC[®]

California Eastern Laboratories

4590 Patrick Henry Dr., Santa Clara, CA 95056-0964 Phone (408) 988-3500 FAX (408) 988-0279
Western (408) 988-7846 Eastern (410) 667-1310 Canada (613) 726-0626

©1991 California Eastern Laboratories

Aircraft Co., Systems Sector to provide low-power and medium-power amplifiers. Under the terms of the contract, which is valued in excess of \$3 million, Lucas Zeta will manufacture, integrate and test the amplifiers. The second contract was awarded to Lucas Aul, a subsidiary of Lucas Aerospace Communications Business. The follow-on contract calls for Lucas to provide AN/SRQ-4 Radio Terminal Sets to the U.S. Navy's

Light Airborne Multi-Purpose System (LAMPS) program. This brings the total value of the contract to date to \$25.7 million.

Amp Achieves ISO Certification — The AMP Aerospace and Government Systems Sector's Federal Systems business group has received International Standards Organization (ISO) 9001 certification. The sector joins 10 other busi-

ness units in AMP as adherents of the ISO 9000 international quality management and assurance standard.

AMD and Rochester Sign Afterlife Pact — Advanced Micro Devices, Inc. and Rochester Electronics, Inc. have entered into an agreement that will allow AMD's customers to continue to buy IC products that AMD has discontinued. The agreement provides Rochester with all residual products (i.e., wafers, dice, finished goods) and access to selected tooling and process recipes for discontinued AMD devices. The agreement covers military and commercial sole-source and multiple-source products.

SBIR Awarded to HiTc — HiTc recently announced that they have received a Small Business Innovation Research Program (SRIB) grant from NASA for a process to produce useful quantities of bulk high temperature superconductors. The process uses HiTc's 3-P technique which starts with melt textured growth generated powder which is subsequently magnetic-pinning-site refined to provide completely phase-pure, clean grain boundary bulk materials.

Ray Proof Ltd Moves — Ray Proof Ltd has moved its RF interference technology operation from Enfield, North London to new premises near Stevenage, Herts. The 47,000 square foot facility houses all aspects of the company's activities, including design, manufacturing, marketing and support services. Their new address is Boulton Road, Pin Green Industrial Area, Stevenage, Herts SG1 4TH, England. Tel: (44) 0438 747477. Fax: (44) 0438 747170.

MPD Moves Operations — Microwave Power Devices recently announced its move to an 85,000 square foot facility. The new address is 49 Wireless Boulevard, Hauppauge, New York 11788. The telephone number remains the same and the fax number is (516) 231-8081.


LEMO Rf Established — LEMO recently announced the establishment of LEMO Rf as a company to meet the requirements of the specialty RF/microwave high frequency connector/component market. They may be reached at 345 Tesconi Circle, Santa Rosa, CA 95401. Tel: (707) 578-8811. Fax: (707) 578-0869.

What's The Word For Shielding Protection, Performance & Value?

Lindgren. A name that means total capability in the science and engineering of shielding solutions.

Founded in the early 1950's Lindgren has grown to become the largest shielding company in the industry. We offer a full spectrum of services, including consultation, design, engineering, fabrication, on-site installation, and certification testing.


Our approach to providing effective, state-of-the-art shielding systems relies on our understanding of the science of shielding, our experience and a company-wide commitment to quality products backed by responsive, personal service.



A recognized industry standard, our screened enclosures are well-suited for applications where maximum performance is required in a "hear-through, see-through" environment. All DEI enclosures are fully assembled and tested at the factory to verify RF performance.

Air Vents, RF Filters, RF Windows, and Low Frequency Magnetic Field Analysis and Containment.

For more information on the products behind the name or a quote on your next shielding project, call (708) 307-7200.



Number One In Shielding Solutions.SM


400 High Grove Boulevard • Glendale Heights IL 60139 USA
(708) 307-7200 • FAX (708) 307-7571

©1993 Lindgren, Inc.

And, unlike many of our competitors, shielding is our *only* business.

Our product line offers the

industry's most comprehensive variety of shielding solutions: DEI Enclosures, Welded Enclosures, Modular Cell-Type Enclosures, In-Place Shielding, Single-Shield 3 Oz. Copper Systems, Anechoic Chambers, Single-Shield Pan-Formed™ Enclosures, RF Doors, Waveguide



Some of the nation's most demanding anechoic chambers are fabricated by Lindgren's LectroMagnetics Division. We hold 28 patents associated with the science of shielding and have an established track record for on-time delivery.

The 48 cent solution.

Wideband Amplifiers – From \$.48 each

UPC1653 To 1300MHz 18dB G _p	UPC1654 To 1100MHz 19dB G _p	UPC1655 To 900MHz 18dB G _p	UPC1656 To 850MHz 19dB G _p	UPC1658 To 1100MHz 17dB G _p 2.0dB NF	
UPC1659 600MHz to 2300MHz 23dB G _p	UPC1675 To 2100MHz 12dB G _p	UPC1676 To 1300MHz 20dB G _p 4.0dB NF	UPC1677 To 1700MHz 24dB G _p P _{out} = 19.5dBm	UPC1678 Up to 1900MHz 23dB G _p P _{out} = 18dBm	UPC1688 Up to 1000MHz 21dB G _p 4.0dB NF

Prescalers – From \$2.20 each

UPB581 ÷ 2 500MHz to 2.8GHz	UPB582 ÷ 4 500MHz to 2.8GHz	UPB584 ÷ 2 500MHz to 2.5GHz	UPB585 ÷ 4 500MHz to 2.5GHz	UPB586 ÷ 512/256 500MHz to 2.5GHz	UPB587 ÷ 2/4/8 50MHz to 1.0GHz V _{cc} = 2.2 to 3.5V	UPB588 ÷ 64/128 500MHz to 2.5GHz
--	--	--	--	--	--	---

Freq. Convertors – From \$1.58 each

UPC1685 DC to 890MHz 14dB GAIN Double Balanced Mixer Applications	UPC1686 DC to 890MHz 22dB GAIN	UPC1687 DC to 890MHz 28dB GAIN I _{cc} of 38mA
--	---	--

IF Amplifiers – From \$3.50 each

UPC1668 10 to 170MHz G _t = 14.5dB 60dB Isolation	UPC1669 10 to 180MHz G _t = 10.5dB 55dB Isolation	UPC1670 10 to 150MHz IM ₃ of 56dBc 60dB Isolation
---	---	--

Transistor Arrays From \$2.40 each

UPA101 F _T = 9GHz Double Balanced Mixer Applications	UPA102 F _T = 9GHz Differential Amplifier
UPA103 F _T = 9GHz Differential Amplifier	UPA104 F _T = 9GHz OR/NOR Functions

Special Function MMICs From \$1.08 each

UPC1684 LED DRIVER 150mA Drive Current 300 Mbits NRZ	UPC1663 VIDEO AMPLIFIER 170MHz @ A _{vol} = 100 1.6ns Propagation Delay
---	--

Note: MMIC prices based on 25K quantities

NEC[®]

Want to make life simpler? Reduce the parts count in your design with silicon MMICs from NEC. They're the low cost, no-hassle way to achieve your design goals.


But be aware of the side effects!

Reducing your parts count can also make your QC easier. Your overall circuit more reliable. And your assembly, whether manual or automated, faster and more efficient.

NEC MMICs come in chips and a variety of packages, including hermetic, low cost plastic, surface mount and tape and reel. So they're ideal for high volume automated assembly.

And their quality and reliability is proven: With a production rate of *7 million a month*, no one knows MMICs like NEC.

Our **Silicon MMIC Product Selection Guide** lists specifications for dozens of parts. Chances are good it has just what you need. To get a copy, call your nearest CEL Sales Office or circle the number below.

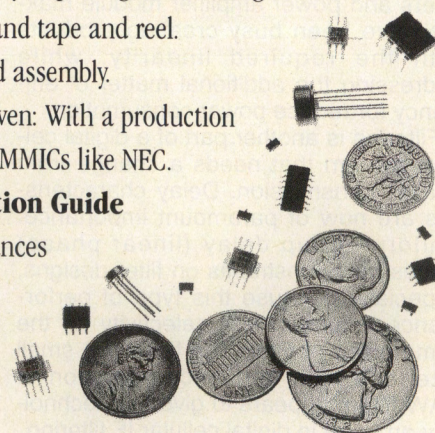

California Eastern Laboratories

CEL Headquarters, 4590 Patrick Henry Drive, Santa Clara, CA 95056-0964; (408) 988-3500 FAX (408) 988-0279 □ Santa Clara, CA (408) 988-7846 □ Los Angeles, CA (310) 645-0985
San Diego, CA (619) 467-6727 □ Bellevue, WA (206) 455-1101 □ Richardson, TX (214) 437-5487 □ Shawnee, KS (913) 962-2161 □ Woodridge, IL (708) 241-3040 □ Cockeysville, MD (410) 667-1310
Peabody, MA (508) 535-2885 □ Hackensack, NJ (201) 487-1155 or 487-1160 □ Palm Bay, FL (407) 727-8045 □ Snellville, GA (404) 978-4443 □ Nepean, Ontario, Canada (613) 726-0626

©1992, California Eastern Laboratories

INFO/CARD 18

The Technology of Personal Communications

By Gary A. Breed
Editor

The promise of huge new markets for RF-based personal communications is the main force driving the RF industry right now. The development of these new markets depends on many factors — government regulations, national and international frequency allocations, technical operating standards, and of course, eventual acceptance by the customer. Rather than reexamine the political and regulatory side of personal communications, this short report will note the changes in engineering techniques and RF components that are required if engineers are to design cost-effective personal communications products.

Digital Cellular

The Pan-European GSM system has brought digital cellular from the lab to production. Digital modulation techniques have created new requirements beyond the current analog FM cellular systems. Linearity is the main change — low level and power amplifiers must utilize class A or AB to accurately transmit the QPSK digital modulation that is part of GSM, as well as coming U.S. and Japanese systems. Transistor manufacturers and power amplifier module makers have been busy creating products with the required linearity, while addressing the additional matter of efficiency for reduce power consumption.

Filtering is another part of a digital cellular system that needs a change from analog transmission. Delay characteristics are now of paramount importance. Uniform group delay (linear phase) places new constraints on filter designs, especially because this type of performance results in less selectivity for the same order of filter. The flexibility, small size, and high frequency operation of SAW filters appears to give that technology an edge in digital cellular IF filtering.

Modulators are one more area of development. Matched, monolithic modulators and demodulators are generally the best solution for high performance I and Q channel processing. Preamplifiers, buffers and baseband filtering on the same chip adds a degree of control and consistency.

Mobile Voice and Data

Transmission of data on channels normally used for voice can be viewed in two ways — short term and long term. In the long term, digital cellular will be a truly digital system, and traditional multiplexing techniques will allow data and voice to share the same system.

In the short term, however, transmitting data on an analog cellular system raises some problems that are not significant with voice-only communications. Data rate is one area of concern. The limitations of the modulation bandwidth and IF performance are part of the problem, placing a firm upper limit on transmission channel capability. Multipath propagation (signals bouncing around and arriving at different times) is another problem. Digital systems will have error-correction schemes to alleviate this problem, but any digital-on-analog system must include it external to the radio equipment.

These problems, the protocols of sharing voice and data on the same channels, plus provisions for error-checking are included in several systems already in use (e.g., Mobitex and others). These interim solutions provide at least modest capabilities until a fully digital cellular infrastructure is in place.

DECT/CT-2/PCS/PHP

This issue's cover story on page 48 announces one company's commitment to the Digital European Cordless Telephone (DECT) system. The British CT-2, Japanese Personal Handy Phone (PHP) and the roughly outlined U.S. Personal Communications Service (PCS) are all in a period of rapid development. Many companies and independent analysts believe that this type of service will be the best market possibility in the near future — it fits between cellular and cordless phones in cost and capability.

The problems are similar to digital cellular, since these are all digital systems with RF portions that are not radically different from one another, or from digital cellular systems. The unique areas of engineering problem-solving are in power consumption and cost. Where a

cellular telephone can be considered a "professional" product, this family of products is certainly intended to reach the consumer market. Price of the finished product is a major factor, while the convenience of long operating time is another. One additional factor is that most of these systems will operate in the 1.7-1.9 GHz range, twice the frequency of the cellular band.

High level integration, 3-volt device technology, miniature packaging and highly automated manufacturing have seen dramatic increases in activity in companies pursuing advanced cordless telephone products. All this must be accomplished in systems that operate at around 2 GHz. Cellular technology required 900 MHz devices, but at twice the frequency, refinements or new processes must be brought to bear.

Multi-Function Systems

Recently, we have seen some highly-publicized announcements of units called "personal digital assistants" or something in a similar vein. The most publicized are from Apple Computer and EO Systems, but others are in the works, as well. These systems integrate notebook computers, cellular telephones and software intended to put all the information needs of a busy business person in one package. From an RF engineer's perspective, most of the same concerns noted above are in play, along with increased pressure for miniaturization and low power consumption. Another new addition is interface requirements among the various functional components — radio link, computer, phone, data network, and operating system software.

All of these new applications present new problems for RF engineers and their digital, mechanical, software and manufacturing counterparts. For most companies, the challenges are welcome because, if met properly, they can mean profitability and success. **RF**

For reprints of this report, call Cardiff Publishing Company at (303) 220-0600. Ask for the Circulation Department.

► PHILIPS SEMICONDUCTORS ◀

Your Partner for Advanced ICs in Wireless Communication Equipment

For your Spread Spectrum needs

**Spread Spectrum—
the optimum solution for...**

- Security Systems
- Cordless Phones
- Wireless LAN's
- Remote Meter Reading

We have the building blocks.

NE600 Front-End

Features:

- Low Power Consumption
- Excellent Reliability
- Low Noise
- Easy Matching

SA620 Front-End

Features:

- Low Voltage – Low Current
- On-Board V.C.O.
- Low Noise
- Excellent Gain Stability

SA626 IF Strip


Features:

- 25MHz IF Bandwidth
- Fast/Linear RSSI
- Low Voltage/2.7 Volt
- Buffered Outputs

UMA1016 Synthesizer

Features:

- Fast Switching
- Low Power Consumption
- High Performance

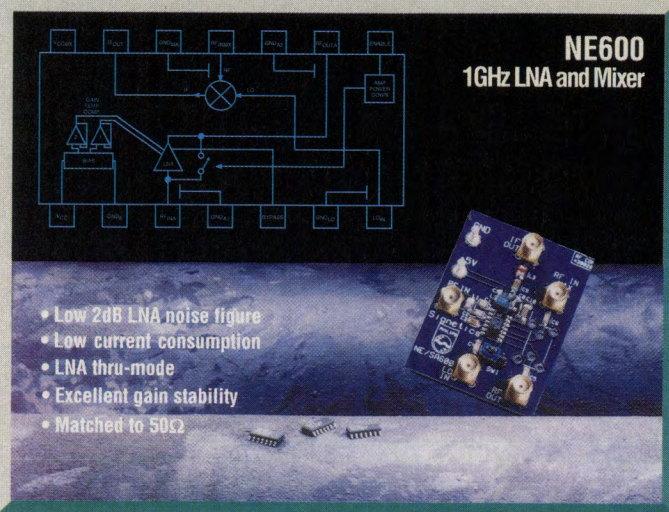

For more information on our complete product line, call 1-800-447-1500, Ext. 1019AF.

**Philips
Semiconductors**



PHILIPS

You don't always get what you pay for.



With PTS synthesizers, you get more.

Because we're synthesizer specialists, we give you *more for your money* in more ways than one.

From our economy PTS x10, to our space-saving PTS 310, to our top-of-the-line PTS 1000, we have *more models* to cover your source needs from 100 KHz to 1 GHz.

And more options, including:

- OCXO, TCXO or external standard,
- choice of resolution from 100 KHz to 0.1 Hz,
- DDS with phase-continuous switching,
- digital phase rotation,
- BCD or GPIB remote control,

and almost a hundred others to let you specify a synthesizer so well-tailored to your requirements that it's like having one custom made for you.

Our priority in design and manufacturing is to make our synthesizers *more reliable*, and this has led to a demonstrated MTBF of 25,000 hours. That's why we can back them with our all-inclusive 2-year warranty, along with a flat-rate service charge for eight years following the warranty period.

But wait, there's less!

All of our synthesizers feature *low power* consumption, *low spurious output* (as low as -75 dBc), *low phase noise*, and fast frequency switching (as fast as 1 μ second).

And all of our models are available, at a lower price, in a remote-only OEM configuration for easy integration into your OEM system.

Our full catalog has all the information you need to specify the most synthesizer for your money.

Call or FAX us for your copy, or for immediate engineering assistance.



PTS

PROGRAMMED TEST SOURCES

P.O. Box 517 Littleton, MA 01460
508/486-3008 FAX 508/486-4495

A Robust Signaling Technique for Part 15 RF Control Network Applications

*By Greg Magin
Intellon Corporation*

In 1985 the Federal Communications Commission revised the Part 15 rules and regulations governing non-licensed RF communications devices to permit coherent spread spectrum operation. The FCC allows power output levels of up to 1 Watt spread over at least 500 kHz of bandwidth in three different frequency bands: 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz (1). The high power spread spectrum operation can provide reliable non-licensed communications while reducing the potential for harmful interference.

The FCC Part 15 rules allow the use of direct sequence, frequency hopping, and hybrid spread spectrum methods. A new digital signaling technique has been developed for operation under the current spread spectrum provisions which is called Spread Spectrum Carrier Technology™. The approach is optimized for low cost Carrier Sense Multiple Access (CSMA) RF packet networks where many users or nodes share the

same channel frequency. Based on direct sequence spreading, the system features very fast synchronization for rapid channel access. The spreading and correlation techniques have been designed to relax the carrier frequency accuracy requirements of the radio link.

A simple limiter based receiver can be used to recover the transmissions. The transmission and reception processing can be performed by a single digital Application Specific Integrated Circuit (ASIC). Figure 1.

There are many potential applications for Spread Spectrum Carrier (SSC) Technology ranging from commercial to residential environments. The system is optimized for the rapid transmission of moderate length control type messages in a packet format. Early applications include: remote utility meter reading, load management, security systems, Heating Ventilation and Air Conditioning (HVAC), and vending machine networking. The growing demand for data communication and control systems will pro-

vide many future opportunities for this new approach.

The Electronic Industry Association (EIA) has adopted SSC as the Consumer Electronics Bus (CEBus) home automation communication standard for RF links (2). CEBus is intended to provide a low cost packet based control network environment over which consumer appliances and devices can communicate. The CEBus committees have defined standards for various media including: radio frequency, AC power line, coaxial cable, infrared, and twisted pair. The protocols employed over the various media have a common interface to reduce software requirements and to facilitate bridging between media.

Signal Generation

The CEBus network transfers information from point to point in the form of short packets, as shown in Figure 2. The packets typically begin with a brief On Off Keyed (OOK) preamble during which channel access and contentions are resolved. Once the channel is secured the packet body containing address, control, or data is sent using Phase Shift Keying (PSK). The CEBus RF standard utilizes pulse width encoding to represent the symbols "1", "0", End Of Field (EOF), and End Of Packet (EOP). The minimum symbol period is defined as the Unit Symbol Time (UST). The duration of the UST is 100 mS dur-

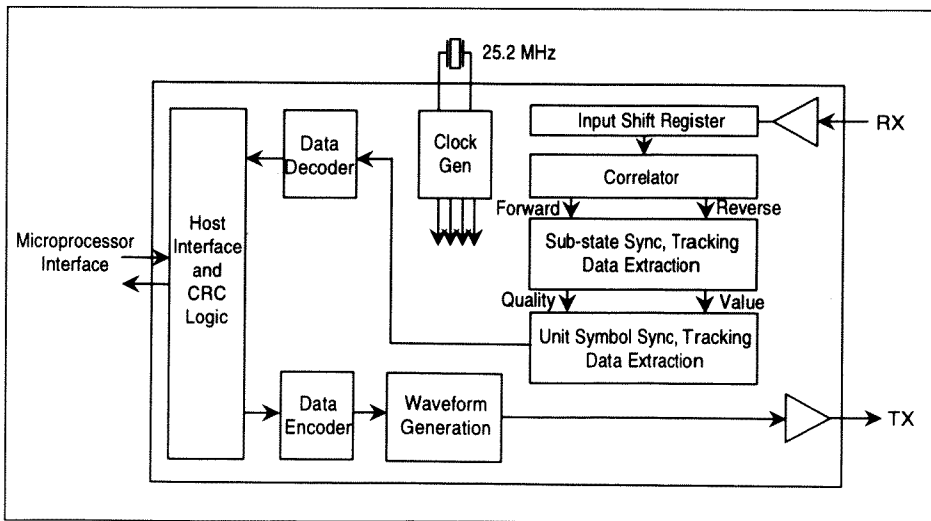


Figure 1. Block diagram of modem ASIC.

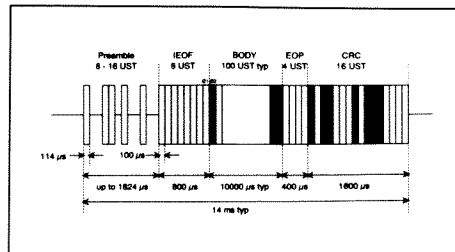


Figure 2. Typical packet timing.

FILTERS



dc to 3GHz from \$1145


lowpass, highpass, bandpass

- less than 1dB insertion loss • greater than 40dB stopband rejection • surface-mount • BNC, Type N, SMA available
- 5-section, 30dB/octave rolloff • VSWR less than 1.7 (typ) • rugged hermetically-sealed pin models • constant phase
- meets MIL-STD-202 tests • over 100 off-the-shelf models • immediate delivery

low pass, Plug-in, dc to 1200MHz

Model No.	Passband MHz loss < 1dB	Stopband, MHz loss > 20dB	loss > 40dB	Model No.	Passband MHz loss < 1dB	Stopband, MHz loss > 20dB	loss > 40dB
★LP-5	DC-5	8-10	10-200	★LP-250	DC-225	320-400	400-1200
★LP-10.7	DC-11	19-24	24-200	★LP-300	DC-270	410-550	550-1200
★LP-21.4	DC-22	32-41	41-200	★LP-450	DC-400	580-750	750-1800
★LP-30	DC-32	47-61	61-200	★LP-550	DC-520	750-920	920-2000
★LP-50	DC-48	70-90	90-200	★LP-600	DC-680	840-1120	1120-2000
★LP-70	DC-60	90-117	117-300	★LP-750	DC-700	1000-1300	1300-2000
★LP-90	DC-81	121-137	167-400	★LP-800	DC-720	1080-1400	1400-2000
★LP-100	DC-98	146-189	189-400	★LP-850	DC-760	1100-1400	1400-2000
★LP-150	DC-140	210-300	300-600	★LP-1000	DC-900	1340-1750	1750-2000
★LP-200	DC-190	290-390	390-800	★LP-1200	DC-1000	1620-2100	2100-2500

Price, (1-9 qty), all models: plug-in \$14.95, BNC \$32.95, SMA \$34.95, Type N \$35.95



Surface-mount, dc to 570MHz


Model No.	Passband MHz loss < 1dB	Stopband, MHz loss > 20dB	loss > 40dB	Model No.	Passband MHz loss < 1dB	Stopband, MHz loss > 20dB	loss > 40dB
SCLF-21.4	DC-22	32-41	41-200	SCLF-190	DC-190	290-390	390-800
SCLF-30	DC-30	47-61	61-200	SCLF-380	DC-380	580-750	750-1800
SCLF-45	DC-45	70-90	90-200	SCLF-420	DC-420	750-920	920-2000
SCLF-135	DC-135	210-300	300-600				

Price, (1-9 qty), all models: \$11.45

Flat Time Delay, dc to 1870MHz

Model No.	Passband MHz loss < 1.2dB	Stopband MHz loss > 10dB	loss > 20dB	VSWR Freq. Range, DC thru 0.2fco X	Group Delay Variations, ns Freq. Range, DC thru fco X	2fco X	2.67fco X
★BLP-39	DC-23	78-117	117	1.3:1	2.3:1	0.7	4.0
★BLP-117	DC-65	234-312	312	1.3:1	2.4:1	0.35	1.4
★BLP-156	DC-94	312-416	416	0.3:1	1.1:1	0.3	1.1
★BLP-200	DC-120	400-534	534	1.6:1	1.9:1	0.4	1.3
★BLP-300	DC-180	600-801	801	1.25:1	2.2:1	0.2	0.6
★BLP-467	DC-280	934-1246	1246	1.25:1	2.2:1	0.15	0.4
▲BLP-933	DC-560	1866-2490	2490	1.3:1	2.2:1	0.09	0.2
▲BLP-1870	DC-850	3740-6000	5000	1.45:1	2.9:1	0.05	0.15


Price, (1-9 qty), all models: plug-in \$19.95, BNC \$36.95, SMA \$38.95, Type N \$39.95
NOTE: ▲ -933 and -1870 only with connectors, at additional \$2 above other connector models.



high pass, Plug-in, 27.5 to 2200MHz

Model No.	Stopband MHz loss < 40dB	Passband, MHz loss < 20dB	VSWR Pass-band Typ.	Model No.	Stopband MHz loss < 40dB	Passband, MHz loss < 1dB	VSWR Pass-band Typ.
★HP-25	DC-13	13-19	27.5-200	★HP-400	DC-210	210-290	395-1600
★HP-50	DC-20	20-26	41-200	★HP-500	DC-280	280-365	500-1600
★HP-100	DC-40	40-55	90-400	★HP-600	DC-350	350-440	600-1600
★HP-150	DC-70	70-95	133-600	★HP-700	DC-400	400-520	700-1800
★HP-175	DC-70	70-105	160-800	★HP-800	DC-445	445-570	780-2000
★HP-200	DC-90	90-116	185-800	★HP-900	DC-520	520-660	910-2100
★HP-250	DC-100	100-150	225-1200	★HP-1000	DC-550	550-720	1000-2200
★HP-300	DC-145	145-170	290-1200				


Price, (1-9 qty), all models: plug-in \$14.95, BNC \$36.95, SMA \$38.95, Type N \$39.95



bandpass, Elliptic Response, 10.7 to 70MHz

Model No.	Center Freq. (MHz)	Passband I.L. 1.5 dB Max. (MHz)	3 dB Bandwidth Typ. (MHz)	Stopbands I.L. > 20dB at MHz	I.L. > 35dB at MHz
★BP-10.7	10.7	9.6-11.5	8.9-12.7	7.5 & 15	0.6 & 50-1000
★BP-21.4	21.4	19.2-23.6	17.9-25.3	15.5 & 29	3.0 & 80-1000
★BP-30	30.0	27.0-33.0	25-35	22 & 40	3.2 & 99-1000
★BP-60	60.0	55.0-67.0	49.5-70.5	44 & 79	4.6 & 190-1000
★BP-70	70.0	63.0-77.0	68.0-82.0	51 & 94	6.0 & 193-1000

Price, (1-9 qty), all models: plug-in \$18.95, BNC \$40.95, SMA \$42.95, Type N \$43.95



Constant Impedance, 21.4 to 70MHz

Model No.	Center Freq. MHz	Passband loss < 1dB	Stopband loss > 20dB at MHz	VSWR 1.3:1 Total Band MHz
★IF-21.4	21.4	18-25	1.3 & 150	DC-220
★IF-30	30	25-35	1.9 & 210	DC-330
★IF-40	42	35-45	2.6 & 300	DC-400
★IF-50	50	41-58	3.1 & 350	DC-440
★IF-60	60	50-70	3.8 & 400	DC-500
★IF-70	70	58-82	4.4 & 490	DC-550

Price, (1-9 qty), all models: plug-in \$14.95, BNC \$36.95, SMA \$38.95, Type N \$39.95

NOTE: ★Add Prefix P, B, N, or S for Pin, BNC, N, or SMA connector requirement.

finding new ways...
setting higher standards

Mini-Circuits™

WE ACCEPT AMERICAN EXPRESS AND VISA

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers/NORTH AMERICA 800-654-7949 • 417-335-5935 Fax 417-335-5945

EUROPE 44-252-835094 Fax 44-252-837010

INFO/CARD 21

E132 REV. C

Symbol	Duration	Length in UST's
one	100 us	1
zero	200 us	2
EOF	300 us	3
EOP	400 us	4

Table 1. Periods of four CEBus encoded symbols.

ing the packet body. The four CEBus encoded symbols have the periods shown in Table 1.

The channel rate is specified at 10,000 USTs per second. The variable length symbol encoding means that the effective bit rate is dependent on the message content.

For the RF media, symbols are encoded using two UST states, Phase 1 or Phase 2. Each state is divided into seven sub-states, Figure 3. The sub-states each consist of a specific carrier spreading sequence of 360 chips. Therefore, each UST contains 2520 chips used to spread the carrier. The basic chip rate is 25.200 MHz which yields a chip time of 39.6825 nS. Each resulting sub-state is 14.2857 mS duration.

There are two possible sub-states. The 360 chip sequence can be transmitted in either a forward or reverse direction. The complete UST is encoded using one of two complimentary maximal length coding sequences of forward (F) or reverse (R) sub-states. Phase 1 is F F F R R F R and Phase 2 is R R R F F R F. The 360 chip sequence was designed to distribute the transmit energy very evenly. The resulting waveform approximates a frequency sweep from 4.2 to 6.3 MHz, as shown in Figure 4. The sequence has good correlation characteristics and is tolerant of moderate frequency offsets.

An additional Phase Modulation Function (PMF) is used to further modify the sub-state sequence of each UST. The 15 bit PMF sequence is the maximal length code 1 0 1 0 1 1 0 0 1 0 0 0 1 1 1. Each bit of the PMF is XORed with the chips of a sub-state sequence causing all the bits of that sub-state to be inverted or normal. This results in 180 degree phase shifts which further improve the spectral energy distribution.

The combined effect of the main 360 chip sequence, the 7 chip forward-reverse sequence, and the 15 chip PMF sequence is a smooth spreading of the transmit energy over a 2.1 MHz bandwidth. The overall spectral distribution is quite rectangular. The energy peaks are

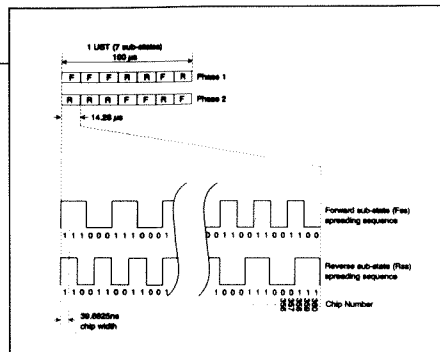


Figure 3. UST and sub-state timing.

approximately 3 dB above the average transmit energy. A transceiver employing these spreading techniques has been reviewed and certified by the FCC.

Figure 5 is a detailed block diagram of the signal generator. The 25.2 MHz system clock is divided and provides all of the timing for the generation process. A 6 bit counter is used to address a ROM which contains both of the 360 chip (bit) waveform sequences. The data input is used to pass or invert the output of the 70K forward/reverse sub-state sequence generator. This line is used to select which sequence will be clocked out of ROM by controlling the MSB. A shift register is used to convert the parallel output of the waveform ROM into a 25.2 MHz serial bit stream. This bit stream is passed or inverted by the 15 long PMF sequence to form the TX output. This simple state machine can be fabricated using any of the modern logic techniques.

The ASIC has a single logic level TX waveform output bit. The output waveform is over-sampled at a rate of 25.2 MHz. The majority of the output energy lies between 4.2 and 6.3 MHz. A simple L-C filter is adequate to clean up the ASIC output. This filtered output is referred to as the transmit baseband and is capable of driving 50 ohm loads directly.

Signal Correlation and Detection

The ASIC provides all of the correlation, synchronization, tracking, data decoding, and CRC functions required to recover the spread signal, see Figure 1. The baseband signal from the receiver front end is first bandpass filtered by a simple L-C filter and then amplitude limited. The limited signal is applied to a zero crossing detector which converts the signal into a serial digital stream. These bits are shifted into a shift register which forms the input of the correlator. The correlator provides detection of both the forward and reverse direction sub-state waveforms.

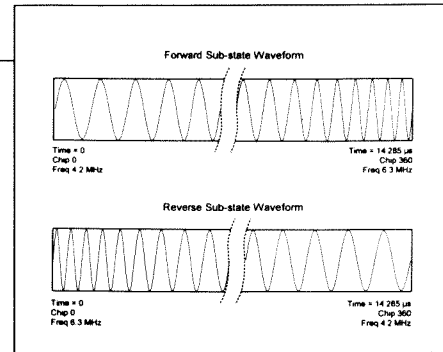


Figure 4. Forward and reverse sub-states.

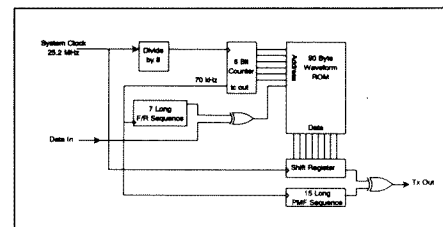


Figure 5. Transmit processor.


The correlation information is used to establish timing synchronization and maintain tracking of the sub-state symbols. Estimations of the sub-state symbol quality and value are determined and are passed to the unit symbol processing circuits. Here the unit symbol timing synchronization and tracking occur. The UST value is passed to the data decoder which determines if a ONE, ZERO, EOF, or EOP was transmitted. The CRC is verified at the end of the packet and the information is delivered to the micro-processor interface.

The digital signal processing which occurs within the ASIC permits high performance reception with simple receiver front ends. The spreading sequence and the correlator work together to permit relaxation of the transmitter and receiver local oscillator frequency accuracy requirements. The RX input to the ASIC can be off frequency by as much as plus or minus 350 kHz before performance begins to degrade. This means that low cost Surface Acoustic Wave (SAW) resonators can be used for both the transmit carrier oscillator and the receive local oscillator. The correlation is also phase insensitive and a moderate amount of phase jitter is not catastrophic.

The FCC Part 15 rules also specify that the receiver of a spread spectrum system be able to coherently re-assemble the spread information (3). The rules call for at least 10 dB of processing gain in direct sequence based systems. There are many different ways to define process gain (4). The FCC however, is interested in the ability of the receiver to reject interference. Therefore, the


Defence Magazine Introduces The 1992 Handbook Series...

Pre-Publication Special Pricing!
Order Now, and Save 25%!



Volume I: European Defence in Transition

Editorial analysis and coverage of the European defence industry, including France, Germany, Switzerland, Netherlands, Belgium, Scandinavia, Austria, Italy and Spain.



Volume II: Airborne Weapons

Comprehensive coverage of the development of airborne weapons and weapon systems since 1987, including laser ranging, smart weapons, anti-armour operations and air-to-air weapons.

Each handbook contains compiled articles...pages and pages of our best (and most requested) coverage of these critical subjects. The comprehensive compilation of articles come directly from recent *Defence* magazine issues, and are presented by subject matter.

Volumes I and II will begin shipping December 1992, and you can save 25% by sending your order to be received before December 1st, 1992. Use the handy coupon below to fax or mail your order in with payment authorization, or call your order into our circulation department at (USA) (303) 220-0600.

----- COUPON ----- COUPON -----

Yes, please ship (quantity) _____ sets of the Handbooks, at £49.00/\$95.00 each, including postage.

Yes, please ship (quantity) _____ sets of Volume I (European Defence in Transition) only, at £29/\$59 each, including postage.

Yes, please ship (quantity) _____ sets of Volume II (Airborne Weapons) only, at £29/\$59 each, including postage.

() Bill my company...signed PO enclosed. \$ _____ amount
() Check enclosed...payable to *Defence*. \$ _____ amount
() MC () Visa () Amex exp. date _____

Card # _____ signature _____

Ship to: Name _____ Company _____

Address _____ ms _____

City _____ State _____ Zip _____

Country _____ Telephone _____

Pre-payment required.


Mail order to: *Defence*, Circulation Dept., 6300 S. Syracuse Way, #650, Englewood, CO 80111, or call 303/220-0600 or FAX your order to 303/773-9716 TODAY!

process gain is typically determined by measuring the jamming threshold with the spreading code enabled and disabled. These new signaling techniques are highly integrated and the system can not function with the spreading disabled. This makes verification of the process gain a more complex problem.

A transceiver employing SSC technol-

ogy at 915 MHz was submitted for examination by the FCC. The Authorization and Evaluation Division of the FCC cooperated to arrive at a suitable measurement method. The system was able to demonstrate more than the required 10 dB of process gain. With this ground work completed, certification of future products should be straightforward.

SAW Low-Cost Low-Loss Filters

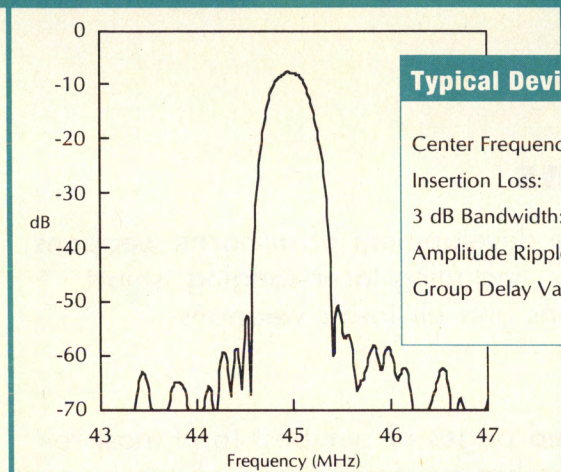

Typical Device Characteristics

Center Frequency:	45 MHz
Insertion Loss:	7.5 dB
3 dB Bandwidth:	330 kHz
Amplitude Ripple:	0.1 dB
Group Delay Variation:	600 nsec (p-p) (across 200 kHz)

Sawtek, the leader in SAW technology, is now leading the industry with filter technology for the communications market. Recent advancements in SAW filter technology provide low insertion loss at price levels previously unthinkable. Now Sawtek offers low-cost, low-loss filters for a variety of applications like GSM, PCN, CT-2, CDMA, TDMA, DECT, wireless LANs, DBS, pocket pagers, ID tags, GPS, and keyless entry systems --- just to name a few. Your products can benefit from the advantages provided by these low-loss filters, such as:

- ✓ *Single-level, low-cost transducer architecture*
- ✓ *Low-profile, surface-mount packaging*
- ✓ *Simple, standard matching networks*
- ✓ *Excellent amplitude and phase characteristics*
- ✓ *Quartz temperature stability*
- ✓ *Quick delivery*

For specifications and pricing information, contact us today.

Telephone: (407) 886-8860 Fax: (407) 886-7061

SAWTEK
INCORPORATED

Orlando, Florida

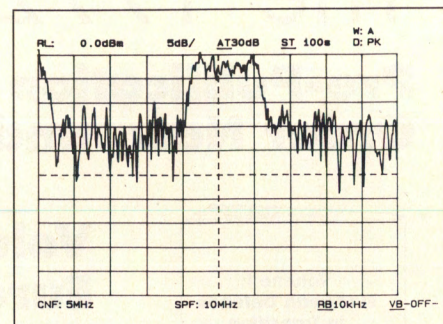


Figure 6. Baseband transmit spectrum before filtering.

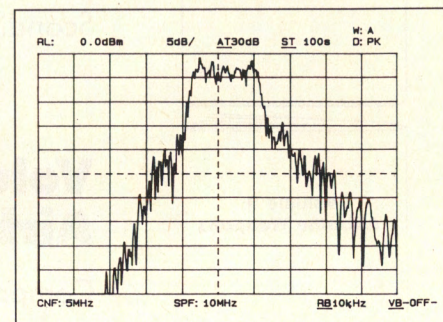


Figure 7. Baseband transmit spectrum after filtering.

Frequency Conversion for Transmission

The spread spectrum baseband signal is generated in the 4.2 to 6.3 MHz range. This low frequency baseband signal can be transmitted directly across various media such as AC power wiring or coaxial cable. The energy spreading, interference rejection, and quick network access features improve the performance of non-radio applications as well. To use SSC technology for radio links, conversion of the baseband signal to higher frequencies is essential.

The TX output bit of the ASIC is basically the output of a one bit over-sampled D to A converter. The sampling rate is equal to the system clock frequency of 25.2 million samples per second. The resulting output spectrum shown in Figure 6 contains a fair amount of energy outside of the desired 4.2 to 6.3 MHz frequency range. The ASIC output driver is capable of driving a 50 ohm load to 2.5 Volts peak-to-peak. A simple 50 ohm passive 5 pole bandpass filter, like that shown in Figure 7, can be used to clean up the unwanted energy. Low Q surface mount parts with 10 percent tolerance are sufficient. The resulting filtered baseband signal is ideal for directly driving a passive double balanced diode mixer.

The filtered baseband signal is typically applied to the IF port of the balanced mixer, Figure 8. The Local Oscillator (LO) port of the balanced mixer is driven with the desired carrier or center frequency. In this manner, the spread spectrum baseband signal PSK modulates the RF carrier. The resulting modulated signal, shown in Figure 9, contains energy sidebands located approximately 5 MHz below and above the carrier frequency. The LO signal feed through is attenuated by the balance of the mixer. Typically both sidebands are amplified by a linear power amplifier before transmission via the antenna.

Both of the sidebands contain similar copies of the spread spectrum information. Only one sideband signal is actually required to convey the message. The classic single sideband generation techniques of filtering or image rejection may be used to eliminate one of the two sidebands. The signal will then occupy one half of the original bandwidth. Since the single sideband signal contains only one frequency component at any instant in time, class C amplification may be used.

The resulting efficiencies could offset the additional complexities incurred for SSB operation.

Down Conversion for Reception

To recover the spread spectrum message, the radio frequency signal must be down converted to the 4.2 to 6.3 MHz baseband range. In this system, it is not necessary to phase lock the receiver LO to the transmitter's carrier. The time typically required to lock onto carriers of differing frequency would add considerable delays to the network. Since the receive LO is not phase locked to the carrier of the incoming DSB signal, destructive cancellation of the sideband information will occur. For this reason, selection of one sideband and rejection of the other sideband is essential. Any of the classic single sideband down conversion techniques may be employed. The unwanted sideband need only be suppressed by 20 dB to avoid destructive cancellation of the information.

The requirement for single sideband down conversion carries some additional

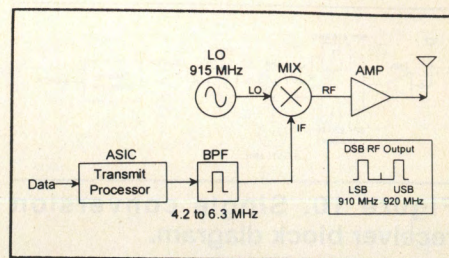


Figure 8. Transmitter block diagram.

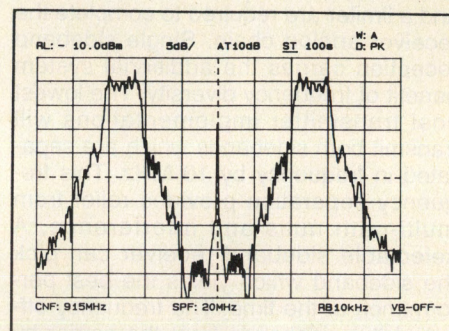



Figure 9. Typical modulated DSB spectrum.

The Leader in Quality

FEEDFORWARD AMPLIFIER

RF-2800 Series

- 1-88 MHz
- +65 dBm OIP₃
- +120 dBm OIP₂
- 4.5 dB Noise Figure
- 16 dB Gain
- Lower Gains Available
- Quality at Low Cost

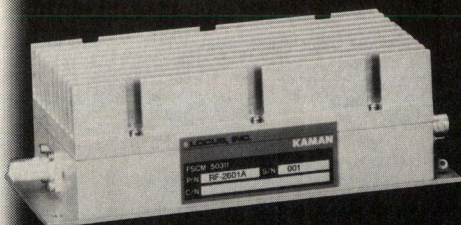

High Dynamic Range

- RF Front-end Systems
- Antenna Preamplifiers
- Antenna Multicouplers
- 2-Tone Test Source Amplifier

Related HDR Products

- Mixers/Converters
- RF Multicouplers

See the Locus Difference

LOCUS, Inc.


KAMAN

P.O. Box 740
State College, PA
16804

814-466-6275 FAX 814-466-3341

**MORE
NEW
LOWER
S/Filsyn™ Filter
Design Software**

**FEATURES
MANUAL
PRICE!
50% Off!**

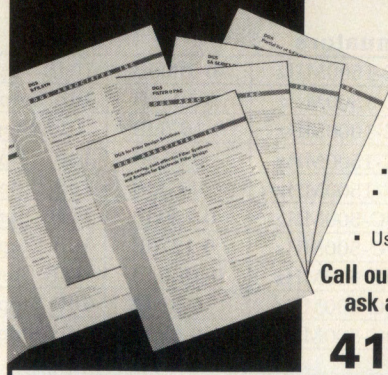

NEW FEATURES!

- Design lattice & ladder wave digital filters
- Design rectangular and round rods
- Plot from the optimizing pre-processor
- GUI simplifies operation
- Easier to use manual complete with many designs
- Users Guide for PC users

Call our NEW telephone number and ask about the 50% off discount!

415-325-4373

DGS ASSOCIATES, INC. FAX 415-325-7278

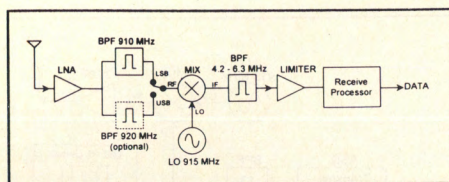


Figure 10. Single conversion receiver block diagram.

benefits. Once one of the sidebands has been selected and converted down to baseband, only a simple bandpass filter and a limiter are required to complete the receiver analog chain. Single sideband reception carries the additional system benefit of frequency diversity. The lowest cost transmitter implementations will transmit both sidebands which are separated in frequency by 10 MHz. This frequency separation provides relief from multi-path nulls and interference. A selectable sideband receiver can pick the sideband which yields the best performance at the time. The frequency offset of the sidebands from the carrier by 5.25 MHz provides a tremendous benefit in terms of RF link LO accuracy require-

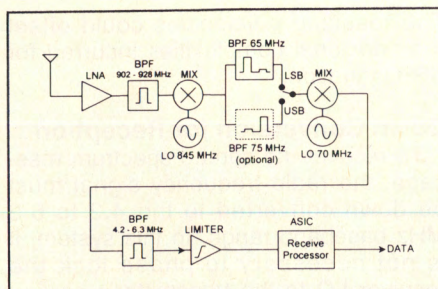


Figure 11. Double conversion receiver block diagram.

ments. If the sidebands started right at the carrier (as they do in classical direct sequence PSK systems), a slight LO frequency offset would cause "folding" of the sideband energy and destructive cancellation of the message information. With the sideband energy spaced far from the carrier, moderate frequency offsets are not destructive.

There are several methods that can be used for single sideband down conversion of the RF signal. Probably the simplest implementation is the single conversion scheme in Figure 10. This approach

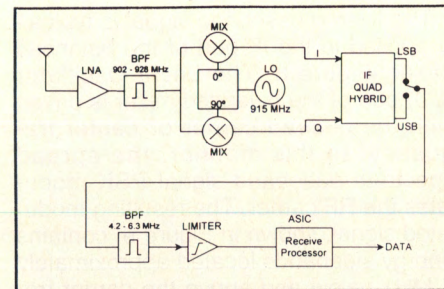


Figure 12. Image rejection receiver block diagram.

relies on a low loss narrow band RF filter for sideband rejection. A low cost helical or SAW based filter can be employed to achieve sideband selection. The LO can be implemented with a simple SAW resonator oscillator circuit. The mixer may be active or passive and need not be balanced due to the wide separation in RF and baseband frequencies. A simple L-C bandpass filter passes the 4.2 to 6.3 MHz baseband signal and determines the receiver noise bandwidth.

The double conversion method places the sideband selection filter at a lower


High Performance Attenuators

Manual Step Attenuators

837	50Ω	DC-1500MHz	0-102.5dB	.5dB Steps
839	50Ω	DC-2000MHz	0-101dB	1dB Steps
1/839	50Ω	DC-1000MHz	0-22.1dB	.1dB Steps
847	75Ω	DC-1000MHz	0-102.5dB	.5dB Steps
849	75Ω	DC-1500MHz	0-101dB	1dB Steps
1/849	75Ω	DC-500MHz	0-22.1dB	.1dB Steps
860	50Ω	DC-1500MHz	0-132dB	1dB Steps
865	600Ω	DC-1MHz	0-132dB	1dB Steps
870	75Ω	DC-1000MHz	0-132dB	1dB Steps

Programmable Attenuators

4440	50Ω	DC-1500MHz	0-130dB	10dB Steps
4450	50Ω	DC-1500MHz	0-127dB	1dB Steps
1/4450	50Ω	DC-1000MHz	0-16.5dB	.1dB Steps
4460	50Ω	DC-1500MHz	0-31dB	1dB Steps
4480	50Ω	DC-1500MHz	0-63dB	1dB Steps
4540	50Ω	DC-500MHz	0-130dB	10dB Steps
4550	50Ω	DC-500MHz	0-127dB	1dB Steps
1/4550	50Ω	DC-500MHz	0-16.5dB	.1dB Steps
4560	50Ω	DC-500MHz	0-31dB	1dB Steps
4580	50Ω	DC-500MHz	0-63dB	1dB Steps

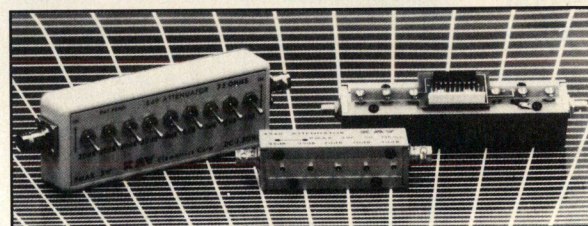

- ✓ New Low Prices
- ✓ Dependability
- ✓ Impressive Accuracy
- ✓ Quick Delivery

For price list and FREE catalog contact:

KAY

Kay Elemetrics Corp.
12 Maple Avenue, PO Box 2025
Pine Brook, NJ 07058-2025 USA
TEL: (201) 227-2000
FAX: (201) 227-7760

Getting on the CEBus

The signaling techniques described in the article were developed by Intellon Corporation. The RF Modem ASIC is available from:

Intellon Corporation
5150 West Highway 40
Ocala, FL 34482
Tel: (904) 237-7416

CEBus Product Development
Seminars are offered by:

The Training Department
5755 SW Natchez
Tualatin, OR 97062
Tel: (503) 692-8296

The EIA Home Automation System standard for CEBus EIA/IS-60 is available from:

Global Engineering Documents
2805 McGaw Avenue
Irvine, Ca 92714
Tel: (714) 261-7892

Papers concerning consumer electronics and home automation are published by:

IEEE International Conference on Consumer Electronics
Diane D. Williams
Conference Coordinator
67 Raspberry Patch Drive
Rochester, NY 14612-2868

quadrature hybrid circuit. Either sideband may be selected by switching the output of the baseband hybrid. The LO hybrid could be a printed micro-strip structure or a surface mount pre-packaged phase shift network. The baseband hybrid can be made using small torroid cores or active phase shift circuits. The unwanted sideband can be rejected by the required 20 dB using low cost components. The amplitude and phase balance requirements on the I and Q path set the limit of sideband rejection at about 30 dB.

All of the receiver implementations require a high gain limiter stage to provide the majority of the system gain. The baseband frequency range of 4.2 to 6.3 MHz is easily accommodated by many of the available IF amplifier/limiter ICs. Gain of 90 dB is typical and is sufficient for a high performance receiver. By placing most of the gain at low frequencies, receiver parts' cost can be kept very low. The limiter is able to respond to rapid variations in signal levels more easily than AGC based designs. The limiter stage provides a low impedance

intermediate frequency, Figure 11. Simple L-C or helical bandpass filters fabricated for the 50 to 300 MHz range may be employed. The double conversion process can yield much better rejection of the unwanted sideband and other spurious signals. The additional complexity may be acceptable for high per-

formance receivers.

Image rejection down conversion is another possible method of sideband selection, as shown in Figure 12. This technique employs two mixers driven by a quadrature LO at the center frequency. The resulting I and Q baseband signals are combined in a low frequency

WBE

Circle Info/Card #125 for Catalog and Price List

For faster service fax ad and address information to 602-254-1570

HYBRID POWER DIVIDER/COMBINERS

Models A66 and A67 are hybrid splitter/combiners with exceptional bandwidth and performance for instrumentation and communications. Applications include signal splitting, combining, mixing, and phasing. Due to the high port-to-port isolation, effects of impedance changes, shunts, or disconnections at one or more ports have a minimum effect on the insertion loss or impedance match through the other ports. This high isolation also minimizes intermodulation problems caused by mixing between signal sources.

Each Model A66 or A67 is individually tuned for optimum performance.

Connector options are available. 3-Way, N-Way, and Special Couplers are available. Quantity and O.E.M. pricing.



Model	N-Way	Freq. Range MHz	VSWR (max)	Loss (max) back-back dB	Isolation (with matched input termination) dB	Response Flatness dB	Max Power to Input	Max Power to Output
A66	2	1-500	1.5:1	.7	20	±.25	.5 Watts	.25 Watts
		2.5-300	1.1:1	.30	35	±.1		
A66GA	2	1-500	1.5:1	.7	20	±.25		
		2.5-400	1.1:1	.5	40	±.15		
A66L	2	.3-100	1.5:1	.5	35	±.2		
		1-50	1.1:1	.2	40	±.06		
A66U	2	5-1000	1.2:1	1.0	30	±.3		
A67	4	1-500	1.5:1	1.0	20	±.25		
		2.5-300	1.2:1	.5	30	±.1		

WIDE BAND ENGINEERING COMPANY, INC.

P. O. Box 21652, Phoenix, AZ 85036

Phone: (602) 254-1570

Fax: (602) 254-1570

INFO/CARD 125

output of 100 mV peak-to-peak to the ASIC RX input.

As discussed, the suppression of the unwanted sideband should be at least 20 dB to prevent destructive cancellation of the message information. This will yield good performance in low cost implementations. A strong interfering signal located in the area of the unused sideband can cause performance degradation. Typically, this will be a Part 15 device with moderate transmit power and the process gain of the system will overcome the interference. System performance can be improved by better rejection of the unwanted sideband.

RF Modem ASIC

All of the functions required to implement this new signaling technique have been integrated into a single low cost ASIC shown in Figure 1. The ASIC is housed in a 28 pin small outline surface mount package. A single power supply of +5.0 V and 25 mA is required. The ASIC has a total of 11 lines for interface to the host microprocessor. The ASIC provides all of the timing requirements

specified by the EIA CEBus physical Layer Specification. The host controller is not responsible for any physical layer timing. During transmit the only responsibility of the host is to provide the ASIC with encoded data 8 USTs at a time, and to monitor the status indicators provided. In receive mode, the ASIC demodulates the incoming signal and presents the recovered data to the host, 8 USTs at a time. During receive, the host must decode the incoming USTs and monitor the status indicators provided.

Conclusion

A new signaling method which has been optimized for operation under the FCC Part 15 direct sequence spread spectrum rules has been developed. A complete baseband modem which fully implements the CEBus RF Physical Layer has been designed in the form of a single low cost ASIC. The relaxed requirements for transmitter and receiver designs permit low cost implementations. The high level of integration achieved enables the design of compact RF data products with robust performance. **RF**

References

1. FCC Part 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz (provisions for spread spectrum intentional radiators).
2. EIA IS-60.3, Part 5 - RF Physical Layer and Medium Specifications.
3. FCC Part 15.247 (e) Process gain of direct sequence systems.
4. Robert C. Dixon, *Spread Spectrum Systems*, Wiley Interscience.


About the Author

Greg Magin is a senior analog engineer for Intellon Corporation. He has been involved with the design and development of low cost commercial and consumer communication devices for the past 12 years. Present responsibilities are project engineer for the spread spectrum RF product line. He can be reached at 5100 W. Silver Springs Blvd., Ocala, FL 34482 or by phone at (904) 237-7416.

Sprague® EMI/RFI Filters

Top performance...broad availability...subminiature size
for feed-thru applications

Count on Sprague® for the precise filter performance you need for both commercial and military applications—and a delivery schedule to match. We're ready to meet your project requirements with a wide choice of standard MLC (multi-layer ceramic) capacitor and capacitor/inductor filter configurations. All provide maximum insertion loss over a wide frequency range. In addition, Sprague® is on the QPL for MIL-F-15733 and MIL-F-28861 for many of the most active slash sheets. For technical information contact Sprague®, 1600 Curran Memorial Highway, North Adams, MA 01247. Phone: (413) 664-4431. Fax: (413) 662-2494. For literature phone: (402) 563-6572.



A COMPANY OF
VISHAY
SPRAGUE®

SPRAGUE Ceramic EMI/RFI Filter Circuits

Type	Decade	Current Rating	
		DC	AC
C	20 dB	7 - 15	5 - 15
L1	40 dB	0.1 - 20	0.1 - 15
L2	40 dB	0.1 - 10	0.1 - 15
Pi	60 dB	0.1 - 10	—
T	60 dB	0.1 - 15	0.1 - 4.0
LL1-2	80 dB	0.1 - 3.0	0.1 - 2.0

Frequency Translation of a Baseband Signal

By Eric A. Adler, Edward A. Viveiros and John T. Clark
Army Research Laboratory

In communications and radar systems, baseband signals are often upconverted to higher frequencies for transmission where typically only the upper or lower sideband is transmitted. Baseband signals described in this paper are broadband and do not extend down to DC. Frequency translation of baseband signals results in the local oscillator (LO) leakage signal and an undesired sideband very close in frequency to the desired sideband. The frequency separation between the desired sideband and the LO leakage signal at the intermediate frequency (IF) output of the mixer is equal to the frequency separation between the lower extent of the radio frequency (RF) mixer input signal and DC. The undesired sideband will be twice that distance from the desired sideband. This creates a problem in filtering the desired sideband from the other sideband and LO leakage.

This problem is further complicated when the upconverted signal is required to have a flat amplitude and linear phase response over a wide bandwidth. This is the case for some radar systems, which use linear frequency modulation (FM) (or chirp) waveforms. Any distortion to the amplitude or phase response will degrade the system performance by spreading the main lobe (decreasing resolution) or generating undesired sidelobes (false targets) in the range response.

This paper describes a technique for obtaining a single IF with minimum amplitude and phase distortion and without the other sideband or LO leakage. The system described will translate a baseband chirp signal, 15 to 45 MHz bandwidth, 100 ms period, and 50 percent duty cycle to an IF centered at 180 MHz.

System Design

The most common problem in frequency translation is the generation of intermodulation products (spurious signals) which fall within or just outside the

desired IF band. Multiple frequency conversion schemes, in which an IF is generated, are often used to achieve better spurious signal levels than can be obtained in single conversion architectures. The IF products out of a mixer include the upper and lower sidebands ($LO \pm RF$), the intermodulation products, and leakage from the RF and LO signals.

The RF input power to a double-balanced mixer is usually set at a low level to minimize the spurious products which result from the mixing process. The two-tone, third-order intermodulation products are of particular concern since they often fall within the desired IF passband. This two-tone intermodulation problem primarily occurs in receiving systems with multiple simultaneous input signals, but can also occur in an exciter design when using waveforms that have close-in spurious signals, such as direct digital synthesizers. This problem can be controlled by setting the maximum RF input

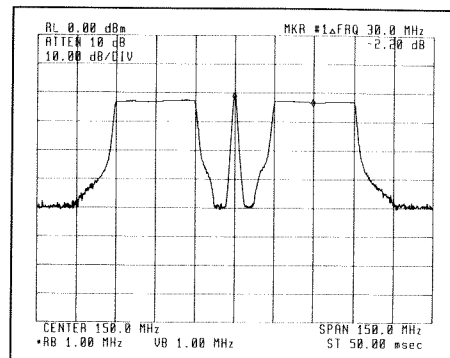


Figure 1. IF output of standard double balanced mixer.

power to the mixer at a level to achieve a required spurious-free dynamic range (SFDR). A rule of thumb is to set the RF power 20 dB below the input 1 dB compression point to achieve 60 dB SFDR. In a typical mixer, this results in the upper and lower sidebands having approximately the same power level as

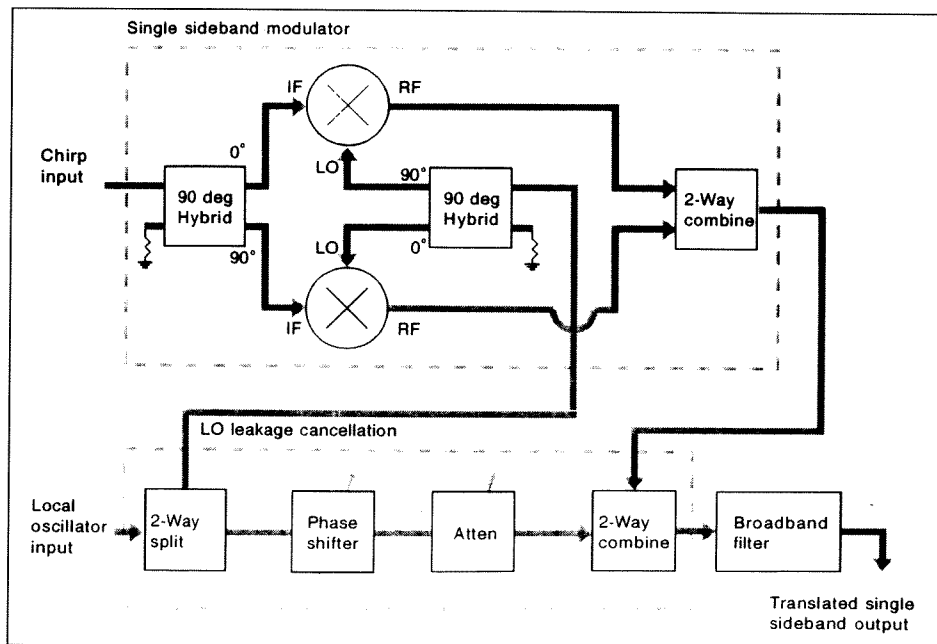


Figure 2. Block diagram of SSB upconverter including single sideband modulator, LO cancellation circuit, and broadband filtering.

In the race to market, we offer you a few shortcuts.



If you need magnetics for your prototype, our Designers Kits can get you off and running fast!

Each assortment puts a wide range of values right at your fingertips. So there's no need to waste hours calling around for samples or winding your own.

And when you're ready for production, you'll find we stock just about all the parts in our kits at low, factory-direct prices.

Call today and you can have your kit tomorrow! To order phone 800/322-2645.

Surface Mount Kits

1008 Surface Mount Inductors

Inductance: 4.7 nH - 10 μ H
42 values (10 of each) **Kit C100 \$125**

0805 Surface Mount Inductors

Inductance: 3.3 nH - 220 nH
19 values (10 of each) **Kit C103 \$60**

"Spring" Surface Mount Air Core Inductors

Inductance: 2.5 nH - 43 nH
10 values (12 of each) **Kit C102 \$60**

RF Inductor Kits

"Unicoil" 7/10 mm Tuneable Inductors

Inductance: .0435 μ H - 1.5 μ H
49 shielded, 49 unshielded (2 of each)
Kit M102 \$60

"Unicoil" 5 mm Tuneable Inductors

Inductance: 9 nH - 281 nH
19 Shielded, 19 unshielded (2 of each)
Kit M105 \$60

"Slot Ten" 10 mm Tuneable Inductors

Inductance: 0.7 μ H - 1143 μ H
18 shielded, 18 unshielded (3 of each)
Kit M100 \$60

"Slot Seven" 7 mm Tuneable Inductors

Inductance: 0.094 μ H - 275 μ H
39 values (3 of each) **Kit M106 \$60**

Axial Lead Chokes

Inductance: 0.1 μ H - 1000 μ H
25 values (5 of each) **Kit F102 \$50**

Horizontal Mount Inductors

Tuneable and fixed
Inductance: 31.5 nH - 720 nH
33 values (3 of each) **Kit M104 \$60**

EMI/RFI Filter Kits

Common Mode Data Line EMI Filters

Attenuation: 15 dBm, 1.5 - 300 MHz
DC current capacity: 100 mA
2, 3, 4, 8 line, surface mount and leaded (4 each)
Kit D103 \$75

Common Mode Line Chokes

Current: .25 - 9 Amps rms
Inductance: 508 μ H - 10.5 mH
8 styles (2 of each) **Kit P202 \$100**

Power Magnetics Kits

Current Sensors

Sensing range: 0.5 - 35 Amps
Freq. resp.: 1 - 100 kHz, 50 - 400 kHz
Transformer and sensor-only versions
8 styles (15 total pieces) **Kit P203 \$50**

Base/Gate Driver Transformers

Inductance: 1.5 mH Min. Freq: 10 - 250 kHz
2 single, 2 double section (2 of each)
Kit P204 \$50

Mag Amp Toroids

Current: 1.5 Amps
Volt-time product: 42 - 372 V - μ sec
6 styles (2 of each) **Kit P206 \$100**

Power Filter Chokes

Current: 3, 5, 10 Amps Inductance: 5 - 300 μ H
18 styles (48 total pieces) **Kit P205 \$75**

Axial Lead Power Chokes

Current: .04 - 4.3 AC Amps
Inductance: 3.9 μ H - 82 μ H
30 values (2 of each) **Kit P209 \$150**

Other Magnetics Kits

Low Pass LC Filters

Poles: 3, 5 and 7 Cutoff frequency: 17 MHz
Impedance: 50 Ohms
3 filters (4 each) **Kit D102 \$60**

Coilcraft

eem/electronic engineers master See our catalog in Vol. A, Section 1800

1102 Silver Lake Rd., Cary IL 60013 800/322-2645 Fax 708/639-1469

INFO/CARD 28

the LO leakage signal. SFDR in this context relates the power level of spurious signals within the desired IF band relative to the IF signal power.

The selection of the intermediate frequency is important since filtering becomes more difficult as the baseband signal is converted to a higher IF. This occurs because the desired IF signal will have the same frequency separation from the LO leakage and undesired sideband. Designing a filter with a wide, flat passband, linear phase response and sharp rolloff to sufficiently attenuate the undesired, close-in signals is an extremely difficult task and will be addressed later.

Single Sideband Modulation


Translating the 15 to 45 MHz chirp signal to an IF centered at 180 MHz with a standard double-balanced mixer produces an IF spectrum, as shown in Figure 1. The input power of the chirp was selected at -15 dBm for SFDR considerations. The IF signal from 165 to 195 MHz is the desired sideband. Note that the power levels of the two sidebands are equal and the 150 MHz LO leakage signal is also approximately the same amplitude.

Since the undesired sideband is only 30 MHz away from the desired sideband, it is difficult to design a filter to effectively remove it (>60 dB suppression) without distorting the phase or amplitude response of the chirp. The undesired sideband can be attenuated by using a single sideband (SSB) modulator (1) instead of the double-balanced mixer. An SSB modulator with LO cancellation is illustrated in Figure 2.

In the SSB modulator, the LO signal is split between two mixers and the RF is split with a quadrature hybrid, which shifts one of the outputs by 90 degrees. The mixer outputs are combined through another quadrature hybrid, which shifts one of the IF's by an additional 90 degrees for a total phase difference of 180 degrees. The input and isolation ports of the second quadrature hybrid are used as output ports of the SSB modulator. One of these ports provides the upper sideband as the output. The port that is not used should be terminated in a matched load. The output spectrum of the SSB modulator is shown in Figure 3. This plot shows the undesired IF signal is suppressed by 20 dB. The LO leakage signal is suppressed by approximately 25 dB, while the desired IF signal is undistorted.

New RF Amplifier New Performance Features Traditional ENI Reliability

**100 Watts
400-1000MHz**

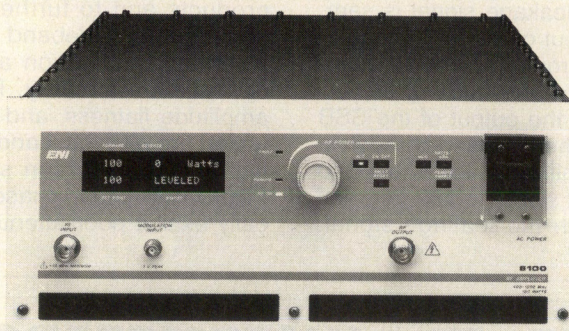

ENI's 6100 Amplifier offers new performance features and solid state reliability for EMC and broadband component testing, communications transmission, ATE, and general laboratory use:

- ☐ 51dB Class AB Linear Gain.
- ☐ Automatic Level Control maintains power output over a 30dB range with ± 0.3 dB flatness.
- ☐ Internal Microprocessor Control provides forward and reflected power readouts with 1W resolution.
- ☐ Standard IEEE and RS232 / 422 Interfaces for easy link-up to your system components.

ASK FOR OUR NEW CATALOG! For complete technical information on the 6100/630L,* contact the ENI office nearest you.

ENI™

*Also Available

Model 630L: 30W Class A output, 400 to 1000MHz

World Headquarters

ENI, A Division of Astec America, Inc.
100 Highpower Road,
Rochester, NY 14623 USA
Tel: (716) 427-8300,
FAX: (716) 427-7839

Sales & Service Offices

Santa Clara, CA
Welwyn Garden City, UK
Gerlingen, Germany
Tokyo, Japan
Osaka, Japan

LO Leakage Cancellation

The LO leakage, which is still present after SSB modulation, can be further attenuated by inserting a notch filter after the mixer. Designing a notch filter with a narrow rejection bandwidth, a wide passband (30 MHz), and minimal phase and amplitude distortion within the passband is extremely difficult. The LO leakage signal can be reduced by injecting a sample of itself 180 degrees out of phase and equal amplitude into a power combiner, as shown in Figure 2. The vector addition of these two signals results in cancellation of the LO signal. The degree of cancellation is strongly a function of the amplitude and phase of the LO leakage signal and the injected sample. The LO leakage signal is sampled at the LO input of the SSB modulator and passed through a variable attenuator to match the amplitude of the LO leakage signal at the output of the SSB modulator. It is then passed through a variable phase shifter, which is used to tune the sampled signal to 180 degrees out of phase with the leakage signal.

The two signals are then summed in a standard two-way combiner. The amount of LO leakage cancellation attained varies, depending on how well the amplitude is matched and how accurately the phase is tuned to 180 degree difference. For our example, the LO leakage is well below the spectrum analyzer noise floor, as illustrated in Figure 4. Further analysis showed the LO cancellation is on the order of 40 dB. The LO cancellation circuit also resulted in an additional 3 dB insertion loss in the desired IF.

Linear Phase Filtering

Additional filtering is required to remove all out-of-band intermodulation products and to further attenuate the undesired IF sideband after the single sideband modulation and LO leakage cancellation circuitry. Phase linearity, amplitude flatness, and stopband attenuation are all critical and somewhat conflicting parameters in selecting a filter. Filters with linear phase response typically exhibit poor attenuation rolloff and

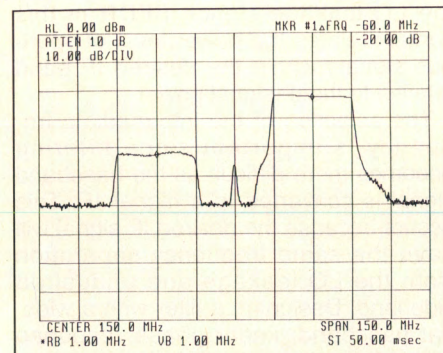


Figure 3. IF output of SSB modulator.

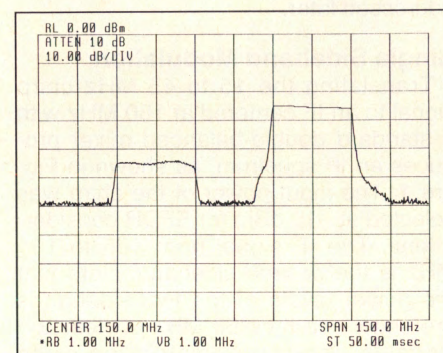


Figure 4. IF output of SSB modulator with LO cancellation.

passband amplitude response (Bessel and Gaussian), while those filters with good rolloff and passband amplitude response have poor phase response within the filter passband (Butterworth and Chebyshev)(2). Additional poles could be added to increase the stopband attenuation but would result in increased phase distortion. The phase response of filters becomes nonlinear in the transition region from passband to stopband and can be seen as a deviation from flatness in the group delay response of the filter since the group delay is the derivative of the phase response.

In our system, the LO leakage will be 15 MHz away and the other sideband will be 30 MHz away, regardless of the choice of IF. The selectivity of bandpass filters is related to the ratio of its 3 dB bandwidth to its center frequency. As the ratio decreases, so does the selectivity. Since the bandwidth of the baseband signal is fixed, a higher IF (and center frequency) results in decreased filter selectivity.

Linear phase filtering is an active subject in filter design but is outside the scope of this paper. A simple approach to linear phase filtering is to use a filter

BIRD™ WATTMETERS, ELEMENTS, ATTENUATORS AND LOADS

We earned our position as the leading Bird distributor with a big inventory, good prices, quick delivery and service. We would like to earn your business... please call today.




2050 S. Bundy Drive
Los Angeles CA 90025
Toll Free: 1-800-877-7979
Or: 1-310-820-1234
FAX: 1-310-826-7790




ALSO IN STOCK:

AEA DATA
AOR
ASTRON
BECKMAN
CENTURIAN
CUSHCRAFT
FANON
HENRY
HOXAN
ICOM
JABRO
KANTRONICS
LARSEN
MAXON
OPTO
PIPO
RADIUS
TEMPO
UNIDEN
YAESU

INFO/CARD 30

TTE*America's Filter Specialist since 1956***PASSIVE BANDPASS FILTERS**

- Designs Include: Bessel, Butterworth, Chebyshev and Elliptical Function • Number of Poles: 2 to 6 • Frequency Range: 100Hz to 3000MHz • Package Styles: PCB, BNC or SMA
- Guaranteed Shipment: 10 Working Days ARO (QTY 1-10)

PASSIVE LOWPASS FILTERS

- Designs Include: Bessel, Butterworth, Chebyshev and Elliptical Function • Number of Poles: 2 to 11 • Frequency Range: 10Hz to 3000MHz • Package Styles: PCB, BNC or SMA • Guaranteed Shipment: 10 Working Days ARO (QTY 1-10)

PASSIVE DIPLEXERS & DUPLEXERS


- Designs Include: Butterworth and Chebyshev
- Types: Contiguous or Noncontiguous



- Passbands • Number of Poles: 2 to 6 • Frequency Range: 10kHz to 3000MHz • Package Styles: SMA • Shipment: 10 Working Days ARO (QTY 1-10)

PASSIVE HIGHPASS FILTERS

- Designs Include: Bessel, Butterworth, Chebyshev and Elliptical Function • Number of Poles: 2 to 11 • Frequency Range: 100Hz to 3000MHz • Package Styles: PCB, BNC or SMA • Guaranteed Shipment: 10 Working Days ARO (QTY 1-10)

**NEW****STANDARD FILTERS FROM \$10⁹⁵**

A few of the features of this new Micro-Miniature series are • <1dB insertion loss (LPF) • >40dB stopband rejection • 60dB/octave roll off • 50Ω impedance • VSWR ≥ 1.7:1 • Hermetically sealed DIP & PCB cases • BNC packages available • QC program based on MIL-1-45208 • CAGE CODE 07766

LOWPASS • DIP Cases, DC to 200MHz**BANDPASS** • DIP Cases, 10.7MHz to 200MHz


Model No.	Passband		Stopband 40dB Min@	Model No.	F _o - Center Freq.	%BW @3dB
	1dB Max@	3dB Nom@				
DL-5	5MHz	6MHz	10MHz	DK-10.7-5P	10.7MHz	5%F _o
DL-10.7	11MHz	14MHz	24MHz	DK-21.4-5P	21.4MHz	5%F _o
DL-21.4	22MHz	24.5MHz	41MHz	DK-30-5P	30.0MHz	5%F _o
DL-30	32MHz	35MHz	61MHz	DK-40-5P	40.0MHz	5%F _o
DL-50	48MHz	55MHz	90MHz	DK-50-5P	50.0MHz	5%F _o
DL-70	60MHz	67MHz	117MHz	DK-60-5P	60.0MHz	5%F _o
DL-90	81MHz	90MHz	157MHz	DK-70-5P	70.0MHz	5%F _o
DL-100	98MHz	108MHz	189MHz	DK-100-5P	100.0MHz	5%F _o
DL-150	140MHz	155MHz	300MHz	DK-150-5P	150.0MHz	5%F _o
DL-200	190MHz	210MHz	390MHz	DK-200-5P	200.0MHz	5%F _o

Case 484 is 0.4" x 0.8"H x 0.4"H. Case 1212 is 1.2" x 1.2" x 0.5"H.

Need technical assistance? Call our engineering hot line (310) 445-2793.

TTE, Incorporated 2251 Barry Avenue West Los Angeles, CA 90064 FAX: (310) 445-2791 TEL: (310) 478-8224

NEW Isolating Protector

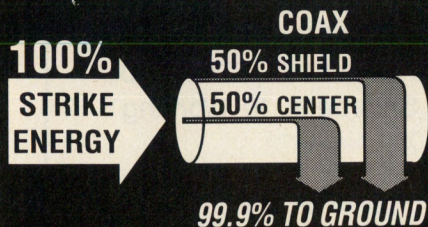

New IE Series Protector Stops Lightning on Coax Line

Our patented Isolated Equipment (IE) Series Protectors ground and then *isolate* both the *shield* and the *center* conductor of your coax line. Lightning is diverted to the outside ground system. It can not travel to the equipment chassis and follow the electrical wires to ground which can happen with all other type protectors including 1/4 wave shorted stubs. The IE Series Protectors are available from 1.5MHz to 2.6GHz (to 20GHz Special). This innovative and unique series is **99.9% effective**, setting a whole new meaning to the term "Coax Protector". Of course it's from the World Leader in RF coax protection.

1500 models of coax, power and twisted pair protectors ... plus lightning/EMP and grounding solutions.

K PolyPhaser CORPORATION

2225 Park Place
P.O. Box 9000
Minden, NV 89423-9000
(702) 782-2511 • (800) 325-7170
FAX: (702) 782-4476

INFO/CARD 32

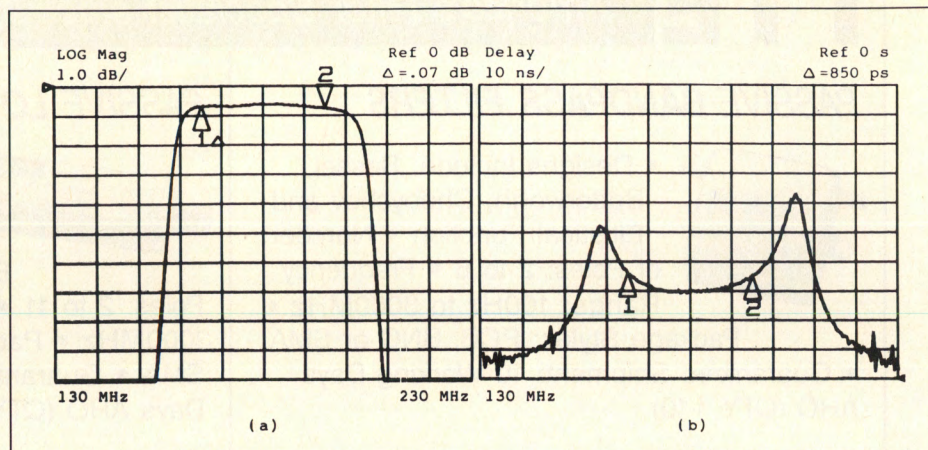


Figure 5. Bandpass filter response a) log magnitude and b) group delay.

with a wider 3 dB bandwidth than is required and minimum passband ripple. The worst amplitude and phase deviations for a filter with good rolloff occur at the 3 dB points of the particular filter. By operating only in a smaller portion of the filter bandwidth, amplitude flatness and phase linearity can be achieved. For the desired 30 MHz signal, a filter with a wide bandwidth, 0.1 dB ripple, centered at an appropriate frequency, is used as shown in Figure 5a. The group delay deviation is shown in Figure 5b. The desired IF band can be placed within the filter bandwidth, away from the nonlinear transition regions, as the markers denote. This filter attenuates the undesired IF band and other intermodulation products. The output of the SSB modulator and bandpass filter is shown in Figure 6. Note the undesired sideband has also been attenuated below the spectrum analyzer noise floor.

Conclusion

A combination of techniques have been used to translate a 30 MHz bandwidth chirp to a higher IF. SSB modulation was used to isolate the desired IF sideband from both the undesired sideband and LO leakage. The LO leakage is further attenuated by injecting a sam-

ple of the LO, from the input of the SSB modulator, which is matched in amplitude and 180 degrees out of phase with the LO leakage into a summing network. Finally, an IF filter with bandwidth wider than is required was used to preserve amplitude flatness and phase linearity of the chirp, as well as to attenuate the other sideband, LO leakage, and all intermodulation products outside the desired IF band.

RF

Acknowledgement

The authors would like to thank Phuong Phu of the Army Research Laboratory for her assistance in assembling and testing the hardware.

References

1. S.A. Maas, *Microwave Mixers*, Artech House, Norwood, MA, 1986.
2. A.I. Zverev, *Handbook of Filter Synthesis*, John Wiley and Sons, Inc., New York, 1967.

About the Authors

Eric Adler is a senior design engineer currently working on a multi-mode radar receiver/exciter for SAR/MTI applications. His past experience includes narrowband frequency excision techniques for wideband COMINT systems. Edward Viveiros is currently a senior design engineer. He has worked on several radar (MTI and SAR) and COMINT systems in receiver, exciter, frequency synthesizer, and system design. John Clark is a design engineer, working on MTI and SAR systems.

This work is part of the wideband receiver/exciter design for the moving target technology program. All authors work in the Signal Processing Systems Branch of the Army Research Laboratory, 2800 Powder Mill Rd., Adelphi, MD 20783-1197. Tel: (301) 394-4160.

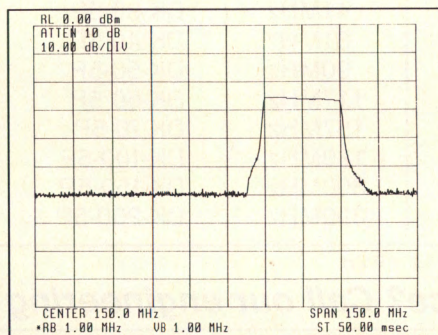


Figure 6. IF output of SSB modulator with LO cancellation and filter.

ULTRA-BROADBAND RF POWER AMPLIFIER SYSTEMS

From KALMUS ENGINEERING, Of Course!



EMI-EMC-RFI

- AC Operation
- Fully Protected
- Drive Mismatched Loads
- No VSWR Shutdown
- ALC Flat Gain Response
- Remote Functions
- Lowest Prices

ALL SOLID-STATE MOS-FET RF AMPLIFIER SYSTEMS

	MODEL	RF OUTPUT	FREQUENCY RANGE	GAIN	USA PRICE
	700LC	1.5W CW	.003-1000 MHz	33dB	\$ 1,695
	704FC	4W CW	.5-1000 MHz	33dB	\$ 2,195
	210LC	10W CW	.008-225 MHz	40dB	\$ 2,495
	710FC	10W CW	1-1000 MHz	40dB	\$ 6,695
	*727LC	10W CW	.006-1000 MHz	44dB	\$ 7,750
NEW	713FC	15W CW	10-1000 MHz	42dB	\$ 4,250
	225LC	25W CW	.01-225 MHz	40dB	\$ 3,295
	*737LC	25W CW	.01-1000 MHz	45dB	\$ 9,995
	712FC	25W CW	200-1000 MHz	45dB	\$ 6,950
NEW	714FC	30W CW	10-1000 MHz	45dB	\$ 9,950
	250LC	50W CW	.01-225 MHz	47dB	\$ 5,250
	715FC	50W CW	200-1000 MHz	47dB	\$ 16,990
	707FC	50W CW	400-1000 MHz	50dB	\$ 9,990
NEW	716FC	50W CW	10-1000 MHz	47dB	\$ 17,950
	*747LC	50W CW	.01-1000 MHz	47dB	\$ 19,500
	116FC	100W CW	.01-225 MHz	50dB	\$ 8,800
	709FC	100W CW	500-1000 MHz	50dB	\$ 16,990
	717FC	100W CW	200-1000 MHz	50dB	\$ 19,500
NEW	718FC	100W CW	10-1000 MHz	50dB	\$ 26,950
	*757LC	100W CW	.01-1000 MHz	50dB	\$ 29,950
	122FC	250W CW	.01-225 MHz	55dB	\$ 14,650
	723FC	300W CW	500-1000 MHz	55dB	\$ 29,995
	LA500G	500W CW	500-1000 MHz	57dB	\$ 53,500

RUGGED VACUUM TUBE DISTRIBUTED AMPLIFIERS

	116C	100W CW	.01-220 MHz	50dB	\$ 9,295
	122C	200W CW	.01-220 MHz	53dB	\$ 11,750
	134C	500W CW	.01-220 MHz	57dB	\$ 19,800
	137C	1000W CW	.01-220 MHz	60dB	\$ 27,550
	140C	2000W CW	.01-220 MHz	64dB	\$ 44,990

Warranty: Full 18 months all parts. Vacuum tubes 90 days.

* Indicates Dual-Band System (coaxial band switching)



1-800-344-3341
(206) 485-9000 fax (206) 486-9657
21820-87th S.E. Woodinville, WA 98072 USA
INFO/CARD 33

The World's Most Complete Line of RF Power Amplifiers

More Than 200 Standard Models
to Choose From


Radios for the Future: Designing for DECT

By Benny Madsen and Daniel E. Fague
National Semiconductor

Nations worldwide are implementing standards that will transform today's conventional land line phone system to an untethered network of services. A first step in achieving this goal is the implementation of digital telephony standards for both cellular and cordless telephones. One of the first digital cordless standards to be implemented is the Digital European Cordless Telecommunications (DECT) standard, a pan-European standard designed to connect all of Europe with a common digital cordless system. This article introduces a new 2 GHz radio architecture which implements the Digital European Cordless Telecommunications (DECT) standard.

The DECT standard presents the radio designer with a number of challenges. For example, a DECT phone must provide all the capabilities of a standard cellular phone at roughly twice the operating frequency, and satisfy user demand for portability: small size, lightweight, long talk and standby times. These requirements make a strong case for integrated RF solutions. Table 1 shows a summary of the key specifications for DECT as well as other digital cordless standards.

The DECT system is based on Time Division Duplex, Time Division Multiple Access (TDD/TDMA). This technique of duplexing uses separate timeslots on a single carrier for transmitting and receiving signals. Figure 1 shows the structure of the DECT TDD/TDMA frame. The complete frame is 10 ms in duration, with a 5 ms transmit and a 5 ms receive sub-frame. Each sub-frame is divided into 12 timeslots of 480 bit times in duration (416.67 μ s). When a communication link is made, a transmit and receive timeslot is assigned to the users. Normally the same timeslot number (i.e., T3 and R3) is used for both transmit and receive. Multiple users are accommodated by assigning different timeslots to different users. This method requires the transmitter to be turned off while receiving and the receiver to be turned off while transmitting. This method of

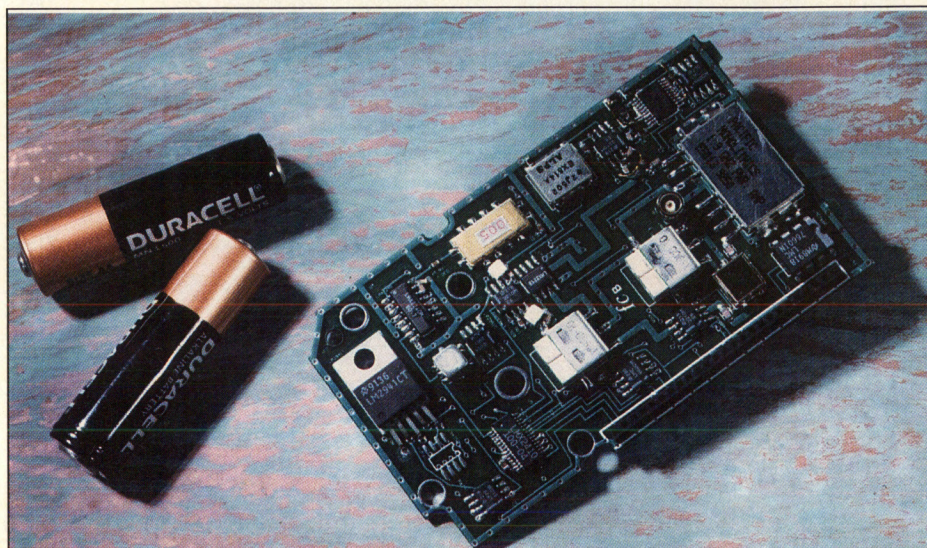

duplexing places strict requirements on the Phase Locked Loop (PLL). It must switch fast and have low spurious noise.

Applicability to the U.S.

In the United States, the FCC has proposed allocating 20 MHz within the Emerging Technologies (ET) band for "non-licensed" Personal Communications Systems (PCS), with 10 MHz allocated for voice type (isochronous) services. The U.S. can choose to modify a standard already developed, like DECT with a frequency almost identical to that proposed by the FCC, or develop its own. The following explains how DECT could be modified to meet the proposed U.S. requirements.

Modulation method — DECT employs a frequency modulation scheme, called Gaussian-shaped frequency shift keying, which could be used in the PCS ET band. Frequency modulation schemes have a number of advantages, including the use of more efficient power amplifiers to lower power consumption. In addition, FM techniques allow the use of limiter/frequency discriminator structures for demodulation. These structures are simple to use and build, as opposed to fully linear receivers requiring sophisti-

cated gain control.

Channel bandwidth vs. data bit rate — The DECT bit rate (1.152 Mb/s) and channel spacing (1.728 MHz) limits spectral efficiency to about 0.67 bits/sec/Hz. As a single parameter, the spectral efficiency is not sufficient for determining the capacity in systems like DECT or any other small cell system. System capacity is a function of cell size (transmitted power), frequency reuse distance, available frequency range, and spectral efficiency. The frequency reuse distance is determined by the receivers' ability to cope with interference from unwanted transmitters; interference on the same channel (co-channel) or adjacent channels. A receiver's ability to cope with same channel and adjacent channel interference is determined by the chosen modulation scheme, as well

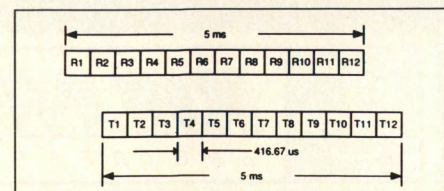


Figure 1 - TDD/TDMA frame structure for DECT.

Parameter	DECT	CT-2	USER PCS	PHP
Origin	ETSI	UK	US	Japan
Access	TDMA & FDMA/TDD	FDMA/TDD		TDMA/TDD
Modulation	GFSK	GFSK		$\pi/4$ -DQPSK
Baseband Filter	$B_b T = 0.5$ (Gaussian)	$B_b T = 0.5$ (Gaussian)		$\alpha = 0.5$ (Root Nyquist)
Data Rate	1.152 Mb/s	72 kb/s	≈ 1.0 Mb/s	384 kb/s
FM Deviation	288 kHz	14.4-25.2 kHz		
RF Channels	0: 1897.344 MHz 9: 1881.792 MHz	1: 864.15 MHz 40: 868.05 MHz	1910-1930 MHz	1895-1911 MHz
No. of RF Channels	10	40	4	52
Channel Spacing	1.728 MHz	10 kHz	1.25 MHz	300 kHz
Synthesizer Switching Speed	30 μ s (BS) 450 μ s (HS)	1 ms (ch.-ch.) 2 ms		30 μ s (BS) 1.5 ms (HS)
Frequency Accuracy	50 kHz	10 kHz		3 ppm
Speech ch./RF ch. (Full/Half Rate)	12/24	1/1		4/8
Speech CODEC	32 kb/s ADPCM	32 kb/s ADPCM		32 kb/s ADPCM
Frame Length	10 ms (12 Tx + 12 Rx)	2 ms (1 Tx + 1 Rx)		5 ms (4 Tx + 4 Rx)
Peak Power	250 mW	10 mW		100 mW

Table 1 - A comparison of digital cordless telephony standards

as receiver structure and design.

The narrower 10 MHz frequency band proposed for U.S. isochronous services will require a higher spectral efficiency than DECT. This can be obtained by narrowing the (Gaussian) modulation filter or by using other modulation schemes. Narrowing the filter will limit receiver sensitivity, while other modulation schemes may sacrifice the simple transceiver structure.

Radio Design Issues

Single conversion receiver, direct modulation transmitter — Digital modulation can be done in a couple of ways. Quadrature (I and Q) modulation is highly accurate, and is the method of choice for the digital cellular standards. A quadrature down conversion provides maximum flexibility in the baseband section for any type of demodulation. However, the added circuits that accompany these types of demodulators are costly. Nor-

mally, a Digital Signal Processor (DSP) must be used in the backend, which increases current consumption, and some automatic gain control circuits must be used to ensure that the baseband A/D converter dynamic range is fully utilized. In some systems, a carrier recovery loop such as a Costas Loop must be implemented to recover the carrier's phase.

The TDD/TDMA nature of DECT allows for two simplifications that drastically reduce the radio's complexity. First, the transmitter is on for short bursts of 424 bits, or about 380 ms. This, and a moderate frequency drift tolerance, allow for an open loop, direct modulation of the voltage controlled oscillator (VCO). Second, the receiver is only on for the same short length of time. The argument can be made that in such a short burst of data, a carrier recovery loop is not required, because the phase difference of the local oscillator (LO) will not deviate much in

such a short time. However, the coherent solution will suffer from the frequency drift allowed in DECT. The large frequency drift makes an unlocked LO unacceptable. But, the drift is not too large that a discriminator can't be used. In fact, the drift allowed is about 10 percent or less of the discriminator's bandwidth, making the discriminator a good choice for DECT.

Traditionally, 2 GHz radio designs were limited to at least two down conversions and one up conversion. Figure 2 shows a typical receiver. The second down conversion is necessary because limiting and demodulating at the high IF is difficult and modulating a low frequency VCO is more practical.

For DECT, National Semiconductor chose a single conversion receiver, direct modulation transmitter architecture. This is shown in Figure 3. There are several key features that make this architecture possible. The signal is received at the antenna and filtered with a low loss (typ. 1 dB) antenna filter. The filter is used on the receive side to reduce possible out-of-band interfering signals. On the transmit side the filter is used to attenuate harmonics of the transmitted signal and to reduce possible wide band noise.

The signal then passes the duplexer which can either be a fast switch or circulator. The insertion loss in the duplexer should not exceed 1 dB. From the duplexer the signal enters a low noise amplifier, image reject filter and mixer structure. National Semiconductor provides various IC solutions for receiver front ends, which combine the low noise amplifier (LNA) and mixer circuit. One of them is the LMX2216 shown in Figure 3.

Before the DECT standard was finalized, a group of component and equipment manufacturers had worked out standards for key DECT components, within the framework of a group called ECTEL (European Community Telecommunications). A standard intermediate frequency of 110.592 MHz was chosen by this group. Consequently, a number of manufacturers provide highly selective Surface Acoustic Wave filters for this frequency with low insertion loss (typ. 3 dB) and reasonable group delay characteristics. The adjacent channel selectivity of most of the filters permits FM demodulation on the output of the filter.

Two ways to do FM demodulation are: (1) the limiter/discriminator structure as shown in Figure 3; and (2) PLL tracking of the instantaneous frequency deviation. By first limiting the signal in a high gain amplifier, then mixing the signal

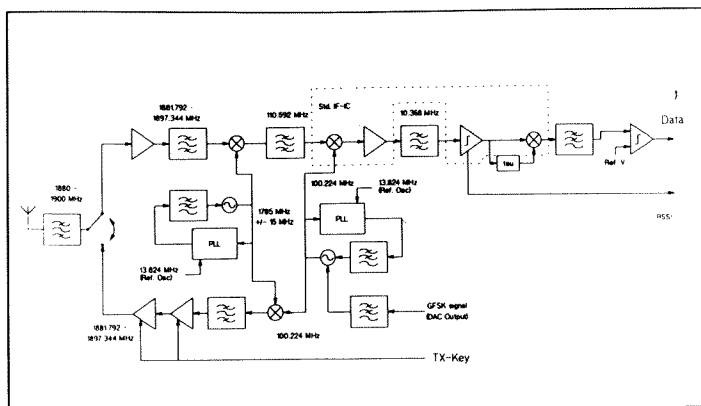


Figure 2 - A block diagram of a typical 2 GHz radio.

with a 90-degree phase shifted replica of itself, the instantaneous frequency deviation is derived. The quadrature tank shifts the phase of the signal 90 degrees, but only at the center frequency. The important parameter of the phase-shifter is a large frequency dependence of the phase-shift. Normally a linear phase-shift dependency of the frequency is desirable. Thus a steep linear phase characteristic is desired. The steepness, though, is determined by the Q of the quad tank, which limits the design possibilities.

For demodulating FM signals at rela-

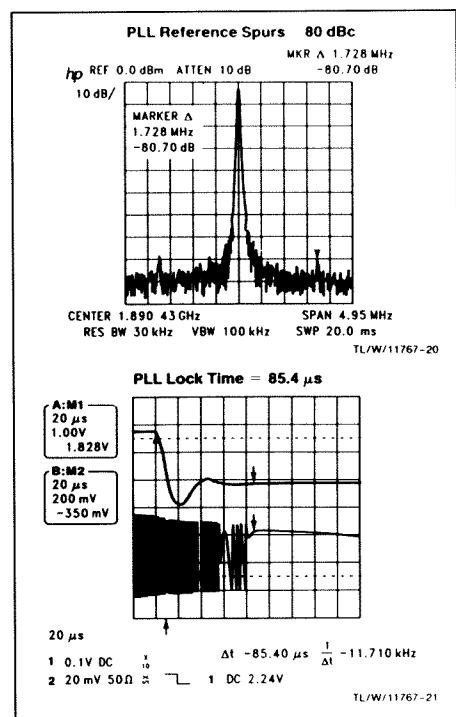


Figure 4 - Lock time and spurious noise performance of National's PLL for the DECT transceiver.

tively high frequencies a phase locked loop is a common solution. The PLL tracks the instantaneous phase and thereby the instantaneous frequency deviation of the received signal. Such solutions are commonly used in satellite TV demodulators. Some of the drawbacks of PLL FM demodulator solutions are less immunity to interference (such as co-channel interference), a significantly higher level of power consumption and increased component cost.

As the demodulated signal leaves the LMX2240, a lowpass filter removes remnants of IF frequency and its harmonics, and improves the signal-to-noise ratio before the signal enters the data comparator. Depending on the signal level at the input of the comparator, the comparator can become crucial to single conversion design. National Semiconductor therefore integrated a high performance data comparator into the LMX2410 baseband processor. The output of the comparator is a binary signal, corresponding to the transmitted binary signal. To derive timing information, the signal is processed by a symbol timing recovery circuit. The symbol timing can either be based on continuously phase locking to the edges of the signal, or burst wise correlating with the known burst signal. The LMX2410 uses the digital PLL method, but simulations show that either of the methods are usable and yield about the same performance.

On the transmit side, the baseband processor includes the Gaussian filter needed to pulse shape the incoming serial binary transmit signal. The baseband processor internally regenerates the transmit clock, eliminating the need for an extra transmit clock line from the digital back-end. The Gaussian filter is implemented by ROM table lookup instead of a conventional FIR or IIR filter. This ROM table and the filter can be

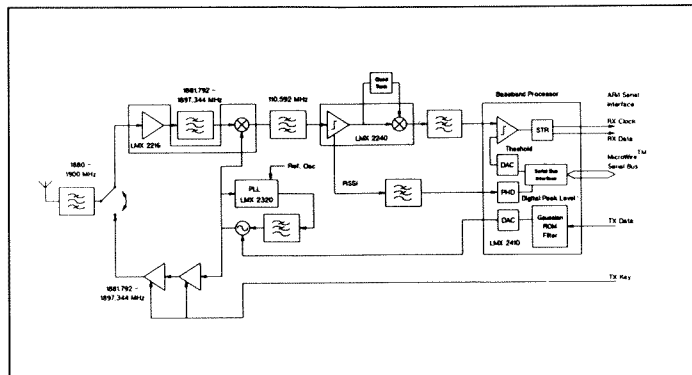


Figure 3 - Block diagram of National Semiconductor's single conversion receiver architecture.

mask programmed to meet other filter requirements, e.g. to support U.S. standards for the PCS and ISM bands. From the filter, the signal is fed to a DAC, then directly to the frequency synthesizer VCO, so the signal directly modulates the VCO. This principle is commonly used in analog cellular and cordless telephones. In order not to introduce distortion, the filter bandwidth of the loop must be significantly lower than the lowest frequency components of the modulating signal. But a low loop frequency leads to a slow switching speed, which is undesirable in a DECT transceiver. In order to modulate the VCO directly, the phase locking needs to be disabled, corresponding to opening the loop while modulating. The principle is simple, but puts requirements on the components used. There are two basic needs. The loop must be opened quickly, without causing a sudden jump in the VCO frequency, and the VCO frequency must be stable during a data burst. The National Semiconductor PLL, LMX2320, in combination with an active loop filter, accomplishes this.

The synthesizer needs to span the DECT frequency band both transmitting and receiving. A wide VCO tuning range and a fast switching speed — in the order of 400 μ s (max.) for a frequency jump of 130 MHz — are needed. The modulated signal from the VCO is fed to the power amplifier. The power amplifier delivers a maximum of 250 mW peak, plus whatever loss is introduced between the PA and the antenna (typically in the order of a couple of dB). The signal is finally fed to the antenna through the duplexer and antenna filter.

Supply voltage and power consumption are also key parameters in the design of handheld and pocket equipment. Today, cordless telephones use as few as three rechargeable battery

cells, either Nickel Cadmium (NiCD) or Nickel Metal Hydride (NiMH). To avoid costly voltage conversion circuits, all parts of the cordless telephones need to operate at 3 volts. The DECT chipset from National Semiconductor will operate down to 2.85 V. Several manufacturers offer 3 volt wideband VCOs with a control voltage range of 0.5 to 2.5 volts, as well as RF power amplifiers in GaAs technology, operating from a 3 volt supply. GaAs, however, requires a negative bias supply. Power amplifiers can also be built using discrete bipolar transistors. These run from a typical supply voltage of 3.6 volts, with a lower power efficiency than GaAs modules. Both solutions can be used and the choice between them depends on cost, power consumption and size requirements.

Phase Locked Loop Issues

Lock time and low spurious noise — A single conversion radio architecture requires fast synthesizer switching speed in order to transmit and receive on as many as 24 timeslots per frame. In addition, in a single conversion transceiver, the synthesizer needs to make a large jump in frequency between transmitting and receiving, typically in the order of 110 MHz.

Lock time is defined as the time it takes a PLL to switch from one frequency to another within a given tolerance. Spurious noise, also called reference spurs, is defined as the level of the reference sidetones in relation to the desired tone. Together, these two parameters form a major tradeoff in radio design. Faster lock time almost certainly means higher spurs and vice versa.

Besides designing a proper loop filter, another key to obtaining simultaneous fast switching and low spurs is a well balanced charge pump circuit on the phase detector output. This charge pump circuit must have excellent balance to reduce or eliminate reference frequency spurs, and its dead band region must be at a minimum, even at high reference frequencies, to ensure good noise performance and fast switching speed. The LMX2320 was designed to meet these requirements. For a DECT transceiver, the PLL must also have a wide tuning bandwidth at a high reference frequency. This requires a 64/65 prescaler to achieve legal divide ratios. The prescaler and PLL must be kept as low current as possible to help preserve battery life. An example of a typical DECT PLL performance is shown in Figure 4. The figure shows settling

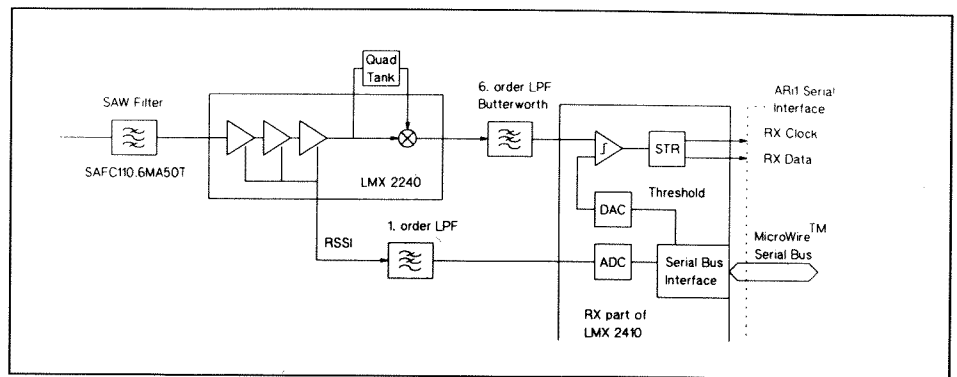


Figure 5 - Simplified block schematic for a DECT transceiver.

time and reference spurs for a simple passive loop filter.

Open loop modulation — Another key element of this architecture is open loop modulation. In this mode, the PLL loop is opened while modulating the VCO, allowing the VCO to run free. The loop filter voltage is preserved by putting the PLL's charge pump circuit into a high impedance state. An active loop filter can be chosen to counteract possible loop discharge due to leakage current from the VCO tuning varactor diode. Alternatively, the PLL chip can be powered down, which also brings the charge pump circuit into a high impedance state. In this case, a buffer may be needed to limit an unintended jump in frequency due to possible load pulling of the VCO.

The modulating signal is added to the loop voltage at the input of the VCO, and the result is a modulated carrier. The modulating signal must have a stable midband voltage before opening the loop, in order to avoid a frequency offset during modulation. Such a frequency offset will occur if the loop is stabilized when the modulation signal is either at the negative or positive peak voltage. In these cases, as the loop is opened and the modulation commences, the resulting center frequency will be a sum of the intended center frequency set by the PLL, and an unintended frequency offset equal to plus or minus half of the peak to peak frequency deviation of the modulated signal.

The LMX2410 Baseband Processor is designed to provide an accurate midband voltage. When the loop is opened and the modulation starts, the deviation correctly swings above and below the intended center frequency. The drift in the carrier is kept to a minimum because the burst in DECT is very short. The DECT standard specifies a frequency drift of less than 13 kHz/ms. A DECT

PLL based on the LMX2320 can be designed to have orders of magnitude less frequency drift than allowed by the DECT standard.

Receiver Parameters

Most of the requirements for the receiver can be derived from type approval specifications. A noise figure, gain and linearity budget can be made for the receiver using data from available components.

Receiver sensitivity — Receiver sensitivity is normally defined as the signal level needed to produce a certain signal to noise ratio, or, for digital systems, the level needed to produce a certain Bit Error Rate (BER) at the output of the receiver. In the case of DECT, the BER at the sensitivity level is 10^{-3} , at nominal temperature and supply voltage and for frequency offsets of -50 kHz, 0 kHz, +50 kHz of the received signal. The required sensitivity for all DECT equipment is -83 dBm. For equipment meant for public access use, like the U.K.'s Telepoint, the requirement is -86 dBm.

In a receiver for digital modulation, the sensitivity is composed of two figures of merit: the receiver front-end sensitivity, normally expressed by the noise figure, and the demodulator performance. The latter depends on the demodulator chosen. Circuit simulations can be used to get an initial idea of the demodulator performance. Figure 5 shows a simplified block schematic for a possible DECT receiver. The IF channel selection filter is a Murata 110.592 MHz SAW filter SAFC110.6MA50T; the limiter-discriminator circuit is a National Semiconductor LMX2240; the lowpass filter is a discrete filter; finally, the baseband processing function (i.e. bit slicing, symbol timing recovery and bit slice threshold setting circuit) is contained in a National Semiconductor LMX2410.

The BER performance for this specific

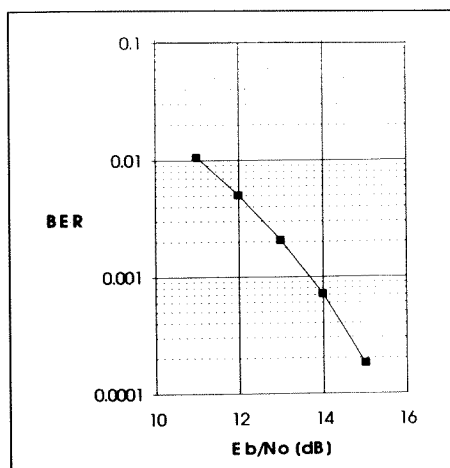


Figure 6 - Simulated BER for the DECT receiver.

circuit is shown in Figure 6. The implication of frequency offset is roughly indicated in Figure 7. As shown by these figures, an E_b/N_o ratio of approximately 13.6 dB is needed for a BER of 10^{-3} and needs to be increased by approximately 1 dB to compensate for a frequency offset of 50 kHz. The receiver (demodulator) could compensate for the frequency offset/error using a DAC to set the threshold level for the bit slicer (data comparator), assuming that the discriminator is sufficiently wideband. The latter will be the case in a DECT receiver, since offsets are on the order of 50 kHz, which is only a fraction of the required discriminator bandwidth.

The following equations assume ideal compensation. Not compensating for frequency offsets increases the requirements in receiver sensitivity by approximately 1 dB. The required noise figure for the receiver front-end can be derived by knowing the demodulator's E_b/N_o performance and assuming conducted measurements, as in the case of DECT. The E_b/N_o ratio equals the signal to noise ratio on the output of a filter with a noise bandwidth equal to the bit rate, r_b :

$$\frac{E_b}{N_o} = \frac{S}{r_b N_o} \quad (1)$$

Since

$$N_o = kT_o F_n \quad (2)$$

where $k = 1.38054 \times 10^{-23}$ K/J, the Boltzmann constant; $T_o = 290$ K, the standard temperature; and F_n is the noise factor. Expressing the ratio E_b/N_o in decibels (dB), we get:

$$\left(\frac{E_b}{N_o} \right)_{dB} = S - F_{dB} - 10 \log_{10}(r_b k T_o) \quad (3)$$

$$F_{dB} = S_{dBm} - \left(\frac{E_b}{N_o} \right)_{dB} + 113.4 \quad (4)$$

where S_{dBm} is the signal in dBm

Inserting the specified sensitivity for all DECT equipment, $S_{dBm} = -83$ dBm, and the needed $E_b/N_o \geq 13.6$ dB, yields

$$F_{dB} = -83 - 13.6 + 113.4 \text{ [dB]} \\ = 16.8 \text{ [dB]} \quad (5)$$

The requirement is therefore a maximum noise figure of 16.8 dB for all DECT equipment, and similarly NF = 13.8 dB for equipment meant for Public Access.

Receiver linearity — Non-linearities in a receiver, such as gain compression, will cause signals from several transmitters to mix with each other in the receiver. The result is intermodulation products. In the worst case, these intermodulation products can end up having the same frequency as the desired RF signal. The intermodulation products can either be products from the desired signal or unwanted signals. Thus, the receiver intermodulation performance is a measure of the receiver's ability to avoid being disturbed by other DECT-like signals on other DECT channels. An ideal receiver is completely linear and would not suffer from intermodulation.

Receiver design is a trade-off between sensitivity, linearity, power consumption and component cost. Receiver linearity is normally expressed as the receiver's third-order Input Intercept Point, (IIP_3). Requirements for IIP_3 can be derived from the type approval measurement methods and specifications.

The receiver intermodulation performance is measured using three signals: a desired DECT signal and two undesired signals. The three signals are on three different DECT RF channels. The frequencies of the undesired signals are chosen such that one of their third-order intermodulation products becomes equal in frequency to the desired signal. Of the undesired signals, one is modulated with a DECT-like signal and the other is not. The intermodulation product of interest is the one that carries DECT modulation with nominal frequency deviation. The frequencies of the two undesired signals are chosen such that the intermodulation product of interest appears at the receive frequency. Hence the intermodulation product will appear as an undesired DECT interferer with the nominal frequency deviation and on the same channel as the desired signal.

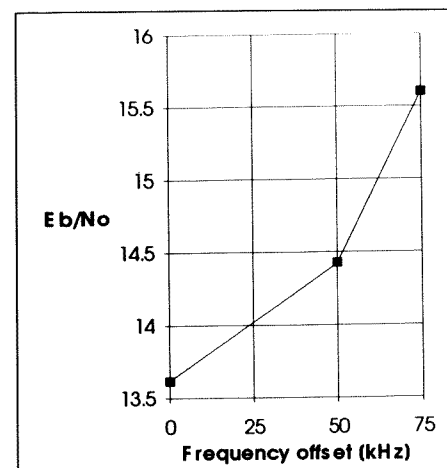


Figure 7 - Required E_b/N_o as a function of the frequency offset on the received signal.

The level of the desired signal is specified to be -73 dBm and the level for each of the two undesired signals is -46 dBm. The third order intercept point for a non-linear 2-port input (IIP_3) is defined as the point at which the third order intermodulation product equals the ideal linear, uncompressed output.

The intercept point can be found by :

$$P_{IIP3} = \frac{3P_{uw} - P_{im3}}{2} \quad (6)$$

with:

P_{IIP3} is the third order input intercept point (in dBm).

P_{im3} is the related intermodulation product for the two unwanted signals (in dBm).

P_{uw} is the power of each of the unwanted signals (in dBm).

P_{uw} is known from the DECT type approval documents. P_{im3} can be derived, remembering that the intermodulation product appears as a co-channel interfering signal, and DECT documents specify the co-channel interference rejection performance.

Co-channel interference rejection is defined as the ability of the receiver to cope with DECT-like interfering signals appearing at the same RF frequency as the desired signal. The co-channel rejection ratio is the ratio of the desired signal to the undesired that produces a certain BER. For a desired signal of -73 dBm, the co-channel rejection ratio is specified to be 10 dB maximum. This 10 dB ratio can be directly used, as the intermodulation performance is measured at the same level of the desired signal. Thus $P_{im3} \geq -83$ dBm. Inserting for $P_{uw} = -46$ dBm and $P_{im3} = -83$ dBm, yields

a receiver input intercept point of $P_{IIP3} = -27.5$ dBm.

Table 2 shows an example of a typical RF chain budget for a DECT receiver. The design issues are to have as low a noise figure as possible, a high input intercept point and a high overall receiver gain. The latter is in order to have the limiter saturated all the way down to the sensitivity level. From the table it can be concluded that (in this particular example) the mixer sets the limit for the overall noise figure, and that the LMX2240 in combination with the IF filter sets the limit for the overall input intercept point. Both figures of merit for the receiver are met by a reasonable margin, i.e. receiver sensitivity is met by a margin of 4.2 dB and input intercept point by a margin of 4.1 dB.

Baseband Issues

Also facing the radio designer are baseband issues such as bit or symbol timing recovery (STR), compensation for DC drift due to carrier frequency drift through a discriminator, and the baseband filtering requirements for the transmitter. National's LMX2410 addresses all of these concerns. Symbol timing recovery is achieved through the use of an all-digital phase locked loop and a non-linear element at the input. Timing is recovered by over-sampling the input data stream (after a threshold comparator) and finding the rising or falling edge. The symbol clock phase is then adjusted to lock it to the incoming data stream's phase. The STR circuit in National's DECT solution can lock the internal clock to the received data in as few as five edges of the incoming data stream.

DC compensation of the incoming data stream is important when using a discriminator because carrier frequency drift will manifest itself as DC drift after an FM discriminator. The DECT preamble is 32 bits in length with a balance of 16 1s and 16 0s. A good way to track the DC level of the incoming signal is to monitor the duty cycle of the preamble and adjust the LMX2410's threshold DAC for the data comparator.

Baseband pre-modulation filtering is important in achieving the proper shaping of the transmit spectrum. In DECT, the pre-modulation filtering is specified as a Gaussian filter characteristic with a -3 dB bandwidth of half the bit rate ($B_p T = 0.5$). National achieves this pre-modulation filtering through the use of a ROM look-up table and an 8 bit DAC on the LMX2410. This allows an ideal Gaussian characteristic to be saved in the ROM. National's chip is also mask-pro-

# Component	Gain	NF	OIP3	Cumulative Data				
				#	Gain	NF	IIP3	OIP3
1 Filter	-1.0	1.0	100.0	1	-1	1.0	97.5	96.5
2 Circulator /Switch	-1.0	1.0	40.0	2	-2	2.0	42.0	40.0
3 LNA/ LMX2216B	10.0	4.7	7.0	3	8	6.7	-1.0	7.0
4 Filter	-2.0	2.0	100.0	4	6	6.8	-1.0	5.0
5 Mixer/ LMX2216B	6.0	17.0	0.0	5	12	12.3	-12.3	-0.3
6 IF SAW-Filter	-4.0	4.0	100.0	6	8	12.4	-12.3	-4.3
7 LMX2240	70.0	8.0	55.0	7	78	12.6	-23.4	54.6
System Cumulative Values								
Required E_b/N_0	13.60 [dB]			Gain	78.0 dB			
Sensitivity	-87.20 [dBm]			N Fig	12.6 dB			
IIP3	-23.4 dBm			OIP ₃	54.6 dBm			

Table 2 - A typical RF chain budget for a DECT receiver.

grammable, which lends itself to easy adaptation for other standards.

System Issues

Three issues which face DECT phone designers are range, multipath fading (or delay spread), and voice quality. With the high bit rate, a DECT phone will have more susceptibility to multipath reflections. A normal delay spread in indoor environments is on the order of 100-200 ns. The bit time of a DECT bit is 880 ns. This means that the potential delay spread due to multipath reflections is 10-20 percent of a bit time. Typically, some method of diversity is used to combat such relatively small fractional delay spreads.

Switched antenna diversity is the simplest to implement. It involves using two antennas (usually in the base station) and measuring the received signal strengths of both antennas. The larger signal is then received for the duration of the burst. Full receiver diversity involves two complete receivers from antenna to the cyclic redundancy checker (CRC) in the baseband section. Whichever received signal passes the CRC is the one that is used for the duration of the burst.

Another, even simpler method is dual slot diversity. In this method, only one receiver is used, but two (usually successive) timeslots are used for receiving one data burst by each of the antennas. Identical information is thus transmitted in both timeslots. In the receiver, the timeslot that was received with the fewest errors is used. This method adds the performance enhancement of the dual receiver diversity principle to a single receiver architecture. However, it decreases system capacity due to the extra timeslots being used.

The range and voice quality of a DECT

phone must be minimally wireline quality. The range of the phone must be long enough so that the phone is not always in hand-off mode, but short enough to allow for multiple cell (base station) sites. In the indoor office environment, a good range is about 100 meters and about 200-300 meters outdoors.

Summary

A new chip set for DECT applications is now available from National Semiconductor. Using a single-conversion receiver and direct-modulation transmitter, these components offer a low cost, low power consumption solution for DECT equipment. *For more information, circle Info/Card #260.*

RF

About the Authors

Benny Madsen has a Ph.D in Electrical Engineering from Aalborg University in Denmark. Recently, he has worked at Dancall Radio, Denmark, developing analog and digital cordless and cellular phones. Since January 1993, he has worked at National Semiconductor Corporation as an engineering project manager in the Wireless Communications Group.

Daniel E. Fague received his M.S.E.E. from the University of California at Davis. Since 1991, he has worked at National Semiconductor Corporation in the Wireless Communications Group, specifying integrated circuits for radio modems. His interests include digital radio modems, indoor and outdoor propagation for mobiles, and digital signal processing.


They can be reached at National Semiconductor, M/S A1500, P.O. Box 58090, Santa Clara, CA 95052-8090.

Dual-Mode Wireless Chip Set

AT&T Microelectronics now offers a pair of integrated circuits specifically designed for the IS-54 cellular standard. The 900 MHz transceiver chip set incorporates virtually all receive and transmit functions needed for detecting and transmitting both analog and digitally modulated signals. The AT&T W2005 receiver is the first single IC to address the unique requirements of the dual mode IS-54 standard and is the only device to perform both FM (analog) and DQPSK (digital) demodulation on the same chip. The W2005 uses a superheterodyne architecture to shift the frequency of the 824-849 MHz signals to an intermediate frequency of 455 kHz, and then offers a dual path


for detecting either the analog or digitally modulated signals. The companion W2010 transmitter uses direct-up conversion to modulate the voice signal at the 900 MHz transmission frequency. The quadrature modulator features an on-chip phase splitter that reduces phase imbalance to less than 0.95 degrees and amplitude imbalance to less than 0.15 dB. Samples of both ICs are currently available, with production quantities expected in mid-1993. In production quantities, the AT&T W2005 Cellular Receiver IC costs \$6.00 each, and the W2010 Quadrature Modulator sells for \$4.50 each.

AT&T Microelectronics
INFO/CARD #250

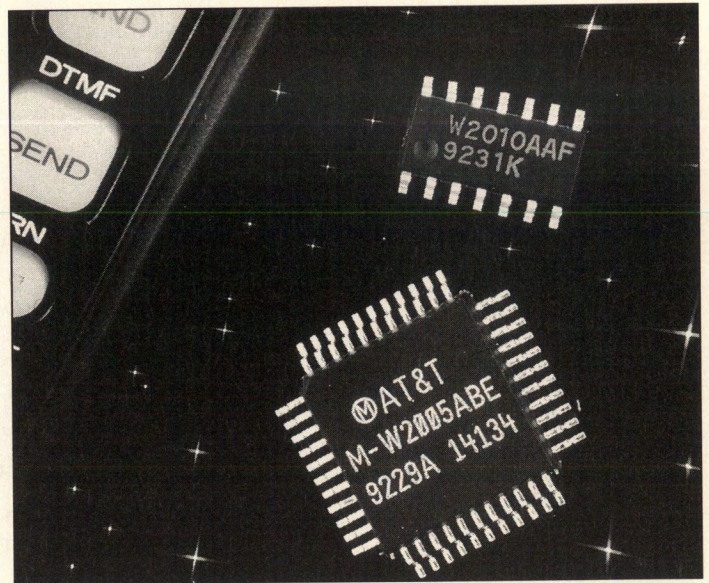

Medium Power Amplifier

RF Micro Devices has announced the availability of the first commercial linear power amplifier fabricated using TRW's Heterojunction Bipolar Transistor (HBT)




technology. The RF2103 is designed for use as the final linear RF amplifier in UHF radio transmitters operating between 800 MHz and 1 GHz. The device is packaged in a 14-pin ceramic SOIC package. The device is self contained with the exception of the output matching network and power supply feed line. It produces a peak output power level of 800 mW (CW), or 40 mW average for a two tone input, at a supply voltage of 6.3 VDC. The device can also be used in 3 V battery applications, where the maximum CW output is 135 mW. Total gain is 25 to 30 dB, with low VSWR across the operating frequency. The RF2103 is now available in a ceramic SO-14 package and will be available in a plastic package later this year. Pricing for the RF2103 in the ceramic SO-14 package is \$15 in quantities of 100K. Projected prices for the plastic version are less than \$10.

RF Micro Devices, Inc.
INFO/CARD #249

GPS "Front-End" Evaluation Card

The GP1010-1 Evaluation Card from GEC Plessey Semiconductors uses the company's GP1010 RF Downconverter to produce sampled digital signals from a global positioning system antenna/low noise RF pre-amplifier, or from simulated signals. The board provides an integrated solution with a minimum of pre-mounted components around the GP1010 IC. Provision is made for RF input at 1.57 GHz and for the




10 MHz reference signal via SMA jacks. The first IF is designed to use low cost LC filter components with a 3 dB bandwidth of 20 MHz. The second IF at 35 MHz uses a GEC Plessey DW9230 SAW filter for better than 40 dB out-of-band noise rejection. The board is supplied assembled and tested. The 60 x 60mm board requires a 5 V power supply, sample clock source, and 10 MHz local oscillator reference source. The board is free of charge to engineers involved in actively designing GPS receivers.

GEC Plessey Semiconductors
INFO/CARD #248

Spectrum Analyzer for Digital Cellular

Anritsu Wiltron introduces the MS2602A spectrum analyzer designed for digital cellular radio




measurements. The spectrum analyzer has a frequency range of 100 Hz to 8.5 GHz, and a level accuracy up to ± 1.1 dB. The MS2602A is a high performance spectrum analyzer, with a high signal purity of -120 dBc/Hz at a 100 kHz offset. This characteristic, plus low intermodulation distortion, allows measurements such as adjacent channel leakage power and linearity measurements of power amplifiers to be made relatively easily. Simultaneous display of frequency and time domain is provided by the MS2602A. Other capabilities include AM/FM demodulation, auto tuning, signal search, zone sweep, 10 multiple markers, GPIB, and an FM waveform display. The MS2602A is priced at \$23,950.

Anritsu Wiltron Sales Co.
INFO/CARD #247

UHF, Broadband Power MOSFETs

Motorola's improved construction techniques have yielded 2nd generation 28 V, UHF, broadband power MOSFETs with very low feedback capacitance and the ability to withstand 30:1 load VSWRs of any phase angle. The efficiency, stability and ruggedness of these new parts create excellent broadband amplifiers that operate to 500 MHz, including the military band of 225-400 MHz. Available power levels are



2 W and 20 W in different package options. Example devices are: MRF158, 2 W output power, 20 dB gain (typ.), 0.45 pF C_{rss} (typ.), \$18.10; MRF164W, 20 W output power, 17 dB gain (typ.), 2.5 pF C_{rss} (typ.), \$79.00; MRF166C, 20 W output power, 17 dB gain (typ.), 4.5 pF C_{rss} (typ.), \$31.45. All prices are for U.S. delivery in low quantities.

Motorola Semiconductor Products Sector
INFO/CARD #246

Precision Frequency & Time Instruments

Superior performance and reliability at an affordable price. That's the basic philosophy at Stanford Research Systems, a worldwide leader in signal recovery instrumentation for scientific research.

SRS offers a full line of precision electronic test and measurement equipment targeted for both R&D and production applications. SRS products have the features you want, the accuracy you need, the quality you demand, and the low prices which make them truly exceptional values.



Synthesized Function Generators

- 3, 15 or 30 MHz range, all with 1 μ Hz resolution
- Sine, square, ramp, triangle, and arb waveforms
- Logarithmic / linear sweeps and modulation
- Optional GPIB, RS-232 interfaces

DS335 \$995

DS340 \$1595

DS345 \$2195

FFT Spectrum Analyzers

- 476 μ Hz to 100 kHz frequency range
- 90 dB dynamic range
- PSD, octave, THD, band, sideband analysis
- Internal source, network analysis (SR770)
- GPIB, RS-232, printer interfaces, 3.5" DOS drive

SR760 \$4750

SR770 \$6500

Time Interval / Frequency Counter

- 25 ps single shot resolution
- 1.3 GHz max. frequency, 11 digit resolution
- Statistics, Allan variance, histogram outputs
- GPIB, RS-232 and printer interfaces

SR620 \$4500

Pulse / Digital Delay Generator

- 4 delay channels, delays to 1000 seconds
- 5 ps delay resolution with 50 ps rms jitter
- GPIB interface, internal or external timebases

DG535 \$3500

10 MHz Frequency Standard (LORAN-C)

- Cesium clock long term stability (10^{-12})
- Four 10 MHz outputs, adjustable TTL output
- Phase comparator with strip chart output
- GPIB interface, 8' antenna, 100' coax cable

FS700 \$4950




STANFORD RESEARCH SYSTEMS

1290 D Reamwood Ave., Sunnyvale, CA 94089, TEL: (408) 744-9040, FAX: 4087449049

INFO/CARD 35

Our WORLD CLASS CRYSTALS



STAY STABLE

Our "world class" crystals are ideal for precision applications that require ULTRA-LOW AGING. And, at nearly the performance of an SC cut crystal with an AT cut crystal price.

For instance, aging better than a 3×10^{-10} /day for a 5.0 MHz, 3rd overtone crystal and 5×10^{-10} /day for a 10.0 MHz, 3rd overtone crystal is typical. (Available in HC-47 holders.)

EG&G crystals are found in some of the most sophisticated products and systems around. And, we're backed by an engineering staff available to fill your needs and solve your problems. Give us a call at 1-800-424-0266 and let us show what we can do for you.



EG&G

FREQUENCY PRODUCTS

4914 Gray Road • Cincinnati, Ohio 45232

In Canada represented by: ELLAM & Assoc. Ltd.

Phone 513-542-5555 • FAX 513-542-5146

Phone 613-727-3892 • FAX 613-727-0368

INFO/CARD 36

RF products

Product Spotlight: Diodes

Broadband Detectors

Metelics has introduced a line of broadband detectors that offer high sensitivity and low VSWR. The detectors are available in several standard and special packages. Both tunnel and zero-bias Schottky types are offered. Available outlines are: S100, M23, K1, K2, M33-1 and M-21.

Metelics Corp.

INFO/CARD #245

Space Qualified

A full line of Hi-Rel MELF devices screened to JANTX or JANTXV specifications for space level military projects are available from Compensated Devices. Surface mount semi-




conductors include Schottky, 1 Amp Schottky, Zener and current regulating diodes.

Compensated Devices, Inc.
INFO/CARD #244

High Frequency Surface Mount Crystal Clock Oscillators Designed For Process Automation

- Up to 250 MHz
- .200" x .300" Footprint
- .550" x .350" x .210" Package Dimensions
- J-Lead Termination
- IR Reflowable
- Shock Resistance to 3000 G
- Tape and Reel Available

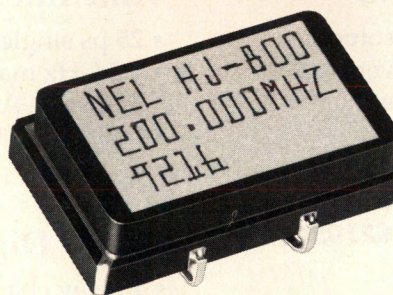

TTL 25-150 MHZ
CMOS 25-150 MHZ
ECL 65-250 MHZ

NEL



For full technical data, or to discuss your application, contact:

**FREQUENCY
CONTROLS, INC.**

357 Beloit St. ■ Burlington, WI ■ 53105 ■ Phone: 414/763-3591 ■ Fax: 414/763-2881

INFO/CARD 67

Simulate Spread Spectrum Communication

Spread spectrum radios can operate on frequencies where many other, sometimes more powerful, transmitters are simultaneously operating. An accurate evaluation of the performance of a spread spectrum radio in such environment would require many transmitters and would be very costly and awkward to perform. Using a UFX-BER Series noise generating instrument to simulate interference from other radios operating within the same frequency band is a much more practical alternative.

Direct-sequence spread spectrum communication techniques such as Code Division Multiple Access (CDMA) are simulated well by white noise. This is because direct sequence spread spectrum looks much like white noise. Frequency-hopping spread spectrum systems, in which several radios are transmitting at the same time, are also well simulated by white Gaussian noise because of the central-limit-theorem. This theorem states that when many non-correlated stochastic variables are added, the result approaches a Gaussian distribution function, provided that none of the variables dominates the sum. Simulation of many non-correlated, frequency-hopping radios can be made by use of white Gaussian noise.

The relation between the number of interferers, their power, and the necessary noise power density of the simulation is:

$$N = 10_{\log} M + \langle P \rangle$$

where:

N = the average white noise power (in dBm)

M = the number of interferers

$\langle P \rangle$ = the average power of interferer (in dBm)

It is therefore necessary to be able to generate carrier-to-noise ratios (C/N) from -40 through $+40$ dB. The UFX-BER Series does this with an accuracy of greater than 0.21 dB RMS.

The UFX-BER instruments include precision step attenuators for the signal and the noise source, plus a signal and noise combiner, built-in carrier-to-noise-ratio power meter, and carrier power monitor (Figure 1).

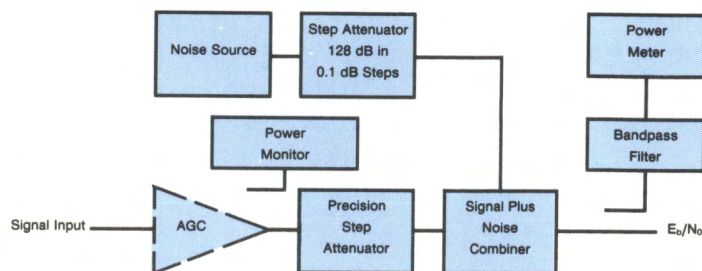


Figure 1. Block Diagram of UFX-BER Series Instrument.

The built-in power meter measures the carrier input power. The carrier output power is then set to the desired level by use of the instrument's precision step attenuator. The signal carrier power may be kept constant by passing the signal through an optional linear automatic gain control (AGC) amplifier. The instrument then generates the desired amount of noise power (also measured with the power meter) and combines the input signal with noise.

The output power and the average signal input power are alternately monitored. The carrier output power, and the peak deviation of the carrier power are then displayed simultaneously on the front panel along with the resultant accurately generated C/N.

The selectable, customer specified filters are all inserted in the power meter and in the noise path only, so as not to introduce any group delay distortion in the carrier path. The filters in the power meter path improve the signal-to-noise-ratio, and thereby the accuracy of the carrier power measurements. The filters in the noise path assure adequate dynamic range to maintain a 5:1 (14 dB) crest factor.

E_b/N_o Noise-generating Instruments for Bit Error Rate Testing

UFX-BER Series

General Specifications

Carrier Path

Attenuation	0 to 60 dB, automatically programmed
Range of carrier input power (C_{in})	-45 to +15 dBm
Flatness	± 0.20 dB for 70 MHz (± 20 MHz) ± 0.30 dB for 140 MHz (± 40 MHz)
Group delay	0.20 ns or less

Output Path

Range of carrier output power	-45 dBm to carrier input level
Range of noise output power (N)	-45 dBm to +5 dBm
Noise flatness	± 0.50 dB or less from 100 kHz to 200 MHz
Accuracy of C/N	See graph
Third-order intercept point	+29 dBm typical
Crest factor (peak to average noise voltage)	14 dB or more

Features:

- Direct display of E_b/N_o or C/N
- Accuracy of 0.21 dB RSS
- 75 ohm impedance BNC connectors
- Variable output power

The UFX-BER Series of noise-generating instruments display the actual E_b/N_o or C/N for testing of satellite communications or digital radio equipment. The UFX-BER generates and measures E_b/N_o for IF back-to-back or loop-back testing with extreme precision over a broad range of input or output power, steps, increments, decrements, and desired E_b/N_o values can be entered directly in dB in 0.25 dB increments from the front panel or by IEEE-488 bus.

Settings are stored in non-volatile memory and the user can create up to eight test routines (including delay time and loops) that will run automatically under program control. The instrument measures 5 1/4 in. high, 17 in. wide, and 20 in. deep and comes with brackets for 19-in. rack mounting.


Options:

1. Automatic gain control amplifier to maintain constant carrier power level
2. Other custom configurations
3. 50-ohm input and output impedance instead of standard 75-ohm impedance
4. RS-232C, RS-422, or RS-423 interface in addition to IEEE-488 interface
5. 220 VAC, 50 Hz, instead of standard 110 VAC, 60 Hz
6. Interferor input
7. Switched filter bank with up to six customer-specified filters



UFX-BER SERIES

MODEL	CENTER FREQUENCY	BANDWIDTHS
UFX-BER-455	455 kHz	Filters are customer specified
UFX-BER-10	10.7 MHz	
UFX-BER-21	21.4 MHz	Maximum bandwidth 200 MHz
UFX-BER-45	45 MHz	
UFX-BER-70	70 MHz	
UFX-BER-140	140 MHz	
UFX-BER-IF1	70 MHz, 140 MHz	
UFX-BER-___	User Specified	

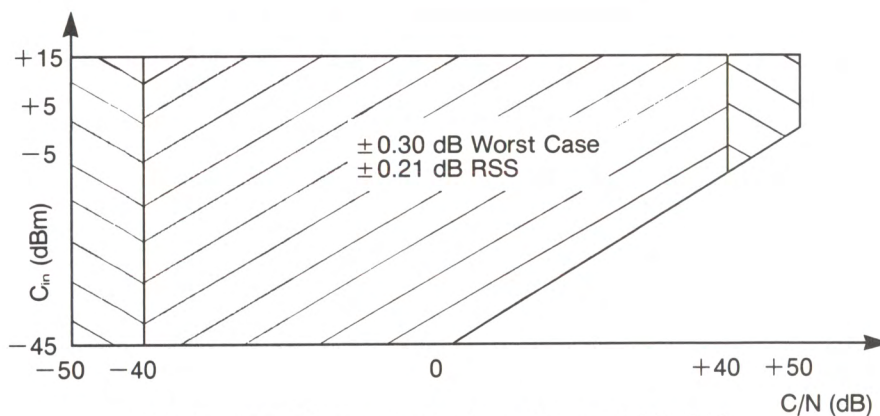

C/N Accuracy Versus Carrier Input Level at $23 \pm 3^\circ\text{C}$

NOISE/COM

E. 49 Midland Avenue, Paramus, New Jersey 07652
(201) 261-8797 • FAX (201) 261-8339

SUBSYSTEMS

Radio Modem Board

The System 200, from Monicor Electronic Corp., communicates any RS-232 data, input and output, at any output level from 2 W to 1 mW. System 200 comes with Monicor's highly efficient TurboLink 2.0 operating system, supporting the X.30 protocol. Transceiver operation is narrow-band FM between 450 and 470 MHz. System 200 is priced at \$465 per set in OEM quantities.

Monicor Electronic Corp.
INFO/CARD #243

GPS Synchronization

Datum Timing has added a GPS time input option to their Model 9700 Programmable Time System. The option is easily installed in any Series 9700 product. Once enabled, the GPS time input option determines position and transfers time to the time code generator with sub-microsecond precision.

Datum Timing, Inc.
INFO/CARD #242

RF Modem

The FM 96 Data Radio from IWL Communications provides fast, reliable data transfer using a UDS half-duplex wireless modem. Asynchronous serial data can be transmitted at 9600 bps over commercial frequencies at 450 - 470 MHz.

IWL Communications, Inc.
INFO/CARD #241

900 MHz RF Modules

RF modules from RF Industries use a synthesizer PROM control interface with an optional serial or

x 2 inches and can be configured for multiple channels, 12.5 or 25 kHz channel spacing and wide frequency range from 850 to 960 MHz.

RF Industries, Ltd.
INFO/CARD #240

AMPLIFIERS

Ultra Low Noise

AML announces model ALV02202408 S-band low noise amplifier with internal signal level monitor and automatic gain control loop. Maximum gain is 37 dB. Gain with full AGS attenuation is 17 dB. Maximum noise figure at maximum gain is 0.7 dB.

AML, Inc.
INFO/CARD #239

10 kHz to 100 MHz, 1 kW

Amplifier Research has extended the power range of its solid-state Series "A" line to 1000 watts minimum, linear output, with the introduction of the model 1000A100 RF amplifier. Price is \$74,000, with delivery in 30 days ARO.

Amplifier Research
INFO/CARD #238

50 W, Solid State


The model AR1929-50 solid state RF amplifier operates over the 1000 to 2000 MHz frequency range. The amplifier from Power Systems Technology provides 50 W at 1 dB compression, 55 watts at saturation, and operates Class A with an instantaneous bandwidth of 1000 MHz. The rack or bench mountable amplifier includes a built-in power supply.

Power Systems Technology, Inc.
INFO/CARD #237


Power Module Boards

Tactical Electronics offers printed circuit boards to facilitate the usage of the following power modules: MHW series (except 714-04 case) from Motorola, M series from Mitsubishi, BGY series from Philips and the SA series from Toshiba.

Tactical Electronics Corp.
INFO/CARD #236



parallel microprocessor control. These OEM modules measure 2

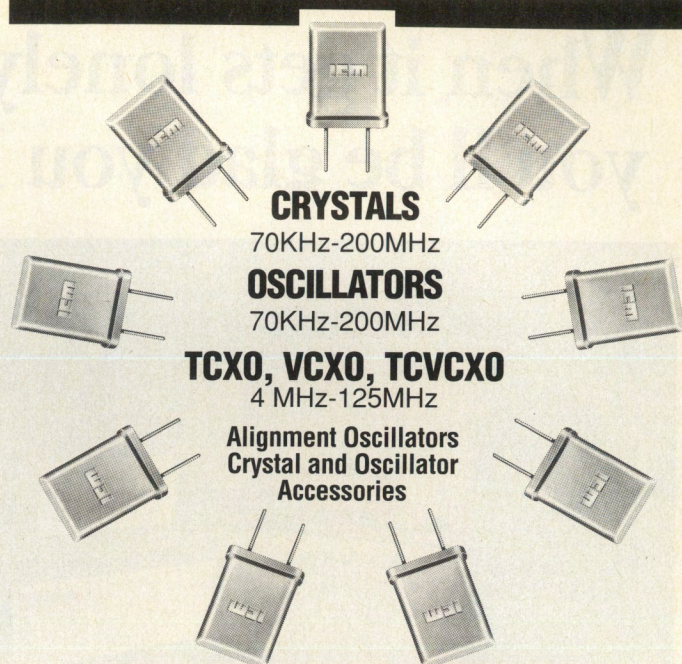

CRYSTALS

70KHz-200MHz

OSCILLATORS

70KHz-200MHz

TCXO, VCXO, TCVCXO

4 MHz-125MHz

Alignment Oscillators
Crystal and Oscillator
Accessories

Call or fax TOLL FREE for information



INTERNATIONAL CRYSTAL MFG. CO., INC.

P.O. Box 26330 • 729 W. Sheridan • Oklahoma City, OK 73126-0330 • (405) 236-3741
FAX (405) 235-1904 • Toll Free Phone 1-800 725-1426 • 24 Hour Toll Free Fax 1-800 322-9426

INFO/CARD 38

RF and Microwave Power Semiconductors

Design, Production or Maintenance

- Cellular
- GPS
- Telemetry
- PCN
- GSM
- SATCOM
- Avionics
- Wireless LAN
- Wireless ID
- Land Mobile
- Broadcast
- Industrial



RF PRODUCTS, Inc.

MACOM

RF Power
Components Inc.



Available: Data Sheets, Technical Assistance, Cross References, Value Added Services Include: DC Matching (BiPolar) and GFS Matching (FETs) and Same Day Shipment

We Speak RF.

In the U.S. 1-800-RF POWER (1-800-797-6937),
Canadian office: 1-800-348-5580,
International inquiries 708-208-2200



Richardson Electronics, Ltd.

Corporate Headquarters
40W267 Keslinger Road
LaFox, IL 60147-0393

INFO/CARD 39

When it gets lonely out there at 1 GHz, you'll be glad you have all this power.




The only amplifier that can deliver 500 watts through that balky decade from 100 to 1,000 MHz is our new Model 500W1000M7. That's the majestic one on the left, with the front-panel bi-directional power meter, ALC, and a bagful of other controls that will let you actually *enjoy* automatic sweep testing in your lab.

The 500W1000M7 presently heads our well-known "W" Series of all-solid-state linear amplifiers that cover four crucial decades of bandwidth from 100 kHz to 1 GHz. Today, you may need only 1 watt (the little portable on the top), or 5, or 10, or 25, or 50, or even 100 or 200 watts *minimum*—all with that fantastic bandwidth instantly available without tuning or bandswitching—a combination of power and bandwidth that's comforting when you work the outer reaches of the rf spectrum. Wherever your power requirements are today, they're sure to go up. And one of these days you're going to want a 500W1000M7.

The "W" Series is part of a complete line of AR amplifiers offering rf power up to 10 kilowatts for rf susceptibility testing, nmr spectroscopy, plasma/fusion research, and a host of other test situations that demand rf power of unconditional stability—immunity to even the worst-case load mismatch, shorted or open cable, wild swings of VSWR—with no fear of oscillation, fold-back, or system shutdown.

You might learn a lot from our free booklet, "Guide to Broadband Power Amplifiers." Send for a copy. Or call our toll-free number (800-933-8181), which will connect you directly to one of our applications engineers.

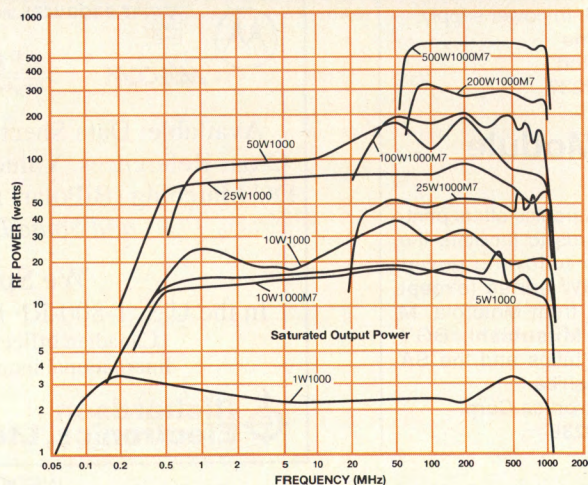

AR AMPLIFIER RESEARCH

160 School House Road
Souderton, PA 18964-9990 USA
TEL 215-723-8181 • FAX 215-723-5688

For engineering assistance, sales, and service throughout Europe, call EMV: Munich, 89-612-8054 • London, 908-566-556 • Paris, 1-64-61-63-29

INFO/CARD 40

SEMI-CONDUCTORS

Radio Data Demodulator

Featuring on-chip anti-alias, bandpass and signal reconstruction filters, the SAA6579 Radio Data System (RDS) demodulator from Philips Semiconductors requires the addition of only six passive components and a crystal to recover RDS data from FM radio broadcasts. Cost is in the region of \$2.20 in volume.

Philips Semiconductors
INFO/CARD #235

MMIC Amplifier

Model P35-4104 GaAs MMIC amplifier features 18 dB of gain. The operating frequency for the amplifier from Daico Industries is 0.05 to 3.0 GHz. Typical power output is +13 dBm, with only a 4.5 dB noise figure. Input and output are matched to 50 ohms. The part is available in chip or surface mount form.

Daico Industries, Inc.
INFO/CARD #234

Speech Compression IC

Qualcomm today announces the Q4400 variable-rate vocoder, the world's first VLSI circuit implementing the QCELP (Qualcomm Codebook Excited Linear Predictive code). Compression rates of 16:1 are possible with the 100-pin plastic quad flat pack device. Power consumption is less than 1 W. Pricing is as low as \$69 each in thousands.

Qualcomm, Inc.,
VLSI Products
INFO/CARD #233


45 MHz Op Amps

Linear Technology's LT1208 and LT1209 dual and quad op amps have a 50 degree phase margin and are stable driving any capacitive load. Slew rate is 400 V/us. The LT1208 and LT1209 are available in 8-pin and 16-pin packages, respectively. Both SO and DIP packages are available. Pricing for the LT1208 dual is \$4.45 in plastic in quantities of 100.

Linear Technology Corp.
INFO/CARD #232

High Power Amplifier

The model AR2569 thin-film cascaded amplifier from Cougar Components operates over 50 to



2500 MHz. Typical gain is 16.8 dB. Typical output power at the 1 dB compression point is +27.5 dBm. The device is packaged in a 4-pin TO-8B housing, with SMA and flatpack available.

Cougar Components
INFO/CARD #231

Amplifier

Amplifonix announces a low-cost, high output amplifier operating from 30 to 500 MHz. Model RZ9604 has typical output compression of +21.0 dBm, with gain of 23 dB. The device is packaged in a TO-8B package and costs under \$30.00 in large quantities.

Amplifonix, Inc.
INFO/CARD #230

DISCRETE COMPONENTS

RF Coils

Adjustable RF coils — both shielded and unshielded — are available from J.W. Miller. Series 4900 adjustable coils provide choices within the 30 to 250 MHz range. Series 48A and 49A adjustable coils provide stability and uniformity within the 10 to 250 MHz range. Inductance values from 0.037 to 0.788 uH are available from stock.

J.W. Miller Division of
Bell Industries
INFO/CARD #229

Chip Inductors

AVX Corp. has introduced the ACCU-L series of surface mount RF inductors. Available as an 0805 chip, ACCU-L inductors exhibit high SRF, high Q and low

resistance. They are ideal for applications between 100 MHz and above 2 GHz. This series covers the range from 2.7 nH to 15 nH with tolerances of ± 0.5 nH and ± 5 percent.

AVX Corp.
INFO/CARD #228

TEST EQUIPMENT

Calorimeter

Dielectric Communications' model 7200 calorimeter may be utilized with any existing fluid cooled load, offering an easy method of accurate RF measurement. Virtually any cooling fluid can be utilized, and power can be displayed in kilowatts, kcal/h or MJ/h.

Dielectric Communications
INFO/CARD #227

Tracking Generator

The 2707 external tracking generator from Tektronix provides swept-frequency coverage from 100 kHz to 1.8 GHz. Output level adjustments can be made between 0 to -48 dBm, in 0.1 dB steps. The 2707 works with Tektronix 271X spectrum analyzers, and is priced at \$3950.

Tektronix
INFO/CARD #226


Noise Figure Measurement

Noise Com has introduced the NCT 6000 series of instruments for noise figure measurement. The series includes a calibrated white noise source, low noise amplifier, impedance matching circuitry, step attenuator with 0.1 dB resolution, power supplies and switches necessary to perform accurate noise figure measurements when using a spectrum analyzer.

Noise Com, Inc.
INFO/CARD #225

Frequency Counter

A portable 300 MHz frequency counter has been introduced by John Fluke Mfg. The PM 6685 has a resolution of 10 digits per second of measuring time. The counter has ovenized oscillator time-base options and stability as



high as 5×10^{-10} /day. Optional RF inputs extend the upper frequency range to 1.3, 2.7 or 4.5 GHz. The PM 6685 U.S. list price is \$1860.

John Fluke Mfg. Co., Inc.
INFO/CARD #224

Radar Signal Simulator

The RA-100AM can simulate up to ten asynchronous pulsed emitters, each with individual pulse widths, pulse repetition intervals, pulse groups, jitter and signal-to-noise ratios. The RA-200 is a rack-mounted, modular RF Radar signal simulation system.

S.T. Research Corp.
INFO/CARD #223

SIGNAL SOURCES

Tiny OCXO

Vectron Laboratories has developed the CO-738S series of oven controlled crystal oscillators with aging rates of 5×10^{-8} /year and temperature stabilities of $\pm 1 \times 10^{-9}$ over 0 to 50 degrees C. Available in frequencies from 32 kHz to 32 MHz, the oscillators measure 1.5 x 1.25 x 0.86 inches. Price is \$373 each for 100 pieces.

Vectron Laboratories, Inc.
INFO/CARD #222

Coaxial Resonator VCO

T and M Microwave model VCR 8001 is a high Q, coaxial resonator oscillator operating at a center frequency of 1525 MHz. The surface mount devices can be tuned ± 10 MHz with a tuning voltage of 0 to 12 V. Typical output power is +13 dBm.

T and M Microwave, Inc.
INFO/CARD #221

A Basic Review of Feedback

By Gary A. Breed
Editor

Feedback is the principle that makes it possible to have accurate linear systems. Amplifiers, oscillators, automatic gain control and phase locked loops are among the common RF applications of feedback. Although the design equations for these circuits are well known and most undergraduate linear systems courses provide a mathematical derivation, this short note reexamines the most basic concepts of feedback from an intuitive perspective.

There are two essential concepts to remember regarding feedback: 1) feedback trades gain for control, and 2) uncontrolled feedback can corrupt the desired results and cause oscillation. The first represents the power of feedback for designers; the second is a warning to the same designers.

The generalized feedback system is shown in Figure 1. The input passes through the forward signal path, an amplifier with gain A . The output is subjected to some transfer function, β , and summed in an inverted form with the input. The net input is now the difference between the original input and a modified portion of the output. This is the classic "negative feedback" concept.

This linear feedback system can be represented by the equation:

$$V_{OUT} = A(V_{IN} - \beta V_{OUT}) \quad (1)$$

or, rearranging:

$$V_{OUT}(1 + A\beta) = AV_{IN} \quad (2)$$

To obtain the overall gain (closed loop gain):

$$A_{CL} = \frac{V_{OUT}}{V_{IN}} = \frac{A}{1 + A\beta} \quad (3)$$

In a perfectly-designed feedback system, we can think of the transfer function β as detecting any error in the input/output relationship. The error-correction signal is then subtracted from the input, resulting in an error-free signal at the output of the system.

The simplest illustration of the principle is an operational amplifier. Figure 2

shows a circuit with the input applied to the non-inverting input, and two equal-value (10kohm) resistors making a voltage divider in the feedback loop to the inverting input. According to equation (3) above, $\beta = 1/2$, since the voltage divider presents $1/2$ of V_{OUT} to the inverting input. The gain of this system will be:

$$A_{CL} = \frac{A}{1 + A/2} \quad (4)$$

In an ideal system, A is infinite, but we can live with a very large A of perhaps 100,000. In this case:

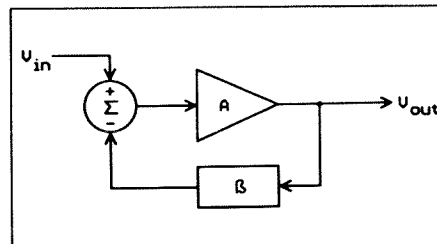


Figure 1. The classic representation of negative feedback.

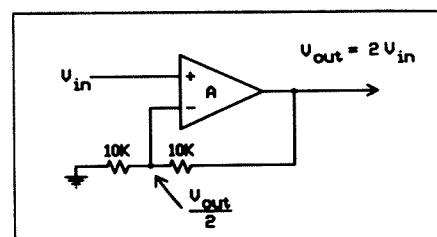


Figure 2. A simple gain-of-2 operational amplifier example.

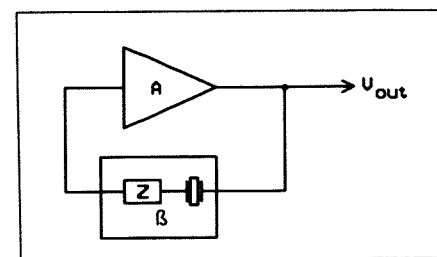


Figure 3. The classic representation of negative feedback.

$$A_{CL} = \frac{100,000}{1 + 50,000} = 1.99996 \quad (5)$$

As A goes to infinity, the closed loop gain will become exactly 2, or $1/\beta$.

Let's follow this process around the op amp loop. First, an input V_{IN} is applied, which is amplified by gain A , which gives us some output V_{OUT} . However, half of the output is then subtracted from the input, so the input is now $V_{IN} - V_{OUT}/2$. If we use the "error function" concept noted above, then $V_{IN} - V_{OUT}/2 = 0$ when the system is operating error-free. This condition is satisfied only if $V_{OUT} = 2V_{IN}$; or $A_{CL} = 2$, as shown by equation (5).


This example demonstrates principle 1) above: we can trade gain for control. Passive feedback components alone define an exact gain-of-2 system. The more gain we have to trade (i.e., A approaching infinity), the better the accuracy.

Non-ideal Systems

Of course, feedback is not limited to ideal amplifiers and resistive feedback networks. The feedback can be any impedance, including frequency- and time-dependent networks of resistors, inductors and capacitors. The network can also be non-linear, using diodes or transistors.


The amplifier need not be ideal, either. Frequency response and phase shift must be included in the forward transfer function, which can then be applied to the feedback (β) transfer function. As long as the operational parameters of the circuit are known, feedback networks for the circuit can be computed.

An oscillator is a common RF circuit requiring application of feedback principles. Let's use the simplified oscillator circuit in Figure 3 as an example. Let's assume that the amplifier A is a packaged device which has a gain of 10 at the frequency of interest, and is an inverting amplifier with a phase shift of 180 degrees at that frequency. For β , we will use a crystal along with additional circuitry (Z) to obtain the necessary feed-

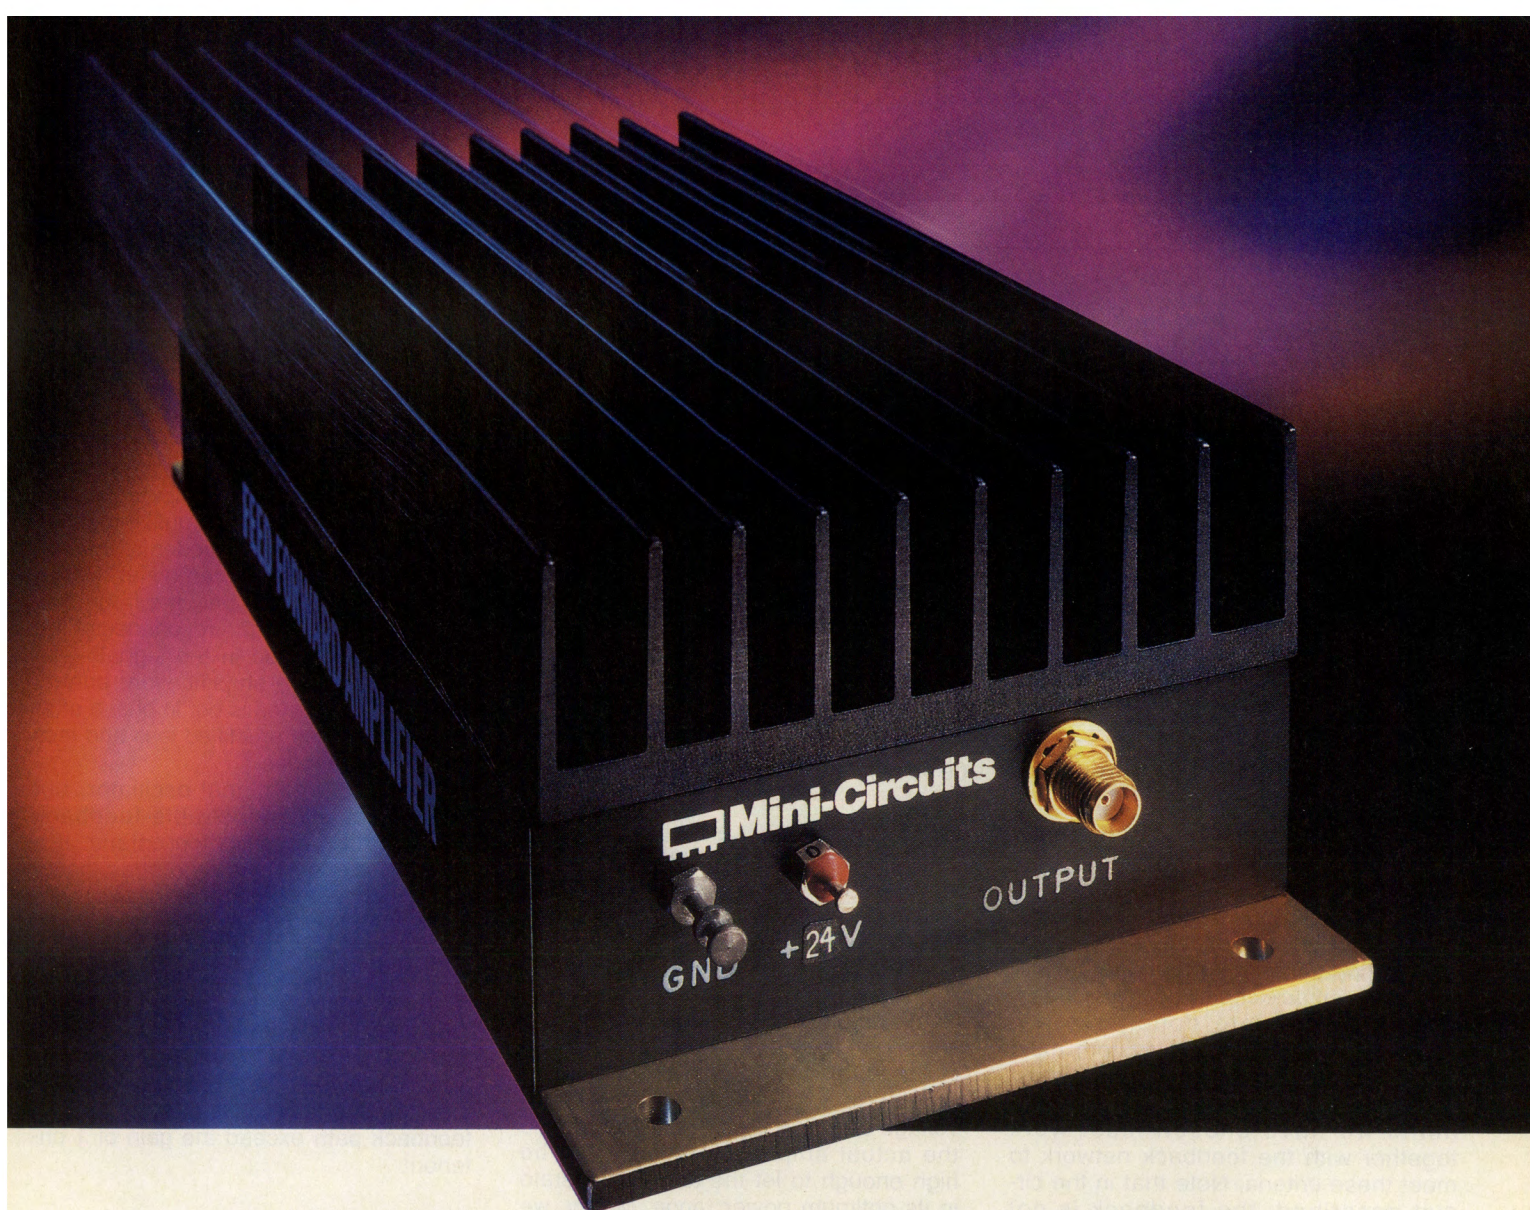

FEED FORWARD AMPLIFIERS

up to +50dBm IP3 50-1000MHz from \$695



Now, amplifiers to 1GHz with higher intercept point, improved reliability, lower DC current requirements, Utilizing feed forward phase and amplitude cancellation techniques, ZHL-P3 amplifiers offer significant advantages over conventional units... cost savings, size and DC power reduction, 10dB higher two-tone third order intercept point. (IP3).

Two models, 50-500MHz and 50-1000MHz, unconditionally stable, with more than 20dB gain and 45dB reverse isolation will satisfy most system needs for low intermodulation distortion. Even amplifier second order intercept point is greater than +63dBm! So, check the specifications listed and re-evaluate your amplifier design decisions for improved system performance at lower cost.

One-week shipment guaranteed. Only from Mini-Circuits.

SPECIFICATIONS	ZHL-1-50P3	ZHL-2-50P3
Frequency, MHz.....	50-500	50-1000
Gain, Min, dB.....	22	21
Power Output ⁽¹⁾ , dBm.....	27 ⁽²⁾	25
Intercept Point, dBm		
IP2.....	70	63
IP3.....	50	43
DC Power		
Volts.....	24	24
Current, Amps.....	1.3	0.65
VSWR, 50 ohms, In/Out.....	1.5:1	2:1
Price (1-9).....	\$695.00	\$895.00
Size ⁽³⁾ L x W x H, inch.....	7 x 3.25 x 2.13	
(1) 1dB compression		
(2) 30dBm, 50-250MHz		
(3) Includes self-contained heat sink		

finding new ways ...
setting higher standards

Mini-Circuits™

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
EUROPE 44-252-835094 Fax 44-252-837010

Distribution Centers / NORTH AMERICA 800-654-7949 • 417-335-5935 Fax 417-335-5945
For detailed specs on all Mini-Circuits products refer to • THOMAS REGISTER Vol. 23 • MICROWAVES PRODUCT DIRECTORY • EEM • MINI-CIRCUITS' 740-pg HANDBOOK.

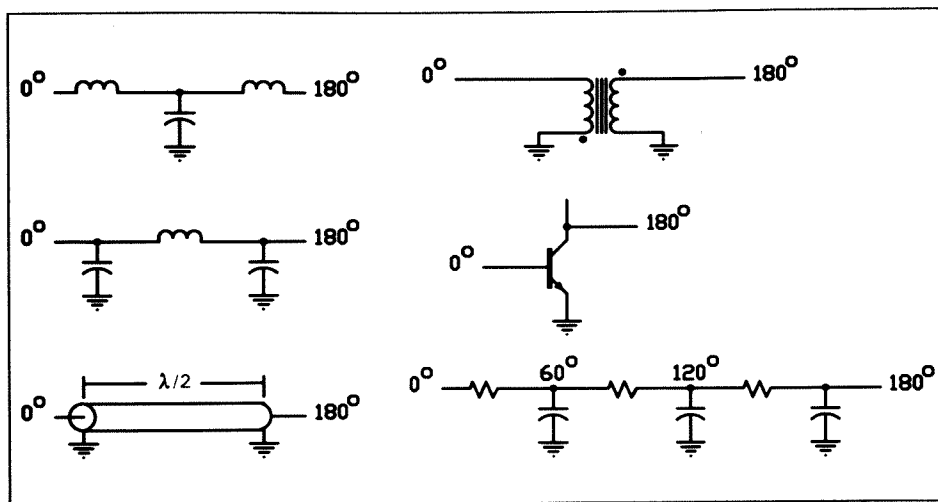


Figure 4. Methods of obtaining the necessary 180-degree phase shift.

back. We'll assume the crystal resonator is operating in its series-resonant mode, so that it is lossless and has no phase shift at the operating frequency.

The criteria for oscillation require that the total phase shift through the amplifier and feedback circuit be $(n)2\pi$. Also, when steady-state conditions are reached, the gain of the system must be 1; or more correctly, the output must remain at a fixed level. The components we have chosen must work together with the feedback network to meet these criteria. Note that in the circuit described, the feedback is not inverted, but presented directly to the input.

Since the amplifier has a phase shift defined as 180 degrees, Z must supply the additional phase shift of 180 degrees to meet the requirement of 2π total phase shift. Figure 4 shows some design options. This part of the feedback network can be a lumped element network with a 180-degree phase shift, or it could be a transmission line section with a 180-degree, or $1/2$ wavelength time delay. At lower RF frequencies, a transformer might also be used to pro-

vide the phase shift, since 180 degrees is a simple inversion. Other possibilities include introducing the required phase shift using cascaded R-C networks or an inverting amplifier.

The other part of the oscillation criteria, a gain of 1 (output at a constant level), requires a non-linear function. As shown in Figure 5, one method is to use opposed diodes to limit the maximum amplitude of the signal. The forward voltage drop of the diodes will determine the actual amplitude, which must be high enough to let the amplifier operate in its optimum power range. Mainly, we want to assure sufficient excess gain when the oscillator is starting, and then maintain that the output level well above the inherent noise level. Another method of limiting the maximum amplitude is to allow the amplifier itself reach saturation. The power supply voltage and bias levels can be selected to perform the same function as the diodes, as long as the ratings of the active devices used in the amplifier are not exceeded.

With a feedback network of diodes for limiting and a transmission network for phase shift, the oscillator should operate

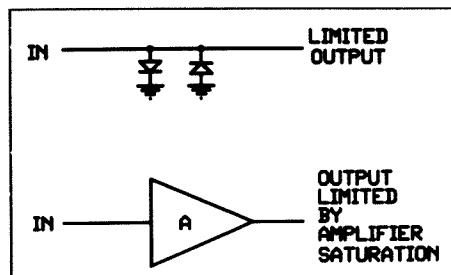


Figure 5. Two ways to limit amplitude.

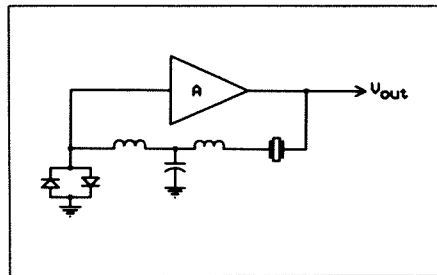


Figure 6. The oscillator with a complete feedback circuit.

(Figure 6).

Again, we can follow the process of operation through the system in an intuitive way. In an oscillator, the system noise is the initial input, which is amplified by A. The entire output voltage is returned to the input via the crystal and phase shift network. At the crystal's resonant frequency, the fed-back output is exactly in phase with the input, boosting the level again and again until it reaches the limiting level of the diodes or the saturation voltage of the amplifier. When this point is reached, only the frequency that corresponds to the resonance of the crystal is contained in the signal — In the process of re-amplification, energy at other frequencies is not in phase after feedback, and is amplified less and less in successive loops.

This is an intentional oscillator, but sometimes an undesirable feedback path meets the oscillation criteria. If a circuit has feedback due to stray inductance and capacitance, poor power supply decoupling, or improper p.c. board layout, we have the situation warned about in principle 2): uncontrolled feedback can result in unwanted oscillation. This is especially important with the new generation of MMIC, video and operational amplifiers, where lots of gain is available that can make a lossy, indirect feedback path exceed the gain of 1 criterion!

Conclusion

Controlling a circuit through feedback is a powerful tool, allowing us to obtain precision linear (and non-linear) responses for amplification, filtering, and other signal processing applications. We can get very good performance from an imperfect active device (as long it has sufficient gain) by applying accurate passive components in a feedback circuit.

This powerful design tool can also work against us, since it can also be used to induce oscillations, intentional and unwanted. Especially in RF circuits, we must always remember that feedback can exist in ways that do not appear on the circuit diagram. **RF**

References

1. T.M. Frederickson, *Intuitive Operational Amplifiers*, McGraw-Hill, 1988, Chapters 2, 3, 4.
2. A. Przedpelski, "VHF and UHF Crystal Oscillators," *RF Design*, July 1990. (Also in the *Oscillator Design Handbook*, Cardiff Publishing Co., 1991.)

An RF Swept Filter for a Medical Ultrasound System

By Alexander Pummer
P.C.S. Consultants

This design is part of a medical ultrasound imaging system. It was designed to eliminate the shortcomings of an existing circuit. The attenuation of ultrasound waves in the body is depth and frequency dependant. The rate of attenuation is approximately 1 dB/cm/MHz. Because of this, the spectrum of the reflected energy is different from that of the transmitted energy. The higher frequencies are more attenuated. This causes a relative increase of noise at higher frequencies.

The normal way of solving this problem is to use a bandpass filter which is tuned to cut out the noisy part of the returning spectrum. Since we want to observe different depths in the body, we have to adjust the passband of this filter. This adjustment should happen continuously since we want to see a continuous picture. The filter has to be tuned during the receiving period.

The presently used solution utilizes a tuned LC circuit where the tuning element is a varicap diode. This circuit has two major problems. The first problem is that the relative high level signal will add to the tuning voltage and contribute to the tuning of the circuit and will therefore cause intermodulation. The second problem is a result of the first one. The filter cannot be tuned exactly to a certain frequency because of the uncertainty in the tuning voltage. The new design separates the tuning element from the signal path. Therefore, there is no parasitic tuning effect, no intermodulation, and the center frequency of the filter is exact at any time.

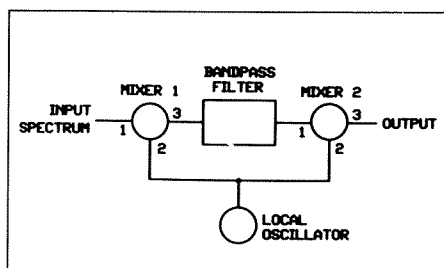


Figure 1. Block diagram of swept filter

The circuit (shown in Figure 1) works as follows: the input spectrum, $f(s)$, feeds into the first mixer port #1. The local oscillator, $f(LO)$, is driving the mixer at port #2. The combination frequencies $f(s) \pm f(LO)$ are available at port #3. The bandpass filter could select $f(s) + f(LO)$ or $f(s) - f(LO)$, but for our application, we will select $f(s) + f(LO)$. The selected spectrum $f(s) + f(LO)$ feeds into the second mixer at port #1. The local oscillator $f(LO)$ is also driving the second mixer at its port #2. The output spectrum of the second mixer is: $f(s) + f(LO) \pm f(LO) = f(s) + 2f(LO)$. A lowpass filter will separate the component $f(s)$ from $f(s) + 2f(LO)$. If we sweep the local oscillator, the output spectrum of the system will be shaped by the amplitude frequency response of the bandpass filter and the virtual center frequency of the system will be equal to the frequency of the local oscillator $f(LO)$. This system will act exactly like the ideal filter we need. The tuning of the local oscillator is totally separated from the signal path. The frequency of the local oscillator is controlled by a frequency closed loop. This loop will exactly tune the oscillator frequency to the required value. The bandpass filter is a fixed filter built with amplitude independent components.

Some Details of the Circuit

The mixers are single balanced only, but they are designed to carry high level signals without producing noticeable intermodulation. Figure 2 shows the mixer. The two switches $S1$ and $S2$ are conducting alternately. The sequence is controlled by the local oscillator. When $S1$ is on, $S2$ is off, and vice versa. These two switches are JFETs. A mixer will generate intermodulation products if the input level is high enough to influence the conduction angle of the switching elements. The conduction angle for a good mixer is determined by the oscillator only. Using the JFET as a switching device in this configuration will allow us to use relatively high signal levels. The signal level of the system at the input of the mixer is approximately 1 Vpp. The control signal for the JFETs comes from

a fast CMOS output. The input capacitance of the devices is low, (3 pF max.), therefore the oscillator power is low. For a diode ring mixer we would have to use much higher oscillator power, which could create interference problems for the rest of the system.

The local oscillator looks relatively complicated, but the two loops of the circuit will take care of all the component tolerances. One of the loops keeps the oscillator amplitude constant. The other is the frequency control loop.

The ultrasound system provides a ramp to tune the oscillator. The loop ensures that at an instantaneous value of this ramp the oscillator will tune to one specified frequency. The actual oscillator frequency is twice that required for the mixing process. A 2:1 frequency divider (D flip-flop) is used to divide the output frequency of the oscillator, and provide the 50 percent duty cycle signal required for the proper function of the mixers.

From the production point of view it works like a digital circuit. In other words, if the right parts are loaded into the board it works without the hand-selecting and tweaking normally associated with RF oscillator circuits. The frequency closed loop usually has a frequency to voltage converter. I decided on a different method. One of the main system's microcontrollers provides a tuning voltage, via a D/A converter, for the oscillator. It then takes a sample of the oscillator frequency by using a ten bit binary counter.

The required frequency accuracy is

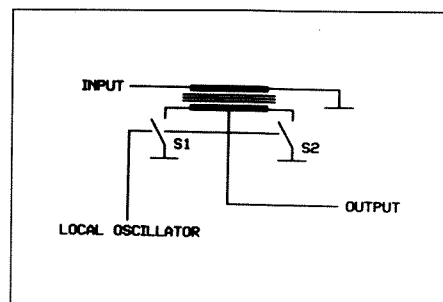


Figure 2. Illustration of mixer action used in the filter.

eight bits. By changing the tuning voltage in a stepwise fashion, the microcontroller will map the oscillator's control voltage/output frequency transfer function and will create a look up table. The control voltage to output frequency transfer function of the oscillator is a non-linear function. This look up table will be created during the initialization of the ultrasound system, and it will be refreshed whenever the filter is not in use and the microcontroller has the time. The loop will cancel any part tolerances, temperature effects, aging and drift. Since this loop is not an analog closed loop, it can be tuned quickly and without an expensive high-speed loop amplifier. This eliminates the problems associated with fast, non-linear closed loops.

The microcontroller also helps to set the overall gain by switching the feedback path of the intermediate frequency amplifier.

Details of Actual Circuit

The design specifications for the actual circuit are shown in Table 1. The

Design specification:

System gain:	0dB $\pm$ 1.5dB
Max input level	1 V pp
Spurious-free dynamic range	at least 55 dB
Band width	$\pm$ 400 kHz for 0.5 dB roll off and min 18dB roll off for 1 MHz
Tuning range	2 MHz to 10 MHz
Tuning accuracy	8 bits = 0.25%
Tuning band width	50 kHz
Power consumption	+5V @ 100mA max -12V @ 50mA max
Parts cost	\$50 max

Additional requirements:

Low labor cost
Minimal adjustment time
Highly reliable, insensitive circuit
No interference with the main system.


Table 1. Design Specifications.

schematic is shown in Figure 3.

The input signal feeds from the main system into transformer T1. This should be a high level transformer in order to avoid nonlinearities due to saturation.

U1 is a fast JFET array. U2 is the frequency divider and it should be located close to U1. The interconnection between U2 and U1 must be extremely short. The clock input line of U2 is not

NETCOM

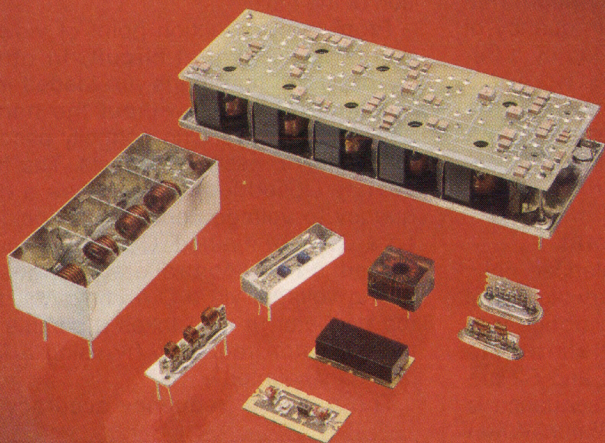

MANUFACTURER OF CUSTOM LUMPED ELEMENT NETWORKS

LC FILTERS DC - 1 GHz
Band Pass, Low Pass, High Pass, Notch


CRYSTAL FILTERS 1 - 100 MHz
Band Pass, Notch

TRANSFORMERS / COILS

NETCOM, INC.



3000 Commercial Avenue, Northbrook, IL 60062 USA
Phone: 708/564-5100 FAX: 708/564-2279

Streamline Crystal Oscillator



- Small Package
- Low Phase Noise
- Low Power Consumption
- Can be Customized

Frequency: 1 to 20 MHz Package: 2x2x1"
Phase Noise:



Wenzel Associates
Quietly the best

1005 La Posada Drive, Austin, Texas 78752 • 512-450-1400 • Fax 512-450-1490

Raltron manufactures its compact VC 7025 Voltage Controlled Crystal Oscillator to meet your Phase Locked Loop specifications, delivering deviation sensitivity or pullability of up to ± 100 PPM/V. Big performance in a small package. At a price you've been looking for.



VCXO WITH PULLABILITY


Raltron manufactures a complete line of the highest quality VCXO's to both standard and custom specifications. Send us your VCXO specifications today or call (305) 593-6033 for more information.

Raltron Electronics Corp.

2315 NW 107th Avenue, Miami, Florida 33172 U.S.A.
Fax (305) 594-3973 Telex 441588 RALSEN
(305) 593-6033

Telecommunications:

If you're into it... listen to this!

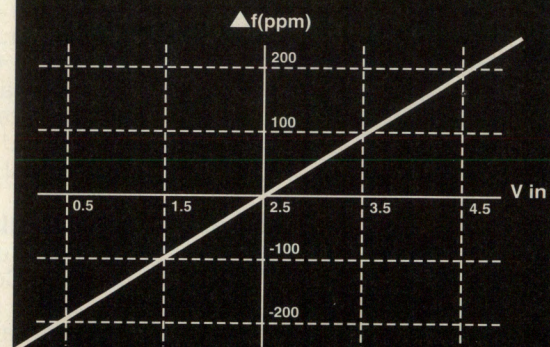

Crystals
Crystal Oscillators
Crystal Filters
Ceramic Resonators

RALTRON

Only Raltron has it all.

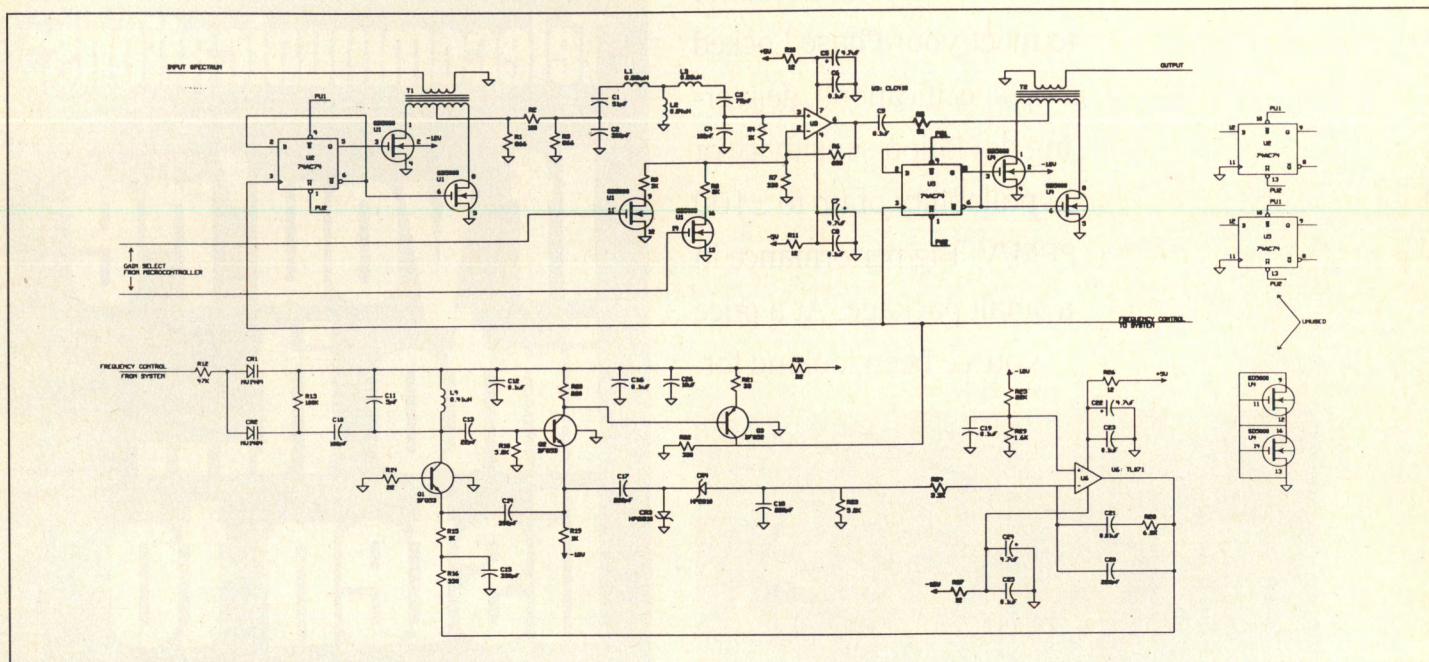


Figure 3. Schematic of the swept bandpass filter.

so critical. R1, R2 and R3 form a 4 dB path which separates the mixer output from the reactive input of the intermediate frequency filter. C1, C2, L1, L2, C3 and C4 constitute the intermediate frequency filter. The coupling is designed for maximum bandwidth and maximum flatness (so-called critical coupling). The coupling works via L2, which is a piece of stripline. The inductance is set by the PCB design, no adjustment is required. The only adjustable parts are L1 and L3. They are tuned for maximum output at 25 MHz. The input and the output of the filter are not equally tapped (i.e. the output loading is less than the input). Amplifier U3 compensates for the insertion loss of the filter, the attenuation of the 4 dB path, and for the conversion losses of both mixers. The self test routine of the main system provides a carrier

to set the overall gain to 0 dB $\pm$ 1 dB. The level of the input and output signal will be compared and the microcontroller will set the feedback path of the amplifier by turning on or off the switches Sa and Sb of U1. The output of the amplifier drives the input of the second mixer via the R5 matching resistor. The layout requirements for U4 and U5 are the same as for U1 and U2. The transformer T2 is identical to T1.

Local Oscillator

The main requirement is simplicity for production. Coils should have two ends only, no tap, no secondary. Although a transistor array is available (RCA 3100), I used discrete parts. Q1 and Q2 are the active elements of the oscillator. The frequency is determined by L4 and the resultant value of C11, C10 and the two junction capacitances of the varicap diodes CR1 and CR2. The oscillator level is 4 Vpp across L4. This is a good compromise between noise and radiation. The 4 Vpp requires the use of two varicap diodes for first order cancellation. The oscillator amplitude is stabilized by the servo. The oscillator level is set by the voltage divider R25 and R29. The output of Q3 is a CMOS logic level signal which drives the two frequency dividers of the two mixers. It also provides a sample of the oscillator frequency for the control circuit. The utilized output frequency range of the oscillator is 27 MHz to 35 MHz. The lowpass filter

mentioned earlier is not part of the circuit. It is already present as an anti-aliasing filter in front of the ultrasound system's A/D converter.

Results

This circuit was breadboarded and tested. It fulfilled the specifications with a healthy margin. The circuit was then integrated into the ultrasound system and worked according to our expectations. Figure 4 shows the filter's response. A patent application has been filed for this filtering scheme. **RF**


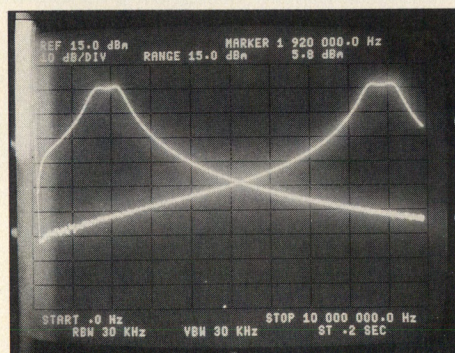


Figure 4. Filter response at either end of its tuning range.

About the Author

Alexander Pummer received his Dipl.Ing degree at the Polytechnic University in Budapest Hungary. He built his first ham radio from scratch at age seven. Since then, he has designed equipment operating from DC to microwaves and in both analog and digital domains. He is a member of the IEEE Electromagnetic and Communication societies. He can be reached at P.C.S. Consultants, 4349 Krause St., Pleasanton, CA 94588 or by phone at (510) 426-8056 or by FAX at (510) 846-9058.



TOUGH ALL-WELDED MIXERS



SURFACE-MOUNT or PLUG-IN FROM **\$3.95** (10 qty)


Expose Mini-Circuits' TUF-mixers to 250°C for five minutes, or to the extreme shock and vibration stresses of MIL-STD-28837, or to 200 cycles of thermal shock from -55° to +100°C...they'll survive without any change in specs. They are mighty tough mixers!

Available with LO drive levels from +7 to +17dBm, performance features include very low conversion loss flat over the entire band, high isolation (L-R, L-I), and well-matched VSWR at all ports.

All-welded internal and external construction is used to assemble and package the TUF-unit in its tiny 0.5 by 0.2 by 0.25 in. metal case, for plug-in or surface-mount* assembly.

TUF-Ultra-Rel™ mixers are guaranteed for five years and boast unprecedented "skinny" sigma (δ) unit-to-unit repeatability as shown in the Table.

Tough, tiny, and with tight repeatability...Mini-Circuits' Ultra-Rel™ TUF-mixers with a five-year guarantee, priced from \$3.95...available only from Mini-Circuits.



ULTRA-REL™ MIXERS

5-YR. GUARANTEE

with extra long life due to unique HP monolithic diode construction, 300°C high temp. storage, 1000 cycles thermal shock, vibration, acceleration, and mechanical shock exceeding MIL requirements.

finding new ways...
setting higher standards

Mini-Circuits™

WE ACCEPT AMERICAN EXPRESS AND VISA

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

EUROPE 44-252-835094 Fax 44-252-837010

For detailed specs on all Mini-Circuits products refer to • THOMAS REGISTER Vol. 23 • MICROWAVES PRODUCT DIRECTORY • EEM • MINI-CIRCUITS' 740-pg HANDBOOK.

SPECIFICATIONS

Model	LO Power (dBm)	Freq. LO/RF (MHz)	■ Conv. Loss (dB) $\bar{X}$ δ	Isol. L-R (dB)	Price, \$ Ea. 10 qty
TUF-3	7	0.15-400	4.98 0.34	46	5.95
TUF-3LH	10		4.8 0.37	51	7.95
TUF-3MH	13		5.0 0.33	46	8.95
TUF-3H	17		5.0 0.33	50	10.95
TUF-1	7	2-600	5.82 0.19	42	3.95
TUF-1LH	10		6.0 0.17	50	5.95
TUF-1MH	13		6.3 0.12	50	6.95
TUF-1H	17		5.9 0.18	50	8.95
TUF-2	7	50-1000	5.73 0.30	47	4.95
TUF-2LH	10		5.2 0.3	44	6.95
TUF-2MH	13		6.0 0.25	47	7.95
TUF-2H	17		6.2 0.22	47	9.95
TUF-5	7	20-1500	6.58 0.40	42	8.95
TUF-5LH	10		6.9 0.27	42	10.95
TUF-5MH	13		7.0 0.25	41	11.95
TUF-5H	17		7.5 0.17	50	13.95
TUF-860	7	860-1050	6.2 0.37	35	8.95
TUF-860LH	10		6.3 0.27	35	10.95
TUF-860MH	13		6.8 0.32	35	11.95
TUF-860H	17		6.8 0.31	38	13.95
TUF-11A	7	1400-1900	6.83 0.30	33	14.95
TUF-11ALH	10		7.0 0.20	36	16.95
TUF-11AMH	13		7.4 0.20	33	17.95
TUF-11AH	17		7.3 0.28	35	19.95

*To specify surface-mount models, add SM after P/N shown.

■ $\bar{X}$ = Average conversion loss at upper end of midband ($f_U/2$)

δ = Sigma or standard deviation

A Resistive Attenuator Calculation Program

By Jouni Verronen
Engineering Consultant

Attenuators are frequently needed in RF circuits. This program is aimed at quick calculation of resistive attenuators of the Pi- and T-type. Also, the resistors for an L-pad of minimum attenuation are easily calculated. In addition to the synthesis of basic attenuator circuits, RESATT also provides analysis. One can check either a T-circuit or Pi-circuit using standard resistor values. The analysis program calculates total loss and impedance match at both ports.

This is one of those small calculation programs that I have written for personal use to allow fast solutions to specific, often-encountered, technical design problems. The general requirements for small, quick programs, are discussed in Reference 1.

The program is divided into two parts, synthesis and analysis. Upon starting, the synthesis portion is activated. If the program was used before, there is a data file (RESATT1.DAT) residing in the same directory as RESATT.EXE. This file contains the latest input values, and the program is initialized with those values. New initial values can be selected

by hitting an appropriate character. These are listed in a help file, which can be accessed from F1.

The user-supplied values are the resistive terminal impedances and the loss of the attenuator. Every time one of these values is changed the program calculates new resistances for both T and Pi topologies. Figure 1 shows a typical screen. If m is hit, the program calculates the minimum attenuation L-network which can match the two terminal resistances given.

One must calculate the real world losses and impedances when standard resistor values are used. This is done in the analysis part of RESATT. The analysis is activated by hitting the right arrow at the keyboard. Hitting the left arrow returns operation to the synthesis half.

To perform an analysis, first either a Pi- or T-circuit must be chosen by striking p or t. After that, the resistor values

Resistive attenuator design		

Date: 1992-03-18	Time: 02:47:23	

Attenuator synthesis for L = 10.00 dB		
T-circuit:		
R1 = 25.97 ohm	R2 = 25.97 ohm	
Ro1 = 50.00 ohm	R3 = 35.14 ohm	Ro2 = 50.00 ohm
Pi-circuit:		
Ro1 = 50.00 ohm	R3 = 71.15 ohm	Ro2 = 50.00 ohm
R1 = 96.25 ohm	R2 = 96.25 ohm	

Attenuator analysis for a Pi-type resistor network:		
Ro1 = 50.0 ohm	R3 = 68.0 ohm	Ro2 = 50.0 ohm
->	R1 = 100.0 ohm	R2 = 100.0 ohm <-
RL1 = 49.6 dB		RL2 = 49.6 dB
R11 = 50.3 ohm		R12 = 50.3 ohm
Calculated loss:	L = 9.63 dB	

Figure 2. A printed report.

can be entered. The analysis program calculates the following items of interest.

- impedance seen towards the attenuator at both ports
- return loss at both ports
- insertion loss

In all these calculations, the ports of the attenuator are terminated with the same resistances (Ro1 and Ro2) which were used in the synthesis part.

For both synthesis and analysis a printed report can be generated. F5 prints the common heading. F6 prints the calculation report for the active side. Figure 2 shows an example of a printed report.

Equations Used

Equations for attenuator synthesis are well known and are not rewritten here, (see References 2 and 3). For analysis, the terminated resistor network was first reduced to one input resistance, for which return loss was then determined. Insertion loss was calculated after that using basic concepts.

Program Versions

The program was written using

Resistive attenuator design 1.00 by JV		
Synthesis :		Analysis :
Ro1 = 75.0 ohm	Ro2 = 50.0 ohm	for T-attenuator:
L = 5.72 dB		
Stroke m for Lmin		
<pre> Rt1 = 43.30 ohm Rt3 = 86.60 ohm Rp1 = ***** ohm Rp3 = 43.30 ohm Rp2 = 86.60 ohm Rt2 = 0.00 ohm </pre>		<pre> Rt1 = 39.00 ohm Rt3 = 82.00 ohm Rt2 = 0.00 ohm </pre>
when:		
Ro1 = 75.0 ohm and Ro2 = 50.0 ohm		
->		<-
Ri = 70.06 ohm		Ri = 47.69 ohm
RL = 29.4 dB		RL = 32.5 dB
Total loss = 5.61 dB		
F1: help F7: exit		

Figure 1. Typical screen showing both synthesis and analysis portions.

INVINCIBLE POWER!

Attenuators and Loads


Power Range From 1 To 300 Watts



JFW Industries, Inc.

5134 Commerce Square Drive, Indianapolis, Indiana 46237

(317) 887-1340 Fax: (317) 881-6790

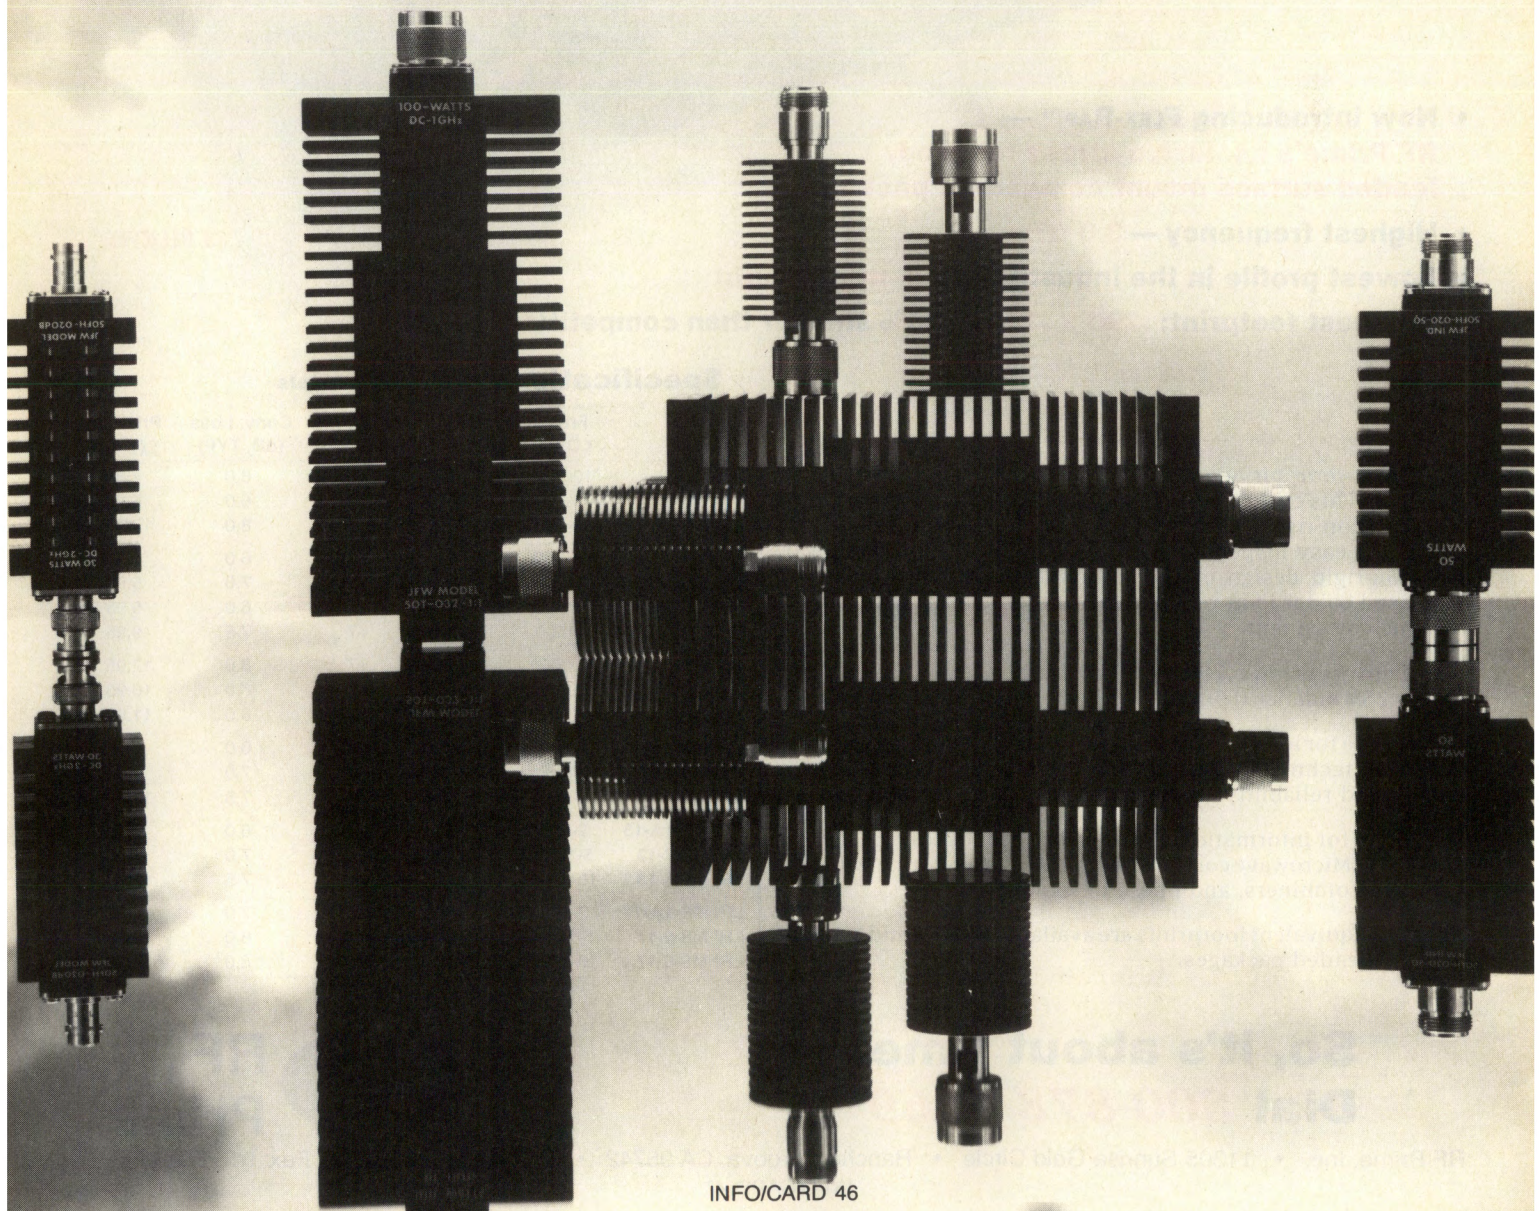

RF Prime

**Introduces an Industry First—
Leaded Surface Mount Passive
Components with FLEX-RAP™.**



- **Now introducing FLEX-RAP™ —**
**RF Prime's exclusive stress relieved,
leaded surface mount component package**
- **Highest frequency — 3.0 GHz**
- **Lowest profile in the industry — .185 max. height**
- **Smallest footprint: .290 x .300 — 25% smaller than competition¹**

Specifications, selected models

Model	Frequency, MHz LO/RF	IF	LO Level (dBm)	Conv. Loss (dB, TYP)	Price, \$ (1-9)
LRFMS-1L	10-500	DC-500	+3	6.0	4.95
LRFMS-2L	500-1000	DC-1000	+3	6.0	5.95
LRFMS-4L	400-1500	DC-900	+3	8.0	12.95
LRFMS-1	0.5-500	DC-500	+7	6.0	4.95
LRFMS-2	5-1000	DC-1000	+7	7.0	5.95
LRFMS-2A	5-1000	10-1000	+7	6.0	5.95
LRFMS-4	5-1500	DC-1000	+7	7.5	9.95
LRFMS-5	10-2000	10-900	+7	8.0	12.95
LRFMS-2T	1150-1900	DC-300	+7	6.0	10.95
LRFMN-25	2000-3000	DC-500	+7	8.0	11.95
LRFMS-1A-10	2-500	DC-500	+10	6.0	6.95
LRFMS-2-10	5-1000	DC-1000	+10	7.0	7.95
LRFMS-5-10	10-1500	10-1000	+10	7.5	11.95
LRFMS-1A-13	2-500	DC-500	+13	6.0	7.95
LRFMS-2-13	5-1000	DC-1000	+13	7.0	8.95
LRFMS-5-13	10-1500	10-1000	+13	7.5	13.95
LRFMS-1A-17	2-500	DC-500	+17	7.0	9.95
LRFMS-2-17	5-1000	DC-1000	+17	8.0	10.95
LRFMS-5-17	10-1500	10-1000	+17	8.0	15.95

RF Prime, your surface mount technology leader, introduces **FLEX-RAP**. This exclusive stress relieved surface mount package insures a non-rigid attachment to your printed circuit board and allows for easy inspection of solder reflow and flux removal. The non-rigid design of the component assures the user of increased solder joint reliability over that of a rigidly attached ceramic component.

These mixers are in a .290 x .300 x .185 package with a footprint that is 25% smaller than that of the competition.

Don't settle for less. RF Prime is your source for superior quality, advanced technology, surface mount mixers. RF Prime, where quality and reliability are designed in — not just tested in.

Call today for information on our entire product line of surface mount RF/Microwave components: mixers, transformers, power splitters/combiners, and phase detectors.

Note 1: Equivalent footprints are available for MCL and Synergy leaded packages.

**So, it's about time.
Dial 800-878-4669**

 **RF
Prime**

QuickBASIC, and the compiled version RESATT.EXE is directly executable under DOS. It requires an EGA or VGA monitor. The source code is also provided in ASCII form (RESATT.BAS). For other monitors it should be modified and then compiled for stand-alone operation.

Conclusions

In these calculations the equations involved are not particularly complicated, but compared to using tables or calculators, this program is quicker, especially as it does both analysis and synthesis; and one gets a printed report, too. **RF**

This program is available on disk from the RF Design Software Service. See page 79 for ordering information.

References


1. Jouni Verronen, "RF Calculation Programs for DOS", *RF Design*, October 1991.
2. Stanislaw Rosloniec, *Algorithms for*

Computer-Aided Design of Linear Microwave Circuits, Artech House, 1990.

3. Gary A. Breed, "Attenuator Basics", *RF Design*, February 1992.

About the Author

Jouni Verronen is an independent consultant, specializing in RF and analog design. He was recently involved in the design of scanning supervisory equipment, which is intended to control cellular telephone traffic more optimally in the NMT cellular system. He holds a M.Sc. in electrical engineering. He can be reached at Kannokotie 13, 90550 Oulu, Finland, or by telephone at 358 81 5546790.



TO-8 Filters \$25.00 each

(quantity: 100 and up)

- 10 MHz to 2,500 MHz.
- 3 sections
- 3 dB bandwidths: 5% to 20%
- Stopband rejection: 50 dBc.
- Temperature: -25 to +50 °C
- Shock: to 15 G
- Vibration: to 5 G
- Relative humidity: to 90%

Special models are also available in the TC series, with up to 6 sections, frequency ranges to 6,000 MHz, 3 dB bandwidths from 3% to 100% of the center frequency, and increased environmental capabilities. Other Lark Engineering Company TO-8 package filter models include lowpass and highpass configurations, and also models that can be qualified to MIL-SPEC environments.

**Call, Write, or Bingo for
our new 100 page Catalog!
714-240-1233**



Lark Engineering Company
A Division of Baier & Baier, Inc.
27151 Calle Delgado
San Juan Capistrano, CA 92675
FAX: 714-240-7910

CRYSTAL FILTERS

• MONOLITHIC • DISCRETE •

TEMEX ELECTRONICS is a manufacturer of Crystal Filters, Discriminators, L/C Filters and Crystals. TEMEX designs to custom specifications as well as the 10.7 MHz and 21.4 MHz standards. We take pride in fast response and the support of our customers. • PHONE • FAX • MAIL •

TEMEX ELECTRONICS, INC.
3030 W. Deer Valley Road Phoenix, AZ 85027
(Tel) 602-780-1995 (Fax) 602-780-2431

INFO/CARD 48

RFdesign REPRINTS

RF Design reprints are available for printing in quantities of 100 or more.

For further information contact:

Reprint Department
RF Design
6300 S. Syracuse Way, Suite 650, Englewood, CO 80111
(303) 220-0600

Second Annual

EMC/ESD

INTERNATIONAL

April 28-30, 1993

(With Fundamentals Tutorials on April 27)

Sheraton Denver Tech Center

Denver, Colorado

The second annual EMC/ESD International engineering conference and exposition brings you the best EMC/ESD-specific training available.

HERE'S WHAT EMC/ESD INTERNATIONAL IS:

- Two & One-Half Days of Conference Tracks: from Introductory to Advanced
- Two Full Days of Exhibits With 60 Exhibiting Companies
- Full-day Fundamentals Tutorials
- Half-day Fundamentals Tutorials
- Overviews and Trends

HERE'S HOW YOU CAN PARTICIPATE:

- Expand Your Knowledge by Attending any of Four Tutorials on Basic EMC and ESD Topics
- Choose From Among 40 Technical Sessions
- See the Newest Products and Services
- Here About the Latest Technological Advances
- Learn the Most Innovative Techniques
- Meet the Top Engineers and Marketers in the Industry

EMC/ESD International is an intense training experience. So be sure and take a break by attending the Western-Style Welcoming Grand Reception on Wednesday evening, April 28. Our special guest will be a 3,000-pound black bull named Tiny. Participants who bring their cameras will be able to have their pictures taken atop the saddled bull.

HERE'S WHAT ATTENDEES SAID ABOUT EMC/ESD INTERNATIONAL 1992:

"This is a presentation that has been past due."

— Charles Chapman,
Senior Maintenance Specialist
Harris Corp.

"Excellent speakers. Timely subjects."

— Tim D'arcangelis
President
Instruments for Industry, Inc.

"Quite relevant in content. Gave good up-to-the-moment status."

— Richard Murphy
Mechanical Systems Design
Bell Northern Research (Northern Telecom)

"The most coherent and comprehensive seminar I've seen or participated in on the subject."

— Tom Cokenias
VP Engineering
Electro Service Corp.

"Very informative, will help our company's efforts to improve our product design with EMC issues in mind."


— Amar Rajan
Principal Engineer
Wangtek Inc.

CALL OR FAX NOW FOR COMPLETE INFORMATION:

(303) 220-0600 * (800) 525-9154 * Fax (303) 770-0253



EMC/ESD International is Sponsored by *EMC Test & Design Magazine*

INTRODUCING THE 70% SOLUTION FOR LINEAR HF POWER THE MwT SLAM-0111

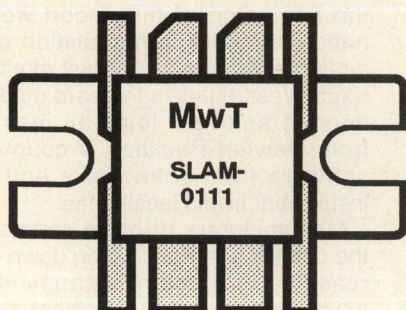


- 25 WATT CLASS A OPERATION
- +55 dBm THIRD ORDER INTERCEPT
- SELF-BIASED
- PUSH-PULL DEVICE
- BROADBAND (2 TO 32 MHz)
- 15 dB POWER GAIN
- ± 0.5 dB GAIN FLATNESS
- INTERNALLY TEMPERATURE COMPENSATED
- 28 VOLT, SINGLE SUPPLY OPERATION

TYPICAL WIDEBAND CIRCUIT PERFORMANCE

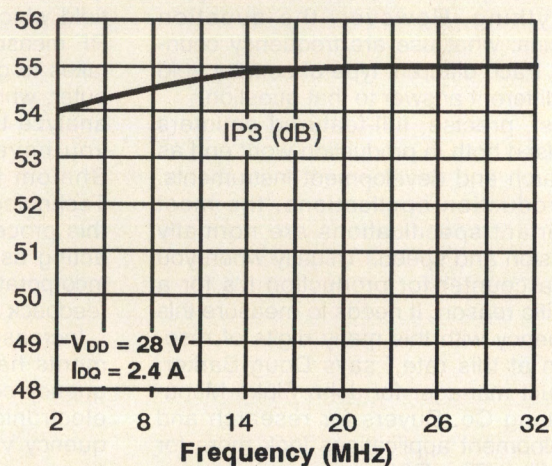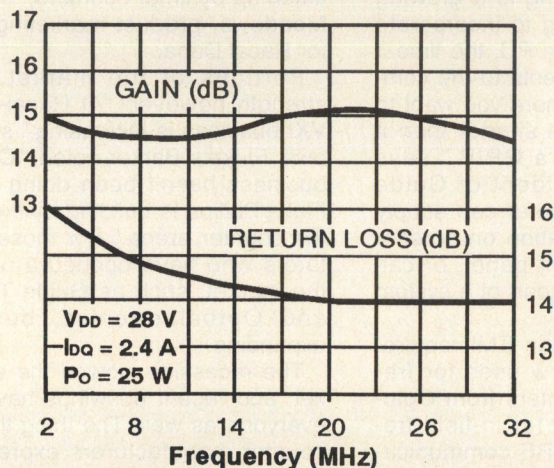

The SLAM-0111 is an internally matched, internally temperature compensated, push-pull power FET that delivers 25 Watts of Class A linear power. It is self-biased, requiring only a single 28 Volt power supply. Compared to circuits built with MOSFETs, an amplifier built with the SLAM-0111 requires 70% fewer components, occupies 70% less volume and costs 70% less. Call us for more about how you can try the 70% solution today!

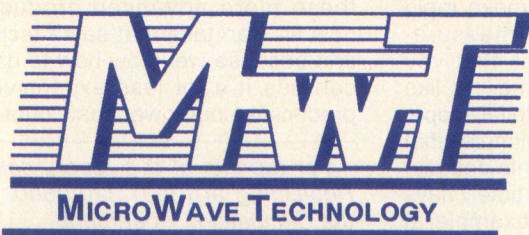

MicroWave Technology
4268 Solar Way
Fremont, CA 94538

TEL: 510-651-6700
FAX: 510-651-2208

Tallying Up Counters

By Andy Kellett
Technical Editor

What use are frequency counters? Do you want to tune an oscillator so it is spot on? The frequency counter would be a good choice except that your oscillator is synthesized and crystal referenced; you will be more interested in spurs than the oscillator's minute drifts. For this case, a spectrum analyzer is the tool to use. Suppose you want to look at the output of a VCO as it is quickly swept over its 10 percent bandwidth. You can get accurate readings at the endpoints where the frequency is stationary, but how did the frequency behave as it went between the endpoints? These examples may merely point out a maxim that applies to all test equipment; no instrument can measure everything. However, the question remains: what use are frequency counters? Each different type of counter sold is a different answer to that question.

Fast, precise, full-featured counters are used both in production work and as research and development instruments. In production applications, the most important specifications are normally precision and speed. "Usually when you buy a counter for production it's for a specific reason. It needs to measure this frequency with this many digits of resolution at this rate," says Doug Barker, product manager for John Fluke Manufacturing Co. Buyers for research and development applications look more for flexibility. "The R&D engineer is looking for more capability, because the counter is probably going to be a shared instrument. Somebody may need it for time interval analysis, and the next person will need it to characterize a VCO," says Barker. While performance and features are increasing, prices continue to decline. "It is true for a lot of our product lines that our older instruments cost more, while our newer models do more but cost less," notes Keithly Instruments applications engineer, Dale Cigoy.

The ability to produce a basic frequency counter for less money is part of the reason frequency counters are being included as a feature in other measuring instruments. "As more counter circuits are available on single chips, it becomes very simple and relatively inexpensive to add the functions. So it makes sense in many applications to add the function simply

because it doesn't cost much," says B&K Precision product manager, Bob Kral. Audio and low HF measurements can be made with the counters integrated into today's multimeters. Frequency counters built into spectrum analyzers have advantages over stand-alone counters. "The advantage of the spectrum analyzer's counter is that you can be very selective about what you are looking at. The spectrum analyzer/counter forms a frequency selective system, so you can make sure you are counting the signal of interest," notes Tektronix applications engineer, Cliff Morgan.

VXI and PC based instruments represent another branch of the counter family tree. Automatic testing is a growing field which is beginning to incorporate RF measurements. "In a PC, the time it takes to get measurements to the computer, which is really where you want to analyze them, is much shorter than if you have to go over a GPIB," says Shalom Kattan, president of Guide Technology. The computer can supply this processed information on screen, acting as a virtual front panel, or can incorporate the data as part of a system feedback loop.

Increased emphasis on EMI requirements has created new uses for frequency counters. Counters from Optoelectronics are meant for in-field frequency verification of RF communications and part 15 signals, and for counter surveillance. The high quality handheld instruments directly count up to 230 MHz, and possess a high gain front-end for signal input from an antenna. A patented digital filter design prevents the self oscillation which can accompany a high gain design.

As counters have become faster, it has become possible to make frequency measurements of an essentially different type. Modulation domain analyzers measure frequency vs. time. "In a modulation domain analyzer you make rapid frequency or time interval measurements correlated in time, so that you can display frequency vs. time. It's like comparing a voltmeter to a digital scope. A digital scope is really a voltmeter that makes very fast measurements and displays them as a function of time," says Guide's Kattan. The VCO example at

the beginning of this report would be handled well by a modulation domain analyzer. Announced at last month's RF Expo West, Guide's PC-card modulation domain analyzer joins an instrument from Hewlett-Packard, a counter and software from John Fluke and a VXI instrument from Racal-Dana.

Manufacturers of basic counters see the counter market slowing down for two reasons. First, other instruments now have frequency measurement capabilities. Second, crystal based circuits have reduced the need to tune circuits. "Because of that [the use of crystal locked oscillators] you see less use of frequency counters, but some of that is taken up by timer counters," says Arlene Meadows, product marketing manager for Racal Dana.

Portions of the market do show strength however. "At Racal-Dana, our VXI business is increasing," says Meadows. Fluke's Barker noted, "Our counter business hasn't been doing too badly. Fluke/Philips is building market share in the counter arena." For those manufacturers who have opened a new part of the market, such as Guide Technology and Optoelectronics, business is expanding.


The recession slowed the entire market, and recent upswings have affected everyone as well. The thing that several counter manufacturers expressed concern over is the changing tax structure and how that will affect their companies, and their companies' customers.

Counters continue to develop rapidly, and developments from the most expensive, state-of-the-art counter systems quickly find use in other segments of the counter industry. Hewlett-Packard product marketing engineer Dave Cunningham comments on how modulation domain analysis technology has found use in the counters he works with, "We've taken what we've learned from these more advanced products, and now we can take that same technology, and because we know how to use it, we can use it a lot less expensively in a product like our lower cost counters." **RF**

For reprints of this report, call Cardiff Publishing at (303) 220-0600. Ask for the Circulation Department.


Defence Magazine Introduces The 1992 Handbook Series...

Pre-Publication Special Pricing!
Order Now, and Save 25%!



Volume I: European Defence in Transition

Editorial analysis and coverage of the European defence industry, including France, Germany, Switzerland, Netherlands, Belgium, Scandinavia, Austria, Italy and Spain.



Volume II: Airborne Weapons

Comprehensive coverage of the development of airborne weapons and weapon systems since 1987, including laser ranging, smart weapons, anti-armour operations and air-to-air weapons.

Each handbook contains compiled articles...pages and pages of our best (and most requested) coverage of these critical subjects. The comprehensive compilation of articles come directly from recent *Defence* magazine issues, and are presented by subject matter.

Volumes I and II will begin shipping December 1992, and you can save 25% by sending your order to be received before December 1st, 1992. Use the handy coupon below to fax or mail your order in with payment authorization, or call your order into our circulation department at (USA) (303) 220-0600.

----- COUPON ----- COUPON -----

Yes, please ship (quantity) _____ sets of the Handbooks, at £49.00/\$95.00 each, including postage.

Yes, please ship (quantity) _____ sets of Volume I (European Defence in Transition) only, at £29/\$59 each, including postage.

Yes, please ship (quantity) _____ sets of Volume II (Airborne Weapons) only, at £29/\$59 each, including postage.

() Bill my company...signed PO enclosed. \$ _____ amount
() Check enclosed...payable to *Defence*. \$ _____ amount
() MC () Visa () Amex exp. date _____

Card # _____ signature _____

Ship to: Name _____ Company _____

Address _____ ms _____


City _____ State _____ Zip _____

Country _____ Telephone _____

Pre-payment required.

Mail order to: *Defence*, Circulation Dept., 6300 S. Syracuse Way, #650, Englewood, CO 80111, or call 303/220-0600 or FAX your order to 303/773-9716 TODAY!

BRAINSTORM

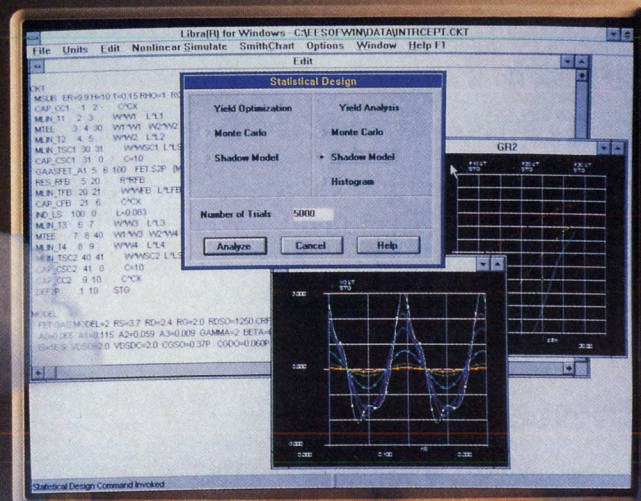

WHEN IT COMES TO HIGH-FREQUENCY DESIGN
ON THE PC, WE'RE OF THE SAME MIND.

The tools you need for today's demanding linear and nonlinear high-frequency circuit design applications.

Based on EEsof's proven simulation technology, **Touchstone®** and **Libra® for Windows™** give you the power of workstation software on your PC. For unparalleled capability and true Windows interface, EEsof is the only choice.

In the lab, on your desk, or at home, get the mobility you need. And these upwardly-compatible simulators network with EEsof's workstation products. Real flexibility. True value.

Call 818-879-6451 or
800-343-3763 for a
brochure.

EEsof®
THE HIGH-FREQUENCY DESIGN TOOLS
USED MOST FREQUENTLY
INFO/CARD 51

RF software

Code Generator for DSP

Hyperception has released version 1.0 of a C-code generator designed to work with the visually programmed Hypersignal-Windows Block Diagram program. An algorithm produced and debugged in Block Diagram is converted to C-code which can then be compiled to run on a manufacturer's DSP chip. The Code Generator is available for \$2995.00.

Hyperception
INFO/CARD #190

Analog Simulator

A software package developed at the Georgia Institute of Technology simulates both circuit and higher-level systems. XSPICE, an extended version of SPICE, contains an event-driven simulations capability. A no-cost license for use of XSPICE is offered.

Georgia Institute of Technology
INFO/CARD #189

Layout/Signal-Integrity Interface

CONTEC Microelectronics has announced the availability of interfaces to Cadence and Mentor Graphics layout tools. With these inter-

faces, users of CONTEC's SI signal integrity analysis package can extract layout and part geometry data for simulation.

CONTEC Microelectronics, CAE Div.
INFO/CARD #188

Wireless Mail

RF Data has introduced software which allows DOS based and compatible devices to exchange mail with wireless data devices incorporating Motorola's new RF modem, Info-Tac. RF/Mail costs \$100 per copy.

Radio Frequency Data Network Systems, Inc.
INFO/CARD #187

Spread Spectrum Sequences

Associated Professional Services announces the release of its Linear Recursive Sequence Analysis software. This software enables users and designers of those systems which use linear recursive sequences to simulate, generate on screen, examine, and correlate sequences. The LRS Analysis Program sells for \$349.

Associated Professional Services
INFO/CARD #186

RF Design Software Service

Programs from RF Design, provided on disk for your convenience.

April Program: RFD-0493

"A Resistive Attenuator Calculation Program" by Jouni Verronen. This utility program calculates resistor values for T and Pi attenuators, as well as minimum-loss L networks to match the given resistive impedances. (Quick Basic, source code and compiled versions)

March DOS Program: RFD-0393

"MNAP9 Nodal Network Analysis Program" by John Eisenberg. Nodal analysis of circuits with resistors, capacitors, inductors, transmission lines, voltage-controlled current sources and user-supplied s-parameter blocks. (BASIC source code; compiled version requires co-processor)

March MAC Programs: RFD-0393-MAC

"Series Feedback Oscillator Design" by Ted Grosch. This program maps circles of constant magnitude reflection coefficient to determine feedback reactances for oscillator design (Basic).

"Log Mac: Frequency and Time Domain Analysis" by Jeff Crawford. Analyzes circuits that can be described as a transfer function in the Laplace domain by frequency response, or by impulse or step response in the time domain. (compiled).

Call or write for a listing of all available programs

We Accept VISA, MasterCard, and American Express! When ordering by mail, please include card number, correct name, and expiration date.

Order by telephone! Call (303) 770-4709 to place your credit card order. Occasionally, you may reach an answering machine, but your call will be returned promptly.

Each month's program(s)..... \$ 15.00postpaid, with article reprints and any author's notes. Price includes shipping to U.S. or Canadian addresses. Orders from other countries must add \$8.00 per order for extra shipping and handling. Specify 3 1/2 or 5 1/4 inch disks


Annual subscription..... \$130.00 postpaid..(\$170 Foreign, via Air Mail).....get each program ASAP.

Check, money order, VISA, MasterCard or American Express accepted for all orders. Purchase orders from U.S. and Canadian companies accepted for orders of \$100 or more. All foreign orders must be pre-paid, with payment via charge card; or bank draft drawn on a bank located in the U.S.


RF Design Software Service
P.O. Box 3702
Littleton, Colorado 80161-3702 U.S.A.
(303) 770-4709

Easy TESLA Block Diagram Simulation Runs on Your PC

- Nonlinear time simulation with built-in spectrum analysis lets you test with noise, multipath and adjacent channels
- Use TESLA to simulate modems, radios, cellular, GPS, spread spec, DSP, HDTV, radar, controls, audio & more!
- Over 60 analog & digital blocks: Filters, VCO, Mixer, RFamp, Laplace, A/D & D/A Converters, BER tester, Noise, S&H, Integ&dump, 5-Function Generator, Phase meter, & more!
- Add new blocks with MODGEN option—BBS user library
- Use OrCAD® to input block diagrams—runs under TESLA

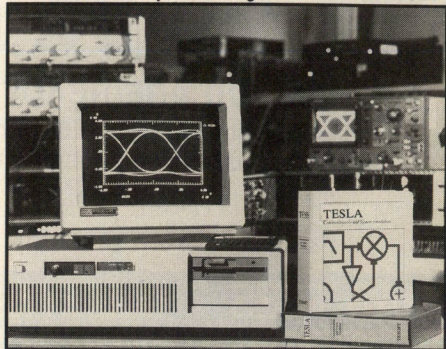

Simulation and lab test of FSK demod (block diagram below)

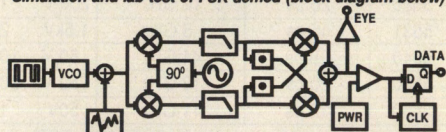

FREE APPLICATION NOTE

TESOFT Inc, PO Box 305
Roswell GA 30077
Phone 404-751-9785
FAX 404-664-5817


CALL FOR WORKING DEMO DISK
TESLA Simulator \$695
MODGEN Model Generator \$495
Symbols for OrCAD/SDT® \$195

INFO/CARD 52

CERAMIC RF CAPACITORS

C-D/SANGAMO

MICA RF CAPACITORS

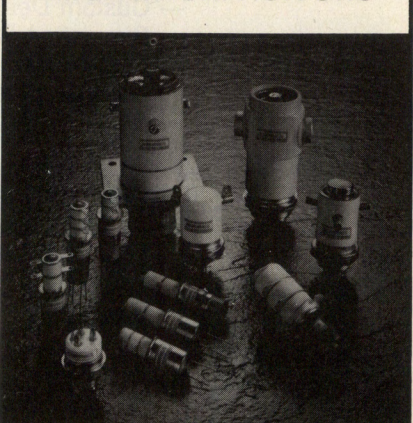

JENNINGS

VACUUM CAPACITORS

VACUUM RELAYS

SURCOM ASSOCIATES, INC.

2215 Faraday Avenue, Suite A
Carlsbad, California 92008
TEL (619) 438-4420
FAX (619) 438-4759

INFO/CARD 53

RFdesign

MARKETPLACE

WHEN YOU ARE READY TO BUY-SELL-TRADE CALL RF DESIGN MARKETPLACE

Increase your REVENUES with **RF Design Marketplace** advertising! Over 40,000 prospects read and buy from this section each month. To reach this sophisticated, targeted market call today (303) 220-0600.

BIAS TEES 10 kHz - 44 GHz

MODEL	RISETIME*	BANDWIDTH**	VOLT/AMPS
5530	28 ps	12 GHz	200 V 10 mA
5531	45 ps	8 GHz	1.5kV 20 mA
5540	8 ps	44 GHz	50 V 100 mA
5550	20 ps	18 GHz	50 V 500 mA
5580	32 ps	11 GHz	50V 1 Amp



*Risetimes measured with HEWLETT-PACKARD 50 GHz oscilloscope and PSPL 15 ps pulse generator.

**Bandwidths measured with WILTRON 20 GHz network analyzer.

Other broadband components available from PSPL include: Signal Probes, Risetime Filters, Attenuators, DC Blocks, Transformers, Power Dividers and Amplifiers.



P.O. BOX 44 • BOULDER, CO 80306 • USA
PHONE 303-443-1249
FAX 303-447-2236

INFO/CARD 57

Need Clock Oscillators or Crystals? Call 714-991-1580

Quartz Crystals

50 KHz to 200 Mhz

TTL Clock Oscillators

250 KHz to 70 Mhz

HCMOS Clock Oscillators

3.50 Mhz to 50 Mhz


TTL and HCMOS Half Size and Surface Mount also available on request

CAL CRYSTAL LAB, INC. • COMCLOK, INC.
1142 No. Gilbert, Anaheim, CA 92801 • FAX 714-491-9825

INFO/CARD 58

NOVA RF Systems, Inc.

The Complete RF/Microwave Solution



- RF/Microwave Systems
- Custom Design/Consulting
- Simulation Software
- Synthesizers (PLL/DDS)
- Complete Lab/Machine Shop
- TDMA/CDMA/Spread Spectrum

1740 Pine Valley Dr. • Vienna, Virginia 22182
(703) 255-2353

INFO/CARD 59

RF SPICE MODELS




6987 N. Oracle Road
Tucson, AZ 85704

- BIPOLARS, FET, VARACTOR, PIN
- MODELS FOR CLASS C POWER
- OPTO LASER AND PIN DIODES
- HIGH SPEED GATES AND FLOPS
- OPAMPS & TRANSIMPEDANCE AMPS
- FULL NON-LINEAR SPICE MODELS
- ACCURACY FROM DC TO 5-10 GHZ
- IN-HOUSE RF & DC MEASUREMENTS

PHONE (602) 575-5323 FAX (602) 297-5160

INFO/CARD 60



- STD. 5 AND 10 MHZ OCXO
- TCXO • VCXO • TC-VCXO
- VCO's • CLOCK OSCILLATORS
- CUSTOMIZED CRYSTAL FILTERS
- STD. 10.7 MHZ, 21.4 MHZ and 45 MHZ
- L/C FILTERS

Call or Fax your requirements.

16406 N. Cave Creek Rd. #5
Phoenix, AZ 85032-2919
Phone & Fax (602) 971-3301

INFO/CARD 61

- Promote your company...
- Trade used equipment...
- Sell your products...

Every month for only \$395
CALL 303-220-0600 TODAY!


RF engineering opportunities

AudioLogic RF DESIGN ENGINEERS

AudioLogic is an exciting new company designing innovative DSP based products for the hearing impaired, located near the Rocky Mountains. Our products require creative solutions in the areas of low power, miniature, battery operated RF communications. Appropriate experience would be 5 years working with consumer or miniature RF products, such as pagers or cellular. If you seek a technical challenge, competitive salary, equity participation, a stimulating work environment and would like to help society, send your resume and salary history to John Melanson, **AudioLogic**, 1355 S. Boulder Rd #F137, Louisville, CO 80027. EOE.

Advertising Index

Advertiser	Page No.
Alpha Industries, Inc.	2
Amplifier Research	60
Analog & RF Models	80
Cal Crystal Lab, Inc.	80
California Eastern Laboratories	23, 25
Coilcraft	42
DAICO Industries, Inc.	6
DGS Associates, Inc.	35
EEsof	78
EG&G Frequency Products	56
ENI	43
Giga-tronics	19-22
Henry Radio	44
Hewlett-Packard	33, 39-40
IFR Systems, Inc.	3
International Crystal Manufacturing Co., Inc.	59
JFW Industries, Inc.	71
K & L Microwave	92
Kalmus Engineering International, Ltd.	47
Kay Elemetrics Corp.	36
KS Electronics	80
Lark Engineering Co.	73
Lindgren, Inc.	24
Locus, Inc.	35
MicroWave Technology	75
Mini-Circuits	4-5, 30-31, 63, 69
NEL Frequency Controls, Inc.	56
Netcom, Inc.	66
Noise/Com, Inc.	57-58
Nova RF Systems, Inc.	80
Penstock, Inc.	15
Philips Semiconductors	27
Picosecond Pulse Labs, Inc.	80
PolyPhaser Corp.	46
Power Systems Technology, Inc.	91
Programmed Test Sources, Inc.	28
Q-bit Corp.	16
QUALCOMM, Inc.	18
Quartztek, Inc.	11
Raltron Electronics Corp.	67
RF Design Software Service	79
RF Prime, Inc.	72
Richardson Electronics Ltd.	59
Sage Laboratories, Inc.	9
Sawtek, Inc.	34
SCITEQ Electronics, Inc.	82
Siemens	12
Sprague®	38
Sprague Goodman	13
Stanford Research Systems	55
Stanford Telecom	17
Surcom Associates, Inc.	79
Temex Electronics, Inc.	73
Tesoft, Inc.	79
TTE, Inc.	45
Wenzel Associates	66
Werlatone, Inc.	8
Wide Band Engineering Co., Inc.	37



...YOUR CAREER

Cellular Engineers: Design/develop RF and analog circuits for high capacity cellular systems. Requires minimum of 2 years experience in any of the following: DSP, ASIC Design, CAE Development, Digital Modulation, Digital Mobile Communications, Channel Equalizers, Transmitter-Receiver-Synthesizer or Audio Design, Digital Signal Processing.

Sr. RF Design Engineer: You will be responsible for the design and development of 900 MHz RF circuitry. Also, you will provide support throughout the development cycle. A BSEE with emphasis on analog/RF design techniques and at least 6 years of experience designing RF subsystems are essential. A background in RF circuit design, including RF amplifiers (low and high power), synthesizers, VCO, VCKO and PLL is necessary. In addition, you need knowledge of modern communication systems theory.

Whatever you are seeking in it...

MMIC Engineer: Develop L/S band GAA's MMIC power amplifiers for commercial wireless communications. Requires: M.S. or BSEE, + 2 years experience with GAA's MMIC design, simulation, packaging and test.

Amplifier Designers: Both Senior and Junior positions exist for designer with experience in Microstrip/Stripline, Hybrid Mic, MMIC Amplifiers. Markets involved will be cellular, wireless and mobile communications. BS/MSEE.


RF Design Engineer: Responsible for design of analog and RF systems and circuits for consumer and commercial digital wireless products. Five to ten years experience in RF systems analysis and design. Experience with low-cost design techniques for frequency synthesizers, power amplifiers, updown converters and baseband circuits for digital communications systems. Must be able to derive RF systems and module requirements to meet overall performance and cost goals. Familiarity with time division duplex or CDMA a plus.

Staff/Principal Engineer: This individual will be responsible for the design/development of UHF/VHF amplifiers. Will be required to control the design on a stand-alone basis while meeting cost and schedule requirements with the support from junior engineers and experienced technicians. Hands-on engineer will also be required to lead IR&D efforts in UHF/VHF RF Power Amplifier design to enhance transmitter technology position. BSEE/MSEE.

RFIC Design: MS or PhD in Electrical Engineering with minimum 5 years related experience is preferred. The candidate should have a good knowledge and experience in Linear Bipolar High Frequency IC design and measurement techniques to design IC's like Amplifiers, Mixers, Oscillators, VCO's, Prescalers, Synthesizers, Limiting Amplifiers, etc. operating up to 2 GHz in Bipolar or BICMOS technologies.

RF/Synthesizer Design: Positions available for candidates experienced in the design and development of communication receiver/transmitter systems and subsystems. Experience in RF synthesizer design, RF circuitry, low power circuit design and GaAs/Silicon MMIC design is desirable. At least a BS degree in Engineering is required.

Wireless LANS: Responsible for the electrical and mechanical design, manufacture and production of a 2.4-2.5 GHz frequency hopping, spread spectrum radio transceiver. Designs include power & low-noise amplifiers, filters, mixers, VCO, synthesizer, doubler, T/R switch and antennas. BS/MSEE.



MICRO COMMUNICATIONS EXECUTIVE SEARCH

871 Turnpike St. • North Andover, MA 08145

We specialize in the placement of communications professionals both nationally and internationally.

CALL COLLECT: TEL: 508-685-2272

FAX: 508-794-5627

CREATING A
WIRELESS
WORLD

RF DESIGN
ENGINEER

Motorola is the source of exciting innovation in cellular and wireless communications. Our engineers are utilizing the latest RF technologies, working on tomorrow's products; redefining the way the world communicates.

As a team member of a group of engineers, you will work on product design and development of portable cellular telephones for the Western European Market. You will be involved in multiple projects at various stages of completion-from initial concept through production. Responsibilities include: project engineering, cost estimation, proposal development, RF and analog design, as well as circuit design and testing.

The qualified candidate will possess a BSEE, MS preferred; and have 2+ years experience in RF transceiver design, design tools and development. Knowledge of receivers, transmitters or synthesizers, 450 to 900 MHz is strongly preferred. Familiarity with high frequency filter, RF power amplifier, antenna design, surface mount devices and microstrip/stripline applications is required. This position is based in Libertyville, Illinois; 40 miles northwest of Chicago.


We offer an excellent salary, comprehensive benefits package and opportunities for professional growth. For immediate consideration, please send your resume and salary history to: Supervisor, Professional Recruitment, Dept. RF/493-TH, Motorola, Cellular, 1501 W. Shure Drive, Arlington Heights, IL 60004. Or FAX your resume to our Resumix FAX line: (708) 632-7382. Motorola is an equal opportunity/affirmative action employer. We welcome and encourage diversity in our workforce.



MOTOROLA
Cellular

CHIRP SYNTHESIZER

230 MHz BW!

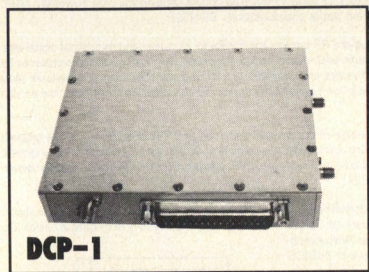


DCP-1

For Synthetic Aperture Radar and other systems requiring state of the art LINEAR FM. Sciteq's DCP-1 provides extended bandwidth, high linearity, phase control, and excellent spectral purity.

The DCP-1 is based upon aggressive GaAs direct-digital synthesizer (DDS) technology, packaged in a small module. The chassis version adds a reference generator, control interface, power supply, and output filter.

• Operating range	1-230 MHz
• Step size	<30 Hz granularity
• Phase control	12-bit
• Spurious	-55 dBc typical (CW)
• Switching	2 nanosecond update

Available in 5.25" chassis or
5" x 7" x 1" module



<30 Hz granularity

**FOR
LINEAR FM
SPREAD SPECTRUM**

SCITEQ MANUFACTURES PLL SYNTHESIZERS
UP TO C-BAND, DDS+PLL UNITS UP TO L-BAND,
AND DDS PRODUCTS
UP TO 400 MHz,
COMMERCIAL
OR MIL.

SCITEQ Electronics, Inc.
4775 Viewridge Ave.
San Diego, CA 92123
(619) 292-0500
FAX (619) 292-9120

RF literature

EMI/RFI Filters

Murata Erie North America's line of EMI/RFI filter devices is covered in detail in their new EMI/RFI Filter Catalog No. E-06-A. The 97-page catalog is free of charge.
Murata Erie North America
INFO/CARD #180

Coils and Filters

Toko America's 164-page catalog of coils and filters covers Toko's complete lines of coils and balun transformers, as well as LC, dielectric, SAW, ceramic, helical and active filters.
Toko America, Inc.
INFO/CARD #179

Sigma-Delta A/D

The design of a 16-bit sigma-delta analog to digital converter using the Comdisco Systems' Signal Processing WorkSystem (SPW) is described in a six-page application note available free of charge from the company.
Comdisco Systems, Inc.
INFO/CARD #178

Digital Signal Processing

The latest issue of DSPatch from Analog Devices includes features about the ADSP-2115 DSP chip, use of the ADSP-2101 chip in a video compression application, questions and answers, tips, and other information concerning the use of Analog Devices' DSP devices.

Analog Devices
INFO/CARD #177

Quartz Products

A full-color brochure from Tele Quarz describes the company's design and manufacturing capabilities for the production of quartz crystals, filters and oscillators.
Tele Quarz USA
INFO/CARD #176

Telecom Reference

Butterworth-Heinemann has recently published the *Telecommunications Engineer's Reference Book*. The 62-chapter book was edited by F.F. Mazda, and covers mathematical techniques, physical phenomena, communications principles, and applications. Cost of the 1,000 page book is \$125.00.
Butterworth-Heinemann
INFO/CARD #175

VXI Catalog

Hewlett-Packard's 1993 VXI catalog includes a high-power 486-embedded controller running MS-DOS and supporting compiled SCPI, a family of high performance A to D converters, a Baseband Signal Analyzer System using HP's new VXI Digital Signal Processor, and a High Speed Data Acquisition System.
Hewlett-Packard Co.
INFO/CARD #174

Receiving Multicouplers

AML announces a fully revised and expanded edition of its Receiving Multicoupler Handbook. The new edition contains applications notes and specs for 50 multicouplers from 10 kHz to 2.4 GHz.
AML, Inc.
INFO/CARD #173

ISO 9000 Training Materials

Six manuals and three videos which cover ISO 9000 related topics are offered by PPM Associates. Guidelines for PC design and assembly, surface mount techniques and design for manufacturability are among the topics covered in the manuals and videos.
PPM Associates, Inc.
INFO/CARD #172

Microwave Oscillators

Forty-six microwave oscillators are described in a information packet from Electronic Surveillance Components. Included are voltage controlled oscillators in the 100 to 3500 MHz range that feature low-cost pin output and surface mount versions.
Electronic Surveillance Components, Inc.
INFO/CARD #171

Shielding Data

Now available is a compilation of shielding quality data on Spira's entire line of EMI gas-kets and honeycomb filters.
Spira Mfg. Corp.
INFO/CARD #170

Cable Assembly Guide

C.E. Precision's guide to specifying flexible, semi-rigid, silicon dioxide, and other coaxial cable assemblies defines what the design engineer needs to consider in specifying coaxial cables for their application.
C.E. Precision Assemblies
INFO/CARD #169

VXI/VME Guide

Analogic announces a free, 74-page "Designer's Guide to High Performance VXI/VME Systems," featuring Analogic's precision VXI instruments, software support, technical notes, and a family of VME-based signal processing boards.
Analogic Corp.
INFO/CARD #168

Mobile Data News

Dataradio has initiated the quarterly publication of its *VIS TIMES*. *VIS TIMES* is a newsletter focusing on products, applications and related information on private mobile data networks using Dataradio's VIS (Vehicular Information Series) open architecture radio modem products.
Dataradio Corp.
INFO/CARD #167

SERIES BHE/BHC...
SOLID STATE AIR-COOLED AMPLIFIERS...

CLASS AB LINEAR OPERATION...


HIGH RELIABILITY, LOW MTTR...

**FEATURING OUR ULTRA-BROAD
BANDWIDTH MODEL BHE 2758-500:
20-500MHz, 500 WATTS...**

State-Of-The-Art **PST**
Solid State Power From

Series BHE/BHC amplifiers are available in a full selection of frequency ranges from 1.5-30 MHz to 1400-1800 MHz, with output powers from 100 to 1000 watts. The ultra-broad bandwidth Model BHE 2758-500 is particularly noteworthy for its instantaneous frequency coverage from 20 to 500 MHz and its high power boost

capability: from 1 milliwatt to 500 watts - making it especially suitable for many applications such as EMI/RFI susceptibility tests, VHF and UHF communication, EW and ECM jamming, radar pattern testing, and laboratory calibration testing.

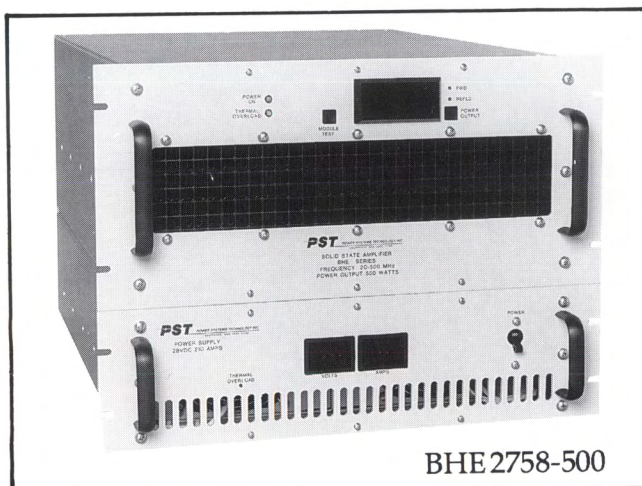

BHE 2758-500

All Series BHE/BHC models include important state-of-the-art design and high performance features such as: connectorized, modular circuit elements that are pre-aligned and field replaceable; integral protection against thermal overload, input/output overdrive and load VSWR; graceful degradation; built-in

test diagnostics. Their wide bandwidths make them ideal for use in multi-octave, frequency-agile systems, totally unattended or remotely computer controlled. Optional IEEE bus interface for remote operation is available.

*Write or call for complete BHE/BHC information - ask for
Product Data 2010 - or to inquire about our many other
standard and custom amplifier designs: Class A, C, narrow band
and pulsed; power outputs up to 10KW; frequencies up to 8.4GHz.*

PST

A SUBSIDIARY OF COMTECH
TELECOMMUNICATIONS CORP.


POWER SYSTEMS TECHNOLOGY INC.

105 BAYLIS ROAD, MELVILLE, NY 11747
TEL. 516-777-8900 • FAX 516-777-8877

INFO/CARD 55

Stability & Reliability

Important in the product Important in the manufacturer

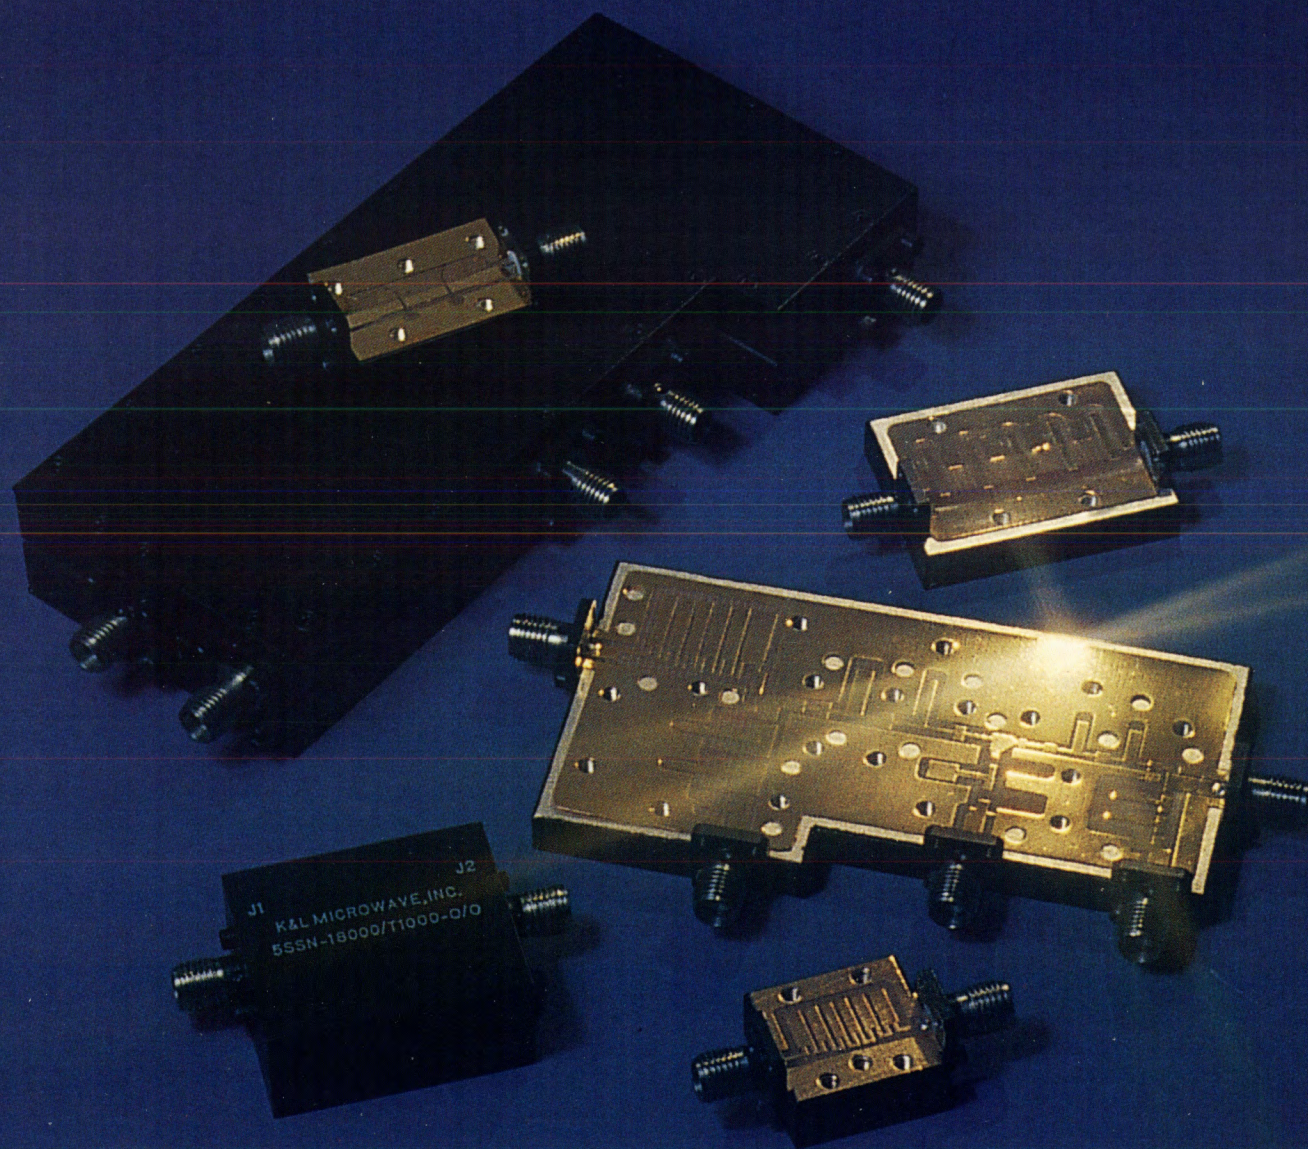

Highpass • Interdigital • Compline
Bandpass • Diplexer • Notch • Hairpin
Edge Coupled • Lowpass • Multiplexer

Call today and ask for K&L's Suspended Substrate Brochure



A DOVER TECHNOLOGIES COMPANY

408 Coles Circle • Salisbury, Maryland 21801 • Phone (410) 749-2424 • FAX (410) 749-5725
INFO/CARD 56