

RF design™

engineering principles and practices

January 1994




Cover Story
**New Test Set Simulates
Multipath Propagation**

Featured Technology
RF Applications in Science

Building Blocks

FOR A WIRELESS WORLD

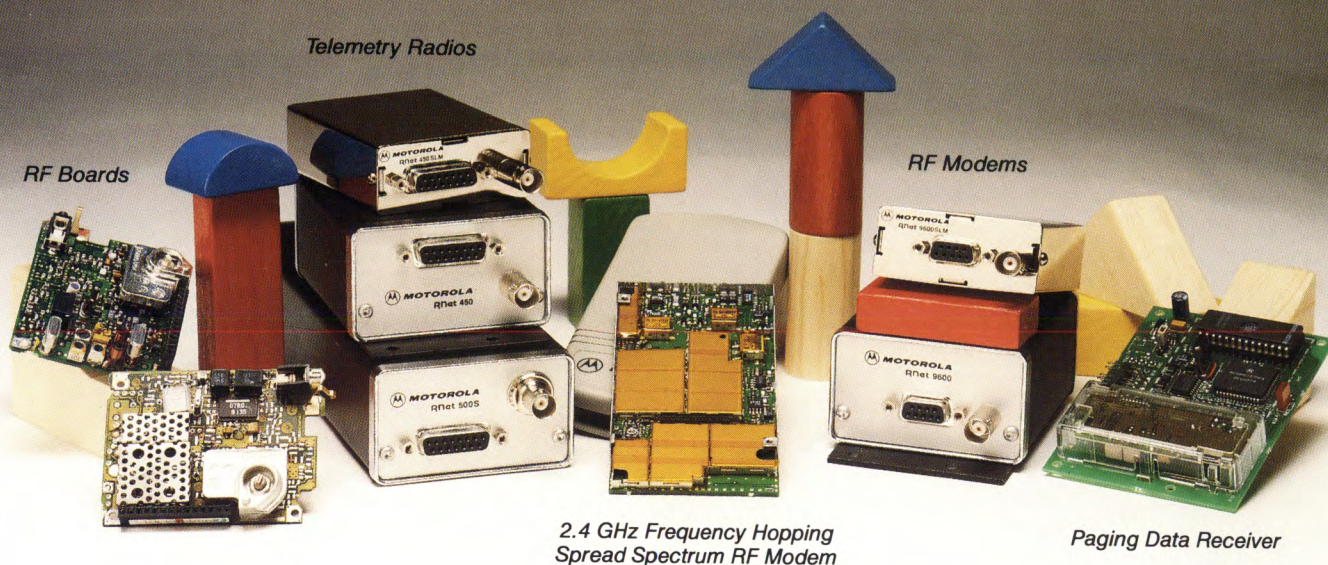

RNet™ Products from Motorola

ANNOUNCING

- 2.4 GHz Frequency Hopping Spread Spectrum RF Modems for unlicensed FCC Part 15 operation with
 - Selectable data rates up to 1 Mbps
 - Various transmit power levels, 1mW to 100 mW
 - Built-in Diversity Antenna

ALSO NEW FROM MOTOROLA

- Synthesized Narrow Band RF Boards
 - Low current drain
 - Fast attack times
 - Surface mount technology
 - Small, compact size

For years, design engineers seeking solutions have been turning to Motorola for product support. Our vision of new opportunities within the context of a wireless society has been realized again with powerful building block RF components that will enable you to move from design to production... the RNet™ Series of OEM RF boards, telemetry radios, RF modems and paging data receivers.

Envisioning . . . that's your job. Enabling . . . that's ours.



MOTOROLA


Wireless Data Group
50 E. Commerce Drive
Schaumburg, IL 60173

For more information and detailed specifications on RNet™ telemetry radios, RF modems, OEM radio modules and paging data receivers,


Call 1/800-624-8999, Ext. 105

INFO/CARD 1

Model AN930
9 kHz to 22 GHz

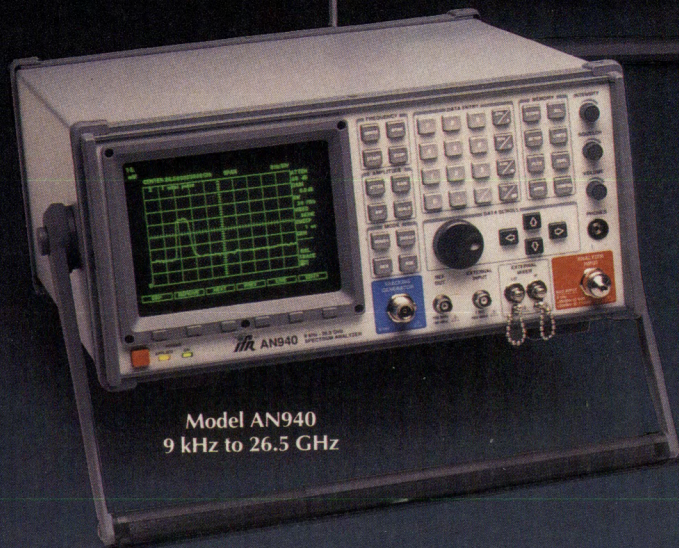

Model AN940
9 kHz to 26.5 GHz

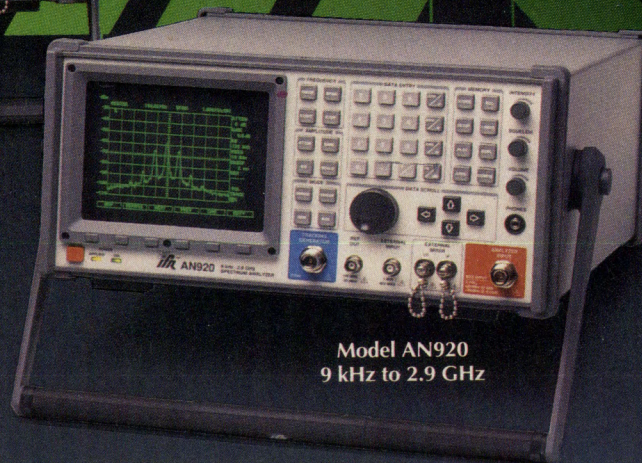

Model AN920
9 kHz to 2.9 GHz

AN900 S E R I E S

REDEFINING PERFORMANCE & VALUE

THE AN900 SERIES PORTABLE SPECTRUM ANALYZERS

With frequency coverage of 9 kHz to 2.9 GHz for the AN920, 9 kHz to 22 GHz for the AN930, and 9 kHz to 26.5 GHz for the AN940, the AN900 series of spectrum analyzers can match your RF and microwave testing requirements.

In addition to being full-featured, portable spectrum analyzers, each AN900 series model provides unique measurement features never before available on any spectrum analyzer.

A wide 30 MHz resolution bandwidth filter provides unequalled measurement capability on wideband or spread spectrum signals. When used in combination with the built-in FM/AM receiver and modulation measurement scales, direct measurement of wideband signal modulation components, including frequency agile signals, is possible.

A 25 MHz digitizing rate enables zero span measurements on pulsed RF and digital signals at sweep rates as fast as 200 ns/div. Pretrigger and posttrigger delay allow precise time interval or gated measurements.

An automatic trace limits test function performs unattended monitoring and detection of erroneous signal conditions. Captured signals can be automatically stored in memory with time and date stamp for later recall and analysis or sent directly to a plotter via the standard RS-232 or IEEE-488 interfaces.

A logical front panel control layout that avoids the use of menus or shift keys simplifies operation and enhances user productivity. For field use, a rugged portable design is complemented by the ability to operate from DC power sources or from an optional rechargeable battery pack.

Other optional built-in features, including a 2.9 GHz tracking generator, quasi-peak detector, and 0.02 ppm time base, expand each model's possible uses.

Contact IFR for more information or to arrange for a demonstration of the AN920, AN930 or AN940.



IFR SYSTEMS, INC.


RENT DIRECTLY FROM IFR
Call 1-800-835-2352, Ext. 207 for details



10200 West York Street / Wichita, Kansas 67215-8935 U.S.A.
Phone 316/522-4981 / 1-800-835-2352 / FAX 316/522-1360

INFO/CARD 2

I&Q MODULATORS

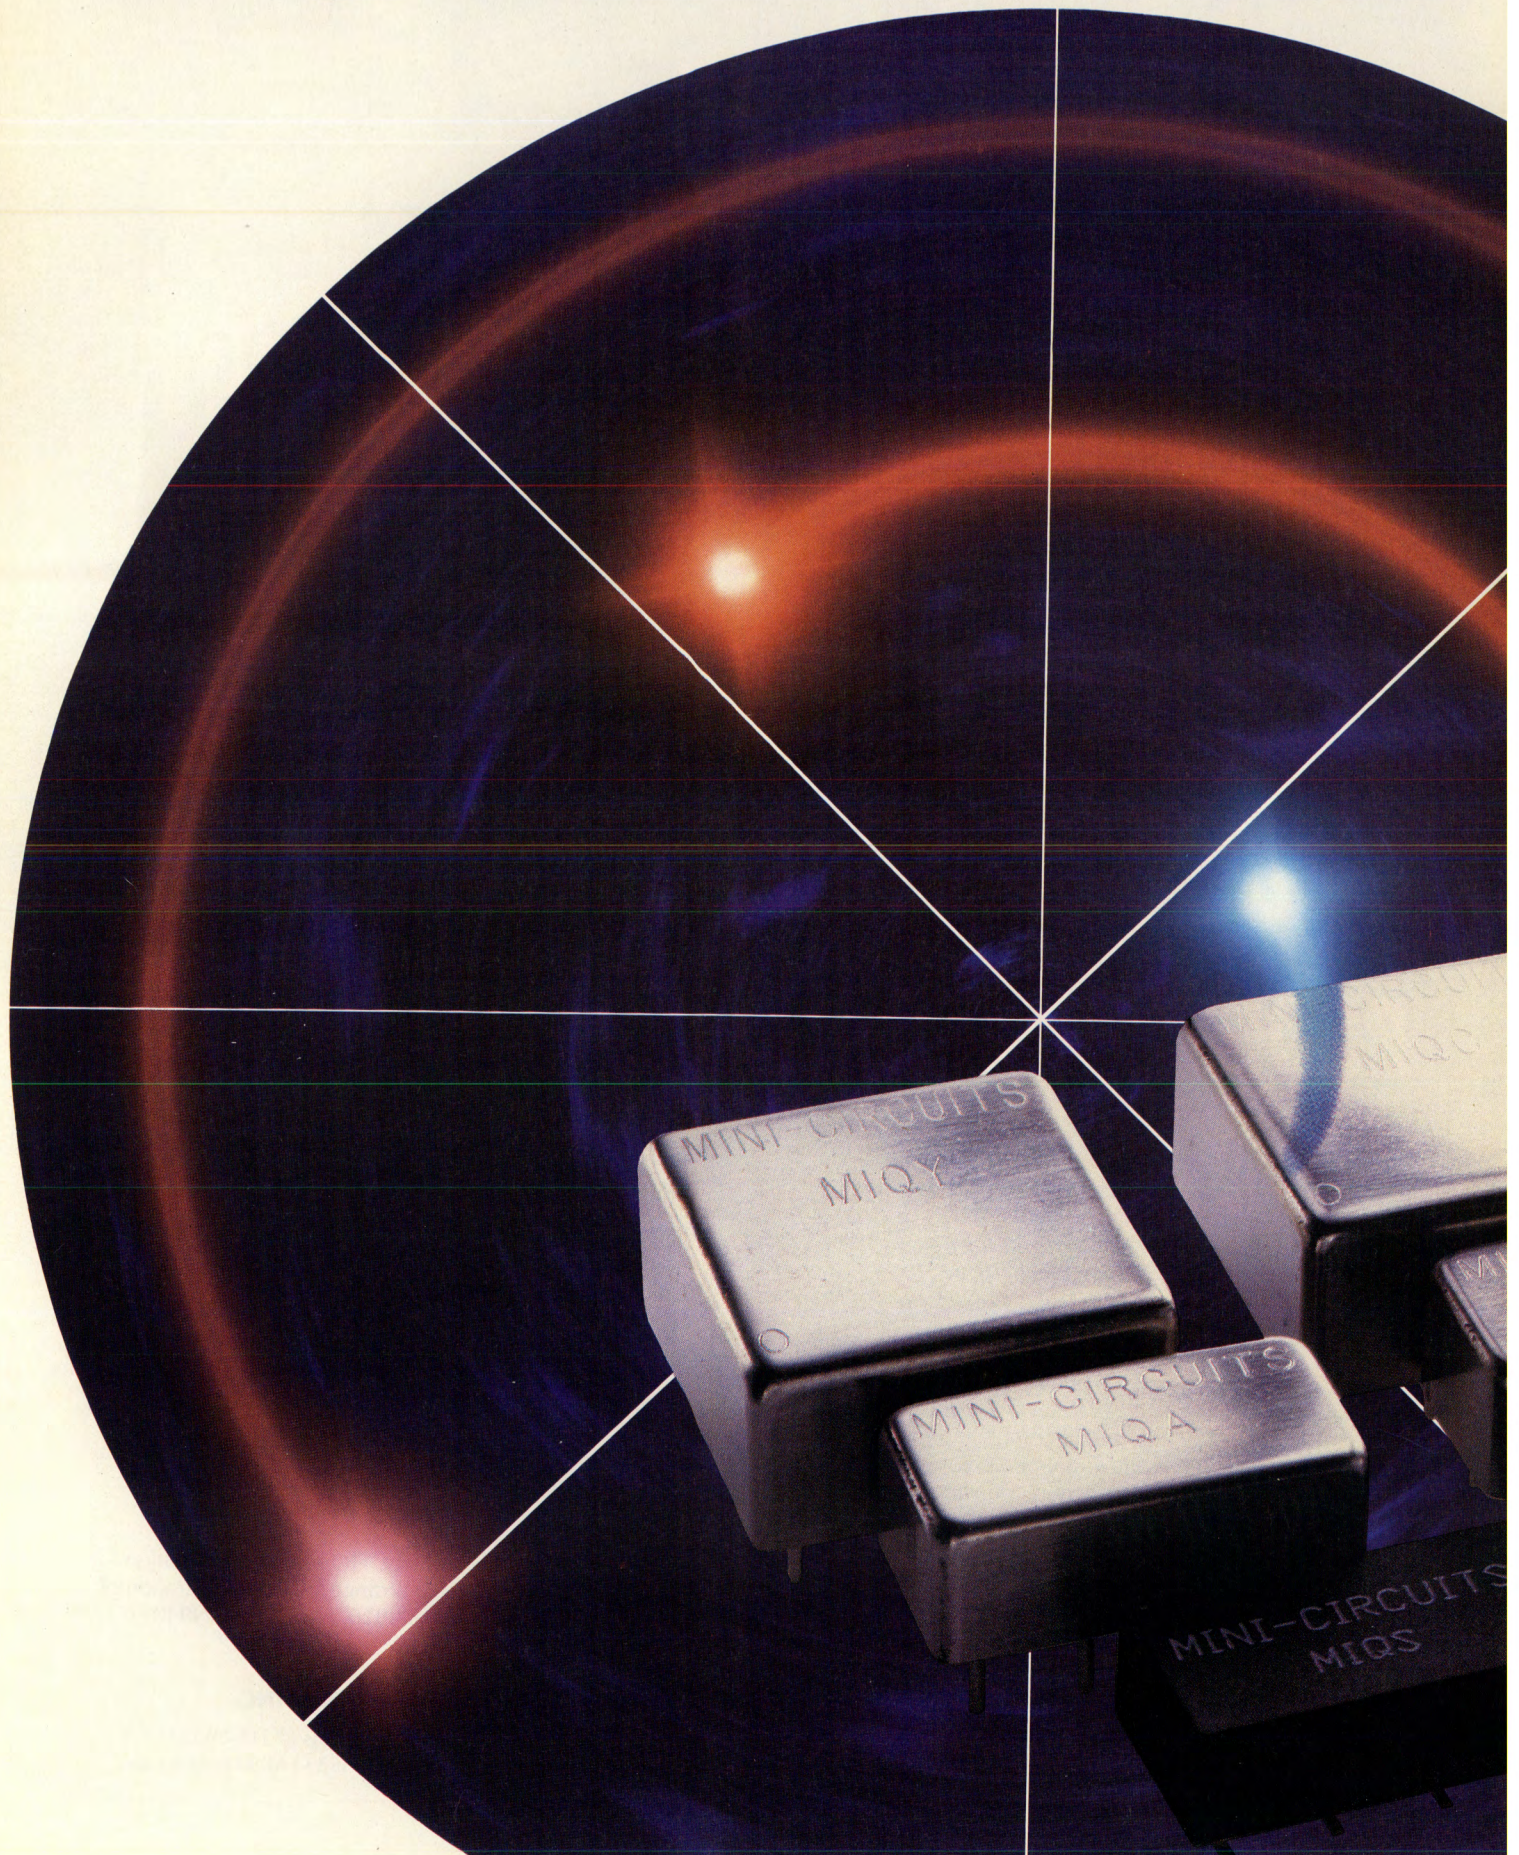

DEMODULATORS

1.15MHz to 1880MHz from **\$19.95**


I&Q Modulators and Demodulators...another smart offering from Mini-Circuits that's pushing industry standards to new heights (and prices to new lows)!

Infuse your cellular, radar and communication system project with the powerful new I&Q Modulator and Demodulator, surface mount and plug-in units. Units so reliable, the specified statistical data on performance holds up with rock-solid repeatability unit-to-unit.


For high speed assembly operations, I&Q Modulators and Demodulators are available in tape and reel format, so you can bank on consistent assembly performance for production efficiency time after time...and with prices starting at just \$19.95, these powerful and compact units truly are the next generation of value on the market today.

So, call your Mini-Circuits distribution center at a number listed below for guaranteed one week shipment or, turn to our applications department with your special specs for custom units at catalogue prices.

We're redefining what VALUE is all about!



MODEL NO	FREQ. (MHz)		CONV. LOSS (dB)		CARRIER REJ. (dBc) Typ.	SIDE BAND REJ. (dBc) Typ.	HARM. SUPPRESS (dBc) Typ.		PRICE \$ QTY (1-9)
	f_L	f_U	x	σ			3xl/Q	5xl/Q	
MIQA-10M	9	11	5.8	0.20	41	40	58	68	49.95
MIQA-21M	20	23	6.2	0.14	50	40	48	65	39.95
MIQA-70M	66	73	6.2	0.10	38	38	48	58	39.95
MIQA-70ML	66	73	5.7	0.10	38	38	48	58	49.95
MIQA-91M	86	95	5.5	0.10	38	38	48	58	49.95
MIQA-100M	95	105	5.5	0.10	38	38	48	58	49.95
MIQA-108M	103	113	5.5	0.10	38	38	48	58	49.95
MIQA-195M	185	205	5.6	0.10	38	38	48	58	49.95
MIQC-88M	52	88	5.7	0.10	41	34	52	66	49.95
MIQC-176M	104	176	5.5	0.10	38	36	47	70	54.95
MIQC-895M	868	895	8.0	0.10	40	40	52	58	99.95
MIQC-1785M	1710	1785	9.0	0.30	35	35	40	65	99.95
MIQC-1880M	1805	1880	9.0	0.30	35	35	40	65	99.95
MIQY-70M	67	73	5.8	0.20	40	36	47	60	19.95
MIQY-140M	137	143	5.8	0.20	34	36	45	60	19.95



MODEL NO	FREQ. (MHz)		CONV. LOSS (dB)		AMP. UNBAL. (dB) Typ.	PHASE UNBAL. (Deg.) Typ.	HARM. SUPPRESS (dBc) Typ.		PRICE \$ QTY (1-9)
	f_L	f_U	x	σ			3xl/Q	5xl/Q	
MIQA-10D	9	11	6.0	0.10	0.15	1.0	50	65	49.95
MIQA-21D	20	23	6.1	0.15	0.15	0.7	64	67	49.95
MIQC-895D	868	895	8.0	0.20	0.15	1.5	40	55	99.95
MIQY-1.25D	1.15	1.35	5.0	0.10	0.15	1.0	59	67	29.95
MIQY-70D	67	73	5.5	0.25	0.10	0.5	52	66	19.95
MIQY-140D	137	143	5.5	0.25	0.10	0.5	47	70	19.95

☐ NON-HERMETICALLY SEALED
 MIQA case 4 x .8 x .4 in.
 MIQY case 8 x .8 x .4 in.
 MIQC case 8 x .8 x .4 in.
 MIQS case 8 x .4 x 2 in.

INFO/CARD 3


Mini-Circuits®

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

For detailed specs on all Mini-Circuits products refer to • THOMAS REGISTER Vol. 23 • MICROWAVES PRODUCT DIRECTORY • EEM • MINI-CIRCUITS' 740-pg HANDBOOK.

CUSTOM PRODUCT NEEDS... **Let Our Experience Work For You.**

DAICO'S SURFACE MOUNT OFFENSIVE

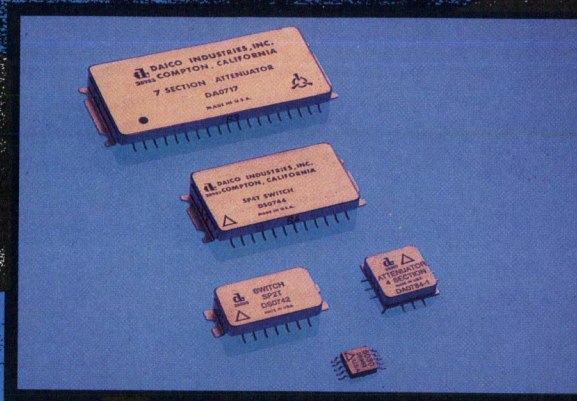

Daico sets the standard for all military surface mounts

Daico's Surface Mount Package (SMP), Dual-In-line Package (DIP) and Flatpack control products will meet your military requirements and are ideal for your multi-layer boards.

Whether its small quantities direct from stock or all encompassing blanket agreements... We have creative solutions to meet your price, quality and delivery objectives.

We're in control and we're there for you.

Surface Mount Switches

Con-fig	Freq MHz	IL dB	Iso dB	Switch Speed μ SEC Max	Control	Package	Part No.
SPST	5-1000	0.7	45	0.035	TTL	12 Pin SMP	DSO799
SPST	10-2000	1.8	53	0.035	TTL	14 Pin SMP	DSO790
SP2T	DC-2000	0.6	25	0.003	-	SOIC 8	DSO702
SP2T	10-1000	0.7	32	0.050	TTL	12 Pin SMP	DSO712
SP2T	5-1000	1.6	58	0.070	TTL	14 Pin SMP	DSO742
SP2T	50-1100	1.4	48	0.150	TTL	10 Pin SMP	DSW25030
SP4T	10-1000	1.0	57	3.0	TTL	24 Pin SMP	DSO744
SP4T	50-500	1.1	52	1.0	TTL	24 Pin SMP	DSO778
SP5T	10-400	1.0	43	0.100	TTL	24 Pin SMP	DSO705

Surface Mount Bi-Phase Modulators

Freq MHz	LSB Range DEG	IL dB	Switch Speed μ SEC Max	VSWR	Package	Part No.
10-500	0-180	1.0	0.070	1.4	12 Pin SMP	DBPO738

Surface Mount Attenuators

# of Sec tions	Freq MHz	LSB Range dB	IL dB	Switch Speed μ SEC Max	Control	Package	Part No.
1	20-700	10/10	1.0	0.035	TTL	12 Pin SMP	DAT15015
4	10-1000	1/15	1.9	0.030	TTL	12 Pin SMP	DAO784-1
5	300-1000	1/31	3.4	0.500	TTL	24 Pin SMP	DAO769
5	10-1000	2/62	5.6	0.050	TTL	24 Pin SMP	DAO757
6	10-1000	1/63	6.3	0.050	TTL	24 Pin SMP	DAO786
7	30-500	0.5/63	4.5	20.0	TTL	38 Pin SMP	DAO795
7	30-250	0.5/63.5	6.1	0.035	TTL	38 Pin SMP	DAO717
7	30-150	0.1/12.7	4.0	0.035	TTL	38 Pin SMP	DAO775
VCA	20-300	-/18	0.8	-	Analog	14 Pin SMP	DAO735



DAICO INDUSTRIES, INC.

2453 E. Del Amo Blvd., Rancho Dominguez, CA 90220

Telephone 310/631-1143 • FAX 310/631-8078

INFO/CARD 4

WE ACCEPT VISA AND MASTERCARD

SWITCHES

ATTENUATORS

PHASE SHIFTERS

MMICS

BIT DETECTORS

COUPLERS

MODULATORS

AMPLIFIERS

featured technology

24 **The Flux-Gate Magnetometer: A Very Sensitive ELF Magnetic Detector**

Build your own sensitive magnetic field measuring instrument following the instructions provided in this article. — Peter Vizmuller

34 **Solar Source Antenna Gain Degradation Measurements**

This Navy engineer was able to eliminate an expensive test set by using the sun as a signal source for antenna performance measurements. — Glenn W. Hurley



cover story

42 **Multipath Fading Emulation for Wireless Communications**

A new simulator allows designers to verify digital transmission system performance in the presence of multipath fading, Doppler shift and time delays. — Bent Hessen-Schmidt

tutorial

56 **Using RF Channel Simulators to Test New Wireless Designs**

RF designers are now concerned with transmission of digital information, which can be highly sensitive to the variations in signal propagation. This tutorial describes what problems must be addressed, and how simulator hardware duplicates "real-world" conditions. — Karl Fielhauer

design awards

62 **Programs Help Design Vacuum Tube Amplifier Output Circuits**

Vacuum tubes remain the primary component in high power amplifiers. Here are three programs that assist in designing output networks in L, Pi and Pi-L configurations. — Thomas F. Crawford

66 **Double Feedback Circuit Analysis**

Circuits with both series and shunt feedback paths are not adequately covered in most references. The author remedies that situation in this article. — Frank Egenstafer

73 **Frequency Independent Phase Tracking System Creates a True Phase Locked Loop**

This patented technique allows phase detection in which the VCO tracks the reference at a selected phase offset. — Glen A. Myers

This issue's Featured Technology is Scientific Applications of RF. In the photo above, researcher Bob Chufo of the U.S. Bureau of Mines operates a test setup that analyzes reflected RF signals to measure coal seam depth. This method was reported at RF Expo East 1992. Photo courtesy U.S. Bureau of Mines.

departments


- 8 Editorial
- 14 Calendar
- 15 Letters
- 16 Courses
- 18 News
- 22 Industry Insight
- 48 New Products
- 76 Company Index
- 77 Product Report
- 79 Marketplace
- 81 Advertiser Index
- 82 New Software
- 82 New Literature
- 84 Info/Card

RF DESIGN (ISSN:0163-321X USPS: 453-490) is published monthly and semi-monthly in August. January 1994, Vol.17, No. 1. *RF Design* is a registered trademark of Argus Inc. Copyright 1994 by Argus Business, a division of Argus Inc., 6151 Powers Ferry Road, NW, Atlanta, GA 30339, (404) 955-2500; Scott Smith, President; Wayne Otterbourg, C.P.A., Vice President, Finance; Arthur E. Sweum, Senior Vice President; Dennis Corcoran, President, Argus Trade Shows. Editorial and advertising offices at 6300 S. Syracuse Way, Suite 650, Englewood, CO 80111, (303) 220-0600. Printed in USA. Second-Class Postage paid at Englewood, CO and at additional mailing offices. Subscription office: *RF Design*, P.O. Box 1077, Skokie, IL 60076. Subscriptions are: \$39 per year in the United States; \$49 per year for foreign countries. Additional cost for first class mailing. Payment must be made in U.S. funds and accompany request. If available, single copies and back issues are \$5.00 each (in the U.S.). This publication is available on microfilm/fiche from University Microfilms International, 300 Zeeb Road, Ann Arbor, MI 48106 USA (313) 761-4700. Authorization to photocopy items for personal use is granted by *RF Design*, provided the base fee of \$3 is paid directly to Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923 and provided the number of copies is fewer than 100. For authorization, contact the Copyright Clearance Center at (508) 750-8400. The Transactional Reporting Service fee code is: 0163-321X/94/\$3.00. For those seeking 100 or more more copies, please contact the magazine directly at (303) 220-0600.

SUBSCRIPTION INQUIRIES: (708) 647-0756.

POSTMASTER & SUBSCRIBERS: Please send address changes to R.F. Design, P.O. Box 1077, Skokie, IL 60076.

HIGH POWER QUADRATURE HYBRIDS

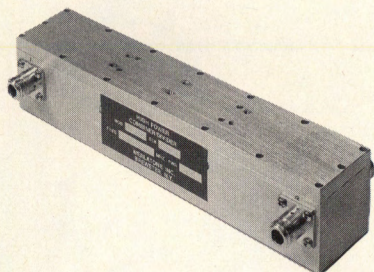

**FREQ. RANGE 100-1000 MHz
POWER 250 WATTS CW**

TYPICAL SPECIFICATIONS

MODEL QH3198 100-300 MHZ
MODEL QH3199 300-1000 MHZ

LOSS0.5db. max.
AMP.BAL..... ± 0.3 db max.
ISOLATION20db typ.
PHASE..... 90 ± 2 deg.
VSWR1.3:1 max.
CONNECTORSN

WERLATONE offers a full line of quadrature hybrids covering the 2-1000MHz frequency range at power levels to 1000 watts.

BROADBAND HIGH POWER

- DIRECTIONAL COUPLERS
- POWER COMBINERS
- HYBRID JUNCTIONS

WERLATONE INC.

DECADES AHEAD

P.O. Box 47

Brewster, NY 10509

Tel. (914) 279 6187

FAX. (914) 279 7404

RF editorial

RF is the King of Electronics in 1994

*By Gary A. Breed
Editor*

This is a monumental year for the RF industry. After all the talk and all the planning, the marketplace will finally get an opportunity to evaluate a whole host of new radio-linked products. Although there has been increasing action in the RF market over the past couple of years, 1994 will show a big jump in product introductions and sales.

A trickle of RF products has begun in the area of personal digital assistants (PDAs). The best analysts refer to these products as communicators rather than computers. The emerging perception of the PDA is as a combination of pager, fax machine and cellular phone.

Add-on RF links for notebook and laptop computers generally fall into the same category, except for wireless LAN interconnections. WLAN products have slowly been working their way into offices, mainly in those special places where the higher cost and slower speed of an RF-linked network connection is offset by the need for portability. As computer users seek greater flexibility, this market will grow.

I predict that this year will see the debut of "one person, one number" telephone services. Test operations are in place now, and the early response is positive. Smart networks that know when the user needs to be in the company PBX, a corporate campus micro-cell, or the general cellular network should be promoted heavily later this year. Personal systems should follow shortly that will switch between a cordless phone at home and a cellular phone elsewhere, reached by calling just one number.

2450 MHz technology is developing

rapidly, which should remove some of the concern over the overcrowded ISM/Part 15 band at 900 MHz. Those \$750 spread spectrum cordless phones will come down in price, and plenty of new wireless gadgets will appear this year. I expect to see everything from cordless CD-quality headphones to household audio/video systems that function as VCR broadcasters, video intercoms and alarm systems.

Worldwide, GSM digital cellular should grow dramatically. Europe will lead the way, followed shortly by many other countries which have adopted that standard. The U.S. cellular market will grow, but expansion with new technology will likely be NAMPS (a narrower bandwidth analog system), with digital cellular a few years away from large-scale installation.


The personal communication system (PCS) market will not have an impact on product sales in 1994; the FCC rules and spectrum distribution will come too late for products to reach the market. However, test marketing of new systems will whet the consumer's appetite with prototype and pre-production models of products for 1995.

We who are observers of the RF industry have been predicting the coming boom. Now, financial analysts, business publications, plus the general print and television media have recognized the importance of these developing markets. Their reports will get the message to the general public, who will finally understand that these new capabilities for communications, convenience and information are not futuristic, but ready now for their evaluation.



WHAT YOU'VE BEEN WAITING FOR!


Technology of the Future Available Today

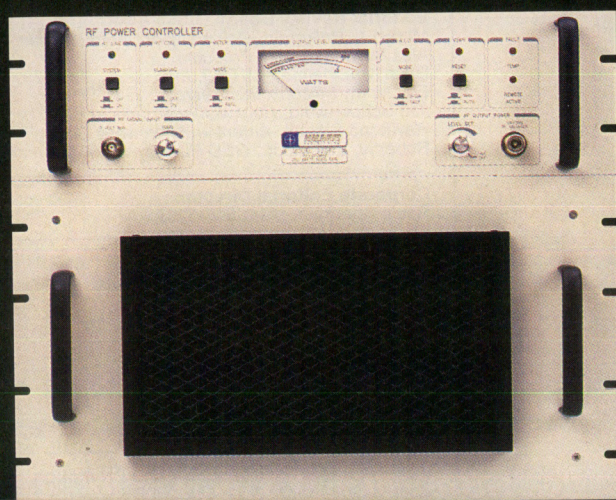

250 Watts CW .01 - 220 MHz

WORLD'S FIRST 14 Octave 250W SOLID-STATE RF Amplifier MODEL 122FC

- Instantaneous bandwidth, no warm-up
- Fully protected
- No VSWR shutdown, drives mismatched loads
- ALC gain leveling & power limit set
- All front panel controls available via remote connector
- IEEE488 / RS232 interface capability
- 19" rack mountable, weight 50 kg
- US \$19,950.00


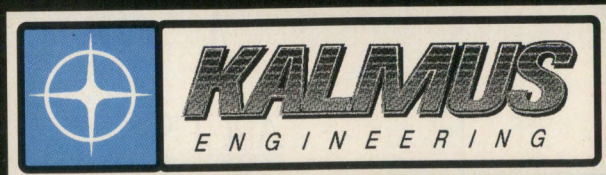


1-800-344-3341
(206) 485-9000 fax (206) 486-9657
21820-37th S.E. • Woodinville, WA 98072 • USA
Paris, France
phone 1-4645-0945 INFO/CARD 6 fax 1-4645-2403

The World's Most Complete Line of RF Power Amplifiers

*More Than 200 Standard Models
to Choose From*

VARIABLE CERAMIC CHIP CAPACITORS

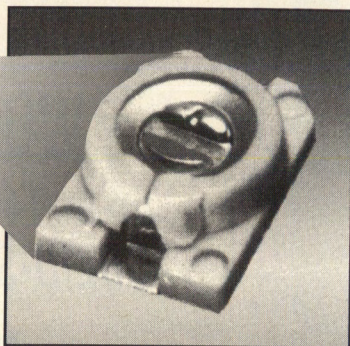

- SURFACE MOUNT
- TAPE & REEL
- BOARD WASHABLE
- HIGH Q
- 5 RANGES:


JZ030	JZ060	JZ080	JZ100	JZ200
1.5 to 3 pF	2 to 6 pF	3 to 8 pF	2 to 10 pF	4.5 to 20 pF

Voltronics 
INTERNATIONAL CORP.

100-10 FORD RD., DENVER, NJ 07834
PHONE: 201-586-8585 • FAX: 201-586-3404

INFO/CARD 7

**Leave nothing
to chance.**

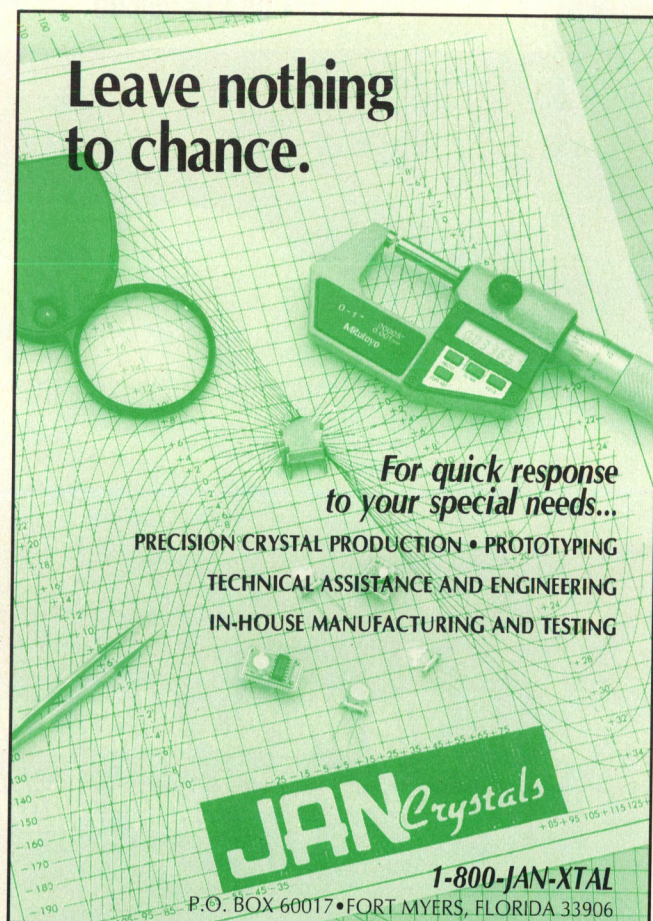

*For quick response
to your special needs...*

PRECISION CRYSTAL PRODUCTION • PROTOTYPING
TECHNICAL ASSISTANCE AND ENGINEERING
IN-HOUSE MANUFACTURING AND TESTING

JAN Crystals
1-800-JAN-XTAL
P.O. BOX 60017 • FORT MYERS, FLORIDA 33906

INFO/CARD 8

RF design

Established 1978

President — Argus Business
Jerrold France

Editorial and Advertising Offices
6300 S. Syracuse Way, Suite 650
Englewood, CO 80111
(303) 220-0600 Fax: (303) 773-9716

Group Publisher
David Premo (303) 220-0600

Editor
Gary A. Breed (303) 220-0600

Technical Editor
Andrew M. Kellett (303) 220-0600

Assistant Editor
Ann M. Trudeau (303) 220-0600

Consulting Editor
Andy Przepelski, *The Shedd Group*

Editorial Review Board
Madjid A. Belkaid, *University of Central Florida*
Alex Burwasser, *RF Products*
Dave Krauthelmer, *MITEQ, Inc.*
Ed Oxner, *Siliconix Inc. (retired)*
Jeff Schoenwald, *Rockwell International*
Raymond Sicotte, *American Microwave Corp.*
Robert J. Zavrel, Jr., *GEC Plessey Semiconductors*

Corporate Editorial Director
Robin Sherman (404) 618-0267

National Sales Manager
Bill Pettit (303) 220-0600

Account Executives
Jessica Caid, Tisha Hill,
Jeff Peck, Brian Noto (303) 220-0600
Mike Henry (703) 257-1202

Classified Advertising Manager
Michael Applegate (404) 618-0217

Vice President — Production and Promotion
Cherryl Greenman (404) 618-0302

Production Manager
Jenny Tague (404) 618-0401

Reprints Manager
Vivian Peterson (303) 220-0600

Creative Director
Brian Buxton (404) 618-0108

Art Director
David Alden (404) 618-0188

Circulation Manager
Shawn DeMario (404) 618-0259

List Rental Manager
Etta Davis (404) 618-0266

Argus Business Corporate Offices
6151 Powers Ferry Rd., N.W.
Atlanta, GA 30339-2941
Tel: (404) 955-2500




BPA

ARGUS
BUSINESS
A Division of
Argus Inc.

Subscription inquiries: (708) 647-0756

January 1994

Seeing Is Believing!

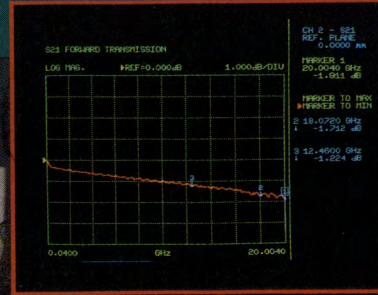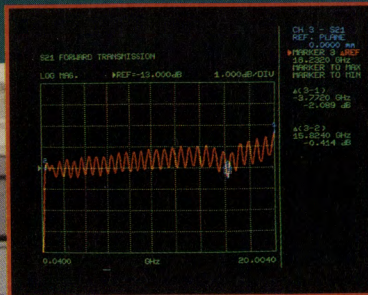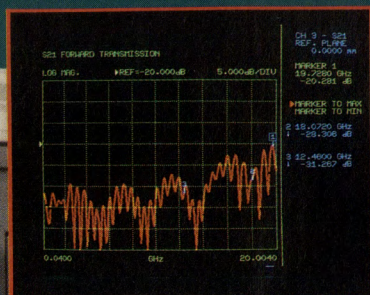

**100MHz-20GHz With
20dB Directivity...In One Convenient Package!**

**CALL MERRIMAC
For The Ultimate In Wideband**

Merrimac

41 Fairfield Place, West Caldwell, N.J. 07006
Tel: (201) 575-1300 / FAX: (201) 575-0531
INFO/CARD 9

GIGA-TRONICS

8540

UNIVERSAL
POWER
METER

Incredibly Fast and Accurate CW and Peak Power Measurements At A Truly Incredible Price.

UNIVERSAL POWER MEASUREMENT

Incredible is credible when describing the 8540 Series of Universal Power Meters.

From Giga-tronics, the new power in power meters.

For the very first time, you can make CW and peak power

an exclusive Burst Mode capturing more than 2,000 readings in the same tick of a clock.

And because the 8540 Series uses diode sensors, you can measure all the way from -70 to $+20$ dBm with the same sensor, and without range changing delays.

If you're worried about having to write new code for your computer controlled testing, don't be: The 8540 Series uses the same GPIB command set as HP's 436A, 437B and 438A.

Think about what all this will do for your ATE productivity as well as for your company's bottom line.

FAST, EASY PEAK POWER MEASUREMENT

Now, an easy-to-use CW power meter can also measure pulsed RF signals with the simple addition of a peak power sensor.

There are no time-consuming, unreliable duty cycle corrections, and you'll get the same accuracy and speed you'd get with a much-more-expensive dedicated peak power meter.

View the pulsed signal's amplitude profile on a scope and see the exact power measurement point on the pulse. Measure the overshoot. Measure the droop.




The two-line display also lets you set the desired resolution and select either Lin or Log readout for each line.

measurements quickly and accurately with a single meter—a Universal Power Meter.

And all for about the same price you'd pay for the competitor's CW only power meter.

POWER MEASUREMENTS INSTANTLY

Imagine seeing display updates instantly: measurement speeds over the GPIB exceeding 200 readings per second and

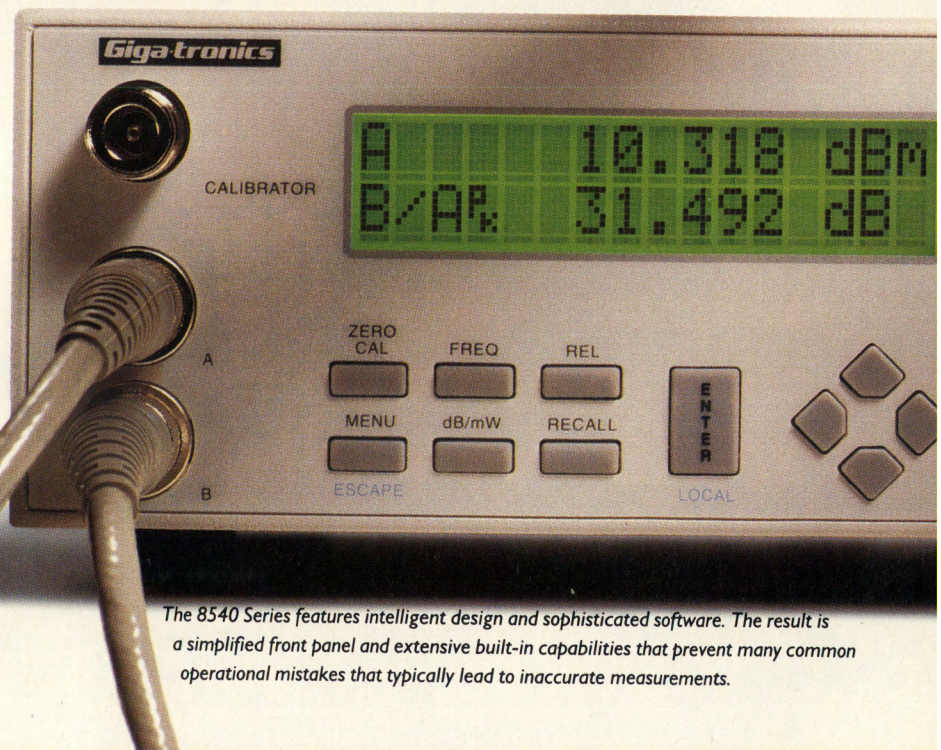


© 1993 Giga-tronics Incorporated

The 8540 Series features intelligent design and sophisticated software. The result is a simplified front panel and extensive built-in capabilities that prevent many common operational mistakes that typically lead to inaccurate measurements.

The Secret Is The Sensors.

Surface Mount technology
assures greater sensor
accuracy and reliability.

Just look
at the incred-
ible improvement
in speed you'll get with
Giga-tronics' diode sensors.

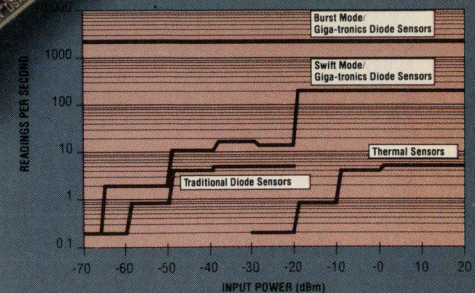

You'll be confident of your peak power readings, and still have all the benefits of an incredibly fast CW power meter.

ONE OR TRUE TWO CHANNEL OPERATION

If a single-channel meter is what you need, the Model 8541 is the meter for you. But if you need two-channel capability, the Model 8542 lets you see readings from both channels *simultaneously*.

SIMPLE, INTELLIGENT OPERATION

The 8540 Series has only half as many controls as other power meters, but don't let that fool you. Intelligent design and sophisticated software give you easy

access to extensive built-in capabilities.

For example, you use the same key to zero and calibrate the power sensors. The meter automatically determines the function you want by detecting whether a sensor is connected to the calibrator.


Imagine all this power and performance. But why just imagine? Get the truly incredible Giga-tronics 8540 Series Universal Power Meter, and start measuring CW and peak power in a fraction of the time.

The Giga-tronics 8540 Series delivers incredible performance by taking full advantage of the speed and dynamic range of diode sensors.

What's more, Giga-tronics has solved the challenge that previously limited diode sensors to the "square law" region—below -20 dBm—by utilizing a built-in power sweep calibration system. So you get speed and a full 90 dB dynamic range without sacrificing accuracy.

A two-line back lit LCD display provides you more data in less time.

A R -14.375 dBm
DLV 122.010 uS

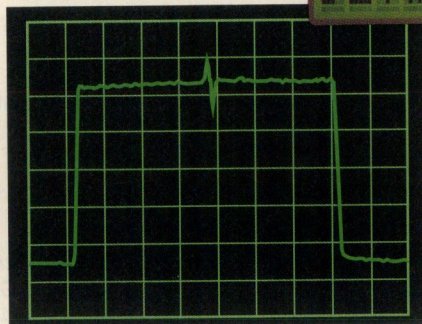

The peak sensor adds a marker on a monitor output for setting an exact measurement point on pulsed signals.

call 001 408 734 5780. We'll send you more information or arrange for an incredible hands-on demonstration.

Call us toll-free at
1 800 726 GIGA.
Outside the U.S.
call your local
Giga-tronics
representative, or

Giga-tronics

Giga-tronics Incorporated
488 Tasman Drive
Sunnyvale, California 94089
Telefax: 408 747 1265

Radio Toolbox

If you want to design state-of-the-art communications equipment, you've got to have the TESLA Block Diagram Simulator.

Using blocks like filters, mixers and VCOs, you can build and test just about any kind of transmission system—DSP, FM, QPSK, 16-QAM, or spread-spectrum. As Randy Roberts, Editor of *Spread Spectrum Scene* puts it, "All this sounds complicated—doesn't it? ...It's not really so bad if you use TESLA..." Most people start simulating with TESLA the same day they get it. Runs on any PC.

How can TESLA help? Unlike linear simulators, it can show you loops and demodulators actually performing. Models real-world non-linearities, multiple-carrier interference and multipath. Other non-linear simulators assume steady-state conditions. They can't show you a cycle-slipping Costas loop or a synthesizer settling-in.

"Our system goes all the way from L-band through PLL tracking of a satnav signal and we're getting good results."

—J.D. Laguna Hills, CA

How is TESLA different from SPICE? Much more powerful. Works at the block level. Has built-in spectrum analysis. You can run *million-point simulations* on TESLA. Takes about half an hour on a 486/50. No way can you do that on SPICE. Most simulations take just a minute or so.

How does TESLA compare to its much-more-expensive competition? Much easier to use. TESLA avoids the stacks of manuals, sluggishness and complexity of its brethren. And, you don't have to be a math professor to use it. Our philosophy: Keep It Simple. TESLA has tremendous power and flexibility but we arrange features so you can ignore them if you don't need them.

You get a full year of top-notch support—access to our extensive experience in telecom simulation. If you have a problem, chances are we can solve it in minutes. *Still only \$695*

30-day trial 404-751-9785

TESOFT, Inc. FAX 404-664-5817
PO Box 305, Roswell GA 30077

RF calendar

January

12-13

San Diego Electronics Show

San Diego, CA
Information: Epic Enterprises, Show Management, 8989 Rio San Diego Dr., Suite 160, San Diego, CA 92108-1647.
Tel: (619) 294-2999. Fax: (619) 294-6699.

27-28

Measurement Science Conference

Pasadena, CA
Information: Measurement Science Conference, John Schulz, Registrar, 1280 Bison Ave, Suite B9-530, Newport Beach, CA 92660. Tel: (714) 863-9031. Fax: (714) 863-1723.

February

8-11

EXPO Comm Mexico 1994

Mexico City, Mexico
Information: TWI, International Exhibition Logistics, 3190 Clearview Way, San Mateo, CA 94402. Tel: (415) 573-6900. Fax: (415) 573-1727.

March

8-11

Communications 1994 - Australian International Communications and Office Technology Exhibition

Melbourne, Australia
Information: TWI, International Exhibition Logistics, 3190 Clearview Way, San Mateo, CA 94402. Tel: (415) 573-6900. Fax: (415) 573-1727.

14-17

The Second International Symposium on Digital Audio Broadcasting

Toronto, Canada
Information: DAB Symposium '94, 126 York Street, #401, Ottawa, Ontario, Canada, K1N 5T5. Tel: (613) 594-8226. Fax: (613) 565-2173.

20-24

National Association of Broadcasters '94

Las Vegas, NV
Information: NAB '94 Convention, 1771 N Street, NW, Washington, DC 20036-2891. Tel: (800) 342-2460, (202) 775-4972. Fax: (202) 775-2146.

21-26

Applied Computational Electromagnetics Society 1994 Conference

Monterey, CA
Information: Jodi Nix, Symposium Facilitator, Veda Incorporated 5200 Springfield Pike, Suite 200, Dayton, OH 45431. Tel: (513) 476-3550. Fax: (513) 476-3577.

22-24

RF Expo West

San Jose, CA
Information: RF Expo West, Registration Coordinator, 6151 Powers Ferry Rd. NW, Atlanta, GA 30339. Tel: (800) 828-0420. Fax: (404) 618-0441.

April

12-15

EMC/ESD International

Anaheim, CA
Information: EMC/ESD International, Registration Coordinator, 6151 Powers Ferry Rd. NW, Atlanta, GA 30339. Tel: (800) 828-0420. Fax: (404) 618-0441.

RF letters

Letters should be addressed to: Editor, RF Design, 6300 S. Syracuse Way, Suite 650, Englewood, CO 80111. Letters may be edited for length or clarity.

ISO 9000 Responses

Editor:

I read the letter "ISO 9000: Barking up the Wrong Tree?" [*RF Design*, October 1993, p. 14] and felt compelled to clarify some of the misconceptions Mr. Lohrer expressed.

I am an ISO 9000 registered lead assessor recognized under both the United States (Registrar Accreditation Board) and United Kingdom (International Quality Assurance) systems. I assure your readers that "36-hour whiz kids" are not being used by registrars in systems audits as Mr. Lohrer suggests. Participating in a Lead Assessors course and passing a written examination could qualify one as a provisional assessor; however, to conduct a registration audit, one must have experience, education and have been supervised in at least 5 audits of greater than 2-day duration. Registrars are required to abide by these qualifications for their auditors as well as maintain a management system in compliance to EN 45012.

Dennis Omanoff
SynOptics Communications, Inc.

Editor:

I was disappointed to read the tirade against ISO 9000 by George Lohrer in your October issue. It does not have to be costly, ineffective or regimented.

Fortunately, in our company we are not burdened by a separate QC/QA hierarchy — quality is everybody's responsibility, including mine as Engineering Manager. Last year, I was given responsibility for developing a Quality Management System to meet the requirements of ISO 9001, to cover R&D through installation and service. It was achieved in July this year, ahead of schedule and with minimal hassle.

If Mr. Lohrer truly believes that he runs a good company which provides high quality products, then he must have good quality procedures already in place. This was the view we took with our analytical instrument business — we only had to write down what we did and have the documentation and processes examined by a "third party" in order to complete the assessment (first time!).

Do not be fooled by so-called consultants who will offer to write this stuff for

you; they get paid by the word! It's your business, run it your way, write it down simply — and get a certificate (to go with the UL, CSA, etc. ones) to prove that what you say is true. This has to be the big advantage of ISO 9000; your business processes have been approved by an independent organization and not just claimed by your marketing operation. This process of self-examination is invaluable, and you will certainly come across improvements which need to be made — and for these, you can take Mr. Lohrer's "time-honored problem-targeted pragmatic approach."

Paul Knight
Finnigan MAT Ltd.

Editor:

I found George Lohrer's letter to the editor to contain arrogant, biased and just plain inaccurate information. As an ASQC Certified Quality Auditor with ten years experience in the "QC/QA establishment" he refers to, I decided it was only fair to answer Mr. Lohrer.


the ISO 9000 series of quality standards are nothing but a set of generic quality standards, not much different from the ones we are familiar with — military or otherwise. Unlike previous schemes, claiming compliance to an ISO standard is usually interpreted as being also "registered," which means that your company has satisfactorily demonstrated to a Registrar its compliance one of the three ISO standards. Registration is the only cost aspect which is different between complying to an ISO standard or any other generic quality standard.

The current feverish activity to become registered stems from customer requirements more than anything else. I imagine that educated customers prefer to do business with a company that has a stable quality system (usually one of the benefits of being registered), which in turn can produce a product with a certain expected quality level.

I would seriously suggest to the readers that they ignore Mr. Lohrer's letter and do one very important thing: Listen to your customers' requirements. If the requirements are for you to comply with any of the standards in order to do business, then you do not have much of a choice, do you? It is a case where a simple rule applies: The customer is always right.

Mario Vaz de Medeiros
Quad Tech, Inc.

Sprague-Goodman

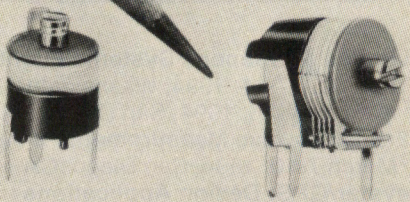

Filmtrim® Single Turn Plastic Trimmer Capacitors

- Cap ranges: 1.0-5.0 pF to 25-500 pF
- Q to 5000 at 1 MHz
- Operating temp:
 - PTFE, Polycarbonate, Polyimide: -40° to +85°C
 - Polypropylene: -40° to +70°C
 - High temp PTFE: -40° to +125°C
- 6 sizes from 5 mm to 16 mm
- More stable with temperature than other single turn trimmers


Phone, fax or write today for
Engineering Bulletin SG-402E.

SPRAGUE
GOODMAN

134 Fulton Ave., Garden City Park, NY 11040
Phone: 516-746-1385 • Fax: 516-746-1396

INFO/CARD 12

Sprague-Goodman

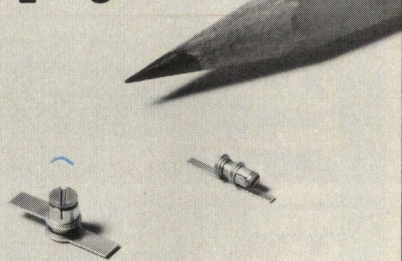

Sapphire Pistoncaps®

- Q to 4000 at 250 MHz
- 6 mounting styles suitable for all RF structures
- Designed to meet MIL-C-14409D
- Operating temp: -55° to +125°C
- Cap ranges: 0.3-1.2 pF to 0.8-8.0 pF
- Subminiature size
- Multiturn resolution
- Extremely stable over temperature, frequency, voltage, etc.

Phone, fax or write today for
Engineering Bulletin SG-207A.

SPRAGUE
GOODMAN

134 Fulton Ave., Garden City Park, NY 11040
Phone: 516-746-1385 • Fax: 516-746-1396

INFO/CARD 13

RF courses

Avionics & Weapons Systems Flight Test

February 7-11, 1994, Washington, DC

August 22-26, 1994, San Diego, CA

RF & Microwave Measurements & Applications

March 7-10, 1994, San Diego, CA

Navstar/GPS: Design Applications

August 1-3, 1994, Washington, DC

High Speed & Microwave Devices & Applications

October 24-27, 1994, Boston, MA

Information: University Consortium for Continuing Education,
16161 Ventura Boulevard, M/S C-752, Encino, CA 91436.

Tel: (818) 995-6335. Fax: (818) 995-2932.

RF and Microwave Circuit Design II: Linear/Nonlinear Techniques and Applications

January 31-February 4, 1994, Los Angeles, CA

Information: UCLA Extension, Engineering Short Courses,
10995 LeConte Ave., Ste. 542, Los Angeles, CA 90024. Tel:
(310) 825-1047. Fax: (310) 206-2815.

Coherent Radar Performance Estimation

January 23-25, 1994, Atlanta, GA

Phased-Array Antenna Design

February 1-4, 1994, Atlanta, GA

Antenna Engineering

February 8-11, 1994, Atlanta, GA

Radar Signal Processing: Theory, Technology and Applications

January 24-27, 1994, Atlanta, GA

Principles of Pulse Doppler Radar: High, Medium, and Low PRF

February 15-17, 1994, Atlanta, GA

Phased-Array Radar System Design

April 19-22, 1994, Atlanta, GA

Information: Georgia Institute of Technology, Continuing Education. Tel: (404) 894-2547.

Radio Frequency Engineering

January 17-21, 1994, Colchester, United Kingdom

Information: Pat Crawford, The Short Course Office, Department of Electronic Systems Engineering, University of Essex, Colchester CO4 3SQ, United Kingdom. Tel: 44-206-872414. Fax: 44-206-872900.

Introduction to Electromagnetic Compatibility Design Practices


January 27-28, 1994, Milwaukee, WI

Design Techniques for Radiated Emissions

January 31-February 1, 1994, Milwaukee, WI


Information: University of Wisconsin-Milwaukee, Non-Credit Registration Office, Drawer No. 491, Milwaukee, WI 53293. Tel: (414) 227-3200 or (800) 638-1828. Fax: (414) 227-3146.

CRYSTAL FILTERS

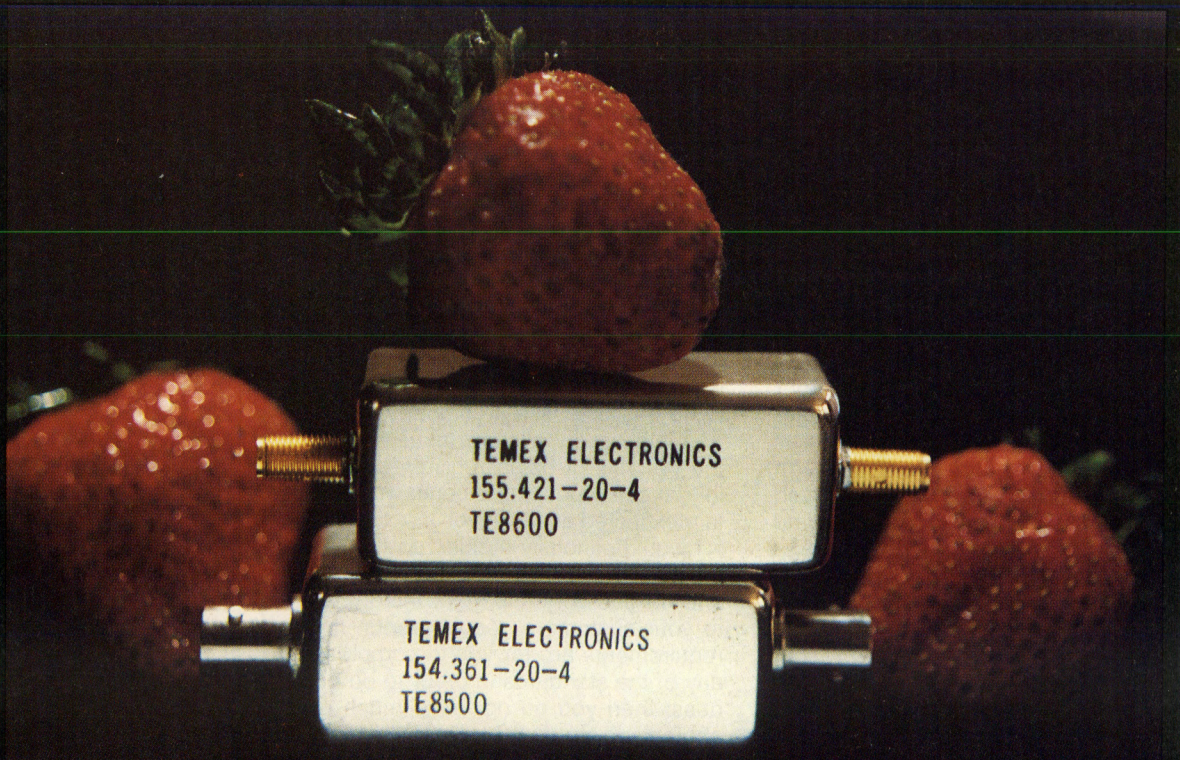

TEMEX ELECTRONICS

3030 W. Deer Valley Road Phoenix, AZ 85027 (602) 780-1995 FAX: (602) 780-2431

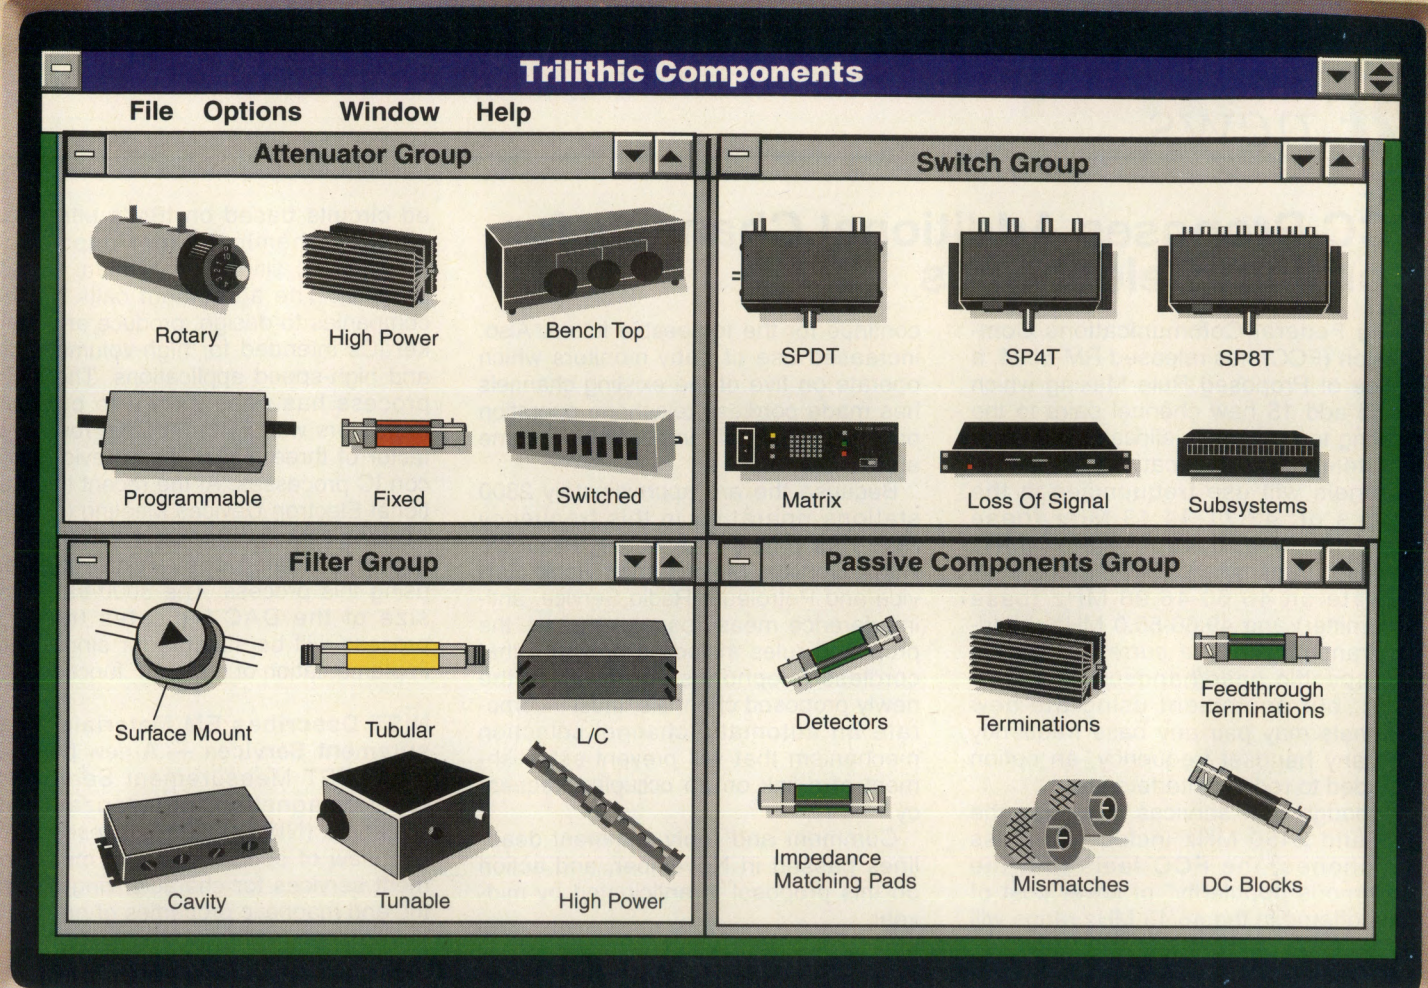

Trilithic ... Today's Icon in RF and Microwave Components

Click on our attenuator group to select units with frequency ranges as high as 18 GHz. Types offered include programmable step, rotary step, bench top, pushbutton, mechanically switched, or fixed.

- ♥ 50 or 75 OHM impedance
- ♥ Fixed values from 1 to 60 dB
- ♥ Power ratings from 0.5 to 500 Watts
- ♥ Dynamic ranges to 127 dB
- ♥ Step sizes as low as 0.1 dB

Click down our switch menu for a diverse assortment of electromechanical RF switches and switching/control systems. Ideal for RF, video switching and data routing applications.

- ♥ 50 or 75 OHM impedance
- ♥ Frequency range of DC to 1 GHz
- ♥ Typical isolation is 70 dB
- ♥ Voltages of 5, 12, and 24 VDC
- ♥ Options of TTL control or latching relays

Click on the filter group and there will be an unsurpassed selection of surface mount L/C (first introduced by Trilithic), cavity, tubular, tunable and high power filters.

- ♥ Highpass, lowpass, bandpass and bandstop
- ♥ Power ratings to 2 Kilowatts
- ♥ For high reliability, military and wireless communications
- ♥ High volume production capability
- ♥ Connectorized, PC, or surface mount

Find help in our passive component group with a useful mixture of detectors, matching pads, high and low power terminations, feedthrough terminations, calibrated mismatches and DC blocks for many production and lab tests.

- ♥ Terminations to 1000 Watts
- ♥ 50, 75, 93 and 600 OHM matching pads
- ♥ 1.0:1 through 5.0:1 calibrated mismatches
- ♥ 50 and 75 OHM RF detectors
- ♥ Many items available from stock

Call 1-800-344-2412

for our new 93 page catalog and a free copy of TRICAT, a DOS-based filter catalog on a disk for your PC.

TRICAT version 2.1 is now available on a 3 1/2" diskette!



TRILITHIC

9202 E. 33rd Street

Indianapolis, Indiana 46236

(317) 895-3600 (800) 344-2412 FAX (317) 895-3613

FCC Proposes Additional Channels for Cordless Telephones

The Federal Communications Commission (FCC) has released RM-8094, a Notice of Proposed Rule Making which would add 15 new channel pairs to the existing ten channels allocated for cordless telephone applications. The new channels will use frequencies in the ranges of: 43.71-44.49 MHz (base transmitter) and 48.75-49.51 MHz (handset transmitter). Existing channels operate on 46.60-46.98 MHz (base transmitter) and 49.66-50.0 MHz (handset transmitter). The current channels use specific base/handset frequency pairs, but equipment using the new channels may pair any base frequency with any handset frequency, an option intended to reduce interference.

Although new services offered in the 915 and 2450 MHz include cordless telephones, the FCC feels that the "enormous popularity" of lower cost of units offered in the 46/49 MHz range will

continue for the foreseeable future. Also, increased use of baby monitors which operate on five of the existing channels has made cordless telephone operation on these channels impossible in some areas.

Because there are approximately 2800 stations operating in this frequency range as part of the Forest Products Radio Service, Motor Carrier Radio Service and Petroleum Radio Service, anti-interference measures are required. The proposed rules include a provision that cordless telephones operating on the newly proposed channels "must incorporate an automatic channel selection mechanism that will prevent establishment of a link on an occupied frequency."

Comment and reply comment deadlines passed in November, and action on this proposal is anticipated by mid-year.

AT&T Demonstrates 0.1 Micron Silicon Devices — Silicon ICs with 0.1 micron transistor geometries have been developed by AT&T's Silicon Electronics Research Laboratory. The new process solves the problem of temperature rise in small-geometry devices that occurs because the lower doping level required at these dimensions increases the current leakage. For this reason, previous devices using 0.1 micron channels required cooling. Using this process, dividers operating to 10 GHz have been demonstrated, along with individual transistors operating to 116 GHz for NMOS and 51 GHz for PMOS. Devices using the new AT&T process can run from 1.5 volt power supplies.

November ITU Conferences Plan for the Future — In November, the World Radiocommunication Conference (WRC 93) closed with a draft agenda for the next two conferences to be held in 1995 and 1997. WRC 93 is seen as a strategic planning exercise for future radio regulations, and a means of testing the new bi-annual system of World Radiocommunication Conferences. The draft agenda for WRC 95 includes: Review of committee work started in 1990 that will simplify the Radio Regulations; review of technical constraints associated with Mobile Satellite Services (MSS) under 3 GHz, intended to help facilitate their

use; review additional matters regarding MSS and other satellite services, including feeder links, earth exploration satellites, broadcasting satellite services and other space services; and address the use of new HF bands recently allocated to broadcasting.

WRC 97 has the following items on the draft agenda: Coordination of space and terrestrial services between 1 and 40 GHz; allocation of unplanned space services; wind profiler radars; further work on HF bands allocated to broadcasting; and discussion of the Global Maritime Distress and Safety System.

The first ITU Radiocommunication Assembly, successor to the Plenary Assembly of the International Consultative Radio Committee (CCIR), approved a recommendation to assure compatibility between VHF broadcasting and aeronautical navigation, and continued progress on discussion of future mobile communications. Under the new structure, this body can be characterized by its unofficial mission statement, to aim at "an efficient contribution to technical standards and the most effective utilization of the radio spectrum in the context of the world's economies and needs."

Analog Devices and IBM Team Up on SiGe Technology — Analog Devices and IBM have announced an agreement regarding RF and mixed-signal integrat-

ed circuits based on IBM's ultra-high vacuum chemical-vapor deposition (UHV/CVD) silicon-germanium (SiGe) process. The agreement calls for the companies to design, produce and market ICs intended for high-volume radio and high-speed applications. The SiGe process has been shown to produce transistors with F_T to 60 GHz, roughly a factor of three higher than previous silicon IC processes. At the recent International Electron Devices Meeting (IEDM), ADI and IBM reported on a 1 GHz 12-bit digital-to-analog converter fabricated using this process. The 3000-transistor size of the DAC indicates that the process will be suitable for single-chip implementation of many RF functions.

NIST Describes EM Materials Measurement Services — A new publication, NIST Measurement Service of Electromagnetic Characterization of Materials (NISTIR 5006), presents an overview of special test and measurement services for characterizing dielectric and magnetic properties of materials at radio and microwave frequencies, from 100 kHz to 26.5 GHz. Measurements can be made of permittivity and permeability, as well as loss tangents of low-loss materials. Copies of the publication can be obtained from the National Technical Information Service, Springfield, VA 22161; (703) 487-4650. Order by: PB 94-110186.

Telephone-Over-Cable TV System Announced — Scientific-Atlanta has announced a system of telephone service delivery over broadband cable TV networks, enabling switched telephone, video, data and interactive TV services to be integrated into a single communications network. Interfacing equipment is located in a box placed at the customer end of the cable drop, where telephone and cable TV wiring then enters the build in the same manner as the existing service. Delivery of the CoAccess™ system hardware in commercial quantities is expected in the first half of 1994.

Conductive Polymers are Water-Soluble — IBM research scientists have invented a new class of polymeric materials which are both electrically conductive and water soluble. These derivatives of polyaniline, called PanAquas™, the polymers can be made insoluble by exposure to radiation such as electron beams, x rays and ultraviolet light. Advantages of these materials include

Is this what BIPOLAR TECHNOLOGY has finally come DOWN TO?

12 GHz f_T Bipolars:

one third the size of a SOT-23!


Need performance, but short on real estate?

Our new bipolars from NEC deliver up to 9 dB Gain and 1.5 dB Noise Figure at 1.9 GHz — in an ultra-super mini mold "19" package that's just 1.6 X 0.8 mm!

These bipolars operate below 3V and at low current to reduce battery size and increase battery life for your wireless applications.

Want the performance, but not quite ready for the miniature package? They're also available in traditional SOT-23, 323, and 143 style packages — and a new high performance 4 pin "18" package that delivers MAG of 13.0 dB at 1 V, 1 mA, 900 MHz.

They're available now, on tape and reel, and priced to meet your needs. For Data Sheets and a copy of *Automated Assembly of Miniature Parts*, call your nearest CEL Sales Office or circle the number below.

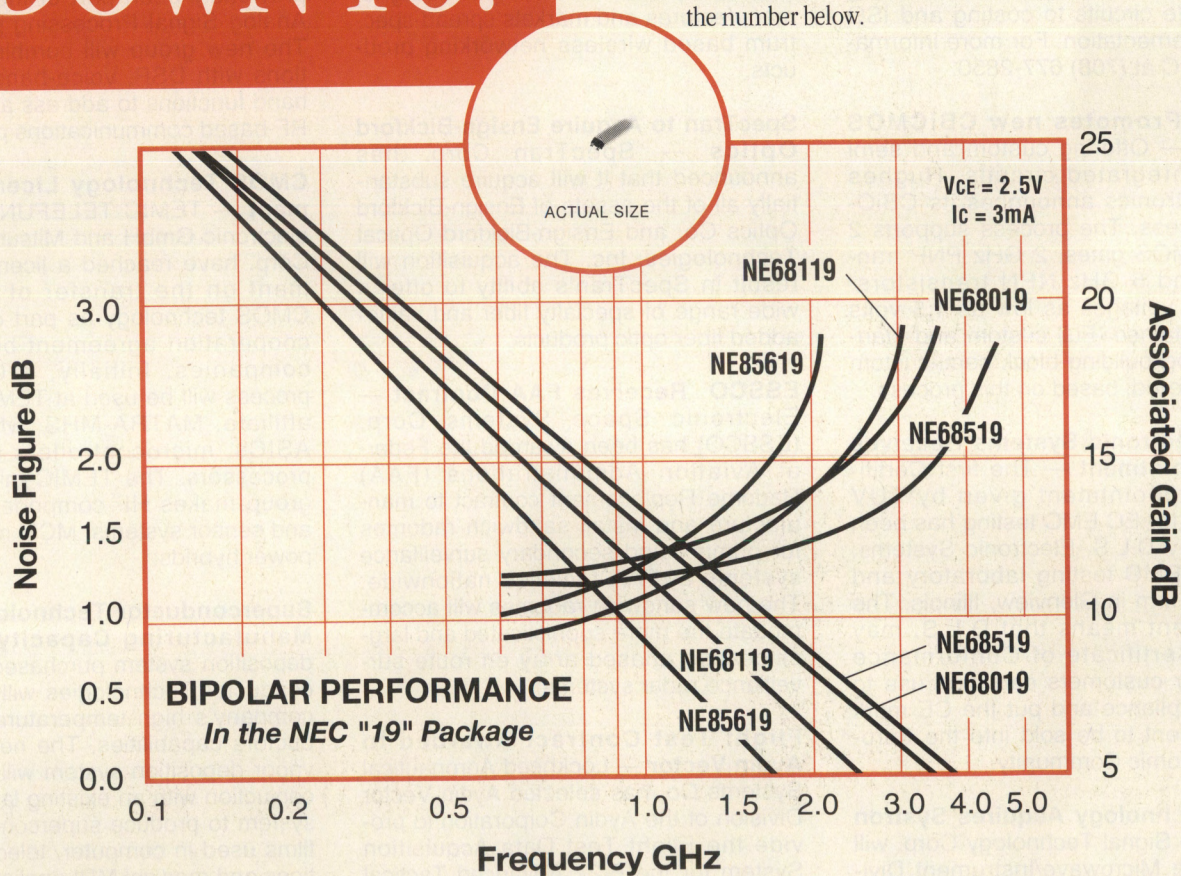

NEC

NEC Bipolars are available
in these packages
(shown approx. 2X size)

NEC "19" Pkg
Ultra Super
Mini Mold

NEC "18" Pkg
4 Pin Super
Mini Mold

NEC "30" Pkg
SOT-323 Style

NEC "33" Pkg
SOT-23 Style

NEC "39" Pkg
SOT-143 Style

California Eastern Laboratories

CEL Headquarters, 4590 Patrick Henry Drive, Santa Clara, CA 95056-0964; (408) 988-3500 FAX (408) 988-0279 □ Santa Clara, (408) 988-7846 □ Los Angeles, CA (310) 645-0985
San Diego, CA (619) 450-4395 □ Bellevue, WA (206) 455-1101 □ Richardson, TX (214) 437-5487 □ Olathe, KS (913) 780-1380 □ Woodridge, IL (708) 241-3040 □ Cockeysville, MD (410) 667-1310
Peabody, MA (508) 535-2885 □ Hackensack, NJ (201) 487-1155 □ Palm Bay, FL (407) 727-8045 □ Snellville, GA (404) 978-4443 □ Nepean, Ontario, Canada (613) 726-0626

processing without organic solvents, curability and removability. They may be most valuable as ESD charge dissipators in both removable and permanent applications, either as a coating or blended into plastics and fabricated directly into structural components.

IPC Develops School for PWB Technology — To be held during the Printed Circuits Expo, April 1994 in Boston, the School for PWB Technology is presented by the Institute for Interconnecting and Packaging Electronic Circuits (IPC). Seventeen tutorials or workshops are currently planned, which are intended to cover topics ranging from laminating and flexible circuits to costing and ISO 9000 implementation. For more information call IPC at (708) 677-2850.

Hughes Promotes new CBiCMOS Process — Offering custom and semi custom integrated circuits, Hughes Microelectronics announces its CBiCMOS process. The process supports 2 micron CMOS gates, 2 GHz PNP transistors and 5 GHz NPN transistors. Operating voltages as low as 1.5 volts can be obtained. Full custom and standard analog building block semi-custom ICs are offered, based on this process.

D.L.S. Electronic Systems Receives TUV Appointment — The first Certificate of Appointment given by TUV Rheinland for EC EMC testing has been received by D.L.S. Electronic Systems, Inc., and EMC testing laboratory and consulting firm in Glenview, Illinois. The appointment means that D.L.S. may issue a Certificate of Conformance which their customers can then use to prove compliance and put the CE mark on equipment to be sold into the European Economic Community.

Signal Technology Acquires Systron Donner — Signal Technology Corp. will acquire the Microwave/Instrument Division of Systron Donner Corp., a Thorne EMI company. The division manufactures microwave and instrumentation products for defense and commercial markets, with sales of approximately \$12.5 million annually. The instrument division will operate under the name ST Systron Donner.

New Thin Film Company Formed — Spectrum Thin Films is a newly formed company which manufactures standard and custom thin film devices for commercial and military applications. The

company, based in Hudson, NH, will make thin film resistor, conductor and multilayer products for hybrid microelectronics, using an environmentally sound laser process.

Proxim Announces Public Stock Offering — Proxim, Inc. has announced that has filed a registration statement with the Securities and Exchange Commission relating to the proposed initial public offering of 2,000,000 shares of common stock. 1,500,000 shares will be sold by the company, and 500,000 shares sold by certain stockholders. Initial pricing is expected to be between \$9 and \$11 per share. Proxim designs, manufactures and markets spread-spectrum based wireless networking products.

SpecTran to Acquire Ensign-Bickford Optics — SpecTran Corp. has announced that it will acquire substantially all of the assets of Ensign-Bickford Optics Co. and Ensign-Bickford Optical Technologies, Inc. The acquisition will result in SpecTran's ability to offer a wide range of specialty fiber and value-added fiber optic products.

ESSCO Receives FAA Contract — Electronic Space Systems Corp. (ESSCO) has been awarded the Federal Aviation Administrations (FAA) Radome Replacement contract to manufacture and install sandwich radomes for primary and secondary surveillance systems at FAA facilities nationwide. The new sandwich radomes will accommodate the more sophisticated and larger beacon phased array en route surveillance radar systems.

Flight Test Contract Awarded to Aydin Vector — Lockheed Aeronautical Systems Co. has selected Aydin Vector Division of the Aydin Corporation to provide the Flight Test Data Acquisition System for the F-22 Advanced Tactical Fighter. Nine vehicles will be built and rigorously tested through the year 2000. The contract, valued at \$20 million, includes micro-miniature MMSC-800 Narrow Band and Wide Band Data Acquisition units, high speed digital tape recorders, data handling equipment and ground support equipment.

Varian to Acquire Quality Hermetics — Varian Associates announces that its Canadian subsidiary, Varian Canada, Inc., has acquired the assets of Quality Hermetics Co. of Toronto. Quality Her-

metics is a privately held company which designs and manufactures glass-to-metal hermetic seals for a variety of applications in solid state amplifiers, avionics equipment, high vacuum systems and semiconductor manufacturing. Varian Canada manufactures microwave tubes and electronic equipment for medical applications.


Analog Devices Announces RF Product Group — A new product line has been formed at Analog Devices, Inc. to continue development of products targeted at new wireless applications. Components for these applications have previously been part of the company's Analog Signal Processing product line. The new group will combine RF functions with DSP, voice-band and base-band functions to address all portions of RF-based communications products.

CMOS Technology License Agreement — TEMIC TELEFUNKEN micro-electronic GmbH and Mitsubishi Electric Corp. have reached a licensing agreement on the transfer of submicron CMOS technology as part of long-term cooperation agreement between the companies. Initially, a 0.5 micron process will be used at TEMIC's French affiliate, MATRA-MHS, which makes ASICs, microcontrollers and microprocessors. The TEMIC microsystems group makes HF components, control and sensor systems, MCM modules and power hybrids.

Superconductor Technologies Adds Manufacturing Capacity — A new deposition system purchased by Superconductor Technologies will double the company's high temperature superconductors capabilities. The new chemical vapor deposition system will be used in conjunction with an existing laser ablation system to produce superconducting thin films used in computer, telecommunications and medical MRI applications.

Vendors Adopt HP Instrument Control Library — Six I/O product suppliers have adopted the standard instrument control interface library which Hewlett-Packard Company recently released as an open standard. The companies are IOTech Inc., Data Translation Inc., Capital Equipment Corp., Keithly Metrabyte and RadiSys Corp. HP also announced that Microsoft Corp. has made a commitment to bring the library to the control, engineering and manufacturing community.

FINALLY! 3 VOLT RF ICs FOR HANDHELD WIRELESS PRODUCTS



NEC's NEW LOW CURRENT SILICON ICs not only reduce power consumption in your 3 Volt designs, they reduce the parts count, improve the reliability, and simplify the assembly. NEC is committed to 3 Volt Silicon technology; these parts are just an introduction.

There are more on the way. Soon.

If 5 Volt ICs are the solution, NEC has a wide selection of them as well, all available right now.

And don't forget NEC's huge family of discrete devices. Many are characterized at 2.5 Volts and they're available in a variety of packages, including a new ultra-small SMD that's a third the size of a SOT 23!

For a **FREE Product Selection Guide**, call your nearest CEL Sales Office. Or circle the number below.

New 3 Volt NEC Silicon ICs

UPC2745
Ultra Broad Band Amplifier
DC to 2.7 GHz
12 dB Gain
-1 dBm PsAT
7.5 mA Icc

UPC2746
High Gain Amplifier
DC to 1500 MHz
19 dB Gain
0 dBm PsAT
7.5 mA Icc

UPB1502
Frequency Divider
0.5 to 2.2 GHz
Divide by 64/65, 128/129
6 mA Icc

UPC2747
Broad Band Low Noise Amplifier
100 MHz to 1800 MHz
12 dB Gain
3.3 dB NF, 5 mA Icc

UPC2748
High Gain Low Noise Amplifier
200 MHz to 1500 MHz
19 dB Gain
2.8 dB NF
6 mA Icc

UPB587
Frequency Divider
50 to 1000 MHz
Divide by 2/4/8
5.5 mA Icc

...plus dozens of Bipolar Transistors characterized at 2.5 Volts, including:

f = 1500 MHz
NE68519
1.3 dB NF
10.0 dB GA
@ only 3 mA Ic

f = 2.5 GHz
NE68030
1.90 dB NF
7.2 dB GA
@ only 3 mA Ic

f = 1000 MHz
NE68039
1.0 dB NF
11.6 dB GA
@ only 1 mA Ic

Surface Mount packages shown actual size

...and a wide variety of 5 Volt RF ICs including:

UPC2708
Wide Band Amplifier
DC to 2.9 GHz
15 dB Gain
10 dBm PsAT

UPC2710
Wide Band Amplifier
DC to 1000 MHz
33 dB Gain
3.5 dB NF

UPC2713
Wide Band Amplifier
DC to 1200 MHz
29 dB Gain
3.2 dB NF

UPC2723
AGC Amplifier
100 MHz to 1100 MHz
38 dB AGC
13 dB Gain

UPC2721
Down Converter
RF= 0.4 to 3.0 GHz
IF= 50 - 600 MHz
Conversion Gain= 15 dB

UPC2726
Differential Amplifier
400 MHz to 1400 MHz
15 dB Gain

NEC

Typical Performance at 25°C, Frequency Range is 3 dB Bandwidth

California Eastern Laboratories

CEL Headquarters, 4590 Patrick Henry Drive, Santa Clara, CA 95056-0964; (408) 988-3500 FAX (408) 988-0279 □ Santa Clara, (408) 988-7846 □ Los Angeles, CA (310) 645-0985
San Diego, CA (619) 467-6727 □ Bellevue, WA (206) 455-1101 □ Richardson, TX (214) 437-5487 □ Olathe, KS (913) 780-1380 □ Woodridge, IL (708) 241-3040 □ Cockeysville, MD (410) 667-1310
Peabody, MA (508) 535-2885 □ Hackensack, NJ (201) 487-1155 or 487-1160 □ Palm Bay, FL (407) 727-8045 □ Snellville, GA (404) 978-4443 □ Nepean, Ontario, Canada (613) 726-0626

Why DSP Could Be the Key to Your Next RF Design

By Andy Kellett
Technical Editor

Digital Signal Processing (DSP) has become faster and less expensive in the last decade, following a familiar pattern: new technology enables new applications, drives new technology, enables new applications... New DSP chips are faster, more self-contained, and increasingly, they are tailored for specific applications — applications such as digital cellular telephony, wireless LANs and digital video transmission.

DSP is crucial to many potentially large RF markets. "This whole infrastructure of satellite based personal communications, cellular-based communications and PCS require some DSP," says Doug Mitchell, Vice President of Marketing and Sales for array Microsystems, a Colorado Springs, CO manufacturer of DSP chips and boards for vector processing of signals. "I don't know that anybody disagrees when you say all those markets could be very large."

DSP processing power is up to the challenge offered by the emerging wireless markets. High-end DSP chips (for instance, the AT&T DSP1617) operate around 50 MIPS (Million Instructions Per Second), and chips are available with 16- to 32-bit, and fixed and floating point resolutions. What specification is the figure of merit depends on your applications says Thomas Hack, a Senior Design Engineer at Siliconix, and a frequent contributor to RF Design of articles on digital RF technology.

When a single processor can't do the job alone, parallel processing can be employed. Multiprocessor DSP is currently used in the most demanding applications for DSP. Radar and video signal processing often require the added power of parallel processing, as do digital cellular base stations, which have to handle several channels of information at once. Several chips are designed to make connecting several in parallel easier. "The TMS320C40 has a glueless interface," says TI's DSP Marketing Manager, Kun Lin, "We have customers who have a thousand TMS320C40s in one system." However, there are diminishing returns as more

processors are connected. "At some point it's more work computing how to split the work, than it is to do the work itself," notes array Microsystems' Mitchell. Still, that point of diminishing returns is well above the performance level of a single DSP chip.

"DSP architectures are heading towards higher integration, with larger on-chip memory and on-chip peripherals," says Bill Windsor, Product Manager for DSP Processors at Analog Devices. Analog's newest 32-bit floating-point DSP, the ADSP-21060, reflects this trend, containing 4M of RAM on-chip and extensive on-chip memory management. Increased integration reduces size and cost; both are important for . The increased inclusion of DSP in handheld devices also drives increased demand for power-conserving DSPs. Many DSPs have wait and stop modes, and many of the next round of DSP device introductions will include 3 V devices.

DSPs are also becoming more application specific. Examples of this type of DSP are devices designed to code and/or decode video signals using JPEG, MPEG and H.261. Such encoding decoding schemes could be implemented with sets of general purpose DSPs, says array Microsystems' Mitchell, but, "no one could afford to buy it." Instead a number of companies, including array Microsystems, are readying monolithic DSP chips dedicated to performing these video encode/decode tasks. Another type of application specific DSP chips are those which perform traditional analog tasks, such as Harris' HSP50016. This chip performs digital down conversion and filtering, simply taking in a sampled signal and spitting out I and Q data streams.

Nobu Okuyama, Senior Product Marketing Engineer for DSP products at NEC, points to the various competing digital cellular and wireless datacom systems when he says, "... wireless communication is not yet firmed up. So, in a sense, it is not the time to talk about customized DSP solutions."

Designing with DSPs has also become easier. Algorithms no longer

have to be hand-entered as machine code. "There are companies now that provide high level design tools which allow a designer to graphically pick and choose blocks to represent the functions in the application, and then the system will compile all the way down to DSP code," says TI's Lin. Companies such as Comdisco and Hyperception, among others, provide such software.


C code is another popular way to implement DSP algorithms, but even here, the designer doesn't have to worry about becoming an ace programmer. Robert DeRobertis, Product Manager for Wireless Signal Processors at AT&T, offers an example, "We offer VSELP code, so all the person has to do is write an executive and call those libraries. We've had customers integrate this into their phone in two or three months, as opposed to the many months it would take to do a complete software development."

Complete chip sets incorporating both RF analog and DSP functions are another way manufacturers are helping reduce design times. "Where RF and DSP never touched before, we are now seeing customers who require products that are gluelessly interfaced together," says AT&T's DeRobertis. The complementary nature of DSP and analog RF circuits is also seen by Charles Fadel, Corporate Marketing Manager for Analog Devices' new Communications Sector. "The advantage of providing a complete system is the ability to interplay the advantages of each section," says Fadel, "For instance, if you have a DSP, you can offload the non-linearity of an amplifier with it."

DSP has become less expensive in the last decade. For instance, TI's TMS320C10 was originally priced around \$500 when it was introduced in 1982. Now, unit quantities sell for about \$5. If this trend continues, RF designers should have some very useful and affordable DSP devices in the next decade. Says TI's Lin, "What looks expensive today will be very inexpensive tomorrow."

RF

MIXERS UNPRECEDENTED IN VALUE.

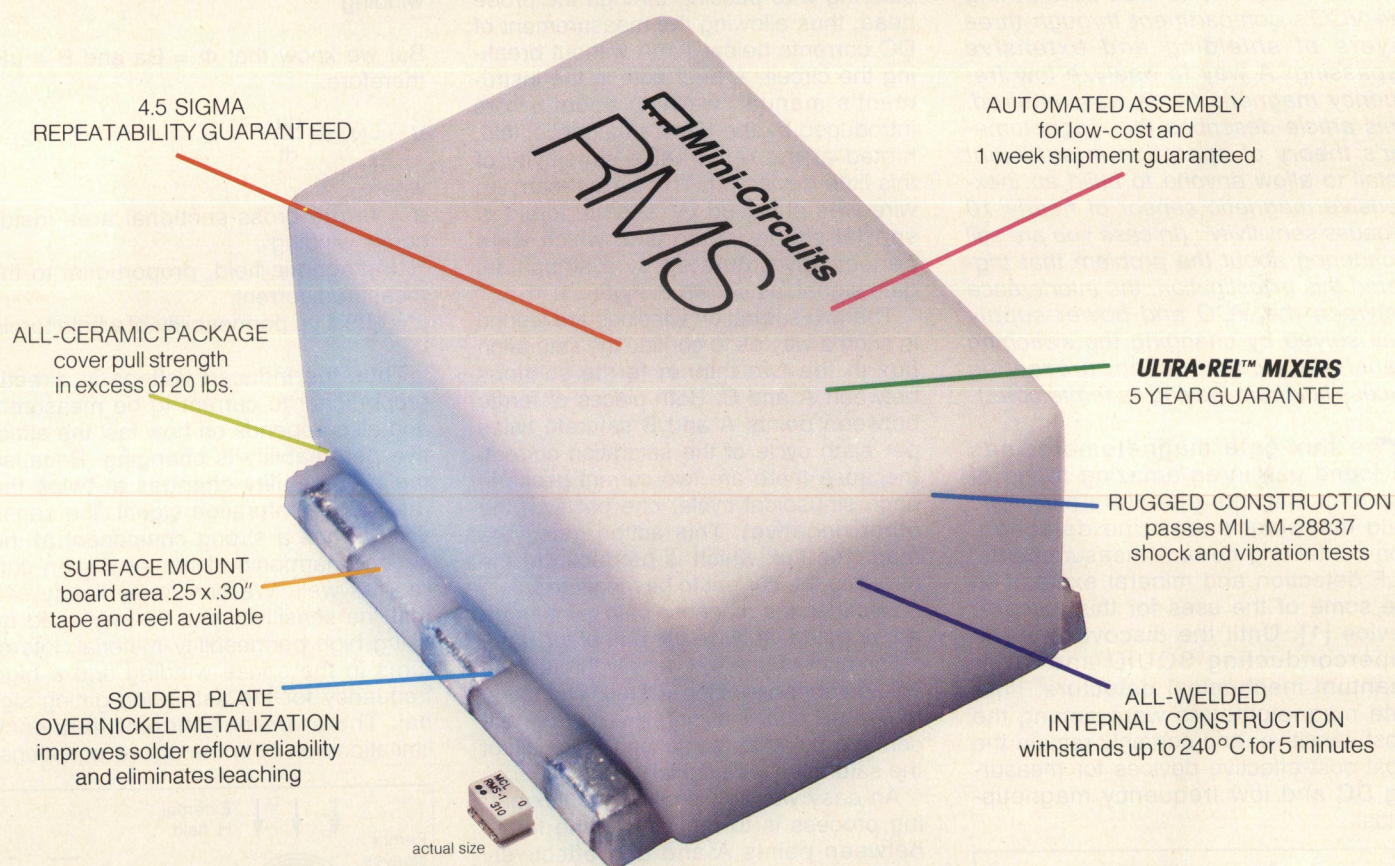

ALL-CERAMIC 5 to 3000MHz **\$395**
from (10-49 qty)

Now you can buy very low-cost, high-performance commercial mixers with the ruggedness and reliability required for military applications. That's value! ... Only from Mini-Circuits.

Model	LO (dBm)	Freq. (MHz)		Midband, dB			\$ ea. (10-49)
		LO, RF	IF	Conv. Loss	Isol L-R	Isol L-I	
RMS-11X	+7	5-1900	5-1000	7.1	29	31	3.95
RMS-11F	+7	350-2000	DC-400	5.5	31	30	4.95
RMS-30	+7	200-3000	DC-1000	6.5	26	22	6.95
RMS-25MH	+13	5-2500	5-1500	7.5	32	32	7.95

finding new ways ...
setting higher standards

Mini-Circuits®

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
EUROPE 44-252-835094 Fax 44-252-837010

Distribution Centers / NORTH AMERICA 800-654-7949 • 417-335-5935 Fax 417-335-5945

For detailed specs on all Mini-Circuits products refer to • THOMAS REGISTER Vol. 23 • MICROWAVES PRODUCT DIRECTORY • EEM • MINI-CIRCUITS' 740-pg HANDBOOK.

CUSTOM PRODUCT NEEDS... Let Our Experience Work For You.

F166 REV. ORIG.

INFO/CARD 18

The Flux-Gate Magnetometer: A Very Sensitive ELF Magnetic Detector

By Peter Vizmuller

Interference between a switching power supply and a receiver's VCO prompted the magnetometer described in this story; a magnetic flux modulated at audio frequencies was permeating the VCO's compartment through three layers of shielding and extensive bypassing. A way to analyze low frequency magnetic fields was required. This article describes the magnetometer's theory of operation in sufficient detail to allow anyone to build an inexpensive magnetic sensor of nearly 10 V/gauss sensitivity. (In case you are still wondering about the problem that triggered this investigation, the interference between the VCO and power supply was solved by changing the switching transformer construction, preventing excess flux from leaving its ferrite core.)

The flux-gate magnetometer has found use in an amazing range of applications. Interplanetary magnetic field mapping, submarine detection, non-contacting current measurements, ELF detection and mineral exploration are some of the uses for this versatile device [1]. Until the discovery of the superconducting SQUID and other quantum mechanical detectors, flux-gate magnetometers were among the most sensitive, and certainly remain the most cost-effective devices for measuring DC and low frequency magnetic fields.

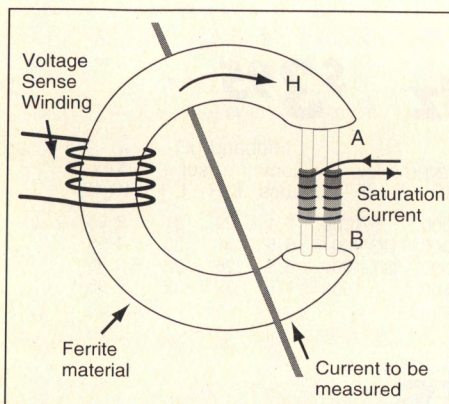


Figure 1. Simplified magnetic flux gate for measuring DC current.

The HP428A clip-on milliammeter was probably the first commercial instrument which utilized a flux-gate device to sense the magnetic field of a current-carrying wire passing through the probe head, thus allowing the measurement of DC currents below 1 mA without breaking the circuit. A brief note in the instrument's manual, warning about errors introduced by the Earth's magnetic field, hinted at the remarkable sensitivity of this little device [2]. The current-carrying wire was enclosed by a ferrite toroid of special shape, portions of which were periodically saturated by a sinusoidal gate signal, as shown in Figure 1.

The two saturation windings are wound in such a way as to confine the saturation flux in the two thinner ferrite sections between A and B. Both pieces of ferrite between points A and B saturate twice per each cycle of the saturation current, (because there are two current peaks in each sinusoidal cycle, one positive, the other negative). This action gates the magnetic flux which is produced in the toroid by the current to be measured.

Because the magnetic path is interrupted, or gated, at twice the rate of the saturation current, the flux density through the voltage sense winding will also change at the same rate, inducing a voltage in the sense winding at the second harmonic of the saturation gate signal.

An easy way to visualize this flux gating process is to realize that the ferrite between points A and B is effectively removed at twice the rate of the gate signal, so that the overall effective permeability of the whole toroid changes between two states: high permeability when unsaturated, and low permeability when partially saturated. The low permeability is due to the presence of an 'air gap' between A and B when that portion is saturated.

Yet another way to explain flux-gate operation is to quantify the various relationships mathematically. Looking at the flux through the sense winding:

$$V = -N_s \frac{d\Phi}{dt} \quad (1)$$

where,
 V = voltage induced in sense winding
 N_s = number of turns in sense winding
 Φ = flux through cross-section of sense winding

But we know that $\Phi = Ba$ and $B = \mu H$, therefore:

$$V = -N_s a H \frac{d\mu}{dt} \quad (2)$$

where,
 a = ferrite cross-sectional area inside sense winding
 H = magnetic field, proportional to the measured current
 μ = effective permeability of whole toroid

Thus the induced voltage is directly proportional to current to be measured, and also depends on how fast the effective permeability is changing. Because the permeability changes at twice the rate of the saturation signal, the sense voltage has a strong component at the second harmonic of the saturation current as well. We can immediately see that the sensitivity can be increased by using high permeability material, lots of turns in the sense winding and a high frequency for the saturation gating signal. There are no inherent frequency limitations on H in the above equations,

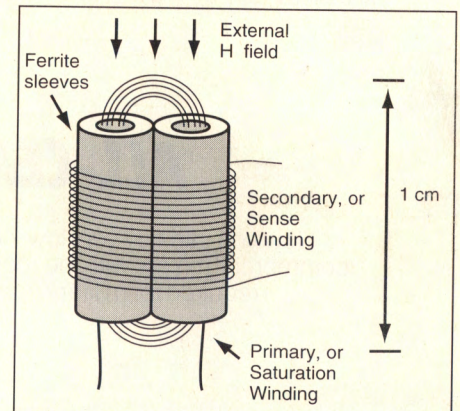


Figure 2. A practical flux-gate magnetometer using two 2673002201 ferrite sleeves and two orthogonal windings.

You don't always get what you pay for.



With PTS synthesizers, you get more.

Because we're synthesizer specialists, we give you *more for your money* in more ways than one.

From our economy PTS x10, to our space-saving PTS 310, to our top-of-the-line PTS 1000, we have *more models* to cover your source needs from 100 KHz to 1 GHz.

And more options, including:

- OCXO, TCXO or external standard,
- choice of resolution from 100 KHz to 0.1 Hz,
- DDS with phase-continuous switching,
- digital phase rotation,
- BCD or GPIB remote control,

and almost a hundred others to let you specify a synthesizer so well-tailored to your requirements that it's like having one custom made for you.

Our priority in design and manufacturing is to make our synthesizers *more reliable*, and this has led to a demonstrated MTBF of 25,000 hours. That's why we can back them with our all-inclusive 2-year warranty, along with a flat-rate service charge for eight years following the warranty period.

But wait, there's less!

All of our synthesizers feature *low power* consumption, *low spurious output* (as low as -75 dBc), *low phase noise*, and fast frequency switching (as fast as 1 μ second).

And all of our models are available, at a lower price, in a remote-only OEM configuration for easy integration into your OEM system.

Our full catalog has all the information you need to specify the most synthesizer for your money.

Call or FAX us for your copy, or for immediate engineering assistance.



PTS

PROGRAMMED TEST SOURCES

P.O. Box 517 Littleton, MA 01460
508/486-3008 FAX 508/486-4495


INFO/CARD 19

**ENHANCED
TUNE MODE**

VERSION 6.0

Serenade® PC for Windows™

Super-Compact®, Microwave Harmonica®, and Microwave Scope®
RF, Microwave, and Lightwave Circuit Simulators
Integrated with Schematic and Layout Editors

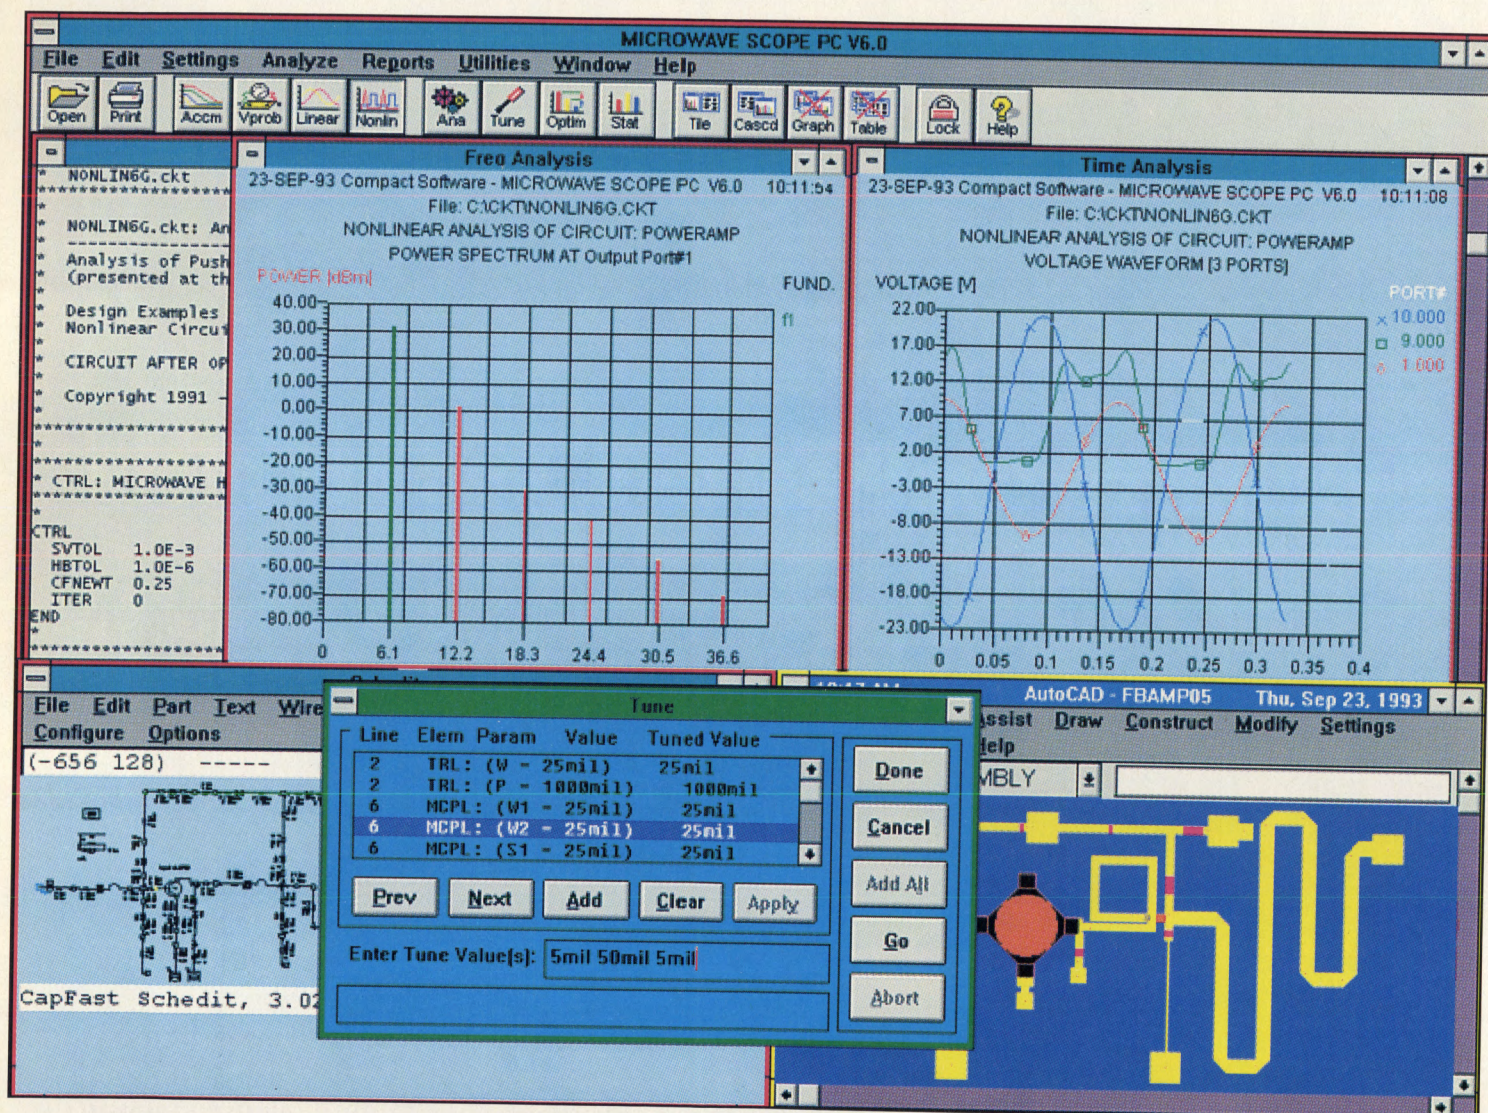

Compact Software®


201 McLean Boulevard
Paterson, NJ 07504
Tel: (201) 881-1200
FAX: (201) 881-8361
INFO/CARD 20

Super-Compact®
Linear Circuit Simulator

Microwave Harmonica®
Nonlinear Circuit Simulator

Microwave Scope®
Lightwave Circuit Simulator

Serenade® PC for Windows™

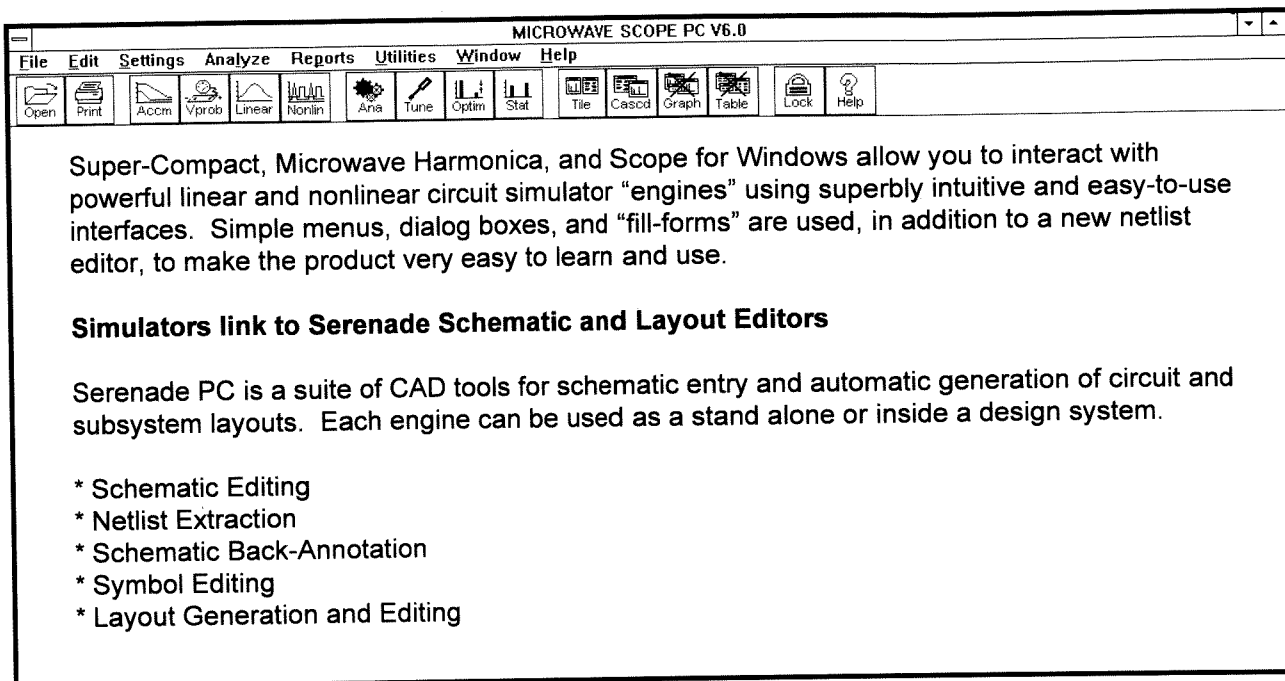

*In order to receive complete literature and a **free demo software kit**, please fax or send this page to Compact Software, or to the representative in your country.*

European Support Center
**Austria, Denmark, Finland, France, Germany, Italy, Luxembourg,
Norway, Portugal, Spain, Sweden, Switzerland**
Technical Software Service (Germany)
FAX: 49-7309-3275 - PHONE: 49-7309-5075

Belgium – See The Netherlands

Ireland – See United Kingdom

Israel
U.S.I.E. Ltd.
FAX: 972-3-93-02558 - PHONE: 972-3-93-45979

Japan
Seki Technotron Corp.
FAX: 81-3-3820-1433 - PHONE: 81-3-3820-1714

The Netherlands
BFI Ibexsa Electronics, S.A.
FAX: 31-20-65-31-353 – PHONE: 31-20-65-350

South Africa
Microwave & Electronic Technology
FAX: 27-12-663-2978 - PHONE: 27-12-663-2975

Taiwan
Evergo Corporation
FAX: 886-2-712-2466 - PHONE: 886-2-715-0283

Turkey
Momentum Projects & Consulting
FAX: 90-1-257-7663 - PHONE: 90-1-257-7170

United Kingdom
BFI Ibexsa Electronics, S.A.
FAX: 44-622-882469 - PHONE: 44-622-882467

Name: _____

Title: _____

Company: _____

Address: _____

Fax #: _____

Phone #: _____

Interested in: _____

- ☐ Super-Compact
- ☐ Microwave Harmonica
- ☐ Microwave Scope
- ☐ Serenade Schematic Editor
- ☐ Serenade Layout Editor

Platform: ☐ Workstation ☐ PC

CSBQ001F

Compact Software®
201 McLean Boulevard • Paterson, NJ 07504
Tel: (201) 881-1200 • FAX: (201) 881-8361

the sensor will work at DC and at frequencies up to the gate frequency with equal sensitivity.

In many cases, the magnetic field to be measured is not produced by a current carrying wire. Leakage from a cathode-ray tube, the Earth's ambient field, magnetization of a mineral rock sample are all examples where it is impossible to interrupt a closed magnetic path, as in the above example. In order to measure open field lines, the basic design can be modified as shown in Figure 2, but the principle of operation remains exactly the same:

The primary, or saturation winding has the same function as before, except that in this case, *all* of the ferrite material is saturated twice per cycle, rather than only a portion of the material. Voltage is induced in the secondary because ferrite effectively 'appears' and 'disappears' inside the secondary winding. The secondary, or sense winding will contain energy at the second harmonic of the primary frequency, only if there is an external magnetic field present. In the absence of an external magnetic field the secondary voltage will consist only of a small leakage signal from the primary. Because the two windings are wound at right angles, there is no transformer action and the primary signal does not get to the secondary, except for a small imbalance signal plus a capacitively coupled signal. In any case, the input (primary) and output (secondary) are at different frequencies, so they are easy to filter and separate.

Note that the magnetometer is now sensitive to direction and polarity; maximum output is obtained when an external magnetic field is along the long axis of the ferrite sleeves, and produces no output if the external field is perpendicular to it. Again, there is no lower frequency limit and the detector will respond to a DC field as well as to a changing field.

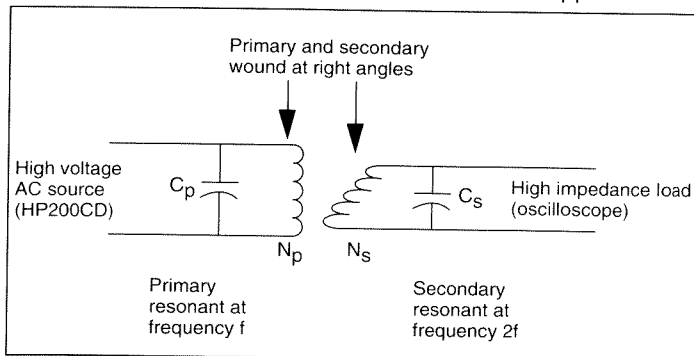


Figure 3. Schematic of flux-gate magnetometer including important resonating capacitors.

Resonating both the primary and secondary winding at their respective frequencies greatly improves the basic detector. Resonating the primary increases the current available for saturation and suppresses second harmonic energy. Resonating the secondary winding at the second harmonic filters out first harmonic energy and increases the available voltage amplitude, if the secondary is terminated in high enough impedance. A parallel capacitor will also absorb any of the inevitable stray capacitance at the input and output connections (Figure 3).

The effective permeability is different for the two windings. The permeability for the primary is very high, because primary flux is almost entirely confined to the ferrite material, whereas the secondary flux passes mostly through free air. If we assume that there is no hysteresis in the ferrite and that the B-H curve (Figure 4) can be modeled as a hyperbolic tangent, we can derive some equations to describe detector performance.

$$B = B_{\text{sat}} \tanh\left(\frac{\mu_i}{B_{\text{sat}}} H\right) \quad (3)$$

B = magnetic flux density

H = magnetic field

μ_i = permeability at H = 0, initial permeability

B_{sat} = saturation flux density

The above formula can be verified by calculating dB/dH at H = 0:

$$\left. \frac{dB}{dH} \right|_{H=0} \quad (4)$$

$$= B_{\text{sat}} \left(\frac{\mu_i}{B_{\text{sat}}} \right) \text{sech}^2 \left(\frac{\mu_i}{B_{\text{sat}}} H \right) \Big|_{H=0}$$

$$= \mu_i$$

The value of μ_i must be known for the ferrite sleeve, and is generally available in suppliers' catalogs [3].

Expanding equation 2 and noting that

$$\mu = \frac{dB}{dH}, \quad I = I_0 \cos(\omega t), \quad H_{\text{int}} = \frac{N_p I}{d} \quad (5)$$

then,

$$V = -N_s a H_{\text{ext}} \frac{d}{dt} \left(\frac{dB}{dH} \right) \quad (6)$$

After much manipulation, (left to the reader as an interesting challenge), we get the following expression for instantaneous detector output voltage when measuring external magnetic field H_{ext} along the long axis of detector:

$$V = -2H_{\text{ext}} N_p N_s a \mu_i^2 I_0 \omega \cdot \quad (7)$$

$$\frac{\sin(\omega t)}{B_{\text{sat}} d} \frac{\sinh \left[\frac{N_p \mu_i I_0 \cos(\omega t)}{B_{\text{sat}} d} \right]}{\cosh^3 \left[\frac{N_p \mu_i I_0 \cos(\omega t)}{B_{\text{sat}} d} \right]}$$

V = secondary output voltage [V]

B_{sat} = saturation flux density of ferrite [T]

I_0 = peak value of primary current [A]

ω = frequency of input current [rad/s]

N_p = number of turns in primary winding
 N_s = number of turns in secondary winding

a = cross-sectional area of both ferrite sleeves [m²]

d = inside diameter of ferrite sleeve hole [m]

H_{ext} = external magnetic field to be measured [A/m]

H_{int} = internal, saturating magnetic field [A/m]

μ_i = initial permeability of ferrite sleeves (absolute, not relative) [H/m]

The above equation states that the amplitude of the secondary signal is directly proportional to the magnetic field parallel to the long axis of the detector. It is not immediately obvious that equation 6 is periodic in 2ω , but we can substitute some practical numbers as shown below, and then plot it, (Figure 5).

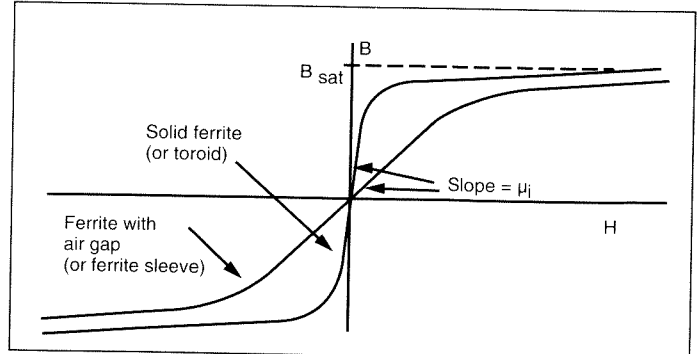


Figure 4. Simplified B-H curves for toroid and sleeve of the same ferrite material.

$B_{\text{sat}} = 0.2 \text{ T}$
 $I_0 = 0.2 \text{ A}$
 $\omega = (2\pi)100 \text{ kHz}$
 $N_p = 5, N_s = 200$
 $a = 2 \times 10^{-6} \text{ m}^2$ (2 square millimeters)
 $d = 0.8 \times 10^{-3} \text{ m}$ (0.8 mm)
 $H_{\text{ext}} = 39.8 \text{ A/m}$ (0.5 gauss)
 $\mu_i = 2 \times 10^{-4}$ ($= 160 \times \mu_0$)

The output is almost 4 volts peak to peak in a 0.5 gauss field (approximately equal to Earth's magnetic field), and there definitely is a strong second harmonic component in the waveform.

Construction

A practical detector can be constructed using two ferrite sleeves, (Fair-Rite part number 2673002201 or 2643002201), and using the number of turns and frequency specified in the example above. The 43 material gives higher output voltage than 73 material, but its temperature stability is worse. The resonating values of the two capacitors can be found by experiment, using the detector's response to the Earth's magnetic field. First, decide on the input operating

frequency (usually in the high 100's of kHz) and determine the output capacitor value C_s required for resonance of the secondary at twice this frequency. Then feed the required signal into the primary and adjust C_p for peak output voltage. There is plenty of output voltage, even using the Earth's magnetic field, so that this procedure can be carried out by orienting the detector with its long axis parallel to the ambient field (the orientation

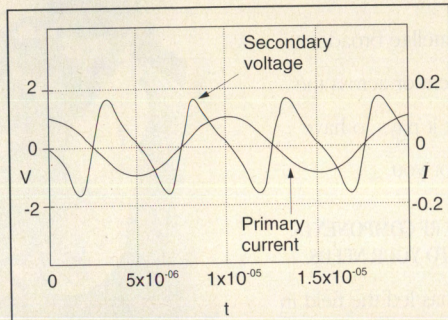


Figure 5. Theoretical detector voltage in 0.5 gauss field showing its second harmonic relationship to primary saturating current.

is almost vertical in U.S. and Canada).

Despite the sleeves' small size (they are approximately 0.4 inches long and 0.072 inch in diameter), the amount of signal required for good saturation is surprisingly high. An HP200CD oscillator at full output, (producing 80 V p-p into an open circuit!), was required for satisfactory operation. The culprit is the high primary inductance; high input voltage is required to force sufficient current into the primary winding for saturation.

Equation 6 shows that the operating frequency should be as high as possible for a sensitive detector, but in practice the frequency is limited to several MHz or below, because of the self-resonance of the secondary winding.


Desirable qualities for the ferrite sleeves are high permeability, low saturation flux density, and for the sleeves to be long. Large cross-sectional area would also be beneficial, but it would also increase primary inductance, which is not desirable. In addition, the ferrite material should have high resistivity in order to limit eddy currents, and low hysteresis to minimize heating. Perminvar ferrites,

— Announcing —

The 9th Annual The 1994 RF Design Awards Contests

- Deadline for entries is July 29, 1994 (postmark date – received by August 8, 1994).
- Winners will be published in the November 1994 issue of *RF Design*.
- Formal presentation of Grand Prizes will be made at RF Expo East, November 15, 1994.
- As in recent years, there are two contests, one for circuit design, the other for design software.
- Complete rules will be published in the February issue; rules will be similar to past contests.
- Prizes will be also be listed in February (they're terrific, once again!)

It's Time to Start Working on Your Entry!

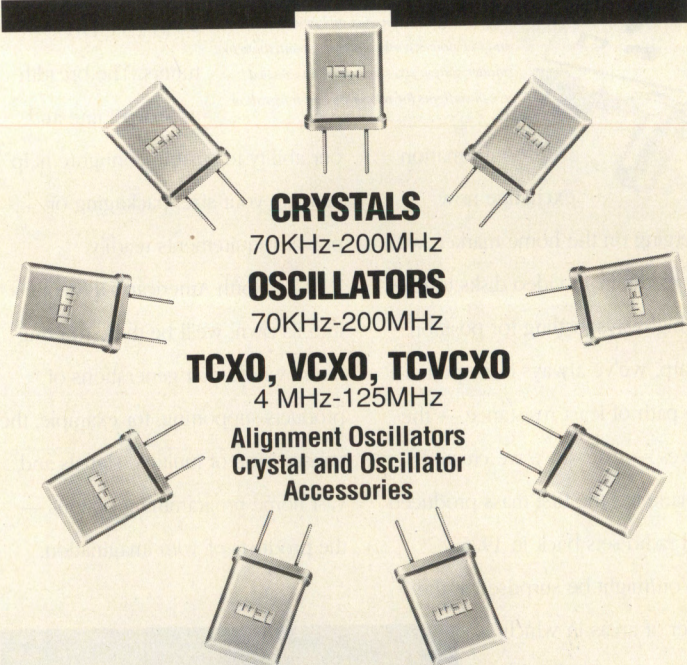

Call or fax TOLL FREE for information



INTERNATIONAL CRYSTAL MFG. CO., INC.

P.O. Box 26330 • 729 W. Sheridan • Oklahoma City, OK 73126-0330 • (405) 236-3741
FAX (405) 235-1904 • Toll Free Phone 1-800 725-1426 • 24 Hour Toll Free Fax 1-800 322-9426

S H A R P

PROGRESS REPORT

Dedicated to the proposition that one good idea leads to another.

Fifty years ago, getting the "big picture" at home depended mostly on your powers of imagination. But the pictures to be delivered to homes within this decade may exceed what all but the most ardent futurist ever imagined.

The TV set is the most likely point of confluence for all the innovations in

by terrestrial or satellite broadcast, across the continent or across the room, here's why it pays to have Sharp go to bat for you.

A FINE LINE OF RF COMPONENTS, FINE-TUNED TO YOUR NEEDS.

For years, Sharp has led the field in the miniaturization, noise reduction and seamless integration of RF components, from Ku band LNBs —

the industry's smallest — to 22cc DBS tuners. The breadth of Sharp's line and

our ability to custom-configure help us meet your size, packaging or power requirements readily.

As North American DBS comes into its own, we'll be there to bring home whole new generations of products supporting, for example, the transmission of multiple signals and vast home programming options — the products of your imagination.

You might be surprised at the number of areas in which Sharp continues to be the pacesetter in wireless communications components. Whether your transmission is in RF or IR bandwidths,

H/V linear and R/L circular polarization LNBs from Sharp provide superior cross-polar discrimination, plus a waterproof, airtight structure which ensures reliable performance in the most severe conditions.




From the crystal radio to the wire

WE BRING TV SIGNALS TO THE HEART OF YOUR COMPUTER.

It should come as no big surprise to see that Sharp, the world's leading manufacturer of RF components, is one of the first to deliver a TV tuner/demodulator in a flat-mount package offering easy integration in system design.

It's the start of a whole new ballgame. Manufacturers of desktop and portable PCs gain immediate entry into video and multimedia — two arenas where tuner size, mounting

and power requirements precluded their entry until now. And because this is a complete component module, they can avoid design and development at the subassembly level — always an enviable competitive edge.

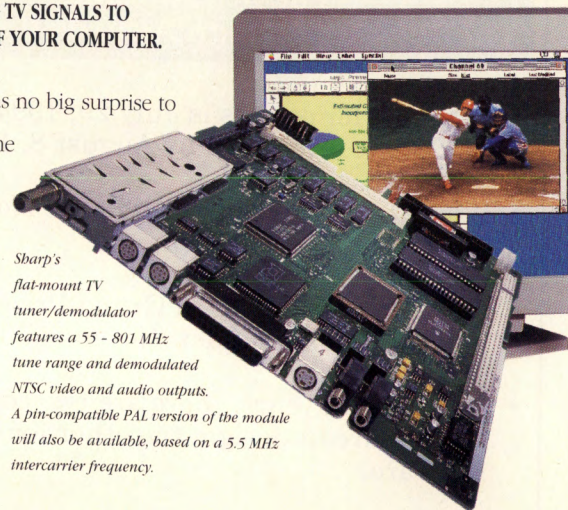

Sharp's flat-mount TV tuner/demodulator features a 55 - 801 MHz tune range and demodulated NTSC video and audio outputs. A pin-compatible PAL version of the module will also be available, based on a 5.5 MHz intercarrier frequency.




ess revolution: we're pulling the future out of thin air.

**SHARP IS ON YOUR WAVELENGTH
IN THE IR SPECTRUM, TOO.**

Sharp is the first company to deliver market-ready technology for short-range high-speed infra-red data transmission. Small size, low cost, low power consumption, immunity to EMI and no FCC licensing requirements make Sharp's IR product series a key player in a nearly limitless range of new applications, from personal communications systems to wireless joysticks and interactive TV. Transmission units providing ranges up to 3 meters, higher data rates and

Sharp's RY5 Series includes receiver, transmitter and bi-directional IR units. They support 38.4kb transmission rates over a 1-meter range, operate from a 5V source, and can be readily interfaced with existing digital circuitry.




3-volt operation are soon to follow as Sharp continues to evolve its expertise and experience in IR communications.

**FREE! SHARP'S LATEST
RF COMPONENTS CATALOG,
WITH NO STRINGS ATTACHED.**

Sharp's RF Components Short Form Catalog will show you a huge range of capabilities, sizes and packaging options indicative of our customer focus and cutting edge expertise. It's yours free, just for calling.

And the fact is, your best connection is Sharp



whether your venture calls for high-end digital signal processing, the power to store hundreds of pages of graphics within the smallest possible space, uncompromising flat panel display quality, or a manufacturer uncommonly committed to responding to your own design ideas. For more information, simply contact your nearest Sharp Electronics Corporation sales office or call us at **1-800-642-0261, Ext. 902.**

INFO/CARD 22

SHARP®
**FROM SHARP MINDS
COME SHARP PRODUCTS™**

FOR MORE INFORMATION CALL SHARP AT 1-800-642-0261 EXT. 902

which have nickel-zinc-cobalt composition, are not suitable for flux-gate magnetometers because their domain structure is semi-permanently changed by high magnetic fields [4]. The consequence of this is an effect similar to dielectric absorption in capacitors: the detector output voltage tends to drift toward its previous value following a disturbance.

Performance over temperature is prob-

ably the single most important challenge in designing a flux-gate magnetometer. Stable operation will invariably require some form of thermal compensation.

The most astonishing fact about flux-gate magnetometers is that under normal circumstances, their sensitivity is not limited by thermal noise. A permanent magnet, or a separate current-carrying coil can be suitably placed to cancel the ambi-

ent field, and the output signal amplified to increase the sensitivity even further. Even with field canceling and 30 dB gain, the detector output still does not contain much thermal noise. However, in addition to the ubiquitous 60 Hz signal, the output reveals events known as microfluctuations [5]: seemingly random variations of the Earth's magnetic field itself. It is difficult to imagine an object as large as the Earth changing its magnetic field in less than a second, but this is exactly what happens. These microfluctuations have been correlated to ionospheric disturbances, ground currents produced by distant thunderstorms, and even air tides [6].

Flux-gate magnetometers are easy to build and despite their simple structure, offer a rich set of design tradeoffs. Many variations of the basic design presented here are possible, and doubtless many more are yet to be discovered by interested experimenters.


RF

CELLULAR SOLUTIONS

For cellular base station applications, these amplifiers offer unchallenged performance, with guaranteed specifications over temperature (call for complete data sheets). The QBS-141 and -142 also offer *soft-fail* designs, with **completely redundant power supplies and RF circuits**. Fault detection circuitry indicates (by increased current and/or LED indicators) if a failure has occurred.

Typical Specifications (25°C)

Specification	QBS-133	QBS-141	QBS-142
Gain (dB)	33	40	33
Frequency (MHz)	824-849	824-849	824-849
Noise Figure (dB)	0.8	1.2	1.2
3rd Order OIP (dBm)	+38	+45	+42
VSWR Input/Output	1.5:1/1.5:1	1.2:1/1.2:1	1.2:1/1.2:1
DC Voltage (Vdc)	15	19-31	19-31
DC Current (mA)	220	800	425
DC Power Connector	Solder Pin	Filtered 9-pin D-sub	Filtered 9-pin D-sub
RF Connectors	SMA (J)	SMA (J)	SMA (J)



Q-bit Corporation

2575 Pacific Avenue NE, Palm Bay, Florida 32905


☎ 407/727-1838 • ☎ 407/727-3729



References

1. *McGraw Hill Encyclopedia of Science & Technology*, McGraw-Hill, New York, 1987, 6th ed., "Magnetometers".
2. *Operating and Service Manual*, Model 428A, Hewlett-Packard, Palo Alto, 1960, Sect. II, p. 2.
3. *Soft Ferrites*, Fair-Rite Corporation, 11th ed., Wallkill, NY, 1991, p. 20.
4. Technical Information, NEOSID Limited, Letchworth, UK, 1990, p. 9.
5. *McGraw Hill Encyclopedia of Science & Technology*, McGraw-Hill, New York, 1987, 6th ed., "Geomagnetism".
6. Lerner, R. G., G. L. Trigg, editors, *Encyclopedia of Physics*, VCH publishers, Inc., 2nd ed., New York, 1991, p. 439, "Geophysics".

About the Author



Peter Viz-muller is a Staff Engineer with Motorola Canada, where he has worked with RF circuits and radio communication systems since

obtaining his M. Eng. degree from the University of Toronto in 1981. He authored a book on helical resonator filters and published several articles. He has used the device described in this article to verify the daily variation in the Earth's magnetic field. He can be reached at (416) 756-5894.

Make your common mode EMI disappear into this black hole.

This tiny toroid inside every Coilcraft EMI filter provides over 15 dB of *true* common mode noise suppression.

By using a single magnetic structure to filter multiple lines, Coilcraft data line filters give you differential *and* common mode noise suppression, something simple ferrite beads just can't do.

You get >15 dB attenuation from 30 to 300 MHz. Or up to 40 dB just by adding capacitors!

They're small and easy to install. And they're far less expensive than filtered connectors.

Order our D103 Designers Kit (\$75) containing 16 samples of our surface mount and DIP filters. Or for more information call 800/322-2645.


Surface Mount Filters Our ultra-miniature surface mount filters come in 10, 8, 4, 3 and 2 line configurations. They're packaged in a flat top ceramic case and are available in tape and reel format for auto insertion.




DIP Filters These filters reduce conducted noise by a factor of 32 from nearly 1 MHz to 300 MHz while passing frequencies below 100 kHz without attenuation. They come in 8, 4, 3 and 2 line versions.



SIP LC Filters With capacitors on each line, these filters achieve up to 40 dB attenuation. We offer versions to filter from 1 to 8 lines.



Cable Filters Plug one of these modules into a cable and its common mode magnetics will filter all lines including the frame ground. EMI is attenuated as much as 19 dB while leaving data signals undisturbed. Choose DB-9, 15, 25 or IEEE 488 versions.



Tip and Ring Filters These low cost filters help telecom designers meet FCC Part 15 and 68 requirements. Available in 2 and 4 wire versions, they provide 20 dB attenuation of common mode noise over a 30 to 250 MHz range; 15 dB out to 300 MHz.



Phone Line Filters Fix noisy phone lines with these plug-in filter modules. They come in 2 and 4 line versions, in RJ-11, RJ-14 and RJ-45 configurations.



Coilcraft

1102 Silver Lake Rd., Cary IL 60013
800/322-2645 Fax 708/639-1469
INFO/CARD 24

Solar Source Antenna Gain Degradation Measurements

By Glenn W. Hurley
Naval Sea Support Center Atlantic

The topic of antenna gain measurements stirs up visions of near and far field measurement set-ups, well equipped indoor and outdoor ranges, and special normalizing software and computers to support these tests. This is to be expected for manufacturers and systems integrators, but how does the end user (field personnel) determine whether an antenna is degrading gracefully?

The Navy, who is one of the microwave industry's largest customers, has had to answer this question for many years. The sea, ever unforgiving in its relentless abuse of every product man has known, has no pity on large microwave antennas used in the Navy's many radars. Salt air corrosion, vibration, and radome abuse are only a few of the causes of gradual degradation. With the aid of several microwave installations on each coast and a few overseas, the Navy has been able to check the critical parameters of many of these systems on a regular basis, during overhauls and pre-deployment periods. With the "down-sizing" of the Defense Department, and specifically

the Navy, most of these microwave checking installations have been decommissioned and replaced with portable towers. Also, changes in system specifications have eliminated some of these mandatory checks, further reducing the availability of these systems for testing. This, along with reduced manpower, has forced the Naval Sea Support Center to look for some simple method of establishing a confidence level of performance for the antennas used on these systems. The following discussion will describe the results of one simple method found for checking antenna sensitivity.

In an effort to verify the gain parameter with minimal equipment, shore facilities, and manpower, the Naval Sea Support Center, Atlantic has been testing a procedure using the sun's energy as a signal source and a spectrum analyzer as the measurement device. The equipment chosen for this test was a ship based, G-band (5.0 - 8.0 GHz) tracking radar. In order to produce the required signal-to-noise ratio (S/N) at the spectrum analyzer, the introduction of a low noise amplifier (LNA), at the antenna terminal, was necessary on

this radar. Many surveillance radars have LNAs already incorporated in their design. The LNA was specified by the Naval Sea Support Center and two were built by Microwave Solutions, of National City, CA.

Because only one technical person is needed to make the measurement, this procedure solves the manpower and minimum shore support requirements. The big advantage to this method is that the sun is a universal source of RF energy, and is in the antenna's far field, eliminating any near field corrections.

Test Methodology

This procedure is a modified version of one previously published [1]. The older procedure requires the measurement of power per unit bandwidth and a comparison of cold-sky to solar flux density ratio. Measuring the power per unit bandwidth is relatively simple with the new generation of spectrum analyzers, which use digital processing and incorporate dBm/Hz (power per 1 hertz bandwidth) normalizing. This mode eliminates the need to keep track of resolution bandwidth changes and the need to renormalize the measurements when resolution bandwidth is changed. The specifications for the LNA were driven by the requirement to provide a S/N ratio 10 dB or more above the spectrum analyzer noise floor. This criteria resulted in the selection of an LNA with a gain of 45 dB and a noise figure of 3 dB, as seen in Figure 1.

The modification of the procedure [1] involved eliminating the sky noise measurement. The older procedure required a cold-sky measurement because the procedure made no assumptions about the antenna gain or effective aperture. However, the antenna referenced in this article is factory specified to be 39 dB (including waveguide losses). With the sun's energy specified in watts/bandwidth/area, one can compute the received power based on antenna effective area, so no knowledge of the background sky noise is required. The

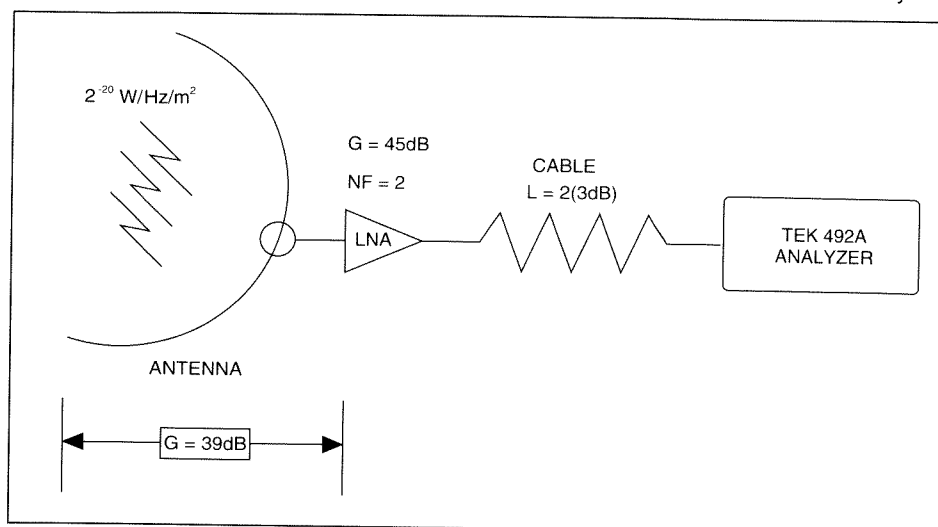


Figure 1. Block diagram of test set-up showing gains, losses and noise figures contributing to the antenna gain measurement.

Richardson Electronics is Your Global Partner in RF Technology

Offering solutions to customer problems for more than 40 years, Richardson Electronics, Ltd. has grown into one of the world's premier suppliers of RF devices.




This Month's Feature . . .

- Technical Expertise
- Experience
- Inventory
- Market Knowledge
- Supplier Literature

New Products 1993



Model	Frequency Range (MHz)	Amplitude Balance (dB) Max.	Phase Balance DEG. Max.	Power Watts (CW)	Isolation (dB) Min.	Max. VSMR	Insertion Loss (dB) Max.
RFP-88-108-90-200	88-108	±0.3	±1.5	200	23.0	1.15:1	0.3
RFP-88-108-90-400	88-108	±0.3	±1.5	400	23.0	1.15:1	0.3
RFP-88-108-90-800	88-108	±0.3	±1.5	800	23.0	1.15:1	0.2
RFP-101-501-90-200	100-500	±0.6	±1.5	200	20.0	1.15:1	0.5
RFP-101-501-90-400	100-500	±0.6	±1.5	400	20.0	1.15:1	0.5
RFP-251-102-90-200	250-1000	±0.5	±1.5	200	20.0	1.15:1	0.5
RFP-251-102-90-400	250-1000	±0.6	±1.5	400	20.0	1.15:1	0.5
RFP-201-401-90-200	200-400	±0.5	±1.5	200	23.0	1.15:1	0.3
RFP-201-401-90-400	200-400	±0.5	±1.5	400	23.0	1.15:1	0.3
RFP-201-401-90-800	200-400	±0.5	±1.5	800	23.0	1.15:1	0.4
RFP-401-102-90-200	400-1000	±0.5	±1.5	200	25.0	1.20:1	0.3
RFP-401-102-90-400	400-1000	±0.5	±1.5	400	20.0	1.20:1	0.3
RFP-401-102-90-800	400-1000	±0.5	±1.5	800	20.0	1.25:1	0.3
RFP-501-102-90-200	500-1000	±0.5	±1.5	200	25.0	1.20:1	0.3
RFP-501-102-90-400	500-1000	±0.5	±1.5	400	20.0	1.25:1	0.3
RFP-501-102-90-800	500-1000	±0.5	±1.5	800	20.0	1.25:1	0.3
RFP-102-202-90-200	1000-2000	±0.5	±1.5	200	20.0	1.20:1	0.3
RFP-102-202-90-400	1000-2000	±0.5	±1.5	400	20.0	1.20:1	0.3
RFP-202-402-90-200	2000-4000	±0.5	±1.5	200	18.0	1.25:1	0.3



Richardson Electronics, Ltd. has teamed with RF Power Components to offer a full-line of 90° Hybrid couplers. These high-quality 3dB 90° Hybrid couplers are drop-in with solder tabs and connectorized models. Call Richardson today for all your RF Power Component needs.

Our industry-leading RF suppliers . . .



MOTOROLA



SGS-THOMSON

Amphenol®



EF JOHNSON



PHILIPS



RF PRODUCTS



PINEAPPLE TECHNOLOGY



U.S. (800) RF POWER
CANADA (800) 348-5580
U.K. (0522) 542631
FRANCE (1) 34-26-4000
ITALY (055) 420-10-30
SPAIN (1) 528-37-00
GERMANY (089) 80-02-13-1
JAPAN (3) 3874-9933
SINGAPORE (65) 298-4974




Committed to the RF Market—

Richardson Electronics, Ltd.

40W267 Keslinger Road
LaFox, Illinois 60147
(708) 208-2200


INFO/CARD 25



Latin America and other international inquiries, contact Corporate Headquarters at (708) 208-2200


DESIGN SOLUTIONS FOR THE RF INDUSTRY

The best of RF technology, quality, and design comes from Silicon Valley Power Amplifiers, a leading manufacturer of high-performance amplifiers and components.

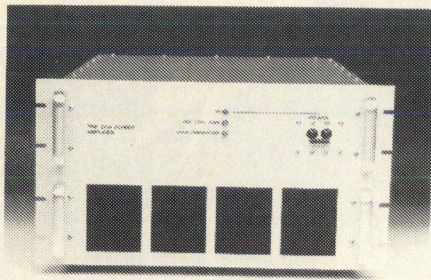

AMPLIFIERS

Part Number	Power Output Watts	Gain dB	Frequency Range MHz
V-1000	1000	60	100-200
U-1000	1000	60	225-450
C-500	500	60	100-500

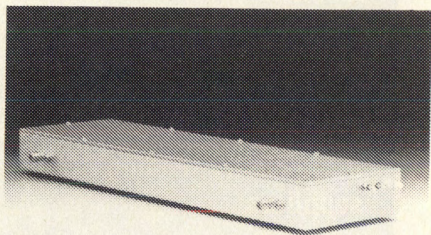

MODULES

Part Number	Power Output Watts	Gain dB	Frequency Range MHz
10-150-4	4	36	10-150
10-100-25	25	40	10-100
10-100-100	100	40	10-100
80-220-300A	300	60	80-220
220-500-300A	300	60	220-550
100-500-25	25	30	100-500
100-500-100	100	40	100-500
100-500-150	150	10	100-500

This high-quality hardware is backed by:

- Excellent service
- Customized design
- Fast response
- Expert technical support
- In-stock delivery
- Standard/special parts

For a free catalogue describing our complete range of power amplifiers and modules, call 408.986.9700 today!



1530 O'Brien Drive Δ Menlo Park, CA 94025
408.986.9700 Δ Fax 408.986.1438
INFO/CARD 26

measured power, corrected for hardware/cable losses, (which are known system constants), and LNA gain is then compared to the measured solar data from the National Institute for Standards and Testing (NIST).

NIST serves as the data bank for several solar flux density measurement institutions around the world. Large calibrated sensors, located in Maine, Hawaii, Australia and Italy, collect data and pass it to NIST on a daily basis. This data is available from their Colorado location by phone (303-497-3171). This data is given at several bands from VHF to EHF, and is expressed in watts/hertz/square meter. All of the measurements in this article were taken on the East Coast, therefore solar flux density data from the Maine site was requested, since it represented approximately the same longitude. Figure 2 contains both a table and a graph showing the solar flux density as a function of frequency for two different time periods. Since NIST only specifies energy at certain frequencies, interpolation must be performed to find the solar flux for the frequency of interest.

The solar flux density, during normal

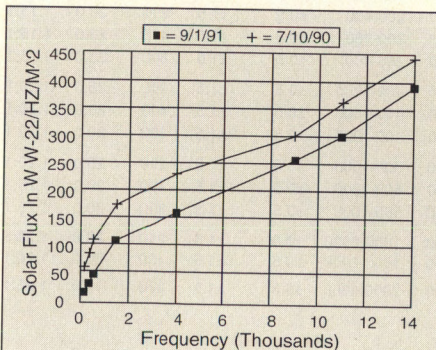


Table 1
Solar Flux Density $W \times 10^{-22} / \text{Hz} / \text{M}^2$

Freq. MHz	09/01/89	07/10/90
200	15	60
400	30	85
600	50	110
1500	110	175
4000	160	230
9000	255	300
11000	300	360
14000	390	440

Figure 2. Solar flux measurements taken at Maine measurement location at two different times.

non-flare up periods, increases in power versus frequency in a linear fashion, approximately 3 dB per octave and follows the relationship,

$$F_x = 3.6 \times 10^{-30} \times f \quad (1)$$

where F_x is the flux density in watts per Hz per square meter and f is the frequency in hertz [3]. The sun subtends 0.5 degrees in the sky, therefore measurements of antenna gain where the beam width is less than 0.5 degrees should have a correction factor applied [1].

Using the relationship of antenna gain found in Skolnik [2],

$$\text{Gain} = A_e \times \frac{4\pi}{\lambda^2} \quad (2)$$

and solving for A_e , the effective antenna area, was found to be 1.6 square meters in the G-band.

The LNA noise contribution (3 dB), for the antennas tested using this procedure, was found to be +0.51 dB. With a noise figure of 3 dB the LNA contributes noise power:

$$P = kTB \quad (3)$$

$$P = (1.38 \times 10^{-23} \text{ J/K})(290\text{K})(1 \text{ Hz})$$

$$= 0.4002 \times 10^{-20} \text{ W/Hz}$$

$$3.6 / 3.2 = 1.125 \text{ or } 0.51 \text{ dB}$$

which is the power referenced to the input of the LNA. The solar flux multiplied by the antenna's effective area of 1.6 m^2 A_e would yield an additional $3.2 \times 10^{-20} \text{ W/Hz}$ of noise power (signal). The total, $3.2 + 0.4 \times 10^{-20} = 3.6 \times 10^{-20} \text{ W/Hz}$, would yield an LNA input power that is 0.51 dB higher than predicted.

$$3.6 / 3.2 = 1.125 \text{ or } 0.51 \text{ dB} \quad (4)$$

With larger reflectors, for example one having an A_e of 6 meters, an error of only 0.142 dB would be realized.

Procedure

a. Record the spectrum analyzer power as "X" (dBm)

b. Calculate received power =

$$= \frac{F_x(A_e)(G)}{\text{Loss}} \quad (5)$$

G = LNA gain

Loss = coax loss

c. Convert the result of step B to dBm.

d. Calculate difference between power

No One Stocks More

RF & Microwave Transistors, Semiconductors and Modules



 **Richardson
Electronics, Ltd.**

1-800-RF POWER (U.S.A.)

**40W267 Keslinger Road
LaFox, Illinois 60147
(708) 208-2200**

INFO/CARD 27

CANADA	(800) 348-5580
U.K.	(0522) 542631
FRANCE	(1) 34.26.4000
ITALY	(055) 420.10.30
SPAIN	(1) 528 37 00
GERMANY	(089) 80 02 13 1
JAPAN	(3) 3874-9933
SINGAPORE	(65) 298-4974

measured in step A and power calculated in step C +/- any corrections

Example

Measured power (X) = -123.2 dBm/Hz

The solar flux from NIST, (F_x), at 4 GHz is 2×10^{-20} W/Hz/m². The effective area, (A_e), of the antenna at 4 GHz is

1.6 m², the low noise amplifier gain is 31622.8 (45 dB), and cable loss is 2.0 (3 dB). Calculating the theoretical power received we get:

$$\frac{2 \times 10^{-20} (1.6) (31622.8)}{2.0} = 5.1 \times 10^{-16} \quad (6)$$

Converting 5.1×10^{-16} W/Hz to dBm/Hz, we get -122.9 dBm/Hz.

Subtracting the power due to the noise contributed by the LNA from the measured power (X):

$$-123.2 \text{ dBm/Hz} - 0.51 \text{ dB} = -123.71 \quad (7)$$

The difference between measured and calculated powers is -0.81 dB. Therefore:

$$\text{gain} = 39 - 0.81 = 38.19 \text{ dB} \quad (8)$$

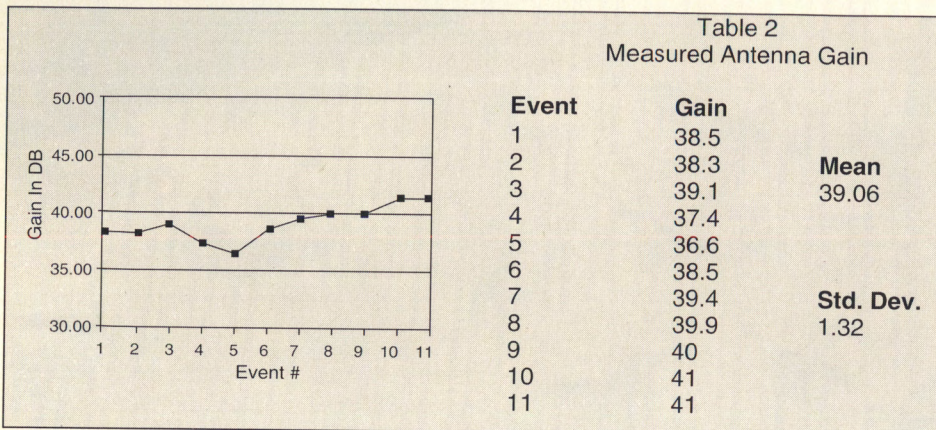


Figure 3. Test results of 11 antennas using the solar source measurement technique.

Results

The test results from 11 systems, taken over 18 months, are displayed in Figure 3. Using the factory specified 39 dB gain as reference, the mean of the data was 0.06 dB high, with a standard deviation of 1.32. No effort was taken to check these systems using alternate procedures due to location and availability. This method of field testing, using solar energy, only applies when the factory gain is previously known. When testing gain on antennas where the effective aperture area is unknown, the cold sky to solar flux density ratio method is required.

Conclusions

Even though this procedure was accomplished at "G" band, it could also be applied at any frequency that NIST data is available and on any system where the antenna/LNA figure of merit provides a signal to the spectrum analyzer greater than 10 dB above the analyzer noise floor.

The author wishes to thank those who helped prepare this paper, especially J. Laulainen of Naval Surface Weapons Center, Port Hueneme, CA. RF

References

1. A. Doty, "Use Solar Energy for Remote Antenna Gain Measurements," *Microwaves & RF*, June 1988, pp. 141.
2. M. Skolnik, *Intro to Radar Systems*; McGraw Hill New York, 1980, pp. 227.
3. R. Bokulic, "Use Basic Concepts to Determine Antenna Noise Temperature," *Microwaves & RF*, March 1991, pp. 107.

About the Author

Glenn Hurley received his degree from the DeVry Institute and began working for Sperry Gyroscope in 1963. Since then he has passed the EIT and now works for the Dept. of the Navy, Naval Sea Support Center in Norfolk Va. He can be reached at (804) 396-0435.



COAXIAL RELAYS


***Proven-Reliability**

"Coaxial relay reliability has always been a problem. About five years ago, we switched to TohTsu Coaxial Relays in our high-power amplifiers. Since that time we have not experienced a single relay failure."

"TohTsu offers traditional Japanese quality and workmanship. The contact designs are exceptional, making a relay that has proven itself both electrically and mechanically reliable."

"Henry Radio will now distribute a full line of TohTsu Coaxial Relays. Most common configurations and connectors are available AT VERY REASONABLE PRICES. Please call or write today for complete information, prices and specifications."

— Ted S. Henry

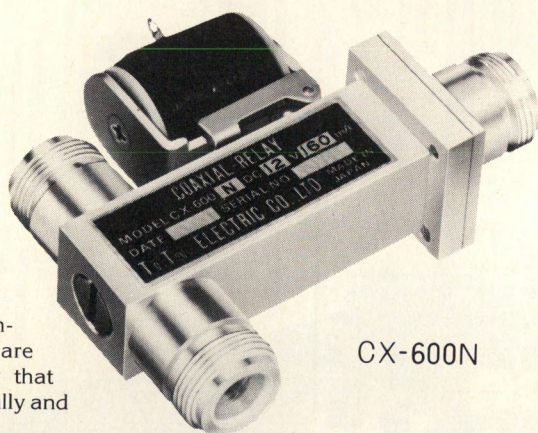

CX-600N

HENRY RADIO



2050 South Bundy Drive
Los Angeles, CA 90025
Phone (800) 877-7979
or (310) 820-1234
FAX 310-826-7790
INFO/CARD 28



COMPACT SOFTWARE LAUNCHES A POWERFUL NEW SIMULATOR!

SUPER-SPICE® is a new RF, Microwave and High-Speed Time-Domain Simulator that overcomes many of the limitations of conventional SPICE simulators. SUPER-SPICE® has the easy-to-learn and use EASi™ X-Windows™/Motif™ compliant interface. Circuit entry is accomplished through the Serenade Schematic Editor. The new simulator provides a range of unique models and capabilities needed by design engineers involved in high frequency analog and digital circuits.

SUPER-SPICE® has high accuracy models for transmission media including microstrip, stripline, coplanar waveguide, multiple coupled lines and discontinuities such as bends, tees, steps and crosses. An efficient electromagnetics module allows complex

multi-layer media to be analyzed within the same software package and the resultant parameters used in subsequent simulations. Fast time-domain calculations of layout-related factors provide valuable insight into the design of high-speed PCBs, MCMs and packages. SUPER-SPICE® is now available for UNIX-based workstations such as Sun SparcStations™ and HP 9000-700 series. A Windows™ compliant version for PCs will also be available soon! Further information may be obtained from:

Compact Software, Inc.,
201 McLean Boulevard
Paterson, NJ 07504, USA

Tel: (201) 881-1200 • Fax: (201) 881-8361
INFO/CARD 29


If you're going to win the wire be sure you've got an expert c

HP RF components. We've got what it takes to win.

The wireless race is on. Lead times are getting shorter. Product specifications are more demanding. Market windows are moving so fast, only those with an edge can meet them.

As a leading supplier of RF components for wireless transmitter and receiver applications, the HP team has what you need to win. Whether your applications include cellular phones, cordless phones, LANs, TV delivery, Satcom, GPS, or mobile data receivers.

In fact, since HP offers the industry's

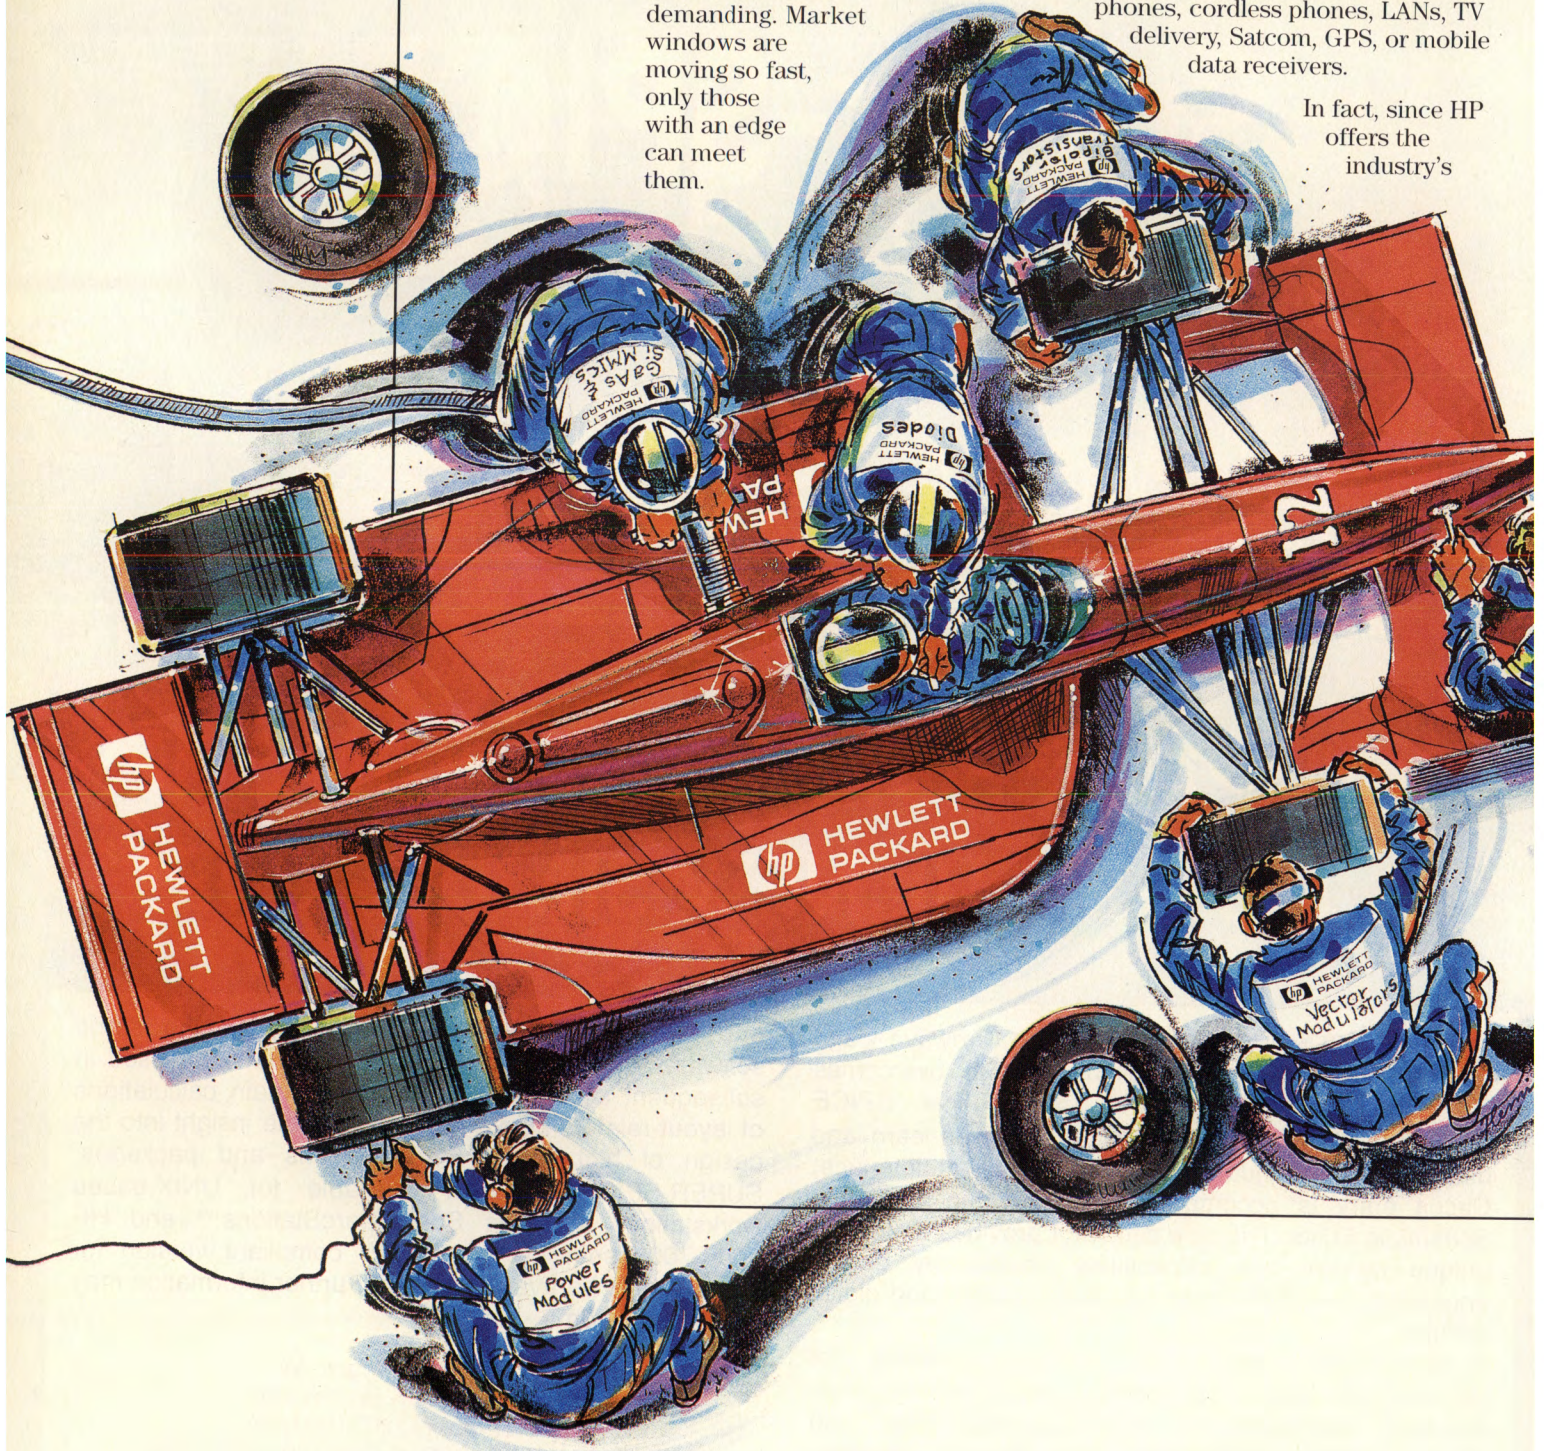


ss race,

W.

broadest range of RF component solutions—from discrete diodes, transistors and MMICs to RFICs—designers have the distinct advantage of working with a single, reliable, world leader.

Race-tuned technologies deliver the winner's edge.

In racing, performance is everything. Which is why designers greet

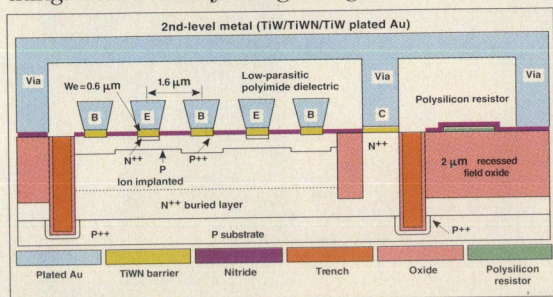

Si Bipolar ISOSAT II process.

HP's finely-tuned engines with enthusiasm. RF devices deliver 15 GHz f_T and 35 GHz f_{MAX} , enabling unequalled

receiver/transmitter performance at frequencies up to 5 GHz and beyond. HP's Si Bipolar highly integrated, low-power consumption MMICs

HP puts you in the pole position with its high-volume, low-cost products:

- AT-41511—Si Transistor
- ATF-10236—GaAs FET
- HSMS-2802—Schottky
- HSMS-2822—Schottky
- HSMP-3890—PIN
- IAM-81008—Active Mixer
- INA-03184—Gain Block
- INA-10386—Gain Block
- MSA-0611—Gain Block
- MSA-0886—Gain Block

provide longer battery life and increased talk time. Further, HP GaAs technology provides low-noise PHEMT FETs as well as GaAs MMICs—switches and gain blocks.

Hot off the line: HP's newest team of RF leaders.


The benefits of our new ISOSAT II manufacturing process are well summed up by

our newest crew members.

HP's HPMX-2003 and 2005 vector modulators provide

precision building blocks for the next generation of

digital radios. The new AT-3 series transistors offer 13 dB gain and 1.0 dB NF at 1 GHz while biased at 2.7V and 1 mA. And all are available in small surface mount packages.

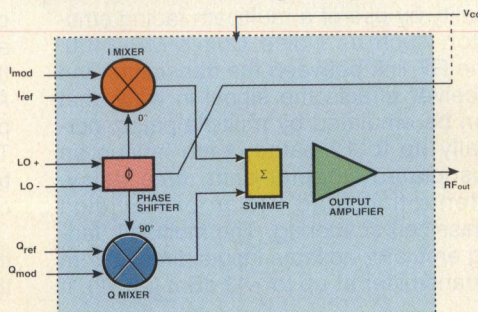

HP's Silicon RFIC Vector Modulator.

Also new, our MGA-86576 PHEMT amplifier MMIC delivering 22 dB gain and 2.0 dB NF from 1.5 to 8 GHz. And, HP will soon release power modules for NADC and GSM applications.

HP integration: your fast track to the future.

HP will push the limits with its next releases, including an RF LSI

circuit with over 1500 NPNs, 50 PNP's, 50 Cs and Ls, and 1800 resistors for cellular

telephone applications.

HP's 2-chip (RF & IF) DECT chipset puts

you on a clear path to higher levels of RF component

integration. The benefits are clear: design becomes easier, saving you time and costs.

The industry's most responsive support crew.

HP's components sales force and worldwide distributor network provide all the tools you need to stay ahead of the pack. Our strategic market focus, broad product line, competitive pricing, and wide range of advanced technologies make HP the ideal RF design partner. For more information, call 1 (800) 537-7715, x7906. But do it now, because the race is on!

HP RF components.

Winning the wireless race.

hp HEWLETT®
PACKARD

INFO/CARD 30

In Canada, call 1 (800) 387-3867, x7906.
In Europe, fax to 31 2503 52977.

Multipath Fading Emulation for Wireless Communications

By Bent Hessen-Schmidt
Noise Com, Inc.


The operating environment of a mobile digital radio system requires designers to allow for variations in propagation. The greatest propagation effect is multipath fading, which occurs when two or more replicas of a radio signal arrive to the receiver with different time delays. Testing for multipath performance is essential for reliable system operation — it is the mobile telephone user who experiences this multipath fading and, therefore, will associate it with the quality of the product he or she is using.

A typical multipath scenario is a mobile phone moving through an environment consisting of buildings, trees, ground, clouds, etc. The transmitter is omni-directional, and its energy is imposed on each of these objects. Objects with irregular surfaces scatter the reflected signal with varying amplitude and a random phase shift that is usually evenly distributed from 0 to 360°. As they arrive at the receiver, the direct and reflected signals add as vectors, causing the amplitude of the received signal to vary, and in the worst case, approach zero and interrupt the communication.

Wireless communication systems such as GSM, DCS1800, CDMA, IS-54, DECT, and CT-2 mobile telephones are required to be tested while subjected to multipath fading [1]. Truly, most line-of-sight communication systems can benefit from multipath fading tests because the design margin for multipath fading is relatively large compared to the allowances for noise figure, carrier to noise ratio, and antenna gain (see Table 1). While all the other allowances usually are tested, the emulation of multipath has just recently become practical with the introduction of new instruments.

Operation of the MP-2400

Multipath fading can today be emulated in the lab and at the manufacturing

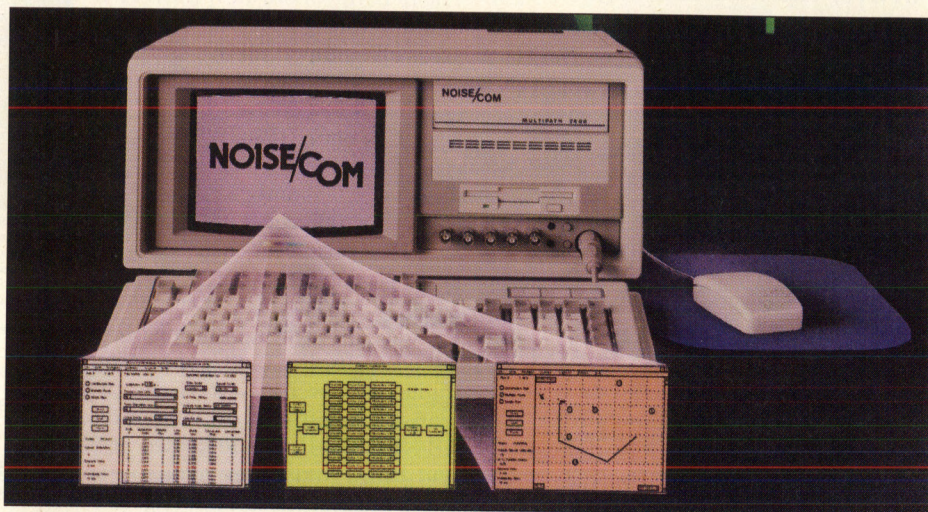

facility by use of a multipath fading emulator, such as Noise Com's MP-2400. The RF link between the transmitter and receiver affects the signal in ways that can be emulated by multiple paths, normally up to 12 paths, each having an associated Doppler shift, time delay, attenuation, and Rician or Rayleigh (classical) scattering. The multipath fading emulator accepts inputs directly from a transmitter at up to +43 dBm (20 W). It


downconverts the signal to an intermediate frequency where it is passed through a large dynamic range, 12 bit, A/D converter and thereafter split into 12 paths each emulating a reflected signal. The signal is split after A/D conversion to assure that each path is fed with exactly the same signal.

Each path will have a signal strength that most likely is less than the power of the direct path. The average power of

Transmitted power (2 W)	(Px)	+43 dBm
Antenna gain, transmitter	(Gt)	+3 dB
Antenna gain, receiver	(Gr)	+3 dB
Loss due to distance between Tx and Rx	(L)	-100 dB
<hr/>		
Nominal Received Carrier Power	(C)	101 dBm
Data Rate (64 kbit/s)		48 dB/Hz
<hr/>		
Nominal Received Bit Energy	(Eb)	-149 dBm/Hz
Noise Floor	(kT)	174 dBm/Hz
Noise figure	(NF)	7 dB
<hr/>		
Receiver Noise Density	(No)	-167 dBm/Hz
Bit Energy to Noise Density @ 10-9 BER	(Eb/No)	18 dB
Fading margin	(M)	50 dB
<hr/>		
Nominal Received Bit Energy	(Eb)	-149 dBm/Hz

Table 1. Typical effect budget for a radio link.

In 10 years, 150 million people will have cellular phones. We're connecting them now.



High dynamic range, low-noise amplifier.

At M/A-COM, the high-volume cellular market is today's reality, not tomorrow's goal.


Our capabilities encompass everything from design-to-cost product development to the integrated technology that enables analog and digital transmission. Working in partnership with our customers, we join engineering's vision with manufacturing's pragmatism. The result is optimal performance at minimal cost.

We cover cellular from A to D.

Whether you are operating in an analog or a digital environment, building new base stations, or servicing and updating existing ones, you can rely on our experience and expertise. We produce the full range of the high-volume, low-cost RF and microwave products base stations require. And we use techniques such as process-oriented manufacturing and CFM (Continuous Flow Manufacturing) to guarantee cost efficiency and high-volume production that meets technical performance requirements.

In addition, we are leaders in the design and production of the more challenging and technologically advanced products the emerging digital and microcellular market requires.

Our new Linear Power Amplifier integrates a number of M/A-COM technologies including GaAs and Silicon MMICs (Monolithic Microwave Integrated



Low-cost high-power passive components.

Circuits), error correcting circuitry, and high-power RF transistors in a product that enables effective, high-quality digital power transmission. And our new cloverleaf pattern antenna is designed to solve the specific problems of crowded metropolitan microcells.

But more important than any specific product or technique is our broad-based capability. Simply put, we have the expertise you need to compete in the analog or digital cellular marketplace. Today. And ten years down the road.


Call on us.

We offer customers decades of RF and microwave expertise, a commitment to research and development that's backed by an annual investment of more than \$40 million, production capabilities geared to volume and cost-competitiveness, and most important, a dedication to working closely with you in every area from product development through the timely delivery of high-performance products.

To learn more about the advantages of working with M/A-COM in the changing world of cellular communications, call us at 1-800-366-2266. We can think of about 150 million good reasons to do it today. In Europe: +44 (0344) 869 595. In Asia: +81 (03) 3226-1671.



High-performance cables, cable assemblies, and connectors.



Micro-miniature surface mount semiconductor discrete and integrated circuit products.



INFO/CARD 31

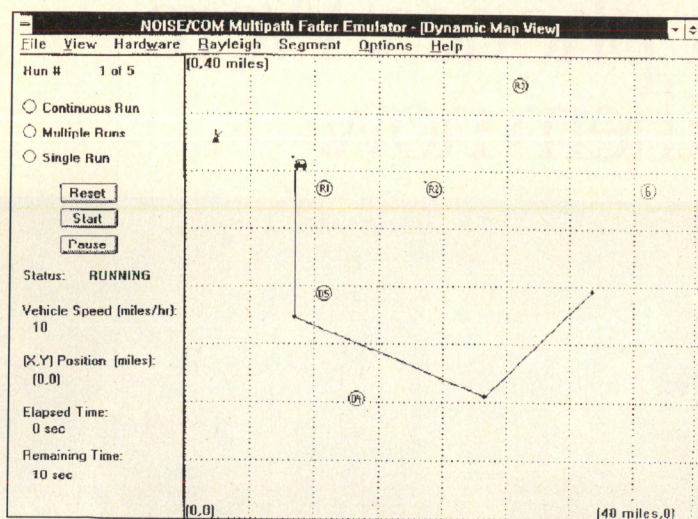


Figure 1. Multipath fading emulator, display for entry of fading path parameters.

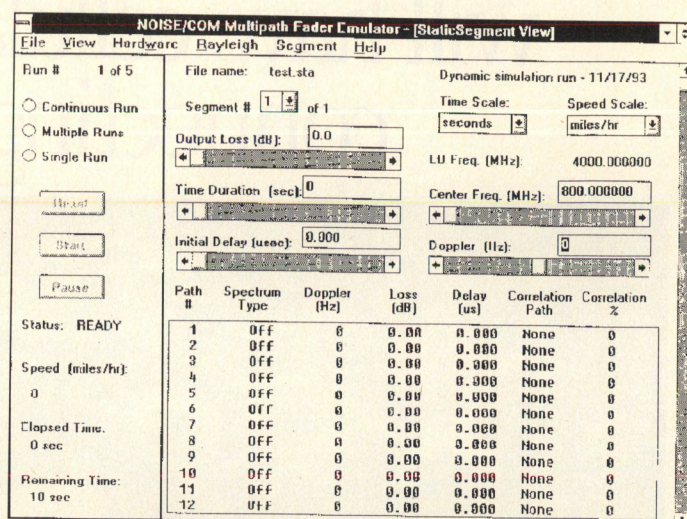


Figure 3. Display for dynamic mode emulation of fading from a mobile car telephone.

each path can therefore be set relative to that of the direct or strongest path. The reflected signals are then delayed relative to the direct because the paths of the reflected signals are longer. Again, this is all done digitally in order to obtain the best accuracy.

Paths with identical delay arise from reflectors located on an ellipse. All these paths will exhibit a Doppler shift due to the speed of the receiver, but the amount of Doppler shift depends on the angle of the reflecting object relative to the direct path, as:

$$F_d = \frac{2v \cos(a)}{c} F_c \quad (1)$$

where v is the speed of the vehicle, F_c is the center frequency of the radio transmitter, c is the speed of light, and a is the angle of arrival.

If the mobile phone is moving directly away from the transmitter, then the Doppler shift of the direct path will reduce the frequency directly in proportion to the speed. If a reflector happens to be in front of the receiver, then the shift for that path will have equal magnitude but opposite sign of the direct path. Objects to the side of the receiver will cause a Doppler shift between these two extremes. For a scenario with reflected signals whose angle of arrival is evenly distributed over 360° the result is a spectrum which spreads the signal energy over a band which is the transmitted frequency (F_c) plus and minus the Doppler shift (F_d). The spectral power distribution is not flat, but has peaking at the Doppler offset since the summation of power from reflectors at or near 0° and 180° will contain more power. This Doppler spreading, which may be of

Rayleigh or Rician nature, is obtained by digital modulation of the A/D converted signal of each paths. Even though each path has a random and independent phase distribution, the paths may be correlated due to the relationship to each other in the scenario. This correlation is achieved in the MP-2400 by summing a portion of the modulation signal from one path with a portion from another.

The required differential path delay, attenuation, and correlation are programmable for each path (Figure 1). The MP-2400 includes modules of identical hardware each containing 3 paths. Each path includes a MAC (multiplier/accumulator) which performs the function of the Doppler spreading by mixing the I/Q signal samples with two filtered Gaussian signal sources. Each source is shaped using a digital FIR filter with a bandwidth equal to the Doppler rate. The result is then delayed and attenuated digitally before being converted to an analog signal using a D/A converter. The paths (up to 12) are summed at the instrument output, emulating the summation which occurs at the receiver antenna. This summation of multiple signals with random phase fluctuations or fading. The maximum rate of fading is exactly the Doppler rate.

The composite signal is upconverted to a microwave frequency using dual conversion, and then downconverted to the received frequency in order to maintain an output free of spurious responses, without local oscillator leakage and with images. The final output is purely the desired signal and the output power can

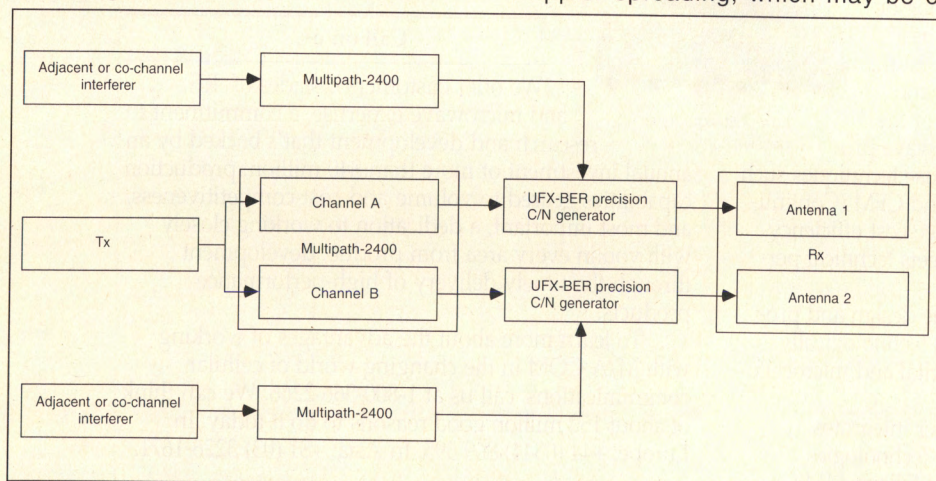


Figure 2. Diversity and interference test using 2 MP-2400s configured for 2 channels with 6 paths each.

Two series, six models, seven options and over two hundred variations. That's Marconi's Series of high performance Signal Generators.

With a frequency coverage from 10kHz to 5.4GHz, the 2030/40's wide range of modules can be integrated to meet the most demanding applications, allowing you to choose the functionality to meet your needs.

Options now include digital and vector modulation to test new radio, broadcast and satellite systems with push button accuracy. You can choose pulse modulation option to speed radar

testing or our high power output for component testing.

The 2030/40 Series offer the highest accuracy, highest resolution and lowest noise

from any signal generator available today. Features you have come to expect from Marconi Instruments, world leaders in electronic test equipment.

So when you need to test components, radar, avionics, radio, broadcast, satellite systems . . . and more, take your pick. There really is only one choice. The 2030/40 Series from Marconi Instruments.


Contact us now for more details.

Marconi Instruments Ltd, Longacres, St Albans, Hertfordshire AL4 0JN, England.
Telephone: UK FREE on 0800 282388 or International (+44) 727 859 292
Facsimile: (+44) 727 857 481
In the USA: TOLL FREE 1 800 233 2955

LOCAL	
Carrier Freq. : 435.250 0000 MHz	Carrier Freq. []
RF Level : -101.2 dBm ON	RF Level []
Int Std: 10 MHz	FM1 Devn. []
Single Composite Mode Modulation ENABLED	
FM1: 500 Hz ON	FM2: 2.50 kHz ON
Int F4: 150.0 Hz	Int F2: 1.0000 kHz
Low Intermod []	Source Freq: F4 []
AM []	FM1 ON/OFF []
FM2 []	Select Source []
qM []	
Wideband FM []	

LOCAL	
Carrier Freq. : 870.030 0000 MHz	Carrier Freq. []
RF Level : -80.0 dBm ON	RF Level []
Int Std: 10 MHz	Mod'n System []
Digital Mod'n Mode Modulation ENABLED	
CONFIGURATION:	
Mixer : INTERNAL	DATA: Internal PRBS (n=15)
Sideband: LOWER	SYSTEM: D-AMPS
IF : 176 MHz	Type : Off. QPSK
Envelope: DISABLED	Rate : 24.30000 kHz
Fading : DISABLED	Filter : Root Nyquist
IQ Errors: DISABLED	Alpha: 0.35
Config. Select []	Data / Timing []
Fading Control []	
IQ Errors []	

With so many options, there is really only one choice for Signal Generators.

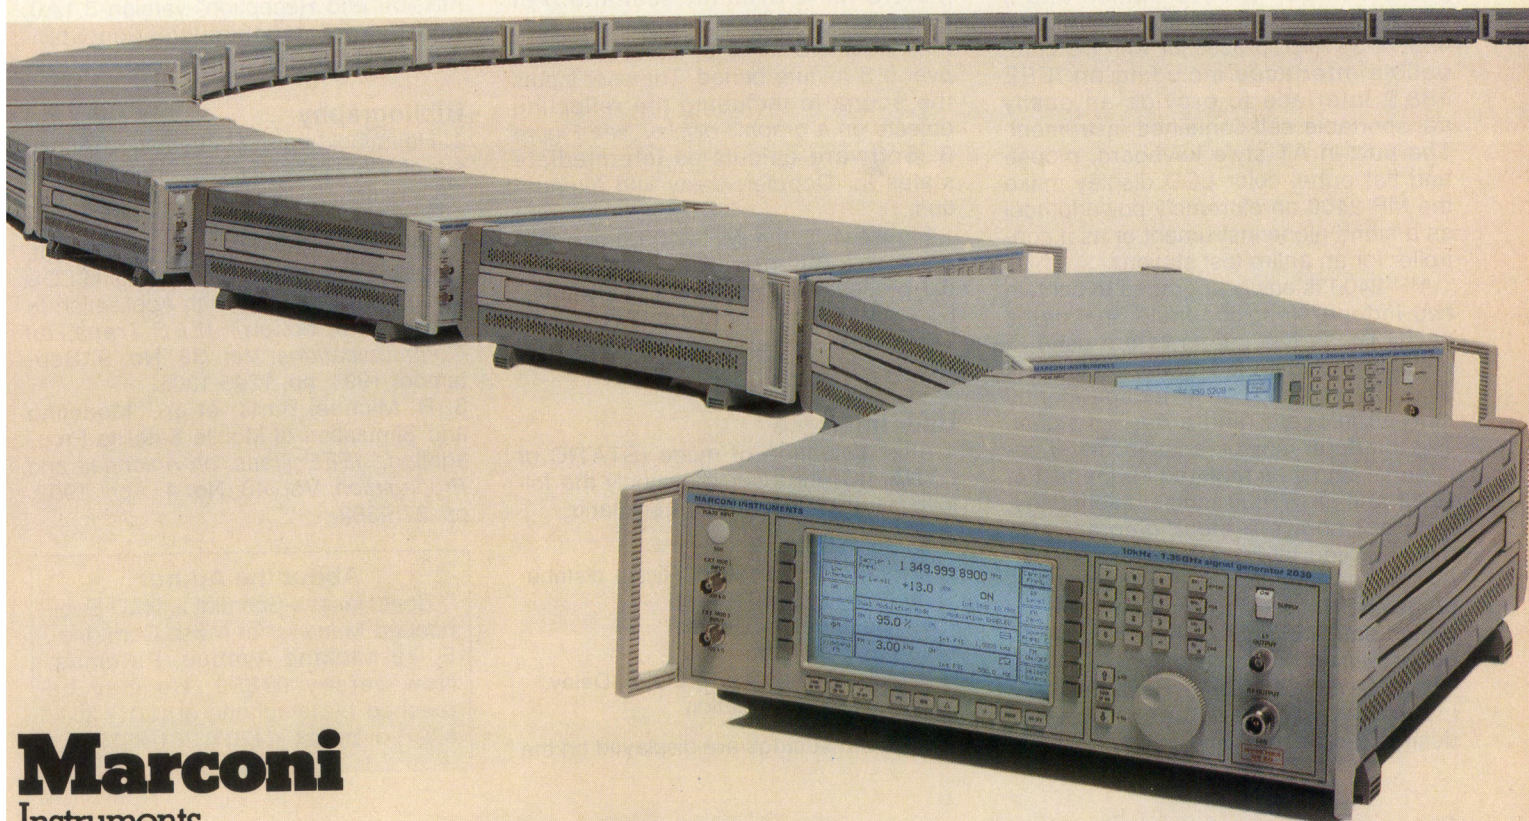

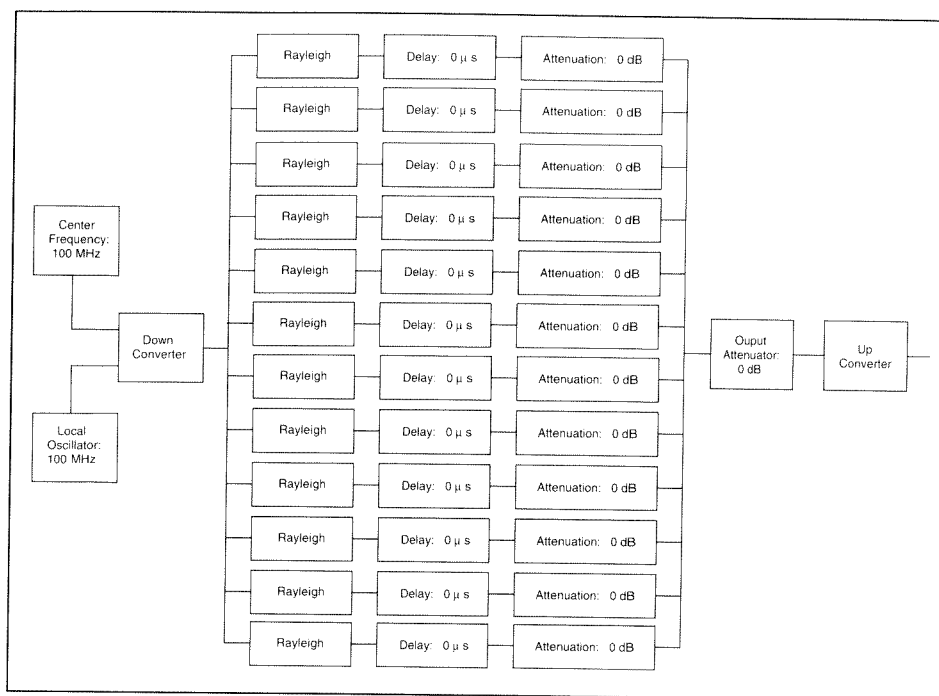


Figure 4. MP-2400 block diagram.

be set between -10 and -100 dBm to match the level expected at the receiver input.

Instrument Features

The MP-2400 emulates a wireless communication channel with up to 12 paths between a base station and a mobile station. It contains an embedded 486DX-33 microprocessor with PC compatible interfaces including an IEEE 488.2 interface to provide an easily transportable self-contained instrument. The built-in AT style keyboard, mouse and flat panel color LCD display make the MP-2400 an extremely powerful tool as a stand alone instrument or as a controller for an entire test station.

MP-2400 is easily upgraded to contain two independent channels of 6 paths each. These two channels are used to emulate multipath fading for the tests of diversity systems or to independently fade an interferer and a desired signal. The interferer may be an adjacent or co-channel signal as required for the test of GSM and DCS1800 mobile telephones. Figure 2 shows a block diagram of a diversity and interference test with two MP-2400s emulating 4 channels with 6 paths each.

Multipath fading can be emulated in both static and dynamic modes:

1) **STATIC MODE** — Here the user individually sets each path with the desired parameters and that scenario is

run continuously. Standard test conditions for GSM, DCS, NADC (CDMA), etc. are factory stored and can be recalled from memory. Up to nine scenarios can be linked and run together.

2) **DYNAMIC (GRAPHIC) MODE** — The user enters the initial and final parameters for a dynamic scenario. For example, a mobile phone starts at rest, then accelerates to 96 km/h (60 Mph) over a 5 minute period. The user inputs the scenario including the reflecting objects on a graphic display, see Figure 3. Software calculates intermediate states for Doppler, delay and attenuation.

Figure 4 is the MP-2400 block diagram, showing a 12 path system. All signal processing is done digitally with 12 bit representation of the data. This provides very consistent and drift free results.

User Interface

After selection of mode (STATIC or DYNAMIC) the user will supply the following information to run a scenario:

- Center Frequency
- Rayleigh (Classical) or Rician distribution
- Vehicle speed or Doppler
- Start and Stop time
- Path characteristics: ON/OFF, Delay, Attenuation, Correlation

The path settings are displayed on the

VGA monitor in a tabular form. The instrument status and graphic representation of certain scenarios, the Doppler spectrum, and the hardware configuration may also be displayed.

Other available features are a help key for setting up path characteristics for desired scenarios and Recall/Save of setups. The user has the option to select the best matching shape of the Doppler spreading from a library if the antenna patterns are different from the standard omni-directional model.

Thus, besides being a requirement, effective multipath testing of modern communication systems can also help make them more efficient. It is now possible to make modern communication systems which tolerate severe multipath fading. These new wireless systems employing sophisticated modulation, diversity antennas, adaptive equalization, forward error correction coding, phase locked synchronization, and adaptive transmitter power control techniques. They may soon be tested using multipath fading emulators.

Readers desiring more information on the Noise Com MP-2400 may contact the author at the address or telephone number given below, or by circling Info/Card #150.

RF

Reference

1. ETSI/TC GSM 05.05, "Radio Transmission and Reception" version 3.12.0, European Telecommunication Standards Institute, February 1992.

Bibliography

1. Haim Goldman, "Mathematical Analysis of the Three-ray Dispersive Fading Channel Model," *IEEE Proceedings-I*, Vol. 138, No. 2, April 1991, pp. 87-94.
2. James A. Hoffmeyer, "Measurement, Modeling, and Simulation of Digital LOS Microwave Channels with Application to Outage Prediction," *IEEE Trans. on Communications*, Vol. 39, No. 9, September 1991, pp. 1295-1305.
3. R. Michael Barts, et al., "Modeling and Simulation of Mobile Satellite Propagation," *IEEE Trans. on Antennas and Propagation*, Vol. 40, No. 4, April 1992, pp. 375-382.

About the Author

Bent Hessen-Schmidt is R&D Engineering Manager at Noise Com, Inc., E. 49 Midland Avenue, Paramus, New Jersey 07652. He may be reached by telephone at (201) 261-8797, or by fax at (201) 261-8339.

Designing telecommunications equipment? Here's how to put your world on a string.

Quite simply, tap into the proper sources. Because, while in one sense the world's a lot smaller, it can seem pretty big when the support you need is on the other side of it.



It needn't be that way in passive components. Because Murata's always nearby. Whether you're building Global Positioning Systems in Singapore, RF modems in Milan, or telephone systems in Thailand.

And we're there in a big way. With the technical expertise that ensures speed and flexibility in meeting new design requirements. With the high-volume manufacturing and distribution resources that—in getting parts where and when you need them—shrink the world to “neighborhood” size. And, of course, with undisputed Murata quality, backed by our unique 1.0 QRS (100% quality, reliability, service) program.

Oh, yes—product line breadth. You'll find our line, the largest, from chip caps to piezoelectric gyroscope systems, can make a world of difference in calculating the economic rewards of vendor reduction efforts.

Call or write for details: Murata Electronics North America, Marketing Communications, 2200 Lake Park

Drive, Smyrna, GA 30080; 1-800-831-9172, Fax: 1-404-684-1541. Because, if it's the telecommunications world you're after, you'll want to string along with us.

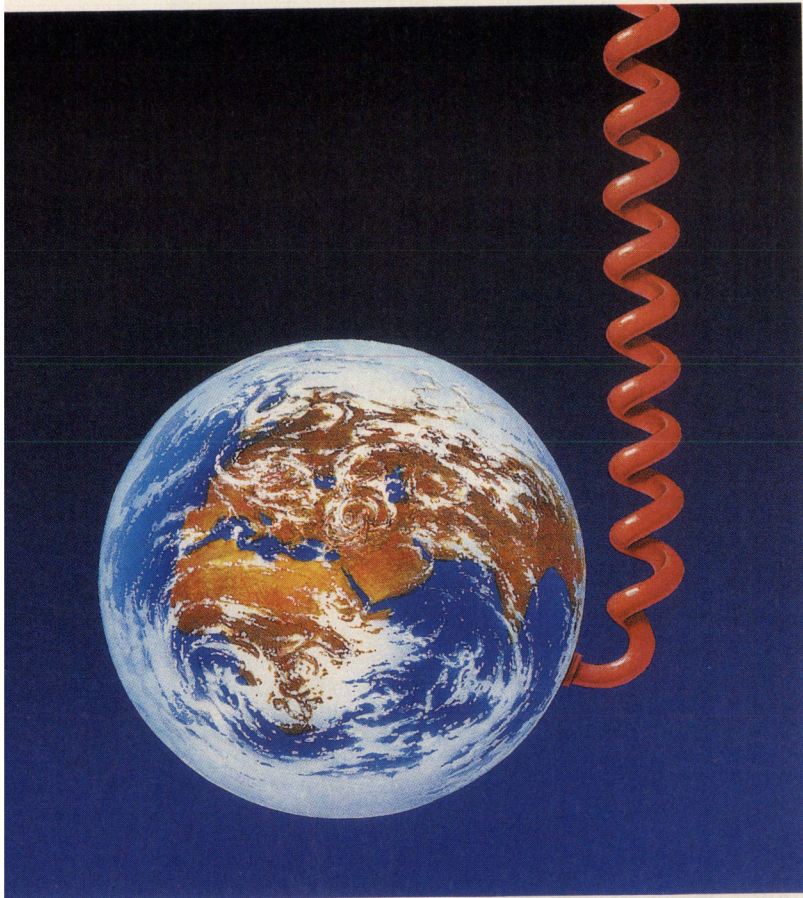


MURATA ELECTRONICS NORTH AMERICA, INC.
INFO/CARD 33

1W MMIC Amplifier

Stanford Microdevices has introduced a miniature, surface-mount GaAs MMIC amplifier designed to cover communication bands operating within the 1500 to 2500 spectrum. These include INMARSAT, GSM, PCN and ISM bands. Using a supply voltage of 7 volts, these class A amplifiers have 30 dB of gain and 33 dBm of output power from 1.7 to 1.9 GHz. Output power is 30 dBm at the band edges (1.5 and 2.5 GHz). When powered at 5 V, third order intermodulation distortion is typically 32 dB at 1.8 GHz, and power added efficiency is typically 25%. These devices may be


operated at 3 volts, putting out 500 mW of linear power. Input and output ports provide excellent matches with typical VSWR of 1.4:1. No external bypass capacitors are required, minimizing board component count. Typical thermal resistance is 18 degrees C per watt. Pricing for model SMM-210 is \$39 at 10,000 pieces. The SMM-210 is available in a 10-pin surface mount package, or as bare die. Products are available in tape and reel format. Parts are in stock, and samples are available upon request.

Stanford Microdevices
INFO/CARD #250

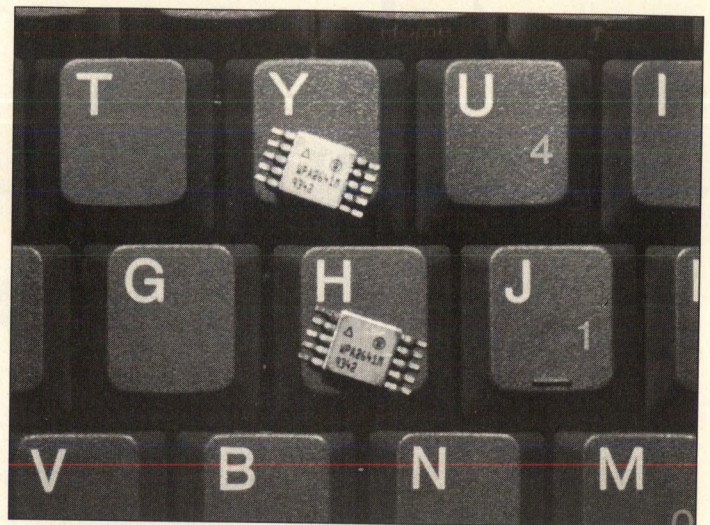

Switching Modules

A new series of switching modules for RF applications is now available from Racal Instruments. The 1277-540 series permits switching of signals up to 1 GHz through the ARINC 608 interface. The switch is configured as nine 1x4 tree multiplexers and up to six RF splitters. With insertion loss of less than 0.5 dB, crosstalk of less than -95 dB, isolation of better than -80 dB and VSWR of 1.2:1, all at 100 MHz, the 1277-540 is ideal for switching of low-level RF signals. Maximum switchable RF power per channel is 60 W. The switch is available in three different models to facilitate different pin-out requirements. 1277-540C provides six RF splitters accessible through the interface connector. Model 1277-540B offers three RF splitters, while 1277-540A contains no RF splitters. The 1277-540 is designed for use in Racal Instruments' 1277 and 1262-77 main-




frames. The former is an ARINC 608A mainframe and interface, while the latter is a VXIbus mainframe with an ARINC 608A sub-chassis. Prices begin at \$5775, with delivery in 10 to 12 weeks.

Racal Instruments
INFO/CARD #249

PC Plug-In Synthesizer

Novatech Instruments introduces the model DDS3 PC, a 12 MHz synthesized signal source on a PC card for use in PC XT and PC AT or later ISA bus computers. The DDS3 PC direct digi-



tal synthesizer provides 5 ppm accuracy, 10 ppm/year stability and excellent spectral purity for the price of \$399. It can generate sine and TTL/HCMOS clock signals simultaneously from 2 Hz to 12 MHz in 2 Hz steps. Output impedance is 50 ohms. Phase noise is less than -90 dBc at 1 kHz offset, spurious signals are below -45 dBc and harmonics are less than -40 dBc. Output amplitude is 12 Vpp into an open circuit and can be attenuated in 10 dB steps to 70 dB. The DDS3 also has an external clock input. The DDS3 PC comes with a C language program that runs under DOS and makes it easy for users to set frequency and attenuation or to sweep through a set of frequency attenuation and dwell time settings. A driver is also available for a third party Windows® based ATE programming environment.

Novatech Instruments, Inc.
INFO/CARD #248

40 MIPS DSP

The ADSP-21060 from Analog Devices is the industry's first DSP in the class of Super Harvard Architecture Computer (SHARC). It integrates the industry's fastest general purpose floating-point core (the ADSP-21020) with a dual-ported 4-megabit SRAM, communication ports, and a sophisticated DMA (direct memory access) controller on a single chip. The 32-bit single precision (or 40-bit extended precision) IEEE floating-point DSP core executes 40 MIPS per second, with 120 MFLOPS peak and 80 MFLOPS sustained. The I/O processor includes a DMA controller, memory mapper and communications which handles transfers between memories and ports without impacting DSP core performance. A software develop-




ment system, including an instruction level simulator, an assembler, a linker, a C compiler and an extensive C runtime library is currently available. The ADSP-21060 will begin sampling 1Q94. Target pricing for 1000 piece quantities is \$296.00.

Analog Devices, Inc.
INFO/CARD #247

250 W MOSFET Amplifier


A 250 watt, 14 octave MOSFET RF amplifier with an instantaneous bandwidth from 0.01 to 220 MHz has been introduced by Kalmus Engineering. Using special broadband ferrite circuitry in conjunction with new high power field effect transistors, the 122FC Offers 55 dB minimum gain, with ± 1.8 dB max. deviation from flatness (± 0.6 dB when leveled).



Three mW input is typically required for full output. Spurious outputs are -60 dBc minimum, and full power harmonics are typically -23 dBc. The class A amplifier is unconditionally stable and has open/short, temperature and overdrive protection circuitry. Forward and reflected RF power are metered, and temperature, VSWR, overdrive and blanking have their own indicators. All major front panel functions are available for remote control and monitoring, via IEEE-488 and RS-232 interfaces. The 122FC measures 48 x 51 x 39 cm and weighs 35 kg. Cooling is by forced air. Price for the 122FC is \$19,950.

Kalmus Engineering Inc.
INFO/CARD #246

When it gets lonely out there at 1 GHz, you'll be glad you have all this power.

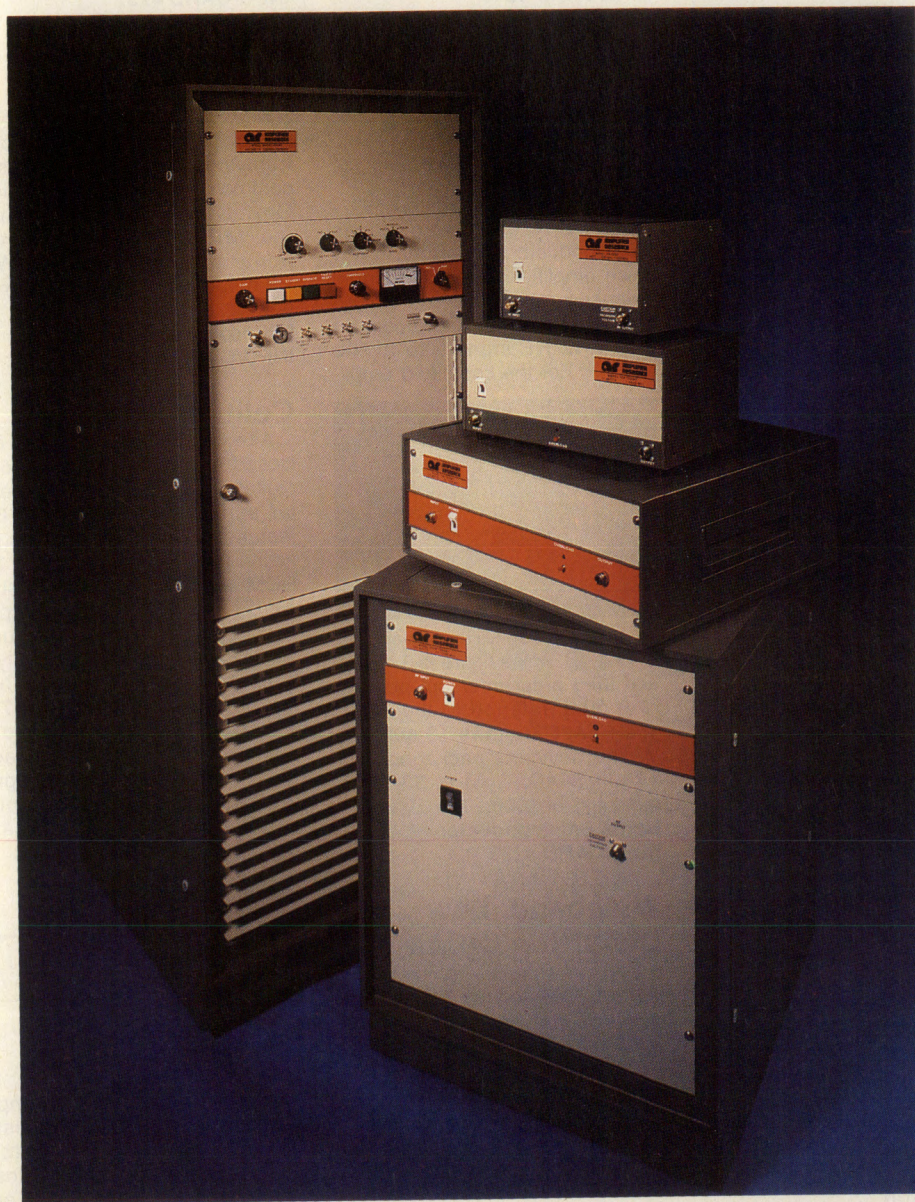


The only amplifier that can deliver 500 watts through that balky decade from 100 to 1,000 MHz is our new Model 500W1000M7. That's the majestic one on the left, with the front-panel bi-directional power meter, ALC, and a bagful of other controls that will let you actually *enjoy* automatic sweep testing in your lab.

The 500W1000M7 presently heads our well-known "W" Series of all-solid-state linear amplifiers that cover four crucial decades of bandwidth from 100 kHz to 1 GHz. Today, you may need only 1 watt (the little portable on the top), or 5, or 10, or 25, or 50, or even 100 or 200 watts *minimum*—all with that fantastic bandwidth instantly available without tuning or bandswitching—a combination of power and bandwidth that's comforting when you work the outer reaches of the rf spectrum. Wherever your power requirements are today, they're sure to go up. And one of these days you're going to want a 500W1000M7.

The "W" Series is part of a complete line of AR amplifiers offering rf power up to 10 kilowatts for rf susceptibility testing, nmr spectroscopy, plasma/fusion research, and a host of other test situations that demand rf power of unconditional stability—immunity to even the worst-case load mismatch, shorted or open cable, wild swings of VSWR—with no fear of oscillation, fold-back, or system shutdown.

You might learn a lot from our free booklet, "Guide to Broadband Power Amplifiers." Send for a copy. Or call our toll-free number (800-933-8181), which will connect you directly to one of our applications engineers.

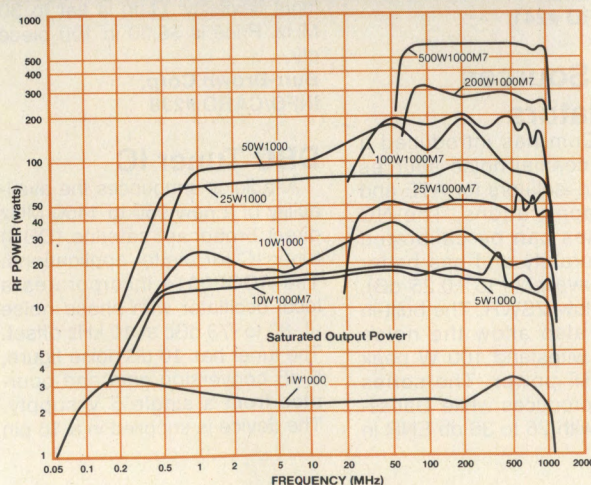

AR AMPLIFIER RESEARCH

160 School House Road
Souderton, PA 18964-9990 USA
TEL 215-723-8181 • FAX 215-723-5688


For engineering assistance, sales, and service throughout Europe, call EMV: Munich, 89-612-8054 • London, 908-566-556 • Paris, 1-64-61-63-29

INFO/CARD 34

Product Spotlight: Signal Analyzers

Vector Signal Analyzers

Hewlett-Packard has announced a vector-modulation-analysis option that gives designers of RF digital commu-



nications systems a single tool with which to analyze a wide variety of modulation formats. The new option works with the HP 89440A (DC to 1.8 GHz) and 89410A (DC to 10 MHz) vector signal analyzers and provides complete digital demodulation of several varieties of QPSK, DQPSK, MSK and

QAM. Option AYA is priced at \$4500.

Hewlett-Packard Co.
INFO/CARD #245

Vector Network Analyzers

Tektronix has introduced the Advantest R3762AH and R3763B vector network analyzers that combine exceptional performance from 300 kHz to 3.6 GHz. The Advantest analyzers are marketed and supported throughout North America by Tektronix under a strategic alliance formed earlier this year. The R3762AH and R3763B make measurements at up to 0.5 ms per point. The R3762AH and R3763B series vector network analyzers are priced at \$24,000 and \$28,000 respectively.

Tektronix, Inc.
INFO/CARD #244

TEST EQUIPMENT

Field Strength Meter w/ GPS and PCMCIA

"The Champ" RF field strength meter now is available with GPS navigation and PCMCIA memory options, allowing automatic logging of location and field strength information. The handheld meter is available for the 900 to 932 MHz and 1.8 to 2.4 GHz bands, with other frequencies available on request. Sensitivity is -120 to -30 ± 1 dBm (with 10 kHz IF BW). BER demodulation is also available.

Berkeley Varitronics
INFO/CARD #243

Extended BW Calibrators

A wideband option for the 4800 series of calibrators from Wavetek extends the instrument's frequency range to 30 MHz, enabling the calibration of a wide range of RF voltmeters. Option 70 uses direct digital synthesis to generate rms output for

amplitudes up to 3.5 V, with response flatness better than 0.35 % over the entire bandwidth.

Wavetek Corp.
INFO/CARD #242

Counter

B+K Precision has improved their model 1856A multifunction counter. Its bandwidth is now 5 Hz to 2.4 GHz, with a temperature compensated crystal oscillator with 0.5 ppm stability from 18 to 28° C. Sensitivity at 2.4 GHz is 50 mV. Retail price remains at \$499.

B+K Precision
INFO/CARD #241

Noise Sources w/ Isolators

Noise Com has introduced a series of coaxial noise sources with built-in isolators for ATE and RADAR applications. The NC 3400 series can be calibrated more accurately and has better flatness, (available to ± 0.25 dB), due to its low VSWR. The built-in isolators also allow the noise source to withstand 100 W peak incident RF power. The series NC 3400 produces white Gaussian noise with 26 to 36 dB ENR in


octave bands up to 18 GHz.

Noise Com, Inc.
INFO/CARD #240

SEMI- CONDUCTORS

Amplifier/Mixer IC for 900 MHz

The HFA3600, from Harris Semiconductor, integrates a low noise amplifier (LNA) and single balanced mixer into one silicon chip to amplify and downconvert 900 MHz RF signals to a 100 MHz IF. For the combined ampli-



fier/mixer at 900 MHz, power gain is 19.1 dB, noise figure is 3.1 dB, and third order intercept point is -7.0 dBm, referred to the input. The HFA3600 draws 13 mA at 5 V. The device is packaged in a 14-pin SOIC. Cost is \$3.56 in quantities of 1000.

Harris Semiconductor
INFO/CARD #239

Wideband, Low Distortion Op Amp

Burr-Brown's OPA628 is a low distortion, wideband operational amplifier that features 160 MHz bandwidth and 90 dB spur free dynamic range. The OPA628 is a unity gain stable, voltage feedback, monolithic operational amplifier with high input impedance, high common mode rejection and symmetrical differential input flexibility. Gain is flat to 30 MHz. Price is \$6.30 in 100 piece qty.

Burr-Brown Corp.
INFO/CARD #238

DBC Tuner IC

Anadigics announces the availability of a new 950 to 1450 MHz direct broadcast satellite (DBS) tuner IC for digital applications. The ADC20014 incorporates a local oscillator with phase noise at -80 to -73 dBc at 10 kHz offset. The tuner has 10 dB noise figure, 5 dB conversion gain and operates from a single 5 V supply. The device is supplied in a 16 pin

SOIC package.
Anadigics
INFO/CARD #237

1 to 2 GHz Power Transistor

Motorola has announced the availability of a microwave power transistor designed for class A, common emitter power amplifiers. Operating from a 20 VDC supply, the MRF2000-5L microwave power transistor delivers 5 W of RF output power for 1 W RF input power.

Motorola Semiconductor
INFO/CARD #236

Cellular DSP

AT&T Microelectronics has disclosed that it is sampling a 16-bit digital signal processor for cellular applications. The DSP1617 features 50 mega-instructions per second (MIPS), 4k RAM and 24k ROM on one chip, making it sufficient for both IS-54 speech processing and radio modem functions. Power consumption is typically 10 mW/MIPS at 5 V and less than 2.7 mW/MIPS at 2.7 V. The DSP1617 is packaged in 100-pin PQFP and TQFP packages, and is pin-for-pin compatible with the DSP1616 family. Pricing is \$49 in PQFP and \$53.90 in TQFP, in lots of 10k.

AT&T Microelectronics
INFO/CARD #235

AMPLIFIERS


Cable Equalizing LNA

Model VMEA 118-106 amplifiers provide gain which rises from 6 dB to 11 dB at 18 GHz to compensate for 20' of cable loss, resulting in flat system IICP and gain. DC may optionally be supplied via the RF cable. NF is < 6 dB over most of the band, IICP3 is $> +7$ dBm. Size is 1.0 x 1.0 x 0.22 inches. DC power is +12 V at 80 mA.

Veritech Microwave, Inc.
INFO/CARD #234

100 W Class A Amp

ENI's model 3100LA RF power amplifier produces 100 W of linear class A output over the frequency range of 250 kHz to 150 MHz. The amplifier features a nominal gain of 55 dB (± 1.5 dB) and will withstand a +13 dBm

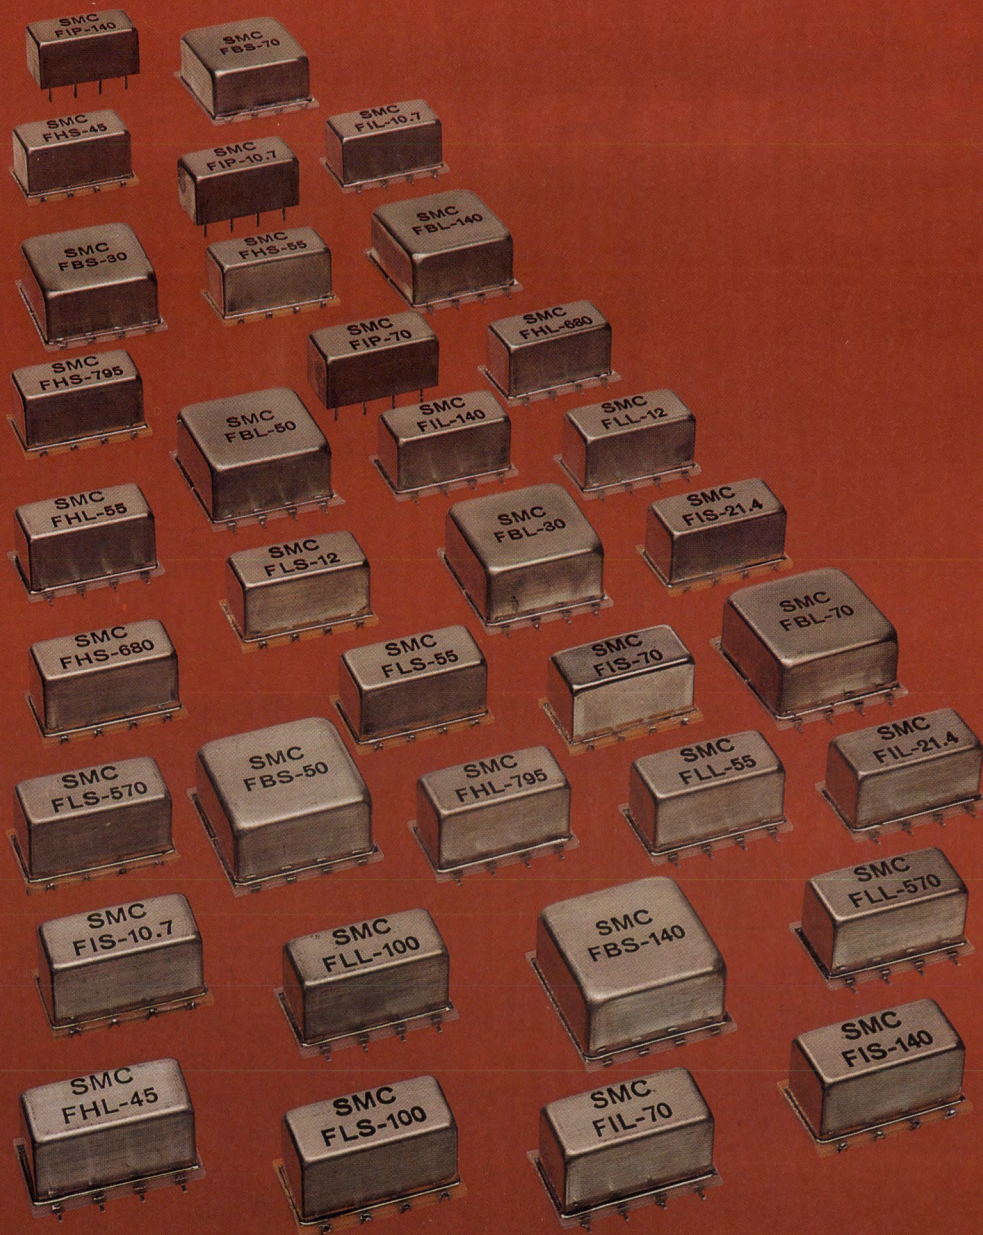

Synergy has introduced a selection of high performance, low cost standard catalog and custom highpass, lowpass and bandpass filters covering passbands within the DC to 2000 MHz range. These filters are readily available in standard pin packages as well as the newest Synergy patented metal surface mount package with either leaded or flush mounting configurations.



Most importantly, when you specify Synergy, you benefit from our Sales and Applications team to assist you in the wide choices of available filters.

For a copy of our latest catalog, contact:
SYNERGY MICROWAVE CORPORATION,
 483 McLean Boulevard,
 Paterson, NJ 07504.
 Phone (201) 881-8800 or
 FAX (201) 881-8361.

Synergy

SYNERGY
 MICROWAVE CORPORATION


FREE BLOCK DIAGRAMS

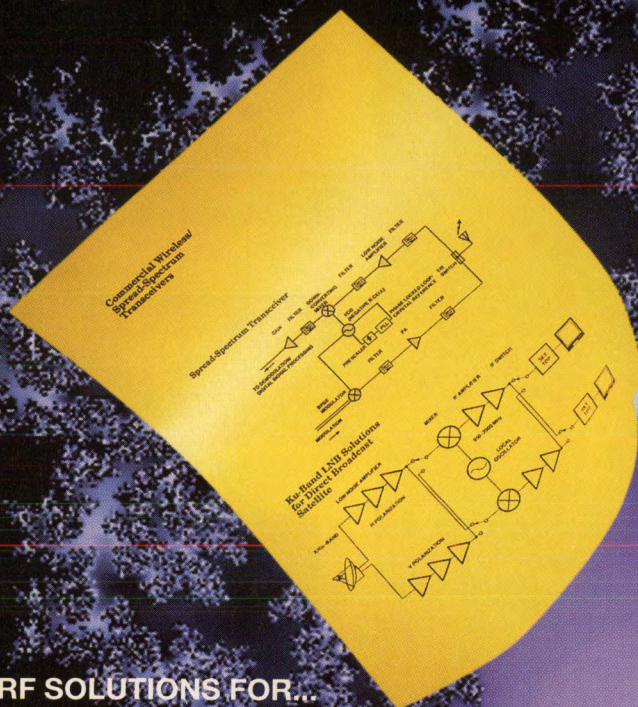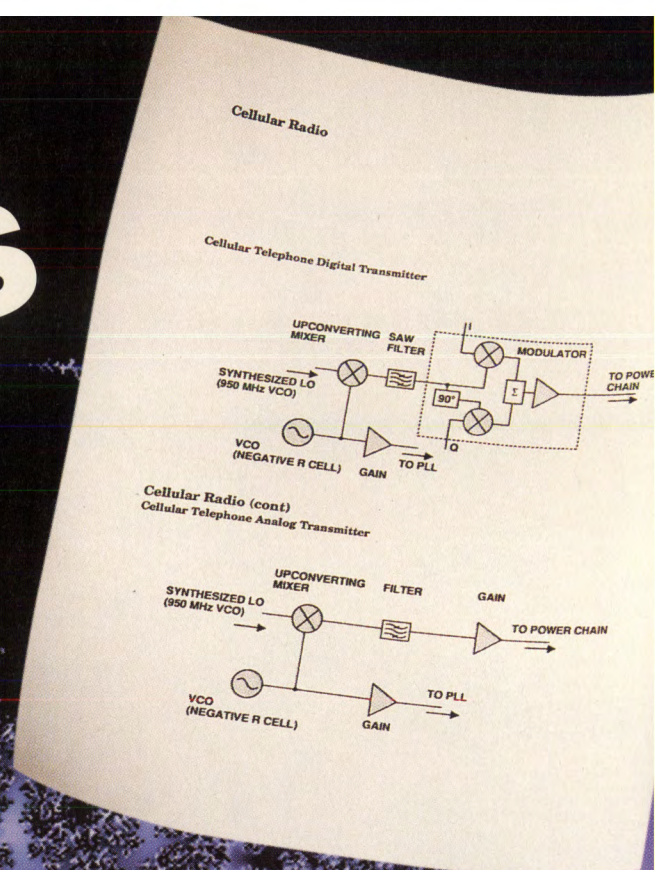

RF SOLUTIONS FOR...

- Cellular Radio
- Personal Communications Systems
- Cordless Telephones
- Commercial Wireless/Spread-Spectrum Transceivers
- Ku-Band LNB Direct Broadcast Satellite
- C-Band LNB Television Receive Only
- CATV Distribution & Set Tops
- Global Positioning Systems
- Millimeter Wave & Collision Avoidance Radar

Find out how to receive the new HP communications catalog with Block Diagrams. Over 900 pages of GaAs and silicon products.

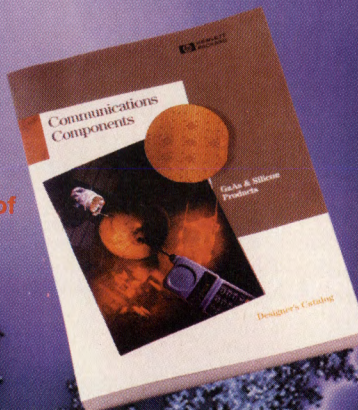

**HEWLETT
PACKARD**

PENSTOCK
WORLD'S LARGEST RF/MICROWAVE DISTRIBUTOR

Call 1-800-PENSTOCK

(408-730-0300)

Canada: 613-592-6088

Penstock has 17 offices nationwide with staffed engineers to answer your questions.

In today's highly competitive environment you need all the design tools to win. HP provides the solution. Penstock provides the products with overnight delivery.

INFO/CARD 36

input signal for all output load conditions. The 3100LA's dimensions are 8.75 x 17 x 17, and it weighs 60 lbs. List price is \$7885.

ENI
INFO/CARD #233

100 W Benchtop Amp

The model 100W000M1 delivers a minimum of 100 watts of cw power through a frequency range of 80 MHz to 1000 MHz. Minimum linear output measured at less than 1 dB gain compression is 60 watts through the same bandwidth. This amplifier's bandwidth precisely matches the 80-1000 MHz bandwidth of the AR model AT1080 log-periodic antenna. Price is \$25,000.

Amplifier Research
INFO/CARD #232

5W, VHF Power Module

Motorola has introduced a new RF power module designed for portable radio applications operat-

ing in the VHF frequency band of 68 to 88 MHz. The MHW105 RF power module operates from 7.5 V and requires only 1 mW of RF input power to deliver 5 W of output power. Epoxy glass PCB construction gives this device consistent performance and reliability.

Motorola Semiconductor
INFO/CARD #231

1 to 1000 MHz Amplifier

Power Systems Technology announces the development and availability of model AR1619-50/3040, a broadband solid state amplifier covering the frequency range of 1 to 1000 MHz in two bands. Each band has independent input and output connectors with power output of 50 W for the 1 to 500 MHz band, and 25 W for the 400 to 1000 MHz band. The amplifier has a built-in power supply and measures 5.25 x 19 x 22 inches.

**Power Systems
Technology Inc.**
INFO/CARD #230

SIGNAL SOURCES

L-band Synthesizer


The VDS-6000 L-band synthesizer is suited for INMARSAT-M, SCADA applications, and as a local oscillator in C and Ku-band VSAT systems. Its single loop design exploits Sciteq's patented Arithmetically Locked Loop (ALL). The ALL combines digital signal processing with fractional-n to preserve $20\log(n)$, but reducing n to improve phase noise for a given step size. The VDS-6000 dissipates 4 W. Price of single units is \$1395.

Sciteq
INFO/CARD #229

Low Profile Ovenized Oscillator

Piezo Crystal announces the availability of model 2920155. This oscillator utilizes Piezo's SC cut crystals and is available in the frequency range of 80 to 110

MHz. Typical phase noise is -150 dBc at 1 kHz offset, and aging rate is 1×10^{-8} /day at the time of shipment. The size is 3.00 x 3.00




x 0.50 inches. Approximate price for the model 2930200 is \$320 to \$350 in quantities of 500.

Piezo Crystal Co.
INFO/CARD #228

SAW-based VCO

AT&T Microelectronics has introduced a surface acoustic wave (SAW) based, voltage controlled oscillator specially designed for applications ranging in frequency from 155 MHz to 1.1 GHz. Output is at 10k ECL levels. The VCO600 comes in a minia-

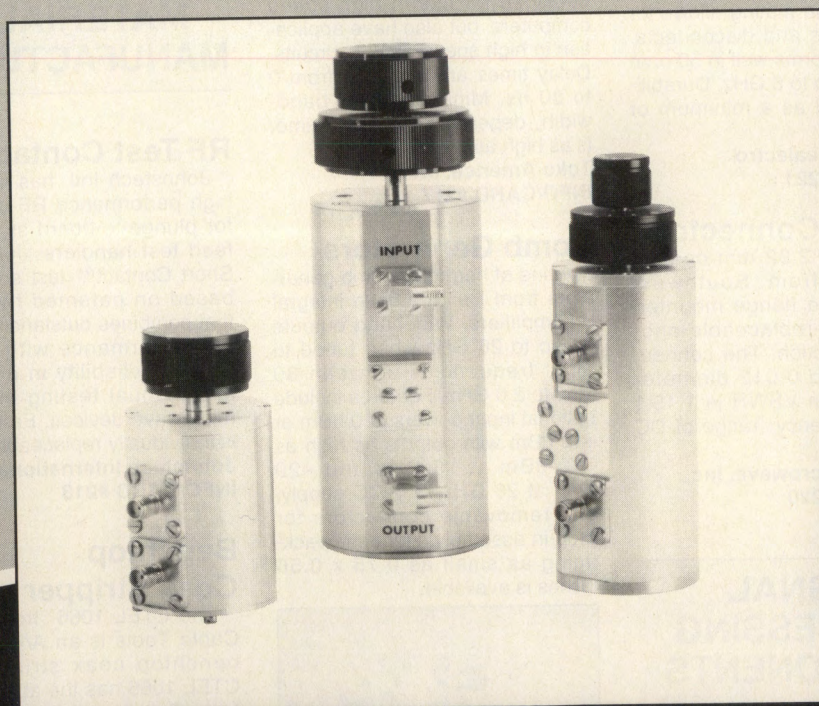

Building The Best Solutions In Rotary Attenuators



JFW Industries, Inc.
5134 Commerce Square Drive
Indianapolis, Indiana 46237
Tel. 317.887.1340
Fax 317.881.6790

INFO/CARD 37

JFW Industries... Providing full support in design and performance.

ture 28-lead ceramic surface-mount package measuring only 0.7 x 0.3 inches. In addition, it offers an output disable and clock-through feature, which improves on-board testing.

AT&T Microelectronics
INFO/CARD #227

VCOs for Wireless

Analog Engineering is pleased to announce two low cost, high performance VCOs designed particularly for the wireless applications in the 902 to 926 MHz and the 2400 to 2500 MHz bands. These 5 V devices consume only 8 mA and deliver 0 dBm. Phase noise at 100 kHz is 110 dBc/Hz typ.

Analog Engineering
INFO/CARD #226

SUBSYSTEMS

Limiter-Mixer Preamps

Alpha Industries announces its MX1011 and MX1010 miniature broadband limiter-mixer preamps covering 0.5 to 2 GHz and 2 to 18 GHz EW bands, respectively. A mere 0.375 cubic inches in volume, these mixers integrate a PIN diode limiter (50 W CW), a double balanced mixer and a low-noise/high-power (+15 dBm) IF preamp in a hermetic package with field replaceable connectors. **Alpha Industries, Components and Subsystems Div.** INFO/CARD #225

CDPD Modem

Cincinnati Microwave has announced the first in a family of wireless modems for the Cellular Digital Packet Data (CDPD) network. The MC-DART 100 has a 19.2 kbps data rate, up to three watts of RF power output, received signal strength indicator and optional switched antenna diversity. The MC-DART 100 is priced at \$495, with volume quantities available in 1Q94. **Cincinnati Microwave, Inc.** INFO/CARD #224

Modem for CDPD

Motorola's Mobile CDPD™ has a 9-pin RS-232 serial interface which supports speeds from 300 to 19,200 bps. The airlink data rate is 19,200 bps. The new modem will operate in full duplex

mode and use Motorola's 3 W cellular telephone platform.

Motorola Cellular Subscriber Group
INFO/CARD #223

CABLES & CONNECTORS

3/8 Inch, Flexible Cable

Andrew Corp. announces the introduction of three new 3/8 inch superflexible 50 ohm HELIAX® coaxial cables. Type FSJ2-50 is similar to Andrew's existing 1/4 inch (FSJ1-50A) and 1/2 inch (FSJ4-50B) superflexible cables. Types ETS2-50T and ETS2-50 are for higher power or plenum applications. Type ETS2-50T is jacketed; Type ETS2-50 is unjacketed.

Andrew Corporation
INFO/CARD #222

MCX Connector

ITT Cannon/Sealectro announces availability of its line of MCX RF connectors. MCX connectors provide a smaller, lighter alternative to an SMB connector when space and weight savings are a consideration. Snap-on mating allows for rapid connects and disconnects. The MCX performs well in 50 ohm applications up to 6 GHz. Durability is specified as a minimum of 500 matings.

ITT Cannon/Sealectro
INFO/CARD #221

2.92 mm Connectors

A family of 2.92 mm coaxial connectors from Southwest Microwave are flange mounted and use field-replaceable one-piece construction. The connectors launch to 0.012 diameter pins. Maximum VSWR is 1.15:1 over the frequency range of DC to 40.0 GHz.

Southwest Microwave, Inc.
INFO/CARD #220

SIGNAL PROCESSING COMPONENTS

Wideband Quadrature Hybrid

Synergy Microwave Corp. announces a new, miniature wideband quadrature hybrid. The

DQP-3-33 covers an 11:1 bandwidth between 3 and 33 MHz. Across the unit's 30 MHz bandwidth insertion loss is typically 0.5 dB and amplitude imbalance is typically 0.7 dB. Phase unbalance is 90 ±4 degrees. Minimum isolation is 20 dB and VSWR is 1.5:1 on all ports. These hybrids are available from stock and are packaged in 8-pin relay headers. Prices start at \$69.95 in quantities of 1 to 9 pieces.

Synergy Microwave Corp.
INFO/CARD #219

Mixer

The MA27LLX from Western Microwave is a triple balanced, multi-octave mixer. The input (RF) is 2 to 20 GHz and output (IF) is 1 to 10 GHz. Isolation is typically 23 dB, conversion loss is typically 6.5 dB, and third order intercept is typically +17 dBm. Required LO drive is +10 dBm. Price is \$161 in quantities between 10 and 24.

Western Microwave, Inc.
INFO/CARD #218


Delay Lines

A new generation of fixed and variable delay lines have been designed for use in high speed computers, but also have application in high speed analog circuits. Delay times are available from 0 to 30 ns. Minimum 3 dB bandwidth, depending on delay time, is as high as 1 GHz.

Toko America, Inc.
INFO/CARD #217

Comb Generators

A line of harmonic/comb generators from Herotek have integral preamplifiers. Wideband outputs go up to 26 GHz when tuned to input frequencies between 30 MHz to 2.0 GHz. Features include optional input powers of 0 dBm or +10 dBm with outputs as high as -10 dBm at 18 GHz and -20 dBm at 26 GHz, 5 V DC supply, and removable connectors for drop-in assembly. Hermetic packaging as small as 0.75 x 0.56 inches is available.



Herotek, Inc.
INFO/CARD #216

SP8T Switch

The GL8T RF switch is part of a series of low cost switches offered in SPST through ST8T versions. The series operates over the 25 to 250 MHz range with maximum VSWR of 1.5:1. Prices range from \$45 (SPST) to \$225 (SP8T)

Geoffroy Labs
INFO/CARD #215

Frequency Multipliers

KW Microwave has introduced x4 multipliers to its multiplier product line. The x4 multipliers have input frequency fin = 714 MHz and 2.16 GHz, with output frequency fout = 2.856 GHz and 8.64 GHz, respectively. Input power is 0 dBm while output power is +5 dBm with -60 dBc spectral purity. Typical size is 3 x 0.4 x 1 inches.

KW Microwave Corp.
INFO/CARD #214

TOOLS, MATERIALS & MANUFACTURING

RF Test Contacts

Johnstech Intl. has introduced high performance RF contactors for plunge-to-board style gravity feed test handlers. Johnstech's Short Contact™ test sockets are based on patented technology that combines outstanding electrical performance with superior contact reliability in automated and manual testing of RF and microwave devices. Each contact is individually replaceable.


Johnstech International Corp.
INFO/CARD #213

Benchtop Coax Stripper

The CTCL 1066 from Coastal Cable Tools is an A/C powered benchtop coax stripper. The CTCL 1066 has the ability to perform all three strips simultaneously in four seconds. The foot switch operated stripper has built-in automatic brake stop and easily replaceable cutter heads.


Coastal Cable Tools Inc.
INFO/CARD #212

If This Is Your Idea Of Telecommunications...

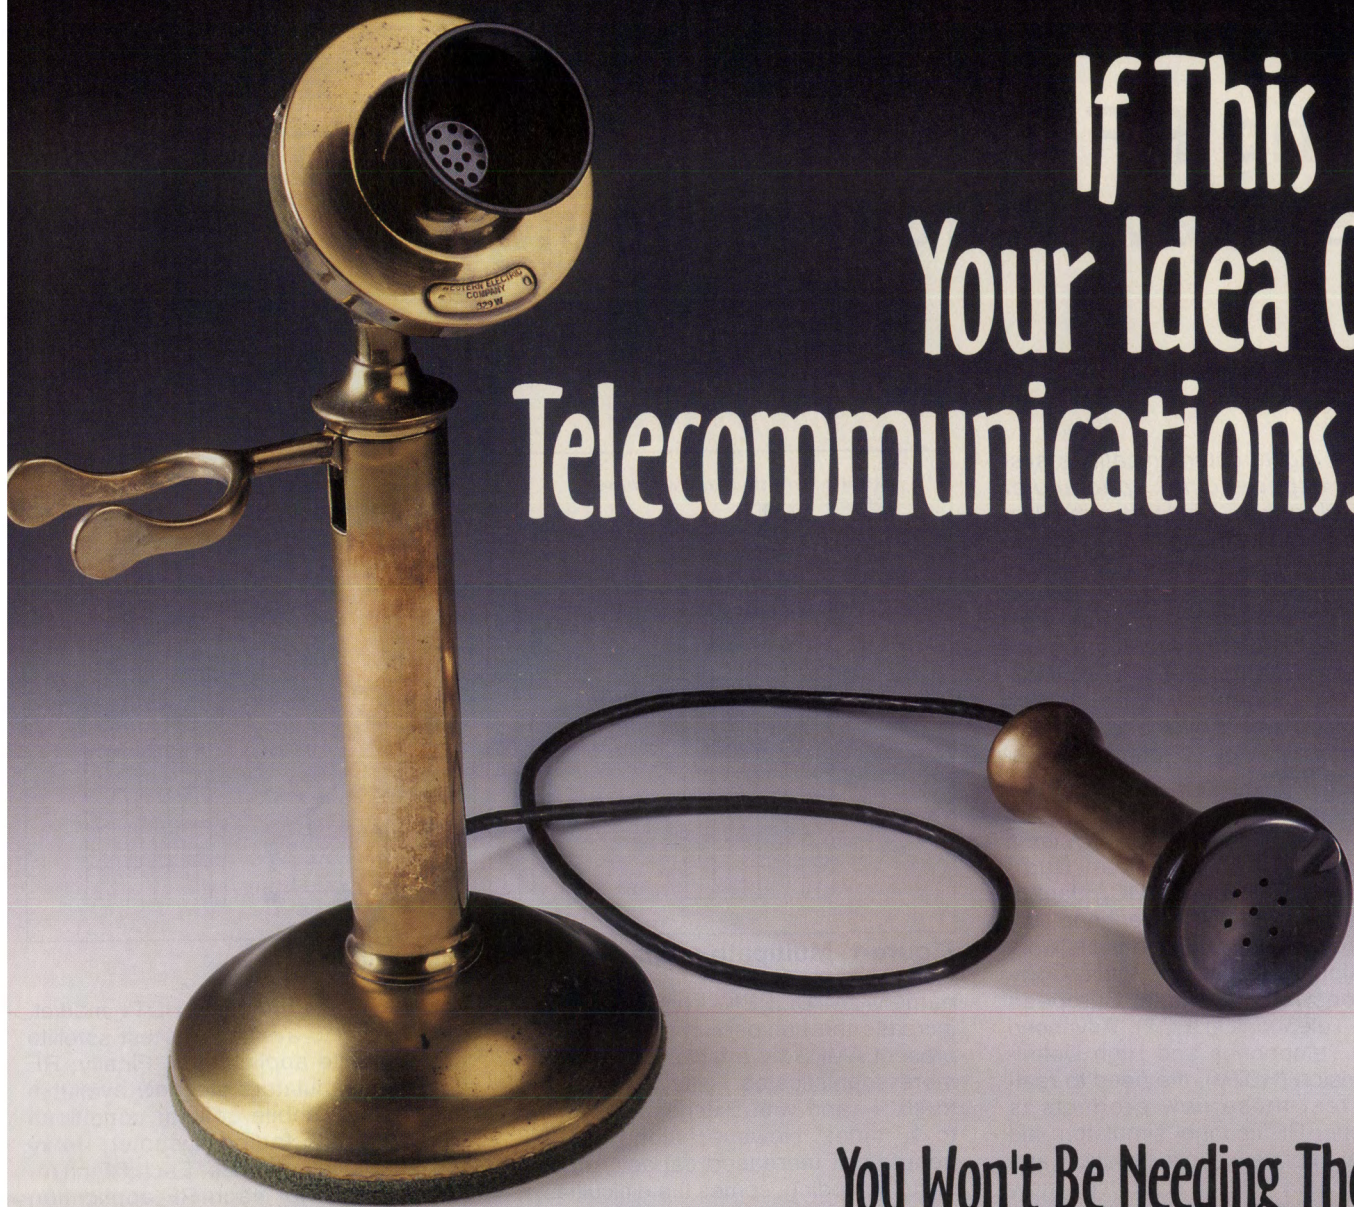

You Won't Be Needing These.

If you're designing for today's hottest applications – from cellular communications to digital switching, test instrumentation to GPS – our new family of OCXOs have been developed with your needs in mind. With precisely selected degrees of stability, aging and size. And competitive pricing, too. To receive an applications packet, call 717-486-3411 or fax 717-486-5920. At OFC, we'll keep on innovating – because nothing stays the same for very long.

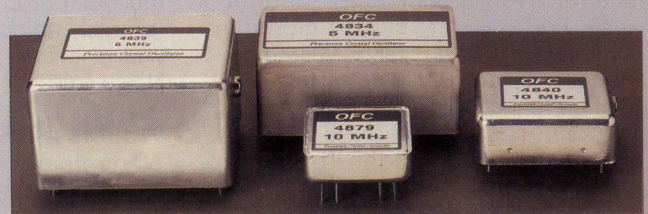

Series	Freq. Range	Stability (-20 to 70°C)	Aging (per day)	Size (In.)	Applications
4834	4-7 MHz	$\pm 3 \times 10^{-9}$	5×10^{-10}	3x2x1.35	Base stations Digital switches
4840	7-15 MHz	$\pm 6 \times 10^{-9}$	7×10^{-10}	2x2x.75	Digital switches Test equipment
4839	2-8 MHz	$\pm 3 \times 10^{-8}$	1×10^{-9}	2.9x2.4x1.75	Base stations Use w/battery supply
4879	5-20 MHz	$\pm 5 \times 10^{-8}$	2×10^{-9}	1.5x1.5x.53	Test equipment Synthesizers



OAK Frequency Control Group™

McCoy • Ovenaire • Croven • Spectrum
an Oak Industries Group of Companies

100 Watts Street • P.O. Box B • Mt. Holly Springs, PA 17065

INFO/CARD 38

Using RF Channel Simulators to Test New Wireless Designs

By Karl B. Fielhauer
Litton Amecom

Wireless digital communications systems are experiencing spectacular commercial growth. Digital communications using RF is among the most difficult environments to design for reliable performance. Yet, customers will demand 100% reliability from their new wireless digital communications products, despite RF propagation conditions. This article presents the propagation effects encountered by these systems that are replicated by RF channel simulators in the laboratory.

With the implementation of systems like: the North American Dual-Mode Cellular System (NADC), Japanese Digital Cellular (JDC) telephone system, Personal Communications Network (PCN), Global System for Mobile Communications (GSM), Digital European Cordless Telephone (DECT), Advanced Cordless Telephones and High Definition Television (HDTV), the need to realistically test these new products is tremendous. RF channel simulators aid in the design of new exotic products and can statistically test how robust a new design is compared to a baseline, theoretical or even a competitor's performance. Presently, the biggest growth in the wireless industry is mobile communications, with cellular leading the way and other technologies to follow soon.

Present cellular systems use the Advanced Mobile Phone System (AMPS) that has been around since the early 1980's. However, AMPS is an analog system requiring voice bandwidth. Because of an overcrowded spectrum due to limited frequency allocation, an AMPS user may not be able to use his cellular phone during peak hours, or may experience a dropped call. This is especially prominent in large metropolitan areas such as New York and Washington, DC. To get around this problem, the FCC approved the NADC system, which increased the number of phone calls by reducing the information bandwidth by digitally encoding the channel,

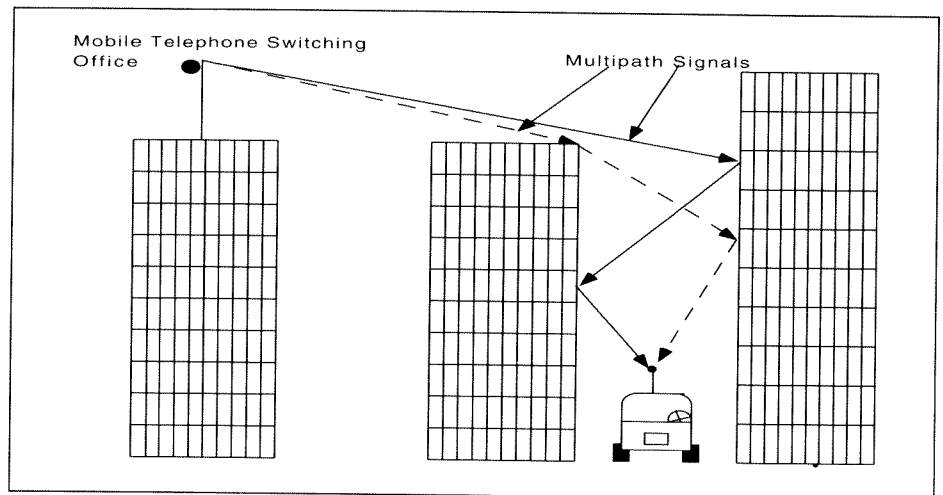


Figure 1. Multipath propagation of a cellular signal.

namely $\pi/4$ DQPSK. This system can increase the numbers of users over the present AMPS by a factor of three, with more sophisticated voice CODECs, up to six — and with Extended TDMA, up to 15 times. However, along with the benefits of increased capacity due to digital encoding, comes the difficulties of demodulation in the presence of fading, multipath propagation, co-channel interference, adjacent channel interference and of course Additive White Gaussian Noise (AWGN).

What is a RF Channel Simulator?

The characteristics of mobile radio channels, although complex in nature, can often be adequately represented by known statistical distributions. RF channel simulation, therefore, amounts to producing in the laboratory, signals that have appropriate statistical properties.

Many companies manufacture RF channel simulators for different mobile and stationary systems from HF into VHF/UHF. RF channel simulators now replicate the conditions of microwave channels conditions under rain fade and atmospheric multipath conditions. The simulators can produce ghost signals with which to test ghost cancellation


designs for the emerging HDTV market. They are also available to test satellite aided mobile applications. Finally, RF channels simulators are now available to simulate mobile cellular conditions with multipath fading, Doppler, delay spread and interference. Each RF channel simulator for each RF application has its own statistical distribution which best represents the channels propagation characteristics.

The RF channel simulator is a versatile tool to improve the quality of digital (and also analog) wireless designs before a new product is sent to market. In addition the simulator can be used in the production phase to measure and identify performance variations from unit to unit. By running different propagation simulations on the production line, the radio can be tested for Automatic Gain Control (AGC) performance, error correction performance, etc., in a real environment. This can quickly be accomplished using Automatic Test Equipment (ATE) and will insure quality before the radio is sent to market.

This article focuses on RF channel simulators used for mobile communications and the effects that will be encountered in that environment, especially

ZRON

2-8GHz AMPLIFIERS

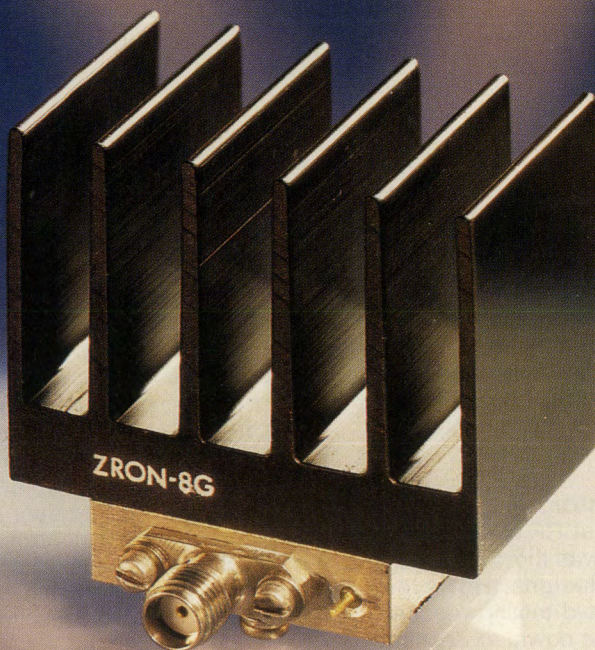

Up to 100mW, 20dB Gain, 2-8GHz,

only \$495⁰⁰

Mini-Circuits fused the science of economy and technology together to create the very broad band, 2 - 8GHz ZRON-8G amplifier. Each SMA connector on this amplifier can be easily removed for quick conversion to drop-in assembly capabilities... and with a price tag of just \$495, the ZRON-8G will fit as well into your budget as it will your project. But, don't let the small price fool you. Each hermetically sealed unit is built extremely tough. Even if the power supply voltage is shorted under full RF power, the ZRON-8G amplifier will survive without damage.


Suitable for both lab and systems applications, this multi-functional GaAs amplifier delivers 20dBm minimum power output at 1dB compression and has a linear gain of at least 20dB over the full frequency range. To that, add a VSWR of 2.0:1 maximum over the whole band and you have a unit that's unconditionally stable for all load and source impedance magnitude and phase.

So, call your Mini-Circuits distribution center for guaranteed one week shipment and seize the competitive power packed in the new ZRON-8G amplifier!

Available with or without heat sink
INFO/CARD 39

SPECIFICATIONS Model: ZRON-8G

Freq. Range GHz	2-8
Gain (dB) Min.	20
Power (dBm)	
Min. Output (at 1dB Comp.)	+20
Dynamic Range	
NF(dB) Typ.	6
Intercept Point (dBm) 3rd Order Typ.	30
VSWR In/Out	2.0:1
DC Power	
Voltage	+15
Current mA Max.	310



Mini-Circuits®

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

For detailed specs on all Mini-Circuits products refer to • THOMAS REGISTER Vol. 23 • MICROWAVES PRODUCT DIRECTORY • EEM • MINI-CIRCUITS' 740-pg HANDBOOK.

CUSTOM PRODUCT NEEDS... **Let Our Experience Work For You.**

F-170 Rev. Orig

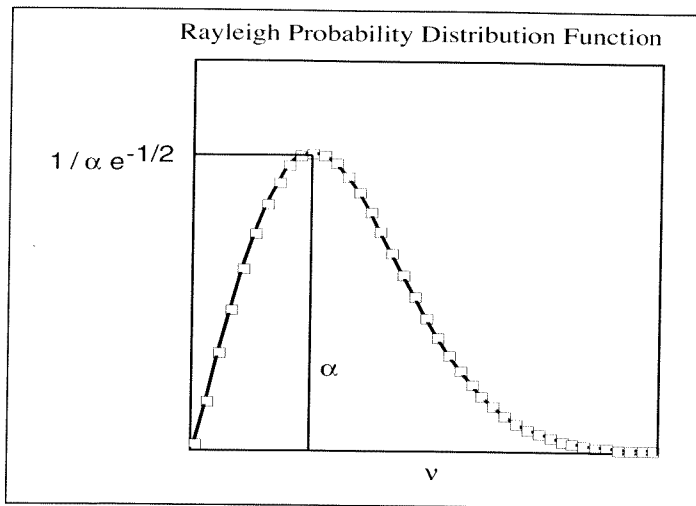


Figure 2. Rayleigh Probability Distribution Function.

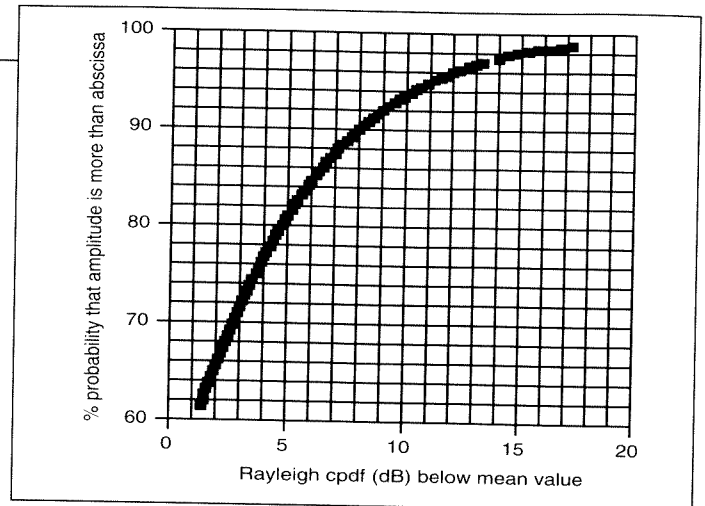


Figure 3. Rayleigh Cumulative Distribution Function.

with the implementation of the NADC, JDC, DECT and GSM systems. Understanding how an RF channel simulator works for mobile applications will enable a basic understanding of the other RF environments in which these simulators have applications.

Why Use a Simulator?

Before the advent of RF channel simulators, field testing was the only way to test new wireless designs. However, using conventional field testing requires time to setup and take down, collect the data, and, worst of all, it is not repeatable. With the use of RF channel simulators this is no longer true. The use of simulators enables design engineers to test their product under favorable and poor conditions in the laboratory and compare their results to previous designs. The outcome of test results are rapid, allowing a testing team to communicate the results quickly to a design team for changes and revisions in DSP algorithms before ASIC's are sent to be fabricated and before diversity combining techniques are agreed upon. In addition coding and modulation schemes and the evaluations of equalizations can be tested using a RF channel simulator.

With a simulator it is possible to write a test plan incorporating such important parameters as fade margin, E_b/N_o , type of fading to be tested, Doppler, the addition of adjacent and co-channel interference and diversity combining techniques. With field testing, the environment where the test is conducted cannot be controlled, therefore propagation effects cannot be tested individually. The effects of adjacent channel, co-channel interference, intersymbol interference and other effects can add upon each other, thus the isolation of each effect upon the radio is not possible. With the use of a RF channel simulator,

the bit error rate performance in fading and interference can be compared to theoretical performance when the propagation effects are isolated thus establishing a baseline of performance. The same test procedure can be rerun to measure design improvements after design changes are implemented. A final benefit is that the data acquisition and test equipment control (including the RF channel simulator) can be, and usually is, fully automated to produce reliable and repeatable results quickly.

What Does an RF Channel Simulator Do?

The mobile radio will have to work in the harshest of RF environments. The major problem is that operation often is in built-up areas, where the mobile antenna is well below or located between surrounding buildings, and there is no line-of-sight path to the transmitter (Figure 1). Propagation is, therefore, mainly by way of scattering from the surfaces of the buildings and by diffraction over and/or around them. The most pronounced effect in mobile cellular communications is that of multipath signal propagation caused by the scattering signals. The multipath reflections grow more likely as the frequency of transmission increases. The three major effects of multipath propagation are multipath fading (Rayleigh fading), delay spread and Doppler-frequency shifts.

The RF channel simulators for mobile applications model multipath propagation caused by the antenna being well below the transmitter (Mobile Telephone Switching Office, or MTSO). In addition, it is possible to incorporate Additive White Gaussian Noise (AWGN), adjacent channel and co-channel interference to the RF channel simulator and test in the presence of fading. In the new markets of digital cellular radio,

understanding and designing systems which work reliably in multipath propagation conditions will be critical to winning the market.

Multipath fading occurs when an RF carrier is reflected over more than one path producing multiple signals with different arrival times (see Figure 1). The signals produce apparent phase differences between the multiple reflections and the original, or the shortest path. Thus for a constant amplitude CW signal, if a multipath reflection is 180° out of phase from the shortest path and equal amplitude, a total cancellation will occur. In some cases, there is constructive addition when two or more signals arrive in phase with one another. However, in the real world the multipath reflections have random arrival times and random phase shift between multipath signals, the fading is then called Rayleigh. This is because the fading is best describe by the Rayleigh probability density function (PDF). A Rayleigh distribution is the root-mean-square (RMS) addition of two independent Gaussian or normal distributions. The Rayleigh PDF is shown in Figure 2 and is defined as:

$$p(v) = \frac{v}{\alpha^2} \exp\left(-\frac{v^2}{2\alpha^2}\right), \quad (0 \leq v \leq \infty) \quad (1)$$

$$0, \quad (v < 0)$$

where $v^2 = x_1^2 + x_2^2$, two independent variants, x_1 and x_2 and Gaussian-distributed both having zero mean and the same standard deviation, and:

$2\alpha^2$ = the mean square value of v over the distribution.

The corresponding Cumulative Probability Distribution Function (CPDF)

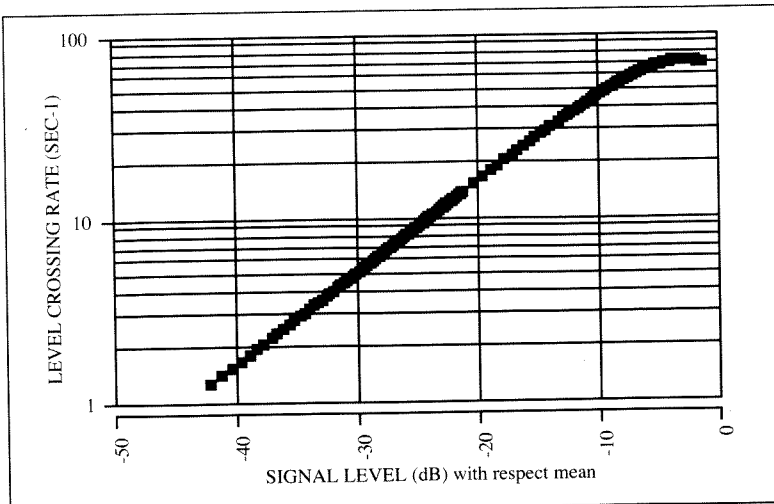


Figure 4. Level crossing rate.

obtained by integrating $p(v)$. The CPDF represents the probability that v is less than level A for an E-Field signal and defined by:

$$P(v \leq A) = \int_0^A \frac{v}{\alpha^2} \exp\left(-\frac{v^2}{2\alpha^2}\right) dv \quad (2)$$

$$= 1 - \exp\left(-\frac{A^2}{2\alpha^2}\right)$$

$0, (v < 0)$

Plotting the Rayleigh CPDF on a logarithmic scale as shown in Figure 3, the received radio signal has smaller attenuation (less severe fade) than 10 dB from its mean value during 94% of the time and a less severe fade than 18 dB during 99% of the time. When evaluating the performance of an RF channel simulator capable of Rayleigh fading, the measured CPDF and the theoretical CPDF should match thus producing true Rayleigh characteristics for your simulation which is critical in mobile cellular applications. Rayleigh fading is relatively short term in duration yet can yield the deepest fades which are a significant impairment to all digital communications. In the NADC system, a $\pi/4$ DQPSK transmitted signal with constant amplitude in the presence of Rayleigh fading is converted into one with randomly varying amplitude and thus is a large problem for a demodulator to recover data error free if the fade depth exceeds the fade margin. Rayleigh fading only exists when there is no line-of-sight to the receiver only multiple reflections. Rayleigh fading can be dealt with by adding error correcting codes, interleaving and diversity combining techniques. Since most RF channel simulators are dual channel, therefore diversity improvement factors are measurable.

For a satellite aided mobile link and

some cellular links the received envelope obeys Rician statistics rather than Rayleigh and some RF channel simulators include both. Rician fading occurs where there may be a line-of-sight path, or a least a dominant specular component to the mobile receiver. It is intuitively to be expected that there will be fewer deep fades and that the specular component will be a major feature of the spectrum.

A mobile receiver does not experience Rayleigh fading until the mobile is moving through a multipath environment. A measure of the number of times per second that a mobile will encounter a multipath fade is represented by the Level Crossing Rate (LCR), an important consideration to the designer of a mobile digital communications systems. The LCR is the number of times per second (Hertz) the carrier envelope crosses a level relative to the mean. A plot of this is shown in Figure 4 for a mobile receiver moving at a rate of 100 km/hour at a frequency of 900 MHz. The expected number of level crossing at a given signal amplitude $v = A$ is:

$$n\left(\frac{v}{\sqrt{2}\alpha^2} = R\right) = \frac{\beta V}{\sqrt{2}\pi} R \exp(-R^2) \quad (3)$$

where:

$$R = \frac{A}{\sqrt{2}\alpha^2}$$

$$\beta = 2\pi/\lambda$$

V = Speed of the vehicle (m/s)

Careful attention should be paid both to the theoretical LCR and theoretical Rayleigh PDF to the measured performance when evaluating RF channel simulators for true Rayleigh fading.

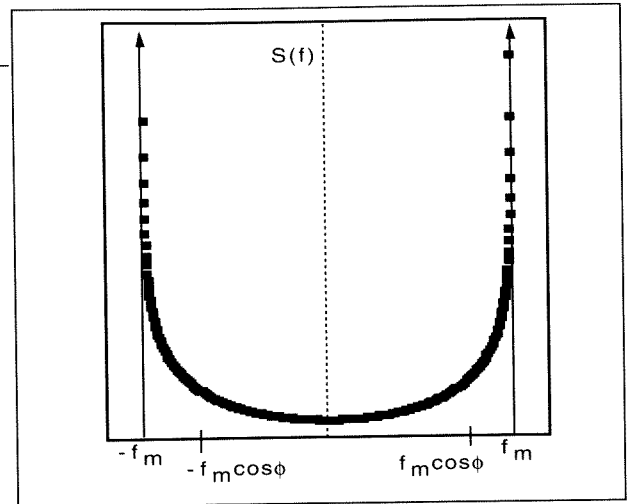


Figure 5. Rayleigh power spectra.

These statistics should be part of the specifications for the mobile RF channel simulator.

Another propagation effect that is modeled by an RF channel simulator is Doppler frequency shift in a multipath environment. The Doppler frequency f is:

$$f = \frac{V}{\lambda} \cos \phi = f_m \cos \phi, \quad 0 < \phi < \pi \quad (4)$$

where f_m is the maximum Doppler frequency. It is clear that in any particular case, the change in path length will depend on the spatial angle between the wave and the direction of motion. Generally, waves arriving from ahead of the mobile have a positive Doppler shift, i.e., an increase in frequency, while the reverse in the case for waves arriving from behind the mobile. Waves arriving from directly ahead of, or directly behind the vehicle are subjected to the maximum rate of change of phase. If the mobile unit is moving through an area of multiple reflections and it is assumed that the angles of arrival are evenly distributed over 360° , then the Doppler shift will be on each of the multipath scattering signals from the MTSO. The multipath scattering signals will be arriving to the moving mobile with positive shifts and with negative shifts causing a spread in the received power spectra. If there are a large number of scattering signals, as in the case of mobile cellular phone, then the receive spectrum will be widened by the multiple Doppler shifts and is referred to as Doppler spread. The limits of the Doppler spectrum can be quite high, for example in a vehicle moving at 30 m/s (approx. 70 mph) receiving a signal at 900 MHz the maximum Doppler shift is 90 Hz and is shown in Figure 5. Frequency shifts of

this magnitude can cause interference with the message information. The theoretical power spectral density $S(f)$ for a mobile in multipath environment is :

$$S(f) = \frac{1}{f_m \sqrt{1 - \left(\frac{f}{f_m}\right)^2}} \quad (5)$$

This spreading of the signal energy is an important characteristic of Rayleigh channel simulator.

Another propagation event affecting largely the mobile receiver is delay spread. Delay spread occurs when the base station transmits an impulse signal to the mobile unit and because multipath scattering the received impulse signal is significantly lengthened. In a high data rate mobile communications environment, a bit time can be significantly lengthened thus overlapping onto another bit period which is the cause for inter-symbol interference.

Long term fading such as that caused by an obstruction or terrain absorption are characterized using the log-normal probability distribution function and is found on most RF channel simulators. Long term fading is also referred to as shadow fading because the mobile moves through the shadow of an obstruction which can take a considerable amount of time. Long term fading is usually compensated by Automatic Gain Control (AGC) circuits. Of the three statistics (Rayleigh, log normal and Rician) that are represented in RF channel simulators, Rayleigh fading with Doppler is the most difficult environment for a mobile receiver to operate.

Implementation of an RF Channel Design in Hardware

Figure 6 represents a basic design of an RF channels simulator for mobile communications receivers which simulates Rayleigh fading. This is a simple hardware configuration for a Rayleigh multipath fading simulator that consists of two Gaussian noise generators, two variable low pass filters and two balanced mixers. The cut-off frequency of the two low pass filters is selected on the basis of the frequency and the assumed average speed of the mobile vehicle. The output of the simulator represents the envelope and phase of a Rayleigh-fading signal. Tests on such simulators show the output signal envelope to be a close approximation to a Rayleigh distribution and the level-

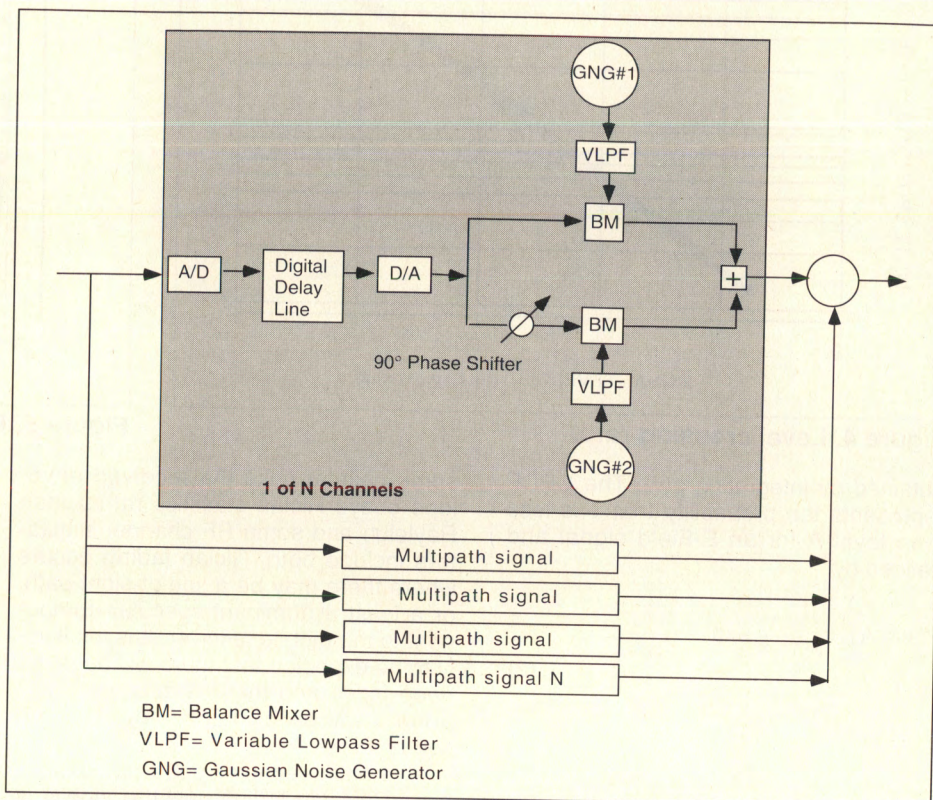


Figure 6. Rayleigh RF channel simulator hardware.

crossing rates agree well with theoretical predictions.

This hardware version is duplicated several times depending on the number of multipath signals that are to be simulated for the environment under consideration. The simulator uses digital delay lines to replicate the multipath delay on each of the multipath signals. The several delayed output signal from the Rayleigh-fading simulators are summed together to form a multipath signals. The NADC systems requires receivers to operate with at least two Rayleigh-faded signals spaced by a delay of up to 42 μ s. These standards have been implemented to guarantee functionality of the various mobile radio manufactures equipment. Usually the RF channel simulator replicates this design to form two separate RF channels in which the fading correlation can be controlled between separate RF channels. This aids investigations of diversity reception techniques and the effects of co-channel and adjacent-channel interference.

Conclusion

The RF channel simulator is a valuable new addition of test equipment for the evaluation of digital modulation and demodulation designs. The RF channel simulator can be used through the initial

design stages through quality control on the production line and can simulate mobile as well as stationary systems. The RF channel simulator can be used to verify design improvements without field testing and performance variations, if any from unit to unit in the production process.

RF


References

1. Eric McHenry, "Simulator Mimics Rayleigh Fading in Mobile Radios," *Microwaves & RF*, January 1992.
2. K. Feher, *Digital Communications — Microwave Applications*, Prentice-Hall, Englewood Cliffs, NJ.
3. F. Davarian, J. Sumida, "Channel Simulator Tests Digital Mobile Radios," *Microwaves & RF*, August 1984.
4. William Lee, *Mobile Communications Engineering*, McGraw-Hill, New York.
5. J.D. Pearsons, *The Mobile Radio Propagation Channel*, John Wiley & Sons, New York.


About the Author

Karl Fielhauer is an RF design engineer with Litton Systems Amecom Division. He has a BSEE from Lawrence Technological University, Southfield Michigan. He can be reached at Litton Amecom, 5115 Calvert Rd., MS-1-83, College Park, MD 20740 tel: (301) 454-9977.

spread spectrum voice & data connection

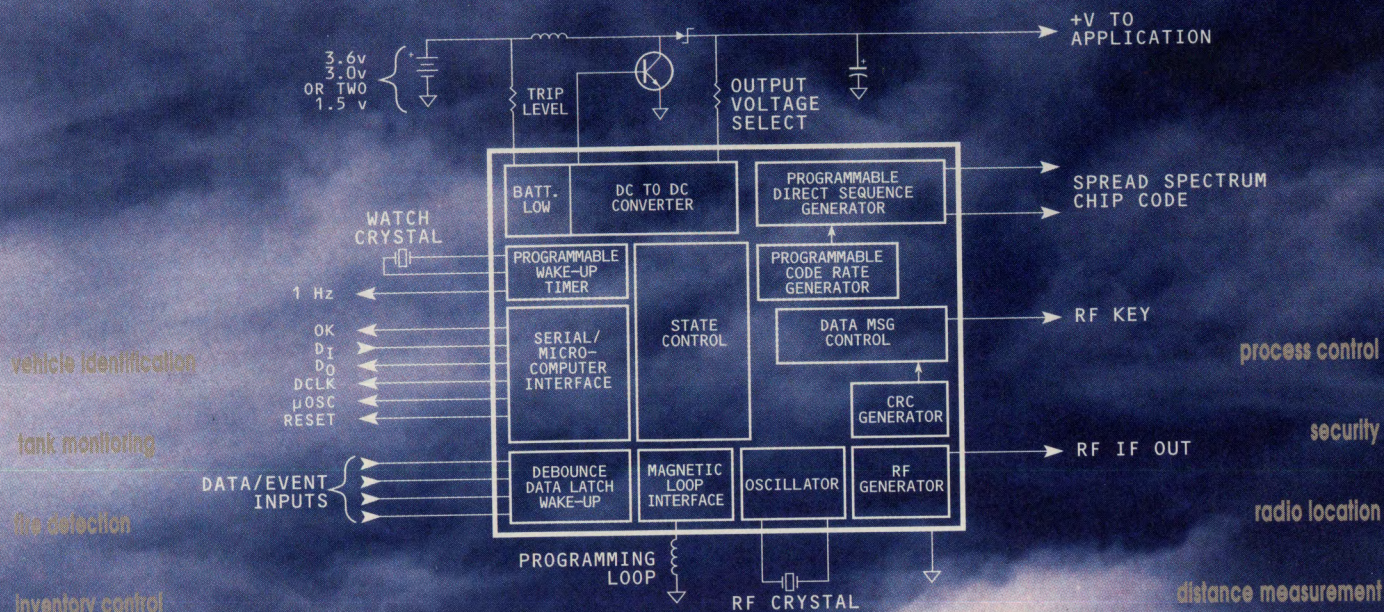

Six years in development, our new
AX-602 *SPREAD SPECTRUM* core IC*
can send information across offices,
through buildings, and up to 30 miles outdoors.



101 West Robert E. Lee Blvd., New Orleans, LA 70124

504.282.8119

Programs Help Design Vacuum Tube Amplifier Output Circuits

By Thomas F. Crawford
Electronic Communications and Service

High power amplifiers still commonly use vacuum tubes, despite the growth of solid state technology. Power triodes and tetrodes remain economical choices, especially for power levels above 1000 watts in the HF, VHF and UHF ranges. The author's entry in the 1993 RF Design Awards Contest was a program which computes the component values for tuned output circuits in Pi, L and Pi-L configurations. This article describes the Pi-L network program.

The Pi-L network program was originally written to assist amateur radio operators in the design and construction of high power amplifiers operating in Class AB1, AB2, B or C. It is intended to guide the user through the design process, allowing either the user or the program (actually, the program's author) to determine various design criteria, depending on the user's level of experience and ability. The program begins with several information screens that may be bypassed after they have been read. The equivalent schematic of the network is shown in Figure 1.

Before entering data for calculation, the program addresses plate resistance. The user may enter a calculated resistance value, or the program can calculate an approximate value based on plate voltage and current, using the following equations:

$$e_{RMS} = \frac{e_{PEAK}}{\sqrt{2}} \quad (1)$$

$$i_{RMS} = \frac{I_{DC} \cdot 1.57}{\sqrt{2}} \quad (2)$$

$$R_L = \frac{e_{PEAK}}{I_{DC} \cdot 1.57} \quad (3)$$

In practice, the voltage swing, e_{PEAK} , will be less than the DC voltage applied, depending on the tube characteristics, loading and drive. With 3000 volts applied, the voltage swing might be

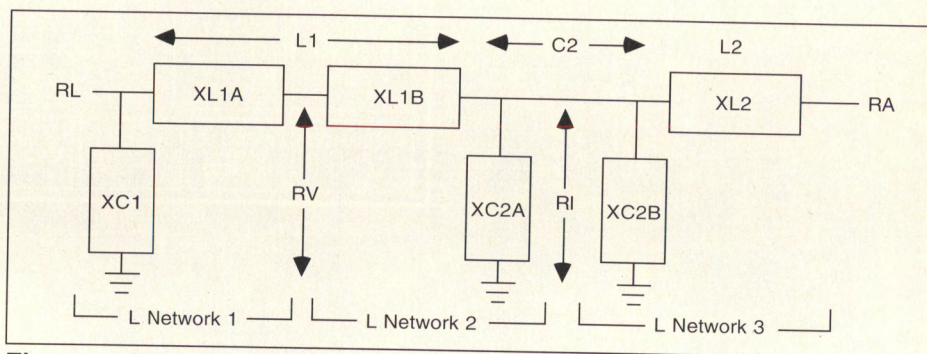


Figure 1. Equivalent schematic of the PI-L output network.

2500 volts. There is no way for an amateur to measure e_{PEAK} . The peak fundamental component of current is one-half the peak current, or $I_{DC} \times \pi/2$:

In the program, the $\pi/2$ current multiplication factor ($\pi/2 = 1.57$) is replaced with 1.8. This is the same as declaring e_{PEAK} to be 0.87 times the full DC voltage. This estimation was determined empirically over many years of evaluation of electron tubes, and should be a good approximation for most applications.

$$R_p = \frac{E_p}{I_p \cdot 1.8} \quad (4)$$

Next comes selection of the operating

Q, which requires a tradeoff between harmonic suppression and critical tuning. Typically, Q values from 10-30 offer acceptable harmonic rejection, but higher Q results in a sharper peak at resonance and very "touchy" tuning characteristics. Select the desired Q for the highest frequency that the network will cover, and since Q increases at lower frequencies, harmonic suppression will not be compromised.

The most difficult choice in the design is the selection of image resistance (RI). Since the program designs the Pi-L network as a cascade of three L-networks, an impedance for the junctions of the networks is required. This is somewhat arbitrary, but limited by the peak voltage

ENTER PROGRAM DATA


Enter the selected PLATE VOLTAGE. (100-.5KV)	[EP] = [3000] Volts
Enter the PLATE CURRENT in AMPERS. (.1 to 2.5)	[IP] = [.75] Amps
The PLATE LOAD RESISTANCE is ...	[RP] = 2222.222 Ohms
The PLATE POWER INPUT is ...	[PIN] = 2250 Watts
Desired Plate Tank Operating Q (1 to 30)	[Q1] = [15]

Select a trial value of IMAGE RESISTANCE
(Values between 150 & 1500 Ohms) [RI] = [750] Ohms

Remember — RA < RI
Enter the Ant. or LOAD RESISTANCE (10 to 800) [RA] = [50] Ohms

Would you like to change any one VALUE before continuing (Y or N) []

Figure 2. Main program screen

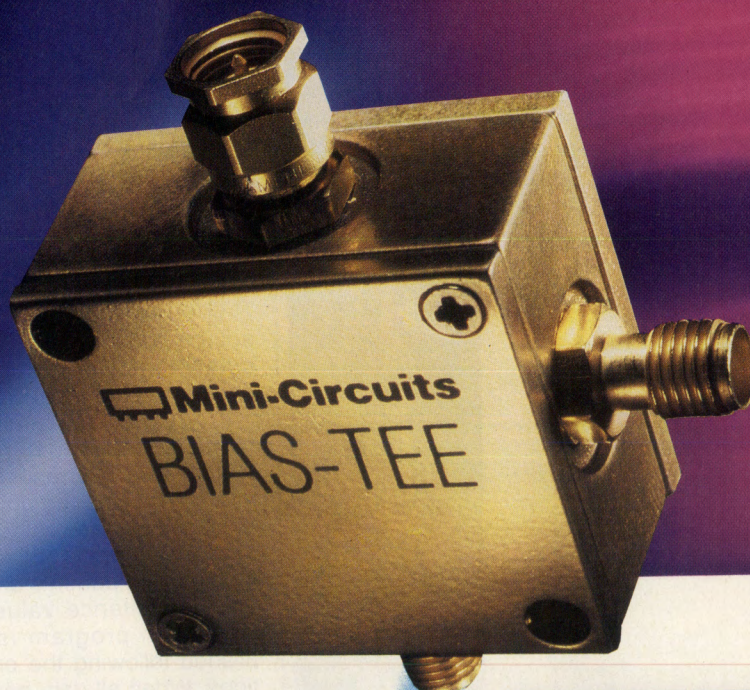

BIAS TEES

From **\$59⁹⁵**

RF ——— RF+DC

Easily combines RF+DC signals
for your modulation or
test requirements.

DC

Now up to 200mA DC current 100KHz-6GHz

Now you can DC connect to the RF port of an active device, and modulate a laser over a very broad frequency range. Using statistical process control and a patent-applied for technique of combining magnetics and microstrip, large DC currents may pass through the Bias-Tee without saturation and degradation of performance. At 1/3 to 1/4 the price of competitive units, these new Bias-Tees are packaged in an aluminum case, available with SMA connectors. So why wait, solve your connection problems with Mini-Circuits' Bias-Tees. Available from stock.

Model	Freq MHz		Insertion Loss, dB Typ.			Isolation dB (RF)-(DC) (RF+DC)-(DC) Typ.			VSWR Typ.	Price \$ ea.
	f _l	f _u	L	M	U	L	M	U		
ZFBT-4R2G	10	4200	0.15	0.6	0.6	32	40	50	1.3:1	\$59.95
ZFBT-6G	10	6000	0.15	0.6	1.0	32	40	30	1.3:1	79.95
ZFBT-4R2GW	0.1	4200	0.15	0.6	0.6	25	40	50	1.3:1	79.95
ZFBT-6GW	0.1	6000	0.15	0.6	1.0	25	40	30	1.3:1	89.95

L = low range M = mid range U = upper range

finding new ways ...
setting higher standards

Mini-Circuits[®]

WE ACCEPT AMERICAN EXPRESS AND VISA

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

EUROPE 44-252-835094 Fax 44-252-837010

Distribution Centers/NORTH AMERICA 800-654-7949 • 417-335-5935 Fax 417-335-5945

For detailed specs on all Mini-Circuits products refer to • THOMAS REGISTER Vol. 23 • MICROWAVES PRODUCT DIRECTORY • EEM • MINI-CIRCUITS' 740-pg HANDBOOK.

CUSTOM PRODUCT NEEDS... Let Our Experience Work For You.
INFO/CARD 41

F164 REV.ORG.

across the loading capacitor, where:

$$E_p = \sqrt{Z_p \cdot P_o \cdot 2.414} \quad (5)$$

Design constraints require $R_l > R_a$, so values in the range of 150-1500 ohms are practical.

The program allows the user to examine the results for various values of Q and R_l . Selecting analysis frequencies close together shows how critical the tuning is likely to be. Observing the component values shows what param-

eters will result in a realizable design.

Program Operation

After the initial information screens, the main input screen (Figure 2) is reached. Limits have been established for each entry, based on values deemed within a practical range. Since it was written for amateur applications, the program halts and asks for re-entry of data when the voltage and current selected are likely to result in power output exceeding the maximum permissible power of 1500 watts. [Modification of the

Plate tuning capacitor reactance:
 $XC1 = RP/Q1$ ($Q1$ is selected tank Q)
 Virtual Resistance:
 $RV = EP/(Q2 + 1)$
 First half of tank coil:
 $XL1A = R1/Q2$
 First half of the loading capacitor:
 $XC2A = Rl/Q2$
 Second half of tank coil:
 $XL1B = RV \times Q2$
 Third network figure of merit:
 $Q3 = \text{SQR}((Rl/RA) - 1)$
 Second half of loading capacitor:
 $XC2B = Rl/Q3$
 Loading coil:
 $XL2 = RA \times Q3$
 Total reactance of $L1$ is the sum of:
 $XL1A + XL1B$
 Total reactance of the loading capacitor is the algebraic sum:
 $XC2 = (XC1A)(XC1B)/(XC1A + XC1B)$
 Component values are calculated according to normal reactance formulas.

Figure 3. Program calculations.

source code to allow higher power calculations for commercial applications should be straightforward — editor].

Frequency entry can be anywhere from 1-500 MHz, but the results for very high or very low frequencies can be very interesting! See the note above on practical component values. The program output includes both reactances of the network components and the inductance and capacitance values. Operation of the entire program is easily accomplished following the on-screen instructions. When all data have been entered, the computation proceeds as shown in Figure 3.

At the end of the calculations, the program gives the choices for printout of the data, calculation of more frequencies, check Q at the low frequency end of the range, do a new calculation, or exit.


The program was written in GWBASIC and compiled in Quick Basic 4.5. Both an executable file and source code are included. This program, along with additional programs for Pi-networks, L-networks and a coil-winding utility, is available from the RF Design Software Service. See page 75 for ordering information. **RF**

About the Author

Thomas Crawford is a retired engineer whose career included the Coast Guard, Air Force, and naval shipyards. He is part of a small company of retirees, Electronics Communications and Service, which designs and builds custom receiver front ends. He can be reached at W490 Bulb Farm Road, Shelton, WA 98584.

GET IN THE THICK OF IT™

WE
CUSTOMIZE

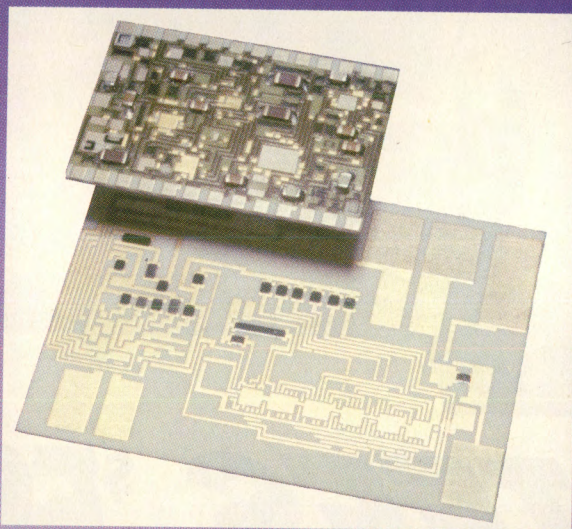

CHALLENGE US

ETF TECHNOLOGY INC.

The Only Source For Your Thick Film Precision Circuits & SMT Resistors

THICK FILM CIRCUITS

Thru Hole Metallization
 .005" Lines & Spacing
 Multilayers Up To 8 Layers
 Nickel Barriers
 Copper Metallization
 Hybrid Circuits
 Surface Mount Networks
 Chip & Wire

SMT • RESISTORS

0402 To 4020
 Zero ohm To 500 megohm
 Down To .1% Tolerance
 50 PPM•TCR
 Custom Sizes
 Custom Metal Terminations
 High Power Chips



TECHNOLOGY INC.

800 Paloma Dr • Suite 120 • Round Rock, Texas 78664
 (512) 218-1048 • FAX (512) 218-9312

BROADBAND

RF AMPLIFIERS



FOR PRIORITY SERVICE

Fax This Ad To Us At
(716) 427-7839

Just fill in your name, address, and fax or phone in the spaces below! For specifications & pricing on specific models, place a ✓ in the first column.

✓	MODEL	CLASS	FREQ. RANGE	POWER	GAIN
LF/MF					
	1040L	B	10kHz -500kHz	400W	55dB (±1dB)
	1140LA	B	9kHz -250kHz	1100W	55dB (±1dB)
	AP-400B	B	80kHz - 2.7MHz	400W	55dB (±1.5dB)
	240L	A	20kHz -10MHz	40W	50dB (±1.5dB)
	2100L	A	10kHz -12MHz	100W	50dB (±1.5dB)
HF					
	A-150	A	300kHz -35MHz	150W	55dB (±1dB)
	A-300	A	300kHz -35MHz	300W	55dB (±1dB)
	A-500	A	300kHz -35MHz	500W	60dB (±1dB)
	A-1000	A	300kHz -35MHz	1000W	60dB (±1.5dB)
VHF					
	325LA	A	250kHz -150MHz	25W	50dB (±1.5dB)
	3100LA	A	250kHz -150MHz	100W	55dB (±1.5dB)
	3200L	A	250kHz -120MHz	200W	55dB (±1.5dB)
UHF					
	400AP	A	150kHz -300MHz	3W	37dB (±1dB)
	403LA	A	150kHz -300MHz	3W	37dB (±1dB)
	411LA	A	150kHz -300MHz	10W	40dB (±1.5dB)
	525LA	A	1MHz -500MHz	25W	50dB (±1.5dB)
	550L	A	1.5MHz-400MHz	50W	50dB (±1.5dB)
	5100L	A	1.5MHz-400MHz	100W	50dB (±1.5dB)
	603L	A	800kHz -1GHz	3W	40dB (±1.5dB)
	630L	A	400MHz-1GHz	30W	51dB (±2dB)
	6100L	AB	400MHz-1GHz	100W	51dB (±2dB)

Name: _____
 Title: _____
 Company: _____
 Mail To: _____
 Call: ☐ Fax: ☐

Check Here To Receive Complete Catalog In Mail: ☐

RFD 1/94

PHONE: (716) 292-7440 • FAX: (716) 427-7839

ENI
 A Division of
 Astec America, Inc.
 100 Highpower Road
 Rochester, NY 14623
 USA

WORLDWIDE SALES & SERVICE
 Santa Clara, CA • Tel: (408) 727-0993
 Welwyn Garden City, UK • Tel: (0707) 371558
 Gerlingen, Germany • Tel: (0715) 621095
 Tokyo, Japan • Tel: 0425 229011
 Osaka, Japan • Tel: 06 367-0823

ENI™

Double Feedback Circuit Analysis

By Frank Egenstafer
American Meter Co.

Double feedback circuits are those circuits incorporating both series and shunt feedback paths. The double feedback topology is a byproduct of many amplifier designs, but the interactions among the two paths and the active device have not been adequately characterized in the past. It is the purpose of this paper to afford the engineer an understanding of how the double feedback stage operates and to supply him with some simple equations that will aid him in making circuit decisions.

To design an amplifier of the type used in the CATV field it was previously necessary to initiate that design without the use of engineering design equations, mainly because there were none. In most cases, the design was pursued by varying the emitter resistance (R_e), shunt feedback resistance (R_f) and the transformer turns ratio until satisfactory results were achieved (Figure 3). This procedure was followed first on a single stage, then on two stages together, then on three, etc. Mostly, by the time three stages were completed, the interaction had become complex and frustrating.

The designer was plagued by all sorts of amplifier behavior, or rather misbehavior, that escaped explanation and reason. It was no simple task to design an amplifier with sufficient gain, wide frequency response, exceptional flatness, good input match, good output match, low noise figure, high output capability, linear distortion characteristics; especially since when all was done, one of the elements had to be made variable (tilt

control), which tended to degrade many of the above characteristics.

Throughout this article, the terms β and h_{fe} are used interchangeably for the high-frequency current gain of a transistor, and the constant $R_f \cdot R_e = R_L^2$ is often used because this equality puts order into the analysis. It permits the elimination of either R_f or R_e from a complex equation and hence the solving of a single quantity in terms of another, and it eliminates an infinite number of value relationships that would exist between R_f and R_e .

Basic Feedback Circuits

Take a transistor, put a resistor in the emitter circuit and a resistor from collector to base and you have a feedback amplifier. It sounds very simple but is, in essence, a very complex circuit, as will soon be shown. Analysis through the use of simple equations, logic, and confirming experimentation indicates that the circuit obeys the family of laws described in the equations presented here. For this analysis, the transistor is considered to be a black box, and β is the only parameter which varies with frequency. The close agreement between theory and practice validates this assumption.

First let us examine, separately, shunt and series feedback and see how each affects the action of a simple transistor stage. Shunt voltage feedback tends to lower both the input and output impedance of a circuit and to stabilize the current gain under control of R_f and R_L (Figure 1). Series current feedback tends to increase both the input and output impedance and to stabilize the voltage

gain under control of R_L and R_e (Figure 2).

If we combine these two circuits we have a circuit that is both current and voltage gain stabilized under control of external resistances. If the gains are equal,

$$\frac{R_f}{R_L} = \frac{R_L}{R_e} \therefore R_L^2 = R_f \cdot R_e \quad (1)$$

which is the expression for checking the bridged-T equation under matched conditions. The gain equations in Figures 1 and 2 are also simplified forms of the complex gain equation.

If we now produce a model embracing both R_f and R_e , equations may be derived which describe the input impedance, the output impedance and the gain under control of R_e , R_f , and β .

$$A = \frac{2R_L(n\beta R_f - (\beta + 1)R_e)}{R_S((\beta + 1)R_e + R_L(n\beta + 1) + R_f) + (\beta + 1)R_e(R_f + R_L)} \quad (2)$$

Letting $R_f \cdot R_e = R_L^2$, and $R_S = R_L$:

$$A = \frac{2[n\beta R_f - (\beta + 1)R_e]}{2(\beta + 1)R_e + (n\beta + 1)R_L + (\beta + 1)R_L + R_f} \quad (3)$$

Letting $\beta = \infty$:

$$A = \frac{2[nR_f - R_e]}{R_L(n + 1) + 2R_e} \quad (4)$$

Letting $n = 1$:

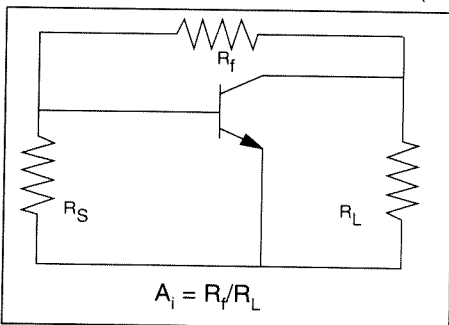


Figure 1. Shunt feedback circuit showing load, source and feedback resistors.

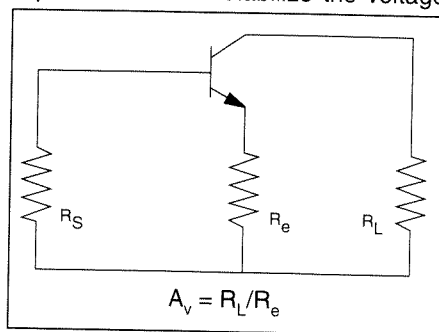


Figure 2. Series feedback circuit showing load, source and emitter resistors.

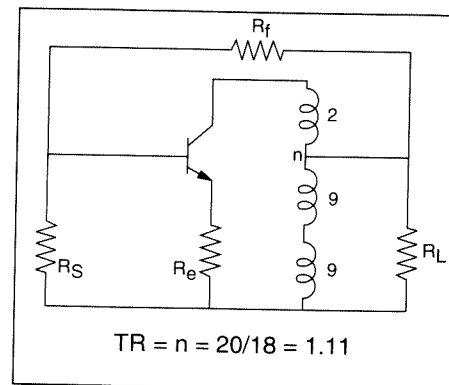


Figure 3. Double feedback circuit.

A lot more than a varactor company


FSI semiconductors mean buying made easy.

Just about every microwave or RF semiconductor you need to manufacture commercial or military components or sub-systems is now available from FSI.

Not just tuning varactors, but PIN and NIP diodes, limiters, multipliers, SRD's, MNS capacitors and spiral inductors. In any of a dozen or more packages including chip, beam lead, glass, ceramic and surface mount configurations.

As an added benefit, every product is available off the shelf or it's in process of replenishment. So we can give you a hard-and-fast shipping date.

Beyond that, we've been providing this kind of quality service for more than 20 years.

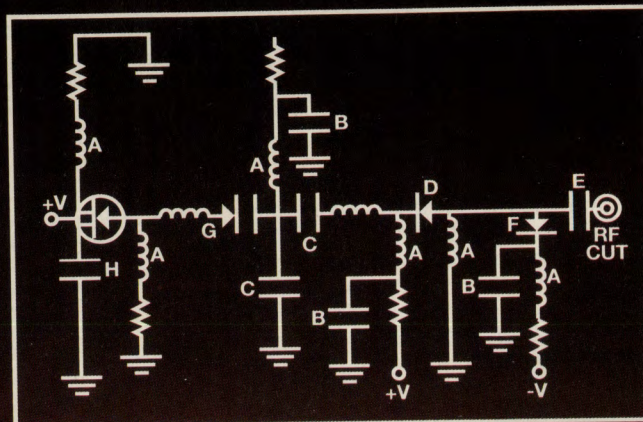

Typical switch with FSI semiconductors. (A) GC9002 Spiral Inductor; (B) GC84020 MNS Chip Capacitor; (C) GC86001 MNS Chip Capacitor; (D) GC4901 Beam Lead; (E) GC84030 MNS Chip Capacitor; (F) GC4221 PIN Diode; (G) GC15004 Linear Tuning Varactor; (H) GC84001 MNS Chip Capacitor.

Sample requests filled promptly.
Comprehensive, 120-page catalog free on request. For more information, call or write Donna Langan, Semiconductor Sales Manager, Loral Microwave-FSI, 16 Maple Road, Chelmsford, MA 01824. Tel: (508) 256-4113. Fax: (508) 937-3748.

INFO/CARD 51

LORAL
Microwave - FSI

$$A = \frac{R_f - R_e}{R_L + R_e} \quad (5)$$

Let $R_f = R_L^2/R_e$:

$$A = \frac{R_L}{R_e} - 1 \quad (\text{Voltage Gain}) \quad (6)$$

Let $R_e = R_L^2/R_f$:

$$A = \frac{R_f}{R_L} - 1 \quad (\text{Current Gain}) \quad (7)$$

Under matched conditions the voltage gain equals the current gain.

Since this feedback circuit has elements connected directly between the output and input, there exists a finite and measurable signal path opposite to the designed direction and it is called the reverse signal path. By analyzing the circuit for gain from output to input, an equation may be realized that sets the order of magnitude for the reverse path. Amplifier circuits involved with oscillators, mixers, frequency doublers and isolation stages require gain stages with controlled or predictable reverse gain values.

$$A_r = 2R_s R_e (\beta + 1) \cdot \quad (8)$$

$$[R_L R_e (\beta + 1) + R_s R_L (n\beta + 1) +$$

$$R_e (\beta + 1)(R_s + R_f) + (R_s R_f)]^{-1}$$

Beta vs. Gain

These graphs were plotted from a computer run of the complex gain equation 3 with $n = 1$. Since there were many different values of R_e , two graphs were required in order to avoid confusion (only one is shown here). The computer program varied β from 3 to 21 for values of

R_e from 6 to 28 ohms, with the constraining value of R_f , determined by $75^2/R_e = R_f$, also computed.

The equations and the graphs indicate that:

- Gain increases with increasing β .
- Gain increases with increasing R_f .
- Gain increases with decreasing R_e .
- Gain variation with β decreases with increasing R .
- Gain variation decreases with increasing β .

Beta was discontinued after 21 because the variation of gain from 21 to infinity is very small and the variation may easily be projected.

The graphs may be used by assuming a transistor with an f_t of say 1400 and a frequency of interest (f_m) of 200 MHz. This says that β or current gain will be 7 ($\beta = f_t/f_m$). Go into the graph at $\beta = 7$, and intersect, for instance, the line of the equation of $R_e = 16$. The gain may be read from either side of the graph. The notation at the left of each line indicates what the gain would be at $\beta = \infty$.

We now have a group of equations that describe the operation of a feedback amplifier in terms of gain but, as yet, they are not useful. This is to say, in their present form they cannot help in designing an amplifier. All the equations do is to permit one to plug in values after completion of the design.

Up to now, we have no way to predetermine the values of R_f and R_e . One way to start is to use the simplified gain equation where gain is described in terms of R_e or R_f (with $R_f \cdot R_e = R_L^2$).

Solving equations 6 and 7 for R_e and R_f , respectively:

$$R_e = R_L/A + 1 \quad (9)$$

$$R_f = R_L(A + 1) \quad (10)$$

With $R_L = 75$ and a required gain of say 3 (about 9.5 dB),

$$R_e = 75/4 = 18.7 \text{ ohms} \quad (11)$$

$$R_f = 75(4) = 300 \text{ ohms} \quad (12)$$

Low-Frequency Gain

Instead of solving for many values of R_e , a graph was constructed which enables one to select the correct value of R_f and R_e for a given gain or vice-versa.

Figure 5 was plotted from the simplified gain equation 5 where $R_f \cdot R_e = R_L^2$, $\beta = \infty$, and $n = 1$. Since β is not in the simplified equation, no frequency dependability is implied; however, in the design of most amplifiers it is found that the low-frequency end of the response is higher than the high-frequency end. This effect is caused by variations of β and distributed circuit capacitance with frequency. The result is a tilted or sloping response, so that figure 5 can be used to set the low-end response only.

This graph proved very accurate and useful in many instances, even though the equations were calculated with $n = 1$ and the circuits all had transformers with n greater than 1. The reason for the accuracy will become evident later when a new graph will be plotted for different values of n .

The accuracy was noted when the graph was used to calculate gain with β at infinity. The calculated gain was very nearly the gain of a transistor amplifier with the same R_e and R_f but with a transformer. The increase in gain because of the transformer was in many cases similar to the gain when β was at infinity.

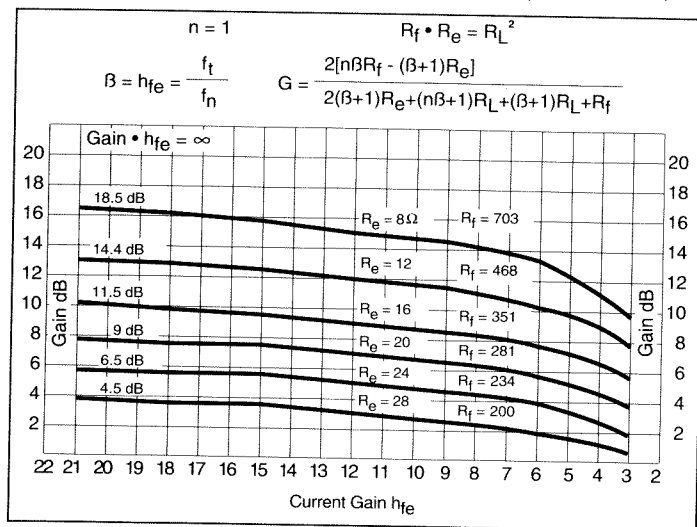


Figure 4. Gain versus different betas.

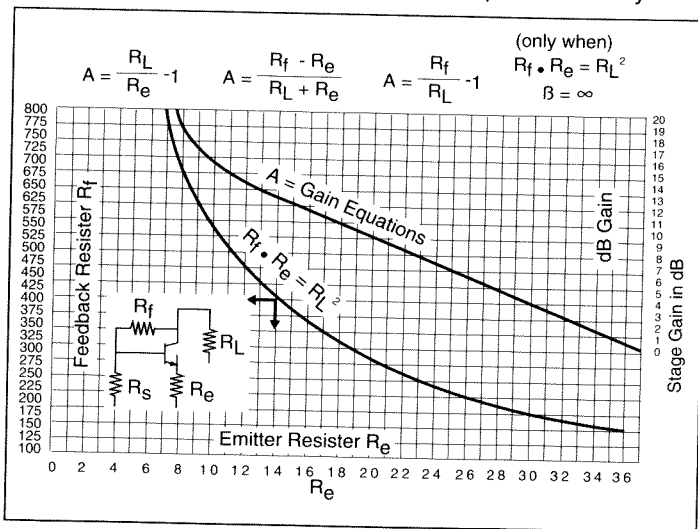


Figure 5. Graph relating R_f , R_e and gain.

To use the graph, select a gain at the right side of the graph, move to the left and intersect the gain equation line, move down to emitter resistor R_e value, move up to the curve of $R_f \cdot R_e = R_L^2$, at the intersection go left to the feedback resistor R_f value.

Since this graph represents the low frequency end of the response some degree of tilt will be exhibited. In order to insure that the slope will not be severe, refer the R_e value chosen to figure 4. In practice, with or without a transformer there will always be some inductance in the circuit that will hold up the gain at the high frequency end of the response curve. This inductance effect will be explained subsequently.

Input and Output Impedances

The equations for input impedance are:

$$Z_{in} = \frac{(\beta + 1)R_e(R_f + R_L)}{(\beta + 1)(R_e) + R_L(n\beta + 1) + R_f} \quad (13)$$

Let $\beta = \infty$

$$Z_{in} = \frac{R_e(R_f + R_L)}{R_e + nR_L} \quad (14)$$

Let $n = 1$ and $R_f \cdot R_e = R_L^2$

$$Z_{in} = R_L \quad (15)$$

The equations for output impedance are:

$$Z_{out} = \frac{(\beta + 1)R_e(R_s + R_f) + (R_f R_s)}{(\beta + 1)(R_e) + (n\beta + 1)R_s} \quad (16)$$

Let $\beta = \infty$

$$Z_{out} = \frac{R_e(R_f + R_s)}{R_e + nR_s} \quad (17)$$

Let $n = 1$ and $R_f \cdot R_e = R_L^2$

$$Z_{out} = R_s \quad (18)$$

Equations 13 and 16 are very similar and are equal to each other when β is at infinity, and equal to the input and output terminations R_s and R_L when $R_f \cdot R_e = R_L^2$ and $n = 1$. It was found that the easiest way to evaluate the action of R_f , R_e and β on Z_{in} and Z_{out} was to select appropriate values and look at the results. In order to obtain many reliable numerical values, equations 13 and 16 were programmed into a computer with R_f varying from 150 to 300 ohms, R_e varying from 10 to 40 ohms and β varying from 3 to 40. The action of the parameters of the equations for Z_{in} and Z_{out} may be summed up as follows:

1. Z_{in} (in ohms) increases from a value below 75 ohms with:

- (a) Increasing β
- (b) Increasing R_f
- (c) Increasing R_e

2. Z_{out} (in ohms) decreases from a value above 75 ohms with:


- (a) Increasing β

- (b) Decreasing R_f
- (c) Decreasing R_e

Experience and analysis of the input and output impedance values obtained from the computer run indicate that match and gain are direct trade-offs. This means that when an amplifier design is initiated it is not gain or match alone that is to determine the constants,


SWITCH TO ARROWSMITH!

For All Your Microwave Switch Needs –
The N-Series Microwave Switches from
Arrowsmith Shelburne

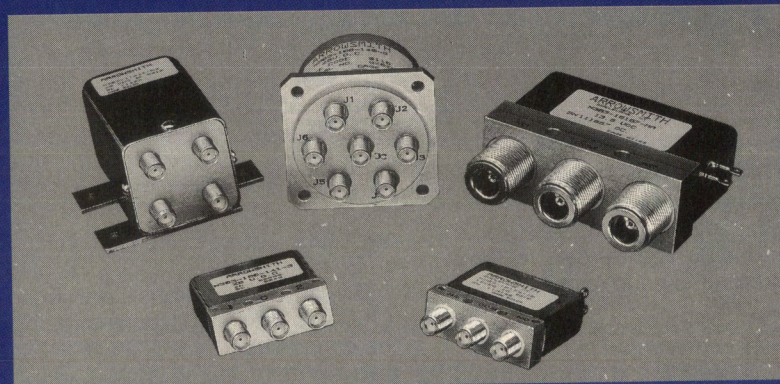

**DESIGN IN HIGH QUALITY AND
SUPERIOR PERFORMANCE AT A
REASONABLE COST**

The N series switches are available with 50 or 75 ohm impedance SMA, SMB, BNC, TNC, F, and N type connectors. Custom voltages are available. Other options include TTL compatibility, self de-energizing, indicator circuitry and suppression diodes. Please contact a sales representative for price and availability today.

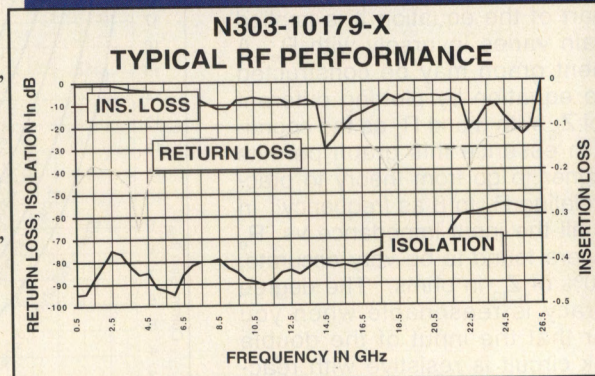

ARROWSMITH
Shelburne, Inc.

2085 Shelburne Road • Shelburne, Vermont 05482
802-985-8621 • FAX: 802-985-1042

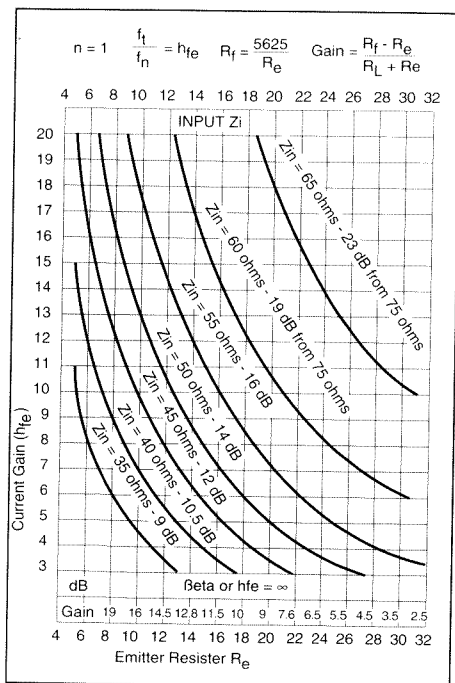


Figure 6. Graph relating beta, gain and input impedance.

but what match at what gain. This constraint is inescapable. With this in mind, it was decided to rearrange the input equation, put on the constraint.

$$R_i = R_L^2 / R_e,$$

and solve the equation for R_e .

$$R_e^2 (Z_{in}(\beta + 1) - R_L(\beta + 1)) + R_e((n\beta + 1)R_L Z_{in} - 75^2 Z_{in}) = 0 \quad (19)$$

The purpose of this quadratic equation was to combine the relationship between gain and match. Although gain is not part of the equation it is implied since gain varies inversely with R_e . A convenient graph may be constructed from the equation by plotting different values of Z_{in} with β and R_e as the coordinates. In essence this graph permits the designer to go from theory to practice by relating R_e to β as frequency. In practice all the input impedance vs. R_e graphs were found to be very accurate, within 10% of Z_{in} in ohms. The degree of accuracy is reasonable when you consider that the input of the double feedback circuit is resistive with reactance secondary in nature.

Input Impedance (with $n = 1$),

The purpose of figure 6 is to permit a designer to obtain a first approximation of a particular design in the least possi-

ble time. The graph shows that with a particular f_i and a particular desired input match one set of R_e and R_i will be approximated that will match the curves. When the transistor (and therefore the f_i) is changed, the graph shows that other values of R_e and gain are optimal. However, the graph will show the varying input match with varying f_i and a constant R_e quite accurately.

The graph also indicates that gain and match are divergent and that a trade-off is required in the design of an amplifier.

Further, the graph indicates that with a constant R_e the input match will vary with f_i . The extent of the variation is also indicated.

Design Example

Given a transistor with $f_i = 1300$, and the highest frequency of operation is 200 MHz, then: $h_{fe} = 1300/200 = 6.5$.

Go into graph on the left hand side at $h_{fe} = 6.5$. As you traverse to the right, a number of lines labeled Z_{in} will be intersected; these curves represent input impedances. Choose Z_{in} and traverse down to the abscissa labeled "Re". For example, let us choose a Z_{in} of 50 ohms or -14dB. An h_{fe} of 6.5 intersects Z_{in} at an R_e of 16 ohms.

This says that a transistor with an f_i of 1300 and an R_e of 16 ohms, along with the constraining $R_i = 5626/16 = 354$, will give an input match at 200 MHz of 16 dB. Since R_i , R_e , R_L are related in the

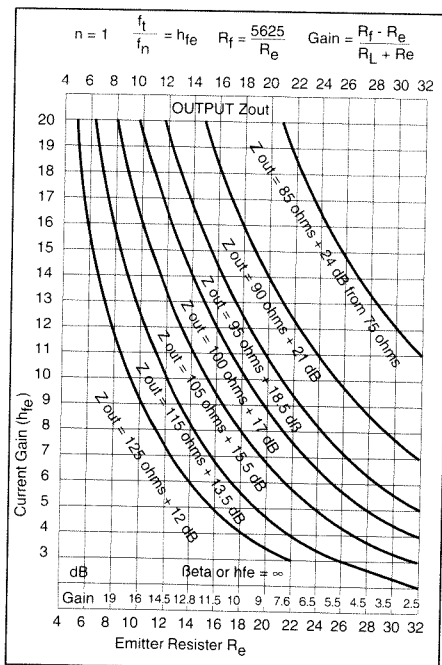


Figure 7. Graph relating beta, gain and output impedance.

gain equation by $(R_i - R_e)/(R_i + R_e)$, equation (4), the gain obtained (in this case 11.5 dB) is included along with R_e .

Working with the general equations indicates that Z_{in} , Z_{out} and gain change very little after an h_{fe} of 20. With h_{fe} in the general equation, the response of an amplifier is usually shown to be falling off at the high-frequency end because of the reduced h_{fe} . This effect is noted in practice, and makes ingenuity a must for designing a flat amplifier.

A number of transistors were checked for f_i where the values ranged between 1000 and 1800. These transistors were then inserted in a typical feedback circuit.

By converting the f_i to β or frequency it was possible to predict with reasonable accuracy the input match at various frequencies, and the gain of the circuit associated with a particular emitter resistor. The match values obtained were accurate to 1 dB in the test circuits used.

A plot of the input or output impedance curve may be constructed by selecting a value of R_e from graph #5 or 6 and moving up that line noting the intersection between the plots of Z and current gain on the left. Use graph #7 as a guide for assigning coordinates and values.

Output Impedance (with $n = 1$)

Figure 7 was constructed for Z_{out} using the same principle. However, after the graph was made it became obvious that Z_{in} and Z_{out} are symmetrical about 75 ohms and, therefore, are equal in dB at all points if $R_i \cdot R_e = R_L^2$. This means that graphs #6 and #7 may be used for both Z_{in} and Z_{out} in dB only.

All input impedances are below 75 ohms in dB and all output impedances are above 75 ohms in dB.

For practical use, convert any dB from the output graph for input use by converting the dB value to ohms below 75; for using the input graph for output match, converting the dB value to ohms above 75.

The quadratic equation used for figure 7 is:

$$R_e^2((\beta + 1)(R_s - Z_o)) + R_e(75^2(\beta + 1) - R_s Z_o(n\beta + 1)) + 75^2 R_s = 0 \quad (20)$$

The accuracy of the output impedance graphs 7, 9b and 9d is limited by the shunting effect of the output capacitance of the transistor and associated circuitry which is in the order of 2 to 3 pF. In practice the effect of this is to lower the actual output impedance (in ohms) by approximately 20%. As β increases the error reduces in magnitude.

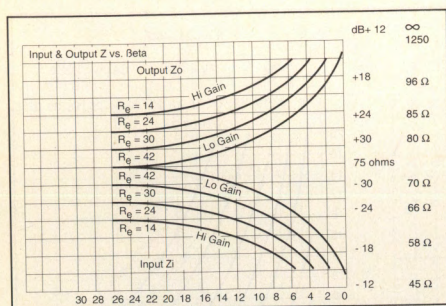


Figure 8. Graph showing how input and output impedances vary with beta.

Input and Output Impedance vs. Beta

This graph shows how the input and output impedances vary with β and with respect to the 75-ohm reference. Note that the impedances are equal and opposite, in dB, with respect to β and that the input and output curves for a given R_e are equidistant from the reference. This occurs only for $n = 1$. This graph clearly indicates that a trade-off of match vs. gain is mandatory in the design of an amplifier stage.

The graph was derived from the complex input and output equations with $R_f \cdot R_e = R_T^2$ and $n = 1$.

This graph also indicates what happens when two similar stages are cascaded. At a β of 10 and an R_e of 24 the output impedance is about +19dB and the input impedance is about -19dB. Measured individually the stages appear to function very well but when they are coupled together the resulting performance is degraded because you are coupling 94 ohms to 60 ohms matched in dB but not in ohms.

The solution is to use a transformer that will make the transformation from high output Z to low input Z more compatible. Since both impedances vary with β the transformer turns ratio will have to be a compromise which lowers the high frequency output impedance closer to 75 ohms and lowers the low frequency impedance below 75 ohms to a value close to the existing input impedance of the following stage.

"n" and the Design Equations

With n appearing in both the numera-

tor and denominator of the complex gain equation, its function is not immediately obvious. Let $R_f \cdot R_e = R_L^2$

$$A = 2(n\beta R_f - (\beta + 1)R_e) \quad (21)$$

$$[2(\beta + 1)R_e + (n\beta + 1)R_L + (\beta + 1)R_L + R_f]$$


Let $\beta = \infty$

$$A = \frac{2(nR_f - R_e)}{R_L(n + 1) + 2R_e} \quad (22)$$

In the simplified equation 17, n appears in both the numerator and denominator but, since R_f is always larger than R_L , the net result of increasing n will be an increase in gain. A few calculations will confirm this fact.

In both the input and output equations n appears in the denominator, so that increasing n reduces the value of Z_{in} or Z_{out} . Since the input impedance for practical values of β and R_e is always less than 75 ohms, making n greater than 1 always takes the input impedance further away from 75 ohms.

The output equation is another story.

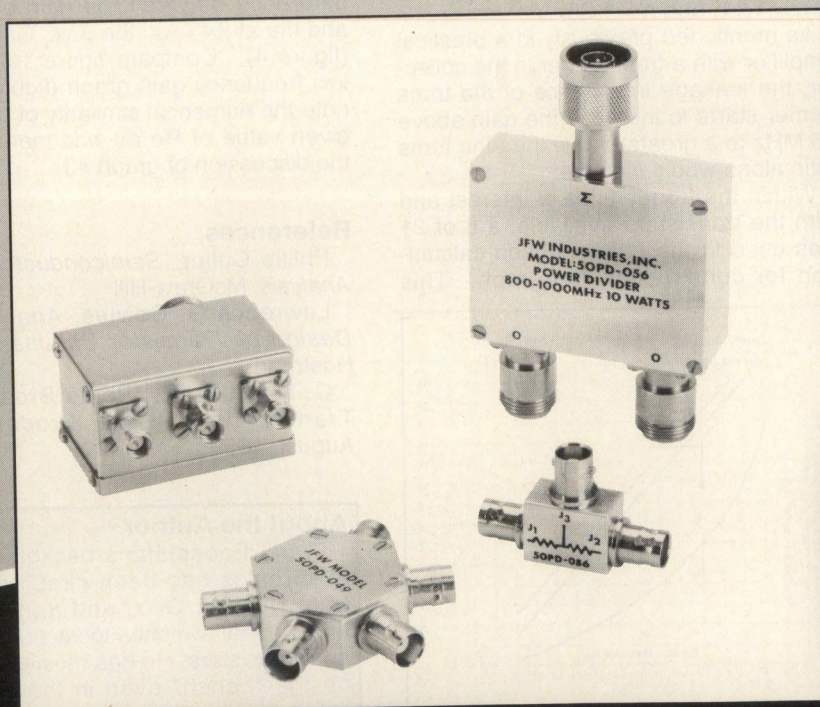

Building The Best Solutions In Power Dividers



JFW Industries, Inc.
5134 Commerce Square Drive
Indianapolis, Indiana 46237
Tel. 317.887.1340
Fax 317.881.6790

JFW Industries... Providing full support in design and performance.

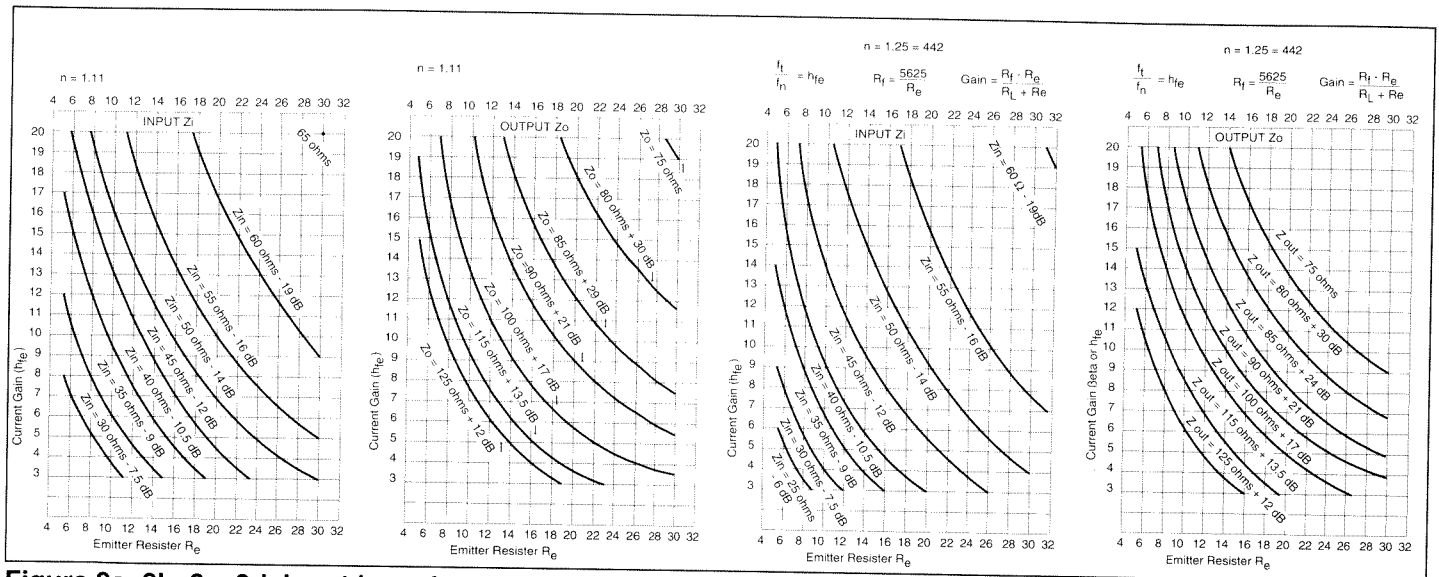


Figure 9a, 9b, 9c, 9d. Input impedances (9a, 9c) and output impedances (9b, 9d) for $n = 1.11$ (9a, 9b) and for $n = 1.25$ (9c, 9d).

Here the impedance for practical values of β and R_e is always above 75 ohms, so that making n greater than 1 moves the output impedance toward 75 ohms.

The action of, n greater than one, on figure 8, "Input and Output Impedance vs. Beta", is to move all curves down from their present position. What this does is to change the asymptote, now 75 ohms, to a value lower than 75 in accordance with the value of n . Any transformer then tends to make the amplifier input and output impedances lower in value. With 75 ohms as a reference this improves the output impedances but worsens the input impedances.

The simplified input and output equations are the same except for R_L and R_s being interchanged.

Let $\beta = \infty$

$$Z = \frac{R_e(R_f + R_L)}{R_e + nR_L} \quad (23)$$

With $n = 1$ and $R_f \cdot R_e = R_L^2$

$$Z = R_L \quad (24)$$

Input and Output Impedance (with $n > 1$)

These graphs were plotted from the same quadratic equations, 19 and 20, as were figures 6 and 7; however, for figures 9a-d, values of n greater than 1 were used. The values of n used were 1.25 (trifilar 4-4-2 winding) and 1.11 (trifilar 9-9-2 winding). By comparing some equivalent R_e vs. h_{fe} points on each of the graphs $n = 1$, $n = 1.11$ and $n = 1.25$

it becomes evident how n affects the impedances.

These graphs may be used in the same manner as were figures 6 and 7.

High Frequency Gain vs. Beta (n Variable)

Figure 10 was derived from the complex gain equation with $R_f \cdot R_e = R_L^2$, $n = 1$, $n = 1.11$, and $n = 1.25$.

As mentioned previously in a practical amplifier with a transformer in the collector, the leakage inductance of the transformer starts to increase the gain above 75 MHz to a greater value than the turns ratio alone would indicate.

Within the frequencies of interest and with the transistors available, a β of 21 was used in the gain equation calculation for constructing the graph. This

value will be, for most transistors, below the point frequency where leakage inductance needs to be considered. This means that the graph will be useful as a first approximation for design.

Notice that the maximum difference in gain from $n = 1$ to $n = 1.25$ is about 1.5 dB, which is approximately equal to the difference between the gain at $\beta = 21$ and the at $\beta = \infty$ on the β vs. Gain graph, (figure 4). Compare figure 10 with the low frequency gain graph (figure 5) and note the numerical similarity of gain for a given value of R_e as was mentioned in the discussion of graph #3. **RF**

References

Phillip Cutler, *Semiconductor Circuit Analysis*, McGraw-Hill

Lawrence G. Cowles, *Analysis and Design of Transistor Circuits*, D. Van Nostrand

C. I. Ruthroff, "Some Broad-Band Transformers", *IRE Proceedings*, August, 1959

About the Author

Frank Egenstafer's background in electronics has been circuit design from DC to 2 GHz, and from relays and stepper switches to vacuum tubes and transistors. He has mostly worked on the "bench" even in the several managerial positions he has enjoyed. He attended Drexel Institute in Philadelphia. He can be reached at (304) 562-6582.

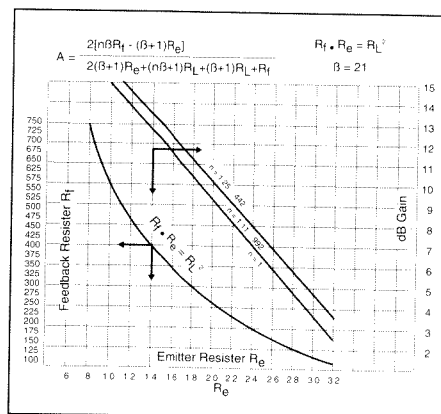


Figure 10. Gain versus beta in high frequency operation and with variable n .

Frequency Independent Phase Tracking System Creates A True Phase Locked Loop

By Glen A. Myers, Ph.D.
Kintel Technologies, Inc.

In a phase-locked loop, the phase of the VCO output voltage relative to that of the input voltage varies with the frequency of the input voltage. This article considers the realization of a circuit for which this phase is selectable with an applied DC voltage and held constant independent of the frequency of the input voltage. The operation of this patented circuitry and some possible applications are presented here.

The block diagram of a phase-locked loop (PLL) is shown as Figure 1. The phase detector consists of a voltage multiplier followed by a lowpass filter (LPF). Most PLLs are contained in systems as dedicated integrated circuits (ICs). And, most of these are configured using digital techniques; the voltage-controlled oscillator (VCO) may be a multivibrator (flip-flop), and the phase detector multiplier an XOR or XNOR gate (1). A limiter, which is commonly part of the IC, converts the analog input into a two-level voltage suitable for one input of the XOR gate. Apart from all the advantages of digital ICs (cost, reproducibility, stability, operability), this realization of PLLs provides linear characteristics of the VCO and also the phase detector (Figures 2 and 3).

A PLL is usable when the frequency of the VCO output voltage equals that of the PLL input voltage. This is called the lock condition. Suppose the frequency of the input moves from a value of f_A to a new value f_B as shown in Figure 2. To maintain lock, the frequency of the VCO output must move in a like manner. This will occur only if the VCO input voltage moves from v_A to v_B (Figure 2). This voltage must come from the phase detector, and this means that the difference in phase of its two input signals must move from ϕ_A to ϕ_B as shown in Figure 3. Clearly, the loop is not phase locked (fixed in phase). Rather, a PLL is frequency locked.

This operation can be explained math-

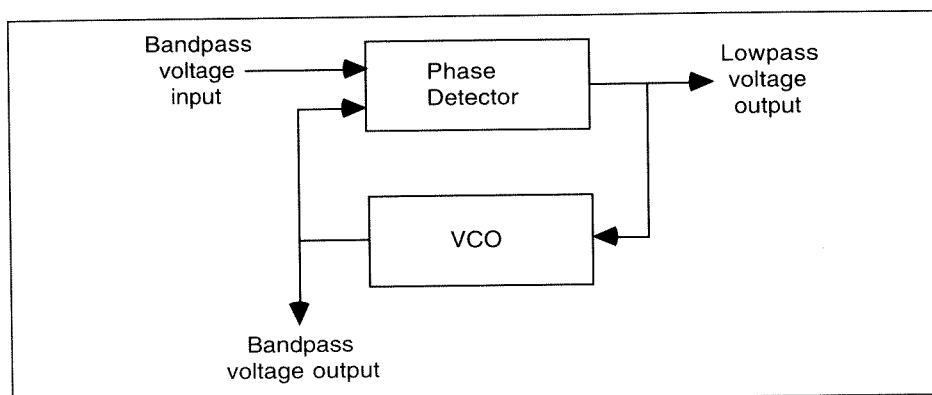


Figure 1. Block diagram of a PLL.

ematically for the characteristics of Figures 2 and 3 by writing:

$$f_0 - f_r = k_f v \text{ for the VCO}$$

$$v = k_p (\phi - \phi_0) \text{ for the phase detector}$$

where:

f_0 = frequency in Hz of the VCO output voltage

f_r = constant = "at rest" frequency of the VCO (f_0 when $v = 0$)

k_f = slope of the VCO characteristic in Hz per volt (constant)

v = VCO input voltage = phase detector output voltage

k_p = slope of the phase detector charac-

teristic in volts per radian (constant)
 ϕ = relative phase of the phase detector inputs
 ϕ_0 = that value of phase for which $v = 0$

Combining these two equations by eliminating v and setting $(k_f)(k_p) = k_L$ gives:

$$(\phi - \phi_0) = (f_0 - f_r)/k_L = (f_{in} - f_r)/k_L$$

which shows dependence of ϕ on $f_0 = f_{in}$ (lock condition) where f_{in} is the frequency of the input

A few comments are in order here before proceeding:

1) The constant k_L includes any voltage gain in the loop.

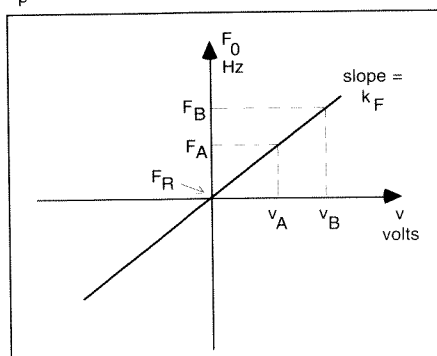


Figure 2. VCO voltage/frequency characteristics.

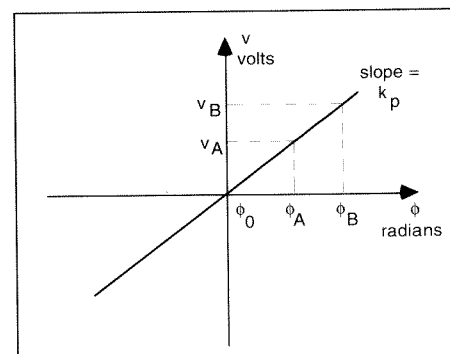


Figure 3. Phase detector characteristics.

Now, let us open the loop and apply an external voltage v_x by means of a summer as shown in Figure 4. We then have:

$$f_0 - f_r = k_f(v + v_v)$$

$$v = k_p(\phi - \phi_0) \text{ as before.}$$

Therefore,

$$f_0 - f_r = k_f v_x + k_f k_p (\phi - \phi_0) \text{ or,}$$

$$\phi - \phi_0 = (f_0 - f_r - k_f v_x) / k_f k_p$$

Previously ($v_x = 0$), $\phi = \phi_0$ when $f_0 = f_r$. Now ($v_x \neq 0$), ϕ has to adjust to accommodate this external voltage. The amount of the adjustment (from ϕ_0) is $-v_x/k_p$ radians. This is a well known method of using a PLL as a phase modulator (2).

We have now set the stage for the presentation of a true phase-locked loop — a patented circuit whose output maintains a constant phase relation with the input voltage independent of the frequency of the input voltage (3), see Figure 5. We have added a second PLL-whose behavior is affected by both outputs of the first PLL. Let the subscripts 1 and 2 be applied to parameters of the first and second PLL respectively. With both loops in lock, then $f_{o2} = f_{o1} = f_{in}$. As with any one PLL, this condition must be satisfied for the phase tracking circuit (PTC) to be usable. By coupling the correct voltage ("DC") from loop 1 into loop 2, we can force the second loop to compensate for this voltage by adjusting its phase ϕ_2 such that $\phi_1 + \phi_2$ does not vary with frequency. Therefore, we have real-

ized a frequency independent phase tracking system.

This operating principle of the PTC is readily revealed by example. Suppose f_A moves from a value of f_A Hz to a new value of f_B Hz. Consider that this requires a 0.75 volt change at the input to the VCO of the first PLL to maintain lock. Let this correspond to a 20 degree increase in ϕ_1 . Assume $k_{f1} = k_{f2}$ and $k_{p1} = k_{p2}$. This is reasonable if identical ICs and identical external circuitry (LPFs) are used to realize loops 1 and 2. For this case, we need a 0.75 volt change at the input to the VCO of the second PLL for it to maintain lock. But we have

injected into loop 2 the value of $(2)(0.75) = 1.5$ volts. This means the phase detector of loop 2 must create -0.75 volts which it does by causing ϕ_2 to decrease by 20 degrees or the same amount that ϕ_1 increased. The net result is a value of $\phi_1 + \phi_2$ which remains constant with f_{in} . The circuit is, then, a frequency independent phase tracking circuit — a circuit which is locked in frequency and set in phase.

A general equation for $\phi_p = \phi_1 + \phi_2$ involving all the parameters of loops 1 and 2 can be derived for the static case in a straightforward manner. This does, perhaps, provide no more insight than

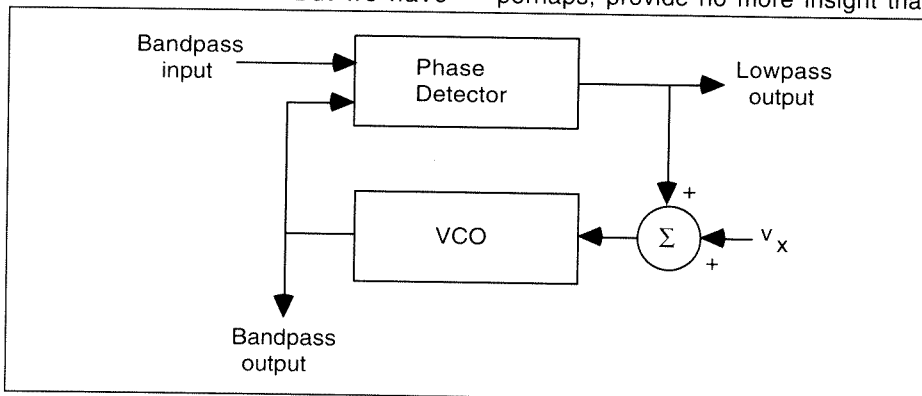


Figure 4. Block diagram of a PLL with an external applied voltage, v_x .

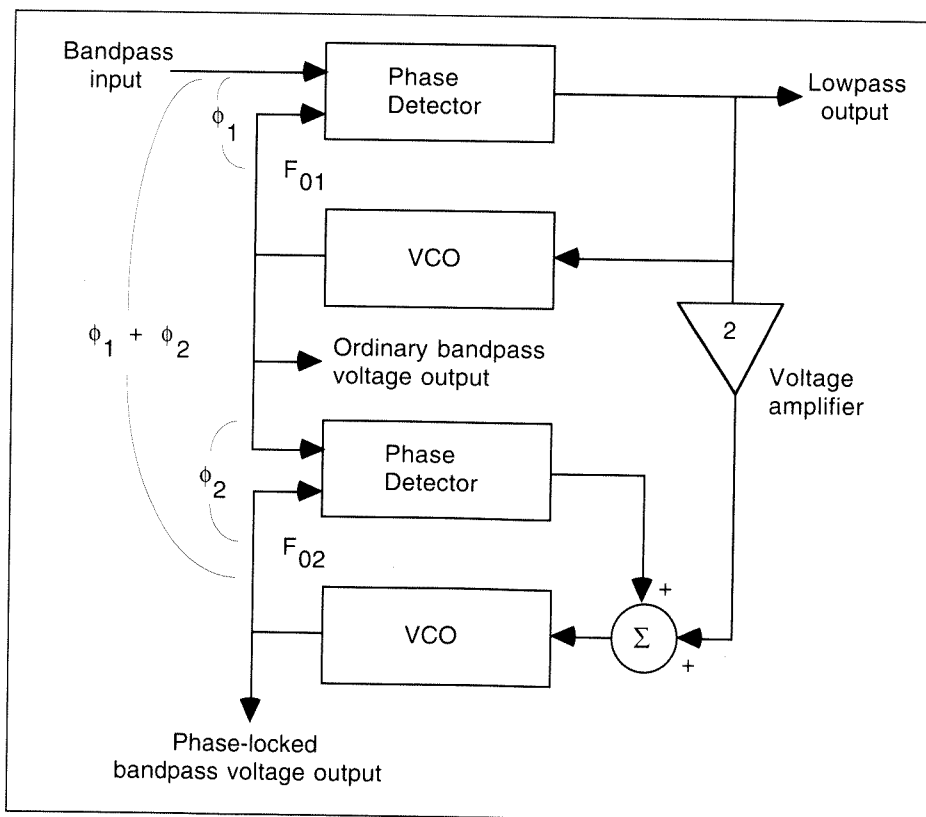


Figure 5. Block diagram of the phase tracking circuit.

the numerical example.

We have built, tested and operated various such phase tracking circuits. Excellent phase tracking is maintained under dynamic conditions (frequency modulated [FM] input) over the entire lock range of the PLL.

In our practice, an external DC voltage is applied to the summer of Figure 5 to set the desired value of ϕ_p and to compensate for differing values of the rest frequencies of the two PLLs. This is a static adjustment. With a FM input, the gain of the voltage amplifier is then adjusted to make k_L the same for both loops. This ensures that ϕ_{hip} does not vary with frequency. These adjustments are readily made by observing a suitable oscilloscope presentation.

A constant value of $\phi_p = 0$ is desirable for some applications (frequency synthesizers, coherent demodulators). We have used a value of $\phi_p = \pi$ radians to suppress a strong interfering carrier. This same value provides us with a patented Power Multiplexing™ capability (multiple frequency reuse) which we have successfully demonstrated (4, 5).

PLLs are also used as bandpass filters. In this case, the PTC provides a constant-phase bandpass filter. When the input is FM, for example, no incident

High Power RF Amplifiers and Power Generators

Our specialty is producing quality high power RF amplifiers, power generators and transmitters in the frequency range of 1 MHz to 200 MHz and at power levels up to 5000 watts.


We can deliver amplifiers from stock, custom build *your* design or design a product to your specifications.

Whether you need *one* or OEM quantities, you'll get the lowest prices and the fastest delivery in the industry.


By starting with raw sheet metal and copper clad boards and by using modern CAD tools and CNC machinery, we *manufacture* from start to finish.

You don't pay expensive middle man profits, you get quicker turnaround and better quality control.

For more information, call toll-free 800-647-1801 today and ask for Steven Pan. Be prepared to be amazed at our low prices and all that we can do for you.




This FET linear amplifier covers VLF to VHF with 200 watts continuous power output or 1500 watts output in pulse applications.

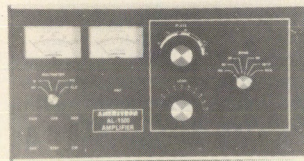

The rugged 3CX1500A7 tube in this HF amplifier delivers over 750 watts of continuous power or up to 4 KW of pulsed output power.

600 Watt FET Linear Amplifier Module, AL-4150, \$849. Operates to VHF.

Can be combined to produce several kilowatts. Ready-to-use. Assembled and tested with four MRF-150 FETs mounted on heat sink with solid copper heat spreader. Evaluate one today!



Write or call Steven Pan ... 800-647-1801

Free Information

AMERITRON®

... the high power RF specialists

921 Louisville Road • Starkville, MS 39759

(601) 323-8211 • FAX: (601) 323-6551

For more information call : 800-647-1800

8 a.m. - 4:30 p.m. CST, Monday-Friday

Prices and Specifications subject to change © 1993 Ameritron, Inc.

INFO/CARD 46

RF Design Software Service

Programs from RF Design, provided on disk for your convenience

This month's programs — Disk RFD-0194

"Programs Help Design Vacuum Tube Amplifier Output Circuits" by Thomas Crawford. Programs in this set are designed to compute the output matching network component values for Class AB1, AB2, B and C power amplifiers. L, Pi and Pi-L network programs are included. (Written in GW Basic, compiled versions and source code included)

December issue programs — Disk RFD-1293

"A Coupled Microstrip Line Review and Design Program," by Brian Brewster. This program computes the even and odd mode impedances, effective dielectric constants, coupling and line geometries from substrate specifications. (FORTRAN, compiled, with source code)
"An S-Parameter Based Amplifier Program," by Dale Henkes. An aid in the design of UHF/microwave amplifiers, including gain and noise circles plotted on a Smith chart, with source and load reflection coefficients, for evaluating tradeoffs in design. (Written in Visual Basic, with Compiled version and source code)

SPECIAL OFFER! — RF Design Editorial Index: 1978-1993

A listing of all articles published in the 15-year history of RF Design, sorted by topic, including title, author, issue and page number. This special package includes a hard-copy listing, plus a text file on disk, ready to be loaded into your favorite word processing program for sorting and browsing — provided in IBM or Macintosh format (specify). Postpaid — shipment by First Class or Air Mail.

All at a special price of just \$12.00! (\$15.00 Foreign) — Order #RFD-INDEX

Each month's disk of programs.....\$15.00 each.....postpaid to U.S. and Canada.....(other foreign add \$8.00 per order)

Order by mail or by telephone at (303) 770-4709. You may reach an answering machine, but your call will be returned quickly. Payment may be by check, money order, VISA, Master Card or American Express. All orders under \$100 and all foreign orders (outside U.S. and Canada) must be pre-paid. Foreign payment must be by charge or by a check drawn on a bank located in the U.S.

RF Design Software Service
P.O. Box 3702
Littleton, Colorado 80161-3702
303-770-4709

tal phase modulation is created by the filtering action of the PTC.

The ability to vary ϕ_p in a known, controlled manner with an external voltage (third input to the summer of Figure 5) has useful applications. For example, in the interferometry method of direction finding, ϕ_p can compensate for the phase shift between two antenna elements and thereby create constructive or destructive interference when their outputs are summed. The condition of interference when detected can be related to wave angle of arrival (patent pending)(6). Conversely, in a transmitter feeding multiple antenna elements, use can be made of the voltage-controlled phase to sweep the beam spatially in a prescribed time-dependent manner. Clearly, using reciprocity, the same beam-forming system can be used to create a phased array for reception (search mode of the receiver). So, use of a PTC in series with each radiating element creates a simple, rapid, highly flexible and easily programmable (computer control of the tuning voltage) phased-array antenna.

Use of multiple phase tracking circuits connected in series or other combinations can serve other useful purposes such as suppression of strong interference and measurement of angle of arrival of each of several FM carriers in the same frequency band. We continue to explore applications of the frequency independent phase tracking capability. We invite the involvement of others in the development of this technology. **RF**


References

1. Allen Hill and Jim Surber, "The PLL Dead Zone and How to Avoid It," *RF Design*, March 1992, pp. 131-134.
2. Dan H. Wolaver, *Phase-Locked Loop Circuit Design*, Prentice Hall, 1991, p. 5.
3. Glen A. Myers and Stephen Petersen, "Method and Apparatus for Frequency Independent Phase Tracking of Input Signals in Receiving Systems and the Like," United States Patent Number 5,038,115, August 6, 1991.
4. Glen A. Myers, "Multiple Reuse of an FM Band," United States Patent Number 4,859,958, August 22, 1989.
5. Glen A. Myers, "Multiple Reuse of an FM Band," United States Patent Number 4,992,747, February 12, 1991.
6. Glen A. Myers, "Method and Apparatus for Isolating and Using Dominant and Successively Subdominant Phase Coherent Carrier Signals," Patent Pending.

About the Author

Dr. Myers is director of engineering of Kintel Technologies, Inc., P.O. Box 32550, San Jose, CA 95152. He can be reached by phone at (408) 372-2310 or by fax at (408) 372-6591.

HF LINEAR AMPLIFIERS - BROADBAND TRANSFORMERS



HF AMPLIFIERS per MOTOROLA BULLETINS

Complete Parts List for HF Amplifiers Described in the MOTOROLA R.F. Device Data

AN758 300W \$154.15	EB63 140W \$ 89.65
AN762 140W \$ 95.15	EB27A 300W \$136.80
AN779L 20W \$ 83.79	EB104 600W \$371.65
AN779H 20W \$ 93.20	AR305 300W \$346.82
AR313 300W \$366.00	

NEW!! 1K WATT 2-50 MHz Amplifier

MOTOROLA AR347 \$1,100.95

POWER SPLITTERS and COMBINERS

2-30MHz	
600 Watt PEP 2-Port	\$ 69.95
1000 Watt PEP 2-Port	\$ 79.95
1200 Watt PEP 4-Port	\$ 89.95

For detailed information and prices, call or write for our free catalog.

WE SHIP
WORLDWIDE



CCI Communication Concepts Inc.

508 Millstone Drive • Beavercreek, OH 45434-5840 • (513) 426-8600
FAX (513) 429-3811

100 WATT 420-450 MHz PUSH-PULL LINEAR

AMPLIFIER — SSB-FM-ATV

KEB67-PK (Kit)	\$159.95
KEB67-PCB (PC Board)	\$ 18.00
KEB67-I (Manual)	\$ 5.00

We also stock Hard-to-Find parts

CHIP CAPS—Kemet/ATC	
METALCLAD MICA CAPS—Unelco/Semco	
RF POWER TRANSISTORS	
MINI-CIRCUIT MIXERS	
SBL-1 (1-500Mz)	\$ 6.50
SBL-1X (10-1000Mz)	\$ 7.95

ARCO TRIMMER CAPACITORS

VK200-20/4B RF Choke	\$ 1.20
56-590-65-3B Ferrite Bead	\$ 20

Broadband HF Transformers

Add \$4.00 for shipping and handling.



WE SHIP
WORLDWIDE

INFO/CARD 47

RF companies

companies and institutions mentioned in this issue's editorial pages

Alpha Industries	54	Microwave Communications Labs.	82
American Meter Company	66	Microwave Solutions	34
Anadigics	50	MicroWave Technology	77
Analog Devices	18, 20, 48	Mitsubishi Electric Corp.	20
Analog Engineering	54	Motorola Semiconductor	50, 53, 77
Andrew Corp.	54	Motorola Cellular	54
Antenna Research Assoc., Inc.	82	NAB '94 Convention	14
AT&T	18, 51, 54	National Inst. for Standards & Tech.	18
Aydin Vector	20	Naval Sea Support Center Atlantic	34
B+K Precision	50	NEC	77
Berkeley Varitronics	50	Noise Com	42, 50
Burr-Brown Corp.	50	Novatech Instruments	48
California Eastern Laboratories	77	Philips	77
Capital Equipment Corp.	20	Piezo Crystal Co.	53
Cincinnati Microwave	54	Power Systems Technology	53
Coastal Cable Tools	54	Proxim Inc.	20
Coilcraft	82	Quad Tech Inc.	14
Comdisco Systems	82	Quality Hermetics Co.	20
Electronic Comm. and Service	62	Racal Instruments	48
Epic Enterprises	14	RadiSys Corp.	20
D.L.S. Electronic Systems	20	Raytheon Semiconductor	82
DAB Symposium '94	14	RF Micro Devices	77
Data Translation	20	RF Monolithics	82
Douglas Integrated Software	82	RF Products	77
Electronic Space Systems Corp.	20	Rockwell International	82
ENI	53	Scientific-Atlanta	18
Ensign-Bickford	20	Sciteq	53
FAA	20	SGS-Thomson	77
FCC	18	Signal Technology Corp.	20
Finnigan MAT Ltd.	11	Southwest Microwave	54
Geoffroy Labs	54	Spectrum Corp.	20
Georgia Tech	16	Spectrum Thin Films	20
Harris Semiconductor	50	Sprague-Goodman Electronics	82
Herotek Inc.	54	Stanford Microdevices	48
Hewlett-Packard Co.	20, 50	Superconductor Technologies	20
Hughes Microelectronics	20	Synergy Microwave	54, 82
IBM	18	Synoptics Communications Inc.	11
Information Handling Services	82	Syston-Donner	20
International Telecomm. Union	18	TEMIC Telefunken	20
IOTech Inc.	20	Tektronix, Inc.	50
IPC	20	Toko America Inc.	54
ITT Cannon/Sealectro	54	TWI	14
Johnstech International Corp.	54	UCLA Extension	16
Kalmus Engineering	48	Univ. Consortium for Contin. Ed.	16
Keithly Metrabyte	20	Univ. of Essex	16
Kintel Technologies	73	Univ. of Wisconsin-Milwaukee	16
KW Microwave Corp.	54	Varian Associates	20
Litton Amecom	56	Varian Canada Inc.	20
Lockheed Aeronautical Systems	20	Veda Inc.	14
M/A-COM Inc.	77, 82	Veritech Microwave	50
Maury Microwave Corp.	82	Wavetek Corp.	50
Measurement Science Conference	14	Webb Laboratories	82
Microsoft Corp.	20	Western Microwave	54

Power Transistor Manufacturers Aim for New RF Markets

By Gary A. Breed
Editor

RF power transistors continue to be an active part of RF research and product development. At this time, the primary force behind these products is the potential for large new markets in the 900-2450 MHz range. However, new satellite systems also represent a major area of development activity.

The continued move toward massive new markets in personal and business communications has been included in the strategy of nearly all RF power transistor makers. The traditional large manufacturers are extremely active, and at the same time, smaller companies are growing.

Young Companies Look for A Piece of Growing RF Business

Among the newer entrants into the RF power marketplace is RF Micro Devices, which is developing Heterojunction Bipolar Transistor technology (HBT) for digital cellular and other digital transmission applications, initially in the 800-1000 MHz range.

RF Products is developing MOSFET technology for linear amplification in the 900 MHz range, as well. A recent announcement was the WRLS0941 power amplifier module, a 1 watt device operating from a 12.5 volt supply.

MicroWave Technology continues its development of Solid State Triode (SST) technology with devices for HF, VHF and UHF/L-band. The company's SLAM linear internally-biased devices target medium and high power applications from 1-100 MHz, and their L-band pulsed power products have been developed for transponder and radar applications.

Modular products, devices with supporting circuitry to make complete amplifier modules, is another growing area of RF power transistor development. The demands for shortening the design cycle and for reducing manufacturing complexity are both served by value-added products. Power amplifiers using discrete components have traditionally been engineering-intensive, involving

matching network design, broadband optimization, allowances for variations in production specifications, plus mechanical considerations like mounting and heat dissipation. These issues are solved almost completely by designing a RF product with a drop-in power amplifier module.

Motorola, M/A-COM, MicroWave Technology, and Philips all offer amplifier modules that incorporate their transistors. Efforts are underway to meet additional needs for low voltage operation, low standby power consumption, good linearity for digital modulation and of course, lowest possible cost.

Applications and Requirements

The RF power applications seen as most important range from digital cellular to PCS to satellite communications. Other applications that are getting transistor manufacturers' close attention are MRI systems, RF heating and sputtering, television broadcasting, VHF/UHF mobile radio, collision avoidance radar. Military applications in voice and data communications at HF through microwaves, plus various countermeasures and radar systems, represent significant business at some companies, and continue to get special attention.

All digital transmission systems, including digital cellular and PCS require several performance features, including linear amplification for the complex digital modulation envelope, power control capability, and good efficiency, although this conflicts directly with the linearity requirement. Complicating product development and designer's choice of an appropriate device is the fact that the 900-2000 MHz range represents a transition region. Bipolar technology is not as simple as it is at lower frequencies, especially at higher powers needed for base stations, but GaAs FET devices are expensive and may have special DC power requirements. HBT devices and SST technology are other alternatives, as mentioned above.

Satellite communications remains a

strong market as more companies establish worldwide networks, maritime communications changes from HF to satellite, and as more aircraft are fitted with satellite communications links. California Eastern Laboratories is actively marketing NEC power MESFETs for satellite systems, including a new line for C-band (4.4-8.5 GHz) transponders, with per-device power output to 18 watts.

MRI has faded as a headline item, but these medical systems represent a significant market niche. Vacuum tubes and transistors share this market, which covers the 10-100 MHz range, with amplifier outputs in the hundred watt to kilowatt range.

Industrial applications at 13.56, 27.12 MHz and other ISM-bands are quietly growing. These heating, sputtering and plasma applications require high efficiency techniques, often using switching-mode amplifiers, although class C is the dominant technique. High power handling and efficiency are key transistor specifications.

VHF/UHF mobile radio systems are a well-established market, and many regions of the country are nearly saturated with users. Among companies active in this area is SGS-Thomson, which has made particular efforts to develop high power transistors for base stations. Inland and coastal marine radio is in this same part of the spectrum, and is a steadily growing market. These systems are virtually all FM, requiring straightforward class C amplifiers.

Military systems is a shrinking market, but fewer companies are targeting military applications for their products. The remaining business is a significant number of dollars, and companies which are successful at mixing a military and commercial customer base can realize continued profits.

This last example may be the best indicator of the RF market. There are many different applications to be served, and flexibility is as much a marketing asset as a good product line.

RF

EMPLOYMENT OPPORTUNITIES

COMWAVE located in Wilkes-Barre adjacent to the picturesque Pocono mountains of Pennsylvania, and is recognized as the leading designer and manufacturer of distance learning (ITFS) and wireless cable transmission products. COMWAVE supplies microwave transmitters, amplifiers, repeaters, and signal boosters worldwide. COMWAVE celebrates over a decade of dedicated quality services to the industries, including complete turnkey systems. COMWAVE seeks:

Circuit Design/Project Engineer

We are seeking an individual with 10 yrs recent microwave or RF analog circuit design experience and minimum 3 years project management experience. A BSEE is desired, but a combination of education and experience will be considered.

Field Service Engineer

Minimum 5 yrs installation/service experience in the microwave communications industry.

Test Technicians

A minimum of 3 yrs experience in related industry, excellent growth opportunities for individual with ASEE or education/experience equivalent.

Sales Engineers

Assertive professional with strong sales experience and technical background in electrical engineering. Salary plus commission provides high income for those willing to go the extra mile.



Convenient bus service to:
NYC
Philadelphia
Washington D.C.

The area offers:

Affordable Living

Hunting

Symphony

Camping

Art Galleries

FISHING

Education

skiing

Theatre

Int'l Airport

Parks (State & Local)

Boating Activities

Beautiful
Fall
Foliage

Tennis

Great
Shopping


Ballet

Low Crime

Clean, Crisp Air

Health Care

Triple A Baseball



INFO/CARD 48

div. of
Communication Microwave Corp.
Crestwood Industrial Park, P.O. Box 69
Mountaintop, PA 18707
Telephone: 717-474-6751
FAX: 717-474-5469

RF design MARKETPLACE

WHEN YOU ARE READY TO BUY-SELL-TRADE CALL RF DESIGN MARKETPLACE
Increase your REVENUES with RF Design Marketplace advertising! Over 40,000 prospects read and buy from this section each month. To reach this sophisticated, targeted market call Michael Applegate at (404) 618-0217 today.

RF career opportunities

SUNBELT OPPORTUNITIES

Several of our growing commercial major electronic companies located in the southeast have asked us to identify candidates in the mid-level experience range.

- 1) BSEE - to design analog/RF circuitry for receiver/transmitters in 300-900 MHTZ - P-Spice
- 2) BSEE - RF Test Engineer - 50 MHTZ to 1 GHZ. Spectrum analyzers, net work analyzers; HP Basic
- 3) BSEE - High power amplifier design engineer - Class AB 100-200 watts; 800-900 MHTZ
- 4) BSEE - Power supply design engineer - switch mode; power factor correction
- 5) MSEE - To design high efficiency power MMICs for military systems. L-Band thru KU Band (2-18 GHz). Knowledge of non-linear modeling.

fortune

PERSONNEL CONSULTANTS OF RALEIGH, INC.
P.O. Box 98388R • Raleigh, NC 27624-8388
Phone: 919-848-9929 • Fax: 919-848-1062
Stan Deckelbaum

INFO/CARD 55

IOWA MIDWEST

RF/MICROWAVE WIRELESS

WORK WITH AN RF ENGINEER IN YOUR MOVE TO THE MIDWEST!

My clients need top-notch RF Design Engineers and Managers, 3 to 10+ years experience, HF to 3.0 GHz. Receivers, Transmitters, Power Amplifiers, Synthesizers, Spread Spectrum, ASIC/MMIC Design, Modems, Communications DSP.

DON GALLAGHER MSEE

Phone: 319-895-8042 Fax: 319-895-6455
1145 LINN RIDGE RD. MT. VERNON, IA 52314

40 YEARS OF RF ENGINEERING, MANAGEMENT, AND PLACEMENT OF ENGINEERS

INFO/CARD 57

RF DESIGN MARKETPLACE

Get In • It Works

404-618-0217

ELECTRONICS ENGINEER - RF/COMMUNICATIONS

Research and development: radio-communication circuits, antennas, and systems. Requires knowledge of both theory and hardware, ability to write clearly and concisely. Minimum BSEE plus two year's experience. U.S. citizenship. Small, well-recognized company. Send resume to:

Dr. F. H. Raab
Green Mountain Radio Research
50 Vermont Ave.
Colchester, VT 05446

INFO/CARD 56

BIG SALES.

small packages.

Ask about our special advertising packages in RF DESIGN Marketplace.

Michael Applegate
Phone: (404) 618-0217
Fax: (404) 618-0342

...YOUR CAREER

Cellular Engineers: Design/develop Rf and analog circuits for high capacity cellular systems. Requires minimum of 2 years experience in any of the following: DSP, ASIC Design, Cae Development, Digital Modulation, Digital Mobile Communications, Channel Equalizers, Transmitter-Receiver Synthesizer or Audio Design, Digital Signal Processing.


Regional Sales Manager: Responsible for sales, promotion and technical support within a specified geographical region with the support of field sales representatives. Identifies new opportunities and coordinates efforts to secure contracts. Responsible for ensuring that field sales representatives are satisfying the customer's needs and providing technical training. This position requires a BS degree in electrical engineering with 1-3 years experience in the RF components industry. This person could be a design engineer with a desire to begin a sales career.

Analog Design EE: BSEE min., MSEE perf. • 5 to 7+ years design exp., professional maturity • Strong (85% of project history in analog board level design, DC to RF (500 MHz to 4 GHz) with module level exp., use of RF and microwave test equip. at these frequencies. • Exp. in analog/digital interfacing and in design tradeoffs in processing signals in analog and digital sections • Self-starter; able to plan, design, and prototype proof-of-concepts, a hands-on person • Adaptable personality (a specialist in one or more application areas but welcoming any opportunity to dive into another) • Analog and digital circuit breadboarding and debugging exp.

Consumer Electronics Engineer: Design and development of microwave compon waveguide horn antennas, X and Ka-band Gunn Diode oscillators, mixers, VCO's filters/receiver front ends. BSEE

Satcom Systems: Familiarity with equipment and systems utilized by broadcast organizations for the distribution of analog and digital audio programming via satellite. Familiarity with the following specific technical areas: communications systems design, data communications principles, modern design, satellite communications receiver design, and satellite link budget calculations.

RFIC Design: MS or PhD in Electrical Engineering with minimum 5 years related experience preferred. The candidate should have a good knowledge and experience in Linear Bipolar High Frequency IC design and measurement techniques in design IC's like Amplifiers, Mixers, Oscillators, VCO's, Prescalers, Synthesizers, Limiting Amplifiers, etc. operating up to 2 GHz in Bipolar or BiCMOS technologies.



MMIC Design Engineer: Develop L/S band GaAs MMIC power amplifiers for commercial wireless communications. Requires: M.S. or BSEE, +2 years experience with GaAs MMIC design, simulation, packaging and test.

Design Engineer: Responsible for the design and development of 900 MHz wireless consumer electronic products. Designed and developed AM/FM/FSK transmitters/receivers in 902-926 MHz frequency range. Hands-on experience on HF/VHF/UHF systems and subsystems which includes LNAs, medium power amplifiers, down converters, saw and coaxial resonator oscillators, VCOs, AM/FM IF systems, RF modulators/demodulators, PLLs & Audio video circuits.

MICRO COMMUNICATIONS EXECUTIVE SEARCH

871 Turnpike St. • North Andover, MA 08145

We specialize in the placement of communications both nationally and internationally.

FOR THESE AND OTHER OPENINGS
CALL COLLECT: TEL: 508-685-2272

FAX: 508-794-5627

INFO/CARD 58

RF career opportunities



AXONN CORP. is the leading supplier of high performance, low cost, embedded spread spectrum technology. Axonn's Fortune 500 customers integrate our SW and HW designs into an impressive array of innovative, very high volume applications. Our designers work hand-in-hand with engineers worldwide to create future product lines. Axonn continually researches new, patentable RF communication techniques. If you want challenge, variety, design creativity and the growth available in a smaller company, call or FAX your resume.

SENIOR & STAFF RF DESIGN ENGINEERS

Hands-on design exp. required with freq. synthesizers, rcvr. design, X-mitter design and 900 to 2400 MHz. Must be proficient with RF modeling software such as Touchtone or Eagleware and familiar with surf. mount. 5 to 10 yrs. exp. required for Sr. position.

Phone: (504) 282-8119 Fax: (504) 282-0999

INFO/CARD 59

Interested in placing an ad in RF DESIGN MARKETPLACE?

Contact: Michael Applegate
6151 Powers Ferry Road N.W.
Atlanta, GA 30339
Phone: (404) 618-0217
Fax: (404) 618-0342

RF products

- Voltage Controlled Oscillators
- Phase Locked Oscillators
- Frequency Synthesizers
- Radar Receivers
- Subsystems
- Integrated Assemblies

delphi
Components, Inc.
A Division of Aura Systems Inc.

27721-A La Paz Road
Laguna Niguel, CA 92677
Ph: 408.280.7073 Fax: 408.280.1633

INFO/CARD 60

RF products & services


COMTRONIX SYSTEMS, INC.

**CUSTOMIZED
SOLID STATE • HIGH POWERED • VHF/UHF
AMPLIFIERS**

**DESIGNED AND BUILT TO YOUR SPECIFICATIONS
UP TO 200 WATTS
HIGHEST QUALITY/BEST PRICES**

CALL OR SEND FOR INFORMATION TEL 413/785-1313 FAX 413/739-1352

INFO/CARD 61



- STD. 5 AND 10 MHZ OCXO
- TCXO • VCXO • TC-VCXO
- VCO's • CLOCK OSCILLATORS
- CUSTOMIZED CRYSTAL FILTERS
STD. 10.7 MHZ, 21.4 MHZ and 45 MHZ
- L/C FILTERS

Call or Fax your requirements.

16406 N. Cave Creek Rd. #5
Phoenix, AZ 85032-2919
Phone & Fax (602) 971-3301

INFO/CARD 62

NOVA RF Systems, Inc.

The Complete RF/Microwave Solution



- RF/Microwave Systems
- Custom Design/Consulting
- Simulation Software
- Synthesizers (PLL/DDS)
- Complete Lab/Machine Shop
- TDMA/CDMA/Spread Spectrum

International Inquiries Welcome
1740 Pine Valley Dr. Vienna, VA 22182
(703) 255-2353

INFO/CARD 63

CAL CRYSTAL LAB., INC. • COMCLOCK, INC.

Need Clock Oscillators or Crystals? Call 1-800-333-9825 • 714-991-1580

Quartz Crystals 50Khz to 200Mhz

TTL Clock Oscillators 250Khz to 70Mhz

HCMOS Clock Oscillators 3.5Mhz to 50Mhz

Tri-State, Half Size and Surface Mount also available on request

Fast Service - 3 weeks or less

Special frequencies our speciality

1142 N. Gilbert, Anaheim, CA 92801 • FAX 714-491-9825

INFO/CARD 64

PCFILT

L-C and transmission
line filter design and
analysis for your
PC compatible

After 6 years of development, could this
be the best thing since sliced bread?

You be the judge!

ALK Engineering
7525 Titleist Dr.
Salisbury, Maryland 21801
Fax (410) 860-9069

INFO/CARD 65

Interested in placing an ad in RF DESIGN MARKETPLACE?

Contact: Michael Applegate
6151 Powers Ferry Road N.W.
Atlanta, GA 30339
Phone: (404) 618-0217
Fax: (404) 618-0342

RSG-10 SIGNAL GENERATOR

The \$2495 profit generator
Quality crafted in the USA

Finally, a synthesized signal generator that's designed to help you generate more than just signals. The Ramsey RSG-10, is the signal generator you can afford, the signal generator that's designed to do what a signal generator is meant to do- provide a very stable, accurate, easy to control signal from 100 KHz to 1.0 Ghz.

For the price, you wouldn't expect any more. But, there is more to the RSG-10. An intelligent microprocessor controlled/programmable memory, for example, can store up to 20 of your most commonly used test set-ups. And unlike other units, just one touch of the memory exchange button is all it takes to quickly shift from one test set-up to another. You get more work done, easier and faster.

At \$2495, the Ramsey RSG-10 is your profit generator.

RAMSEY

RAMSEY ELECTRONICS
793 CANNING PARKWAY, VICTOR, NY 14584
Fax: (716) 924-4555
TELEX: 466735 RAMSEY CI



ORDER DIRECT—CALL 1-800-446-2295

INFO/CARD 66

FREQUENCY CONTROL PRODUCTS

CRYSTAL OSCILLATORS

CRYSTAL OVENS

VCXO's

M05

TCXO's

M18

OCXO's

M43

✓LOW PROFILE

✓SINE OR SQUARE WAVE

✓TIGHT STABILITIES

✓PHASE LOCKING INPUTS

✓INTERNAL SMD CONSTRUCTION

ISOTEMP
RESEARCH, INC.

P.O. Box 3389 Charlottesville VA 22903
(804) 295-3101 FAX (804) 977-1849

INFO/CARD 67

Advertiser Index

ADVERTISER.....	PAGE #
ALK Engineering	81
Amplifier Research.....	49
Anderson Laboratories.....	86
Arrowsmith Shelburne, Inc.....	69
Axon Corp.	61,80
CAL Crystal Laboratory, Inc.	
- Comlock, Inc.	80
California Eastern Labs.....	19,21
Coilcraft.....	33
Communications Concepts.....	76
Compact Software	26-27,39
Comtronix Systems, Inc.....	80
Comwave	78
DAICO Industries, Inc.....	6
Delphi Components, Inc.....	80
ENI	65
ETF Technology, Inc.	64
Fortune.....	79
Gallagher and Associates.....	79
Green Mountain Radio Research	79
Giga-tronics	12-13
Henry Radio	38
Hewlett-Packard/Sig. Ana. Div.....	40-41
IFR Systems, Inc.....	3
International Crystal Mfg. Co., Inc.....	29
Isotemp Research, Inc.....	81
Jan Crystals	10
JFW Industries, Inc.	53,71

ADVERTISER.....	PAGE #
Kalmus Engineering.....	9
KS Electronics.....	80
Loral Microwave - FSI.....	67
M/A COM (3 divisions)	43
Marconi	45
Merrimac	11
MFJ Enterprises.....	75
Micro Communications Executive Search	79
Mini-Circuits	4-5,23,57,63
Motorola	2
Motorola - GEG.....	85
Murata Erie North America	47
Nova RF Systems, Inc.	80
Oak Frequency Control.....	55
Penstock, Inc.	52
Programmed Test Sources, Inc.....	25
Q-Bit Corp.	32
Ramsey Electronics	81
Richardson Electronics Corp.	35,37
Sharp Microelectronics Group	30-31
Silicon Valley Power Amplifiers.....	36
Sprague Goodman Electronics, Inc.	15
Synergy Microwave Corp.....	51
Temex Electronics.....	16
Tesoft, Inc.....	14
Trilithic.....	17
Voltronics	10
Werlatone, Inc.....	8

RF software

GPS API

Rockwell Intl. Corp. now offers Application Programming Interfaces (APIs) for its NavCard™, MicroTracker™ and NavCore V™ GPS receiver engines. The GPS engine API currently supports DOS and Windows operating systems and provides access to a wide variety of GPS-related parameters, as well as standard interface features. The API is available at no cost to qualified application developers and software publishers.

Rockwell International Corp.
INFO/CARD #211

Multi-Processor DSP Code

MultiProx 1.2 automatically creates multiple programs from a single DSP algorithm optimized to run on multiple processors. The algorithms are developed using Comdisco's DSP Framework™ program. The code is generated, compiled and downloaded to each processor. All necessary inter-processor communications are completed automatically. MultiProx supports Motorola's DSP96002 and TI's TMS320C30/C40 floating point processors. MultiProx 1.2 is immediately available and priced at \$15,000.

Comdisco Systems, Inc.
INFO/CARD #210

Intermodulation-Test Software

Maury Microwave announces the availability of PC based software for the Maury Automated Tuner System, designed to provide fast, accurate characterization of the intermodulation distortion (IMD) parameters of a device. The new MT993D IMD application software is an add-on to the Maury Power Characterization Software, and provides graphic and tabular displays of several parameters.

Maury Microwave Corp.
INFO/CARD #209

Site Interference

ComSitePlus™ is an integrated communications site RF interference analysis package. The program automatically looks-up digitized transmitter noise and receiver de-sense curves, vertical and horizontal space isolation graphs, insertion and rejection losses, and other curves. ComSitePlus calculates actual signal levels in intermod "hit" lists and allows a user to concentrate on only the "hits" most likely to cause receiver problems.

Douglas Integrated Software
INFO/CARD #208

Active Filter Design

AFDplus is an active filter design and analysis package. The package creates low-pass, highpass, bandpass, bandstop and all-pass filters, using any of several response functions. The menu-driven program includes sensitivity and worst case analyses, PLL synthesis and analysis, netlist generation and cascaded filter designs. AFDplus ships from stock for \$995.

Webb Laboratories
INFO/CARD #207

RF literature

Standard Parts Catalog

The Standard Parts Catalog from Synergy Microwave contains descriptions of Synergy's lines of surface mount mixers, surface mount power dividers, surface mount 90° hybrids, surface mount 180° hybrids, wideband 90° hybrids, and passband filters. Also included in the 38-page catalog are a surface mount tutorial and technical articles on SMD-MIL packaging and a metal hermetic SMT package.

Synergy Microwave Corporation
INFO/CARD #206

Switch/Attenuator Catalog

M/A-COM has published a new GaAs MMIC Switch and Attenuator catalog. The catalog provides product specifications, application notes and outline drawings for components designed for cellular, PCN/PCS, IVHS, GPS, medical and military applications. Among the products in this expanding product line are eight new plastic components.

M/A-COM, Inc.
INFO/CARD #205

UHF Radio Products

An updated guide to RF Monolithics' (RFM) low-power UHF radio products is now available from the company. The guide lists RFM's wireless products for original equipment manufacturers. SAW components within the 224 to 928 MHz range are matched to frequencies used around the world. Surface mount hybrid AM transmitters, resonators, and delay lines are among the devices listed.

RF Monolithics, Inc.
INFO/CARD #204

Full Line Catalog

Active and passive devices operating in the 5 MHz to 26.5 GHz range are described in Microwave Communications Laboratories' 85-page catalog. Dividers/combiners, couplers, hybrids, D.R.O.s, filters, switches, terminations and attenuators are among the products described.

Microwave Communications Laboratories, Inc.
INFO/CARD #203

Historical MIL Specs

Information Handling Services® has announced that its collection of unclassified, canceled and superseded U.S. Military Specifications, Standards, Drawings and related documents is now available on CD-ROM.

Over 190,000 documents and 1.29 million pages are represented.

Information Handling Services
INFO/CARD #202

Inductor Catalog

A 52-page catalog of inductive components for RF applications is available from Coilcraft. It includes detailed specifications on a broad range of surface mount inductors and transformers, tunable inductors, axial lead chokes, wideband RF transformers, LC filter modules, test fixtures, tuning tools and low cost designer's kits.

Coilcraft
INFO/CARD #201

Trimmer Catalog

Sprague-Goodman offers a four-page engineering bulletin featuring their complete line of trimmer capacitors and inductors for microwave tuning. Bulletin SG-670 incorporates features and specifications, plus photos, outline drawings and charts for the six elements available: metallic tuning elements, dielectric tuning elements, metallic and dielectric tuning rotors, dielectric resonator tuners, LC tuning elements and resistive tuning elements.

Sprague-Goodman Electronics, Inc.
INFO/CARD #200

Antenna Catalog

Antenna Research's 130-page catalog of transmit and receive antennas and accessories for communication, direction finding, GPS, telemetry, search and surveillance is now available. The catalog covers a full range of omnidirectional, directional and hemispherical coverage antennas from 100 Hz to 40 GHz. Accessories include field intensity meters, tripods, preamps, rotators, masts and an antenna analyzer.

Antenna Research Associates, Inc.
INFO/CARD #199

Semiconductor Data Book

Raytheon Semiconductor has published a 1994 data book detailing their high performance products targeted for video processing, multimedia, test & instrumentation, avionics and high-speed communications. The 1700 page book incorporates information on all Raytheon Semiconductor's standard and application specific products and capabilities.

Raytheon Semiconductor
INFO/CARD #198

RF DESIGN (ISSN:0163-321X USPS: 453-490) is published monthly and semi-monthly in August. January 1994. Vol.17, No. 1. RF Design is a registered trademark of Argus Inc. Copyright 1994 by Argus Business, a division of Argus Inc., 6151 Powers Ferry Road, NW, Atlanta, GA 30339, (404) 955-2500; Scott Smith, President; Wayne Otterbourg, C.P.A., Vice President, Finance; Arthur E. Sweum, Senior Vice President; Dennis Corcoran, President, Argus Trade Shows. Editorial and advertising offices at 6300 S. Syracuse Way, Suite 650, Englewood, CO 80111, (303) 220-0600. Printed in USA. Second-Class Postage paid at Englewood, CO and at additional mailing offices. Subscription office: RF Design, P.O. Box 1077, Skokie, IL 60076. Subscriptions are: \$39 per year in the United States; \$49 per year for foreign countries. Additional cost for first class mailing. Payment must be made in U.S. funds and accompany request. If available, single copies and back issues are \$5.00 each (in the U.S.). This publication is available on microfilm/fiche from University Microfilms International, 300 Zeeb Road, Ann Arbor, MI 48106 USA (313) 761-4700. Authorization to photocopy items for personal use is granted by RF Design, provided the base fee of \$3 is paid directly to Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923 and provided the number of copies is fewer than 100. For authorization, contact the Copyright Clearance Center at (508) 750-8400. The Transactional Reporting Service fee code is: 0163-321X/94/\$3.00. For those seeking 100 or more micro copies, please contact the magazine directly at (303) 220-0600.

SUBSCRIPTION INQUIRIES: (708) 647-0756.

POSTMASTER & SUBSCRIBERS: Please send address changes to R.F. Design, P.O. Box 1077, Skokie, IL 60076.


R-2600

Bob Wendt of Canyon State Communications

"We take it to the mountain."




"We bought our Motorola R-2600s for features, ease-of-use, and quality. As an independent two-way service business we are always looking for equipment that will help us get the job done right. Computerized, digital accuracy, with an analog feel. Dependable on the job. I particularly like its software upgrades. Our regular use of the R-2600 is on the bench, but when necessary (just about every day) we take it to the mountain."



Bob Wendt


Bob Wendt, Manager
Phoenix Technical Operations
Canyon State Communications

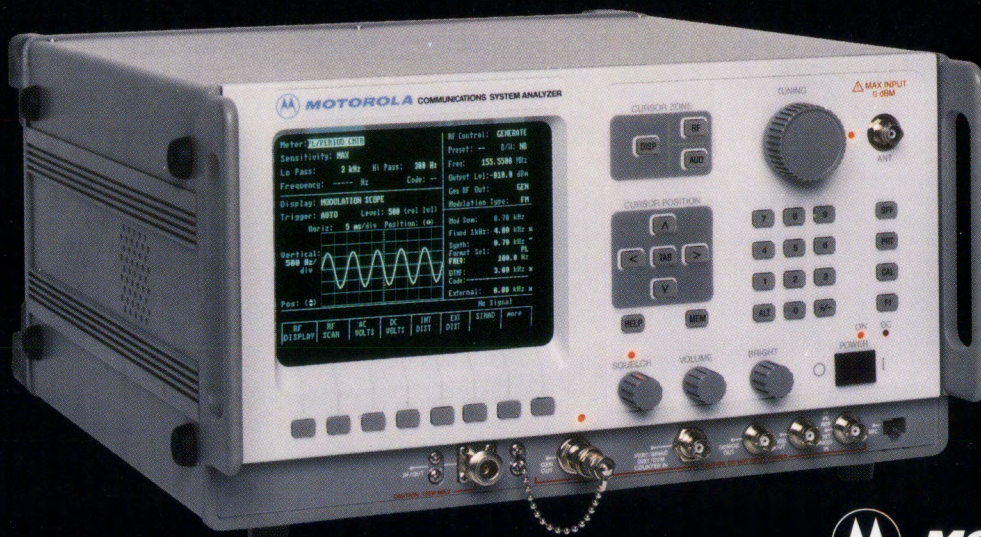

MOTOROLA
Test Equipment CBU

For more information call 1-800-235-9590

INFO/CARD 49

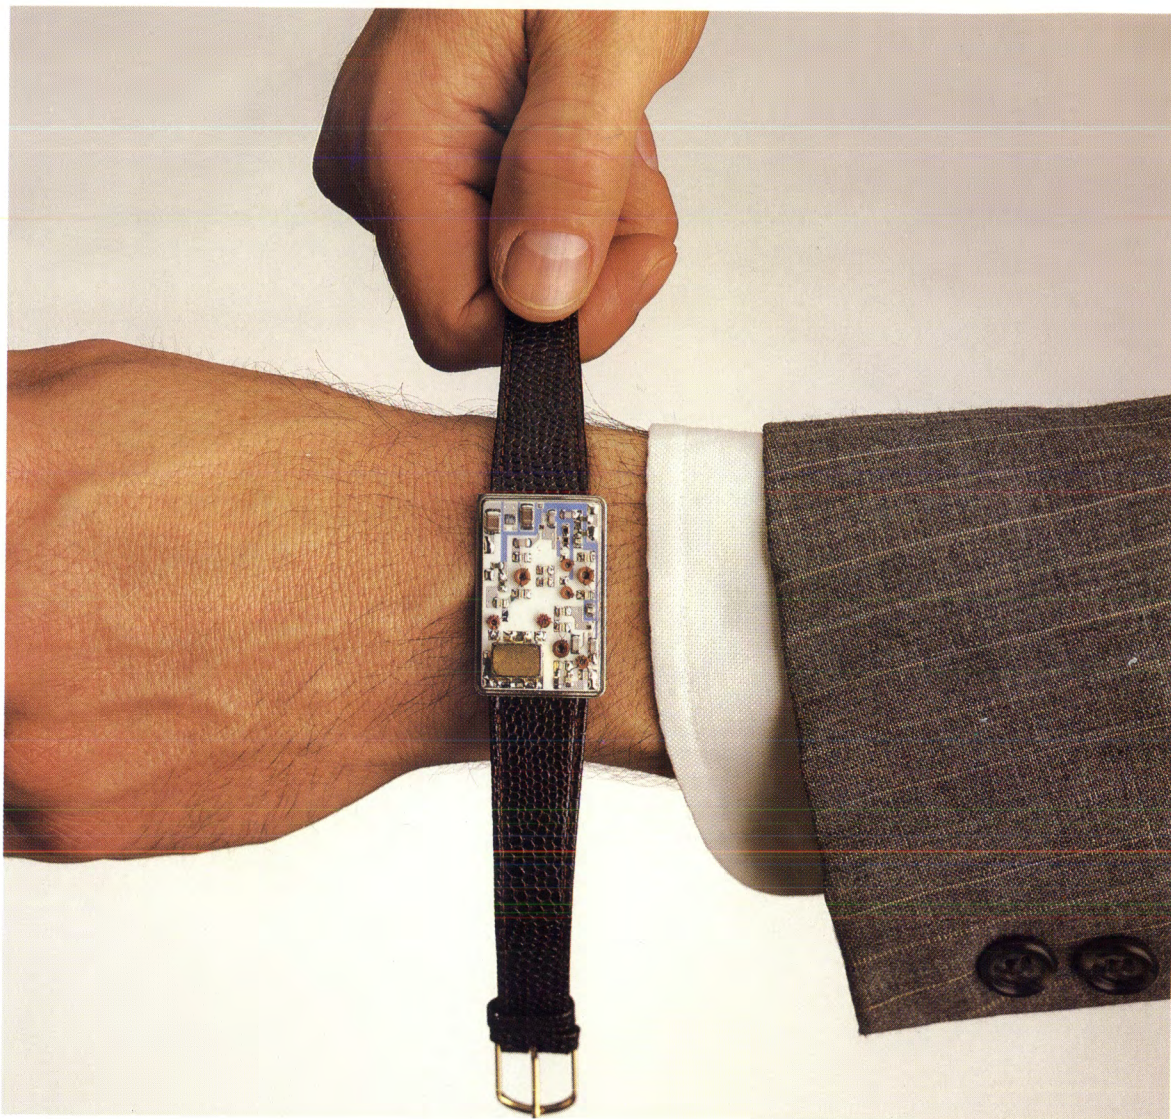

**You can't buy
a better precision
timepiece for
under 2.4 GHz.**

If you're operating in a frequency range from 100 MHz to 2.4 GHz, you can't buy a better oscillator than an Andersen VCO. It gives you the highest spectral purity with the lowest spurious ($> -60\text{dB}$). And typical single sideband phase noise of $> -119\text{dBC @1 KHz offset}$.

It's compact. It's rugged. It operates in temperatures up to 100°C . It can be tuned up to 1.5 MHz or phase-locked to a reference. Plus, its low mass and low profile make it ideal for surface-mount technology, DILS or flatpaks.

Isn't it about time you discovered the precision, the versatility and simplicity of designing with Andersen oscillators? Contact Andersen Laboratories, 45 Old Iron Ore Road, Bloomfield, CT 06002. Telephone (203) 286-9090/FAX 203-242-4472.

 **ANDERSEN LABORATORIES**