

This article was downloaded by:

On: 25 January 2011

Access details: *Access Details: Free Access*

Publisher *Taylor & Francis*

Informa Ltd Registered in England and Wales Registered Number: 1072954 Registered office: Mortimer House, 37-41 Mortimer Street, London W1T 3JH, UK



Separation Science and Technology

Publication details, including instructions for authors and subscription information:

<http://www.informaworld.com/smpp/title~content=t713708471>

Solution of the Diffusion Equations in a Gas Centrifuge for Separation of Multi component Mixtures

Chuntong Ying^a; Zhixiong Guo^a; Houston G. Wood^b

^a DEPARTMENT OF ENGINEERING, PHYSICS TSINGHUA UNIVERSITY, BEIJING, PEOPLE'S REPUBLIC OF CHINA ^b Department Of Mechanical, AEROSPACE AND NUCLEAR ENGINEERING UNIVERSITY OF VIRGINIA, CHARLOTTESVILLE, VIRGINIA, USA

To cite this Article Ying, Chuntong , Guo, Zhixiong and Wood, Houston G.(1996) 'Solution of the Diffusion Equations in a Gas Centrifuge for Separation of Multi component Mixtures', Separation Science and Technology, 31: 18, 2455 — 2471

To link to this Article: DOI: 10.1080/01496399608001059

URL: <http://dx.doi.org/10.1080/01496399608001059>

PLEASE SCROLL DOWN FOR ARTICLE

Full terms and conditions of use: <http://www.informaworld.com/terms-and-conditions-of-access.pdf>

This article may be used for research, teaching and private study purposes. Any substantial or systematic reproduction, re-distribution, re-selling, loan or sub-licensing, systematic supply or distribution in any form to anyone is expressly forbidden.

The publisher does not give any warranty express or implied or make any representation that the contents will be complete or accurate or up to date. The accuracy of any instructions, formulae and drug doses should be independently verified with primary sources. The publisher shall not be liable for any loss, actions, claims, proceedings, demand or costs or damages whatsoever or howsoever caused arising directly or indirectly in connection with or arising out of the use of this material.

Solution of the Diffusion Equations in a Gas Centrifuge for Separation of Multicomponent Mixtures

CHUNTONG YING and ZHIXIONG GUO

DEPARTMENT OF ENGINEERING PHYSICS
TSINGHUA UNIVERSITY
BEIJING, PEOPLE'S REPUBLIC OF CHINA

HOUSTON G. WOOD

DEPARTMENT OF MECHANICAL, AEROSPACE AND NUCLEAR ENGINEERING
UNIVERSITY OF VIRGINIA
CHARLOTTESVILLE, VIRGINIA, USA

ABSTRACT

The demand for stable isotopes in physical and chemical research and in medical diagnostics is growing, and the gas centrifuge process is able to provide large quantities of stable isotopes. A set of diffusion equations describing separation in a gas centrifuge for a multicomponent mixture is established. These equations involve general diffusion coefficients. Using the radial averaging method and the simplified diffusion transport vector for a multicomponent isotopic mixture, nonlinear partial differential equations are transformed to a set of nonlinear ordinary differential equations. An iteration method for the solution is presented. The relationship between the separation factor and the mass difference, $\gamma_{ij} = \gamma_0^{M_j - M_i}$, is shown to be in agreement with both the computational and the experimental results with very high precision.

Key Words. Gas centrifuge; Diffusion equation; Multicomponent mixture; Stable isotopes; Separation

1. INTRODUCTION

Over the past years, many countries have developed the gas centrifuge to separate the binary mixture of $^{235}\text{UF}_6$ and $^{238}\text{UF}_6$ for producing uranium

enriched in the fissionable isotope ^{235}U for fuel in nuclear reactors. Recently, with the growing demand for stable isotopes in physical and chemical research and in medical diagnostics, the use of the gas centrifuge process has made it possible to produce many different isotopes, especially when large quantities are needed. Many countries [such as the United States (1, 2), Russia (3–5), and China (7)] and organizations [URENCO (6)] have reported their activities in the public literature in the field of multicomponent separation by gas centrifuge.

In a recent paper, Wood et al. (8) discussed multi-isotope separation in a gas centrifuge. In that paper they solved Onsager's pancake equation for the countercurrent flow field and the diffusion equation for each isotope. This solution method was connected to an algorithm which optimizes the centrifuge's performance. In the analysis, the diffusion coefficient was assumed to be the same throughout the centrifuge, a good assumption for gases with large molecular weights and small differences in the molecular weights of the isotopes. However, when these conditions are not met, variations in the diffusion coefficient may be important.

The object of the present paper is to establish a general set of diffusion equations describing the separation phenomena in a gas centrifuge for multicomponent mixtures. The diffusion equations in a gas centrifuge for multicomponent mixtures are different from those for binary mixtures because general diffusion coefficients are involved. These equations are a set of nonlinear partial differential equations. Using the radial averaging method (9–12) and the simplified diffusion transport vector for multicomponent isotopic mixtures (13), nonlinear ordinary differential equations are obtained. An iteration method of the solution is presented. The computational and experimental results show the separation factor, γ_{ij} , may be expressed as $\gamma_{ij} = \gamma_0^{M_j - M_i}$, where γ_0 is the overall separation factor for the unit mass difference, and M_i and M_j are the molecular weights of the i th and the j th component, respectively. This relationship is compared with the experimental data and is found to agree with very high precision.

2. DIFFUSION EQUATIONS AND DIFFUSION COEFFICIENTS FOR MULTICOMPONENT MIXTURES

For a mixture of n components, the diffusion transport vector \mathbf{J}_i of the i th isotope is (14)

$$\mathbf{J}_i = -\rho \frac{M_i}{M} C_i \left(\sum_{j=1}^n D_{ij} \mathbf{d}_j + D_i^T \nabla \ln T \right); \quad i = 1, 2, \dots, n \quad (2.1)$$

where ρ is the density of the mixture, C_i is the concentration of the i th

component, M_i is the molecular weight of the i th component, \bar{M} is the average molecular weight of the mixture, i.e., $\bar{M} = \sum_{i=1}^n M_i C_i$, D_{ij} are the general multicomponent diffusion coefficients (GMDC), and \mathbf{d}_j is the diffusion driving force, which could be written as (15)

$$\mathbf{d}_j = \nabla C_j + C_j \left(1 - \frac{M_j}{\bar{M}} \right) \nabla \ln p - \frac{M_j}{\bar{M}} \frac{C_j}{p} \left(\rho \mathbf{F}_j - \sum_{k=1}^n \rho_k \mathbf{F}_k \right); \quad (2.2a)$$

$$j = 1, 2, \dots, n$$

$$\sum_{j=1}^n \mathbf{d}_j = 0 \quad (2.2b)$$

where p is the pressure, \mathbf{F}_k is the external body force per unit mass of the k th component, and ρ_k is the density of the k th component. If we consider the process gas is rotating in the gas centrifuge with angular velocity Ω , then $\mathbf{F}_j = \Omega^2 \mathbf{r}$. Because $\rho = \sum_{k=1}^n \rho_k$, the last two terms in Eq. (2.2a) are eliminated and we obtain

$$\mathbf{d}_j = \nabla C_j + C_j \left(1 - \frac{M_j}{\bar{M}} \right) \nabla \ln p; \quad j = 1, 2, \dots, n \quad (2.3)$$

The GMDC are determined by (14)

$$\sum_{k=1}^n \frac{C_i C_k}{\mathfrak{D}_{ik}} (D_{ij} - D_{kj}) = \delta_{ij} - \frac{M_i}{\bar{M}} C_i; \quad j = 1, 2, \dots, n-1 \quad (2.4a)$$

$$\sum_{i=1}^n M_i C_i D_{ij} = 0 \quad (2.4b)$$

here δ_{ij} is the Kronecker delta and \mathfrak{D}_{ik} is the binary diffusion coefficient (15)

$$\mathfrak{D}_{ik} = 2.628 \times 10^{-7} \frac{T^{3/2} \sqrt{(M_i + M_k)/(2M_i M_k)}}{p \sigma_{ik}^2 \Omega_{ik}^{(1,1)}} [\text{m}^2/\text{s}] \quad (2.5)$$

where p (atm) is the pressure, σ_{ik} (10^{-10} m) is the molecular interaction diameter; $\Omega_{ik}^{(1,1)}$ is the integral of interaction for molecular mass transfer; M_i and M_k (mole) are the molecular weights of the i th and k th component, respectively; and T (K) is the temperature. \mathfrak{D}_{ik} does not depend on the concentration C_i or C_k , but from Eq. (2.4) one finds that D_{ij} is a function of the concentration.

Using Eqs. (2.1) to (2.5) to obtain the diffusion transport vector in the gas centrifuge, we assume that the term of thermal diffusion $D_i^T \nabla \ln T$ in Eq. (2.1) is negligible.

As for the diffusion coefficients, Levin and Ying (13) showed that if any transformation such as

$$\bar{D}_{ij} = D_{ij} + A_i^* \quad (2.6)$$

gives a new value of the diffusion coefficient \bar{D}_{ij} , the diffusion transport vector of \mathbf{J}_i is unchanged. This is because

$$\sum_{j=1}^n A_i^* \mathbf{d}_j = A_i^* \sum_{j=1}^n \mathbf{d}_j = 0 \quad (2.7)$$

Reference 13 also shows that for an isotopic mixture with large molecular weights and a small difference in the molecular weights of the isotopes, the diffusion coefficient $C_i D_{ij}^{is} \approx \mathfrak{D}_i (\delta_{ij} - M_i / \bar{M})$ is diagonally dominant, where

$$\mathfrak{D}_i = \left(\sum_{k=1}^n \frac{C_k}{\mathfrak{D}_{ik}} \right)^{-1}$$

We may take

$$C_i \bar{D}_{ij}^{is} = \mathfrak{D}_i \delta_{ij} \quad (2.8)$$

Then the approximate diffusion transport vector \mathbf{J}_i in the gas centrifuge for an isotopic mixture is obtained as

$$\mathbf{J}_i = -\rho \frac{M_i}{\bar{M}} \mathfrak{D}_i \left[\nabla C_i + \left(1 - \frac{M_i}{\bar{M}} \right) C_i \nabla \ln p \right] \quad (2.9)$$

The diffusion equations in steady state are a set of mass conversation equations for each component in the mixture. They are

$$\nabla \cdot \left(\rho \mathbf{V} \frac{M_i}{\bar{M}} C_i + \mathbf{J}_i \right) = 0; \quad i = 1, 2, \dots, n-1 \quad (2.10a)$$

$$C_n = 1 - \sum_{i=1}^{n-1} C_i \quad (2.10b)$$

where \mathbf{V} is the velocity of the mixture. The first term in Eq. (2.10a) is the convection vector of the i th component and the second term is the diffusion transport vector. By substituting Eq. (2.9) into Eq. (2.10), a set of concentration equations is obtained:

$$\begin{aligned} \rho V_r \frac{\partial C_i}{\partial r} - \frac{\rho \mathfrak{D}_i}{r} \frac{\partial}{\partial r} \left[r \frac{\partial C_i}{\partial r} + \frac{\Omega^2 r^2}{RT} (\bar{M} - M_i) C_i \right] \\ + \rho V_z \frac{\partial C_i}{\partial z} - \rho \mathfrak{D}_i \frac{\partial^2 C_i}{\partial z^2} = 0; \quad i = 1, 2, \dots, n-1 \end{aligned} \quad (2.11a)$$

$$C_n = 1 - \sum_{i=1}^{n-1} C_i \quad (2.11b)$$

where V_r is the radial component of the velocity and V_z is the axial component of the velocity. The boundary conditions are as follows:

a. There is no radial transport at the rotor wall and on the axis.

$$\text{at } r = r_a, \quad \frac{\partial C_i}{\partial r} + \frac{\Omega^2 r_a}{RT} (\bar{M} - M_i) C_i = 0 \quad (2.12a)$$

$$\text{at } r = 0, \quad \frac{\partial C_i}{\partial r} = 0 \quad (2.12b)$$

where r_a is the radius of the rotating cylinder.

b. The axial transport over the end caps equals the withdrawal flow rate.

$$\text{at } z = 0, \quad \int_0^{r_a} \left(-\rho \mathcal{D}_i \frac{\partial C_i}{\partial z} + \rho V_z C_i \right) 2\pi dr = -F(1 - \theta) C_i^w; \quad (2.13a)$$

$$i = 1, 2, \dots, n$$

$$\text{at } z = Z_H, \quad \int_0^{r_a} \left(-\rho \mathcal{D}_i \frac{\partial C_i}{\partial z} + \rho V_z C_i \right) 2\pi dr = -F\theta C_i^p; \quad (2.13b)$$

$$i = 1, 2, \dots, n$$

where Z_H is the length of the gas centrifuge. F is the feed flow rate, and θ is the "cut," i.e., the product flow rate equals θF .

In addition, the feed concentration C_i^F of the i th component is related to product concentration C_i^P and waste concentration C_i^W of the i th component by the overall balance equation for the i th component:

$$C_i^F = \theta C_i^P + (1 - \theta) C_i^W; \quad i = 1, 2, \dots, n \quad (2.14)$$

It is obvious that Eq. (2.11) are a set of nonlinear partial differential equations. The coefficient \mathcal{D}_i and average molecular weight \bar{M} in Eq. (2.11a) are dependent on the concentration.

3. RADIAL AVERAGING APPROXIMATION METHOD FOR THE SOLUTION OF THE DIFFUSION EQUATIONS

An averaged concentration of the i th isotope \bar{C}_i is defined as

$$\bar{C}_i = \frac{1}{\pi r_a^2} \int_0^{r_a} C_i 2\pi r dr; \quad i = 1, 2, \dots, n \quad (3.1)$$

The variable \bar{C}_i depends only on the axial coordinate z .

The stream function ψ is defined as

$$\psi(r, z) = \int_0^{r_a} \rho V_z 2\pi r dr \quad (3.2)$$

Then we have

$$\partial\psi/\partial r = 2\pi r \rho V_z \quad (3.3)$$

The radial convection term $\rho V_r(\partial C_i/\partial r)$ in Eq. (2.11) can be neglected because the radial component V_r of the velocity is predominant over the axial component V_z only in the very thin Ekman layers near the end caps. The diffusion term $-\rho \mathcal{D}_i(\partial^2 C_i/\partial z^2)$ is negligible also. Integrating Eq. (2.11a) over r , we obtain

$$\begin{aligned} \frac{\partial C_i}{\partial r} &= -\frac{\Omega^2 r}{RT} (\bar{M} - M_i) C_i + \frac{1}{r \rho \mathcal{D}_i} \frac{d\bar{C}_i}{dz} \int_0^r \rho V_z r' dr' \\ &= -\frac{\Omega^2 r}{RT} (\bar{M} - M_i) C_i + \frac{\psi}{2\pi r \rho \mathcal{D}_i} \frac{d\bar{C}_i}{dz}; \quad i = 1, 2, \dots, n \end{aligned} \quad (3.4)$$

We introduce the net axial flow flux of the i th component P_i^* , as

$$P_i^* = \int_0^{r_a} \left(J_{iz} + \rho C_i V_z \frac{M_i}{M} \right) 2\pi r dr; \quad i = 1, 2, \dots, n \quad (3.5)$$

The net axial flow flux of mixture, P^* , is

$$P^* = \sum_{i=1}^n P_i^* \quad (3.6)$$

Using integration by parts, we obtain

$$\begin{aligned} \int_0^{r_a} 2\pi r \rho V_z C_i dr &= \int_0^{r_a} \frac{\partial \psi}{\partial r} C_i dr = \psi C_i \Big|_{z, r=r_a} \\ &- \int_0^{r_a} \psi \frac{\partial C_i}{\partial r} dr = P^* \bar{C}_i(z) - \int_0^{r_a} \psi \frac{\partial C_i}{\partial r} dr \end{aligned} \quad (3.7)$$

Substituting Eq. (3.7) into Eq. (3.5), we have

$$\begin{aligned} P_i^* &= \frac{M_i}{M} \left[P_i^* \bar{C}_i(z) - \int_0^{r_a} \psi \frac{\partial C_i}{\partial r} dr - \int_0^{r_a} \rho \mathcal{D}_i \frac{d\bar{C}_i}{dz} 2\pi r dr \right]; \\ i &= 1, 2, \dots, n \end{aligned} \quad (3.8)$$

Using Eq. (3.4) from Eq. (3.8), we obtain

$$\left(\frac{1}{2\pi\rho\mathfrak{D}_i} \int_0^{r_a} \frac{\psi^2}{r} dr + \pi\rho\mathfrak{D}_i r_a^2 \right) \frac{d\bar{C}_i}{dz} = \frac{\Omega^2}{RT} (\bar{M} - M_i) C_i \int_0^{r_a} \psi r dr - \left(\frac{\bar{M}}{M_i} P_i^* - P^* \bar{C}_i \right); \quad i = 1, 2, \dots, n \quad (3.9)$$

Equation (3.9) is a set of concentration equations.

We define the following parameters:

$$\begin{aligned} L &\equiv \frac{1}{2} \int_0^{r_a} |\rho V_z| 2\pi r dr \\ \epsilon_i &\equiv \frac{\Omega^2}{RT} (\bar{M} - M_i) \int_0^{r_a} \frac{\psi r}{L} dr \\ \varphi_{Pi} &\equiv \frac{\theta F}{\pi r_a \rho \mathfrak{D}_i}; \quad \varphi_{Wi} \equiv \frac{(1 - \theta) F}{\pi r_a \rho \mathfrak{D}_i} \\ Y_{1i} &\equiv \frac{1}{r_a^2 \pi r_a \rho \mathfrak{D}_i} \int_0^{r_a} \psi r dr \\ Y_{2i} &\equiv \frac{1}{2(\pi r_a \rho \mathfrak{D}_i)^2} \int_0^{r_a} \frac{\psi^2}{r} dr \end{aligned} \quad (3.10)$$

Using a procedure similar to that used by Soubbaramayer (12) for the binary mixture, the concentration equations in the enriching section are obtained:

$$\begin{aligned} (1 + Y_{2i}) \frac{dC_i}{ds} &= (2\epsilon_i Y_{1i} + \varphi_{Pi}) C_i - \varphi_{Pi} C_i^P; \quad i = 1, 2, \dots, n - 1 \\ C_n &= 1 - \sum_{i=1}^{n-1} C_i \end{aligned} \quad (3.11)$$

where $s = z/r_a$. We drop the overbar of C from Eq. (3.11).

The concentration equations in the stripping section are

$$\begin{aligned} (1 + Y_{2i}) \frac{dC_i}{ds} &= (2\epsilon_i Y_{1i} - \varphi_{Wi}) C_i + \varphi_{Wi} C_i^W; \quad i = 1, 2, \dots, n - 1 \\ C_n &= 1 - \sum_{i=1}^{n-1} C_i \end{aligned} \quad (3.12)$$

The coefficients ϵ_i , Y_{1i} , Y_{2i} , φ_{Pi} , and φ_{Wi} are dependent on concentration. Equations (3.11) and (3.12) are two sets of nonlinear ordinary differential equations. Before we start to solve Eqs. (3.11) and (3.12), we need to

know the velocity distribution in the gas centrifuge, i.e., the V_z or ψ . The velocity field can be obtained in a variety of ways, such as with the Onsager pancake model reported by Wood and Morton (16). However, here we use a simplified model for the purpose of illustration. We assume that ψ has the following pattern (17):

$$\begin{aligned}\psi(\xi, \eta) = & R_w[e^{-b_1\xi} - (1 + b_1\xi)e^{-2b_1\xi}][4\eta(1 - \eta)]^{2/3} \\ & + R_s[e^{-b_2\xi} - (1 + b_2\xi)e^{-2b_2\xi}]e^{-2\eta}\end{aligned}\quad (3.13)$$

where

$$\xi = A^2 \left(1 - \frac{r^2}{r_a^2}\right); \quad \eta = \frac{z}{Z_H}; \quad A^2 = \frac{\overline{M}\Omega^2 r_a^2}{2RT}$$

The term with R_w represents the wall-driven pattern; the term with R_s represents the mechanical-driven pattern.

The constants b_1 and b_2 vary for different process gases, and we take $12 \leq b_1 A^2 \leq 25$, $8 \leq b_2 A^2 \leq 15$, and $b_1 A^2 > b_2 A^2 > 7.2$.

When parameters F , θ , ψ , and C_i^F are given, using our iteration method we obtain the solution of Eqs. (3.11) and (3.12), i.e., the concentration distribution of each component in the gas centrifuge and the C_i^P , C_i^W . The solution of the concentration $C_i^{(k+i)}$ for the $(k + 1)$ th iteration in the enriching section from Eq. (3.11) is

$$\begin{aligned}\frac{C_i^{(k+1)}(s)}{C_{i0}^{(k+1)}} = & \exp[B_{Pi}^{(k)}(s)] \left[1 - \frac{C_i^{P(k+1)}}{C_{i0}^{(k+1)}} \varphi_{Pi}^{(k)} \int_{S_F}^s \frac{\exp[-B_{Pi}^{(k)}(s')]}{1 + Y_{1i}^{(k)}} ds' \right]; \\ i = & 1, 2, \dots, n - 1\end{aligned}\quad (3.14)$$

$$C_n^{(k+1)} = 1 - \sum_{i=1}^{n-1} C_i^{(k+1)}$$

where

$$B_{Pi}^{(k)} \equiv \int_{S_F}^s \frac{\varphi_{Pi}^{(k)} + 2\epsilon_i^{(k)} Y_{1i}^{(k)}}{1 + Y_{2i}^{(k)}} ds'$$

C_{i0} is the concentration of the i th component at the feed point in the gas centrifuge, $S_f = Z_f/r_a$, and Z_F is the feed position.

The solution of the concentration $C_i^{(k+i)}$ for the $(k + 1)$ th iteration in the stripping section from Eq. (3.12) is

$$\frac{C_i^{(k+1)}(s)}{C_{W_i}^{(k+1)}} = \exp[B_{W_i}^{(k)}(s)] \left[1 + \varphi_{W_i}^{(k)} \int_0^s \frac{\exp[-B_{W_i}^{(k)}(s')]}{1 + Y_{2i}^{(k)}} ds' \right];$$

$$i = 1, 2, \dots, n - 1 \quad (3.15)$$

$$C_n^{(k+1)} = 1 - \sum_{i=1}^{n-1} C_i^{(k+1)}$$

where

$$B_{W_i}^{(k)} \equiv \int_0^s \frac{-\varphi_{W_i}^{(k)} + 2\epsilon_i^{(k)} Y_{1i}^{(k)}}{1 + Y_{2i}^{(k)}} ds'$$

From Eq. (3.14) we obtain

$$\frac{C_i^{P(k+1)}}{C_{i0}^{(k+1)}} = \frac{1}{\exp[-B_{P_i}^{(k)}(S_H)] + \varphi_{P_i}^{(k)} \int_{S_F}^{S_H} \frac{\exp[-B_{P_i}^{(k)}(s')]}{1 + Y_{2i}^{(k)}} ds'} \quad (3.16)$$

From Eq. (3.15) we obtain

$$\frac{C_{i0}^{(k+1)}}{C_i^{W(k+1)}} = \exp[B_{W_i}^{(k)}] \left[1 + \varphi_{W_i}^{(k)} \int_0^{S_F} \frac{\exp[-B_{W_i}^{(k)}(s')]}{1 + Y_{2i}^{(k)}} ds' \right] \quad (3.17)$$

The right sides of Eqs. (3.16) and (3.17) are known. Combining Eqs. (3.16), (3.17), and (2.14), the $C_i^{P(k+1)}$, $C_i^{W(k+1)}$, and $C_{i0}^{(k+1)}$ are obtained. At the same time, we obtain the concentration distribution $C_i^{(k+1)}$ for the $(k + 1)$ th iteration in the gas centrifuge. The criterion of the convergence of the iteration is

$$\max_{i=1}^n \left| \frac{C_i^{(k+1)} - C_i^{(k)}}{C_i^{(k+1)}} \right| < \epsilon$$

where ϵ is the allowable error.

We calculated many examples, and some of them are shown in Figs. 1 to 4. The figures show the concentration distribution along the axis. Figure 1 shows the concentration of ^{234}U , ^{235}U , and ^{236}U increasing along the axis from the bottom to the top. The concentration of ^{238}U is nearly constant through the whole gas centrifuge because the concentration of ^{238}U in the feed flow is very large, 0.9925. Figure 2 shows a similar result, only the dominant isotope is the light one instead of the heavy one. Figure 3 shows the concentration distribution of the tungsten isotopes in the gas centrifuge. Figure 4 gives the results for OsO_4 separation. Note that the maximum concentration of ^{190}Os is not at the ends of the gas centrifuge. For long gas centrifuges, this phenomenon often appears.

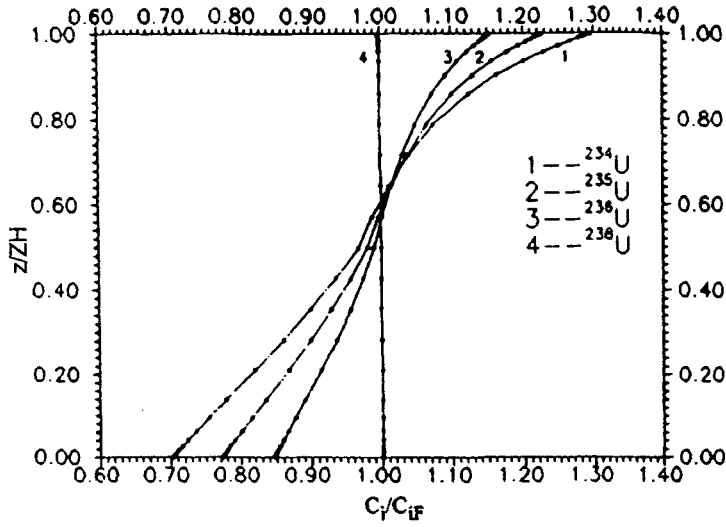


FIG. 1 The concentration distribution of UF_6 in the gas centrifuge.

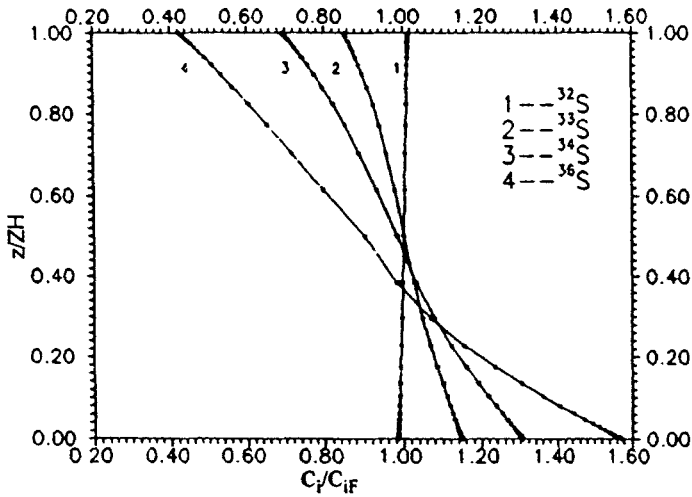


FIG. 2 The concentration distribution of SF_6 in the gas centrifuge.

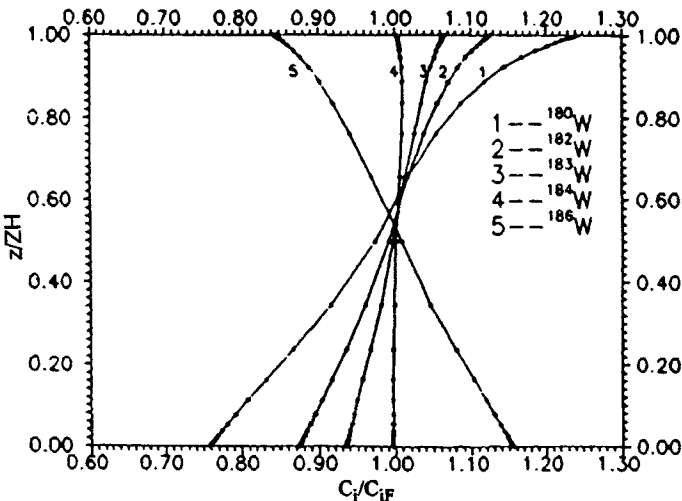


FIG. 3 The concentration distribution of WF_6 in the gas centrifuge.

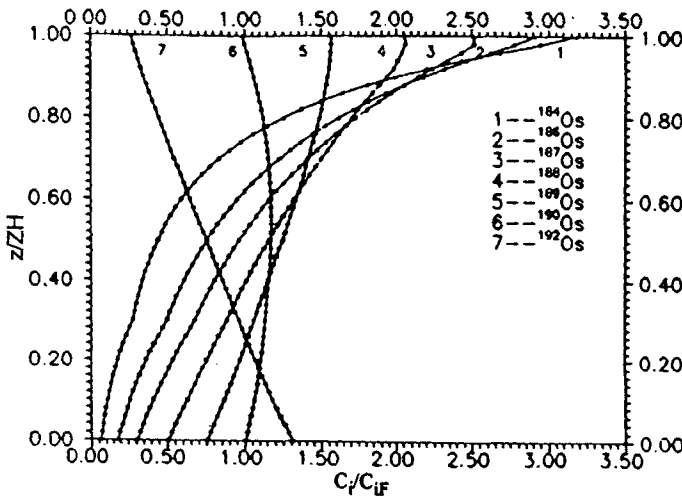


FIG. 4 The concentration distribution of OsO_4 in the gas centrifuge.

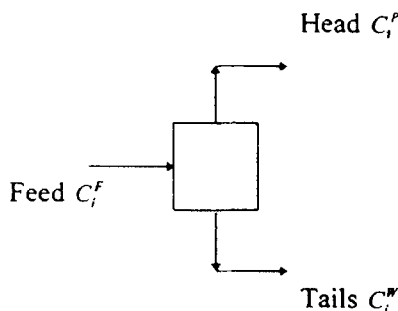


FIG. 5 A schematic of a gas centrifuge.


4. RELATIONSHIP BETWEEN SEPARATION FACTORS AND MASS DIFFERENCE

There are several definitions of the separation factors for multicomponent mixtures, and we use the following definitions (see Fig. 5):

$$\alpha_{ij} = \frac{C_i^P/C_j^P}{C_i^F/C_j^F}, \quad \beta_{ij} = \frac{C_i^F/C_j^W}{C_i^F/C_j^W}, \quad \gamma_{ij} = \alpha_{ij} * \beta_{ij} = \frac{C_i^P/C_j^P}{C_i^W/C_j^W} \quad (4.1)$$

The computational results show that the following relationship holds with very high precision:

$$\gamma_{ij} = \gamma_0^{M_j - M_i} \quad (4.2)$$

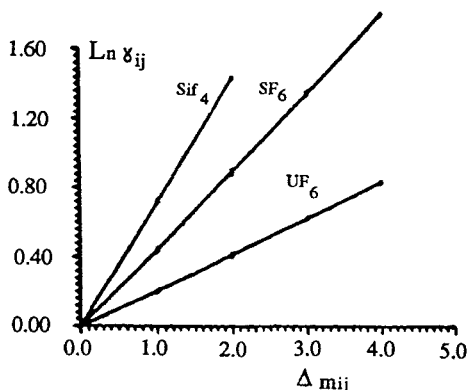FIG. 6 The relationship between $\ln \gamma_{ij}$ and $(M_j - M_i)$.

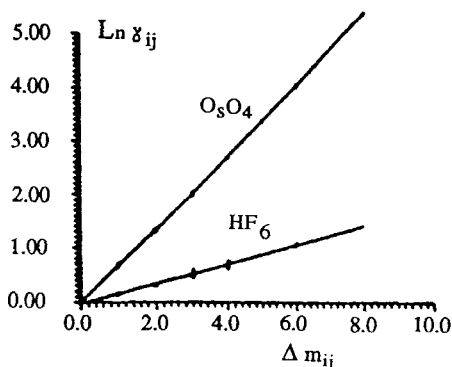


FIG. 7 The relationship between $\ln \gamma_{ij}$ and $(M_j - M_i)$.

where γ_0 is the overall separation factor with unit mass difference. γ_0 depends on the flow pattern in the gas centrifuge, the size and the operating parameters, etc.

The relationship between $\ln \gamma_{ij}$ and $(M_j - M_i)$ for the computational results is shown in Figs. 6 and 7. In the figures the points are the calculated results. Almost all of them are on the straight lines which represent the relationship.

Some authors, such as Von Halle (18) and Raichura et al. (19), define the separation factors differently. They made assumptions for the relationship between their separation factor and mass difference. Here, we use the definition of the separation factor as (4.1), and we find that the relationship of (4.2) is kept with very high precision. This is useful for the calculation of the concentration distribution in a cascade of gas centrifuges. Our work about the cascade theory will be published in the near future.

5. COMPARISON OF THE EXPERIMENTAL RESULTS WITH THE RELATIONSHIP

A variety of isotopes have been enriched using gas centrifuges in the laboratory of Tsinghua University, and some experimental results are shown in Figs. 8 to 10. In Figs. 9 and 10 the feed concentrations are different because they were obtained from different areas.

We checked our experimental results and the results published by Roberts (1) and Szady (2) with the relationship (4.2). The correlation coefficients r and the overall separation factors for unit mass difference, γ_0 , are calculated. When the absolute value of the correlation coefficient $|r|$ is close to unity, it means the relationship (4.2) agrees with the experimen-

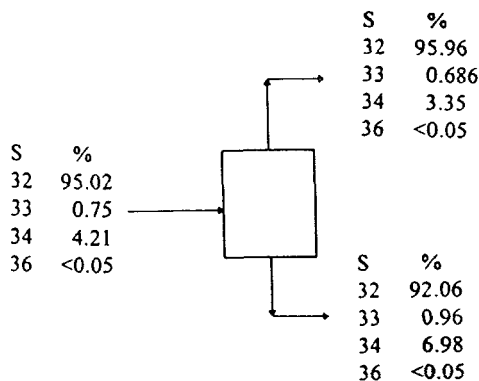


FIG. 8 Sulfur isotopes were separated in a gas centrifuge. SF_6 was the process gas.

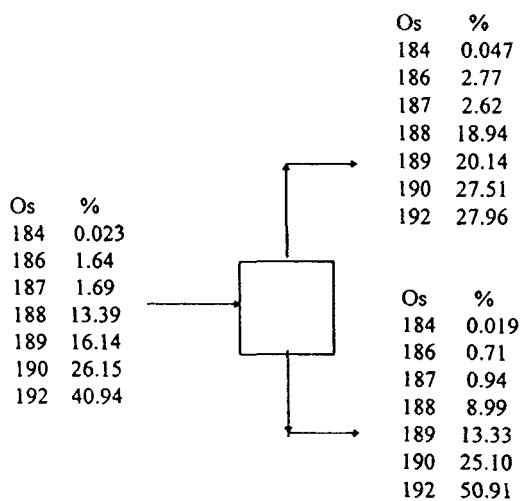


FIG. 9 Osmium isotopes were separated in a gas centrifuge. OsO_4 was the process gas.

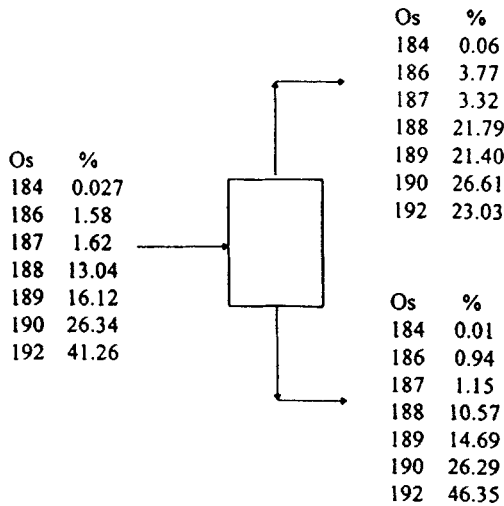


FIG. 10 Osmium isotopes were separated in a gas centrifuge. OsO₄ was the process gas.

tal data. If $|r| = 1$, it means all the data are completely satisfied with the relationship (4.2).

Table 1 lists the correlation coefficients for six experimental samples. The first two columns, i.e., sulfur and osmium, are calculated using the experimental data obtained at Tsinghua University; the other four columns are calculated using the experimental data from References 1 and 2. Most of the correlation coefficients are greater than .99 which confirms that relationship (4.2) is a good approximation for the separation factors. γ_0 is different for these six samples.

TABLE 1
The Correlation Coefficients r for the Experimental Data

Elements	S	Os	Cr	S	Kr	Xe
Process gas	SF ₆	OsO ₄	CrO ₂ F ₂	SF ₆	Kr	Xe
r	.9997	.9983	.9991	.9960	.9951	.9895
γ_0	1.47	1.40	2.43	2.06	6.09	2.28

6. CONCLUSIONS

A theory for the separation of multicomponent mixtures based on general diffusion coefficients has been developed. The method of radial averaging has been used to reduce the partial differential equations to ordinary differential equations, and an iterative method has been used to obtain solutions to these equations. A simplified model of the countercurrent flow has been used here to calculate the concentration distributions for a variety of isotopic mixtures. The relationship between the separation factor and mass difference, $\gamma_{ij} = \gamma_0^{M_j - M_i}$, is determined from the results of these calculations and compared to experimental results obtained at Tsinghua University and at Oak Ridge, Tennessee. The formula is found to be in good agreement.

In the future we plan to couple this separation theory with Onsager's pancake model for the centrifuge flow field. This will allow direct comparisons with the work reported by Wood et al. (8), and it will allow studies in which the isotopes do not necessarily have large molecular weights or small differences in molecular weights.

REFERENCES

1. W. L. Roberts, "Gas Centrifugation of Research Isotopes," *Nucl. Instrum. Methods Phys. Res.*, **A282**, 271-276 (1989).
2. A. J. Szady, "Enrichment of Chromium Isotopes by Gas Centrifugation," *Ibid.*, **A282**, 277-280 (1989).
3. V. D. Borisevich, G. A. Potapov, G. A. Sulaberidze, and V. A. Chuzhinov, "Multicomponent Isotope Separation in Cascades with Additional External Flows," in *Proceedings of the Fourth Workshop on Separation Phenomena in Liquids and Gases* (C. Ying, Ed.), Tsinghua University, Beijing, China, 1995.
4. V. E. Fillipov and L. Yu. Sosnin, "Modeling of Gas Flow and Separation Process of Multicomponent Mixture of Isotopes in Countercurrent Centrifuge with Internal Input of Feed," *Ibid.*
5. V. D. Borisevich, E. V. Levin, S. V. Yupatov, and E. M. Aisen, "Numerical Investigation of the Separation of Sulfur Isotopes in a Single Gas Centrifuge," *At. Energy*, **76**(6), 454-458 (1994).
6. E. Ratz, E. Coester, and P. deJong, "Production of Stable Isotopes by Gas Centrifuge," in *Proceedings of the International Symposium on Synthesis and Applications of Isotopes and Isotopically Labeled Compounds*, Toronto, September 3-7, 1991.
7. C. Ying and Z. Guo, "Some Characteristics for Multicomponent Isotope Separation," in *Proceedings of the Fourth Workshop on Separation Phenomena in Liquids and Gases* (C. Ying, Ed.), Tsinghua University, Beijing, China, 1995.
8. H. G. Wood, T. C. Mason, and Soubbaramayer, "Multi-Isotope Separation in a Gas Centrifuge Using Onsager's Pancake Model," *Sep. Sci. Technol.*, **31**(9), 1185-1213 (1996).
9. R. L. Hoglund, J. Shacter, and E. Von Halle, "Diffusion Separation Method," in *Encyclopedia of Chemical Technology*, **30**(13), 2631-2657 (1979).

10. E. Von Halle, "The Countercurrent Gas Centrifuge for the Enrichment of U-235," in *Proceedings 70th Annual Meeting AIChE*, New York, 1977.
11. K. Cohen, *The Theory of Isotope Separation*, McGraw-Hill, New York, NY, 1952.
12. Soubbaramayer, "Centrifugation," in *Uranium Enrichment* (S. Villani, Ed.), Springer-Verlag, New York, NY, 1979.
13. E. V. Levin and C. Ying, "Diffusion Transport Vector for Multicomponent Gas Separation in Ultracentrifuge," *Sep. Sci. Technol.*, 30(18), 3445–3458 (1995).
14. C. F. Curtiss, "Symmetric Gaseous Diffusion Coefficients," *J. Chem. Phys.*, 49(7), 2917–2919 (1968).
15. J. O. Hirschfelder, C. F. Curtiss, and R. B. Bird, *The Molecular Theory of Gases and Liquids*, Wiley, New York, NY, 1954.
16. H. G. Wood and J. B. Morton, "Onsager Pancake Approximation for the Fluid Dynamics of a Gas Centrifuge," *J. Fluid Mech.*, 101(1), 1–31 (1980).
17. D. R. Olander, "The Theory of Uranium Enrichment by the Gas Centrifuge," *Prog. Nucl. Energy*, 8(1), 1–33 (1981).
18. E. Von Halle, "Multicomponent Isotope Separation in Matched Abundance Ratio Cascade of Stages with Large Separation Factor," in *Proceedings of the First Workshop on Separation Phenomena in Liquids and Gases*, Darmstadt, Germany, July 20–23, 1987.
19. R. C. Raichura, M. A. M. Al-Janabi, and G. M. Langbein, "Some Aspects of the Separation of Multi-isotope Mixtures with Gas Centrifuge," in *Proceedings of the Second Workshop on Separation Phenomena in Liquids and Gases* (P. Louvet, P. Noe, and Soubbaramayer, Eds.), Versailles, France, July 10–12, 1989.

Received by editor December 22, 1995