

This article was downloaded by:

On: 25 January 2011

Access details: *Access Details: Free Access*

Publisher *Taylor & Francis*

Informa Ltd Registered in England and Wales Registered Number: 1072954 Registered office: Mortimer House, 37-41 Mortimer Street, London W1T 3JH, UK



Separation Science and Technology

Publication details, including instructions for authors and subscription information:

<http://www.informaworld.com/smpp/title~content=t713708471>

Physico-Chemical Processes for Landfill Leachate Treatment: Experiments and Mathematical Models

W. Xing^a; Huu Hao Ngo^a; S. H. Kim^a; W. S. Guo^a; P. Hagare^a

^a University of Technology, Sydney, NSW, Australia

To cite this Article Xing, W. , Ngo, Huu Hao , Kim, S. H. , Guo, W. S. and Hagare, P.(2008) 'Physico-Chemical Processes for Landfill Leachate Treatment: Experiments and Mathematical Models', Separation Science and Technology, 43: 2, 347 — 361

To link to this Article: DOI: 10.1080/01496390701787214

URL: <http://dx.doi.org/10.1080/01496390701787214>

PLEASE SCROLL DOWN FOR ARTICLE

Full terms and conditions of use: <http://www.informaworld.com/terms-and-conditions-of-access.pdf>

This article may be used for research, teaching and private study purposes. Any substantial or systematic reproduction, re-distribution, re-selling, loan or sub-licensing, systematic supply or distribution in any form to anyone is expressly forbidden.

The publisher does not give any warranty express or implied or make any representation that the contents will be complete or accurate or up to date. The accuracy of any instructions, formulae and drug doses should be independently verified with primary sources. The publisher shall not be liable for any loss, actions, claims, proceedings, demand or costs or damages whatsoever or howsoever caused arising directly or indirectly in connection with or arising out of the use of this material.

Physico-Chemical Processes for Landfill Leachate Treatment: Experiments and Mathematical Models

W. Xing, H. H. Ngo, S. H. Kim, W. S. Guo, and P. Hagare

University of Technology, Sydney, NSW, Australia

Abstract: In this study, the adsorption of synthetic landfill leachate onto four kinds of activated carbon has been investigated. From the equilibrium and kinetics experiments, it was observed that coal based PAC presented the highest organic pollutants removal efficiency (54%), followed by coal based GAC (50%), wood based GAC (33%) and wood based PAC (14%). The adsorption equilibrium of PAC and GAC was successfully predicted by Henry-Freundlich adsorption model whilst LDFA + Dual isotherm Kinetics model could describe well the batch adsorption kinetics. The flocculation and flocculation–adsorption experiments were also conducted. The results indicated that flocculation did not perform well on organics removal because of the dominance of low molecular weight organic compounds in synthetic landfill leachate. Consequently, flocculation as pretreatment to adsorption and a combination of flocculation–adsorption could not improve much the organic removal efficiency for the single adsorption process.

Keywords: Landfill leachate, activated carbon adsorption, adsorption modeling, flocculation

INTRODUCTION

One of the major pollution problems caused by the municipal solid waste (MSW) landfill is leachate, which results from the degradation of the

Received 10 May 2007, Accepted 18 September 2007

Address correspondence to Huu Hao Ngo, Faculty of Engineering, University of Technology, Sydney, P. O. Box 123, Broadway, Sydney, NSW 2007, Australia. Tel.: +61-2-9514-1693; Fax: +61-2-9514-2633; E-mail: huuha.ngo@uts.edu.au

organic fraction of the solid waste in combination with percolating rainwater. Generally, the landfill leachate contains the pollutants that can be divided into three groups: organic matter including dissolved organic matter and xenobiotic organic substances; inorganic matters, such as ammonia, nitrogen, phosphorus, sodium sulphate, iron chlorides; and heavy metals (e.g., copper, iron, zinc, lead, manganese etc.) (1, 2).

The characteristic of landfill leachate is various with different sites and environmental conditions because of the consequence of solid waste composition, age of the waste, operation of the landfill, hydrogeologic conditions in the vicinity of the landfill site, rate of the water movement through the waste, landfill temperature, moisture content, pH, landfill chemical/biological activities and seasonal weather variations (2, 3). Generally, the raw landfill leachate presents very high ammonia nitrogen (2,500–5,000 mg/L) and COD (5,000–20,000 mg/L) which can contaminate ground water and surface water supply and threatens human health when it migrates from the landfill (4).

Technologies developed for landfill leachate treatment can be classified as physical, chemical, and biological which are usually applied as an integrated system because it is difficult to achieve the satisfying treatment efficiency by either one of technology alone (5). As one of the major physical treatment technologies, activated carbon adsorption is widely employed for organic matter, ammonium and toxicity removal in landfill leachate treatment (6–9). Furthermore, flocculation, as an effective chemical technology, has been applied as a useful pretreatment method for removing the non-biodegradation organic compounds and heavy metals from fresh landfill leachate or as post treatment technology for stabilized leachate (10–13).

The main objectives of this study are

- (i) to evaluate the typical single physico-chemical process in synthetic landfill leachate treatment and their integration in terms of total organic carbon (TOC) removal and
- (ii) to develop the mathematical models to describe and predict their performance.

EXPERIMENTAL

Materials

Synthetic Landfill Leachate used in the Experiments

The synthetic landfill leachate is representative of secondary treated landfill leachate. The average total organic carbon (TOC) concentration of the

synthetic landfill leachate is about 110 mg/L. The composition of synthetic landfill leachate used in the study is shown in Table 1.

Activated Carbon Types

The studies were conducted with four kinds of activated carbons: wood based granular activated carbon (GAC), coal based GAC, wood based powdered activated carbon (PAC), and coal based PAC. The physical properties of these GAC and PAC are shown in Table 2.

Table 1. Compositions of synthetic leachate

Component	Per liter
Acetic acid	0.14 ml
Propionic acid	0.1 ml
Butyric acid	0.02 ml
K ₂ HPO ₄	0.6 mg
KHCO ₃	6.24 mg
K ₂ CO ₃	6.48 mg
NaCl	28.8 mg
NaNO ₃	1 mg
NaHCO ₃	60.24 mg
CaCl ₂	57.64 mg
MgCl ₂ · 6H ₂ O	62.28 mg
MgSO ₄	3.12 mg
NH ₄ HNO ₃	48.78 mg
CO(NH ₂) ₂	13.18 mg
Na ₂ S · 9H ₂ O	Titrate to Eh-120 mv:-180 mv
NaOH	Trite to pH = 5.8 – 6.0
Trace metal solution (TMS)	0.02 ml
Tap Water	to make 1 L
Composition of trace metal solution (TMS)	
FeSO ₄	2000 mg
H ₃ BO ₄	50 mg
ZnSO ₄ · 7H ₂ O	50 mg
CuSO ₄ · 5H ₂ O	40 mg
MnSO ₄ · 7H ₂ O	500 mg
(NH ₄) ₆ Mo ₇ O ₂₄ · 4H ₂ O	50 mg
Al ₂ (SO ₄) ₃ · 16H ₂ O	30 mg
CoSO ₄ · 7H ₂ O	150 mg
NiSO ₄ · 6H ₂ O	500 mg
96% H ₂ SO ₄	1 ml
Distilled water	to make 1 L

Table 2. Characteristics of activated carbon types used

Specifications	Estimated value			
	GAC		PAC	
	Wood based	Coal based	Wood based	Coal based
Iodine number, mg/(g · min)	800	>1100	900	>1300
Maximum ash content	5%	10%	6%	12%
Maximum moisture content	5%	3%	5%	8%
Surface area (BET m ² /g)	>1100	>1100	882	>1300
Type	Wood based	Coal based	Wood based	Coal based

Experiments

Adsorption Equilibrium and Kinetics Experiments

Four kinds of GAC and PAC adsorption capacity with synthetic landfill leachate were evaluated by equilibrium and kinetic adsorption. Equilibrium adsorption was described and predicted with Henry-Freundlich dual isotherm model. Linear driving force approximation (LDFA) model was used to evaluate kinetic adsorption.

Equilibrium adsorption experiments were conducted at room temperature (25°C). Different doses of GAC or PAC were distributed into 250 mL flask containing 100 ml synthetic landfill leachate. In order to avoid the influence of the light to adsorption, all flasks were covered by aluminum foil. All samples were shaken continuously for 72 hours on a shaking table at speed 130 rpm. After 72 hours shaking, samples of synthetic landfill leachate were taken from all flasks and filtered through 0.45 μm filter and then analyzed in terms of TOC. In the experiment of kinetics adsorption, GAC or PAC was distributed into 2 liters beaker filled with synthetic landfill leachate at three different concentrations. The solutions with activated carbon were mixed with a mechanical stirrer at a speed of 110 rpm for 6 hours. During the kinetic experiment, samples were taken from these three beakers at different period time and filtered through 0.45 μm filter before analyzing TOC.

Flocculation Experiments

In the flocculation experiments, FeCl₃ was used as flocculant to remove contaminants from synthetic landfill leachate. Different doses of FeCl₃ were added into six beakers of 1 L volume with synthetic landfill leachate. The experiments were performed in a conventional jar-test apparatus and consisted of three subsequent stages:

- (i) the initial rapid mixing stage took place for 1 minute at 100 rpm;
- (ii) the following slow mix stage for 30 minutes at 30 rpm; and
- (iii) the final settle stage lasted for another 30 minutes. After the settling period, the supernatant was withdrawn from beaker and used for TOC and chemical oxygen demand (COD) analyses to decide the optimum dose of FeCl_3 .

Flocculation as Pretreatment to Adsorption

The experimental process consisted of two stages: the first one was flocculation, the optimum dose of FeCl_3 were added into three 2-L beakers with synthetic landfill leachate and the flocculation process is the same as that described in the previous section. The supernatant after the settlement was used as influent in the following adsorption stage. In the adsorption stage, the GAC or PAC was distributed into 2-L beakers with 1.5 L supernatant of flocculation at different concentrations, and the kinetics experiments were conducted as the demonstration in an earlier section. The treatability of this process was described by the removal efficiency of TOC.

Flocculation–adsorption

In the internal integration of flocculation into adsorption experiments, the optimum dose of FeCl_3 and three different doses of activated carbon (PAC and GAC) were added into three 2 L beakers with synthetic landfill leachate together and then the conventional jar-test was conducted. After the settling period, the supernatants were withdrawn from three beakers and analyzed TOC.

Analysis

TOC concentration of water sample was measured using Analytikjena Multi N/C 2000 analyzer.

RESULTS AND DISCUSSION

Performance of Adsorption

Wood-based GAC

Figures 1a and 1b show the results of wood based GAC equilibrium and kinetics adsorption. As can be seen from the figures, the removal efficiency of TOC is the function of GAC dosage. The wood based GAC could remove approximately 33% TOC at dose of 30 g/L while only 15% TOC removal

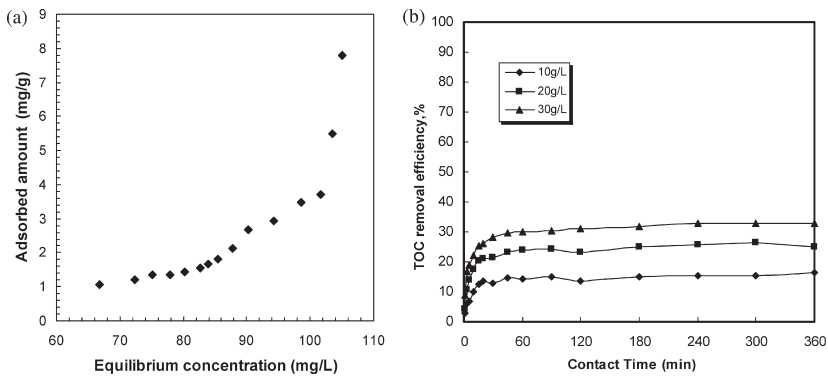


Figure 1. (a) Equilibrium adsorption of wood based GAC (Average initial TOC = 110 mg/L, mixing rate = 130 rpm, contact time = 72 hrs); (b) Kinetics adsorption of wood based GAC (Average initial TOC = 110 mg/L, mixing rate = 110 rpm, contact time = 6 hrs).

efficiency could be obtained at dose of 10 g/L. For the results of the kinetics experiment, TOC removal efficiency increased dramatically in the first 45 mins and then it remained stable. In other words, during the first 45 minutes, the available sites on the GAC surface for adsorption were abundant which resulted in the organic adsorption. When all the adsorption sites were occupied and the rate of adsorption and desorption were balanced, organic removal by GAC adsorption were constant.

Coal-based GAC

The results of coal based GAC adsorption equilibrium and kinetic are presented in Figs. 2a and b. As expected, higher coal based GAC dosage resulted in better organic adsorption due to larger GAC surface. For all the three different dosages investigated, the organic matter in the synthetic landfill leachate was quickly adsorbed within the first 45 mins, after that the adsorption and desorption achieved balance and the organic adsorption rate by coal based GAC remained almost constant.

Wood-based PAC

The removal of organic matter in terms of TOC by wood based PAC is shown in Figs. 3a and b. The results indicated that the wood based PAC adsorption resulted in very low organic matter removal from the synthetic landfill leachate (lower than 15% with all the concentration of wood based PAC). The poor performance of this kind of PAC suggested that this wood based PAC was not suitable to use in removing organic matter from synthetic landfill leachate which consists of a very complex component.

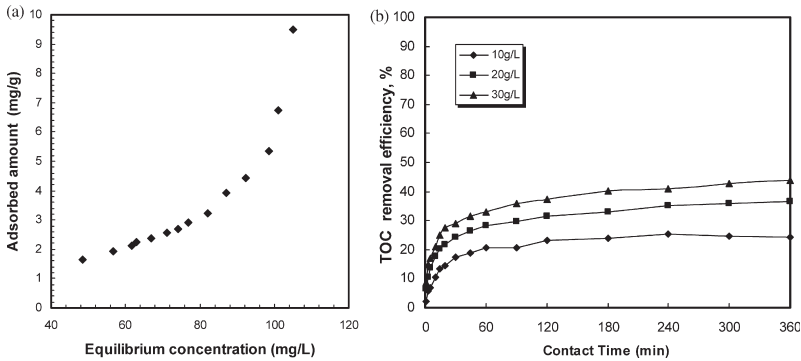


Figure 2. (a) Equilibrium adsorption of coal based GAC (Average initial TOC = 110 mg/L, mixing rate = 130 rpm, contact time = 72 hrs); (b) Kinetics adsorption of coal based GAC (Average initial TOC = 110 mg/L, mixing rate = 110 rpm, contact time = 6 hrs).

Coal-based PAC

As can be see in Figs. 4a and b, TOC removal by coal based PAC adsorption increased with the increase of PAC dosage as expected. A 30 g/L dose of coal-based PAC led to a very high amount of organic matter adsorption (approximately 54% TOC removal). Kinetics adsorption experimental results show that the removal of organic matter as the function of adsorption time. In the first 45 minutes, the coal-based PAC adsorbed organic contaminants rapidly and then the organic removal stayed constant until 6 hours.

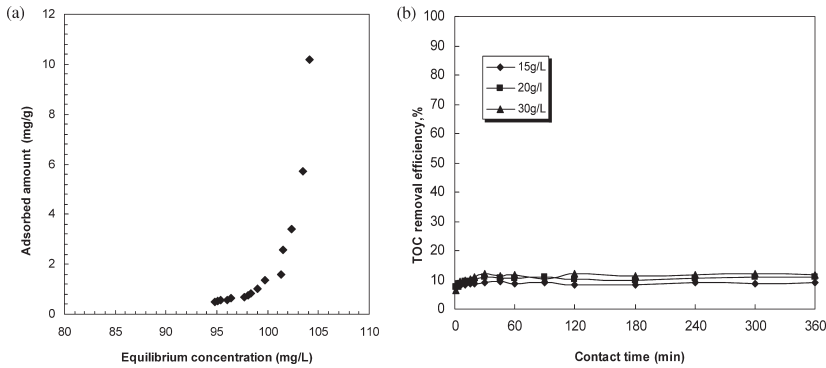


Figure 3. (a) Equilibrium adsorption of wood based PAC (Average initial TOC = 110 mg/L, mixing rate = 130 rpm, contact time = 72 hrs); (b) Kinetics adsorption of wood based PAC (Average initial TOC = 110 mg/L, mixing rate = 110 rpm, contact time = 6 hrs).

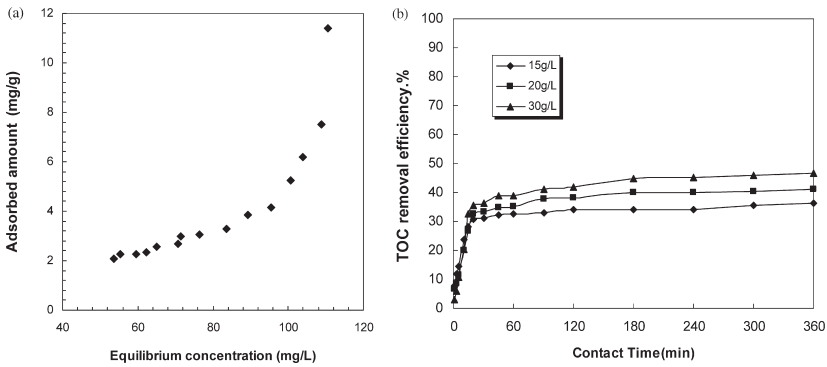


Figure 4. (a) Equilibrium adsorption of coal based PAC (Average initial TOC = 110 mg/L, mixing rate = 130 rpm, contact time = 72 hrs); (b) Kinetics adsorption of coal based PAC (Average initial TOC = 110 mg/L, mixing rate = 110 rpm, contact time = 6 hrs).

Compared with the adsorption capability of PAC and GAC discussed above, it is observed that the coal based PAC is the adsorbent that achieved the best organic removal (54% TOC removal at dose of 30 g/L), followed by coal based GAC and wool based GAC which only removed 50% and 33% organic matter at a dose of 30 g/L, respectively (Fig. 5). The wood based PAC is the one present the lowest removal capability for organic matter (less than 15% TOC removal) from synthetic landfill leachate. The results indicated that the organic removal efficiency is correspondent to the surface area of activated carbon. The coal based PAC has the largest surface area to adsorbed organic contaminants from synthetic landfill leachate, thus, it performed better TOC removal efficiency than other activated carbons.

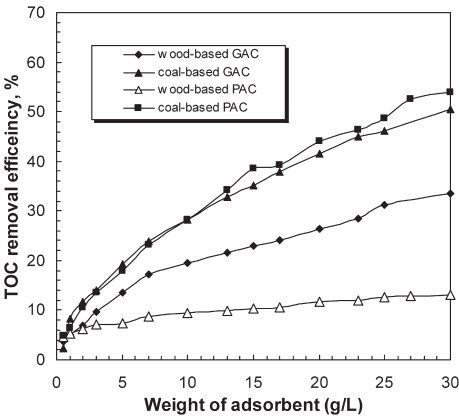


Figure 5. Comparison of TOC removal efficiency by four kinds of activated carbon.

Performance of Flocculation as Pretreatment to Adsorption

Figures 6a, b and c show the removal efficiency of organic matter from synthetic landfill leachate by using ferric chloride flocculation as pretreatment for activated carbon adsorption. Although flocculation was used as pretreatment, compared with the single activated carbon adsorption, the combined process did not perform much better removal efficiency of organic matter (average increasing of 4% for these three experiments). This can be explained as flocculation can effectively remove high molecular weight organic matters while most of the organic

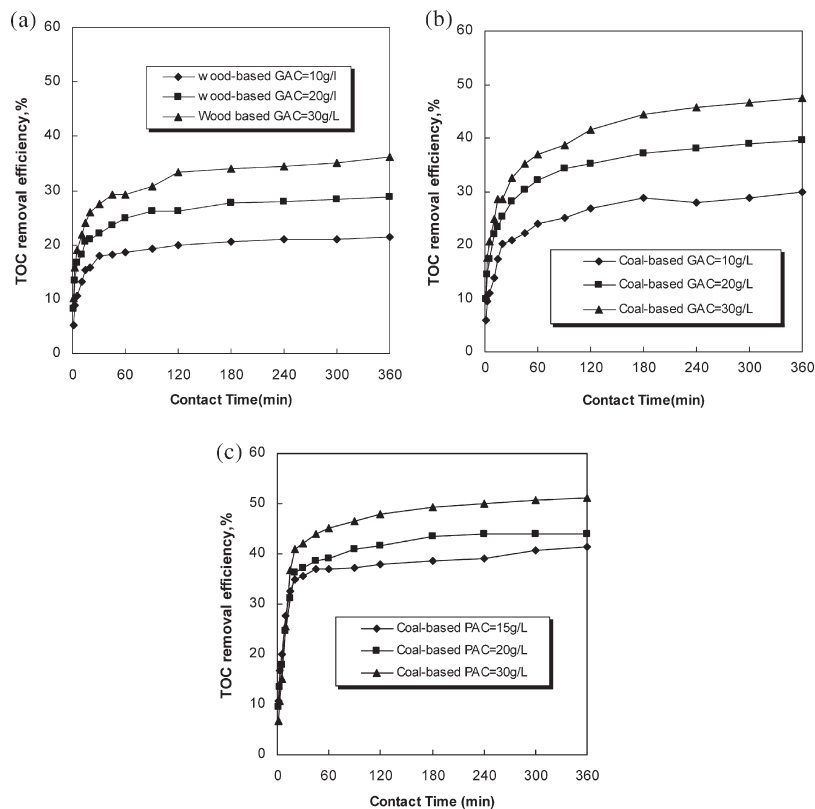


Figure 6. (a) Flocculation as pretreatment to wood based GAC for TOC removal from landfill leachate (Average initial TOC = 110 mg/L, mixing rate = 110 rpm, contact time = 6 hrs) (b) Flocculation as pretreatment to coal based GAC for TOC removal from landfill leachate (Average initial TOC = 110 mg/L, mixing rate = 110 rpm, contact time = 6 hrs); (c) Flocculation as pretreatment to coal based PAC for TOC removal from landfill leachate (Average initial TOC = 110 mg/L, mixing rate = 110 rpm, contact time = 6 hrs).

compounds containing in the synthetic landfill leachate used are low in molecular weight (Acetic acid, 60.05 g/mol; Propionic acid, 74.08 g/mol; Butyric, 88.11 g/mol), thus flocculation pretreatment is not very helpful in removing low molecular weight organic contaminants from the synthetic landfill leachate.

Performance of Internal Integration of Flocculation into Adsorption

The preliminary testing on flocculation–adsorption experiments are presented in Fig. 7. The results demonstrated that the TOC removal efficiency was quite low, even lower than that by the adsorption process only. One of the main possible reasons for the poor performance of combined flocculation–adsorption is that compared with the adsorption normal mixing intensity (between 110 rpm and 130 rpm), the intensity of 30 rpm during the flocculation–adsorption process was not sufficient for activated carbon adsorption. In addition, the trial conditions (PAC and FeCl₃) are not the optimum conditions. Further study is necessary to find out the possible and proper way to make this process work well for landfill leachate treatment. The performance comparison of different processes is shown in Table 3.

Mathematical Models

Equilibrium Modeling

In this study, the Henry-Freundlich dual isotherm model was employed to describe and predict the GAC and PAC equilibrium adsorption. The Henry-

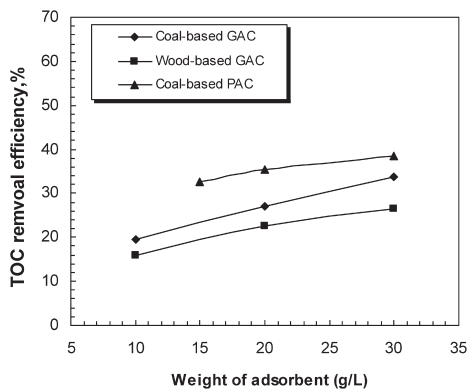


Figure 7. Combination of flocculation–adsorption for TOC removal from landfill leachate (rapid mixing gradient rate = 100 rpm, slow mixing gradient rate = 30 rpm, average initial TOC = 110 mg/L).

Table 3. Performance comparison of adsorption and integration of flocculation and adsorption

Type	Dose (g/L)	Adsorption	TOC removal efficiency (%)	
			Flocculation as pretreatment to adsorption	Internal integration of flocculation into adsorption process
Wood based GAC	15	15	21	14
	20	25	28	22
	30	33	36	26
Coal based GAC	15	24	29	19
	20	37	40	27
	30	44	47	34
Coal based PAC	15	36	41	32
	20	41	44	35
	30	46	51	38

Freundlich isotherm is the model that combines Henry’s law and Freundlich model. It is expressed by Equation (1):

q = K · Ce + kF · Ce^{1/n} (1)

where q is the adsorbed amount (mg/g), Ce is the equilibrium organic concentration (mg/L), K, kF, n are the Henry-Freundlich constants.

The equilibrium parameters obtained from simulation are presented in Table 4.

As can be seen in Fig. 8, the model results indicated that Henry’s law fitted well the data in the region of Ce less than 80 mg/L while the rest of region was successfully predicted by Freundlich model. Therefore, the combined model was able to apply for describing and simulating the results.

Kinetics Modeling

The adsorption rate of the adsorbate by activated carbon is linearly proportional to a driving force using the LDFA model, defined as the

Table 4. Henry-Freundlich dual isotherm constants (25°C)

	Coal-based PAC	Coal-based GAC	Wood-based GAC	Wood-based PAC
K	0.0390	0.0339	0.0136	0.0047
kF	2.41E-22	2.42E-21	3.97E-21	8.1E-131
n	0.0911	0.0946	0.0957	0.0154

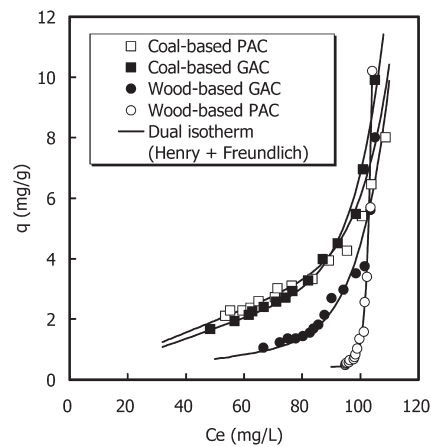


Figure 8. Adsorption equilibrium of synthetic landfill leachate by four kinds of activated carbon with Henry-Freundlich dual model (25°C).

Table 5. LDFA+ Dual isotherm kinetics constants

	Coal-based PAC	Coal-based GAC	Wood-based GAC	Wood-based PAC
k_f	8.0E-08	1.0E-06	1.1E-06	3.6E-06
R^2	0.975	0.980	0.984	0.986

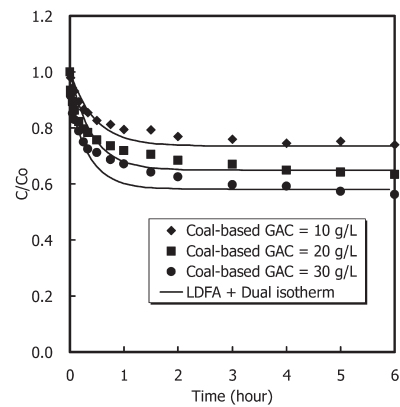


Figure 9. LDFA + Dual isotherm kinetics for TOC adsorption on coal-based GAC.

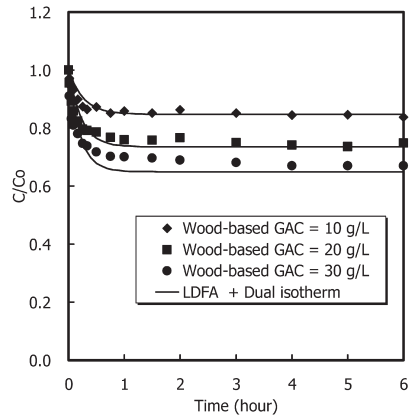


Figure 10. LDFA + Dual isotherm kinetics for TOC adsorption on wood-based GAC.

difference between the surface concentration and the average adsorbed-phase concentration. This model is very simple and easy to apply for adsorption kinetics experimental modelling (14).

$$\frac{dq}{dt} = \frac{3 \times k_f}{R \times \rho_p} (c_i - c_s) \quad (2)$$

where R is radius of adsorbent (m), k_f is overall mass transfer coefficient (m/s), ρ_p is density of particle (kg/m^3), c_i is initial concentration of adsorbate in fluid phase (mg/l), c_s is concentration of adsorbate in fluid phase at equilibrium (mg/l).

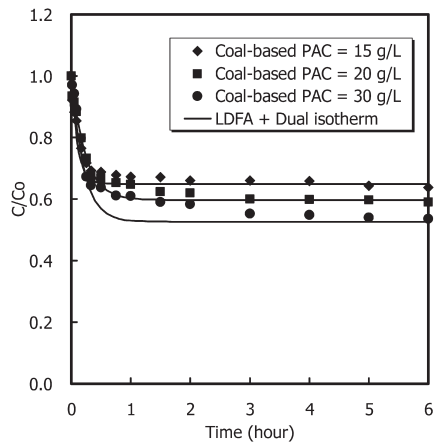


Figure 11. LDFA + Dual isotherm kinetics for TOC adsorption on coal-based PAC.

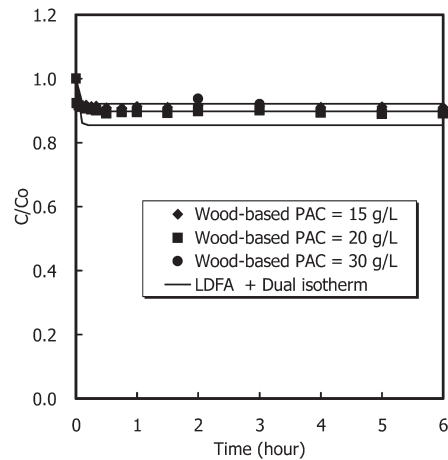


Figure 12. LDFA+ Dual isotherm kinetics for TOC adsorption on wood-based PAC.

Table 5 presents the kinetics constants of LDFA + Dual isotherm kinetics models for activated carbon adsorption. These values could be applied to predict the kinetic experimental data. Regardless of the amount of the adsorbents, kinetic constants had the same value with same concentration and temperature (15). The kinetics adsorption experimental data of four kinds of activated carbon with synthetic landfill leachate were well fitted well to the LDFA +Dual model (Figs. 9–12).

CONCLUSIONS

- Coal based PAC exhibited a highest organic matter removal rate (54%), followed by coal based GAC (50%) and wool based GAC (33%). The wood based PAC showed the lowest adsorption capacity on TOC removal from synthetic landfill leachate due to its smaller surface area.
- Flocculation pretreatment was not effective in removing low molecular weight organic contaminants from the synthetic landfill leachate. The combination of flocculation–adsorption did not perform well on organic matter removal from the synthetic landfill leachate.
- The GAC and PAC adsorption equilibrium with the synthetic landfill leachate fitted well with Henry-Freundlich adsorption model. The batch adsorption kinetics with organic matter was successfully predicted by LDFA & Dual Isotherm Kinetics model.

ACKNOWLEDGMENTS

This study was partial funded by the Institute of Water and Environment Resource Management (IWERM), University of Technology, Sydney

(UTS). The authors are also grateful to Activated Carbon Technologies Pty Ltd., Australia for their support in providing the activated carbons.

REFERENCES

1. McArdle, J.L., Arozarena, M.M., and Gallagher, W.E. (1988) *Treatment of Hazardous Waste Leachate: Unit Operation and Cost*; Noyes Data Corporation: New Jersey.
2. Westlake, K. (1995) *Landfill Waste Pollution and Control*; Albion publishing limited: England.
3. Iaconi, C.D., Ramadori, R., and Lopez, A. (2006) Combined biological and chemical degradation for treating a mature municipal landfill leachate. *Biochemical Engineering Journal*, 31: 118–124.
4. Chan, G.Y.S., Chang, J., Kurniawan, T.A., Fu, C.X., Jiang, H., and Je, Y. (2007) Removal of non-biodegradable compounds from stabilized leachate using VSEPRO membrane filtration. *Desalination*, 202: 310–317.
5. Uygur, A. and Kargi, F. (2004) Biological nutrient removal from pre-treated landfill leachate in a sequencing batch reactor. *Journal of Environmental Management*, 71: 9–14.
6. Rivas, F.J., Beltran, F., Carvalho, F., Acedo, B., and Gimeno, O. (2004) Stabilized leachates: sequential coagulation-flocculation + chemical oxidation process. *Journal of Hazardous Materials*, B116: 95–102.
7. Rodriguez, J., Castrillon, L., Maranon, E., Sastre, H., and Fernandez, E. (2004) Removal of non-biodegradable organic matter from landfill leachates by adsorption. *Water Research*, 38: 3297–3303.
8. Aziz, H.A., Adlan, M.N., Zahari, M.S.M., and Alias, S. (2004) Removal of ammonia-nitrogen ($\text{NH}_3\text{-N}$) from municipal solid waste leachate by using activated carbon and lime stone. *Waste Manage*, 22: 371–375.
9. Kurniawan, T.A., Lo, W.H., and Chan, G.Y.S. (2006) Degradation of recalcitrant compounds from stabilized landfill leachate using a combination of ozone-GAC adsorption treatment. *Journal of Hazardous Materials*, B137: 443–455.
10. Amokrane, A., Comel, C., and Veron, J. (1997) Landfill leachates pretreatment by coagulation-flocculation. *Water research*, 31: 2775–2782.
11. Tati, A.A., Zouboulis, A.I., Matis, K.A., and Samaras, P. (2003) Coagulation-flocculation pretreatment of sanitary landfill leachate. *Chemosphere*, 53: 737–744.
12. Galvez, A., Zamorano, M., Ramos, A., and Hontoria, E. (2005) Coagulation-flocculation pretreatment of a partially stabilized leachate from a sanitary landfill site at Alhendin (Granada, Southern Spain). *Journal of Environmental Science and Health*, 40: 1741–1751.
13. Ntampou, X., Zouboulis, A.I., and Samaras, P. (2005) Appropriate combination of physico-chemical methods (coagulation/flocculation and ozonation) for the efficient treatment of landfill leachates. *Chemosphere*, 62: 722–730.
14. Lee, S.H., Vigneswaran, S., and Moon, H. (1997) Adsorption of phosphorus in saturated slag media columns. *Separation and Purification Technology*, 12: 109–118.
15. Lee, J.W., Yang, T.H., Shim, W.G., Kwon, T.O., and Moon, I.S. (2007) Equilibria and dynamics of liquid-phase trinitrotoluene adsorption on granular activated carbon: effect of temperature and pH. *Journal of Hazardous Materials*, 141 (1): 185–192.