


*F. G. Peoble,*

*Curtain Fixture.*

*No. 107,956.*

*Patented Oct. 4, 1870.*

*Fig. 1*

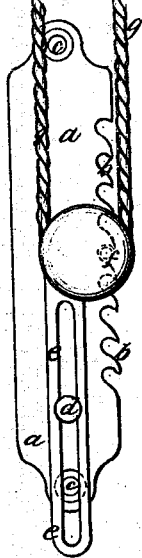


*Fig. 2*



*Fig. 3*



*Fig. 4*



*John R. Hurston*  
*Alfred Sheddock*

*Witnesses*

*Frederick G. Peoble*  
*Inventor*

# United States Patent Office.

FREDERICK G. PEOBLE, OF NEW YORK, N. Y.

Letters Patent No. 107,956, dated October 4, 1870; antedated September 10, 1870.

## IMPROVEMENT IN CURTAIN-FIXTURES.

The Schedule referred to in these Letters Patent and making part of the same.

### *To all whom it may concern:*

Be it known that I, FREDERICK G. PEOBLE, of the city of New York, in the county and State of New York, have invented a new and useful Improvement in "Curtain-Fixtures;" and I do hereby declare the following to be a full description of the same, reference being had to the annexed drawing making part of this specification.

Figure 1 is a front view.

Figure 2 is a side view.

Figures 3 and 4, modifications of my invention.

My invention is an improved device for holding and tightening the cords of roller curtains, and consists of a plate, *a*, made either of stamped or cast metal, serrated, or provided with a series of notches, *b*, the object of which will be explained hereafter, and holes *c*, to screw it to the side of the window.

Pivoted to the plate *a*, by the large-headed rivet *d*, is a slotted arm, *e*, which carries the pulley *h*, around which the cord *g* runs.

It is also provided with a pin, *f*, for the purpose of catching in the notches *b*.

When the device is fixed in place, and the cord *g* passed over the pulley *h*, all that is necessary to get the right tension on the cord is to move the slotted arm *e* down and pass the pin *f* into the required notch.

I do not wish to confine myself to any particular shape, as there are several ways in which my invention may be made; for instance, the notches *b* may be on a curved line, as shown at fig. 3, or made in the center of the plate *a*, as shown at fig. 4.

What I claim, and desire to secure by Letters Patent, is—

The slotted arm *e*, provided with a pin, *f*, in combination with the serrated or notched plate *a*, made substantially as described.

Witnesses: FREDERICK G. PEOBLE.

JOHN R. MARSTON,

ALFRED SHEDLOCK.