
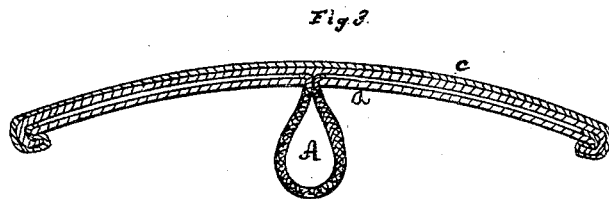



E. B. Gibbud,
Neck Tie.

No. 112,237.

Patented Feb 28, 1878.

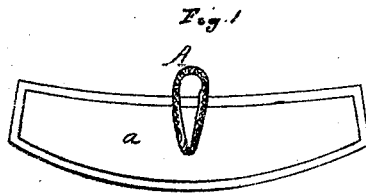

Witnesses
J. H. Shumway
A. J. Tibbitts

E. B. Gibbud
Inventor
By his Attorney
Wm. E. Earle

United States Patent Office.

ELI B. GIBBUD, OF WATERBURY, CONNECTICUT, ASSIGNOR TO HIMSELF AND BENJAMIN H. BRADLEY, OF SAME PLACE; SAID GIBBUD AND BRADLEY ASSIGNORS TO JOHN BACHELDER, OF NORWICH, CONNECTICUT.

Letters Patent No. 112,237, dated February 28, 1871.

IMPROVEMENT IN NECK-TIE RETAINERS.

The Schedule referred to in these Letters Patent and making part of the same.

To all whom it may concern:

Be it known that I, ELI B. GIBBUD, of Waterbury, in the county of New Haven and State of Connecticut, have invented a new Improvement in Neck-Tie Retainers; and I do hereby declare the following, when taken in connection with the accompanying drawings and the letters of reference marked thereon, to be a full, clear, and exact description of the same, and which said drawings constitute part of this specification, and represent in—

Figure 1, a rear view;

Figure 2, a transverse section; and in

Figure 3, a longitudinal section.

This invention relates to an improvement in the construction of that part of a neck-tie by which the tie is secured to the neck of the wearer, and consists in two pieces of metal cut to the required form of the base of the tie, the one slightly larger than the other, and so that the edges of the larger may be turned over the edges of the smaller, the larger being covered with the desired fabric or material, the covering secured by turning the fabric under the smaller and securing it thereon by the edges of the larger, which are turned over the smaller.

In order to the clear understanding of my invention, I will fully describe the same as illustrated in the accompanying drawings.

a is the inside plate.

c, the outside plate, the outside plate being larger than the inside.

The inside plate is punched or provided with an arrangement for securing the elastic loop *A* thereto; then a piece of fabric or material required for the covering is cut a little larger than the largest piece of metal and placed over the outside of the larger piece *c*, as denoted in red figs. 2 and 3, the edges of the fabric being turned over the edge of the larger piece *c*; then the inner piece placed thereon and the edges of the metal and covering material turned over and struck down on to the smaller so as to secure all together, as seen in fig. 3. The knot or tie is secured to the covering material in the usual manner.

Having fully described my invention,

What I claim as new and useful, and desire to secure by Letters Patent, is—

The base of a neck-tie, consisting of the two plates *a* and *c* and the covering, all secured together in the manner herein set forth, as an article of manufacture.

E. B. GIBBUD.

Witnesses:

RUSS. W. AYRES,

CHAS. W. GILLETTE.