

H. E. BRAUNFELD.
Singletree Coupling.

No. 214,753.

Patented April 29, 1879.


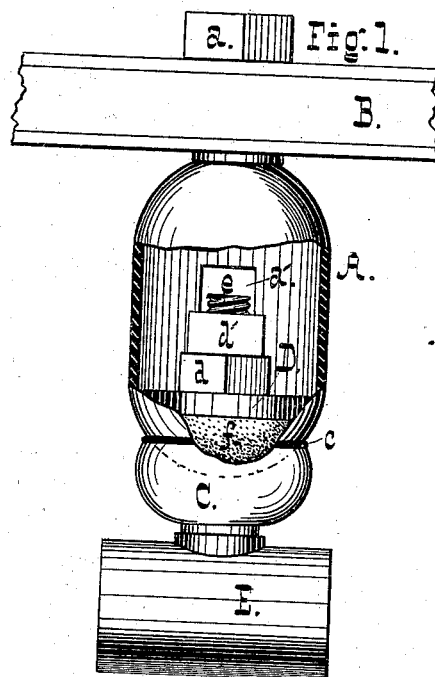


Fig. 2.



Witnesses,
W. A. Buttram.
S. L. M. Barclay.

Inventor
H. E. Braumfeld.
by
A. W. Williams
Attorney.

UNITED STATES PATENT OFFICE.

HENRY E. BRAUNFELD, OF BALTIMORE, MARYLAND.

IMPROVEMENT IN SINGLE-TREE COUPLINGS.

Specification forming part of Letters Patent No. **214,753**, dated April 29, 1879; application filed September 21, 1878.

To all whom it may concern:

Be it known that I, HENRY E. BRAUNFELD, of Baltimore city, State of Maryland, have invented certain new and useful Improvements in Single-Tree Couplings; and I hereby declare the same to be fully, clearly, and exactly described, as follows, reference being had to the accompanying drawings, in which—

Figure 1 is a plan view of the device, partly in section; and Fig. 2 is a sectional view, illustrating certain details of construction.

This invention relates to that class of devices in use for attaching the single-trees of vehicles to the cross-bar between the shafts, or to the ends of the double-tree, as the case may be; and it consists in a device for accomplishing that end, constructed as hereinafter described, and possessing points of novelty which are made the subject of the claim.

In the accompanying drawings, A represents a metallic shell, preferably in the form of a short cylinder, terminating at either end in a hemisphere, and having a screw-bolt attached to or integral with one of the hemispheres, the said bolt serving to secure the device to the cross-bar or double-tree B, being fastened by means of a nut. E is a metallic tube, within which the single-tree (not shown) is secured in any appropriate manner, to which tube the piece C is attached, having a hemispherical cup adapted to fit over the end of the shell A.

Integral with the piece C is a bolt, *e*, which extends into the shell A through an opening in its end.

A washer, *c*, preferably of leather, is inserted between the parts C and A, and a similar washer, *f*, is placed on the interior of the shell,

between it and the block D, through which latter the bolt *e* passes, as shown. A pair of nuts, *d d'*, being screwed upon the bolt *e*, secure the parts together.

The shell A is provided with an opening, *a'*, through which the nuts are inserted, and are preferably screwed home by being held in any convenient manner while the tube *e* is revolved. As an obvious alternative, the opening may be made large enough for the insertion of a spanner; but the described construction is preferable, as it prevents the entrance of moisture into the shell.

The advantages of the device are evident. The ball-and-socket joint admits of motion on the part of the single-tree in every direction, and the latter may readily be turned into a vertical position, thereby greatly economizing space in the case of double-team vehicles. Finally, the described construction precludes the possibility of the hair of the horse's tail becoming entangled in the coupling, which has heretofore been a source of much annoyance with the couplings in general use.

Having thus described my invention, what I claim as new, and desire to secure by Letters Patent, is—

1. In combination with the shell A, the tube E, cup C, bolt *e*, and ball D, substantially as described.

2. In combination with the shell A and cup C, having tube E, the ball D and washers *c f*, substantially as described.

HENRY E. BRAUNFELD.

Witnesses:

R. D. WILLIAMS,
JOSEPH RAIBER.