

W. O. GROVER.
Feeding Devices for Sewing-Machines.

No. 216,791.

Patented June 24, 1879.

Fig.1.

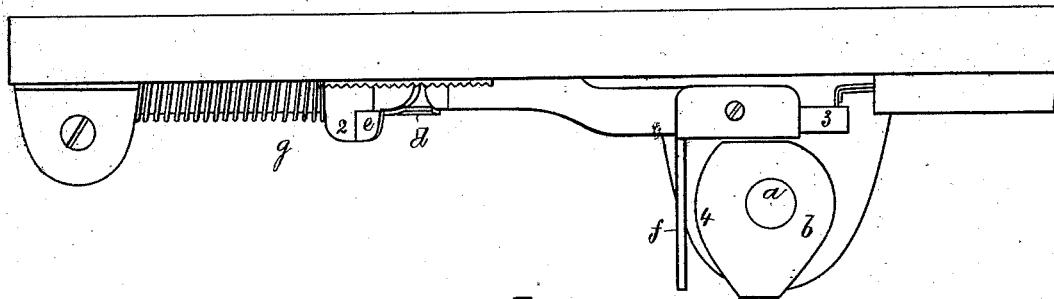


Fig.2.


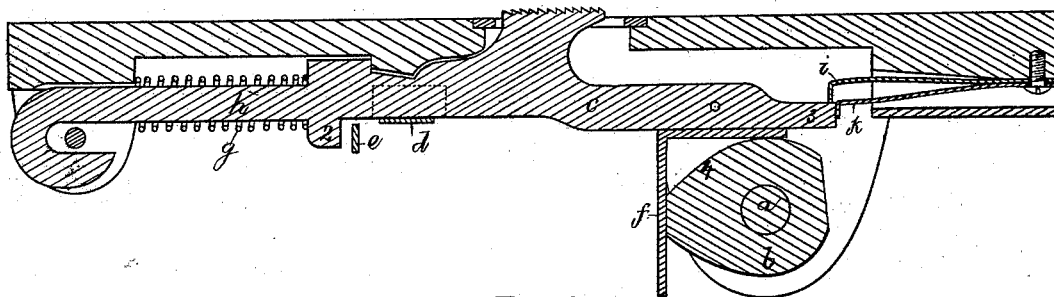


Fig.3.

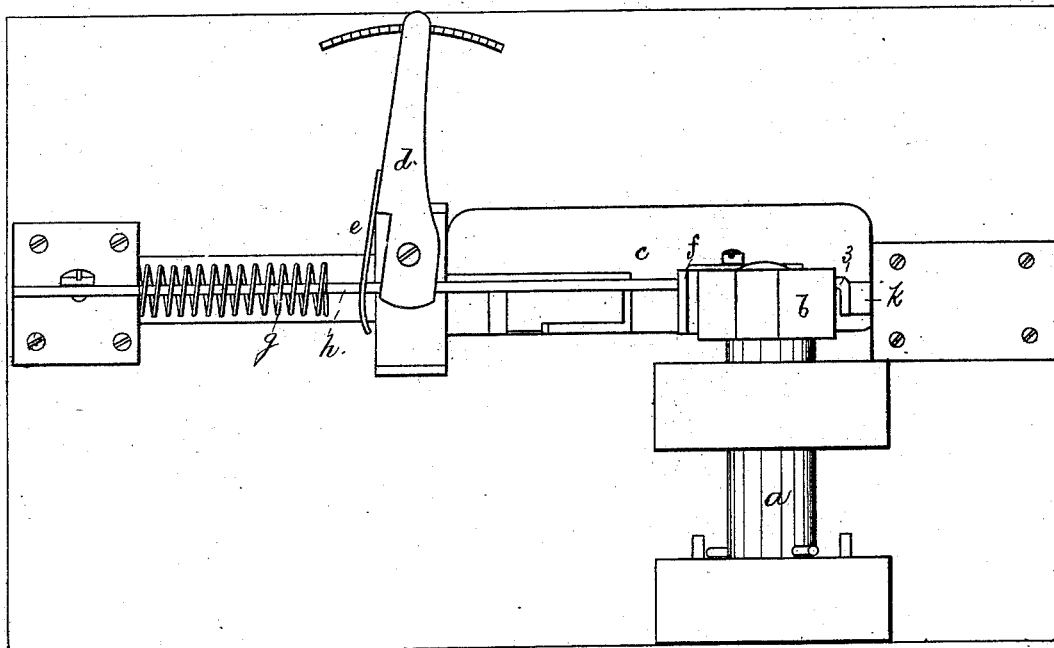

Witnesses.

L. F. Connor
H. E. Whitney

Inventor.

William O. Grover
by Crosby Strogan, Atty.

UNITED STATES PATENT OFFICE.

WILLIAM O. GROVER, OF BOSTON, MASSACHUSETTS.

IMPROVEMENT IN FEEDING DEVICES FOR SEWING-MACHINES.

Specification forming part of Letters Patent No. **216,791**, dated June 24, 1879; application filed January 29, 1879.

To all whom it may concern:

Be it known that I, WM. O. GROVER, of Boston, county of Suffolk, State of Massachusetts, have invented an Improvement in Feeding Devices for Sewing-Machines, of which the following description, in connection with the accompanying drawings, is a specification.

This invention relates to sewing-machines, and has special reference to the construction and mode of operation of the feeding mechanism.

In this my invention a four-motioned feeding device has its rising or grasping and forward or feeding movements imparted to it by a single cam on a rock-shaft located below the cloth-plate.

Figure 1 is an end view of a sewing-machine cloth-plate with the feed-bar depressed; Fig. 2, a similar view in section with the feed-bar elevated and moved forward; and Fig. 3 is an under-side view.

The shaft *a*, below the cloth-plate will, by a crank-and-link connection, or by any other usual mechanism, be rocked from a rotating shaft of the machine, which rotating shaft will operate the needle-bar and other parts of the machine in any usual way. At the forward end of this shaft is a cam, *b*, which has a movement from the position shown in Fig. 1, wherein the feed-bar *c* is depressed to its lowest position, to the position in Fig. 2, wherein the feed bar is most elevated and thrown fully forward.

In Fig. 1 the feed-bar is not in its most backward position, for the stitch-regulating lever *d* or the spring *e* thereon is, in that figure, as in Fig. 3, so placed as to check the backward movement of the said bar, the shoulder 2 meeting the said spring and preventing the projection *f* of the feed-bar from receding

to the face 4 of the cam. The feed-bar is moved backward after each stitch by the spring *g*, located upon the part *h* of the bar, until the shoulder 2 meets spring *e*, and the spring so receiving the shoulder reduces the noise usually accompanying the working of the feed-bar. The end 3 of the feed-bar is acted upon by a depressing-spring, *i*, which always exerts a tendency to depress that end of the bar toward the cam *b*, while the spring *k* acts as a stop to hold the end 3 of the feed-bar and prevent it from being thrown backward by spring *g* while it is descending under the action of spring *i* until the cam *b* moves from the position shown in Fig. 2 nearly to that shown in Fig. 1.

I claim—

1. The feed-bar and rocking shaft and single cam thereon, combined with the depressing-spring and yielding stop at the end 3 of the bar, to operate substantially as described.

2. A feed-bar provided with a shoulder or projection, combined with a stitch-regulating lever provided with a spring-arm, to act against its shoulder and check the backward movement of the feed-bar, substantially as described.

3. The combination, with the feed-bar and means to impart to it its feeding motions, of a yielding stop, to co-operate with the forward portion of the feed-bar, substantially as described.

In testimony whereof I have signed my name to this specification in the presence of two subscribing witnesses.

WILLIAM O. GROVER.

Witnesses:

G. W. GREGORY,
L. F. CONNOR.