
W. P. GILMER. Tobacco-Box Clamp.

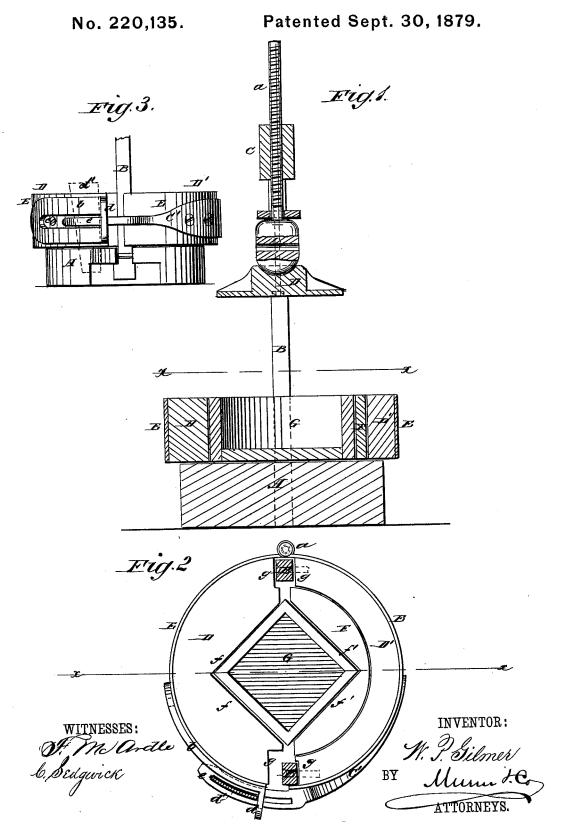

## UNITED STATES PATENT OFFICE.

WILLIAM P. GILMER, OF MOUNT AIRY, NORTH CAROLINA.

## IMPROVEMENT IN TOBACCO-BOX CLAMPS.

Specification forming part of Letters Patent No. 220,135, dated September 30, 1879; application filed June 5, 1879.

To all whom it may concern:

Be it known that I, WILLIAM P. GILMER, of Mount Airy, in the county of Surry and State of North Carolina, have invented a new and Improved Tobacco-Box Clamp, of which

the following is a specification.

This invention relates to improvements in clamps for holding the boxes under the plunger of presses for compressing plug-tobacco in the boxes, the object whereof is to enable boxes of different sizes to be clamped and held securely under the plunger and in the proper position relative thereto.

My invention consists in making one half of the clamp in two parts, the one containing the angular recess for the corner of the box being adjustable, so as to permit it to slip around back or forth and adjust itself to the box, and in clamping the recesses in each half are brought to a perfect square merely by tightening the key-wedge.

In the accompanying drawings, Figure 1 is a vertical section of a press containing my improvements on line xx of Fig. 2. Fig. 2 is a horizontal section on line x' x', Fig. 1; and Fig. 3 is a side elevation of the press.

Similar letters of reference, indicate corre-

sponding parts.

Referring to the drawings, A represents the bed of the press, from opposite sides whereof rise standards B B, supporting a cross-bar, C, through the middle whereof runs the screwshaft a, supporting and operating the plunger D.

The clamp is composed of a circular plate divided diametrically into two parts, D D'. The peripheries of the parts are bound with metal bands E, the ends whereof, on one side, are hinged together at a, thus connecting the two parts of the clamp, but allowing them to

swing to and apart at will.

To the opposite end of the strap on part D is fixed a plate, b, provided with a slot, c, and at the end of this plate is a slotted projection, d; and at the end of the strap on D' is a semicircular plate, c', having a slotted projecting tongue, e, adapted to pass through the slotted projection d, and in the slot c, where it is held by the key d', passed down through its slot, thus fastening the two parts of the clamp together.

In part D is a right-angular recess, f, and in part D' a semicircular piece, F, is cut out, and provided with a right-angular recess, f', so that when the two parts are placed together they form a square socket to receive the box.

The clamp is placed upon the bed A, the part D on one side of the standards B B, and part D' on the opposite side, recesses g g being made in the faces of the two parts at each end for the standards. The part D' is securely fastened to the standard by means of the plate c' at the side of the clamp opposite the hinge, which is a little larger than the standard, for the purpose of receiving a wedge on either side of the standard, in order to maintain the diagonal center immediately under the plunger when prizing in larger or smaller boxes.

The manner of operating the improvement is as follows: When the plug-tobacco is to be pressed into the box, the clamp is opened, and the box G placed on the bed under the plunger, with the opposite corners toward or in line with the standards B B. The two parts of the clamp are then brought together against the box, so that it is clasped in the socket formed by the two recesses f f'.

The clamp should be made to clamp the

smaller-sized boxes, which will be held se-

When it is desired to clamp a larger box, the sub-section F is simply moved around in the part D' until the vertex of its angle is diagonally opposite to that of the fixed section D. This will cause the box to come directly under the plunger.

Having thus described my invention, I claim as new and desire to secure by Letters Pat-

The described box-clamp for plug-tobacco, having one half made in two sections, the adjustable section containing recess for corner of box, and the recesses of both when brought together forming a square, as shown and de-

WILLIAM P. GILMER.

Witnesses:

T. M. BROWER,

J. B. HOLLINGSWORTH.