

(No Model.)

G. H. HENKEL.

INKSTAND.

No. 264,695.

Patented Sept. 19, 1882.

Fig. 1.


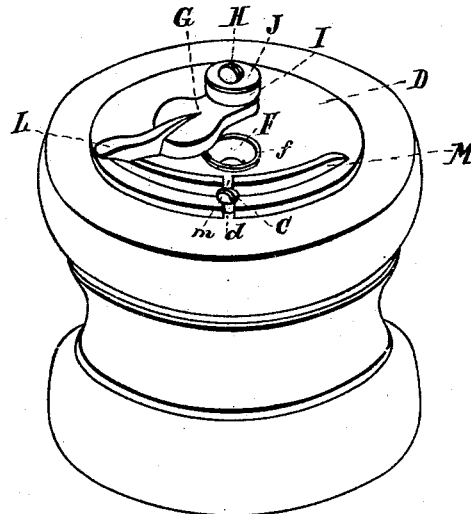


Fig. 2.

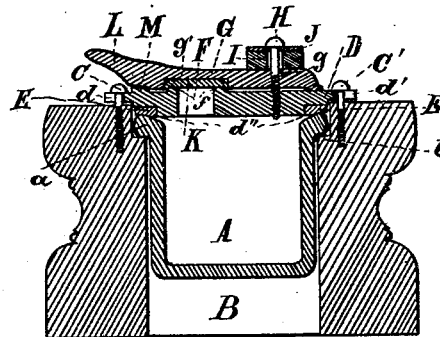

Attest:
Carl Spengel
Carl Spengel

Inventor:
George H. Henkel
By Knight Bros.
Atty's

UNITED STATES PATENT OFFICE.

GEORGE H. HENKEL, OF MIDDLETOWN, OHIO, ASSIGNOR OF TWO-THIRDS
TO ANNA C. HENKEL AND CHRIS. J. ALBERT, BOTH OF GERMANTOWN,
OHIO.

INKSTAND.

SPECIFICATION forming part of Letters Patent No. 264,695, dated September 19, 1882.

Application filed April 6, 1882. (No model.)

To all whom it may concern:

Be it known that I, GEORGE H. HENKEL, of Middletown, Butler county, Ohio, have invented a new and useful Improvement in Ink-Well Covers, of which the following is a specification.

My invention relates to a simple, cheap, and effective hermetical cover for ink-wells.

In the accompanying drawings, Figure 1 is a perspective view of an ink-well provided with my cover, the same being shown in the open condition. Fig. 2 is a vertical section of the same in the closed condition.

A may represent a customary glass or earthenware ink-well proper, having the usual marginal lip, *a*, for resting upon the accustomed ledge, *b*, in the supporting-stand B, which may be in portable form, as shown, but which generally consists of the top of a school or other writing-desk.

Secured by screws C C' to the top of the stand or desk is a cap, D, preferably of cast-iron, whose notches *d d'* permit the traverse of said screws in the manner shown. An annular recess, *d''*, on the under side of cap D, receives a rubber or other suitable gasket, E, which, pressing upon the rim of the ink-well, makes the joint between it and said cap airtight.

The dipping-hole consists of an orifice, F, in the cap, having a raised margin, *f*. This, when not in use, may be hermetically closed by my cover or button, consisting of a metallic bar, G, pierced at *g* for fastening-screw H, that also does duty as the pivot of said button.

Between the head of the fastening-screw H and the top of the button a rubber washer, I, backed by a metal or other suitable disk, J, serves to hold the button down with elastic

pressure against the cap, and especially against the mouth of the dip-hole.

The button G is recessed at *g'* for a rubber or other suitable gasket, K. The button or cover G has a spur, L, for convenient manipulation.

The cap D has, concentric with the screw H, a ridge, M, which curves gradually upward to its center, where it is notched, as shown at *m*.

Access to the well is easily had at any time by removing one of the screws C, when the cap may be withdrawn edgewise, and as easily replaced by a reversal of these actions.

The inkstand is closed by vibrating the button G until it reaches the middle of the ridge M, where the spring or cushion I at once forces the button, with its gasket K, against the margin of the dip-hole, and thus closes the well.

The well is easily opened for use by a reversal of the above movement—that is to say, by a slight elevation of the free end of the button—followed by a lateral movement until it is clear of the dip-hole.

I claim as new and of my invention—

An ink-well having the cap D, provided with gasket E and fastening-screws C, which occupy notches *d d'*, and having a dip-hole, F, with raised margin *f*, in combination with cover or button G, secured to the said cap by pivot-screw H, and with spring or cushion I, and the notched swell or rib M *m* upon the cap D, substantially as set forth.

In testimony of which invention I have hereunto set my hand.

GEO. H. HENKEL.

Attest:

FRANK DOTY,
W. H. TODHUNTER.