
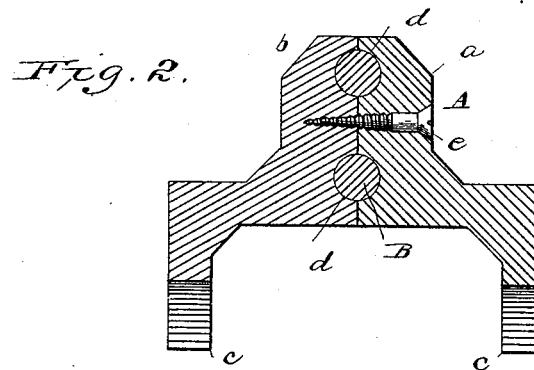


(No Model.)

P. OKELL.  
DOG FOR LOG CHAINS.

No. 266,505.

Patented Oct. 24, 1882.

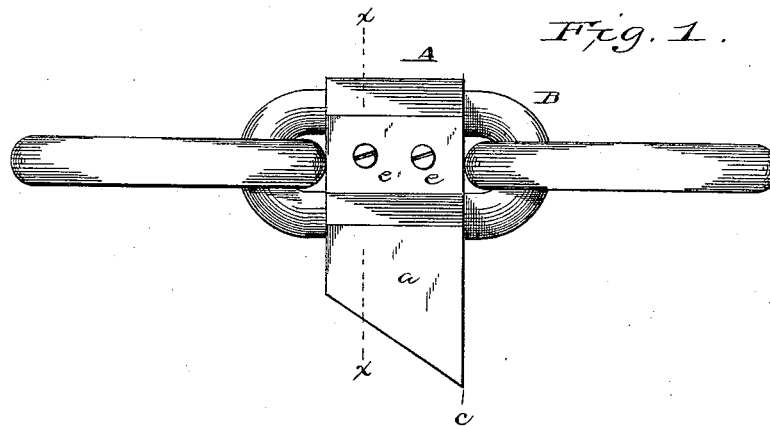

*Witnesses,*  
*Edwin L. Jewell.*  
*J. J. McCarthy.*

*Inventor,*  
*Peter Okell.*  
*E. M. Alexander*  
*Attorney.*

# UNITED STATES PATENT OFFICE.

PETER OKELL, OF FORT MADISON, IOWA.

## DOG FOR LOG-CHAINS.

SPECIFICATION forming part of Letters Patent No. 266,505, dated October 24, 1882.

Application filed August 1, 1882. (No model.)

*To all whom it may concern:*

Be it known that I, PETER OKELL, of Fort Madison, in the county of Lee, and in the State of Iowa, have invented certain new and useful  
5 Improvements in Dogs for Log-Chains; and I do hereby declare that the following is a full, clear, and exact description thereof, reference being had to the accompanying drawings, and to the letters of reference marked thereon, making a part of this specification.

10 This invention relates to an improved dog for log-chains; and it has for its objects to provide a movable and adjustable device that may be secured to the chain at any desired point,  
15 as more fully hereinafter specified. These objects I attain by the means illustrated in the accompanying drawings, in which—

20 Figure 1 represents a side elevation, showing my device applied to a portion of a chain; and Fig. 2, a sectional view on the line *x x* of Fig. 1.

25 The letter A indicates the dog, which is constructed in two parts, *a b*, having the usual chisel-edges, *c*, in order to bite into the log and hold the chain thereto. The contiguous faces

of the two parts are provided with semicircular grooves or recesses *d*, as indicated.

The dog is attached to a link of a chain at any desired point of the chain by clasp-  
30 ing the link B between the parts, the sides of the link sitting in the recesses or grooves before mentioned. The parts are secured together upon the link by screws *e* or other suitable devices.

Having thus described my invention, what I claim, and desire to secure by Letters Patent, 35 is—

A dog for log chains, constructed in two parts, with adjoining recesses or grooves, in which a chain-link is adapted to fit, the parts  
40 being provided with suitable chisel-edges, and with screw or other fastening devices, whereby the parts are secured together, substantially as shown and described.

In testimony whereof I affix my signature in presence of two witnesses, this 17th day of  
45 July, 1882.

P. OKELL.

Witnesses:

WILL H. ATLEE,  
E. STEWART.