
A. OELSCHLEGER.

BRUSH FOR CLEANING CHIMNEYS.

No. 303,880.

Patented Aug. 19, 1884.

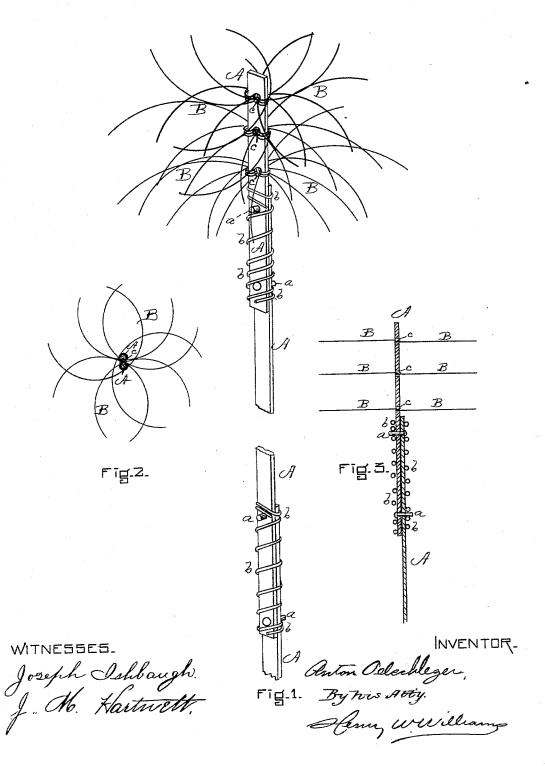

United States Patent Office.

ANTON OELSCHLEGER, OF BOSTON, MASSACHUSETTS.

BRUSH FOR CLEANING CHIMNEYS.

SPECIFICATION forming part of Letters Patent No. 303,880, dated August 19, 1884.

Application filed February 2, 1884. (No model.)

To all whom it may concern:

Be it known that I, Anton Oelschleger, of Boston, in the county of Suffolk and State of Massachusetts, have invented new and use-5 ful Improvements in Brushes for Cleaning Chimneys, of which the following is a specification.

This invention relates to brushes for cleaning house chimneys, and is illustrated in the 10 accompanying drawings, in which-

Figure 1 is a perspective view of the operative portion of the device; Fig. 2, a cross-section, and Fig. 3 a vertical section.

A series of flexible metallic strips, A, each 15 one being usually about five feet in length and sufficiently flexible to follow in an ordinarily crooked or tortuous flue, are provided, each strip being provided at each end with a horizontally - projecting pin, a, and a cor-20 responding opening or perforation. The pins a extend through the corresponding openings in the next strips A and some little distance beyond, as shown in the drawings. It will be seen, therefore, that where the 25 strips overlap there are always one pin a extending from one strip through an opening in the next strip and one pin a extending from the latter strip in the opposite direction through an opening in the former 30 strip. The overlapping portions of the strips are tightly wound with wire, b, and the pins a, projecting beyond the wire, prevent the strips from slipping. The strips being readily put together and separated, as many may 35 be used or as few as the length of the chimney to be cleaned requires. The uppermost strip is furthermore provided with perforations c, in which are caught wires B. These wires B,

which may be more or less in number, are each passed through one of the perforations c, 40 and each end is bent once around an edge of the strip A in opposite directions, so that the ends of each wire project oppositely. As many wires may be passed through each perforation as desired, and they are wound about 45 equally around the opposite edges of the strip. The section in Fig. 2 is taken through one of these perforations.

The advantages of my wires B over whalebone, bristles, and wood fiber in chimney-clean- 50 ing brushes are principally that the wires B, while starting the soot, do not clog the draft, so that the soot, instead of being pulled down the chimney, is merely loosened, and the draft passing between the wires carries it up and 55 out through the top of the chimney, and that the long sparsely-arranged wires penetrate readily every corner of the flue.

By arranging each wire so that its ends project in opposite directions, any mass of soot 60 pulling down one side of the wire lifts the other side or end, thus affecting the matter which may be on that side of the flue.

Having thus fully described my invention, what I claim, and desire to secure by Letters 65 Patent, is-

The strips A, provided with the pins a and corresponding perforations, said pins projecting beyond the surface of the next strip, and the strips at their overlapping portions being 70 wound with the wire b, substantially as and for the purpose set forth.

ANTON OELSCHLEGER.

Witnesses:

HENRY W. WILLIAMS. Joseph Ishbaugh.