

C. DRAKE.

SHUTTER FASTENER.

No. 305,681.

Patented Sept. 23, 1884.



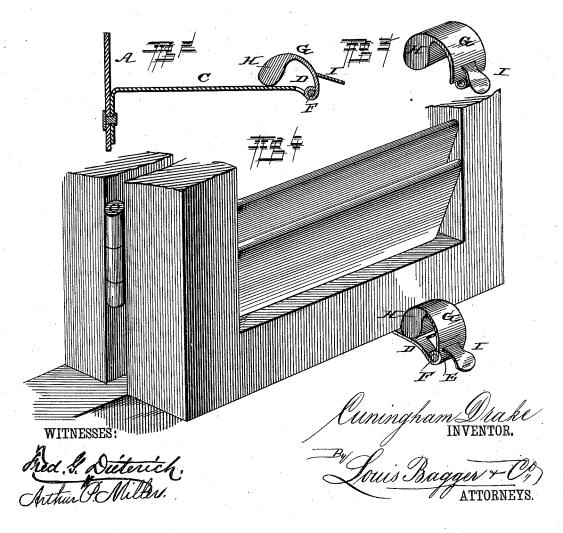

United States Patent Office.

CUNINGHAM DRAKE, OF PHILADELPHIA, PENNSYLVANIA.

SHUTTER-FASTENER.

SPECIFICATION forming part of Letters Patent No. 305,681, dated September 23, 1884.

Application filed May 2, 1884. (No model.)

To all whom it may concern:

Be it known that I, CUNINGHAM DRAKE, a citizen of the United States, and a resident of Philadelphia, in the county of Philadelphia 5 and State of Pennsylvania, have invented certain new and useful Improvements in Shutter-Fasteners; and I do hereby declare that the following is a full, clear, and exact description of the invention, which will enable others skilled in the art to which it appertains to make and use the same, reference being had to the accompanying drawings, which form a part of this specification, and in which—

Figure 1 is a perspective view of my im-15 proved shutter-fastener. Fig. 2 is a longitudinal sectional view of the same. Fig. 3 is a detail view, and Fig. 4 is a perspective view, illustrating the operation of the device.

Similar letters of reference indicate corre-

20 sponding parts in all the figures.

My invention has relation to devices for retaining outside shutters or window-blinds in their open position; and it consists in the detailed construction of a device of that class, as will be hereinafter more fully described and claimed.

In the accompanying drawings, A denotes a plate of any suitable metal, having screw-holes B for the insertion of screws or nails, whereby the plate may be fastened to the wall of a building

Fastened upon and projecting at right angles from the plate A is an arm, C, the outer end of which is bifurcated to form lips D, the free ends of which are bent to form sleeves E for the insertion of the hinge-bolt F. Upon

this bolt is hinged, between the lips D D, the button G, which consists of a curved piece of metal the free or inner end of which is weighted, as shown at H. This weighted part H rests 40 upon the outer end of arm C when the device is in operation, thereby locking the shutter between plate A and the hinged button G. If desired, the button may be provided with a downward-projecting finger-piece, as shown at 45 I, for operating it either in opening or closing the shutter.

The use of this device will readily be understood from the foregoing description, taken in connection with the drawings, without further explanation. It will be seen that it can be manufactured at a small cost, is always ready and handy for use, and can easily be manipulated by a person standing in the open window.

Having thus described my invention, I claim and desire to secure by Letters Patent of the United States—

The improved shutter-fastener herein shown and described, the same consisting of the fast-60 ening-plate A and horizontally-projecting arm C, having lips D at its outer end, in combination with the weighted button G, adapted to rest with its weighted free end upon the outer end of the arm, as and for the purpose set forth. 65

In testimony that I claim the foregoing as my own I have hereunto affixed my signature in presence of two witnesses.

CUNINGHAM DRAKE.

Witnesses:

LOUIS BAGGER, AUGUST PETERSON.