

(No Model.)

W. P. VROOMAN.  
BUTTON HOLE CUTTER.

No. 384,653.

Patented June 19, 1888.

FIG. 1.

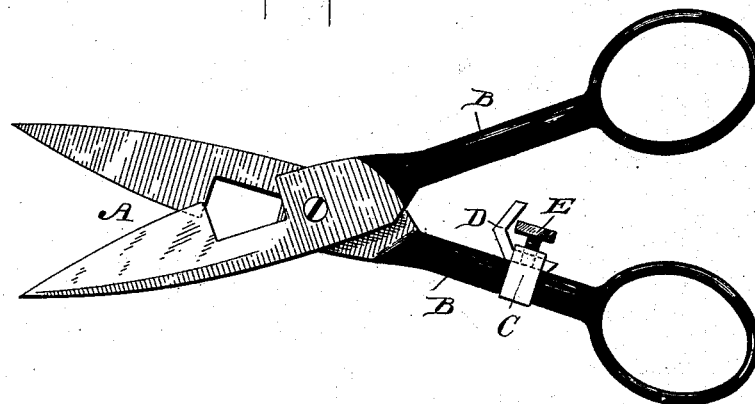


FIG. 2.





FIG. 3.



Witnesses.

L. G. Conner Jr.  
William Calver.

Inventor.

W. P. Vrooman,  
by Henry Calver  
att'y.

# UNITED STATES PATENT OFFICE.

WILLIAM P. VROOMAN, OF FREMONT, OHIO.

## BUTTON-HOLE CUTTER.

SPECIFICATION forming part of Letters Patent No. 384,653, dated June 19, 1888.

Application filed September 29, 1887. Serial No. 251,047. (No model.)

*To all whom it may concern:*

Be it known that I, WILLIAM P. VROOMAN, a citizen of the United States, residing at Fremont, in the county of Sandusky and State of Ohio, have invented certain new and useful Improvements in Button-Hole Cutters, of which the following is a specification, reference being had therein to the accompanying drawings.

My invention relates to that class of button-hole cutters which consist of a pair of notched scissor-blades, the movements of which, in closing, are limited by an adjustable stop, the purpose of the latter being to determine the length of the button-holes to be cut. The stops heretofore usually employed to determine the lengths of the button-holes are screws or notched ratchet-blocks attached to one of the handles of the cutters and impinging against the other handle thereof; but these stops are open to the objection that their adjustment is liable to be disturbed in handling the cutters, so that when the latter have been set for a certain size of button-hole larger or smaller holes than are desired may be unwittingly cut by the user, owing to the accidental displacement of the stop.

In my improved button-hole cutters the stop is attached to one of the handles of the cutters in a positive manner, and is adjustable lengthwise of the handle to which it is attached toward and from the pivot of the cutters, the said stop being securely held in place by a set-screw, so that it cannot be accidentally displaced after it has been adjusted to cut a certain length of button-hole when it has been properly secured.

In the accompanying drawings, Figure 1 represents a pair of button-hole cutters with my invention applied thereto. Figs. 2 and 3 are enlarged detail views of the stop-block and its retaining-band.

A denotes the blades of the cutters, and B the handles thereof.

C is a band of proper size to surround the shank of one of the handles B, and also the shank of the stop-block D.

The band C is provided at its overlapping ends with holes *c*, through which, when the band is in its operative position, as shown in Fig. 1, the set-screw E passes into the threaded

hole *d* in the stop-block, the said screw extending through the latter to impinge against the handle to hold the stop-block in place. When the said screw is loosened slightly, the said stop-block may be adjusted from or toward the pivot *a* of the cutters, or lengthwise of the handle, to which the said stop-block is attached, the movement of the stop toward the pivot shortening the cutting movements of the blades, and the movement of the said stop in the opposite direction lengthening the cutting movements, as will be readily understood, and when the set-screw has been properly tightened the stop will be positively secured in place, so that accidental displacement thereof cannot occur.

I do not wish to be understood as limiting my invention to the precise construction herein shown and described, although I have herein set forth what I consider to be the best and most convenient form of my invention; but it is obvious that the stop-block might be permanently attached to or formed in one piece with the band C, or that other modifications within the limits of mechanical skill might be made without departing from the spirit of my invention.

I am aware of the device shown by Kamak's United States Patent No. 316,151, in which a stopping device, which is adjustable lengthwise of the handle by which it is carried, is shown, said stopping device being held to its adjustment by a spring, and being provided with a forwardly-projecting stopping portion, which extends between the shanks of the blades near the pivot. This stopping device, however, differs from mine in that it is not positively secured in position, and is therefore more or less liable to accidental displacement; and also in that the stopping projection does not extend toward the handle opposite to that to which the said device is attached, so as to impinge against the same, but projects forward so near the pivot of the cutters that the latter are liable to be strained and loosened on the pivot, and these disadvantages are avoided by my invention.

Having thus described my invention, I claim and desire to secure by Letters Patent—

1. The combination, with a pair of button-hole cutters, of a stop adjustably attached to

one of the handles thereof and movable lengthwise of the said handle, said stop being provided with a set-screw, by which it is positively retained in adjusted positions, and being also  
5 provided with a projecting portion extending toward the handle opposite that to which it is attached, substantially as set forth.

2. The combination, with a pair of button-hole cutters, of the band C, having overlapping

perforated ends, the stop-block D, having a 10 threaded hole, and the set-screw E, substantially as set forth.

In testimony whereof I affix my signature in presence of two witnesses.

WILLIAM P. VROOMAN.

Witnesses:

THOS. HUNT,  
JOHN T. GARVER.