


(No Model.)

F. VAN PATTEN.
HAME.

No. 458,604.

Patented Sept. 1, 1891.

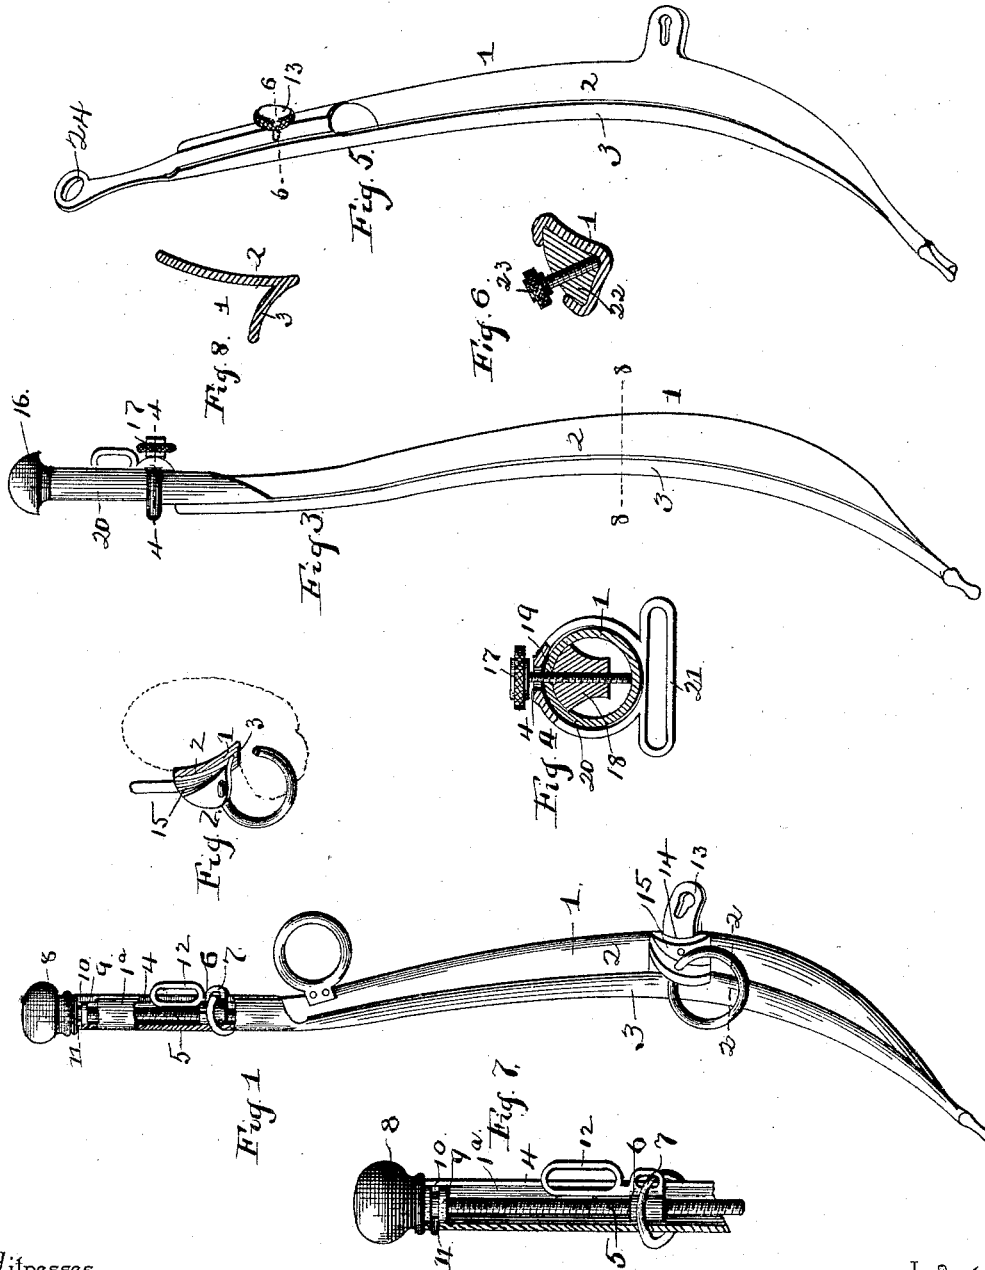

Witnesses

Norace G. Seitz

Geo. H. Wheelock

Inventor

— Frederick Van Patten, —

By his Attorneys,

C. A. Snow & Co.

UNITED STATES PATENT OFFICE.

FREDERICK VAN PATTEN, OF AUBURN, NEW YORK.

HAME.

SPECIFICATION forming part of Letters Patent No. 458,604, dated September 1, 1891.

Application filed September 6, 1890. Serial No. 364,121. (No model.)

To all whom it may concern:

Be it known that I, FREDERICK VAN PATTEN, a citizen of the United States, residing at Auburn, in the county of Cayuga and State of New York, have invented a new and useful Hame, of which the following is a specification.

My invention relates to improvements in hames; and it consists, essentially, in constructing the hame with a flange, so that it will be substantially V-shaped in cross-section with one side shorter than the other; and it also consists in certain other features, all of which will be hereinafter described, and then particularized in the claims.

In the drawings, Figure 1 is a side view of a hame embodying my improvements. Fig. 2 is an enlarged cross-section on line 2 2, Fig. 1, showing also the collar. Fig. 3 is a modification. Fig. 4 is an enlarged cross-section on line 4 4, Fig. 3. Fig. 5 is another modification, and Fig. 6 is a cross-section thereof on line 6 6, Fig. 5. Fig. 7 is a detached enlarged section of the adjusting means at the top of the hame. Fig. 8 is a transverse section on the line 8 8, Fig. 3.

1 represents the hame, and it is constructed substantially of V shape in cross-section, being provided with a wide portion 2 to fit against the collar, as usual, said portion being concave, and a narrow concave portion or flange 3, that fits against the convex front roll of the collar, said collar being shown in dotted lines in Fig. 2. This flange 3 performs two functions—that of adding strength whereby the hame can be made very light, and together with portion 2 for perfectly fitting and keeping the collar in shape. The hame may be made of cast or sheet steel or other metal, or any other suitable material.

In Fig. 1 I have shown the upper end 1^a of the hame as tubular and provided with a slot 4.

5 is a screw-bolt that screws into a screw-threaded collar 6, provided with an eye 7, projecting through the slot 4. Said eye 7 carries a loop to which the connecting-strap from the other hame is connected. The collar and its eye are adjusted up and down by the turning of a knob or bulb 8 at the upper end of the hame for operating the screw-bolt 5, said knob having in its under side a recess to provide a perfect fit for the upper end of the tubular

portion 1^a of the hame. The bolt 5, just below the knob, is enlarged at 9, and this enlargement is provided with a circumferential groove 10, that receives a screw or pin 11, projecting inwardly from the tubular portion, the object being to permit the turning of the bolt and to permit removal thereof by the removal of the screw or pin. This construction permits of the accommodation of the hames to different-sized collars.

12 is the loop for one of the reins, and which is made integral with the collar 6.

The draw-eye 13 is received in a recess 14 in a ring-holder 15 and rests against the upper surface of the hame 1. The ring-holder 15 engages under the flange 3, by which it is held more securely than otherwise.

In Figs. 3 and 4 the tubular portion of the hame has a finishing-knob 16 secured to its upper end. In this form I provide a set-screw 17, that passes through the slot 4 and engages a screw-threaded perforation in a block 18, through which it passes, so that when screwed inwardly the parts will bind by reason of the engagement of the end of the screw with the tubular portion 1^a and the consequent pressure brought to bear on block 18. This set-screw passes through a perforation 19 in the collar 20, that slides on the tubular portion, said collar being provided with loop 21 for the connecting-strap of the hames.

In Figs. 5 and 6 a similar collar and loop to that shown in Figs. 3 and 4 is employed; but instead of making the upper end of the hame tubular it is made triangular in cross-section to receive a telescopic piece 22, that is adjustable in height by means of a set-screw 23.

24 is a loop at the upper end of the telescopic piece to receive the connecting-strap of the hames.

What I claim is—

1. In a hame having a hollow slotted portion, the combination of an adjustable collar projecting through the slot, a vertical screw-bolt engaging said collar and arranged within the hollow portion of the hame, and a knob or bulb at the upper end of the bolt snugly fitting and closing the upper end of said hollow portion, swiveled to the upper end of the hame, and serving as a handle for the bolt, substantially as set forth.

2. In a hame having a hollow slotted portion,
the combination of an adjustable collar pro-
jecting through the slot, a vertical screw-bolt
provided with a circumferential groove, a pin
5 projecting into the groove, and the knob at
the upper end of the bolt for turning the
same, substantially as set forth.

In testimony that I claim the foregoing as
my own I have hereto affixed my signature in
presence of two witnesses.

FREDERICK VAN PATTEN.

Witnesses:

GEO. W. BENHAM,

B. M. WILCOX,