
(No Model.)

J. H. IRVING.

No. 492,684.

Patented Feb. 28, 1893.

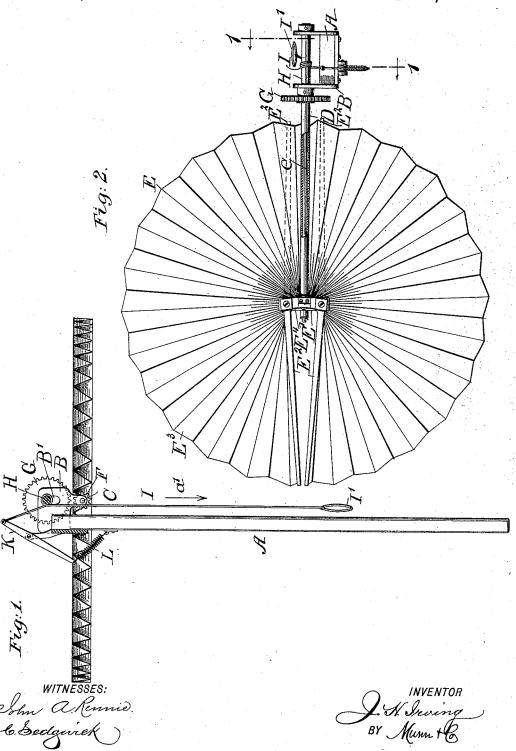

ATTORNEYS.

UNITED STATES PATENT OFFICE.

JAMES HAMILTON IRVING, OF JERSEY CITY, NEW JERSEY.

FAN.

SPECIFICATION forming part of Letters Patent No. 492,684, dated February 28, 1893.

Application filed November 16, 1892. Serial No. 452, 194. (No model.)

To all whom it may concern:

Be it known that I, James Hamilton IR-VING, of Jersey City, in the county of Hudson and State of New Jersey, have invented a new 5 and Improved Fan, of which the following is a full, clear, and exact description.

The invention relates to hand fans, and its object is to provide a new and improved fan, which is simple and durable in construction 10 and can be readily set in motion by the user, without much exertion.

The invention consists of certain parts and details, and combinations of the same, as will be hereinafter described, and then pointed

out in the claims.

Reference is to be had to the accompanying drawings forming a part of this specification, in which similar letters of reference indicate corresponding parts in all the figures.

Figure 1 is a sectional side elevation of the improvement on the line 1-1 of Fig. 2; and

Fig. 2 is an end view of the same.

The improved fan is provided with a suitably-constructed handle A carrying on its for-25 ward end, a suitable bearing B in which is secured a rod C on which is mounted to turn a hollow shaft D carrying the fan leaf E preferably made eircular in form and adapted to be folded as hereinafter more fully described.

On the hollow shaft D is secured a pinion F in mesh with a gear wheel G secured on a shaft H mounted to slide in elongated slots B' formed in the bearing B so that the said gear wheel can move in and out of mesh with the pinion 35 F. A cord or rope I winds several times around the shaft H and is provided at one end with a finger ring I' adapted to be taken hold of by one of the fingers of the hand grasping and carrying the handle A. The other end of the rope or cord I is connected with one end of a lever K, fulcrumed on the bearing B and connected at its other end with a spring L attached to the handle A, as plainly shown in

Fig. 1.

As illustrated in Fig. 2, the fan leaf E is adapted to be folded upon itself and for this purpose the fan leaf is provided with an arm E' secured to the hollow shaft B and carrying on its ends the pivoted arms E2 connected 50 with the free end of the folded fan leaf E3 proper. A spring E4 secured on the frameE'

the arms E², so as to hold the latter in either an open position, as shown in Fig. 2, or in a closed position, that is when the said arms 55 have been given one-half turn toward the shaft

D; see dotted lines in Fig. 2.
The device is used as follows: When the fan leaf E³ proper, is extended as shown in Fig. 2, and the operator takes hold of the han- 60 dle A with one hand and inserts one of his fingers of this hand in the ring I' and pulls on the same in the direction of the arrow a', then the shaft H is drawn inward in the slots B' so that the gear wheel G is brought in mesh 65 with the pinion F, so that on a further pull on the ring $ar{\mathbf{I}}'$, the said shaft H, the gear wheel G and the pinion F are rotated, whereby the fan E is revolved in one direction. At the same time, the pull on the rope I causes the lever 70 K to swing, thus compressing the spring L so that on the operator releasing the pull on the ring I' the spring L exerts a pressure on the lever K to cause the latter to swing back to its normal position shown in Fig. 1, whereby 75 the rope I is pulled in the inverse direction of the arrow a', and turns the shaft H first outwardly and then rotates it in the inverse direction as soon as it is out of mesh with the pinion F. At the next forward pull 80 on the ring I' in the direction of the arrow a', the above described operation is repeated, that is the shaft H slides in the slots B' to bring its gear wheel G in mesh with the pinion F and on the release of the pressure 85 on the ring I', the shaft H slides outward to move the gear wheel G out of mesh with the pinion F. Thus, it will be seen that on every pull on the ring I', the fan E is rotated so as to cause a disturbance of the air surrounding 90 it, thus fanning the person carrying the fan.

Having thus fully described my invention, I claim as new and desire to secure by Letters

Patent-

1. A folding fan comprising the cross arm E' 95 provided at its ends with the pivoted arms E2 having squared portions at their pivoted ends, a spring bearing on said squared portions and holding the arms open or closed and the fan leaf E⁸ secured to the arm E' and arms E², 100 substantially as set forth.

2. A hand fan comprising a handle, a fan shaft journaled transversely in the outer end presses onto the squared ends of the pivots of I thereof, a cross arm on the outer end of the

in the plane of the shaft, the folding circular leaf secured to the said cross and swinging arms, a drive shaft journaled in bearings on 5 the handle, gearing for connecting said two shafts and an operating mechanism for the drive shaft, substantially as set forth.

2

3. A fan consisting in the handle provided with a transverse fan shaft carrying the fan 10 leaf at its outer end and provided with a pinion at its inner end, a drive shaft movable toward and from the fan shaft and having a pinion to mesh with that on the fan shaft, a spring normally holding the drive shaft away 15 from the fan shaft and disconnecting their pinions, and a cord for rotating the drive shaft |

shaft provided with swinging arms at its ends | and at the same time drawing it toward the fan shaft to throw said pinions into mesh, sub-

stantially as set forth.

4. The combination with the fan shaft and 20 its pinion, of the drive shaft movable toward and from the fan shaft and having a pinion to engage with the pinion thereof, a spring pressed lever and an operating cord wound about the drive shaft and connected with one 25 end of the spring pressed lever, substantially as set forth.

JAMES HAMILTON IRVING.

Witnesses: THEO. G. HOSTER, C. Sedgwick.