

## A. W. HOUSE. MANTEL.

No. 493,404.

Patented Mar. 14, 1893.

Fig. 1.

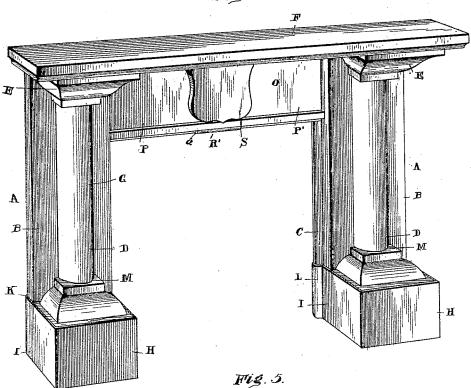

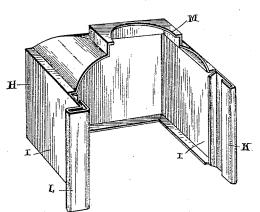

Witnesses


AW.House.

Inventor

## A. W. HOUSE. MANTEL.

No. 493,404.

Patented Mar. 14, 1893.

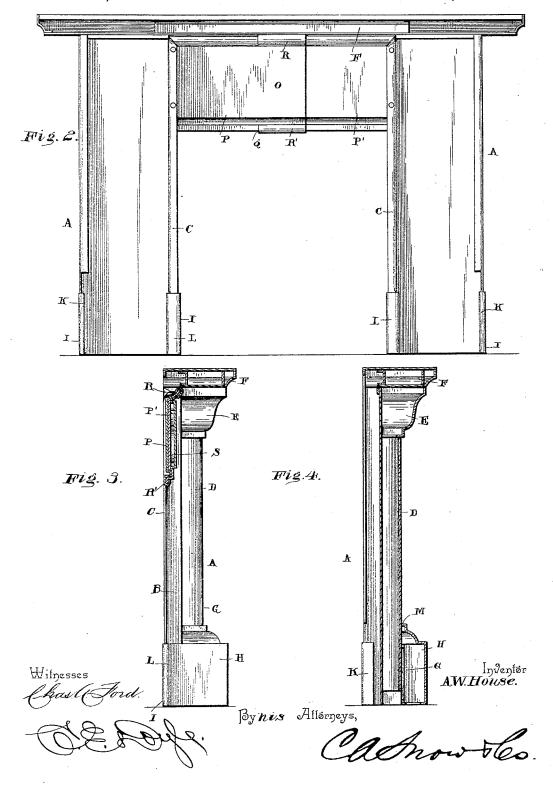

## UNITED STATES PATENT OFFICE.

ALLEN W. HOUSE, OF HOMESTEAD, PENNSYLVANIA.

## MANTEL.

SPECIFICATION forming part of Letters Patent No. 493,404, dated March 14, 1893.

Application filed July 22, 1892. Serial No. 440,895. (No model.)

To all whom it may concern:

Be it known that I, ALLEN W. House, a citizen of the United States, residing at Homestead, in the county of Allegheny and State of Pennsylvania, have invented a new and seful Sheet-Metal Mantel, of which the following is a specification.

My invention relates to improvements in nantels, and refers particularly to mantels formed of sheet-metal, the object of my improvement being to provide a mantel capable of adjustment to different sizes of fire-places, and at the same possessing the requisite strength, durability, and rigidity.

A further object of my invention is to provide adjusting means which are simple in construction and enable the parts to be independently adjusted at the place of attachment.

Further objects of my invention will appear in the following description, and the novel features thereof will be particularly pointed out in the claims.

In the drawings: Figure 1 is a perspective view of a mantel embodying my improvement.

Fig. 2 is a rear view of the same. Fig. 3 is a vertical central sectional view, taken through the coupling by which the two sections of the breast are united. Fig. 4 is a vertical sectional view through one of the jambs. Fig. 5 is a detail perspective view of one of the adjustable bases.

A A represent the side-jambs, provided with the inner and outer returns B, the inner returns terminating in the facings C, which 35 are adapted to rest against the wall close to the sides of the chimney or fire-place opening. To the front surfaces of the jambs are attached the ornamental pilasters D D, provided at their upper ends with the crowns or caps E, 40 upon which is supported the horizontal shelf F. The shafts G of the said pilasters are extended nearly to the lower ends of the jambs, and are finished or covered, as are the bottoms of the jambs, by the vertically-adjustable 45 bases H. The sides of said bases are carried rearwardly to form flanges I, the rear ends of the outer flanges being returned or bent inwardly to form guides K to engage the rear edges of the jambs, and the inner flanges be-50 ing bent inwardly upon the above-mentioned facings, and then returned, or bent outwardly and forwardly, to form guides L to slide upon I said facings. The bases are provided in their upper sides with openings M, to receive the shafts of the pilasters, whereby the appearance is the same in all adjustments of the bases.

By reference to Fig. 2 of the drawings, it will be noted that the bearing-surfaces for the side-jambs, are formed by inwardly-bent edges, 60 those at the inner sides of the jambs having been described above as facings, and those upon the outer sides thereof being formed by bending the edges of the outside flanges. The breast of the mantel, which is shown at O, 65 comprises two relatively adjustable sections P P', which are attached, respectively, to the upper ends of the side-jambs and overlap each other at their inner ends, said overlapping ends being united by the coupling Q. This coup- 70 ling comprises the upper guide R, which is carried by the section P and embraces the upper edge of the section P', whereby the latter is enabled to slide through the guide, and the lower guide, R', which is attached to the 75 lower edge of the section P' and extends to the rear and engages the lower edge of the section P, whereby the latter is enabled to slide freely therein.

The conformation and configuration of the 80 mantel, including various ornaments which may be attached thereto, form no part of my invention, as they may be varied at the discretion of the manufacturer; but I have shown, at the center of the breast of the mantel, a 85 breast-plate S, to cover and conceal the coupling which is employed to unite the inner ends of the sections of the breast. This breast-plate being adjustable, may be arranged to suit the adjustment of the sections.

From the above description, it will be obvious that the width of my improved mantel may be altered at will to suit the width of the fire-place opening, no securing devices being required to hold the parts in their adjusted positions, and also that the height of the mantel may be adjusted by sliding the bases downwardly or upwardly upon the jambs. It will be seen that the bases conform at their outer and inner sides to the shape of the side-jambs, nowhereby the appearance of this part of the device is the same with all adjustments of the bases.

Having thus described my invention, what

I claim, and desire to secure by Letters Pat-

ent. is—

1. In a device of the class described, the side jambs and the horizontal breast connecting said jambs at their upper ends and comprising independent overlapping sections P P', attached to and carried by the jambs, respectively, the section P being provided at its upper edge with a guide R to engage the upper edge of the section P', and the latter being provided at its lower edge with a guide R' to engage the lower edge of the section P, substantially as specified.

2. A portable and adjustable mantel comprising hollow bases, independent side-jambs adjustably fitted at their lower ends, respectively, in said bases, a breast formed in separate overlapping sections permanently attached at their outer ends to the jambs, means

20 to secure the overlapping inner ends of the

sections of the breast together, and a separable shelf supported upon the upper ends of the side jambs, all substantially as specified.

3. In a mantel, the combination with the side-jambs provided at their inner and outer 25 sides with returns and at their inner sides with facings, of the vertically-adjustable bases provided with rearwardly-extending flanges bearing guides to engage, respectively, the rear edges of the outside returns and the 30 inner edges of said facings, substantially as specified.

In testimony that I claim the foregoing as my own I have hereto affixed my signature in

the presence of two witnesses.

ALLEN W. HOUSE.

Witnesses:

W. C. MILLER, J. W. BOWER.

Affidavit having been filed showing that the name of the patentee in Letters Patent. No. 493,404, granted March 14, 1893, for an improvement in "Mantels," should have been written and printed Allen W. Honse, instead of "Allen W. House," it is hereby certified that the proper correction has been made in the files and records pertaining to the case in the Patent Office, and should be read in the Letters Patent that the same may conform thereto.

Signed, countersigned, and sealed this 25th day of April, A. D. 1893.

[SEAL.]

JNO. M. REYNOLDS, Assistant Secretary of the Interior.

Counter signed:

John S. Seymour, Commissioner of Patents.