

(No Model.)

H. LOFTIE.
BRICK.

No. 523,076.

Patented July 17, 1894.

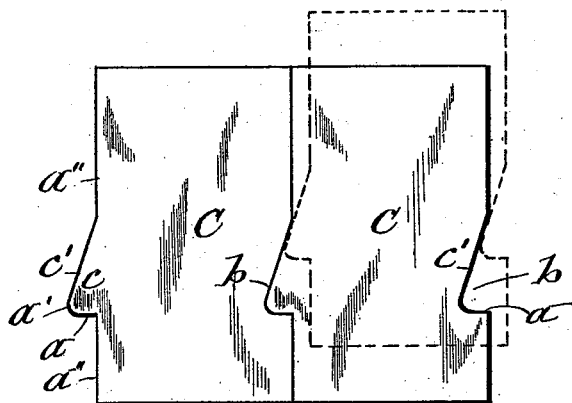


Fig. 1

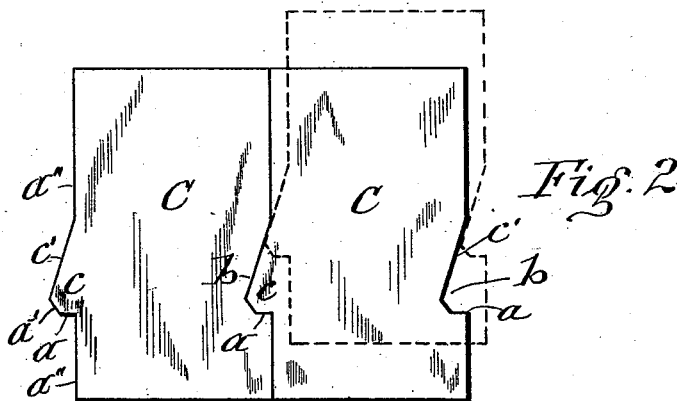


Fig. 2

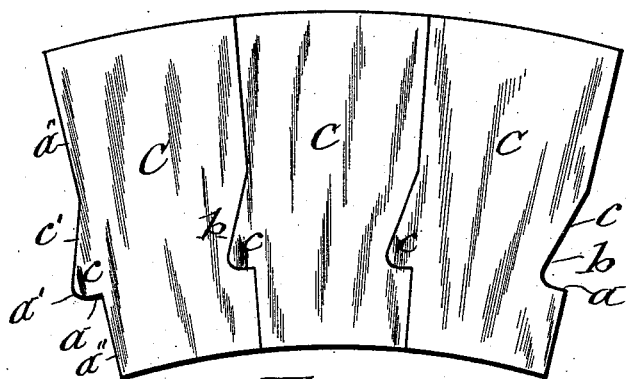


Fig. 3

WITNESSES:

L. B. Rendix
J. J. Laasy

INVENTOR:

Henry Loftie
By E. Laasy
his ATTORNEY

UNITED STATES PATENT OFFICE.

HENRY LOFTIE, OF SYRACUSE, NEW YORK.

BRICK.

SPECIFICATION forming part of Letters Patent No. 523,076, dated July 17, 1894.

Application filed October 6, 1893. Serial No. 487,331. (No model.)

To all whom it may concern:

Be it known that I, HENRY LOFTIE, of Syracuse, in the county of Onondaga, in the State of New York, have invented new and useful
5 Improvements in Bricks, of which the following, taken in connection with the accompanying drawings, is a full, clear, and exact description.

This invention relates to building and paving
10 ing bricks, especially to that class of bricks which are formed with tongues and grooves for interlocking with those of the adjacent bricks.

The object of my present invention is to
15 provide bricks with longitudinal interlocking side-bearings having positive engaging shoulders at right angles to the sides of the bricks and so shaped as to allow the bricks to be
20 easily molded with said bearings and to be handled and transported with less liability of breaking or injuring the bearings formed thereon, and also allow said bricks to be set
25 edgewise upon a foundation of either sand or mortar or other loose or soft material without danger of causing said material to be dragged
and caught between the bricks by the brick in
process of being laid. I thus insure close and
perfect joints between the bricks which are
30 caused to support each other by their abrupt or square engaging shoulders.

To this end my invention consists essentially of a brick having on one side a longitudinal projection and in the opposite side a
35 corresponding longitudinal groove, said projection and groove being formed with a right angled bottom shoulder and with a gradually sloping top and blunted at the junction of
said top and bottom portions, all as herein-
after more fully described and specifically set
40 forth in the claim.

The invention is fully illustrated in the annexed drawings, in which—

Figures 1 and 2 are end views of bricks
45 formed for setting them on a horizontal bed or foundation, and Fig. 3 is an end view of bricks shaped for setting them in a crowning or arching position.

C—C— represent the ends of the bricks
50 which are designed to be set edgewise as shown. Each of these bricks I form with the longitudinal projection —c— on one side and with the corresponding longitudinal groove —b— on the opposite side. Said pro-

jection and groove are each formed with the
horizontal or right angled bottom shoulder 55
—a— and with the sloping top —c'— and blunted at the junction of said bottom and
top portions as shown at —a'. The side portions —a''— above and below the projection
and groove are in line with each other. The 60
projection —c— is thoroughly braced by the long and gradually sloping top portion —c'—
thereof, and the breaking of the projection is
further guarded against by the blunting
—a'— thereof, and thus the square and posi- 65
tive bearing shoulder —a— is preserved. Besides this the sloping portions —c'— of the
projection and groove allow the brick to be
brought down closely by the side of the
previously laid brick as represented by dotted 70
lines in Figs. 1 and 2 of the drawings and to be seated with its square projecting shoulder
—a— upon the corresponding shoulder in the
bottom of the groove —b— of the adjacent
brick. This latter simultaneous downward 75
and lateral movement of the brick obviates the liability of dragging into the joint between the bricks the underlying sand, or mortar or other loose or soft material of which
the bed or foundation is composed. I thus 80
insure a perfectly close joint between the bricks and a perfect engagement of the interlocking shoulders thereof.

Bricks designed for forming an arch or to
be laid on a crowning bed or foundation have 85
their side-portions above and below the projection —c— and groove —b— sloped convergent from the top to the bottom of the
brick as shown in Fig. 3 of the drawings.

What I claim as my invention is— 90

The improved building and paving brick
having on one side a longitudinal projection
and in the opposite side a corresponding longitudinal groove, said projection and groove
being formed with a right angled bottom 95
shoulder and with a gradually sloping top and blunted at the junction of said top and
bottom portions substantially as and for the purpose set forth.

In testimony whereof I have hereunto 100
signed my name this 3d day of October, 1893.

HENRY LOFTIE. [L. S.]

Witnesses:

J. J. LAASS,
C. L. BENDIXON.