


No. 648,257.

Patented Apr. 24, 1900.

J. HEYMAN.
SUSPENDER END.

(Application filed Dec. 16, 1899.)

(No Model.)

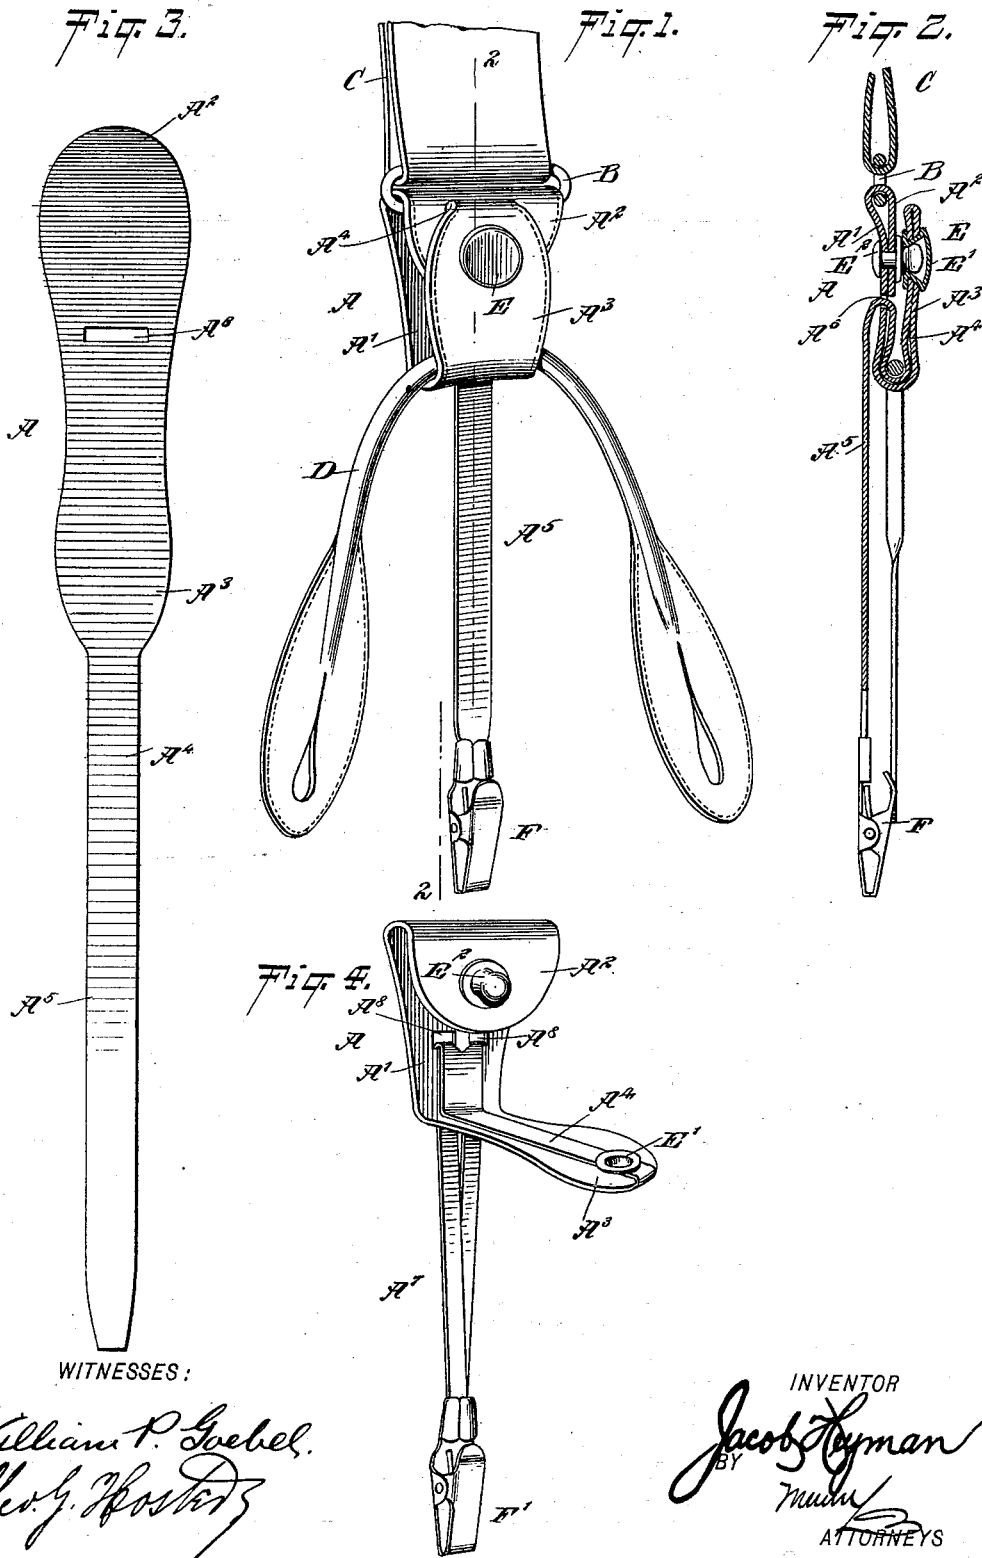

UNITED STATES PATENT OFFICE.

JACOB HEYMAN, OF NEW YORK, N. Y.

SUSPENDER-END.

SPECIFICATION forming part of Letters Patent No. 648,257, dated April 24, 1900.

Application filed December 16, 1899. Serial No. 740,535. (No model.)

To all whom it may concern:

Be it known that I, JACOB HEYMAN, a subject of the Emperor of Germany, and a resident of the city of New York, borough of Manhattan, in the county and State of New York, have invented a new and Improved Suspenders-End, of which the following is a full, clear, and exact description.

The invention relates to front suspender-ends having button-pieces for connecting with trousers and terminal drawers-supporting tongues.

The object of the invention is to provide a new and improved suspender-end having its strap reinforced at the inside to readily withstand the strain exerted by the button-piece on the strap, the latter, its reinforcing-strip, and the drawers-supporting tongue being all made of a single piece of leather or like material to cheapen the cost of the manufacture of the suspender-end and to render the latter exceedingly durable.

The invention consists of novel features and parts and combinations of the same, as will be fully described hereinafter and then pointed out in the claim.

A practical embodiment of the invention is represented in the accompanying drawings, forming a part of this specification, in which similar characters of reference indicate corresponding parts in all the views.

Figure 1 is a perspective view of the improvement as applied. Fig. 2 is a transverse section of the same on the line 2 2 in Fig. 1. Fig. 3 is a plan view of the blank for the reinforced strap and the tongue, and Fig. 4 is a perspective view of a modified form of the strap in an open position.

The improved suspender-end is provided with a strap A, made of leather or other suitable material and doubled up to form a loop, the upper portion of which is adapted to engage a loop B on the lower end of the shoulder-strap C of the suspender. The strap A when doubled up forms a back A', having an integral overhanging top piece A² for engagement with the loop B, as described, said strap having its front A³ extending a sufficient distance upward to pass in front of the overhanging portion A², and the upper end of the front A³ terminates in a reinforcing-strip A⁴, which extends on the inside of the strap-loop

along the front A³ and the bottom of the strap-loop, and then extends upward a distance on the back A' and terminates in a tongue A⁵, which passes through a slot A⁶ in the back A' and hangs downward from the strap, as is plainly indicated in the drawings, between the ends of the button-piece, the middle portion of which rests on the reinforcing-strip A⁴, as is plainly indicated in Figs. 1 and 2. The upper end of the front A³ and the overhanging portion A² are adapted to be connected with each other by a fastening device E, preferably having two members—namely, a socket E' and a button E²—of which the button connects with the overhanging portion A² below the loop part for the loop B. The socket E' binds upon the front A³ the upper end of the reinforcing-strip A⁴, so that the reinforcing-strip and the front are securely held together.

Now by the arrangement described the loop of the strap A can be readily opened or closed by separating or closing the members E' E² of the fastening device E to insert or remove or lock the button-piece D in place when the latter is attached to the buttons of the trousers.

On the lower end of the tongue A⁵ is secured a suitable fastening device F of any approved construction for connecting the tongue with the drawers, so that the tongue forms a support for the drawers.

As shown in Fig. 4, the tongue A⁷ is made in two parts, extending through separate slots A⁸ in the back A' of the strap A, and the lower ends of said separate strap parts are placed one in front of the other and connected with the fastening device F'. In either of the two constructions, however, the strap proper, the reinforcing-strip A⁴, and the tongue A⁵ are made from a single piece of material, so that it requires but comparatively little labor to form the suspender-end with the strap reinforced, as described, at its essential point and at the same time form a terminal drawers-supporting tongue.

It is understood that when the device is used the strain of the button-pieces D on the trousers is principally exerted on the reinforced portion of the suspender-strap A, and consequently there is no danger of the strap breaking under a heavy strain or becoming otherwise disarranged.

Having thus fully described my invention, I claim as new and desire to secure by Letters Patent—

5 A suspender-end, provided with a strap whose one end is adapted to be secured to a loop on the shoulder-strap of the suspender and provided with a slot near said end, the said strap being bent upwardly at an intermediate portion toward the end of the strap
10 whereby to form a tab-retaining loop with such end and then doubled upon itself to form a reinforcing-strip, the said reinforcing-strip extending downwardly along the inner face

of the adjacent member of the loop, across the bottom thereof, upwardly along the inner 15 face of the opposite member of the loop, and finally passing out through the slot and downwardly below the loop whereby to form a drawers-retaining tongue.

In testimony whereof I have signed my 20 name to this specification in the presence of two subscribing witnesses.

JACOB HEYMAN.

Witnesses:

EVERARD BOLTON MARSHALL,
ALFRED H. DAVIS.