


Medium voltage power supplies thyristor regulated Series MYN from 650 V to 2000 V / 7kW to 70 kW



Design examples

MYN 14000 - 650
650V / 20A

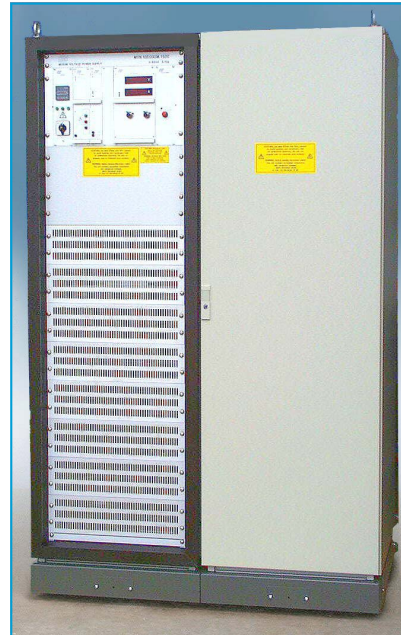

MYN 105000 - 1500
1500V / 70A

Features:

- Simple construction
- Extremely robust
- High efficiency
- Short circuit proof and unlimited operation with full current in short circuit condition
- Voltage and current regulation with automatic and sharp transition; control mode indicated by LEDs
- Voltage and current setting with 10-turn potentiometers with precision scale; the adjusting knob can be locked
- Limitation of inrush current on switching on
- Suitable also for inductive and capacitive loads
- Interlock loop to monitor the external load and internal loop as a standard
- Elapsed-hour meter as a standard

Function:

A transformer is used to transform the mains supply to high voltage. Either on the primary side or on the secondary side of this transformer a phase controlled thyristor rectifier circuit is fitted. A series LC filter is used to smooth the resulting rectified voltage.

Design:

- Depending on Voltage and Power the units are built as single or double 19" cabinets of various height. The side covers are detachable, the rear door is lockable.
- All cabinets are equipped with fork-lift-compatible plinths and removable crane-eyes.
- Single 19"- cabinets up to 38U are easily transportable by fork-lift.
- Cooling is carried out via built-in fans, with the air being exhausted (depending upon type) either via the rear or the top.

Output:

- Output isolation:
The output is floating with isolation voltage $\pm 2000V$ against earth. Either the positive or the negative terminal may be connected to earth.
- Output terminals:
All output terminals are located at the rear side of the cabinet. For Output current up to 10A high voltage connectors with the appropriate dielectric strength are installed. Mating connectors are delivered with the power supply. For higher current feed through terminals.

Technical Data:

- Mains connection:
400V $\pm 10\%$ 47Hz to 53Hz, three-phase
- Ambient temperature:
0°C to +40°C

The following data applies for voltage and current regulation, and refers to the rated value (unless otherwise stated):
(For explanations please refer to Definitions and Terms on page 61.)

- Setting range:
from approx. 1% to 100%
- Setting resolution:
 $\pm 1 \times 10^{-4}$
- Residual ripple:
 $< 1 \times 10^{-2} \text{pp} + 100 \text{mVpp}$
- Recovery time:
<100ms to 500ms (depending on type) for load variations of $\pm 10\%$
- Setting time at nominal load:
<100ms to 2 sec (depending on type) for changes of the output voltage from 10% to 90% or 90% to 10%
- Discharging time constant for output without load:
approx. 5sec. to 60sec., depending on type

- Deviation:
for $\pm 10\%$ mains voltage variation:
 $< \pm 1 \times 10^{-4}$
for no load / full load:
 $< \pm 1 \times 10^{-3}$
over 8 h under constant conditions:
 $< \pm 3 \times 10^{-4}$
within the temperature range:
 $< \pm 3 \times 10^{-4} / K$

Possible Options:

- Analogue programming (One of the outputs on "0V" - potential; see also page 52)
- Analogue programming, floating (see page 52)
- Computer interface - IEEE 488, RS 232, RS 422, Profibus DP (more on request) (see page 54)
- Internal resistance setting and regulation (see page 56)
- Power regulation with display (see page 56)
- Roller blades for cabinet units

More options and special solutions on request. Some options may involve changes to the description of the unit - especially concerning the mechanical design.

Medium voltage power supplies thyristor regulated

Series MYN from 650 V to 2000 V / 7kW to 70 kW



Type	Voltage	Current	Width	Height	Depth	Weight
MYN 7000 - 650	0 - 650 V	0 - 10 A	19" / 600 mm	20 U / 1100 mm	600 mm	230 kg
MYN 10500 - 650	0 - 650 V	0 - 15 A	19" / 600 mm	29 U / 1500 mm	600 mm	340 kg
MYN 14000 - 650	0 - 650 V	0 - 20 A	19" / 600 mm	29 U / 1500 mm	600 mm	400 kg
MYN 21000 - 650	0 - 650 V	0 - 30 A	19" / 600 mm	38 U / 2000 mm	800 mm	480 kg
MYN 28000 - 650	0 - 650 V	0 - 40 A	19" / 600 mm	38 U / 2000 mm	800 mm	600 kg
MYN 35000 - 650	0 - 650 V	0 - 50 A	19" / 600 mm	38 U / 2000 mm	800 mm	800 kg
MYN 70000 - 650	0 - 650 V	0 - 100 A	19" / 600 mm	38 U / 2000 mm	800 mm	1400 kg
MYN 7000 - 1250	0 - 1250 V	0 - 5 A	19" / 600 mm	20 U / 1100 mm	600 mm	230 kg
MYN 10500 - 1250	0 - 1250 V	0 - 8 A	19" / 600 mm	29 U / 1500 mm	600 mm	340 kg
MYN 14000 - 1250	0 - 1250 V	0 - 10 A	19" / 600 mm	29 U / 1500 mm	600 mm	400 kg
MYN 21000 - 1250	0 - 1250 V	0 - 15 A	19" / 600 mm	38 U / 2000 mm	800 mm	480 kg
MYN 28000 - 1250	0 - 1250 V	0 - 20 A	19" / 600 mm	38 U / 2000 mm	800 mm	600 kg
MYN 35000 - 1250	0 - 1250 V	0 - 25 A	19" / 600 mm	38 U / 2000 mm	800 mm	800 kg
MYN 70000 - 1250	0 - 1250 V	0 - 50 A	19" / 600 mm	38 U / 2000 mm	800 mm	1400 kg
MYN 7000 - 2000	0 - 2000 V	0 - 3 A	19" / 600 mm	20 U / 1100 mm	600 mm	230 kg
MYN 10500 - 2000	0 - 2000 V	0 - 5 A	19" / 600 mm	29 U / 1500 mm	600 mm	340 kg
MYN 14000 - 2000	0 - 2000 V	0 - 6 A	19" / 600 mm	38 U / 2000 mm	800 mm	400 kg
MYN 21000 - 2000	0 - 2000 V	0 - 10 A	19" / 600 mm	38 U / 2000 mm	800 mm	480 kg
MYN 28000 - 2000	0 - 2000 V	0 - 12 A	19" / 600 mm	38 U / 2000 mm	800 mm	600 kg
MYN 35000 - 2000	0 - 2000 V	0 - 15 A	19" / 600 mm	38 U / 2000 mm	800 mm	800 kg
MYN 50000 - 2000	0 - 2000 V	0 - 25 A	19" / 600 mm	38 U / 2000 mm	800 mm	1200 kg

Mating high voltage connectors for units with up to 10A output current are included in the scope of delivery. Mating high voltage cables you'll find beginning with page 59.