NOTES ON THIS MANUAL

Keep these instructions with your computer at all times. The proper set up, use and care can help extend the life of your computer. In the event that you transfer ownership of this computer, please provide these instructions to the new owner.

This manual is divided into sections to help you locate the information you require. Along with the Table of Contents at the beginning of this manual, an Index has been provided to help you find topical information.

If you want to start up your PC immediately, please read the chapters Operational Safety (page 3) and Setting up and Getting Started (page 8).

We strongly recommend you read this entire manual to ensure the proper set-up and operation of your PC.

Many application programs incorporate extensive help functions. As a general rule, you can access help functions by pressing F1 on the keyboard. These help functions will be available to you while you are using the Microsoft Windows[®] operating system or the respective application program.

We **strongly recommend** that you read the Online Manual for your PC, which can be found in the **Start Menu**.



M Information about your PC

This interactive manual is designed to provide additional information about your PC as well as useful links accessible via the World Wide Web.

Windows^{xp} invites you to a **tour** (notes on the task bar) to familiarize yourself with the operating system. We listed further useful sources of information starting on page 60.

AUDIENCE

These instructions are intended for both the novice and advanced user. Regardless of the possible professional utilisation, this PC is designed for day-to-day household use. The functions and applications for use with this PC have been designed with the entire family in mind.

PURCHASE DETAILS

| Serial Numbers | |
|----------------------------|--|
| (i.e. Microsoft®) | |
| Place and date of Purchase | |

Enter your purchase details below for quick reference.

You will find the PC serial number on the Service Hotline card. The serial number also appears on the rear of the PC.

QUALITY

Medion has selected the components in this computer for their high level of functionality, ease of use, safety and reliability.

Through balanced hardware and software design we are able to provide you with an innovative personal computer useful for applications relating to both work and leisure.

We are pleased to welcome you as our newest customer. **Thank you for choosing our products.**

Information in this document is subject to change without notice.

MAKING COPIES OF THIS MANUAL

This manual contains information protected by law. All rights reserved. Duplicating this information in mechanical, electronic, or any other form, without the written approval by the manufacturer, is prohibited by copyright law.

^{© 2005} Medion®. All rights reserved. Microsoft®, MS-DOS®, and Windows are registered trademarks of Microsoft Corporation in the U.S. and other countries. Pentium® is a registered trademark of Intel Corporation. The names of actual companies and products mentioned herein may be the trademarks of their respective owners.

Table of Contents

| | Notes on This Manual | ii ii ii |
|----------|---|----------------|
| <u>S</u> | afety and Maintenance | 1 |
| | Operational Safety Data Security | |
| <u>S</u> | etting Up & Getting Started | <u>5</u> |
| | Included with Your PC | 7 |
| | Setting Up | 8 |
| | Positioning the Monitor | |
| | Working in Comfort | 9 |
| | Set-Up Location | |
| | Ambient Temperature | |
| | Connecting | |
| | Cabling | |
| | Front connectors | |
| | Connecting the Monitor | |
| | Installing Wireless Keyboard & Mouse | |
| | Connecting a USB Keyboard/Mouse Connecting a PS/2 Keyboard/Mouse | |
| | Connecting Parallel Devices | |
| | Modem/ISDN Connection | |
| | Connecting Serial Devices | |
| | LAN Connection | |
| | Connecting Speakers/Audio Output | |
| | Connecting a Sound Source/Audio Input | . 22 |
| | Connecting a Microphone | |
| | Antenna connection for TV / radio receiver | |
| | Connecting the PC to a Television | |
| | Connecting a recording source / Video inlet | |
| | USB/IEEE 1394 | |
| | Connecting the Power Supply | . 25 |

| Getting Started | |
|---|----------|
| Switch | |
| Main Power Switch | 26 |
| Short description of the Windows® Desktop | 28 |
| Operation | 31 |
| Operation | 33 |
| The Mouse | |
| The Keyboard | |
| Neigungswinkel der Tastatur | |
| The Alt and Ctrl Keys | |
| Multimedia Functions | |
| Readjustment of the Mouse/Keyboard | |
| The Hard Drive | |
| Important directories | 38 |
| The optical drive | 39 |
| Loading a Disk: | 40 |
| Playing Back and Retrieving Data from Discs | |
| How to remove a Disc: | |
| The CD-Rom/DVD drive as Boot Drive | |
| DVD Technology | 42 |
| Subjects Concerning the CD/DVD-Rewriter | |
| Recordable/Rewriteable Discs | |
| The Card Reader | |
| The Graphics Card | |
| Performance characteristics | |
| Current image playback frequencies Connecting the PC to a Television | |
| The Sound Card | |
| USB Port | |
| IEEE 1394 (Fire Wire) | 50 |
| Application Options for IEEE1394 | 50 50 |
| Technical Specifications | |
| The Radio-/TV- Tuner Card | |
| Software for your Radio/TV Tuner Card | |
| The Network | |
| What is a Network? | 52 |
| What Do You Need for Networking? | 53 |
| Wireless LAN | |
| Bluetooth | |
| Enabling and disabling Bluetooth/WLAN | 57 |

| Troubleshooting within the Network | 58 |
|------------------------------------|----|
| Modem / ISDN | 59 |
| What is a Modem? | 59 |
| Serial COM-Port | 59 |
| Software | |
| Getting to Know Windows XP | 60 |
| Writing CDs/DVDs | |
| Installation of Software | 63 |
| Windows Activation | 65 |
| BIOS Setup | 66 |
| Customer Service & Self-Help | 67 |
| Self-Help | 69 |
| Data and System Security | |
| Data Security | |
| Maintenance Programs | 69 |
| Password Reset File | |
| System Recovery | |
| Correction | |
| Windows [®] Update | |
| Restoring the Factory Settings | 73 |
| Limits of the Recovery | 73 |
| Carrying out a Restore | |
| FAQ - Frequently Asked Questions | 75 |
| Customer Service | 77 |
| Troubleshooting | 77 |
| Localise the Cause | 77 |
| Errors And Possible Causes | 78 |
| Additional Support | 79 |
| Driver Support | |
| Transporting the PC | 80 |
| Cleaning and Care | 80 |
| Recycling and Disposal | |
| Battery treatment | 81 |
| Upgrades and Repairs | |
| Notes for Service Engineers | 83 |

| Appendix | 8 <u>5</u> |
|--|------------|
| Standards | 87 |
| Electromagnetic Compatibility | 87 |
| Electrical Safety | |
| Ergonomics | 87 |
| Noise Emission | 88 |
| Information about the regulatory compliance of | |
| the modem | 88 |
| Information about the regualtory compliance of v | wireless |
| keyboard / mouse, Bluetooth and wireless LAN. | 88 |
| FCC Compliance Statement | |
| Warranty | 90 |
| Liability limitations | |
| Copying this manual | 91 |
| Index | 92 |

Chapter 1

Safety and Maintenance

| Subject | Page |
|--------------------|------|
| | |
| Operational Safety | 3 |
| Data Security | 4 |

OPERATIONAL SAFETY

Please read this chapter carefully and observe all listed notes. This ensures a reliable operation and long life expectancy of your PC.

- Do not allow children to play unattended with electrical equipment. Children are incapable of judging potential risks properly.
- Do not open the PC casing or use the PC with the casing removed. When the casing is open there is a danger to life from electric shock.
- CD-ROM-/CDRW-/DVD-drives are Laser Class 1 devices. These lasers must remain in their sealed PC casing. Do not remove the drive covers, as exposure to the lasers may prove harmful.
- Do not insert objects through the slots and openings of the PC. This may lead to electric shock or an electrical shortcircuit or fire that will damage your PC.
- Do not cover the slots and openings in the PC casing. These openings are for ventilation purposes. Covering these vents may lead to overheating.

Switch off your PC immediately or do not switch it on at all and contact customer service ...

- ... if the power cord or the connectors attached to it are burnt or damaged. Replace the defective power cord with an original power cord. Under no circumstances may a defective power cord be repaired.
- ... if the housing of the PC is damaged or fluids have leaked into it. Have the PC checked by customer service first, because the PC may not be safely operated otherwise and there may be a life-threatening risk of electrocution!

DATA SECURITY



Every time you update your data make back-up copies on an external storage medium. The supplier does not assume liability for data loss or damage to data storage units, and no claims can be accepted for damages resulting from the loss of data or consequential losses.

Chapter 2

Setting Up & Getting Started

| Subject | age |
|-------------------------|------|
| | |
| Included with Your PC | 7 |
| Setting Up | 8 |
| Positioning the Monitor | 8 |
| Set-Up Location | .11 |
| Connecting | .12 |
| Getting Started | . 26 |

INCLUDED WITH YOUR PC

Please check that the contents listed below are supplied with your package and notify us <u>within 14 days of purchase</u> if this is not the case. You MUST provide your PC's serial number when contacting a customer service representative.

Your PC bundle should include the following components:

PC and power cord

Windows-compatible keyboard⁺

Mouse⁺

Remote Control Set (optional)

Microsoft Windows® Getting Started Manual + Recovery CD for re-installing the operation system

Application and Support CD

This instruction manual

Warranty Card

Setting-up poster (optional)

^{*} optional


⁺ As a USB radio kit these devices may optionally be equipped with a radio receiver.

SETTING UP

Remember that choosing the proper location for your PC is just as important as connecting it correctly. Place your PC in a stable, vibration-free area. Detailed below are additional guidelines on setting up your PC.

Positioning the Monitor

Ensure that the monitor is set up in such a way that reflections, glare and light/darkness contrast are avoided.

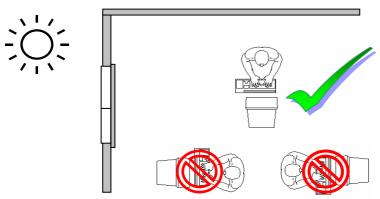

You should not position the monitor in close proximity to a window, because this is the brightest area of the room because of daylight. This brightness impedes the adjustment of the eyes to the darker monitor.

Always position the monitor in a line of sight that runs parallel to the window front (see picture).

You should also apply a parallel line of sight with respect to artificial lighting. This means that in a room lit by artificial light essentially the same criteria and objectives apply. Should it not be possible to arrange the monitor as outlined above, the following measures might be helpful:

- Turn, lower or incline the monitor.
- Place horizontal or vertical shades at the windows.

WORKING IN COMFORT

 Take regular breaks from the work at your screen to prevent tenseness and exhaustion.

Sitting in one position for long periods can be uncomfortable. To minimize the potential for physical discomfort or injury, it's important that you maintain proper posture.

- Overall: Change your position frequently and take regular breaks to avoid fatique.
- Back: While sitting at your work surface, make sure your back is supported by the chair's backrest in erect position or angled slightly backwards.
- **Legs**: Your thighs should be horizontal or angled slightly downward. Your lower legs should be near a right angle to your thighs. Your feet should rest flat on the floor. If necessary, use a footrest, but double check that you have your seat height adjusted correctly before getting a footrest.
- Arms: Your arms should be relaxed and loose, elbows close to your sides, with forearms and hands approximately parallel to the floor.
- **Wrists**: Your wrists should be as straight as possible while using the keyboard, mouse or trackball. They should not be bent sideways, or more than 10 degrees up or down.
- **Head:** Your head should be upright or tilted slightly forward. Avoid working with your head or trunk twisted.



- Hand rest: 2" 4"
- Top line of screen at eye level or slightly below
- Viewing distance: 20" 27.5"
- Legroom (vertical): minimum 25.5"
- Legroom (horizontal): minimum 23.6"

SET-UP LOCATION

- Keep your PC and all units connected to it away from moisture, dust, heat and direct sunlight. Failure to observe these instructions can lead to malfunctions or damage to the PC.
- To prevent damage to your PC from a fall, place and operate the PC and all connected units on a stable, balanced and vibration-free surface.

AMBIENT TEMPERATURE

- ➤ The PC can be operated at an ambient temperature of between **10° C** and **35° C** (+41° and +95° F) and at a relative humidity of between **30%** and **70%** (without condensation).
- When powered off, the PC can be stored at temperatures between -20° C and 50° C (−40° and +158° F).
- Unplug the cable during thunderstorms and make especially sure to remove the antenna cables, if present. We recommend the use of a surge protector for additional safety, in order to protect your PC from being damaged by power peaks or lightning strikes through the power network.
- Delay operating a PC after transport until the device has adjusted to the ambient temperature. In situations of large temperature or humidity differences condensation may build up moisture inside the PC, which might cause an electrical short circuit.
- > Store the **original packing** safely in case the device must be transported.

CONNECTING

For a better guidance, open up the left inner page of the cover with the diagrams to find the location of the described connections.

Note: The devices listed are <u>not necessarily in-</u> <u>cluded</u> with your PC.

CABLING


Please follow the instructions below in order to correctly connect your PC:

- Arrange cables in such a way that no one can tread on or trip over them.
- Do not place objects on the cables.
- To avoid damage to your PC, connect your peripherals (e.g., keyboard, mouse and monitor) whilst your PC is powered off. Some devices can be connected whilst your PC is in use. These devices usually have a USB or IEEE 1394 connector. Please follow the appropriate instructions for each device.
- Keep the PC at least one meter (approximately three feet) away from high frequency and magnetic interference sources (e.g., televisions, loudspeaker cabinets, mobile telephones, etc.) in order to avoid malfunctions and/or loss of data.
- To avoid EMC issues, make sure that all devices are connected to each cable or that cables not in use are removed from the computer.
- Please note that only **shielded** cables shorter than 3 metres (9.84 ft) should be used for the LPT, COM, USB, IEEE 1394, audio, video and network interfaces with this PC.
- > To avoid electromagnetic interferences, please ensure that all connection cables are attached to the corresponding peripheral devices. Remove any unused cables.

- The connection of devices is limited to equipment that complies with EN60950 "Safety of information technology equipment" or EN60065 "Audio, video and similar electronic apparatus. Safety requirements".
 - Note: You only need to connect those components to your computer you require. If you do not have the described device (e. g. printer) you may skip the respective item and carry it out later, if necessary.

FRONT CONNECTORS

Here is how you can access the (optional) card reader and some further connectors on the front of your PC casing.

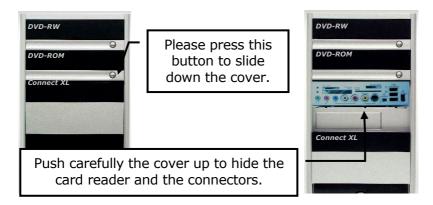

(Diagrams the same)

CONNECTING THE MONITOR

Diagram reference: W, W2

- ➤ If your graphics card has two VGA sockets), you can use either port to connect to the monitor. Your PC may optionally be equipped with a digital connector (DVI, W2). With the help of an adapter you can also use this connector for your VGA monitor.
- ➤ Um eine Beschädigungen der Kontakte zu vermeiden, achten Sie darauf, dass der Stecker und die Buchse genau zusammen passen. Because of its asymmetric form the plug only fits into the socket in one position.
 - Connect the data cable of the monitor to the socket on the graphics card (reference W or W2). If necessary, remove the white guard-ring on the monitor plug and ensure that the plug and socket mate together precisely.
 - 2. Hand-tighten the screws on the monitor cable.
 - CAUTION! Your PC monitor is preconfigured for a screen resolution of 1024 x 768 pixels and an optimal refresh rate of 75 hz. If your monitor does not support these settings it may become damaged or malfunction during use.

You can change the screen resolution and configuration of your monitor as follows (See also your monitor's User Manual):

- 1. Once you have powered on the PC, press the F8 key to select **Safe Mode**.
 - ⇒ If you don't hit the F8 key on time, you won't see
 the start menu which gives you the option to run in
 Safe Mode. Reboot your PC and retry if you have
 missed this.
- 2. Select **Display Properties** to designate the screen resolution for your monitor.

You can then adjust the "Display Features" to your monitor.


INSTALLING WIRELESS KEYBOARD & MOUSE

These devices are optional. The wireless keyboard and mouse operate with digital radio technology to ensure no hinder communication between the keyboard, the mouse and your computer without connecting cable. The transmission and receiving of keyboard and mouse are free from angle restriction. Before working with your new keyboard and mouse, take a few one-time preparations.

⊃ Beware: Please read and follow the security advices concerning the use of batteries on page 81.

Inserting batteries in mouse


The mouse requires two alkaline batteries (Type: AAA).



(Diagram the same)

- 1. Remove the cover of the battery compartment of the mouse by pushing it in the direction of the arrow.
- 2. Insert the two alkaline batteries (AAA) in the battery compartment.
- 3. Slide the battery compartment cover open again.

INSERTING BATTERIES IN KEYBOARD



(Similar picture)

The keyboard requires two alkaline batteries (AA).

- 1. Remove the battery compartment cover (1) on the bottom of the keyboard by pushing it in the direction of the arrow.
- 2. Insert two AA batteries. The illustration on the cover shows how to insert the batteries properly.
- 3. Recover the battery compartment.

CONNECTING THE PALM REST



1. Connect the palm rest to the keyboard.

CONNECTING THE RECEIVER

Diagram reference: E

- Attach the USB receiver for the mouse and the keyboard to any free USB connection. It is recommended to use a connection at the back of the PC because of the visual appearance.
 - ⇒ The distance between the reception station and the transmitter (keyboard and mouse) should not exceed 50 cm, in order to receive optimum wireless conditions.
 - Change the batteries if it is no longer possible to make entries smoothly.
 - ⇒ The operation of the mouse and the keyboard is described on page 33.

Please proceed as described as follows if your computer is equipped with a cable-connected mouse/keyboard combination:

CONNECTING A USB KEYBOARD/MOUSE

Diagram reference: E

1. Connect the USB keyboard or mouse to a free USB port.

CONNECTING A PS/2 KEYBOARD/MOUSE

Diagram reference: PS2-1 / PS/2-2

If you intend to connect a USB keyboard or mouse, you can skip this step.

1. Connect the PS/2 keyboard to the left, blue PS/2 port and the mouse to the right green PS/2 port.

CONNECTING PARALLEL DEVICES

Diagram reference: P (optional)

- ➤ Take care that the connector and the socket fit exactly to avoid damaging the contacts. Because of its asymmetric form the plug only fits into the socket in one position.
 - 1. Connect the printer cable from your printer to the red printer socket **P** on the rear of your PC.
 - 2. Hand-tighten the screws of the printer cable.

If you wish to use a **scanner**, which also connects to the PC via the parallel interface, follow the instructions above. With the PC parallel port in use, the printer can be connected directly to the scanner. You will have use of both devices if they are connected in this manner.

MODEM/ISDN CONNECTION

Diagram reference: Z

Your PC may be fitted with an analog modem or an ISDN card to prepare your PC for Internet excess and fax operation, according to the equipment.

MODEM

The modem cable has an **RJ11** plug, which is plugged into the modem of your PC, and a **TAE** plug, which fits an N-coded, analogue telephone socket.

⇒ ATTENTION! Please observe that the modem may only be connected to an analogue telephone line. The connection of a digital system (ISDN etc.) to an analogue telephone line can possibly cause damage to the modem or the connected devices and the telecommunication network.

ISDN

The ISDN cable has **RJ45** plugs at either end. It makes no difference which end is plugged into which socket.

- Connect the matching plug of the enclosed communication cable to jack **Z** of your computer. Usually the jack is marked with "Line".
- 2. Then connect the other plug to the telephone or ISDN outlet.
 - → ATTENTION! Operate the ISDN unit only with digital telephone systems. This prevents an inadmissible operation possibly causing damage to the unit or the connected devices.

CONNECTING SERIAL DEVICES

Diagram reference: **S** (optional)

You can connect an external modem or another serial device using this port.

- Take care that the connector and the socket fit exactly to avoid damaging the contacts. Because of its asymmetric form the plug only fits into the socket in one position. Hand-tighten the screws.
 - In order to connect an external modem, card reader or other serial device, connect the serial cable with the turquoise-coloured connection socket (S) on the rear of your PC.
 - 2. Hand-tighten the screws of the serial cable.

LAN CONNECTION

Diagram reference: Q

According to the features your PC can be equipped with a network connection, in order to prepare it for network operation. The network cable usually has two **RJ45** plugs so that it is unimportant which plug is connected to which jack.

- 1. Connect the one plug of the cable to the PC jack.
- 2. Connect the other plug to the other PC or hub/switch.

For further information refer to chapter "**The Network**" starting at page 52.

CONNECTING SPEAKERS/AUDIO OUTPUT

Diagram reference: H, H2, H3, H4, U, U2

Here you can connect your **headphones**, **active speakers** or **audio connection cables** for recording. Please refer to the user's guide of your stereo installation for information about which connector you should use (usually **Line In** or **Aux**).

 Connect your **headphones** or **active speakers** by plugging the cable with the **3.5 mm stereo** jack plug into the green socket (reference **H**).

PCs with Surround sound

➤ NOTE: You will find information about placing speakers by starting the sound software in the task bar

If your PC is equipped with it the following connection is required:

- Connect the **Front** speaker to the green socket (reference **H**).
- 2. Connect your rear speaker to the **Rear** connector (**H2**).
- 3. Your centre speaker or subwoofer can be connected to the socket **Centre/Subwoofer** (**H3**).
- 4. Connect to the optional **Back Surround** socket (**H4**) two more speakers for the back surround.
- 5. In order to use the (optional) **digital audio outlet** plug the cinch cable in the jack at location **U**. The optical digital audio outlet is positioned at location **U2**. Connect the cable to an audio device that features a corresponding digital cinch inlet according to the **SPDIF standard**.

CONNECTING A SOUND SOURCE/AUDIO INPUT

Diagram reference: J, J2, T, T2

This port is used to accommodate a connecting cable for external audio sources (i.e. stereo system, keyboard/synthesizer).

- Connect the cable with the 3.5 mm stereo jack plug to the light-blue coloured socket (reference J). You can also connect a stereo Cinch cable (position J2).
- 2. If you want to record a digital audio source use the (optional) audio input **T** or **T2**. A **SPDIF**-Cinch cable will also be necessary for the **T** while **T2** is an optical output.

CONNECTING A MICROPHONE

Diagram reference: I

- You can use the pink socket I to connect a microphone with a 3.5 mm mono jack plug.
- Position the microphone in such a way that it does not point directly at the speakers. If you hear feedback, characterised by loud whistling noises, reposition the microphone until the sound stops.

ANTENNA CONNECTION FOR TV / RADIO RECEIVER

Position in the flap-out overview: Y, Y2, Y3

Should your PC be equipped with a TV tuner card, then you must connect the corresponding 75 Ohm coaxial cables (aerial or cable) for radio and TV reception.

- 1. Connect the supplied radio antenna with the corresponding connector (Y) on the TV card.
- 2. Connect the TV connector on your TV card (**Y2**) with the aerial antenna or cable TV.

You can watch digital TV through your satellite dish, if your PC features a **DVB-S** connection (**Y3**) and your satellite installation can receive digital programs.

CONNECTING THE PC TO A TELEVISION

Diagram reference: V, V2, V3 (optional)

If your computer's VGA card is equipped with a TV-Out socket you can establish a connection to a TV. Depending on the configuration you can use a composite cable (cinch, \mathbf{V}), an S-Video cable ($\mathbf{V2}$) or a SCART cable ($\mathbf{V3}$).

- **NOTE**: These sockets are only for output purpose.
- Connect your PC and your television with the cord required for your TV.

CONNECTING A RECORDING SOURCE / VIDEO INLET

Diagram reference: K, L

Depending on the configuration you can connect an external video source to your PC using an S-Video or composite (cinch) cable. These connections enable you to record and, if necessary, edit video data.

- 1. Connect the plug of the cord to the jack (position **K** for cinch and **L** for S-Video).
 - **→ ATTENTION**: These two front connectors cannot be used simultaneously.

USB/IEEE 1394

➤ Warning: Connect your USB-/IEEE 1394 devices after initial set-up of your new PC. This will prevent unnecessary confusion during installation. These devices can generally be connected during operation. Read the manual for your peripheral device first.

The voltage outputs of your PC for IEEE 1394 as well as for USB are protected by a fuse (limited power source according to EN60950). This ensures that a malfunction of the PC will not damage the peripheral devices connected to the respective jacks.

CONNECTING IEEE 1394 (FIRE WIRE) DEVICES

Diagram reference: F, F2

⇒ Peripheral devices can have different connecting cables (6-pole = F, 4-pole = F2). Please check what kind of cable you need for your peripheral device.

Important: The connectors of the front side are not configured for parallel use.

CONNECTING USB DEVICES

Diagram reference: E

You have a choice of several connection sockets. It does not matter which you use.

- 1. If you wish to use a **printer**, **scanner** or other device with a USB port, connect the cable to the USB socket on your PC.
 - Note: Connect your devices always to the same port otherwise your operating system will give a new ID and asks for driver installation.

CONNECTING THE POWER SUPPLY

Diagram reference: X, X2

2. Finally, connect the power supply to your PC and monitor, by plugging the power cord into the outlet.

Observe the following **safety precautions**:



Please note: Even with the power switch switched off some parts of the device receive current. **You must unplug the power plug** from the socket, if you want to interrupt the power supply to your PC or cut off your device from current entirely.

- The power socket must be in the vicinity of the PC and within reach of the power cables. DO NOT stretch the power cables tightly to reach a power socket.
- Only operate the PC on grounded plugs of the domestic power net.
- Use **only** the supplied power cord.
- To provide additional protection against electric shock, power surges, lightning strikes, or other electrical damage to your PC, we recommend the use of a surge protector.
- If you are using an extension cord, ensure that the cord meets your local safety requirements. If in doubt, ask an electrician.
- The power supply unit has an On/Off switch (X2) that can be used to power off the PC. When the switch is Off (0) no power is being consumed.

DO NOT Start Your PC Yet!

First, read the following section to find out what you need to know in order to get started.

GETTING STARTED

The software on this PC comes fully pre-installed.

You do not have to load any of the CD's/DVD's supplied.

With many programs (e.g., telephone-CD's or encyclopaedias), however, it is necessary to insert the corresponding CD/DVD in order to call up the data which is stored on it. The software will ask you to do this as necessary.

Once you have made all the connections and secured the necessary connectors you can turn on the monitor, the other peripherals and finally the PC itself.

Step 1: Power on

1. Power on the monitor and your peripherals.

SWITCH

Diagram reference: X2

 Power on your PC by pressing the Switch to position [1]. (You will interrupt the current entry by pressing the switch to position 0.)



MAIN POWER SWITCH

Digram reference: N

3. Press **Main Power Switch** briefly to start loading the operating system.

You can program the function of the main switch in the power management of Windows® (please refer to on-line help). The PC will always be switched off, if the main switch is pressed for more than 4 seconds.

> Warning! If the operating system is not shut down properly (through

⇒ Shut Down), then there is a risk of data loss.

Step 2: Starting Initial Setup

The PC starts and now goes through a number of phases:

Note: Ensure that there is no bootable CD (e.g. the Recovery-CD) in the CD-ROM drive. Such disks will prevent the operating system from loading directly off the hard drive.

The **operating system** is loaded from the hard disk. During the initial set-up, the loading process takes slightly longer than normal to register the operating system and the individual components completely. Your operating system is finished loading when a welcome screen is shown on your display.

Follow the instructions on the screen. Dialogue boxes will explain any steps that need to be taken. The greeting procedure will guide you through the following screens and dialogues.

Should you have any questions just click on



License Agreement

Explanation:

Please read through the license agreement carefully. It contains important legal information on the use of your software.

In order to see the full text, use the mouse and the scroll bar to move downwards until you have reached the end of the document. You accept the agreement by clicking on the **I accept the** agreement option field. Only by doing so will you be entitled to use the product under lawful terms and conditions.

Computer Name

Please note, that when assigning a name to a computer, the **computer name** and the **user name** may not be identical.

Step 3: Finalizing

After the login procedure the Windows $^{\mbox{\scriptsize 8}}$ desktop appears on your screen.

This can be adjusted so that the screen of your computer looks different. The basic operation, however, is ensured.

SHORT DESCRIPTION OF THE WINDOWS® DESKTOP

(The respective illustration is shown on the next page.)

1 The Start button

Click once on this button with your left mouse key to call the illustrated start menu.

2 Program bar

The most commonly used programs are listed here. The operating system recognizes them automatically. If you press the right mouse key on an entry you can determine which entry is kept and which is deleted from the list. The program associated with the entry will **not** be deleted.

All programs

Here you find the entries to every program installed on your PC. Here, too, you can edit entries with the right mouse key.

4 Information about your PC

Click on this button once with the left mouse key to receive important information about your PC as well as valuable hints and additional assistance.

5 Switching off

Click on this button with the left mouse key to switch off the PC.

6 Task bar

Here you receive information and status reports about the operating system and the running programs.

"Icons" on the "Desktop"

Icons are program links used to start the respective programs. A **double click** (press the left mouse key quickly twice) on the symbol starts the application.


The **Desktop** includes almost the complete screen and is the filing area for those entries or other links you would like to access quickly.

8 Logged in user

This shows the logged in user. The image is changed by clicking on it.

© Control Panel

This is the central control of your computer. Here you are able to configure your computer at will. However, you should read about the implications of possible changes in "Help and Support".

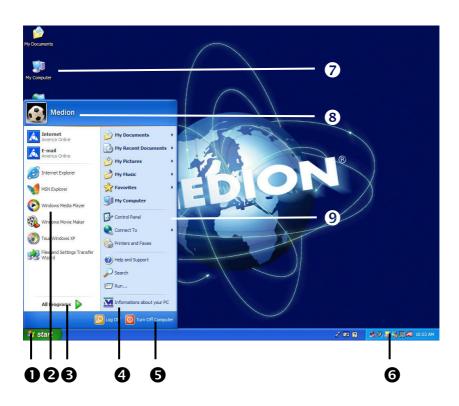

Chapter 3

Operation

| Subject | Page |
|--------------------------|------|
| | |
| The Mouse | 33 |
| The Keyboard | 33 |
| The Hard Drive | 37 |
| The Optical Drive | 39 |
| The Card Reader | 45 |
| The Graphics Card | 46 |
| The Sound Card | 49 |
| The USB Port | 49 |
| IEEE 1394 (FireWire) | 50 |
| The Radio-/TV-Tuner Card | 51 |
| Network | 52 |
| Modem / ISDN | |
| Software | 60 |

OPERATION

THE MOUSE

The mouse has beside the two key a wheel that can be used as:

To scroll through a document or internet pages.






If the mouse course moves jerkily on the screen, try a different surface (mouse pad). Glass and metallic surfaces might cause problems.


THE KEYBOARD

This section contains useful information on using the keyboard. All diagrams are **schematic**.

NEIGUNGSWINKEL DER TASTATUR

On the base of the keyboard are two folding feet that let you adjust the angle of the keyboard. Pull them forward to adjust the angle of the inclination.



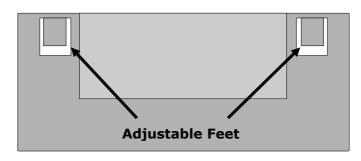

THE ALT AND CTRL KEYS

The left **Alt** key performs certain functions in conjunction with other keys. The application program determines these functions. In order to enter a combination of keys that include the **Alt** key, hold the **Alt** key down while pressing the other key. The right **Alt** key operates in a similar way but selects certain special characters. The **Ctrl** key, like the **Alt** key, carries out program functions.


Useful key combinations (software-dependent):

| Key Combination | Function and Description | |
|--------------------|---|--|
| Alt + F4 | As a rule ends the program selected or closes the window opened. | |
| Alt + Print screen | Copies the image of the window currently active to the clipboard. | |
| Shift + 2 | Generates the @ character required for e-mails (pronounced: at). | |
| Ctrl + Alt + Del | Windows security is launched. | |

(Country-specific variances are possible.)

MULTIMEDIA FUNCTIONS

Some keyboards are provided with multimedia keys. These keys have the following functions:

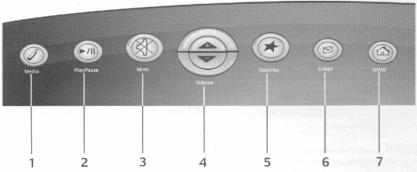

Media (e.g. Mediaplayer) Starting the set media reproduction program.

2 Play/Pause

Use this key to start or pause for a short time the playback of a title just as you would with a normal CD player.

3 Mute

This button sets the volume at 0 (silent).

4 Volume

This key increases (+) or decreases (-) the volume.

5 Favourites

Opens the folder "Favourites".

6 E-Mail

Use this key to start the standard e-mail program.

7 Internet

With this key you can start the standard browser.

READJUSTMENT OF THE MOUSE/KEYBOARD

A readjustment of the transmission channel can put things right, if several wireless operated devices are working in one room and they are disrupting each other.

It is very easy to carry this out:



- 1. Press the connection button ('Connect') on the upper side of the receiver.
- 2. Turn the mouse over and press the 'Connect' button with a pointed implement (e.g. ball-point pen).
- 3. Wait for 20 seconds-
- 4. Press the connection button ('Connect') on the upper side of the receiver again.
- 5. Turn the keyboard over and press the 'Connect' button with a pointed implement (e.g. ball-point pen).

You will find information about changing the batteries from page 15.

THE HARD DRIVE

The hard drive is the main storage medium combining large storage capacity and rapid data access.

The hard drive contains the operating system of the computer, other application programs and backup files. These programs and files are pre-installed on your PC, so you may note that some of the space on your hard drive is already taken.

The Windows operating system cannot use the full capacity of the hard drive, which means that there will be a difference between the capacity that the BIOS displays and what the operating system displays. The operating system of the PC, further application programs and backup files are located on the hard drive and reduce its total capacity.

The hard drive is addressed as drive C, D and E.

Never switch off the computer while the busy indicator is lit since this may result in loss of data.

Usually your hard disk is divided into more partitions, but there can also be some minor variations.

| Partition | Drive | Туре | Capacity (approx.) |
|-----------|-------|---------------|--------------------|
| Boot | C: | NTFS or FAT32 | 50% |
| Backup | D: | NTFS or FAT32 | 40% |
| Recover | E: | NTFS or FAT32 | 10% |

In your first partition (**Boot**) you will find your operating system, application programs and the users' documents and settings.

The second partition (**Backup**) serves for data security and contains additional drivers and tools.

The third partition (**Recover**) contains the copies of your Windows-installation in the delivery state.

IMPORTANT DIRECTORIES

In the following we listed the most important directories describing their contents.

- → Attention! Do not delete or modify these directories or their contents since data could be lost or the functionality of the system could be at risk.
- **C:** The master directory of drive C: includes important files required to start Windows. In the factory setting these files are hidden for safety reasons.
- **C:\Programs** As the name suggests, in this directory programs install the files belonging to the application.
- **C:\Windows** The main directory of Windows.

 This is where the files of the operating system are saved.
- **C:\Documents and Settings** This folder includes the settings and documents of all the PC users.
- **D:\Driver** This folder includes the drivers required by your computer (pre-installed).
- **D:\Tools** Here you find additional programs and other documentation for your PC.
- **E:\Recover** Here the backup files are located enabling you to recover the factory setting (see page 73).

THE OPTICAL DRIVE

Depending on the model of your PC it will have a **CD-ROM**, a **CD-ReWriter**, a **DVD**, a **DVD-ReWriter** or a combination of these drives. The drives installed in your PC are appropriately labeled to allow you to easily select the desired drive.

The table below shows which media you can use in which drive:

| Medium | CD-ReWriter | DVD | DVD-ReWriter |
|-----------|-------------|------------|--------------|
| CD | ✓ | ✓ | ✓ |
| DVD | × | ✓ | ✓ |
| CD-R/-RW | ✓ | ✓ | ✓ |
| DVD-R/-RW | × | √ * | √ ∗ |

Whether or not you can use a disc in a particular drive depends on whether the format is supported by the drive and the operating system. So for example, a CD that has been created for another operating system may not be readable.

* Writable media for DVD (DVD-R/RW) **must** be **compatible** with your drive type. There are various formats (DVD-R, DVD+R, etc.), which are not compatible with each other. The specified writing speed must also be supported by your drive.

Since this technology is still very new, incompatibilities may still occur even if the correct media are used.

We therefore recommend that you use **only branded blank media** and that you check these for compatibility with your devices. Blank CD's, however, do not really cause any problems and can generally be written to without hesitation with your CD- or DVD-writer (where present).

Nevertheless, we recommend that you check which media suit your devices best.

LOADING A DISK:

◆ Attention: Do not place protective foils or other stickers on your CD's. To avoid damage to your drive, do not use deformed of damaged CD's. Attention: Do not use scratched or dirty disks, discs with pieces broken off or disks of poor quality. Because of the high speeds in the drive the disks might break and damage your data as well as your drive. Examine the disks before you enter them. If damage or dirt is visible, you should not use them. Damage caused by faulty media is excluded from warranty and their repair must be charged.

Diagram reference: A

- 1. Press the eject button (Diagram reference, **B**) on the front of the CD-ROM-drive to open the tray.
- 2. Place the disk on the tray so that it lays flat with the label facing upward.
- 3. Press the eject button again to close the tray.
 - Note: Many CD's start automatically when they are inserted. This depends on the operating system and the corresponding settings.

PLAYING BACK AND RETRIEVING DATA FROM DISCS

Your PC is able to playback and to retrieve Audio CDs, DVD Movies and Data discs.

After loading the disc your operating system will open a selection window with different options for playback. Normally the following programs are provided:

- Windows[®] Media Player
- Power DVD
- Power Cinema

If your operating system doesn't open the selection window you still have the possibility of the access via the explorer or "My Computer".

How to remove a Disc:

- 1. Press the eject button (Diagram reference, **B**) at the front of the CD-ROM drive to open the drawer.
- 2. Remove the disc and store it in the CD cover in a safe place.
 - Do not try to remove the CD from the drive while the computer is accessing the disk.

THE CD-ROM/DVD DRIVE AS BOOT DRIVE

The optical drives can be used for booting the operating system. If the PC does not boot, it is possible that **autostart** is turned off in the BIOS or the CD is not bootable.

DVD TECHNOLOGY

The Compact Disc (CD) was introduced in 1982.

Who could imagine doing without the CD as a storage medium for data, multimedia, computer games and video now? A CD can hold up to 700 MB of data, but that amount is too small to store a high-quality encoding of an entire feature film. The DVD (**D**igital **V**ersatile **Disc**) has the same dimensions as a CD but stores more data at a greater density. In some cases, both sides of the DVD can be used to store information. Furthermore, each side can contain two layers of information (dual layer).

Thanks to high data density, the transfer speed is considerably higher than for a CD, so that a DVD drive with 6 times speed can transfer considerably more data than a 6-speed CD drive.

A DVD drive can also read both DVD-ROMs and CD-ROMs, providing the user access to an astounding amount of media.

VARIOUS DVD FORMATS

| Format | Side A | Side B | Max. capacity |
|--------|--------|--------|---------------|
| DVD-5 | SL | - | 4.7 GB |
| DVD-9 | DL | - | 8.5 GB |
| DVD-10 | SL | SL | 9.4 GB |
| DVD-14 | DL | SL | 13.2 GB |
| DVD-18 | DL | DL | 17.0 GB |

SL=Single Layer, DL=Dual Layer

Look at our website to see whether potential Firmware updates are available, if certain media are not supporter by your drive.

DVD-VIDEO

Special characteristics of DVD-Video:

- Up to 8 hours of feature films on a single DVD.
- Up to 8 audio tracks and 32 subtitle tracks.
- Greater picture quality than VHS or SVHS.
- Time-frame navigation and picture stills.
- Selection of different camera angles in some media.
- Parental Control, in which certain scenes or an entire film or rating of films can be made accessible only to certain age groups. DVD players can, for example, be set so that scenes or films which have not been approved for younger audiences will not play.

In spite of the high storage capability of the DVD the data must be extremely compressed in order for a complete feature film to be stored.

REGIONAL PLAYBACK INFORMATION FOR DVD

The playback of DVD movies includes the decoding of MPEG2 videos, digital AC3 audio data and the deciphering of CSS protected contents.

CSS (sometimes called copy guard) is the name of a data protection program incorporated by the movie industry as an action against illegal copies.

Among the numerous regulations for CSS licensees the most important ones are the country specific playback restrictions.

In order to facilitate the geographically restricted release of movies, DVD titles are released for certain regions.

Copyright laws require the restriction of each DVD movie to a certain region (usually the region, in which it is sold).

DVD movie versions can be published in several regions but the CSS regulations require that each CSS decipherable system may only be used in one region.

■ Attention: The decoding software included with your PC may be changed for regional DVD decoding up to five times, after which the drive will only play DVD movies for the region setting last entered. Changing the region code after that will require factory resetting which is not covered by warranty. If resetting is desired, shipping and resetting costs will be billed to the user.

SUBJECTS CONCERNING THE CD/DVD-REWRITER

You receive information on the so-called **blank discs**. These media, requiring a CD rewriter (burner) to produce CDs are called CD recordable (CD-R) or CD rewritable (CD-RW).


RECORDABLE/REWRITEABLE DISCS

Normal Discs are pressed from a digital, glass master and then sealed. In the case of blank disc, the information is burnt onto the disc with the laser of the Rewriter. Therefore these discs are more sensitive than normal CDs.

Please avoid the following when using recordable/rewriteable discs - especially blanks - that have never before been used:

- radiation by direct sunlight (UVA/UVB)
- scratches and damage to the disk surface
- extreme temperatures

THE CARD READER

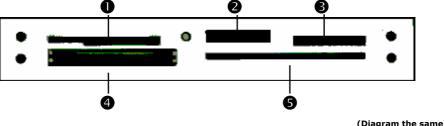

(Diagram the same)

If your PC is provided with a Card Reader (Diagram reference: **C**), you can handle different memory card types. The following table refers to the use of the Card Reader:

| Slot | Card type | Contacts |
|------|---|-----------------|
| 0 | SmartMedia / XD | point to bottom |
| 2 | Memory Stick / Memory Stick Pro | point to bottom |
| € | SD (Secure Digital) MMC (MultiMediaCard) | point to bottom |
| 4 | CF (Compact Flash) IBM® Microdrive | point to front |
| 6 | SmartCard (GSM, HBCI etc.) | point to top |

If a card is inserted, a free drive will be assigned* by Windows® and the LED next to the slot is lit.

The optional SmartCard port is for home banking (HBCI) and access control. IF you want to use the home banking function, please ask your banc if your account supports the SmartCard access.

^{*} Only if this concerns a removable disk.

THE GRAPHICS CARD

Your computer is fitted with an high performance graphics card, one of the most technologically advanced and best-equipped VGA cards available.

Performance Characteristics

- > High Performance Acceleration
- Interactive Direct3D Acceleration
- Video Acceleration for DirectDraw/DirectVideo, MPEG-1, MPEG-2, DVD and Indeo[®] Video Technology
- ACPI Power Management

CURRENT IMAGE PLAYBACK FREQUENCIES


The graphic card can, depending on the set resolution, display vertical image playback frequencies of between 60 Hz and 240 Hz.

| Resolution | Colors | Resolution | Colors |
|-------------|-----------------|-------------|-----------------|
| 640 x 480 | 8-, 16-, 32-bit | 1600 x 900 | 8-, 16-, 32-bit |
| 800 x 600 | 8-, 16-, 32-bit | 1600 x 1200 | 8-, 16-, 32-bit |
| 1024 x 768 | 8-, 16-, 32-bit | 1920 x 1080 | 8-, 16-, 32-bit |
| 1152 x 864 | 8-, 16-, 32-bit | 1920 x 1200 | 8-, 16-, 32-bit |
| 1280 x 960 | 8-, 16-, 32-bit | 1920 x 1440 | 8-, 16-, 32-bit |
| 1280 x 1024 | 8-, 16-, 32-bit | 2048 x 1536 | 8-, 16-, 32-bit |

You can change the graphics setting using the **Display Properties** help program. For optimum image reproduction we recommend an image playback frequency of between 75 Hz and 85 Hz, provided that your monitor can support this. An image playback frequency of less than 70 Hz will generate a flickering image, unless an LCD monitor is being used.

CONNECTING THE PC TO A TELEVISION

With the help of the video output connector at the back of your PC, you can transfer the image from your PC to the television set.

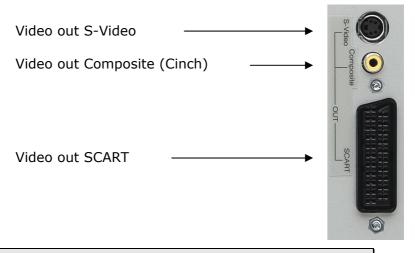

■ In order to connect your TV to the PC you will need a SCART cable, an S-Video cable or a composite video cable. This cable is **not** included with your computer but may be obtained from an audio/video specialist or dealer. Read the operating instructions for your television set to find out which cable you need.

How to Connect the PC to a Television:

- → To use the TV function you must first connect the TV to the graphics card before starting up the PC.
- 1. Shut down Windows and power off the PC.
- Connect an S-Video, a SCART or a Composite cable to on the respective connector of your PC (reference V/V2/V3) and on you TV set.

Switch on the television to see the PC image on your TV set.

- 1. Start up the PC and wait for Windows to fully load.
- 2. In the **Display Properties** program set up the configuration.
- 3. End configuration by clicking on **OK**.
 - ⇒ The Video Output connectors at the back of you PC are only for playback. For video recording please use the Video Input (composite or S-Video) connectors at the front of your PC.

THE SOUND CARD

Your PC has an integrated stereo sound card.

The sound card is compatible with the industry standard *Sound Blaster* and *Microsoft Sound System Version 2.0*.

This guarantees optimal support for all popular programs and games.

■ NOTE: The speaker/headphones output is designed for active speaker systems or headphones. Passive speakers cannot be used or if they are the quality will be significantly reduced.

If your PC is equipped with a surround sound you can set it with the enclosed software as required.

For this purpose click on the symbol



USB PORT

- Devices connected directly to the USB bus should not draw more than 500 mA.
- > The voltage output is protected by a fuse (Limited Power Source according to EN 60950).
- > Should the devices need more power than this, it will be necessary to provide a hub (distributor / booster).

On the USB it is possible to connect up to 127 devices which correspond to the USB standard (1.1 and 2.0 supported).

The data transfer speed is 1.5 Mbit or 12 Mbit, depending on the device connected. USB 2.0 can reach up to 480 Mbit.

NOTE: If possible, connect your USB devices always to the same port were it has been installed. Otherwise you will get a new ID and your operating system asks for a new installation of the driver.

IEEE 1394 (FIRE WIRE)

The IEEE 1394 connector, also known as iLink® or Fire Wire, is a serial bus standard used for rapid digital data exchange.

APPLICATION OPTIONS FOR IEEE1394

- Connection of digital devices of the entertainment industry, such as set-top speakers, digital video and camcorder, 'Digital Versatile Disk' (DVD), television etc.
- Multimedia applications and video processing.
- > Input and output devices such as printers, scanners, etc.

TECHNICAL SPECIFICATIONS

- Depending on the application, the maximum data transfer is about 100, 200 or 400 Mbit/s, corresponding to a data throughput of up to 50 MB per second.
- The device can be plugged in or unplugged during operation (hot plugging).
- The standardised cord ('Shielded Twisted Pair' -STP) includes 6 strands. Two lines are live (8V up to 40V, 1.5 A max.) and can be used as an external power supply. The four signal lines transfer data or control information. Some devices do not require a power supply via the cord so that four pole plugs are used.
- ➤ The voltage output of the 6-pole IEEE 1394 jack is protected by a fuse (limited power source according to EN60950).
 - NOTE: The IEEE 1394 ports located at the front of you PC can only be used separately. A simultaneous use is not possible.

THE RADIO-/TV- TUNER CARD

The Radio-/TV- Tuner Card is an **optional** feature. Possibly your PC is equipped with a so-called Combo board. You recognise this at the modem or ISDN jack on the outside in addition to the TV/Radio antenna sockets. Then both devices are located on one Combo board requiring a special Combo slot.

In regard to a Combo board the following must be observed:

- ➤ The installation, removal and conversion of a board require the necessary technical training. Please read the chapter "Safety precautions", starting on p. 1 or consult a PC technician.
- If you would like to use a different modem or ISDN board, the built-in modem/TV Tuner Combo board <u>must not be re-</u> moved or plugged into a different slot.
- > The built-in modem/TV Tuner Combo board only works properly in the intended blue Combo slot.
 - **→ ATTENTION:** In another slot the PC may not be able to start.

SOFTWARE FOR YOUR RADIO/TV TUNER CARD

The Software to watch TV and listen to Radio broadcasts is already installed and can be found in **All Programs**, **Home Cinema**. You can control the program with the **optional** remote controller (see Online help and/or separate Operating Instructions). Get additional help by pressing the F1 Key. Please keep in mind that recording broadcasts can occupy up to 2.4 GB per hour.

THE NETWORK

If your PC is provided with a Fast Ethernet-Network connector, you can connect it to a network. The following explanation refers to PCs with a network connector. You will find further information about networking in the **Help** section within the **Start** menu.

WHAT IS A NETWORK?

A network means connecting your PC to another or several other PCs. Users can transfer information and data between computers and share resources such as printers, modems and hard disk drives.

Here are some practical examples:

- You can exchange Email and manage appointments in an office.
- Users share a printer in a network and save their data on a central server.
- Share one modem or one ISDN card among computers for Internet access.
- > Two or more PCs can be connected to play network games or share data.

WHAT DO YOU NEED FOR NETWORKING?

Some requirements have to be fulfilled if you want to make PCs communicate with one another.

- The PCs must have the same network cards that support the same network technology. Unless otherwise stated your PC will support the current standard, Fast Ethernet (10/100 Mbit).
- 2. The network cards must be connected to one another. All you need is a Shielded Twisted Pair cable (CAT5) which has an **RJ-45** connector.
 - If you want to connect two PCs you need a Cross-Link cable.
 - If more PCs must be connected you need a supplementary distributor (**Hub** or **Switch**) and a **Patch** cable.
- 3. All connected PCs need a networking **operating system**. That's the case with Windows[®].
- 4. All network PCs must speak the same "language" to understand one another. For this purpose they use protocols.
 - The network protocol is determined by the integration of the client server. Loading all PCs with the same client, for example "Client for Microsoft® Networks", meets the first prerequisite. Your PC, if equipped with a network connection, has been preconfigured with this server in the factory.
 - A transport protocol is required so data can be transported via the network. Your network PC has TCP/IP preconfigured. It is the most common protocol and mandatory for internet access. You need IPX/SPX usually only, if access is required to Novell[®] networks.
- 5. The setting of protocols, therefore, must be correct. In your network computer, TCP/IP is preconfigured so that the required settings are automatically taken from a so-called **DHCP server**.

Since usually only large networks are equipped with it, Windows® ME and Windows® XP offer a mechanism automating this function and accepting this setting automatically. You can call these settings in the input request with <code>ipconfig</code> /all.

 The correct protocols must be enabled to make shared access possible. This requires the installation of the server "File and printer release for Microsoft® networks". It is also factory installed.

The release is awarded on the PC where the resource (folders or printers) are located.

Here the release name or, if necessary, a required password can be determined.

A successful release is indicated by a stretched out hand below the icon:



HP CLJ 8500 - PS

7. The released resources can be shown and linked via the network environment.

WIRELESS LAN

Wireless LAN is an **optional** feature. This function allows you to create a wireless network link with a partner.

SAFETY NOTES

→ ATTENTION: Don't use this feature in environments where highly sensitive devices are placed such as in hospitals etc.. To avoid any interference disable this option in your device manager.

CONDITIONS

The partner used can be a wireless **access point**. An access point is a wireless transmitter that communicates with your notebook and controls access to the network connection (e.g., a home network or a broadband connection such as DSL).

Wireless access points are often found in offices, airports, universities or Internet cafés. They offer access to enterprise services and networks or to the Internet. **Access authorizations** are normally needed. A fee may be required to use a public access point.

To set up a wireless network to share Internet access, files, and printers at home, you will need an access point, a router, and a broadband (DSL or cable) modem. Some access points can also serve as a router and/or a broadband modem. Check with your retailer to find the best solution for your needs.

A link to another computer with wireless LAN functionality can also be created **without an access point**. This will allow you to share files, but you will need an access point and a router to share an Internet connection.

The wireless network link works according to standard **IEEE 802.11g** and is compatible to the standard **IEEE 802.11b**. Other standards (802.11a etc.) are not supported.

If encrypted transmission is used, this must operate according to the **same principle on all devices**. Encryption is a method of protecting the network from unauthorized access.

The transmission speed (max. 54 Mbps) can vary according to distance and other factors. If i.e. the other devices support the 802.11b standard the transmission speed can be max. 11 Mbps.

Search for "wireless networking" in Windows Help and Support for more information.

BLUETOOTH

Bluetooth wireless technology is designed to replace cables between devices, such as printers, keyboards, and mice. Bluetooth wireless technology operates over a short distance. Bluetooth devices use radio transmission, which enables computers, mobile phones, printers, keyboards, mice, and other devices to communicate with each other without cables.

There are several uses for Bluetooth wireless technology, including, but not limited to:

- Creating a wireless connection to the Internet with a mobile phone or a modem server.
- Transferring files between computers or between a computer and another device.
- Printing to a Bluetooth wireless printer.
- Using a Bluetooth wireless keyboard and mouse.
- Joining a personal area network (PAN).
- Synchronizing a personal digital assistant (PDA) to a computer or another device using Bluetooth wireless technology.

Use the application "**BlueSoleil**" to establish the proper connection to your device.

The data transfer speed for Bluetooth wireless technology can be up to 700 kilobits (Kbps) per second.


The data transfer speed can vary depending on the device or environmental factors. A Bluetooth device can transmit through walls, pockets, and briefcases.

Since Bluetooth is using the same frequency range as WLAN, simultaneous use might cause interference. If this should happen you can disable one service temporary.


→ ATTENTION: Make sure the Wireless LAN / Bluetooth option is switched OFF in any environment where it might interfere with critical and sensitive devices, e.g., on aircraft, in hospitals and other medical centers, etc.

ENABLING AND DISABLING BLUETOOTH/WLAN

- 1. Launch Network Connections in Control Panel.
- 2. Right-click on the service you want to enable/disable.
- 3. Choose either Enable or Disable.

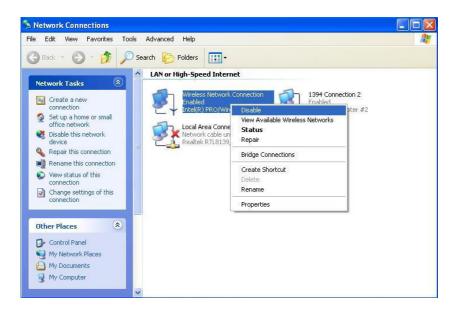

TROUBLESHOOTING WITHIN THE NETWORK



- The network environment is delayed in time. Check the release by searching for the respective **computer name**.
- Why does an error message appear when I click on the network environment?
 - The **computer name** must be unique on the network and may not be the same as the **task group**.
- It appears that the network boards are unable to communicate. What might be the problem?
 - Maybe one of the used network boards works with a **different speed** (e. g. 10 instead 100 Mbit) and your network computer is unable to recognize this. If necessary, set the network driver to the compatible speed.

If two PCs should be linked you require a **cross-link cable**, otherwise use a **patch** cable.

In addition, check the **protocols** and the **configuration**.

- The data transmission is incorrect or very slow. What might be the problem?
 - Maybe you have the wrong cable (UTP / CAT3 or lower) or the problem is the proximity of a power cord or another source of interference.

For further hints on troubleshooting refer to the Windows help under "**Network errors**".

MODEM / ISDN

This chapter is intended for systems equipped with a modem or ISDN jack.

WHAT IS A MODEM?

The term "modem" is an abbreviation of **Mo**dulator/ **DEM**odulator. A modem changes the bit stream of the PC into analogue signals which then can also be transmitted via the telephone line (modulation).

The modem on the other side reverses the conversion (demodulation). Simplified, a modem converts outgoing data into tone and tone incoming via the telephone line back into data.

The built-in modem is able to receive data according to the ITU standard for V.90 transmissions with up 56 Kbit/s.

Since the power output of modems is restricted due to the regulations of some telecommunication providers, the possible maximum download speed can be restricted. The actual speed may be dependent on the online conditions and other factors.

Data sent from the user to the server are transmitted with 31.2 Kbit/s. Prerequisite for this high speed reception is an analogue telephone line compatible with the V.90 standard and a corresponding compatible Internet provider or company-owned host computer. Contrary to the modem, **ISDN** data are transmitted digitally.

The modem is fitted with an RJ-11 interface, into which a standard telephone lead can be plugged. If your modem is a combo card please make sure that it is used only with the appropriate port.

WARNING! Use only analogue telephone sockets. The modem cannot withstand the voltage levels of digital telephone systems such PABX or lines such as ISDN or Broadband services

SERIAL COM-PORT

The **optional** 9-pin serial interface is used as the port for serial devices such as modems, card readers or mice. The interfaces are addressed as **COM1** or **COM2** and are FIFO 16550-compatible. To use these ports it is necessary, as standard, to have a so-called null-modem cable which is usually supplied with the device to be connected.

SOFTWARE

This section deals with software, differentiating between **BIOS**, **application programs** and **operating systems**.

GETTING TO KNOW WINDOWS XP

Windows XP offers different options to understand its operation. We will mention only a few of those options here:

WINDOWS XP HOME EDITION - FIRST STEPS

This manual will provide general information about the operating system. We recommend that all beginning users or users of previous versions of Windows read this information.

WINDOWS^{XP} HELP AND SUPPORT

An answer to almost every question can be found in this program. You'll find it in the Start menu or you can launch it by simply pressing the F1 key.


This help function fully covers the Windows operating system. It is helpful for both beginners and professionals. You can print or bookmark the information,

which is categorized into topics. You start like this:

Click on



2. Select now



MICROSOFT INTERACTIVE TRAINING - STEP BY STEP

To obtain an overview over the functions and the operations of Windows^{XP} we **recommend** the program "Windows^{XP} Step by Step Interactive".

The objective of the program is to ease both the initial contact with and the transition to Windows^{XP} for beginners and experienced users.

The program is categorized into many small topics, so that the user can gain access to the information according to his requirements. Multimedia effects including video clips and speech output convey the contents of the various topics clearly and efficiently. Interactive tasks allow you to apply the conveyed topics in a simulation environment of the program to facilitate a successful learning experience.

Windows XP Step by Step Interactive covers ...

- operating Windows XP
- new functions in Windows XP
- the process of log-on log-off and user administration for creating a security structure
- · configuration of the Internet access
- · operating the email program
- ... and much more!

Use this program to better understand your PC and to operate it optimally. It also is an additional source of information for recognizing and eradicating potential problems. You start the program like this:

- 1. Click on Start
- 2. Select now All Programs



3. The program is located in the folder "Accessories", subfolder "Microsoft Interactive Training".

WRITING CDS/DVDS

We describe the writing process with the software **Nero - Burn**ing ROM. Please follow this instruction only if you use this software

⊃ Note: A writing process should always take place on its own. Please terminate all running programs (fax reception, screen savers, Power-Management etc.).

STARTING NERO - EXPRESS

To start nero - Express proceed as follows:



2. Now select



- 3. The program is located in the "Nero Burning ROM" folder and can be started by clicking "Nero - Express".
- 4. An interface appears that allows you to easily create different media. Follow the instructions on the screen.
 - Note: The nero BURNING ROM program has enhanced functions and is particularly suitable for the more experienced user. You can also start this program from the ahead Nero folder or switch directly to it from the Express program.
 - ⇒ For detailed information, read the extensive On-line Help (F1 key).

INSTALLATION OF SOFTWARE

Note: If your operating system is configured that the installation procedure accepts only signed drivers (default) and software this information screen will appear:



Although the software lacks the digital signature it may work properly. Click on "Tell me why this testing is important" to get detailed information. Confirm by clicking on "**Continue Anyway**".

The software included in delivery is **already pre-installed** in the factory.

Attention! It happens that during installation procedure important files can be changed or even cancelled. To avoid eventual problems in using older files after installation, make sure to safeguard your hard disk. See page 69 for further information regarding data backup.


THIS IS HOW TO INSTALL YOUR SOFTWARE:

Please follow the instruction of the software vendor. We will describe a typical installation. Once you insert a CD, the installation menu is started automatically.

Note: If the automatic start does not work, it is likely that the so-called Autorun function has been deactivated. Read the respective chapter in Windows Help on how to activate this function.

An example for the manual installation without the autorun function:

- 1. Click on and select the item $\mathbb{Z}^{Run...}$ (Or hit $\mathbb{Z} + \mathbb{R}$ to launch the corresponding dialog).
- 2. Now enter the letter of the CD-ROM drive followed by a colon and the program name setup:



- 3. Click on "OK".
- 4. Follow the instruction given by the program.

SOFTWARE DEINSTALLATION

In order to remove installed software from your PC, follow the next steps:

1. Click on



2 Click on



3. Then select the following program:



Select the respective program, start the deinstallation and follow the instructions on the screen.

If the system becomes unstable due to a certain software or driver, you are able to recover the stability of the system with various methods (see starting on page 70). Then you do not need to uninstall the driver.

WINDOWS ACTIVATION

Microsoft is committed to the protection of intellectual property rights and the reduction of software piracy. Therefore Windows XP contains software-based product activation technology. Your copy of Windows XP has already been **activated for your PC**.

Product activation is needed if some components of your PC have been replaced or you use a non-authorized BIOS. If necessary you can activate Windows XP as often as requested.

You will probably need to activate Windows XP by telephone even if Internet Activation is available. This is due to the pre-activated SLP version which runs with a special Product-ID. However, activation needs your unique Product ID which can be found on the **Certificate of Authenticity** sticker on your PC housing. When you call, please inform your agent that you are running an OEM-(SLP) version of the software.

PRODUCT ACTIVATION ON YOUR PC

In few cases it may still be required to activate **Windows XP**. If an activation via the **internet** is acknowledged with an error message you should perform the following steps.

- 1. Please select the **telephone activation** and click until the related screen appears.
- 2. Now click on **Change Product Key**. A new window appears. Enter the product key. This is located on the **Certificate of Authenticity (COA)**, on the computer's casing.
- 3. Acknowledge your entry and follow the instructions on the screen. Notify your Microsoft consultant, if necessary, that you have an OEM license.

BIOS SETUP

THE BIOS SETUP PROGRAM

In the BIOS set up (your PC's Basic Configuration) you have a number of parameter settings available for your PC. For example, you can change the operating mode of the interfaces, security features or power management.



The PC is factory pre-set to guarantee optimum operation. Please only modify the parameters if this is absolutely essential and if you are familiar with the configuration possibilities.

EXECUTION OF THE BIOS SETUP

You can only execute the configuration program when starting the system. If the PC has already been started exit Windows[®] and reboot. Prior to rebooting the PC press the key »Del« and keep it pressed until the message »Entering Setup« appears.

Chapter 4

Customer Service & Self-Help

| Subject | Page |
|----------------------------------|------|
| | |
| Data and System Security | 69 |
| System Recovery | 70 |
| FAQ - Frequently Asked Questions | 75 |
| Troubleshooting | 77 |
| Driver Support | 79 |
| Transport | 80 |
| Cleaning and Care | 80 |
| Recycling and Disposal | 80 |
| Upgrades and Repairs | 83 |

SELF-HELP

DATA AND SYSTEM SECURITY

The programs described below are part of your Windows operating system. You will additional information on these programs in the Windows Help file.

DATA SECURITY

Back up data regularly on external media such as a CD-R or CD-RW. Windows offers both a **Backup** program and a **Files and Settings Transfer Wizard**.

You will find both programs in **Accessories/System Tools** within the Start menu. Make a backup disk with all your passwords and the operating system's original configuration.

MAINTENANCE PROGRAMS

You can avoid some hardware and software errors with the help programs such as **Disk Defragmenter** and **Disk Cleanup**. The help program **System Information** can also be helpful since it gives you detailed information about your system configuration. You will find these programs in **Accessories/System Tools** too.

PASSWORD RESET FILE

To protect individual user accounts from complications resulting from lost passwords, users should create a password reset disk and keep it in a safe place. If the user should forget his/her password, the password can be reset with the password reset disk so that the user has access again to his/her local user account.

Windows Help describes how to create a password reset file.

SYSTEM RECOVERY

Windows^{xp} provides a useful function enabling the storage of the so-called **Recovery points**.

The system remembers the current configuration as a snapshot and returns to this, if necessary. The advantage is that an unsuccessful installation can be cancelled.

Recovery points are created automatically by the system, but they can also be set manually.

You can determine and configure yourself the maximum memory taken up by this. You find this program in the program file under accessories, system programs.

We recommend setting a **recovery point** before installing a new software or driver. If the system does not run stable any longer this enables you usually to return to a workable configuration without deleting newly created documents. In the next paragraph read your options for a repair of an incorrect installation.

CORRECTION

Windows^{xp} includes various functions ensuring that the PC as well as the installed applications and devices work correctly.

These functions assist you in solving the problems which might occur by adding, deleting or replacing files required for the functionality of the operating system, the applications and devices. The recovery function or functions you use depend on the type of occurring problem or error. For detailed information refer to the Windows help.

Enter the search word "**Overview over the repair**" in order to evaluate which of the following functions is the safest way to correct your problem:

Backup, Recovery of the driver, Deactivation of the device, System recovery, Last function known to work, Secured mode and system recovery, Recovery console, Windows installation CD.

Please refer to the tool.

WINDOWS® UPDATE

Windows Update is the online updating of Windows. Use Windows Update to download elements such as security updates, important updates, the newest help files, drivers and Internet products from the Internet.

The website is regularly augmented by new content, so that you can download the newest updates and error corrections at any time, to protect the Notebook and guarantee its functioning. Windows Update will search through the Notebook and provide a list of individual updates specially for the configuration of your Notebook.

Each update that Microsoft regards as important for the operation of the operating system, programs or hardware components will be classified as an "important update" and automatically selected for installation for you.

Important updates will be provided to remove known problems and to protect the Notebook against known security risks. Carry out four simple steps, to download the updates needed and to keep your computer on the current status of technology:

- 1. Open **Windows Update** in the Help and Support Center.
- 2. Click on Search for update.
- Click on Add to select the desired update and to add it to the updates to be installed, while you are searching through the available updates in each category. You can also read a complete description of each individual element by clicking on the Read further Link.
- 4. Click on **Check and install updates**, when you have selected all the desired updates, and then click on **Install now**.

WINDOWS UPDATE INFORMATION FOR DATA SECURITY Windows Update needs certain information about the respective Notebook, so that a suitable list with updates can be provided for you. This information will include the following:

- Version number of the operating system
- · Version number of Internet Explorer
- Version numbers of additional software programs
- Plug & Play identification key of the hardware devices Windows Update will stand up for the protection of your private data and will not record your name, address, email address or other forms of personal data. The information collected will only be used during the time that you are visiting the website. It will also not be stored.
 - ⇒ The update can only be executed via the Internet. Ensure that you are on-line with your notebook when downloading the updates.

RESTORING THE FACTORY SETTINGS



Should your system not function correctly, you have the opportunity to recover the original set-up.

Use the included application/support disk to do this. This recovery method offers you several possibilities for system recovery:

- · System recovery from hard disk
 - 1. Rebuild start files
 - 2. Rebuild system and driver files
 - 3. Return to shipping status

LIMITS OF THE RECOVERY

- Changes made to the original configuration (RAS, Desktop or Internet settings) and installed Software will be ignored by this Recovery and will not be reloaded.
- Driver Updates or hardware installed by you will be ignored by this Recovery.
- <u>Beware!</u> All data on drive C will be erased. If necessary, backup all required data on drive D.

This recovery will reset your system to its condition at delivery. Printer installations or other additional software must be reinstalled. You will also need to enter the **Product Key** (License Number) again.

→ Attention! If you delete the directory E:\Recover or the files located there a recovery is no longer possible. For safety reasons you can copy the file FACTORY.PQI and all other FACTORY.00X files to a CD-Recordable.

CARRYING OUT A RESTORE

- 1. First, please read the entire **Restore** section of the Windows Help file.
- 2. Insert the Support-CD and reboot the PC.
 - → Attention! Do not use the Product Recovery CD-ROM for restoration purposes. This disk does not restore the original set-up. You can use it when an individual set up is required.
- 3. Select the option **Start from CD-ROM**.
- 4. Follow the on-screen instructions
- 5. The PC restarts to its original factory settings.

FAQ – FREQUENTLY ASKED QUESTIONS



When do I have to activate Windows?



Your software has been preactivated in the factory. An activation will only be required, if ...

- ... several components are replaced by others.
- ... you install a new motherboard.
- ... a different BIOS version has been installed.
- ... you install the software to another computer.



What is the Windows activation?



Your operating instructions include a chapter about this subject.



How do I perform a data backup?



Use the program Backup for this.

It is important that you follow the operating instructions of this program.

Make a backup and another backup of selected data to an external medium (CD-R), to familiarise yourself with the technique.

A backup is unsuitable if you are not able to recover the data, the medium (CD-R, CD-RW) is defective or no longer available.

- Oo I still have to install the enclosed CDs/DVDs?
 - No. Basically all programs are already preinstalled. The disks are only intended as backup copies.
- When is the recovery of the factory setting recommended?
 - This method should be chosen as the last resort. Read chapter "**System recovery**" on page 70 concerning the alternatives possible.
- Why is the boot partition missing when booting from the support/ application CD?
 - The first partition is formatted with the file system NTFS. Compared to FAT32 this file system offers more security and a more efficient access. However, NTFS partitions can only be read from operating systems supporting this. This is not the case in the aforementioned CD.

CUSTOMER SERVICE

TROUBLESHOOTING

Errors can have simple causes, but sometimes they are caused by faulty equipment. We would like to give you some ideas to solve common problems. Should these instructions not lead to success, please feel free to call us.

LOCALISE THE CAUSE

Visibly check all cables and connections. Should all lights be off, check whether all equipment is supplied with power.

- > Check power points, power cable and all power switches.
- Switch off the PC and check all cable connections. Check the connections to peripherals. Do not exchange cables, even though they may look similar. The polarity in those cables may be different. When it is confirmed that the computer has power and all connections are correct, turn the computer on again.

Frequent use of the programs **Disk Defragmenter** and **Disk Cleanup** will help you to avoid problems with your operating system.

The tool "System Information", available in the program folder "System Tools" is also very useful.

ERRORS AND POSSIBLE CAUSES

The monitor is blank.

- Confirm that the system is not in stand-by mode. Press any key on the keyboard to test this out.

Wrong Date and Time:

 Double-click the clock on the taskbar and correct the date and time.

After a system restart a new drive letter is assigned to the cards in the card slots.

- This can happen, when the card reader re-initializes the slots during a system start. New IDs might be assigned, which can lead to new drive letters for some cards.

No data can be accessed from the optical Drive.

- Check whether the disc is inserted correctly.
- Is the optical drive (Drive E) displayed in Windows Explorer? If so, test another disc.

The mouse does not work.

- Check the cable.
- Does your mous work with other programs? Is your mouse activated?
- Check the batteries. If they are empty change them by using batteries of the same type.

There is not enough room on the HDD.

Audio and video recording require a lot of storage capacity (up to 2.4 GB / hour). Back up unnecessary files of "My Documents" onto CD-R's or move them to drive D:.

The PC does not start up.

- If all cable connections are correct, then try to reset the power supply of the PC. Set the power switch at the rear of the PC to position 0 (OFF). Now press down the main switch at the front of the PC for 10 seconds. Wait 5 more seconds and the restart the PC.

ADDITIONAL SUPPORT

If the suggestions in the above section have not solved your problem, please contact the service hotline and we will attempt to help you solve the problem. Before you contact the Technology Centre, however, please have the following information available:

- How is your computer configured?
- What additional peripherals do you use?
- What messages, if any, appear on your screen?
- What software were you using when the error occurred?
- What steps have you already undertaken to solve the problem?
- Have you upgraded or removed drivers or hardware?
- Can you manually repeat the problem?
- If you have been given a customer number previously, please quote this.

DRIVER SUPPORT

This PC has been extensively tested in our laboratories with a large number of compatible devices. It fulfils all required standards and complies with the standard "Designed for Windows", which certifies utmost compatibility.

However, often the software drivers for individual components are updated from time to time. This is a regular process provided by the manufactured to mend possible compatibility problems that may occur with components (e.g., programs or hardware) that were not tested at the time of your PC's manufacture. Driver updates and the latest information on your product are available on the Internet.

Visit Medion on the Web at www.medion.com

TRANSPORTING THE PC

Please observe the following guidelines when transporting the PC:

> To avoid damage during transport, store the PC in its original packaging.

CLEANING AND CARE

The lifetime of the PC can be extended by taking the following measures:

- ➤ Warning! There are no user-serviceable or user-cleanable parts inside the PC housing.
- Before cleaning, always remove the power plug and all connecting cables.
- > Clean the PC with a damp, lint-free cloth. **Do not use any solvents, corrosive or gaseous cleaning agents**.
- DO NOT use CD-ROM cleaning disks or similar products that clean the lens of the laser to clean your CD-ROM/CDR-W/DVD-drive.

RECYCLING AND DISPOSAL

This PC and its packaging was produced mostly from materials which can be disposed of in an environmentally friendly manner and be professionally recycled.

After its use the computer will be taken back and recycled or use will be made of its useful material, if it is returned in a condition corresponding to its intended use.

Parts not usable will be properly disposed of.

ATTENTION! There is a lithium battery on the motherboard. No type of battery belongs in the household waste. All are taken back free of charge by the manufacturer, dealer or their representatives for a proper method of utilisation or disposal.

Should you have any questions concerning the disposal please contact your dealer or our service.

BATTERY TREATMENT

Batteries may contain combustible materials. By misuse, this may cause battery **leakage**, **heat**, **explosion** or **ignition**, bringing about **injury** or **damage** to the device.

Please observe strictly the following matters:

- KEEP CHILDREN AWAY from batteries.
 If by any chance, the batteries are swallowed, consult a doctor immediately.
- DO NOT CHARGE batteries (except rechargeable batteries).
- DO NOT FORCIBLY DISCHARGE batteries.
- DO NOT SHORT-CIRCUIT batteries.
- DO NOT HEAT or DISPOSE OF IN FIRE.
- DO NOT DISASSEMBLE or DEFORM batteries.
 Your hands and fingers may be injured, or the liquid of the
 battery may get into your eyes or adhere to your skin. If this
 happens, rinse with a large quantity of water immediately and
 consult a doctor.
- DO NOT expose batteries to strong impact by dropping or throwing the batteries.
- DO NOT reverse the positive (+) and negative (-) terminals to avoid short-circuit.
- Do NOT MIX used and new or different types of batteries together.
 - Your equipment may not operate properly. In addition, the battery exhausted first may be excessively drained (over-discharged).
- REMOVE PROMPTLY the used batteries from the device.
- **REPLACE ALL BATTERIES** with new batteries of the same type at the same time.

- **INSULATE THE TERMINAL** parts with tape or the like at the **storage or disposal** of the batteries.
- **DO NOT throw** rundown batteries in the domestic refuses! Respect the environment and throw them in the specific containers for separate collection. If necessary, turn to your reseller or to our service assistance. Thank you!



UPGRADES AND REPAIRS

- Only a qualified engineer should perform upgrades and repairs to your PC.
- If you do not have the necessary qualifications, go to an appropriate Service Engineer. Please contact our Service Centre if you are experiencing technical problems with your PC.

Notes for Service Engineers

- Before opening the housing, disconnect the PC from all power sources and remove
 any connecting cables. If the PC has not been disconnected from the power outlet before being opened, there is a danger to life through electric shock. There is also a risk
 of damage to the components.
- Internal components of the PC may be damaged by electrostatic discharge (ESD).
 Carry out system upgrades and changes in an ESD-protected workshop.
 If no such workshop is available, wear an antistatic wrist strap or touch a highly conductive metal object. Medion can repair damage sustained by inappropriate handling for a fee.
- Use only original spare parts.

Caution: Lithium batteries can not handle intense pressure, high temperatures or fire. Danger of explosion if replaced incorrectly. Replace batteries with a compatible type as recommended by the manufacturer.

Lithium batteries are hazardous waste and require proper disposal. Contact the Service Centre for additional information on battery disposal.

Notes on Laser Radiation:

Laser devices of Laser Class 1 to Laser Class 3b may be used in the PC. Where the PC housing remains closed, the device meets the requirements of **Laser Class 1.** By opening the PC housing you will gain access to laser devices of up to Laser Class 3b.

The CD-ROM-/CDRW-/DVD-drives installed contain **no user-serviceable** parts.

When removing and/or opening laser devices, the following guidelines must be observed:

- Only the manufacturer should perform repairs to the CD-ROM-/CDRW-/DVD-drives.
- DO NOT look into the laser beam, even while wearing optical protection.
- DO NOT allow yourself to be exposed to the laser beam. Avoid exposure of the
 eyes or skin to direct or stray radiation.

Chapter 5

Appendix

| Subject | Page |
|-------------------------------|------|
| | |
| Electromagnetic Compatibility | 87 |
| Electrical Safety | 87 |
| FCC Compliance Statement | 89 |
| Warranty | 90 |
| Index | 92 |

STANDARDS

This PC meets the requirements of the following standards:

ELECTROMAGNETIC COMPATIBILITY

This PC meets the following requirements for standards of electromagnetic compatibility and electrical safety:

| EN 55022 | Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement. |
|--------------|--|
| EN 55024 | Information technology equipment - Immunity characteristics - Limits and methods of measurement. |
| EN 61000-3-2 | Limits - Limits for harmonic current emissions (equipment input current up to and including 16 A per phase). |
| EN 61000-3-3 | Limits - Limitation of voltage fluctuations and flicker in low-voltage supply systems for equipment with a rated current up to 16 A. |

ELECTRICAL SAFETY

| EN 60950 | Safety of information technology equipment. |
|----------|---|
| | |

ERGONOMICS

Ergonomic requirements according to the following standards:

| DIN EN ISO | Ergonomic requirements for office work with display devices: |
|------------|--|
| 9241-3 | Part 3: Requirements for visual displays |
| 9241-4 | Part 4: Requirements for keyboards |
| 9241-8 | Part 8: Requirements for colour representation |
| 9241-9 | Part 9: Input devices except keyboards |

NOISE EMISSION

Requirements for noise emission according to the measurement procedure in accordance with the following standard:

| ISO 7779 (ISO 9296) | Acoustics. Measurement of airborne noise emitted by information technology and telecommunications |
|------------------------|---|
| • | equipment. |

This PC fulfils the requirements of noise emissions according to ISO 7779 with following values:

| Operating Mode | Max. Sound power level L _{WAd} (B/A) (declared according to ISO 9296) |
|---------------------------------|--|
| Idling | 48 |
| Operating | 52 |
| | Max. Sound pressure level L _{pAm} (dB/A) (declared according to ISO 9296) |
| At bystander position Idling | 40 |
| St bystander position Operating | 47 |

INFORMATION ABOUT THE REGULATORY COMPLIANCE OF THE MODEM

This PC, if equipped with a modem, has been tested according and complies with the European regulatory guidelines for radio equipment and telecommunication installations (R&TTE 1999/5/EG).

The modem meets the requirements of TBR21 (01/1998) and EG201120/V1.1.1/01/98 regarding connection with an analog telephone network.

INFORMATION ABOUT THE REGUALTORY COMPLIANCE OF WIRELESS KEYBOARD / MOUSE, BLUETOOTH AND WIRELESS LAN

The following low power radio equipment, which has separately been tested and approved according R&TTE guideline (1999/5/EC), is bundled with this PC:

- -Wireless keyboard / mouse / receiver
- -Wireless LAN

These radio devices are marked individually with the CE mark. The declarations of conformity of these radio devices are available under www.medion.com/conformity.

88 APPENDIX

FCC COMPLIANCE STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. Shielded interface cables, if any, must be used in order to comply with the emission limits.

WARRANTY

The receipt serves as proof of first purchase and should be kept in a safe place. Your legal rights are not limited by these warranty conditions. It is required should you need to make use of the guarantee. We guarantee that this equipment is in perfect working order. Upon production of the receipt, the remaining period of guarantee shall pass on from the original parts to the respective replacement parts. If you hand in this equipment to make use of the quarantee, you must remove all programs, data and removable storage media. Products which are sent without accessories will be replaced without accessories. The warranty obligation does not apply in the case of the problem being caused by an accident, a catastrophe, vandalism, misuse, incorrect use, ignoring the safety and maintenance regulations, changes by software, viruses or another piece of equipment or accessories or by other modifications not approved by ourselves. This limited guarantee declaration replaces all other guarantees of express or implied nature. This includes the guarantee of saleability or the suitability for a certain purpose but is not limited to this. In some countries the exclusion of implied guarantees is not permissible upon principle. In this case the validity of all express and implied guarantees is limited to the guarantee period. Once this period has expired, all guarantees become invalid. In some countries limiting the period of validity for implied guarantees is not permitted, so that the above limitation does not come into force. If you have any guestions with regard to these guarantee conditions, please contact us.

90

LIABILITY LIMITATIONS

The contents of this manual are subject to unannounced changes caused by technical progress. Manufacturer and sales shall not be responsible for any damages which have been caused as a result of omissions or errors in the information provided in this manual.

Under no circumstances shall we be liable for any of the following:

- Claims made against you by third parties based on loss or damage.
- 2. Loss or damage to your blanks, recordings or data.
- 3. Economic follow-on damage (including lost profit or savings) or associated damage even in the case that we have been informed of the possibilities of this type of damage.

In some countries the exclusion or limitation of accompanying or followon damage is not legally accepted so that the above limitations do not come into force.

COPYING THIS MANUAL

This document contains legally protected information. All rights reserved. Copying in mechanical, electronic and any other form without the written approval of the manufacturer is prohibited.

INDEX

| A | Disable |
|--|--|
| Ambient Temperature11 Audienceii Autorun64 | Bluetooth |
| В | |
| BIOS Setup66 | E |
| Bluetooth Enabling and disabling57 | Electrical Safety |
| C Cabling | Enable Bluetooth |
| CD-blanks44 | F |
| CD-ROM | FAQ |
| COM159 | G |
| Connecting 12 | Graphics Card46 |
| Connecting 12 Antenna for radio/TV 22 Keyboard 18 Microphone 22 Modem/ISDN 19 Monitor 14 | H Hard Drive 37 HD See Hard Drive Hotline 79 |
| Parallel devices18 | I |
| Recording | IBM [®] Microdrive |
| Speakers/Audio Output21 Television23 | K |
| USB devices 24 Video inlet 23 Customer Service 77 | Keyboard |
| D | Multimedia functions 35 Palm rest 16 |
| Data and System Security69 Data security69 | |

92 APPENDIX

| L | R | |
|---|---|--|
| Laser Radiation83 License Agreement27 | Radio-/TV- Tuner Card51 Remote controller51 Restore74 | |
| М | | |
| Main Power Switch26Maintenance80Maintenance programs69Memory Stick45MMC45Modem / ISDN59Mouse33Inserting batteries15MultiMediaCard45 | S Safety Instructions 1 SD 45 Secure Digital 45 Serial Number ii Service Engineers 83 Set-Up Location 11 SmartMedia 45 Software Deinstallation 65 Sound Card 49 | |
| N | Standards | |
| Nero 62 Network 52 LAN Access Point 55 Troubleshooting 58 What do you need for networking? 53 What is a Network? 52 Wireless LAN 55 Noise Emission 88 | Electrical Safety | |
| 0 | Transporting | |
| Operation | Troubleshooting70, 77 | |
| Mouse | U USB Port | |
| P | W | |
| Password reset File | Warranty | |
| Q Qualityii | Windows® Desktop | |