

A Database Publication

Volume 6  
Number 12  
February 1989  
£1.50

# THE MICRO USER

## SECURITY

*Advice on how to  
protect your files*

## SPLIT

*An easy utility to  
divide long files*

## TAPE TIMER

*Fast access to audio  
and video recordings*

## TYPE-IN GAME

*Archimedes arcade  
action in ArcRoids*

## SCHEDULING

*Make your Z88  
count the hours*

## RISC OS

*New series: How to  
get the best from it*

## REVIEWS

- Double View
- Scorpio
- First Word Plus
- First Fonts
- ... plus all the  
latest games

How to  
beat the  
language  
barrier

Top-selling guide  
to the BBC Micro, Master  
Archimedes and Z88

RUSSIAN  
FOR BEGINNERS

BRITISH BROADCASTING CORPORATION

МНЖРОЖОМПШТЕР СИСТЕМ





# PLAY IT AGAIN SAM

# 6

NEW  
RELEASE



## GALA FORCE 2 A New Release from Superior Software

Everything that Galaforce was, and more – more aliens, more patterns, much more speed, more features (including collectable capsules – some help, some hinder), excellent sound effects and music. "A wonderful shoot 'em up – fast, furious, beautifully designed and stunningly compulsive. This will be one of the top three BBC games of the year – I promise". . . . A & B Computing (September 1988)



NOW ALSO  
AVAILABLE  
FOR THE  
ELECTRON



## HUNCHBACK Superior's Authentic Arcade Conversion

This superbly addictive and amusing arcade conversion is now available again for the BBC Micro and is available for the first time ever for the Electron. "This game has excellent graphics and sound . . . a good addition factor and is fun into the bargain". . . . Micro User



SUPERIOR  
APPROVED




## HOPPER Acornsoft's Classic Hit

The best implementation of the "Frogger" game. (Even better than Superior's own version!) Fast-moving with detailed, colourful graphics. Features include diving turtles, crocodiles, snakes and dragonflies. "It's great fun . . . an excellent version of the arcade favourite. Highly recommended". . . . Micro User



SUPERIOR  
APPROVED

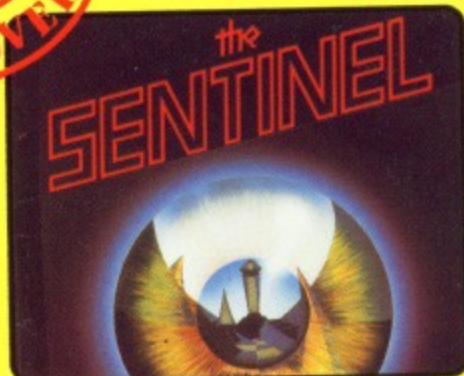

## THE SENTINEL Firebird's Revolutionary Game

Absorb your way through 10,000 different 3D landscapes. Gain height by absorbing the trees and the sentries, and finally defeat The Sentinel. "The Sentinel is the best BBC Micro game ever. An entirely new concept. The graphics are amazing. Buy it!" . . . Acorn User



## PLAY IT AGAIN SAM 6 for the BBC Micro and Acorn Electron

Superior Software has combined a top-quality brand-new release with three great classics (one new to the Electron). The result is one of the best ever four-game BBC/Electron compilations. Don't miss it for your collection!

|                             |        |                                      |        |
|-----------------------------|--------|--------------------------------------|--------|
| BBC Micro Cassette .....    | £9.95  | Acorn Electron Cassette .....        | £9.95  |
| BBC Micro 5 1/4" Disc ..... | £11.95 | BBC Master Compact 3 1/2" Disc ..... | £14.95 |

(Compatible with the BBC B, B+ and Master Series computers)

Please make cheques payable to "Superior Software Ltd".

## ACORN ELECTRON VERSION

Unfortunately it is not technically possible to produce an Acorn Electron version of THE SENTINEL. The four games on the Acorn Electron version of PLAY IT AGAIN SAM 6 are: GALA FORCE 2, HUNCHBACK, HOPPER and VIDEO'S REVENGE.

**VIDEO'S REVENGE** – An action-packed, fast-moving alien blaster from Budgie Software. "If you can imagine Defender twisted on its side with the mentality of Rambo in a bad mood, then you are getting close to the destruction possible in Video's Revenge. Sprites are fast and furious . . . sound is wonderful". . . . Micro User.

**SUPERIOR  
SOFTWARE**  
Limited

**ACORN SOFTWARE**

(Acornsoft is a registered trademark of Acorn Computers Ltd. Superior Software Ltd is a registered user.)  
Dent APS2, Regent House, Skinner Lane, Leeds LS7 1AX. Telephone: (0532) 459453



The screen pictures  
show the BBC Micro  
versions of the games.

24 HOUR TELEPHONE  
ANSWERING SERVICE FOR ORDERS

## OUR GUARANTEE

- All mail orders are despatched within 24 hours by first-class post.
- Postage and packing is free.
- Faulty cassettes and discs will be replaced immediately. (This does not affect your statutory rights).



# Archimedes

**BEEBUG the recognised Archimedes specialists.**

## ARCHIMEDES 300 SERIES

*Always in stock*

|                          |         |         |
|--------------------------|---------|---------|
| 0190G 305 Entry System   | 803.85  | 763.66  |
| 0191G 305 Mono System    | 872.85  | 829.21  |
| 0192G 305 Colour System  | 1056.85 | 1004.01 |
| 0193G 310 Entry System   | 960.25  | 912.24  |
| 0194G 310 Mono System    | 1029.25 | 977.79  |
| 0195G 310 Colour System  | 1213.25 | 1152.59 |
| 0257G 310M Entry System  | 1029.25 | 977.79  |
| 0258G 310M Mono System   | 1098.25 | 1043.34 |
| 0259G 310M Colour System | 1282.25 | 1218.14 |

## ARCHIMEDES 400 SERIES

|                         |         |         |
|-------------------------|---------|---------|
| 0263G 440 Entry System  | 2908.35 | 2762.93 |
| 0265G 440 Colour System | 3161.35 | 3003.28 |

## ARCHIMEDES SOFTWARE

|                                |        |        |
|--------------------------------|--------|--------|
| 1089C Kermit                   | 56.35  | 53.53  |
| 1080D Ansi C                   | 113.85 | 108.16 |
| 1081C ISO Pascal               | 113.85 | 108.16 |
| 1082D Fortran 77               | 113.85 | 108.16 |
| 1083B Twin                     | 33.35  | 31.68  |
| 1084D Logistix                 | 113.85 | 108.16 |
| 1086D Prolog X                 | 228.85 | 217.41 |
| 1087D Lisp                     | 228.85 | 217.41 |
| 0900B PC Software Emulator     | 113.85 | 108.16 |
| 1088D 1st Word Plus            | 91.94  | 87.34  |
| 0901C Archimedes Termulator    | 67.85  | 64.46  |
| 0902D ARM Assembler Package    | 228.85 | 217.41 |
| 0903B EMR Sound Synthesiser    | 49.95  | 47.45  |
| 0904B EMR Creations Disc       | 19.95  | 18.95  |
| 0905E Logotron Logo            | 69.00  | 65.55  |
| 0906D Pipedream                | 113.85 | 108.16 |
| 0917B Pipedream Spellcheck     | 49.45  | 46.98  |
| 0908C Flying Start II Database | 99.95  | 94.95  |

## PRICES INCLUDE VAT

Where two prices are shown, the first is our full price and the second our members price.

|                                  |        |        |
|----------------------------------|--------|--------|
| 0909B Archeffect                 | 24.99  | 23.74  |
| 0910B ArcTFS                     | 29.95  | 28.45  |
| 0911B Autosketch                 | 91.54  | 86.96  |
| 0912B ARC-PCB                    | 99.95  | 94.95  |
| 0913B ARC-PCB (with autorouting) | 195.00 | 185.25 |
| 0914B Linguinity Presenter       | 29.84  | 28.35  |

## BOOKS

|                                  |       |       |
|----------------------------------|-------|-------|
| 1242C Programmers Ref. Man.      | 29.95 | 28.45 |
| 1211B Arch. Assembly Lang.       | 14.95 | 14.20 |
| 0915B Program Disc for code 1211 | 9.95  | 9.45  |
| 0916C Code 1211 & 0915 together  | 21.95 | 20.85 |

## CLARES

|                             |        |        |
|-----------------------------|--------|--------|
| 0937C Pro-Artisan           | 169.95 | 161.45 |
| 1095C Artisan               | 39.95  | 35.96  |
| 1099C Artisan Support Disc  | 19.95  | 18.95  |
| 1096C Graphic Writer        | 29.95  | 26.96  |
| 1097C Archimedes Toolkit    | 39.95  | 35.96  |
| 1098C Alpha Base            | 49.95  | 44.96  |
| 1094B Sound & Graphics Demo | 11.50  | 10.93  |

## MEMBERS SPECIAL OFFER ON ARCHIMEDES

**0% 12 Months Finance**  
**£50 Voucher to spend as you wish**  
**Printer Lead, Ten 3.5" discs,**  
**Lockable disc box**  
**And Either**  
**Free upgrade to Risc OS**  
**& Artisan Package**  
**OR**  
**Free PC Emulator**

**See details on other advert**

|                         |       |       |
|-------------------------|-------|-------|
| 1079B Arc Buffer Module | 19.95 | 18.95 |
| 1078B Render Bender     | 79.95 | 75.95 |

## MINERVA

|                                 |       |       |
|---------------------------------|-------|-------|
| 0931C Sigmashet                 | 69.95 | 66.45 |
| 0932C Gammaplot                 | 69.95 | 66.45 |
| 0920C Deltabase                 | 29.95 | 28.45 |
| 0921C System Delta Plus         | 69.95 | 66.45 |
| 1233C Sys. Delta Plus Ref. Man. | 29.95 | 28.45 |
| 0922C Order Processing*         | 64.95 | 61.70 |
| 0923C Sales Ledger*             | 64.95 | 61.70 |
| 0924C Stock Manager*            | 64.95 | 61.70 |
| 0925C Purchase Ledger*          | 64.95 | 61.70 |
| 0926C Nominal Ledger*           | 64.95 | 61.70 |
| 0927C School Administrator*     | 79.95 | 75.95 |
| 0928C Video Rental*             | 69.85 | 66.36 |
| 0929C Reporter*                 | 24.95 | 23.70 |

\* Requires System Delta Plus

## BEEBUGSOFT

|                             |       |       |
|-----------------------------|-------|-------|
| 0100C Masterfile ADFS       | 22.00 | 16.50 |
| 0101D Hearsay               | 69.00 | 51.75 |
| 0102B Archimedes DFS Reader | 10.42 | 9.90  |

## ARCHIMEDES KEYSTRIP HOLDER

Fill-in your own definitions or attach ready printed keystrips to our smart spiral bound holder.  
**Members Price £2.95 Code 0794B**

## ARCHIMEDES KEYBOARD EXTENSION LEAD

Extend your keyboard cable with our 1 metre curly lead  
**Members Price £7.95 Code 0832B**

## OTHER HARDWARE

|                                |       |       |
|--------------------------------|-------|-------|
| 0805D CC ROM Podule            | 56.35 | 53.53 |
| 0806B Battery Backup for above | 11.50 | 10.93 |

|                               |        |        |
|-------------------------------|--------|--------|
| 0803B Armadillo Sound Sampler | 126.50 | 120.18 |
| 0825C IEEE488 Podule          | 326.50 | 310.17 |
| 0802C Chromalock Podule       | 339.25 | 322.29 |
| 0808C Watford Video Digitiser | 286.35 | 272.03 |

## ARCHIMEDES UPGRADES

|                                |        |        |
|--------------------------------|--------|--------|
| 0234B Econet Board (as M128)   | 48.88  | 46.43  |
| 0266C 0.5Mb RAM (305 only)     | 171.35 | 162.78 |
| 0267G Floppy Disc Drive        | 143.75 | 136.56 |
| 0271D I/O Podule *             | 97.75  | 92.86  |
| 0268G 20Mb Hard Disc (300's) * | 573.85 | 545.16 |
| 0269C Podule Backplane         | 44.85  | 42.61  |
| 0270D ROM Podule *             | 67.85  | 64.46  |
| 0272D MIDI add-on to I/O       | 44.85  | 42.61  |
| 0273D MIDI Podule *            | 79.35  | 75.38  |

\* Requires Podule Backplane

## ARCHIMEDES LEADS

|                                  |       |       |
|----------------------------------|-------|-------|
| 0832B Keyboard Extension Lead    | 8.37  | 7.95  |
| 0558B SKART Lead                 | 9.42  | 8.95  |
| 0425C Archimedes Printer Lead    | 9.42  | 8.95  |
| 0795C 5.25" Disc Drive Interface | 29.05 | 27.60 |
| 0796C Serial Link Kit & Disc     | 18.16 | 17.25 |
| 0797B Just Serial Link Cable     | 12.11 | 11.50 |
| 0826B Arch. to Magic Modem       | 7.32  | 6.95  |
| 0827B Arch. to Linnet Modem      | 7.32  | 6.95  |
| 0828B Arch. Audio Lead           | 6.26  | 5.95  |

## ARCHIMEDES GAMES

|                                |       |       |
|--------------------------------|-------|-------|
| 0936B Alerion                  | 14.95 | 14.20 |
| 1179B Zarch                    | 19.95 | 18.95 |
| 1187B Conquerer                | 24.95 | 23.70 |
| 0930B Minotaur Game            | 14.95 | 14.20 |
| 0935B Dread Dragon Droom (ed.) | 18.95 | 18.00 |

## ARCHIMEDES ACCESSORIES

|                             |      |      |
|-----------------------------|------|------|
| 0794B Arch. Keystrip Holder | 3.11 | 2.95 |
| 0789B Blue Beebug Mouse Mat | 3.68 | 3.50 |
| 0788B Red Beebug Mouse Mat  | 3.68 | 3.50 |
| 0716B Archimedes Dust Cover | 9.00 | 8.55 |

## ARCHIMEDES SPARES

|                              |       |       |
|------------------------------|-------|-------|
| 0839B Mouse                  | 51.49 | 48.92 |
| 0838D Keyboard Circuit Board | 92.18 | 87.57 |

## Carriage

Carriage is denoted by the letter contained in the stock code. A-60p, B-E1, C-E2, D-E3, E-E4, , G-E7. When ordering several items, use the highest price code and half of each subsequent code. For courier delivery use code G.

## Credit Cards



Access and Visa orders are welcome, and may be placed by letter or telephone (24 hours).

**BEEBUG LTD,**  
 Dolphin Place, Holywell Hill,  
 St. Albans, Herts., AL1 1EX.

**(0727) 40303**

**Please telephone for a Free Information pack and Archimedes brochure.**



# THE MICRO USER

Managing Editor  
**Derek Meakin**

Group Editor  
**Alan McLachlan**

Features Editor  
**Peter Davidson**

Production Editor  
**Peter Glover**

Assistant Features Editor  
**Steve Turnbull**

News Editor  
**Mike Cowley**

Technical Editor  
**Mike Cook**

Promotions Editor  
**Christopher Payne**

Promotions Coordinator  
**Robin Nixon**

Reviews Coordinator  
**Pam Turnbull**

Advertisement Manager  
**John Snowden**

Advertising Sales  
**Peter Babbage, Gail Blincow**

Tel: 0625 878888 (All depts.)  
0625 879940 (Subs.)  
Telecom Gold: 72:MAG001  
Telex: 9312188888 DB  
Prestel Mailbox: 614568383  
Fax: 0625 879966

Published by:  
**Database Publications Ltd,**  
Europa House, Adlington Park,  
Adlington, Macclesfield SK10 4NP.

Subscription rates for  
12 issues, post free:

£18 - UK  
£28 - Europe (incl. Eire)  
£34 - Overseas Surface  
£45 - Overseas Air

40,376  
Jan-June 1988  
ISSN 0265-4040

The Micro User welcomes program listings and articles for publication. Material should be typed or computer-printed, and preferably double-spaced. Program listings should be accompanied by cassette tape or disc. Please enclose a stamped, self-addressed envelope, otherwise the return of material cannot be guaranteed. Contributions accepted for publication will be on an all-rights basis.

© 1989 Database Publications Ltd. No material may be reproduced in whole or in part without written permission. While every care is taken, the publishers cannot be held legally responsible for any errors in articles, listings or advertisements.


The Micro User is an independent publication and neither the BBC nor Acorn Computers Ltd are responsible for any of the articles in this issue or for any of the opinions expressed.

News trade distribution: Diamond Europress Sales & Distribution, Unit 1, Burgess Road, Ivyhouse Lane, Hastings, East Sussex TN35 4NR. Tel: 0424 430422.


Database Publications is a  
division of Europress Ltd

## Features

**7 News**  
All the latest events in the ever-changing world of your BBC Micro.

**22 Ruskeys**   
Join the language revolution and spell it out in Russian, Greek or ...

**26 Mad Hatter**  
Our monthly look at adventure games - old, new and revamped.

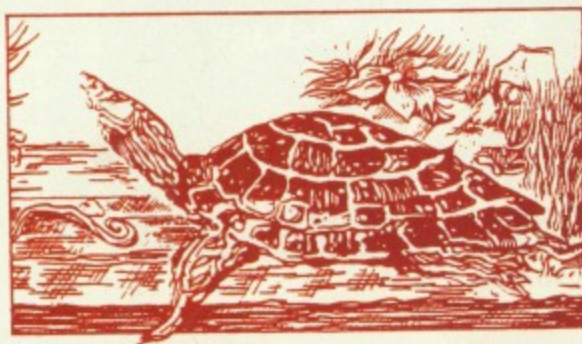

**29 Whizz Kids**  
We visit the men behind Heyley Software, a new force in fantasy.

**36 Wimps**  
The series continues: Handling your menus on the Archimedes.

**39 Ceefax Guide**  
What's coming this month on the telesoftware pages of BBC TV.

**43 Body Building**  
Our technical guru demonstrates more experiment board techniques.

**47 Beyond Arthur**  
The beginning of a new series on what you'll get from the Risc OS.


**56 Library**  
Find those useful routines in a trice with our handy Library index.


**59 Hac Man**  
A wealth of useful hints and news from our resident games expert.

**77 Problem Solved**  
A helping hand with some of those mind-testing hardware problems.

**127 Letters**  
The chance to get your news, views, moans and name into print.

## Game


**79 Skulls**   
You'll need lightning reactions to pack the falling blocks correctly.


**107 ArcRoids**   
Can you beat the high score in this classic test of your blasting skill?

## Education

**73 Update**  
Up-to-the-minute news of the BBC Micro in the world of education.


**74 Education Reviews**  
Looking at the best in software for the BBC Micro series in schools.

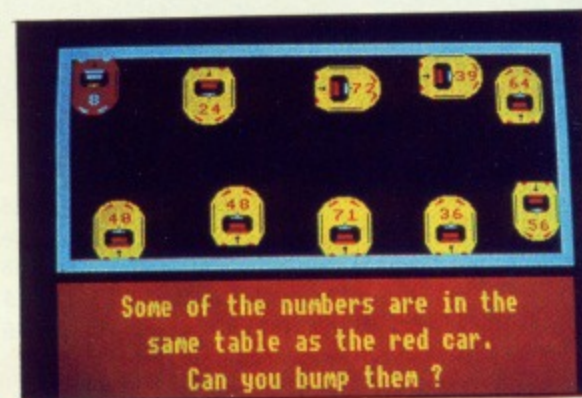


**53 Logger**   
Now you can keep an accurate record of time spent on individual projects plus tasks within them with this useful routine for your portable micro.





## Utilities

**48 Get it Right!**   
By popular demand we repeat the secrets behind our checksums.

**51 Tape Timer**   
This routine will give you speedy access to video tape recordings.

**65 Split**   
A program to assist in dividing files that exceed memory length.

**87 Protection**   
One way to make it difficult for your own programs to be hacked.

**119 File Type**   
List Archimedes file types, set them by name and add your own.

## Reviews


**31 Software Scene**  
Our reviewers cast their eyes over the very latest games releases.

**40 First Word Plus**  
We put the Acorn-approved Archimedes word processor to the test.

**42 First Fonts**  
A range of fonts for First Word Plus – how do they perform in use?

**83 DoubleView**  
Edit two documents at once: We try out this re-written package.

**113 Software Quickies**  
We test two Archimedes packages from a brand new software house.

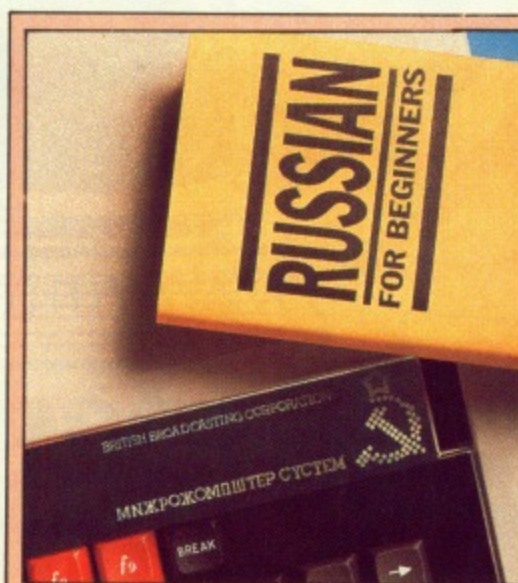


## Cover story

### Watch your language!

Now you can create foreign characters on your BBC Micro. With this type-in utility you can key in perfect text every time in Russian – or, with a little work, any other non-standard language. Turn to Page 22.

## Games for all

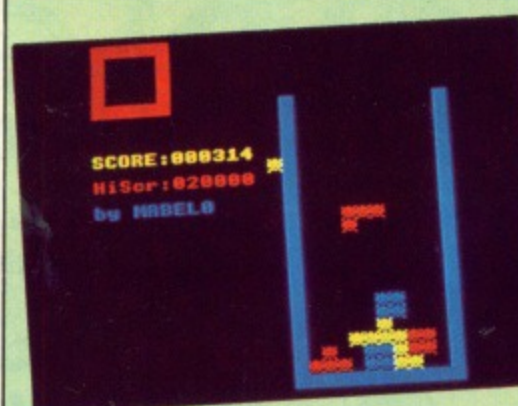


This month you can play a clever version of a stunningly original game from the USSR.


Plus, for Archimedes users, a very challenging implementation of a classic arcade game in ArcRoids.

## New series

In April Acorn will be releasing its world-beating Risc OS multi-tasking system for the Archimedes. As a preview we start a series of articles that tells you what you to expect and how to get the most out of it. Turn to Page 47.

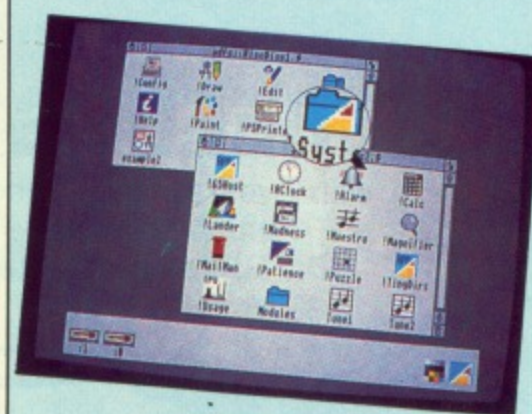

## GAME, SET AND MATCH

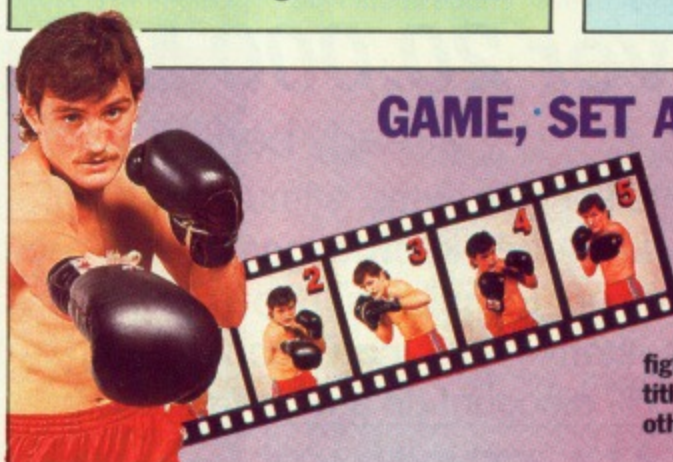

To celebrate the exciting By Fair Means or Foul boxing game for the BBC Micro, we present a great competition that gives you the chance to see the famous Barry McGuigan in his fight to gain the world featherweight title. And there's over £500 worth of other great prizes. Turn to Page 20.

## MICRO USER CLASSIFIEDS

The best bargains in the world of the BBC Micro come from fellow readers of *The Micro User*. Turn to **Page 124** to find just what you're looking for – from cheap modems to complete computer systems.



Our Checksum routines will help you to find your typing errors when keying in listings. For full details of how to use them, see the article on Page 48.



The Type-it-in symbol indicates that the feature contains at least one full length listing for you to key in on your micro.

## NEXT MONTH

**STATISTICS**  
Five packages compared

**CARDBOX**  
A superb index utility

**DESIGN**  
Create animated displays

**EDUCATION**  
Play Odd One Out

**THE MICRO USER**

March issue on sale February 1





**Don't leave  
your computer out  
in the COLD!**

**Give your  
BBC MICRO, MASTER  
or ARCHIMEDES**

the attention and support it deserves!!  
Join one of our User Groups now!

## **BEEBUG**

with 7 years of experience  
in supporting the  
BBC Micro and Master

## **RISC USER**

dedicated to the  
Archimedes

**over 20,000 Members**  
already benefit from

- A magazine full of new ideas, stimulating programs and useful hints
- Showroom with friendly knowledgeable staff
- Free help from our technical support team
- Our own software range at 25% discount to members and 5% discount on a wide range of other products
- Swift mail-order service
- Trade-in service to upgrade your system

**ALL FOR JUST £14.50 A YEAR!**

I would like to subscribe to, and become a member of: ☐ **BEEBUG Magazine and Support Group** ☐ **RISC USER Magazine and Support Group**

Name \_\_\_\_\_

Address \_\_\_\_\_

I enclose a cheque for £ \_\_\_\_\_ (all cheques must be in pounds sterling)  
drawn on a UK bank) or,  
Please debit my Access/Visa account No \_\_\_\_\_ / / /

Expiry \_\_\_\_\_ / \_\_\_\_\_

Send to:

**BEEBUG LTD**

### **SUBSCRIPTION RATES (1 YEAR)**

| <b>BEEBUG<br/>or RISC USER</b> | <b>BEEBUG and RISC USER<br/>joint subscription</b> |
|--------------------------------|--|
| £14.50                         | UK, BFPO, Ch.I £23.00                              |
| £20.00                         | Rest of Europe & Eire £33.00                       |
| £25.00                         | Middle East £40.00                                 |
| £27.00                         | Americas & Africa £44.00                           |
| £29.00                         | Elsewhere £48.00                                   |

Dolphin Place, Holywell Hill, St. Albans, Herts AL1 1EX  
Tel. St Albans (0727) 40303, FAX (0727) 60263, Micronet: \*BEEBUG



# NEWS *beat*

## Micros to help air safety?

CROWDED skies and stressed air traffic controllers are a growing source of aggravating delay and potential danger for air travellers. Lack of trained controllers is a large part of the problem but a training aid developed on the BBC Master could now be called to the rescue.

At Stansted, the Civil Aviation Authority is evaluating a new simulation system recently upgraded to the Archimedes. Tony Archer, a controller at Lydd airfield, combined with a systems programmer friend to produce the simulator after three years work.

They formed the Surrey based company Woodmarsh (0797 26236) to develop AART – Approach Area Radar Trainer – which they say is the first low cost system of its kind based round an off the shelf micro.

It gives trainees full radar simulation of background airspace and control zone positions. Using a second machine and a radio simulator, also designed by Woodmarsh, a flight operator takes the role of pilot to respond to the trainee's instructions.

The idea started when Tony was finding difficulty training for his radar controller's qualification. It can be a very costly business, with most training being on mainframe computers at residential centres.

"I thought it would be great to have a simulator myself", he told *The Micro User*. "A friend of mine is a genius at programming, so we got together".

They started with a system for the Sinclair QL graduating to the Master and then opting for the speed of the Archimedes.

"I think we are ahead of the game but it is very early days yet", said Tony. "There is defi-

nately a controller shortage at the moment because there has been very little money for training.

"Now the CAA suddenly realises it has not got enough people, there is great interest in any training aids that will help get them through quickly".

If the CAA gives its seal of approval to AART it could put 24 systems into its towers. Tony also hopes to interest independent airfields in it. He is also thinking of converting it into a game.

**BARNARDO's will benefit from a generous offer made by Harrow-based Supersoft (01-861 1166). The company is giving away software worth £50,000 to people making donations to the childrens charity, much of it for the BBC Micro and Electron.**

Peter Calver, managing director of Supersoft explained: "We have a large supply of surplus stock from the last five years. Anyone who writes to us enclosing a donation to Barnardo's will receive a program".

He told *The Micro User*: "These programs would normally have gone for sale on markets and, since we receive very little from this, we decided to put them to better use.

"If it is successful, we hope that other software houses may also join in by donating their surplus stocks".

The offer is on a pot luck basis with no specific software named.

Cheques and postal orders should be made payable to Barnardo's and sent to Barnardo's Offer, Winchester House, Canning Road, Wealdstone, Harrow, HA3 750.



*Your life in his hands: An air traffic controller at work*

## Helpful words from BBC Micro

SIX million adults have reading, writing and spelling problems and many could benefit from a new aid on the BBC Micro range.

The Wordwise Plus Literacy Pack from Special Needs Software (041-357 1659) is the result of three years work by educationalists Jacquetta Megarry and Eric Deeson.

Funded by the Learning Technology Unit of the Training

Agency, it builds on the success of Wordwise Plus, the UK's best selling word processor for BBC Micro.

It allows tutors to tailor information to the individual needs of their students.

The pack, complete with tutor's booklet, summary cards, reference cards and self-study word processing course costs £33.35. With Wordwise Plus chip it costs £56.35.

## Artisan upgraded

CLARES Micro Supplies (0606 48511) has released ProArtisan, its new graphics package for the Archimedes.

With 256 colours available, ProArtisan works in Mode 15 and is a follow-on from Clares' Artisan package.

It has features making it useful to both ends of the artistic scale: Those who cannot draw can get good results from the image manipulation package yet the scope of

the software can provide powerful facilities for education.

The new package has many extensions to Artisan including a wider fill menu and more sprites. Drawing is improved with an airbrush, rainbow pens and an extensive magic brush.

A font designer is also included in the toolkit menu with 26 fonts supplied on disc and there are 19 new printer dumps in mono and colour.

ProArtisan costs £169.95.



# CJEmicro's

## THE ACORN SPECIALISTS

**The widest range of Archimedes Hardware & Software anywhere!**

### ARCHIMEDES

#### External Drive Interface

Fully buffered with link options. THE BEST.  
£30.00. N.B. not all drives are Archimedes compatible

#### Drive Swap Switch

For above makes external drive '0', internal drive '1'. Ideal for PC Emulator as 5.25" drive becomes A:Internal B: £8.00.

#### Drive Select Translation Cable

When used with above, interface links in external drive can stay set to '0', saves hassle when moving a drive from a Beeb. £9.00.

#### DFS Utils

A quick and easy to use program that will transfer all or selected files from DFS to ADFS and ADFS to DFS.  
DFS Formatter included £20.00  
DFS Reader only £13.00

#### Monitor Switch Box

Archie/BBC. Plug both a BBC and an Archimedes into an Acorn Archimedes colour monitor. £10.00.

Archimedes <-> BBC RS423 link kit including file transfer software. £15.00.



P&P £1 or as quoted  
TRADE & EXPORT  
ORDERS WELCOME  
please enquire for  
delivery cost.  
Phone/Credit Card  
and Official  
Orders welcome.

C.J.E. MICRO'S (Dept. MU), 78 Brighton Road, Worthing, W. Sussex BN11 2 EN  
(0903) 213361 (3 lines)

### FONTAID

'FONTAID' NLQ Font designer for CANON/TAXAN & STAR NL10/LC10 (Archie version available).  
Ring for a leaflet

### SOFTWARE

'Multi Font NLQ' for most printers (SWR workspace version now available)  
'INFORM' Sideways Ram information system!  
Ring for a leaflet

### PRINTERS & MONITORS

#### PRINTERS

Star/Canon/Panasonic/Juki

#### MONITORS

Phillips/Microvitec

Ring for best prices

Archimedes

Acorn   
The choice of experience.

Special offers on  
ARCHIMEDES & MASTERS.  
Ring for details.  
Officially approved ACORN/  
ARCHIMEDES Dealer &  
Service Centre.  
Come to our shop for a  
demonstration.



# NEWS *beat*

## Archimedes goes into battle

BEFORE they go into action, young soldiers can now experience realistic battlefield conditions thanks to the Archimedes.

Westland System Assessment of Yeovil (0935 24545) has used the powerful graphics and sound facilities of the Archimedes for WIFT, its Westland direct Fire Trainer system. Its micro generated graphics projected on a large screen are used for gunnery and mortar training.

Target positions are set up, then students calculate grid references and select their choice of mortar or artillery and fire. The Archimedes then runs full sound and graphics simulation of the shot.

Already the Irish Army has installed one of the systems at its infantry weapons school at McDonagh Barracks, The Curragh. British army bases in Bristol, Wiltshire and Berlin use it and John Davies of Westland reports growing interest from UK and overseas markets.

## STITCHING

A STITCH on line brought Mold based Clwyd Technics (0352 741751) to the finals of the Welsh National Business Awards.

Its system to design patterns by linking Master 128 and BBC Bs to Knitmaster knitting machines put the company in the final three of the New Enterprise section of the awards run by HTV and Western Mail.

## TICKING

THE November issue of *The Micro User* included an article about Rubik's Clock. We have been asked to point out that Rubik and Rubik's Clock are the trade marks of Seven Towns Ltd, 7 Lambton Place, London W11 2SH.

GRAPHICS artist Paul Bayley of Malvern has enlisted the help of his BBC Micro in an appeal to raise £4 million for the restoration of Worcester Cathedral.

His artistic talents were turned to the cathedral appeal when his 14-year-old daughter was asked to take part in a poster competition at her school.

Paul remembered he had used his BBC Micro to draw the cathedral two years ago and had kept it on disc. It took only a few deft strokes with his pixel editor to give a graphic "before and after" view of the potential plight of the historic building.

He erased the cathedral's central tower which could

## BBC Micro helps cathedral appeal



Paul's original drawing

collapse within 15 years if nothing is done to preserve it.

And the end result was so well received by the Dean and Chapter that they passed it on to the Australian company brought in

to tackle the job of raising the £4 million appeal target.

Paul's two cathedral views will now be used as a graphics first in the prestigious Worcester Choral Society's annual programme.

"The original drawing took me just over a week to complete, working in the evenings", said Paul. "It was then an easy matter using the pixel editor to erase any part of the building and I think the end result was very effective".



## Little oaks from giant Acorn

ACORN has presented two saplings to Treetops School, Grays, Essex to replace trees lost from the school's grounds in the 1987 storms.

Treetops caters for children with learning difficulties and boasts several BBC Masters. It has plans to install a further six machines aiming at a micro in every classroom.

The sapling oaks were presented by Katherine Pierpoint, corporate communications coordinator for Acorn, and received by the Mayor of Thurrock, Councillor George Watts, who performed the planting ceremony. Also present were headmaster Mike Smith, school governors and 106 pupils.

## Masterly gospel songs

AFTER only five months computer experience, a 34 year-old Newcastle teacher has composed a suite of five original gospel songs using a BBC Master and Hybrid 4000 music system.

"Suck it and see orchestration" is Dave Blackwell's term for his first venture into micro music composing and he is now a convert.

"I wanted to use the micro as a creative tool", he said. "You often write a piece then wish you had made alterations. With the Master and Hybrid system. I


could make the changes as I went along to get it just right".

Head of music at Redewood School, Newcastle upon Tyne, Dave is on Educational Support Grant secondment in the area, showing teachers how to be more creative with their music use of computers.

**BURNINGS, beheadings and battles have come to the Archimedes courtesy of US Gold (021-356 3388). For its first venture on the Archimedes games front, Gold has chosen the acclaimed Joan of Arc, originally developed in France.**

**A complex game, it includes a lot of violent action mixed with historical detail. It costs £32.99**





# MICROMAN Computers

PASTURE LANE FARM,  
PASTURE LANE, RAINFORD,  
ST. HELENS, MERSEYSIDE, WA11 8PU

PHONE 074488 3667

## SHOWROOM

SHOWROOM OPENING  
9-6 MONDAY TO FRIDAY  
9-1 SATURDAY



## MAIL ORDER

PHONE 074488 5242

We accept both Access and Visa credit cards. Simply telephone your order, giving card number, expiry date, name and address, or send your order with cheque or postal order to the address opposite.

### DELIVERY CHARGES INCLUDING VAT

Computers/Printers/Drives:  
Next day £8.00, Trackback £4.00  
Small Items: £1.00



## ACORN PREMIER DEALER : ECONET : SERVICE CENTRE

# Archimedes

| ARCHIMEDES 300         | Ex VAT  | Inc VAT |
|------------------------|---------|---------|
| Archimedes 310 Base    | 835.00  | 960.25  |
| Archimedes 310 Mono    | 895.00  | 1029.25 |
| Archimedes 310 Colour  | 1055.00 | 1213.25 |
| Archimedes 310M Base   | 895.00  | 1029.25 |
| Archimedes 310M Mono   | 955.00  | 1098.25 |
| Archimedes 310M Colour | 1115.00 | 1282.25 |

### ARCHIMEDES 400

|                       |         |         |
|-----------------------|---------|---------|
| Archimedes 440 Base   | 2529.00 | 2908.35 |
| Archimedes 440 Mono   | 2589.00 | 2977.35 |
| Archimedes 440 Colour | 2749.00 | 3161.35 |

### 0% FINANCE

For a limited period Microman are able to offer 0% finance on Archimedes Computers please phone or call in for further details.

### ARCHIMEDES SPECIAL OFFERS

We have a range of special packs available to suit individual requirements, these include a range of FREE OFFERS please talk to our sales staff for specific details.  
(These offers do not apply to 0% Finance)

### MULTISYNC MONITORS

|                 |        |        |
|-----------------|--------|--------|
| NEC Multisync 2 | 520.87 | 599.00 |
| Taxan 770 Plus  | 599.00 | 688.85 |

### ARCHIMEDES PODULES/EXPANSION

|                          |       |       |
|--------------------------|-------|-------|
| Acorn Backplane Podule   | 39.00 | 44.85 |
| Acorn ROM Card           | 59.00 | 67.85 |
| Acorn I/O Podule         | 85.00 | 97.75 |
| Acorn MIDI Add-on to I/O | 39.00 | 44.85 |
| Acorn MIDI Card          | 69.00 | 79.35 |
| 5.25/3.5 Disc Interface  | 25.00 | 28.75 |
| Arc/BBC Serial Link      | 25.00 | 28.75 |
| CC ROM Podule            | 49.00 | 56.35 |
| CC ROM Podule + BB       | 59.00 | 67.85 |

### ARCHIMEDES UPGRADES

|                         |        |        |
|-------------------------|--------|--------|
| RISC OS - APRIL 89      | 29.00  | 33.35  |
| PC Emulator             | 99.00  | 113.85 |
| 0.5 MB RAM (305 only) * | 149.00 | 171.35 |
| Floppy Disc Drive *     | 115.00 | 132.25 |
| 20MB Hard Disc *        | 499.00 | 573.85 |

(Requires Backplane Podule)

\* Dealer Upgrade Only

### ARCHIMEDES SOUND SOFTWARE

|                         |        |        |
|-------------------------|--------|--------|
| EMR Studio 24 Plus      | 86.09  | 99.00  |
| EMR Sound Synth         | 43.44  | 49.95  |
| EMR Creations Disk      | 17.35  | 19.95  |
| Armadillo Sound Sampler | 110.00 | 126.50 |
| Sound Sampler + FFT     | 140.00 | 161.00 |
| FFT Software            | 40.00  | 46.00  |

| LANGUAGES           | Ex VAT | Inc VAT |
|---------------------|--------|---------|
| Ansi C              | 99.00  | 113.85  |
| ISO-Pascal          | 99.00  | 113.85  |
| FORTAN 77           | 99.00  | 113.85  |
| Software Dev Toolbx | 199.00 | 228.85  |
| Assembler           | 199.00 | 228.85  |
| Prolog X            | 199.00 | 228.85  |
| LISP                | 199.00 | 228.85  |
| Twin                | 29.00  | 33.35   |

### ACORN ARCHIMEDES SOFTWARE

|                      |        |        |
|----------------------|--------|--------|
| 1st Word Plus        | 79.95  | 91.94  |
| Logistix             | 99.00  | 113.85 |
| Acorn DTP - APRIL 89 | T.B.A. | T.B.A. |

### AUTOSKETCH

79.00 90.85

Ex VAT Inc VAT

AUTOSKETCH is a precision drawing package with a friendly appearance that makes it particularly well-suited to the Educational and enthusiast user.

### ROLAND A3 X-Y PLOTTERS

|                   |        |         |
|-------------------|--------|---------|
| Roland DXY880A A3 | 595.00 | 684.25  |
| Roland DXY980A A3 | 950.00 | 1092.50 |

Roland Main Dealer: Details on application

### CLARES SOFTWARE

|                   |        |        |
|-------------------|--------|--------|
| Artisan           | 34.74  | 39.95  |
| Artisan Utilities | 17.35  | 19.95  |
| Pro-Artisan       | 147.78 | 169.95 |
| Render Bender     | 69.52  | 79.95  |

### STAR LC10 COLOUR

The ideal choice of printer for the Archimedes and Clares Artisan Software.

229.00 263.35  
Ex VAT Inc VAT

|                |       |       |
|----------------|-------|-------|
| AlphaBase      | 43.44 | 49.95 |
| Graphic Writer | 26.04 | 29.95 |
| Toolkit Module | 34.74 | 39.95 |

### MINERVA ARCHIMEDES SOFTWARE

|                           |       |       |
|---------------------------|-------|-------|
| Minerva Deltabase         | 26.04 | 29.95 |
| Minerva System Delta Plus | 60.83 | 69.95 |
| Minerva Gamma Plot        | 60.83 | 69.95 |

### MISC ARCHIMEDES SOFTWARE

|              |       |        |
|--------------|-------|--------|
| Flying Start | 69.95 | 80.44  |
| U Connect    | 52.13 | 59.95  |
| Signwriter   | 43.44 | 49.95  |
| Pipedream    | 99.00 | 113.85 |

### Z88 'ALL IN ONE PACK'

Z88 COMPUTER  
128K RAM PACK  
CARRYING CASE  
SET OF BATTERIES  
PLUS FREE Z88 BBC LINK  
299.00 343.85  
Ex VAT Inc VAT

| Z88 COMPUTER    | Ex VAT | Inc VAT |
|-----------------|--------|---------|
| Z88 Computer    | 239.00 | 274.85  |
| Mains Adapter   | 8.65   | 9.95    |
| 128K RAM Pack   | 43.44  | 49.95   |
| 512K RAM Pack   | 173.04 | 199.00  |
| 128k EPROM Pack | 43.44  | 49.95   |
| Z88 PC Link II  | 30.39  | 34.95   |
| Z88 BBC Link    | 21.70  | 24.95   |

### PANASONIC KXP 1081

145.00 166.75  
Ex VAT Inc VAT

### STAR LC-10

9pin, Multi-Font NLQ Dot Matrix  
189.00 217.35  
Ex VAT Inc VAT

### STAR LC24-10

24pin, Full Featured LQ Dot Matrix  
329.00 378.35  
Ex VAT Inc VAT

### STAR LASER PRINTER 8

1MB MEMORY AS STANDARD  
HP LaserJet Plus Emulation  
FREE ON-SITE SERVICE CONTRACT  
1449.00 1666.35  
Ex VAT Inc VAT

### BBC MASTER SERIES

|                     |        |        |
|---------------------|--------|--------|
| Master 128          | 379.00 | 435.85 |
| Master Turbo Module | 120.00 | 138.00 |
| IEEE 488 Interface  | 283.91 | 326.50 |

### BBC/MASTER DISC DRIVES

|                          |        |        |
|--------------------------|--------|--------|
| Single 400K 40/80T       | 99.96  | 114.95 |
| Single 400K 40/80T + PSU | 113.00 | 129.95 |
| Dual 800K 40/80T         | 191.29 | 219.95 |
| Dual 800K 40/80T + PSU   | 217.35 | 249.95 |

### BBC B/B + UPGRADES

|                           |       |       |
|---------------------------|-------|-------|
| Acorn 1770 Disc Interface | 49.00 | 56.35 |
| Acorn ADFS ROM            | 26.08 | 29.99 |

### WATFORD PRODUCTS

|                      |        |        |
|----------------------|--------|--------|
| Solderless ROM Board | 32.00  | 36.80  |
| 32K Shadow Board     | 59.00  | 67.85  |
| BEEB Digitiser       | 109.00 | 125.35 |
| Quest Mouse          | 25.00  | 28.75  |
| Quest Mouse + Paint  | 54.00  | 62.10  |

### PHILIPS MONITORS


|                    |        |        |
|--------------------|--------|--------|
| Philips CM8833     | 239.00 | 274.85 |
| Philips Green 7502 | 73.00  | 83.95  |

For full ARCHIMEDES, BBC and PC price list please phone.

GOVERNMENT, NHS AND EDUCATIONAL ORDERS ACCEPTED



# NEWS *beat*

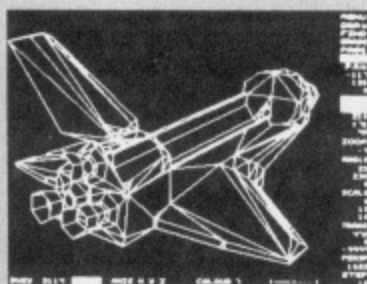

## 3D CAD for Arc

NEW from Silicon Vision (01-861 2173) is its 3D draughting system SolidCAD for the Archimedes. In addition to 3D views it allows drawing in plan, front and side elevations making it a useful tool for architects, engineers and teachers.


There are zoom and pan options for precision draughting and surface definition for creating solid colour objects.

Silicon has followed up its BBC Micro version with one for the Archimedes which includes a shading facility for added realism. It costs £49.95.

For more sophisticated design, Realtime Solids Modeller on the Archimedes has high speed animation and costs £89.95 or £40 to upgrade from SolidCAD.

Another new product from the company is RiscBasic for speeding up Archimedes Basic programs by compiling them automatically into pure ARM Risc code. It costs £99.95.

In the pipeline from Silicon is Presentation Manager for edit and play back of micro controlled lectures and demonstrations. Managing director Yunas Nadiadi is also intending to bring out add-ons for his PCB design system ARC-PCB and for SolidCAD.

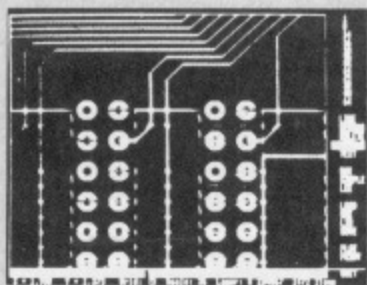

## Superior promises more

BROTHERS Richard and Steve Hanson of Superior Software (0532 459453) have added a number of new games titles to their stable and promise more are on the way.

First on the list is a BBC Micro version of Elite's Question of Sport which has now survived initial packaging problems.

Breaking all pre-release mail


order records for Superior, Repton Infinity is a massive four game package complete with a new games creation language and 72 page games creation manual. It costs £12.95 on cassette, £14.95 on disc – £19.95 for the Master Compact.

Superior has also put out BBC Micro versions of Play It Again Sam 6 and System 3's

Last Ninja. The Repton series comes to the Archimedes for the first time with Repton III.

Other BBC Micro rights acquired by Superior are Palace's Barbarian II and Mediagenic's Predator which should be available soon.

For the results of *The Micro User* Barbarian competition and details of our latest contest see Page 20.

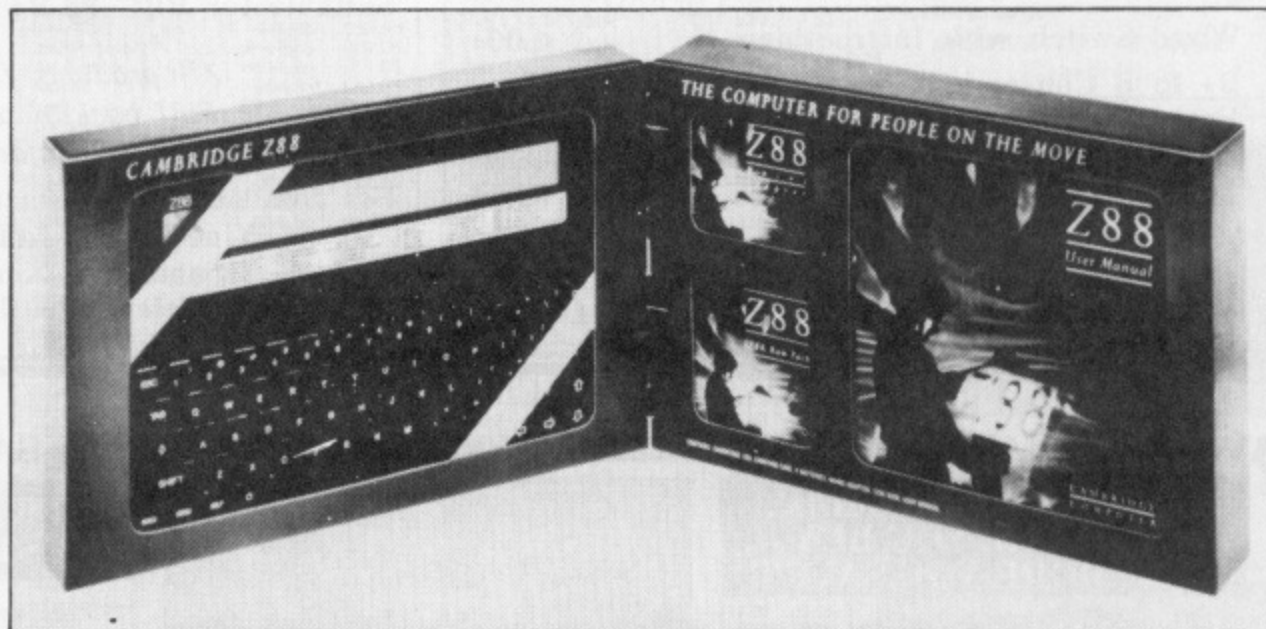

**CAMBRIDGE Computer (0233 312216) has brought out a promotional pack for the Cambridge Z88 laptop.**

**It includes carrying case, mains adapter, four batteries, a 128k ram pack, an updated user manual and a Z88. Price £344.94.**

## Way with Wimp

SIMITRON (0342 28188) has launched Archway, an aid to people who want to write programs running under the Archimedes Wimp.

Archway provides a program creation environment including tools, script shells, run-time code, a library of functions and procedures and extensive examples.

It costs £79.95 and the Risc OS version will be £95.95. Early orders will get a free upgrade to Risc OS.

## Presenting products in a really big way

SLIDES upside down or in the wrong order are a nightmare for speakers who need to illustrate their topic. At the end of February, Lingenuity (098-685 476) will launch a desktop presenter package aimed at eliminating these problems and increasing the scope of graphic displays.

Presenter Story was developed by X-Ample Technology in Holland and runs on the Archimedes. It is being published and distributed by Lingenuity, the product division of Lindis International, Acorn's export distributor.

Using Presenter Story, business and technical presentations can be projected straight on to large video screens. It makes use of the Archimedes' high resolution graphics and is available in educational, busi-

ness and video versions.

Jack Lillingstone of Lingenuity told *The Micro User*: "It is a very clever package that can cover all professional presentation requirements".

Prices to be decided.

Lingenuity has also upgraded its first Archimedes hardware product, the Colour Converter which changes the monochrome Watford Digitiser into full colour.

New additional software using error correction dithering allows the Archimedes to simulate 256,000 colours and a Mode 12 facility provides the opportunity to use digitised pictures with 16 colour software.

All existing registered users will be automatically upgraded free of charge. The Colour Converter package costs £195.44.



Disc Drive for  
Christmas?

## Vine Micros Ltd

You Need  
Replay!

### REPLAY

*The Ultimate in Tape to Disk Transfer.*

#### Features include:

- \* Very fast saving and loading of files
- \* Screen grabbing facility
- \* Fits internally. No soldering or track cutting required
- \* Saves up to 22 files per disk
- \* Fully menu driven
- \* Money back guarantee if not satisfied

|                                    |         |
|------------------------------------|---------|
| BBC Master (add-on for Romboard 3) | £ 27.00 |
| * Master Replay & Romboard 3 *     | £ 39.00 |
| BBC B Mk1 (please state DFS)       | £ 29.90 |
| BBC B Mk2 (for any 1770 DFS)       | £ 29.90 |
| BBC B+ Mk2                         | £ 29.90 |

Mk2 additional features include:  
Built-in Formatting, Auto file creation.

#### Master to B Conversion

For those who have upgraded from a B to a Master, to enable most old cassettes to be used. Replay/Romboard 3 must be fitted (OS 1.20 ROM required)  
Wired Switch with Instructions £ 4.00

#### B+ to B Conversion

Enables you to switch between OS 2.00 on B+ and OS 1.20 used by the B. (OS 1.20 ROM required)  
Conversion Board £ 14.95

#### Write Protection Switch

Fits internally in the Master to write-protect sideways RAM, no soldering required. £ 8.90

#### Romboard 3 -for Master 128

Adds 3 extra ROM sockets.  
Works by replacing the computer's built-in ROM software with other ROMs (including the Inter-series from Computer Concepts). £ 17.50

#### Romboard 4 -for Master 128

Adds 4 extra ROM sockets plus a Read/Write protect switch.  
Supports up to 4 ROMs, by overlaying either RAM banks or cartridge slots. £ 26.50

#### ADDCOMM - details available

Provides 40 extra BASIC commands including Graphics, Toolkit, and other utilities.  
Suitable for BBC B, B+ and Electron £ 18.00

#### Matrix ROM - details available

Adds BASIC commands to enable matrix algebra in your own programs.  
Suitable for BBC B, B+ and Electron £ 18.00

- \* All products fully documented
- \* Full backup services available
- \* All prices include VAT and postage

For details/orders contact:

Vine Micros Ltd, Marshborough  
Sandwich, Kent. CT13 0PG  
Telephone: 0304 812276.

SAVE ££££'s SAVE ££££'s SAVE ££££'s SAVE ££££'s SAVE ££££'s SAVE ££££'s SAVE ££££'s

### !!! FLOPPY DISKOUNTS!!! THE MORE YOU BUY - THE MORE YOU SAVE!!!

|                         |     |     |     |      |      |
|-------------------------|-----|-----|-----|------|------|
| 3.5" Bulk Packed-       | 25+ | 50+ | 75+ | 100+ | 150+ |
| Price each disk         | 82p | 80p | 78p | 76p  | 74p  |
| Single Sided 135 T.P.I. | 82p | 80p | 78p | 76p  | 74p  |
| Double Sided 135 T.P.I. | 84p | 82p | 80p | 78p  | 76p  |

-ALL DISCS ARE SUPPLIED WITH LABELS AND ARE  
CERTIFIED 100% ERROR FREE

|                             |     |     |     |      |      |
|-----------------------------|-----|-----|-----|------|------|
| 5.25" Bulk Packed-          | 25+ | 50+ | 75+ | 100+ | 150+ |
| Price each disk             | 44p | 39p | 34p | 32p  | 31p  |
| Double Sided 48 T.P.I.      | 44p | 39p | 34p | 32p  | 31p  |
| Double Sided 96 T.P.I.      | 46p | 41p | 36p | 34p  | 33p  |
| Double Sided Col. 96 T.P.I. | 55p | 49p | 45p | 39p  | 38p  |

COLOURED DISKS, COME IN FIVE COLOURS  
ALL DISKS COME WITH ENVELOPE AND LABEL SET  
AND HAVE A HUB RING AND FULL GUARANTEE

### ACCESSORIES

|                              |        |
|------------------------------|--------|
| Mouse Mat                    | £4.95  |
| BBC Printer Cable            | £5.95  |
| 3.5" Cleaning Kit (fluid)    | £4.95  |
| 5.25" Cleaning Kit (fluid)   | £3.95  |
| 14" Monitor Stand            | £14.49 |
| Economy 80 col printer stand | £9.95  |

|   |        |
|---|--------|
| Space Saver<br>Printer Stand<br>(80col) | £23.95 |
|---|--------|





**UNIVERSAL PRINTER STAND £12.95**  
The adjustable Printer Stand-2 piece construction, fits all standard and wide carriage printers. Also provides convenient space for paper and storage. Rubber feet, vibration absorbing pads.

### STORAGE BOXES

|                            |       |
|----------------------------|-------|
| 3.50" Lockable - Holds 40  | £4.95 |
| 3.50" Lockable - Holds 80  | £5.95 |
| 3.50" Lockable - Holds 120 | £8.95 |
| 5.25" Lockable - Holds 50  | £4.95 |
| 5.25" Lockable - Holds 100 | £5.95 |
| 5.25" Lockable - Holds 140 | £8.95 |

ALL WITH LOCK & TWO KEYS  
DIVIDERS & ANTISTATIC

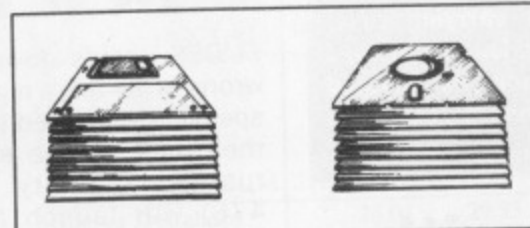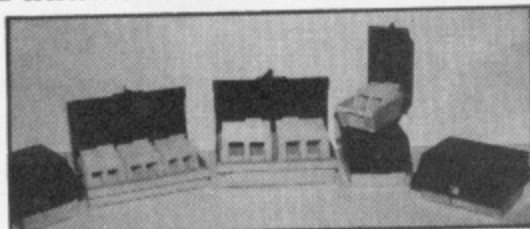

# Fantastic Savings!

### BULK PACKED OFFERS - BEST VALUE IN TOWN

|  |        |
|--|--------|
| 25 Double Sided 5.25" 96T.P.I. Disks with our storage box ...  | £11.50 |
| 50 Double Sided 5.25" 96T.P.I. Disks with our storage box ...  | £17.00 |
| 75 Double Sided 5.25" 96T.P.I. Disks with our storage box ...  | £22.50 |
| 100 Double Sided 5.25" 96T.P.I. Disks with our storage box ... | £28.50 |

You can choose either 50 capacity storage box  
or 100 capacity storage box to go with your  
disks.  
If you want a 140 capacity storage box just add  
a further £2.95

|   |        |
|---|--------|
| 20 Double Sided 3.5" 135T.P.I. Disks with our storage box ... | £19.95 |
| 40 Double Sided 3.5" 135T.P.I. Disks with our storage box ... | £36.95 |
| 60 Double Sided 3.5" 135T.P.I. Disks with our storage box ... | £49.95 |
| 80 Double Sided 3.5" 135T.P.I. Disks with our storage box ... | £64.95 |

You can choose either 40 capacity storage box  
or 80 capacity storage box to go with your  
disks.  
If you want a 120 capacity storage box just add  
a further £2.95

ALL BOXES COME WITH LOCK, 2 KEYS,  
DIVIDERS AND ARE ANTISTATIC  
ALL DISKS COME WITH LABELS AND ARE 100%  
GUARANTEED ERROR FREE

FREE  
DELIVERY!



## MELTON COMPUTER SUPPLIES

Melton Mowbray, Leics. LE13 1YG

Tel: 0664 410666 (24 hrs). Fax: 0664 410221

EDUCATIONAL & GOVERNMENT ORDERS WELCOME



ASK FOR LATEST  
SPECIAL OFFER  
SHEETS!

E&OE

Remember the price you see is all you pay (U.K. only). Prices include VAT and carriage

SAVE ££££'s SAVE ££££'s SAVE ££££'s SAVE ££££'s SAVE ££££'s SAVE ££££'s SAVE ££££'s



# ★ ★ ★ ★ ★ SOFTWARE ★ ★ ★ ★ ★ AMAZING ★ ★ ★ ★ ★ Bargains ★ ★ ★ ★ ★ OFFERS!

## ELECTRON SPECIALS

ELECTRON COMPUTERS ..... £59.95  
(Re-conditioned; includes power supply, serial lead & 90 day warranty)  
PLUS ONE INTERFACE ..... £54.95

### PACKAGE ONE

PLUS 1, VIEW + VIEWSHEET ..... £74.95

### PACKAGE TWO

ELECTRON COMPUTER, PLUS 1, + VIEW Only ..... £114.95

### PACKAGE THREE

VIEW + VIEWSHEET ROMS ..... £21.95

### PACKAGE FOUR

LOGO, VIEW, VIEWSHEET For ..... £49.95

And get USP ROM FREE

### PACKAGE FIVE

PLUS 1, VOLTMADE 3B Twin Joysticks with VIEW or VIEWSHEET ..... £81.95

### PACKAGE SIX

PLUS 1, LOGO, VIEW & VIEWSHEET ..... £114.95

And get USP ROM FREE

## JOYSTICKS AT LOW PRICES

ELECTRON JOYSTICK INTERFACE & SOFTWARE £14.95  
QUICKSHOT II TURBO JOYSTICK £13.95  
BUY BOTH £24.95!

VOLTMADE DELTA 3B TWINS £24.95 £19.95  
For use with Plus 1 or BBC

VOLTMADE 14B HANDSET £15.95  
INTERFACE FOR 14B £14.95  
BUY BOTH £27.95!

VOLTMADE DELTA 3B SINGLE £13.95

VOLTMADE DELTA 3S £12.95  
(for Master Compact)

## COMPETITION PRO

£22.45 £19.95

## ELITE ZIPSTICK

£15.95 £10.95

## EDUCATION

### EDUCATIONAL COMPENDIUM (3-10 YRS)

Workshop ABC  
Spooky Manor Talkback  
Cass or Disk £11.95

### BEST FOUR LANGUAGE BEST FOUR MATHS (7-11 YRS)

BBC DISC COMPACT  
£17.95 £16.95

Maths with a story 1 or 2  
Picture Craft (5-14yrs)  
Answerback Junior Quiz  
Answerback Senior Quiz  
Happy Writing  
Happy Numbers

BBC or ELE CASS DISC  
£9.95 £10.95  
£15.95 £15.95  
£7.95 £8.95  
£7.95 £8.95  
£8.75 £8.75  
£8.75 £8.75

## DR WHO AND THE MINES OF TERROR!

RRP Offer  
BBC Cass & Rom ..... £18.95 £9.95  
BBC Disc & Rom ..... £19.95 £9.95  
BBC B+/Master Disc £17.95 £8.95  
Compact Disc ..... £17.95 £8.95

| Price                      | R.R.P.  | Offer   |
|----------------------------|---------|---------|
| 1st Word Plus              | £91.94  | £84.95  |
| Alerion                    | £14.95  | £12.95  |
| Alpha Base                 | £49.95  | £44.95  |
| Ansi C                     | £119.85 | £99.95  |
| Archimedes Dust Cover      | —       | £14.95  |
| Archimedes Ref. Manual     | —       | £29.95  |
| Artist                     | £19.95  | £17.95  |
| Artisan Support Disk       | £19.95  | £17.95  |
| Artisan                    | £99.95  | £34.95  |
| Autosketch                 | £99.85  | £79.95  |
| Creations Disk             | £19.95  | £15.95  |
| Conqueror                  | £24.95  | £19.95  |
| Corruption (New!)          | £24.95  | £19.95  |
| Database                   | £29.95  | £25.95  |
| Desk Top Enhancer          | £29.95  | £24.95  |
| Fireball (New!)            | £19.95  | £13.95  |
| Flying Start 2             | £99.95  | £89.95  |
| Fortran 77                 | £119.85 | £99.95  |
| Freddy's Folly (New!)      | £14.95  | £11.95  |
| Gama Plot                  | £99.95  | £59.95  |
| Graphic Writer             | £29.95  | £24.95  |
| Hoverbod                   | £14.95  | £11.95  |
| Interchart                 | £20.75  | £24.95  |
| Intersheet                 | £44.85  | £39.95  |
| Interword                  | £44.85  | £39.95  |
| ISO Pascal                 | £119.85 | £99.95  |
| Jet Fighter                | £14.95  | £11.95  |
| Kermil                     | £66.95  | £49.95  |
| Lisp                       | £220.85 | £219.95 |
| Logistix                   | £119.85 | £99.95  |
| Minotaur                   | £14.95  | £11.95  |
| Missile Control            | £14.95  | £11.95  |
| Nominal Ledger             | £64.95  | £54.95  |
| Order Processing/Invoicing | £64.95  | £54.95  |
| Orion (New!)               | £14.95  | £11.95  |
| Pac Mania                  | £19.95  | £17.95  |
| PC Emulator                | £119.85 | £113.85 |
| Personal Accountant        | £279.95 | £249.95 |
| Pipedream                  | £119.85 | £99.95  |
| Presenter                  | £20.69  | £24.95  |
| Pro Artisan                | £169.95 | £154.95 |
| Prolog                     | £220.85 | £215.95 |
| Purchase Ledger            | £64.95  | £54.95  |
| Sales Ledger               | £64.95  | £54.95  |
| Sigma Sheet                | £69.95  | £59.95  |
| Sound Synth                | £49.95  | £44.95  |
| Spellmaster                | £58.99  | £49.95  |
| Stock Management           | £64.95  | £54.95  |
| System Delta Plus          | £69.95  | £59.95  |
| Terramax                   | £19.95  | £17.95  |
| Toolkit Module             | £99.95  | £34.95  |
| Twin                       | £99.95  | £29.95  |
| U-Connect                  | £59.95  | £49.95  |
| View 3                     | £59.95  | £49.95  |
| Wordwise +                 | £20.99  | £19.95  |
| Zarch                      | £19.95  | £17.95  |

## WORD PROCESSORS

| TITLE               | F | RRP   | SALE  |
|---------------------|---|-------|-------|
| Hi View             | D | 59.80 | 49.95 |
| Inter-Word          | R | 56.35 | 49.95 |
| Mega 3              | R | 97.75 | 84.95 |
| Overview            | R | 96.90 | 79.45 |
| Printer D Generator | D | 11.50 | 9.50  |
| Printmaster (Epson) | R | 33.35 | 28.95 |
| Spellmaster         | R | 59.00 | 49.95 |
| View 3.0            | R | 59.80 | 44.95 |
| View: Debhand Guide | D | 7.95  | 6.95  |
| View Index          | D | 14.95 | 11.50 |
| View Professional   | D | 99.95 | 79.45 |
| Viewspell           | R | 39.95 | 31.95 |
| Wordwise            | R | 45.42 | 35.95 |
| Wordwise+           | R | 56.35 | 45.95 |

## SPREADSHEETS

| TITLE       | F | RRP   | SALE  |
|-------------|---|-------|-------|
| Inter-Sheet | R | 56.35 | 49.95 |
| Ultracalc 2 | R | 29.95 | 24.95 |
| Viewsheets  | R | 59.80 | 49.95 |

## INTEGRATED OFFICE SUITE

| TITLE               | F | RRP   | SALE  |
|---------------------|---|-------|-------|
| Mini Office         | C | 5.95  | 4.75  |
| Mini Office II      | C | 14.95 | 11.95 |
| Mini Office II      | H | 59.95 | 54.95 |
| Mini Office II 40t  | D | 16.95 | 13.95 |
| Mini Office II 80t  | D | 16.95 | 13.95 |
| Mini Office II M40t | D | 19.95 | 15.95 |
| Mini Office II M80t | D | 19.95 | 15.95 |

## RECENT RELEASES AT SPECIAL PRICES

|                             | BBC    | BBC   | BBC   |
|-----------------------------|--------|-------|-------|
|                             | or ELE | Disc  | Comp. |
| Acornsoft Hits 1            | 4.95   | 9.50  | 11.50 |
| Acornsoft Hits 2            | 4.95   | 9.50  | 11.50 |
| Barbarian                   | 7.45   | 9.50  | 11.50 |
| Bonecruncher                | 7.45   | 9.50  | 11.50 |
| Breakthrough                | 7.45   | 9.50  | 11.50 |
| By Fair Means or Foul       | 7.45   | 9.50  | 11.50 |
| Codename Droid              | 7.45   | 9.50  | 11.50 |
| Craze Rider                 | 7.45   | 9.50  | 11.50 |
| Elixir                      | 7.45   | 9.50  | 11.50 |
| Exile                       | 9.95   | 11.95 | 15.95 |
| Kourtyard                   | 7.45   | 9.50  | —     |
| Life of Repton              | 5.50   | 6.50  | 7.95  |
| Palace of Magic             | 7.45   | 9.50  | 11.50 |
| Pipeline                    | 7.45   | 9.50  | 11.50 |
| Play it Again Sam           | 7.45   | 9.50  | 11.50 |
| Play it Again Sam 2         | 7.45   | 9.50  | 11.50 |
| Play it Again Sam 3         | 7.45   | 9.50  | 11.50 |
| Play it Again Sam 4         | 7.45   | 9.50  | 11.50 |
| Play it Again Sam 5         | 7.45   | 9.50  | 11.50 |
| Play it Again Sam 6         | 7.45   | 9.50  | 11.50 |
| Quest                       | 7.45   | 9.50  | 11.50 |
| Repton Infinity             | 9.95   | 11.95 | 15.95 |
| Skirmish                    | 7.45   | 9.50  | —     |
| Spellbinder                 | 7.45   | 9.50  | 11.50 |
| Spy Cat                     | 7.45   | 9.50  | 11.50 |
| Spy vs Spy                  | 7.45   | 9.50  | 11.50 |
| Strykers Run                | 7.45   | 9.50  | 11.50 |
| Superior Collection 1       | 7.45   | 9.50  | 11.50 |
| Superior Collection 2       | 7.45   | 9.50  | 11.50 |
| Superior Collection 3 (Ele) | 7.45   | 9.50  | 11.50 |
| The Last Ninja              | 7.45   | 9.50  | 11.50 |

## DESKTOP PUBLISHING

| TITLE                                     | F   | RRP   | SALE  |
|---|-----|-------|-------|
| Admin Extra (40T)                         | D   | 14.95 | 11.95 |
| Admin Extra (80T)                         | D   | 14.95 | 11.95 |
| Fleet St Editor (40T)                     | D   | 39.95 | 29.95 |
| Fleet St Editor (80T)                     | D   | 39.95 | 29.95 |
| Fonts & Graphics 4                        | D   | 14.95 | 11.95 |
| Fonts & Graphics 8                        | D   | 14.95 | 11.95 |
| Stop Press (Mas)                          | D+R | 49.95 | 41.95 |
| Stop Press (B/B+)                         | D+R | 49.95 | 41.95 |
| Walt Disney (40T)                         | D   | 14.95 | 11.95 |
| Walt Disney (80T)                         | D   | 14.95 | 11.95 |
| Mouse & Stop Press (State B/B+ or Master) | D&R | 79.99 | 69.95 |
| Mouse & Superart (State B/B+ or Master)   | D&R | 79.95 | 69.95 |
| Mouse only                                |     | 38.75 | 34.95 |

## SUPERIOR DEAL!

Death Star Repton 2  
\* Mr. Wiz Repton 3  
\* Chess \* Draughts  
\* Tempest \* Overdrive  
Fruit Machine \* Stranded  
(\* Ele Only) Invaders

Any 5 for £9.95 Cass only

## DUST COVERS

BBC ..... £11.95  
Master 128 ... £11.95  
Compact ..... £11.95

## ACORNSOFT SPECIALS

Crime & Detection  
Music Quiz  
Theatre Quiz  
Sci Fi Quiz  
Dating Game  
Royal Quiz  
Spinx Adventure  
Crazy Tracer  
Castle of Riddles  
Starship Command

ANY  
5  
FOR  
£7.95!

## MICROPOWER AND OTHER GAMES

### ELECTRON

Gyroscope ..... £6.95  
Bandits at 3 O'Clock ..... £6.95  
Escape from Moon Base Alpha ..... £7.95  
Ghouls ..... £7.95  
Stock Car ..... £7.95  
Killer Gorilla ..... £7.95  
Rubble Trouble ..... £7.95  
Swoop ..... £7.95  
Croaker ..... £7.95  
Bumble Bee ..... £7.95  
Position ..... £7.95  
Felix & the Fruit Monsters ..... £7.95  
Cybertron Mission ..... £7.95  
Moonrider ..... £7.95  
Felix and the Evil Weevils ..... £6.95  
Frenzy ..... £6.95

### BBC

Gyroscope ..... £7.95  
European Knowledge ..... £7.95  
World Geography ..... £7.95  
Junior Maths ..... £7.95  
Killer Gorilla ..... £7.95  
Bandits at 3 O'Clock ..... £7.95  
Stock Car ..... £7.95  
Cybertron Mission ..... £7.95  
Position ..... £7.95  
Fat Man Sam ..... £9.95  
Star Driller ..... £9.95  
Microcom ..... £9.95  
Wizards Challenge

ANY FIVE FOR ONLY £7.95!  
(Cass only)

## EDUCATIONAL SPECIALS

Linkword Spanish  
Linkword Italian  
Maths 'O' Level 2  
Biology  
English  
World Geography  
(BBC Only)  
European Knowledge  
Graphs & Charts  
Business Games  
Talk Back  
Workshop

ANY 2  
FOR  
£3.95!  
Cass  
Only

## MICRO POWER GAMES

Ghouls Frenzy  
Cybertron Mission Rubble Trouble  
My Eel Stock Car  
Jet Power Jack The Mine  
Blockbuster Dune Rider  
Felix & Evil Weevils Swag  
Felix Fact Plutonium Plunder  
Killer Gorilla Bandits at 3 O'clock

£2.95 ANY 5 FOR £2.95  
EACH or £11.95 EACH

## SPARE DISCS

LOOK! ELECTRON POWER SUPPLIES ONLY £9.95

## MICROPOWERS CASTLE QUEST

BBC  
CASS DISC  
£5.95 £7.95

## LOGO

For Master 128  
or Ele Plus 1  
ONLY £24.95

LISP Rom (Ele) £9.95  
LISP Cass (Ele) £2.95

### BBC

## IMOGEN

CASS DISC  
£7.95 £6.95

## MAGIC MUSHROOMS

with free badge  
(Ele Cass) £2.25!

- \* Please add 95p P&P (Overseas £4.50).
- \* All prices include VAT
- \* Goods despatched within 48 hours - subject to availability
- \* Out of hours answerphone; 0532 687735

SOFTWARE  
Bargains

Dept. MU29, 8, 8A Regent Street,  
Chapel Allerton, Leeds LS7 4PE.  
Tel: 0532 687735 or 0532 687789



We can offer attractive discounts for all educational establishments, phone or write for a quote.

We supply a catalogue of our entire stock range per machine type with every order.



# **WORDWISE PLUS INTER-WORD INTER-SHEET INTER-CHART INTER-BASE SPELL-MASTER MEGA 3**

These products are available under low cost educational multi-user licences for all BBC Micros, and some for the Archimedes.

Over 1000 schools and colleges in the UK have chosen to buy site licences for our products, because they know they must have state of the art software and value for money. Can your school afford to be without the most powerful and popular programs?

Contact Computer Concepts for details of bulk purchase and special educational licence arrangements.



**Computer Concepts Ltd**

Gaddesden Place, Hemel Hempstead, Herts HP2 6EX. Tel: 0442-63933 Fax: 0442-231632



# 520ST-FM SUPER PACK



The Atari Super Pack is ideal for you if you want to get off to a flying start with the best in entertainment software. The Pack includes a 520ST-FM with 1Mb RAM, a built-in 1Mb disk drive, over £450 of top games and a joystick. If you buy the Super Pack at Silica Shop, we will add our own ST Starter Kit (worth over £200), Free Of Charge. Return the coupon for details.

## £399

INCLUDING VAT

With SM124 mono monitor: £498 INC VAT

With SC1224 colour monitor: £698 INC VAT

## 1Mb DISK DRIVE £450 OF SOFTWARE

### ARCADE GAMES

|                       |                    |        |
|-----------------------|--------------------|--------|
| Arkanoid II           | Imagine            | £19.95 |
| Beyond The Ice Palace | Elite              | £19.95 |
| Black Lamp            | Firebird           | £19.95 |
| Buggy Boy             | Elite              | £19.95 |
| Chopper X             | Mastertronic       | £9.99  |
| Ikari Warriors        | Elite              | £14.95 |
| Marble Madness        | Electronic Arts    | £24.95 |
| Quadrailen            | Logotron           | £19.95 |
| Ranarama              | Hewson Consultants | £19.95 |
| Return To Genesis     | Firebird           | £19.95 |
| Roadwars              | Melbourne House    | £19.95 |
| Starquake             | Mandarin           | £19.95 |
| Test Drive            | Electronic Arts    | £24.95 |
| Thrust                | Firebird           | £9.95  |
| Thundercats           | Elite              | £19.95 |
| Wizball               | Ocean              | £19.95 |
| Xenon                 | Melbourne House    | £19.95 |
| Zynaps                | Hewson Consultants | £19.99 |

### SPORTS SIMULATIONS

|                         |          |        |
|-------------------------|----------|--------|
| Eddie Edwards Super Ski | Elite    | £19.95 |
| Seconds Out             | Tynesoft | £19.95 |
| Summer Olympiad '88     | Tynesoft | £19.95 |

### PRODUCTIVITY SOFTWARE

|           |                     |        |
|-----------|---------------------|--------|
| Organiser | Triangle Publishing | £49.95 |
|-----------|---------------------|--------|

### JOYSTICK

|                     |            |       |
|---------------------|------------|-------|
| Atari CX40 Joystick | Atari Corp | £4.99 |
|---------------------|------------|-------|

FREE ATARI BUNDLE VALUE: £458.97

# 1040ST-FM PROFESSIONAL PACK

## NOW WITH TV MODULATOR

For the serious home user and the small business, we are pleased to announce a new package based around the 1040ST-FM. The 1040ST-FM has 1Mbyte RAM and a 1Mbyte built-in disk drive. In addition, the 1040ST-FM now comes with a TV modulator built-in. (The previously available 1040ST-F was designed for use with a monitor only and did not come with a modulator.) This modulator allows the 1040ST-F to be plugged directly into any domestic TV set, and comes complete with a lead to allow you to do so. The new 'Professional Pack' from Silica includes the new 1040ST-FM with modulator plus four high quality software packages including a spreadsheet, database, word processor and programming language. This 'Professional Pack' software will enable you to get straight down to business with your new computer. In addition to this software (worth £384.84), if you buy the Professional Pack from Silica Shop, you will also receive the Silica ST Starter Kit (worth over £200), Free Of Charge. Return the coupon for further information.

## £499

INCLUDING VAT

With SM124 mono monitor: £598 INC VAT

With SC1224 colour monitor: £798 INC VAT



|                     |                  |         |
|---------------------|------------------|---------|
| ATARI 1040ST-FM     | (Computer)       | £499.99 |
| VIP PROFESSIONAL    | (Spreadsheet)    | £149.95 |
| MICROSOFT WRITE     | (Word Processor) | £149.95 |
| SUPERBASE PERSONAL  | (Database)       | £59.95  |
| BASIC DISK & MANUAL | (Language)       | £24.98  |

NORMAL RRP: £884.82

LESS DISCOUNT: -£385.82

PROFESSIONAL PACK PRICE: £499.00

# 2Mb & 4Mb MEGA ST

The MEGA ST computers are styled as as lightweight keyboard with a separate CPU, connected by a coiled telephone style cable. There are two versions of the MEGA ST, one with 2Mbytes of RAM and the other with 4Mbytes. Each version has a 1Mbyte double sided disk drive built-in to the CPU unit. The MEGA ST's do not come with modulator built-in and must therefore be used with a monitor. With every MEGA ST purchased, we will add the 'Professional Pack' software (worth £384.83) detailed above, plus the Silica ST Starter Kit (worth over £200) both Free Of Charge. Return the coupon for further details.

**2Mb MEGA ST**  
**£899** INC VAT

+ mono monitor = £998  
+ colour monitor = £1198

**4Mb MEGA ST**  
**£1199** INC VAT

+ mono monitor = £1298  
+ colour monitor = £1498



# DTP PageStream £149 +VAT =£171.35

Desktop Publishing (DTP) is one of the fastest growing applications for personal computers. We are pleased to announce a powerful low cost package for the Atari ST called PageStream. PageStream costs only £149 (+VAT=£171.35) and, because it works with an Atari 1040ST and a Seikosha SP-180AI printer, you can be up and running with a complete system for less than £1000. Some of the features of PageStream are listed to the right. If you would like further information on this program, complete and return the coupon below, ticking the 'DTP' box in the corner.

- \* TEXT-FLOW AROUND GRAPHICS
- \* ROTATION OF TEXT & GRAPHICS
- \* SLANT OR TWIST ANY OBJECT
- \* POSTSCRIPT COMPATIBLE
- \* TAG FUNCTION
- \* AUTO/MANUAL KERNING & HYPHENATION
- \* GROUPING OF OBJECTS

# ATARI ST COMPUTERS

The range of Atari ST computers offers something for everyone. From the games enthusiast who wants the challenge of the very best in arcade action, to the businessman who wants to make financial forecasts or faultless presentations. The ST offers high quality graphics, sound and speed for the gamer, whilst providing a fast, user friendly and affordable solution to business. The ST is now firmly established in the home environment and boasts a wealth of users in education, local government, television, and a variety of different businesses. Software for the range stretches to cover applications as diverse as ENTERTAINMENT, ACCOUNTS, ART, COMMUNICATIONS, COMPUTER AIDED DESIGN, DATABASES, DESKTOP PUBLISHING, EDUCATION, MUSIC, PROGRAMMING, SPREADSHEETS, WORD PROCESSING and more. For a full list of the software available, as well as details of the ST range, complete and return the coupon below.

All prices correct at the time of going to press. E&OE.

# 520ST-FM EXPLORER PACK WITH BUILT-IN 1Mb DISK DRIVE



The value for money offered by the Atari ST range is reflected in the Explorer Pack featuring the 520ST-FM computer with 512K RAM. The 520ST-FM computer now comes with a built-in 1 Mb double sided disk drive as well as a free mouse controller and a built-in TV modulator. The new 520ST-FM Explorer Pack includes the 520ST-FM computer, the arcade game Ranarama, a tutorial program and some useful desktop accessories. In addition, if you buy the Explorer Pack from Silica, we will give you the Silica ST Starter Kit worth over £200, FREE OF CHARGE. Return the coupon for details of our Starter Kit and of the full ST range.

## £260

ONLY £2.51 PER WEEK  
RETURN COUPON FOR DETAILS  
+VAT= £299

+ SM124 mono monitor: £398 INC VAT

+ SC1224 colour monitor: £598 INC VAT

# WHY SILICA SHOP?

Before you decide when to buy your new Atari ST computer, we suggest you consider very carefully WHERE you buy it. There are MANY companies who can offer you a computer, a few peripherals and the top ten selling titles. There are FEWER companies who can offer a wide range of products for your computer and expert advice and help when you need it. There is ONLY ONE company who can provide the largest range of Atari ST related products in the UK, a full time Atari ST specialist technical helpline and in-depth after sales support, including free newsletters and brochures delivered to your door for as long as you require after you purchase your computer. That one company is Silica Shop. We have been established in the home computer field for ten years with an annual turnover in excess of £8 million and can now claim to meet our customers requirements with an accuracy and understanding which is second to none. But don't just take our word for it. Complete and return the coupon below for our latest literature and begin to experience the Silica Shop specialist Atari service.

- SILICA STARTER KIT:** Worth over £200, FREE with every Atari ST computer bought from Silica.
- PROFESSIONAL PACK:** Free business software with 1040ST-FM and MEGA ST's bought from Silica.
- DEDICATED SERVICING:** 7 full-time Atari trained staff with years of experience on Atari servicing.
- THE FULL STOCK RANGE:** All of your Atari requirements from one place.
- AFTER SALES SUPPORT:** The staff at Silica are dedicated to help you get the best from your ST.
- FREE CATALOGUES:** Mailed direct to your home as soon as we print them, featuring offers as well as all of the new releases.
- FREE OVERNIGHT DELIVERY:** On all hardware orders shipped within the UK mainland.
- PRICE MATCH PROMISE:** We will match competitors on a 'same product same price' basis.
- FREE TECHNICAL HELPLINE:** Full time team of Atari technical experts always at your service.

# FREE SILICA STARTER KIT WORTH OVER £200

WITH EVERY ST - RETURN COUPON FOR DETAILS  
ALL PRICES QUOTED INCLUDE FREE UK DELIVERY

# DO YOU OWN AN ATARI ST?

If you already own an Atari ST computer and would like to be registered on our mailing list as an ST user, let us know. We will be pleased to send you copies of our price lists and newsletters FREE OF CHARGE as they become available. Complete the coupon and return it to our Sidcup branch and begin experiencing a specialist ST service that is second to none.

## SILICA SHOP:

|  |                                |
|--|--------------------------------|
| <b>SIDCUP (&amp; Mail Order)</b>                       | <b>01-309 1111</b>             |
| 1-4 The Mews, Hatherley Road, Sidcup, Kent, DA14 4DX   |                                |
| OPEN: MON-SAT 9am - 5.30pm                             | LATE NIGHT: FRIDAY 9am - 7pm   |
| <b>LONDON</b>  | <b>01-580 4000</b>             |
| 52 Tottenham Court Road, London, W1P 0BA               |                                |
| OPEN: MON-SAT 9.30am - 6.00pm                          | LATE NIGHT: NONE               |
| <b>LONDON</b>  | <b>01-629 1234 ext 3914</b>    |
| Selfridges (1st floor), Oxford Street, London, W1A 1AB |                                |
| OPEN: MON-SAT 9am - 6.00pm                             | LATE NIGHT: THURSDAY 9am - 8pm |

To: Silica Shop Ltd, Dept MUSR 0289, 1-4 The Mews, Hatherley Road, Sidcup, Kent, DA14 4DX  
**PLEASE SEND FREE LITERATURE ON THE ATARI ST**

Mr/Mrs/Ms: ..... Initials: ..... Surname: .....

Address: .....

Postcode: .....

Do you already own a computer  
If so, which one do you own?

DTP ☐



# SOFTWARE AT BARGAIN PRICES



## ACORN TELETEXT ADAPTORS

complete with manual £85.00  
with TFS ROM £89.95



| CURRENT TITLES                 | Cass  | Disk  |
|--------------------------------|-------|-------|
| Spycat .....                   | 7.50  | 9.95  |
| Icarus .....                   | 7.50  | 9.95  |
| Tetris .....                   | 6.95  | 9.95  |
| Boulderdash .....              | 7.50  | 11.95 |
| Indoor Sports .....            | 7.50  | 11.95 |
| Quest .....                    | 7.50  | 9.95  |
| Play It Again Sam II .....     | 7.50  | 9.95  |
| Kourtyard .....                | 7.50  | 9.95  |
| Skirmish .....                 | 7.50  | 9.95  |
| The Lost Crystal .....         | 9.95  | 11.95 |
| Spellbinder .....              | 7.50  | 9.95  |
| Life of Repton .....           | 5.50  | 6.50  |
| Elixir .....                   | 7.50  | 9.95  |
| Bonecruncher .....             | 7.50  | 9.95  |
| Despatch Rider .....           | 6.00  | 8.95  |
| Impact .....                   | 7.50  | 9.95  |
| Ransack .....                  | 7.50  | 9.95  |
| Ziggy .....                    | 6.00  | 8.95  |
| Graham Gooch Cricket .....     | 6.50  | 9.95  |
| Thunderstruck II .....         | 6.50  | 9.95  |
| Spy v Spy .....                | 7.50  | 9.95  |
| Phantom (Tynesoft) .....       | 6.50  | 9.95  |
| Winter Olympiad .....          | 7.50  | 12.50 |
| Village of Lost Souls .....    | 7.50  | 10.50 |
| Project Thesus .....           | 7.50  | 10.50 |
| Rick Hanson Trilogy .....      | 18.00 | 21.00 |
| Play It Again Sam .....        | 7.50  | 9.95  |
| Spitfire 40 .....              | 7.50  | 10.95 |
| Palace of Magic .....          | 7.50  | 9.95  |
| Crazy Rider .....              | 7.50  | 9.95  |
| Codename Droid .....           | 7.50  | 9.95  |
| Repton 40 Screens .....        | 5.50  | 6.75  |
| Revs + 4 Tracks .....          | 10.50 | 12.95 |
| Grand Prix Construction .....  | 7.50  | 9.95  |
| Superior Collection Vol1 ..... | 7.50  | 9.95  |
| Superior Collection Vol2 ..... | 7.50  | 9.95  |
| Colossus Chess .....           | 7.50  | 12.95 |
| The Hunt .....                 | 7.50  | 10.95 |
| Paperboy .....                 | 7.50  | 12.95 |
| Elite .....                    | 10.50 | 10.95 |
| Star Wars .....                | 7.50  | 10.95 |
| Evening Star .....             | 7.50  | 9.95  |

## LATEST TITLES

|                     | Tape | Disk  |
|---------------------|------|-------|
| Repton through Time | 5.50 | 6.50  |
| Saigon .....        | 7.50 | 11.95 |
| Barbarian .....     | 7.50 | 9.95  |
| Steve Davis Snooker | 1.99 | 4.99  |
| Shark .....         | 7.50 | 9.95  |
| Breakthrough .....  | 7.50 | 9.95  |

## ATS ROM

From BBC Soft  
For Teletext  
Adaptors

**£9.95**

## NEW

From Superior  
**PIPELINE**

**PLAY IT AGAIN SAM III  
PLAY IT AGAIN SAM IV  
FAIR MEANS OR FOUL**

PRICE  
HELD

Disk £9.25 each  
Cass £7.00 each

## TOWERHILL SPECIAL

Here and There  
with  
Mr. Men

**Disk £4.99**

Latest from Superior  
**EXILE**

PRICE  
HELD

Disk £11.95  
Cass £10.25

## DISC SPECIALS £3.99 each

Roundheads, World War I,  
Psycastria, Footballer of the Year,  
Bugbyte II

## NEW

**EMPIRE STRIKES  
BACK**

Disk £9.95  
Cass £7.50

**SUMMER OLYMPIAD**

Disk £11.95  
Cass £7.50

## NEW

## NEW FOR 1989

|                            | Disk  | Cass |
|----------------------------|-------|------|
| Play it Again Sam V .....  | 9.25  | 7.00 |
| Play it Again Sam VI ..... | 9.25  | 7.00 |
| Ninja .....                | 9.25  | 7.00 |
| Repton Infinity .....      | 11.50 | 9.50 |
| Circus Games .....         | 11.95 | 7.50 |
| Superman .....             | 11.95 | 7.50 |



# TOWERHILL COMPUTERS LTD

Unit 5, Acacia Close,

Cherry Court Way Ind Est, Leighton Buzzard, Bedfordshire

Telephone: Leighton Buzzard (0525) 385329/383074


ALL PRICES INCLUDE V.A.T. AND P&P. OVERSEAS ORDERS ADD £2.00



VISA



# FREE! TENSTAR PACK WORTH OVER £229!

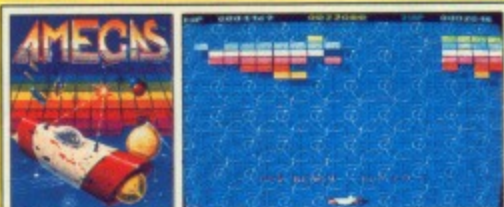


FREE! - AMEGAS - by Players



FREE! - INSANITY FIGHT - by Microdeal



FREE! - ART OF CHESS - by SPA

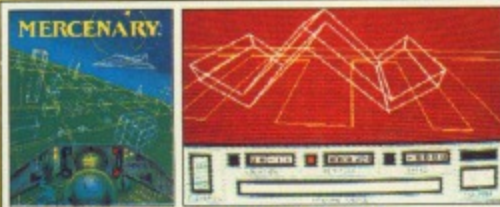

FREE! - MERCENARY COMP - by Novagen



FREE! - BARBARIAN, ULT WARRIOR - by Palace



FREE! - TERRORPODS - by Psygnosis



FREE! - BUGGY BOY - by Elite



FREE! - THUNDERCATS - by Elite



FREE! - IKARI WARRIORS - by Elite



FREE! - WIZBALL - by Ocean

# Commodore AMIGA



ONLY  
**£3.34**  
PER  
WEEK  
RETURN COUPON  
FOR DETAILS

# £346.95

+VAT =  
**£399**

INCLUDES  
FREE UK  
DELIVERY

The Amiga 500 is one of a new breed of technologically advanced computers, which are now emerging as the new standard for home computing, based around the new Motorola 68000 chip. The A500 has 512K RAM and a 1Mbyte double sided disk drive built-in. It can be connected directly to a wide range of monitors, or to a domestic TV set through a TV modulator. Designed with the user in mind, the A500 features a user friendly WIMP environment and comes supplied with a free mouse. And, when you buy your Amiga from Silica Shop, the UK's No1 Amiga specialists, you will experience an after sales service that is second to none, including a technical support helpline and free newsletters and price lists. Return the coupon below for our current information pack, which will give details of the Silica service and the very latest Silica Amiga offers. E&OE.

## WHY SILICA SHOP?

Before you decide when to buy your new Commodore Amiga computer, we suggest you consider very carefully WHERE you buy it. There are MANY companies who can offer you a computer, a few peripherals and the top ten selling titles. There are FEWER companies who can offer a wide range of products for your computer as well as expert advice and help when you need it. There is ONLY ONE company who can provide the largest range of Amiga related products in the UK, a full time Amiga specialist technical helpline and in-depth after sales support, including free newsletters and brochures delivered to your door for as long as you require after you purchase your computer. That one company is Silica Shop. We have been established in the home computer field for ten years and can now claim to meet our customers requirements with an accuracy and understanding which is second to none. Here are just some of the things we can offer you:

**THE FULL STOCK RANGE:** The largest range of Amiga related peripherals, accessories, books and software in the UK.

**AFTER SALES SUPPORT:** The staff at Silica Shop are dedicated to help you to get the best from your Amiga.

**FREE NEWSLETTERS:** Mailed direct to your home as soon as we print them, featuring offers and latest releases.

**FREE OVERNIGHT DELIVERY:** On all hardware orders shipped to Silica Shop customers within the UK mainland.

**PRICE MATCH PROMISE:** We will normally match our competitors offers on a 'same product same price' basis.

**FREE TECHNICAL HELPLINE:** Full time team of Amiga technical experts to help you with your technical queries.

But don't just take our word for it. Complete and return the coupon below for our latest Amiga literature and begin to experience the Silica Shop specialist Amiga service.

## PHOTON PAINT PACK

|                            |                |
|----------------------------|----------------|
| A500 Computer              | £399.99        |
| TV Modulator               | £24.99         |
| Photon Paint               | £69.95         |
| TenStar Pack               | £229.50        |
| <b>TOTAL RRP:</b>          | <b>£724.43</b> |
| <b>LESS DISCOUNT:</b>      | <b>£325.43</b> |
| <b>PACK PRICE INC VAT:</b> | <b>£399</b>    |

## 1084S MONITOR PACK

|                            |                |
|----------------------------|----------------|
| A500 Computer              | £399.99        |
| 1084S Colour Monitor       | £299.99        |
| Photon Paint               | £69.95         |
| TenStar Pack               | £229.50        |
| <b>TOTAL RRP:</b>          | <b>£999.43</b> |
| <b>LESS DISCOUNT:</b>      | <b>£350.43</b> |
| <b>PACK PRICE INC VAT:</b> | <b>£649</b>    |

## FREE FROM SILICA

When you buy the Amiga 500 from Silica Shop, you will not only get a high power, value for money computer, we will also give you some spectacular free gifts. First of all, we are now including a TV modulator with every A500 stand alone keyboard, so you can plug your Amiga straight into your TV at home (the modulator is not included with the A500+A1084S pack as it is not required for use with monitors). Secondly, we have added a free copy of Photon Paint, an advanced graphics package with an RRP of £69.95. Last (and by no means least!), so that you can be up and running straight away, we are giving away the sensational TENSTAR GAMES PACK with every A500 purchased at Silica Shop. This pack features ten top Amiga titles which have a combined RRP of nearly £230! Return the coupon for details.

## FREE TENSTAR PACK

|   |                        |
|---|------------------------|
| When you buy your Amiga 500 from Silica Shop, we want to make sure you get the best deal possible. That is why we are giving away the TENSTAR GAMES PACK worth nearly £230, absolutely FREE with every A500 purchased from us. The TenStar Games Pack includes ten titles for the A500, each individually packaged in its own casing with instructions. |                        |
| Amegas  | £14.95                 |
| Art Of Chess  | £24.95                 |
| Barbarian, Ult Warrior  | £19.95                 |
| Buggy Boy   | £24.95                 |
| Ikari Warriors  | £24.95                 |
| Insanity Fight  | £24.95                 |
| Mercenary Comp  | £19.95                 |
| Terrorpods  | £24.95                 |
| Thundercats   | £24.95                 |
| Wizball   | £24.95                 |
| <b>TOTAL RRP:</b>   | <b>£229.50 INC VAT</b> |

## DO YOU OWN AN AMIGA?

If you already own an Amiga computer and would like to be registered on our mailing list as an Amiga user, let us know. We will be pleased to send you copies of our price lists and newsletters FREE OF CHARGE as they become available. Complete the coupon and return it to our Sidcup branch and begin experiencing a specialist Amiga service that is second to none.

## SILICA SHOP:

|  |                                |
|--|--------------------------------|
| <b>SIDCUP (&amp; Mail Order)</b>                       | <b>01-309 1111</b>             |
| 1-4 The Mews, Hatherley Road, Sidcup, Kent, DA14 4DX   |                                |
| OPEN: MON-SAT 9am - 5.30pm                             | LATE NIGHT: FRIDAY 9am - 7pm   |
| <b>LONDON</b>  | <b>01-580 4000</b>             |
| 52 Tottenham Court Road, London, W1P 0BA               |                                |
| OPEN: MON-SAT 9.30am - 6.00pm                          | LATE NIGHT: NONE               |
| <b>LONDON</b>  | <b>01-629 1234 ext 3914</b>    |
| Selfridges (1st floor), Oxford Street, London, W1A 1AB |                                |
| OPEN: MON-SAT 9am - 6.00pm                             | LATE NIGHT: THURSDAY 9am - 8pm |

To: Silica Shop Ltd, Dept MUSR 0289 1-4 The Mews, Hatherley Road, Sidcup, Kent, DA14 4DX  
**PLEASE SEND ME FREE LITERATURE ON THE AMIGA**

Mr/Mrs/Ms: ..... Initials: ..... Surname: .....

Address: .....

Postcode: .....

Do you already own a computer?  
If so, which one do you own? .....



MINERVA SOFTWARE  
FOR THE

Archimedes

£69.95  
EACH

# SYSTEM DELTA

System Delta is the most comprehensive database available yet. It's so simple to operate that it has already become the standard in educational fields. It is very professional and pleasing in its presentation, making full use of the genuine Archimedes WIMP environment. It can handle vast amounts of data in the office, school or home, with its capacity of 2.14 billion records and 16 million fields. Its multiple 'key fields' allow any record to be found in 1 sec. even in a file of 20,000 records.

It maximises on the Archimedes' speed and has unique multi-tasking allowing an operation to continue on one file whilst performing a search or print on another. Easy file creation using free format screens with eight data types. Multiple display, print and report formats with each file including a user defined label facility. Three methods of search from simple option selection to in-depth multiple criteria, multiple fields or results of formulae. Comprehensive maths facilities allow results to be placed in other fields. Fast sort by any criteria on any number of fields. Transfer fields from one database to another. Imports data from other databases, exports data to Gamma and Sigma. Absolutely no programming required - but if you wish to program we provide a full set of commands for you.




# GAMMA PLOT

Seeing is believing! GammaPlot is an extensive chart/graph plotting program with a full art package included. It allows even a novice to produce stunning charts and drawings on one screen. Several charts may be placed on one sheet, in any position with text or drawings to make the data easily understood.

GammaPlot supports six main graph and chart types of line, scatter, pie, histogram and text-only charts. Segments may be highlighted or percentages, values and labels switched on. Statistics are also available. Choose from the text styles supplied or any of the native Archimedes 'pretty fonts' or even define your own, and any of these can be enlarged or reduced. Various shapes, patterns and borders are supplied with a full 256 colour range. Full zoom facility. Various pen types are provided to draw pictures or add signatures. Import digitised pictures or company logos. Print facilities include colour output. Data entry is via the keyboard or any Delta, Gamma or Sigma file.



# SIGMA SHEET

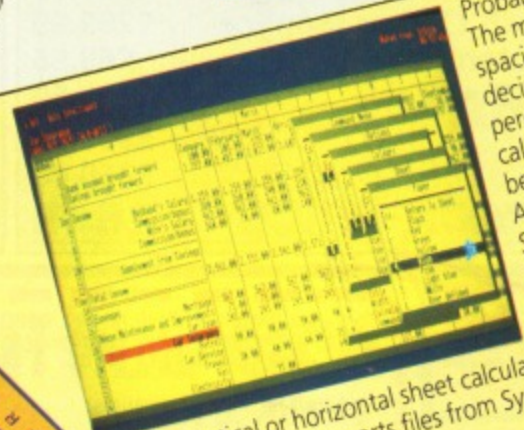

Probably the largest and fastest spreadsheet on any small business micro! The massive sheet size is 1000 columns by 16000 rows. Definable colours, spacing, and widths. Various cell formats including justification, up to 17 decimal places, preceding currency sign, bracketed or coloured negatives, percentage, exponential. Select to display the formulae instead of calculated sheet for really fast and easy sheet set up. Cell references may be alphanumeric or by label for ease of use, eg. A2 or 'Jan' sales. Automatic relative or absolute reference adjustment while replicating. Simple yet extensive maths allowing calculations based upon references to other cells. Over 30 maths/statistical functions including SUM, AVG, COUNT, MAX, SIN, LOG, SQR, etc. Full date and time handling. Makes use of Maths co-processor, if fitted. Imports files from System Delta and most spreadsheets. Exports data to Gamma Range.

PLUS ACCOUNTS, GAMES & SPECIALIST SOFTWARE FOR ARCHIMEDES AND FULL RANGE OF SOFTWARE FOR THE BBC MICRO



MINERVA SOFTWARE

69 SIDWELL STREET · EXETER EX4 6PH · TELEPHONE EXETER (0392) 437756



# T H E . L A S T NINJA



LEVEL 1



LEVEL 2



LEVEL 5



LEVEL 6

## THE LAST NINJA ... THE STATE OF THE MARTIAL ARTS

The secrets of the Ninjitsu way had been jealously guarded for centuries, only once every decade were the scrolls seen at the ritual of the White Ninja.

None coveted these secrets more than the evil Shogun. Seizing the opportunity of the ritual he sprang a fiendish trap that destroyed the brotherhood, except for one ... You. The Last Ninja.

Your sworn oath is to recover the scrolls, you travel to the mystical lands of the Shogun. Already his guards are mastering the ways of the Ninjitsu.

To reach the Shogun's Palace you must use all your weapon craft and fighting skills as you travel through dangerous wastelands, magnificent gardens then descend into the direst dungeons before the final confrontation ... You cannot fail. You are the Last Ninja.

BBC Micro Cassette .....\$9.95 Acorn Electron Cassette .....\$9.95  
BBC Micro 5¼" Disc .....\$11.95 BBC Master Compact 3½" Disc .....\$14.95

(Compatible with the BBC B, B+ and Master Series computers)

Please make cheques payable to "Superior Software Ltd".  
(The screen pictures show the BBC Micro version of the game.)

THE LAST NINJA, one of the greatest No. 1 hits on the Commodore computer, is now available for the BBC Micro/Master and Acorn Electron computers, under licence from System 3/Activision (UK) Ltd.

**SUPERIOR  
SOFTWARE**  
Limited

**ACORNSOFT**

(Acornsoft is a registered trademark of Acorn Computers Ltd. Superior Software Ltd is a registered user.)  
Dept LN1, Regent House, Skinner Lane, Leeds LS7 1AX. Telephone: (0532) 459453



24 HOUR TELEPHONE  
ANSWERING SERVICE FOR ORDERS

### OUR GUARANTEE

- All mail orders are despatched within 24 hours by first-class post.
- Postage and packing is free.
- Faulty cassettes and discs will be replaced immediately.  
(This does not affect your statutory rights.)



# Game, set

**£500 IN PRIZES**  
(Including a unique opportunity)

This is your opportunity to see not only a professional boxing match, but one in which Barry McGuigan will be challenging for the World Super Featherweight Title.

The fight will take place in early February at the London Arena – newly built as part of the London Docklands complex – and this will be the first contest to be held there creating worldwide interest and comment. Love it or hate it boxing is an ancient sport and Barry McGuigan is one of its most respected exponents. Definitely a fight not to be missed.



## 1st PRIZE

Two tickets for you and a friend to see this world class bout

**PLUS PLUS**

A signed copy of By Fair Means or Foul


Any other two Superior Software games.

## 2nd PRIZE

The next four correct entries to be pulled from the sack will each receive a signed copy of this excellent boxing game – which allows you to cheat as long as the referee doesn't catch you!

PLUS

You can also choose one more title from the superb array of games now available from Superior Software.

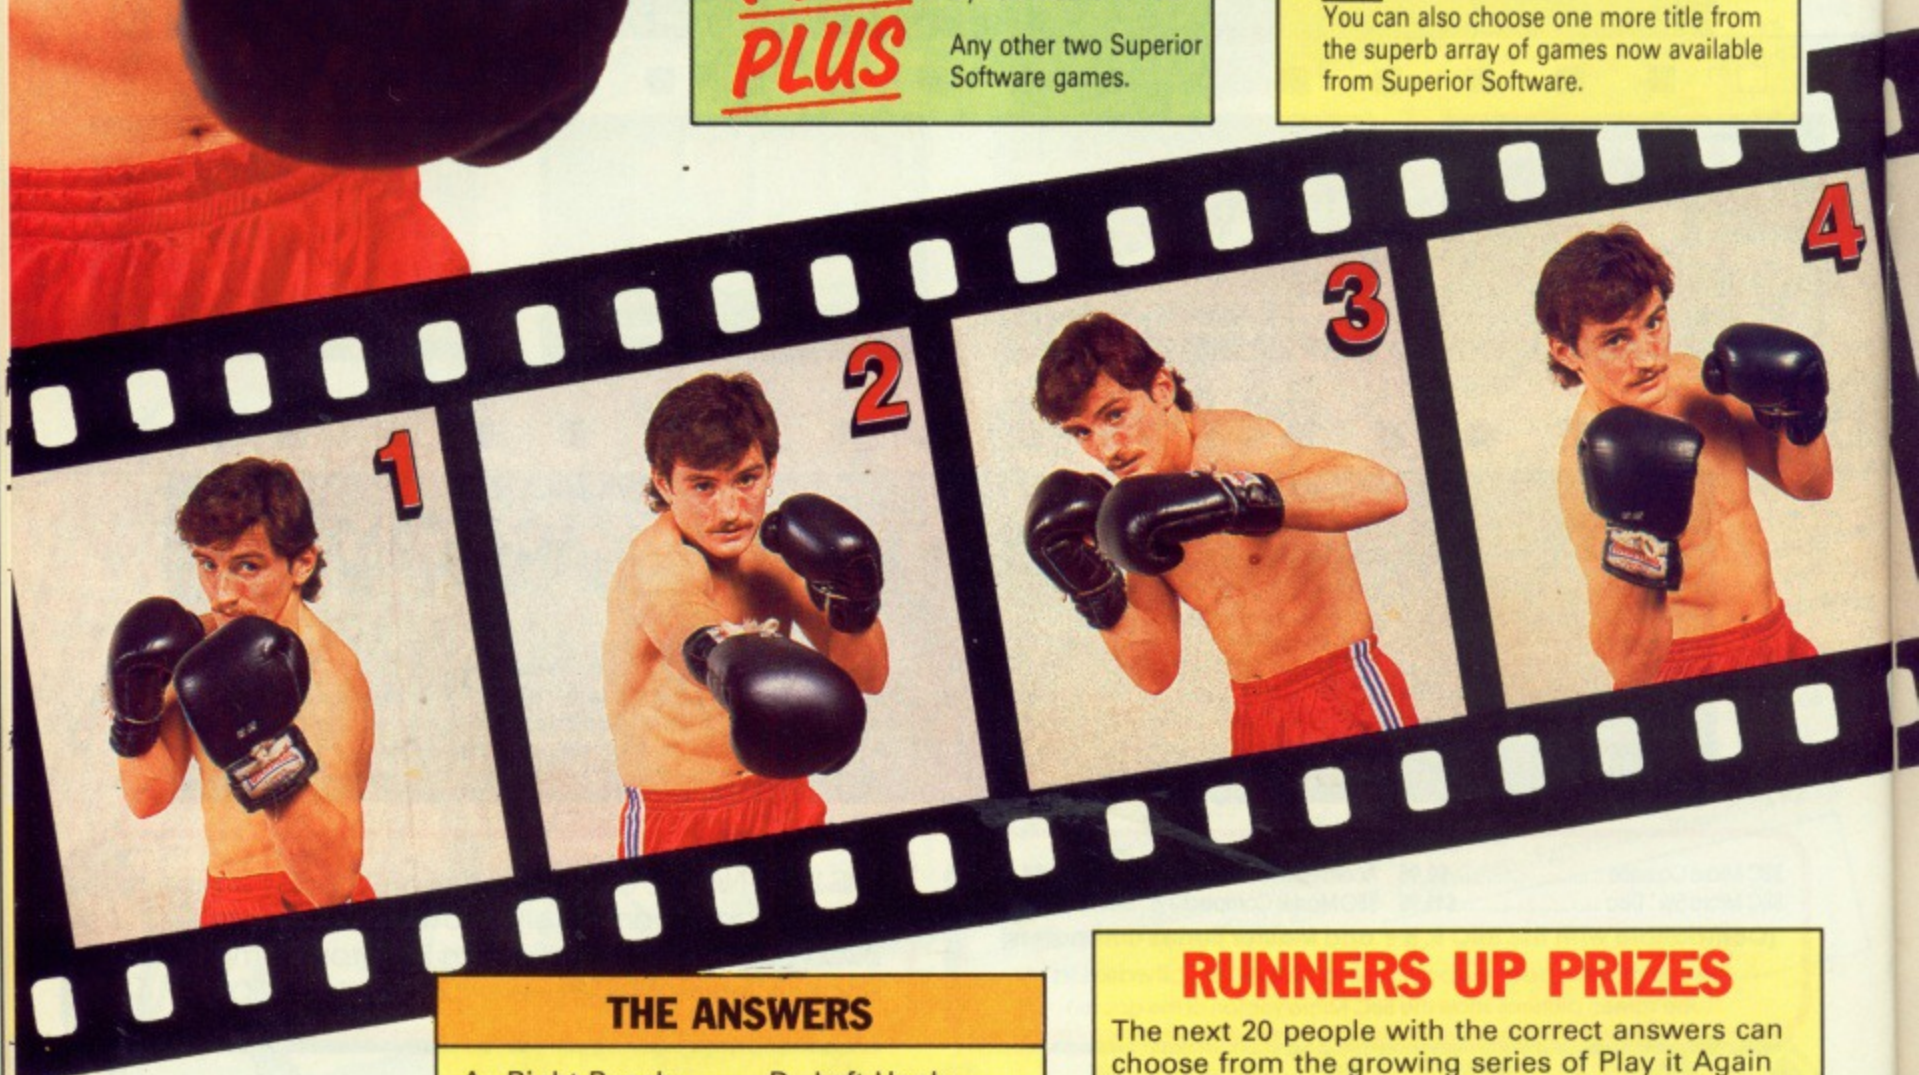

### THE ANSWERS

- |                |                   |
|----------------|-------------------|
| A. Right Punch | D. Left Hook      |
| B. Left Punch  | E. Left Uppercut  |
| C. Right Hook  | F. Right Uppercut |

## RUNNERS UP PRIZES

The next 20 people with the correct answers can choose from the growing series of Play it Again Sam compilations. In addition to Superior titles these now include the best games from other software houses.



# and match



## WHAT YOU HAVE TO DO

Not to be outdone by the rugby fraternity this is now the turn of supporters of the gentlemanly art of pugilism – boxing.

Below are five poses of classic boxing moves. All you have to do is match these with their correct terms. The first entries with the right answers will be the winners.

If you think that picture A is a Right Punch then mark an A in the first box in the entry coupon.

When you have completed all the boxes add your name, age, address and send it to us to arrive no later than February 1 1989.

## Barbarian winners




The two winners pictured with Welsh rugby star Jonathan Williams.



Have you ever wanted to experience the hustle, bustle and sheer excitement which comes from world class sport? The Match of The Year it was called in the newspapers and on television. Do you wish you could have been there?

Thanks to Superior's Barbarian competition in the July issue of *The Micro User*, Mark Freeman from London and Richard Williams from Bury not only had a grandstand view but also met their heroes from the teams.

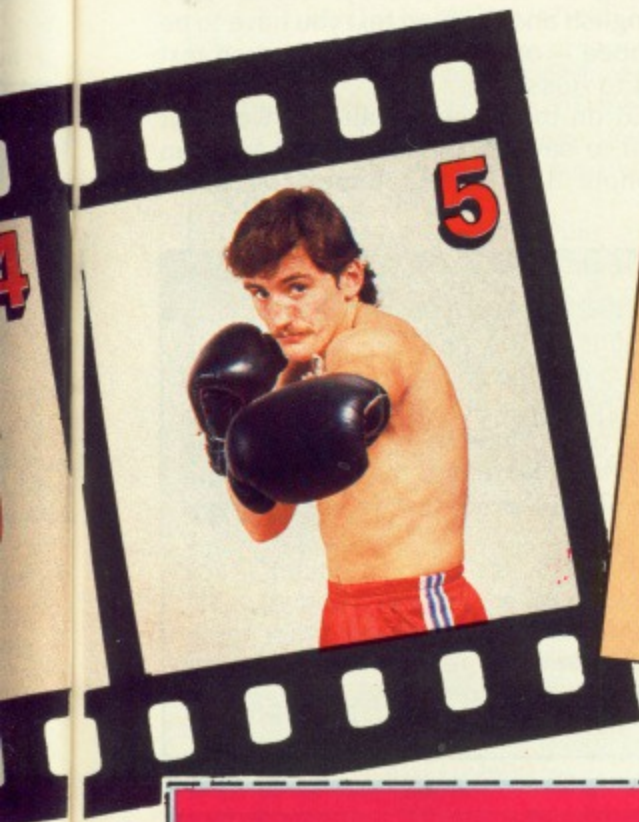

## ENTRY FORM

1.

☐

2.

☐

3.

☐

4.

☐

5.

☐

Name: .....

Address: .....

.....

.....

Postcode: .....

Tel: ..... Age: .....

Now send to Game Set and Match, The Micro User, Europa House, Adlington Park, Adlington, Macclesfield SK10 4NP.



# Russian with real character

*Stovin Johnson makes his contribution to glasnost*

**L**EARNING Russian can be a real problem especially if your handwriting in that language is unreadable even to yourself. So here's a utility that allows you to write Russian on a Mode 4 graphics screen, mix it with English and move between the two at will. And – for those who don't speak Russian – the techniques in this utility will enable you to display any character-based language.

Because the Cyrillic alphabet contains more characters than ours there are a lot to be defined. So when the program is run the character space is exploded and PAGE raised by seven memory pages – the program then re-CHAINS itself.

From the program's main menu you are

presented with four options: You can view all the Russian characters by using C, press E to enter text, F gets text from a file and Q quits.

In edit mode you are presented with a green *tabula rasa* on which you type black characters. You start in Russian mode, pressing f0 – *Print* on the Archimedes – switches to English and using it again returns you to Russian. Plus you can use four control keys to move about the screen:

|           |              |
|-----------|--------------|
| Control+H | Cursor left  |
| Control+I | Cursor right |
| Control+J | Cursor down  |
| Control+K | Cursor up    |

In addition Control+L will clear it. Delete and cursor copying all work correctly, but to copy combined English and Russian text you have to be in English mode – otherwise copied English text is converted to Russian.

Putting text on the screen is all very well, but we still need to save it: By pressing f1 you can grab the whole 10k screen under the auto-

## The new character set

The definitions of the new characters are in PROCdefine and allocated to particular keys in PROCkeys. The key assignment data is represented by a pair of numbers: The first is the original key Ascii value and the second is the new value. The list is terminated by two zeroes.

So, for example, the first character (171) takes the place of + (43) the second (160) supplants – (45) and so on until the rest of the new character set has replaced the relevant parts of the old. Also some keys are kept but moved, for instance S becomes C.

## Keyboard capers

You can mark the keys using Letraset – sheet number 3609 – by rubbing the legends on to number 8 Blick self-adhesive 7mm diameter circular labels then stick them on to the front facing side of the keys. One or two of the Letraset uppercase characters were too big for the labels but the equivalent lowercase are quite satisfactory.

The task is a bit fiddly – tweezers are useful – but the result is well worth the effort. The keyboard layout is shown in Figure 1 and the numbers of the definitions are given below each key, upper case above lower case.





For Master, Compact and Archimedes remove line 40 before running.

incrementing filename S.FileNN. Alternatively pressing f9 creates a text file — the actual character values on each line are saved using the name R.FileNN, trailing spaces are omitted to save space. If you are using ADFS you'll need to create the R and S directories first. Pressing f2 or Escape returns you to the main menu.

If you have a text file on disc you can bring it on to the screen as if it was typed at the keyboard by

selecting the *From file* option, enter the filename and it all happens automatically. Some text may get scrolled off the screen if the file is too long, you will then be able to modify and save the screen as before.

So type in the listing and save it as RUSKEYS, correct your typing errors using Get it Right! and save it again. When it's correct RUN it and Pee-shet pa-rohsky yizlek!

## Creating your own character set

Implementing a different language using the Ruskeys program is a fairly simple, if lengthy, procedure. The first step is to design each of the new symbols. If you have a character definer this will be easy, but even by hand this can be done quickly.

As an example let's take the Greek letter pi shown in the grid: Block in the squares that need to be filled, then grouping each row in fours add up the column values and write the result down in hexadecimal — apart from 0 to 9 you only need to know 10 to 15, that is A to E.

Now you can write out your VDU23 statement to define, say, character 224. Take the rows a pair at a time and enter the hexadecimal values in the order high row then low. Place a semicolon after each because you're sending two bytes at a time rather than one, like this:

```
VDU23,224,&007E;&2424;&2424;&0024;
```

Repeat the design procedure for all the new characters giving each of them a different code number. You can use any number from 128 to 255, but make sure you always use continuous blocks of 32.

Once they are all finished you can replace lines 770 to 1400 in the program with the new definitions. Note that in those lines the values like 23,224 have been replaced with the shorter hexadecimal equivalent — 23 is &17 and 224 is &E0. The two numbers are combined in high/low byte order and followed

|     |  | Column values |   |   |   |   |   |   |   | row values |  |
|-----|--|---------------|---|---|---|---|---|---|---|------------|--|
| row |  | 8             | 4 | 2 | 1 | 8 | 4 | 2 | 1 |            |  |
| 0   |  |               |   |   |   |   |   |   |   | 00         |  |
| 1   |  |               |   |   |   |   |   |   |   | 7E         |  |
| 2   |  |               |   |   |   |   |   |   |   | 24         |  |
| 3   |  |               |   |   |   |   |   |   |   | 24         |  |
| 4   |  |               |   |   |   |   |   |   |   | 24         |  |
| 5   |  |               |   |   |   |   |   |   |   | 24         |  |
| 6   |  |               |   |   |   |   |   |   |   | 24         |  |
| 7   |  |               |   |   |   |   |   |   |   | 00         |  |

by a semi-colon:

```
VDU&E017;...
```

The next step is to create the key replacement values which is even easier. Let's say you decide to make pressing unshifted p give the pi character. Lower case p has an Ascii value of 112 and we have given pi the character code of 224, so we can simply enter the pair of numbers:

```
DATA 112,224
```

after PROCkeytable at line 1460 but before the 0,0 in the final line.

Now when you run the program and have the alternate language switched in, pressing the lower case p will produce pi.

```
10 REM Ruskeys
20 REM by Stovin Johnson
30 REM (C) The Micro User
40 IF PAGE<&2000 THEN PAGE=&2000:CHAI
N"Ruskeys"
50 PROCinit
60 ON ERROR IF ERR=17 ELSEMODE7:PROCe
rror
70 REPEAT MODE4:PROCmenu
80 IF C%=1 PROCinput
90 IF C%=2 PROCfromdisc
100 IF C%=3 PROCseechr
110 UNTIL C%=4:PROCquit:END
120 DEF PROCinput:CLS
130 VDU19,0,2;0;19,1,0;0;
140 LOCAL G%,Q%,R%;R%=TRUE
150 REPEAT G%=GET:IFG%=>240PROCfunkey
160 IFR%IFG%<127IFG%>32G%=table?G%
170 IFG%>31VDUG%ELSEIFG%>7IFG%<14VDUG%
:IFG%=13VDU10
```

Turn to Page 25 ►

|            |            |            |            |            |            |            |            |            |            |            |            |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 1          | 2          | 3          | 4          | 5          | 6          | 7          | 8          | 9          | 0          | Ц          | Э          | Щ          |
|            |            |            |            |            |            |            |            |            |            | 138<br>160 | 142<br>167 | 141<br>169 |
| Q          | W          |            | R          |            |            | U          | I          |            | P          | @          |            |            |
| Й          | Ё          | Е          | Р          | Т          | У          | Ш          | И          | О          | П          | Ы          | З          |            |
| 134<br>134 | 172<br>195 | 69<br>101  | 80<br>112  | 84<br>108  | 89<br>121  | 140<br>162 | 133<br>161 | 79<br>111  | 136<br>157 | 165        | 51<br>150  |            |
|            | S          | D          | F          | G          | H          | J          |            | L          |            |            |            |            |
| А          | С          | А          | Ф          | Г          | Ч          | Ю          | К          | Л          | Ъ          |            |            |            |
| 65<br>97   | 67<br>152  | 130<br>148 | 137<br>159 | 129<br>147 | 139<br>161 | 143<br>168 | 75<br>153  | 135<br>154 | 171<br>170 |            |            |            |
| Z          |            | C          | V          | B          | N          |            |            |            |            |            |            |            |
| Я          | Х          | Ж          | В          | Б          | Н          | М          |            |            |            |            |            |            |
| 144<br>169 | 86<br>120  | 131<br>149 | 66<br>146  | 128<br>145 | 72<br>156  | 77<br>109  |            |            |            |            |            |            |

Figure 1: The keyboard layout using the Russian character set



# MURDER

All prices are savagely  
slaughtered

## THE FAMOUS CENTEC DISK AND BOX OFFER!

|  |        |
|--|--------|
| 25 5.25" disks with our storage box .....  | £11.95 |
| 50 5.25" disks with our storage box .....  | £17.95 |
| 75 5.25" disks with our storage box .....  | £22.95 |
| 100 5.25" disks with our storage box ..... | £28.95 |

You can choose either single sided, or double sided 48tpi or 96tpi disks (if you need coloured or reversible disks, just add 19p extra per disk)

You can choose either a 50 capacity storage box, or a 100 capacity storage box to go with your disks. If you want a 140 capacity storage box, just add a further £3.49

## STORAGE BOXES — BEST RANGE — BEST PRICE

All boxes are lockable, and are supplied with 2 keys. Made from anti-static plastic, they are a top quality product at rock bottom prices

|                   | 1     | 3     | 5     | 7     |
|-------------------|-------|-------|-------|-------|
| 140 x 5.25" ..... | £8.95 | £7.95 | £7.49 | £6.99 |
| 100 x 5.25" ..... | £6.95 | £5.95 | £5.49 | £4.99 |
| 50 x 5.25" .....  | £5.95 | £4.95 | £4.49 | £3.99 |

MIX 'N' MATCH FOR BEST PRICE!

## BRANDED 5.25"

|                          | Verbatim | 3m     | Sony   | Maxell |
|--------------------------|----------|--------|--------|--------|
| Double sided 48tpi ..... | £8.45    | £8.45  | £9.75  | £11.50 |
| Double sided 96tpi ..... | £12.35   | £13.00 | £14.24 | £13.00 |
| Double sided 1.6Mb ..... | £18.20   | £18.20 | £15.60 | £18.20 |

## BULK DISKS AT CRAZY PRICES

|                                     | 25+ | 50+ | 100+ | 150+ |
|-------------------------------------|-----|-----|------|------|
| Double sided 48tpi .....            | 37p | 30p | 26p  | 24p  |
| Double sided 96tpi .....            | 39p | 34p | 31p  | 28p  |
| Double sided coloured 96tpi .....   | 55p | 49p | 45p  | 39p  |
| Double sided reversible 96tpi ..... | 55p | 49p | 45p  | 39p  |
| Double sided H.D. 1.6Mb .....       | 85p | 75p | 69p  | 66p  |

## CENTEC DISK SUPPLIES

UNIT 3, THE METRO CENTRE, BRIDGE ROAD,  
ORPINGTON, KENT BR5 2BE

TEL: (0689)35353 (6 Lines) (24 Hours)

Fax 0689 77737

Please note we operate a call stacking system. Outside office hours a telephone answering machine will take your order.

Remember - all prices include VAT and delivery and apply to UK only! There are no hidden extras to pay! Prices apply to the UK only.

Personal callers welcome: Monday - Friday 9.00am - 5.00pm



E. & O.E.

FREE DELIVERY

## EPROMS, 8271

|                             | Ex VAT | Inc VAT |
|-----------------------------|--------|---------|
| 1-9 27128 250nS 21V .....   | 4.30   | 4.95    |
| 10+ 27128 250nS 21V .....   | 3.87   | 4.45    |
| 1-9 27128 250nS 12.5V ..... | 3.22   | 3.70    |
| 10+27128 250nS 12.5V .....  | 2.91   | 3.35    |
| 1-9 2764 250nS .....        | 2.60   | 2.99    |
| 1-9 27256 250nS .....       | 4.22   | 4.85    |
| 10+27256 250nS .....        | 3.83   | 4.40    |
| 1-9 TTL/Cmos set .....      | 3.91   | 4.50    |
| 1-9 8271 controller .....   | 39.13  | 45.00   |
| 1-9 6264 LP 150nS .....     | 8.00   | 9.20    |
| Acorn 8271 DFS .....        | 45.22  | 52.00   |
| Acorn 1770 DFS .....        | 45.22  | 52.00   |

## ROMS

|                         | Ex VAT | Inc VAT |
|-------------------------|--------|---------|
| Inter-Word .....        | 35.65  | 41.00   |
| Inter-Sheet .....       | 35.65  | 41.00   |
| Inter-Base .....        | 46.96  | 54.00   |
| Wordwise Plus .....     | 37.39  | 43.00   |
| MEGA 3 .....            | 71.30  | 82.00   |
| Spell Master .....      | 40.00  | 46.00   |
| View Spell .....        | 26.00  | 29.90   |
| View Plot Disc .....    | 19.13  | 22.00   |
| Viewsheet .....         | 36.52  | 42.00   |
| ViewStore .....         | 36.52  | 42.00   |
| OverView I & II .....   | 68.70  | 79.00   |
| View Professional ..... | 58.26  | 67.00   |

## MONITORS

|                            | Ex VAT | Inc VAT |
|----------------------------|--------|---------|
| Philips CM8802 .....       | 173.04 | 199.00  |
| Philips CM8852 .....       | 251.30 | 289.00  |
| Philips BM7502 Green ..... | 65.22  | 75.00   |
| Philips TV Tuner .....     | 56.52  | 65.00   |
| Taxan KX P31 Green .....   | 68.70  | 79.00   |
| Taxan KX Amber .....       | 82.61  | 95.00   |
| Taxan KX1202 Green .....   | 68.70  | 79.00   |
| Microvitec 1451 .....      | 221.74 | 255.00  |

(Prices inc. BBC Cable)

## MASTER/ARCH

|                                | Ex VAT | Inc VAT |
|--------------------------------|--------|---------|
| Master 128K Micro .....        | 365.22 | 420.00  |
| Archimedes 305 from .....      | 699.00 | 803.35  |
| 512 Co-processor .....         | 173.04 | 199.00  |
| Turbo Upgrade .....            | 98.78  | 113.50  |
| Acorn Cartridges .....         | 10.87  | 12.50   |
| Care Cartridges from .....     | 8.65   | 9.95    |
| Reference Manuals .....        | 14.00  | 14.00   |
| View 3/View Sheet Guides ..... | 9.00   | 9.00    |
| Master & B Dust Covers .....   | 3.00   | 3.45    |

Second user BBC B's available


## Philips CM8833

with BBC cable  
£239.00 (£207.83+VAT)

## VOLTMACE JOYSTICKS

|                        |       |       |
|------------------------|-------|-------|
| Delta 14B single ..... | 12.61 | 14.50 |
| Delta 3B single .....  | 11.26 | 12.95 |
| Delta 3B twin .....    | 17.35 | 19.95 |

## Panasonic KXP1081



with BBC cable & paper  
£159.00 (£138.26+VAT)  
with Screen Dump, 2m cable + paper  
£165.00 (£143.48+VAT)  
Exc VAT Inc VAT  
KXP1080 Fabric Ink ribbon 3.74 4.30  
KXP1080 View Printer Driver 7.83 9.00  
KXP1080 Control/Dump Rom 13.00 14.95

## Panasonic KXP1082

(AS 1081 BUT 160CPS  
with BBC cable & paper  
£189.00 (£164.35+VAT)

## Kaga/Taxan KP815

With BBC cable & paper  
£175.00 (£152.17 + VAT)

## CITIZEN 120D

with BBC cable & paper  
£135.00 (£117.39+VAT)

## CANON PW1080A

with BBC cable & paper  
£159.00 (£138.26 + VAT)

## STAR LC10

with BBC cable & paper  
£205.00 (£178.26+VAT)

## EPSON LX 800

With BBC cable & paper  
£219.00 (£190.43 + VAT)

## STAR LC10 Colour

with BBC cable & paper  
£249.00 (£216.52+VAT)

## EPSON LQ500

With BBC cable & paper  
£325.00 (£282.61 + VAT)

## STAR LC2410

with BBC cable & paper  
£335.00 (£219.30+VAT)

## EPSON FX800

with BBC cable & paper  
£339.00 (£294.78+VAT)

## CANON A55 (17")

with BBC cable & paper  
£315.00 (£273.91+VAT)

## PRINTERS/CABLES/Etc.

|                               | Ex VAT | Inc VAT |
|-------------------------------|--------|---------|
| Epson LX86 .....              | 112.17 | 129.00  |
| Star NL10 .....               | 164.35 | 189.00  |
| MP480 (480 cps) .....         | 260.00 | 299.00  |
| 1.5m (4 foot) BBC cable ..... | 4.00   | 4.60    |
| 2.0m (6 foot) BBC cable ..... | 6.00   | 6.90    |
| Compact printer cable .....   | 6.00   | 6.90    |
| IBM/Archimedes cable .....    | 6.00   | 6.90    |
| LX800 Sheet Feeder .....      | 62.61  | 72.00   |
| LC10 Sheet Feeder .....       | 56.52  | 65.00   |
| NL10 Sheet Feeder .....       | 47.83  | 55.00   |
| 2 way Printer Switch .....    | 20.00  | 23.00   |
| Printer Dust Covers .....     | 4.00   | 4.60    |

## PRINTER RIBBONS

|                              | Ex VAT | Inc VAT |
|------------------------------|--------|---------|
| LX/FX 800 Print Ribbon ..... | 2.30   | 2.65    |
| LX80 Print Ribbon .....      | 2.13   | 2.45    |
| LC10 Print Ribbon .....      | 4.00   | 4.60    |
| NL-10 Print Ribbon .....     | 4.80   | 5.52    |
| 120D Print Ribbon .....      | 4.00   | 4.60    |
| KP/PW Print Ribbon .....     | 3.22   | 3.70    |
| Juki 6100 Print Ribbon ..... | 1.30   | 1.50    |

Phone for quality discounts

## DISKETTES (100% Error free)

| (lifetime warranty)              | Ex VAT | Inc VAT |
|----------------------------------|--------|---------|
| 10 Banana Reversible .....       | 8.65   | 9.95    |
| 10 3.5" D/S 135tpi .....         | 8.61   | 9.90    |
| 10 96tpi D/S D/D + case .....    | 6.04   | 6.95    |
| 10 96tpi D/S D/D in box .....    | 5.17   | 5.95    |
| 50 96tpi D/S D/D in boxes .....  | 17.17  | 19.75   |
| 100 96tpi D/S D/D in boxes ..... | 32.09  | 36.90   |
| 40 Disc Box 3.5" + lock .....    | 5.17   | 5.95    |
| 50 Disc Box hinged + lock .....  | 5.65   | 6.50    |
| 100 Disc Box hinged + lock ..... | 6.52   | 7.50    |
| Black Library case .....         | 1.21   | 1.39    |

## 5 1/4 DISC DRIVES

|                           | Ex VAT | Inc VAT |
|---------------------------|--------|---------|
| Cumana CSX100 .....       | 90.43  | 104.00  |
| Cumana CSX400 .....       | 117.39 | 135.00  |
| Cumana CD800S .....       | 252.17 | 290.00  |
| MD100A 100k No PSU .....  | 84.35  | 97.00   |
| MD100B 100k & PSU .....   | 99.13  | 114.00  |
| MD400A 400k No PSU .....  | 85.22  | 98.00   |
| MD400B 400k & PSU .....   | 100.87 | 116.00  |
| MD802C 800k No PSU .....  | 173.04 | 199.00  |
| MD802E 800k & PSU .....   | 190.43 | 219.00  |
| MD802D 800k & stand ..... | 204.35 | 235.00  |

Phone for Viglen & Torch Winchester

Phone for our best price before placing your order  
EDUCATIONAL & GOVERNMENT ORDERS WELCOME

All products have a 12 month no quibble guarantee  
Prices subject to variation without prior notification

We are closed some Saturday afternoons

Carriage 92p (80p + VAT) Securicor £6.90 (£6.00 + VAT)

# WeServe

Larger items  
delivered  
by Securicor



Micro Dept.  
128 West Street,  
Portchester,  
Hants.  
PO16 9XE  
Tel: 0705 325354



## ◀ From Page 23

```

180 UNTIL QX:ENDPROC
190 DEF PROCfunkey
200 IF GX=240 RX=NOTRX
210 IF GX=241 PROCsave
220 IF GX=242 QX=TRUE
230 IF GX=249 PROctodisc
240 GX=0:ENDPROC
250 DEF PROCfromdisc
260 INPUT"File name",f$
270 PROCos("EXEC "+f$)
280 PROCinput:ENDPROC
290 DEF PROCos($os%):LOCALXX,YX
300 XX=os%:YX=os%DIV256
310 CALL&FFF7:ENDPROC
320 DEF PROCsave
330 PROCos("SAVE S.File"+FNn(out)+" FF
FF5800 FFFF8000")
340 ENDPROC
350 DEF PROctodisc:s$=STRING$(40,"!")
360 ZX=OPENOUT("R.File"+FNn(out))
370 FOR YX=0 TO 30:s$="":FX=0
380 FOR XX=39 TO 0 STEP-1
390 BX=FNn(XY,YX):IF FX s$=CHR$BX+s$ E
LSEIF BX<>32 s$=CHR$BX+s$:FX=TRUE
400 NEXT:PROCsend(s$):NEXT
410 CLOSE#ZX:out=out+1:ENDPROC
420 DEF FNn(NX)
430 =STR$(NXDIV256)+STR$(NXMOD256)
440 DEF FNn(XY,YX)
450 VDU31XXYX:LOCAL AX:AX=135
460 =(USR(&FFF4)&AND&FF00)DIV&100
470 DEF PROCsend(s$)
480 IF s$="" BPUT#ZX,13:ENDPROC
490 FOR LX=1 TO LENs$
500 BPUT#ZX,ASC MID$(s$,LX)
510 NEXT:BPUT#ZX,13:ENDPROC
520 DEFPROCseechr:CLS
530 PRINT:PRINT'SPC4;
540 FOR IX=32 TO 126:CX=table?IX
550 IF CX<>IX VDU32,32,CX
560 IF POS>30 PRINT:PRINT'SPC4;
570 NEXT:PRINT'TAB(12)'Press space'
580 REPEAT UNTIL GET=32:ENDPROC
590 DEFPROCmenu:CLS
600 PRINTTAB(15,4)'OPTIONS'
610 PRINT'TAB(11)'Enter text'
620 PRINT'TAB(11)'From disc'
630 PRINT'TAB(11)'Characters'
640 PRINT'TAB(11)'Quit'
650 PRINT'TAB(11)'Select your choice';
660 REPEAT GX=GETAND&DF
670 CX=INSTR("EFCQ",CHR$GX)
680 UNTIL CX>0:ENDPROC
690 DEF PROCquit:*FX225,1
700 CLOSE#0:VDU3,4:PRINT':ENDPROC
710 DEF PROCerror:PROCquit:REPORT
720 PRINT' at line ";ERL:ENDPROC
730 DEF PROCinit:*FX20,1
740 DIM os%&100:PROCdefine:*FX225,240
750 PROCkeytable:out=0:ENDPROC
760 DEF PROCdefine
770 VDU&8017;&6C7C;&7C60;&6666;&7C;
780 VDU&8117;&667E;&6060;&6060;&60;
790 VDU&8217;&163E;&2626;&7F46;&42;
800 VDU&8317;&4949;&1C2A;&492A;&49;
810 VDU&8417;&4400;&7444;&4C4C;&74;
820 VDU&8517;&6666;&7E6E;&6676;&66;
830 VDU&8617;&836;&6763;&7B6F;&73;
840 VDU&8717;&263E;&2626;&6626;&66;
850 VDU&8817;&66FF;&6666;&6666;&66;-
860 VDU&8917;&3C18;&5A5A;&3C5A;&18;

```

```

870 VDU&8A17;&6666;&6666;&7E66;&6F;
880 VDU&8B17;&6666;&3E66;&606;&6;
890 VDU&8C17;&6B6B;&6B6B;&6B6B;&7F;
900 VDU&8D17;&6B6B;&6B6B;&6B6B;&7F;
910 VDU&8E17;&6C38;&3E06;&6C06;&38;
920 VDU&8F17;&DECC;&F3F3;&DEF3;&CC;
930 VDU&9017;&663E;&3E66;&6636;&66;
940 VDU&9117;&3C00;&5C40;&4464;&38;
950 VDU&9217;&0;&667C;&667C;&7C;
960 VDU&9317;&0;&727E;&6060;&60;
970 VDU&9417;&0;&163E;&2616;&427E;
980 VDU&9517;&0;&1A6B;&2B1E;&49;
990 VDU&9617;&0;&61C;&60C;&1C;
1000 VDU&9717;&0;&6E66;&767E;&66;
1010 VDU&9817;&0;&623C;&6040;&3E;
1020 VDU&9917;&0;&6C66;&6C78;&66;
1030 VDU&9A17;&0;&361E;&3636;&66;
1040 VDU&9B17;&66;&623C;&607E;&3E;
1050 VDU&9C17;&0;&6666;&667E;&66;
1060 VDU&9D17;&0;&66FF;&6666;&66;
1070 VDU&9E17;&0;&187E;&1818;&18;
1080 VDU&9F17;&0;&1800;&0B7E;&7EDB;&18;
1090 VDU&A017;&0;&3636;&3636;&73F;
1100 VDU&A117;&0;&6666;&663E;&6;
1110 VDU&A217;&0;&2A2A;&2A2A;&3E;
1120 VDU&A317;&0;&2A2A;&2A2A;&73F;
1130 VDU&A417;&0;&1070;&161C;&1C;
1140 VDU&A517;&0;&6636;&667B;&3B;
1150 VDU&A617;&0;&3030;&663C;&1C;
1160 VDU&A717;&0;&663C;&661E;&3C;
1170 VDU&A817;&0;&524C;&5272;&4C;
1180 VDU&A917;&0;&361E;&361E;&66;
1190 VDU&AA17;&0;&1000;&1C10;&1212;&1C;
1200 VDU&AB17;&0;&7000;&1C10;&1212;&1C;
1210 VDU&AC17;&66;&627E;&6278;&7E;
1220 VDU&AD17;&3225;&3035;&0;&1E50;
1230 VDU&AE17;&02F4;&5845;&4C50;&444F;
1240 VDU&AF17;&0245;&4843;&5241;&4341;

```

```

1250 VDU&B017;&4554;&5352;&5320;&4150;
1260 VDU&B117;&4543;&0;&C5A;&462A;
1270 VDU&B217;&2058;&3032;&312C;&0;
1280 VDU&B317;&F64;&462A;&2058;&3232;
1290 VDU&B417;&2C35;&3731;&0D35;&6E00;
1300 VDU&B517;&F418;&5220;&5355;&4953;
1310 VDU&B617;&4E41;&4320;&4148;&4152;
1320 VDU&B717;&5443;&5245;&0D53;&7800;
1330 VDU&B817;&F410;&5520;&5050;&5245;
1340 VDU&B917;&4320;&5341;&0D45;&8200;
1350 VDU&BA17;&EF29;&3220;&2C33;&3231;
1360 VDU&BB17;&2C38;&3231;&2C34;&3031;
1370 VDU&BC17;&2C38;&3639;&312C;&3432;
1380 VDU&BD17;&312C;&3230;&312C;&3230;
1390 VDU&BE17;&312C;&3432;&302C;&0;
1400 VDU&BF17;&258C;&02EF;&3332;&312C;
1410 ENDPROC
1420 DEF PROCkeytable:DIM table &100
1430 FOR IX=0 TO 255:table?IX=IX:NEXT
1440 REPEATREADIX,JX:IFIX>0table?IX=JX
1450 UNTIL IX=0:ENDPROC
1460 DATA 43,171,45,160,59,170
1470 DATA 61,138,64,132,66,128
1480 DATA 67,131,68,130,70,137
1490 DATA 71,129,72,139,73,133
1500 DATA 74,143,76,135,78,72
1510 DATA 80,136,81,134,82,80
1520 DATA 83,67,85,140,86,66
1530 DATA 87,172,90,144,91,150
1540 DATA 92,163,94,167,98,145
1550 DATA 99,149,100,148,102,159
1560 DATA 103,147,104,161,105,151
1570 DATA 106,168,107,153,108,154
1580 DATA 110,156,112,157,113,134
1590 DATA 114,112,115,152,116,158
1600 DATA 117,162,118,146,119,155
1610 DATA 122,169,123,51,124,141
1620 DATA 126,142,0,0

```



|              |              |              |               |               |               |
|--------------|--------------|--------------|---------------|---------------|---------------|
| 10 = 0 0     | 280 = 6569 3 | 550 = 6EE5 E | 820 = 5C48 3  | 1090 = 8FEA 2 | 1360 = 6D32 5 |
| 20 = 0 0     | 290 = 232E 5 | 560 = 55F6 0 | 830 = A50E 9  | 1100 = 16A0 F | 1370 = F8C8 5 |
| 30 = 0 0     | 300 = 6677 3 | 570 = AA3E D | 840 = 2C92 E  | 1110 = 5FE1 4 | 1380 = DC0F 2 |
| 40 = 73A7 7  | 310 = 4C80 8 | 580 = BF3A C | 850 = 55F8 B  | 1120 = 7675 6 | 1390 = 2553 E |
| 50 = DEBB 4  | 320 = EB7 F  | 590 = 5C12 C | 860 = D2CF F  | 1130 = C18C B | 1400 = 14D1 2 |
| 60 = 69DE B  | 330 = E8AC C | 600 = 6E54 3 | 870 = A3BC 9  | 1140 = A1EF 8 | 1410 = ED0F 0 |
| 70 = A467 B  | 340 = ED0F 2 | 610 = 6A4 A  | 880 = 426C 5  | 1150 = F4CC 5 | 1420 = 3D32 5 |
| 80 = 2549 0  | 350 = 1CF4 1 | 620 = B702 2 | 890 = D663 C  | 1160 = 272C 8 | 1430 = 7752 5 |
| 90 = D828 0  | 360 = 8D90 6 | 630 = B5E4 1 | 900 = 804D F  | 1170 = C2FF A | 1440 = 46EB 4 |
| 100 = F41D C | 370 = 3755 9 | 640 = 23B3 B | 910 = 407C 4  | 1180 = 2FC8 B | 1450 = AB95 0 |
| 110 = CEF3 A | 380 = 94B0 7 | 650 = 7098 8 | 920 = 76CE 6  | 1190 = 323C E | 1460 = 9C3B 7 |
| 120 = DF0F 8 | 390 = D599 A | 660 = 1008 7 | 930 = C51F 6  | 1200 = AC8 A  | 1470 = F614 A |
| 130 = 4555 D | 400 = 374C F | 670 = 9C61 1 | 940 = 99D0 5  | 1210 = 1DD1 A | 1480 = 488C 8 |
| 140 = 8873 5 | 410 = 91AC 7 | 680 = B64B D | 950 = 64F5 3  | 1220 = A5A4 E | 1490 = B920 F |
| 150 = A4A5 B | 420 = C7F3 2 | 690 = A87C 4 | 960 = 88A6 B  | 1230 = CDCC 0 | 1500 = 7D5D B |
| 160 = 47E2 B | 430 = 5126 4 | 700 = F9BB C | 970 = 12B D   | 1240 = A915 7 | 1510 = 6699 3 |
| 170 = 1893 1 | 440 = 1BDB F | 710 = 61C4 5 | 980 = FA54 F  | 1250 = BF4E 2 | 1520 = 5C51 6 |
| 180 = BEA3 E | 450 = 4A7D C | 720 = 7580 3 | 990 = 18E3 1  | 1260 = 1EAB 8 | 1530 = BF7E 9 |
| 190 = BEEE F | 460 = 2462 5 | 730 = 75D1 F | 1000 = 3A64 F | 1270 = E4A6 0 | 1540 = D2A2 B |
| 200 = 20 6   | 470 = E9D8 D | 740 = FA05 6 | 1010 = BCBD 1 | 1280 = 6562 A | 1550 = 1863 F |
| 210 = 5054 1 | 480 = 8B58 A | 750 = C89C 9 | 1020 = B1F 6  | 1290 = D2E A  | 1560 = 3635 3 |
| 220 = 8C5F 7 | 490 = 3610 E | 760 = D510 B | 1030 = 113C 8 | 1300 = 3C3C D | 1570 = 4857 D |
| 230 = BB89 1 | 500 = B70E 5 | 770 = 59B5 B | 1040 = 3246 B | 1310 = EA4A A | 1580 = 886E E |
| 240 = 5E29 E | 510 = 2F2D 7 | 780 = 221F 4 | 1050 = 8993 6 | 1320 = 558B C | 1590 = 9943 6 |
| 250 = 849B D | 520 = EBDD F | 790 = 27A0 B | 1060 = 4E1B D | 1330 = BBF6 7 | 1600 = BC7 5  |
| 260 = 3DD5 B | 530 = 26B1 8 | 800 = E651 9 | 1070 = 8A6A 3 | 1340 = E7F6 C | 1610 = EA37 5 |
| 270 = 3457 9 | 540 = A380 2 | 810 = 731B A | 1080 = 61B0 8 | 1350 = 6FED 6 | 1620 = 4174 8 |



B B+ M 10/16



*The Mad  
Hatter flies  
off bounty  
hunting*

## But which Elite is yours?

**T**HE volume of mail I have received about various aspects of *Elite* has been amazing. It seems one thing that needs clarifying relates to the various versions of the game in circulation. Essentially, there are three — each with its own special characteristics. First, there is the tape version that has to reside totally in the memory of your BBC Micro, and therefore is very limited.

You cannot take part in either of the missions, there's no access to military or mining lasers, the number of ships encountered is restricted and when you have a docking computer it takes you instantaneously to the space station. This is the version I had at first and it is fun to play despite its limitations.

Next there is the ordinary disc version, which was released at the same time as the tape. Because the disc can be accessed regularly there are more types of enemy ship, play is a little faster and — most important — you can participate in the two missions. The docking computer doesn't give instantaneous entry to the space station.

One feature of this version becomes apparent when you are engaged in bounty hunting — alloys predominate. Thus on three such trips I collected 12 tons of alloys out of a total of 22 tons of booty, 14 out of 35 tons and 16 out of 33 tons.

Finally, there is version two of *Elite* — the

combined Acornsoft and Superior Software disc — which is the one I usually refer to. This caters for the BBC B (40 track) on side one and the other allows for BBC B, B+, Master and 6502 second processors on 80 track.

All have slightly different characteristics, most notably the way the energy bomb effect is displayed. There is more use of colour on version two and when a co-processor is used the increase in speed is tremendous. It is this version that has things like generation ships and space dredgers in the higher memory configurations. I hope this helps to clarify matters.

A final thought for this month on tactics, since many of you have taken fresh encouragement from the hints and tips given over the past few months: Be patient and don't be greedy. I usually have to confine myself to playing sessions lasting about an hour, which is about long enough to destroy half the number of pirates required for a *Right on Commander!*

If I am getting hard pressed, with energy banks depleted I don't hesitate to hyperspace out of danger — using the energy bomb at the last second if needed. You'll still have plenty of combat opportunity when doing a trading run back to Biabete.

See you next month. Until then, happy hunting and happy adventuring.

## No strings attached

The third and final stage of Geoff Larsen's *Puppet Man* involves satisfying Erato and confronting the Puppeteer himself. Go to the stage and talk to the juggler, Pierrot. Take the indian club and jump. Go to the house and then up, N, get the glove and examine the shelf. Take the note, retrace your steps and go to the crossroads.

From there move S, S, W and S. Here, sooner or later, a man in the bushes creates a path leading west. Move around till you hear him and then you can continue. Go W, W, W and drop the club then S, S, W, S and E. Examine the fire, wear the glove and take the poker.

Next go W, N, W and examine the fire, then poke the cinders to reveal the black key which, you take. Now move E, S, E and light the candle so that you can proceed W, N, N and up. Go to the



door, unlock the desk, examine it and get the poem, now you must retrace your steps to the stage and give it to Columbine.

For the last moves, jump and go W, N, N, N, examine the stump and get the marionette. Now go to the village inn — east from the green — and give the marionette to the Puppet Man.





## L's a'poppin'

The second part of Bill Hensman's solution to **L** begins at the maze: Move N, E, E and S to find the sphere. As it is only a location marker you can safely ignore it and continue E, E, N and N to a staircase. Now climb up to the courtyard to meet the turtle.

You cannot approach the turtle directly since he always takes two steps to your one in the same direction. Bill's answer is to move S repeatedly until he is level with you and then do the same thing moving W.

When you finally meet, the turtle hands over a rusty key which will be needed later. Now go back

down to the maze and retrace your steps to the telephone room. From here go W to the corridor and then S, S to the end and then E into the creeper room. Later in the game a rope ladder will be found here. Meanwhile, enter N and you are back at the workshop where you should now take the tetrahedron.

Proceed E to the kitchen and N to the L-shaped room then W to the pantry. Get the cube and go back to the L-shaped room and then go E to a boiler room.

● More next month...

## On the road to success

### Dungeon adventure: The Final Solution

Let's take a look at Stuart Booth's treatment of the ramp area — you can compare it with my own solution in the October 1987 issue of *The Micro User*. First, go to the salt cellar and take the pig. Whatever you do, don't LOOK in this room — remember what happened to Lot's wife. Next you should go E and climb the ramp to the first doorway then go E, U and E. Take the topaz and move W, W to get out.

Climb the ramp to the third doorway — with the ornate entrance — go in and PUSH the statue to reveal a hole: A second PUSH will close it. Take the rhinestone from this concealed room and leave.

Now go back down the ramp to the bottom, N and then D again to the new doorway. Go in and push button nine in the skinner box and then button four in the reward room. Next climb the ramp to the square doorway, go in and take the box. After that you should go back down and then S along the ladder to the ramp with the shallow water. Drop the pig and the box here, take the

pearl, open the box to get the opal and leave the box.

Store the chest, ore, opal, pearl, rhinestone, sapphire, topaz and spices in the packing case and climb back up the ramp to the rubbery doorway. Enter and take the emerald from the black glass room.

Now you must be brave. Continue up until you hear the bouncing boulder, climb up one more move, enter the doorway and leave once the boulder has passed and carry on up to the dark doorway. Go in to trigger the black sphere and then leave and carry on all the way up to the room with the sanity-sapping images on the wall. Close your eyes here and move N where another black sphere awaits. Open your eyes after the mutual destruction and take the diamond and shield.

Go S now, close your eyes again, move D and then open your eyes once more. Carry on down to the doorway with the holes, enter and examine the corpse. Take the blindfold, wear the gauntlet and leave.

Next climb back up to the red gold room, enter

Turn to Page 28 ►

Be  
patient and  
don't be  
greedy



## ◀ From Page 27

and you will find you can now take the ring safely. Descend to the dark doorway and take the wedge from inside. Go down to the doorway with scratches, because you can now enter safely when you hear the boulder.

At the message *The walls at the far end clash together* throw the wedge. When the bars lift, go W and then into the treasure room for the agate. Next go down to the room with the hand sign, throw the ring, enter and collect the ruby. You must now go D to the acrid-smelling doorway, wear the blindfold and enter. Take the brooch and leave. Lastly descend to the pale room, go in and

throw the brooch at the executioner; ignore the hood but take the amethyst.

Either go to the black pedestal and enter GREEN, or leave through the signposted doorway carrying nine of the gems. Make sure you have the cross and crucifix before leaving the exit chamber.

Finally make sure you have either the horn or the teeth from the packing case. Go outside and, as the Orcs are encountered, either blow the horn or plant the teeth. Remember Cadamanthus? Then amble east along the forest road to civilisation in order to win.

As Stuart says, it's simple — when you know how.

## Valley of the Kings

Kings are traditionally good friends but powerful enemies, and this holds good in Twin Kingdom Valley. So, for our second look at this adventure, we'll concentrate on winning friends and influencing people.

Last month I left you beside Watersmeet after bathing in and drinking the magical waters. Now it is time to go underground and equip yourself a little more completely. Enter the cave near Watersmeet, switch on the lamp and move W, N and E. Return by going SW, taking the holdall and moving E then S.

You can put many extra items in the holdall, enabling you to carry a great deal more than before. Stuart Booth utters a caveat in his notes: Never put a lit lamp in the holdall, or attempt to light the lamp while it is in there. I can't say that I ever did — but if you want to see why Stuart utters his warning, do remember to SAVE first — and remember that the process takes quite a long time.

Put the jug and brass key into the holdall, then take the diamond and collect the gold key from the kitchen. Go to the passage beside the gold door open it and go S to the cave at the top of the shaft and open the door here — this time a metal one. The keys are graded in a hierarchy that allows you to open lesser doors. The master key, when you find it, allows you to open every door.

Now it is time to enter the Hall of the Forest King. There you give the guard the diamond as a token of your esteem — fret not, you haven't lost it forever — in return you are given an amulet which serves as a means of identification, showing that you are now the King's ally.

Return to the cave system now and collect the short wooden rod and the crystal ball. Into the twisty maze you go, moving N, E, W to meet the witch. In exchange for the crystal ball she will give you the bronze key.

Now you must go W, W, W, S and finally up through the Hall of the Forest King, through the metal door to the bronze door. Open it, enter and close the door again. This traps the dwarf inside enabling you to kill him so that you can take the ring and the bag of gold from his corpse. Wear the amulet and put the rod, bronze key and any spare



weapons into the holdall. Return to the cabin and there deposit the gold key, ring and the bag of gold.

● Next month we'll continue our solution of Twin Kingdom Valley.

Win friends and influence people. Is how to get ahead in the Twin Kingdom Valley



# Whizzkids

*Nic Outterside examines  
the development of Heyley Software*

**T**HERE can be few adventure software houses supplying the BBC Micro market that have enjoyed the kind of startling growth and success that has been the fortune of Heyley Software during the past year.

Behind every success there is a story and the one at Heyley is remarkable. What began as the hobby of two schoolboys has developed into a respected software house producing some of the most original and addictive adventures available.

Howard Robert's first encounter with a micro was with a ZX81 in 1982 and despite the lack of anything approaching computer studies at school and with a ZX81 plagued by a wobbling ram pack he soon taught himself Basic programming.

Meanwhile, a street away, Tony Heap was getting to grips with an HP85 and soon experienced the delights of an early text adventure called **Gnome**.

Both boys became addicted and were determined to buy the best – a BBC Model B. Tony saved furiously and by early 1983 had bought one with monitor and disc drive. Back in Ley Hey Road, Howard, forked out £335 for his machine, opening the door to the world of text adventures.

A few months later Howard happened upon an early Level 9 advertisement and ordered a copy of **Colossal Adventure** and soon ordered more games including his all-time favourite, **Lords of Time**.

After reading an article by Pete Austin outlining the Level 9 writing system and how to write good adventures Howard became hooked.

Tony had – by an equal stroke of luck – discovered that graphical stunner **Twin Kingdom Valley** and was shortly making inroads into **Sphinx Adventure** and **Castle of Riddles**. For both boys these early experiences were to shape their writing method for the future.

Christmas 1985 found a heavily Level 9 influenced 18-year-old scribing a 254 location text epic titled **The Ultimate Prize**. Howard admits that **Colossal Adventure** and the Jackson and Livingstone Fighting Fantasy books were in the forefront of his thoughts as the first Heyley adventure took shape. This period was also to provide the meeting with Tony Heap which was soon to be forged into an inseparable writing partnership.

Howard's father loaned them £120 to gamble on a quarter page advertisement and they were rewarded by 15 orders, which just covered the advertising costs. More importantly, reviewers and adventurers were introduced to the name


Heyley – a name which was to appear again and again in the micro press during the next two years.

By early 1987 orders for their games were trickling in, but with the likes of Level 9 and Epic controlling the BBC Micro adventure market, success was limited. Then with the release of Tony Heap's **Dreamtime**, BBC Micro adventurers really began to take notice. Tony had worked hard on this multi-levelled jaunt which featured a space level which reeked of Douglas Adams' excellent *Hitchhikers' Guide to the Galaxy*.

The Mad Hatter along with *Electron User's* Pen-dragon heartedly applauded this latest Heyley release and both warmed to the sense of humour which pervades all the Heyley games.

As Tony began to learn machine code programming he brought more influence to bear on the coding of the ensuing Heyley adventures. **The Taroda Scheme** became a joint family effort with everyone chipping in an idea or puzzle. The overall concept came from Tony's father during

Turn to Page 30 ►

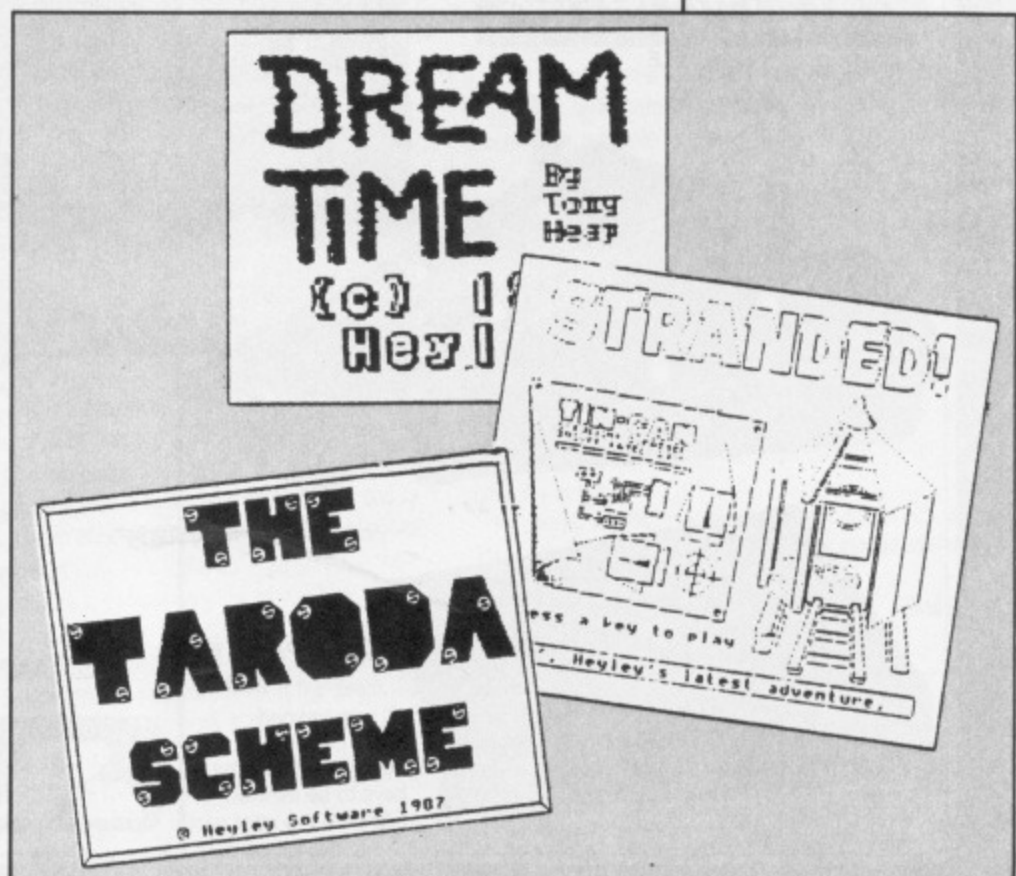



Meanwhile  
Tony's ideas  
were  
propagating  
during  
lessons  
at school

◀ From Page 29

evening tea from which sprang five pages of pencilled notes.

Meanwhile Tony's ideas were propagating during lessons at school – Macbeth provided the inspiration for a puzzle in **Stranded!**. Nowadays they both keep a pad with them at all times, as Howard commented "You never know when a brilliant idea might come to you".

The launch of the Archimedes in late 1987 provided sufficient temptation for Heyley to order one of these mega machines. They were soon writing the first commercial adventure for it entitled **Stranded!** and this received immediate critical acclaim.

Thanks to favourable reviews of their first four adventures Howard and Tony were seeing a part-time hobby developing into a small profitable business. However, in March 1988 they made their second successful gamble when they paid £500 for a stand at the Manchester Electron and Micro User Show.

Howard tells the story of their breakthrough: "We set up our stand with our five games – including **Stranded!** – alongside a stock of other companies' adventures which we had negotiated to sell.

"Friday was terrible, we only sold three games all day and were seriously thinking of packing up

and going home. But on Saturday and Sunday hundreds of customers flooded our stand and we were really in the public eye, selling our own games alongside established Level 9 adventures." Orders started to flood in and now Heyley was being mentioned in the same breath as giants like Infocom and Level 9.


The show also gave Tony and Howard the chance to establish important contacts with people such as Geoff Larsen of Larsoft and Dave Hitchins of Pres. Following the show, Heyley were to tie-up a deal with a major adventure publishing company to write a full graphic adventure for the Archimedes entitled **Rising Crime** with 60,000 words of text, 35k of puzzle data and a vocabulary of over 600 words – it's absolutely staggering with some of the best adventure graphics I have seen on any micro.

What of the future? Both Howard and Tony have grown with their adventures, offering different skills and freely criticise each other in attempts to produce the ultimate adventure which will perhaps provide their ultimate prize. Tony is currently working on his own machine code adventure writing system with a full multi-sentence parser and hopes to utilise it for a supernatural-based adventure for the new year.


Howard and Tony have youth on their side, experience under their belt and – Heyley promises to be with us for many years to come.

## VOLTMACE

Archimedes  
COMPATIBLE

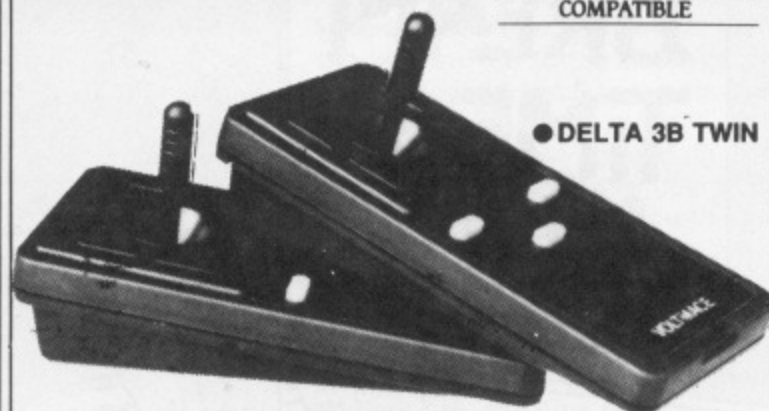

● DELTA 3B TWIN

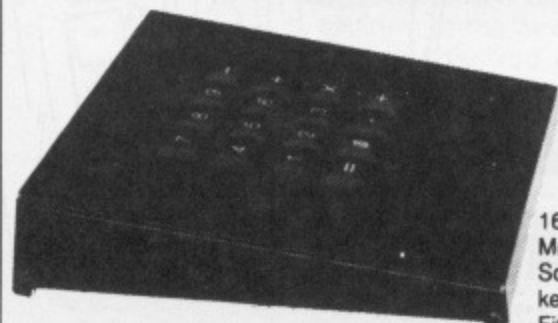

DATAPAD 16B  
£39.95

16 way keypad  
Metal case  
Software allows the  
keys to be defined  
Fits onto the user port

FOR A BBC A, B, B+, MASTER, ARCHIMEDES & ELECTRON PLUS 1  
DELTA 3B TWIN –

£21.95

2 joysticks wired to one plug.

As with all our joysticks they have the fast action sprung to centre return of the steel shafted nylon covered joystick. The light action makes them ideal to hold and the 3 fire buttons allow left or right-handed use.

DELTA 3B SINGLE

£14.95

A single joystick that in some ways can act as two. The custom made potentiometers are wired so that it will work as a left hand or right hand joystick. It can run some programs written for two joysticks and has two independent fire functions.

### TEAC 40/80 TRACK SWITCHABLE 5.25" DISC DRIVES

|   |         |
|---|---------|
| Bare Drives fitted with a switch on the front ..... | £80.00  |
| As above, cased with BBC leads .....                | £95.00  |
| As above, with power supply .....                   | £115.00 |
| Archimedes buffered interface .....                 | £22.00  |
| Watford D/D DFS kit .....                           | £44.85  |
| DFS Manual .....                                    | £6.95   |

### REPLACE 5.25" DRIVES WITH 3.5"

Panasonic 400/800k grey fronted 3.5" DS Drives on carrier plates to replace 5.25" Drives .....

£80.00

### UNBRANDED GUARANTEED DISCS

|                                  |        |
|----------------------------------|--------|
| 10 5.25" 40Tr Double sided ..... | £4.95  |
| 10 5.25" 80Tr Double sided ..... | £4.95  |
| 10 3.5" 135TPI – DS/DD .....     | £10.95 |

Disc-Drive head cleaner kits – Liquid type – non-abrasive 3.5" or 5.25" £3.95



All prices include VAT + P&P.  
Joysticks are available from  
your dealer or direct from us on  
(0462) 894410  
Special offers only available direct



Unit 9, Bondor Business Centre, London Road, Baldock, Herts. SG7 6NG. Telephone (0462) 894410



# SOFTWARE SCENE

## Gnome Ranger ... graphic delight

Price £9.95 (80 track disc) for Master and enhanced BBC B.  
Supplier: Level 9, PO Box 39, Weston-super-Mare, Avon BS24  
9UR.  
Tel: 0934 814450

IT came as a considerable shock to discover that until recently I had been living a sadly deprived existence. I first realised this when I reviewed Time and Magik, and this suspicion was reinforced as I became entranced with Lancelot – I had been suffering from a lack of Level 9. Final proof was supplied with Gnome Ranger – an outrageous exercise tinged with the usual Austin humour.

The positive reaction to Time and Magik encouraged the Austins to re-enter the BBC Micro market. We must ensure that they never leave it again, I had quite forgotten just how funny they could be.

Ingrid Bottomlow, a fetchingly Ramboesque picture of hirsute feminine charm, comes home from the Institute of Gnome Economics. Life down on the farm is transformed, as described most touchingly in The Gnettlefield Journal – a 48 page booklet supplied with the game.

At the end of this hilarious saga her desperate family consult a leprechaun and Ingrid is teleported into the wide blue yonder. Undaunted, she sets about returning home, helping distressed entities on the way. And so the game itself starts.

I often say that I am a text-only fan where adventures are concerned, but the standard of illustrations in Gnome Ranger is little short of superb and my resistance to adventures containing pictures is crumbling rapidly as a result.


The text quality is, naturally, superlative. Once again I must use some of my precious word allowance to illustrate because those who have not come across adventures of this quality may find it hard to believe. So, there follow two typical snatches from the first part of this three part offering:

*"The centaur introduced himself: 'Hello, my little rosebud. I am Capricorn Centaur, humble proprietor of this multifarious emporium. You may take anything your heart desires from this infinite variety by first giving me two other items in exchange'."*

To my mind this is far superior to merely being told that you can obtain items by barter. Similarly, how about this – as Ingrid encounters a Caledonian eagle:

*"She took up Ingrid carefully in her talons and carried her down to the base of the pinnacle. Before flying off she dropped a small silver bell into Ingrid's hands. 'If ye need any help, my dear, just give a wee ring on this and I'll be with ye before ye can say porridge'."*

inevitably, I had to ring the bell – and then enter Say

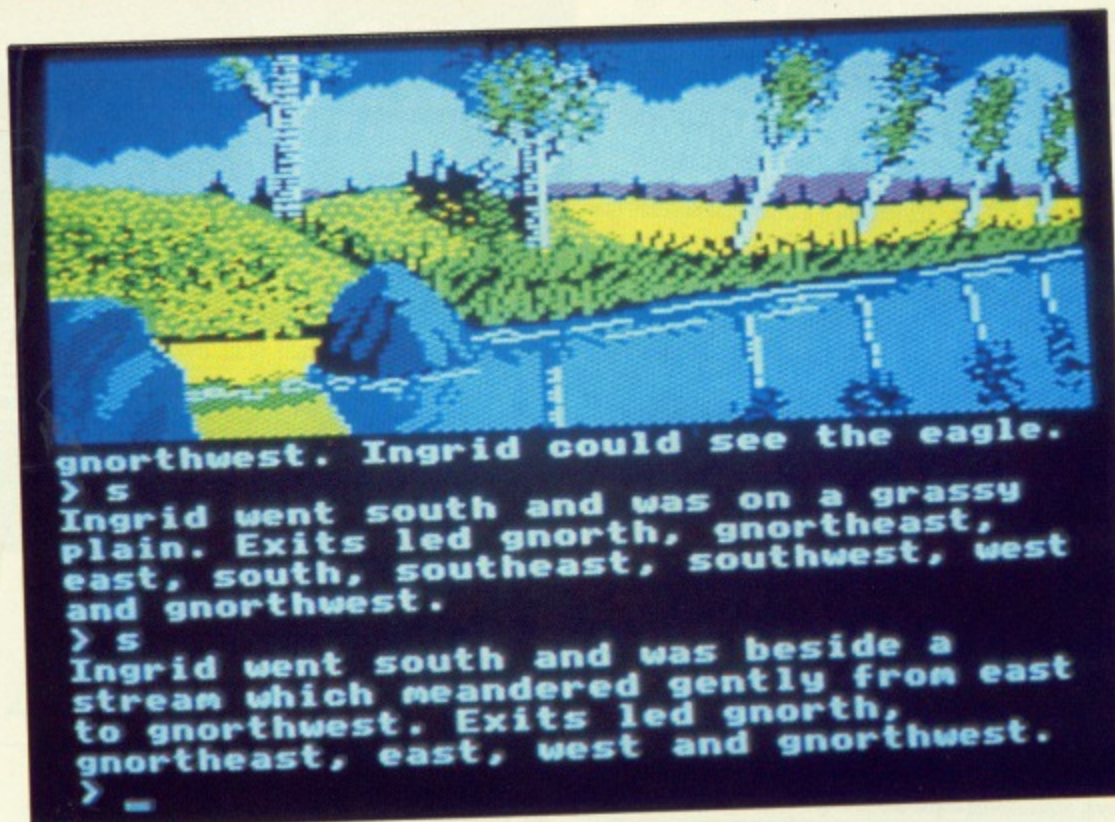

Two superb pictures from Ingrid's exploits



porridge – simply to see what happened: I don't think the eagle was being quite that literal was the response.

Part one of the adventure consists of a lovely long chaining puzzle. The ultimate task is to defeat a wicked witch and to achieve this a team of helpers must be recruited and put to work. This is not as easy as it looks but – as always – there are plenty of places to explore as you find your way around and begin to work out a plan of campaign.

Newcomers to adventuring should notice the importance of the WAIT command at various points in the game. For example, there is the need to coax a very shy nymph into doing your bidding, and patience is essential as you go about this – she won't come charging up to you from the depths of her leafy glade.

There is an interesting variant on the maze principle – go

to the marsh area carrying anything and a mist envelopes you. One way out is to drop everything – which doesn't help your progress much – but you still need to figure out another way to extricate yourself and still retain your possessions.

The high level commands mentioned when I reviewed Lancelot are available in Gnome Ranger and this is a great aid to later stages of the game. You should not, however, imagine that map making is now redundant – their greatest help comes after this.

The best way to use these commands is to explore everywhere painstakingly and thoroughly then work out what tasks need to be done. Now – having made notes – use the high level commands to work your way through each section of the adventure as economically as possible. The two most useful instructions – to my mind, at any rate – are GO TO location and FOLLOW entity. The latter clarifies matters most helpfully at times.

As always, a comprehensive hint sheet is available and a glance through it had me in stitches: it's almost as much a work of art as the game itself.

Mad Hatter

|                       |    |
|-----------------------|----|
| Presentation .....    | 9  |
| Atmosphere .....      | 9  |
| Graphics .....        | 9  |
| Value for money ..... | 10 |
| Overall .....         | 9  |



# SOFTWARE SCENE

## Star Fleet 1 ... reflective planning and hectic activity

Price: £24.95 (disc)

Requirements: Archimedes with PC Emulator

Supplier: Interstel/Electronic Arts, Langley Business Centre,  
11/49 Station Road, Langley, Slough, Berkshire SL3 8YN.  
Tel: 0753 49442

IT is hard to classify Star Fleet 1, a program that combines aspects of both management and strategy simulations. You need an Archimedes equipped with a PC Emulator to play it – which rules out the basic 305 machine – and a colour monitor is an advantage too.

The initial setting-up procedures are quite lengthy: First you have to register as a new player, then enter a password to gain proper access to the game and finally choose your own private password.

After that the universe is created before your very eyes. One of my reference books tells me that it took seven days. Well Star Fleet 1 took long enough for me to take the car out and fill it with petrol at my local garage and still have a minute or two to wait afterwards.

Although subsequent entry into the game is considerably speeded up, you'll need at least an hour of spare time to make it worth starting a playing session.

In the package are a couple of well-produced booklets which are essential reading before beginning to play the game properly. They are a mixture of background and instruction, and an hour spent absorbing the information given is well spent.

Your task is to rid your sector of the galaxy of assorted baddies – the number of enemies and time allowed varies from mission to mission. As your experience and expertise increases, so does your rank and the difficulty of the missions encountered if you are to receive further promotion.

You can seek out and destroy the enemy with torpedoes or disable them with phaser fire then capture and tow them to a star base where you can also replenish your supplies.



The game in action

My first mission saw me totally disabled and powerless, my second left my ship a raging inferno, I ran out of time on the third but the fourth and fifth I completed. I felt pathetically grateful to be told I was a hero and to be promoted from cadet to Lieutenant JG. That, I think, indicates something of the addictiveness of what at first sight appears a rather unprepossessing game.

The screen display is fairly simple and such graphics as

are present are relatively crude. Star Fleet 1 is no Zarch, yet it has the compelling quality of a first-rate idea well implemented.

The game is well bug-proofed. Irrelevant entries are trapped and excellent use is made of the function keys to provide the many controls of your ship. A mixture of real-time activity and reflective planning are required to master this program – and the activity can get pretty hectic on occasions.


If you like management and strategy simulations this is for you – I'm just off to have another session.

Mad Hatter



Searching a sector

|                       |   |
|-----------------------|---|
| Presentation .....    | 9 |
| Atmosphere .....      | 9 |
| Graphics .....        | 5 |
| Addictiveness .....   | 9 |
| Value for money ..... | 8 |
| Overall .....         | 8 |

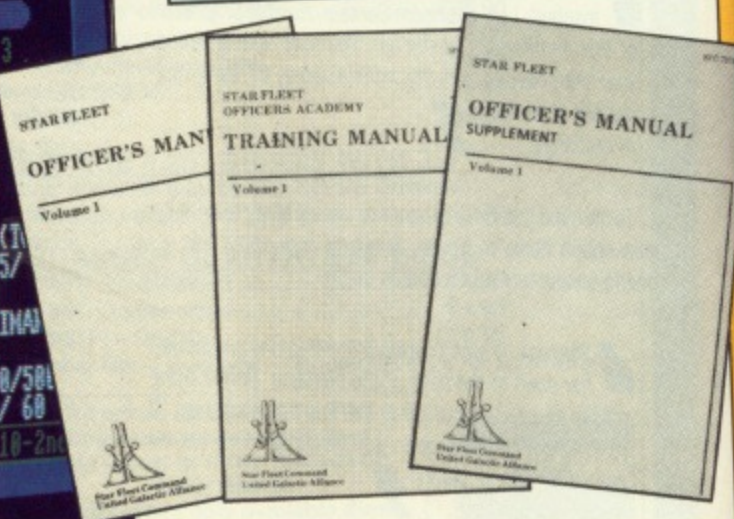



# SOFTWARE SCENE

## Zenon ... nice graphics, shame about the plot

Price: £4.99 (5.25in disc), £6.95 (3.5in disc), £4.95 (tape)  
Supplier: Impact Software, Neepsend House, 1 Percy Street,  
Sheffield S3 8AU.  
Tel: (0742) 769950

DURING the next few months Impact Software is planning to release a number of top quality games at budget prices. Hot on the heels of the excellent Clogger comes Zenon – a one or two player arcade style action game with 250 levels.

The packaging sleeve reveals that the game has no real plot. All you are told is that you have to penetrate all 250 levels of the game – a feat that would require an extraordinary amount of stamina and concentration. Little wonder the manufacturers have claimed that it has yet to be achieved.

Having begun to play, another reason why I would not succeed in penetrating to the heart of Zenon soon became apparent. The sad fact is that the game is repetitive and boring. It failed to hold my attention for very long and I soon began to lose interest in running, or flying along, zapping the steady stream of creatures barring my path to the next level.

This is a shame because the amount of time that must have been spent in designing the sprites for the many different aliens, androids, fireballs and missiles that are encountered has been wasted. I'll probably never get to see half of them.

I also began to get the feeling that I'd played something very similar before. I couldn't remember what it was at first, but looking through my collection I dug out Rampage, which seems to have more than a passing similarity – and is a much more interesting implementation.

The mechanics are reasonably simple: You are beamed down to the surface of the planet Zenon with a Repeat laser

and jetpack. Once you have arrived, the screen begins scrolling from right to left, bringing on a steady stream of creatures, missiles and other objects which you must either destroy or dodge by flying over or running under them.

Contact with anything hostile drains you of energy, though for the first few seconds after arriving you are immune to damaging effects. This gives you time to make yourself comfortable and find the keys you need to play the game. The two player option allows you and a friend to battle against the creatures simultaneously. Fortunately, your weapons do not affect each other, and I found that you tend to stay alive a lot

longer with a friend to back you up. Once your energy is depleted you lose a life, and losing four means the end of the game. Occasionally you encounter a weapon cannister which, when touched, exchanges your current device for one contained in it. This can sometimes increase your potential for wreaking damage – but it can also work the other way.

It is possible to restore lost energy by either avoiding taking damage, thus allowing your spacesuit to recharge slowly, or by collecting the energy cells which occasionally pass by. To complete a level you must negotiate a distance equivalent to about 10 screen widths and this allows you to progress on to the next – which is slightly more difficult and contains new creatures to zap.

Zenon has all the sounds you would normally associate with this type of game, but if you like a bit of peace and quiet you can turn them off. The same applies to the music, which, you can have running continuously as you play.

I don't rank this as one of the best games I've played, but then at about half the normal price of many others, I didn't expect it to be. However, if Impact can produce more games at the same price, with the same excellent quality graphics with more to them than just zapping aliens it might be on to a nice little earner.

And we impoverished gamers might be on to a good source of entertainment which doesn't leave us with a big hole in our pockets.

Desmond



|                       |   |
|-----------------------|---|
| Sound .....           | 7 |
| Graphics .....        | 8 |
| Playability .....     | 5 |
| Value For Money ..... | 8 |
| Overall .....         | 7 |

## Commando ... the heat of battle

Price: £2.99  
Supplier: Encore, Eastern Avenue, Lichfield WS13 6RX.  
Tel: 0543 414885

COMMANDO is the officially licensed home micro version of the arcade-machine game of the same name. For the information of anyone who has not ventured into an amusement arcade in the last few years, or who missed the game on its initial release for the BBC Micro, Commando is another of the one man against the odds combat games that have become so popular in recent years.

You are cast in the role of Super Joe, the commando of the title. Armed only with a submachine gun and half a dozen grenades, you must penetrate the enemy defences and destroy the fortress. Easy to describe, much less easy to accomplish.

Like Tynesoft's Saigon, which I reviewed in the July 1988 issue of *The Micro User*, Commando features a number of different scenes. Once you have fought your way from the bottom of one screen to the top, it scrolls down to reveal a new set of hazards.

Every new screen brings a fresh horde of enemy soldiers

streaming from all directions – to fall beneath your machine gun and your grenades come in handy when their numbers become too great. But remember that they are equipped with similar weapons. One stray bullet or grenade can prove fatal, so keep a sharp eye about you.

Fans of Superior's Play It Again Sam series will know that Commando also features on the Sam 3 compilation. However there is one difference between the two versions: When playing the game it is often difficult to determine from the screen display when you have been killed. Superior has added a blinding white flash to herald your call-up to the ranks of the ex-commandos. However, this is an exact re-release of the original version – indeterminate demise and all.

I have never been particularly impressed by the BBC Micro version of Commando. Its main drawback is that it comes off very badly from the dilemma that faces every programmer – weighing up the pros and cons of each screen mode and the conflicting features of screen resolution, size and available colours.

Commando runs in four colour Mode 5 and I found that many graphic features tended to merge into one another. Although I get the impression that battlefields are pretty drab



places, with the same four colours Saigon seems to generate an impression of far greater vibrancy.

Whether you go for Play It Again Sam 3 or this stand-alone Commando depends very much on how many of the other games featured on Sam 3 you already own. But either way Commando gives you the chance to play the all-conquering superhero. If you're a fan of shoot anything that moves games you could do worse than this one.

Hac-Man

|                       |   |
|-----------------------|---|
| Sound .....           | 5 |
| Graphics .....        | 6 |
| Playability .....     | 6 |
| Value for money ..... | 6 |
| Overall .....         | 6 |



# SOFTWARE SCENE

## Jet Fighter ... yawn from the grave

Price: £14.95  
Supplier: Minerva Software, 69 Sidwell Street, Exeter EX4  
6PH  
Tel: 0392 437756

I WAS really looking forward to a flight simulator on the Archimedes, so I eagerly grabbed Jet Fighter and booted it up without looking at the sleeve – only to suffer a terrible disappointment. It isn't a flight simulator, it's just Jet Pac.

Why can't we have something original on the Archimedes? All we've got are continual re-hashes of old 8 bit games plus a couple of vertical scrollers. What's going on?

Moan finished... on to the game. The scenario is that you, space-suited humanoid that you are, are stuck on a strange planet. Pieces of your spaceship are scattered about on various platforms that hang mysteriously in air – in exactly the way that bricks don't.

Your first task is to assemble the ship, and this is not too difficult in itself. Unfortunately the denizens of this particular planet belong to the one-touch-death variety and they float around in various patterns. So from the planet's surface you jet off and fly around avoiding trouble and generally having a good time.

Having re-assembled the ship you need to refuel it. Well, someone up there must like you because he – whoever he is – keeps dropping little canisters marked Fuel down from the sky. However, you have to keep moving around looking as

sometimes they come to rest on the previously mentioned platforms.

Meanwhile you occasionally find other odd items dropping down – Eccles cakes, a letter from him upstairs and numerous other things. Collecting them adds to your score but doesn't help you get off the planet.

Once you've collected enough fuel you can walk behind the rocket and up you go – only to land again for the second level. This time you only need to refuel, but the game continues in a similar vein with more baddies appearing – like the homing owl head and the small but deadly unmoving invincible blob.

All the sprites are well animated and quite detailed but the colour choice is rather garish. The overall playing area is several times larger than the screen and the scrolling is very smooth.

Control is via the mouse and very easy, but the screen



background is a set of stars which never move. This means that unless there happens to be something else on the screen you can't tell how fast you're moving, and as such it's very easy to bump into the baddies.

Perhaps I'm too old for this game and youngsters – say 5 to 10 – might find it fun. Although well implemented it lacks any staying power and it certainly didn't have me running back for more. Considering the high quality of Orion, also by Minerva, I'm surprised this made it to the shelves at the same price.

Lazarus

|                       |   |
|-----------------------|---|
| Sound .....           | 6 |
| Graphics .....        | 7 |
| Playability .....     | 8 |
| Value for money ..... | 9 |
| Overall .....         | 7 |

## Joe Blade II ... tricky beat-'em-up

Price: £1.99  
Supplier: Players, Mercury House, Calleva Park, Aldermaston,  
Berkshire RG7 4QW.  
Tel: 07356 77421

JOE Blade II is, unsurprisingly, the sequel to Joe Blade, a game which I thoroughly enjoyed when it was released a short while back. This new version is very similar to the original and features that teenage pin up and pop idol, media celebrity, hero of the people, defender of the flag and helper of those less fortunate than himself – or so the cassette inlay claims – Joe Blade.

In this latest romp you are again in control of the do-gooder and your task is to clean up the streets of London circa 1995. No, you're not a garbage collector – though you'll find several dustbins which can be collected on your travels – you are a one man police force out to reduce the rapidly increasing crime rate.

The city has gone to the dogs since 1989 and the place is crawling with muggers, skinheads, punks and the like. Anyone who ventures out into the backstreets and alleyways is likely to be pounced on and given a severe beating, not to mention being robbed to boot.

Your task is to patrol the city keeping a sharp lookout for shady characters and signs of trouble. Any punks you come

across on your beat must be disposed of by leaping up Kung-Fu style and booting them in the head. They then disappear in a cloud of dust, but there always seem to be more just around the corner.

The aim is to do away with 60 or so punks and rescue 16 citizens. You'll come across the latter every now and then as you walk around.


Like the original game, the graphics are superbly detailed and the playing window – which occupies the major part of the screen – shows a 3D side-on view. You can walk left and right and through alleyways into and out of the screen. As you move on to the next screen it rapidly flicks up – there's no scrolling here.

Apart from punks, you'll come across clocks which give you extra time to clean up the city – you've got just 10 minutes – and dustbins, for which I've yet to find a use.

On encountering a citizen the screen clears and up pops one of four types of puzzle. All involve re-ordering a mixed up list of the numbers one to four. Sounds easy, but you can only swap certain pairs of numbers, and this pair is rapidly changing. To make things even harder the numbers are displayed as strange hieroglyphics and there's a time limit too.

If you don't succeed you are dead meat and have to start all over again. I found this part extremely difficult and it spoils the game slightly.

Joe Blade II is a bit too like the original game in many respects and if you have that I would suggest you try this

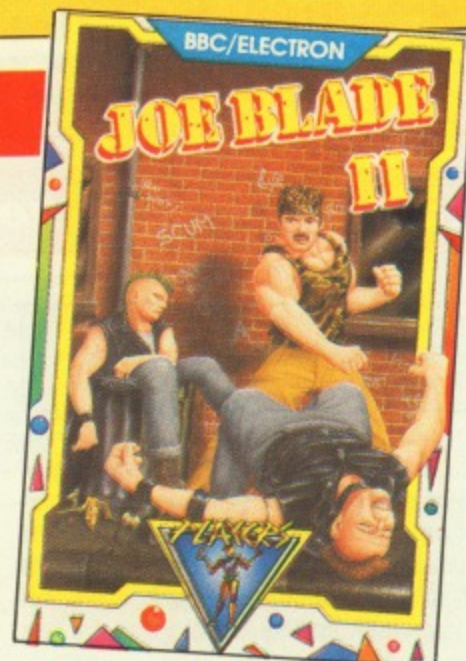

version before buying it. If however, you haven't seen Joe Blade in action it's an entertaining – if at times frustrating – game that will keep you amused for many an hour. Well worth a look.

Roland Waddilove

|                       |    |
|-----------------------|----|
| Sound .....           | 7  |
| Graphics .....        | 10 |
| Playability .....     | 8  |
| Value for money ..... | 9  |
| Overall .....         | 8  |



# SOFTWARE SCENE

## Play it Again Sam 5 ... destined for the charts

Price: £9.95 (tape) £11.95 (disc)  
Supplier: Superior Software, Regent House, Skinner Lane,  
Leeds LS7 1AX.  
Tel: 0532 459453

SUPERIOR Software's policy of buying up other companies or their software is having a noticeable effect upon the quality of its Play it Again... compilations. Its already impressive games portfolio has been swollen with top titles from Alligata and Micro Power – some of which are found in this volume.

I was delighted to see that Micro Power's **Imogen** had been included – it has been a favourite of mine ever since I reviewed it many years ago. Imogen is a wizard who lost a few of his marbles as a result of a disagreement with a dragon.

For his own safety, and that of the local community, he was incarcerated in a dungeon by the great wizard. He must earn his freedom by solving the dungeon's many puzzles and collecting the 16 pieces of the Spell of Release.


One of Imogen's party pieces is transformation – he can



Exterminating insects in Bug Blaster

change from wizard to monkey to cat at will. Each form has a different ability: The wizard can use objects, the monkey is an expert climber and the cat can leap great distances. Your desired form is selected using a series of icons at the top of the screen.

There is no time limit, the only stipulation being that the 16 sections must be completed using no more than 150 transformations. If this seems generous let me assure you

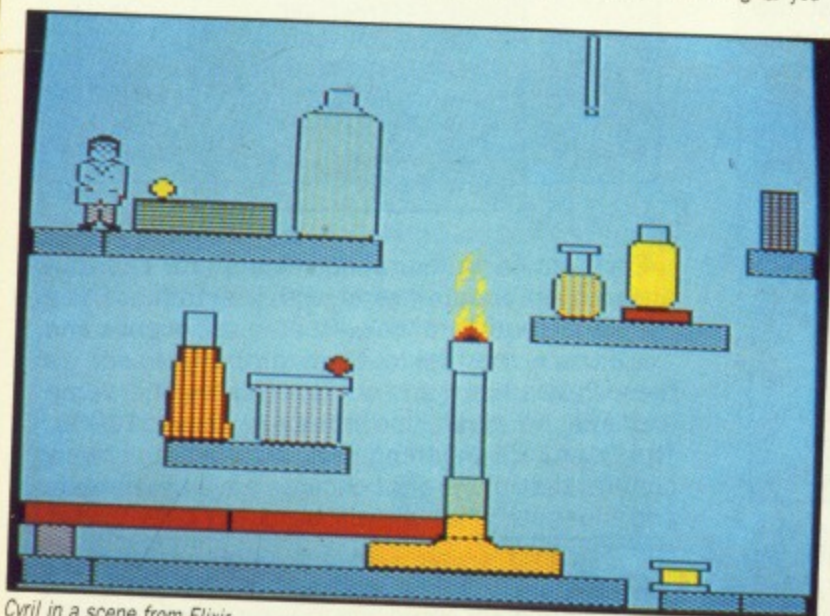

Cyril in a scene from Elixir

that it isn't. A few wasted changes as a result of badly timed leaps can easily mean the difference between success and failure.

Puzzles range from traditional adventure game brain strainers to obvious, but difficult to execute, tests of manual dexterity. I would also add that a warped sense of humour is a distinct advantage when playing Imogen.

Having got themselves the basis of a superb game, Micro Power blended these puzzles with graphics of a quality that had never before been seen on the BBC Micro. High resolution monochrome characters were animated with a degree of grace and realism that brought them to life. Imogen was, and still is, in a class of its own in the arcade/adventure field.

**Elixir** is an arcade/adventure game from the opposite end of the quality spectrum – a most surprising fact as it is the only one of the four programs to come from the Superior stable. This tedious adventure revolves around the exploits of Cyril, the shrunken chemist, as he strives to locate the elixir that will restore him to his former stature.

Cyril clambors about shelves on which stand bottles and jars of pills and potions, the colour of a pill indicating the effect it will have upon Cyril. His snail's pace meanderings are interspersed with fatal falls, killer flash bulbs, acid drips and a runaway circular saw.

Considering the quality of the other programs in the package I would be very surprised if this one is played at all.

Leaving the arcade/adventure field we take a stroll down memory lane to an arcade game of yesteryear. **Bug Blaster** from Alligata was, and still is, a first rate version of that insect extermination game – Centipede.

Winding its way through a field of mushrooms is a giant centipede – and your task is to blast this Mega-myriapod before it gets you.

The rate of the beast's descent is determined by how many mushrooms it collides with. Each collision is followed by a change in horizontal direction and one step down the screen and the mushroom population increases with each new screen.

Other hazards come in the shape of falling fleas, bouncing spiders and an assortment of other members of the insect family which traverses the screen at regular intervals. Bug Blaster is a rave from the grave that is still capable of setting the pulse racing as you fight for survival against mother



Attacking the fortress

nature's rejects.

The final game of the compilation is one which left me open-mouthed when I first saw it. **Fortress** is the only version of Zaxxon that was ever written for the BBC Micro.

For those of you who are too young to remember it, Zaxxon was a diagonally scrolling zap and blast game that had the same effect in the arcades as After-Burner has today. It was a game that you queued up to play.

Flying the latest X3 Starfighter, you must penetrate the enemy's high security defence system. To do this you have to fly at ground level, skimming over walls and squeezing through gaps in electric fences.

Opposition is provided by missile silos, ground-based blasters – and – most difficult of all – enemy fighters. These fast-moving craft respond instantly to your every movement, resulting in many, many, head-on collisions before you learn how to avoid them.


Not being the most economical of aircraft, the X3 has to be refuelled at regular intervals and this is achieved, quite illogically, by blasting the enemy fuel dumps as you advance through the base.

I am sure that no other software company bothered to compete with Amcom's Fortress because it was simply the best arcade game at that time.

With the exception of Elixir, Play it again Sam 5 is yet another top quality Superior Software release that is destined for the charts.

Carol Barrow

|                       |   |
|-----------------------|---|
| Sound .....           | 8 |
| Graphics .....        | 9 |
| Playability .....     | 9 |
| Value for money ..... | 9 |
| Overall .....         | 9 |

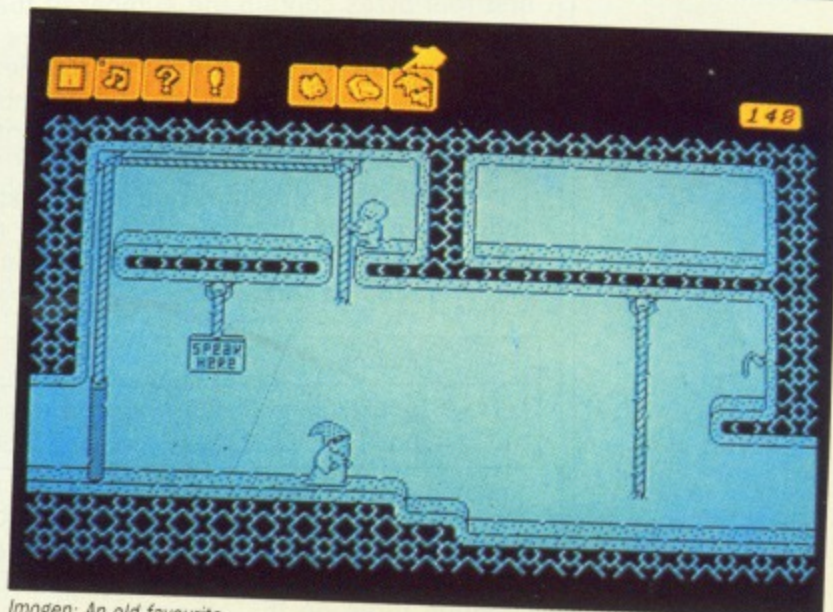

Imogen: An old favourite





## Taking up the options

*Ken Down makes a selection from his new menus*

**W**E looked last month at how to get our menu on to the screen. Now it's time we worked out a method of decoding it – a way of telling which option was selected and from which menu or sub-menu. In Basic II it's possible to set the 6502 processor's registers by using the resident integers *A%*, *X%*, *Y%* and *C%*. The values in these variables are transferred to the *A*, *X* and *Y* registers and the Carry flag.

It's possible to do much the same sort of thing in Basic V but in a more convenient way using the SYS command. Any variables that follow the call number, or name, are assigned to the Risc chip's registers with the first going to *r0*, the second to *r1* and so on. Not only that, but the full 32 bit number is transferred, in contrast to the 8 bit 6502 registers.

As well as returning a value to the variable *result%* the Wimp Manager routine, *Wimp-Poll*, also stores information in the area of memory the address of which is in *r1* – *poll%*.

When you click the select button over a menu option the Wimp returns a result of nine. It also sets up the parameter block *poll%* so that the first four bytes contain the number of the option in the first menu. The second four bytes contain the number of the selected option in the second menu, and so on. When no further sub-menus were activated, the final four bytes contain the value -1.

In the sample program published last month option four from the main menu had no sub-menus attached. If you click on this option *poll%* will be set up as follows:

| Address        | Value |
|----------------|-------|
| <i>poll%!0</i> | 3     |
| <i>poll%!4</i> | -1    |

You will notice that the option numbers returned in *poll%* start at zero, so what we have called option one is called zero by the Wimp.

Option three on the other hand has one sub-menu. Select this and *poll%* is returned with

offset values as shown in the following table:

| Address        | Value |
|----------------|-------|
| <i>poll%!0</i> | 2     |
| <i>poll%!4</i> | 0     |
| <i>poll%!8</i> | -1    |

By checking the contents of *poll%* we can work out which option from which menu has been chosen. We can also deal with the situation where there are sub-menus but the user has accidentally – perhaps – clicked the main menu. So let's put in a line to direct the program to the menu decoding procedures:

```
310 WHEN9:PROCmenuselect
```

The *menuselect* procedure also uses the CASE statement:

```
1600 DEFPROCmenuselect
1610 CASE!poll%OF
1620 WHEN0:PROCzero
1630 WHEN1:PROCone
1640 WHEN2:PROCTwo
1650 WHEN3:PROCThree
1700 ENDCASE
1710 ENDPROC
```

Each option in the menu results in a call to a different procedure and it's the task of the individual routine to look after the sub-menus and make sure they have been properly used. As these procedures are not specific to the Wimp they will be given line numbers above 10000. They don't do anything very significant, merely confirm that the proper choices have been made and illustrate what we will be doing later in this series.

In view of the fact that option one from the main menu is disabled you may be wondering why there is a *PROCzero*. The reason is that, if you choose *Subsub3*, *PROCTwo* replaces the *or* in the



main menu string with a full stop and re-creates the menu block with a call to FNcreatemenu. Next time you click the menu button and call up the menu you will find that option one is enabled.

Using the same method we could disable some options that were enabled or transfer the tick from one option to another.

So here are the procedures called by the menu – they aren't terribly exciting:

```
10000 DEFPROCzero:VDU4:PRINTTAB(10,16)"At last!"
VDU5:ENDPROC
```

There is really nothing to say about this except to comment that all screen operations are usually carried out at the graphics cursor so you wouldn't normally use VDU4 in the middle of a Wimp program – these routines are just for demonstration purposes. Here's the next one:

```
10100 DEFPROCone:VDU4:IFpoll%4=-10R(poll%4=1
ANDpoll%8=-1)THEN
10110VDU7:PRINTTAB(10,16)"Invalid selection"
10120ELSE
10130IFpoll%4THEN
10140PRINTTAB(10,16)"Sub1"
10150ELSE
10160IFpoll%8=0PRINTTAB(10,16)"Subsub1"
10170IFpoll%8=1PRINTTAB(10,16)"Subsub2"
10180IFpoll%8=2PRINTTAB(10,16)"Subsub3":i%=1
NSTR(menu$,"@Option 1"):MID$(menu$,i%,1)=".":
j%=FNcreatemenu(menublock%,menu$)
10190ENDIF
10200ENDIF
10210VDU5
10220ENDPROC
```

Notice how line 10100 checks to make sure that the correct sub-menu has been clicked on and the use of the multi-line IF statements in this procedure. They certainly make life easier.


Line 10180 makes option one available by using the MID\$ statement as an assignment to alter the contents of menu\$. After making this alteration it is necessary to re-create the menu information block, so the program calls FNcreatemenu again. Next type:

```
10300 DEFPROctwo:VDU4:IFpoll%4=-1THEN
10310VDU7:PRINTTAB(10,16)"Invalid filename"
10320ELSE
10330IF$mtext%=""PRINTTAB(10,16)"No name"ELSE
PRINTTAB(10,16)$mtext%
10340ENDIF
10350VDU5
10360ENDPROC
```

This procedure not only checks that you have clicked on the proper input box but also ensures you haven't deleted the default filename. By now you have probably discovered that when you move the mouse pointer over the input box a strange, vertical cursor called a caret appears. It can be moved left and right with the cursor keys and the delete key will kill text to the left and Copy deletes to the right. From here we move to:

```
10400 DEFPROcthree:VDU4:PRINTTAB(10,16)"A good
choice":VDU5:ENDPROC
```

When this is typed in, try it and see what happens

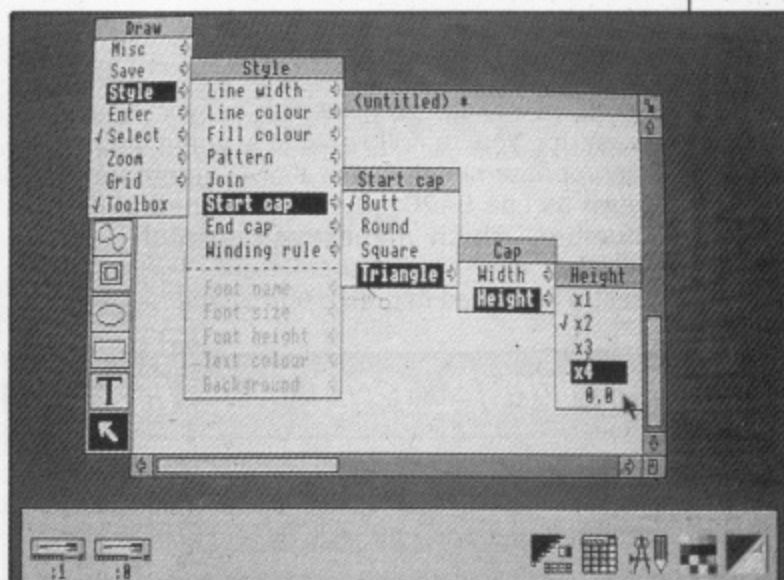

Windows like this can easily be created using the techniques in this series

## SPRITE ACTION

Prepare two sprites using the sprite editor from the utilities folder on the Welcome disc – you can find this either by using the DeskTop or by entering:

```
CHAIN$Utilities.SEdit'
```

The program operates on sprites in the system sprite area, so if it is run from the DeskTop it will load up those. You can either remove them one by one using the Delete option or press Reset then type:

```
*SNEW
OLD
RUN
```

Redefine the first eight colours to black, red, green, yellow, blue, purple, cyan, white. Then create two sprites called stop and warn in Mode 12 with the following sizes:

| Sprite name | Width | Height |
|-------------|-------|--------|
| stop        | 45    | 23     |
| warn        | 46    | 23     |

You can design them however you want or use the DeskTop originals modified to the right size. Make the sprites' surroundings transparent, otherwise they will blank out the background colour on which they appear. Details of how to do this are found on page 169 of the User Guide where it talks about defining a sprite mask.

When you've finished, make sure your work disc is in the drive and save the sprites under the name MoneyIcons, which is the file the program looks for in line 40.

when you click the various menu options using the left hand – Select – button.

As I promised last month, here's a simple routine to calculate the value for the icon flag

**Turn to Page 38 ►**



## ◀ From Page 37

word. It makes extensive use of <<, making it easy for you to follow what's going on. Where appropriate simply press Y or N. In other places, such as line 5420, you are prompted to INPUT a number, which means you should type the number and then press Return. The final flag result is printed in both decimal and hex. You can

## MASKING THE WIMP\_POLL ROUTINE

Various bits of the 32 bit mask prevent a particular poll option being returned. To calculate the correct overall mask value choose the items you don't want signalled and add up the individual values.

| Bit number | Value | Masks out                     |
|------------|-------|-------------------------------|
| 1          | 2     | Re-draw window request        |
| 4          | 16    | Pointer is leaving a window   |
| 5          | 32    | Pointer is entering a window  |
| 6          | 64    | Mouse button has been pressed |
| 8          | 256   | Key has been pressed          |

The other bits should theoretically mask other operations but don't.

include the routine into your programs for easy reference:

```

5400DEFPROCiconflags:q%=0:t%=FALSE:h%=FALSE:f
ont%=TRUE
5410PRINT"Does the icon contain text? Y/N";g
%=GET:IFg%=89q%+=1:t%=TRUE
5420PRINT"Is the icon a sprite? Y/N";g%=GET
:IFg%=89q%+=1<<1
5430PRINT"Does the icon have a border? Y/N";
:g%=GET:IFg%=89q%+=1<<2
5440IFt%PRINT"Is text centred horizontally?
Y/N";g%=GET:IFg%=89q%+=1<<3:h%=TRUE
5450IFt%PRINT"Is text centred vertically? Y/
N";g%=GET:IFg%=89q%+=1<<4:5460PRINT"Is the b
ackground filled? Y/N";g%=GET:IFg%=89q%+=1<<
5
5470IFt%PRINT"Is the text font anti-aliased?
Y/N";g%=GET:IFg%=89q%+=1<<6:font%=FALSE
5480PRINT"Will the icon need your help for r
edrawing? Y/N";g%=GET:IFg%=89q%+=1<<7
5490PRINT"Is icon text indirected? Y/N";g%=
GET:IFg%=89q%+=1<<8
5500IFt%IFNOTh%PRINT"Is text right justified
? Y/N";g%=GET:IFg%=89q%+=1<<9
5510PRINT"Enable multi-selection with ADJUST
button? Y/N";g%=GET:IFg%=89q%+=1<<10
5520INPUT"INPUT Button type (5 if not known)
";b%:q%+=(b%<<12)
5530INPUT"Exclusive Selection Group (0 if not
-15 max)";b%:q%+=(b%<<16)
5540PRINT"Invert icon when selected? Y/N";g
%=GET:IFg%=89q%+=1<<21)
5550PRINT"Icon shaded and disabled? Y/N";g%
=GET:IFg%=89q%+=1<<22)
5560IFfont%INPUT"Foreground colour? 0-15";b%:
q%+=(b%<<24)
5570IFfont%INPUT"Background colour? 0-15";b%:
q%+=(b%<<28)
5580IFNOTfont%INPUT"Font number";b%:q%+=(b%<<
24)
5590PRINTq%,"q%:ENDPROC

```

Notice that line 5490 asks you if the icon text is

indirected. Using the method I showed you last month the longest menu option possible is 11 characters. However it is possible to store its text elsewhere and change the information chunk to contain the address of the text. PROCinit already has a block of memory set aside to hold the text – *textblock%*.

In order to keep track we need to pass another variable to FNcreatemenu. This means that the definition of FNcreatemenu has to change and also all calls to it:

```

1200DEFNcreatemenu(mb%,t$,tb%)
1360t$=MID$(t$,INSTR(t$,")+1):submenu%=FNc
reatemenu(nextmenu%,new$,nexttext%)
5240j%=FNcreatemenu(menublock%,menu$,textblo
ck%):ENDPROC
10180IFpoll%18=2PRINTTAB(10,16)Subsub3:=1
NSTR(menu$,*Option 1):MID$(menu$,1,1)=.
j%=FNcreatemenu(menublock%,menu$,textblock%)

```

In the same way as we calculated the address of *nextmenu%* we need to work out the address of *nexttext%* based on the number of items in each menu:

```

1230nextmenu%=mb%+28+24*numofitems%:nexttext%
=tb%+24*numofitems%

```

Instead of storing the menu option string at *ptr%+12* with:

```
$ (ptr%+12)=t$
```

we need to store the text at *tb%* and put its address in *ptr%+12*. Notice that *tb%* is then increased by 24, thus allowing you a maximum of 23 characters per menu option. If you wish to alter this, either to allow longer or shorter strings, you should change the number 24 in both 1230 and 1500:

```
1500$tb%=LEFT$(t$,g%-1):ptr%+12=tb%:tb%+=24
```

The final step is to inform the Wimp that the menu text is indirected. We change the flag byte from &10021 to &10121 in line 1550:

```
1550ptr%18=&101210Rshade%0Rwriteable%<<60R0<
<240R7<<28:REM last two are foreground and ba
ckground colours

```

When you run the program now everything should work exactly as before. The difference will come if you change one of the menu options to something like Balance Sheet for May. At first only 11 or 12 characters will appear because the menu width set in line 1290 is too narrow. A good rule of thumb is to set the width to (length of longest string)\*16+24. In our example this would mean a width of 360.

● Next month we'll start to look at handling icons.



## Jan 6 to 12

### T/Mou06 SWMouse SWRMice SWTest

The Opcodes series – designed to help you get more from your micro – concludes its study of rodents with an explanation of how to save memory by monitoring the movements of a mouse from sideways ram.

### Prog1 to Prog8

Lost at sea? Find out all about navigation lights and buoys, as seen from the bridge of a sailing boat. If you enjoy sailing, this important program could save your life.

### Cur/M Cur/T Cur/B

Many people find the unalterable flash rate of the cursor can cause problems like headaches while

game of Chinese Chess against the micro or a human opponent. From the May 1988 issue of *The Micro user*.

## Jan13 to Jan 19

### T/Pen00 PenTest RHBoot

The informative Opcodes series turns its attention to the use and control of a light pen from within your own software. This – the first in the series – introduces the basic principles of pen design.

### Master Emulator

A major package, in rom image format, to make your standard BBC B emulate a Master. This superb utility gives many of the features not normally found on the original machine.

Facilities include additional

and other text files can be read on screen or output to your printer as required.

### Notes for schools

Notes for the current schools programme *Scene*.

### Dirk

Improve your ADFS disc handling with this fully recursive directory kill utility from the May 1988 issue of *The Micro User*.

## Jan 20 to Jan 26

### T/Pen01 Offset

Module one of the Opcodes light pen course introduces the software techniques needed to find the co-ordinates of the light pen's position on the screen. However, nothing is ever simple. Some of

### TTXPrnt

Another chance to receive the Ceefax page printout utility for the ATS rom. This routine will work with almost any printer, producing the text of the currently displayed page. A version specifically for use with the Integrex Colourjet printer producing full colour will be available from Tele-Software in the near future.

### Teachers' notes

Notes to support the BBC Educational programme *Scene*.

### Beasty

Play Beastroids – an intriguing version of the classic arcade game – from the June 1988 issue of *The Micro User*.

## Jan 27 to Feb 2

### T/Pen02 IOINTER

More from the Opcodes series explaining the use and control of a light pen. Each time the electron beam of the screen passes the end of the pen an interrupt is generated within the micro. T/Pen02 shows how to use this interrupt to find out which part of the screen the pen is pointing at.

### Timer Tmr/Inf

A routine to keep track of your recordings – on video, cassette or reel-to-reel. Timer calculates the duration of recordings from the tape counter and vice-versa.

### TVAlign TVInfo

Test your monitor or TV with TVAlign which produces a series of screen displays to test the characteristics of your VDU. An experienced TV engineer will be able to use these tests to adjust your set to optimum performance.

### Econet Teletext File Server

Another chance to receive the Teletext file server for Econet systems. This allows any station on an Econet network to receive teletext pages with just a single teletext adapter on the system. Teletext can even be accessed across an Econet bridge.

### Teachers' notes

Notes to accompany the schools broadcasts *Scene*, *Introducing Science Extra: Computers* and *Secondary Science*.

### Patrol Moon2

Can you collect enough power crystals to escape from this hostile planet? Try your hand at arcade action from the October 1988 issue of *The Micro User*.



Software is currently transmitted for a period of one week. Files are available from Friday afternoons to the following Thursday evening, with the exception of the Issues teachers' notes which, due to their topical nature, are available from the Wednesday morning to the following Tuesday evening during the week of transmission. The details are provisional only.

they're using word processors. This utility slows the flash rate down and reduces the risk of these problems, making the software more manageable.

### Giant

An experiment in broadcasting software for the Hybrid Music 500 synthesiser. This program is not compatible with the 5000 system, but if enough people are interested further music files may follow.

### AuNotes

A program to allow schools to receive teachers' notes with the minimum of fuss and effort.

### Teacher's notes

Notes to accompany the schools programme *Scene*.

### Chess1 Chess2

Enjoy a quiet but fascinating

commands such as \*CONFIGURE, \*ROMS, \*UNPLUG and over 20 further utilities. Many commands not found on the Master are also included, for example \*PRINT-BUFFER which sets up a printer buffer in memory, so Master owners will also find the routine invaluable.

A full User Guide is included with the broadcast, giving all the information necessary to get the most from your micro.

### Switch Switch2

Exercise your mind with this intriguing puzzle. Although the principle of Switch is simple enough, it takes ingenuity, patience and very careful thought to solve.

### TextRd

A utility to help you read any text file – including those broadcast on Telesoftware. Teacher's notes

the problems of using one with the BBC Micro are also discussed.

### Colour1 Colour2

Use your Epson FX black and white printer to give you a full colour dump of any screen image. Impossible? Armed with a few different coloured ribbons – readily available – Colour1 will produce superb and stunning full-colour images of your screen displays. Why spend a fortune on colour printers when these programs will produce the same result?

### Break T/Break

Have you ever accidentally pressed Break and lost all your hard programming work? Well, here's the solution. This routine will protect your software from corruption and restore the program and variable values if Break is accidentally pressed.





# The very last Word?

*Ian Whitmore investigates  
Acorn's successor to View*

Product: 1st Word Plus  
Price: £91.94  
Supplier: Acornsoft, Acorn Computers Ltd, Fulbourn Road, Cherry Hinton, Cambridge CB1 4JN  
Tel: 0223 214411

**B**EFORE the launch of the Archimedes, Acorn considered View to be the definitive BBC Micro word processor. But moving from the 8 bit into the big league has meant a big jump in concepts – and 1st Word Plus is the system for the Archimedes.

The word processor itself has been around for quite a while on 16 bit micros using the Gem Wimp environment. Acornsoft arranged with GST – who wrote the original – to port it over to the 32

bit Archimedes. It is supplied on two unprotected discs. The first contains the word processor and mail merge and the other provides utilities such as printer driver, hard disc installation program and dictionary facilities.

The manual is 245 pages long in the same style as the one supplied with the Archimedes – with large unwieldy pages which are often virtually empty. However the information is clear and gives a good tutorial-based introduction to word processing in general, as well as detailed guidance on 1st Word Plus and 1st Mail.

Loading is simple – just click the icon from the Desktop, boot the disc or type \*1stword+ at the Arthur prompt. When loaded you get about 400k of text space on a 310 and 3Mb on a 440 – that's 900 pages of A4. The package is Wimp based and works in Mode 12 – or Mode 20 if you have a multi-sync monitor. On start-up you are presented with the file submenu – Figure 1 – inviting you to load a document from the 1wp.doc directory.

You can select the file you want either by double-clicking Select on the name in the list or by typing it in and pressing Return. Moving through the directory structure is just a case of picking them from the file window or leaving the current one by clicking the close icon.

Although you can use any directory structure you wish, 1st Word Plus makes very good use of it by default: Under 1wp there are seven sub-directories:

| Directions | Contents                               |
|------------|--|
| doc        | Current documents                      |
| bak        | Document backups                       |
| pic        | Picture files                          |
| hex.cfg    | Printer driver source and object files |
| dat.mrg    | Mail merge files                       |

Once selected, a file is loaded and a window opened for it.

The Wimp operates in the standard way and you get 74 characters across and 28 lines down in a fully opened window. 1st Word Plus is almost wysiwyg – what you see is what you get – as the program displays all the supported printer facilities on screen if it can – see Figure 2. It does not show different type sizes such as pica, elite, condensed and expanded, although it alters the line length intelligently to give the same physical margin when printed.

Always accessible but hidden by the text window is a display occupying the lower half of the screen containing all the available characters, a number of editing facilities like Delete and cursor movement and the printer driver and port

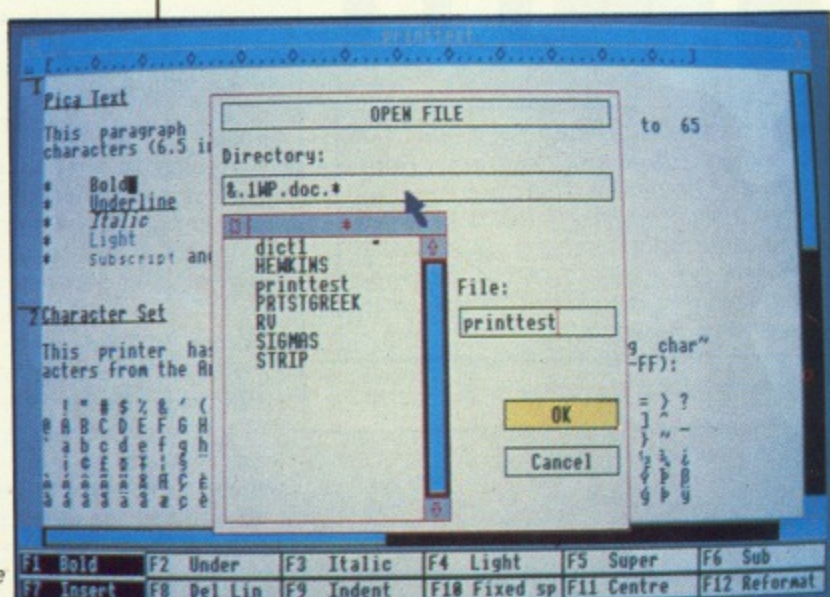


Figure 1: The file sub-menu

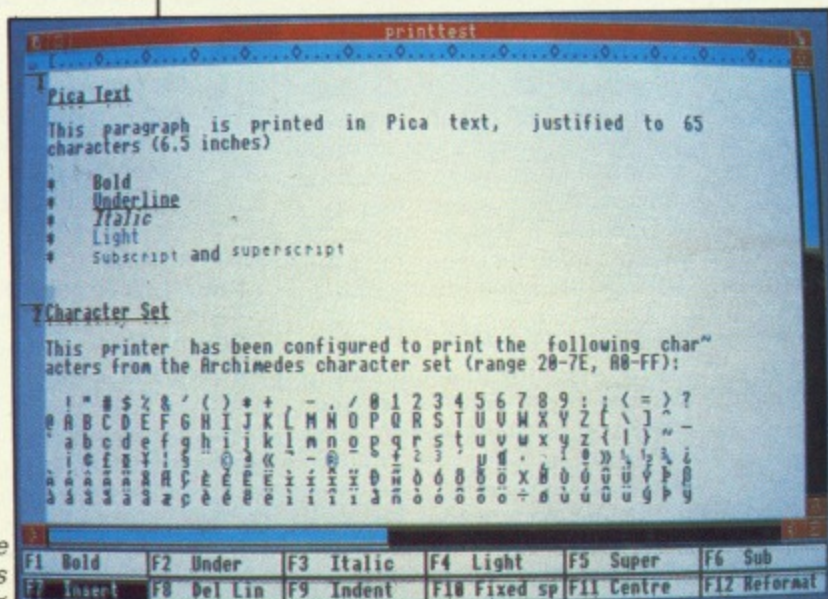


Figure 2: The display is almost wysiwyg



being used. This means that you can edit a document using just the mouse without touching the keyboard, although it's a bit tedious. The real bonus is that the Ascii characters above 128 can be selected and used within the text – only those supported by the printer driver are displayed.

A strip is provided giving the various operations from the function keys alone and Control+function key. Shifted function keys do nothing – a hold over from some other micros where F2 is Shift+F1 – and you can't use them as standard BBC Micro soft keys.

The many facilities are all accessible via the mouse and pressing the Menu button brings up the main menu from which you can open various submenus containing the vast array of functions.

The file menu – Figure III – allows you to open up to four documents simultaneously. Printing is from the disc copy of a file and other options are save, read/write insertions, delete files and exit the program.

Search and replace options are on the edit menu – Figure IV – with four powerful features that select word processor, hyphenation, insert and word-wrap modes. With word processor mode active all loads and saves are done in 1st Word Plus file format and all the usual options are available. But with this off you are in text edit mode and file operations are performed as Ascii only. One drawback of the system is that 1st Word Plus recognises line feeds at the end of every line, so almost all imported files have to be doctored before use.

Hyphenation allows long words at the ends of lines to be hyphenated when the text is reformatted, and it worked very well. One particularly useful feature on the edit menu is goto, which lets you move to one of four invisible markers which you can place within the text – or just go to any specific line.

Block operations are well supported, even allowing you to move text between different documents or save to disc. When a block has been marked you can modify it with the style menu which sets typefaces, justification and so forth. As 1st Word Plus does not reformat automatically when you insert text, a reformat option lets you re-do the paragraph, whole document or between rulers.

If you are about to perform a function that 1st Word Plus considers dangerous a window opens up asking for confirmation.

The text is controlled by rulers, the current one being displayed at the top of the text. The layout menu supports loading, addition and deletion of

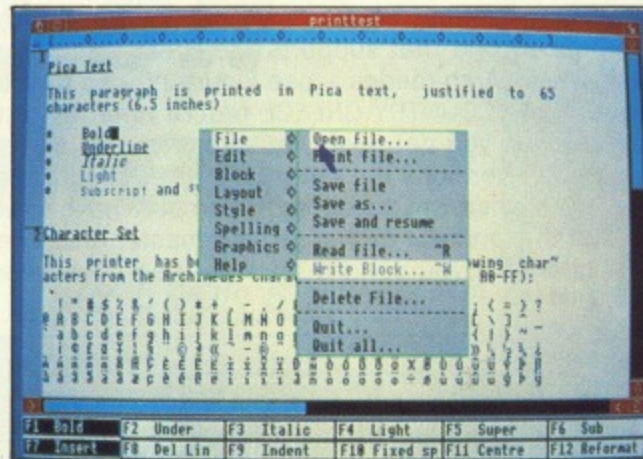


Figure III: A multitude of file options

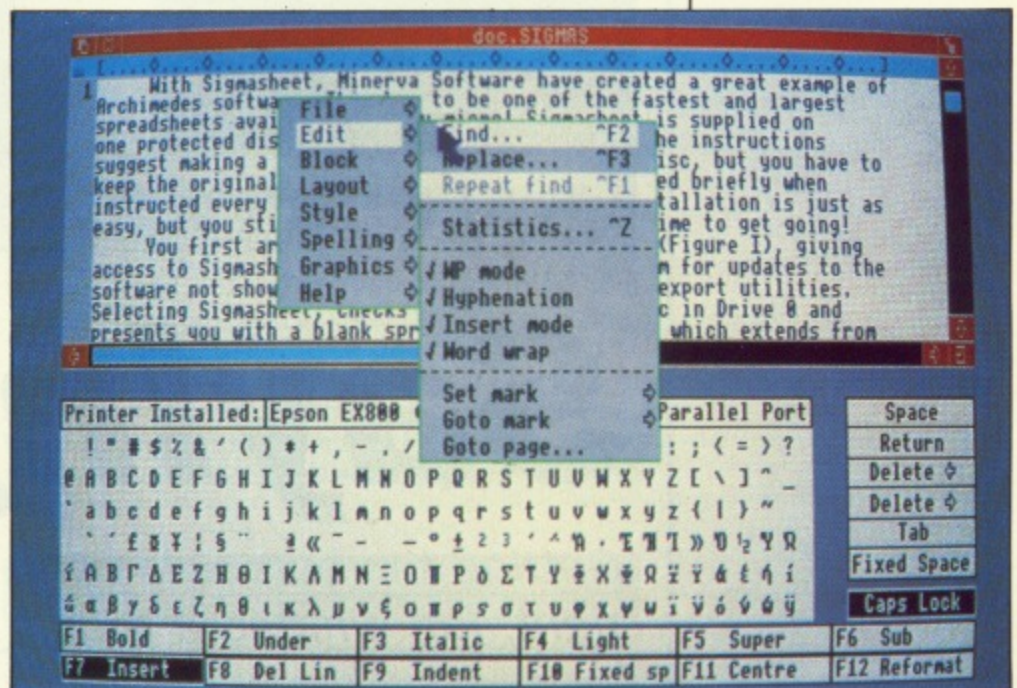


Figure IV: Accessing the edit menu

rulers, plus a powerful footnote option. Clicking the character shown to the left of the ruler gives you the ruler menu which controls such things as character pitch, ruler length, tab stops, justification and tab stops.

From the layout menu you can get to the page layout submenu – Figure V. Here you can insert header and footer text, select page length and top and bottom margins. Unfortunately you can only have one set of headers and footers per document.

The final three menus are spelling, graphics and help. Spell checking from the 40,000 word memory dictionary is fast and intelligent while the Help option gives on-screen explanations of many of the 1st Word Plus features, including those not in the manual – Word and rest-of-line delete.

The graphics option allows pictures to be incorporated, but not manipulated, into your text and output if you're using a dot matrix printer. Colour printing is also supported, but one oddity is that the colours displayed – see Figure VI – are not those that will be printed, nor do they match the original picture. However the printouts match the original.

1st Word Plus is supplied with a number of printer drivers and an appendix in the manual gives clear instructions to help you modify one of those supplied to suit your own purposes. I was able in an hour to create drivers to support all the Ascii characters higher than 128 on my Epson

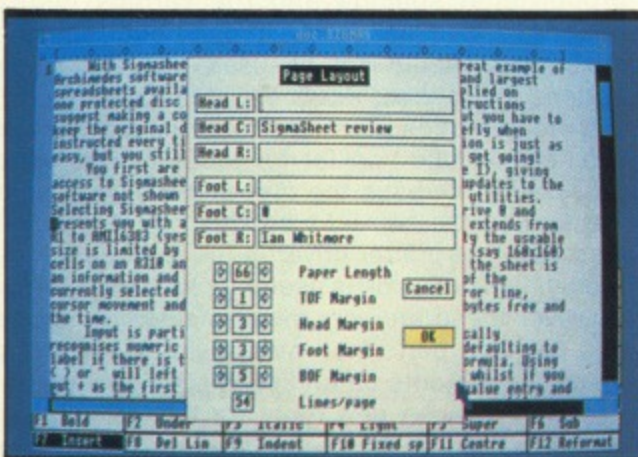


Figure V: Adjusting the page layout

Turn to Page 42 ►



## ◀ From Page 41

EX800 including colour dumps and NLQ. I also produced one that supports the Greek character set in the Archimedes – see Figure IV – so that if you type \*COUNTRY GREECE before entering 1st Word Plus you get Greek on screen.

Earlier versions did not pause after each page – even when set to do so. Acornsoft have now fixed this and will exchange your master disc free of charge if you send it back to them. However

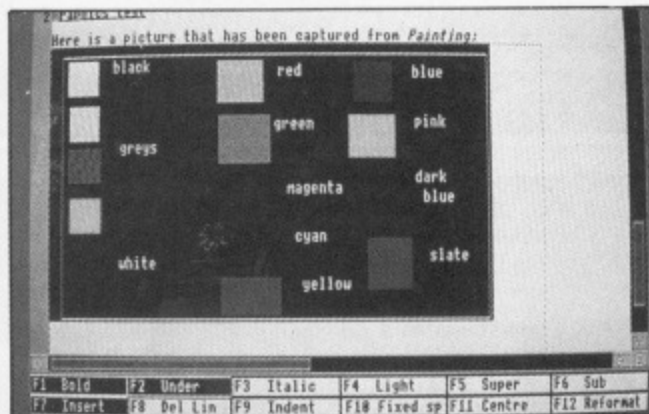


Figure VI: Including graphics in your document

other minor bugs remain including crashing when replacing ? with nothing and the replace fails with lines longer than 160 characters. Also Delete and Copy will not work across line ends if the ruler is wider than the screen.

Other irritating characteristics are the omission of multi-file options or case-swap functions and the annoying way that new styles often cancel out previously set options in the same area.

Although I've not looked at 1st Mail in depth, I am impressed by the package's mail merge facilities. It takes a master document in the *doc* directory and a datafile from *dat* – both created from 1st Word Plus – then performs a merge sending the result to the printer or a file in the *mrg* directory for editing or later printing. Once again the instructions are clear and include a tutorial session.

Overall, 1st Word Plus and 1st Mail are very good and offer a vast number of facilities. Both are easy to learn to use and although they cost a lot more than most word processors for the 8 bit BBC Micro, this package offers far more and is good value for money. When all the bugs are gone and the missing features incorporated it will be perfect.

# Saying it in style

*Getting the output looking right, Ian Whitmore tries . . .*

Product: First Fonts

Price: £15

Supplier: Ian Copestake Software, 10 Frost Drive, Wirral, Merseyside L61 4XL

Tel: 051-648 6287

**I**AN Copestake has been writing word processor orientated software for the Acorn market for some years and has now turned his hand to support for 1st Word Plus on the Archimedes. He has written a series of new printable fonts – including French, German, Greek and one for forms and stationery – which are also supported on screen.

The one reviewed here was M5T which is for mathematical and scientific symbols and printing on an Epson LQ printer, a NEC Pinwriter P2200, NEC P6 Plus/P7 Plus, Citizen HQP-40, Star LC24-10 with or without the optional ram card. Although many other nine pin printers are also catered for such as the Star LC10.

Three files are needed for each font/printer combination. You load two before calling 1st Word Plus, the onscreen font and a printer character definition program – the printer must be online when you load this one.

The third file is a printer driver and is called from within 1st Word Plus in the usual way by clicking over the driver title just above the character display and selecting the new driver from disc.

The bottom three lines of the screen display contain a whole collection of mathematical and scientific characters, all of which are selectable by clicking over them with the mouse or using a

specific key combination, with the on screen cursor showing the position in the text where the character is to be inserted. Some are complete, some part symbols and some are in subscript and superscript already. They can be used in bold, underlined and italic form, but not sub or superscript.

All the normal characters, shown in the upper three lines, are available from the keyboard, as usual including super and subscript. They are output in the printer's Roman typeface, but the light text option uses the sans serif font.

The first seven characters in the second half of the display are printer codes allowing you to alter line spacing between 1/8 and 1/6 inch, select proportional spacing and the various justify options. These act in the proportional spacing mode and should not be used with the same options in 1st Word Plus.

Documentation consists of one sheet of A4 and a hints and tips booklet for those new to word processing. Perhaps the disc could have a boot file to load the two files needed first and could also have the printer driver in the right directory, though this omission is useful for hard disc users. However these are very minor niggles as in use this package performed well, giving clear easily readable printouts on an Epson LQ1000.

All in all these new fonts for the Archimedes certainly add a lot to an already worthwhile product.



# Putting on the brakes

## THE BEEB BODY BUILDING COURSE

**O**VER the last two months in this series on the Body Build Experimenter's Board we have looked at the shift register and timers. I set you the problem of simulating the action of a shift register using PBO as the data input and PB1 as the clock. The solutions in Basic and Forth are shown in Listings I and II respectively.

These are fully described on the following pages and not only is simulating registers a useful exercise in programming but it makes you appreciate how much code the shift register hardware can replace. In addition, it can handle clock rates about 200 times faster than our simulation.

When you run the program you might notice something a little strange. If you connect wires to the data and clock inputs you will see the shift register bit pattern change as you touch the free ends of the wire. This illustrates an important effect — mains pickup.

What is happening is that your body is acting as an aerial and you are picking up the 50Hz signal radiated from the mains all about you. This effect would not exist if you were on board a sailing boat powering your micro from batteries in the middle of the Atlantic. For any readers in that condition I apologise for the following irrelevant explanation.

By touching the wire you are injecting this very small signal into the comparator and this is acting like a high gain amplifier feeding a 50Hz pulse waveform into the micro. It only works because the input to the comparator is of a very high impedance, so the very small amount of power you are picking up can develop a large enough voltage to turn it on.

You might not realise it, but there is a considerable difference between power and voltage — power is the result of multiplying the voltage by the current flowing. If you have a very high impedance — or resistance — you can't get much current flowing, so for a given amount of power you can develop a high voltage.

The pickup you can generate by simply sitting close to the mains can range from 5 to 50 volts. But don't worry: Every time you get a static shock from carpets it is in the order of a few thousand volts with no power behind it. Contrast this with the mains, where a shock of 250 volts can easily prove fatal: It is simply that the mains has the

*Mike Cook shows  
how to drive  
his motor*

power to support the current that the voltage causes to flow — a current of a few milliamps is sufficient to be fatal. It is all neatly summed up in the old saying: *It's the volts that jolts but it's the mills that kills.*

If you want to stop mains being injected like this the best way is to lower the impedance of the input by using a pull-up resistor. Simply wire a resistor — the value is not critical, anything from 1K to 47K — from each of the inputs to the 5v line. They will then have a logic one on them and to make them have a logic zero simply touch them with a wire connected to the E — earth — line. Make sure you don't connect the E to the 5v, as this will short out the power supply and make the micro crash.

### Measuring frequency

As promised in last month's issue, we're going to look at how you can make the timers measure frequency, but before that we need a source of frequency to measure. So let's move on to the motor on the board and see how to drive it. Remember that the techniques we shall be looking at can apply to all DC motors, not just that one — you can apply the same control techniques to your own buggy or other motorised device.

As it's a DC motor all you need to do is to put a DC voltage across it and off it goes. However the one on the board has a rating of 1.5v to 3v and although it will run happily off 5v it tends to go a little fast.

We can get about 2v to drive the motor from one of the amplifiers on the board. If we feed the voltage reference output — Rf out — into the DC amplifier — A3 in — we can use the amplifier's output — A3 out — to power the motor. We want a little control over it so the supply is connected

Turn to Page 44 ►

The Body Build Experimenter's Board, first described in the August 1988 issue of *The Micro User*, enables you to learn about interfacing in a relatively painless way. It contains many components which can be interlinked to enable a wide variety of experiments to be performed.

```

10 REM BODY BUILDING EXPERIMENT BOARD
20 PRINT "Shift register"
30 PRINT "Clock on PB1"
40 PRINT "Data on PBO"
50 PRINT "Displayed on the LED bars"
60 ?&FE62=0 : REM B SIDE INPUTS
70 ?&FE63=&FF : REM A SIDE OUTPUTS
80 S%=0
90 ?&FE61=0
100 REPEAT
110 PROC TRANS
120 S%=((S%*2) OR (T% AND 1)) AND &FF
130 ?&FE61=S%
140 UNTIL FALSE
150 END
160 DEF PROC TRANS
170 REM HOLD UNTIL HIGH
180 REPEAT
190 T%=?&FE60
200 UNTIL (T% AND 2)=2
210 REM HOLD UNTIL LOW
220 REPEAT
230 T%=?&FE60
240 UNTIL (T% AND 2)=0
250 ENDPROC

```

Listing I: The Basic shift register simulation

```

SCR = 5      5 H.
0 ( SHIFT REGISTER SIMULATOR )
1 : ?CLOCK B.IN.READ DUP 1 ?BIT 0 = ;
2 : TRANSITION 0
3 BEGIN DROP ?CLOCK NOT UNTIL
4 BEGIN DROP ?CLOCK UNTIL ;
5 : SHIFT CONFIG.IN
6 0 BEGIN 2* 255 AND TRANSITION
7 1 AND OR DUP B.OUT AGAIN ;
8

```

Listing II: The Forth shift register simulation



## ◀ From Page 43

through a relay to allow the motor to be turned on and off using bit 0 of the printer port.

The whole arrangement is shown in Figure 1. Setting bit 0 turns the motor on and clearing it turns it off. Make sure the relays are enabled by making Link 1.

We've already seen how to turn bits on and off, so I won't repeat it here but try this experiment: Cut out a small piece of thin card about 46mm by 7mm, push a small sharp object through the centre to start a hole and then push it on the motor shaft. Make sure that the card passes

through the opto slot and does not catch anywhere. Program two function keys — one to turn on the motor and the other to turn it off.

Now see what happens when you turn the motor on and then off. So — you may say — the motor goes on and off, what of it? Well, what happens is that when you switch the motor off it does not stop directly — it runs down. To make this a little clearer let's arrange for the opto switch to control the LED and feed into the speaker. Place Links 2 and 3 both in position B and connect a wire between connectors 7 and 6. Now whenever there is something in the opto slot the LED will go out and the speaker will click. Again turn the motor on

**BASIC:** The heart of the simulation is the procedure PROC-TRANS which waits for a cycle of the clock input. It consists of two loops: One that waits until the clock input is high and the other until it is low. In this way the procedure only returns on a high to low transition of the input clock signal.

The variable T% is used to capture the state of the data input at the same time as the clock. Therefore when we exit the procedure it contains the data value at the time of the falling clock signal, just like the hardware shift register.


Every time the clock input makes a negative

transition we have to shift the existing data — stored in S% — one place to the left, add in the new data and display the results. We also have to simulate the most significant bit falling off the end of the 8 bit shift register.

This is all achieved in line 120, which is easy to follow if you break it down into sections.

The part (S%\*2) shifts the old data one place to the left, (T% AND 1) isolates the data from the other inputs on the port. Then ORing these two together merges them and finally, the whole lot is ANDed with &FF to restrict the results to eight bits.

*How Listing 1 simulates the action of the shift registers*

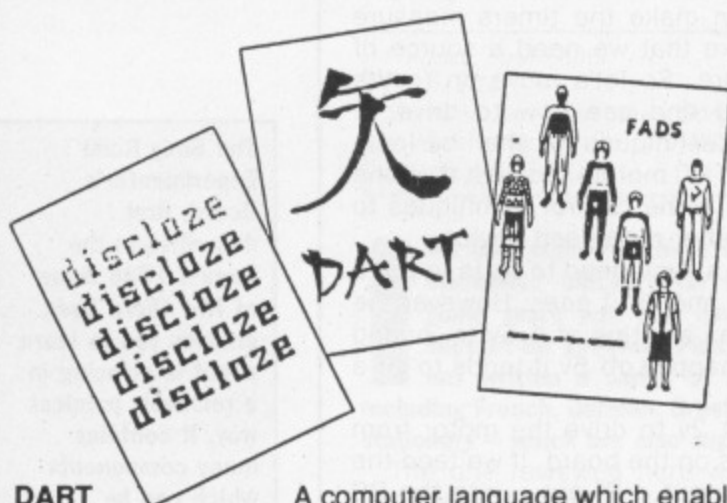

## Software for Learning in the Home and in the School

|                 |   |     |
|-----------------|---|-----|
| <b>DART</b>     | A computer language which enables turtle graphics to be displayed on the screen or with a floor turtle, and allows you to build your own procedures.                | £13 |
| <b>DISCLOZE</b> | A text disclosing program used to develop reading skills.   | £12 |
| <b>FADS</b>     | Fashion design to assess the effects of fashion on figure types.  | £25 |
| <b>MOSAIC</b>   | An easy to use powerful design package combining tile-based patterns, includes drivers for both monochrome and colour printing.                                     | £20 |
| <b>QUEST</b>    | The popular information retrieval package used in schools throughout the country. Additional datafiles for geography, history and home economics available.         | £27 |
| <b>STOPRESS</b> | Versatile viewdata software with built in word processor and friendly graphics. Assemble your own information system and develop an electronic newspaper in colour. | £30 |

*Catalogue on request*



**Advisory Unit for Microtechnology in Education**  
Endymion Road, Hatfield, Herts AL10 8AU. Tel: 07072 65443



and off, and note how long it takes to run down. What is happening is that when the power is removed the motor is spinning as it is only the motor's friction that causes it to slow down and stop. This is known as the flywheel effect. If we want the motor to stop immediately we will have to apply a brake. And fortunately we can apply an electric one.

When a permanent magnet motor like this is spinning freely it acts as a generator and we can put a mechanical load on it by putting an electrical load on its output. In short, to stop a motor we want not only to remove its power but also short it out. In this way we will put maximum load on the generator. This is known as flywheel braking and can be very effective.

As our relays are dual pole change over units, this is easily done. Wire up the board as shown in Figure 11 and note the difference when we turn it off – it stops almost dead.

This technique of flywheel braking can improve the accuracy and control that you can achieve with simple DC motors.

Now here is this month's task for you: Write a program to increment a count display every time the opto switch is cut. Make the program turn the motor on and then when it has run up to speed turn it off and count the number of times it revolves after it is turned off. The transition routines we looked at this month should help you. Remember you can read the state of the opto switch from bit 6 of the B side of the VIA. Answers next month in Basic and Forth.

● Next month we will see how to control the direction of our motor and several ways of controlling its speed.

**FORTH:** In Forth we can use words that we've already defined in earlier blocks, so make sure that blocks 1 to 4 have been loaded. The word ?CLOCK reads in the B side of the user port, duplicates the findings and tests bit 1 to see if it is a zero.

Thus this word exits with a logical value on top of the stack and the data read in under it. The word TRANSITION waits until the clock has produced a negative edge. As the ?CLOCK returns two values on the stack we want to get rid of the data if the loop is not terminated – this is done by DROP after BEGIN.

However the first time round the loop we have not executed ?CLOCK and so there is nothing on the stack to drop. Therefore we place a dummy number 0 on the stack at the start of the word definition. We perform the first loop until the clock input is not zero – or one – and then the second loop until it is zero. When we leave TRANSITION we will have the data when the clock fell on the top of the stack.

Finally SHIFT ties it all together – the initial state of the shift register is placed on the stack. Then we enter an infinite loop: It shifts what is on the stack and restricts it to eight bits, then we wait for the clock signal to fall. The data now on the stack is isolated from the other bits with the AND operation this is then added to our shift register value with the OR operation. Finally we make a copy of the shift register and display it.

How Listing 11 works

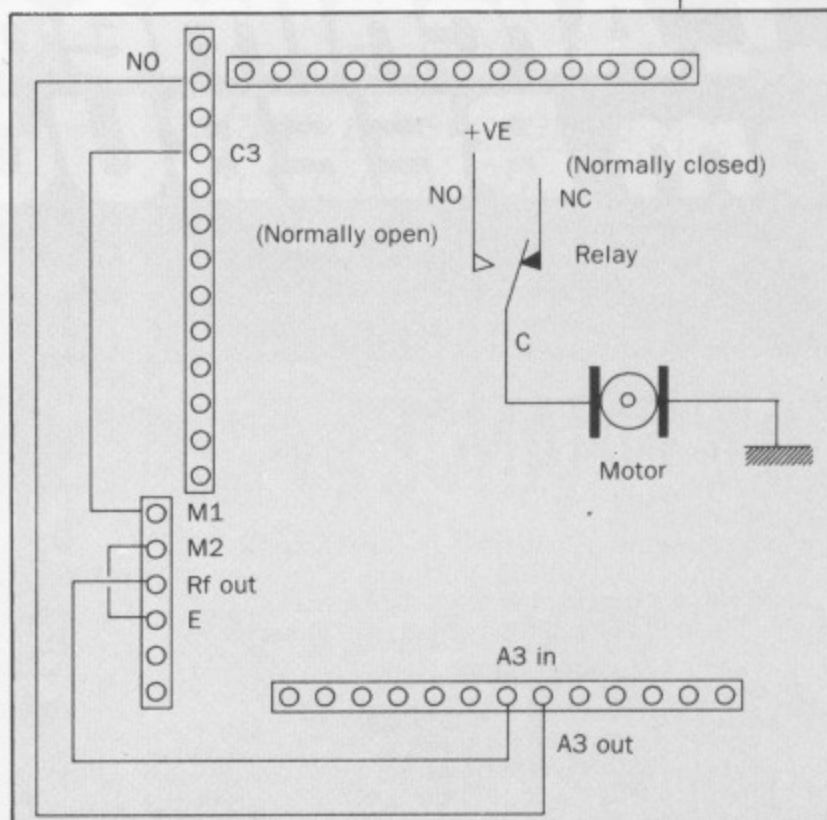


Figure 1: Simple motor control

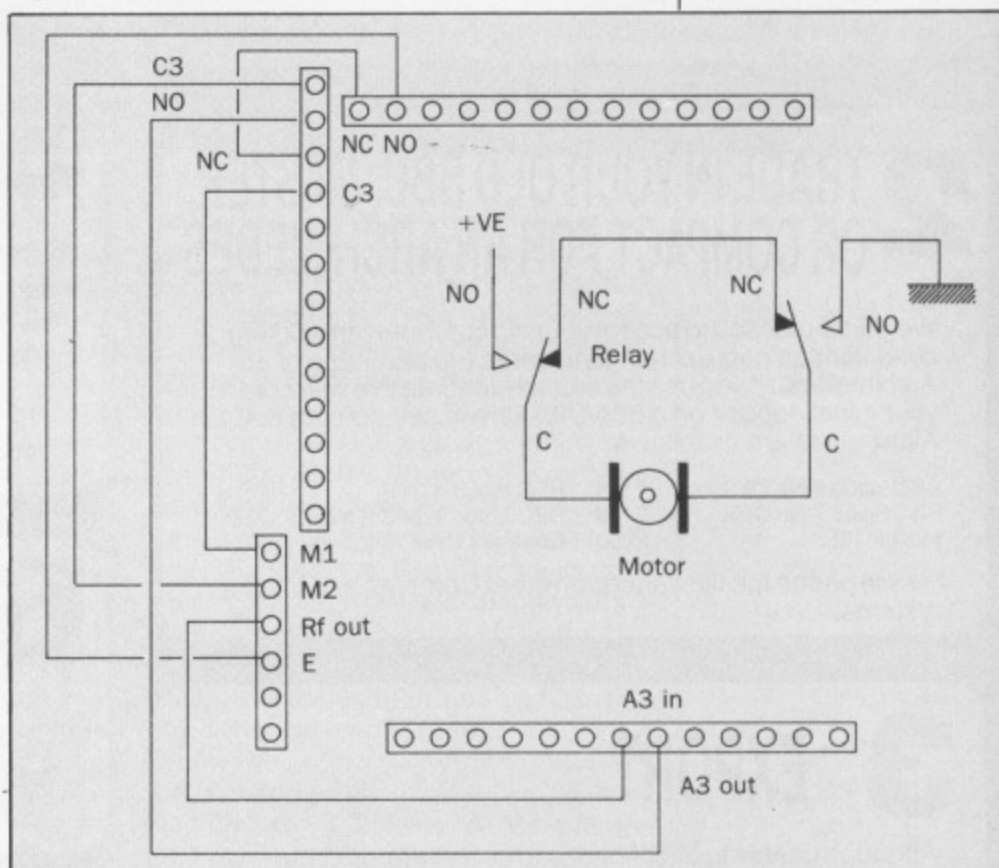


Figure 2: Flywheel braking

## BEEB BODY BUILDING PACK ORDER FORM

### Body Build Packs

- ☐ 2 20-way cable with IDC connectors ..... £8.99
- ☐ 49 26-way cable with IDC connectors ..... £12.99
- ☐ 50a Experimenter's Board – PCB ..... £16.48
- ☐ 50b Experimenter's Board – Components ..... £35.00
- ☐ Special offer all the above packs at £13.46 off ..... £60.00
- ☐ Experimenter's Board – assembled with cables ..... £70.00

Name.....

Educational establishment orders accepted.

Address.....

Post code.....

**Make cheques payable to Musbury Consultants and send to:**  
8 Fairhill, Helmshore,  
Rossendale, Lancs, BB4 4JX

Foreign orders add £3.00 if airmail delivery is required.

All prices include VAT and P&P



# 5% Discount On ALL Archimedes From BEEBUG



Archimedes

*Specialists*

## In Addition To...

### 1 0% FINANCE

For a limited period we are able to offer 0% APR finance over 9 months on the purchase of any Archimedes. You pay no interest at all. This is a **brand new** scheme only available from BEEBUG. The deposit and repayments are shown below.

#### Members Prices

| A305M        |            |         | A310        |            |         |
|--------------|------------|---------|-------------|------------|---------|
| Deposit      | 9 Payments |         | Deposit     | 9 Payments |         |
| A305 Base    | £79.66     | £76.00  | A310 Base   | £93.24     | £91.00  |
| A305 Mono    | £91.21     | £82.00  | A310 Mono   | £104.79    | £97.00  |
| A305 Colour  | £104.01    | £100.00 | A310 Colour | £117.59    | £115.00 |
| A310M        |            |         | A440        |            |         |
| A310M Base   | £104.79    | £97.00  | A440 Base   | £278.93    | £276.00 |
| A310M Mono   | £107.34    | £104.00 |             |            |         |
| A310M Colour | £129.14    | £121.00 | A440 Colour | £303.28    | £300.00 |

### 4 FREE PC EMULATOR AND 1st WORD PLUS

Purchase your Archimedes by Cheque, Access, Visa, Official Order or 13.75% finance and we will supply you, absolutely free a Printer Lead, Ten 3.5" discs, a Lockable disc box and a choice of either a Free upgrade to RISC OS & Artisan Package or The PC Emulator (as supplied with a 310M). Additionally if you are purchasing a 440 system you will receive 1st Word Plus & Acorn's Software Developers Toolbox.

#### Prices Including VAT

|           |          |      |         |        |          |
|-----------|----------|------|---------|--------|----------|
| A305 Base | £763.66  | Mono | £829.21 | Colour | £1004.01 |
| A310 Base | £912.24  | Mono | £977.79 | Colour | £1152.59 |
| A440 Base | £2762.93 |      |         | Colour | £3003.28 |

### 2 TRADE IN YOUR OLD BBC, MASTER OR COMPACT FOR AN ARCHIMEDES

We will be pleased to accept your old computer (in working condition) as part exchange towards the purchase of an Archimedes. (If you use the finance scheme this will replace your initial deposit on a 305/310, so you pay nothing now). Allowances are as follows:

|                    |      |                         |      |
|--------------------|------|-------------------------|------|
| BBC Issue 4 No DFS | £125 | BBC Issue 4 DFS         | £175 |
| BBC Issue 7 No DFS | £175 | BBC Issue 7 DFS (Or B+) | £225 |
| Master 128         | £250 | Compact Base System     | £215 |

Please phone for allowances on other Compact and Master systems.

### 5 13.75% FINANCE OVER 12 TO 36 MONTHS

As a Licensed Credit Broker we are able to offer finance on the purchase of any equipment, including the Archimedes. You still benefit from the free PC Emulator, discs, disc box and printer lead. (Typical APR 27.5% on the purchase of a 310 Colour System over 36 months.

Deposit £152.59      36 payments £39.24)

### 6 DISCOUNTS FOR EDUCATION

We are able to offer attractive discounts to Education Authorities, Schools, Colleges and Health Authorities. Please write with your requirements for a quotation.

These discounts are available to you as a member of RISC User, THE leading magazine dedicated solely to Archimedes. So if you are not yet a member, join now for only £14.50 for a full year.

**TO FIND OUT MORE  
PHONE OR WRITE NOW.  
TEL: 0727 40303**

We offer a complete service, including Advice, Technical Support, Showroom, Mail Order and Repairs. Our showroom in St. Albans stocks everything available for the Archimedes. Call in for a demonstration.

Please indicate your requirements below.

Subscription to Risc User (£14.50 UK) ☐ Information Pack and Catalogue ☐ 0% Finance Form for 305/310/310M/440 Base/Mono/Colour ☐ 12-36 Months Finance Form for 305/310/310M/440 Base/Mono/Colour ☐ Trade In BBC/Master/Compact ☐ Purchase 305/310/440 Base/Mono/Colour ☐ UK Courier Delivery £7.00. Overseas please ask for a quotation.

I enclose a cheque value £.....

Please debit my Access/Visa/Connect Card No

Expiry...../..... with £.....

Name .....

Address .....

Signature .....



# Threshold of a dream

*Steve Turnbull  
starts a new series  
on the new OS  
from Acorn*



**O**N November 11 1988 in a room in Acorn's training centre in Cambridge the company unveiled its new operating system for the Archimedes – Risc OS. It was put through its paces, demonstrating once again the expertise of Acorn's software development team.

Where the Arthur OS was an adequate stopgap that gave access to the power of the Arm chip set, Risc OS takes BBC Micros firmly beyond any rivals in both performance and price.

In this short series – leading up to the official release of the software in April – we'll be looking at the facilities you get for your money and how to use them to best effect. So when you plug in the new roms you'll immediately be able to make the most of your acquisition.

## Getting started

The first step is to insert the four new roms. Switch the machine off, remove the fixing screws – one on each side and three at the back – and slide the lid off. If you have any cards inserted you'll have to remove them to get at the sockets. The four operating system roms are in a line just behind the disc drive. Gently remove them by alternately levering with a screwdriver at either end until they come free.

The rom socket nearest the edge of the board is labelled Low and the furthest one is High and if you examine the new roms you can see they have sequential serial numbers. The lowest numbered one goes in the Low socket and the rest follow in order. Unlike the roms you removed – which were two pins short – the new ones fill the sockets completely.

And that's all you need to do – there are no links to move and nothing to solder. Now you can replace any expansion cards and the lid – but don't replace the screws until you have tested the system. When you switch on, the machine beeps as usual and should come up with the new DeskTop – if it doesn't, issue:


```
*CONFIGURE LANGUAGE 3
```

Switch off and on again. In the past you may have preferred to work from Basic – but from now on you'll only want the DeskTop.

## Colourful windows

When you get into the DeskTop you are presented with a pleasant screen in grey tones with the icon bar a lighter shade along the bottom. The Archimedes logo sits in the bottom right with a 4x4 palette block next to it.

On the left-hand side is a floppy disc icon and if you have any other filing systems or storage devices configured – a second floppy, hard disc or Econet, for example – they will be here too. The

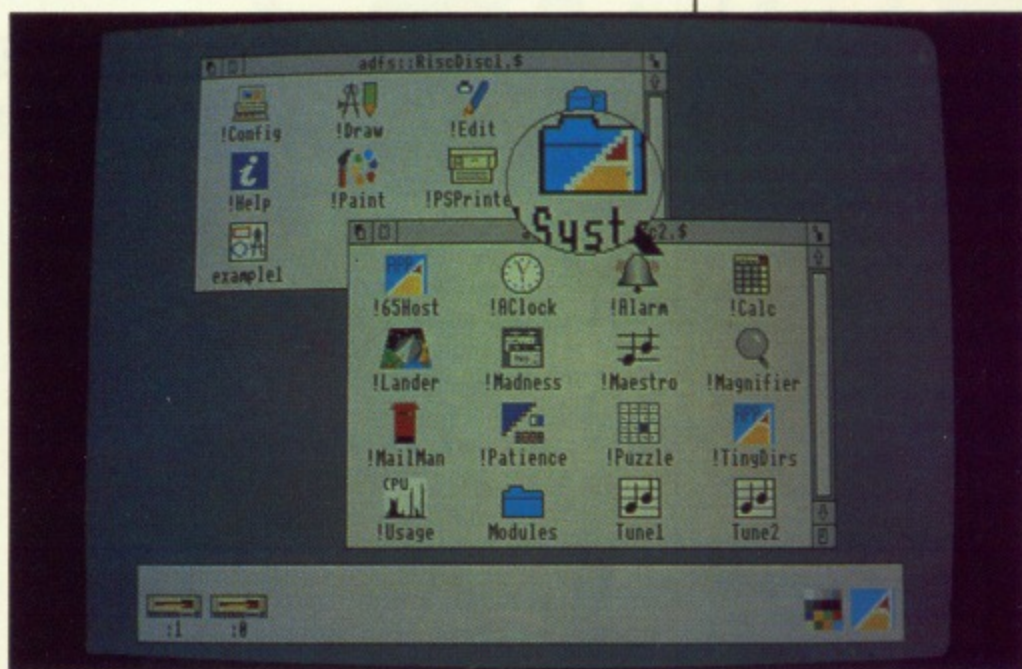

The Risc OS desktop

floppy disc icon is much more detailed than before and the drive number is given below it.

Clicking the drive icon with Applications disc 1 in it brings up the root directory, but here's where the first real difference occurs. The on-screen pointer changes to an hourglass symbol – the sand actually moves from the top to the bottom while you wait – and there are a great number of disc accesses. Finally the directory window comes up, showing a very colourful set of icons.

What happens is that when a request to open a directory viewer is made the DeskTop looks at each file, determines its type and displays its internal icon for that type if it has one. If the file is a directory and its name starts with ! – such as !Writer – then it's an application and is further investigated for a file called !Sprites which contains the icons for the program itself and for any files which can be handled by it.

For example, on disc 1 there's a text editor called !Edit and this provides both its own icon and the one for any text files. Once the icon is loaded it is remembered for any future disc accesses until the machine is reset. However one of the most important features of the new operating system and the superb DeskTop is that you need to know very little about what it's doing in order to use it to the full.

● Next month we'll be looking at using the DeskTop and its various features.

## Availability

The new Risc OS from Acorn will not be available until April and this series of articles has been written using a preview version. Also the disc software has not been finalised.

The new operating system, complete with four roms, two manuals and two discs packed with software, will be available for just under £30.



# Check up on Checksums

Steve Turnbull unravels their inner most secrets

**S**INCE we first published the Checksum program in the June 1987 issue of *The Micro User* people have written in with the problems they've been having using the Basic generator program. To help this situation we began putting an all-singing all-dancing machine code version on to each monthly disc – unfortunately it's too long for the magazine. But in February 1988 we brought all the information together once and for all. We repeat it here in case you missed it.

Panel I shows how to produce Checksums using the Basic program, and Panel II shows the facilities available in the long machine code version.

The listing given with this article produces a much shorter machine code program that generates checksums without all the frills and it can stay resident in your micro to be called when you need it. So type in the listing and, using an older Get it Right!, make sure the checksums match – if you're not sure how to do this read Panel III – save the program and then run it. The code created and saved is the new checksum generating program.

You can automatically run this version from

disc just by typing the command:

```
*XS
```

After this you can call it again with:

```
CALL&B00
```

No disc access is needed. To produce a print-out of the checksums you'll need a Control+B before pressing the Return after \*xs or the call. Or if you want the automatic paging facility use Control+N. To switch these off afterwards use Control+C and Control+O respectively.

If you are using the 6502 second or co-processor you should alter the program to run at &F600 by changing line 80 to read:

```
80 wrch=&FFEE;byte=&FFF4;code=&F600
```

It's used in the same way. To call it again use:

```
CALL&F600
```

I hope this finally clarifies the checksums and how you should use them.

## Tape users

Save the program xs as described then to use it:

```
*LOAD xs B00  
CALL &B00
```

All other instructions are the same as for disc users.

Type in the program in the June 1987 issue of *The Micro User* and save it as BCheck. Run it, then isolate and correct any typing errors you may have made.

Find out your normal PAGE setting using:

```
PRINT "PAGE"
```

This gives you a three or four digit hexadecimal number, that we'll represent with XXXX.

Now enter this sequence of instructions:

```
MODE 7  
PAGE=&7000  
LOAD"BCheck"  
*KEY9"PAGE=&7000:MOLD:MRUN:M"  
*KEY8"PAGE=&XXXX:MOLD:M"  
PAGE=&XXXX  
NEW
```

Your micro now has the BCheck program loaded and the function keys correctly set up, so you can begin to type in the magazine listing, described in Panel III.

To run BCheck and generate the checksums just press f9. When they have been displayed you can return to your program using f8.

This program is on all *The Micro User* monthly discs from December 1987 and must be loaded from disc each time it is run using:

```
*XSUM
```

This generates checksums from the first to last line, it has automatic paging and can be interrupted by pressing the Escape key. There are several other variations on this command:

```
*XSUM P
```

sends the complete list of checksums to the printer. You can specify start and end line numbers as well, in the same format as the LIST command:

```
*XSUM 500,1000  
*XSUM 1540,  
*XSUM P 220,320
```

The final example will send the checksums of the specified line numbers to the printer. When you specify the range of line numbers the cumulative checksum digit is still calculated from the complete program and so is still correct.

Panel I: Using the Basic checksum generator

Panel II: The long machine code version





## A STEP-BY-STEP GUIDE TO USING CHECKSUMS

Let's assume you've chosen to type in the game, *Dune Hunter*, from the November 1987 issue of *The Micro User*. You've switched on your micro and the magazine is open beside it:

- Type in 10 lines of the program then run whichever version of the checksum program you are using to produce the checksums for these first 10 lines.
- A checksum consists of four hexadecimal digits — sometimes three or two digits — in a group followed by a space and then a single digit called the cumulative digit.
- Compare each single cumulative digit of the last 10 lines displayed with the equivalent digit in the checksum list in the magazine.
- If they are all the same you know that you have made no errors so far, and you can safely type in the next 10 lines and repeat the check for these.
- When there is a difference in the cumulative digits, find the first one which differs. Either that line or the one before will contain a discrepancy between the magazine and what you

have typed — the line that is different can be identified because the group of four digits listed by the program will be different to those in the magazine.

Some of the more common errors to watch out for are: Confusions between a lower-case L and the digit one, digit zero and capital O, or incorrect numbers of spaces between quotes and so on.

- Once you have found and corrected the difference you should re-do the checksums for that group of 10 lines so you can spot any other differences.

- Just keep repeating the enter, checksum and correction sequence until you've typed in the whole program, which will then run correctly first time, but always save it first.

Once you have become familiar and confident with the technique you can type in bigger chunks of the program before checking. In time you will be able to type in the whole program before using the checksums — but the checking method remains the same.

### Archimedes checksums

A special generator was published in the January issue of *The Micro User*.

Panel III: How to use checksums

```

10 REM Short Checksums
20 REM by Steve Turnbull
30 REM (c) The Micro User
40 MODE7:PROCinit:PROCassemble
50 PROCos('SAVE xs '+STR$code+'+200')
60 END
70 DEFPROCinit:newl=&FFFE7
80 wrch=&FFEE:byte=&FFF4:code=&B00
90 rem=&F4:return=13:spc=32
100 qts=ASC"":colon=ASC":"
110 comma=ASC",":Lbrk=ASC"["
120 rbrk=ASC"]":mcom=ASC"\"
130 Lcrc=&70:ocrc=&72:wrcr=&74
140 Lptr=&76:crctr=&78:Lnum=&7A
150 LLen=&7C:Ltmp=&7D:txtptr=&7E
160 nmbase=&80:Lnum=&81:hnum=&82
170 Lowrk=&83:hiwrk=&84:qlg=&85
180 codeflg=&86:savebyt=&87
190 fldsize=&88:zflg=&89:Lend=&8A
200 escflg=&8F:ENDPROC
210 DEFPROCassemble
220 FOR LX=0 TO 2 STEP 2
230 P%=code:[OPT LX
240 .check LDA #0:STA codeflg:STA ocrc
250 STA ocrc+1:LDA #131:JSR byte
260 STX Lptr:STY Lptr+1
270 .start JSR newl
280 .while BIT escflg:BMI escape
290 LDY #1:LDA (Lptr),Y:BPL doline
300 .wayout RTS:.escape BRK:BRK
310 OPT FNs('Escape'):BRK
320 .bad BRK:BRK
330 OPT FNs('Bad program'):BRK
340 .doline LDA #0:STA Lcrc:STA Lcrc+1
350 STA qlg:TAY:LDA (Lptr),Y
360 CMP #&0D:BNE bad:INY:LDA (Lptr),Y
370 STA Lnum+1:INY:LDA (Lptr),Y
380 STA Lnum:INY:LDA (Lptr),Y
390 STA Lend:JSR prescan:CPY #5
400 BCC display:LDY #4
410 .skipspc LDA (Lptr),Y:CMP #spc
420 BNE scan:INY:CPY LLen
430 BEQ display:BNE skipspc
440 .scan LDA (Lptr),Y:JSR dobyte
450 INY:CPY LLen:BCC scan
460 .display:LDX Lnum:LDY Lnum+1
470 JSR pdec:LDA #spc:JSR wrch
480 LDA #ASC":JSR wrch:LDA #spc
490 JSR wrch:LDX Lcrc:LDY Lcrc+1
500 JSR phex:LDA ocrc:JSR lastchk
510 LDY LLen:CPY Lend:BEQ newline
520 LDA #ASC*:JSR wrch
530 .newline JSR newl
540 .update CLC:LDA Lptr:ADC Lend
550 STA Lptr:BCC unwhile:INC Lptr+1
560 .unwhile JMP while
570 .prescan LDY Lend
580 .psLoop DEY:LDA (Lptr),Y:CMP #spc
590 BEQ psLoop:INY:STY LLen:RTS
600 .dobyte STA savebyt:CMP #qts
610 BNE notqe:PHA:LDA qlg:EOR #&FF
620 STA qlg:PLA
630 .notqe BIT qlg:BMI skpcode
640 BIT codeflg:BMI jcode
650 JSR basic:JMP skpcode
660 .jcode JSR mcode
670 .skpcode LDA savebyt:CPY LLen
680 BEQ skipcrc:STY Ltmp:LDX Lcrc
690 LDY Lcrc+1:JSR docrc:STX Lcrc
700 STY Lcrc+1:LDX ocrc:LDY ocrc+1
710 JSR docrc:STX ocrc:STY ocrc+1
720 LDY Ltmp:skipcrc RTS
730 .basic CMP #rem:BEQ skpline
740 CMP #Lbrk:BNE xbasic:LDA #&FF
750 STA codeflg:RTS
760 .skpline LDY LLen:xbasic RTS
770 .mcode CMP #mcom:BEQ skipcom
780 CMP #rbrk:BNE xncode:LDA #0
790 STA codeflg:xncode RTS
800 .skipcom LDA qlg:PHA:LDA #0
810 STA qlg
820 .skpLoop INY:LDA (Lptr),Y:CMP #qts
830 BNE skpch:PHA:LDA qlg:EOR #&FF
840 STA qlg:PLA
850 .skpch CPY LLen:BEQ skpexit
860 CMP #colon:BNE skpLoop:BIT qlg
870 BMI skpLoop
880 .skpexit PLA:STA qlg:LDA (Lptr),Y
890 STA savebyt:RTS
900 .docrc PHA:STX wrcr:STY wrcr+1
910 EOR wrcr+1:STA wrcr+1:LDX #7
920 .crclp BIT wrcr+1:CLC:BPL crcskp
930 LDA wrcr:EOR #&10:STA wrcr
940 LDA wrcr+1:EOR #&08:STA wrcr+1
950 SEC
960 .crcskp ROL wrcr:ROL wrcr+1:DEX
970 BPL crclp:LDX wrcr:LDY wrcr+1

```

Turn to Page 50 ►



◀ From Page 49

```

980 PLA:RTS
990 .lastchk PHA:LDA =spt:JSR wrch
1000 PLA:AND =80F:TAX:LDA =8FF:PHA
1010 TXA:JMP notz:.pdec LDA =10
1020 BNE pnun:.phex LDA =16
1030 .pnun STX Lonum:STY hinum
1040 STA nmbase:LDA =4:STA fldsize
1050 LDA =255:STA zflg
1060 .nbit PHA:LDA =0:STA Lowrk
1070 STA hiwrk:LDX =16
1080 .next ASL Lonum:ROL hinum
1090 ROL Lowrk:ROL hiwrk:LDA Lowrk:SEC
1100 SBC nmbase:TAY:LDA hiwrk:SBC =0
1110 BCC done:INC Lonum:STY Lowrk
1120 STA hiwrk:.done DEX:BNE next
1130 LDA Lowrk:DEC fldsize:BNE nbit
1140 .out TAX:BNE notz:PLA:PHA:PHP:TXA
1150 PLP:BMI notz:BIT zflg:BPL notz
1160 LDA =spt:BNE digout
1170 .notz LDX =0:STX zflg:CMP =10
1180 BCC add:ADC =6:.add ADC =48
1190 .digout JSR wrch:PLA:BPL out
1200 .exit RTS:J:NEXT:ENDPROC
1210 DEFFNs(s$):SP=s$:P=P%+LENSP%:=L%
1220 P=P%+LENSP%:=L%
1230 DEFPROCos(s$700):LOCAL X%,Y%
1240 Y%=7:CALL&FFF7:ENDPROC

```

✓ Get it right!

|              |              |              |              |               |
|--------------|--------------|--------------|--------------|---------------|
| 10 = 0 0     | 230 = 7CBB D | 440 = 2C54 4 | 710 = 9CF9 0 | 980 = EC5C 6  |
| 20 = 0 0     | 240 = 7334 F | 450 = 7C07 2 | 720 = 521B D | 990 = 1CF2 7  |
| 30 = 0 0     | 250 = F159 9 | 460 = A2F9 9 | 730 = 4F47 8 | 1000 = 6066 6 |
| 40 = 236A A  | 260 = A5F0 C | 470 = 103A 6 | 740 = 1303 2 | 1010 = D1F8 F |
| 50 = 657A A  | 270 = 9A6D 6 | 480 = 2A1F 4 | 750 = 28A4 6 | 1020 = 8693 D |
| 60 = FD2E 7  | 280 = FB52 4 | 490 = 8D0F 1 | 760 = 73F4 1 | 1030 = 6D46 3 |
| 70 = 5B0A D  | 290 = A20C 8 | 500 = A69 9  | 770 = FCEC A | 1040 = 2284 1 |
| 80 = 4F15 B  | 300 = AA8E C | 510 = 952 F  | 780 = 1CC4 6 | 1050 = 48E4 7 |
| 90 = 245B B  | 310 = 82B5 3 | 520 = 8D9D A | 790 = F2AF 3 | 1060 = 4FFE 7 |
| 100 = 70B9 9 | 320 = 166B C | 530 = 109C F | 800 = B7B3 5 | 1070 = 72EC 5 |
| 110 = EBD0 4 | 330 = E73 6  | 540 = 4312 1 | 810 = 4048 C | 1080 = FF8D 4 |
| 120 = 1687 1 | 340 = E3C5 3 | 550 = D4A9 9 | 820 = C795 A | 1090 = 664B 6 |
| 130 = A0BB B | 350 = 6D40 4 | 560 = 1606 D | 830 = 59D6 7 | 1100 = 1E51 C |
| 140 = D695 4 | 360 = E3D6 1 | 570 = D10D 1 | 840 = D058 2 | 1110 = 444B F |
| 150 = A59F 4 | 370 = C6C5 C | 580 = 7B1C 6 | 850 = 19FA 2 | 1120 = 4F4F A |
| 160 = 4D12 7 | 380 = 144F 0 | 590 = 573 6  | 860 = 24EC C | 1130 = 9E0D B |
| 170 = 4D1F 4 | 390 = B381 0 | 600 = EFB2 B | 870 = D682 9 | 1140 = 5029 6 |
| 180 = 5ED5 C | 400 = D3BA F | 610 = 12CE A | 880 = 217E D | 1150 = 3A1B E |
| 190 = 97FD 8 | 410 = 7E1A 5 | 620 = D058 1 | 890 = A331 F | 1160 = 5B26 5 |
| 200 = 55AA E | 420 = DDEC 7 | 630 = A3C3 B | 900 = 348E 2 | 1170 = EE96 2 |
| 210 = 98E9 0 | 430 = 51FF 8 | 640 = 8BC6 D | 910 = 3CEB 0 | 1180 = F3D2 3 |
| 220 = AAB9 5 |              | 650 = 1092 2 | 920 = 9556 8 | 1190 = 27C9 3 |
|              |              | 660 = 9D39 0 | 930 = FD54 5 | 1200 = 4ED4 3 |
|              |              | 670 = CF23 6 | 940 = 16CE 5 | 1210 = 17F3 E |
|              |              | 680 = D7F4 F | 950 = 8D00 9 | 1220 = 51B2 E |
|              |              | 690 = 8759 9 | 960 = FC1F C | 1230 = 86D7 B |
|              |              | 700 = 49F2 9 | 970 = A74E 2 | 1240 = 50E0 0 |



## M.C. Supplies Ltd. Dept SP2

Glen Celyn Hse. Penybont, Powys. LD1 5SY  
24Hr Tel 0597 87784 Fax 0597 87416

VISA

### 5.25" Top Quality Bulk Disks

| Qty                 | 25+ | 50+ | 100+ | 200+ |
|---------------------|-----|-----|------|------|
| DS/DD 48TPI .....   | 37p | 30p | 26p  | 23p  |
| DS/DD 96TPI .....   | 42p | 35p | 30p  | 27p  |
| DS/HD 1.6 Meg ..... | 90p | 79p | 72p  | 66p  |

All Disks 100% Guaranteed  
All complete with Envelopes & Labels

### 3.5" Top Quality Bulk Disks

| Qty                | 25+   | 50+   | 100+  | 200+  |
|--------------------|-------|-------|-------|-------|
| DS/DD 135TPI ..... | 80p   | 78p   | 76p   | 75p   |
| DS/HD 2 Meg .....  | 3.22p | 2.90p | 2.70p | 2.51p |

All Disks 100% Guaranteed  
All complete with Labels

### Lockable Disk Storage Boxes

| Qty                      | 1+   | 3+   | 5+   | 7+   | 10+  |
|--------------------------|------|------|------|------|------|
| 5.25" 50 Capacity .....  | 5.75 | 4.75 | 4.20 | 3.75 | 3.50 |
| 5.25" 100 Capacity ..... | 6.75 | 5.75 | 5.20 | 4.75 | 4.50 |
| 3.5" 40 Capacity .....   | 5.75 | 4.75 | 4.20 | 3.75 | 3.50 |
| 3.5" 80 Capacity .....   | 6.75 | 5.75 | 5.20 | 4.75 | 4.50 |

All Boxes are Antistatic, and include 2 Keys and dividers

Mix and Match for Best Price

### 5.25" Disks + Box deal

|   |       |
|---|-------|
| 25 DS/DD 48 TPI + 100 Capacity Box .....  | 13.70 |
| 50 DS/DD 48 TPI + 100 Capacity Box .....  | 19.40 |
| 25 DS/DD 96 TPI + 100 Capacity Box .....  | 14.90 |
| 50 DS/DD 96 TPI + 100 Capacity Box .....  | 21.70 |
| 25 DS/HD 1.6 Meg + 100 Capacity Box ..... | 27.00 |
| 50 DS/HD 1.6 Meg + 100 Capacity Box ..... | 43.75 |

All other Qtys = Disk price + 10 Box Price

### 3.5" Disks + Box deal

|                                  |        |
|----------------------------------|--------|
| 25 DS/DD + 40 Capacity Box ..... | 23.50  |
| 50 DS/DD + 80 Capacity Box ..... | 43.50  |
| 25 DS/HD + 40 Capacity Box ..... | 84.00  |
| 50 DS/HD + 80 Capacity Box ..... | 149.50 |

All other Qtys = Disk price + 10 Box Price

All prices inclusive of VAT and carriage

# ALL PRODUCTS 100% GUARANTEED



# Get your recording times taped

*Peter Harris knows how to find programmes quickly*

**M**OST position indicators on audio and video tape recorders count the number of turns made by one or other of the tape spools. This means that there is no simple relationship between the number on the tape counter and the playing time left on the tape. No one relishes the task of trying to find a programme that they have recorded just after a two hour film, but help is now at hand.

TapeTim is a routine that returns a table of counts for 5 or 10 minute intervals on a tape from just two measurements made at around half-way and the end of the tape.

Type the program in, check it with Get it Right! and save it. Then run it and follow the on-screen prompts to create your personal tape index. You have to enter two pairs of values – time and counter – for the program to work.

The choice is yours, but bear the following in mind: Two values at the start of the tape, say 10 minutes apart, will stop the program working as the method of calculation used will take hours to work out the higher counter points. In fact any data pairs which are close together give inaccurate results.

The further apart on the tape the measuring positions are, the better the results – the ideal values being near the beginning and end. So put on the tape, rewind it then reset the counter. Play the tape for 10 minutes and record the counter

position, then wind it through to the end and record the final position. For the best accuracy you could have the tape play through normally and do something else while it's busy.

For the mathematically inclined, the routine uses the fact that the spiral of tape may be considered as a series of concentric circles, since it is so thin relative to the radius. Therefore the running time is proportional to the sum of the circumferences of the circles to that point.

The program may be used with both audio and video tapes, but needs to be run for each different length and recorder – we've found that there is not much difference between brands.

```

10 REM TapeTim3
20 REM by Peter Harris
30 REM (c) The Micro User
40 INPUT Count 1: C1%TAB(15,VPOS-1)T
ime 1:T1%
50 INPUT Count 2:C2%TAB(15,VPOS-1)T
ime 2:T2%
60 INPUT Length of tape (mins):L%
70 PRINT Output to printer? (Y/N) ;
80 REPEAT AS=CHR$(GETAND&5F)
90 UNTIL INSTR("YN",AS)>0:PRINTAS
100 IF AS="Y" VDU2
110 PROCsimul(C1%*2,C1%,T1%,C2%*2,C2%,
T2%)
120 A=X:B=Y
130 PRINT "A=";A"B=";B'
140 IF L%>60 I%=10 ELSE I%=5
150 IF INSTR("Yy",AS) VDU2
160 PRINT "Tape length ";L% mins"
170 FOR N%=I% TO L% STEP I%
180 count%=FNcount(N%,A,B)
190 PRINT N% mins",count%
200 NEXT VDU3:END
210 DEFFNcount(time,A,B)
220 LOCAL C,K:K=C2%/T2%:C=time*K
230 REPEAT T=(A+C+B)*C:C=C+(time-T)*K
240 UNTIL ABS(time-T)<0.01:=INT(C+.5)
250 DEFPROCsimul(a1,b1,c1,a2,b2,c2)
260 LOCAL K:K=a1*b2-b1*a2
270 X=(c1*b2-b1*c2)/K
280 Y=(a1*c2-c1*a2)/K:ENDPROC

```

✓ Get it right!

|              |              |              |
|--------------|--------------|--------------|
| 10 = 00      | 110 = 2CD9 5 | 210 = FEBB D |
| 20 = 00      | 120 = 9CC7 9 | 220 = 378C 1 |
| 30 = 00      | 130 = D273 B | 230 = 9C94 B |
| 40 = E223 3  | 140 = B5BF 9 | 240 = 72A8 0 |
| 50 = 2B7A 9  | 150 = E255 F | 250 = E661 4 |
| 60 = C9A4 A  | 160 = E0E9 5 | 260 = BA88 C |
| 70 = A635 7  | 170 = 590F 2 | 270 = 6432 E |
| 80 = E46F 4  | 180 = 7A56 F | 280 = 21D 0  |
| 90 = 15F3 0  | 190 = 49C9 B |              |
| 100 = 4DB6 9 | 200 = 54BA 5 |              |





# SILICON VISION

SOFTWARE FOR THE ARCHIMEDES & BBC



## SolidCAD

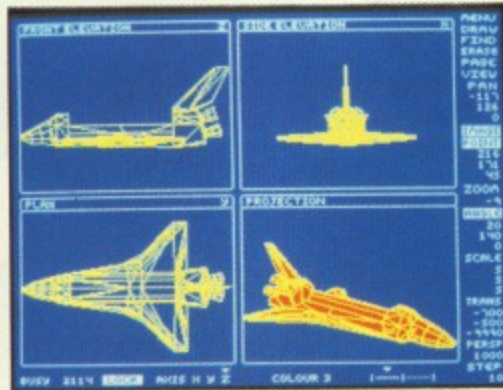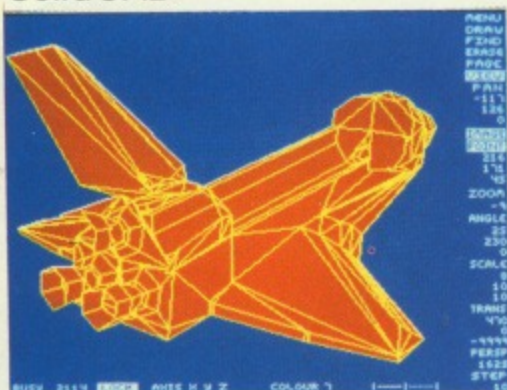

The ultimate 3D Draughting System for Architectural design, Interior design, Engineering Design and Teaching CDT. Allows drawing in plan, front & side elevations and also directly in 3D view. Includes powerful zoom & pan options for precision draughting and surface definition for creating solid colour objects. Also includes Sweep, Extrude & Macro facilities for designing very complex objects easily. Designs created with SolidCAD are compatible with the Realtime Graphics Language for high-speed flicker-free animation. The custom Archimedes version also performs smooth shading for realism. SolidCAD(Arc) users can upgrade to the Realtime Solids Modeller (Arc) for £40.00.

£49.95 (ARC or BBC B/B+ /Master), **New**

## REALTIME SOLIDS MODELLER

The package includes both the sophisticated design environment of SolidCAD and the high speed animation capability of a Realtime Graphics Language (RGL) module developed in pure ARM Risc code for supercharged performance. The package is ideal for Architectural design, Interior design, Engineering design & teaching CDT. The RGL module can be used to create standalone flicker-free animation of designs from your own programs. Smooth shading is also performed for realistic images. Through our in-house expertise in 3D Design and High-speed techniques, no other package can rival the design environment & animation speed of the Realtime Solids Modeller.

£89.95 (ARC) **New**

## REALTIME GRAPHICS LANGUAGE

The Realtime Graphics Language rom provides a complete 3D Solids/Wireframe animation system with 52 star commands and 3D Editors for designing objects to animate from your own programs. Includes a 35,000 pixels/sec line generator for fast 3D drawing rates, 3D Rotate, Scale, Orbit, Perspective and Turtlegraphics. Also compatible with designs created with SolidCAD (BBC).

£49.95 (BBC B/B+ /Master)

## SUPER-DUMP

The ultimate printer driver which takes advantage of the highest resolution capability of ordinary Epson compatible printers to provide 1920x1024 resolution. Images can also be scaled, positioned and previewed before printing. Fully compatible with SolidCAD, Realtime Graphics Language, Gate-Array design system & 3D CAD/Animation system. Your own graphics programs or other CAD packages can be made compatible with Super-Dump by the addition of a few simple commands. An example program is included in the package.

£15.95 (BBC B/B+ /Master), £24.95 (ARC) **New**

## Presentation System

The package provides an interactive environment to create, edit and play-back computer controlled presentations for lectures and demonstrations. Also handles graph plotting for polynomials & user-defined functions which can be incorporated within the presentations.

£34.95 (BBC B/B+ /Master), £49.95 (ARC) **New**

All Archimedes software run in native mode on A305 - A440


**SILICON VISION LTD, SIGNAL HOUSE, LYON ROAD, HARROW MIDDLESEX HA1 2AG. TEL: 01-422 2274 or 01-861 2173**

**FAX: 01-427 5169. TELEX: 918266 SIGNAL G.**

(Access/Mastercard/Eurocard accepted)

All prices include VAT and Carriage (Overseas orders add £4).

## ARC-PCB

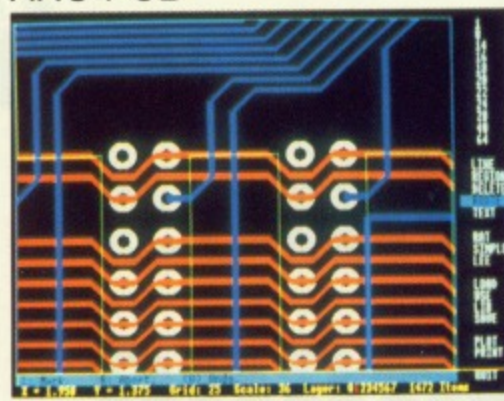

The ultimate PCB design system developed specifically for the Archimedes with a specification that cannot be matched. Includes Automatic routing, Rats-nesting, 8 layers, Surface mount capability, 0.001" resolution, 32"x32" maximum board size, On-line Help, Fast Zoom/Pan/Redraw, Text & Silkscreen facility, Variable Line/Pad/Text/Grid sizes, Part Libraries, Block Move/Copy/Rotate/Mirror/Erase options, and up to 300,000 components.

For hardcopy, the system supports the industry standard HP-GL, GRAPHTEC, PLOTMATE plotters and printers at their highest resolutions. Also provides automatic drilling information with extensive support from PCB manufacturers for final layout and production, optional 1 year telephone Hotline support (£100) and software maintenance service (£75) is also available.

£195.00 (ARC) **New**

## Risc BASIC

The first true BASIC V syntax compiler which will convert your programs into supercharged Risc code for turbo performance leaving the competition standing. Features include Relocatable modules, full cross references, Double precision floating point & Integer support, in-line assembly, Window-based or command line compilation environment, standalone code generator, object code optimiser, full array manipulation and dimensions support, multiple exit structures & full runtime error handler.

£99.95 (ARC) **New**

## RiscFORTH

A new 32-bit implementation of the FORTH-83 standard, designed to take full advantage of the ARM architecture. Features include Multi-tasking, Optimising compiler, built-in ARM assembler with floating point mnemonics, built-in Full screen Editor, File system interface, OS calls support, Floating point & Integer maths, WIMP support, Single-step debugger, Shadow screen for documentation, Block manipulation, Dictionary & Vocabulary display, Call finding and a standalone code generator.

£99.95 (ARC) **New**





# Tabs on time

If you're lucky enough to use a Z88 you will probably be wondering how you ever managed without it. The diary is a very useful utility for logging time spent on various activities, but it doesn't automatically include time of day – and adding everything up when a project is finished is a real chore. But the Z88 has an internal clock and you can easily have a Basic program running while you're working on something else – hence the Logger.

This simple utility can be used to keep a close track of time spent on a large number of different projects – it never stops running and its data is kept saved in a file so the information is not lost even with a soft reset.

Type the program into your Z88 – or enter it on your BBC Micro and transfer it across. Make sure you save it before you start. Type RUN and you never need to stop it because all its functions are available from the main menu and the Z88 index can be accessed as normal by pressing  $\square$ I.

To use Logger just decide what project or application you are going to work on next and also the activity within that application, and enter this information at the prompts – the date and time are taken care of automatically. If you change your mind halfway through, enter END at either the application or activity prompt.

Whenever you want to take a break from logging press B at the main menu. Also, the last few entries can be edited by pressing E. This is very useful if you forget to tell Logger that you're taking a break for lunch, for example. You simply press B when you get back and edit the time to when you actually started your break. The log file can be cleared by pressing C, and press Escape to change the log file. Entering END at the new file prompt will make the program stop.

The option to print the log is activated by P. This creates a file for you to load in to PipeDream for printing later – for long logs this may take a few minutes. Be patient and you will be provided

with a document with the same file name as the log but ending in an L. When you request a print of the log all the entries are grouped together according to the application name that you have given them.

Line 80 contains several variables that you may want to modify. If there are insufficient applications try increasing *mx*. The device and directory where the log files are stored can be changed from the default :RAM.0/ by changing the value of *Dr\$*. As the program stands all entries that begin after 6:30 pm will be flagged with a ^ as possible overtime. By altering the values of *O* and *O\$* it is possible to change both the time and the symbol.

```
10 REM LOGGER
20 REM By Ian Summers
30 REM (c) The Micro User
40 PROCset
50 PROCof
60 REPEAT:PROCLg:UNTILFALSE
70 DEFPROCset
80 mx%=40:Dr$=:RAM.0/:O%=18.5*3600:
O$="":REM personalisation items
90 ONERRORCLOSE#0:IFERR=17CLS:GOTO50
ELSE IFERR=252PROCnr:GOTO60 ELSE REPORT:
PRINT" at line "ERL:END
```

Turn to Page 54 ►

*Keeping track  
of your tasks  
made easy by  
Ian Summers*

## POSSIBLE PITFALLS

Don't call your application anything beginning with an asterisk or it will be ignored. Don't include any commas in filename, application or activity. Any activity that lasts less than a minute will be ignored but the time will be added to the application total.

Don't delete the file called Control. If you must tamper with the log file press Escape and specify the same log file – it's not possible to edit any entries that were entered before pressing Escape.

Hours and minutes taken to accomplish activity (Ones marked ^ were started after 18:30 hours. Entries of less than a minute are not printed)

| Log of file: TESTLOG   |        |          |                                     |
|--|--------|----------|-------------------------------------|
| Friday 29th July 1988  |        |          |                                     |
| 17:24  | LOGGER | 1:28     | WRITING DRAFT ARTICLE               |
| 19:22  | LOGGER | 0:02     | PRINTING DRAFT                      |
| 19:24  | LOGGER | 0:28     | READING AND MARKING CORRECTIONS     |
| 19:53  | LOGGER | 0:22     | TYPING IN CHANGES                   |
| 20:15  | LOGGER | 0:10     | FINAL CHECKING ON SCREEN            |
| 20:25  | LOGGER | 0:02     | PRINTING ARTICLE                    |
| 20:27  | LOGGER | 0:02     | CREATING PRINT FILE OF LOG          |
| 20:30  | LOGGER | 0:02     | ADDING PRINT FILE OF LOG TO ARTICLE |
| ARTICLE  |        |          |                                     |
| LOGGER   |        | 2:38     | TOTAL (hrs:mins)                    |
| Total hours for TESTLOG are 2:38                             |        |          |                                     |
| Application (all activities of the same application grouped) |        | Activity |                                     |

An example log



```

IDS(dy$,q%,4,r%-q%-4):mh%=0
440 REPEAT:mh%=mh%+1:UNTILmh$=M$(mh%):
yr%=VAL(MID$(dy$,r%+1,s%-r%-1))-1988:an%
=yr%*365+D$(mh%-1)+dy%-1:an%=an%+yr%DIV4
:IFmh%<3ANDyr%MOD4=0an%=an%-1
450 =an%
460 DEFPROClog:IF nn CLS:PRINT SS"Last
session... "$B$l$d$ "tm$B$ "RSAP$R$ "
B$AC$B$
470 REPEAT:CLS:tm$=FNrt:PRINT R$$$ "s
t$$$R$B$l$d$ "tm$B$ "RSAP$R$ "B$AC$B$T
AB(13,1)R$$$ Menu "R$$$TAB(13,2)R$ B
R$ will cause a break in loggingTAB(13
)R$ C"R$" will clear "lf$R$$$;
480 PRINT " Log file "R$$$SPC13R$ E "R
$" to edit the last few entries of "lf$
SPC13R$ P "R$" will print "lf$R$$$ Ti
me "R$$$SPC7R$$$ESC"R$$$ to start a ne
w log"SPC13R$ Select from menu or pres
s any other key to log change in ";
490 PRINT "application/activity "R$CST
AB(0,5)S$Fm$$$
500 REPEAT:G=INKEY(0):IFG>0G=G AND&5F
510 tm%=Fntm:PRINTSSTAB(0,7)FNrt S$;:U
NTILG>0:PRINTTAB(0,8)C$:IF G = ASC("B")
THEN st$="Break in... ":PRINT:PROClog(*
BREAK*,"<",<FALSE):UNTILFALSE
520 IFG=ASC("C")PROCclear:UNTILFALSE
530 IFG=ASC("P")PROCpr:UNTILFALSE
540 IFG=ASC("E")PROCed:UNTILFALSE
550 NPS=FNnew("Application ",R$+AP$+R
$,9):IF NPS = "END" CLS:UNTILFALSE
560 NT$=FNnew("Activity"+STRING$(5," "
),B$+AC$+B$,42)
570 IFNT$ = "END" CLS:UNTILFALSE
580 IF NPS <> "" THEN AP$=NPS
590 IF NT$ <> "" THEN AC$=NT$
600 IF AP$="" OR AC$="" THEN CLS:PROCe
r("You must enter an application and act
ivity"):UNTILFALSE
610 st$="Logging... ":CLS:PROClog(AP$
,AC$,fg):UNTILFALSE:ENDPROC
620 DEFFNnew(ty$,df$,ln%):REPEAT:PRINT
'ty$(DEFAULT="df$) up to "ln%" charac
ters"STRING$(ln%+2,".")<"a$CHR$225STRI
NG$(ln%+6,CHR$8);:INPUTnew$:IFLENnew$>ln
%VDU7:UNTILFALSE ELSE UNTILTRUE:=new$
630 DEFPROCed:REPEAT:CLS:FORPN%=6TO0ST
EP-1:tm%=SC$(PN%)MOD(24*3600):PRINTR$ "
PN%+1 "R$;:IFAP$(PN%)<>""PRINTS$DY$(PN%
)TAB(38)LEFT$(FNrt,5)S$ "RSAP$(PN%)R$
"B$AC$(PN%)B$ELSEPRINT
640 NEXT:PRINTR$ Enter the number to
edit an entry or "a$CHR$225" to make cha
nges and return to main menu "R$ ";:REP
EAT:G=GET:UNTILINSTR("1234567"+CHR$13,CH
R$G)
650 IFG=13UNTILTRUE:PROCRe:ENDPROC
660 PRINTTAB(0,7)SPC80;:G=6-49:REPEAT:
CLS:PRINTR$SPC3S$DY$(G) "SSRS:tm%=SC$(
G):PRINTR$ A "R$LEFT$(FNrt,5)R$ B "R$
AP$(G)R$ C "R$AC$(G)R$ Which attribu
te of the entry do you want to change ("
a$CHR$225" for no changes) "R$ ";
670 REPEAT:H=GET:UNTILH-64>0ANDH-64<40
RH=13:IFH=13UNTILTRUE:UNTILFALSE
680 ONH-64GOTO690,740,780
690 tm%=Fntm:PRINTR$ Currently "LEFT
$(FNrt,5) "R$ How many minutes do you
want to add to time (use '-' to take awa
y) ";:INPUT MN$:S$=SC$(G)+MN%*60
700 IFSS%<SC$(G+1)PRINTCHR$7R$ You ca
nnot move the time to before that of the
previous entry "R$ Press a key:IFGET:
UNTILFALSE
710 IFG>0IFSS%>SC$(G-1)PRINTCHR$7R$

```

54 MICRO USER February 1989



```

cleared):ENDPROC
1080 DEFPROCPr:CLS:PRINT$ Calculating.
..SS:PROCTs(30):tm:=FNdate(dy$+,"")*24*
3600+FNtm:F=OPENUP(Dr$+Fn$):PTR=F:EX:=PR
INT=F,*END*:PRINT=F,STR$(tm):PRINT=F,
*PRINT*:CLOSE=F:F=OPENIN(Dr$+Fn$):P%=0
:B%=0:PRINT:FORX%=0TOm%:T%(X%)=0:NEXT
1090 REPEAT:PROCrd:PRINT.:N%=TRUE:IF
P%>0PROCrd
1100 IFN%P%=P%+1:AS(P%)=AS(W%)-U%:T%(
B%)=T%(B%)+W%:U%=T%:B%=P%
1110 UNTILEOF=F:CLOSE=F:PROCdp:ENDPROC
1120 DEFPROCrd:dS=dS:INPUT=F,dS:IF VAL(
dS)=0 INPUT=F,TS ELSE TS=dS:dS=dS
1130 IFdS=*END*:T%=VAL(TS):REPEATINPUT
=F,dS:UNTILEOF=F:dS=dS:AS=*PRINT*:YS=
:ENDPROC
1140 INPUT=F,AS,YS:T%=VAL(TS):ENDPROC
1150 DEFPROCrd:FORX%=1TOP%:IFAS=AS(X%)W%
=T%-U%:T%(B%)=T%(B%)+W%:U%=T%:B%=X%:N%=F
ELSE
1160 NEXT:IFN%ANDP%=mx%PROCer(Too many
applications: increase mx% (line 60))
1170 ENDPROC
1180 DEFPROCdp:IFP%=0 PROCer(No log fo
und):ENDPROCELSE PRINT
1190 OU=OPENOUT(Dr$+Fn$+L):PRINT=OU,
%OP%BM4:PRINT=OU,%OP%LM4:PRINT=OU,%O
P%HE/LOGGER %H4%(C) Ian Summers 1988%4%
//Page nPn/
1200 PRINT=OU,%OP%FO/+Fn$+L//nDn/P

```

```

RINT=OU,%CO:A,72,72%CH2%Log of file:
+Fn$+H2%:PRINT=OU:tt%=0:FORX%=1TOP%
:IFLEFTS(AS(X%),1)=*ORT%(X%)<60THENGOT
01270
1210 tt%=tt%+T%(X%):Ld$=NEW:PRINT=OU,
:PRINT=F:OPENIN(Dr$+Fn$):PROCrd:U%=T%
:AOS=AS:CO$=YS:REPEAT:PROCrd
1220 IFdS<>Ld$ANDAOS=AS(X%)PRINT=OU,
+ +IPS+dS+IPS:PRINT $SDSS:Ld$=dS
1230 IFU%MOD86400>0VS=0ELSEVS=
1240 IFAOS=AS(X%)ANDT%-U%>59tm%:U%=OVS=
LEFTS(FNrt,5)+ +AOS+STRINGS(10-LENAOS,
)+FNHR(T%-U%)+VS+STRINGS(3,")+CO$=P
RINTOUS:PRINT=OU,OUS
1250 AOS=AS:CO$=YS:U%=T%:UNTILEOF=F:CLO
SE=F:OUS=STRINGS(6,")+AS(X%)+STRINGS(1
0-LENAOS(X%),")+FNHR(T%(X%))+STRINGS(4,
")+TOTAL (hrs:mins)
1260 PRINTBSOUSBS:PRINT=OU,PBS+OUS+PBS
1270 NEXT:LLS=Total hours for +Fn$+
are +FNHR(tt%)
1280 PRINTBSLLBS:LLS=PBS+LLS+PBS:PRI
NT=OU,:PRINT=OU,LLS:CLOSE=OU
1290 PRINTTo print the log - go into a
blank PipeDream application and enter:
TAB(10)BSa$CHRS43"FL"Dr$Fn$L "a$CHRS22
5TAB(10)a$CHRS43"PO "BSa$CHRS225"
1300 PRINT "Print of "Fn$ finished - P
ress a key to continue:IFGET:ENDPROC
1310 DEFPROCer(er$):CLS:PRINT Zser$F$
"Press a key to continue"FS:IFGET:PRINT

```

```

TAB(0,2)SPC30TAB(0,1):ENDPROC
1320 DEFPROCnr:PROCer("Device "+Dr$+" n
early full"+gp$+"Last action has not bee
n carried out"+gp$+"Create some room usi
ng FILER before continuing"):ENDPROC
1330 :
1340 DEF PROC(B)
1350 REM Cambridge Computer Ltd
1360 IF B=0 THEN ENDPROC
1370 A=OPENOUT:RAM.0/EE.CLI
1380 BS="RAM.0/E.CLI"
1390 PRINT#A,".">+BS
1400 PRINT#A,"J",LIST+STR$(B),"PROC"
1410 CLOSE#A
1420 *CLI .*:RAM.0/EE.CLI
1430 ENDPROC
1440 DEF PROCF
1450 A=INKEY(0)
1460 A=OPENIN BS
1470 INPUT#A,AS,AS
1480 CLOSE#A
1490 A=OPENOUT BS
1500 PRINT#A,"J",AS
1510 PTR#A=PTR#A-1
1520 BPUT#A,0
1530 CLOSE#A
1540 *ERASE :RAM.0/EE.CLI
1550 VDU8
1560 OSCLI*CLI .<"+BS
1570 ENDPROC

```

## 21st Software

PRESENTS A SELECTION OF HARDWARE, UTILITIES & SOFTWARE FOR THE BBC MICRO NOW VISA AGENTS

| Cassettes Only |       | Discs Only |       |
|----------------|-------|------------|-------|
| Death Star     | £5.95 | Overdrive  | £3.95 |
|                |       | Repton 2   | £3.95 |
|                |       | Repton     | £3.95 |

| NEW SUPERIOR'S PIPELINE                |  |
|--|--|
| Cass: £7.50 Disc: £9.95 Compact £12.50 |  |
| PLAY IT AGAIN SAM III or IV or V or VI |  |
| Cass: £7.50 Disc: £9.95 Compact £12.50 |  |
| REPTON THRU INFINITY                   |  |
| Cass: £10.25 Disc: £11.95              |  |
| EXILE                                  |  |
| Cass: £10.25 Disc: £11.95              |  |

| NEW RELEASES          |                  |
|-----------------------|------------------|
| Superior's            | Cass Disc Cmpct  |
| Play it Again Sam 5   | 7.50 9.95 12.50  |
| By Fair Means or Foul | 7.50 9.95 12.50  |
| Play it Again Sam II  | 7.50 9.95 12.50  |
| Spycat                | 7.50 9.95 12.50  |
| Tynesofts             |                  |
| Winter Olympiad 88    | 7.95 12.95 12.95 |
| Indoor Sports         | 7.95 12.50 12.50 |
| Saigon                | 7.95 12.50 12.50 |
| Summer Olympiad 88    | 7.95 12.50 12.50 |

| C.D.S.              |             |
|---------------------|-------------|
| Colossus Chess IV M | 8.25 12.95  |
| Brian Clough M      | 12.95 15.95 |

| CLARES              |       |
|---------------------|-------|
| Fortnite Plus       | 15.95 |
| Replica III         | 13.50 |
| Beta Base Utilities | 10.85 |

| DATABASE                 |       |
|--------------------------|-------|
| Instant Mini Office Roms | 54.95 |

| HEWSON |            |
|--------|------------|
| Urduum | 7.95 12.95 |

| KOSMOS SOFTWARE          |           |
|--------------------------|-----------|
| French Mistress A or B   | 7.95 8.95 |
| German Master A or B     | 7.95 8.95 |
| Spanish Tutor A or B     | 7.95 8.95 |
| Answer Back Jun. or Sen. | 8.95 9.95 |
| Answer Back Sport        | 8.95 9.95 |
| Identify Europe          | 8.95 9.95 |

| LEISURE GENIUS |       |
|----------------|-------|
| Scrabble       | 11.50 |

| SPECIAL DISCS                |  |
|------------------------------|--|
| Bugbyte/Lothlorien           |  |
| World War 1 Disc-£4.95       |  |
| Bugbyte Compilation II-£4.95 |  |
| Both Together-£9.45          |  |

| SPECIAL! SPECIAL!                  |  |
|------------------------------------|--|
| ANY 3 SUPERIOR, BBC DISCS          |  |
| That normally retail at £9.95 each |  |
| Only £27.00 (for 3)                |  |

| ARCHIMEDES SOFTWARE |        |
|---------------------|--------|
| ToolKit             | £37.95 |
| Artisan             | £37.95 |
| Alpha Base          | £45.95 |
| Image Writer        | £26.95 |

| SUPERIOR SOFTWARE |        |
|-------------------|--------|
| Zorch             | £17.45 |
| Conqueror         | £20.45 |

| ACORN SOFTWARE AND SUPERIOR SOFTWARE |                   |
|--------------------------------------|-------------------|
| Repton 3 M                           | 7.95 9.95 12.95   |
| Elite M                              | 11.65 13.65 17.95 |
| Revs + 4 Tracks M                    | 11.65 13.65 18.65 |
| Acornsoft Hits I or II M             | 7.95 9.95 12.95   |
| Superior Collection Vol I M          | 7.95 9.95 12.95   |
| Superior Collection Vol II M         | 7.95 9.95 12.95   |
| Grand Prix Cons. Set M               | 8.45 10.65 12.95  |
| Around the World 80 Screens          | 5.95 8.75 12.95   |
| Codenamed Droid M                    | 7.95 9.95 12.95   |
| Crazee Rider M                       | 7.95 9.95 12.95   |
| Life of Repton M                     | 5.95 9.95 12.95   |
| Elair M                              | 7.95 9.95 12.95   |
| Spellbinder M                        | 7.95 9.95 12.95   |
| Bonecruncher M                       | 7.95 9.95 12.95   |
| Palace of Magic M                    | 7.95 9.95 12.95   |
| Play it Again Sam                    | 7.95 9.95 12.95   |

| TYNESOFT   |                  |
|--|------------------|
| Spy Vs Spy M   | 7.95 10.95 13.45 |
| Goal   | 8.50 10.65 11.65 |
| Futureshock M  | 8.50 10.65 11.65 |
| Jet Set Willy II                                       | 8.50 10.65 11.65 |
| The Big K.O.   | 8.50 10.65 11.65 |
| Commonwealth Games                                     | 8.50 10.65 11.65 |
| Winter Olympics  | 8.50 10.65 11.65 |
| Micro Value (4 games)                                  | 3.99             |
| Micro Value Gold (contains Ian Botham + Jet Set Willy) | 3.99             |

| UTILITIES & ROMS Etc. |  |
|-----------------------|--|
| UTILITIES & ROMS Etc. |  |

All new Superior Titles available on release date:

ALL PRICES ARE INCLUSIVE OF VAT AND CARRIAGE EDUCATIONAL & GOVT ORDERS WELCOME

We guarantee all titles are originals. We offer a quick and reliable service.

Please ensure all Visa & Access orders quote the cardholders name and registered address

**21st SOFTWARE LTD. Dept MU**  
"Cheyne House"  
56 Styal Rd. Wilmslow SK9 4AQ  
Tel: Wilmslow (0625) 528885

**ACCESS & VISA HOTLINE**  
Ask for Jacqui  
0625 528885  
24Hr Answer Service

## SQUIRREL SOFTWARE

Programs on Disc for BBC B, B+, Compact and Master



The CARES DISK comprising all four Cares utilities - £29.95

### INVESTMENT CARE PLUS

Keeps track of all UNIT TRUSTS, SHARES etc. Produces displays & printouts of Capital Gains, Dividends. Current Holdings valuations showing Quantities. Bid/Offer prices. Values. Gains/Losses. APR. HiVal %. etc. and a 3D BAR CHART program with a disc search procedure to collect past data.

### CASH CARE

Bank account AND Savings account. Full Analysis - 60 categories. Budget Forecasts. 3-D Bar Charts. Password Protection. Easy storage of data. Printouts of all accounts and Bar Charts.

### BUILDING SOCIETY CARE

Checks the complex interest calculations involved on a day to day basis. Shows interest earned to date. Spreadsheet display. Easy storage of data. Printout of account to date

### VAT CARE

225 Sales AND 225 Purchases each month (BBC). Three month period. ALERT warning if VAT 2% or more incorrect. Easy storage of data. Printout with month & 3 monthly totals.

### TV DIRECTOR - popular in schools and colleges

Make your own video without cameras! £14.95

### THE GAMES DISK COMPILATION OF GAMES PROGRAMMES

Supergolf - Trafalgar - Polar Perils - Bunfun £14.95

### PROGRAMS FOR ARCHIMEDES

**THE CARES DISK** - improved version of above £34.95

**SUPERWOLF** - adapted especially £12.95

**WORDSSQUARE** - crossword compiler with a 72000 + wordbank - can complete a 15 x 15 square in less than 60 seconds! Full printout facilities to produce professional looking crosswords £36.95

PLEASE FORWARD ME .....40TK ☐ 80TK ☐ 3.5 ☐  
I HAVE A BBC-B ☐ BBC B+ ☐ COMPACT ☐ ARCHIMEDES ☐ MASTER ☐  
DEBIT MY ACCESS CARD NO .....  
OR ENCLOSED £ ..... SIGNATURE .....  
ADDRESS .....

Dept MU2, 4 Bindloss Avenue, Eccles, Manchester M30 0DU  
Please phone 061-789 4120 for brochure



Compiled by Steve Turnbull

Searching through back issues of the Library looking for a particular routine that you were sure was in the April 1987 issue can be a very time-consuming and tedious. So this month we're producing an index of all the programs we've ever published in the Library along with a brief description of what they are for. Now all you have to do to find that elusive utility is look it up.

### Input

| Name            | Language      | Description   | Issue          |
|-----------------|---------------|---|----------------|
| Key input       | Basic         | Limited single key entry routine                    | March 1987     |
| String input    | Basic         | Safe string entry routine to replace INPUT command  | April 1987     |
| Number input    | Basic         | Controlled input of numbers replacing INPUT command | May 1987       |
| Form filler     | Wordwise Plus | Easy entry of data into forms                       | June 1987      |
| Clear input     | Basic         | String input length illuminated by blocks           | January 1988   |
| String tidy     | 6502          | Standardises upper/lower case of input strings      | August 1988    |
| Binary print    | Basic         | Displays numbers in binary                          | September 1988 |
| Protected input | Pascal        | Controlled character input                          | October 1988   |

### Output

| Name                  | Language      | Description  | Issue          |
|-----------------------|---------------|--|----------------|
| Hexout                | 6502          | Prints hexadecimal numbers   | March 1987     |
| Print text            | 6502          | String output  | March 1987     |
| Faint characters      | 6502          | Makes on-screen text unreadable                                      | June 1987      |
| String output         | 6502          | Prints string containing any Ascii code                              | July 1987      |
| Formatting numbers    | Basic         | Allows numbers to be printed in specific format                      | July 1987      |
| Print using           | Basic         | Returns string of number in specific format                          | September 1987 |
| Delay print           | Basic         | Prints strings slowly with word wrap                                 | September 1987 |
| Feint text/Mode 7 zap | 6502/Basic    | Modifications to Faint text plus Mode 7 screen zoom in and zoom out. | September 1987 |
| Striped writing       | Basic         | Text printed with striped coloured letters                           | October 1987   |
| Double height         | Basic         | Prints double height characters in Modes 0 to 6                      | November 1987  |
| Text scroller         | Basic         | Scrolls text across the screen                                       | November 1987  |
| Ascii to Integer      | 6502          | Converts number string in various bases to integer                   | December 1987  |
| Decimal to Roman      | Basic         | Faster conversion from decimal to Roman numerals                     | December 1987  |
| Labels                | Wordwise Plus | Prints address labels with special message added                     | December 1987  |
| Fast ellipses         | Basic         | Draws ellipses without sines and cosines                             | January 1988   |
| Trendy print          | Basic         | Reveals text smoothly from top to bottom                             | January 1988   |
| Vertical labeller     | 6502          | Rotates a text string through 90 degrees                             | February 1988  |
| Disc jacket template  | Basic         | Prints a template to cut out and make disc jacket                    | April 1988     |
| Double height         | 6502          | Displays double height text using normal PRINT commands              | May 1988       |
| Elegant text printer  | 6502          | Output any string embedded in machine code                           | May 1988       |
| Smooth scroller       | 6502          | Scrolls message on Mode 2 screen with pause and flash                | June 1988      |
| Barrel scroller       | 6502          | Rolls characters on to screen from top to bottom                     | July 1988      |
| Roller                | 6502          | Rolls lines on to screen from top to bottom single or double height  | September 1988 |
| Super scroll          | 6502          | Moves big characters across the screen along a mathematical path     | January 1989   |

### Conversions

| Name             | Language | Description                                      | Issue        |
|------------------|----------|--|--------------|
| Number Bases     | 6502     | Prints a 16 bit number in any base from 2 to 255 | May 1987     |
| Roman to decimal | Basic    | Converts Roman numerals to decimal               | July 1987    |
| Decimal to Roman | Basic    | Converts decimal numbers to Roman numerals       | October 1987 |



## Disc

| Name               | Language | Description                                       | Issue         |
|--------------------|----------|---|---------------|
| Disc title check   | 6502     | Repeated disc checking until title matches string | May 1987      |
| Disc info          | 6502     | Displays number of files and size of disc         | June 1987     |
| ADFS total compact | Basic    | Ensures ADFS disc completely compacted            | October 1987  |
| Cat plus           | 6502     | Improved file/size information about disc         | October 1987  |
| File peek          | Basic    | Decides file type from load and exec addresses    | February 1988 |
| Basic Saver        | 6502     | Saves program using name in first line            | April 1988    |
| Password           | 6502     | Creates !boot file to ask for password            | April 1988    |
| Date stamp         | 6502     | Puts the date into the load and exec information  | January 1988  |

## Display

| Name         | Language | Description                      | Issue        |
|--------------|----------|----------------------------------|--------------|
| Pattern fill | 6502     | Character-based screen clear     | July 1987    |
| Melter       | 6502     | Screen clear in various patterns | October 1987 |

## Miscellaneous

| Name                    | Language               | Description   | Issue         |
|-------------------------|------------------------|---|---------------|
| Program-less Diary      | Basic                  | Uses Basic line numbers as dates for a diary        | May 1987      |
| Break message           | 6502                   | Prints message after Break or Control+Break         | October 1987  |
| Sample Menu             | Pascal                 | Protected input and menu system                     | October 1987  |
| Tab-copy                | 6502                   | Uses key press to jump to alternate routine         | November 1987 |
| Day find                | Basic                  | Gives day of week of date given                     | November 1987 |
| Date stamp              | Wordwise Plus (Master) | Includes current date when text printed             | August 1987   |
| Date stamping           | Wordwise Plus (Master) | Inserts date into text when segment invoked         | November 1987 |
| Sideways ram clear      | 6502                   | Clears a sideways ram with zeroes                   | December 1987 |
| Sound reducer           | 6502                   | Reduces volume of all sounds                        | December 1987 |
| Address print           | Basic                  | Prints address labels several across                | January 1988  |
| Wordwise startup        | Wordwise Plus          | Menu system for word processing                     | January 1988  |
| Envelope find           | Basic                  | Prints sound envelope definitions                   | February 1988 |
| Break message           | 6502                   | Prints start-up message on Break or Control+Break   | April 1988    |
| Simple terminal         | Basic                  | Routine that routes input and output to serial port | March 1988    |
| Easter day              | Basic                  | Calculates date of Easter for a given year          | March 1988    |
| Anagram                 | Basic                  | Outputs all permutations of input string            | March 1988    |
| Fax diary               | Basic                  | Prints calendar for personal organisers             | May 1988      |
| Ascii from Inter-Word   | 6502                   | Converts Inter-Word format file to Ascii            | June 1988     |
| Permanent function keys | 6502                   | Maintains function keys across Control+Break        | June 1988     |
| Elegant Anagrams        | Basic                  | Produces all permutations of a given string         | June 1988     |
| Centre & Underline      | Wordwise Plus          | Easy text styles for word processing                | July 1988     |
| Where on Earth?         | Basic                  | Calculates shortest distance between two points     | July 1988     |
| No language environment | 6502                   | Complete language permitting just star commands     | August 1988   |
| Line printing           | Basic                  | Short line editing routine with wysiwyg display     | October 1988  |
| Dancing cursor          | 6502                   | Interrupt driven routine to change cursor shape     | November 1988 |

## Programming

| Name                     | Language      | Description  | Issue          |
|--------------------------|---------------|--|----------------|
| Error recovery           | 6502          | Handles errors in machine code                       | March 1987     |
| Line number stripper     | Wordwise Plus | Removes line numbers from Ascii version of Basic     | March 1987     |
| Relocator                | Basic         | Program relocation routine                           | April 1987     |
| Cursor on/off            | 6502          | Switches the cursor on and off in any mode           | April 1987     |
| Master Clock/Calendar    | Basic IV or V | Splits result of TIMES into date or time             | April 1987     |
| Instant line stripper    | Wordwise Plus | Quick way of removing line numbers from Ascii Basic  | June 1987      |
| Joystick Test            | Basic         | Tests for presence of joystick                       | September 1987 |
| Random numbers           | 6502          | Generates random number from TIME                    | September 1987 |
| Environment              | Basic         | Detects which machine and filing system in use       | November 1987  |
| Register loader          | ARM           | Puts big numbers in ARM registers                    | February 1988  |
| VIA interrupts           | 6502          | Easy to use package for intercepting interrupts      | February 1988  |
| Label highlighting       | 6502          | Emphasises labels within machine code source         | March 1988     |
| Alpha sort               | Basic         | Bubble sorts an array of strings                     | March 1988     |
| Teletext characters      | Basic         | Allows you to design teletext graphics               | May 1988       |
| String search            | Basic         | Routine to find a string regardless of case          | May 1988       |
| Label highlights 2       | 6502          | Emphasises machine code labels in all modes except 7 | July 1988      |
| Functions                | Lisp          | Various list handling functions for Lisp             | July 1988      |
| Error correction         | Basic         | Automatic editing of line containing the error       | August 1988    |
| Number functions         | Basic         | Various number crunching routines                    | October 1988   |
| Memory status display    | 6502          | Displays information about current Basic program     | November 1988  |
| Shell sort               | 6502          | Demonstrates this efficient sorting technique        | November 1988  |
| Read/write I/O processor | 6502          | Routines to communicate easily from second processor | November 1988  |
| Word wrap                | 6502          | Text output routine with automatic word wrap         | November 1988  |
| Menu system              | Basic         | Complete expandable method of handling menus         | January 1989   |





**TEL: 0276 72046**  
**FAX: 0276 51427**

Now available through **PRES Advanced Computer Products** range of software products

### ADVANCED CONTROL PANEL

(20) /M/B/E/C £30 ex VAT £34.50 inc VAT

ACP is a front end control panel language providing a sophisticated yet friendly interface between user and computer for access to Languages, MOS functions and the users own file utility etc. Main features include pull down windows, simple to change MOS configure, floating point calculator, file manager, SW ROM's facilities

#### (16K EPROM & FULL MANUAL)

"Its very easy to create an entire customised front end for your own use." - *Acorn User, August 1987*.  
"ACP is much better than any of the other front end systems I've seen." - *Acorn User, August 1987*  
"I can recommend it to anyone who wants easy access to the Electron's functions." - *Electron User, August 1987*.

#### ACPs main features are:-

- \* Pull down windows operate throughout
- \* Users can create their own windows
- \* Simple to change MOS-s configure options
- \* Easy entry to other languages
- \* Floating point calculator
- \* File manager

### ADVANCED DISC TOOLKIT

(01) /M/B/E/C £30 ex VAT £34.50 inc VAT

Any Acorn user including Master, BBC B+, Electron, DFS, 1770 DFS, ADFS, 2nd & co-processors A.C.P.'s BEST SELLING product containing over 30 commands inc:- powerful memory & disc editor, search memory/disc/basic, catalogue/unplug ROMS, load/run programs below page, automatic menu, file transfer (inc. locked cassette files), ADFS utils etc, etc ("it's superb"... Database Pubs. - "A top-class toolkit - I have no hesitation in recommending it... Acorn User Nov. 86")  
(16K EPROM & FULL MANUAL)

### ADVANCED DISC INVESTIGATOR

(06) /M/B/E/C £25 ex VAT £28.75 inc VAT

A very powerful Disc utility for standard & non-standard discs. Backup most protected discs, edit any type of non-standard disc, check & repair faulty tracks, create new disc formats, copy 40 track discs to 80 track discs, verify two non-standard discs.  
("ADI features an extremely comprehensive sector editor, and one of the finest I've seen"... Tubelink on Prestel)  
(supplied on 16K EPROM + manual)

### ADVANCED 1770 DFS


3 versions ADM/C(11) - ADB(12) ADE (13)  
£30.00 ex VAT £34.50 inc VAT

ACP have totally re-written the Acorn 1770 DFS, enhancing existing features & adding new ones. The result is a very fast and powerful disc filing system with the ability to operate in double density occupying both sides of a disc (640K). Automatic file relocation, improved file handling, 62 file catalogue and Sways RAM can be used as a fast RAM DISC.  
(16K EPROM + comprehensive manual)

## PRES - ADVANCED FILE MANAGER

The ultimate 'front-end' for ADFS and DFS includes:

- Menu** - infinitely expandable
- Delete** - deletes any number of files
- Rename** - rename multiple files using wildcards
- Copy** - extremely comprehensive file copier

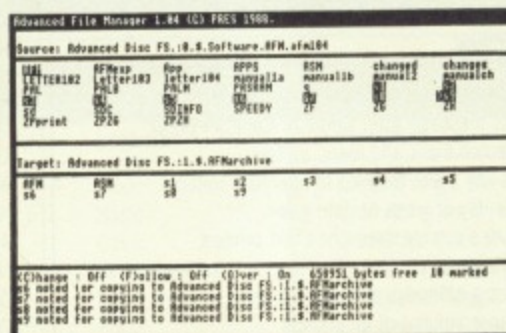

Screen picture shows AFM in Copy mode on Master Turbo

AFM follows the PRES 'Master Plan' of upwards compatibility - it runs on Electron, BBC B, B+, B+128, Master 128 and Compact, with Second/Co-processors and Acorn-compatible versions of DFS & ADFS.

#### AFM has four distinct modes:

**MENU** - allows browsing through the files and directories on a disc. Files are started from a menu of up to 7 options chosen for a selected ROM. Loaders are provided for Basic, The Basic Editor, View, ViewSheet, ViewStore, ViewSpell, Edit, Wordwise (+) and InterWord. This list can be expanded infinitely using an Acorn-approved OSWORD call... full details and example in the manual..

**DELETE** - allows files to be marked and then deleted with one keystroke.

**RENAME** - allows one or more files to be marked and then renamed using a wildcarded name, ie one which varies with each file renamed. Thus you could rename s1, s2 and s3 to be s1\_old, s2\_old, and s3\_old in one operation... and that's only the beginning! As well as using the whole of the original name you can also pick out individual characters to form part of the new name.

**COPY** - the strongest feature of AFM. It is a two stage copy routine. With both source and target directories shown on screen the files to be copied are marked. Once all the files have been marked copying is started and the computer can be left to get on with it! Large files can be split across several disks, and recombined.

As much as possible of the computer's memory is used for copying files, including unused parts of shadow screen memory, sideways ram banks (inc. AP7), ram cartridges (inc. ABR (32K) and AQR (256K)), tube memory (up to 61K), B+ paged ram (12K) and unused parts of the Slogger Master Ramboard (Electron).  
£25 ex VAT; £28.75 inc VAT

### ADVANCED PLUS 7

M/B/C/E

An internal battery-backed RAM upgrade for the Advanced Plus 6. TWO 16K pages of Sideways RAM, battery-backed and featuring full write protect facility. Just like ABR but fitted internally & vacating a cartridge slot. This product is compatible with all BBC/Master/Compact & Electron computers.

£39.50 ex VAT; £45.42 inc VAT

### ADVANCED ROM ADAPTER 2

M/E

An Acorn approved cartridge containing a card with special 'zero' profile sockets that allow you to fit compatible 8k or 16k EPROMS/ROMS. The cartridge is fully enclosed providing complete protection for your ROMS. Simple to use - No switching - complies fully to the Acorn (sideways) Rom filing system.

"The best ROM cartridge is by far the ARA 2... A&B Dec 86"  
£13.00 ex VAT; £14.95 inc VAT

### ADVANCED BATTERY-BACKED RAM

M/E/+1

A standard Acorn approved cartridge but containing 32k (2 x 16k) of sideways RAM. The added bonus is the battery-backed feature that holds the RAM contents when the power is switched off! Different ROM images can be loaded into either bank from ROM images previously saved. The banks can also be locked to imitate ROM use. The use of ABR is simplified by the newly written PRES software utilities which include:- SaveROM, LoadROM, Lock, Unlock, Printer Buffer, Zero and MakeROM a new utility to put your own software from disc or tape into ABR & use the ROM filing system. All software is supplied in ABR with a simple menu to transfer the utilities to your own media. No hardware switching - totally software controlled. Instructions for using supplied software and necessary information for users developing their own applications.  
"It's a superb add-on"... Database Software

£39.00 ex VAT; £44.85 inc VAT

### PRES ARCHIMEDES UTILITIES (New Product)

A low cost utility for Archimedes users containing: Memory allocation map, screen mode table, file type listing, module interrogator, continuous compaction & hard disc back-up.

Only £11.00 ex VAT; £12.65 inc VAT

### SPECIAL LIMITED OFFER FOR MASTER USERS

AMX Mouse package with Super Art Software & Mk III Mouse - Previously over £60 - PRES price:  
£29.00 ex VAT; £33.35 inc VAT

### PRINTER - PANASONIC KX-P1081 GRAPHIC EPSON

Compatible NLQ ready to connect including cable, delivery and VAT (Spare Ribbon £5.50 ex VAT; £6.23 inc VAT)  
Only £155.65 ex VAT; £179.00 inc VAT

Please send order to:-  
P.R.E.S. LTD.,  
6 Ave House, High Street,  
CHOBHAM, Surrey, England.  
GU24 8LZ. Tel: 0276 72046 (24 hr). Fax:  
0276 51427  
(Mail order only)  
All our prices include  
UK delivery & VAT



(in event of any query-  
please include your tel. no.)

Name .....

Address .....

Postcode .....


Tel: .....

Credit Card No.: .....

Product Qty @ Total

I enclose payment for £ .....  
Exp date ..... (Ref MU14)



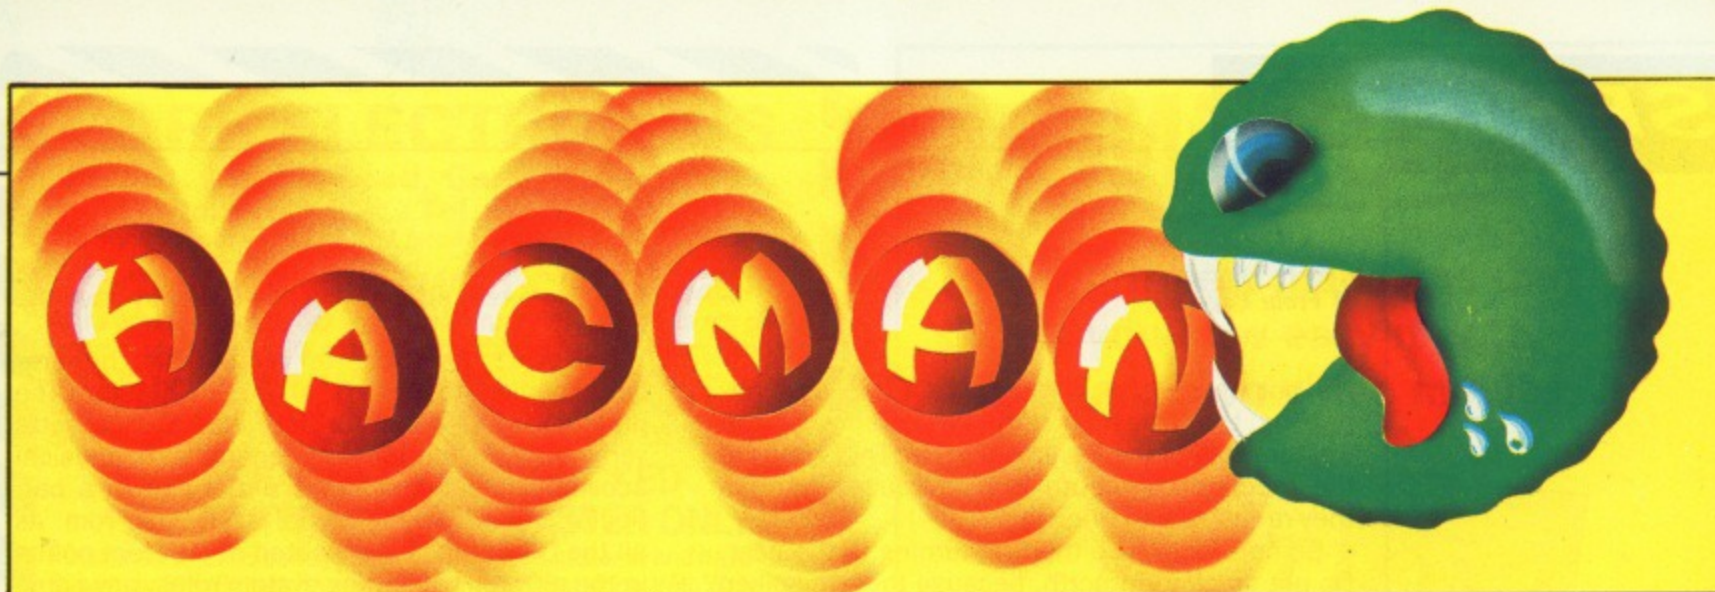

# Micro expansion

*Games old and new are investigated by Hac Man*

B B+ m1

**Y**OU may already know that Acorn recently halved the price of the Master 512 IBM compatible co-processor. For something that first appeared on the market at around £400 to retail now at a quarter of that price is an astounding bargain – and it has proved too much for me to resist.

What are my first impressions of IBM games? Not a lot. Many of them probably wouldn't even get on to the BBC Micro software shelves. Only one – a dungeons and dragons-type game by the name of Rogue – has really grabbed me. It's nothing at all to look at, but very addictive.

It has recently been re-released by Mastertronic. However, although the original game – available, I understand, through the public domain – worked almost perfectly on the Master 512, this new version does not – not even with the improved 2.1 version of Dos Plus. A great pity, since the new version features many enhancements.

I am trying to compile a list of software of all types – not just games – that run on the Master 512 and any information would be greatly appreciated.

## Clogger clashes

I first mentioned the subject of games clashing with sideways roms a few months ago, and it is still a problem. Latest victim is **Clogger**, a version of which appeared on the free disc supplied with the December 1988 issue of *The Micro User*. The offender is Exmon II, the excellent machine code monitor without which most of my own pokes would not have seen the light of day.

In fact the game works perfectly with Exmon II 2.01 but not with the first version – 1.00. You can check which one you have by typing \*HELP – the 1.00 rom is not compatible with the Master and crashes frequently, making an upgrade almost essential. It is also well worth upgrading if you own a B+ or a Model B with expanded memory, because you can specify new parameters when examining memory, allowing you to peek into shadow ram or filing system ram or private MOS ram.

However, if you have Exmon II 1.00 plugged into a standard Model B, version 2.01 offers little

over its predecessor. Nevertheless, the sudden loss of Clogger might prompt quite a few readers who have experienced the delights of this most peaceful of games to consider a hasty upgrade. Here, however, is a cheaper option – simply enter the following line before running the game:

```
!&21E=!(!&FFB7+&1E)
```

The problem is that Exmon II 1.00 diverts the filing system control vector – FSCV – for its own purposes. This line just resets it by reading the default value from the OS rom. The rom call is legal and will work on all Acorn machines. Thanks to Walt Patterson for alerting me to this rather obscure but intriguing problem.

## Ravenskull solution Part 2

Continuing from last month: Go back south to the roundabout and use the magenta/blue key to open the southern gate. Do not go south just yet because collecting the treasure there will cause a spiked gate to appear immediately to the east, blocking off a large section of the game.

Instead, clear all the treasure from the eastern and western passages. When you get to the southern end of the passages down the western side – just north of the Ravenbee – wait as before, then follow the Ravenbee and go north when you come to the *second* break in the wall.

Collect the treasure, move to the southwest corner of the castle and collect the scroll. Do NOT use it yet, but go back to the east avoiding the Ravenbee and duck north through the entrance surrounded by acid pools – the one you bypassed on the way in. Collect the treasure and return to the roundabout.

Stand in front of the eastern gate and open it with the scroll. Beware – this gate reappears as soon as you have gone through. Collect all the treasure and the pickaxe before going south: Make absolutely certain that you have got everything because two boulders slam together as you pass, blocking off your retreat.

Pick up the two pieces of treasure from the room with the two Ravenbees. Take great care –

Turn to Page 60 ►

Master misses out on the 512 Rogue

## Featuring:

Way of the Exploding Fist  
Clogger vs Exmon II  
Master 512  
Ravenskull  
Labyrinth



◀ From Page 59

it's not easy. Walk around this room, not forgetting the treasure until, you come to the western side of the Ravenbee room. The coffins in the room to the south will do you no harm — they're just a bit unnerving.

Go north and take the first turning to the east. Do not go straight north, because the two spiked gates will move to block off both the eastern entrance and the way back. Pick up the scroll and drop it behind you. Do not use it — it's a trap and will kill you instantly.

Follow this path to its conclusion, then use the pickaxe to take out the section of wall immediately north of you. Go through and drop the pickaxe, then pick up the treasure and the second green/blue key.

Go through the spiked doors and collect the treasure in front of you. This will cause another spiked door to appear behind you, but don't worry — you've completed that section. Go south and pick up the last two pieces of treasure, then return to the roundabout.

Head north and duck into the first room you come to — just before the four with the slamming doors. Use the key to open the door, go through and pick up the first piece of the crucifix. You have now completed level 1 of Ravenskull.

If when attempting to pick up the crucifix you get the message *treasure?*, it means that somewhere along the way you have missed one or more of the pieces. Unfortunately, this almost certainly means that you will have to start the assault on Castle Ravenskull all over again.

## Master of the Fist

Regular readers may remember the December 1988 column in which I featured a routine to convert the disc version of **Way of the Exploding Fist** to run on the BBC B+ and Master 128. *Fist*, in my humble but often-voiced opinion, was the best of the karate games that suddenly appeared on the BBC Micro a few years ago, so I was glad to see it re-issued recently on the Mastertronic Ricochet label. The cassette version now retails at a mere

£1.99 — a real steal if you don't already have the game.

However, the cassette version has hitherto been denied to owners of B+ or Master. The problem is the same for both disc and cassette versions — the routine that generates the musical accompaniment features a direct call to a particular location in the Model B's OS 1.2 rom. As all the OS routines are located at different points in the different operating system roms, any game that uses this technique will not stand a chance of working on any other machine. In common with its predecessors, this latest release of *Fist* also proved to be incompatible with the Master.

The silly thing about the incompatibility of this latest version is that the game itself is now perfectly compatible — the music routine has been rewritten so that the direct MOS call now goes through the legal OS vectors. Only the loading routines didn't, but that's a different story. mind. Both cassette and disc versions worked perfectly on the Master — only their protection routines didn't, but that's a different story.

Nevertheless, we remain undaunted by all this illegal programming, and present a routine to convert the Ricochet tape version of *Way of the Exploding Fist* to run on the Master:


```
10 REM Way of the Exploding Fist
20 REM B+/Master conversion (Ricochet tape version)
30 REM by Hac-Man 1988
40 REM (C) The Micro User
50 REM
60 !112=2819072
70 !&2F00=&2FA00AA2: !&2F04=&4CFF720
80 !&2F08=&2E4C2D00: !&2F0C=&454D4147
90 !&2F10=&30342031: !&2F14=&49480D30
100 CALL &2F00
```

Enter the listing as shown and save it on to one of your own blank tapes, calling it, say, *FISTLDR*. Insert the original *Fist* cassette, type *RUN* and press Return. The game will now load. The next time you want to play, *LOAD "FISTLDR"*, insert the original *Fist* cassette, type *RUN* and press Return.

The only other point to note about the program is that you will save time if you wind the game cassette so that it is positioned just before the

Turn to Page 62 ▶

**Cassette**  
*Fist* — a real steal if you don't already have it

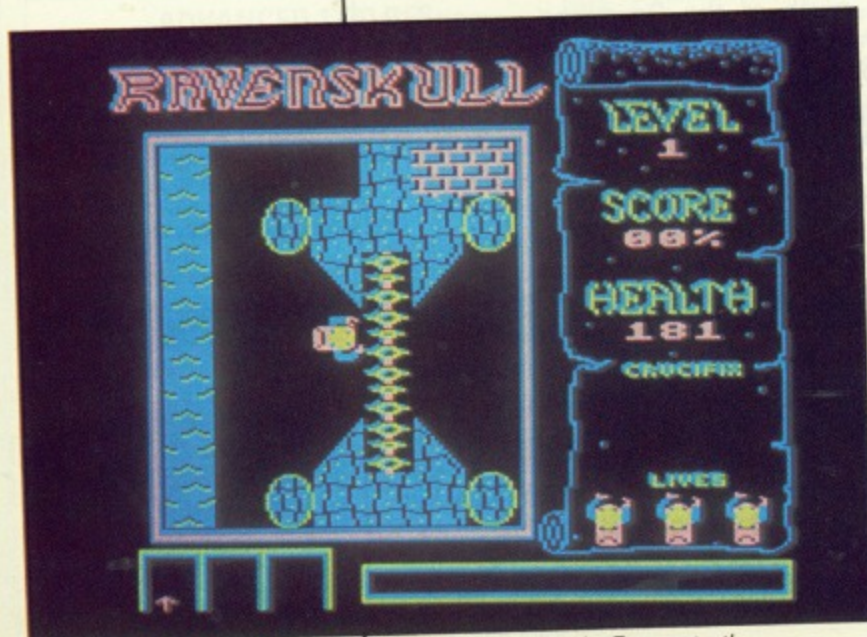

Getting into Castle Ravenskull



A fist in time



# CARE ELECTRONICS

800 St. Albans Road, Garston, Watford,  
Herts. WD2 6NL. Tel: 0923 672102  
For your convenience first price Ex VAT, Second Inc VAT

## CARE MASTER SMART CARTRIDGE

At the press of a button halt any program running and execute any one of a host of useful built in, or user defined functions and once completed will return to the program and continue. Built in functions include:- Tape to Disc, Screen Dump to Disc or Printer, Sound On/Off, Autosave and much more ..... £30.00 £34.50c

## CARE 32K BATTERY BACKED RAM CARTRIDGE FOR MASTER ONLY

For use as a 32K Sideways Ram or Plug Spellmaster in and have User Dictionary 16K (Battery Backed) all on the same cartridge. With Write Protect Switch and a battery life of approx 10 years .... £35.00 £40.25c

## CARE MASTER ROM CARTRIDGES

ALSO SUITABLE FOR INTERWORD & SPELL MASTER

|  |        |         |
|--|--------|---------|
| Standard Cart takes two Roms .....   | £9.00  | £10.35c |
| Standard Cart with Single Zif .....  | £13.40 | £15.41c |
| Standard Cart with Two Zifs .....  | £17.60 | £20.24c |
| Quad Cart takes Four Roms .....  | £14.00 | £16.10c |
| Cartridge for Two 32K Roms .....   | £12.00 | £13.80c |
| Master Rom Extender for using BBC B Cartridges on the Master-Ideal for schools ..... | £12.00 | £13.80c |
| Morley AA (Internal) Rom Board .....   | £40.00 | £46.00d |

## BBC B ROM CARTRIDGE SYSTEM

|                                    |        |         |
|------------------------------------|--------|---------|
| BBC B Low Profile Rom System ..... | £12.00 | £13.80c |
| BBC B Spare Cartridges .....       | £3.00  | £3.45c  |

BBC B Cartridges can be used on the Master with the Master Rom Extender-See above

## EPROM PROGRAMMER V2

Programs 8K, 16K, 32K CMOS or NMOS devices voltage selectable 21V or 12.5V. Complete with comprehensive software which includes Rom management system, plugs into the user port ..... £30.00 £34.50d

## SPECIAL OFFER

### MORLEY TELETXT ADAPTOR

Comes complete with 16K ATS Rom, Manuals and utilities Disc at the unbeatable price of ..... £84.80 £97.52b

## LABELMASTER

Uses a variety of print styles and sizes. All formatting is done for you and can accept different label sizes. A comprehensive label printing program that is easy to use for BBC B, Master, Compact and Electron-Please state model when ordering ..... £15.00 £17.25c

## CARE PRINTER BUFFER

User definable for BBC B, Master on Rom or Disc. £13.00 £14.95c

## MASTERCOPY

If you need to copy between DFS and ADFS and DFS. MCOPI is it.

|                    |        |         |
|--------------------|--------|---------|
| Disc Version ..... | £11.26 | £12.95c |
| Rom Version .....  | £13.00 | £14.95c |

## PRINTER SWITCHERS

|  |        |         |
|--|--------|---------|
| Two computers to one printer or vice versa .....   | £25.00 | £28.75b |
| Three computers to one printer or vice versa ..... | £33.00 | £37.95b |
| Four computers to one printer or vice versa .....  | £44.00 | £50.50b |

Please note that the above units switch all lines, are suitable for all types of printers and computers using Centronics Parallel and INCLUDE LEAD

|                                       |         |          |
|---------------------------------------|---------|----------|
| Six computers to one printer .....    | £71.00  | £81.65b  |
| Four to one automatic switcher .....  | £102.00 | £117.30b |
| Eight to one automatic switcher ..... | £128.00 | £147.20b |

For advice or a quote on your installation please phone

|                                       |        |         |
|---------------------------------------|--------|---------|
| User port switcher 2 to 1 & off ..... | £33.00 | £37.95d |
| User port switcher 6 to 1 & off ..... | £72.00 | £82.80b |
| RS423 Serial Switcher 2 to 1 .....    | £20.20 | £23.23d |

## CARE READY MADE LEADS RANGE

|  |        |         |
|--|--------|---------|
| BBC/Master RGB-7 Pin Hitachi .....     | £6.20  | £7.13c  |
| BBC/Master RGB-7 Pin Ferguson .....    | £6.20  | £7.13c  |
| Centronics to Centronics Printer ..... | £11.00 | £12.65c |
| User Port Extension lead 0.5M .....    | £9.00  | £10.35c |
| 1MHz Bus Extension lead 0.3M .....     | £10.20 | £11.73c |

Wide range of leads in stock-please phone

Government & Educational orders welcome. How to Order: Enclose your cheque or P/Order made payable to CARE ELECTRONICS. Access or Visa cards welcome Please allow 7 days for delivery. Please add Post & Packing - a=£11.50; b=£3.45; c=£1.15; d=£2.30



# NOW OUT!

The bright new magazine that shows you how easy it is to make your own video movies...



If you have a video camera - or just thinking of getting one - you'll find *Video Action!* your passport to an exciting new world. No dull technical reviews but pages packed with help and advice - written by experts in a language **anyone** can understand. You'll find all

you need to know about lighting, scripting, directing, sound dubbing . . . and the magic of desktop video - using a home computer to create titles and captions and generate your own startling special effects.

It's available at your newsagents now for £1.50. If you take out a 12 month subscription on the form below you'll save £5 off the normal price. (UK only)

## ORDER FORM

Please send me the next 12 issues of *Video Action!* for the special price of £13 (normally £18)

Payment: Please indicate method ( )

☐ Access Mastercard Eurocard Barclaycard Visa

Expiry Date  /

No.

☐ Cheque/Eurocheque made payable to Database Publications Ltd.

Name

Signed

Address

Post Code

Send to: FREEPOST, *Video Action*, Europa House, Adlington Park, Adlington, Macclesfield SK10 4NP.



## ◀ From Page 60

GAME1 file because the conversion routine does not make use of any files before this one.

One good thing can be said about incompatible games: As long as someone, somewhere, is not sticking to the rules, I will never be short of material with which to fill the odd corners of this column.

## Amazing lives

I recently picked up a copy of the Master Compact version of the Acornsoft Hits Volume 2 – a collection of blasts from the dim and distant past, when Acornsoft was a games force in its own right and most of the best BBC Micro games came packed in those big, awkward black and blue cardboard boxes. Snapper, Hopper, Planetoid and other such arcade conversions were the best-sellers of the day – long before the advent of serious games such as Elite.

However, these older games should not be dismissed out of hand, they are still as playable as ever. After a hard day of running around mazes chomping power pills, Hac-Man finds a bit of simple relaxation is often better than any complex relaxation.

**Labyrinth**, featured on the above-mentioned

compilation, is one of these oldies. I did not see the game until about a year after its initial release but I still go back to it from time to time when I fancy something to test both my arcade skills and my memory. Although it could never be described as mind-taxing, this plan view maze game does require a small degree of concentration to avoid getting hopelessly lost, and has a charm all its own. A fitting choice perhaps for some attention of a cheating nature with infinite lives:

```
10 REM Labyrinth infinite lives
20 REM Master Compact Acornsoft Hits 2 version
30 REM by Hac-Man 1988
40 REM (C) The Micro User
50 FOR I%=0 TO 2 STEP 2
60 PX=&900:COPT I%
70 JSR &1F0F:JSR &7100
80 LDA =&AD:STA &4526 : \infinite lives
90 JMP &1F00
100 J:NEXT
110 PRINT "Please insert Acornsoft Hits disc
and press a key...";A%=GET
120 *MOUNT 1
130 ?&C413=&F2
140 *RUN !BOOT
150 !&21B5=&60AA00A9:CALL &900
```

As usual, save this routine on to one of your own blank discs, type RUN, press Return and follow the on-screen instructions.

STILL THE NUMBER ONE DISK SUPPLIER!

## BULK DISKS AT CRAZY PRICES

OUR SPECIAL OFFER PRICES ARE UNBEATABLE!

Same Day Despatch

ARCHIMEDES PRINTER CABLE £6.95

New Lower Prices

80 Column Spool Saver £24.95

UNIVERSAL PRINTER STAND £12.95

The adjustable Printer Stand – 2 piece construction, fits all standard and wide carriage printers. Also provides convenient space for paper and storage. Rubber feet, vibration absorbing pads.

### THE FAMOUS CENTEC DISK & BOX OFFER!

20 Double Sided 135 TPI Discs with 40 Capacity Disc Box ..... £20.95  
30 Double Sided 135 TPI Discs with 40 Capacity Disc Box ..... £29.95  
40 Double Sided 135 TPI Discs with 80 Capacity Disc Box ..... £36.95  
50 Double Sided 135 TPI Discs with 80 Capacity Disc Box ..... £43.95  
60 Double Sided 135 TPI Discs with 80 Capacity Disc Box ..... £49.95  
75 Double Sided 135 TPI Discs with 80 Capacity Disc Box ..... £59.95  
100 Double Sided 135 TPI Discs with 80 Capacity Disc Box ..... £82.95  
All boxes come complete with dividers, two keys and are antistatic  
All discs come with labels and are guaranteed 100% error free

### JUDGE FOR YOURSELVES

You'll be guilty of paying more & getting less if you go elsewhere



### ACCESSORIES

Tilt & Turn Monitor Stand 12" ..... £10.75  
Tilt & Turn Monitor Stand 14" ..... £12.50  
3.5" Mailer (Plastic) Pack of 10 ..... £6.50

3.5" TOP QUALITY BULK PACKED DISKS

|                     | 25    | 50    | 100   | 150    |
|---------------------|-------|-------|-------|--------|
| Single Sided 135TPI | 22.95 | 41.95 | 79.95 | 116.95 |
| Double Sided 135TPI | 24.95 | 43.95 | 81.95 | 119.95 |

CENTEC BRANDED 3.5" Verbatim 3M Sony Dysan

|                     | 16.25 | 16.25 | 16.90 | 16.90 |
|---------------------|-------|-------|-------|-------|
| Double Sided 135TPI | 16.25 | 16.25 | 16.90 | 16.90 |
| Double Sided 2Mb    | 35.95 | 39.95 | 39.95 | 39.95 |

### STORAGE BOXES - BEST RANGE - BEST PRICE

All boxes are lockable, and are supplied with 2 keys. Made from anti-static plastic, they are a top quality product at rock bottom prices

|            | 1+    | 3+    | 5+    | 7+    |
|------------|-------|-------|-------|-------|
| 120 x 3.5" | £8.95 | £7.95 | £7.49 | £6.99 |
| 100 x 3.5" | £7.95 | £7.49 | £6.99 | £6.49 |
| 80 x 3.5"  | £6.95 | £5.95 | £5.49 | £4.99 |
| 40 x 3.5"  | £5.95 | £4.95 | £4.49 | £3.99 |

### MIX 'N' MATCH FOR BEST PRICE!

3.5" Disc Cleaning Kit ..... £4.95


3.5" Top Quality Rainbow Pack of five colours

|                     | 25    | 50    | 100   | 150    |
|---------------------|-------|-------|-------|--------|
| Single Sided 135TPI | 23.95 | 46.95 | 91.95 | 129.95 |
| Double Sided 135TPI | 26.95 | 52.95 | 98.95 | 145.95 |

All discs are supplied with labels and are certified 100% error free

Free Delivery

10 Capacity Library Case (per pack of 6) ..... £5.70



E. & O.E.

## CENTEC DISK SUPPLIES

UNIT 3, THE METRO CENTRE, BRIDGE ROAD, ORPINGTON, KENT BR5 2BE  
TEL: (0689)35353 (6 Lines) (24 Hours) Fax 0689 77737

Please note we operate a call stacking system. Outside office hours a telephone answering machine will take your order. Remember – all prices include VAT and delivery! There are no hidden extras to pay! Personal callers welcome: Monday – Friday 9.30am – 4.30pm

All disks are sent by Trackback or Courier service at no extra cost



# There's nothing to touch it on paper – 24 pins and no needle.



Our KX-P1124 dot matrix printer is the 24-pin solution to choose when you need personalised, stylish, high-quality printing at high speeds.

With six resident fonts, the KX-P1124 gives all the flexibility you need to customise every document. And that's only the start. This powerful performer goes on to give you some of the most sophisticated paper handling facilities on the market.

The KX-P1124 has adjustable tractors which can be used with either rear or bottom feed to handle everything from routine cut-sheet correspondence and continuous paper to labels, multi-part stationery and all low tear-off applications. Simple paper parking and easy front loading of A4 sheets (either portrait or landscape) add an extra dimension. And to round off the benefits, this printer is exceptionally quiet (under 53dBA) and easy to manage, thanks to its logical front control panel.

- 192cps draft speed, 60 cps LQ
- Excellent letter quality in six exciting print styles
- Easy front feeding of cut-sheet paper, either portrait or landscape
- Bottom/rear feed tractor facilities standard
- Comprehensive, simple to use front panel feature selection. No DIP switches
- Industry-standard emulations and interfaces

**Panasonic**  
Office Automation 

**Contact Julie Everard**

Panasonic Industrial UK  
A Division of Panasonic Europe Ltd.  
280-290 Bath Road, Slough  
Berks. SL1 6JG  
Tel: 0753 73181 Telex: 847811  
Fax: 0753 77339

I would like more information on the Panasonic KX-P1124 Printer.

Name

Job Title

Company Name

Address

Post Code

Tel No.


**Panasonic. Superior printers... setting the standard.**



Now there's  
a helpful book  
to accompany this  
top-selling package!



BBC version

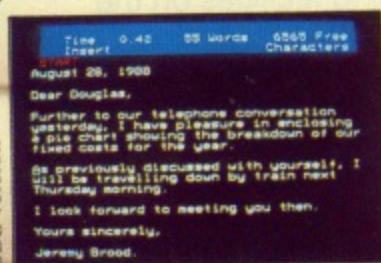

Word processor

C64 version




Database


Amstrad version




Spreadsheet

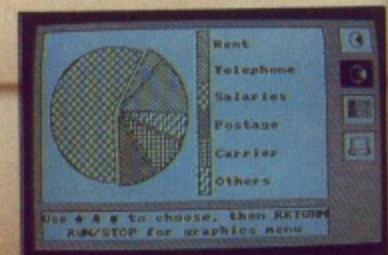

Graphics

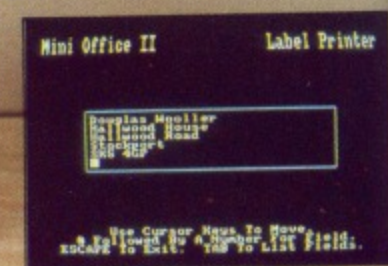

Label printer

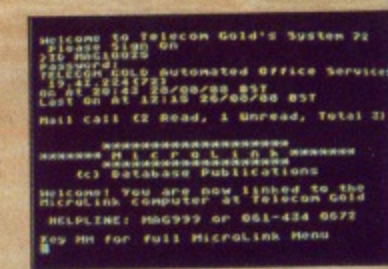

Communications

Six modules in one  
powerful package  
...at a price that  
can't be matched!

## THE PROGRAM

Mini Office II is the highly-acclaimed, award-winning suite of integrated programs which will turn your computer into a versatile business machine.

Look at some of the tasks you can perform with the six separate modules:

- Compose a letter with the **WORD PROCESSOR**. Set the printout options using embedded commands or menus and use the mail merge facility to produce personalised circulars.
- Build a versatile card index with the **DATABASE**. Use the flexible printout routine, do powerful multifield sorting, perform all arithmetic functions and link with the word processor.
- Design the layout of a label with the easy-to-use **LABEL PRINTER**. Select label size and sheet format, read in database files and print out in any quantity.
- Prepare budgets and tables with the **SPREADSHEET** module. Total columns and rows with ease, copy formulae absolutely or relatively, and recalculate automatically.
- With the **GRAPHICS** module you can produce pie charts, overlay line graphs and display bar charts side by side or stacked. Enter data directly or load data from the spreadsheet.
- Using a modem with the **COMMS** module you can access services such as MicroLink and order a wide range of goods from flowers to software, and send instant electronic mail, fax, telex and telemessages.

## THE BOOK

This book not only has the facts, but also the kinds of hints and tips that can only be accumulated through years of computer use.

More than a manual, the Dabhand guide to Mini Office II assumes nothing. Beginning with the first sentences typed into the editor, you are led through all aspects of using the system, up to advanced techniques.

Liberally sprinkled with examples, this book contains handy tips on such things as function key definitions, planning databases, maximising memory usage, producing professional looking graphics, and getting to grips with communications.

All the examples are on the accompanying disc which even includes a very useful routine to print out large spreadsheets sideways.

Please send me Mini Office II and the Dabhand Guide

☐ I enclose a cheque payable to Database Software

☐ Please debit my Access/Visa number:

\_\_\_\_\_

Expiry date: \_\_\_\_/\_\_\_\_/\_\_\_\_

Signature .....

Name .....

Address .....

.....

Postcode .....

| Available for:   | MO2 | Book | Disc with book | Price (please tick) |
|------------------|-----|------|----------------|---------------------|
| Tape users       | ●   | ●    | -              | £19.95              |
| Model B. B+      | ●   | ●    | -              | £21.95              |
| Model B. B+      | ●   | ●    | -              | £29.95              |
| Master (5 1/4")  | ●   | ●    | -              | £24.95              |
| Master (5 1/4")  | ●   | ●    | ●              | £32.95              |
| Compact (3 1/2") | ●   | ●    | -              | £26.95              |
| Compact (3 1/2") | ●   | ●    | ●              | £36.95              |

Send to: Database Software,  
Europa House, Adlington Park,  
Adlington, Macclesfield  
SK10 4NP.

When you buy both the program and the book using the coupon alongside we'll knock £5 off the combined price!



**M**OST people have used \*TYPE to view a file, only to see the screen fill up with weird characters and the machine hang up. The program Split implements the equivalent of \*TYPE but works on any type of file of any length, showing all the characters – including embedded codes – on an 80 column Mode 3 screen.

In addition, some files – especially those transmitted via telesoftware and electronic mail systems – are often too long to load into memory, so a way of shortening or splitting them is needed. But how do you know where to split it until you can view it – and how can you view it until you split it?

Apart from all this, there is the problem of how to perform the splitting. But again, Split comes to the rescue. Because it only loads one screenful at a time, it allows you to view files of any length. By positioning the cursor at the required place and pressing S you can split the text at exactly the place you want.

When Split is running the screen display shows Returns – Ascii value 13 – as wraparound arrows in the same way as does Inter-Word. Tab characters appear as arrows pointing to the right and line feed characters as arrows pointing down. All other non-printable characters are represented by large dots.

However, by positioning the cursor under any character its Ascii value can be read at the foot of the screen. The cursor keys work as usual and allow you to move around the screen at will.

You can examine your word processor files and see the embedded codes it uses, for example, corresponding to underline on or off. It is interesting to examine an Inter-Word file since every character at the beginning of a new line has had &80 added to the normal Ascii value thus revealing where all the soft returns are situated.

Split allows you to go back, but only by one screen. It is difficult to implement more than this because the size of each screenful of information varies according to how many Returns there are.

When run, Split requires a source filename, but an output filename is optional. Pressing the spacebar loads in the next one – provided, that is, you have specified an output file. Split is intel-

ligent enough to know if you have just come back by one screen, and in this case does not save the current screen again.

Pressing L takes you back to the previous screen and S splits the file at the current cursor position. In this case the text up to – but not including – the character at the cursor is saved and the output file is closed. Split then prompts you for a new output filename and the remaining text on the screen is re-displayed so you can carry on. The splitting process can be carried out as

# Divide and conquer

many times as you need. Pressing the Escape key will close all files and quit Split.

Standard operating system routines have been used throughout, so Split will work on most BBC Micros. It can be assembled to page &1B00 if required for use on a network.

Type in the listing, ensuring you've made no mistakes using Get it Right!, and save it as SPL/SRC. Don't use the name Split as this is used for the resulting machine code file. Do not insert too many extra spaces as you enter the listing – for example don't type the space between the line number and the rest of the line, or put any redundant spaces at the end of a line – otherwise you may get a No room error. Finally set PAGE to &3000 and run the program with:

```
PAGE=&3000
CHAIN"SPL/SRC"
```

The machine code utility is automatically saved as Split ready to run with just \*Split.

B B+ M  

*Ian Langdown offers you the ultimate solution to viewing those lengthy files*

```
10 REM File Splitter
20 REM by Ian Langdown
30 REM (c) The Micro User
40 IFPAGE<&3000 PRINT PAGE SHOULD BE
AT &3000:END
50 CS=CHR$141+CHR$129+CHR$157+CHR$131
+STRING$(3,"")
60 AS=STRING$(4,"")+FILE SPLITTER+
STRING$(9,"")+CHR$156+CHR$8D
70 BS=(c) The Micro User +STRING$(5
)+CHR$156+CHR$8D
80 oswrch=&FFEE:osascii=&FFE3
90 osbyte=&FFF4:osbget=&FFD7
100 osbput=&FFD4:osfind=&FFCE
110 osargs=&FFDA:oscli=&FFF7
120 osrdch=&FFE0:N=&70:D=&3000:G=&72
130 WA=&74:a=&77:B=&18:XA=&78:C=&22
140 U=&79:S=&7A:L=&7B:x=&7C:y=&7D
150 D=&7E:H=&80:O=&82:JA=&84:n=&A00
160 M=n+30:E=&86
170 FOR L=&003STEP3:P=&1900
180 [OPT L%:IC LDA=22:JSR oswrch
190 LDA=7:JSR oswrch:LDX=0
200 .MB LDA pA,X:JSR oswrch:INX
```

```
210 CPX=50:BNE MB:.JC LDA=0:STA N
220 STA WA:STA x:STA y:STA J:STA J+1
230 STA J+2:STA f:LDA=1:STA Z:STA G
240 STA P:STA T:LDA =0%DIV256
250 STA N+1:STA G+1:STA P+1:LDA =B%
260 STA a:LDA =C%:STA XA:LDX=4
270 LDA=12:JSR osbyte:LDX=1:LDY=0
280 LDA=4:JSR osbyte:.KC LDX=2
290 LDA =NA MOD256:STA H
300 LDA =NA DIV256:STA H+1
310 .bb JSR K:DEX:BNE bb:LDX=2
320 LDA =0A MOD256:STA H
330 LDA =0A DIV256:STA H+1:.cb JSR K
340 DEX:BNE cb
350 LDA=&D:JSR osascii:JSR osascii
360 .ZA LDA =YB MOD256:STA H
370 LDA =YB DIV256:STA H+1:.JSR K
380 JSR V:CPX=0:BNE NB:JMP KA
390 .NB CPX=1:BNE qA:LDA=&D:JMP ZA
400 .qA LDA=&40:JSR W:CMP=0:BNE b
410 LDY=0:LDA =a MOD256:STA H
420 LDA =a DIV256:STA H+1:JSR K
430 JMP ZA:.b STA S
440 .B LDA =rA MOD256:STA H
```

```
450 LDA =rA DIV256:STA H+1:JSR K
460 JSR V:CPX=0:BNE bb:JMP KA
470 .bb CPX=1:BNE sA:LDA S:BEQ b
480 LDA=0:STA L:JMP zA
490 .sA LDA=&40:JSR W:CMP=0:BEQ OB
500 LDA =PA MOD256:STA H
510 LDA =PA DIV256:STA H+1:JSR K
520 JMP B:.OB LDA=&80:JSR W:STA L
530 .zA LDA=22:JSR oswrch:LDA=3
540 JSR oswrch:INC f:.DA LDA G:STA P
550 LDA G+1:STA P+1:LDA=12
560 JSR oswrch:LDA N+1:STA D+1:LDY=0
570 STY U:LDA N:STA D:LDA=&FF:LDX=0
580 STX WA:.tA LDX S:BNE dB:STX D+1
590 STX G+1:JMP e1
600 .dB LDA=1:JSR osfsc:CPX=&FF
610 BEQ rB:LDY S:JSR osbget:LDY=0
620 STA (D),Y:.INC D:BNE d:INC D+1
630 .d INC x:JMP uA
640 .QB LDY=0:STY y:STY x:LDA D
650 BNE e:DEC D+1:.e DEC D:.e1 LDA D
660 STA G:LDA D+1:STA G+1:JMP EA
```

Turn to Page 67 ►



Send a

# FAX

on your Micro!

Now you can use a BBC Micro (or any other computer) to send correspondence in seconds to ANY of the many millions of fax machines in ANY part of the world.

And if you want you can send the same fax to up to 50 different addresses simultaneously.

All you need, in addition to your computer, are a telephone, a modem – and a subscription to MicroLink.

Fax is just another of the many new services now available on MicroLink, Britain's fastest-growing electronic mail provider.

**MicroLink** electronic mail and much, much more!

Details from 0625 878888

## INVEST WITH PRO-PUNTER



- \* NOW, you can turn your BBC into an expert racing adviser.
- \* PRO-PUNTER is a sophisticated, disc-based expert computer system for home micros which ACCURATELY interprets horse racing form.
- \* In extensive trials over both FLAT AND NATIONAL HUNT seasons: 57% of horses top-rated by PRO-PUNTER won, representing an average post-tax PROFIT per race of 80% of capital invested. 85% of winners came from within the top three rated, representing an average post-tax PROFIT per race of 18%, all three backed.
- \* Researched and developed over three years, PRO-PUNTER uses information from the racing press and analyses ALL major aspects of racing form.
- \* Produces a RACE FORECAST, generates a COMPUTER S.P., highlights good and poor VALUE BETS and OFFERS INVESTMENT ADVICE.
- \* PRO-PUNTER adjusts automatically to the race under analysis. You don't need to be an expert yourself.
- \* Since its launch, in 12 Months, proofing to the racing press has resulted in a profit in excess of 90 level-stake points over 100 races and a strike-rate in excess of 50%.
- \* Available now for the BBC, Atari ST and AMSTRAD PCW, CPC 6128 & IBM Compatibles.


\*PRICE £57.50 including VAT, P&P (please specify machine). Orders and enquiries to:

DGA SOFTWARE, PO BOX 36,  
ASHTON-UNDER-LYNE, LANCs. OL7 9AJ  
Telephone: 061-330 0184



We offer  
a unique  
inspection  
copy service

Call us  
for full  
details  
today!

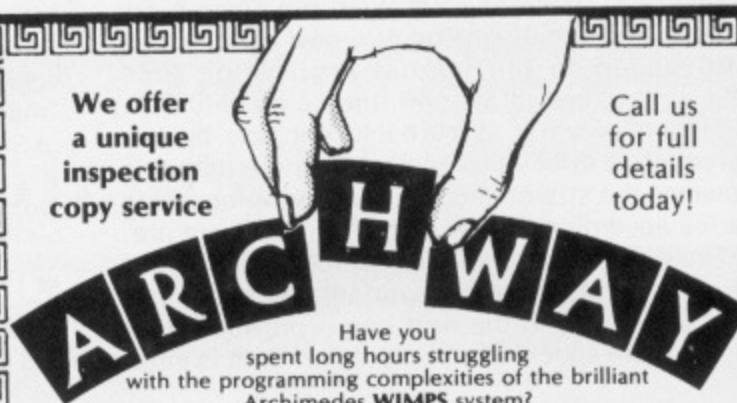

Have you  
spent long hours struggling  
with the programming complexities of the brilliant  
Archimedes WIMPS system?

With ARCHWAY that's all behind you. Now YOU can easily and quickly build multi-window programs with pop-up menus, icons, mouse control, etc. of a professional quality.

ARCHWAY provides tools, bricks, mortar and a basic structure. YOU slot the final bricks into place and add finishing touches.

A comprehensive suite of integrated tools lets you define and edit windows, menus, icons, dialogue boxes, mouse pointers, sprites, fill and line patterns, anti-aliased fonts, short cut keys and much more! You can import files (eg ARM machine code and music editor).

The bricks include an extensive library of functions and procedures providing ready access to many of Archimedes' most powerful features. An in-depth user guide (300+ pages, ring bound) takes you gently step-by-step through a progressive series of program building examples with the emphasis on clarity.

The ARCHWAY run-time package together with script shells in BBC BASIC provide the structure. **£79.95** incl. VAT & p/p

The complete system comes on 4\*800k discs (3 tools & 1 run-time). You need 1M of RAM to run the tools. One disc drive is sufficient.

SPECIAL INTRODUCTORY OFFER: No charge for upgrade to the extended RISC OS (Arthur 2) version we will release in 1989.



## SIMTRON

Programs to  
help you

4 CLARENCE DRIVE, EAST GRINSTEAD,  
WEST SUSSEX RH19 4RZ Telephone (0342) 328188

Cheques/POs/official orders or Access/Visa number and expiry date.  
24-hour 'phone for Credit Card orders.



## ◀ From Page 65

```

670 .UA CMP=&D:BEQ c:LDA x:CMPI=79
680 BEQ c:JMP tA:.c INC U:LDA=0
690 STA x:LDA U:CMPI a:BCC tA:BEQ tA
700 JMP QB:.rB LDA=0:STA Z:STY y
710 LDA D:BNE ex:DEC D+1:.ex DEC D
720 LDA D:STA G:LDA D+1:STA G+1
730 .EA JSR FA:LDA=12:JSR oswrch
740 JSR LA:LDA=1:STA JA:JSR QA:JSR z
750 LDA f:CMPI T:BCC ZB:LDA Z:BNE ZB
760 LDA =vA MOD256:STA H
770 LDA =vA DIV256:STA H+1:JSR K
780 JSR RA:.zB JSR p:LDA=0:STA x
790 STA y:TAX:TAY:JSR FA
800 .fA STX x:STY y:LDA M,Y:CMPI=&FF
810 BNE zB:CPY=0:BEQ zB:DEY:LDA M,Y
820 STX x:STY y:.zB JSR z0:JSR wA
830 PHA:LDA=31:JSR oswrch:LDA=0
840 JSR oswrch:LDA=22:JSR oswrch:PLA
850 JSR xA:JSR eB:JSR RB:JSR z0
860 .AA JSR RA:CMPI=&1B:BEQ mA:CMPI=32
870 BNE SB:LDA f:CMPI T:BNE gA:JSR SA
880 LDA Z:BNE gA:JMP KA:.gA JMP no
890 .SB AND=&DF:CMPI =ASC'S:BNE z3
900 LDA L:BNE nA:JSR z
910 LDA =TA MOD256:STA H
920 LDA =TA DIV256:STA H+1:JSR K
930 JSR RA:JSR z:LDA=12:JSR oswrch
940 JSR p:JSR FA:JMP AA:.nA JMP aA
950 .z3 CMPI =ASC'L:BNE yA:JSR bA
960 CMPI=&1B:BNE z1:JSR z:JSR p
970 JSR FA:JMP AA:.z1 DEC f:JMP DA
980 .yA CMPI=136:BCC AA:CMPI=140
990 BCS AA:JMP i:.nA LDA=&7E
1000 JSR osbyte:JMP KA:.i CMPI=136
1010 BNE j:JSR fB:JMP fA:.j CMPI=137
1020 :BNE k:JSR TB:JMP fA:.k CMPI=138
1030 BNE L:JSR gB:JMP fA:.L CMPI=139
1040 BNE p:JSR up:JMP fA
1050 .p LDA =hA MOD256:STA H
1060 LDA =hA DIV 256:STA H+1
1070 .K LDY=&FF:.hB INY:LDA (H),Y
1080 CMPI=&FF:BEQ iB:JSR osasci:JMP hB
1090 .iB RTS
1100 .RA LDA=21:LDX=0:JSR osbyte
1110 JSR osrdch:CMPI=&1B:BNE ke
1120 LDA=&7E:JSR osbyte:LDA=&1B
1130 .ke RTS
1140 .V LDX=0:.go JSR osrdch:CMPI=&1B
1150 BNE AB:LDA=&7E:JSR osbyte:LDA=&D
1160 STA n:LDX=0:RTS
1170 .AB CMPI=127:BNE BB:JSR osasci

```

```

1180 TXA:BEQ go:DEX:JMP go
1190 .BB STA n,X:JSR osasci:INX
1200 CMPI=&D:BNE go:RTS
1210 .W LDX =n MOD256:LDY =n DIV 256
1220 JSR osfind:RTS
1230 .LA LDA=31:JSR oswrch:LDA=0
1240 STA x:STA y:JSR oswrch
1250 JSR oswrch::LDA wA:BNE CB:LDA S
1260 BNE CB:STA D+1:STA G+1:LDA=226:JSR
oswrch:RTS
1270 .CB LDA N:STA D:LDA N+1:STA D+1
1280 .sB LDY y:STY U:RTS
1290 .jB JSR z:LDA=12:JSR oswrch
1300 JSR p:.fA LDA=28:JSR oswrch
1310 LDA=0:JSR oswrch:LDA=23
1320 JSR oswrch::LDA=79:JSR oswrch

```

This is one of hundreds of programs available FREE for downloading on

### MicroLink

In addition to these many BBC Micro programs in the MicroLink library will also run on the Electron.

```

1330 LDA=0:JSR oswrch:.z0 LDA=31
1340 JSR oswrch:LDA x:JSR oswrch
1350 LDA y:JSR oswrch:RTS
1360 .z LDA=28:JSR oswrch:LDA=0
1370 JSR oswrch:LDA=24:JSR oswrch
1380 LDA=79:JSR oswrch:LDA=24
1390 JSR oswrch:RTS
1400 .SA LDA L:BNE ou:RTS:.ou LDA G+1
1410 BNE tB:RTS
1420 .tB LDA N+1:STA D+1:LDA N:STA D
1430 .q LDA D+1:CMPI G+1:BCC iA
1440 LDA D:CMPI G:BNE iA:LDY=0
1450 LDA (D),Y:LDY L:JSR osbput:RTS
1460 .iA LDY=0:LDA (D),Y:LDY L
1470 JSR osbput:INC J+2:BNE jA
1480 INC J+1:BNE jA:INC J:.jA INC D
1490 BNE r:INC D+1:.r JMP q
1500 .eB LDA =GA MOD256:STA H
1510 LDA =GA DIV256:STA H+1:JSR K
1520 LDA J:JSR cA:LDA J+1:JSR cA
1530 LDA J+2:JSR cA:RTS
1540 .RB LDA=DB MOD256:STA H
1550 LDA=DB DIV256:STA H+1:JSR K
1560 LDA f:JSR xA:RTS
1570 .DB OPT FNs(CHRS31+CHRS34+CHRS22+"
Screen: +CHRS&FF)
1580 .f OPT FNB(0):.T OPT FNB(0)
1590 .no LDA=0:STA x:STA y:JSR jB
1600 INC f:LDA f

```

```

1610 CMP T:BCC uB:STA T:.uB JMP DA
1620 .KA LDY=0:LDA=0:JSR osfind:LDA=4
1630 LDX=0:JSR osbyte:LDA=22
1640 JSR oswrch::LDA=7:JSR oswrch
1650 LDX =qt MOD256:LDY =qt DIV256
1660 JMP oscli
1670 .qt OPT FNs("B..+CHRS&D)
1680 .fB LDA G+1:BNE vB:RTS
1690 .vB LDA=&86:JSR osbyte:CPX=0
1700 BEQ s:DEX:RTS
1710 .s CPY=0:BEQ t:DEY:LDA M,Y
1720 .t RTS:.TB LDA G+1:BNE kB:RTS
1730 .kB LDA=&86:JSR osbyte:.ri TXA
1740 CMPI M,Y:BCS u:INX:RTS:.u LDX M,Y
1750 CPY U:BEQ t:INX:LDX=0:RTS
1760 .gB LDA G+1:BNE wB:RTS
1770 .wB LDA=&86:JSR osbyte:CPY U
1780 BNE v:JMP AA:.v INY:TXA:CMPI M,Y
1790 BCC t:.w LDX M,Y:RTS
1800 .up LDA G+1:BNE xB:RTS
1810 .xB LDA=&86:JSR osbyte:CPY=0
1820 BEQ t:.DEY:TXA:CMPI M,Y:BCS w
1830 RTS
1840 .pA OPT FNs(STRINGS(50,CHRS0))
1850 .yB OPT FNs(CHRS&D+CHRS134+Source
filename: +CHRS&FF)
1860 .o OPT FNs(CHRS&D+File does not e
xist'+CHRS&D+CHRS&FF)
1870 .rA OPT FNs(CHRS134+Output filena
me or RETURN: +CHRS&FF)
1880 .PA OPT FNs(CHRS131+FILE ALREADY
EXISTS'+CHRS&D+CHRS7+CHRS&FF)
1890 .GA OPT FNs(CHRS31+CHRS6+CHRS22+"O
utfile Length = &'+CHRS&FF)
1900 .J OPT FNB(0):OPT FNB(0):OPT FNB(0
)
1910 .hA OPT FNs(CHRS12+SPACE=More & O
utput; L=Last; S=Split at cursor; ESC=Ex
it'+CHRS&FF)
1920 .Z OPT FNB(0):.vA OPT FNs(CHRS12+
END OF FILE...Press a key'+CHRS7+CHRS&FF
)
1930 .TA OPT FNs(CHRS12+No Output File
Exists. Press a key'+CHRS7+CHRS&FF)
1940 .xA PHA:LDX x:LDY y:INX:LDA M,Y
1950 DEY:CMPI=&FF:BNE z4:TXA:CMPI M,Y
1960 BCC z4:PLA:LDA=32:JSR oswrch
1970 JSR oswrch:JSR oswrch:RTS
1980 .z4 LDA=38:JSR oswrch:PLA
1990 .cA PHA:LSR A:LSR A:LSR A:LSR A
2000 JSR ph:PLA:.ph CLC:AND=&F
2010 ADC=&30:CMPI=&3A:BCC yB:ADC=6
2020 .yB JMP oswrch:.dA LDA N+1
2030 STA D+1:LDA N:CLC:ADC x:STA D
2040 BCC EB:INC D+1:.EB CPY=0:BEQ z2
2050 DEY:LDA M,Y:CLC:ADC=1:ADC D
2060 STA D:BCC EB:INC D+1:JMP EB
2070 .z2 LDA (D),Y:RTS
2080 .wA LDA=&86:JSR osbyte:STX x
2090 STY y:JSR dA:RTS
2100 .QA LDA G+1:BNE UB:STA x:STA y
2110 STA O:LDA=12:JSR oswrch:LDX=&FE
2120 JMP KA:.UB LDY y:STY O:LDX x
2130 LDA=&FF:STA M,Y:.Sc LDA D+1
2140 CMPI G+1:BCC Ge:BEQ LB:BCS KA
2150 .LB LDA D:CMPI G:BCC Ge:BEQ Ge
2160 .KA LDA=226:JSR oswrch:LDY O:DEX
2170 CPX=&FF:BEQ BA:CPX=79:BCC BA
2180 LDA =79:STA M,Y:INX:STY O:LDA=0
2190 STA M,Y:JMP mB:.BA INX:.mB TXA
2200 STA M,Y:INX:LDA=&FF:STA M,Y
2210 LDA=&86:JSR osbyte:LDA=32
2220 .AC JSR oswrch:INX:CPX=80:BCC AC
2230 LDX=0:.BC JSR oswrch:INX:CPX=80
2240 BCC BC:STY U:RTS
2250 .Ge LDY=0:LDA (D),Y:CMPI=32

```

```

j
-File Splitterj
---- by Ian Langdownj
---- (c) The Micro Userj
-(*--<)&2900 -"PAGE SHOULD BE AT &2900":.j
-2"C$=-141+-129+-157+-131+-3 " " )j
-(</A$=-4, " ")+&FILE SPLITTER"+.9, " ")+-156+-&Dj
-f-B$="(c) The Micro User "+-5, " ")+-156+-&Dj
-p-oswrch=&FFEE:osasci=&FFEE3j
-z-osbyte=&FFF4:osbget=&FFD7j
-d-osbput=&FFD4:osfind=&FFCEj
-n-osargs=&FFD8:oscli=&FFF7j
-x%osrdch=&FFE0:H=&70:D%=&3000:G=&72j
--M=&74:a=&77:B%=&18:XA=&78:C%=&22j
--!U=&79:S=&7A:L=&7B:x=&7C:y=&7Dj
--#D=&7E:H=&80:O=&82:JA=&84:n=&A00j
---M=n+30:E=&86j
---- L%=&0-3-3:P%=&1900j
--!COPT L%:.IC LDA#22:JSR oswrchj

```

&0D Outfile Length = &000000 Screen: &01

SPACE=More & Output; L=Last; S=Split at cursor; ESC=Exit

Using Split on the disc file of itself

Turn to Page 68 ▶



## ◀ From Page 67

```

2260 BCC nB:CMF=127:BCS UA
2270 .MC JSR osasci
2280 .F INX:CPX=80:BCC aB:DEX:TXA
2290 LDY O:STA M,Y:LDX=0:INC O
2300 .aB INC D:BNE Sc:INC D+1:JMP Sc
2310 .nB CMF=80:BNE FB:LDA=224
2320 JSR oswrch:.CC CPX=0:BNE Co
2330 STA JA:.Co TXA:LDY O:STA M,Y
2340 CPX=79:BCC DC:JMP EC:.DC LDA=32
2350 .Pd INX:JSR oswrch:CPX=79:BCC Pd
2360 .EC LDA JA:BNE FC:RTS
2370 .FC LDX=0:INC O:LDY O:LDA=&FF
2380 STA M,Y:JMP aB:.FB CMF=9:BNE UA
2390 LDA=225:JSR oswrch:JMP F
2400 .UA CMF=10:BNE oA:LDA=228
2410 JSR oswrch:JMP F
2420 .oA LDA=227:JSR oswrch:JMP F
2430 .aA LDA=&86:JSR osbyte:STX x
2440 STY y:JSR z:CPX=0:BNE GB:CPY=0
2450 BNE GB:.GC LDY L:LDA=0
2460 JSR osfind:JMP HA
2470 .GB LDA G+1:BEQ GC:STA O+1
2480 LDA G:STA O:LDA D:STA G:LDA D+1
2490 STA G+1:LDA G:BNE HB:DEC G+1
2500 .HB DEC G:JSR SA:LDA=0
2510 JSR osfind:INC G:BNE IB:INC G+1
2520 .IB LDA G:STA D:LDA G+1:STA D+1
2530 LDA O:STA G:LDA O+1:STA G+1
2540 .HA LDA #JB MOD256:STA H
2550 LDA #JB DIV256:STA H+1
2560 .IA JSR K:JSR V:CPX=0:BEQ IA
2570 CPX=1:BEQ IA:LDA=&40:JSR W:CMF=0
2580 BEQ VB:TAY:LDA=0:JSR osfind
2590 LDA #g MOD256:STA H
2600 LDA #g DIV256:STA H+1:JSR K
2610 JSR RA:JMP HA
2620 .VB LDA=&80:JSR W:STA L
2630 LDA N:STA H:LDA N+1:STA H+1
2640 JSR FA:JSR z0
2650 .KB LDY=0:LDA D+1:CMF G+1:BCC oB
2660 LDA D:CMF G:BEQ WB
2670 .oB LDA(D),Y:STA (H),Y:INC D
2680 BNE HC:INC D+1:HC INC H:BNE pB
2690 INC H+1:.pB JMP KB
2700 .WB LDA (D),Y:STA (H),Y:LDA H
2710 STA G:LDA H+1:STA G+1:LDA N
2720 STA D:LDA N+1:STA D+1:LDA=0
2730 STA J:STA J+1:STA J+2:JMP EA
2740 .JB OPT FNs(CHRS12+New Filename :
+CHRS&FF)
2750 .g OPT FNs(CHRS7+File Exists: Pre
ss a key+CHRS&FF)
2760 .NA OPT FNs(CS):OPT FNs(AS)
2770 OPT FNB(&FF)
2780 .OA OPT FNs(CS):OPT FNs(BS)
2790 OPT FNB(&FF)
2800 .bA LDX #E:LDY S:.LC LDA T:CMF=1
2810 BEQ XB:CMF f:BEQ qB:.XB JSR z
2820 LDA #VA MOD256:STA H
2830 LDA #VA DIV256:STA H+1:JSR K
2840 JSR RA:JSR FA:LDA=&1B:RTS
2850 .qB LDA=0:JSR osargs:LDA G:CLC
2860 ADC#1:STA D:LDA G+1:ADC#0
2870 STA D+1:LDA D:SEC:SBC N:STA D
2880 LDA D+1:SBC N+1:STA D+1:LDA E+1
2890 CMF D+1:BCC CA:LDA E:SEC:SBC D
2900 STA E:LDA E+1:SBC D+1:STA E+1
2910 LDA#1:JSR osargs:LDA P:CLC:ADC#1
2920 STA D:LDA P+1:ADC#0:STA D+1
2930 LDA D:SEC:SBC N:STA D:LDA D+1
2940 SBC N+1:STA D+1:LDA E+3:BNE LA
2950 LDA E+2:BNE LA:LDA E+1:CMF D+1
2960 BCC CA:BNE LA:LDA E:CMF D:BCC CA
2970 .LA LDA E:SEC:SBC D:STA E
2980 LDA E+1:SBC D+1:STA E+1
2990 .LB LDA#1:JSR osargs:RTS
3000 .CA LDA=0:STA E:STA E+1:STA E+2

```

```

3010 STA E+3:JMP LB
3020 .P OPT FNB(0):OPT FNB(0)
3030 .VA OPT FNs(CHRS12+1st page -OR-
already back 1 page Press a key+CHRS7
+CHRS&FF)
3040 .osfsc JMP(&21E)
3050 J:NEXT
3060 FORIX=0TO49:READA:IX?pA=A:NEXT

```

```

3070 DATA 23,224,3,3,3,35,70,252,64
3080 DATA 32,23,225,48,24,12,126,126
3090 DATA 12,24,48,23,226,255,255,255
3100 DATA 255,255,255,255,255,23,227
3110 DATA 0,0,0,60,60,0,0,0,23,228,0
3120 DATA 24,24,24,153,219,60,24
3130 $8700=*SAVE Split 1900 +STRS~PX
3140 X=0:Y=7:CALL&FFF7:END
3150 DEFFNB(B):?PX=B:PX=PX+1:=LX
3160 DEFFNs(sS):$PX=sS:PX=PX+LENS:=LX

```

**✓ Get it right!**

```

10 = 00
20 = 00
30 = 00
40 = 4B75 5
50 = DAE7 E
60 = CE88 9
70 = 6946 B
80 = 8F1A 5
90 = D738 7
00 = DA58 4
10 = 9F38 F
20 = E70 6
30 = 829F 9
40 = 5E4F 5
50 = ECC8 F
60 = 7A1F 2
70 = 43CC A
180 = C5ED 0
190 = 784C 1
200 = AE1B 2
210 = 5143 B
220 = 6B5A C
230 = A878 7
240 = E844 D
250 = C8AC A
260 = 5128 4
270 = A4AD C
280 = 5C7A B
290 = 5B46 3
300 = C3 8
310 = FE02 C
320 = 1E25 6
330 = DE46 F
340 = D537 3
350 = CF20 2
360 = C3FE 5
370 = C70F 4
380 = 4227 3
390 = 77D1 0
400 = 9D68 6
410 = A6F9 9
420 = 4F9 A
430 = 301E 8
440 = C667 8
450 = 2999 3
460 = 2BA3 D
470 = 37E6 8
480 = B233 A
490 = EE6C D
500 = C9C3 1
510 = 9FEF 7
520 = C3D B
530 = 67A9 7
540 = 3F10 4
550 = E0AB 3
560 = B3D2 F
570 = 5146 D
580 = C38F 6
590 = E9D8 E
600 = 13B3 6
610 = 1E7F B
620 = 4D3C 2
630 = 383D E
640 = 54D2 9

```

```

650 = 7755 A
660 = 591A 5
670 = 27A8 3
680 = EE9D 8
690 = FDB4 E
700 = 4FD8 9
710 = 2080 D
720 = FBDA 2
730 = 26D4 C
740 = 3545 5
750 = 47FC 4
760 = 6BC0 8
770 = 4E22 9
780 = 6346 0
790 = DD7D A
800 = B764 E
810 = 26D C
820 = 43E7 A
830 = F94A A
840 = 32CC 6
850 = AC93 6
860 = D6C1 D
870 = 99FB E
880 = 32EC 8
890 = D5FB 7
900 = AB7F 4
910 = CC6E 5
920 = F854 4
930 = 6F6B 8
940 = 4F B
950 = CFF0 9
960 = 5B13 5
970 = 8D50 1
980 = 817E B
990 = D0A 9
1000 = AD57 5
1010 = 81C5 0
1020 = 78EC 7
1030 = D615 2
1040 = 19DA 5
1050 = 87DC 7
1060 = AA6A F
1070 = 2438 B
1080 = 9BDE 9
1090 = B162 6
1100 = D4F2 6
1110 = 6380 6
1120 = 9D22 B
1130 = 5542 9
1140 = E75A B
1150 = E64A 7
1160 = 239E 9
1170 = AC96 5
1180 = 62C9 7
1190 = F7D9 C
1200 = 60A0 A
1210 = AED2 8
1220 = 6EAB 0
1230 = 37D8 F
1240 = 7BCC D
1250 = DC00 5
1260 = 4637 6

```

```

1270 = 30C0 D
1280 = D8D6 E
1290 = F060 7
1300 = 76C3 F
1310 = 102 D
1320 = 9A61 1
1330 = 2B06 6
1340 = ACE8 0
1350 = 2CBA 9
1360 = 9AA7 E
1370 = 32BA 3
1380 = 98A1 0
1390 = ADF0 5
1400 = 4919 1
1410 = 9A71 F
1420 = 22D3 B
1430 = 69C3 C
1440 = 4E39 F
1450 = 9EB6 7
1460 = 3EB A
1470 = F078 B
1480 = 1F77 9
1490 = AEAA 6
1500 = 4FB1 1
1510 = 18A2 4
1520 = 5004 B
1530 = 1E6E E
1540 = A842 6
1550 = 25BC A
1560 = 56BC 2
1570 = D5DC 5
1580 = B297 8
1590 = 1370 E
1600 = D98D 5
1610 = EDA0 F
1620 = 25E3 0
1630 = 16E8 E
1640 = 38C0 4
1650 = 6ACC 5
1660 = 1B15 F
1670 = EA0E A
1680 = 48D6 0
1690 = 970F 6
1700 = 5C41 D
1710 = 5CB2 B
1720 = 75F0 D
1730 = 39B5 B
1740 = AD6D F
1750 = 123B 7
1760 = D880 F
1770 = DC09 8
1780 = FF3B 4
1790 = 94D0 5
1800 = FE10 8
1810 = 745B 0
1820 = 3F4 8
1830 = 9843 8
1840 = 672B 8
1850 = B659 3
1860 = 4DF5 5
1870 = D014 E
1880 = 61D8 1

```

```

1890 = 7E7E A
1900 = 3AAF 4
1910 = 516A A
1920 = A98C D
1930 = ECEF 0
1940 = 8517 1
1950 = 8028 C
1960 = BE03 6
1970 = 23D9 B
1980 = 8937 F
1990 = 6D6F 5
2000 = B602 3
2010 = ED0F 0
2020 = A7BD 5
2030 = F8CE D
2040 = 8B7C 4
2050 = AD54 0
2060 = 98A6 D
2070 = 2E0E 1
2080 = 34DF 1
2090 = 5A6E E
2100 = 98C4 7
2110 = 82C3 D
2120 = 21FD 8
2130 = C08B D
2140 = FE75 B
2150 = B88A F
2160 = B284 9
2170 = F542 E
2180 = 5CE0 6
2190 = E78A 6
2200 = DA8 0
2210 = 3C67 6
2220 = 421F 0
2230 = 6CDB 9
2240 = AB9B E
2250 = F914 A
2260 = 5AA1 C
2270 = 9729 8
2280 = 37F1 4
2290 = D81C 3
2300 = 2FC9 4
2310 = 5B78 E
2320 = F5A0 8
2330 = 1E8F 2
2340 = 4829 A
2350 = 2E20 3
2360 = C3B1 D
2370 = CE8 7
2380 = 23CB A
2390 = 4FAB 9
2400 = 302C 6
2410 = 1D2E E
2420 = D010 8
2430 = DCA 9
2440 = 9FFA C
2450 = 18E6 D
2460 = 3B94 8
2470 = 9B05 8
2480 = 87C0 4
2490 = 1225 7
2500 = 9A3D 2
2510 = D2C5 5
2520 = 6DF1 9

```

```

2530 = 9688 F
2540 = 2FEF D
2550 = 16D2 D
2560 = A07F 8
2570 = 32DA C
2580 = B60B 0
2590 = C307 1
2600 = B940 A
2610 = 9E68 8
2620 = 1F6B 4
2630 = F245 C
2640 = 7AA2 3
2650 = 4136 6
2660 = D0E0 D
2670 = 2BCE D
2680 = F601 B
2690 = 3ABB A
2700 = 6E03 8
2710 = 21A0 2
2720 = BBF 8
2730 = D7E8 9
2740 = 1AB 5
2750 = 9814 D
2760 = 7525 D
2770 = B539 E
2780 = 1B76 8
2790 = B539 5
2800 = 966F 5
2810 = FFB3 C
2820 = 46A8 F
2830 = 4399 5
2840 = 9D0D 3
2850 = 7B13 1
2860 = DFE3 1
2870 = FE03 F
2880 = EAA5 6
2890 = 116F 3
2900 = 994E A
2910 = B781 9
2920 = CB8C 1
2930 = 93F4 3
2940 = A2B C
2950 = 1490 4
2960 = 5C96 B
2970 = C31E 8
2980 = 1E86 7
2990 = 1760 A
3000 = B5C6 3
3010 = 65F0 5
3020 = 14BC C
3030 = 68EB E
3040 = 271A F
3050 = DA42 D
3060 = 67F3 F
3070 = 4508 8
3080 = 9DD1 9
3090 = FCCD E
3100 = 4D7F 3
3110 = D5EC 3
3120 = 2322 E
3130 = 1B2F A
3140 = 1EC4 C
3150 = D4A 8
3160 = 1F5E A

```



# TECHNOMATIC

*To celebrate our move* to the new premises we are offering special deals on

**Archimedes**



**Archimedes 310** (£835) + Colour Monitor AKF11 (£220)  
National Panasonic KXP 1081 + Lead (£145)  
+ Pro Artisan (£169)

for only

**£1055**

**A SAVING OF £314 + VAT**

**Archimedes 310** (£835) + Multisync Monitor\* (£479)  
+ Pro Artisan (£169)

for only

**£1159**

**A SAVING OF £324 + VAT**

**Archimedes 440** (£2529) + Colour Monitor  
AKF11 (£220) National Panasonic KXP1081 +  
Lead (£145) + Pro Artisan (£169) +  
Software Developers Toolbox (£199)

for only

**£2649**

**A SAVING OF £613 + VAT**

**Archimedes 400** (£2529) + MultiSync Monitor\* (£479)  
+ Pro Artisan (£169) + Software Developers  
Toolbox (£199)

for only

**£2749**

**A SAVING OF £627 + VAT**

Add £50 to above prices for PC Emulator  
Carriage for any of the above systems £16

\*Taxan 770+ or NEC Multi/Sync will be offered at our option.  
Customers for (B) and (C) will be offered 5% discount on our stock printers.  
These offers are valid whilst current stocks last.

\* 0% finance offer applies to certain products please enquire for details.  
Technomatic is a licensed credit broker.

**Techno House 468 Church Lane London NW9 8TQ**  
**Tel: 01-205 9558 Fax: 01-205 0190**  
**305 Edgware Road, London W2 Tel: 01-723 0233**

**0% FINANCE/12 MONTHS TO PAY\***

**Enquire about our open days**



△ ...a fax machine  
and more

**FAX**

△ **• P A C K •**



**W**ith the ever increasing popularity of FAX machines this form of document communication is set to replace conventional postal deliveries with a fast, reliable, strike free, electronic mail service.

FAX PACK brings this world of facsimile document transfer to the Archimedes. By combining the facilities of a FAX machine with the power and flexibility of a computer, FAX PACK offers considerable benefits over conventional FAX systems.

FAX PACK basically allows any document, be it printed text or graphics, or an electronic document such as a word processor file, to be sent to FAX machines anywhere in the world, in seconds. This is done by scanning (digitising) the document and then sending it digitally over a normal phone line to the receiving FAX machine which re-constructs the image and then prints it.

#### THE HARDWARE

The basic FAX PACK consists of a modem podule that plugs into any Archimedes computer, and the software to drive it. A variety of options are available such as scanners and power switching boxes.

The podule has connections for a scanner and power switching box (see below) and a conventional telephone line. An adapter is provided allowing a conventional phone to be paralleled with FAX PACK so that only one telephone line is required for both FAX and conventional use. However if a lot of FAX mail is going to be sent/received then a separate dedicated line is advisable.

**Scanner & Sheet Feeder**



Unlike many normal FAX machines the hardware also provides both auto-answer and auto-dial facilities making it convenient and allowing completely automatic operation without human intervention.

### THE SOFTWARE

As part of FAX PACK this not only provides all the basic mechanisms for communicating with FAX machines but also includes high level WIMP based facilities for viewing FAXes on screen within a window, where they can be pixel edited, scaled, cropped, printed, etc.

This WIMP based software is simplicity itself to use so FAX PACK can be used in the office by staff with little or no computer experience. Of course unlike any conventional FAX machine FAXes can be viewed on screen, or filed away on disc for future reference without ever getting onto paper.

The software also allows text, word processed files, even graphics, to be automatically converted to a suitable FAX format for sending to other FAX machines. The paperless office becomes closer to reality since it is now possible to write articles, documents or letters and then send these directly to remote machines without involving paper.

However facilities are also included for printing FAXes to a range of 9 and 24 pin dot matrix, inkjet and laser printers.

### SUPER FAST MODEM

The FAX podule actually consists of a 9600 bps auto-answer, auto-dial modem, and so can be used for much more than just FAX transfer. The software can detect the type of remote machine, and if it finds a similarly equipped computer (rather than a FAX machine) at the other end it can then transfer ANY file fully error checked and glitch free. And by using some very advanced transmission protocols it can transmit data 4 times faster than most conventional modems on normal telephone lines.

### THE SCANNER

In order to send printed material it is necessary to digitise the page. An optional hand-held, A4 width, 200 dpi scanner can connect to the FAX podule. Being hand-held it is not only supremely compact, but it can digitise complete A4 pages, or pages from books or other awkward shaped documents.



Of course images scanned in this fashion are not only useful for FAX purposes but also for inclusion in word processor or desk top publishing programs. FAX PACK software allows company logos and signatures to be scanned, cropped and then included as part of other FAXed material.

### AUTOMATIC POWER SWITCH

This external power switching box can automatically switch the computer on in order to answer incoming FAXes. The FAX podule can then answer the phone, receive the FAX and file it to disc, and then switch the computer off again. The computer can therefore be switched off and left completely unattended for very long periods of time.

### GUARANTEE


Not only do we provide a one year guarantee for the product, but also a 28 day money back no quibble guarantee. Owners can also receive free software updates as enhanced or new facilities are made available.

FAX PACK Podule and software  
£499 +VAT

200 dpi hand-held scanner  
£299 +VAT

Associated sheet feeder  
£150 +VAT

Power switching box  
£74+VAT

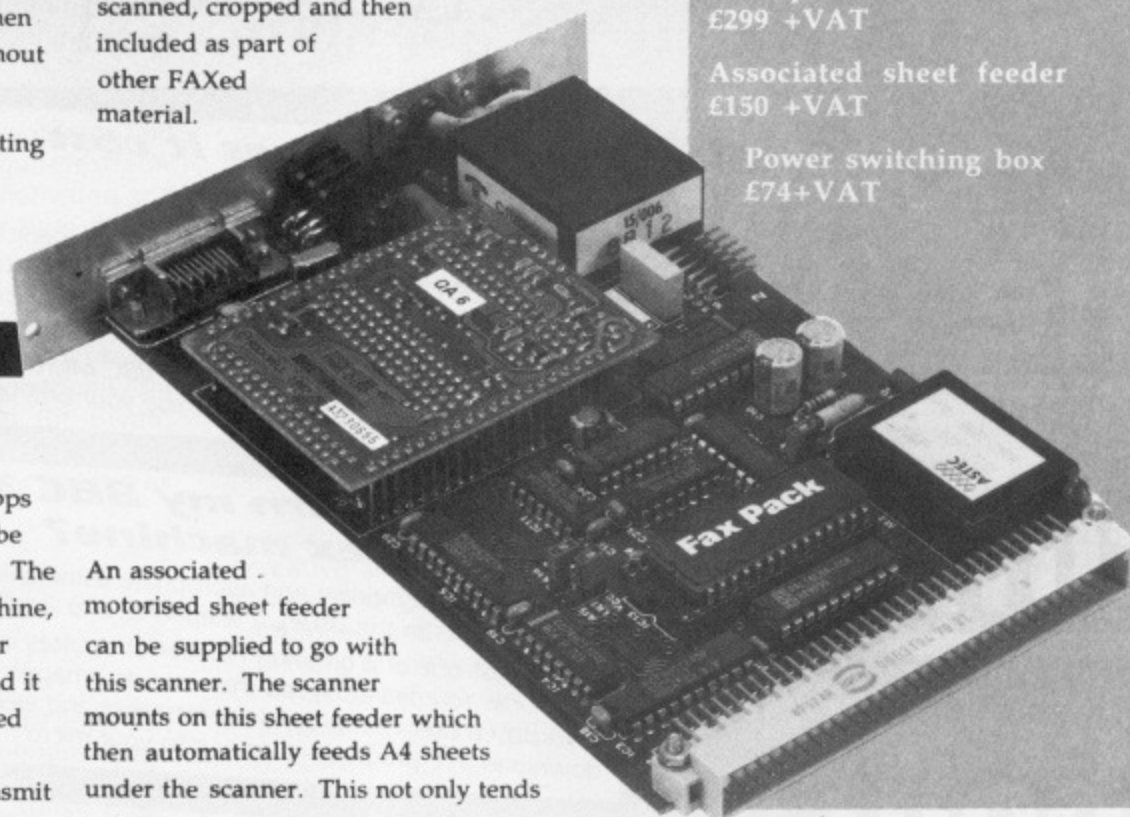

An associated motorised sheet feeder can be supplied to go with this scanner. The scanner mounts on this sheet feeder which then automatically feeds A4 sheets under the scanner. This not only tends to be more accurate than scanning by hand, but is also more convenient.



Computer Concepts Ltd

Gaddesden Place,  
Hemel Hempstead, Herts. HP2 6EX  
Telephone: 0442 63933 Fax: 0442 231632

The above prices include post and packing. Contact Computer Concepts or your local dealer for prices and availability.



# POOLSWINNER II

THE ULTIMATE POOLS PREDICTION PROGRAM

- **MASSIVE DATABASE** Poolswinner is a sophisticated Pools prediction aid. It comes complete with the largest database available - 22000 matches over 10 years.
- **PREDICTS** Not just SCOREDRAWS, but ALWAYS, HOMES and NO SCORES.
- **SUCCESSFUL** SELEC guarantee that Poolswinner performs significantly better than chance.
- **ADAPTABLE** Probabilities are given on every fixture - choose as many selections as you need for your bet. The precise prediction formula can be set by the user - you can develop and test your own unique method.
- **SIMPLE DATA ENTRY** All team names are in the program. Simply type in the reference numbers from the screen. Or use FIXGEN to produce fixture list automatically (see below).
- **LEAGUE AND NON-LEAGUE** All English and Scottish League teams are supported, and also the non-league sides often used on pools coupons.
- **PRINTER SUPPORT** Full hard copy printout of data if you have a printer.



PRICE £18.00 (all inclusive)

**FIXGEN 88/9**

AT LAST: No more struggling for hours to get the fixture list into the computer. FIXGEN has been programmed with all English and Scottish League fixtures for 1988/89. Simply type in the date, and the full fixture list is generated in seconds. Fully compatible with Poolswinner. Yearly updates available.

POOLSWINNER with FIXGEN £19.50 (for both)

## COURSEWINNER V3

THE PUNTERS COMPUTER PROGRAM

You can develop and test your own unique winning system by adjusting the analysis formula, or use the program in simple mode. Coursewinner V3 uses statistical analysis of major factors including past form, speed ratings, course statistics, prize money, weight, going, trainer and jockey form etc, etc. It outputs most likely winners, good long odds bets, forecasts, tricast etc. The database includes vital course statistics for all British courses. You can update the database - never goes out of date. **FULL PRINTER SUPPORT.**

PRICE £18.00 (all inclusive) includes Flat AND National Hunt versions.

**NOT JUST A TIPSTER PROGRAM.** Coursewinner V3 can be used by experts and occasional punters alike.

### AVAILABLE FOR

All supplied on tape ...  
(Automatic Conversion to disc)

AMSTRAD CPCs

BBCs

COMMODORE 64/128

SPECTRUM

DISCS ...

(Add £3.00)

AMSTRAD PCW

IBM Format

COMMODORE AMIGA

ATARI ST

Send Cheques/POs for  
return of post service to ...

**selec**  
SOFTWARE

VISA  
phone 24 hrs

62 ALTRINCHAM RD, GATLEY, CHEADLE, CHESHIRE SK8 4DP. ☎ 061-428 7425

(Send for full list of our software)

GRANNY'S GARDEN

FLOWERS OF CRYSTAL

ZOOPAK

BOX OF  
TREASURES

WORLDS WITHOUT  
WORDS

SNATCH

BIG CALCULATOR

DRAGON WORLD

SEND A5 22p SAE FOR BROCHURE OF OUR RANGE  
OF QUALITY EDUCATIONAL SOFTWARE PACKAGES.

4MATION EDUCATIONAL RESOURCES, LINDEN LEA,  
ROCK PARK, BARNSTAPLE, DEVON EX32 9AQ. TEL: 0271 45566

BUSH RESCUE

TELE-BOOK



# The truth about TELEX

## How much does it cost to go on Telex?

You could go the conventional way and buy a dedicated Telex machine. The cheapest will cost you £1,604 (the Whisper), the dearest £2,892 (the Cheetah). You will also need a separate telephone line, costing £101 to install, plus £404 a year rental. That's a total outlay over the first year of a minimum of £2,109. (All prices include VAT.)

Or you could do what more and more BBC Micro users are doing - use your BBC Micro to double as a Telex machine. And just use your ordinary telephone!

## How do I turn my BBC Micro into a Telex machine?

All you need is a modem and appropriate communications software (see the advertisements in this issue), a telephone, and a subscription to *MicroLink*. Telex is just one of a growing number of services available to micro users on *MicroLink*. You can also read the news as it happens, go teleshopping, create your own closed user group, send telemessages and electronic mail right round the world, download free programs directly into your micro ... and much more.

## But why use Telex?

Because it's a standard means of instant communication between businesses. Today there are 150,000 Telex machines in use in Britain - and more than 2 million worldwide. It's used to dramatically speed up business communications - it's just as quick as using the phone but far more efficient, because you have a hard copy of every "conversation" for your records.


But there's a big bonus you get when you use *MicroLink* for Telex that the conventional way doesn't offer.

With *MicroLink* you don't HAVE to be in your office to send or receive Telex messages. You can just as easily use your computer at home (or even a portable). So now you can check whether there are any Telex messages waiting for you - anywhere, anytime. How's that for your business efficiency?

How to join:  
Phone 0625 878888



## U·P·D T·E

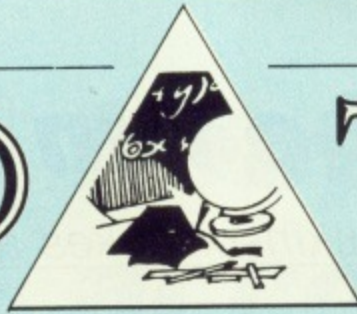

### Post Office backs technology centre

TRAIL-blazing parents and staff at a Hampshire comprehensive have provided their children with one of the most advanced technology centres to be found in Britain's schools. Wavell School, Farnborough, appealed for help to 150 national and local organisations. The Post Office came up with £65,000, Acorn Computers provided a further £10,000 and many other companies provided either cash or goods.

The result is The Post Office Information Technology Centre with 35 micros, peripherals and software in a suite of rooms.

The chairman of the Post Office, Sir Bryan Nicholson, went to Wavell to open the new centre which will be used by 700 pupils. "The challenge before industry and education is simple enough", he said. "We must create a properly trained and educated generation of young people equipped with the skills to develop our industry and commerce for the good of society. Nothing could be more worthwhile than that and nothing could represent money better spent".

The headmaster at Wavell, Robin Lees, told *The Micro User* of the difference the new centre had made to his pupils. "The effect is quite extraordinary. They have become far more motivated and of course they take up less teacher time. It is a much better learning environment. The micros are used across the whole sphere of education", he said.

The Wavell experience need not end there. The centre is already open to the local community for evening classes and according to Sir Bryan, seven local primary schools could be linked up with a computer in every classroom for as little as £2,000 a school.

### Science programs back up TV

AN education officer with the BBC has gone out on a limb to make three science programs available for the Archimedes.

David Watkins asked BBC Soft to publish Archimedes versions of its Science Topics series which backs up schools television and runs on a BBC Micro or Master 128. But BBC Soft felt it was not commercially viable.

"I am convinced that there is a need for secondary science software for the Archimedes so I have produced this initial pack of three titles myself", said David. He is marketing the programs as Innocent Software (0494 462969) under a six month licence.

The three programs are Ecology and Conservation, the managing of a nature reserve, Relationships, which is about the control of malaria and



Pupils of Wavell School, Farnborough, tap into the databanks at the hi-tech information centre

Food and Population, concentrating on provision of adequate and balanced food supplies.

They run in native Archimedes code and are on a single disc selling for £29.95.

### Building for the future

LOOKING to the calibre of potential future employees, the Halifax Building Society has given more than £50,000 worth of Acorn equipment to schools in the Calderdale region. It has chosen the Archimedes which will be used for all aspects of information technology including word processing, spreadsheets, databases and desktop publishing.

"We want students from a wide range of disciplines to develop a more positive attitude to information technology", said Richard Frost, a senior programmer at the Halifax. "By working together using information technology as a creative tool, students also develop teamwork skills and gain experience for work by using advanced and powerful hardware and software relevant to the world of commerce and industry".

Teachers from 17 Calderdale schools joined Richard Frost for a residential training course run by Acorn.

### Archimedes evaluated

THE power and versatility of the Archimedes in our classrooms is being evaluated by Acorn (0223 245200) and a number of education authorities and specialists.

Already more than 70 local education authorities have put the Archimedes into their schools or are committed to doing so in the near future, according to Acorn's education adviser, Roger Broadie.



## All the fun of the fair

*Ian Dickinson takes a fling on the swings*

Product: Funfair  
Price: £14, £16 (compact)  
Supplier: Northern Micromedia Resources  
Centre, Coach Lane Campus, Coach Lane,  
Newcastle Upon Tyne NE7 7XA.  
Tel: 091-270 0424

### Points for

- Plenty of work materials
- Simple and fun to use
- Excellent use of graphics

### Against

- Disc intensive

### The bottom line...

Very impressive with lots of scope

**W**ELCOME! One and all to ... the Funfair. That is the invitation on the cover of a software package produced by Northern Micromedia of Newcastle. It consists of two 40 or 80 track discs – or just one disc if you have a Compact – an A5 booklet and a collection of resource sheets. Also included is an overlay sheet for use with a Concept keyboard.

The idea is that you're given a specified amount of money to spend while exploring the delights of the funfair, while also solving problems. Success results in you being given vouchers, which are accumulated. At the exit you can exchange them for prizes – pictures related to the funfair which can be printed out on an Epson-compatible printer. The prize pictures are provided as part of the package and, if you don't have a printer, can

therefore be photocopied and handed out instead of using the output.

The program is straightforward: You choose the direction you want to go in using the arrow keys. On entering a stall a neatly drawn picture – always very colourful – is loaded from disc and displayed. Because the software is so disc-intensive there is no copy protection and working copies can be made for security.

When presented with a picture, pupils must make some sort of decision – it may be deciding what to buy or solving a problem related to the activity that they have just been involved with. These decisions can take the form of recall or answering some simple questions. You receive a voucher at this point for a correct answer.

The software is easy to master because of the limited number of keys used for input. And it's even simpler if you are lucky enough to own a Concept keyboard. Funfair is aimed at a wide range of ages and abilities, although pupils aged from 9 to 13 would make best use of it.

One of its great pluses is its versatility – the program can be tailored to suit individual needs. Also the teacher can easily alter the difficulty range from very easy to hard.


Although Funfair is primarily a package to develop basic skills in mathematics and language, it can be used as the pedestal for a whole range of other subjects and activities. Events that occur during the visit to the funfair can be used as a basis of discussion and investigation at a later stage, for example, putting rubbish into bins, distorting mirrors, fund-raising and a whole host of other topics.

Documentation comes in the form of a neatly presented A5 booklet. It has an uncluttered style, giving clear and concise instructions on how to use the package. The teacher's options are clearly laid out, showing exactly how to enter and change the requests of the program. It is possible, for example, to change the money that the pupil starts with from £1, £2 or £3. Also provided is a diagram outlining the areas of interest that Funfair can be used to introduce.

The last 12 pages are taken up with classroom reports and ideas for extension work. This is a useful section, giving some insight into the program's use. As well as this, there are 47 work/prize sheets. The whole package is presented in a sturdy A4 plastic file.

To sum up, Northern Micromedia has produced an excellent package at a very reasonable cost. At this price you will be hard pushed to get a better quality program for this age and ability range of pupils. Children find it easy and fun to use, and it is simplicity itself for the hard-pressed teacher to configure to individual requirements.

If you need a package for younger or less able children that will encourage various topics of conversation and investigation and also be fun to use at the same time, take up the invitation of Northern Micromedia and go for a trip to the Funfair.

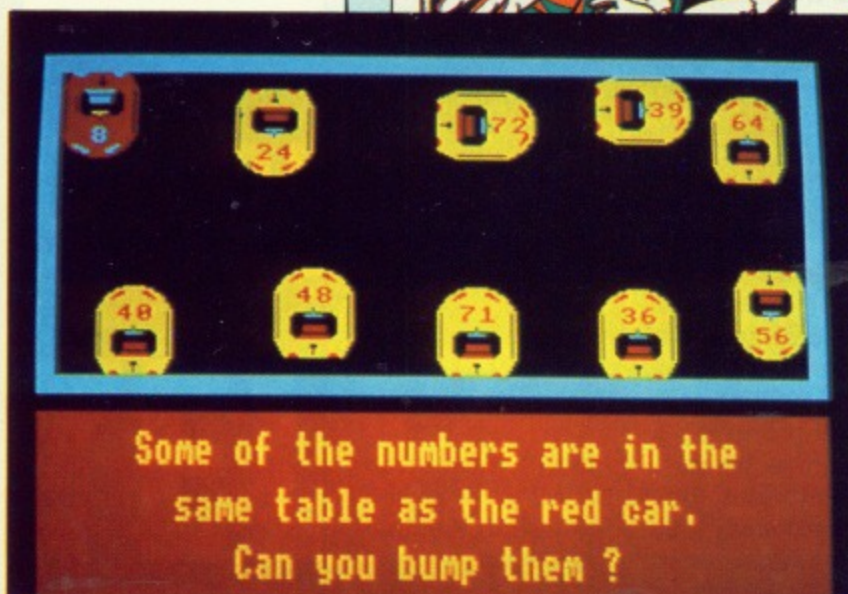

Bumper cars at the fair



Product: Funds  
Price: £30.00 (mail order only)  
Supplier: Dedicated Software, PO Box 116, Reading,  
Berkshire RG3 1BR.

## Keeping account

*Rog Frost steps into the daunting world of book-keeping*

**F**OR some, the task of book-keeping is absolute child's play, but for others it's a complete nightmare. Dedicated Software has come to the rescue for people in the latter class with a very useful software tool called Funds. It is aimed at school administration and with the new Education Act giving total financial control to the school governors there could well be a need for such software. Its potential uses go even further though, with domestic or small business use being real possibilities.

What Funds does is set up 17 different accounts, each with its own meaningful name, which can contain up to £1,000,000 – in the black or red. The data can be stored on the original program disc or on a separate one.

It is menu-based, extremely easy to use and appears to have been written for the complete novice – there is no need to remember any codes or special key presses. Entering information is carefully controlled by the questions presented to you and each entry is checked by the micro to ensure that it is sensible.

With entries the program can't validate an *Are you sure?* message is displayed. There's even a corny little rhyme which tells you to press Return if you aren't pressing keys and nothing seems to be happening.

When you have titled all your accounts – you don't need to use all 17 of them – and have allocated them their initial balances, a printout is produced. Numbering starts at page one unless you choose otherwise and also carries the date that you entered. The intention is that you store all printouts in a ring binder so that they can be checked easily by auditors or accountants.

Having created accounts, the task of updating

them – often weekly – starts. A batch of invoices and incoming cheques can be dealt with in one go. Again, it's merely a case of answering the on-screen questions to enter the information. Good quality printouts just happen as you complete each entry. They contain the title of the account, the date of the transaction, the reference number, the amount of money involved and the balance remaining.

If your work fills more than one page a new sheet is started and numbered automatically. At the end of your session a summary for all 17 accounts is printed and, once again, correctly page numbered.

Funds comes with a 32-page manual, which, like the program, is well produced. It is easy to read, and the authors seem to have thought of and found answers to every conceivable problem. The manual helps you through a training program and also gives information over and above that found on the disc Help files.

The program's main limitation is that it can only support 17 different accounts. In larger schools many more could be required.

### Points for

- Easy to follow
- Well documented

### Against

- Limited use for large schools

ACCOUNTING.

RUN DATE 21 NOVEMBER 1988.

PAGE 1

STATEMENT

TOTAL REMAINING IN "COMPUTER ACCOUNT" .....

TOTAL REMAINING IN "Fund Number 2" .....

TOTAL REMAINING IN "Fund Number 3" .....

TOTAL REMAINING IN "Fund Number 4" .....

TOTAL REMAINING IN "Fund Number 5" .....

TOTAL REMAINING IN "Fund Number 6" .....

TOTAL REMAINING IN "Fund Number 7" .....

TOTAL REMAINING IN "Fund Number 8" .....

TOTAL REMAINING IN "Fund Number 9" .....

TOTAL REMAINING IN "Fund Number 10" .....

TOTAL REMAINING IN "Fund Number 11" .....

TOTAL REMAINING IN "Fund Number 12" .....

TOTAL REMAINING IN "Fund Number 13" .....

TOTAL REMAINING IN "Fund Number 14" ..... £0.00

TOTAL REMAINING IN "Fund Number 15" ..... £0.00

TOTAL REMAINING IN "Fund Number 16" ..... £0.00

TOTAL REMAINING IN "Fund Number 17" ..... £3000.00

GRAND TOTAL FOR ALL FUNDS.....

FUNDS ACCOUNTING.

RUN DATE 21 NOVEMBER 1988.

PAGE 2

\*\*\*\*\*

DEDUCTED FROM "COMPUTER ACCOUNT" SOURCE- ACORN COMPUTERS

| DATE             | REFERENCE | PAYMENT | FUND BALANCE |
|------------------|-----------|---------|--------------|
| 20 NOVEMBER 1988 | 1347      | £798.00 | £2202.00     |

\*\*\*\*\*

DEDUCTED FROM "COMPUTER ACCOUNT" SOURCE- DISC SUPPLIERS PLC

| DATE             | REFERENCE | PAYMENT | FUND BALANCE |
|------------------|-----------|---------|--------------|
| 21 NOVEMBER 1988 | 1348      | £137.50 | £2064.50     |

\*\*\*\*\*

ADDED TO "COMPUTER ACCOUNT" SOURCE- DATABASE

| DATE             | REFERENCE | RECEIPT | FUND BALANCE |
|------------------|-----------|---------|--------------|
| 21 NOVEMBER 1988 | ACC 12    | £37.53  | £2102.03     |

\*\*\*\*\*

DEDUCTED FROM "COMPUTER ACCOUNT" SOURCE- NEWSAGENT

| DATE             | REFERENCE | PAYMENT | FUND BALANCE |
|------------------|-----------|---------|--------------|
| 21 NOVEMBER 1988 | 1349      | £18.00  | £2084.03     |

\*\*\*\*\*

Sample outputs  
from the  
package

**The bottom  
line...**

**A first-rate piece of  
software**

Sample outputs  
from the  
package

**The bottom line...**

A first-rate piece of software



## Getting the pip

Product: *Pip's Island Adventure*  
Price: £15  
Supplier: Northern Micromedia, Resources Centre, Coach Lane Campus, Coach Lane, Newcastle Upon Tyne NE77 7XA.  
Tel: 091-270 0424

**T**HIS package has been put together by a group of teachers who have obviously used it within the school. Such software often lacks the professional touch, but *Pip's Island Adventure* has relevant content, excellent graphics and a good range of support materials.

Pip has already been to the moon on a previous jaunt, so to many children he is already a classroom companion. Visually he seems to be a distant relation of that old favourite, Podd. Here he has been foolish enough to have been swept out to sea on an air bed. Fortunately an opportune island has saved him.

You must now rescue him: A task which involves solving a number of language and mathematical problems. The age range covers five to seven-year-olds and the beautifully drawn and coloured graphics will surely appeal. My class was fascinated and the youngest kept returning to his favourite parts again and again.

The program comes on three discs and care should be taken always to leave the current one in the drive. The discs reflect the three stages of the adventures: The crossing to the island, finding the lost charm of Vedra and the rescue of Pip.

In addition to the discs are a teacher's manual, introductory storybook and a vast array of photocopy masters including colouring, maths and language activities, as well as a number of simple games. The quality throughout is superb.

The first stage of the adventure asks you to decide how to cross to the island. The prepositions on, under and over are used to select from craft ranging from a raft to a helicopter. On the way two random hazards – from five possible – have to be negotiated. As an example, the

## Pip's Island Adventure



octopus can only be beaten by eight correct answers to sums, the number range of which can be pre-determined. Several answers are allowed but after a number of incorrect responses you are asked to try and rescue Pip on another occasion. Unfortunately, a couple of the hazards are not logical, as in the case of the submarine being affected by a thunderstorm.

The next section introduces you to Vedra, who has lost a charm. If you can find this you will be rewarded with a map of the island. The activities here are much more fun and include a very simple version of Pacman-type mazes and Pelmanism ideas. Much hand and eye coordination takes place here and the children found the animation sequences very amusing.

Finally you will discover Pip in a pit or tied to a tree. One of three coloured paths can be chosen, each of which holds two hazards. One is random, whereas the other is determined by the route you tread. Recognition of colours, fruits and shapes are covered here as well as number bonds and the alphabet. After the random hazard is passed, you may select an item which will be needed to rescue Pip. The ladder helps at the pit, while the scissors cut the ropes. The torch and the key are mere diversions.

There are certificates for completing each stage and an ingenious cloze exercise. The text can be dumped to any Epson-compatible printer, with certain words omitted. This means that with a large class some could be working on the micro and others on the hard copy at their desks. Incidentally, all the way through a beautiful infant script is used. Written slowly to encourage reading along with the story, this is superbly implemented.

Though there are no fatal flaws in this package I cannot understand why the Break key has not been disabled. I would also like some control over the sound, though this is effective in many places it is annoyingly intrusive at others.

Otherwise this is a competently written and well programmed package which will be a useful addition to many infant classrooms. It does not allow for any flexibility on the teacher's part, for the problems cannot be easily altered, but the random choice element does ensure a good spread of activity.

*Phil Tayler  
makes his  
escape from  
the island*

### The bottom line...

A useful package even though it's slightly flawed

This is the island of Vedra.



Pip is here.

Reading the island



**Your technical questions  
answered by MIKE COOK**

# PROBLEM SOLVED

## Plotting the future

I AM a fifth year GCSE technology student and I have decided to make a plotter for my BBC Micro. I've written a lot of software – utilities and adventures – but have never used the user port and I've been unable to find information on its commands or connections. I plan to drive the plotter with two motors and an interface but do I have to use stepping motors and drivers?

Also I have a original copy of Linear Graphics CAD program which I use in school on their plotter, so could I use this to control my plotter instead of writing my own software?

I am writing to you because my collection of *The Micro User* does not cover any of the subjects. – **Richard Russell, Harberton, Devon.**

● If you turn to the back of the user guide you will find a list of connections for the user port. For driving it see the *Body Build* articles in October 1988 or July, August and September 1983. And the current series on the *Experimenter's Board* has lots of information on how to program the user port.

You will need to use stepping motors unless you have some form of positional feedback, and for information on these see *The Micro User* May 1984 and on DC motors see November 1985. You will have to write software to drive your specific hardware, so your existing CAD software will be of no use.

## Baulky printer

I CAN'T get my printer to work properly on my BBC Micro. It self-checks OK and the lead checks out on continuity. When I enter Control+B or VDU2, type in garbage until the buffer is full, type in more and switch the online switch on/off quickly I get the extra garbage on screen. So I'm getting the ACK correctly and I think it must be the strobe that's not getting through.

I believe that in the micro there is a transistor north of S1 which may have something to do with this but I'm not sure how to check it. I would be most grateful for some help. – **Dave Gwilt, Londonderry, N.Ireland.**

● If you want to test the strobe transistor with a meter, make link S1 to the north and measure the

voltage between the centre pin of the link and earth – the RF modulator box makes a good earth.

Power the micro up and you will see about 1 volt at this point. Now power up the printer and it will rise to over 4 volts. If this does not happen there's something wrong with the lead or your printer. Now type in the following:

```
?&FE6C=&C
```

You should then see the voltage drop to zero – if it does the transistor works. Remember if you have tested the lead for continuity only and there might be a short circuit between adjacent pins. Also, just because the printer works on self-test it does not mean that the parallel interface portion is working.

## Load of hot air

THE monitor screen for my issue 4 BBC B appears to keep steady in any low or medium mode but after 10 minutes in a high resolution the screen develops a prominent shimmer. This must be due to the heat instability effect of the video ULA because if cooling air is directed on to it the screen returns to normal again.

The ULA fitted on my micro is a Ferranti 8220 and I think I have seen some information in the past to the effect that this chip has given some trouble. I noticed that the video ULA fitted to a friend's micro was an Acorn VC2023, which seems to give no trouble at all in this respect.

As I use the 80 column mode fairly often should I replace the 8220 with the other type of ULA? – **Stephen Beaumont, Paddock, Huddersfield.**

● Yes, the early Ferranti video ULAs did use a different grade of silicon that made them more susceptible to heat. Replacing this should cure your problem.

## Silence isn't golden

I HAVE a BBC Micro Issue 4 and have had no problems with it until recently when the sound cut out all together. I have checked for any loose connections but there are none. I have a Database Electronics Sound Master fitted.

I'd be most grateful if you could tell me what is

Turn to Page 78 ►

## On the agenda...

- Building a driver for a plotting device
- Finding the fault in a printer
- Display problems – replacing the video ULA
- Getting a micro to make a sound
- X-raying a BBC Micro
- Getting more from the rom power drivers
- Setting the Master clock
- Making rom images work on a Master



## ◀ From Page 77

wrong and if there is anything I could do to correct this fault. — **C. Lynn, Eggington, Beds.**

● When any external equipment — like Sound Master — is fitted to a micro you should remove that first to ensure the fault is not there.

Next, if the sound still doesn't work, you need to see if the audio amplifier is working, and this is quite easy. Turn your micro on, turn it over and find the 1MHz bus connector. Hold the metal shaft of a screwdriver and touch the 8th pin from the right hand side on the bottom row. This is the audio input and you should hear a slight click as you touch it — getting the pin wrong will not affect your micro.

If it doesn't click check the 5 volt supply — the purple wire connected to the edge of the main board. Test it with a voltmeter to see if it's producing a voltage, then test the speaker lead to check for any breaks.

If all this is fine the fault probably lies with the audio power amplifier chip — the 8 pin LM386 — or the nearby 14 pin LM324. If you do get clicks the probable cause is the sound generating chip — IC18, a 76489.

## Scanning a micro

I WILL be going on holiday soon and I cannot bear to leave my micro at home. Would it harm any part of it or my disc drive if I put it through the X-ray machines at airports? — **David Adams, Lime Regis, Dorset.**

● X-rays can, in large doses, damage electronic chips but the intensity of those used in security systems will do no harm to your micro.

## Power drivers

I OWN an issue 4 BBC B with Watford shadow ram and a full complement of roms. For some time I had been plagued with strange malfunctions after the micro had been on for half a hour or so. Some of the symptoms were:

■ When listing programs, some lines would appear out of sequence on the right hand side of the screen.

■ Random inexplicable error messages appeared when running programs.

These problems would disappear if any one of the roms was removed.

My attention was drawn to a letter that appeared in the August 1988 issue of *The Micro User* regarding overheating micro chips. It was suggested that a heatsink should be attached to IC14 — a 74LS245. This had the effect of delaying the onset of the malfunction until the machine had been on for about two hours.

After trying many solutions I piggy-backed two 74LS245s and fitted these in a low profile socket into the position for IC14. This increases the drive capability of the device and has appeared to completely eradicate the problem in my machine.

I hope this will help anyone else experiencing similar problems. — **M.R. Fryer, Fareham, Hants.**

● While solutions will sometimes work, they are not to be always recommended and I would definitely not recommend this one because the two

devices will be slightly different, say in switching time, and this can cause excess current spikes that could damage the chips. A much better solution is to fit a single 74ALS254 as this has a higher drive capability.

## Time to get a watch

I HAVE a BBC Master 128 and the clock has ceased to function. When I enter \*TIME the following appears on the screen:

```
vI, FF i 19FF. D2:28:27
```

and the printer is activated. The internal clock seems to be working because when I enter \*TIME again the last two numbers progress:

```
vI, FF i 19FF. D2:29:13
```

but the garbage doesn't translate into a meaningful date and time. The battery has been replaced and the computer re-configured satisfactorily.

Can you tell me what is the source of the problem, please? — **Hector Goodman, Beckenham.**

● As a first step you could try using the Panel program to set the clock or program it directly with this short program:

```
10 DIM XX32
20 XX?0=24
30 $(XX+1)="Mon,01 Jan 1989.00:00:00"
40 YX=XXDIV256
50 AX=15
60 CALL &FFF1
70 *TIME
```

If this fails — and assuming you have a fresh battery — it points to a faulty clock chip. This is a 146818 RTC and would need replacing. It also contains a small amount of ram for the configure parameters.

## Writing to ram

I HAVE recently upgraded to a Master and I am now having difficulty getting some rom images to function.

It has been suggested to me that this is because it requires write protection, so I would like to know if I can fit a write protect switch.

I would also like to know if it is possible to use the bank of sideways ram to function as a small ram disc and, if so, how is this possible? — **B. Jenkinson, Shebbear, Devon.**

● It is not possible to simply fit a write protect switch to a Master because the ram used to store rom images and the main ram are physically the same device. Therefore any attempt to put a switch in the read/write line would interfere with the machine's normal operation.

It is possible to use the bank of sideways ram as a small ram disc in two ways. First you can load in a rom image containing prepared programs and then use the much neglected \*ROM filing system.

Alternatively you could buy the DFS and Advanced Quarter-Meg ram cartridge from PRES — 0276 72046 — that has the code for a ram disc of up to 256k.

Have you any hardware problems with your BBC Micro? If so, write to Mike Cook, The Micro User, Europa House, Adlington Park, Adlington, Macclesfield SK10 4NP, giving full details of your system and the problem. Unfortunately, Mike cannot send you personal replies, but as many questions as possible will be answered on the pages of *The Micro User*.



# Blocks and buckets

*A mind-boggling strategy game from Mike Goldberg*

```
10 REM Skulls (part 1)
20 REM by Mike Goldberg
30 REM (c) The Micro User
40 MODE7:VDU23,1,0;0;0;0;
50 VDU10,131,157,10,13
60 FOR I%=0 TO 1:VDU141,134
70 PRINTTAB(11)="SKULLS ==":NEXT
80 VDU131,157:PRINT
90 FOR LX=1 TO 4:READ C%,n$:PRINT
100 PROCprint(C%,n$):PRINT:NEXT:PRINT
110 DATA 130,Stack the shapes falling
    from the top of the screen into the box.
120 DATA 131,When no more shapes fit t
    he box then the game is over. However th
    e shapes can be rotated on their descent
    !
130 DATA 129,The whole stack of shapes
    will drop down a line if you can make a
    complete line across the box.
140 DATA 134,Extra points for a comple
    te line all the same colour.
150 VDU129,157,13,10,134:Y%=VPOS
160 PRINTSPC3"Press SPACE for key in st
    ructions"
170 VDU129,157:REPEATUNTILGET=32
180 VDU28,0,19,39,5,12,28,6,19,39,8
190 PRINTSPC8CHR$130"Keys":PRINT
200 FOR LX=1 TO 6:READ a$,b$,c$
210 PROCkey(a$,b$,c$):NEXT
```

Turn to Page 81 ►

Listing I: Save this as Skulls

**T**HERE was a great fuss last year about that new, wonderfully original shape-fitting game from Russia. Well, here's our superb version of the same idea and it's quite simple to play.


When you start a shape composed of four blocks appears above a big bucket and slowly descends to the bottom. As it drops you can move it to the left and right with Z and X, or rotate it with the spacebar.

When it comes to a halt another shape starts to fall, and the idea is to fit the blocks snugly together without any holes. When a complete line has been created it is removed by the little alien — and everything above it drops down to fill the space.

As your score builds up the shapes drop faster, giving you less time to work out where to position them. When the pile finally pokes up above the alien, the game is over. You score for completing a line — the nearer the bottom the better — and if the line is all one colour you get a 25,000 point bonus.

Programming the shape movement is quite easy — finding out whether it bumps into something is another thing altogether. The data for each shape is held in various arrays specifying which positions to check for each possible orientation of every combination of blocks.


The program is in two parts. Type in Listing I, check it using Get it Right! and save it as Skulls. Then enter Listing II, ensure it too, is right and save it as Sku2. Now you can CHAIN"Skulls" to play the game.

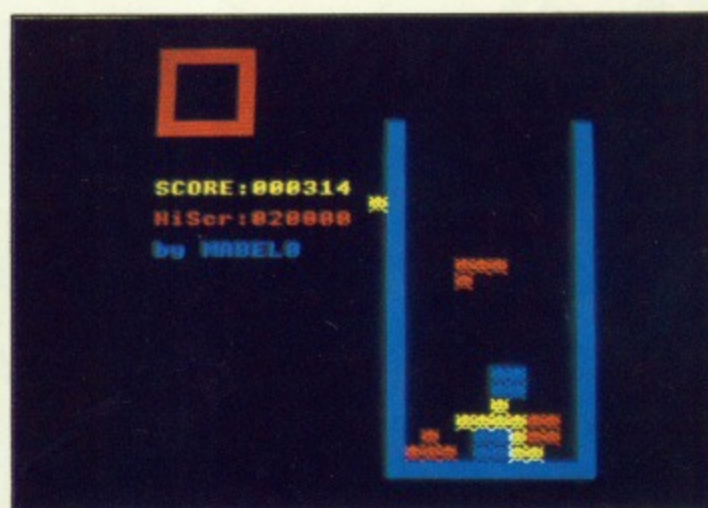

Here's our  
superb  
version of  
the same  
idea

## MAJOR VARIABLES

|               |   |
|---------------|---|
| X%,Y%         | Position of shape   |
| V%            | Orientation of shape  |
| x%(I),y%(I)   | Offsets to see if shape has touched down                      |
| L%(I),R%(I)   | Offsets to check whether object has collided to left or right |
| A%(I)         | Offsets for collisions downwards                              |
| DX%(I),DY%(I) | Offsets to examine for collisions if rotating.                |
| game%         | Flags whether game is over                                    |
| end%          | Shape can be moved flag                                       |
| stop%         | Flags shape has reached end of drop                           |
| f%            | Counts number of skulls on a line                             |
| ok%           | Flags whether skulls on line are one colour                   |
| old%          | Holds colour of first skull on a line                         |
| no%           | Flags whether a shape protrudes beyond the alien              |

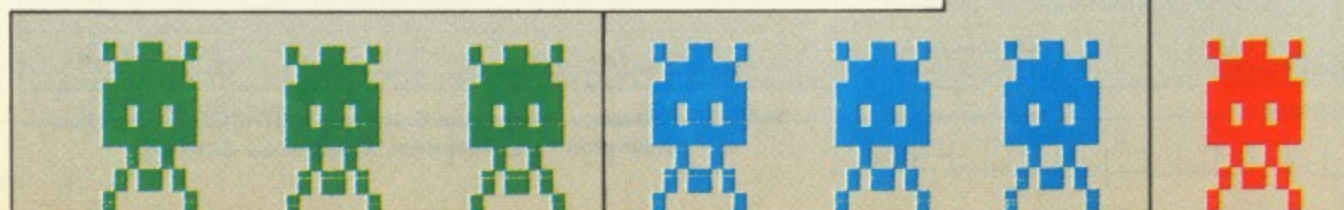



# Learning has never been such fun!

A computer is an ideal teaching tool for young children – if you have the right software.

Fun School 2 is available for three age groups: Under-6s, 6-8 years and Over-8s. Each pack consists of eight colourful and exciting programs carefully designed by a team of educationalists.

The computer itself monitors the child's progress. The skill level – initially set by parents – is automatically adjusted to suit the child's ability.

Now children can enjoy using their parents' computer while they learn at their own pace.

*You can give your children an unfair advantage with Fun School 2 – it's the ideal way to introduce youngsters to the joys of using computers.*

Detailed instructions are supplied with each pack giving educational help to parents and teachers, together with full instructions for each program.

**A colourful  
button badge  
with each  
package!**




#### Fun School 2 for 6 to 8 year olds contains:

- **Number train:** Calculations made enjoyable
- **Shopping:** Which shops for which products?
- **Maths Maze:** Fun improving arithmetical skills
- **Treasure Hunt:** Introduction to coordinates
- **Bounce:** Get to grips with angles
- **Packing:** Discover tessellating shapes
- **Caterpillar:** Word building challenge
- **Number jump:** Have fun practising tables



#### Fun School 2 for Under-6s contains:

- **Shape Snap:** Colourful shape recognition
- **Find the Mole:** Experiment with number sizes
- **Teddy Count:** Ideal introduction to numbers
- **Write a Letter:** Creative fun at the keyboard
- **Colour Train:** Play at spotting colours
- **Pick a Letter:** Word building made easy
- **Spell a Word:** Enjoy naming the pictures
- **Teddy Bears Picnic:** Move around a maze

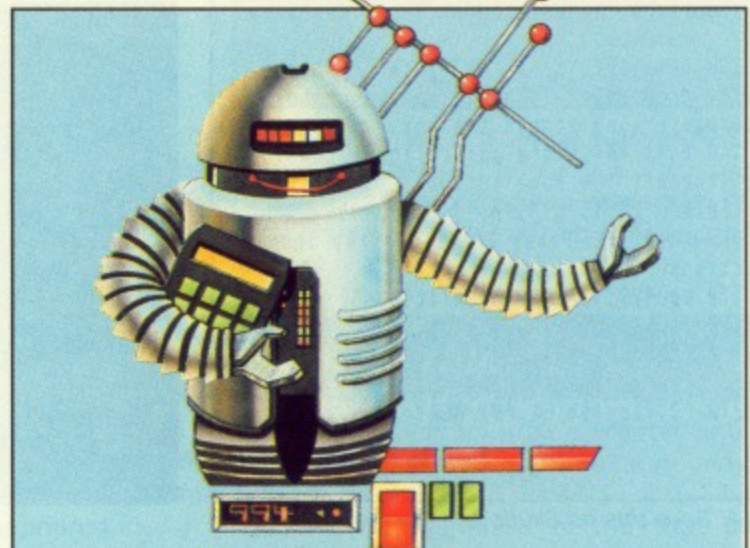

#### Fun School 2 for Over-8s contains:

- **Build a Bridge:** Shape-fitting challenge
- **Passage of Guardians:** Enjoy anagrams
- **Unicorn:** First steps in problem solving
- **Logic Doors:** Mapping made easy
- **Souvenirs:** An introduction to travel
- **Code Boxes:** Discover binary arithmetic
- **Mystery machine:** Have fun breaking codes
- **Escape:** A final check on progress

## ORDER FORM

Please supply Fun School 2 on ☐ tape at £9.95\* ☐ 5¼in disc at £12.95\*

For ages: ☐ Under-6s ☐ 6-8 years ☐ Over-8s ☐ 40 track ☐ 80 track

\* Add £2 Eire/Europe; £4 Overseas

☐ Cheque payable to Database Software

☐ Please debit my Access/Visa card no:

Expiry date:

/

Name \_\_\_\_\_

Address \_\_\_\_\_

Postcode \_\_\_\_\_

Signature \_\_\_\_\_

**SEND TO:** Database Educational Software, FREEPOST, Europa House, Adlington Park, Adlington, Macclesfield SK10 4NP.





|              |              |               |
|--------------|--------------|---------------|
| 10 = 00      | 180 = A297 8 | 350 = 661B 51 |
| 20 = 00      | 190 = 4894 F | 360 = D1B3 E1 |
| 30 = 00      | 200 = A8E8 F | 370 = A2AB C1 |
| 40 = A8DF F  | 210 = 4F16 D | 380 = 5748 E1 |
| 50 = 29BC F  | 220 = 33A4 3 | 390 = 8EEB F1 |
| 60 = 72B3 9  | 230 = 9F0F 2 | 400 = ED0F F1 |
| 70 = 80D1 9  | 240 = 6029 1 | 410 = DB15 B1 |
| 80 = D45B F  | 250 = C792 6 | 420 = 7337 41 |
| 90 = 6C2F F  | 260 = FABA B | 430 = CBE 61  |
| 100 = A6F9 E | 270 = F150 0 | 440 = 72DC 11 |
| 110 = 9D54 1 | 280 = B962 4 | 450 = A540 31 |
| 120 = 3050 4 | 290 = E41C B | 460 = 5B8 A1  |
| 130 = 89F6 9 | 300 = C6F4 7 | 470 = 19E1 D1 |
| 140 = E70E 3 | 310 = 05BF 0 | 480 = 98DC B1 |
| 150 = 8D74 6 | 320 = 3B2B 0 | 490 = 27A0 91 |
| 160 = 29FF 7 | 330 = 2D61 C | 500 = FB92 B1 |
| 170 = 496 D  | 340 = 6D54 C | 510 = ED0F 01 |

## From Page 79

```

220 DATA Z,=,Move left
230 DATA X,=,Move right
240 DATA Space,=,Rotate
250 DATA ,,
260 DATA Delete,=,Pause
270 DATA Copy,=,Restart
280 VDU26
290 PRINTTAB(4,Y%)CHRS134"== Press SPA
CE to load game ==SPC1
300 ENVELOPE1,1,30,-20,30,40,20,20,126
,-1,-1,-5,120,90
310 ENVELOPE2,1,4,-4,2,20,20,20,126,-1
,-1,-1,126,126
320 ENVELOPE3,1,1,-1,0,2,2,0,126,-1,-1
,-1,80,70
330 ENVELOPE4,1,20,-2,-1,90,30,50,126,
-1,-1,-1,120,120
340 ENVELOPE5,2,40,50,30,5,5,126,-1,

```

```

-1,-1,126,120
350 REPEATUNTILGET=32:CHAIN"SKU2"
360 DEF PROCprint(C%,n$)
370 REPEAT w$=FNword
380 IF LENw$+POS>38 PRINT
390 PRINTCHRSC%w$;:UNTIL n$=""
400 ENDPROC
410 DEF FNword
420 LOCAL P%:P%=INSTR(n$," ")
430 IF P%=0 w$=n$:n$="" ELSE w$=LEFT$(
n$,P%-1):n$=MID$(n$,P%+1)
440 =w$
450 DEF PROCkey(a$,b$,c$)
460 LOCAL A%,B%,C%
470 A%=129:B%=131:C%=134
480 a$=RIGHT$(STRING$(6,"")+a$,6)
490 b$=RIGHT$(STRING$(4,"")+b$,4)
500 PRINTCHRSA$a$CHRSB$b$SPC3CHRS C$c$
510 ENDPROC

```

```

10 REM Skulls (part 2)
20 REM by Mike Goldberg
30 REM (c) The Micro User
40 PROCrelloc(&E00):MODE129
50 DIMH$(1),VS(3),HS$(9),H$(9),E$(1)
60 FORIX=0TO9:HS$(IX)=20000-IX*1000
70 H$(IX)="MABEL"+STR$IX:NEXT
80 VDU19,2,4,0;19,3,3,0;
90 VDU23,1,0,0;0,0,0;
100 VDU23,224,153,126,255,219,255,36,9
0,129
110 VDU23,225,24,60,36,90,189,126,36,9
0
120 VDU23,226,153,126,255,219,255,36,9
0,36
130 VDU23,255,-1,-1,-1,-1;
140 ES(0)=CHRS224:ES(1)=CHRS226
150 PROCtable(0)
160 DIM AS(3),AX(3,3)
170 DIM LX(3,3),RX(3,3)
180 DIM x%(3,3),y%(3,3)
190 DIM DX%(3,3),DY%(3,3)
200 REPEAT PROCinit:PROCscreen
210 REPEAT PROCreadshape:PROCstart
220 REPEAT PROCcheck:PROCdescend
230 IF stop%=0 PROCkeys
240 UNTIL stop%=1:SOUND1,3,90,1
250 PROCscore((50-Y%)*2)
260 IF delay%>10 delay%=delay%-1
270 no%=0:J%=1020-7*32:FOR IX=15 TO 24
280 P%=POINT(IX*32,J%):IF P%>0 no%=1
290 NEXT:IF no% game%=1 ELSE PROCline:
CX=(CX+1)MOD3+1:RX=RND(7)
300 UNTIL game%=1:SOUND2,4,100,1
310 PRINTTAB(16,13)"GAME OVERTAB(8,29
)"Press Space to continue...";
320 REPEATUNTILGET=32:VDU28,15,26,24,3
330 FORIX=1TO24:VDU30,11:NEXT
340 VDU26:PROCwait(1)
350 PROCtable(S%):CLS:UNTILFALSE
360 DEFPROCinit:COLOUR3
370 PRINTTAB(0,9)"SCORE:000000"
380 dd$=RIGHT$(STR$(H$(0)),6)
390 COLOUR1:PRINTTAB(0,11)"HiSer:":dd$
400 COLOUR2:PRINTTAB(0,13)"by H$(0)"
410 CX=1:S%=0:game%=0:delay%=100
420 RX=RND(7):ENDPROC
430 DEFPROCscreen:VDU28,14,27,25,5
440 COLOUR130:CLS:VDU28,15,26,24,5
450 COLOUR128:CLS:VDU26
460 VDU28,0,5,5,0:COLOUR129:CLS
470 VDU28,1,4,4,1:COLOUR128:CLS:VDU26
480 PRINTTAB(0,29)"Press SPACE to star

```

```

t
490 COLOUR3:PRINTTAB(13,10)CHRS224
500 REPEATUNTILGET=32
510 PRINTTAB(0,29)SPC30:ENDPROC
520 DEFPROCreadshape:LOCAL C%
530 FOR IX=0 TO 3:AS(IX)=""NEXT
540 PROCrestore(R%)
550 FOR IX=0 TO 3:READ NX
560 FOR JX=1 TO NX:READ CX
570 IF CX=1 CX=224
580 AS(IX)=AS(IX)+CHRS C%
590 QS=AS(IX):NEXT KX=IX:PROCchk:NEXT
600 FORIX=0TO3:FORJX=0TO3
610 READX%(IX,J%),Y%(IX,J%):NEXT:NEXT
620 FORIX=0TO3:FORJX=0TO3
630 READLX(IX,J%):NEXT:NEXT
640 FORIX=0TO3:FORJX=0TO3
650 READRX(IX,J%):NEXT:NEXT:ENDPROC
660 DEF PROCrestore(R%)
670 IF RX=1 RESTORE 1160
680 IF RX=2 RESTORE 1190
690 IF RX=3 RESTORE 1210
700 IF RX=4 RESTORE 1280
710 IF RX=5 RESTORE 1350
720 IF RX=6 RESTORE 1390
730 IF RX=7 RESTORE 1480
740 ENDPROC
750 DEFPROCstart:XX=18:YX=3:VX=0
760 COLOUR1:OS=AS(0):start%=0
770 PRINTTAB(X%,Y%)OS:ENDPROC
780 DEFPROCkeys:LOCAL TT%,TU%
790 TT%=TIME+delay%/10:REPEAT*FX21
800 IF INKEY-99 PROCrotate
810 IF INKEY-98 PROCm(-1)
820 IF INKEY-67 PROCm(1)
830 IF INKEY-90 REPEATUNTILINKEY-106
840 PROCwait(.02):UNTIL TIME>TT%
850 ENDPROC
860 DEFPROCrotate:LOCAL T%,q%
870 COLOUR0:PRINTTAB(X%,Y%)OS
880 q%=VX:VX=(VX+1)MOD4:end%=0
890 FOR TX=0 TO 3
900 IF POINT((CX+DX%(VX,T%))*32,1020-((
YX+DY%(VX,T%))-2)*32)>0 end%=1:TX=3
910 NEXT
920 IF end%=1 VX=q% ELSE OS=AS(VX)
930 COLOURCX:PRINTTAB(X%,Y%)OS
940 PROCwait(.1):ENDPROC
950 DEFPROCm(x%):end%=0
960 y%=(YX-2)*32:FOR IX=0 TO 3
970 IF x%=-1 IF POINT((CX+X%+LX(VX,IX))
)*32,1020-y%>0 end%=1
980 IF x%=1 IF POINT((CX+X%+RX(VX,IX))

```

```

*32,1020-y%>0 end%=1
990 YX=YX+32:NEXT
1000 IF end%=1 ENDPROC
1010 COLOUR0:PRINTTAB(X%,Y%)OS
1020 X%=X%+x%:COLOURCX
1030 PRINTTAB(X%,Y%)OS:ENDPROC
1040 DEFPROCdescend
1050 IF stop%=1 ENDPROC
1060 COLOUR0:PRINTTAB(X%,Y%)OS
1070 YX=YX+1:COLOURCX
1080 PRINTTAB(X%,Y%)OS:ENDPROC
1090 DEFPROCcheck:stop%=0
1100 FOR IX=0 TO 3
1110 IF POINT((CX+X%(VX,IX))*32,1020-((
YX+Y%(VX,IX))*32)>0 stop%=1:IX=3
1120 NEXT:ENDPROC
1130 DATA6,1,1,10,1,11,1,12,9,1,11,11,1
,8,10,1,8,10,10,1,7,10,1,11,1,10,1,1,13,
11,11,9,1,10,1,8,8
1140 DATA10,1,8,10,1,0,1,1,1,2,2,3,1,1,
1,2,0,2,2,3,-19,0,2,1,1,2,2,3,2,1,-1,1,2
,2,0,3,-19,30,30,0,2,2,2,1,2,30,30,1,0,1
,2,1,1
1150 DATA30,30,3,2,2,2,1,2,30,30,1,3,1,
2,1,1
1160 DATA8,1,1,1,8,8,10,1,9,11,1,1,8,
10,1,8,10,1,7,10,1,1,1,8,11,1,9,1,8,11,1
,8,10,10,1,1,0,2,1,1
1170 DATA2,1,3,-19,0,0,1,2,2,-19,3,-19,
0,2,1,2,2,2,3,-19,0,2,1,2,2,-19,3,-19,-1
9,-19,0,0,-19,0,1,1,-19,-19,2,0,-19,0,0,
0
1180 DATA30,30,2,0,30,1,1,1,30,30,2,2,3
0,0,0,1
1190 DATA10,1,1,8,11,1,8,8,10,10,1,6,1,
1,8,10,1,1,10,1,1,8,11,1,8,8,10,10,1,6,1
,1,8,10,1,1,0,2,1,1,2,-19,3,-19,0,1,1,2,
2,2,3,-19,0,2,1,1,2,-19,3,-19,0,1,1,2,2,
2,3,-19
1200 DATA-19,1,0,0,-19,-19,0,1,-19,1,0,
0,-19,-19,0,1,30,1,1,0,30,30,1,2,30,1,1,
0,30,30,1,2
1210 DATA4,1,1,1,1,13,9,11,11,1,8,10,1,
8,10,1,8,10,1
1220 DATA4,1,1,1,1,13,9,11,11,1,8,10,1,
8,10,1,8,10,1
1230 DATA0,1,1,1,2,1,3,1,1,2,2,-19,2,-1
9,2,-19,0,1,1,1,2,1,3,1,1,2,2,-19,2,-19,
2,-19
1240 DATA-19,-19,0,-19,1,1,1,1
1250 DATA-19,-19,0,-19,1,1,1,1

```

Turn to Page 82 ►

Listing II: Save as Skull 2



## ◀ From Page 81

```

1260 DATA30,30,3,30,1,1,1,1
1270 DATA30,30,3,30,1,1,1,1
1280 DATA7,1,1,1,8,8,10,1
1290 DATA11,9,11,1,8,8,10,1,1,8,10,1
1300 DATA8,10,1,1,1,11,8,8,1
1310 DATA11,9,11,1,8,10,1,1,8,8,10,1
1320 DATA0,1,1,2,2,1,3,-19,0,1,1,2,2,-1
9,3,-19,0,2,1,2,2,2,3,-19,0,-19,1,2,2,1,
3,-19
1330 DATA-19,-19,0,1,-19,1,0,1,-19,-19,
1,30,-19,1,1,1
1340 DATA30,30,2,1,30,1,1,1,30,30,1,2,3
0,1,2,1
1350 DATA7,1,1,8,8,10,1,1,7,1,1,8,8,10,
1,1,7,1,1,8,8,10,1,1,7,1,1,8,8,10,1,1
1360 DATA0,2,1,2,2,-19,3,-19,0,2,1,2,2,
-19,3,-19,0,2,1,2,2,-19,3,-19,0,2,1,2,2,
-19,3,-19
1370 DATA-19,-19,0,0,-19,-19,0,0,-19,-1
9,0,0,-19,-19,0,0
1380 DATA30,30,1,1,30,30,1,1,30,30,1,1,
30,30,1,1
1390 DATA9,11,1,8,10,1,1,8,10,1
1400 DATA7,10,1,1,8,11,1,1
1410 DATA9,11,1,8,10,1,1,8,10,1,7,10,1,
1,8,11,1,1
1420 DATA0,1,1,2,2,-19,3,-19,0,2,1,2,2,
1,3,-19
1430 DATA0,1,1,2,2,-19,3,-19,0,2,1,2,2,
1,3,-19
1440 DATA-19,0,0,1,-19,-19,1,0
1450 DATA-19,0,0,1,-19,-19,1,0
1460 DATA30,0,1,1,30,30,2,1
1470 DATA30,0,1,1,30,30,2,1
1480 DATA6,1,1,1,8,10,1
1490 DATA10,9,10,1,1,8,11,1,8,11,1
1500 DATA6,1,8,10,1,1,1
1510 DATA11,9,11,1,1,8,8,10,1,8,10,1
1520 DATA0,1,1,1,2,2,3,-19,1,2,2,0,-1
9,3,-19,0,2,1,2,2,3,-19,0,-19,1,2,2,0,
3,-19
1530 DATA-19,-19,0,2,-19,2,2,1,-19,-19,
0,0,-19,1,1,1

```

```

1540 DATA30,30,2,2,30,2,2,2,30,30,0,2,3
0,2,1,1
1550 DEFPROCline
1560 LOCAL I%,J%,K%,f%,ok%
1570 FOR J%=10 TO 26:PROCwait(.05)
1580 VDU31,13,J%-1,32,8,10,224
1590 PROCscanline(J%):NEXT
1600 FOR J%=26 TO 10 STEP-1
1610 VDU31,13,J%+1,32,8,11,224
1620 NEXT:ENDPROC
1630 DEF PROCscanline(J%)
1640 LOCAL K%,f%,ok%,old%
1650 K%=1020-J%*32
1660 old%=POINT(15*32,K%)
1670 IF old%=0 ENDPROC
1680 FOR I%=16 TO 24
1690 P%=POINT(I%*32,K%)
1700 IF P%=0 I%=24 ELSE f%=f%+1:IF P%<>
old% ok%=1
1710 NEXT:IF f%=9 PROCdoline
1720 PROCwait(.05):ENDPROC
1730 DEF PROCdoline:LOCAL c%,e%,s%
1740 c%=1:e%=1:s%=1000+J%*10
1750 IF ok%=0 PROCcolx:c%=2:e%=5:s%=250
00
1760 PROCpiebald(J%):PROCscore(s%)
1770 VDU28,15,J%,24,7,30,11,26
1780 SOUNDc%,e%,90,1:PROCwait(.05)
1790 ENDPROC
1800 DEFPROCscore(w%):LOCAL L%
1810 COLOUR3:S%=S%+w%:SS=STR$S%
1820 L%=LEN$S$:PRINTTAB(12-L%,9);S%
1830 IFS%>HS%(0)COLOUR1:PRINTTAB(12-L%,
11);S%
1840 ENDPROC
1850 DEFPROCpiebald(J%)
1860 LOCAL C%,I%,Z%:COLOUR3
1870 FOR I%=13 TO 24
1880 PRINTTAB(I%,J%)E$(C%);
1890 C%=ABS(C%-1):SOUND1,-14,90+Z%,1
1900 PROCwait(.2):VDU127:Z%=Z%+8:NEXT
1910 FOR I%=24 TO 13 STEP-1
1920 PRINTTAB(I%,J%)E$(C%);
1930 C%=ABS(C%-1)
1940 PROCwait(.1):VDU127:NEXT

```

```

1950 COLOUR2:VDU31,14,J%,255:ENDPROC
1960 DEFPROCcolx:LOCAL I%
1970 COLOUR3:COLOUR129:bo$="BONUS25000"
1980 VDU31,15,J%:FOR I%=1 TO 10
1990 VDUASCMIOS(bo$,I%):PROCwait(.1)
2000 NEXT:PROCwait(2):COLOUR128
2010 ENDPROC
2020 DEFPROCchk
2030 COLOUR3:PRINTTAB(1,3)Q$:t%=0
2040 FORi%=1T04:k%=i%*32:FORj%=1T04
2050 P%=POINT(k%,1020-j%*32)
2060 IFP%>0DX(K%,t%)=i%-1:0Y(K%,t%)=j
%-1:t%=(t%+1)MOD4
2070 NEXT:NEXT
2080 FORi%=1T04:PRINTTAB(1,i%)SPC4
2090 NEXT:ENDPROC
2100 DEFPROCtable(S%):COLOUR3
2110 COLOUR130:CLS:PROCnewscore(S%)
2120 PRINTTAB(5,7)THE -SKULLS- ACE SCO
RE-TABLE:PRINT
2130 FORI%=0T09
2140 PRINTI%+1) HSS(I%)TAB(20)HSX(I%)
2150 NEXT
2160 PRINTTAB(8,29)Press SPACE to star
t
2170 REPEATUNTILGET=32
2180 COLOUR128:CLS:ENDPROC
2190 DEFPROCnewscore(S%)
2200 Z%=-1:REPEAT Z%=Z%+1
2210 UNTIL S%>HSX(Z%) OR Z%=9
2220 IF Z%=9 ENDPROC
2230 FOR J%=9 TO Z%+1 STEP-1:K%=J%-1
2240 HSX(J%)=HSX(K%):HSS(J%)=HSS(K%)
2250 NEXT:FX15
2260 INPUTTAB(8,25)Enter name:n$
2270 HSS(Z%)=LEFT$(n$,8):HSX(Z%)=S%
2280 ENDPROC
2290 DEF PROCwait(t):t=TIME+t*100
2300 REPEAT UNTIL TIME>t:ENDPROC
2310 DEF PROCrelloc(Q%):P%=PAGE
2320 IF(INKEY-256>1)OR(P%<=Q%)ENDPROC
2330 L%=TOP-P%:*TAPE
2340 FORI%=0TOLXSTEP4:I%Q%=I%P%:NEXT
2350 ?&13=?&13-(PAGE-&E00)DIV256
2360 PAGE=Q%:RUN

```

Get it right!

|              |              |              |               |               |               |               |               |               |
|--------------|--------------|--------------|---------------|---------------|---------------|---------------|---------------|---------------|
| 10 = 00      | 280 = 32FC 1 | 550 = 8FA3 A | 820 = E8E6 9  | 1090 = 5C91 A | 1360 = D76A 2 | 1630 = 9C15 D | 1900 = 17F5 4 | 2170 = 5B81 9 |
| 20 = 00      | 290 = C206 C | 560 = DA5B E | 830 = 3426 E  | 1100 = C7F 5  | 1370 = F66F B | 1640 = 29B4 B | 1910 = 6544 C | 2180 = 6B7 7  |
| 30 = 00      | 300 = 3853 1 | 570 = 40B3 9 | 840 = B246 7  | 1110 = 6DF6 4 | 1380 = 7AD3 7 | 1650 = 2C94 D | 1920 = 4E34 F | 2190 = 79E2 D |
| 40 = EEA9 9  | 310 = BE91 3 | 580 = BA60 6 | 850 = ED0F 4  | 1120 = E531 E | 1390 = 1F32 0 | 1660 = 388F 3 | 1930 = 559A E | 2200 = D6E0 F |
| 50 = 5D90 3  | 320 = 4B60 7 | 590 = 478B B | 860 = AE3E C  | 1130 = CCA0 B | 1400 = F980 B | 1670 = E857 7 | 1940 = 60B9 F | 2210 = 50E0 F |
| 60 = 76A2 4  | 330 = 1618 5 | 600 = 2E4B 5 | 870 = 1B01 C  | 1140 = EEC5 5 | 1410 = 12A2 A | 1680 = 8DF9 8 | 1950 = 3B32 2 | 2220 = A110 7 |
| 70 = 509C B  | 340 = 40F2 D | 610 = 6B34 A | 880 = 74D7 E  | 1150 = 4D0A 8 | 1420 = 2F7F D | 1690 = F21F 0 | 1960 = 9D10 F | 2230 = E2D1 D |
| 80 = 977B 5  | 350 = 872B F | 620 = 2E4B 2 | 890 = 67AF 9  | 1160 = D602 A | 1430 = 2F7F 1 | 1700 = A60D C | 1970 = 7265 8 | 2240 = CF88 F |
| 90 = 8EF3 6  | 360 = 9AAB 2 | 630 = E3EF D | 900 = 5658 4  | 1170 = 658F 1 | 1440 = 3896 E | 1710 = 603B 2 | 1980 = 95E0 9 | 2250 = FB45 1 |
| 100 = C144 A | 370 = 6CC0 5 | 640 = 2E4B 5 | 910 = 2C83 0  | 1180 = F42D 0 | 1450 = 3896 3 | 1720 = D0AA D | 1990 = 758 F  | 2260 = CDD6 9 |
| 110 = AFDC A | 380 = F6C4 F | 650 = F1D5 3 | 920 = CCB0 B  | 1190 = 252A 1 | 1460 = 1697 B | 1730 = D853 3 | 2000 = C6D2 B | 2270 = 75B9 B |
| 120 = C541 C | 390 = CED1 1 | 660 = 7A6D C | 930 = E6E7 F  | 1200 = 832 3  | 1470 = 1697 A | 1740 = EA85 3 | 2010 = ED0F B | 2280 = ED0F 6 |
| 130 = 70B7 1 | 400 = 9383 9 | 670 = D444 9 | 940 = 69ED 5  | 1210 = F6FE 2 | 1480 = 4A60 D | 1750 = B492 7 | 2020 = F9C8 C | 2290 = 292F 2 |
| 140 = 80F8 9 | 410 = 147C 6 | 680 = 39D8 5 | 950 = 9B54 C  | 1220 = F6FE 3 | 1490 = 8719 A | 1760 = 89FF E | 2030 = C1E4 7 | 2300 = E9A6 F |
| 150 = 5A95 B | 420 = 1706 9 | 690 = 3815 2 | 960 = 90F7 C  | 1230 = 4D4E 2 | 1500 = 266A 1 | 1770 = BFA5 3 | 2040 = 5011 B | 2310 = A5E6 B |
| 160 = 83EA 6 | 430 = 3A6E 9 | 700 = 83B4 F | 970 = FE03 0  | 1240 = 795 7  | 1510 = 413B 5 | 1780 = 4832 2 | 2050 = E5AE 4 | 2320 = 8D8 C  |
| 170 = DF0E 4 | 440 = DF36 4 | 710 = 2DA2 4 | 980 = 9F3E C  | 1250 = 795 B  | 1520 = 4922 E | 1790 = ED0F B | 2060 = 4459 A | 2330 = 6F26 2 |
| 180 = B2FB A | 450 = 53F9 F | 720 = 6A98 B | 990 = DDC5 5  | 1260 = 1032 F | 1530 = 992F 9 | 1800 = 860D 9 | 2070 = 24BD D | 2340 = D690 9 |
| 190 = 594A 1 | 460 = A75B 7 | 730 = 7CD 2  | 1000 = 2EF8 5 | 1270 = 1032 B | 1540 = C121 8 | 1810 = D6BD A | 2080 = D0FF 6 | 2350 = A805 3 |
| 200 = 5633 3 | 470 = 7024 7 | 740 = ED0F C | 1010 = 1B01 8 | 1280 = 91FE 4 | 1550 = 961E 6 | 1820 = B52E 7 | 2090 = E531 4 | 2360 = 73F1 4 |
| 210 = CF5B B | 480 = 5FAA C | 750 = FB2 B  | 1020 = DC3F B | 1290 = A824 7 | 1560 = 33ED 8 | 1830 = 69E8 1 | 2100 = 4C45 2 |               |
| 220 = 7129 F | 490 = CA90 3 | 760 = A094 E | 1030 = 4064 A | 1300 = E4EA 9 | 1570 = B0BA B | 1840 = ED0F 4 | 2110 = A4F B  |               |
| 230 = 873C F | 500 = 5B81 F | 770 = 4064 E | 1040 = 48E F  | 1310 = F6F8 8 | 1580 = 5B73 2 | 1850 = 2934 B | 2120 = 1BAC 1 |               |
| 240 = 5AE4 A | 510 = 2038 0 | 780 = 25F2 A | 1050 = 15D4 0 | 1320 = C2CB 4 | 1590 = DDAC D | 1860 = 6D01 3 | 2130 = 2964 8 |               |
| 250 = DF55 4 | 520 = 212A 7 | 790 = 2FB3 9 | 1060 = 1B01 B | 1330 = EECB 7 | 1600 = D8BF 6 | 1870 = CEF8 3 | 2140 = 535C 5 |               |
| 260 = 9857 5 | 530 = F863 1 | 800 = 1645 D | 1070 = 94F3 5 | 1340 = C565 F | 1610 = FA45 7 | 1880 = 4E34 4 | 2150 = 2C83 C |               |
| 270 = 2102 5 | 540 = 809C 8 | 810 = D223 0 | 1080 = 4064 E | 1350 = 4DD2 B | 1620 = E531 D | 1890 = C8D0 F | 2160 = F49A E |               |



***Two for the  
price of one***

## Rory McCloy gets a new View and sees double

Product: DoubleView

Price: £39.95 to £49.95 depending on package

Supplier: Tubelink, PO Box 641, London NW9 8TF  
Tel: 01-205 9393

**E**XTENDING a software package is tricky and improving a good one even harder. But Tubelink has taken View and built in some really impressive utilities. DoubleView comes as two 16k eproms, or rom images on disc for loading into sideways ram, depending on the package. There's also a professional manual of 32 pages which provides a clear and concise guide to the new utilities. It doesn't cover how to use View so a first time purchaser will need one of the View guides as well.

You need 16k of sideways ram in your micro for it to run and it's only really on a Master or a B+128 machine that you can avoid serious memory limitations. DoubleView is not compatible with the Tube and won't run on the Master Turbo co-processor.

The most obvious major change is the split screen facility enabling two documents to be edited at the same time see Figure 1. The sizes of the two windows can be altered and the cursor shifted from one document to the other with Control+X, while Control+F will switch from the split screen to the current document occupying the full screen.

If you run DoubleView with memory-buffering the split document feature halves your available memory, so on my Master I had just 14,334 bytes free for each document.

However, you can set up DoubleView so that one document resides in memory and the other on disc, then when you switch to the other document the alternate one is automatically saved to disc. This technique of disc-buffering allows the expected full 28926 bytes of memory free for each of the two documents in DoubleView. Fortunately I have a hard disc and disc-buffering took place so quickly it was not a limitation, but it could become tedious with floppy discs. Tubelink does not recommend that DoubleView is used with tape.

Although the double document facility is a fundamental feature of DoubleView there are not many occasions when I find the need to edit two at once. However, some of the other features of DoubleView – see Table 1 – may well persuade you to buy it.

The powerful startup command `*DBVIEW` can be suffixed with multiple options – see Table II – so that your particular requirements are set for each of the two documents when you enter the

DoubleView Release Version 1.00

14th June 1988

Dear User,

Here are a few notes regarding compatibility with other software:

We have tested DoubleView with 'HyperDriver' from DABS Press, and the example file on the HyperDriver disk works fine. However, the following

```

12014 / 02 ReadMe! No Printer driver selected No markers set
NJ * * * * *

```

DoubleView Application Notes  
Release Version 1.00  
14th June 1988

There has been one major change made in DoubleView since the manual was printed. This concerns setting of markers when saving files and when using some of the commands in the VIEW Commands Menu.

After responding with 'P' when asked 'All or Part' in the save menu, a list of the markers will be displayed, with those currently set identified with an arrow beneath them. Initially, only 'Start' and 'End' are

```
9177 / 0%  Ap1Note  No Printer driver selected  No markers set
```

Figure 1: The split screen

- Edit two documents simultaneously.
- Single or split screen with variable height windows.
- Updated status information window for each document.
- Cut and paste clipboard file.
- Automatic document saving at selected intervals.
- Pop-up menus for commands with help prompts.
- Multi-File system allows easy editing of long documents.
- Improved saving/write facility.
- Definable startup options.
- Configuration files.
- Screen options for colour and 80/106 columns.
- Multiple copies of documents printed automatically.
- Read/merge part of ViewSheet sheet.
- Works with Spellmaster, DFS, ADFS and Econet.

Table 1: Features of DoubleView

**Turn to Page 84 ►**



## ◀ From Page 83

program. By making this command part of a !boot file on your workdiscs all you need do is just Shift+Break to go straight into editing.

The main screens each contain a status information window at the bottom which reports the bytes free, the position of the cursor expressed as a percentage of the way through the document, the document name, the printer driver selected for that document (which can be different for the two documents) and the number of markers set.

For those familiar with View, the Command mode screen has gone and is replaced with a series of pop-up windows. Pressing Escape brings up the main menu window, shown in Figure II, and the cursor keys will move the highlighted selection up and down the menu. Alternatively you can select the choice by pressing the first letter of the menu option, but I found it very frustrating that this only moved the highlight to that option and you still had to press Return to activate it.

View commands — see Figure III — are chosen from the first option of the main menu and are selected once again by moving the highlight to a command and pressing return to activate it. A useful addition to this menu are the Help instructions which appear in the window as each command is selected. Various status information is also seen, including the document name, the printer driver selected and the status of micro-spacing, folding and the field.

Loading a document into the current edit screen is performed by Control+N and a pop-up window appears with the current disc catalogue filenames listed. Loading can be by typing the filename or moving the highlight to the appropriate name on the catalogue listing and pressing Return. Control+S saves a document and there are options in pop-up windows to select all or part of the document. The slow WRITE command of View has been re-written, and DoubleView saving is both faster and more sophisticated. Locked files can be over-written but only after a warning prompt and acknowledgment.

DoubleView contains many new facilities, and I particularly like the automatic saving of both documents. The Options Menu can be used to alter the timing of the saving from 1 to 99 minute

- A Full screen height for each document.
- B Background colour.
- C Cursor flash rate.
- D Disc buffering.
- DP Prefix for disc swap files.
- F Folding status for both documents.
- F1 Folding status for document one.
- F2 Folding status for document two.
- L Number of lines for document one.
- M Screen mode 0 or 3.
- O Load options file.
- P Load printer driver.
- R Set auto save recovery file time.
- S Set the Setup options for both documents.
- S1 Set the Setup options for document one.
- S2 Set the Setup options for document two.
- T Text colour.
- U1 Multi-File name for document one.
- U2 Multi-File name for document two.
- W 106 columns wide screen.

Table II: Startup options for \*DBVIEW

intervals and the specific directory tree for the filenames to be saved. Tubelink has called this auto-recover, perhaps misleadingly, as you will only lose what you have typed in since the last automatic save took place. This could be a lot if the saving interval is set too long during a busy editing session. With my hard disc, automatic saving took place almost imperceptibly, so I could have a fairly short save interval.

Another major feature of DoubleView is the ClipBoard. This allows full cut-and-paste editing, with marked blocks of text easily saved to a ClipBoard file and moved to the other document if desired or returned later to another part of the current document. Multiple cut-out sections of text are added to each other in the ClipBoard file.

Tubelink claims that the re-writing of the routine for displaying text achieves a 35 per cent increase in speed of screen updating and scrolling. However, on my Master this change was not appreciable and I found the new system caused a flickering effect on scrolling which was not as acceptable as the original.

## Points for

- Some very powerful utilities
- Best on Master with hard disc

## Against

- Severe hardware limitations

## The bottom line ...

Very worthwhile if you need the special features.

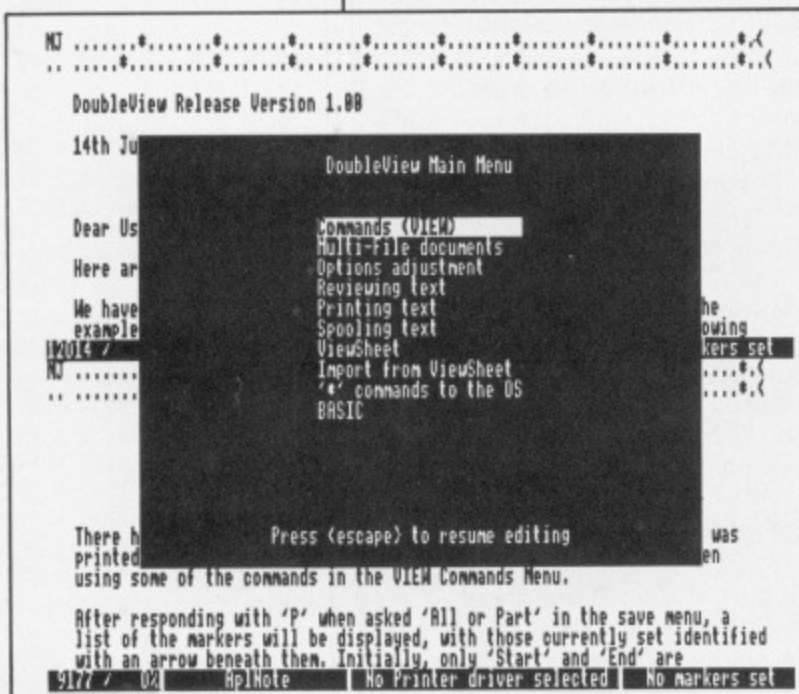


Figure II: The main menu

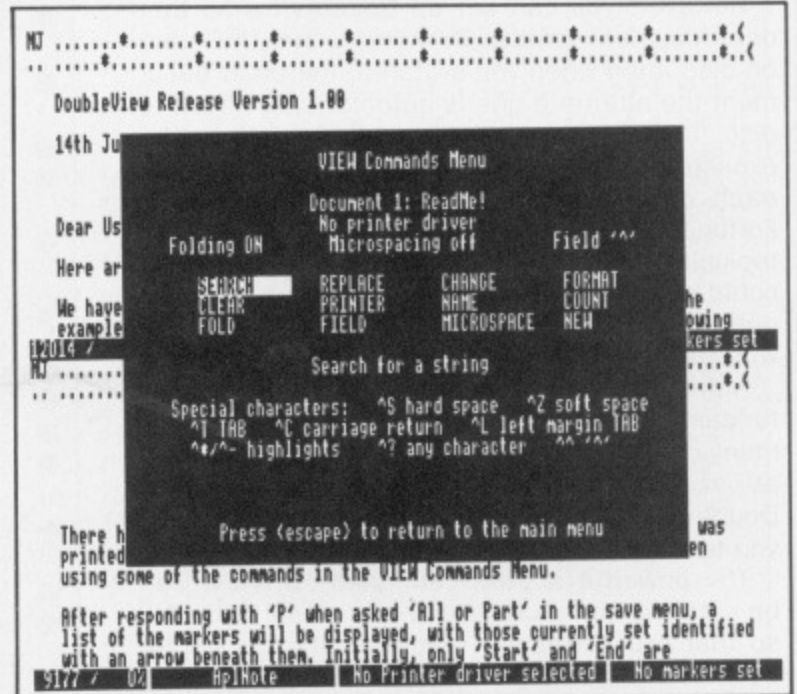


Figure III: The View commands



# The day Daniel's dad brought his office printer home.



My dad's firm is always busy so he has lots of LC-10 printers at his office.

In fact, he sometimes has so much work to do that he keeps a personal computer in his study so he can bring work home.

But when he's really busy, he brings home one of those Star printers too.

Of course, I know exactly how to use them because we have the colour version at school.

It can print documents in six different colours.

So I'm not surprised WHAT MICRO? called the LC-10 the 'Best Budget Dot Matrix Printer' on the market.

What's more it's a lot less expensive than other printers but much better quality.

(My friend, Philip, even has one for his Commodore.)

For a start the front control panel is child's play.

The six different fonts give you so many different style options when you print things.

It's pretty fast too with a draft elite speed of 144 cps and high density near letter quality at 36 cps.

There's also the LC-10's special feature called 'push-tractor' which gives the lowest tear-off position of the paper.

And you can park continuous paper and automatically load single sheets – and I think that's unique for this sort of printer.

You know, if I keep my paper round going for a few more weeks I'll soon have enough to buy my own LC-10.

And then for a small fee, dad can borrow mine.



**THE**  
**star**  
COMPUTER PRINTERS

Star Micronics U.K. Ltd.  
Craven House, 40 Uxbridge Road,  
Ealing, London W5 2BS.  
Telephone: 01-840 1800.

A division of  
Star Micronics Co., Ltd., Japan.

Please send me details of the Star LC-10 business printers.

Name \_\_\_\_\_

Company \_\_\_\_\_

Address \_\_\_\_\_

Postcode \_\_\_\_\_ Telephone \_\_\_\_\_

Or just call Belinda on 01-840 1829.

L10MU02



# TWILLSTAR COMPUTERS LTD

|                      |        |
|----------------------|--------|
| <b>ARCHIMEDES</b>    |        |
| 305 BASE AKB10       | 612.00 |
| 305 & mono monitor   | 665.00 |
| 305 & colour monitor | 827.00 |
| 310 BASE AKB15       | 731.00 |
| 310 & mono monitor   | 783.00 |
| 310 & colour monitor | 922.00 |
| A310M AKB30          | 783.00 |
| A310M mono           | 835.00 |
| A310M colour         | 975.00 |

|                   |        |
|-------------------|--------|
| <b>410 SERIES</b> |        |
| Mono              | P.O.R. |
| Colour            | P.O.R. |

|  |         |
|--|---------|
| <b>440 SERIES</b>                      |         |
| Entry System                           | 2210.00 |
| Mono                                   | 2263.00 |
| Colour                                 | 2403.00 |
| Archimedes/Master Econet               | 43.00   |
| 0.5 MB RAM                             | 127.00  |
| Floppy disk                            | 110.00  |
| 20 Mbyte hard disk & module (300 only) | 423.00  |
| Module Backplane                       | 35.00   |
| Archimedes Pref. Manual                | 29.95   |
| Assm. Lang. Prog. Manual               | 11.00   |

|                                 |        |
|---------------------------------|--------|
| Archimedes software in stock    |        |
| <b>MASTER 128</b>               |        |
| Complete with internal software | 346.00 |
| Master Turbo Upgrade            | 99.00  |
| Master Econet Module            | 40.00  |
| Universal second processor      | 75.00  |
| Epson Cartridge                 | 13.00  |
| Reference Manual Part 1         | 14.95  |
| Reference Manual Part 2         | 14.95  |

|   |        |
|---|--------|
| <b>BBC MASTER COMPACT ENTRY SYSTEM</b>                        |        |
| *128K* *Single 640K Drive*                                    |        |
| *Bundled Software*  | 306.00 |
| <b>TV SYSTEM</b>  |        |
| *128K* *Single 640K Drive* *UHF Modulator* *Bundled Software* | 319.00 |

|   |        |
|---|--------|
| <b>MONO SYSTEM</b>  |        |
| *128K* *Single 640K Drive* *Bundled Software* *12" High Res Monochrome Monitor* | 349.00 |
| <b>COLOUR SYSTEM</b>  |        |
| *128K* *Single 640K Drive* *Bundled Software* *14" Medium Res Colour Monitor*   | 481.00 |

|   |        |
|---|--------|
| <b>MONITORS</b>   |        |
| <b>Phillips BM 7502</b>   |        |
| 12" Hi res. P31 Green Phosphor Screen. CVBS input. Audio input Band width 20 MHz. 2000 CHRS Display | 68.00  |
| <b>Samsung 12" Mono White</b>   | 89.00  |
| <b>Samsung 12" Mono Green</b>   | 89.00  |
| <b>Samsung 12" Mono Amber</b>   | 97.00  |
| <b>Samsung 14"</b>  |        |
| Mono Hi Res White   | 97.00  |
| <b>Samsung 14"</b>  |        |
| Mono Hi Res Green   | 97.00  |
| <b>Samsung 14"</b>  |        |
| Mono Hi Res Amber   | 109.00 |
| <b>Samsung 14" CGA</b>  | 249.00 |
| <b>Samsung 14" CGA/EGA</b>  | 335.00 |
| <b>Samsung 14" VGA</b>  | 335.00 |
| <b>Samsung 14" Multiscan</b>  | 355.00 |

|   |        |
|---|--------|
| <b>COLOUR MONITORS</b>  |        |
| <b>Phillips CM8833</b>  |        |
| 14" CVBS and RGB medium resolution colour monitor. IBM PC compatible. Fast blankup to enable superimposing. Stereo Audio. Ear phone socket. 600 dots x 285 lines vertical | 199.00 |
| <b>Phillips CM8852</b>  |        |
| 14" RGB professional med res colour. 700 dots x 285   | 251.00 |

|                            |       |
|----------------------------|-------|
| <b>PARALLEL T SWITCHES</b> |       |
| Parallel T switch (2 way)  | 15.00 |
| Parallel T Switch (4 way)  | 25.00 |
| Auto Switch 4-1            | 69.00 |

|   |        |
|---|--------|
| <b>MITSUBISHI DISC DRIVES</b>   |        |
| Source 100% BBC compatible slimline disk drives. All drives supplied complete with formatting diskette, comprehensive users manual and all necessary cables. All drives are 40/80 switchable and have two years warranty. |        |
| <b>5 1/4" Drives without P.S.U.</b>   |        |
| 400A Single 400K Double Sided   | 98.00  |
| SD 802C Dual 400K Double Sided  | 190.00 |
| <b>5 1/4" Drives with P.S.U.</b>  |        |
| 400B Single 400K Double Sided   | 117.00 |
| SD 802E Dual 400K Double Sided  | 204.00 |
| SD 802D Dual 400K Drives horizontally mounted in a monitor stand to fit both the BBC B and the Master series  | 230.00 |
| Mitsubishi Bave drives uncased with 40/80 switch  | 77.00  |

|  |        |
|--|--------|
| <b>WINCHESTER DISC DRIVES</b>                          |        |
| 20 Mbyte   | 408.00 |
| 30 Mbyte   | 432.00 |
| 40 Mbyte   | 552.00 |
| 60 Mbyte   | 672.00 |
| All Winchester come ready to plug into the Master 128. |        |
| ADFS RAM required for BBC                              | 26.00  |


## PANASONIC KX-P 1081

Panasonic KX-P1081.

The faster and enhanced KX-P1081. 120 cps in draft mode. Fully Epson RX80 and IBM Matrix and Graphics Printers compatible. Standard friction and tractor feed. Operator accessible print mode switch. Standard 8 bit parallel interface. RS232 interface is optional.



## NEC P2200 PINWRITER



CHOOSE YOUR FREE GIFT WITH EVERY NEC P2200

2 CHOICES OF GAINING  
1. RECEIVE  
FREE PRINTER CABLE  
FREE PRINTER STAND  
FREE 200 SHEETS PAPER  
OR

2. RECEIVE  
FREE CUT SHEET FEEDER  
WORTH £59

(WHILE STOCKS LAST - SO HURRY)  
24-pin dot-matrix printer. Letter-perfect print. In several sizes, at 56 characters per seconds (cps). Or switches to draft mode for high-volume outputs at 168 cps. Built-in tractor that permits push or pull feeding.  
Print Rate: High-speed draft: 168 cps. Standard draft: 140cps. Letter quality: 56 cps  
Printhead: Impact, 24-pin dot matrix.  
Input Buffer: 8K standard  
Graphic Resolution: Up to 360 x 360 dpi  
CUT SHEET FEEDER ..... 59.00  
SERIAL INTERFACE KIT ..... 55.00  
FRONT CARTRIDGE ..... 25.00

## NEC MONITORS

**MULTISYNC PLUS** ..... 695.00  
This 15 inch, high resolution (1024 x 768) monitor is ideal for use with IBM/XT/AT and PS/2 plus Apple Mac II and other IBM PC compatible microcomputers. It automatically scans all horizontal frequencies from 21.8 KHz to 48 KHz and vertical frequencies ranging from 50 to 90 Hz. It supports EGA, enhanced EGA, VGA, MCGA, and VGA colour graphics standards.

**MULTISYNC II** ..... 450.00  
This redesigned 14" MultiSync high resolution monitor offers all the benefits of the previous model such as automatic synchronisation, suitable for use with IBM/XT/AT and PS/2 plus Apple Mac II and compatible with Hercules, MDA, CGA, EGA, EGA+, VGA, and VGA modes.

**MULTISYNC GS** ..... 149.00  
Offers the user a high resolution (720 x 480), 14 inch monochrome display which is hardware compatible with IBM PC, XT, AT, and PS/2 machines. The MultiSync GS supports MDA, Hercules, CGA, EGA, MCGA and all the above major graphics standards and three vertical frequencies ranging from 50 to 70 Hz.

|                              |                   |
|------------------------------|-------------------|
| <b>PC ADD ONS</b>            |                   |
| 20 Mb Hard Disk              | 199.00            |
| 30 Mb Hard Disk              | 240.00            |
| 20 Mb Hard Card              | 199.00            |
| 30 Mb Hard Card              | 240.00            |
| Other PC products available. | Call for details. |

**SPECIAL PACKAGE**  
Phillips CM8833 Monitor and TV Tuner ..... 249.00

Save £45

Maintenance contracts available.  
Authorised service centre.  
Call for details 01-574 5271



APEX HOUSE  
BLANDFORD ROAD  
NORWOOD GREEN  
SOUTHALL  
MIDD UB2 4HD  
☎ 01-574 5271 or  
☎ 01-571 5938  
Telex: 25247 Telex Gattrn TIL  
Fax: 01-574 4326

You can purchase any of the items listed. All you have to do is write your requirements on a sheet of paper, and we will despatch your goods within 24 hours, subject to availability. Please add the following amounts for Postage and Packing.

Items below 10.00 add 1.50 Items below 50.00 add 2.50  
Items below 100.00 add 3.50 Items over 100.00 add 8.00  
(UK Mainland only) All prices exclude VAT. Please add 15% VAT to all orders. Prices correct at time of going to press but subject to change without notice. Please make cheques payable to: TWILLSTAR COMPUTERS LTD.

Access/Visa Card Holders: Welcome.  
VISIT OUR MEGA-COMPUSTORE OPEN 9am - 6pm Monday to Saturday  
CREDIT FACILITIES, we are authorised credit brokers, Typical APR 36%

## PRINTERS

**AMSTRAD LQ3500 di** ..... 260.00  
24 pin NLQ 160cps. LQ 54CPS. Prints graphics output. Supplied with bolt-on tractor and featuring PC and Epson LQ-1500 compatibility.  
(Subject to availability)

**AMSTRAD DMP4000** ..... 250.00  
200cps wide-carriage. Inbuilt tractors allow fast paper slew rates, and PC and Epson FX compatibility.  
(Subject to availability)

**NEW PRINTERS**  
**AMSTRAD DMP3250 di** ..... 169.00  
**AMSTRAD LQ5000 di** ..... 339.00

**STAR LC-10** ..... 189.00  
New enhanced version complete with IBM & Parallel Interface  
Sheetfeeder ..... POA  
**STAR LC-10 Colour** ..... 219.00  
Ribbon ..... 4.70

**MP135**  
135 cps, 80 column printer. Friction tractor feed. NLQ. Epson & IBM Compatible ..... 126.00

|                       |         |
|-----------------------|---------|
| <b>EPSON PRINTERS</b> |         |
| LX-800                | 199.00  |
| FX-800                | 320.00  |
| FX-1000               | 399.00  |
| EX-800                | 420.00  |
| EX-1000               | 565.00  |
| LO-500                | 299.00  |
| LO-850                | 449.00  |
| LO-1050               | 599.00  |
| LO-2500+              | 720.00  |
| LO-2550               | 899.00  |
| SO-2500               | 969.00  |
| SO-3500               | 1199.00 |


**NEC PINWRITER P9XL**  
P960XL ..... 885.00  
P965XL Serial/Parallel ..... 970.00

**NEC SILENTWRITER LC866+/LC890**  
LC866+ ..... 1870.00  
LC890 ..... 2995.00  
FREE with Silentwriter 12 months onsite maintenance contract.

## NEC PINWRITER P5XL

|                             |        |
|-----------------------------|--------|
| P565XL Serial/Parallel      | 740.00 |
| Pin tractor                 | 50.00  |
| Bi-directional tractor      | 125.00 |
| Single bin cut sheet feeder | 240.00 |
| Double bin cut sheet feeder | 440.00 |
| Font cartridge              | 40.00  |
| RAM cartridge               | 30.00  |

## NEW NEC PINWRITER P6/P7



The ultimate matrix printer for business. Print speeds of 265cps in draft and 90cps in letter quality. Inbuilt tractors. A paper park and low tear off facility. Twenty inbuilt fonts as standard. A font cartridge facility for greater flexibility. An amazing 80K byte print buffer. 24 pin printhead. Centronics parallel interface. Compatible with previous NEC 24 pin printers.  
P6+ 80 characters ..... 434.00  
P7+ 136 characters ..... 608.00

## DAISYWHEELS

**BROTHER HR 20**  
Daisywheel BK standard buffer upgradable to 16K. Standard serial/parallel port ..... 338.00

**JUKI Daisywheel**  
Juki 6200 ..... 320.00

**QUENDATA GPR-2000**  
Print speed of 18 characters per second. Fully Qume compatible. Takes Qume exchangeable Daisywheel and ribbons. Selectable 10, 12 & 15 pitch. Supports proportional spacing. Standard friction feed. Tractor/cut sheet feeder and serial interface optional ..... 146.00

**CITIZEN Daisywheel**  
Premiere 35  
35cps 15" daisywheel. Diablo compatible ..... 399.00

## PRINTERS

**CITIZEN 120D** ..... 117.00  
Dot Matrix Printer. 120cps NLQ. 2 year warranty. You have to see the quality at this price.


**CITIZEN LSP 100P** ..... 138.00  
120/25cps 80 column Centronics IBM Parallel

**CITIZEN MSP 15E**  
160/40cps 136 column Centronics IBM Parallel ..... 240.00


**CITIZEN HQ P40** ..... 350.00  
80 column. 24 pin. Dual interface. Colour Option ..... 50.00  
Colour Ribbon ..... 20.00

**CITIZEN HQ P45** ..... 310.00  
136 column. 24 pin. Dual interface.

**NEW CITIZEN 180E** ..... 169.00  
175cps Draft Elite  
30 NLQ. 4k Buffer.  
2 year warranty.



CITIZEN 120D



CITIZEN HOP40

## PRINTERS



# Program protector

*Mike Cook shows how to keep the pirates at bay*

**T**HE protection of software is a thorny area and one where the technical press has to tread very carefully. Software houses have, understandably, been known to take exception when magazines have published details of how to make backup copies.

Any discussion of protection techniques could be looked on as a tutorial in how to break protection because no system is absolute. I like to say that software protection is like a ball of string — you can't tie any knots that cannot be untied.

What most systems try to achieve is that the undoing of the knot will be so time-consuming and require such technical knowledge that the effort involved will outweigh the cost of the package. Of course there will always be people who hack into protection just for the challenge, but there are also a few unscrupulous souls who want to pass someone else's programs off as their own.

Another problem of software protection is that it normally involves an intimate knowledge of the specific machine or operating system. This means that when a compatible micro is launched or a new operating system or filing system is used, the protection system fails to allow the software to run.

One way of helping legitimate, but technically naive, users to protect their software is the Black Box approach. This is a system or program that will render the software uncopyable. One appeared in the April 1987 issue of *The Micro User* in an article by Chris Nixon and contained a system of protecting up to seven programs on a disc. Once protected, these could not be copied, backed up or loaded and it served as a good overall protection system.

People require different levels of protection, and I have been getting letters lately asking for a way to make programs unlistable. This plea comes from people who don't mind other folk having their programs or passing them on, but who want to make sure that they are not tampered with and that their name lives on embedded in them.

There are many ways of introducing a signature — some section of code or memory that reveals the name of the author — into a routine. For

example, the command \*AUTHOR could be implemented to reveal the names of the people who wrote the software. I know of at least one case of software piracy that went to court and was won when the plaintiff proved that the programs sold contained his name.

Of course if you make the name easily visible any thief could easily change it, so the trick is to scramble it in some way.

One favourite way is to Exclusive Or your signature with a keyword or phrase — only when you repeat the process with the same key is the signature revealed.

Another technique — which has even been used on review software sent to *The Micro User* — is to alter all the variable, procedure and function names to variations on some sequence of letters. For example, they could be changed to variations of the name of the person buying the program. So, if the buyer is Fred Bloggs you could change variables like this:

| Original | Altered |
|----------|---------|
| buffer   | fredbl  |
| circle   | Fredbl  |
| value    | fredB   |

You could even write a program to do the replacements for you. It can make people very wary of giving copies away to anyone else — just in case the programmer comes across a person who has a copy which doesn't contain the right name.

The most secure professional types of signature and protection are tailored to an

Turn to Page 88 ►

**“If you make the name easily visible any thief could easily change it”**





◀ From Page 87

individual program, using its unique features to weave the protection around. However, in reply to everyone who has been asking me for a way to make programs unlistable, I have come up with the solution shown in the listing.

As you can see, I have adopted the Black Box approach in that the heart of the program is in machine code stored in decimal in data statements. This means you will have to go to considerable effort just to look at what the machine code does to be able to write a program to reverse the process.

Using the program is simple: Type it in, ensure you've made no errors using Get it Right! and save it. When you run the routine you are asked how many lines you want to protect and at what intervals the protected lines should be. Note that these intervals are the number of lines between the protected ones — line numbers are not taken into account.

Protecting a line increases its length and you are told by how much. If you are running close to the micro's memory limit the extra protection may well exceed the amount of ram available. So in a short program you could afford to protect more lines than a long one.

Don't worry about the unprotected lines — if someone can reconstruct your program from those they are probably clever enough to have written it themselves.

When you have answered the questions, the routine installs the protection patch. To use it you simply load in the program you want to protect and press function key one. In a short time the prompt will re-appear and then you can save the protected version. Make sure you use a different name or disc to save the protected program, as there is no simple way to un-protect it.

Once protected, you will be able to treat it like a normal program for running, loading and copying. However you will not be able to list it and it will be very difficult for you to alter the code.

As a final note, I would remind you of an ancient Egyptian proverb: *A lock only ever stopped an honest man.* By protecting your listings you are making a statement of ownership and warning all who trespass that they are considered dishonest.

```

10 MODE7
20 PRINTTAB(0,3)"Program Protector"
30 PRINT"By Mike Cook"
40 PRINT
50 PRINT"This stops a program from be
ing listed"
60 PRINT
70 PRINT"1) Load the program you want
to protect"
80 PRINT"2) Press function key 1"
90 PRINT"3) Save the protected progra
m"
100 PRINT:PRINT
110 INPUT"How many lines to protect ",
PX
120 IF PX>240 OR PX<2 THEN PRINT"RANGE
OF 2 - 240":GOTO 100

```

```

130 PRINT"This will add ";PX*8;" bytes
to the code."
140 PRINT"OK ? (Y/N)";
150 AS=GET$
160 IF AS<>"Y" THEN GOTO 100
170 PRINT:PRINT:PRINT"at what line inc
rement do you want"
180 INPUT"to protect the lines ",N%
190 IF N%>40 OR N%<1 THEN PRINT"RANGE
OF 1 - 40":GOTO170
200 *KEY1CALL &A00:M
210 FOR A%=&A00 TO &AC7
220 READ B%
230 ?A%<B%
240 NEXT
250 ?&A01=N%
260 ?&A07=P%
270 PRINT:PRINT"PROTECTION PATCH NOW I
NSTALLED"
280 END
290 DATA169,3,133,135,133,137,169,10
300 DATA133,136,169,131,32,244,255,232
310 DATA134,128,132,129,169,132,32,244
320 DATA255,202,134,130,136,136,132
330 DATA131,160,2,177,128,133,134,160
340 DATA0,177,128,201,255,240,78,165
350 DATA134,201,247,176,35,160,2,200
360 DATA177,128,201,220,240,26,201,221
370 DATA240,22,201,32,240,241,160,2
380 DATA177,128,24,105,8,145,128,32
390 DATA125,10,32,164,10,76,90,10,32
400 DATA183,10,166,134,202,32,183,10
410 DATA202,208,250,160,0,177,128,201
420 DATA255,240,17,160,2,177,128,170
430 DATA198,135,208,233,165,137,133
440 DATA135,198,136,208,164,96,165,130
450 DATA133,132,165,131,133,133,160,0
460 DATA177,132,160,8,145,132,198,132
470 DATA165,132,201,255,208,2,198,133
480 DATA165,129,197,133,208,232,165
490 DATA128,197,132,208,226,96,32,183
500 DATA10,162,8,160,2,189,190,10,145
510 DATA128,32,183,10,202,208,245,96
520 DATA230,128,208,2,230,129,96,66,58
530 DATA34,03,21,34,61,36,95,34,0

```

**Get it right!**

|              |              |              |
|--------------|--------------|--------------|
| 10 = 8AFC C  | 190 = 530C E | 370 = 7C13 8 |
| 20 = 1281 C  | 200 = 70DB 9 | 380 = 7673 2 |
| 30 = FC23 5  | 210 = 8657 9 | 390 = 94C5 D |
| 40 = FF3E 3  | 220 = 9D3E E | 400 = D20 F  |
| 50 = C46D B  | 230 = 4220 A | 410 = 73F8 A |
| 60 = FF3E D  | 240 = 2C83 D | 420 = A3AD 8 |
| 70 = D984 2  | 250 = F43E 2 | 430 = DA6 3  |
| 80 = 1734 C  | 260 = F3DB C | 440 = F2F1 A |
| 90 = 4D52 6  | 270 = C7F4 F | 450 = 665D E |
| 100 = C102 2 | 280 = FD2E 2 | 460 = BB7A B |
| 110 = 3DEC E | 290 = 88BB 2 | 470 = 7118 3 |
| 120 = DAE3 C | 300 = 42D4 A | 480 = 94A8 5 |
| 130 = D76C 8 | 310 = B8C9 A | 490 = 6B68 A |
| 140 = 1E4A F | 320 = 11B 2  | 500 = A4C6 F |
| 150 = 77F2 D | 330 = F5DD 2 | 510 = DE85 0 |
| 160 = 5E93 4 | 340 = 38F4 3 | 520 = C104 7 |
| 170 = CB13 4 | 350 = E7 C   | 530 = 535B D |
| 180 = 539F E | 360 = BC07 1 |              |



# COLOURJET 132

## HIGH PERFORMANCE COLOUR INK JET PRINTER

(compatible with IBM pc, BBC micro, Nimbus etc.)

- ★ PRINTS ALL 64 SCREEN COLOURS FROM CGA AND EGA USING OPTIONAL INTEGRIX SOFTWARE
- ★ EMULATES OTHER PRINTERS (A1210, PJ1080A and QUADJET)
- ★ OVERHEAD TRANSPARENCY PRINTING
- ★ 80 + 132 COLUMN OPERATION, A4 WIDTH
- ★ UP TO 1280 DOTS/LINE ADDRESSABLE
- ★ FULL VIDEOTEX CAPABILITY
- ★ OPTIONAL BUFFERED RS232 (INTERNAL)
- ★ HIGHLY VERSATILE

ULTRA  
LOW  
NOISE

LIST PRICE  
£589 + VAT



EDUCATIONAL DISCOUNTS AVAILABLE

INTEGREX LTD CHURCH GRESLEY, BURTON ON TRENT  
STAFFS DE11 9PT  
Tel (0283) 215432  
Telex 341727 INTEGEX





# Archimedes

## HARNESS THE POWER

### Alpha-Base

**£49.95**

**Alpha-Base** is the successor to **Beta-Base**, the top selling database for the BBC micro. Alpha-Base really does 'HARNESS THE POWER' of the Archimedes. As with all Clares products we have made **Alpha-Base** powerful but easy to use. You can be using a database within 5 minutes of receiving the program - that's easy. But don't be fooled, you do not lose any functions or power. Here are just some of the functions:




- \* WIMP based using icons and mouse
- \* Hard disc compatible - massive files
- \* Free format screens with on line editing of field order
- \* Upto 400 fields & 27600 chars per record
- \* Upto 2.14 billion records per file !!!
- \* Multiple display, entry and printer forms can be used with each file
- \* Fast search by fields or record
- \* Plain English entry of search & sort criteria with many inbuilt functions
- \* Five data types including formulae
- \* Calculation facilities with inbuilt min, max, average, age etc
- \* Comprehensive print options inc labels
- \* Validation on each field if required
- \* Transfer fields from one file to another
- \* Password security if required
- \* Data stored on disc so computer failure will not result in loss of the data

If you want a powerful database that you can boot up and run within 5 minutes then buy **Alpha-Base** now. Absolutely no programming skills required.

### Graphic Writer

**£29.95**

**Graphic Writer**, formerly **Image Writer**, is a sophisticated WIMP based word processor with an inbuilt graphics editor. It can be used as a standard word processor or graphics can be included to provide diagrams, graphs etc within your document. Graphics can even be imported from **ARTISAN**

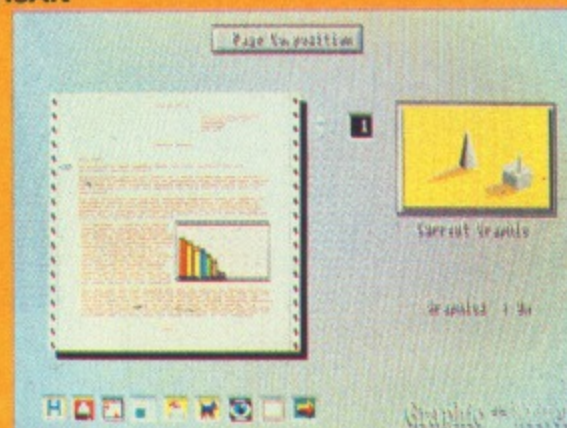

- \* Totally icon driven from menus
- \* Multiple documents in memory, upto 512k
- \* Super smooth scrolling
- \* Fast search & replace
- \* Justify centre etc
- \* Text styles give plain, bold, italic, underlined, subscript, superscript or combinations of these eg bold italic underlined subscript.
- \* Centered and Temporary text styles
- \* Block operations - move, copy, delete and recall
- \* Full WYSIWYG preview
- \* Graphics editor
- \* Page format controls page length, headers, footers, pad and pound characters.
- \* Page Composition allows placing of graphics, mini preview etc
- \* Multiple print out options
- \* Auto page numbering even through multiple documents

To create a document with **Graphic Writer** you type in your text, using the many text styles available, leave room for the graphics and then place the graphics using **Page Composition**. It's simple and easy to use. You can have up to 14 documents in memory on a 310, that's equivalent to about 220 pages of A4 text.

See what the magazines say:

the scrolling is unbelievably smooth... I can highly recommend this excellent product as being **THE** word processor for the Archimedes

**MICRO USER** April 1988

excellent value... bowled over by its stunning use of graphics.

**RISC USER** December 1987



98 Middlewich Rd  
Northwich  
Cheshire CW9 7DA  
Tel: 0606 48511

ALL PRICES INCLUDE  
VAT and P+P  
OVERSEAS ORDERS  
ADD £4



DON'T FORGET, YOU CAN ORDER WITH ACCESS CARD TOO!





**WATFORD ELECTRONICS  
&  
A&B COMPUTING**



following the success of the Autumn Open Day, by popular demand  
proudly present

# **THE SPRING HANDS ON OPEN DAY**



AT WATFORD ELECTRONICS SHOWROOM  
JESSA HOUSE, 250 LOWER HIGH ST, WATFORD

**ON SUNDAY 5th MARCH 10.00 AM – 4.00 PM**

**YOUR CHANCE TO TRY OUT THE LATEST  
HARDWARE AND SOFTWARE FOR THE ACORN  
RANGE OF MICROCOMPUTERS**

**COME ALONG AND MEET ALL THE KEY STAFF OF A&B COMPUTING,  
COLTON SOFTWARE AND WATFORD ELECTRONICS.  
PERSONAL ATTENDANCES WILL BE MADE BY MR. NAZIR JESSA M.D.  
OF WATFORD ELECTRONICS  
AND MR. PETER WHELAM M.D. OF ARGUS PUBLICATIONS**

**PLUS PLUS PLUS**

ALSO ON HAND WILL BE ACORN TECHNICAL STAFF TO ANSWER ALL YOUR QUERIES ON  
THE ACORN RANGE INCLUDING THE NEW ARCHIMEDES

**DON'T MISS OUT!**

IF YOU'RE SERIOUS ABOUT YOUR MICRO, YOU OWE IT TO YOURSELF TO  
COME ALONG AND MEET THOSE WHO COUNT IN THE WORLD OF ACORN

**A&B – WATFORD – ACORN**



# Watford Electronics

Jessa House, 250 Lower High Street, Watford WD1 2AN, England

Tel: Watford (0923) 37774 Tlx: 8956095 Fax: 01 950 8989

Shop Hours: 9am to 6pm (Mon.-Sat.) Thursdays 9am to 8pm

All prices exclusive of VAT; subject to change without notice & available on request.

Credit Card Orders (ACCESS & VISA) Tel (0923) 33383 or 50234 (24 Hours)



The choice  
of Experience



The choice  
before and after  
the experience

## Archimedes *micro*

| System | Basic | Mono  | Colour |
|--------|-------|-------|--------|
| 305    | £699  | £759  | £909   |
| 310    | £829  | £875  | £1025  |
| 310M   | £879  | £925  | £1099  |
| 440    | £2399 | £2449 | £2595  |

(Securicor carr. £10 on Micros)

### FREE PRINTER OFFER

With every Archimedes Micro purchased from us this month, we are giving away absolutely **FREE** a Panasonic KX-P1081 Dot Matrix **PRINTER** and an Archimedes **PRINTER LEAD** worth £160. If you already own a printer, then simply phone in for alternatives.

|  |      |
|--|------|
| ● 0.5 Mb RAM for 305   | £149 |
| ● Podule Backplane   | £37  |
| ● ROM Podule (Computer Concepts)   | £48  |
| ● ROM Podule (C.C.) with Battery Backup  | £59  |
| ● ROM Podule (takes five 8 bit ROMs, of 16, 32, 64 or 128K)                    | £56  |
| ● Archimedes Ref Manual  | £29  |
| ● 2nd 800K floppy disc drive (for 305, 310 & 410)                              | £118 |
| ● Econet Network Board   | £40  |
| ● Backplane for 2 podules, with fan (305, 310)                                 | £39  |
| ● New Backplane for 4 podules  | £39  |
| ● New Backplane for 2 Podules  | £29  |
| ● I/O Podule (with User port, Analogue port & 1MHz bus)                        | £85  |
| ● MIDI add-on to I/O Podule  | £38  |
| ● MIDI Expansion Card  | £66  |
| ● Real time Video Digitiser (Watford)  | £249 |
| ● Sound Sampler (Armadillo)  | £105 |
| ● 20 Mb Hard Disc & Controller Card  | £469 |
| ● Watford's latest 20 Megabyte Hard Disc, Controller Card & Utilities Software | £360 |
| ● Archimedes IEEE Interface Adaptor  | £280 |
| ● PC Emulation Pack incl. MSDOS 3.21   | £79  |
| ● ARM Assembly Lang. Prog. Manual  | £12  |

### WORDPROCESSORS

|                     |     |              |     |
|---------------------|-----|--------------|-----|
| Wordwise +          | £18 | Pipedream    | £89 |
| Image Writer        | £25 | Spellchecker | £48 |
| Interword ROM       | £35 | View         | £49 |
| 1st Word Plus       | £79 | Viewspell    | £32 |
| Archie Spell Master | £49 | ViewIndex    | £12 |

### DATABASES

|                     |     |           |     |
|---------------------|-----|-----------|-----|
| AlphaBase           | £39 | Viewstore | £49 |
| System's Delta Plus |     |           | £60 |

### SPREADSHEETS

|                |     |            |     |
|----------------|-----|------------|-----|
| Intersheet ROM | £35 | Viewsheets | £49 |
| Sigmasheet     |     |            | £59 |

### BUSINESS GRAPHICS

|           |     |                |     |
|-----------|-----|----------------|-----|
| GammaPlot | £59 | Interchart ROM | £25 |
|-----------|-----|----------------|-----|

### INTEGRATED PACKAGES

**Logistix** - Database, Spreadsheet, Time Management & Business Graphics

£95

### GRAPHICS, ART & DESIGN

|                  |      |                  |     |
|------------------|------|------------------|-----|
| Artisan          | £31  | Gamma Plus       | £60 |
| Pro Artisan      | £145 |                  |     |
| Support Disc     | £17  | Autosketch       | £69 |
| Toolkit (Beebug) | £32  | Toolkit (Clares) | £31 |
| Arc Termulator   | £59  | Zarch            | £16 |

### Computer Concepts' Archimedes Software on DISC

|                  |     |                   |     |
|------------------|-----|-------------------|-----|
| Inter-Word Disc  | £27 | Inter-Sheet Disc  | £27 |
| Inter-Chart Disc | £17 | Spell-Master Disc | £48 |

### LANGUAGES

|                                   |           |
|-----------------------------------|-----------|
| ANSI 'C'; ISO-PASCAL; FORTRAN 77; | £95 each  |
| Cambridge LISP; PROLOG X          | £181 each |
| Archimedes Assembler              | £189      |
| TWIN EDITOR                       | £27       |

### 0% (APR) FINANCE

For a limited period, Watford Electronics are able to offer the Archimedes range of microcomputers at 0% (APR) finance. Credit facility available subject to status. Please inquire for further details.  
(Watford Electronics are Licenced Credit Brokers)

### Archimedes to BBC SERIAL LINK

Using this simple data link, it is possible to solve all your BBC to Archimedes data transfer problems. The kit is supplied with a disk, and the necessary cable to connect the two computers. Using this package it is possible to transfer any data from the BBC to Archimedes at up to 19200 baud.  
By far the easiest way to transfer data to your new computer.

Only £25

### Archimedes 5 1/4" / 3 1/2" Disc drive Interface

With this interface it is possible to connect almost any 5 1/4" / 3 1/2" disc drive with its own power supply to the Archimedes. NO SOLDERING is involved. Supplied complete with necessary lead.

Only £19

Note: This is not simply a lead. Attempting to connect an external disc drive by direct connection may result in damage to your Micro.

New

By Popular demand we are now  
supplying refurbished and fully  
guaranteed BBC Micro Model B with  
Disc Filing System

(Please telephone for price & availability)

### The 80186 Co-Processor

This package consists of the Master 512 board, Watford Co-Pro Adaptor, 1770 Disc Upgrade and Acorn ADFS. This is a complete package, with its own power supply, ready to interface with your BBC Micro. The Master 512 board using the 80186 16 bit Processor at 10MHz and running Digital Research DOS Plus, gives a high degree of IBM compatibility at an extremely reasonable price. Included in the 512k package is a mouse and the amazing Digital Research GEM suite of software; GEM Paint, GEM draw and GEM desktop giving a complete Mouse Icons environment (All other GEM packages will work on the 512k). Famous packages that will work with the 512k board include Wordstar, Dbase II, Lotus 123 and many others. The only requirement to upgrade any BBC Model B to this system is you must have twin 80 track disc drives.

New low price £219

CREDIT TERMS now available.  
Please telephone or write in for  
further information.

### BBC MASTER

MASTER 128K Micro incl. Acorn's: View, Viewsheets, ADFS, BASIC Editor & TERMINAL plus £125 worth of FREE OFFER (see below) **£379**

### SPECIAL OFFER

FREE . . . £105 worth of  
Hardware & Software

Gemini's OFFICE MATE & OFFICE MASTER packages on Disc consisting of: Database, Spreadsheet, Beebplot graphics. Accounts packs: Cashbook, Final Accounts, Mailist, Easyledger, Invoice & Statements, Stock Control and Watford's 3 1/2", double sided 1 Megabyte (unformatted) single disc drive complete with cables, ready to connect to the micro - with every BBC Master purchased from us this month.

BBC MASTER with Turbo Board +  
above SPECIAL OFFER **£513**

512K Processor Add on Board  
"inc. Mouse and GEM package" **£119**

BBC MASTER plus 512K 80186  
Co-processor Board (incl. Mouse  
and GEM package) plus the above  
£105 worth of SPECIAL OFFER **£498**

### ADD-ONS & ACCESSORIES

|                                      |              |
|--------------------------------------|--------------|
| Turbo 65C102 Add-on Module           | £119         |
| Econet Module for the Master         | £40          |
| Twin ROM Cartridge for Master        | £7.50        |
| Quad ROM Cartridge for Master        | £11          |
| Universal Processor Adaptor          | £75          |
| Master Reference Manual I            | (No VAT) £14 |
| Master Reference Manual II           | (No VAT) £14 |
| Master Advance Ref. Manual           | (No VAT) £19 |
| 64K Upgrade Kit for B+               | £32          |
| Acorn 1770 DFS Kit complete          | £49          |
| ECONET Upgrade Kit for BBC           | £42          |
| ALL ECONET UPGRADES Available        |              |
| ARIES' Professional IEEE Interface   | £238         |
| Morley Teletext Adaptor with ATS Rom | £99          |
| Filestore E01S                       | £899         |
| Filestore E40S                       | £799         |
| Filestore E60S                       | £1080        |
| Ecolink                              | £270         |

### BBC MASTER COMPACT

|   |                                      |      |
|---|--------------------------------------|------|
| System 1                                | Standard Package                     | £299 |
| System 1A                               | System 1 + TV Modulator              | £315 |
| System 2                                | System 1 + Green Hires Monitor       | £345 |
| System 3                                | System 1 + Medium Res Colour Monitor | £469 |
| RS232 Kit for BBC Compact               |                                      | £25  |
| Additional 3 1/2" Drive for BBC Compact |                                      | £90  |
| (Securicor carriage £7)                 |                                      |      |

### 65C102 2nd PROCESSOR

This amazing package consists of the Acorn 65C102 'Turbo' Board, the Watford Co-Pro Adaptor and Acorn 1.2 DNFS ROM. The 'Turbo' board, running at 4MHz with 64k of additional RAM will increase the speed by between 50 and 200% depending on the application running, and allow a BASIC program of up to 44k in any screen mode. Simply by plugging in the Co-Pro and the DNFS ROM with its special Tube host code and you massively increase the power of any Model B. This is a complete package, with its own power supply, ready to interface with your BBC Micro.

**£159**

Continued



## Z88 Sinclair's Portable Micro



The worlds first, truly portable Micro. It is A4 size, only an inch thick and weighs under 2lbs. Ideal for use when travelling or as a personal organiser.

Only: **£239**

### FREE

With every Z88 purchased from us this month, we are giving away absolutely FREE, a Z88 to BBC Interface Link, 4 rechargeable batteries and a compact Mains Battery Charger worth £38.

### ACCESSORIES

|   |        |
|---|--------|
| Mains Adaptor                             | £8.65  |
| 32K RAM Pack or 32K EPROM Pack            | £17.35 |
| 128K RAM Pack or 128K EPROM Pack          | £43.40 |
| 512K RAM Pack                             | £169   |
| Z88 Spellmaster for Pipedream             | £51    |
| Z88 to BBC Link                           | £21.70 |
| Z88 to PC Link II                         | £30    |
| Z88 to Macintosh Link                     | £49    |
| Z88 EPROM ERASER                          | £34.75 |
| Serial Printer Cable                      | £8.65  |
| Parallel Printer Cable                    | £24.00 |
| Z88 Modem                                 | £145   |
| Z88 Soft Carrying Case                    | £8.50  |
| Sinclair Z88 Computing Book               | £9.95  |
| AA Nicad Rechargeable Battery             | £1.50  |
| Battery Charger, Compact & Fast (3 Hours) | £6     |

### Z88 PACKAGE OFFER

This special offer package consists of:  
A Z88 Micro, 128K Ram pack, Mains Adaptor, Carrying Case & a Set of Kodak batteries.

Only **£289**


## CO-PRO Adaptor



With this Watford's Co-pro Adaptor unit, you can now attach any BBC Master's coprocessors to your original BBC B.  
Use the super fast Turbo Board with your BBC B, it is much faster than the 6502 2nd processor superseding it.  
With the 512K add-on your standard BBC machine achieves IBM PC compatibility at a realistic price running GEM, Lotus 123 and many other programs. Included with the 512k package is a high precision mouse and the Digital Research GEM suite of software; GEM Desktop, GEM Write GEM Paint. This requires both the 1770 DFS and the ADFS to be fitted to your computer.  
To use other co-processors you require a BBC B with DNFS 1.20 or higher, or BBC B+ fitted with 1770 DFS 2.20 or greater. Co-processors work exactly like a second processor.  
Master owners may use Co-Pro to add a second Co-processor externally.  
Watford, brings power to your BBC at only:

**£35 (carr £5)**

## Archimedes Real-Time Digitiser

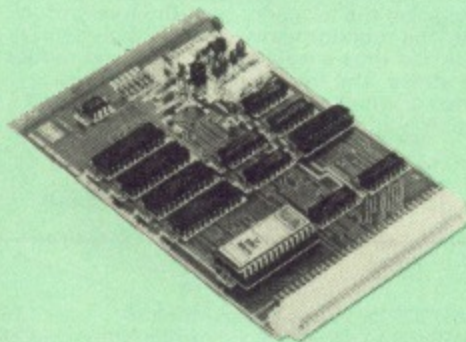

Watfords' Archimedes Video Digitiser is the most sophisticated digitiser ever designed for a micro. It provides a fast and flexible means of capturing images from a video camera or recorder for display and manipulation on the Archimedes range of Micros. Off-air television signals may also be digitised via a video recorder or TV tuner.

Once captured, Video images can be stretched, squashed, rotated, stored on disk, printed, or used by applications software.

Applications include desktop publishing, graphics, animation, image analysis and recognition, medical imaging, automatic inspection and measurement, databases, interactive video, remote transmission of pictures via a modem, movement detection ... or anything else you can think of!

### SPECIFICATION

#### SOFTWARE

All the driver software for the digitiser is contained in a ROM on the podule. Facilities provided include:

- Grabbing of images to the screen or dumping to memory.
- Continuous grabbing and display for previewing or camera alignment.
- 'Hot key' grabbing - pressing a (configurable) key combination grabs and displays an image on the screen while another program (e.g. paint software such as Artisan) is running.
- Scaling (zoom/shrink) any section of an image to any size in X and Y directions, with optional X/Y flip, window clip and logical (AND/OR/XOR) plotting.
- Rotation and scaling to any angle and size, rotating about any point, with optional window clip, and logical (AND/OR/XOR) plotting.
- Very versatile matrix printer screendump facility for Epson FX, LQ and EX compatible printers - pictures can be printed to ANY size (including multiple sheets) at any orientation, using any available printer density and one of six internal sets of dot patterns, or with user definable patterns (pattern editor supplied). The screen-dump can also be used for general purpose graphics screen printing.
- Pixel value lookup tables: pixel values can be passed through a user defined lookup table to allow contrast enhancement, thresholding pseudo-colouring etc.
- Smoothing and noise spot removal to enhance image quality.
- Creation of sprites from all or part of a digitised image.
- Saving and loading of digitised images in compressed format.
- Combination of pictures by adding, averaging, subtracting, multiplication etc.
- Much faster versions of the Arthur \*ScreenLoad and \*ScreenSave commands.

Software facilities are accessed via operating system star (\*) commands and SWI calls. High resolution screen modes using MultiSync type monitors are supported.

#### UTILITY DISK

A disk is included, containing sample pictures, examples and utility programs including the following:

- Colour image grabbing using colour filters with monochrome or colour cameras, including colour balance adjustment and scaling facilities.
- Pattern editor for 2 colour display modes and printer screen-dumps.
- 512 line interlaced display for non MultiSync monitors.
- Thresholding to create two colour images.
- Capture and replay of animated sequences.
- Several example programs illustrating the use of digitiser software.

#### RESOLUTION

Images are digitised to 512 (h) x 256 (v) pixels, and then scaled to fit the Archimedes' screen. It is possible to digitise to 512 x 512 pixels if the picture is stationary for about 0.1 second. 512 x 512 images can either be displayed on a MultiSync monitor, or on a normal monitor using interlacing.

Pictures are digitised to 64 levels of grey (6 bits). Note, however, that it is only possible to display all 64 levels on a monochrome monitor, or a colour monitor which has a composite (CVBS) input. For this reason, the Philips CM8533 monitor is recommended instead of the standard Archimedes monitor. It is also possible to connect both a colour and a monochrome monitor at the same time.

Any 2,16 or 256 colour graphics mode can be used to display digitised pictures. In two colour modes, grey levels are represented using dot patterns, which may be redefined if required (a pattern editor is supplied).

Cont.

#### SPEED

Video fields are captured in real time (1/50th sec.), and then transferred to Archimedes' memory or the screen. The grab/display rate is dependant on the screen mode and picture size, up to 25 fields per second for quarter screen images, or 12.5 per second for fullscreen (Mode 9).

#### HARDWARE

The digitiser is a single width podule, with a BNC socket on the rear panel for the video input, which may optionally be terminated via a link. There is 128K of on-board memory to store the digitised image, and a 32K ROM on the podule contains all the driver software.

Automatic video level control and black level clamping circuitry is used to ensure that the optimum contrast is obtained from a variety of video sources. A filter is included to avoid patterning effects when using colour sources.

**Price £249**

## Watford Dealers' List

### UNITED KINGDOM

Alpha Microtec Ltd, 321 Stratford Road, Shirley, Solihull, West Midlands. Tel: 021-745 8998.

Badger Micros (Devon), Badger's Hill, Southerton, Ottery-St. Mary, Devon EX11 1SE. Tel: 0395 68516.

Beebug Retail, Dolphin Place, Holywell Hill, St. Albans.

Cambridge Computer Store, 4 Emmanuel St., Cambridge CB1 1NE. Tel: 0223 358264.

Circuit Distribution Ltd, Park Lane, Broxbourne, Herts.

HCCS, 575-583 Durham Road, Low Fell, Gateshead, Nr. Newcastle Upon Tyne. Tel. 091 4870760.

Mancomp Ltd, Printworks Lane, Levenshulme, Manchester. Tel: 061-224 1888-9888.

Microman Computers, Pasture Lane Farm, Pasture Lane, Rainford, St. Helens, Merseyside WA11 8PU. Tel: 074488 3667.

The Computer Depot, 205 Buchanan Street, Glasgow G1 2JZ. Tel: 041-332 3944.

Verospeed Ltd, Boyatt Wood, Eastleigh, Hants.

### OVERSEAS DEALERS

\*Absolute Electronics, Rewal House, 208-210 La Trobe Street, Melbourne, 3000, Victoria, Australia. Tel: (03) 663 2411.

Computer Distribution Company, Parklaan, 47, 8-9300 Aaist, Belgium.

E.B.N., Eisenstrasse 13, 1000 Berlin 41. Tel: (030) 7952057.

Lendac Data Systems, Unit 31, IDA Enterprise Centre, Pearce Street, Dublin 12. Tel: 710796.

Lindis International Ltd, Wood Farm, Linstead Magna, Halesworth, Suffolk. Tel: 098 685 476.

Scientex P.V.B.A., Zilvermidstraat 2, B-2000 Antwerpen, Belgium. Tel: 03 233 59 06.

Techno-matic Data, Holbergsgade 19, 1057 København K, Denmark.

\*Velobyte, Scheaedyksadyk 5a-6a, 3011 EB Rotterdam, Holland. Tel: (010) 413 8197/414 5171.

Viking Tecno, Vestergade 12.1, 9620 Aalestrup, Denmark. Tel: 08 642522.

\*Acorn/Watford Referral Centres.

**Watford Electronics are  
Appointed & Authorised  
DEALERS / REPAIR CENTRE  
for Acorn Computers Ltd  
Cambridge Computers Ltd  
Microvitec Monitors  
Panasonic Printers**


Continued



## MONITORS

&amp;

## SWIVEL BASES

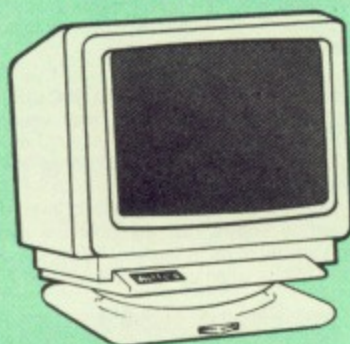

All Monitors are supplied complete with BBC connecting leads FREE.

## MICROVITEC 14"

- 1431 - Standard resolution as used on the BBC television computer programme £175
- 1451 - Medium resolution, suitable for word processing in mode 0 £219
- 1441 - High res, exceeds the capabilities of the BBC micro £359
- 1431AP RGB + PAL and AUDIO £199
- 1451AP RGB + PAL and AUDIO £255
- 2030 CS 20" Med Res £380
- 2040 CS 20" Hi Res £675
- Dust Cover for Microvitecs £5.50
- Touchtec 501 Touch Screen £239

## TAXAN 14"

- TAXAN Super Vision 2 Type 620 Hi-res RGB Colour monitor. Ideal for Wordprocessing £263

## 14" MULTISCAN COLOUR

- TAXAN Multisync 770 Plus £449
- EIZO Flexscan 80605 - For technical info. read the review in Micro User, Jan. '89 £459
- NEC JC-1402P - Multisync II £459

NEW

## Aries 1458 14" Multisync

Aries 1458 is a state of the art, stylishly finished, flat screen, Enhanced Multiscan Colour Monitor. An auto-switching device changes modes without having to adjust the monitor (it also works in monochrome). Its wide frequency range (15-45KHz) and multi-colour display allows increased options and flexibility. 0.31mm dot pitch. Input Signal: TTL/Analogue, H-Sync 15-45KHz; V-Sync 47-100Hz; Bandwidth 35MHz; Resolution 800 x 600 Hi-resolution Multi colour Display; Display Colours CGA-16, Mono-Green (3 levels), EGA 64, Analogue - limited only by the video display adaptor; Built-in tilt and swivel base.

Launch offer £379

NEW

SPECIAL OFFER  
AMBER MONITOR

BT MERLIN/Acorn 12" Hi resolution Amber monitor. Ideal for wordprocessing. Consealed front panel mounted controls. Illuminated mains on/off rocker switch. Supplied complete with BBC Cable.

Only £49

(Offer valid while stocks last)

N.B. carriage on Monitors £7 (securicor)

## SPARE LEADS

- BNC Lead for Zenith or Philips £3
- Skart Monitor Lead £5
- RGB lead for TAXAN Monitors £3
- Archimedes Colour Monitor Lead £7.50

By placing your monitor on one of our professional swivel bases (see monitors drawing on the left), you gain the freedom to adjust the monitor viewing angle to suit your needs and thus alleviate eye strain and reduce back stress. The front mounted adjustable control dial makes adjusting the monitor viewing angle very simple.

for 12" Monitors £7 (carr. £2.50)

for 14" Monitors £10 (carr. £2.50)

## PHILLIPS

- BM7502 12" Hi-res Green Monitor £65
- CM8833 14" Med. Res Colour Monitor £219

## STAR BUY

- PHILLIPS 14" Medium Res, dark glass, attractively finished Colour Monitor - supplied complete with RGB, SKART and Audio/Phono Inputs. A push-button switch toggles between Hi-Res monochrome green text mode and full colour display. Has Composite Video Input. (Please state the type of Connecting Lead you require).

ONLY £199

Dust Cover for Phillips Monitors £6

## Anti-Glare VDU Screen

These extremely effective, easy to install, 12" & 14" VDU screens eliminate harmful glare, improves contrast on colour monitors. Increases productivity in offices. A must for all wordprocessor users. Hundreds of these screens are in daily use in various branches of one of the leading High Street banks.

£12

## TAXAN KP-815 PRINTER


80 column, Bi-directional, 160 CPS, (NLQ 24cps); Friction & tractor feed + paper roll holder as standard; Epson FX compatible.

Offer Price £155

Taxan KP915 132 Column Printer £275 (carr £7)

- RS232 Interface £49
- RS232 Interface with 2K Buffer £69
- RS232 Interface with 16K Buffer £89

## Panasonic KX-P1081

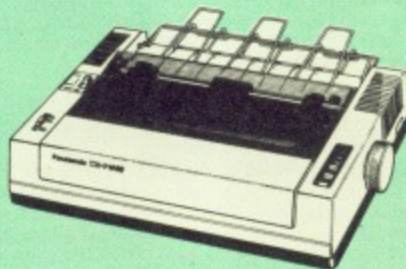

Attractively finished in BBC beige. Bi-directional, logic seeking. Has IBM and Epson RX compatible command calls. Speed: 120CPS draft mode, 24 CPS NLQ mode. Character width range from 5 cpi to 17 cpi. Up to 40 downloadable characters. Functions include, Proportional spacing, Justification, centering and left & right ranging.

(Price includes, FREE a 4ft Printer Lead, and a Dump Out 3, Screen Dump ROM worth £35 with every printer purchased from us).

Special Price: £145 (carr. £6)

Optional RS232 Interface: £39

## RS-232 GENDER CHANGERS

- Male to Female £4.95
- Male to Male £4.95
- Female to Female £4.95

Panasonic KX-P4450  
LASER PRINTER

Latest technology at affordable price. Prints 11 pages a minute. Two A4 size paper bins, Serial & Parallel ports, 512K Buffer - expandable to 1.5Meg, 15 Character LCD Display, Diablo 630, Epson FX-286, IBM Proprinter, HP Laserjet emulations, 5K pages per month duty cycle.

ONLY £1,625

## NEC P2200 PINWRITER

24 pin; 80 column; 168CPS - 56CPS LQ; Epson LQ compatible, 7K Buffer; 7 resident FONTS, Friction & Tractor feed, front load single sheet feed, etc.

Price: £269

FREE Cut Sheet Feeder worth £65 with every P2200 printer purchased from us this month)

- Pinwriter Serial Interface £55
- Additional Font Cartridge £25
- NEC P2200 Pinwriter Ribbon £6

## NEC PINWRITER P6/P7 Plus

The Ultimate matrix Printer for Business.

24pin printhead; Print speed, 265cps Draft, 90cps LQ; Inbuilt Tractor & Friction feed; A paper park & low tear facility; 20 inbuilt FONTS; A font cartridge facility; 80K of Printer Buffer; Colour option available; P6 is 80 column & P7 is the wide 136 column.

- P6 Plus 80 columns £439
- P7 Plus 136 columns £575
- Colour Option £74
- Serial Interface £73
- Cut Sheet Feeder £125

Star LC10 £175 LC10 Colour £225

## EPSON PRINTERS

- EX800 £405
- EX1000 £545
- FX850 £315
- FX1000 £425
- GQ3500 Laser £1249
- LQ500 £285
- LQ850 £430
- LQ1050 £589
- LQ2500+ £839
- LX800 £175
- SQ2500 £975

## PLOTTERS

- Hitachi 672 Colour Plotter £475
- Plotmate Plotter A4S £379
- Plotmate Plotter A3M £549

## CUT SHEET FEEDERS for

EX800 £149; EX1000/LQ2550 £210; FX800 £149; FX1000 £179; LQ/LX800 £139; LQ500 £75; LQ850 £135; LQ1050 £175.

## TRACTOR FEED for

EX800/1000 £85; LQ800 £44; LQ850 £69; LQ1050 £85; LQ2500 £195

## ACCESSORIES

- EX800/1000 Colour Option £55
- EX800/1000 Colour Ribbon £18
- LQ2500 Colour Option £65

(Securicor Carriage on Printers £7)

## EPSON PRINTER INTERFACES

- All these interfaces fit inside the printer.
- RS232 £32
- RS232 + 2K Buffer £52
- IEEE 488 £40
- RS232 + 8K Buffer £79

Universal  
Printer Sharers/Changers

Connect upto 5 Micros to 1 printer or 5 Printers to 1 Micro with our combined, Sharer/Changer. These Units are made to a very high standard. For extreme reliability, they all have Printed Circuit Boards mounted inside the case, (not a Spagetti Junction of wires). Internal connection is made via high quality ribbon cables. (Ideal for School environments.)

- | Connects | Serial | Centronics |
|----------|--------|------------|
| 2 to 1   | £22    | £23        |
| 3 to 1   | £30    | £32        |
| 5 to 1   | £40    | £42        |

(Cables extra at £6 each. Please specify type required when ordering)



## INTEGREX COLOUR JET PRINTER

|                                |      |
|--------------------------------|------|
| ● Colour Jet 132 Printer       | £515 |
| ● Paper Roll                   | £6   |
| ● Screen Dump Software         | £10  |
| ● Colour Cartridge             | £14  |
| ● Black Cartridge              | £8   |
| ● 100 A4 OHP transparencies    | £55  |
| ● 8K Serial Interface Optional | £99  |

### Professional Printer Stand



This new professional printer stand takes hardly more space than your printer. Due to the positioning of the paper feed and re-fold compartments i.e. one above the other, the desk space required for your printer functions is effectively halved. Additional facilities include: Easy access to paper from both sides, used with both top and bottom feed paper and with its dial controlled paper feed system with adjustable deflector plates it ensures smooth paper flow and automatic refolding.

80 Column version £23 (carr. £2.50)  
132 Column version £26 (carr. £2.50)

### PRINTER LEADS

|                                    |        |
|------------------------------------|--------|
| BBC Centronics 4' long             | £5     |
| BBC Centronics 6' extra long       | £7     |
| Compact's Special Centronics Lead  | £7     |
| Archimedes Printer Lead 1 meter    | £7     |
| IBM Parallel Lead 1 meter          | £7     |
| Double Ended 36 way Centronic Lead | £9     |
| RS232 Leads (Various)              | P.O.A. |

### PRINTER RIBBONS & VARIOUS DUST COVERS

| Type                                   | Ribbons | Dust Covers |
|--|---------|-------------|
| BBC Micro                              | —       | £3.50       |
| BBC Master                             | —       | £4.00       |
| Archimedes Micro pair                  | —       | £9.00       |
| IBM PCs pair                           | —       | £6.00       |
| Brother HR15/20                        | £3.00   | £5.00       |
| DMP2000                                | £3.75   | £4.75       |
| EX/LQ800                               | £4.50   | £4.50       |
| EX/LQ1000                              | £7.50   | £5.00       |
| RX/FX80/85/800/MX80                    | £3.90   | £4.95       |
| RX/FX100/1000                          | £5.75   | —           |
| Kaga/Taxan KP810/815                   | £4.90   | £4.00       |
| LC10 (Black)                           | £4.25   | £5.00       |
| LQ500/800                              | £3.75   | £5.00       |
| LQ1050/LQ2500                          | £8.50   | £5.50       |
| LX80/86/800                            | £3.80   | £4.50       |
| M1009/GLP                              | £3.80   | £3.75       |
| Panasonic KX1080/81                    | £4.00   | £4.75       |
| SQ2500                                 | £23.00  | £5.50       |
| Star NL10                              | £3.75   | £4.50       |
| Olivetti Ink Jet Cartridges (set of 4) | £9      | —           |

Our attractive Dust Covers are manufactured from translucent PVC. The seams are stitched and edges are taped to prevent splitting due to continuous use.

### Listing Paper (Perforated)

|  |     |
|--|-----|
| ● 1,000 Sheets 9½" x 11" Fanfold Paper     | £7  |
| ● 2,000 Sheets 9½" x 11" Fanfold Paper     | £12 |
| ● 1000 Sheets 9½" x 11" NCR 2 Part Fanfold | £19 |
| ● 1,000 Sheets 15" x 11" Fanfold Paper     | £9  |
| ● 1000 Sheets true A4 Fanfold Paper        | £11 |
| ● 2000 Sheets true A4 Fanfold Paper        | £19 |
| ● Teleprinter Roll (Econo paper)           | £4  |

(All our Fanfold paper is Micro perforated leaving a smooth clean edge when the tractor feed strips are detached).


Carriage 1K Sheets £2.50. 2K Sheets £3.00

### PRINTER LABELS

(On continuous fanfold backing sheet)

|                              |       |
|------------------------------|-------|
| 1,000 90 x 36mm (Single Row) | £5.00 |
| 1,000 90 x 36mm (Twin Row)   | £4.90 |
| 1,000 90 x 49mm (Twin Row)   | £7.50 |
| 1,000 102 x 36mm (Twin Row)  | £6.25 |
| Carriage on 1,000 Labels     | £1.00 |

## PLINTHS FOR BBC MICRO, MASTER & PRINTERS

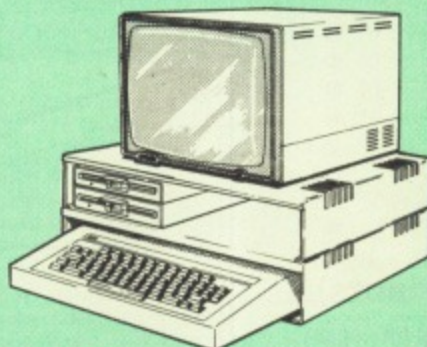


Protect your computer from the heat of your VDU. Our micro plinths have slots for maximum ventilation. The single plinth is suitable for a BBC and VDU, whilst the double height version provides enough room for our stacked disc drive and other peripherals like, Eprom programmer, music unit or simply discs & stationary. The computer slides neatly in the lower section allowing easy access to remove the lid.

The single printer stand is equally sturdy but instead of cooling slots it has elegant cutouts on the sides. This allows easy access to paper from all sides. Colour: BBC Beige.

|                      |                |
|----------------------|----------------|
| Single BBC Plinth    | £12 (carr. £2) |
| Double BBC Plinth    | £20 (carr. £3) |
| Printer Plinth       | £12 (carr. £2) |
| Single Master Plinth | £13 (carr. £2) |
| Double Master Plinth | £24 (carr. £3) |


### Perspex Printer Stand

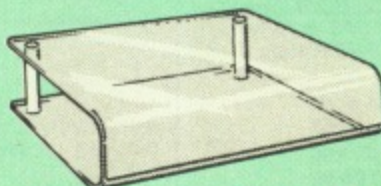

Give your Computer System a touch of Class with our elegant, smoke finished Perspex Printer stand. The printer sits on top and the fanfold paper rests neatly underneath, thus occupying the same space as the printer footprint.

Only: £16 (carr. £3)

### Copy Holder

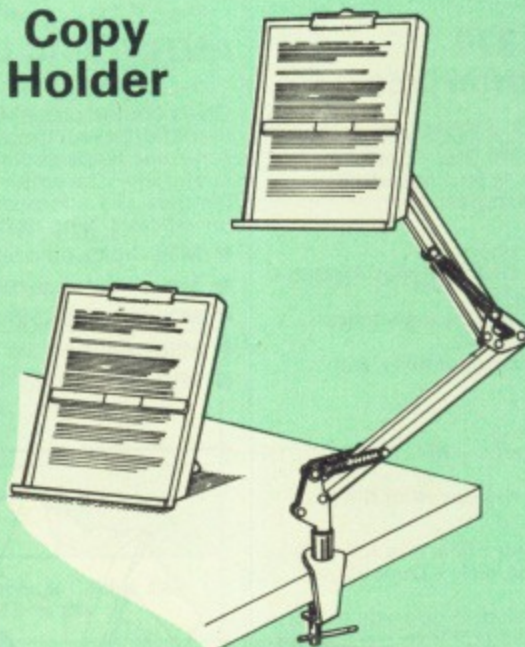

Whether you want to type in your latest program or the draft of a new trilogy, Watford's manuscript holders are superb for holding your paper at the ideal height and angle to allow you to read and type in ease and comfort.

Available in 2 full A4 versions, desk resting and shelf clamping. Paper is held firmly by means of a plastic retaining ruler and a clip grip. (for resting books or magazines, the desk top version is recommended).

Desk Top £10 (carr. £2)  
Angle poise £14 (carr. £3)

## MEGABUFFER 256



The Smallest 256K Printer Buffer Unit in the world 38mm x 130mm x 134mm.

This new Megabuffer 256 from Watford is a full featured 256K Printer Buffer. It allows the computer to print 256,000 character in a short time thus freeing the computer very quickly. In short it makes light work of printing large documents, screen dumps, etc. It is extremely simple to connect. The features are:

- Improves efficiency by making more efficient use of computer and printer.
- Compatible with any computer and printer that uses Centronics Parallel connections including all BBCs, IBM PCs, etc.
- Total compatibility with all software.
- Cheaper, phone bills when using your Modems.
- Ideal for those doing large graphics screen dumps that are slow to print.
- Multi-Copy facility allows you to print several copies via Megabuffer without going through your computer.
- Data Dump facility is included.
- Built in test unit for both the buffer & your printer.

In conclusion it can safely be said that MEGABUFFER 256 is the ultimate printer Buffer for both the amateur and professional user.

Only £149 (carr £2)

## OKIMATE COLOUR PRINTER

The first ribbon transfer printer in its price range which offers fully versatile colour or black printing. A 24 element print head produces more than 100 shades with exceptional clarity. Ideal for use with Quest Paint or AMX Super Art.

Only: £119

|                 |     |
|-----------------|-----|
| BBC Screen Dump | £10 |
| Colour Ribbon   | £6  |
| Black Ribbon    | £6  |

## THE EPSON RX-FX-KAGA PRINTER COMMANDS REVEALED

So you bought yourself a new printer, because the salesman in the shop showed you how clever it is and impressed you with all sorts of printouts to show its capabilities - he may even have offered you a special price.

However, now that you have got it home and connected it to your BBC microcomputer, you are wondering how to make it perform these magical tasks. The manual seems to give no clues, and when you type in the example programs, the computer throws the LPRINT statements back in your face.

Now what do you do, when this £400 piece of high technology refuses even to move its head, and you have stayed up until 2 in the morning with copious supplies of coffee, desperately trying to print something out. Once again, Watford Electronics comes to your help with our new book entitled 'THE EPSON RX-FX-KAGA PRINTER COMMANDS REVEALED'.

This book describes in plain, easy to understand English, how to use and make the most of your KP810, PW1080A or any other Epson FX80 compatible Printers like Panasonic KX-P1080/1, etc., with the BBC Micro, both from BASIC and Wordwise.

It describes in detail how to obtain the maximum in graphics capability from your printer and includes full indexes allowing you to cross index the numerous commands. Every command is explained in detail, with an accompanying BBC Basic program and an example of its use from Wordwise.

£5.95 (No VAT)




CREDIT CARD 24 HOUR  
Ansaphone Hot Lines  
(0923) 50234 or 33383

Continued



## DISC DRIVE SHARER

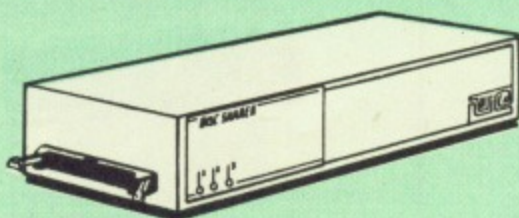

### (Ideal for educational establishments)

At last, a low cost alternative to the Econet system. Watford's Intelligent Disc Drive Sharer allows you to connect 3 BBC micros (model B, B+ and Master series) to a single or double disc drive. Running under any DFS or DDFS, this intelligent unit will automatically queue the computers. Each computer has a status light dedicated to it. If it is green you will get immediate access to the disk, and red means that you are next in line. The unit plugs directly into the disc drive socket on each computer and is powered by the mains. (N.B. Not for use with ADFS.)

Launch Price: **£65**

Price includes 3 Cables

### NOW WITH EXTRA FEATURES AT NO EXTRA COST – Watford's latest DFS 1.44

- Incorporates Acorn's Official Tube Host Code so that those with 2nd processors no longer need to waste a ROM socket on the DNFS.
- Option to DOUBLE the speed of BPUT and BGET.

### WATFORD's & ACORN's SINGLE DENSITY DFS

*Watford's popular and widely acclaimed DFS has now been available for six years and has gained a large following amongst serious and educational users of the BBC Micro. Owners of Acorn or any other standard DFS can upgrade to our "Ultimate" DFS merely by replacing their DFS ROM. See below for this upgrade. (P.S. Watford's highly sophisticated DFS is fully compatible with Acorn standard DFS). (while Acorn's 1770 DFS is fully compatible with Watford's Mk II DDFS)*

- Complete Disc Interface Kit including DFS ROM and fitting instructions **£59**
  - Acorn's 0.90 DFS Kit complete **£59**
  - DFS Manual (Comprehensive) (no VAT) **£6.95**
- (P.S. Our DFS manual is the only comprehensive Manual available for the BBC micro and covers both Acorn & Watford DFSs).*
- Watford's sophisticated DFS ROM only **£16**
  - We will exchange your existing DFS ROM for Watford's Ultimate DFS ROM for only **£12**
  - DNFS ROM only **£17**    ● ADFS ROM only **£25**


## Special 40/80 Disc Drive/DDFS Mk II Offer



- The popular 40/80 track 400K single Disc Drive, Double Sided, cased with Cables. Plugs directly to your Micro.
- Watford's extremely popular DDFS Disc Interface (allows 720K storage). Will run in both, Single & Double Density modes.
- A comprehensive User Friendly Manual.

A Bargain at Only **£125** (£6 carr)  
(Offer valid while stocks last)

## 3½" DISC DRIVE OFFER



These top quality 3½" Double sided, 80 track, 1 Megabyte (unformatted each Disc Drives), are attractively finished in BBC beige. They are supplied complete with all cables and a Utilities Disc. They run directly from the BBC B/Master's own PSU.

- CLS35 400K Unit **£69**
- CLD35 800K Unit **£126**

## Mysteries of Disc Drives & DFS Revealed

Are you tired of faulty cassettes, and lengthy loading times? Do you want to upgrade your BBC micro to take discs but you get tied up in the plethora of jargon surrounding the choice and use of these systems.

Then The Mysteries of Disc Drives and DFS Revealed is the book for you. It explains in detail the different types of systems available, how they are installed and how to use them. Many examples are given including pre-written programs to call various functions of the DFS available only through Operating System calls. Different types of disc, 40/80 tracks etc. are all explained. This book is ideal for the beginner confused by the plethora of choice available in the marketplace.

**£5.95** (Book No VAT)

## DISC ALBUMS

Attractively finished in black leather look vinyl. Stores upto 20 Discs. Each disc can be seen through the clear view pocket.

**£4**

## FLOPPY HEAD CLEANER KIT

The heads in floppy drives are precision made and very sensitive to dirt. The use of a cleaner Kit is a sensible precaution against losing valuable data. It is recommended to clean the drive head once a week. It is very simple to use. Available in 3½" & 5¼", please specify.


**£4**

## ANTISTATIC LOCKABLE DISC STORAGE UNITS

Gives double protection – Strong plastic case that affords real protection to your discs. Antistatic helps avoid data corruption whilst in storage. The smoked top locks down. Dividers and adhesive title strips are supplied for efficient filing of discs.


- M35 - holds upto 50 5¼" discs **£5.00**
- M85 - holds upto 95 5¼" discs **£8.00**
- M25\* - holds upto 25 3½" Discs **£5.50**
- M50 - holds 50 3½" Discs **£7.50**
- M10 - holds upto 10 Data Cartridges **£15**

\* Not lockable



## PLASTIC LIBRARY CASES

Holds up to 10 5¼" Discs. Only **£2.00**



## DISC PLONKER RACK

When using ones micro, there is a tendency to have more than one Disc on the desk. This exposes them to the hazards of fingerprints, scratches, dust, coffee and an untidy desk.

Why not protect your valuable data from all these hazards with the help of our extremely handy and low cost DISC PLONKER RACK. It holds up to eight 5¼" Discs.

Protection at Only: **£2**



**NEW**

## Watford's MkII 1770 Double Density DFS Interface

Many of our customers have wanted to use our superior DDFS and Acorn ADFS together. Now our Mk II DDFS Board with its 1770 Disc Controller, has been adapted to allow the use of Acorn ADFS as well. It also has all the commands of the Acorn's 1770 DFS, plus the added features:

Added features include:

- Acorn ADFS compatible – Use ADFS on our DDFS board.
- Tube host Code – No longer any need to have the DNFS in your machine to use Co-Processors, even the CoPro and Master 512.
- Auto 40-80 Track sensing – no need to fuss with 40/80 track switches (even works with protected disks).
- An extremely powerful 8271 emulation – ensuring compatibility with almost all software.
- New low profile – small footprint board.
- Fits with all third party ROM boards.
- Option to double the speed of file handling operations – BPUT and BGET.
- Operates in both single and double density modes.
- OSGBPB has been recoded, increasing still further the speed of file handling.

Please note that not all DDFS's are capable of providing either the full 80% storage increase or of allowing a file the full size of the disk – Ours allows both of these!

If you already have a DDFS (any manufacturer), and wish to upgrade to our MkII version, then simply return your existing ROM and DDFS board and we will supply the new DDFS for only **£30.00**.

- Special introductory offer **£39.00**
- DDFS Manual (No VAT) **£6.95**
- We will exchange your existing DFS Kit for our sophisticated DDFS for only **£25.00**

Please note, as the MkII DDFS is a hardware and software upgrade, it is not possible for existing Watford DDFS users to simply exchange their ROM for the new version.

## DUST COVERS (For our Disc Drives)

Single CLS (without PSU) **£3.20**    Twin CLD (without PSU) **£3.85**  
Single CS (with PSU) **£3.95**    Twin CD (with PSU) **£3.90**



## Quality Disc Drives from Watford

To help you decide which drive is the most suitable for your needs (and your pocket!), we have produced the table below.

The first capacity given in the first column indicates capacity in single density mode. That within the brackets is the capacity in double density mode. All disc drive type numbers start with the prefix "C".

The tinting on some of the boxes is used to indicate which Drives are 40 track (non-tinted) and which are 80 track (tinted). All our 80 track drives are already fitted with a 40-80 select switch.

All our Disc Drives are Double Sided and will operate in both Single and Double Density modes. Extensive experience of the usage of disc drives suggests that the JAPANESE drives currently represent about the best in terms of speed, reliability and overall "elegance" available for the BBC Micro.


Various UK "manufacturers" of disc drives for the BBC micro (more accurately, "packages" label other manufacturers drives with their own name). We buy the high quality NEC and Mitsubishi drives in large quantities directly from the manufacturers, package them and sell them at "dealer" prices direct to the public.

If you look around the popular BBC micro press, you will find that the prices we quote for the top quality, new slimline disc drives are, virtually without exception, some of the best around. These prices, coupled with the backup of one of the country's largest distributors of BBC peripherals provides a superb deal.

Unless you anticipate using dual drives in a fully expanded BBC system for long periods of time with little ventilation, then we suggest that our range of "CL" disc drives without the PSU (Power Supply Unit) would be quite adequate (extensive tests within our workshops have confirmed this). All drives are supplied complete with a SPECIAL UTILITIES Disc, Cables and Plugs. The Drives with power supply have a mains moulded plug for safety purposes. Ideal for Schools & Colleges. We are now able to supply all single disc drives with Power Supply, in either single or dual case. (Dual case has a twin data cable and a power supply capable of driving two disc drives) allows easy expansion to a dual drive unit, at a later date. Prices stated in the pricing boxes below are for single drives in standard single cases. Single drives in a dual case cost an extra £5. (At Watford we anticipate your needs of tomorrow, not just today!)

When using a BBC Micro, most people find themselves short of desk space. The Watford's BBC Micro plinths form an ideal way of recovering some of this precious space) your BBC, Disc Drive and Monitor can all occupy the same vertical footprint and still be comfortably situated. With the Watford Double plinth, your Disc Drive is mounted vertically at one side, leaving a very valuable area directly in front of you for such useful items as spare discs, pen, paper, reference manuals, etc. Follow the trend with Watford plinth. (Turn to the 5th page of our advert for the Plinths). P.S. All our 5¼" Disc Drives with PSU are compatible with the Compact Micro. All you require is the special Compact Disc Drive Cables designed by us.

### Our Disc Drives conform to BS415

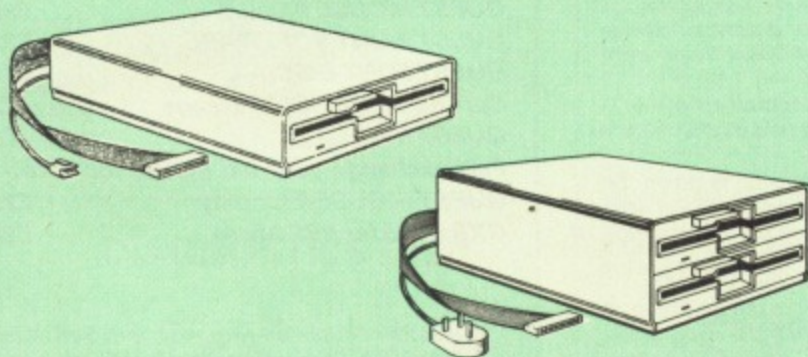

### "Test Bureau Approved for Use in Education"

| Capacity  | Drives without P.S.U. |                  | Drives with P.S.U. |                 |
|---|-----------------------|------------------|--------------------|-----------------|
|   | Single                | Twin             | Single             | Twin            |
| 400K (720K)   | CLS400S<br>£82        | CLD 400<br>£168  | CS 400S<br>£92     | CD400<br>£188   |
| 800K (1.44M)  |                       | CLD 800S<br>£162 |                    | CD 800S<br>£182 |
| ● TWIN Disc Drive Case, complete with Power Supply & Cables £43<br>Securicor carriage on Disc Drives £5 to £6 |                       |                  |                    |                 |

Prefix C = Cased Drive  
L = Less PSU  
S = Single  
D = Double

Suffix S = 40-80 Switchable

e.g. CLS400S = Cased Disc Drive, Less power supply unit, single 5¼" 400K, (720K in double density); Double sided; 40/80 track switchable.

Cable to connect 5¼" Disc Drives to BBC Compact  
Single £9 Twin £12  
Special Cable to connect both 3½" and 5¼" Disc  
Drives simultaneously to the BBC Compact £13

## 3M – DISKETTES

3M – SCOTCH Diskettes with Lifetime warranty from Watford Electronics your 3M Appointed Distributor.

|  |        |
|--|--------|
| ● 10 × 5¼" S/S D/D 40 Track Diskettes (744)                  | £6.00  |
| ● 10 × 5¼" D/S D/D 40 Track Diskettes (745)                  | £7.00  |
| ● 10 × 5¼" S/S D/D 80 Track Diskettes (746)                  | £11.50 |
| ● 10 × 5¼" D/S D/D 80 Track Diskettes (747)                  | £11.00 |
| ● 10 × 5¼" 1.6M D/S D/D High Density Discs for IBM XT and AT | £16    |
| ● 10 × 3½" S/S D/D 40/80 track Discs                         | £10.00 |
| ● 10 × 3½" D/S D/D 40/80 track Discs                         | £11.75 |
| ● 10 × 3½" High Density Diskettes                            | £25    |

## TOP QUALITY 3½" & 5¼" DISKETTES

To complement our range of Quality Discs and Disc Drives, WE are now supplying SPECIAL OFFER packs of 10 Lifetime guaranteed discs. Each disc has a reinforced hub ring. Supplied complete with selfstick labels and a Plastic Library Disc Box.

|  |            |
|--|------------|
| ● 10 × M3 3½" D/S D/D 80 Track Discs   | £11        |
| ● 10 × M9 3½" Double Side High Density | £25        |
| ● 10 × M4 5¼" S/S D/D 40 Track Discs   | £5         |
| ● 10 × M5 5¼" D/S D/D 40 Track Discs   | £7         |
| ● 10 × M7 5¼" D/S D/D 80 Track Discs   | £9         |
| ● 10 × M8 5¼" D/S H/D Hi-Density Discs | £14        |
| ● 3" Double Sided Discs                | £2.50 each |




## Special BULK OFFER on 5¼" DISCS

(Supplied packed in Anti-Static Lockable Storage Units)  
(Lifetime warranty on Discs)

### BULK PACK DISCS in lots of 100

| Type              | S-S 40T | D-S 40T | D-S 80T |
|-------------------|---------|---------|---------|
| ● Without Sleeves | £35     | £39     | £45     |
| ● With Sleeves    | £38     | £42     | £48     |

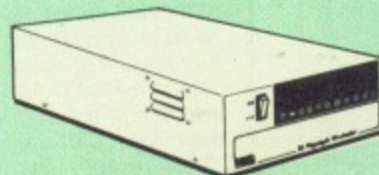

## WATFORD'S WINCHESTER DRIVES

Undoubtedly the best value for money Winchester Hard disc available anywhere for the BBC Micro.

This 30 Megabyte hard disc is completely compatible with the Acorn ADFS – that's why we have bundled it with each Winchester drive, along with a Utilities Disc.


Finished in rugged metal and fetching BBC beige, the Winchester has an internal fan, so quiet you won't even hear it! A switched mode power supply and a neon-lit on/off switch are there along with a light on the hard disc to tell you when it is working – just compare the price with our competitors' 20 or 28 Mbyte discs!

Compatible with the Master, and the BBC B (with 17 X disc interface).

- 10 Megabyte £350; ● 30 Megabyte £420

## CDP800S

## CDPM800S

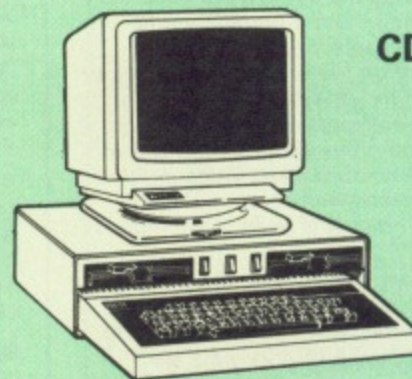

Twin 800K Double sided 40-80 track switchable disc drives mounted in an attractively finished Beige colour plinth for the BBC Micro. Supplied complete with integral power supply, cables and Utilities disc. The mains switch with neon On/Off light indicator, and the two 40/80 track switches are mounted on the front panel for ease of use.

CDP 800S for BBC Micro £192

CDPM 800S for Master £196

DP35-800 for BBC/Master £165

(For DP35-800S spec. see Page 9 of our advert)

(Securicor Carr. £7)

(The above drive units are 2 Megabytes unformatted)

Continued





## QUEST MOUSE MkII

The ultimate in Mouse technology, the Watford Electronics Quest Mouse must be the most powerful Mouse package yet produced for the BBC Micro. Featuring state of the art 32K ROM software the Quest Mouse package is filled with features essential to the budding artist. The Quest Mouse is a high precision, low profile and large footprint mouse. It has three large comfortable buttons and its RUBBER COATED STEEL BALL is smooth and easy to use on virtually any work surface. This also eliminates any directional bias that one encounters on the most well-known mouse for the BBC. The Quest Mouse is FULLY HARDWARE COMPATIBLE with the AMX MOUSE so that it will work with any of the AMX range of software.

The two parts of the Quest package are available separately so that existing Mouse owners can upgrade to the Watford's sophisticated Quest Paint software or replace their existing worn out mice for a minimum cost.

## QUEST PAINT

The Quest Mouse software is supplied on a PALPROM unit to allow the sophisticated 32K program to be used from a single ROM socket. It is compatible with the BBC B, BBC B Plus and BBC Master Series machines.

The software is used to draw high resolution Mode 1 pictures in full colour. All menu selection and control of the drawing process is performed with the mouse so that you will hardly ever touch the keyboard.

## SOFTWARE FEATURES

The software is far too powerful for us to describe it fully in such a small space. Below is a list of the various features. Please write to us for a fully descriptive leaflet.

Disk interface not required. Utilities disk has facility to create and print big screens. Colours applied can be solid, either pattern of user defined pattern. Drawing can use brush or airbrush. Brush shapes can be defined and stored. Airbrush sprays colour/pattern randomly with four jet sizes and even or center spread. Colour cycles. Colour protection to stop particular colours from being overwritten by selected drawing actions. All standard drawing facilities like: rubber, straight pencil lines, triangles, circles, ellipses, rectangles, parallelograms, polygons, etc are provided. All shapes can be solid or just a boundary line. Once a shape has been set up it can be repeated anywhere on the screen. Global colour replace in a rectangle. Powerful fill facility for areas and vertical/horizontal lines. Full cut and paste of rectangular areas with rotation and size with screens from Watford Beeb Video digitiser. Load and Save screens with colour pallet information, save brush and pattern definitions etc.

Take The Guesswork Out of Selecting a Mouse Package

With reviews like this how can you go wrong.

**Popular Computing Weekly, 9-11 June '87**

"What you actually get for your money is a well built, three button mouse (far superior to the AMX mouse)."

"Overall the combination of a quality mouse and decent art package gives Watford Electronics a real chance of supplanting AMX as mouse supremos."

**Micro User June '87**

"Quest Mouse and Quest Paint can hold their heads high in the market. . ."

**A&B Computing June '87**

"... Watford Electronics, a company famed for excellent hardware add ons and versatile software packages. Called Quest mouse, 'this is a very special mouse driven drawing package...'"

## FREE

our popular Colour Art software pack worth £15 with every Quest Mouse II & Quest Paint purchased this month.

"... you will have one of the most comfortable and professionally built mice I have used in a long time. The buttons are responsive, the mouse movement is smooth and without directional bias - a pleasure to use."

"What we have here is probably the best art package there is for the BBC Micro. . ."

"Quest Paint is a major leap forward in BBC programming. . ."

"Quest Paint is an original piece of programming, it is friendly and well endowed with many useful facilities. I would comfortably say it is easier to draw good pictures with Quest Paint than it is with more expensive 'Professional' art packages for the Atari ST and the Commodore Amiga. A recommended buy if you are looking for the best in BBC micro based art packages".

**Acorn User, September '87**

"The mouse (Quest) performs well in the face of competition from AMX, Wigmore and the rest. . ."

"... this package represents excellent value for money. If you are interested in art then this program is for you to buy".

"Given time, I can see no reason why Quest Paint shouldn't take on the title of the definitive art package available for the BBC Micro to date".

"All in all, Quest Paint is a very professional package. It contains virtually every feature the budding artist could require".

"What makes Quest Paint so versatile is the addition of a sub-menu which allows you extensive control over each function".

"Until recently, Superart from AMS had been judged as the definitive mode 1 graphics package for the BBC micro. But now it has a serious rival in the form of Quest Paint, from Watford".

"As a measure of what is contained within Quest Paint, I would say it had all the features of Superart plus. . ."

"In most art packages, provision is given for drawing triangles and rectangles. Quest Mouse goes 14 better, allowing any regular polygon of upto 16 sides".

"One facility, not found on any other Art package to my knowledge, is the ability to access a digitiser from within the program".

The reviewer concludes by saying, "The result is an extremely comprehensive and professional art package".

**John Kilby, Head of Computer Science, Bishop Wulstan High School, Rugby, writes:**

"Quest has been an excellent piece of equipment. The problem that seems to occur everyday is that at lunchtime the pupils rush to the computer room to make sure that they are first in the queue for the 'Quest' mouse".

**Lt. Col. C.G. Holton, HQ 1 (BR) Corps, BFPO 39, writes:**

"As ever your service is superb and the Quest Mouse proves every bit as good as the adverts claim".

**Beeblet User Group, New Zealand Oct '87:**

"One of its nicer features is that the top menu is done in Mode 0, the drawing itself is in Mode 1. Thus on screen together are two different Modes. A neat way around an old problem".

"PAN is used when a larger than one screen size image is required. The mind boggles at an A3 size drawing".

"I like it partly because of the mouse itself which is smooth and easy to handle but mainly I suppose because of the features I longed for and previously never got. Its easy to use with almost everything at your fingertips from the mouse. The software is simple where needed and complex where complexity is required".

# ConQuest

Watford's Quest package is an extremely powerful and flexible drawing package, with very wide and unusual features. However, since its launch various suggestions for even more advanced & powerful facilities were received from the Quest users. ConQuest allows you these more advanced facilities, like, distortion of a cutout to any shape and a full font designer. If you also have a GXR ROM in your machine or you are using a BBC Master then ConQuest will take advantage of this to give ellipses at any angle, sectors and arcs, etc. Quest combined with ConQuest and Acornsoft GXR ROM make up THE MOST POWERFUL drawing packages available for the BBC range. Quest Paint is able to take advantage of almost any additions to your machine, such as Shadow or Sideways RAM. ConQuest takes this principal even further, by utilising the otherwise normally incompatible Sideways RAM facility by holding pictures in them.

Some of the features are:

- Pick filenames off the screen for loading and saving.
- Rotate a cutout to any angle and Distort it to any four sided shape.
- Has Built in Font editor.
- Default brushes and patterns on startup.
- 16 x 16 font available on start up.
- Ability to reset patterns, fonts and brushes to default at any time.
- ROM based enhanced Epson and compatible printer dump.
- ROM based enhanced extended picture routine.
- Ability to create and abort extended pictures
- Improved disk access speed for extended pictures.
- User definable sideways RAM driver for incompatible sideways RAM systems.
- Ellipses at any angle on Master 128 (or B with GXR ROM).


|   |            |
|---|------------|
| <b>QUEST MOUSE II &amp; QUEST PAINT</b>                               | <b>£49</b> |
| <b>QUEST MOUSE II, QUEST PAINT, AMX STOP PRESS &amp; PAGEFONT</b>     | <b>£82</b> |
| <b>QUEST MOUSE II ONLY</b>  | <b>£25</b> |
| <b>QUEST PAINT SOFTWARE</b>   | <b>£32</b> |
| <b>QUEST FONT DISC</b>  | <b>£12</b> |
| <b>ConQuest 32K ROM Package</b>                                       | <b>£29</b> |
| <b>QUEST MAT</b>  | <b>£3</b>  |
| <b>Part-exchange your old Mouse for a New QUEST MOUSE II for only</b> | <b>£23</b> |
| <b>GXR ROM for BBC Micro</b>  | <b>£22</b> |

N.B.

1. Quest Paint supplied complete with Software in a 32K ROM, Comprehensive User Guide and a Utility Disc.

2. Quest Font Disc has 22 text FONTS for use within Quest Mouse.

## MARK II LIGHT PEN

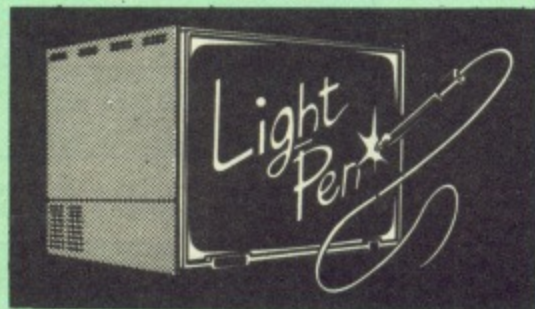

Our Mark II Light Pen is the very latest in light pen technology. It is totally insensitive to local lighting conditions and works with many different monitors. The pen only responds to the High Frequency light produced by your monitor/TV. An LED indicates when valid video data is being produced. A conveniently located switch is also fitted.

**Price Only £21**

(Price includes FREE software Disc and Operating Manual)



## RB2 Marconi TRACKER BALL

RB2 (AMX/Quest compatible) £45  
RB2 including Quest Paint £75

### FLEET STREET EDITOR

Software pack for BBC Micro £33  
Software pack for the Master £39  
Software Pack for Compact £40  
Admin Xtra Disc Utility £13  
Walt Disney Disc Utility £13  
Fonts N Graphics Disc Utility £13

## THE NEW Mk III AMX MOUSE

**ONLY: £59** Inc. Super Art package  
(carr £1.50)

(Please specify for BBC, Master or Compact)

FREE our popular Colour Art software pack worth £15 with every AMX Mouse package purchased from us.


MOUSE MAT £3  
AMX MOUSE ONLY £29  
AMX UTILITY Package £11  
AMX SUPERART Package £34  
AMX STOP PRESS – A Desktop publishing software. Works with Keyboard, Joystick or a mouse £32

We are giving away absolutely FREE, our PAGE-FONT disc with every purchase of STOP PRESS from us.

PAGE-FONTS – Over 20 Fonts for use with AMX Pagemaker £12

AMX DESIGN (ROM) £55  
AMX XAM Educational £15  
AMX EXTRA EXTRA £16  
AMX MAX A gem of desktop (ROM) £15

### DIAGNOSTICS DISC

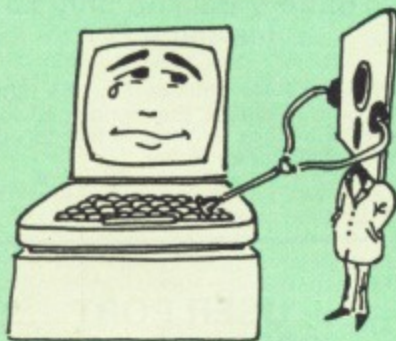

The BBC Micro is a very complex machine and thus diagnosing a fault can be very difficult. At Watford Electronics, we realise how difficult it can be when faced with a problem, finding yourself a long way from your nearest dealer, or even just uncertain about your Beeb's health, but not wanting to waste time and money taking it to be looked at.

The solution to these problems is here now, in the form of the Watford's Diagnostics Disc. This excellent utility is specially designed to test out the following areas of your Beeb:

RAMs, ROMs, ULAs, Sound, Keyboard, Disc, RS423, ADC, User Port, Printer Port, Cassette, Joysticks, Speech, Disc Drives, 6502 and Z80 2nd Processors.

This utility is an invaluable aid for all those who take the reliability of their system seriously. A comprehensive manual provides full operating details and a list of possible causes and remedies for any faults that you may find along the way. The package also enables a permanent equipment and service record to be maintained.

**Only £20.00**

## BEEB VIDEO DIGITISER



"Test Bureau Approved for  
Use in Education"

Using any source of composite video (colour or monochrome) and the Watford Beeb Video Digitiser, you can convert an image from your camera into a graphics screen on the BBC Micro.

This uses the full graphics capacity of the BBC micro in modes 0, 1 or 2. The video source may be a camera, video recorder or television, and is connected via the video output socket.

Images produced can be compressed, stored to disc, printed on an Epson compatible printer, directly used to generate graphics, analysed for scientific and educational use or converted to other formats e.g. Slow Scan TV or receiving a picture from a remote camera using a modem.

The output from the digitiser exactly matches the graphics capability in each mode, with up to 8 levels of grey in mode 2. The unit connects into the User Port and automatically scans a complete picture in 1.6 seconds.

Both the black and white levels can be adjusted manually for the optimum picture, or switched to automatic for unattended use. The image produced can be reversed if necessary.

Full controlling software is supplied on a normal sideways ROM and this is easily accessed via additional \* commands. The package is designed to allow easy input of complex screens and give full access of the data to the user. Once on the screen, the image can be used as a normal graphics screen, allowing any of the usual graphics commands in BASIC or other ROMs to work on it.

A special print dump routine is included with the driver programs. This is specially designed to produce a fast, correctly proportioned picture, with reduced "contouring", resulting in an accurate reproduction of the original image.

Detailed examples of driving this unit from BASIC or other languages are all provided in the extensive manual supplied.

**£109 (Carr. £3)**

(Price includes) Digitiser Unit, Software in ROM & a Comprehensive Manual  
(BBC B+ and Master compatible, except Master with Econet)

## Magazine Maker

(As seen on TV)

A combination of the Pagemaker and Watford's Beeb Video Digitiser.

Using any video that provides a composite signal and the digitiser, images from a camera or TV can be converted into a graphics screen on the BBC Micro.

They can then be used within Stop Press to illustrate magazines or newsletters – in fact anything that needs to be created on A4 size paper.

With Stop Press's many features, a variety of pictures can be composed – the only limit being the imagination.

Pictures can be doctored using Stop Press's graphics option to produce any number of effects.

Text can be formatted around the digitised photo on screen using the facilities available, which include 16 typefaces, character and pattern definer, text formatting and the ability to load in wordwise and viewfiles plus much more.

Once created the picture can be printed out. The Magazine Maker is suitable for any use that requires illustrated documents.

**Complete Package £135.00 (carr. £3)**

## OFFICE MASTER



**CASHBOOK** – A complete "Stand Alone" accounting software package for the cash based sole trader/partnership business. It is designed to replace your existing cashbook system and will provide you with a computerised system complete to trail balance.

**FINAL ACCOUNTS** – Will take data prepared by the Cashbook module and produce a complete set of accounts as following: Trial Balance with inbuilt rounding routine; Notes to the accounts; VAT Summary; Profit & Loss A/C; Balance Sheet.

**MAILIST** – A very versatile program. Enables you to keep records of names and addresses and then print, examine, sort and find them, all with special selection techniques.

**EASILEDGER** – A management aid software tool designed to run alongside an existing accounting system. Essentially a Debit/Credit ledger system which can handle sales, purchase and nominal ledger routines to provide instant management information.

**INVOICES & STATEMENTS** – Greatly reduces the time and cost of preparing Invoices and Statements by storing essential information like customer names, addresses and account numbers. Has VAT routines and footer messages facility.

**STOCK CONTROL** – Allows you to enter stock received, stock out, summary of stock items and current holdings together with details of total cost, total stock to minimum level, units in stock ordering, quantity and supplier detail.

**All this for only £21 (Disc)**

## OFFICE MATE



- DATABASE
- BEEBCALC SPREADSHEET
- BEEBLOT GRAPHICS


**DATABASE** – Set up a computerised card index system with powerful search facilities.

**SPREADSHEET** – Offers many calculation and editing features.

**BEEBLOT** – Provides visual representation from Spreadsheet data.

**OFFICE MATE Only £10 (Disc)**

## Disc Drives DP35-800S

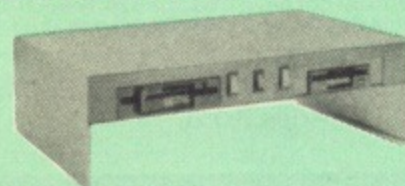

A Double disc drive – with a difference! Times are changing fast for the floppy disk, and whilst the current standard for the BBC B and Master Series is the 5.25 inch disk, the standard for the future will most certainly be the smaller; faster and more reliable 3.5 inch disks – now a standard feature of both the Master Compact and the Archimedes Series.

To support the present disc drive users, and cope with the future, we have designed our own plinth-mounted disk system – called the DP35 800S, it contains both the 5.25 inch and the 3.5 inch drive formats as well as offer a firm and rigid support for a monitor on top. With the BBC Micro underneath, the plinth makes a surprisingly small footprint on the desk – leaving you more space to work with.

The 5.25" disc drive is 40/80 track switchable. For ease of access, the switches are front mounted. DP35-800S has its own power supply, independent of the BBC Micro.

Watford's new plinth enables users to read, write and format disks both in DFS and ADFS format – currently the accepted standard for the Master Compact and the Archimedes, it also enables the user to read disks written for the Archimedes. Ideal for both BBC & Master.

**Launch Offer: £165 (carr. £7)**

**Continued**





## ARIES CORNER

### B-32 Shadow RAM Card

Like the BBC B+, the B32 provides 20k of shadow screen RAM and 12k of sideways RAM. Unlike the B+, the B32 has simple software commands which allow the user to reconfigure the RAM as 16k of shadow RAM and 16k of sideways RAM, or all 32k as sideways RAM.

With the B32, the programmer gets up to 28k of RAM available for Basic, Logo, Comal, Forth, Lisp and BCPL programs in any screen mode. The business user gets extra memory for View, ViewSheet, Wordwise Plus, Interword and many other applications. For advanced applications, the scientific user gets access to a massive 47k of data storage using the Acorn approved \*FX call.

Sideways RAM enables you to load sideways ROM images from disc, allowing you to have a large library of sideways ROMs (subject to the copyright holder's permission) stored on disc. The B32's sideways RAM can also be used to extend any operating system buffer (such as the printer buffer) or to load tape programs into a disc system.

The B32 simply plugs into the 6502 processor socket on your BBC micro - no flying leads to connect and no soldering. Provision of the on-board ROM socket means that the Aries-B32 control ROM does not use up one of your existing ROM sockets.

● Recommended by Computer Concepts for use with their Inter series of ROMs.

Price: **£80** (carr. £2)

### Aries B-12 Sideways ROM Board

This board is extremely well made, simple to install, reliable when fully loaded and compatible with the Aries-B20 and the Aries-B32.

The B12 provides a total of twelve sideways ROM sockets (the four in the original machine are replaced by the twelve on the board), all fully accessible by the MOS sideways ROM system. In addition, there are two sockets for sideways RAM, giving up to 16k of RAM using 6264 static RAM chips.

The B12 system consists of two parts: a large detachable "mother board" which carries the extension ROM sockets and a small "base board" on a short ribbon cable, which plugs into the existing sideways ROM sockets. This two-board design eliminates the reliability problems previously associated with some other ribbon-cable based systems.

If you do not have a B32 or B20, a small adaptor module (the Aries-B12C) is available at a nominal cost.

Price: Aries B-12 **£40**  
Aries B-12C **£5**



**CREDIT CARD 24 HOUR**  
**Ansaphone Hot Lines**  
**(0923) 50234 or 33383**

### ARIES B-488 IEEE-488 INTERFACE UNIT

The Aries-B488 is an interface unit to enable the BBC micro to control and monitor IEEE-488 bus systems. The IEEE-488 bus (also known as the 'GPIB' or 'HP-IB') is the standard method of interconnecting programmable laboratory instruments and control equipment. Using the B488, up to 15 devices may be connected in a single high-speed data network.


**£238** (Carr £3)

### EXTERNAL ROM BOARD for BBC MASTER

This external Beige finished, free standing cased unit with its own Power Supply allows you to plug-in upto 12 ROMs and 16K Sideways RAM.

Only **£78**

### SIDEWAYS ZIF SOCKET

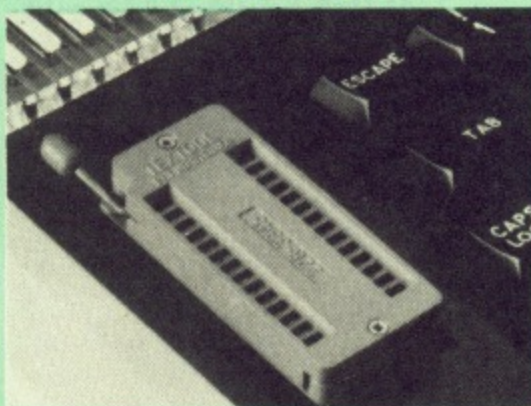

Allows you to change your ROMs quickly and efficiently, without opening the lid. The ZERO INSERTION FORCE (ZIF) socket is located into the ROM Cartridge's position.

● Very simple to install. NO SOLDERING required. The ZIF (Zero Insertion Force) eliminates the possibility of damage to your ROM pins when inserting & extracting.

● The low profile of the socket allows unrestricted access to the Keyboard.

● All data and address lines are correctly terminated to ensure correct operation of suitable ROMs with the BBC micro. We also supply a purpose designed see-through storage container with anti-static lining, allowing you to store up to 12 ROMs, protecting them from mechanical and static damage.

● This versatile hardware solves the problem of running out of socket space. Simply lift the ROM from the ZIF & insert a different one (No pulling or pushing of Cartridges. It is a must for all professionals and Hobbyists alike.)

● BBC, B+ and Master compatible.

**ONLY £16** (carr £2)

### Low Profile CARTRIDGE SYSTEM

Complete System consists of: Low profile ROM Cartridge, Socket housing, Cable assembly, 5 labels and a library storage rack for the BBC B.

● Complete System **£11**  
● Spare Cartridges **£2.50**  
● Spare Rack **£1.50**

**ROM Cartridges for the BBC Master**  
Twin **£8**; Quad **£12**

### 16K DISC RAM


Complete with such features as read and write protection, these new modules from Watford Electronics are ideal for the hobbyist, software developer and ROM collector. Key points to note about this new addition to the Watford range of products are:

- Write protection (useful in a variety of circumstances).
- Read protection (allows recovery from ROM crashes).
- Compact construction.
- Supplied complete with Battery Backup.
- Multiple units may be fitted, even with a ROM board.
- No overheating or overloading problems.
- Free utilities disc supplied.
- Can be used as a 16K PRINTER BUFFER.
- Ideal for professional software development.
- Supplied with utilities software disc.

Only: **£35** (carr £2)

P.S. 16K Disc Ram Board is not designed to work in conjunction with a Sideways ROM Board.

### SOLDERLESS SIDEWAYS ROM SOCKET BOARD

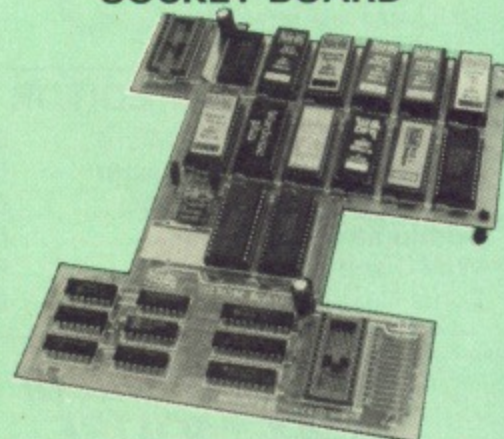

In the May 1986 Micro User's independent review, the writer concludes, "The board has been well laid out. Its position is much better than others - not over the HOT RAM chips and further away from the disc controller area". "I give the solderless ROM board the thumbs up and wish it success".

This brand new board from Watford Electronics is designed specifically for those wishing to add a ROM board to their own BBC without the need to perform any soldering.

This new board expands the total possible number of ROMs in a BBC from 4 to 16.

Unlike our competitors inferior boards, the ONLY upgrade required for fitting battery backup to the Watford Solderless ROM board (all Watford ROM boards, actually) is the fitting of the battery itself. (No other expensive components are required.)


- The key features of this new, no fuss, easy to install quality product from BBC leaders Watford Electronics are as follows:
- Increase your BBCs capacity for ROMs from 4 to 16.
- No soldering required.
- Very low power consumption.
- Minimal space required.
- Compatible with Torch, DDFS, RAM Card, 2nd Processor, etc.
- Socket 14 takes two 6264 RAM chips.
- Read protect to make RAM "Vanish" allows recovery from ROM crashes.
- Battery backup option for RAM chips.
- Supplied ready to fit with comprehensive instructions.

**Price: Only £32**  
**Battery backup fitted £36**  
**Battery Backup only £3**  
(carriage £2)

● Sideways RAM Utilities Disc for Solderless ROM Board. Includes the options to load and save ROM Images and the facility to use Sideways RAM as Printer Buffer.

Only: **£8**

### USER PORT SPLITTER UNIT

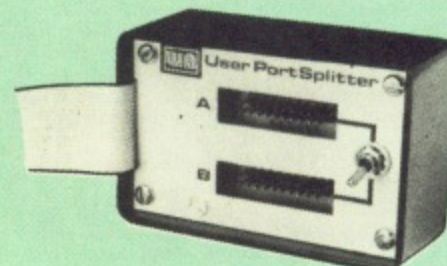


Gone are the days when you had to plug and unplug devices from the User Port. This extremely useful little device allows two units to be connected to the User Port simultaneously, and select between them simply by toggling a switch. This device is particularly useful for those people using Quest Mouse and the Watford Video Digitiser or any similar combination.

Excellent Value at **£22** (carr £2)



## ROM/RAM CARD

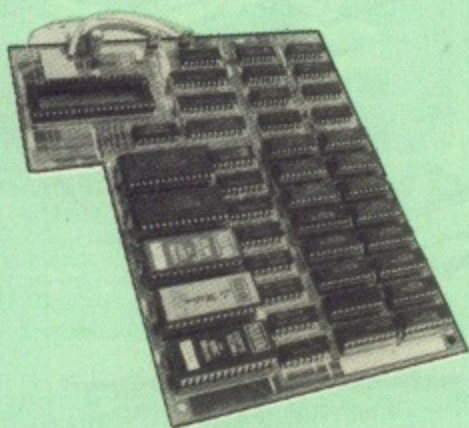

Watford Electronics announced the first ever commercial ROM board for the BBC micro, the Watford Electronics 13 ROM Socket Board 3 years ago. Following the success of this board, we have designed what probably represents the ultimate in expansion boards, the new Watford Electronics ROM/RAM board. This highly versatile and sophisticated board represents the latest in "2nd generation" sideways ROM technology for the BBC micro, designed to satisfy the serious BBC user.

- NO SOLDERING required to fit the board.
- NO overheating problems.
- No User Port corruption (avoids problems with the mouse, modems, Eprom Programmers, etc.)
- Fully buffered for peace of mind.
- Firm mounting in BBC micro.
- Compatible with all BBC micros (not BBC+ or Master).
- Total number of ROMs increased from 4 to 8.
- Up to 8 banks of sideways RAM (dynamic).
- Option for 16k of Battery backed CMOS RAM (CMOS RAM needs one ROM socket).
- Software Write protect for ALL RAM.
- Read protect for CMOS RAM (ALLEVIATES crashes during ROM development).
- Separate RAM write register (&FF30 to &FF3F).
- Automatic write to currently selected RAM socket for convenience.
- Accepts any ROM.
- FREE utilities disc packed with software.
- Compatible with our DDFS board, 32k RAM Card, Delta Card, sideways ZIF, etc.
- Large printer buffer.
- UNIQUE Fully implemented RAM FILING SYSTEM (similar to the popular Watford DFS).
- ROM to RAM load and save facilities.

The SFS (Silicon Filing System) can utilise up to the full 128k of RAM (with the SFS in any paged RAM) as a SILICON DISC. This behaves as a disc drive, with all the normal Watford DFS features (including OSWORD & 7F for ROM-SPILL, etc.) to provide an environment that looks like a disc but loads and saves MUCH faster.

The ROM-RAM Board plugs into the 6502 CPU socket. This leaves free all the existing ROM sockets, which can still be used normally.

Any ROM that can be plugged into the BBC micro's own ROM sockets may be used in the ROM-RAM Board.

The ROM-RAM Board is supplied with all ordered options fitted as standard. Upgrade kits (with full instructions) are available for all of the options, for later.

Please write in for further details.

### INTRODUCTORY PRICES:

- ROM/RAM card with 32k dynamic RAM .....£48
  - ROM/RAM card with 64k dynamic RAM .....£65
  - ROM/RAM card with a massive 128k dynamic RAM .....£109
- (carriage on ROM-RAM Card £3)

### OPTIONAL EXTRAS:

- 16k plug-in Static RAM kit.....£17
  - 16k Dynamic RAM for Upgrade.....£17.50
  - Battery backup.....£3
  - Read and Write protect switches.....£2 each
- Complete ROM-RAM board  
All options installed .....£115

P.S.

Is your existing ROM Board overflowing with ROMs? Do you need more Sideways RAM? Is your Board unreliable? Then upgrade to Watford ROM/RAM Board and pay £5 less

## Le Modem



### The MODEM from Watford

At last a professional MODEM for the BBC Micro. Unlike other 'Modem packages' this is a complete package there are no extra software costs to get 'up and running'. Of course Le MODEM is multi-standard, i.e. 300/300, 1200/75 & 75/1200 UK and BELL (USA) are all supported.

The features that make Le MODEM such good value are:

- A complete communications terminal that transforms your BBC Micro into a very powerful World-wide data transfer system.
- Auto Dials, Auto answers, and is completely controlled by your micro. There are no external controls!
- Allows you to access PRESTEL, B.T. GOLD, THE SOURCE, MICROLINK, MICRONET, MICROWEB, THE TIMES NETWORK, MICRO LIVE (BBC TV database), CITY BB and more.
- Designed to be SIMPLE but SOPHISTICATED. To LOGON to a data base all you have to know is its TELEPHONE NUMBER, Le MODEM does the rest.
- Supplied with a comprehensive telecomms package in a 16K sideways ROM which includes a FULL PRESTEL terminal allowing TELE-SOFTWARE to be downloaded.
- A comprehensive 80 column terminal. This includes XMODEM error checked transfer protocol, to allow error free data transfer anywhere in the world!
- FULLY controlled by simple "COMMANDS" allowing you to control it from your own BASIC programs. To get you started we supply a FREE disc of bundled software!
- Connects to the 1MHz bus. A \*AUDIO ON-OFF command allows you to actually hear the telephone line through your BBC micro loudspeaker.
- Completely self contained with internal mains power supply. (Even a free mains plug is fitted!) A \*TEST facility gives ON SCREEN indication that Le MODEM is working correctly.
- Packaged in such a way that you need nothing else except a BBC Micro to communicate with computers all over the world.
- FREE Registration to MicroLink.

### SPECIAL OFFER

Price: **£75**  
(carr £3)



(Price includes, Le Modem, Software ROM, Cables & Comprehensive Manual)  
(Write in for further details)


## REPLICA 3

This new improved REPLICA 3 from Clares is a very powerful disc based TAPE to DISC Utility. It now transfers even more programs than ever before. Replica 3 will not work with all programs but then neither will anything else. 30,000 Replicas have been sold to date. It has to be good.

£15 (40 or 80 track)

Acorn's Speech Synthesiser  
package, complete  
Special Offer £18

## APOLLO



### The NEW Modem from Watford

Following numerous requests from you, our discerning customers for an APPROVED, Low Cost & High Performance modem with Auto Dial & Auto Answer facilities as standard) we bring you the versatile APOLLO Modem. Just compare the features and look at the price (which incidentally includes the cost of the Software, manual and BBC connecting cable). We are sure you will agree that Watford Electronics in their traditional way are giving you a super 'value for money' deal.

Just look at these features:

- V21 for Bulletin boards, Microlink, Telecom Gold, etc.
- V23 for Prestel, Home Banking, and other Viewdata services.
- Reverse V23 allows User run Viewdata service.
- 1200-1200 half duplex for communications.
- XMODEM, HEX and ASCII file transmission.
- Auto Dial of given 'phone number.
- Auto Answer for User's Bulletin Board.
- 80 column terminal with split screen facility.
- Prestel text screen dump.
- Fully BABT approved.
- FREE Registration to MicroLink.

The Apollo is attractively finished in matt black. It opens the doors to world communication to both, the Hobbyist and the Professionals alike. With baud rates varying from 300/300 Originate and Answer, 1200/75 and 75/1200 full duplex and 1200/1200 half duplex, virtually all the popular tele-services can be accessed. A comprehensive Comms ROM oversees the use of the APOLLO, providing simple commands for all the software controlled facilities. APOLLO is an ideal modem for both the first time buyer and the seasoned user. Join the Telecommunications Revolution - Buy a Watford APOLLO!

Only: **£82** (Carr £3)

Price includes, the Modem, Comm Software  
Cables & Operating Manual).  
(Write in for full specification)

### VOLTMACE JOYSTICKS

|                               |     |
|-------------------------------|-----|
| Delta 3B Single Joystick      | £10 |
| Delta 3B Twin Joysticks       | £15 |
| Delta 3C Joystick for Compact | £10 |
| Delta 14B Single Joystick     | £11 |
| Delta 14B/1 Adaptor Module    | £12 |
| Transfer Software Disc-Tape   | £7  |

### ATTACHE CARRYING CASE

For the BBC Micro. Attractively finished in antique brown leatherette. Lockable.

Only **£10** (£2 carr.)

### Versatile BEEB SPEECH SYNTHESISER Unit



The Watford Speech Synthesiser is a very flexible speech synthesis unit based upon the powerful phonemes system. This system stores the building blocks of speech (called phonemes) and allows you to combine them quickly and easily to form virtually any word imaginable.

Supplied with an advanced ROM, you are provided with a 500 word dictionary to get you started. These can easily be added to by following the notes given in the comprehensive manual.

SPECIAL PRICE **£32** (carr £2)

Continued



## COMPUTER CONCEPT'S ROMS

|                         |     |
|-------------------------|-----|
| ACCELERATOR             | £30 |
| CARETAKER Basic Utility | £23 |
| DISC DOCTOR             | £28 |
| Graphics ROM            | £29 |
| TERMI                   | £25 |
| COMMUNICATOR            | £49 |
| Printmaster             | £24 |

## Wordwise

£26

## Wordwise plus

£40

We are giving away absolutely **FREE**, the superb Word-Aid ROM worth £24, with every WORDWISE PLUS package bought from us.

## Word-Aid

The most comprehensive utilities ROM for Wordwise-Plus

Extend the power of your Wordwise Plus word processor with this most advanced ROM from Watford. By utilising the powerful Wordwise Plus programming language, WordAid provides a whole host of extra features, all accessed via a special new menu option. This ROM has been personally approved by Mr Charles Moir, the author of WORDWISE PLUS.

- Alphabetical sorting of names and addresses.
- Text transfer options.
- Chapter marker.
- Epson printer codes function key option.
- Search and display in preview mode.
- Embedded command removal.
- Print Multiple copies of a document.
- Multiple file options for print and preview.
- Address finder.
- Label printer.
- Mail-merger.
- Number/delete/renumber.
- Clear text-segment area.
- BBC B, B+ and Master compatible.

Only £24

(N.B. Word Aid requires a Disc Interface in your Micro)

HI-WORDWISE-PLUS DISC: £5

SPELL MASTER £42

Inter SHEET ONLY £37

## INTERCHART

ONLY: £25

## Inter-WORD

£36

## MEGA-3 ROM

Interword, Intersheet & Interchart – 3 in one ROM

£76

INTERBASE £49

All Prices Exclusive of VAT

## VIEW

VIEW WORDPROCESSOR 2.1 £35

VIEW 3.0 ROM £48

VIEW PROFESSIONAL £59

HI-VIEW (for 6502 2nd Processor) £36

VIEW SHEET (Acornsoft) £36

VIEWSTORE £36

VIEWSPELL with 80 track disc £29

VIEWPLOT Disc £20  
(Please specify for Master 128 or Compact)

VIEW-INDEX £12

OVERVIEW Packs 1 & 2 £69

## Watford's own Sophisticated VIEW PRINTER DRIVERS

Epson FX80 & Kaga KP (Disc) £8  
Juki & Brother HR15 (Disc) £8  
Silver Reed Printers (Disc) £8

## MINI OFFICE II

DISC Version for BBC B & B+ £14.00  
DISC Version for BBC Master £16.50  
ROM Version £43.00

(When ordering please specify for which Micro & 40 or 80 track Disc).

## Advanced Computer Products

Advanced Disc Toolkit £30  
Advanced Disc Investigator £25  
Advanced 1770 DFS BBC £29  
Advanced 1770 DFS Master £30

## EPSON NLQ ROM




Harness the full potential of your Epson RX or FX printer. The NLQ ROM makes Epson printers produce Near Letter Quality output with optional proportional spacing, enlarged and underlined. Accessed by simple \* commands from Basic, Wordwise and View (with driver) or almost any other language.

(Send an SAE for sample printout)

Only: £25

VIEW PRINTER DRIVER for NLQ ROM £7

## VIEW PRINTER DRIVER ROM

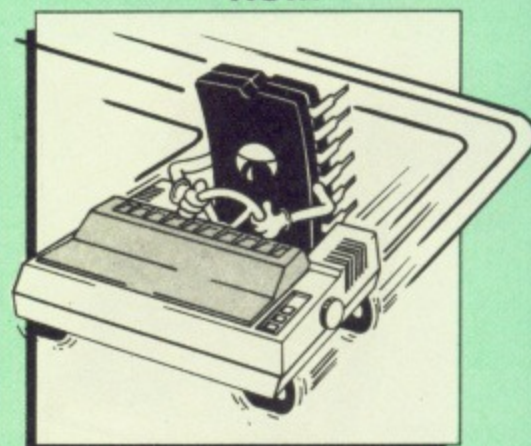

View is a powerful word processor, but until now has seriously lacked in terms of printer support. With the launch of our Printer Driver ROM, which includes an extremely powerful and easy to use Printer Driver Generator, View users can find themselves in the realms of advanced word processing only at a small outlay.

The VPD extends View's printer command with a series of mnemonic commands. All standard highlight sequences are also supported. A large range of printers are supported by drivers contained within the ROM (the drivers can be downloaded and customised). Printers supported include: Epson's MX, RX, FX, LX, JX80 range, H180, KP810/910, PW1080, JP101, HR15, M1009, GLP, Panasonic KX-P1081/2, JUKI 6100, etc.

Other printers are readily supported by defining a Printer Driver using the built in Printer Driver Generator. The features mentioned below are available to both the built in Printer Drivers and user defined drivers (assuming the printer supports the features).

NLQ control, Underline, Bold, Proportional Spacing, Microspacing, Italic, Superscript, Subscript, Condensed, Enlarged, Double Strike, Set lines per inch numerically (e.g. LPI 6), Set characters per inch numerically (e.g. CPI 5), Select printer font, Select printer ribbon colour, Translation sequences, Emulation of BBC Character Set, Simple numeric expressions for certain operations, Full printer setup, Send control codes, Print prompt on screen, Redefinable Pad character, Pause for key press, Prompt to change daisywheel, and Execute \* command when printing.

Other features include a very powerful on screen preview, with bold, italic, underline, super/subscript, enlarged highlights, and a special printer driver to allow memory based text to be previewed by View 1.4. Of course, View 1.4, 2.1 and 3.0 are all supported, as is Shadow RAM and 6502 Second Processors. The BBC B series and Master series of micros are supported. A comprehensive manual is supplied. All in all, a very professional product for the discerning user who wants power at their finger tips. (Write in for a detailed leaflet).

Price: Only £33

## ROM-SPELL



Probably the most advanced and fastest spelling checker available for the BBC Micro. Compatible with View, Wordwise and Wordwise Plus ROMSPELL is simple to use with easy editing of incorrect words. Full facilities for editing the user dictionary to allow customisation to your personal needs. Dictionary includes over 30,000 words and is supplied with a Comprehensive manual. NOT compatible with 1770 DFS. (Please state 40 or 80 track disc)

Price still only: £25



## DUMPOUT 3



A highly sophisticated screen dump ROM. This has to be the most flexible and powerful screen dump ROM yet produced for the BBC micro. It will put on paper anything you see on the screen, including full Mode 7 graphics. Also provided are window setting utilities and OSWORD calls to plot and read Mode 7 graphics pixels.

### Facilities:

- Vertical and horizontal scaling in all graphics modes and mode 7
- Rotation of image by 90, 180 or 270 degrees
- Left hand margin setting
- Screen dump window setting
- Colours appear as grey scale
- Two tone fast dump
- Colour mask
- Mode 7 contrast expansion
- Mode 7 contiguous dump
- Key triggered and User Port triggered dumps

The Micro User Feb. 1985.

*'Without reservation I wholeheartedly recommend the Dump Out 3 ROM as the ultimate screen dump facility for the BBC Micro ... it must represent excellent value for money and surely cannot be beaten'.*

For use with the following printers:


GLP, GP80/100/250, CANNON, STAR, KAGA/TAXAN, NEC, SHINWA CP80, GEMINI, EPSON MX/RX/FX, M1009, NEC PC8023, DMP100/200/400, Panasonic KX1081/82, Mannesman Tally and compatibles.

**Only: £25**

## BBC SOFTWARE'S Popular Educational Software

- Maths with a Story 1 (Disc). 4 primary level maths programs **£11.25**
- Maths with a Story 2 (Disc) 4 further maths programs **£11.25**
- Picture Craft (Disc) 6 - 14 age group. Pack consists of flexible geometrical design & colouring programs **£17**
- WAVES: Science Topics (Disc) CSC O Level Physics program. **£14.95**
- RELATIONSHIP: Science (Disc) O Level Biology program. **£20.00**
- BONDING: Science (Disc) O Level Chemistry program. **£20.00**
- ELECTROMAGNETIC SPECTRUM (8 Discs) O Level program. **£20.00**
- ELECTRONICS IN ACTION (Disc) O Level program **£19.95**
- NEWTON & THE SPACE SHUTTLE (Disc) O Level program. **£20**
- ECOLOGY (Disc) O Level program. **£20**
- POLYMERS (Disc) O Level program. **£20**
- Classification & Periodic Table O Level. The suite is supplied with its own database of chemical elements which can be classified according to your own rule. **£20**
- FOOD & POPULATION (Disc) O Level program. **£20**
- MICROTECHNOLOGY (Cassette) O Level program. **£11.25**
- A VOUS LA FRANCE (2 Cassettes) A French language home study aid. **£21.70**
- DEUTSCH DIREKT! (Disc & Audio Cassette) **£19.95**
- Modem Master (Disc) **£11.25**
- ADVANCED TELETEXT SYSTEM **£8.65**
- PERIOD TABLE SOFTWARE **£20**
- Astronomy - Primary (Disc) **£12**
- Computers at Work - Primary **£17.35**
- Introducing Geography - Primary **£17**
- Introducing Geography 11-17yrs **£17.50**
- Electric Fields 6-14 years **£11.25**
- BlackQueen Contract Bridge **£13**
- Espana Viva - 3 Discs **£19.95**
- A Vous La France Disc **£21.50**

## ROM MANAGER

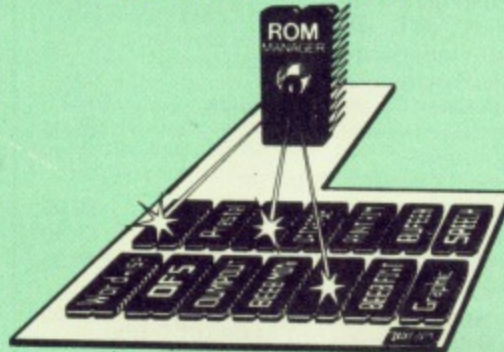


Take control of your Sideways ROMs with ROM Manager. This powerful utility ROM gives you power over your sideways ROMs. Disable whole ROMs, send commands directly to named ROMs and many other powerful facilities.

*"Provides comprehensive management of all your installed ROMs". (BEEBUG November '84.)*

**ONLY £20**

## ADDER

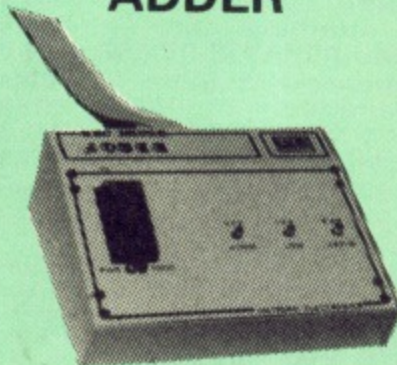

The only low cost EPROM Programmer for the BBC Micro that will program both the standard 21V and the new 12V5, 27128 EPROMS.

Adder is the ultimate EPROM programmer for the BBC Micro. It will program many different EPROMs up to the very latest 27256 32K devices.

The Adder unit connects to the User Port and draws its power from there too. The EPROM is mounted in a top quality ZIF socket. There are no switches or controls as Adder is entirely software controlled.

The Adder software provides sophisticated facilities for programming EPROMs from a RAM image produced by loading disc files. The software is menu driven and designed for ease of use.

### Features:

- Two ultra fast programming algorithms or standard slow algorithm.
- Supports standard 21V programming and newer 12.5 volt EPROMs. (Software switched).
- The RAM image to be programmed can be built up in many ways. Sections of image can be loaded separately. Part programming. Read EPROM. Edit data in memory.
- Automatic processing to handle a list of files to program into the EPROM.
- Automatic disc buffering to allow programming of 32K 27256 devices from a 32K file without extra effort.
- Verification gives detailed error list and checksums are maintained. There is also a blank check facility.
- Works with all standard filing systems. Generates header code for RFS ROMs to allow Basic programs etc. to be stored in EPROM. More than one file per ROM permitted.
- Programs the following EPROMs: From 2K to 32K: 2516, 2716, 2532, 2732, 2764, 2764A, 27128, 27128A, 27256 (Both 12.5V and 21V).

**£75 (£3 Carr)**

## TEX EPROM ERASERS


EPROMs need careful treatment if they are to survive their expected lifetime. Over erasure of EPROMs very rapidly turns them into ROMs!

The TEX erasers operate following the manufacturers specifications to give the maximum possible working life by not erasing too fast. We use these erasers for all our own erasing work.

- ERASER EB - Standard version erases up to 16 chips. **£28 (carr £2)**
- ERASER GT - Deluxe version erases up to 18 chips. Has automatic safety cut-off to switch off the UV lamp when opened. **£30 (carr £2)**
- Spare UV tubes. **£9**

## 32K

## SHADOW RAM-Printer Buffer Expansion Board

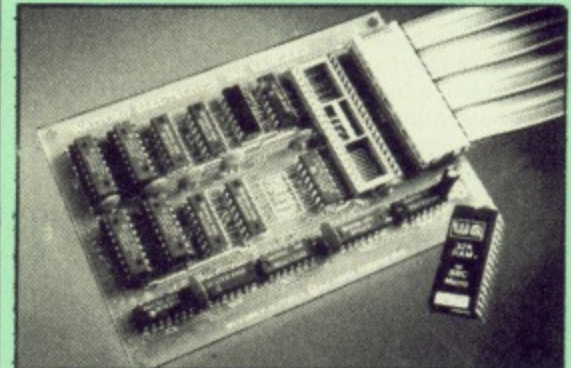

### A MUST FOR WORD PROCESSING

Watford Electronics now brings you the latest state-of-the-art MEMORY EXPANSION BOARD for your BBC microcomputer. Don't throw away your BBC B for a BBC B Plus or BBC Master. Just plug the ribbon cable into the 6502 processor socket, and fit the compact board inside the computer. Immediately you will gain not 16K or even 20K, but a massive 32K of extra RAM!!!

- IMPROVE your WORD PROCESSING system, whether disc or cassette based. Don't wait for a slow printer - type in text while printing. TWO JOBS DONE SIMULTANEOUSLY and £100+ saved on a printer buffer.

- "VIEW" Wordprocessor users can now type in letters in 80 columns and have up to 28,000 bytes free - 5 times as much as normal.

- In WORDWISE (or WORDWISE-PLUS), preview in 80 columns with the full 24K of text in memory. This product is recommended as an ideal complement by Computer Concepts.

- Combine GOOD GRAPHICS and LONG PROGRAMS. Use the top 20K of the expansion RAM as the screen display memory, leaving all the standard BBC RAM free for programs. Benefit from MODE 0/1/2 graphics and 28K of program space.

- Use the FULL 32K or the bottom 12K of the expansion RAM as a PRINTER buffer for PARALLEL or SERIAL printers, sound channels, RS423 etc. Print large text files while running long graphics programs, and have all your buffer options available as well (\*FX15,21,138,145,ADVAL etc). Please note only a 12K printer buffer can be used with Wordwise or Wordwise-Plus, due to the way they are written.

- Unique facility to turn ROMs off and on again. Unlike all other ROM managers, this feature does not use 'unofficial' memory. Two bytes of normally user-inaccessible memory on the RAM card are used to ensure ROMs are disabled WHERE OTHER ROMS FAIL.

- Recommended by Computer Concepts for use with their Inter series of ROMs.

**Only £59 (carr £2)**

(Price includes a comprehensive manual and the ROM)

## INCREDIBLE WORDPROCESSING DEAL

Watford's 32K SHADOW RAM CARD and Computer Concept's INTERWORD Wordprocessor package.

at Only **£89** (carr £2)

Continued



**BOOKS (No VAT on Books)**

|   |        |
|---|--------|
| 15 Hr Wordprocessing BBC/View           | £5.95  |
| 15 Hr Wordprocessing BBC/WW & WW+       | £5.95  |
| 30 Hour BASIC (BBC Micro)               | £9.95  |
| 6502 Assembly Language Program          | £19.95 |
| 6502 Application                        | £13.95 |
| 6502 Development Package                | £7.50  |
| 6502 Programming the                    | £16.95 |
| 6502 Reference Guide                    | £10.95 |
| 68000 Assembly Language                 | £15.95 |
| 68000 Assembly Language Prog.           | £19.95 |
| 68000 Assembly Language Techniques      | £24.95 |
| 68000 Machine Code Programming          | £13.00 |
| 68000 Microprocessor Handbook           | £14.95 |
| 68000 Programming the                   | £22.95 |
| 68000 User Guide                        | £8.95  |
| 6809, Programming the                   | £18.95 |
| Advanced Disc User Guide                | £18.95 |
| Advanced Prog. Guide to BBC             | £9.95  |
| Adv. Sideways RAM User Guide            | £9.95  |
| <b>Advanced User Guide for BBC</b>      | £10.95 |
| Amiga Hardware Ref Manual               | £23.70 |
| Amiga Machine Lang. Guide               | £19.95 |
| ARM Assembly Lang. Prog. Manua          | £12    |
| Art of Microcomputer Graphics           | £16.95 |
| Assembly Language Prog. for the BBC     | £9.95  |
| AY-3-8910 Programmable Sound Generator  |        |
| Data Manual                             | £3     |
| BASIC2—User Guide                       | £2     |
| Basic ROM User Guide                    | £11.95 |
| BBC—Advanced Graphics with the          | £10.95 |
| BBC—Advanced Programming                |        |
| Techniques for                          | £8.95  |
| BBC—Mastering Assembly Code             | £8.95  |
| BBC Micro & the small Business          | £5.75  |
| BBC Micro Basic Sound & Graphics        | £7.95  |
| BBC Micro—File Handling On              | £7.95  |
| BBC Micro Programs in BASIC             | £5.95  |
| BBC Micro ROM Book                      | £10.95 |
| BBC Micro—within the                    | £13.95 |
| BBC Master 128 for High Flyer           | £10.95 |
| BCPL User Guide                         | £14    |
| BCPL The Language & its Compiler        | £8.50  |
| C Big Red Book of                       | £7.50  |
| C—A Dabhand Guide to                    | £14.95 |
| 'C' Introducing                         | £9.95  |
| C for Programmers                       | £9.95  |
| C Programming Lang.                     | £23.95 |
| COMAL—Introduction to                   | £9.50  |
| Complete FORTH                          | £6.95  |
| Computer Graphics & CAD fundamentals    | £9.95  |
| Deutsch Direkt (Book only)              | £5.95  |
| DNFS Instruction Booklet                | £2     |
| Disc Drive Projects for Micros          | £6.50  |
| <b>DISC FILING SYSTEM (DFS)</b>         |        |
| <b>Operating Manual for BBC</b>         | £6.95  |
| File Handling on BBC Micro              | £8.50  |
| FORTH—Advanced                          | £9.95  |
| FORTH—A Text Reference                  | £19.10 |
| FORTH—Introduction to                   | £8.95  |
| FORTH on the BBC Micro                  | £9.95  |
| FORTH—Starting                          | £19.10 |
| Hackers Handbook—New                    | £6.95  |
| Hitch-Hikers Guide to A.I.              | £8.95  |
| Interfacing and Robotics                | £15.95 |
| Introduction to COMAL                   | £9.50  |
| Introduction to FORTH                   | £8.95  |
| Introduction to LOGO                    | £6.95  |
| Introduction to PASCAL                  | £17.95 |
| Inside Information, Computers & Coms.   | £9.95  |
| ISO—PASCAL Reference Manual             | £9.95  |
| LISP 2nd Edition                        | £15.95 |
| LISP Looking At                         | £11.95 |
| LISP on the BBC Micro                   | £7.95  |
| LISP the Language of                    |        |
| Artificial Intelligence                 | £13.95 |
| Logo on the BBC Micro                   | £7.50  |
| LOGO—Introduction to                    | £6.95  |
| <b>Mysteries of DISC DRIVES and DFS</b> |        |
| <b>REVEALED</b>                         | £5.95  |
| Mastering Assembly Code                 | £8.95  |
| Mastering CP-M                          | £17.95 |
| Mastering Interpreters &                |        |
| Compilers                               | £14.95 |
| Mastering Music                         | £6.95  |
| Mastering the Disc Drive                | £7.95  |
| Master Operating System                 | £12.95 |
| Master Reference Manual Part 1          | £14.00 |
| Master Reference Manual Part 2          | £14.00 |
| Master Reference Manual—Advanced        | £19    |
| Mathematical Prog. in BBC Basic         | £7.95  |
| Micro Prolog                            | £10.00 |

|                                      |        |
|--------------------------------------|--------|
| Microtext for the BBC                | £10.00 |
| Microtext Plus Manual                | £9.95  |
| Microtext User Guide                 | £5     |
| PASCAL—Introduction to               | £17.95 |
| PASCAL Programming                   | £9.45  |
| Pick Operating Sys. Practical Guide  | £14.95 |
| Practical Disc File Techniques       | £5.95  |
| Structured Basic                     | £7.95  |
| <b>The Epson FX-KAGA PRINTER</b>     |        |
| <b>Commands REVEALED</b>             | £5.95  |
| The Software Business                | £5.50  |
| Towers Int. Transistor Selectors     | £14.95 |
| Understanding Interword—             |        |
| A Beginners Guide                    | £6.50  |
| Using DOS+ on the 1512               |        |
| (95% Ok for 512 Bd)                  | £9.95  |
| View 3.0 User Guide                  | £10    |
| View Guide (View 2.1)                | £4.50  |
| Viewsheets & Viewstore Dabhand Guide | £12.95 |
| Mastering View, Viewsheets &         |        |
| Viewstore                            | £12.95 |
| VIEW Dabhand Guide                   | £12.95 |
| Viewsheets User Guide                | £10    |
| Viewstore User Guide                 | £10    |
| Wordprocessing On The BBC Micro      | £6.25  |
| Writing Interactive Interpreters     |        |
| & Compilers                          | £8.45  |
| Wordwise + A User Guide              | £10.95 |
| Z80 Applications                     | £15.95 |
| Z80 Assembly Language Prog.          | £20.95 |
| Z80 Programming the                  | £19.95 |
| Z80 Reference Guide                  | £9.95  |
| Z88 Computing                        | £9.95  |

**BOOKS for  
IBM PC & Compatibles  
(No VAT on Books)**

|                                       |        |
|---------------------------------------|--------|
| 1-2-3 For Business 2nd Edition        | £18.45 |
| 1-2-3 Command Language                | £18.45 |
| 1-2-3 Special Edition (QUE)—Using     | £21.95 |
| 8086/8088 Assembly Language Prog.     | £11.95 |
| 8086/8088 Programming the             | £17.95 |
| Ability—Using                         | £12.95 |
| Accountancy software in Business—     |        |
| Using                                 | £12.95 |
| Advance C Tech & Application          | £19.95 |
| Advanced Tech. in Turbo Pascal        | £19.95 |
| Aldus Pagemaker—Using                 | £18.45 |
| Amstrad Basic 2 Manuals               | £12.95 |
| Amstrad Technical Manuals             | £19.50 |
| Amstrad PC Programmers Ref Guide      | £15.95 |
| Amstrad PC1512-1640 Step by Step—     |        |
| Using                                 | £8.50  |
| Art and Desktop Publishing            | £18.45 |
| Autocad—using                         | £18.95 |
| BBC Assembly Ref. Manual—within       | £11.95 |
| Business companion on the 1640        | £12.95 |
| CP-M Bible                            | £16.50 |
| CP-M Handbook with MPM                | £9.95  |
| CP-M Plus Handbook                    | £13.95 |
| CP-M Soul of                          | £16.50 |
| CP-M The software BUS                 | £8.95  |
| dBase II & III—Understanding          | £7.95  |
| dBase II—Working with                 | £9.95  |
| dBase III—Mastering                   | £19.95 |
| dBase III Plus                        | £12.95 |
| dBase III Plus Handbook 2nd Edition   | £19.95 |
| dBase III Plus—tips, tricks and traps |        |
| (QUE)                                 | £18.40 |
| dBase III Plus—Quick Ref. Guide       | £4.95  |
| dBase III Plus—Quick Prog. Guide      | £8.95  |
| DOS Instant Reference (up to 3.3)     | £10.95 |
| DOS, Mastering for Versions up to 3.3 | £19.95 |
| DOS Plus Manual/Amstrad PC            | £17.00 |
| DOS Plus—Mastering                    | £12.50 |
| Excel IBM Version—Using the           | £17.95 |
| Hard Disk Manage IBM PC XT AT         | £17.35 |
| Hard Disc—Managing your               | £18.45 |
| IBM Mac Connection                    | £17.35 |
| IBM PC & Macintosh Networking         | £17.95 |
| IBM PS/2 Handbook                     | £17.95 |
| IBM PC AT—Inside the                  | £20.95 |
| Local Area Networks 2nd Generation    | £19.95 |
| Lotus 1-2-3 Desktop Companion Soft/B  | £24.95 |
| Lotus 1-2-3—Illustrated               | £18.45 |
| Laserprint it                         | £15.95 |
| Managing your Hard Disk               | £18.45 |
| Mastering 1-2-3 2nd Edition           | £18.95 |
| Microcomputer CAD Manual              | £25.95 |

|                                    |        |
|------------------------------------|--------|
| MS-DOS—ABC on                      | £17.95 |
| MS-DOS Advanced Programming        | £19.95 |
| MS-DOS Advances (Microsoft)        | £19.95 |
| MS-DOS Handbook 3rd Edition        | £18.95 |
| MS-DOS Instant Reference Guide     | £10.95 |
| MS-DOS Illustrated                 | £18.45 |
| MS/PC DOS 3.3—Illustrated          | £18.95 |
| MS-DOS Mastering—Tricks of         | £22.50 |
| MS-DOS Performance Programming     |        |
| Under                              | £19.95 |
| MS-DOS Quick Prog Ref Guide        | £8.95  |
| MS-DOS Quick Reference Guide       | £3.95  |
| MS-DOS—Running 3rd edition         | £21.95 |
| MS-DOS—Supercharging               | £17.95 |
| MS-DOS Users Guide 2nd Edition     | £16.95 |
| MS-DOS—Using                       | £9.50  |
| Operating the IBM PC Network       | £18.45 |
| Pagemaker—Desktop Publishing       | £15.95 |
| Pagemaker IBM PC—Mastering         | £18.45 |
| Pagemaker—Illustrated              | £18.45 |
| PC 1640 Technical Ref. Manual      | £19.95 |
| Quattro—Mastering                  | £21.95 |
| Smart—Using                        | £21.45 |
| Smart—tips, tricks and traps (QUE) | £22.45 |
| SuperCalc 4                        | £19.95 |
| SuperCalc 4—Using                  | £17.45 |
| Symphony 3rd Edition—Mastering     | £22.95 |
| Turbo Pascal Complete 2nd Ed.      | £21.45 |
| Turbo Pascal Library               | £14.95 |
| Using 1-2-3 2nd Edition            | £21.95 |
| Using DOS+ on the 1512             |        |
| (95% OK for 512 Ed)                | £9.95  |
| Using Microsoft WORD 2nd Edition   | £18.45 |
| Using PC-DOS 2nd Edition Ver. 3.3  | £20.45 |
| Using Pagemaker on the IBM PC      | £22.45 |
| Using SuperCalc 4                  | £17.45 |
| Ventura—Mastering                  | £21.95 |
| Ventura Publishing—Instant         | £34.75 |
| Ventura Tips + Tricks              | £18.95 |
| Word Perfect Desktop Companion     | £25.95 |
| Wordperfect—Illustrated            | £18.45 |
| Wordperfect 3rd Ed—Using           | £18.45 |
| Wordperfect Made Easy              | £15.95 |
| Wordstar & CP/M made easy          | £9.95  |
| WordStar Release 4—Mastering       | £17.95 |
| WordStar 1512/1640—Using           | £9.50  |
| WordStar User's Ref. manual        | £12.50 |
| Wordstar—Quick program Ref. Guide  | £8.95  |
| WordStar 4.0—Using                 | £17.45 |
| Xerox Ventura—Desktop Publishing   | £14.50 |
| Xerox Ventura Publishing—Inside    | £18.45 |

**NEW****The Advanced  
Reference Manual  
for the BBC Master**

At last Acorn's long awaited Advance Reference Manual for the BBC Master Series of Microcomputers has now been published. Watford Electronics' own authors have edited and added missing sections to the original script and produced a very high quality publication.

It features information about:

- Memory Organisation
- Slow data bus
- Detailed circuit description
- Keyboard controller
- Screen display
- User port
- Serial Processor
- Peripheral bus controller
- 1 Mhz Bus
- Machine operating System
- Second processors—Internal, Z80 and 80186
- Disc Filing Systems
- ANFS
- Terminal Emulator & Editor
- View internal format
- Detailed differences between Model B, B+, Master 128K and Compact
- Comprehensive appendix on 65C12 instruction set

At the rear of the manual there are pull out circuit diagrams for the Master 128K. A worth-while addition to any Master owner's library.

**All this for just £19 (NO VAT)**



## THE COMPLETE BBC COMPUTER USER HANDBOOK

"Why has no-one written a book like this before? It's long overdue".

If you own a BBC-B, BBC B+, Electron, Master 128, Master Compact or Archimedes then this book is for you. It shows you how to get the most from your computer, and how to make the computer work for you. Although some sections are machine specific, most of the information, programs, hints and good solid experience are for the whole range of BBC machines. The general style and level means that both beginner and expert will feel satisfied with the quality and quantity of the material.

**GENERAL** – Uses and abuses of computers.

**HARDWARE** – How to design your own work station. Hardware additions (disc drives, ROMs, printers, 2nd processors, etc). DIY alterations.

**HARDWARE RUNNING BBC-BASIC** – All BBC machines are described with their differences. Compatibility between the various BBC machines. Networks. The Archimedes and its advantages.

**GETTING ORGANISED** – so that you keep track of your programs and control of your software. Setting up for easier programming sessions.

**NEAT PROGRAMMING** – Good style. Writing structured programs. Getting the best from BBC-BASIC, Graphics and screen displays. Speeding up programs. Saving space.

**GENERAL PROGRAMMING TIPS AND HINTS** – with a multitude of examples (eg input vetting, dealing with dates, blanking out function key messages, error trapping, disabling ESCAPE and BREAK, use of EOR with colour, etc).

**DEBUGGING** – Specific errors and how to handle them. How to test programs fully.

**STANDARD PROGRAMS** – Assessing word-processors, spread-sheets, databases, graphics packages, communications etc. How to customise them to your own requirements.

**COMPUTERS AT HOME AND IN THE OFFICE** – Introducing the computer to the office. Program protection. Computers and the law. Communications. Selling your own programs. 28 FULL CHAPTERS, elegantly written and extensively indexed. To dip into, consult, or read from cover to cover, again... and again... and again...

Only: **£14.95** (Book No VAT)

**Watford Electronics are the  
main Approved Stockist of  
ACORN SPARES and Acorn  
ECONET Referral Centre**

### Servisol Foam Cleaner

This 415ml, king size multi-purpose foam cleaner spray is ideal for cleaning the Keyboard, Monitor, Disc Drive and your computer furniture surfaces. Simply spray on the surface to clean and wipe off with a clean cloth.

**£2.50**

### Antistatic Aerosol Spray

Ideal for cleaning and preventing static build-up on TV/Monitor Screens.

**£2.50**

### Aerosol Dust Spray

Aerosol Dust Spray

This simple to use aerosol spray is ideal for removing Dust and Dirt deposits from the Keyboards and similar inaccessible places.

**£3**




**CREDIT CARD 24 HOUR  
Ansaphone Hot Lines  
(0923) 50234 or 33383**

## SURGE PROTECTOR Plug

Fitted in place of your normal mains plug, this device protects your equipment against mains surges. Nearby lightning strikes, thermostats switching and many other sources which put high voltage transient spikes on to the mains. This can lead to data corruption in memory and on disc and can result in spuriously crashing machines. A must for every computer user.

Protection for only **£7.50**

## 4 WAY MAINS DISTRIBUTION SOCKET

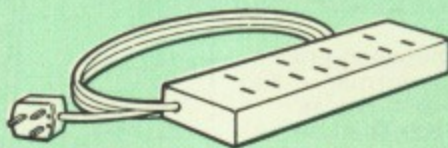

4 way top quality mains trailing sockets. Supplied wired up with mains plug ready for use. Can be screwed to floor or wall if required. Very useful for tidying up all the mains leads from your peripherals.

**£7.95** (carr £1.50)

## SPIKES CLEANER UNIT

A 4 way mains distribution unit as above with a built-in Surge Arrester, providing protection for your complete computer system

**£13.00** (carr. £1.50)

## ROM EXTRACTION TOOL

This extremely useful tool allows you trouble free chip insertion and removal from your computer by distributing the removal force over the whole body of any 24 or 28 pin chip.

**£2**

## Replacement FLEXIBLE 17 way Keyboard Connector £3

## 28pin DIL HEADER PLUG

SOLDER type **£1.50**; IDC CRIMP type **£1.95**

## 8 WAY DIP SWITCH

Increase the speed of your Disc Drives by soldering this switch to your BBC B or B+ Keyboard.

Only **£1.00**

28 pin ZIF SOCKET (Textool) **£6.95**

## Watford DATA DUCK

Convert two single Disc Drives into one Dual Drive with this simple external unit (Suitable for Disc Drives with PSU. For Disc Drives without PSU, you will also require Watford Power Duck, see below).

**£14**

Watford POWER DUCK **£8**

## CONNECTING LEADS

(All ready made and tested)

CASSETTE LEADS 7 pin DIN Plug to 5 pin DIN Plug + 1 Jack Plug **£2.00**  
to 3 pin DIN Plug + 1 Jack Plug **£2.00**  
to 7 pin DIN Plug **£2.50**  
to 3 Jack Plugs **£2.00**  
6 pin DIN to 6 pin DIN Plug (RGB) **£2.50**

## DISC DRIVE POWER LEADS

Supply from BBC power supply to standard Disc Drive connector.

Single **£3.00** Dual **£3.75**

## DISC DRIVE INTERFACE LEADS

BBC to Disc Drives Ribbon Cable  
Single **£4** Twin **£6**

## Miscellaneous Connectors

|                       | Plugs | Sockets |
|-----------------------|-------|---------|
| RGB (6 PIN DIN)       | 30p   | 45p     |
| RS423 (5 pin Domino)  | 40p   | 50p     |
| Cassette (7 pin DIN)  | 25p   | 65p     |
| ECONET (5 pin DIN)    | 20p   | 30p     |
| Paddles (15 pin 'D')  | 80p   | 200p    |
| Disc Drive Plug 4 way | 75p   | —       |
| 6 way Power Connector | 80p   | 95p     |

## SPARES for BBC Micro

|                 |     |                |       |
|-----------------|-----|----------------|-------|
| BBC Keyboard    | £36 | Speaker        | £2    |
| Master Keyboard | £62 | Keypad         | £1.50 |
| UHF Modulator   | £4  | 16MHz Crystal  | £4    |
| Speaker Grill   | £1  | 32.768MHz Xtal | £1.00 |
| Power Supply    | £56 | Master PSU     | £59   |
| BBC Casing      | £20 |                |       |

## CHIP SHOP

|                    |        |
|--------------------|--------|
| DS3691             | £4.50  |
| DS88LS120          | £5.25  |
| LM324              | £0.45  |
| SN76489            | £5.50  |
| SAA5050            | £8.75  |
| UPD7002            | £6.00  |
| WD1770             | £12.00 |
| 2764-250nS         | £3.50  |
| 27128-250nS (12V5) | £3.25  |
| 27128-250nS (21V)  | £5.25  |
| 27256-15           | £5.00  |
| 27512              | £10.50 |
| 27C101G (1 Meg)    | £17.50 |
| 4013               | 60p    |
| 4020               | £0.90  |
| 4164-15            | £3.25  |
| 4464-12            | £8.95  |
| 4464-15            | £8.25  |
| 4816 RAM           | £2.00  |
| 41256-15           | £8.25  |
| 41256-12           | £9.75  |
| 6264LP-8K          | £8.00  |
| 6502A CPU          | £4.50  |
| 65C02 3M           | £9.75  |
| 65C12              | £9.00  |
| 6512A              | £10.00 |
| 6522               | £3.40  |
| 6522A              | £4.50  |
| 62256ALS-15        | £8.50  |
| 6818               | £4.00  |
| 6845SP             | £6.00  |
| 68B50              | £2.95  |
| 68B54              | £7.50  |
| 7438               | 40p    |
| 74LS00             | 25p    |
| 74LS04             | 25p    |
| 74LS10             | 25p    |
| 74LS123            | 80p    |
| 74LS163            | 70p    |
| 74LS244            | 80p    |
| 74LS245            | £1.00  |
| 74ALS245           | £2.75  |
| 74LS373            | £1.00  |
| 74LS393            | £1.00  |
| 75453              | 70p    |
| 75159              | £2.00  |
| 8271               | £49    |
| 9637               | £2.00  |
| ICL7673PA          | £2.00  |

## ASSORTED ROMS

|                               |      |
|-------------------------------|------|
| ACORN ADFS                    | £25  |
| ACORN BASIC 2 plus User Guide | £22  |
| Acorn BCPL                    | £42  |
| Acorn COMAL                   | £38  |
| ACORN DNFS                    | £17  |
| Acorn FORTH                   | £32  |
| Acorn Graphics                | £25  |
| Acornsoft C                   | £52  |
| Acorn LISP                    | £19  |
| Acorn LOGO                    | £49  |
| Acorn OS B+                   | £25  |
| Acorn OS 1.2                  | £14  |
| Basic Editor                  | £24  |
| Beebfont                      | £25  |
| Beebmon                       | £22  |
| BROM Plus                     | £32  |
| Buffer & Backup               | £20  |
| Communicator                  | £49  |
| Commstar II                   | £28  |
| Graphics Extension Rom        | £21  |
| GXR-B                         | £22  |
| GXR-B+                        | £27  |
| Help II                       | £51  |
| ISO Pascal                    | £30  |
| ISO-Pascal Stand              | £28  |
| Alone Generator               | £45  |
| ICON Master                   | £38  |
| Logotron LOGO                 | £32  |
| Master OS ROM                 | £62  |
| Master Termulator             | £46  |
| Micro Prolog                  | £199 |
| Microtext Disc                | £43  |
| Microtext Rom                 | £21  |
| Mini Office II ROM            | £25  |
| MUROM                         | £29  |
| NLQ DESIGNER                  | £13  |
| ROMIT                         | £35  |
| Serial ULA                    | £25  |
| TED                           | £32  |
| Termulator B, B+              | £31  |
| Termulator Master             | £14  |
| Toolkit Plus B, B+            | £26  |
| Video ULA                     | £39  |
| ULTRACALC II                  |      |
| 1Mb OS ROM                    |      |

NEW

## BBC PCB DESIGNER

A PCB Designer package for the BBC Micro that eclipses some industry standard CAD Software.

Input for the design may be manual or Auto mode.

Some of the PCB Designer's features are:

- Over 120 library pad sizes/shapes
- Four colour adjustable palette
- Zoom range 2:1 to 1:4
- Highlighting of specific tracks
- Normal and surface mounted components
- Rapid screen review
- Menu driven
- Variable gridlock
- Switchable measurement grid
- Pre-select pan/scroll facility
- Large 24" x 24" Board size
- Copy route facility
- Connectivity held at all times
- Ratsnesting of part connections
- Auto-placement of text references
- Text linked to parts
- Automatic placement of vias
- Printer and plotter outputs provided
- Comprehensive manual

**Introductory Offer: £59**

(Please write in for further technical details)

Continued



**If you thought £150 didn't buy much of a modem you haven't heard about the aries 1200**

NEW

## Aries 1200 MODEM

APPROVED for connection to telecommunication systems specified in the instructions for use subject to the conditions set out in them.

Up till now buying a modem was a compromise between price and performance, but the new Aries 1200 offers performance and features not found on modems costing two or three times as much. Look at the features offered by the Aries 1200, features which you wouldn't expect from a modem at this price – and some which you would be lucky to find on a modem at any price.

- Operates in V21 (300/300), V23 (1200/75 and 75/1200) and proprietary V23 1200 mode.
- Connect it to any type of computer or terminal via the 25 way serial D connector or the BBC standard 5 pin Domino socket.
- A built in phone socket means your phone plugs straight through.
- A reset switch so the hardware makes it easy to restart – even when your software doesn't.
- Industry standard Hayes (C) compatibility means that this is one of the easiest modems to use. It can automatically work out the speed your computer is working at, and even the speed and protocol of the modem at the other end.
- Auto Call mode can dial using tone or pulse (the modem works that out too), and when it connects it will automatically determine the speed of the answering modem.
- Auto answer mode means the modem can be left unattended to answer calls from other modems, and of course it automatically works out the speed and protocol of the calling modem.
- The built in speaker and front panel LED's mean that you always know what the modem is doing.

... Features at any price.

- Proprietary V23 mode mean that two Aries 1200's can communicate at 1200/1200 and in this situation you can take advantage of the built in data compaction which reduces the volume of text you send by 30%.
- Built in scrambler means that data transferred between two Aries modems is automatically encrypted. The encryption code can be user defined for a totally private email system.
- User defined control commands means that the Aries can even be used from a dumb terminal or with non standard software.
- Front panel light include indicators for Power, Auto Answer Mode, Transmit, Receive, On line, Terminal ready and Carrier Detect. There's even an indicator to show the quality of the phone line.
- Internal watch-dog monitors the modems activity and in the event of a power failure or computer crash it automatically resets the modem. The Aries modem can never hold open your phone line or lock up your computer.
- Built in printer port allows the Aries to direct incoming data directly to a printer, text can be tagged so that it is selectively sent either to the printer or the computer.
- All modem setting are stored in solid state non volatile memory – no battery to go flat and hang crash the system.


**Launch Offer Only: £149**

Hayes Compatible BBC Comms Software ROM & Manual **£25**

### WATFORD CUT PRICES NOT PERFORMANCE

Prices subject to change without notice and available on request. ALL OFFERS subject to availability.  
Mail Order and RETAIL SHOP. Trade and Export inquiries welcome.  
Government and Educational Establishments' OFFICIAL ORDERS Accepted.  
Shop Hours: 9.00am to 6.00pm. Monday to Saturday. Thursdays 9am to 8pm. (Free Customer's Car Park)

VAT: UK customers please add 15% VAT to cost incl. Carriage.  
CARRIAGE: Unless stated otherwise, minimum £1 on all orders. £3 on Larger items. On bulkier items, £7 Securicor charge applies (UK mainland only). Overseas orders, carriage is charged at cost.

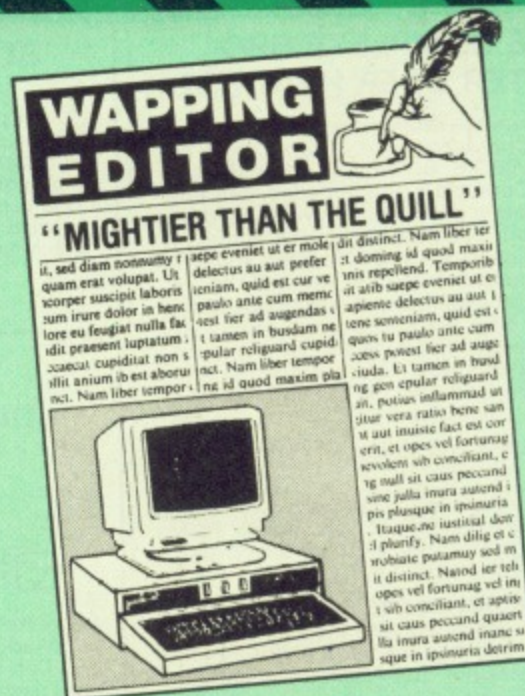

## The WAPPING EDITOR

Watford Electronics bring professional quality Desktop Publishing to the Beeb. The Wapping Editor is a totally self contained mouse-driven desktop publishing package designed to run on the BBC B, B+ and Master computers. The massive 64K Rom contains ALL the software you need to do your own publishing. It 'Brings the Freedom of Press' to your fingertip. The software has a word processor, a graphics package, a page layout section and a font designer. Although very sophisticated, Wapping Editor is simplicity itself to use. Anyone already familiar with Quest Paint will immediately feel at home.

## GRAPHICS PACKAGE

Imagine Quest Paint re-written to take advantage of the high resolution of Mode 0, well this is it. The Wapping Editor could well be worth buying for this facility alone. This must surely be the graphics.

## WORD PROCESSOR

This section is a fully functional word processor specially tailored to suit the Desktop Publishing environment. Gone are all the unnecessary and cumbersome text formatting commands – these are dealt with in the 'Page-Layout' section. The features of this word processor include wordwrap, wordcount, insert/overwrite, move block, copy block, delete block, search and replace, browse, etc, many of these features being mouse controlled. Text input can of course be taken from existing word processor files like Wordwise, View, etc, but it is not necessary to have a separate word processor in order to use this package.

## PAGE-LAYOUT SECTION

Page Layout becomes easy using these mouse-driven routines. The user simply 'pulls' a rectangle onto the page and states which text document or graphic is required to fill the space – it's as simple as that! Text can be automatically printed in a pre-set number of columns, left justified and/or right justified, or centered. Several different typefaces can be held in memory at one time. Graphics may be stretched, 'squashed' or cropped to fit any size rectangle. Graphics input can be from the software provided in the package or, using the 'mode convert', from any graphics mode screen.

## THE FONT EDITOR

This is an enhanced version of the font editor contained in the Con-Quest ROM and allows the editing of ALL 95 characters. As well as being able to design your own typefaces, fonts from other DTP packages or from Quest Paint may be loaded into the editor and converted for use with the Wapping Editor. This sophisticated editor has numerous functions including slide, flip, invert and rotate individual characters or the whole font. Individual characters can be mirrored or copied and a mask feature allows you to superimpose two characters. Lines and columns can be inserted or deleted allowing the character to be stretched or squashed. This font editor will also allow 'font' and 'brush' files to be designed for use with Quest Paint. This package is the latest in the line of integrated professional quality mouse-driven software from Watford Electronics, the company that adds power to Beeb.

Wapping Editor  
Wapping Editor with Quest Mouse

**Launch Offer: £69  
£89**

Specifications of all products are given in good faith but is subject to change without notice. Some items vary in their availability. Please ring for latest delivery situation.

## Watford Electronics

JESSA HOUSE, 250 Lower High Street,  
WATFORD WD1 2AN, ENGLAND  
Telephone: (0923) 37774; Telex: 8956095;  
FAX: 01 950 8989

ORDER VIA  
**MicroLink**  
72-MAG030





**O**UT in the far depths of space between planets you mine the glittering power crystals. But the only way to find them is by smashing open each asteroid in every swarm you can locate. So you turn to your trans-space scanner to seek out the nearest group, move to the navigation computer and hyperspace into the pack.

Immediately your attention is gripped by the need to avoid the oncoming asteroids – blowing them to pieces with your laser torpedoes. And when you finally blast the smallest pieces, if luck is with you a single crystal lies at the centre waiting to be picked up.

The controls of your mining ship are simple – Z and X for rotation, Shift to activate the impulse drives and Return for the torpedoes. Your vessel can take four direct hits from asteroids before being destroyed, and as you work, your ship systems automatically repair any damage and build up further power to resist destruction. Automatic tractor beams will pick up the power crystals as you pass near them: Be quick, they only have a short half-life and must be collected before they disintegrate.

Type in the listing using the Basic Editor – with

tabs set to four – save the program and then ensure it is correct using the checksum program from the January issue. If the display is flickery you need to configure additional screen memory – you need 160k for two Mode 12 screens. So save the program and enter:

```
*CONFIGURE SCREENSIZE 20
```


Press Control+Break and you can now load and run it successfully. It is very important to save your program before re-configuring because, as the various ram pages get swapped around, it may be shifted elsewhere in memory and lost forever. In order to save space the machine code has been converted to hexadecimal, but the full program showing exactly how the whole thing works is on this month's disc.

Although running in Mode 12, the program will operate in any screen mode because it uses only standard operating system calls – and despite this it still runs at a very good speed, which just goes to show how fast the Archimedes really is.

So when you play ArcRoids be prepared for some real action!

# Meteor miner

*Steve Turnbull presents ArcRoids – a fast action game for your Archimedes*

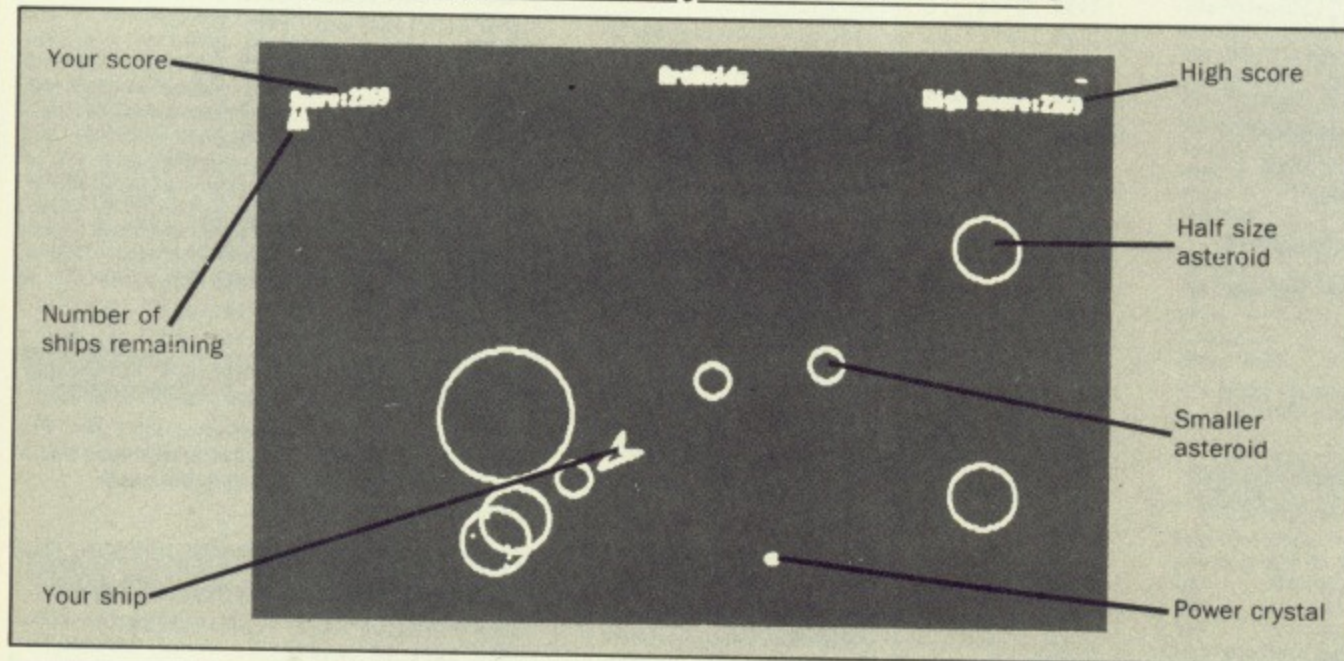

```
10 REM > $.ArcRoids
20 REM by Steve Turnbull
30 REM (c) The Micro User
40 MODE12:OFF:ON ERROR PROCerror:END
50 PROCinit:REPEAT PROCgameInit
60 REPEAT:PROCinitScreen
70 REPEAT:PROCdoScreen
80 UNTIL data!heapPointer=1 OR !FNshi
p=-1
90 message=FNmessage:PROCwait(wait)
100 message=FALSE
110 UNTIL numLives<=0 AND data!roidCou
```

```
nt>0
120 UNTILFALSE:END
130 DEF PROCerror
140 ON ERROR OFF:PROCquit
150 PRINTREPORT$ at "ERL:ENDPROC
160 DEF PROCquit:MODE MODE:*FX4
170 ON:SOUND OFF:ENDPROC
180 DEF PROCinit:Z%=RND(-TIME):*FX4,1
190 VDU&FF17;&2810;&4428;&9244;&C6AA;
200 SYS "OS_SWINumberFromString",,"OS_
Plot" TO OS_Plot
210 SYS "OS_SWINumberFromString",,"OS_
```

```
Byte" TO OS_Byte
220 shipType=1:roidType=2:missType=3
230 dustType=4:maxObjects=200
240 maxMiss=5:M%=0:angInc=RAD(12)
250 shipAng=0:READ shipPts
260 DIM s%(shipPts,2),pts%shipPts*3*4
270 FOR P%=0 TO shipPts-1:FORX%=0TO2
280 READ s%(P%,X%):NEXT:NEXT
290 PROCturn(0):roidSize=96:screen%=1
300 hiscore=0:bonus=0:bonusInc=10000
```

Turn to Page 108 ►



## ◀ From Page 107

```

310 PROCinitSound:PROCdecl:PROCassem
320 mcode=code+code!0
330 addObject=code+code!4
340 makeSound=code+code!8
350 code!(code!12)=data
360 data!heapPointer=0
370 PROCgenRoids(roidSize,3):ENDPROC
380 DATA 5,0,0,40,1,20,-60,1,-20,20
390 DATA 1,-20,-20,1,20,60
400 DEF PROCgenRoids(SX,NX):LOCAL RX
410 FOR RX=0 TO NX-1:IF RND(2)=1 THEN
420 X%=RND(100)-50:Y%=RND(1024)-1
430 IF RND(2)=1 X%+=1280
440 ELSE
450 Y%=RND(100)-50:X%=RND(1280)-1
460 IF RND(2)=1 Y%+=1024
470 ENDIF
480 PROCaddObject(roidType,X%,Y%,RND(3
1)-16,RND(31)-16,SX,&7FFFFFFF)
490 NEXT:ENDPROC
500 DEF PROCaddObject(A%,B%,C%,D%,E%,F%,G%)
510 LOCAL B%,C%,D%,E%,F%:B%=B*&10000
520 C%=C*&10000:D%=D*&10000
530 E%=E*&10000:F%=F*&10000
540 CALL addObject:ENDPROC
550 DEF PROCinitSound:SOUNDON:VOICES4
560 *ChannelVoice 1 Percussion-Snare
570 *ChannelVoice 2 Percussion-Medium
580 *ChannelVoice 3 Percussion-Soft
590 *ChannelVoice 4 WaveSynth-Beep
600 READ sounds%
610 DIM soundTable sounds%*8
620 FOR S%=0 TO sounds%-1:READ C%,A%,P%,D%
630 soundTable!(S%*8)=(A%<<16)OR(C%AND
&FFFF)
640 soundTable!(S%*8+4)=(D%<<16)OR(P%AND
&FFFF):NEXT:ENDPROC
650 DATA 4,1,-7,0,16,2,-7,0,16
661 DATA 3,-7,0,1,4,-15,200,2
670 DEF PROCgameInit
680 numLives=3:data!score=0
690 message=-1:REPEAT:*FX21
700 PROCdoScreen:UNTIL INKEY=32
710 level%=0:new=TRUE:bonus=5000
720 data!heapPointer=0:ENDPROC
730 DEF PROCinitScreen
740 IF data!shipOffset=-1 OR new THEN
750 PROCaddObject(shipType,640,512,0,0
,0,&7FFFFFFF)
760 IF NOTnew numLives-=1
770 ENDIF
780 IF data!roidCount=0 OR new THEN
790 level%+=1
800 PROCgenRoids(roidSize,2+level%)
810 ENDIF:nextMiss=0:new=FALSE
820 message=FALSE:ENDPROC
830 DEF PROCdoScreen
840 LOCAL TX:TX=TIME+4
850 SYS OS.Byte,112,screen%

```

```

860 CLS:PROCkeys:PROCtext
870 CALL mcode:PROCdisplay
880 REPEAT UNTIL TIME>TX
890 WAIT:SYS OS.Byte,113,screen%
900 screen%=screen%MOD2+1
910 ENDP
920 DEF PROCkeys:*FX21
930 IF !FNship=-1 ENDP
940 IF INKEY=98 PROCturn(angInc)
950 IF INKEY=67 PROCturn(-angInc)
960 IF INKEY=1 PROCaccel(shipAng-PI/4,
2)
970 IF INKEY=74 PROCfire(shipAng) ELSE
nextMiss=0
980 IF INKEY=56 REPEATOSCLI"FX21":UNTI
L NOT GET
990 PROCaccel(shipAng-PI/4,0):ENDPROC
1000 DEF PROCturn(inc):shipAng+=inc
1010 LOCAL K%,Q%,X%,Y%,sin,cos
1020 sin=SIN(shipAng):cos=COS(shipAng)
1030 FOR K%=0 TO shipPts-1:Q%=pts%+K%*3*4
1040 Q%!=s%(K%,0):X%=s%(K%,1)
1050 Y%=s%(K%,2):Q%!=X%*cos+Y%*sin
1060 Q%!=X%*sin-Y%*cos:NEXT:ENDPROC
1070 DEF FNship=data+objectHeap+data!sh
ipOffset*objSize
1080 DEF PROCaccel(Ang,v):v=v*&10000
1090 LOCAL X,Y,sin,cos:P%=FNship
1100 sin=v*SIN(Ang):cos=v*COS(Ang)
1110 X=P%+objXvec:Y=P%+objYvec
1120 P%+objXvec=(X+cos+sin-X/32)

```

This is one of hundreds of  
programs now available  
FREE for downloading on  
**MicroLink**

```


1130 P%+objYvec=(Y+sin-cos-Y/32)
1140 ENDP
1150 DEF PROCdisplay:LOCALP%,x%,y%
1160 IF data!shipOffset>-1 P%=FNship:IF
!P%>-1 ELSE ENDP
1170 x%=P%!4>>16:y%=P%!8>>16
1180 sin=SIN(shipAng)*20
1190 cos=COS(shipAng)*20
1200 data!shipX1=(x%+2*sin)<<16
1210 data!shipY1=(y%-2*cos)<<16
1220 data!shipX2=(x%+cos-sin)<<16
1230 data!shipY2=(y%+sin+cos)<<16
1240 data!shipX3=(x%-cos-sin)<<16
1250 data!shipY3=(y%-sin+cos)<<16
1260 ENDP
1270 DEF PROCtext
1280 PRINTTAB(36,0)"ArcRoids";
1290 PRINTTAB(1,1)"Score:";data!score
1300 IF data!score>hiscore hiscore=data
!score
1310 PRINTTAB(60,1)"High score:";hiscore
1320 IF data!score>bonus THEN
1330 numLives+=1:bonus+=bonusInc
1340 SOUND 4,-15,150,8
1350 ENDP
1360 PRINTTAB(1,2)STRING$(numLives,CHR$
255);
1370 CASE message OF
1380 WHEN-1:PRINTTAB(30,12)"Press space
to start"
1390 WHEN 1:PRINTTAB(36,12)"Level ";lev
el%+1
1400 WHEN 2:PRINTTAB(36,12)"Game Over"
1410 OTHERWISE
1420 ENDCASE:ENDPROC
1430 DEF PROCfire(Ang)

```

```

1440 IF data!shipOffset=-1 ENDP
1450 IF data!numMiss>=maxMiss ENDP
1460 IF TIME>nextMiss THEN
1470 LOCAL P%,s,x,y,px,py,vx,vy
1480 LOCAL mpx,mpy,mvx,mvy:P%=FNship
1490 px=P%+objXcrd>>16
1500 py=P%+objYcrd>>16
1510 vx=P%+objXvec>>16
1520 vy=P%+objYvec>>16
1530 mpx=px+pts%!4:mpy=py+pts%!8
1540 sin=SIN(Ang-PI/4)
1550 cos=COS(Ang-PI/4):s=22
1560 mvx=vx+s*cos+s*sin
1570 mvy=vy+s*sin-s*cos
1580 PROCaddObject(missType,mpx,mpy,mvx
,mvy,0,28)
1590 nextMiss=TIME+17:data!score-=1
1600 AX=2:CALL makeSound
1610 data!numMiss+=1
1620 ENDP:ENDPROC
1630 DEF PROCwait(t):t=TIME+t:REPEAT
1640 PROCdoScreen:UNTILTIME>t:ENDPROC
1650 DEF FNmessage:LOCAL TX:wait=300
1660 IF data!roidCount=0 THEN
1670 TX=1
1680 ELSE
1690 IF numLives<=0 TX=2 ELSE TX=0
1700 ENDP:TX=TX
1710 DEF PROCdecl:Link=14:sp=13
1720 DIM data &1000
1730 P%=0:O%=data:[OPT 6
1740 .objType EQU 0:.objXcrd EQU 0
1750 .objYcrd EQU 0:.objXvec EQU 0
1760 .objYvec EQU 0:.objParm EQU 0
1770 .objTime EQU 0:]::objSize=P%
1780 FOR pass=4 TO 6 STEP 2
1790 P%=0:O%=data:[OPT pass
1800 .heapPointer EQU 0
1810 .soundPointer EQU 0:soundTable
1820 .shipPointer EQU 0:pts%
1830 .removeTemp EQU 0
1840 .collideTemp EQU 0
1850 .numMiss EQU 0
1860 .score EQU 0
1870 .shipOffset EQU 0
1880 .roidCount EQU 0
1890 .shipX1 EQU 0:.shipY1 EQU 0
1900 .shipX2 EQU 0:.shipY2 EQU 0
1910 .shipX3 EQU 0:.shipY3 EQU 0
1920 .Random EQU 0:RND
1930 .gpbuffer FNbytes(32,pass)
1940 .objectTemp FNbytes(objSize,pass)
1950 .newRoidTemp FNbytes(objSize,pass)
1960 .objectHeap FNbytes(maxObjects*ob
jSize,pass)
1970 ]:NEXT:ENDPROC
1980 DEF FNbytes(size,pass):P%+=size
1990 IF (pass AND 4) THEN O%+=size
2000 =""
2010 DEF PROCassem
2020 DIM code 800:P%=code
2030 REPEAT READ a$:!P%=EVAL("&"+a$)
2040 P%+=4:UNTIL a$="END":ENDPROC
2050 DATA 10,FC,47C
2060 DATA 4A4,E92D4000,EB000002
2070 DATA EB000040,EB0000E5,E8BD8000
2080 DATA E92D4000,EB0000D1,E25A0001
2090 DATA 4A00000F,E028BA99,E898007F
2100 DATA E0811003,EB000021,E0822004
2110 DATA EB000025,E2566001,E888007F
2120 DATA 5AFFFFF4,E3500003,59C1014
2130 DATA 2411001,58C1014,E3E00000
2140 DATA E5880000,EAFFFFED,E3E00000
2150 DATA E58C001C,E3A00000,E58C0020
2160 DATA E59CE000,E3A07000,E1A0A000

```

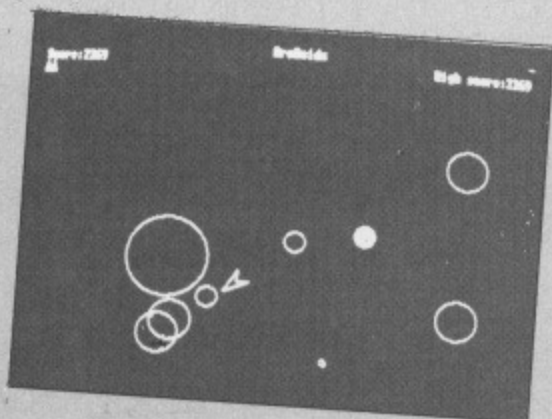

Turn to Page 110 ▶



## Computers and Upgrades

|                               |              |
|-------------------------------|--------------|
| Archimedes 305                | £669.00 (a)  |
| Archimedes 305 Mono System    | £759.00 (a)  |
| Archimedes 305 Colour System  | £919.00 (a)  |
| Archimedes 310                | £835.00 (a)  |
| Archimedes 310 Mono System    | £895.00 (a)  |
| Archimedes 310 Colour System  | £1055.00 (a) |
| Archimedes 310M               | £895.00 (a)  |
| Archimedes 310M Mono System   | £955.00 (a)  |
| Archimedes 310M Colour System | £1115.00 (a) |
| Archimedes 440                | £2529.00 (a) |
| Archimedes 440 Mono System    | £2589.00 (a) |
| Archimedes 440 Colour System  | £2749.00 (a) |

**NEW FOR 1989 - SPECIAL PACKAGE PRICES  
AND DEALS ON ALL ARCHIMEDES - 0%  
FINANCE, SOFTWARE etc.  
PHONE OUR SALES STAFF FOR DETAILS**

|   |                  |
|---|------------------|
| Archimedes podule backplane   | £39.00 (d)       |
| Archimedes ROM podule   | £59.00 (d)       |
| Archimedes I/O podule   | £85.00 (d)       |
| Archimedes Midi add-on to I/O podule  | £39.00 (e)       |
| Archimedes Midi podule  | £69.00 (d)       |
| Master 128  | £369.00 (a)      |
| Master Compact  | From £310.00 (a) |
| Master Turbo Upgrade  | £110.00 (c)      |
| Master 512 Upgrade  | £95.00 (c)       |
| Master 128 Eeprom Cartridge   | £11.00 (c)       |
| Master 128 Dust Cover   | £4.50 (e)        |
| Compact RS 232 Interface  | £26.00 (c)       |
| Compact TV Modulator  | £26.00 (e)       |
| 1770 Disc Interface   | £41.00 (d)       |
| ADFS ROM (B+ or B with 1770)  | £25.00 (e)       |
| B+64 64K Upgrade  | £30.00 (d)       |
| Trade in your old Model B against a new Master 128,<br>Master Compact or Archimedes |                  |
| Cambridge Computers Z88   | £244.00 (a)      |
| Z88 PSU   | £8.65 (d)        |
| 128K RAM  | £43.00 (e)       |
| 128K Eprom  | £43.00 (e)       |

ATARI & COMMODORE - Now available  
Phone for latest offers

## Printers (Dot Matrix)

|  |             |
|--|-------------|
| Citizen 120D 80col/120cps + 25cps NLO                | £130.00 (a) |
| Citizen MSP15E 136col/160cps + 40cps NLO             | £230.00 (a) |
| Citizen MSP40 80col/200cps + 50cps NLO               | £300.00 (a) |
| Citizen MSP45 136col/200cps + 50cps NLO              | £390.00 (a) |
| Citizen MSP50 80col/250cps + 60cps NLO               | £390.00 (a) |
| Citizen MSP55 136col/250cps + 60cps NLO              | £515.00 (a) |
| Citizen HQP40 24pin 80col/200cps + 60cps LQ          | £369.00 (a) |
| Citizen HQP45 24pin 136col/200cps + 60cps LQ Special | £360.00 (a) |
| Star LC10 120cps + 30cps NLO                         | £199.00 (a) |
| Star ND10 80col/180cps + 45cps NLO                   | £320.00 (a) |
| Star ND15 136col/180cps + 45cps NLO                  | £380.00 (a) |
| Star NR10 80col/240cps + 60cps NLO                   | £395.00 (a) |
| Star NR15 136col/240cps + 60cps NLO                  | £460.00 (a) |
| Star LC24-10 80col/142cps + 47cps LQ 24pin           | £305.00 (a) |

## Printers (Laser)

|                                   |              |
|-----------------------------------|--------------|
| Citizen Overture 110+ 10pages/min | £1390.00 (a) |
| Star Laser Printer 8.8 pages/min  | £1700.00 (a) |

All laser printers with 1 year on site maintenance

## AMX Mouse and Software

|                       |            |
|-----------------------|------------|
| AmX Mouse + Super Art | £50.00 (d) |
| AMX Pagemaker         | £37.00 (d) |
| Extra Extra           | £21.00 (e) |
| Mouse Mat             | £4.34 (e)  |

## Disc Drives

|   |                   |
|---|-------------------|
| Mitsubishi Drives                         |                   |
| Single DS 40/80T                          | £96.00 (a)        |
| Single DS 40/80T inc PSU                  | £111.00 (a)       |
| Dual DS 40/80T                            | £189.00 (a)       |
| Dual DS 40/80T inc PSU                    | £209.00 (a)       |
| Dual DS 40/80T inc PSU & Pinth            | £214.00 (a)       |
| 20Mb Winchester                           | £449.00 (a)       |
| Combination 3.5 5.25 Winchester available | Phone for details |
| 2 year Warranty on all Drives             |                   |



**COMPUTING**  
BUSINESS SYSTEMS • HARDWARE  
SOFTWARE • VIDEO SYSTEMS  
MEDIA SUPPLIES  
OFFICIAL DOMESDAY DEALER  
APPROVED ECONET DEALER



ACORN APPROVED DEALER

**Phone 0602 787923**

## Discs

|  |            |
|--|------------|
| Discs 5.25" (Boxed in 10's Lifetime guarantee) |            |
| 3M744 SS/DD 48TPI                              | £8.00 (d)  |
| 3M745 DS/DD 48TPI                              | £9.00 (d)  |
| 3M747 DS/DD 96TPI                              | £13.00 (d) |

Add £1 for plastic library case

|  |            |
|--|------------|
| B & S Label 96TPI in see through LIB. Case DS/DD | £10.00 (d) |
| Disc Cleaning Kit (state 5.25" or 3.5")          | £5.00 (d)  |
| 3.5"   |            |
| 3M 35SS SS/DD (Box of 10)                        | £13.00 (d) |
| 3M 35DS DS/DD (Box of 10)                        | £16.00 (d) |
| B & S Label DS/DD                                | £13.00 (d) |

## Lockable Anti-Static 5.25" Storage Cases

|                   |            |
|-------------------|------------|
| 50 Disc Capacity  | £8.00 (d)  |
| 100 Disc Capacity | £10.00 (d) |

## Monitors

All Monitors include BBC Lead

|  |             |
|--|-------------|
| BM 7502 (Green) Hi-Res Mono Monitor with Audio               | £69.00 (a)  |
| Philips Colour Monitor RGB, Composite Video, Audio in Linear |             |
| RGB Green Screen SwitchableBBC/IBM Compatible CM8833         | £220.00 (a) |
| High Screen ST88 Monitor Spec as Philips CM8833              | £195.00 (a) |
| Philips Multisync CM8873                                     |             |
| CGA/EGA/PGA Compatible                                       | £520.00 (a) |

Ideal for use with Acorn Archimedes computers.

|   |             |
|---|-------------|
| Microvitec  |             |
| 1431 (Metal or Plastic Case please specify) Std. Res. | £184.00 (a) |
| 1451 (Metal or Plastic Case please specify) Med Res.  | £229.00 (a) |
| 1441 (Metal or Plastic Case please specify) High Res. | £379.00 (a) |
| 1431 AP Metal Case RGB and CV/Audio Std. Res.         | £209.00 (a) |
| 1451 AP Metal Case only RGB and CB Audio Med. Res.    | £259.00 (a) |
| TILT and SWIVEL Stands for Plastic Case Only          | £19.00 (a)  |
| Pinth   |             |
| BBC B Single  | £11.00 (c)  |
| BBC Master Single                                     | £12.00 (c)  |
| BBC Master with Shelf                                 | £22.00 (b)  |

UK Customers: Please add 15% VAT to all prices (including carriage).  
Government and educational establishments official orders welcomed.  
When ordering please enclose a cheque or postal order for the appropriate amount, UK Carriage Rates (a) £8.00 - courier insured delivery (b) £3.50 (c) £2.50 (d) £1.50 (e) £1.00. All prices are correct at time of going to press. All offers are subject to availability, all prices are subject to change without prior notification and are available on request. Current price list is available on request. Goods normally despatched on receipt of order.

We are Licensed Credit Brokers (Please call for written details)  
£1000 instant credit available - No deposit required. APR 32.1%

**B & S COMPUTING (NOTT) LTD**  
THE LENTON BUSINESS CENTRE  
LENTON BOULEVARD  
NOTTINGHAM NG7 2BY  
PHONE: 0602 787923

## ROM Boards

|                         |            |
|-------------------------|------------|
| ATPL Sideways Model B   | £35.00 (d) |
| ATPL Sideways Model B+  | £31.00 (d) |
| Viglen Spare Cartridges | £2.50 (e)  |

## Peartree Products

|                                      |            |
|--------------------------------------|------------|
| MR5000 Master ROM Cartridge          | £8.95 (e)  |
| MR6000 Master ROM Cartridge          | £11.95 (e) |
| MR7200 Master RAM Cartridge          | £33.95 (e) |
| MR8000 Master RAM Cartridge          | £49.95 (e) |
| MR3000 Mini ROM Board BBC B only     | £15.95 (e) |
| MR4300 Mini ROM/RAM Board BBC B only | £39.95 (e) |
| MR4800 Mini RAM Board BBC B only     | £89.95 (d) |

## Printer Ribbons and Accessories

|  |            |
|--|------------|
| Epson LX 86 (Compat)                             | £2.50 (e)  |
| Epson MX 80/RX 80/FX80/FX85 (Compat)             | £3.00 (e)  |
| Juki 5510/Citizen MSP 20 (Compat)                | £3.00 (e)  |
| Citizen 120D/LSP10                               | £3.75 (e)  |
| Taxan 810/Canon (Compat)                         | £3.75 (e)  |
| Juki 6100 Multistrike                            | £2.30 (e)  |
| Tally MT85 Fabric                                | £5.00 (e)  |
| Tally MT85 Carbon                                | £7.00 (e)  |
| Printer lead 1.5m B/B+/M128/ELK +1               | £6.00 (e)  |
| Printer lead 1.5m Compact                        | £8.00 (e)  |
| Printer lead 1.8m IBM or Compatible + Archimedes | £10.00 (d) |
| 80col Printer Stand with Paper shelves           | £29.00 (c) |
| Printer Switch Box 2 Way "T" Switch              | £34.00 (c) |

## Modems

|   |             |
|---|-------------|
| All Modems inc BBC Lead                     |             |
| Miracle WS2000                              | £95.00 (c)  |
| Miracle WS4000 Hayes compatible             | £144.00 (c) |
| Pace Nightingale + Commstar II              | £94.00 (c)  |
| Pace Commstar II ROM                        | £28.00 (e)  |
| Pace Linnet                                 | £124.00 (c) |
| Pace Series 4 2123S                         | £230.00 (a) |
| 50ft. Telephone Extn. Cable on Wind up Reel | £9.50 (d)   |

## Software

|                         |            |
|-------------------------|------------|
| Acorn Soft              |            |
| Micro Prolog            | £50.00 (d) |
| Logo                    | £44.00 (d) |
| View Printer Driver (D) | £8.00 (e)  |
| Lisp                    | £33.00 (e) |
| View Professional       | £75.00 (c) |
| Viewsheet               | £37.00 (d) |
| View Spell (80T only)   | £29.00 (d) |
| View Index              | £10.00 (e) |
| Word Plus (Arch)        | £75.00 (c) |
| Computer Concepts       |            |
| Interword               | £39.00 (d) |
| Interchart              | £26.00 (d) |
| Mega 3                  | £75.00 (c) |
| Wordwise                | £30.00 (c) |
| ISO Pascal              | £42.00 (d) |
| BCPL                    | £39.00 (d) |
| Comal                   | £32.00 (d) |
| Hi View                 | £37.00 (d) |
| View 3.0                | £39.00 (d) |
| View Store              | £37.00 (d) |
| View Plot               | £21.00 (e) |
| Overview                | £69.00 (c) |
| Logistix (Arch)         | £95.00 (d) |

All latest Archimedes Software (inc. Games) - Now in stock

|   |            |
|---|------------|
| Mirrorsoft                                      |            |
| Fleet Street Editor                             | £31.00 (d) |
| Clare   |            |
| Fontwise +                                      | £16.00 (e) |
| Artisan (Arch)                                  | £31.00 (e) |
| VINE MICRO REPLAY (State MC and Disc interface) | £30.00 (e) |

NB It is essential to state machine and 40/80T  
when ordering software

## Books (No VAT on Books)

|  |            |
|--|------------|
| Master Ref. Manuals Pt1                      | £14.00 (d) |
| Advanced Master Ref. Manual (Bray & Dickens) | £19.95 (d) |
| Lisp   | £8.00 (e)  |
| BCPL   | £14.00 (d) |
| View 3                                       | £9.00 (e)  |
| Archimedes Ref. Manual                       | £29.95 (d) |
| Arm Assembly Language Manual                 | £12.95 (e) |
| Mastering View, Viewsheet and Viewstore      | £12.95 (e) |
| Understanding Interword                      | £6.50 (e)  |
| View A Dabhand Guide                         | £12.95 (e) |
| Z88 Computing                                | £9.95 (e)  |
| Forth  | £8.00 (e)  |
| View Guide                                   | £6.00 (e)  |
| View Sheet                                   | £9.00 (e)  |
| ISO Pascal                                   | £8.00 (e)  |
| Into View                                    | £6.00 (e)  |
| View Store                                   | £9.00 (e)  |
| Replica III                                  | £11.00 (e) |
| Artisan Support                              | £16.00 (e) |

## Fanfold Paper and Labels

|   |            |
|---|------------|
| 2000 x 1 Part 60gm 11 x 9.5" Micro Perf.    | £12.00 (c) |
| 1000 x 1 Part 85gm 11 x 9.5" Micro Perf.    | £9.00 (c)  |
| 1000 x 1 Part 90gm "Perfect" A4 Micro Perf. | £12.00 (b) |
| 1000 89mm x 36mm Labels                     | £4.00 (d)  |
| 1000 89mm x 49mm Labels                     | £6.00 (d)  |
| 1000 102mm x 36mm Labels                    | £5.00 (d)  |

Please state Single or Twin Row, when ordering Labels





## ◀ From Page 108

2170 DATA E25EE001,458C7000,48BD8000  
2180 DATA E8BB007F,E3700001,AFFFFF9  
2190 DATA E8AA007F,E3500001,58C701C  
2200 DATA E2877001,E3500002,59C0020  
2210 DATA 2800001,58C0020,EAFFFFF0  
2220 DATA E3510656,C2411517,C1A0F00E  
2230 DATA E3710719,B2811517,E1A0F00E  
2240 DATA E3520647,C242264D,C1A0F00E  
2250 DATA E3720719,B282264D,E1A0F00E  
2260 DATA E92D5FFF,EB00009B,E35A00C8  
2270 DATA 8BD9FFF,E028BA99,E888007F  
2280 DATA E28AA001,E58CA000,E8BD9FFF  
2290 DATA E92D4000,EB000092,E25AA001  
2300 DATA 48BD8000,E58CA010,E028BA99  
2310 DATA E898007F,E3500001,A000003  
2320 DATA E3500003,A000025,E59CA010  
2330 DATA EAF0FFF4,E59CA000,E028BA99  
2340 DATA E25AA001,4AFFFFF9,E028BA99  
2350 DATA E898007F,E3500002,13500005  
2360 DATA 1AFFFFF7,E28CE07C,E88E007F  
2370 DATA E28C0024,EB00005B,BA000005  
2380 DATA E28C002C,EB000058,BA000002  
2390 DATA E28C0034,EB000055,AAFFFFEC  
2400 DATA E59C007C,E3500005,A000004  
2410 DATA E3A00000,EB0000B0,E3A0A014  
2420 DATA E92D0400,EA00001C,E3A00003  
2430 DATA EB0000AB,E59C1018,E2811C02  
2440 DATA E58C1018,E3E00000,E5880000  
2450 DATA EAF0FFDC,E28C8060,E888007F

2460 DATA E59CA000,E25AA001,4AFFFFD4  
2470 DATA E028BA99,E898007F,E3500002  
2480 DATA 1AFFFFF9,E28CE07C,E88E007F  
2490 DATA E28C0064,EB000037,CAFFFFF4  
2500 DATA E59C1014,E2411001,E58C1014  
2510 DATA E3A0A007,E92D0400,E3A00001  
2520 DATA EB000090,E3E00000,E5880000  
2530 DATA E59CA010,E02EBA99,E58E0000  
2540 DATA E3A00064,E0400845,E59C1018  
2550 DATA E0811000,E58C1018,E1A0A8C5  
2560 DATA E28C807C,E898007F,E35A000C  
2570 DATA B00000F,A000004,E1A0580A  
2580 DATA EB000015,EBFFFF9D,EB000013  
2590 DATA EBFFFF9B,E8BD0400,E25AA001  
2600 DATA AFFFFAC,EB00000E,EB00003A  
2610 DATA E1A0E20,E2866002,E3A00004  
2620 DATA EBFFFF92,EAFFFFF6,E92D4000  
2630 DATA EB000033,E2000003,E3500003  
2640 DATA EB000003,E3A00064,E3A00005  
2650 DATA EBFFFF89,E8FD8000,E92D4001  
2660 DATA E1A00003,EB000029,E1A035C0  
2670 DATA E1A00004,EB000026,E1A045C0  
2680 DATA E8BD8001,E92D48E0,E1A0B000  
2690 DATA E1A00845,EB00000C,E1A07000  
2700 DATA E59B0000,E0400001,E1A0840  
2710 DATA EB000007,E1A06000,E59B0004  
2720 DATA E0400002,E1A0840,EB000002

2730 DATA E0866000,E1560007,E8BD88E0  
2740 DATA E92D5800,E1A0B000,E1A0C000  
2750 DATA E0000C9B,E8BD9800,E92D5FFF  
2760 DATA E28C1040,E3A0201F,EF020028  
2770 DATA E1A00001,E1A01002,EF020046  
2780 DATA EF020003,E8BD9FFF,E28FCF4A  
2790 DATA E59CC000,E28CB098,E59CA000  
2800 DATA E3A0901C,E1A0F00E,E92D4006  
2810 DATA E1A02000,E3A00001,E28C1040  
2820 DATA EF000007,E5910001,E59C103C  
2830 DATA E02003E1,E02008E2,E58C003C  
2840 DATA E8BD8006,E92D4000,EBFFFFEC  
2850 DATA E3A0901C,E25AA001,48BD8000  
2860 DATA E8BB007F,E1A01841,E1A02842  
2870 DATA E08FF100,F1A00000,EAFFFFF7  
2880 DATA EA000003,EA00000B,EA000011  
2890 DATA EA000017,EA000019,E3A00004  
2900 DATA EF000045,E59C3008,E3A04005  
2910 DATA E8B30007,EF000045,E2544001  
2920 DATA 1AFFFFF8,EAFFFFE9,E3A00004  
2930 DATA EF000045,E1A01845,E3A02000  
2940 DATA E3A00091,EF000045,EAFFFFE2  
2950 DATA E3A00004,EF000045,E1A01000  
2960 DATA E3A02000,E3A00091,EF000045  
2970 DATA EAFFFFDB,E3A00045,EF000045  
2980 DATA EAFFFFD8,E3A00004,EF000045  
2990 DATA E3A01008,E3A02000,E3A00099  
3000 DATA EF000045,EAFFFFD1,E92D5007  
3010 DATA E28FC01C,E59CC000,E59CC004  
3020 DATA E1A02180,E79C0002,E2822004  
3030 DATA E79C1002,EF040186,E8BD9007  
3040 DATA CB94,0,0,END



|              |              |               |               |               |               |               |               |
|--------------|--------------|---------------|---------------|---------------|---------------|---------------|---------------|
| 10 = 00      | 390 = 772B 3 | 770 = 8E1 E   | 1150 = AD79 F | 1530 = 9048 8 | 1910 = 03B8 E | 2290 = 1006 E | 2670 = 61AA 7 |
| 20 = 00      | 400 = 2B4A C | 780 = EDFC D  | 1160 = C158 3 | 1540 = D0BB 8 | 1920 = DF55 2 | 2300 = A981 0 | 2680 = 5193 0 |
| 30 = 00      | 410 = FDC3 2 | 790 = 8B1E 1  | 1170 = D74C D | 1550 = 2F2F 1 | 1930 = F2E2 B | 2310 = 7A42 2 | 2690 = 366B 5 |
| 40 = BA90 0  | 420 = 7788 0 | 800 = E77C 7  | 1180 = 8FC7 C | 1560 = CB30 4 | 1940 = E453 4 | 2320 = 18D3 0 | 2700 = 9A7B A |
| 50 = 1012 6  | 430 = B61D F | 810 = C3C2 F  | 1190 = A4A5 B | 1570 = 8F8B 2 | 1950 = F3A4 6 | 2330 = DB5A 1 | 2710 = 9E54 1 |
| 60 = D94D 0  | 440 = 18C0 A | 820 = E2F5 D  | 1200 = C410 1 | 1580 = ED25 4 | 1960 = 97F6 6 | 2340 = A254 6 | 2720 = 35EC A |
| 70 = 40F 6   | 450 = 3656 D | 830 = CAC D   | 1210 = A833 3 | 1590 = 8DAE 3 | 1970 = 953B F | 2350 = 3438 D | 2730 = 3684 A |
| 80 = A4B4 B  | 460 = 30E1 E | 840 = FE93 F  | 1220 = DBC8 6 | 1600 = D6A0 A | 1980 = 4A35 4 | 2360 = 5D07 E | 2740 = 771E 3 |
| 90 = 457 D   | 470 = 8E1 C  | 850 = 2AEA 0  | 1230 = E3FC 9 | 1610 = 1BFC 7 | 1990 = 74C6 A | 2370 = 800F 8 | 2750 = 5415 2 |
| 100 = 8926 1 | 480 = D3D9 8 | 860 = F439 4  | 1240 = A492 D | 1620 = 6377 1 | 2000 = E350 5 | 2380 = 1024 2 | 2760 = 55BF A |
| 110 = 2CF8 7 | 490 = E531 E | 870 = 3BAB 0  | 1250 = 9CA6 4 | 1630 = 6650 E | 2010 = B623 3 | 2390 = 4075 F | 2770 = E0CC 9 |
| 120 = 5577 4 | 500 = 8A1D C | 880 = 64BD 4  | 1260 = ED0F 4 | 1640 = EFE9 1 | 2020 = 9CA9 6 | 2400 = 3F90 1 | 2780 = E19B 2 |
| 130 = 72B4 D | 510 = 5091 9 | 890 = 2F2F C  | 1270 = A245 1 | 1650 = 21FB B | 2030 = 15C2 9 | 2410 = 316C 8 | 2790 = D5F8 1 |
| 140 = 561A 7 | 520 = 3E94 D | 900 = 3F78 D  | 1280 = 98A4 A | 1660 = FABA 9 | 2040 = 2859 C | 2420 = 7FF3 3 | 2800 = 6B61 0 |
| 150 = AFCA 8 | 530 = E23D D | 910 = ED0F F  | 1290 = 703 6  | 1670 = 8747 8 | 2050 = AA11 6 | 2430 = 6F58 5 | 2810 = B8E6 1 |
| 160 = 4AA4 9 | 540 = 72EC D | 920 = D89C D  | 1300 = 617C 3 | 1680 = 18C0 8 | 2060 = 56AE C | 2440 = 7BB5 F | 2820 = DA2C 3 |
| 170 = B3D4 3 | 550 = AE15 C | 930 = 9618 D  | 1310 = 7F40 1 | 1690 = 7BFF 1 | 2070 = 3FE6 9 | 2450 = FAEF 1 | 2830 = 2F2B 7 |
| 180 = B6C2 F | 560 = 1DB6 9 | 940 = F066 D  | 1320 = 4842 B | 1700 = 67C8 D | 2080 = 3CD8 7 | 2460 = D4C1 A | 2840 = 1F18 E |
| 190 = 3341 F | 570 = C0EB F | 950 = 94B5 F  | 1330 = E000 B | 1710 = 6280 7 | 2090 = 4F2 4  | 2470 = 5D6B 2 | 2850 = 7785 A |
| 200 = 7D A   | 580 = FBD6 8 | 960 = E858 4  | 1340 = 3DD D  | 1720 = E764 9 | 2100 = 64F1 E | 2480 = 2939 B | 2860 = AFA9 3 |
| 210 = 26B6 A | 590 = C1F8 D | 970 = 5C54 6  | 1350 = 8E1 3  | 1730 = 134F F | 2110 = 84A7 D | 2490 = 58F1 C | 2870 = DF02 C |
| 220 = 8416 4 | 600 = 2F82 C | 980 = F722 8  | 1360 = 3368 3 | 1740 = 86E1 C | 2120 = 4216 1 | 2500 = CEE7 7 | 2880 = 1F7E 6 |
| 230 = 1870 2 | 610 = 19A 6  | 990 = EDA8 8  | 1370 = 8E12 0 | 1750 = BEFB B | 2130 = CC35 3 | 2510 = F5BF 2 | 2890 = 19B4 C |
| 240 = E010 D | 620 = 8B1E B | 1000 = 9D42 5 | 1380 = 3A3B 2 | 1760 = E440 3 | 2140 = 2D08 2 | 2520 = 26FD B | 2900 = 21F9 4 |
| 250 = A82D 0 | 630 = F5D7 9 | 1010 = FDD3 8 | 1390 = 2251 B | 1770 = 14CA C | 2150 = 6969 3 | 2530 = 4E0D E | 2910 = D96F 9 |
| 260 = 5FF1 6 | 640 = E331 5 | 1020 = B5DE 6 | 1400 = 5D5 9  | 1780 = A1D2 7 | 2160 = B9F0 8 | 2540 = FDC0 2 | 2920 = 7A1A 5 |
| 270 = BD11 F | 650 = 86C6 F | 1030 = D112 6 | 1410 = 8F78 4 | 1790 = F161 6 | 2170 = FB1C 9 | 2550 = 9911 4 | 2930 = BDF3 0 |
| 280 = 8654 9 | 651 = C296 2 | 1040 = 94BB B | 1420 = D157 6 | 1800 = 326C 1 | 2180 = 39C9 9 | 2560 = 88CC C | 2940 = CA3 8  |
| 290 = 56F6 B | 670 = A0EA 5 | 1050 = 10D5 F | 1430 = 2157 1 | 1810 = D9B6 5 | 2190 = 65CB 0 | 2570 = 1E5B 5 | 2950 = 2094 6 |
| 300 = ADF7 1 | 680 = D4C6 1 | 1060 = AB73 B | 1440 = 948 9  | 1820 = 3314 C | 2200 = 2C5D 0 | 2580 = 2C11 9 | 2960 = D4E9 1 |
| 310 = F088 F | 690 = D9C8 A | 1070 = 6E87 0 | 1450 = C693 4 | 1830 = 286D F | 2210 = 2F5B 7 | 2590 = 5A38 A | 2970 = CA66 2 |
| 320 = 689F 9 | 700 = 3BC3 3 | 1080 = 3978 7 | 1460 = 342 E  | 1840 = C0AB 4 | 2220 = 9181 8 | 2600 = 5B2C 4 | 2980 = 59D6 5 |
| 330 = 4081 2 | 710 = F945 0 | 1090 = 78A7 1 | 1470 = 53AC F | 1850 = 5603 8 | 2230 = 7A42 9 | 2610 = FFA F  | 2990 = 27D1 7 |
| 340 = BBEB 3 | 720 = 90A3 9 | 1100 = 2A06 0 | 1480 = 4D32 6 | 1860 = F066 0 | 2240 = 75E9 5 | 2620 = ED80 6 | 3000 = B34F C |
| 350 = F10F D | 730 = D56D 4 | 1110 = 3E86 C | 1490 = B9A0 2 | 1870 = 4858 0 | 2250 = 7586 D | 2630 = BA38 7 | 3010 = 390 3  |
| 360 = 89B9 4 | 740 = 9C8B A | 1120 = EBA2 6 | 1500 = 5657 F | 1880 = D432 E | 2260 = 630B D | 2640 = 6A3C 0 | 3020 = 6209 0 |
| 370 = 8248 5 | 750 = FBCA 4 | 1130 = 2435 B | 1510 = 2021 E | 1890 = 9608 7 | 2270 = F0A7 A | 2650 = DF13 9 | 3030 = D01D 9 |
| 380 = EBD3 7 | 760 = 8A69 C | 1140 = ED0F 3 | 1520 = CFD6 E | 1900 = F160 6 | 2280 = 6889 4 | 2660 = 5C29 D | 3040 = F4A4 4 |




**EXILE** is an even more enjoyable game to play than **ELITE** or **ZARCH**... David Braben (co-author of **Elite**, author of **Zarch**).

**PRIZE COMPETITION**  
Can You Become Exile World Champion?

# EXILE



Leaving the Space Craft



Attacked by a Robot



Shooting the Mischievous Monkeys



Searching for Abandoned Weapons

## Have you the Skill and Cunning to Conquer the World of EXILE?

A Massive Arcade Adventure featuring Characters with Realistic Movements and Actions.

The planet Phoebeus has been taken over by an exiled, evil Genetic Engineer, named Triax. In a complex warren of caves, he has built an evil world inhabited by eccentric robots and strange mutated creatures, such as blue monkeys, giant wasps and sharp-toothed eyeless maggots. On the planet surface and around the caves are scattered the debris of a previous mission, and maybe some of the members of that ill-fated venture still remain.

Have you the skill and cunning to conquer the evil world of the exile? Are you of elite status? If you take up the challenge, you will have to carefully pick your way through the massive cave system, solving complex puzzles along the way and ruthlessly destroying the alien creatures, until finally you face the evil one himself.

### Each copy of EXILE includes:

- The Exile game programs, including an enhanced version which will run on the BBC Master series and BBC Micros with sideways RAM.
- A Novella, which sets the scene for the Exile game.
- An Instruction Manual.

The game was designed and written by Peter Irvin and Jeremy Smith.

BBC Micro Cassette ..... £12.95 Acorn Electron Cassette ..... £12.95  
BBC Micro 5 1/4" Disc ..... £14.95 BBC Master Compact 3 1/2" Disc ..... £19.95

(Compatible with the BBC B, B+ and Master Series computers)

Please make cheques payable to "Superior Software Ltd".

(The screen pictures show the enhanced version of the games.)

**SUPERIOR SOFTWARE**  
Limited

**ACORNSOFT**

(Acornsoft is a registered trademark of Acorn Computers Ltd. Superior Software Ltd is a registered user.)  
Dept. EX1, Regent House, Skinner Lane, Leeds LS7 1AX. Telephone: (0532) 459453

Available from

**WHSMITH**

and all major dealers



24 HOUR TELEPHONE  
ANSWERING SERVICE FOR ORDERS

### OUR GUARANTEE

- All mail orders are despatched within 24 hours by first-class post.
- Postage and packing is free.
- Faulty cassettes and discs will be replaced immediately.

(This does not affect your statutory rights)



# Time and magik

## The trilogy



Interactive fiction  
from **Level 9**

**T**hree of Level 9's most acclaimed adventures – Lords of Time, Red Moon and The Price of Magik – come together in one package. Each has been enhanced and enlarged with more text than ever before – 60,000 mind-expanding words creating magik and mystery round every corner. There's a powerful new parser, and most disc versions include stunning digitised pictures that help to dramatically heighten the atmosphere.

"Three excellent games ... the adventure bargain of the year" – *Your Amiga*, June, '88.

"Each is a classic – so buy it" – *ST Update*, July, '88.



Screen shots from  
Atari ST version

Please tick the format you require:

| £14.95                            | Tape | Disc |
|-----------------------------------|------|------|
| Spectrum 48k/128k                 |      |      |
| Commodore 64/128                  |      |      |
| Amstrad CPC                       |      |      |
| Amstrad CPC, PCW, Spectrum Plus 3 |      |      |
| Atari XL/XE*                      |      |      |
| MSX 64k                           |      |      |
| Apple II*                         |      |      |
| BBC Master (80 track)             |      |      |

| £19.95                        | Disc |
|-------------------------------|------|
| Atari ST                      |      |
| Commodore Amiga               |      |
| Amstrad PC and PC compatibles |      |
| Macintosh                     |      |

Tape versions come with three cassettes in every package

\* Text only

**MANDARIN**  
SOFTWARE

Dealers: Ring Diane O'Brien on 0625 878888 for your free Mandarin Software information pack

☐ I enclose a cheque for £.....(including VAT and p&p) made payable to Mandarin Software

☐ Please debit my Access/Visa card no:

\_\_\_\_\_

Expiry date: \_\_\_\_\_

Signature: \_\_\_\_\_

Name: \_\_\_\_\_

Address: \_\_\_\_\_

Postcode: \_\_\_\_\_

SEND TO: Mandarin Software, Europa House, Adlington Park, Adlington, Macclesfield SK10 4NP



# Archimedes SOFTWARE QUICKIES

## Design by design

### Steve Turnbull analyses a new draughting package

Product: Drawing Board  
Price: £59  
Supplier: Jansons, 93 North Street, Stilton, Peterborough  
PE7 3RR  
Tel: 0733 244702

JANSONS is a new name to the software world and the company's programs show definite innovation. Drawing Board is a simple designers tool with great potential.

The package comes in a simple video cassette-sized box containing just disc, function key strip and three page manual – yes just three – which describes only how to boot the disc, how to transfer anti-alias fonts to your work disc and how to use the online manual.


All Jansons products have an on-screen manual instantly accessible at the touch of the Control key. Page control is via the mouse giving access to the next and last pages, index and exit. The Drawing Board instructions are 88 pages long and well laid out, complete with diagrams and pictures of the program menus.

One problem with this type of system is that it is difficult to proof read and this is demonstrated by a fair number of typos and missing words. However, despite this drawback, it is very easy to follow and it's immensely useful to be able to flip back and forth between manual and working screen.

The main screen consists of a light blue grid, a crosshair mouse pointer, a blue block top left surrounded by a black rectangle and a status line along the bottom. The screen is a window on to a much bigger work area and when the mouse is moved right to an edge the screen scrolls in that direction.

This is where the blue block comes into play: It represents the grid – which is only a single screen in size – and the black rectangle is the viewing window in relation to it. So you can tell where the working area is relative to your current position.

The status line covers such details as the pointer coord-

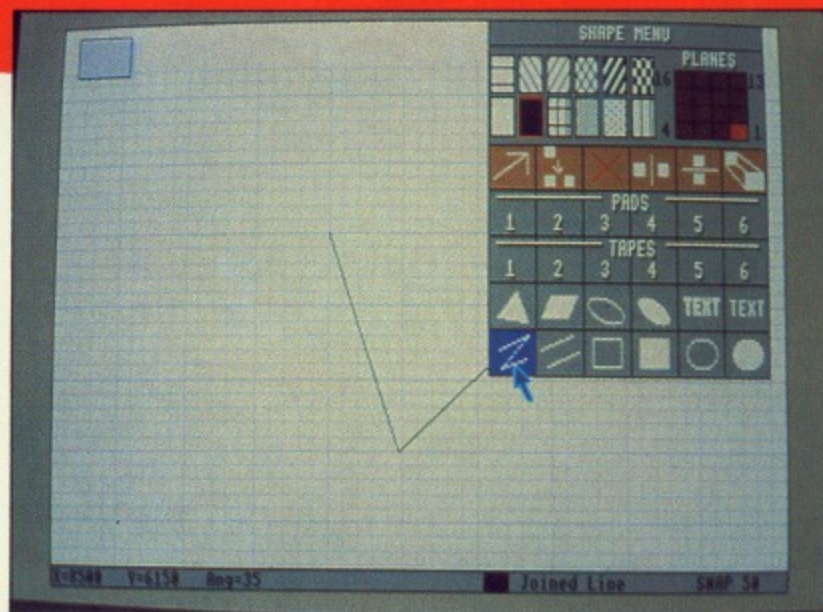

Choosing  
a shape

inates, its angle in relation to a reference point that you can set, current colour, operation and snap value – the axes increments that specified points will snap to. For example with snap at 50 setting a point at 239 will automatically move to 250.

Pressing Menu on the mouse brings up the main menu which gives six options in icon form – file handling, notepad, text, shape, calculator and printer. The file handling gives you the choice of load, save, delete and merge – but no facilities to look at what's on the disc. And the notepad is simply a place to put reminders and information about your current drawing.

The shape option provides access to the most used sub-menu – it would have been better to go to this one first and have a second click for the main menu. The choices here allow you to draw the various built-in geometric shapes provided by the operating system in any colour and pattern – which can be defined. You can also alter the drawing using move, copy, delete, mirror and rescaling options.

The facilities mentioned so far don't demonstrate much difference between this and any other drawing package – but the key is that Drawing Board is object-oriented. This buzzword means that the software does not store the picture

information on screen, but instead records the objects that have been created. For example, in a screen-oriented program, drawing a square puts a number of pixels on the screen and once it's there you can't get rid of it – if you overdraw something you wanted you are stuck.

But an object-oriented program keeps a list of what's been drawn and if you don't like what you've done you can just move or delete it, and the screen can be redrawn. In addition, the working area can occupy much more than just one screen size.


The second major feature of Drawing Board is that objects can be placed on up to 16 separate planes, of which any selection can be on current display – from one to all of them – and can be printed together or separately.

The most obvious application is in circuit board design where you can place components on the grid on one plane and place connections on one or more of the others. By printing out the planes separately you get both the component placement and the circuit design in perfect alignment.

Jansons obviously see this as the best application too and has provided shape options to aid circuit board design – this is a good package just looking for applications.

## Basic graphics

### Teri Paul makes her programming easier

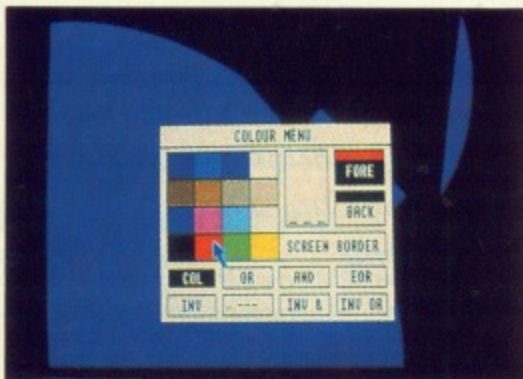

Selecting a new colour

Product: ArclmEd  
Price: £24.95  
Supplier: Jansons, 93 North Street, Stilton, Peterborough  
PE7 3RR  
Tel: 0733 244702

CREATING screens of text and graphics using Basic is a tremendously time-consuming and frustrating business – every time you change one command it usually means that many of the next ones need to be modified to compensate.

ArclmEd – Archimedes Image Editor – is designed to make that particular job easier. Like Drawing Board, the program is primarily another object-oriented designer but without many frills – you get basic shape functions, colour control and a number of rotate and reflect commands are also available on

either the entire or a portion of the screen.

You can load, save and merge the images as you might expect, but with one special addition – the ability to create Basic programs composed of the instructions needed to produce the picture.

This facility is further enhanced by options to allow the saved program to be created as a procedure, with relative – rather than absolute – coordinates, with matrix transformations permitted on every point. You can also select whether or not to include the colour commands.

Unfortunately, and despite the obvious good intentions, I found ArclmEd very difficult to use. The online manual was very handy because the program was hardly intuitive and I had to keep referring to it. In the final analysis I can't decide whether the software really is worthwhile. Jansons clearly use it to help write the manuals – but beyond that I'm not sure.



# WORK OF ART BY VAN GOGH.



## ARTWORK BY PRO·ARTISAN

*Van Gogh. A true master, producing masterpieces with oils and canvas. Had he been painting today who knows what modern miracles he might have taken advantage of. Like **Pro-Artisan**, a computer graphics and image manipulation package. Which combined with Archimedes produces breathtaking graphics all at a movement of a mouse. Bending, shaping, colouring, toning. Giving any artwork the potential to be a **work of art**.*

**PRO·ARTISAN**

THE ART OF GRAPHICS MANIPULATION.

CLARES MICRO SUPPLIES, 98 MIDDLEWICH ROAD, RUDHEATH, NORTHWICH, CHESHIRE CW9 7DA. Tel: 0606 48511



# ZENON

1 or 2 Player Action  
Keyboard or Joysticks



Beaming down to  
start your mission



Alone in the thick  
of the action



Your jetpack boosts you  
away from the Terrapede



Together you can fend off  
attacks from front and rear

## ZENON - You wouldn't dare

Imagine a land so dangerous that only the most heroic of space explorers would dare to tread. A land filled with more evil foes than can possibly be overcome.

### Imagine Zenon .....

Zenon is total arcade action for one or two players. Playing alone is fantastic. Playing simultaneously with a friend is unbelievable.

Beaming down to the surface of Zenon from your intergalactic cruiser immediately puts you into the action amongst a host of deadly androids, meteorites, fireballs, missiles and other unforeseen perils. Set against a background of scrolling stars you must run for your life or boost into the air using your atomically-powered jetpack.

Initially you are armed with only a simple Repeat Laser which you will quickly find inadequate to deal with the sheer volume of enemies. Watch out for the opportunity to grab more powerful weaponry including the Twin-Shot Laser, Atomic Blaster and not forgetting the ultimate weapon - the lethal Machine Laser.

No space explorer has yet reached the heart of Zenon. There are 250 levels to be completed and new inconceivable monstrous androids will try to thwart you as you advance.

No one knows all of the aliens that await you, but many will undoubtedly require several hits to destroy them. Documented proof exists of only a few: the massive Terrapedes (snake-like androids), Orbitroids (giant steel eyes), Roamodrums (walking machines) and various types of Shapeoids; plus Rods, Zebbadoids, Packoids, Duckadrons and Rambodroids.

**Don't go alone.....**

### HOW TO ORDER

Simply fill in the coupon and send with a cheque or postal order to Impact Software.

- ▶ All "ZENONS" despatched by 1st Class Post on same day as order. (Unparalleled Service).
- ▶ Free postage and Packing.

**IMPACT**  
Software

Impact Software  
Neepsend House  
1 Percy St.  
Sheffield S3 8AU  
Tel. (0742) 769950

To: Impact Software, Neepsend House, 1 Percy St., Sheffield, S3 8AU.

(BLOCK CAPITALS PLEASE)

Please send me the following:

ZENON Electron/BBC Cassette @ £4.95

ZENON BBC B/Master 5 1/4" disc @ £4.99

ZENON Master Compact 3 1/2" disc @ £6.95

I enclose a cheque/PO (made payable to  
Impact Software) for

£

Name .....

Address .....

Postcode .....

(N.B. If there are any other games you would also like to order at the same time please see the comprehensive Impact Games Club advert elsewhere in this magazine).



# ARCHIMEDES GAMES

|                                 |              |   |              |
|---------------------------------|--------------|---|--------------|
| <b>Guazer</b> (Impact Software) | <b>11.95</b> | <b>Alerion</b> (Dabs Press)             | <b>12.95</b> |
| <b>Pacmania</b> (Grandslam)     | <b>15.95</b> | <b>Terramex</b> (Grandslam)             | <b>15.95</b> |
| <b>Repton 3</b> (Superior)      | <b>15.95</b> | <b>Zarch</b> (Superior)                 | <b>15.95</b> |
| <b>Rise in Crime</b> (Robico)   | <b>24.95</b> | <b>Hoverbod</b> (Minerva)               | <b>11.95</b> |
| <b>Jet Fighter</b> (Minerva)    | <b>11.95</b> | <b>Missile Control</b> (Minerva)        | <b>11.95</b> |
| <b>Corruption</b> (Rainbird)    | <b>19.95</b> | <b>Conqueror</b> (Superior)             | <b>19.95</b> |
| <b>Fireball</b> (Godax)         | <b>15.95</b> | <b>Enthar Seven</b> (Robico)            | <b>24.95</b> |
| <b>Orion</b> (Minerva)          | <b>11.95</b> | <b>Minotaur</b> (Minerva)               | <b>11.95</b> |
| <b>Freddy's Folly</b> (Minerva) | <b>11.95</b> | <b>Star tracer</b><br>(GEM Electronics) | <b>16.95</b> |

## SUPERFAST SERVICE

### Buy with confidence :

1. Over 300 titles always in stock.
2. Over 98% of orders despatched the day they are received by 1st class post.
3. We immediately replace any faulty games purchased from us.
4. Prices are fully inclusive - nothing else to pay.
5. Plus we'll send you a free copy of our club magazine with lots more games, game reviews and bargains galore.

**Over 10,000 Regular Satisfied Customers Can't Be Wrong!!!**


| TITLE & PUBLISHER  |       | BBC or Electron Cassette | BBC 5 1/4" Disc | Master Compact 3 1/2" Disc                          | TITLE & PUBLISHER     |       | BBC or Electron Cassette  | BBC 5 1/4" Disc | TITLE & PUBLISHER |                           | BBC or Electron Cassette | BBC 5 1/4" Disc | BUDGET CASSETTES<br>BBC B or Electron |               |              |
|--|-------|--------------------------|-----------------|---|-----------------------|-------|---|-----------------|-------------------|---------------------------|--------------------------|-----------------|---------------------------------------|---------------|--------------|
| M = Master Compatible  |       |                          |                 |   | M = Master Compatible |       |   |                 |                   | M = Master Compatible     |                          |                 |                                       |               |              |
| <b>IMPACT SOFTWARE</b> (Discs are BBC B & Master Compatible 40/80) |       |                          |                 |   | <b>A + F</b>          |       |   |                 |                   | <b>ELK ADVENTURE CLUB</b> |                          |                 |                                       |               | <b>ACORN</b> |
| Orbital M  | 4.95  | 5.95                     | 6.95            | Chuckie Egg   | 4.95                  | -     | The Axe of Kolt   | 4.95            | -                 | Starship Quest            | 3.95                     | -               | Magic Mushrooms                       | BBC ONLY 1.99 |              |
| Clobber M  | 4.95  | 4.99                     | 6.95            |   |                       |       |   |                 |                   | Magnetic Moon             | 3.95                     | -               | Snooker                               | BBC ONLY 1.99 |              |
| Zenon M  | 4.95  | 4.99                     | 6.95            | <b>ACORN</b>  |                       |       |   |                 |                   |                           |                          |                 | Starship Command (Elec Only)          | 1.99          |              |
| Cheat It Again, Joe 1  | 2.99  | 4.99                     | -               | Aviator (BBC Only)                                  | 5.95                  | -     | <b>FIREBIRD</b>   |                 |                   |                           |                          |                 | <b>ADDICTIVE</b>                      |               |              |
| Cheat It Again, Joe 2  | 2.99  | 4.99                     | -               | Sphinx Adventure (Elec Only)                        | 4.95                  | -     | Sentinel (BBC Only) M   | 7.25            | 9.50              |                           |                          |                 | Football Manager                      | 2.99          |              |
| Cheat It Again, Joe 3  | 2.99  | 4.99                     | -               | Revs & Revs 4 Tracks (BBC B Only)                   | 4.95                  | 7.95  | Cholo (BBC Only) M  | -               | 15.95             |                           |                          |                 | <b>ALTERNATIVE SOFTWARE</b>           |               |              |
|  |       |                          |                 |   |                       |       |   |                 |                   |                           |                          |                 | Psycestra                             | 1.99          |              |
| <b>SUPERIOR</b>  |       |                          |                 | <b>ASL</b>  |                       |       | <b>GRAND SLAM</b>   |                 |                   |                           |                          |                 | Combat Lynx                           | 1.99          |              |
| Play It Again Sam 6 M  | 7.25  | 9.50                     | 11.50           | Shark M   | 7.25                  | 9.50  | World War 1 (BBC Only) M  | -               | 9.95              |                           |                          |                 | Red Arrows (BBC Only)                 | 1.99          |              |
| Last Ninja M   | 7.25  | 9.50                     | 11.50           | Breakthrough M                                      | 7.25                  | 9.50  |   |                 |                   |                           |                          |                 | Crazy Erbert                          | 1.99          |              |
| Repton Infinity M  | 9.95  | 11.95                    | 15.95           | Impact M  | 7.25                  | 9.50  | <b>GREMLIN GRAPHICS</b>   |                 |                   |                           |                          |                 | Olympic Spectacular                   | 1.99          |              |
| Play It Again Sam 5 M  | 7.25  | 9.50                     | 11.50           | Powerpack 1 or 2 (Elec Only)                        | 5.95                  | -     | Krakout (BBC Only) M  | 7.50            | 11.95             |                           |                          |                 | Soccer Boss                           | 1.99          |              |
| Exile M  | 9.95  | 11.95                    | 15.95           | Ziggy M   | 5.95                  | 8.95  |   |                 |                   |                           |                          |                 | Licence to Kill (Elec Only)           | 1.99          |              |
| By Fair Means or Foul M  | 7.25  | 9.50                     | 11.50           | Ransack M   | 7.50                  | 9.50  | <b>HEWSON</b>   |                 |                   |                           |                          |                 | Video Pinball                         | 1.99          |              |
| Play It Again Sam 4 M  | 7.25  | 9.50                     | 11.50           | Despatch Rider M                                    | 5.95                  | 8.95  | Evening Star M  | 7.50            | 11.95             |                           |                          |                 | Triple Deckers 1 to 10 (each)         | 1.99          |              |
| Play It Again Sam 3 M  | 7.25  | 9.50                     | 11.50           | Thunderstruck                                       | 2.99                  | -     |   |                 |                   |                           |                          |                 | Round Ones                            | 1.99          |              |
| Pipeline M   | 7.25  | 9.50                     | 11.50           | Thunderstruck 2                                     | 2.99                  | 5.95  | <b>HEYLEY SOFTWARE</b> (State 40 or 80 Track) (All BBC Only)                |                 |                   |                           |                          |                 | Mineshaft                             | 1.99          |              |
| Repton Thru Time M   | 5.50  | 6.50                     | 7.50            | Sphere of Destiny M                                 | 5.95                  | 9.50  | The Ultimate Prize M  | -               | 7.95              |                           |                          |                 | Moon Cresta (BBC Only)                | 1.99          |              |
| Barbarian M  | 7.25  | 9.50                     | 11.50           | Omega Orb M   | 4.95                  | 5.95  | The Pirates Peril M   | -               | 7.95              |                           |                          |                 | <b>ATLANTIS</b>                       |               |              |
| Spycat M   | 7.25  | 9.50                     | 11.50           | Graham Gooch Test Cricket M                         | 6.95                  | 9.95  | Dream Time M  | -               | 7.95              |                           |                          |                 | Frankenstein                          | 1.99          |              |
| Quest M  | 7.25  | 9.50                     | 11.50           |   |                       |       | The Taroda Scheme M   | -               | 7.95              |                           |                          |                 | Anarchy Zone                          | 1.99          |              |
| Play It Again Sam 2 M  | 7.25  | 9.50                     | 11.50           | <b>BBC SOFT</b>                                     |                       |       | Stranded M  | -               | 7.95              |                           |                          |                 | Pro - Golf                            | 2.99          |              |
| Bonecruncher M   | 7.25  | 9.50                     | 11.50           | Bismark (BBC Only) M                                | -                     | 13.95 |   |                 |                   |                           |                          |                 | League Challenge                      | 2.99          |              |
| Spellbinder M  | 7.25  | 9.50                     | 11.50           | Black Queen (BBC Only) M                            | -                     | 13.95 | <b>INCENTIVE</b>  |                 |                   |                           |                          |                 | Survivors                             | 2.99          |              |
| Play It Again Sam M  | 7.25  | 9.50                     | 11.50           | White Knight Mk 12 (BBC Only) M                     | -                     | 13.95 | Moon Cresta   | 1.99            | 4.99              |                           |                          |                 | Cops and Robbers                      | 1.99          |              |
| The Life of Repton M   | 5.50  | 6.50                     | 7.50            |   |                       |       |   |                 |                   |                           |                          |                 | Creepy Cave                           | 1.99          |              |
| Elktr M  | 7.25  | 9.50                     | 11.50           | <b>BEAU JOLLY</b>                                   |                       |       |   |                 |                   |                           |                          |                 | Park                                  | 1.99          |              |
| Palace of Magic M  | 7.25  | 9.50                     | 11.50           | Five Star Games 1 (5 games)                         | 7.25                  | -     | <b>LOGOTRON</b>   |                 |                   |                           |                          |                 | Golden Figurine                       | 1.99          |              |
| Repton Around the World M  | 5.50  | 6.50                     | 7.50            | Five Star Games 2 (5 games)                         | 7.25                  | -     | Xor M   | 7.50            | -                 |                           |                          |                 | <b>BLUE RIBBON</b>                    |               |              |
| Crazee Rider M   | 7.25  | 9.50                     | 11.50           | Five Star Games 3 (7 games)                         | 7.25                  | -     |   |                 |                   |                           |                          |                 | Steve Davis Snooker                   | 1.99          |              |
| Codenamed: Droid (Stryker's) M                                     | 7.25  | 9.50                     | 11.50           | Computer Hits 2 (BBC Only) (10 games)               | 4.95                  | -     | <b>LEISURE GENIUS</b>   |                 |                   |                           |                          |                 | 3D Doty                               | 1.99          |              |
| Grand Prix Cons. Set M (BBC only)                                  | 7.25  | 9.50                     | 9.50            | Computer Hits 3 (10 games)                          | 7.25                  | -     | Scrabble (BBC Only)   | 11.50           | 12.95             |                           |                          |                 | Return of R2                          | 1.99          |              |
| Repton 3 M   | 7.25  | 9.50                     | 11.50           | Computer Hits 4 (12 games)                          | 7.25                  | -     | Monopoly (BBC Only)   | 11.50           | 12.95             |                           |                          |                 | Bar Billiards                         | 1.99          |              |
| Revs & 4 Tracks (BBC only) M                                       | 9.95  | 11.95                    | 15.95           | Computer Hits 5 (5 games)                           | 4.95                  | -     |   |                 |                   |                           |                          |                 | Video Card Arcade                     | 1.99          |              |
| Elite M  | 9.95  | 11.95                    | 15.95           |   |                       |       | <b>LOTHLORIAN</b>   |                 |                   |                           |                          |                 | Nightmare Maze                        | 1.99          |              |
| Acorn Hits Vol 1 or 2 M  | 3.99  | 9.50                     | 11.50           | <b>BUGBYTE</b>                                      |                       |       | Roundheads (BBC Only) M   | -               | 9.95              |                           |                          |                 | Ravage                                | 1.99          |              |
| Sup. Coll. 1 or 2 (BBC only) M                                     | 7.25  | 9.50                     | 11.50           | Bugbyte Comp 1 (4 games) M                          | -                     | 6.95  |   |                 |                   |                           |                          |                 | Darts                                 | 1.99          |              |
| Superior Coll. 3 (Elec Only)                                       | 7.25  | -                        | -               | Bugbyte Comp 2 (4 games)                            | -                     | 6.95  | <b>MANDARIN</b>   |                 |                   |                           |                          |                 | Golf                                  | 1.99          |              |
| Speech (BBC Only) M  | 7.25  | 9.50                     | 11.50           | Dunjunz M   | 2.99                  | -     | Lancelot (80 Track Only BBC B with sideways/shadow RAM, B+, Master) M       | -               | 12.95             |                           |                          |                 | <b>BUGBYTE</b>                        |               |              |
| Citadel M  | 7.25  | 9.50                     | 11.50           |   |                       |       | Icarus M  | 7.50            | 9.95              |                           |                          |                 | Monkey Nuts                           | 1.99          |              |
| Ravenskull M   | 7.25  | 9.50                     | 11.50           | <b>CDS</b>  |                       |       | Time and Magik (80 Track Only BBC B with sideways/shadow RAM, B+, Master) M | -               | 12.95             |                           |                          |                 | Roboto                                | 2.99          |              |
| Thrust M   | 7.25  | 9.50                     | 11.50           | Football Director M                                 | 7.50                  | 10.95 |   |                 |                   |                           |                          |                 | Plan B2                               | 2.99          |              |
| Galaforce M  | 7.25  | 9.50                     | 11.50           | Colossus Bridge M                                   | 10.95                 | 12.95 | <b>MARTECH</b>  |                 |                   |                           |                          |                 | Plan B                                | 2.99          |              |
|  |       |                          |                 | Colossus Chess M                                    | 7.50                  | 12.95 | War (BBC Only)  | -               | 4.99              |                           |                          |                 | Hunty Dory                            | 2.99          |              |
| <b>TYNESOFT</b>  |       |                          |                 | Steve Davis Snooker M                               | 1.99                  | 4.99  | <b>MIRRORSOFT</b>   |                 |                   |                           |                          |                 | Urnamans                              | 2.99          |              |
| Summer Olympiad M  | 7.25  | 11.50                    | 11.50           | Brian Clough Football M                             | 7.50                  | 9.50  | Mastermind & Quizmaster   | 5.95            | -                 |                           |                          |                 | Twin Kingdom Valley                   | 2.99          |              |
| Saloon M   | 7.50  | 11.95                    | -               |   |                       |       | Tetris M  | 4.95            | 5.95              |                           |                          |                 | Megarack (BBC Only)                   | 2.99          |              |
| Winter Olympiad '88 M  | 7.50  | 11.95                    | 11.95           | <b>CODA SOFTWARE</b> (State 40 or 80 track)         |                       |       | Spitfire '40 M  | 5.95            | 7.95              |                           |                          |                 | Tennis                                | 2.99          |              |
| Spy vs Spy M   | 7.50  | 11.95                    | 11.95           | Headcoach M   | -                     | 15.95 | Strike Force Harrier  | 4.95            | 6.95              |                           |                          |                 | Cricket                               | 2.99          |              |
| The Big K O M  | 6.50  | 10.50                    | 10.50           | <b>DOCTORSOFT</b>                                   |                       |       |   |                 |                   |                           |                          |                 | Ice Hockey                            | 2.99          |              |
| Boulderdash M  | 7.50  | 11.95                    | 11.95           | Phantom Combat M                                    | 2.99                  | 4.99  | <b>MOSIAC</b>   |                 |                   |                           |                          |                 | Starforce 7                           | 2.99          |              |
| Indoor Sports M  | 7.50  | 11.95                    | 11.95           |   |                       |       | Yes Prime Minister M  | 12.95           | 16.95             |                           |                          |                 | Squeakiser                            | 2.99          |              |
| Phantom M  | 6.50  | 10.50                    | 10.50           | <b>DOMARK</b>                                       |                       |       |   |                 |                   |                           |                          |                 | Skyhawk                               | 2.99          |              |
| Oxbridge M   | 6.50  | -                        | -               | Empire Strikes Back (BBC Only) M                    | 7.25                  | 9.95  | <b>ROBICO</b> (State 40 or 80 Track when ordering discs)                    |                 |                   |                           |                          |                 | Dunjunz                               | 2.99          |              |
| Commonwealth Games M   | 6.50  | 10.50                    | 10.50           | Not a Penny More (BBC Only) M                       | 11.95                 | 15.95 | Enthar Seven M  | -               | 15.95             |                           |                          |                 | <b>DOCTORSOFT</b>                     |               |              |
| Future Shock M   | 7.50  | 11.95                    | 11.95           | Star Wars M   | 7.25                  | 9.95  | Island of Xaan (BBC Only) M   | 7.95            | 10.95             |                           |                          |                 | Phantom Combat                        | 2.99          |              |
| Microvalue (4 games)   | 3.99  | -                        | -               | Trivial Pursuits (All BBC Only) :- Genius Edition M | 12.50                 | 15.95 | Rick Hanson Trilogy M   | 17.95           | 20.95             |                           |                          |                 | <b>ELITE</b>                          |               |              |
| Microvalue 2 (4 games) ) Elec                                      | 3.99  | -                        | -               | Young Players M                                     | 12.95                 | 16.95 | Project Thesius M   | 7.95            | 10.50             |                           |                          |                 | Commando                              | 2.99          |              |
| Microvalue 3 (4 games) ) Only                                      | 3.99  | -                        | -               | Baby Boomer M                                       | 7.50                  | -     | Myerom M  | 7.95            | 10.50             |                           |                          |                 | Airwolf (BBC Only)                    | 1.99          |              |
| Microvalue Gold  | 3.99  | -                        | -               | Bulls Eye (BBC Only)                                | 7.50                  | -     | The Hunt M  | 7.50            | 10.95             |                           |                          |                 | <b>GREMLIN GRAPHICS</b>               |               |              |
| <b>GODAX</b>   |       |                          |                 | Countdown (BBC Only)                                | 7.50                  | -     | Village of Lost Souls M   | 7.50            | 10.50             |                           |                          |                 | Football of the Year                  | 2.99          |              |
| Skirmish M   | 5.95  | 5.95                     | 7.95            | Treasure Hunt (BBC Only)                            | 7.50                  | 10.95 |   |                 |                   |                           |                          |                 | <b>THE MICRO SELECTION</b>            |               |              |
| Kourtyard M  | 5.95  | 5.95                     | 7.95            | Blockbusters (BBC Only)                             | 7.50                  | -     | <b>TOPOLOGIKA</b>   |                 |                   |                           |                          |                 | Thai Boxing (Elec Only)               | 1.99          |              |
|  |       |                          |                 |   |                       |       | (Text Adventures 51/4" state 40 or 80 tracks)                               |                 |                   |                           |                          |                 | Fight Path 737 (Elec Only)            | 1.99          |              |
| <b>DATABASE SOFTWARE</b>   |       |                          |                 | <b>ELITE</b>  |                       |       | Return to Doom M  | -               | 10.95             |                           |                          |                 | <b>PLAYERS</b>                        |               |              |
| Mini Office (Elec Only)  | 4.95  | -                        | -               | Paperboy M  | 7.50                  | -     | Kingdom of Hamill M   | -               | 9.50              |                           |                          |                 | Joe Blade                             | 1.99          |              |
| Starquake (BBC Only) M   | 7.50  | 9.50                     | -               | <b>EPIC SOFTWARE</b>                                |                       |       | Countdown to Doom M   | -               | 9.50              |                           |                          |                 | Joe Blade 2                           | 1.99          |              |
| Mini Office 2 (BBC B ONLY)   | 12.95 | 14.95                    | -               | The Lost Crystal M                                  | 9.95                  | 11.95 | Achelon M   | -               | 9.50              |                           |                          |                 | <b>ROCOCHET</b>                       |               |              |
| Mini Office 2 (Master Disc)  | -     | 15.95                    | 17.95           |   |                       |       | Philosopher's Quest M   | -               | 9.50              |                           |                          |                 | Beech Head (BBC Only)                 | 2.99          |              |

## BUDGET CASSETTES BBC B or Electron

|                               |      |  |
|-------------------------------|------|--|
| <b>ACORN</b>                  |      |  |
| Magic Mushrooms BBC ONLY      | 1.99 |  |
| Snooker BBC ONLY              | 1.99 |  |
| Starship Command (Elec Only)  | 1.99 |  |
| <b>ADDICTIVE</b>              |      |  |
| Football Manager              | 2.99 |  |
| <b>ALTERNATIVE SOFTWARE</b>   |      |  |
| Peycacia                      | 1.99 |  |
| Combat Lynx                   | 1.99 |  |
| Red Arrows (BBC Only)         | 1.99 |  |
| Crazy Erbert                  | 1.99 |  |
| Olympic Spectacular           | 1.99 |  |
| Soccer Boss                   | 1.99 |  |
| Licence to Kill (Elec Only)   | 1.99 |  |
| Video Pinball                 | 1.99 |  |
| Triple Deckers 1 to 10 (each) | 1.99 |  |
| Round Ones                    | 1.99 |  |
| Mineshaft                     | 1.99 |  |
| Moon Cresta (BBC Only)        | 1.99 |  |
| <b>ATLANTIS</b>               |      |  |
| Frankenstein                  | 1.99 |  |
| Anarchy Zone                  | 1.99 |  |
| Pro - Golf                    | 2.99 |  |
| League Challenge              | 2.99 |  |
| Survivors                     | 2.99 |  |
| Cops and Robbers              | 1.99 |  |
| Creepy Cave                   | 1.99 |  |
| Parik                         | 1.99 |  |
| Golden Figurine               | 1.99 |  |
| <b>BLUE RIBBON</b>            |      |  |
| Steve Davis Snooker           | 1.99 |  |
| 3D Doty                       | 1.99 |  |
| Return of R2                  | 1.99 |  |
| Bar Billards                  | 1.99 |  |
| Video Card Arcade             | 1.99 |  |
| Nightmare Maze                | 1.99 |  |
| Ravage                        | 1.99 |  |
| Darts                         | 1.99 |  |
| Golf                          | 1.99 |  |
| <b>BUGBYTE</b>                |      |  |
| Monkey Nuts                   | 1.99 |  |
| Robots                        | 2.99 |  |
| Plan B2                       | 2.99 |  |
| Plan B                        | 2.99 |  |
| Hunty Dory                    | 2.99 |  |
| Urnamans                      | 2.99 |  |
| Twin Kingdom Valley           | 2.99 |  |
| Megarock (BBC Only)           | 2.99 |  |
| Tennis                        | 2.99 |  |
| Cricket                       | 2.99 |  |
| Joe Hockey                    | 2.99 |  |
| Starforce 7                   | 2.99 |  |
| Squeakalier                   | 2.99 |  |
| Skyhawk                       | 2.99 |  |
| Dunjunz                       | 2.99 |  |
| <b>DOCTORSOFT</b>             |      |  |
| Phantom Combat                | 2.99 |  |
| <b>ELITE</b>                  |      |  |
| Commando                      | 2.99 |  |
| Airwolf (BBC Only)            | 1.99 |  |
| <b>GREMLIN GRAPHICS</b>       |      |  |
| Footballer of the Year        | 2.99 |  |
| <b>THE MICRO SELECTION</b>    |      |  |
| Thai Boxing (Elec Only)       | 1.99 |  |
| Flight Path 737 (Elec Only)   | 1.99 |  |
| <b>PLAYERS</b>                |      |  |
| Joe Blade                     | 1.99 |  |
| Joe Blade 2                   | 1.99 |  |
| <b>RICOCHET</b>               |      |  |
| Beach Head (BBC Only)         | 2.99 |  |
| Gisburnes Castle              | 1.99 |  |
| Brian Jacks Super Challenge   | 1.99 |  |
| Geoff Capes Strongman         | 1.99 |  |
| Galactic Patrol               | 1.99 |  |
| Vegas Jackpot                 | 1.99 |  |
| Eddie Kid Jump Challenge      | 1.99 |  |
| Knightmare (BBC Only)         | 1.99 |  |
| <b>SUPERIOR/BLUE RIBBON</b>   |      |  |
| Karate Combat                 | 2.99 |  |
| Percy Penguin                 | 1.99 |  |
| Mr Wiz                        | 1.99 |  |
| Repton                        | 2.99 |  |
| Deathstar                     | 1.99 |  |
| Tempest                       | 1.99 |  |
| <b>TOP TEN</b>                |      |  |
| Warehouse                     | 2.99 |  |
| Peter Scott Trilogy           | 1.99 |  |
| Grid Iron                     | 1.99 |  |



## CLOGGER

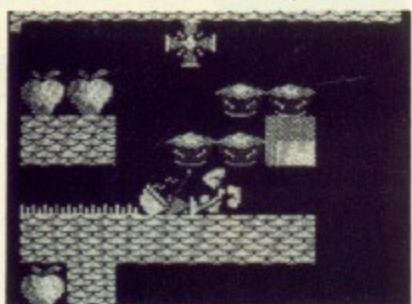

(IMPACT SOFTWARE)

A brand new arcade/adventure which will appeal to all age groups. 18 superb levels are featured in this new cult game which will enthral you for weeks to come. Travel back in time to a strange mystical land and see if you have the talent to become a Master Clogger.

Elec/BBC Cassette £4.95  
BBC B/Master 5 1/4" Disc £4.99

## ZENON



(IMPACT SOFTWARE)

Total arcade action for 1 or 2 players. 250 levels of terrifying opponents face you (and maybe a friend). Run for your life or use jetpacks as you dodge the deadly hordes. Grab more powerful weapons, capture the energy cells and blast your way along. Zenon is keyboard and joystick compatible for the ultimate in arcade action.

Elec/BBC Cassette £4.95  
BBC B/Master 5 1/4" Disc £4.99

## ORBITAL



Release Date:-  
5th January 1989

(IMPACT SOFTWARE)

A game to drive you crazy. Guise Ozzy round the 12 levels to collect all the marbles. Use the transporters to avoid the deadly Octopodes. Those who complete all 12 levels will need to be ready for the even tougher challenge that follows.  
IT'S MADNESS!!!!

Elec/BBC Cassette £4.95  
BBC B/Master 5 1/4" Disc £5.95

## CHEAT IT AGAIN, JOES 1, 2 & 3

### Volume 1

Includes cheats for :-

Elite  
Citadel  
Ravenskull  
Star Wars  
Bonecruncher  
Thrust  
Repton 1 & 2  
and many more..

### Volume 2

Includes cheats for :-

Repton 3  
Around The World  
Life of Repton  
Codename: Droid  
Icarus  
Impact  
Spycat  
and many more..

### Volume 3

Includes cheats for :-

Shark  
Repton Thru Time  
Skirmish  
Barbarian  
Empire Strikes Back  
Splitfire '40  
Anarchy Zone  
and many more..

The 'Joes' are a selection of cheats which can make games a lot easier to play. Each of the 3 volumes contains cheats for 20 games. These give you such things as infinite lives, immortality, access to higher levels etc. etc.  
"Exceptional value for money"  
The Micro User & Electron User

PRICES OF EACH VOLUME

Electron Cassettes £2.99  
BBC 'B' Cassettes £2.99  
BBC B/Master 5 1/4" Discs £4.99



## FREE HELPSHEETS/MAPS

Spend over £4 on games and you may choose ONE of the following helpsheets/solutions and maps absolutely FREE.

Spend over £10 and you may choose any TWO FREE :-

|  |  |  |
|--|--|--|
| Impact Jokes.....(Lots of jokes)       | Exile.....(Helpsheet)                    | Hoverbod.....(Passwords + cheats)        |
| Impact Jokes 2.....(Lots more jokes)   | Terramex.....(Solution)                  | Frakl.....(Helpsheet)                    |
| Shark.....(map)                        | The Hobbit.....(Solution)                | Thunderstruck 2.....(Solution + map)     |
| Spycat.....(Solution + map)            | Citadel.....(Solution + map)             | Kourtyard.....(Helpsheet + map)          |
| Plan B.....(Solution + map)            | Plan B2.....(Solution + map)             | Dunjunz.....(Helpsheet + 25 maps)        |
| Zarch.....(Helpsheet)                  | Spy Vs Spy.....(Helpsheet)               | Gisbomes Castle.....(Solution + map)     |
| Stryker's Run.....(Electron map)       | Spellbinder.....(Solution + maps)        | Palace of Magic.....(Solution + map)     |
| Ziggy.....(Solution + maps)            | Elktr.....(Solution + maps)              | Impact.....(Helpsheet + passwords)       |
| Future Shock.....(Solution + map)      | Paperboy.....(Helpsheet)                 | Icarus.....(Helpsheet + maps)            |
| Airwolf.....(Solution + map)           | Twin Kingdom Valley.....(Solution + map) | Sphinx Adventure.....(Solution + map)    |
| Return of R2.....(Map + tips)          | Omega Orb.....(Solution + map)           | Anarchy Zone.....(Helpsheet + passwords) |
| Bug Eyes 2.....(Map)                   | Elite.....(Helpsheet + tips)             | Repton 2.....(Helpsheet + 18 maps)       |
| Myorem.....(Solution)                  | Tarzan.....(Solution + map)              | Bonecruncher.....(All passwords + maps)  |
| The Lost Crystal.....(Solution + maps) | Stranded.....(Solution)                  | Skirmish.....(Helpsheet)                 |
| Imogen.....(Solution + 16 maps)        | Codename: Droid.....(Solution + map)     | Cholo.....(Solution)                     |
| Quest.....(Solution + map)             | Thunderstruck.....(Solution + map)       | Quest for Freedom.....(Solution + map)   |
| Ravenskull.....(Solution + 4 maps)     | Suds.....(Solution)                      | Kayleth.....(Solution)                   |
| Last of the Free.....(Solution + map)  | Philosopher's Quest.....(Solution + map) | Starquake.....(Helpsheet)                |
| Stardrifter.....(Helpsheet + map)      | Rick Hanson.....(Solution)               | Rick Hanson 2.....(Solution)             |

## HOW TO ORDER

Simply fill in this coupon and send a cheque or postal order to Impact Software.

- \* All games despatched by 1st class post.
- \* FREE postage and packing (Overseas add £1).
- \* Despatch normally same day as order.
- \* Minimum orders £2.50.



ACCESS ORDERS WELCOME.

Impact Software

Impact Software  
Neepsend House  
1 Percy St  
Sheffield S3 8AU  
Tel: (0742) 769950

IMPACT Software

Impact Software,  
Neepsend House,  
1 Percy Street,  
Sheffield S3 8AU

Access Hotline:  
(0742) 769950

### IMPACT NEWSLINE

For the very latest games news ring:  
0898 654334  
Off Peak Rate: 25p per minute  
Peak Rate: 35p per minute  
(If you are using your parents phone please ask for their permission first)

Please send me the following :

| TITLE | FORMAT          | COMPUTER | PRICE |
|-------|-----------------|----------|-------|
|       | (Cassette etc.) |          |       |

Cost of helpsheets.....

TOTAL COST..... £

If you are ordering with Access write your number below :

|  |  |  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|--|--|

(BLOCK CAPITALS PLEASE)

Name.....

Address.....

Postcode.....

Please send me FREE helpsheets/solutions/maps for the following games (from those above)

1.....(Orders over £4)

2.....(Orders over £10)



**PRIZE COMPETITION**  
Can You Design the  
Best Archimedes  
Repton 3 Screen?

**Archimedes**

**PRIZE COMPETITION**  
Can You Become the  
Archimedes Repton 3  
World Champion?

# REPTON 3



*The Life Of  
Repton*



*Around the World in 40 Screens*



Repton 3



Around the World  
in 40 Screens



The Life of  
Repton



Repton Thru Time

## ARCHIMEDES REPTON 3 The Thinking Man's Arcade Game

The Repton series of games is the most successful software ever published for the BBC Micro/Electron computers and has aptly been described as "the thinking man's arcade game".

Now, a massive enhanced version is available for the Archimedes, comprising four complete games:

- Repton 3
- The Life of Repton
- Around the World in 40 Screens
- Repton Thru Time

Enhanced game features include:

- A choice of four tunes
- A position Save/Recall facility

In addition, the software includes a sophisticated **Screen Editor** and a **Character Editor** with a choice of 16 colours from a total of 4096 hues. An enhanced feature is that you can design new screens on the Screen Editor and immediately test them by entering the game section.



The Screen Editor  
Redesigning an Egyptian Repton screen



The Character Editor  
Rory McRepton brandishing his claymore!

For the **Archimedes** computer: **£19.95** (on 3½" disc)

**SUPERIOR  
SOFTWARE**  
Limited

(Acornsoft is a registered trademark of Acorn Computers Ltd. Superior Software Ltd is a registered user.)  
Dept AR1, Regent House, Skinner Lane, Leeds LS7 1AX. Telephone: (0532) 459453

**ACORN**SOFT

Please make  
all cheques  
payable to  
"Superior  
Software Ltd".




24 HOUR TELEPHONE  
ANSWERING SERVICE FOR ORDERS

### OUR GUARANTEE

- All mail orders are despatched within 24 hours by first-class post.
- Postage and packing is free.
- Faulty cassettes and discs will be replaced immediately. (This does not affect your statutory rights).





*Richard  
Phillips  
explores the  
Risc method  
of file typing*

# The modular approach

**O**NE of the most useful elements of the Archimedes operating system is file typing but, unfortunately there aren't many commands to deal with it. This program implements a module called **FileType** giving two new commands to make the whole thing more flexible.

Type in the listing using the Basic Editor — with tabs set to three spaces — then save it. Ensure you've made no errors using the Archimedes Get it Right! routine published in the January issue of *The Micro User*. When you run the program it automatically saves the module as **FileType**. Now load it with:

```
*RMLoad FileType
```

or just double-click it from the DeskTop. If you get *No room in RMA* just quit whatever program you're in to the Arthur supervisor and then issue the **RMLoad** command.

Once loaded you have access to the new commands, **\*FileType** and **\*ShowTypes**. The former allows you to set the type of a particular file using the text name of the type or the hex code rather than just the code needed with built-in **\*SetType**. The **\*ShowTypes** provides you with a list of the currently allocated file types.

This means that you can issue the following command to set the file type of a file *abcd* to *Text* with:

```
*FileType abcd Text
```

which is a great improvement on:

```
*SetType abcd &FFF
```

**\*Showtypes** produces a list of the currently allocated file types and their appropriate hexadecimal number. You can specify a range of file types to be checked in three ways:

```
*ShowTypes <start value>
*ShowTypes <start value> <end value>
*ShowTypes <start value> <+offset>
```

The arguments can be expressed as either a number or a string. For instance:

```
*ShowTypes &899
```

will list all the file types from **&899** up to **&FFF**.

```
*ShowTypes Palette Data
```

lists from **Palette (&FED)** to **Data (&FFD)** and:

```
*ShowTypes Palette +4
```

gives those from **Palette (&FED)** to **Palette+4**

(**&FF0**). The program also sets up two file types called *Asm* and *Batch* which have the values **&EEE** and **&899**.

You can add your own file types by placing the text and associated number into a table called *types*. This is quite simple — you just put a new command after line 3600 like this:

```
3605 FNtyp(&xxx,'new_type')
```

You are allowed a maximum of eight characters for the type name.

If you want the operating system to do anything with your file types you must setup the corresponding **Alias\$@LoadType** and/or **Alias\$@RunType** system variables.

You can use the **\*Show** command to see the way in which these variables are initialised by the rest of the system. For example, to make the operating system run the **ASM** program when a file with type *Asm* is double-clicked from the DeskTop:

```
*Set Alias$@RunType_EEE Asm %0
```

Note that there should be a trailing space after the **%0**.

If we have a file called *abcd* which is being **\*RUN** — by whatever method — the operating system looks through its list of run Aliases then replaces the **\*RUN abcd** with:

```
*Asm abcd
```

The **%0** adds any parameters after the **\*RUN abcd** to the **\*ASM abcd**.

```
10 REM >TypeSource
20 REM by Richard M. Phillips
30 REM (c) The Micro User
40 REM Set TAB to indent 3 spaces
50 MODE0
60 sp = 13:fromReg = 0
70 toReg = 2:lenReg = 8
80 typReg = 8:tmpReg = 9
90 countReg = 9:n$=CHR$0
100 t$=CHR$9:x$=CHR$10:r$=CHR$13
110 varTypString = 0
120 setTyp = &12
130 getFileTyp = 18
140 lookUpFileType = &42
150 overflowFlag = 1<<28
160 DIM code &1000
170 FOR pass = 4 TO 7 STEP 2
180 0%=code:P%=0
190 [opt pass
200 EQU0 0
```

Turn to Page 120 ►



## ◀ From Page 119

```

210 EQU initialisationCode
220 EQU 0
230 EQU serviceCall
240 EQU titleString
250 EQU helpString
260 EQU keywordTable
270 EQU 0:EQU 0
280 EQU 0:EQU 0
290 .titleString
300 EQU "FileType"+n$:ALIGN
310 .helpString
320 EQU "FileType"+t$+"1.00 (1 Jan 1989)"+"n$:ALIGN
330 .keywordTable
340 EQU "FileType"+n$:ALIGN
350 EQU fileType
360 EQU 800020302
370 EQU fileTypeSyntax
380 EQU fileTypeHelp
390 EQU "ShowTypes"+n$
400 ALIGN
410 EQU showTypes
420 EQU 800020300
430 EQU showTypesSyntax
440 EQU showTypesHelp
450 EQU "Author"+n$
460 ALIGN
470 EQU 0:EQU 0:EQU 0
480 EQU authorHelp:EQU 0

```

```

490 ALIGN
500 .fileTypSyntax
510 EQU Syntax: *FileType <filename> <file type> +n$:ALIGN
520 .fileTypHelp
530 EQU *FileType provides a simple way to 'SetType' a file. Spaces can be inserted into the file type by using the OS variable <Space>. +r$+Syntax: *FileType <filename> <file type> +n$:ALIGN
540 .showTypsSyntax
550 EQU Syntax: *ShowTypes [start] [<+>offset end]+n$:ALIGN
560 .showTypsHelp
570 EQU *ShowTypes provides a list of allocated file types. Spaces can be inserted into the file type by using the OS variable <Space>. +r$+Syntax: *ShowTypes [start] [<+>offset end]+n$
580 ALIGN
590 .authorHelp
600 EQU "FileType was written by Richard M. Phillips."+"r$+(c) The Micro User."+"n$:ALIGN
610 .initialisationCode
620 STMF (sp)!,{r14}
630 ADR r0,spaceHack
640 ADR r1,spaceValue
650 MOV r2,#1

```

```

660 MOV r3,#0
670 MOV r4,#varTypString
680 SWI "XOS.SetVarVal"
690 LDMFD (sp)!,{r14}
700 ORRVSS pc,r14,#overflowFlag
710 MOV pc,r14
720 .spaceHack
730 EQU "Space"+n$:ALIGN
740 .spaceValue
750 EQU &a0:EQU 0:ALIGN
760 .fileTyp
770 STMF (sp)!,{r14}
780 ADR toReg,filename
790 BL getArg
800 ADR toReg,typBuf
810 BL getArg
820 STMF (sp)!,{toReg}
830 MOV r0,#10
840 ADR r1,typBuf
850 SWI "XOS.ReadUnsigned"
860 STRVC r2,typCounter
870 LDMFD (sp)!,{toReg}
880 BVC setNumericFileType
890 CMP lenReg,#8
900 ADRGT r0,lenErr
910 LDMGTFD (sp)!,{r14}
920 ORRGTS pc,r14,#overflowFlag
930 BLNE padTyp
940 BL findTyp
950 LDMVSFD (sp)!,{pc}
960 .setNumericFileType

```

## Mijas Software

Bringing the new software world to YOUR BBC Micro

First with a Relocatable Assembler and Linker first with Source-Level Debug. Now bring you a new 'C' Compiler

### Updated ! Exciting ! Fast ! 'C' Compiler

A NEW Software system for real performance and productivity on YOUR BBC MICRO

Use it for games business or industrial software. Ideal for learning structured programming and compiler techniques

New version 1.5 compiles faster, runs faster and even easier to use on ANY BBC B or Master

Written in 'C' itself for speed and portability

FULL SOURCE-CODE of the 'C' Compiler and libraries with EVERY COPY. Can be modified and re-compiled on any BBC 'B' or MASTER

### Small 'C' v 1.5

A true compiler. Does not use p-code

Full Source-Level Debug

Full I/O and C libraries

Separately compilable source-files

Produces 'stand-alone' programs of minimum size

Full support of BBC Graphics

Screen Mode may be changed at any time.

40+K of Program space even without overlays

Shell ROM image provided giving a 'MAKE' facility.

Use any editor, a simple line editor is included.

Write your own BASIC, PASCAL FORTRAN or Artificial Intelligence Compiler using this 'C' system.

STOP PRESS: Mijas Software can now supply a laser typesetting program for BBC or MASTER written in Small 'C'. Write for details.

Complete System including Assembler Linker, Debug, Shell and utilities in ROM Image format on disk



£50

Ready-blown EPROMS £7.50 each set of 4 £25

From:- Mijas Software, Mijas, Winchester Rd Michdever, Hants SO21 3DG Tel 0962 89 352

Official orders welcome from educational establishments


## Computer Repairs (UK)

2 Austins Place, High Street, Hemel Hempstead, Herts, HP2 5HN. Telephone: 217624




### REPAIRS

Archimedes P.O.R.  
BBC Model B £34.50  
Electron £29.50



### FLIP-OVER FUNCTION STRIP HOLDERS

Each holder comes with 10 clear plastic sleeves. Easily fitted to the BBC or BBC - Master series.

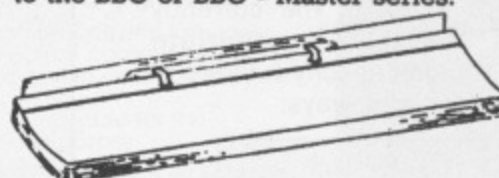

only £6.50

Flip over function strip holder .....£6.50  
Extra sleeves for above .....£0.40 each  
Blank function strip cards.....10 for £1.25  
Function strip design software .....£4.50

#### SPECIAL OFFER

1 holder, 1 disc copy of software and 10 cards.....£10.00  
OR 1 holder, 10 extra sleeves and 10 cards .....£10.00

### <CR> VOLUME CONTROL SWITCH

Hardware volume control switch easily fitted to BBC.....£7.50

We specialise in 2nd user equipment  
Telephone for price.

All prices include post, packing etc. in (G.B.)



```

970 LDR typReg,typCounter
980 LDR tmpReg,initialTyp
990 CMP typReg,#0
1000 BMI argErr
1010 CMP typReg,tmpReg
1020 BGT argErr
1030 BL setFileType
1040 LDMFD (sp!),{pc}
1050 .argErr
1060 ADR r0,invalidErr
1070 LDMFD (sp!),{r14}
1080 ORRS pc,r14,#overflowFlag
1090 .lenErr
1100 EQU 12345678
1110 EQU "File type longer than 8
characters"+n$:ALIGN
1120 .invalidErr
1130 EQU 12345679
1140 EQU "Illegal file type"+n$
1150 ALIGN
1160 .findTyp
1170 STMFD (sp!),{r14}
1180 ADR tmpReg,typBuf
1190 LDMIA tmpReg,{r7,r8}
1200 LDR countReg,initialTyp
1210 .countLoop
1220 MOV r0,#getFileTyp
1230 MOV r2,countReg
1240 SWI "XOS_FSControl"
1250 LDMVSD (sp!),{pc}
1260 CMP r2,r7
1270 CMPEQ r3,r8
1280 BEQ foundFileType
1290 CMP countReg,#0
1300 SUBGE countReg,countReg,#1
1310 BGE countLoop
1320 ADR r0,notFound
1330 LDMFD (sp!),{tmpReg}
1340 ORRS pc,tmpReg,#overflowFlag
1350 .foundFileType
1360 STR countReg,typCounter
1370 LDMFD (sp!),{pc}
1380 .padTyp
1390 MOV r0,ASC(" ")
1400 .padLoop
1410 STRB r0,[toReg],#1
1420 ADD lenReg,lenReg,#1
1430 CMP lenReg,#8
1440 BLT padLoop
1450 MOV pc,r14
1460 .setFileType
1470 STMFD (sp!),{r14}
1480 MOV r0,#setTyp
1490 ADR r1,filename
1500 LDR r2,typCounter
1510 SWI "XOS_File"
1520 LDMFD (sp!),{pc}
1530 .notFound
1540 EQU 1234567a
1550 EQU "Unknown File Type"+n$
1560 ALIGN
1570 .initialTyp
1580 EQU 000000fff
1590 .typCounter
1600 EQU 0
1610 .filename
1620 .buffer:FNDcb(256):ALIGN
1630 .typBuf:FNDcb(256):ALIGN
1640 .showTypes
1650 STMFD (sp!),{r14}
1660 CMP r1,#0
1670 STREQ r1,startTyp
1680 MOVEQ tmpReg,#&ff
1690 ORREQ tmpReg,tmpReg,#&f00
1700 STREQ tmpReg,endTyp
1710 BEQ listTypes

1720 STMFD (sp!),{r1}
1730 ADR toReg,typBuf
1740 BL getArg
1750 STMFD (sp!),{r0}
1760 MOV r0,#10
1770 ADR r1,typBuf
1780 SWI "XOS_ReadUnsigned"
1790 BVC firstNumeric
1800 CMP lenReg,#8
1810 ADRGT r0,lenErr
1820 LDMGTFD (sp!),{countReg,tmpReg
,r14}
1830 ORRGTS pc,r14,#overflowFlag
1840 ADR toReg,typBuf
1850 ADD toReg,toReg,lenReg
1860 BL padTyp
1870 BL findTyp
1880 LDMVSD (sp!),{r1,tmpReg,r14}
1890 ORRVSS pc,r14,#overflowFlag
1900 LDR r2,typCounter
1910 .firstNumeric
1920 LDMFD (sp!),{fromReg}
1930 STR r2,startTyp
1940 LDMFD (sp!),{r1}
1950 CMP r1,#2
1960 MOVNE tmpReg,#&ff
1970 ORRNE tmpReg,tmpReg,#&f00
1980 STRNE tmpReg,endTyp
1990 BNE listTypes
2000 ADR toReg,typBuf
2010 BL getArg
2020 ADR r1,typBuf
2030 LDRB tmpReg,typBuf
2040 CMP tmpReg,ASC("+")
2050 ADDEQ r1,r1,#1
2060 MOVNE tmpReg,#0
2070 MOVEQ tmpReg,#1
2080 SUBEQ lenReg,lenReg,#1
2090 STRB tmpReg,offset
2100 BNE noCopy
2110 MOV tmpReg,lenReg
2120 ADR fromReg,typBuf
2130 .moveLoop
2140 LDRB toReg,[fromReg],#1
2150 STRB toReg,[fromReg]
2160 ADD fromReg,fromReg,#1
2170 SUB tmpReg,tmpReg,#1
2180 CMP tmpReg,#0
2190 BGT moveLoop
2200 STRB tmpReg,[fromReg]
2210 ADR r1,typBuf
2220 .noCopy
2230 MOV r0,#10
2240 SWI "XOS_ReadUnsigned"
2250 BVC secondNumeric
2260 CMP lenReg,#8
2270 ADRGT r0,lenErr
2280 LDMGTFD (sp!),{r14}
2290 ORRGTS pc,r14,#overflowFlag
2300 ADR toReg,typBuf
2310 ADD toReg,toReg,lenReg
2320 BL padTyp
2330 BL findTyp
2340 LDMVSD (sp!),{r14}
2350 ORRVSS pc,r14,#overflowFlag
2360 LDR r2,typCounter
2370 .secondNumeric
2380 LDRB tmpReg,offset
2390 CMP tmpReg,#0
2400 LDRNE countReg,startTyp
2410 ADDNE r2,r2,countReg
2420 STR r2,endTyp
2430 .listTypes
2440 LDR tmpReg,startTyp
2450 CMP tmpReg,#0
2460 ADRMI r0,badErr

2470 LDMMIFD (sp!),{r14}
2480 ORRLTS pc,r14,#overflowFlag
2490 LDR typReg,endTyp
2500 MOV r0,#&ff
2510 ORR r0,r0,#&f00
2520 CMP typReg,r0
2530 CMPLT tmpReg,r0
2540 CMPLT tmpReg,typReg
2550 ADRGT r0,badErr
2560 LDMGTFD (sp!),{r14}
2570 ORRGTS pc,r14,#overflowFlag
2580 SWI "OS_WriteS"
2590 EQU x$r$+"File Types:"+x$r$
2600 EQU x$r$+" Type Text"
2610 EQU x$r$+x$r$+n$:ALIGN
2620 LDR countReg,startTyp
2630 SUB countReg,countReg,#1
2640 .typLoop
2650 ADD countReg,countReg,#1
2660 LDR typReg,endTyp
2670 CMP countReg,typReg
2680 BGT noMoreTypes
2690 MOV r0,#getFileTyp
2700 MOV r2,countReg
2710 SWI "XOS_FSControl"
2720 AND typReg,r2,#&ff
2730 CMP typReg,ASC("8")
2740 BEQ typLoop
2750 STMFD (sp!),{r2,r3}
2760 SWI "OS_WriteS"
2770 EQU "&"+n$:ALIGN
2780 MOV r0,countReg
2790 ADR r1,numberBuf
2800 MOV r2,#9
2810 SWI "XOS_ConvertHex8"
2820 LDMFD (sp!),{r2,r3}
2830 LDMVSD (sp!),{r14}
2840 ORRVSS pc,r14,#overflowFlag
2850 ADD r0,r0,#5
2860 SWI "OS_Write0"
2870 SWI "OS_WriteS"
2880 EQU "+n$:ALIGN
2890 ADR typReg,typBuf
2900 STMIA (typReg!),{r2,r3}
2910 MOV r0,#0
2920 STMIA typReg,{r0}
2930 SUB r0,typReg,#8
2940 SWI "OS_Write0"
2950 SWI "OS_NewLine"
2960 B typLoop
2970 .noMoreTypes
2980 LDMFD (sp!),{pc}
2990 .numberBuf
3000 FNDsd(9):ALIGN
3010 .badErr
3020 EQU 1234567b
3030 EQU "Illegal parameter(s) to
*ShowTypes"+n$:ALIGN
3040 .startTyp:EQU 0
3050 .endTyp:EQU 0
3060 .offset:EQU 0
3070 .serviceCall
3080 CMP r1,#lookUpFileType
3090 MOVNE pc,r14
3100 STMFD (sp!),{r8-r9}
3110 ADR typReg,types
3120 .checkLoop
3130 LDR countReg,[typReg],#4
3140 CMP countReg,#0
3150 LDMMIFD (sp!),{r8-r9}
3160 MOVMI pc,r14
3170 CMP r2,countReg
3180 ADDNE typReg,typReg,#8

```

Turn to Page 122 ►



## ◀ From Page 121

```

3190 BNE checkLoop
3200 LDMIA typReg,{r2,r3}
3210 LDMFD (sp)!,{r8-r9}
3220 MOV r1,#0
3230 MOV pc,r14
3240 .getArg
3250 STMFD (sp)!,{r14}
3260 BL skipSpaces
3270 MOV tmpReg,fromReg
3280 LDRB r1,[fromReg]
3290 BL eoln
3300 CMP r1,#0
3310 LDMEQFD (sp)!,{pc}
3320 .copyLoop
3330 LDRB r1,[fromReg],#1
3340 CMP r1,ASC(" ")
3350 SUBEQ fromReg,fromReg,#1
3360 BEQ copiedArg
3370 AND r1,r1,#&7f
3380 STRB r1,[toReg],#1
3390 BL eoln
3400 CMP r1,#0

```

```

3410 BNE copyLoop
3420 SUB toReg,toReg,#1
3430 .copiedArg
3440 SUB lenReg,fromReg,tmpReg
3450 MOV tmpReg,#0
3460 STRB tmpReg,[toReg]
3470 LDMFD (sp)!,{pc}
3480 .skipSpaces
3490 LDRB r1,[fromReg],#1
3500 CMP r1,ASC(" ")
3510 SUBNE fromReg,fromReg,#1
3520 BEQ skipSpaces
3530 MOV pc,r14
3540 .eoln
3550 CMP r1,#0
3560 CMPNE r1,#13
3570 CMPNE r1,#10
3580 MOVEQ r1,#0
3590 MOV pc,r14
3600 .types
3610 FNtyp(&eee,"Asm")
3620 FNtyp(&899,"Batch")
3630 EQU -1

```

```

3640 J:NEXT
3650 SYS "OS_File",10,"FileType",&FFA,,
code,0X:END
3660 DEF FNdsd(size):LOCAL SX
3670 FOR SX=0 TO size-1
3680 IF (pass AND 4) THEN
3690 !0X=0:0X+=4:PX+=4
3700 ELSE
3710 !PX=0:PX+=4
3720 ENDIF
3730 NEXT:=""
3740 DEF FNdcB(size):LOCAL SX
3750 FOR SX=0 TO size-1
3760 IF (pass AND 4) THEN
3770 ?0X=0:0X+=1:PX+=1
3780 ELSE
3790 ?PX=0:PX+=1
3800 ENDIF
3810 NEXT:=""
3820 DEF FNtyp(typ,typs)
3830 [opt pass
3840 EQU typ
3850 EQU LEFT$(typ$+STRING$(8," ")
8)
3860 J:=0

```



|              |              |               |               |               |               |               |               |
|--------------|--------------|---------------|---------------|---------------|---------------|---------------|---------------|
| 10 = 00      | 500 = 74CA 8 | 990 = 3B3E B  | 1480 = 9194 9 | 1940 = C5C5 3 | 2400 = 50B1 E | 2890 = AB62 5 | 3380 = 45B7 8 |
| 20 = 00      | 510 = A055 9 | 1000 = DC78 E | 1490 = B521 8 | 1950 = 5FE4 F | 2410 = 6723 8 | 2900 = 4CA 4  | 3390 = FF99 9 |
| 30 = 00      | 520 = 17FA E | 1010 = FA8A A | 1500 = A151 A | 1960 = 792A C | 2420 = 2373 8 | 2910 = DE6A 6 | 3400 = 7FA6 B |
| 40 = 00      | 530 = 942A 0 | 1020 = C2E8 E | 1510 = B0E 7  | 1970 = 5DBD 1 | 2430 = 7050 D | 2920 = EBE2 2 | 3410 = 9BD9 4 |
| 50 = FA1B B  | 540 = 22CB 0 | 1030 = 220F A | 1520 = C378 D | 1980 = 4DAF 9 | 2440 = A4F6 7 | 2930 = FA58 6 | 3420 = 3FDC E |
| 60 = 9410 3  | 550 = A50 0  | 1040 = C378 4 | 1530 = DBC2 0 | 1990 = 402D 2 | 2450 = 9E7 D  | 2940 = 858B 7 | 3430 = E336 D |
| 70 = F1DC E  | 560 = 15F9 5 | 1050 = D18F B | 1540 = 609A 9 | 2000 = E343 5 | 2460 = 7EA3 8 | 2950 = ECD 6  | 3440 = 5453 A |
| 80 = 1868 1  | 570 = 96E0 7 | 1060 = 90E8 F | 1550 = C6E6 C | 2010 = 9A68 0 | 2470 = 68B4 C | 2960 = 577D 3 | 3450 = 8160 5 |
| 90 = 1C1F 0  | 580 = 24FA F | 1070 = 5487 F | 1560 = 24FA 4 | 2020 = 507 3  | 2480 = ECB5 F | 2970 = 397C E | 3460 = B60 1  |
| 100 = 5B53 4 | 590 = F699 E | 1080 = EFB4 F | 1570 = 7192 4 | 2030 = 1D8D 2 | 2490 = 86F9 B | 2980 = C378 8 | 3470 = C378 7 |
| 110 = 3EA8 9 | 600 = 9604 8 | 1090 = F35 F  | 1580 = AFAE 5 | 2040 = 2795 E | 2500 = A7EB C | 2990 = E3C6 0 | 3480 = CF84 A |
| 120 = 8841 D | 610 = 214A 1 | 1100 = AB46 0 | 1590 = A651 4 | 2050 = 594C 6 | 2510 = 6FD8 7 | 3000 = 5F83 B | 3490 = 300C 7 |
| 130 = BE8D F | 620 = 9C32 2 | 1110 = 803F 9 | 1600 = B504 B | 2060 = 45B7 6 | 2520 = 6B0 8  | 3010 = 6E3B B | 3500 = 1F4F 2 |
| 140 = CAB9 A | 630 = 39F F  | 1120 = 973C E | 1610 = 39F8 3 | 2070 = D8D8 F | 2530 = F654 C | 3020 = 50F9 F | 3510 = 9AAA 1 |
| 150 = 23B6 A | 640 = 57AA 4 | 1130 = BB67 3 | 1620 = 488A F | 2080 = 1609 D | 2540 = 946A 5 | 3030 = 7CCF D | 3520 = 9A19 5 |
| 160 = 749B 7 | 650 = 2323 9 | 1140 = 3FFA 6 | 1630 = 70DA 4 | 2090 = 322D E | 2550 = 1D5C 7 | 3040 = 66E0 7 | 3530 = 1C0B F |
| 170 = 6C33 0 | 660 = 45B6 9 | 1150 = 24FA B | 1640 = D3F2 2 | 2100 = C86E 4 | 2560 = D419 3 | 3050 = 626C E | 3540 = 56FE B |
| 180 = 307E 2 | 670 = 2714 0 | 1160 = EBB3 A | 1650 = 9C32 D | 2110 = 8A29 B | 2570 = 3B9A 4 | 3060 = 1EB5 9 | 3550 = 7FA6 6 |
| 190 = 6EDE 5 | 680 = 4659 7 | 1170 = 9C32 1 | 1660 = 7FA6 8 | 2120 = D104 B | 2580 = DBF2 1 | 3070 = E091 C | 3560 = 522D 4 |
| 200 = B504 A | 690 = 5487 0 | 1180 = 91E6 F | 1670 = E8F9 B | 2130 = 3725 F | 2590 = 468 8  | 3080 = EB04 3 | 3570 = 624E F |
| 210 = 335D E | 700 = 388C 2 | 1190 = AA92 A | 1680 = BDE4 E | 2140 = 137E 5 | 2600 = AF9D D | 3090 = 525F 0 | 3580 = 9369 A |
| 220 = B504 8 | 710 = 1C0B 2 | 1200 = C962 1 | 1690 = 5C00 4 | 2150 = 48C9 0 | 2610 = A92D E | 3100 = 373D E | 3590 = 1C0B B |
| 230 = 76D0 E | 720 = 52D2 F | 1210 = C468 9 | 1700 = 615F 1 | 2160 = 100A 3 | 2620 = CA7 0  | 3110 = 3AC9 9 | 3600 = 4FAC 2 |
| 240 = B94A 0 | 730 = 474F 6 | 1220 = 44D3 0 | 1710 = BE56 3 | 2170 = 7F50 7 | 2630 = D95F 6 | 3120 = 1BEB 2 | 3610 = 2CAD E |
| 250 = BC26 7 | 740 = 530B 1 | 1230 = B31C 7 | 1720 = D15F 8 | 2180 = 9E7 2  | 2640 = 4351 6 | 3130 = BA0B B | 3620 = 391C 4 |
| 260 = FCF3 5 | 750 = 27BB A | 1240 = A388 D | 1730 = E343 9 | 2190 = 7D44 9 | 2650 = 1A9C 2 | 3140 = 18F6 9 | 3630 = A023 F |
| 270 = 5081 D | 760 = D984 5 | 1250 = 6BAA A | 1740 = 9A68 8 | 2200 = 599D 5 | 2660 = 86F9 F | 3150 = 1976 B | 3640 = DA42 3 |
| 280 = 5081 B | 770 = 9C32 8 | 1260 = A913 2 | 1750 = E26E C | 2210 = 507 A  | 2670 = 5412 C | 3160 = 6EAC 6 | 3650 = 46B3 E |
| 290 = 2F0B B | 780 = 775 C  | 1270 = D74E 1 | 1760 = 45D1 3 | 2220 = 5A1D E | 2680 = A7FC 3 | 3170 = C042 A | 3660 = C817 1 |
| 300 = CB5F 8 | 790 = 9A68 C | 1280 = 9138 0 | 1770 = 507 D  | 2230 = 45D1 9 | 2690 = 44D3 8 | 3180 = 52D9 F | 3670 = 5DA5 5 |
| 310 = DBAC 1 | 800 = E343 A | 1290 = 18F6 5 | 1780 = D192 A | 2240 = D192 C | 2700 = B31C 1 | 3190 = 50B8 C | 3680 = B281 9 |
| 320 = 94A8 3 | 810 = 9A68 F | 1300 = B317 1 | 1790 = 3DD7 E | 2250 = 9549 E | 2710 = A388 8 | 3200 = 4626 5 | 3690 = 63C0 0 |
| 330 = 5E8C 7 | 820 = B5E2 1 | 1310 = 1F31 8 | 1800 = E9C7 7 | 2260 = 7C52 5 | 2720 = CB1E 2 | 3210 = 5FBE 6 | 3700 = 18C0 D |
| 340 = CB5F 6 | 830 = 45D1 5 | 1320 = 385E 6 | 1810 = 7C52 E | 2270 = 7C52 5 | 2730 = 76DD 2 | 3220 = A8DE C | 3710 = 4924 C |
| 350 = 54DB 6 | 840 = 507 6  | 1330 = EC81 8 | 1820 = 89D2 3 | 2280 = D419 9 | 2740 = 89E7 6 | 3230 = 1C0B 8 | 3720 = 8E1 3  |
| 360 = E07B E | 850 = D192 7 | 1340 = 469 5  | 1830 = 3B9A 4 | 2290 = 3B9A 0 | 2750 = E8EC D | 3240 = 21CF 7 | 3730 = BD64 2 |
| 370 = 9E62 0 | 860 = B467 3 | 1350 = 3266 5 | 1840 = E343 6 | 2300 = E343 2 | 2760 = DBF2 3 | 3250 = 9C32 C | 3740 = D59D F |
| 380 = 81BB 6 | 870 = DD61 E | 1360 = 80F9 1 | 1850 = FFB4 0 | 2310 = FFB4 B | 2770 = 3B53 5 | 3260 = 1846 B | 3750 = 5DA5 4 |
| 390 = E0A1 5 | 880 = C56E 7 | 1370 = C378 0 | 1860 = CC83 A | 2320 = CC83 5 | 2780 = 6D96 F | 3270 = 5009 5 | 3760 = B281 7 |
| 400 = 24FA C | 890 = E9C7 6 | 1380 = 7714 F | 1870 = 5A03 6 | 2330 = 5A03 3 | 2790 = 6AC2 8 | 3280 = 303D E | 3770 = B19F 2 |
| 410 = CCD7 5 | 900 = 7C52 F | 1390 = 63EC 3 | 1880 = 875E 0 | 2340 = B265 F | 2800 = A22B 5 | 3290 = FF99 C | 3780 = 18C0 D |
| 420 = C039 5 | 910 = D419 8 | 1400 = 18DD E | 1890 = 388C 3 | 2350 = 388C 4 | 2810 = DF9 C  | 3300 = 7FA6 B | 3790 = 1FC6 E |
| 430 = D6AF B | 920 = 3B9A F | 1410 = 46C2 B | 1900 = A151 5 | 2360 = A151 5 | 2820 = 806F C | 3310 = ED34 9 | 3800 = 8E1 9  |
| 440 = B786 7 | 930 = 31B9 A | 1420 = AD2E A | 1910 = D2CD 9 | 2370 = 8388 6 | 2830 = B265 1 | 3320 = ABA4 5 | 3810 = BD64 9 |
| 450 = 291D 1 | 940 = 5A03 2 | 1430 = E9C7 3 | 1920 = 5494 F | 2380 = 5AA3 3 | 2840 = 388C 4 | 3330 = 300C B | 3820 = E260 F |
| 460 = 24FA 4 | 950 = 6BAA F | 1440 = 4368 6 | 1930 = 4DED 0 | 2390 = 9E7 1  | 2850 = 78 C   | 3340 = 1F4F 4 | 3830 = 6EDE 5 |
| 470 = BA58 0 | 960 = E897 D | 1450 = 1C0B A |               |               | 2860 = 858B 0 | 3350 = 8678 2 | 3840 = AC47 E |
| 480 = 2D22 5 | 970 = 637A 1 | 1460 = F5CD 3 |               |               | 2870 = DBF2 9 | 3360 = DDB4 1 | 3850 = A146 C |
| 490 = 24FA 2 | 980 = 1761 2 | 1470 = 9C32 9 |               |               | 2880 = 8A26 B | 3370 = CF9E 4 | 3860 = B43 2  |



# FREE

with every computer  
we sell . . .

. . . our expertise!

If you are buying a new Archimedes or Master Series computer, you don't expect to know all about it from day one. That's where we come in. We don't leave our customers high and dry with their problems – they know they can rely on us to get them out of trouble. Whether it's hardware or software, we're the people who know.

## THE DATA STORE

6 Chatterton Road, Bromley, Kent

Tel: 01-460 8991. Fax 01-313 0400

(closed Wednesday)

**An old-fashioned specialist computer shop**



BRITISH  
BROADCASTING  
CORPORATION  
MASTER SERIES  
MICROCOMPUTER

### STEPPER MOTOR CONTROLLER

This ROM based software allows you to "talk" direct to two Stepper Motors and a Relay in BASIC via 20 new "star" commands. It is widely used for DIY plotters, turtles and computer control (CNC) of small machine tools. No machine code is now necessary for any of these projects.

ROM with handbook & fitting instructions £14.95 inc. P & P.

#### INTERFACING ?

We have Interfaces available ex-stock for many purposes including Stepper Motors, Lamps, Relays and small DC motors. 9 output lines so you can control two stepper motors and a relay from the User Port. Up to 9 relays can be added for controlling mains devices. Full user information included with each.

VERSION 1. Powered from BBC auxiliary power supply. £23.00 inc. P & P.

VERSIONS 2 & 3. With integral mains Power supply (optically isolated).

(2) 300mA per coil £49.00 (3) 800mA per coil £57.46 inc. P & P.

HI-POWER VERSIONS. High output for stepper motors or other uses.

Up to 3 or 5 Amps per line. Needs a separate power supply (See below).

3 Amp £42.50 P & P £3.00. 5 Amp £65.00 P & P £3.00.

POWER SUPPLIES for high current stepper motors etc. Custom voltages.  
100 or 200 VA versions. £62.00 or £69.70 Post & packing £3.00.

#### SCRAPBOOK

A free-format storage & retrieval system for all types of information including colour and graphics. Incorporates screen designers and facilities to search, sort, browse, print, extract etc. Forget fields, records etc. Store information as you want to read it – on the screen. Store up to 320 Teletext screens on a disc. Do automatic "slide show" type presentations.

Disc and manual £12.95 inc. P & P.

Please indicate 40/80 track and whether SS/DS drive available.

SCRAPBOOK DEMONSTRATION disc £1.25 inc. P & P.

#### Instant On-Screen Help

All BBC models can have On-Screen help with our range of ROMs and Discs. Why thumb the handbook when you can have the important details on screen even when wordprocessing?

#### WORDWISE COMPANION

For Computer Concepts Wordwise and Wordwise Plus wordprocessors.

#### BASIC COMPANION

Instant help for getting to grips with BASIC programming.

#### PROGRAMMERS COMPANION

Colours, Graphics, Sounds, VDU codes, ASCII codes, \*FX commands etc.

#### MACHINE CODE COMPANION

Assembly language. OS routines, 6502 Instructions, Addressing, Vectors etc. Each ROM gives you instant access to 15 screens of help via one simple command. ROM with simple fitting instructions £19.95 inc. P & P.

Custom versions containing a mixture of our helpscreens or your own special data (E.g. Printer Codes) £5.00 extra.

All Companions are also available as ROM IMAGES on disc for loading into sideways RAM. £8.95 each or £19.95 for all four inc. P & P.

Disc versions of Basic, Programmers and Machine code Companions.

£9.95 each or all three £19.95 inc. P & P.

COMPANIONS DEMONSTRATION disc £1.25 inc. P & P.



**MICRO HELP**



5 Hill Terrace, LLANDUDNO, Gwynedd, LL30 2LS. Telephone (0492) 76925

## The land of Shades

*by someone who has  
been there and survived*

There are two styles of play in Shades: T. collectors pick up treasure, stacking up points in the hope of one day getting to the status of wizard. Killers go around killing T. collectors and each other in the hope of gaining a glorious reputation.

It is very hard to get to be a wizard if you are a killer, because you will inevitably be killed a few times yourself, losing your points. But that does not stop people! Many players have two or more characters so they can play one as a killer and one as a more peaceful sort.

Whichever you choose you must know something about fighting or you will be at the mercy of anyone.

In Shades everybody can do some damage with their bare hands. This is your POWER which you can check by typing SCORE. But this is not much use except for killing very weak creatures like the bat and the sprite.

Luckily there are weapons: If you get the axe and type POWER AXE you will see it does 20 points of damage on its own, plus your own bare hands power.

When you are attacked you can type RET. ALIATE WITH AXE (if you have it) and you will suddenly stand a chance of winning. RET AXE is the short form, and you must get used to employing these shortened forms or you will end up as mincemeat before you even get your spelling right.

If you want to start the fight then you type KILL GUARD or KILL NANJUSI or whoever it is you want to kill. But if you lose a fight you have started you will forfeit all your points instead of half, so be careful. Also it's a good idea to STEAL your opponent's weapon if he has one and do not forget to FLEE OUT if you are losing badly.

Whirlwind's first rule of fighting: Fleeing is more fun than being a corpse, but being a corpse is more fun than doing nothing at all. Fight back hard and the killers may give up eventually.

May the Goddess go with you!  
Whirlwind

PS. Hi to Goldie's Ozzy, Rapunzel, Sharon, Ann, Plutonium and Liane's boyfriend Humber. Also boo, hiss to Comander who is cheeky to the girls: I have your name in my book so I will be killing you soon, he he!

You can enter the land of Shades using your micro,  
a modem – and a registration to MicroLink.

If you are not a member write for details to: MicroLink,  
Europa House, Adlington Park, Adlington, Macclesfield SK10 4NP.



# MICRO USER CLASSIFIEDS

● Pace Nightingale modem and Commstar £55. Tel: 02406 4555 after 5pm.

● Watford 32K Shadow ramcard, manual £30. Tel: Southampton 0703 635086.

● Model B 1.20S basic 2 Solidisk DDFS Mini Office 2 £200. Tel Worcester 358712.

● Master 512 Dual DS40/80 drives, interword, max dumpout 3, replay, lots software, mouse, joystick, manuals, magazines, eprom programmer, over £1000 worth, £600 ono. Tel 0788 536333 after 6pm.

● BBC 'B' issue 7 Torch double drive Z80 2nd Processor Watford DFS B20 Shadow ram B12 Rom extension rom's discs 1451 monitor AMX mouse books £585 RX80 £65 Jones Emsworth. Tel: 0243 377873.

● BBC 'B', data-recorder, over 100 games, leads, manuals, books, mags, joysticks all boxed worth over £800 only £250. Tel: 0342 324059 evenings ask for Mark.

● Fleet street editor 80 track plus manual and additional graphics pack £20. Tel: 043787 296.

● Cumana 40T 100K drive with power supply £50. Tel: (Telford) 0952 882381.

● BBC games, utilities and magazines for sale all originals and very cheap. Contact Mark for details. Tel: 0742 580101 after 6pm.

● Master 512 £350 or may split Master 128 £260, 512 co-processor (hardly used) £90, Watford co-pro adaptor (unused) £30. Tel: Great Dunow 4234 after 6pm.

● BBC B with dual 40/80T disk drive, replay chip, joysticks, books, mags and loads of games. £350 ono. Tel: 0234 708398.

● Master Turbo board £80. Morley AA Romboard £32. Morley Eprom programmer V2 £25. Morley Teletext adapter £80. Care 32k x 2 cart £9. Care Quad cart £10. Microvitec colour monitor mid-res £160. Tel: Joe 0753 32688 after 6pm.

● Acorn Electron, Plus 1, AP3, T2P3, View, software and books £180. Tel: 01 764 8847 evenings.

● Archimedes A310 colour, Ansi 'C', twin editor, Zarch, Archimedes reference manuals, arm book, boxed as new £900. Tel: Manchester 061 434 3488 (ask for Flat 5).

● Master 128 system, TV/monitor, Morley Teletext adapter. Technomatic 5.25/3.5 DD dual drives, tape recorder, joystick, Spellmaster, games, Superart, Amx MKIII mouse £1190. Tel: 01 515 3517 after 6pm.

● BBC B computer with disc drive, tape player, monitor, joystick and many games including Commando Yie and Kung-Fu Way of the exploding fist. In good condition £400

negotiable. Tel: 01 352 7396.

● 8271 DFS kit £40: 1770 DFS kit with ADFS Rom £40. Tel: 0246 410839 (evenings).

● Z80 second processor, software included, offers. Gemini Accounts suite, offers. Tel: Lingfield 833760.

● Z88 and case, with mains adaptor, 128k Ram and 32k Eprom, parallel printer cable, book and club magazines £300. Tel: 01 348 8518 evenings.

● Winchester drive 10 megabyte. New, no case/software hence £250. Tel: 0222 596351.

● Z88 with PC Link and mains adaptor, as new £175 o.n.o. Tel: 01 449 9751.

● BBC B with: Watford DDFS, Opus switchable drive, Solidisk Fourmeg 32k, roms, software, books, joysticks, only £320 o.n.o. for quick sale. Tel: Woking (04862) 65976 evenings.

● BBC B Issue 7 Genlocked. Solidisk DFS, double sided 40/80 drive. Wordwise, Pascal, Moviemaker, Discdoctor, Sleuth Roms, 2 joysticks, switch/analog. Many programmes disc/cassette. Microvitec 1451 colour monitor. Ideal for video titling and graphics £650. Tel: 0420 58306.

● Compact games, mags, joystick, Dumpout 3, 5.25 cable, printer cable, View

Logo £450. Electron Rombox Plus, Plus 3, View Viewsheets T2P3, games, discs, tapes, mags, books £250. Tel: 092576 4832.

● Master compact including 3.5" disc drive, joystick, Elite game, unwanted gift, hardly used £200 o.n.o. Tel: 0424 754973.

● Prism modem 1000. BBC Micro Viewdata communications system. B.T. approved. Boxed as new. Offers. Tel: 051 639 2015 after 6.00pm.

● BBC B disc drive (100k) software, discs, books £240. Tel: (Devon) 0822 854148.

● Wanted EMR Midi Interface plus disc software, will pay £50. Tel: 051 449 1569.

● Cumana CD 358 twin 3.5 inch disc drive + PSU formatting disc and cables £135. Approx 120 3.5 inch discs £75 o.n.o. Tel: 01 572 2917.

● Master Compact with TV Modulator and second internal drive £265. Tel: 01 572 2917.

● Cumana 40T single sided disc drive £45. Tel: 01 368 6136 Sasha.

● Electron, Plus 1, printer, cassette player, joysticks, View/Viewsheets roms, educational software, hardly used, £220. Tel: 0625 28831.

● Master 128 as new, unwanted gift £330. Tel: 0524 54388.

● BBC B Acorn DFS Issue 7.

PLEASE PRINT THIS AD IN THE NEXT MICRO USER

|  |  |  |  |  |  |
|--|--|--|--|--|--|
|  |  |  |  |  |  |
|  |  |  |  |  |  |
|  |  |  |  |  |  |
|  |  |  |  |  |  |
|  |  |  |  |  |  |

Name \_\_\_\_\_  
Address \_\_\_\_\_

Cheque enclosed for £ \_\_\_\_\_  
(minimum £2 for 10 words)

I certify that any software offered  
for sale is original and not a copy

Signed \_\_\_\_\_

POST TO: Micro User Classifieds, FREEPOST, Macclesfield, Cheshire SK10 4YB.



**Has upgrading your BBC Micro given you hardware you no longer need?**

**Or have changing interests left you with unwanted software?**

**This is THE place to advertise your surplus items. Our 179,000 readers are always on the lookout for a bargain and this is the first place they'll look!**

**An added bonus!**

Your advert will be automatically displayed on MicroLink, the electronic mail service operated in association with Telecom Gold. This means it will be seen by thousands of computer enthusiasts who can send an instant response.

Amx mouse, desk, utilities, Art, Paint-Pot, discs and manuals. Torch Z80 processor complete. Perfect Writer, Speller, Calc Filer, discs and manuals. Ram/Rom board, disc and manual. Miracle Modem WS2000. Thorn tape cassette/leads, micro discs. Sensible offers. Tel: 01 876 5347 evenings.

● BBC 'B' First generation software for sale, cassette versions including Elite: Trivial Pursuit + various manuals + Datacoder. Tel: 01 679 1494 after 6pm.

● Torch Graduate 256k dual drive, IBM PC compatibility for BBC B. Runs most popular PC programs i.e. 123 Wordstar, Dbase 2/3. Bargain only £350. Tel: 0277 353783.

● BBC B Issue 7. Watford 21F, joystick, manuals, mags, 100+ games £350 o.n.o. Cumana CDX800S drive with DDFS £200. Cassette recorder £15. Amx MKIII £30. Disc box, 10 blank discs, formatter and choice of five disc games £20, extra games £15. Tel: 0274 637482.

● Quicksell BBC B with DFS 40/80trk 400k disc drive, datarecorder, Quickshot II + adaptor, Interword, Dump-out3, mags(33), manuals(7), games(12) leads inc. Phone for more details. Worth £950 sell £500 o.n.o. Highest offer gets free VIC-20. Tel: Matthew 01 427 8750 after 6pm.

● BBC B, software, 64k rom/ram board, DDFS, disc drive, Amx mouse, joystick, Replay, many books, worth over £1000. Bargain £330 o.n.o. Tel: Bristol (0272) 568898.

● BBC B Issue 7, DDFS, Advanced User Guide, cassette player, extras £310: Music 500 £20, 5.25" discs, Codename Droid, Shark, Elixir, Repton around the world £5 each. Tel: (0482) 801018.

● £350+ worth games. Mostly discs, will sell under £60. Please apply. J.Fox, Strode House, Lacock, Chippenham, Wiltshire.

● BBC B Issue 7, Watford DFS, 32k shadow Ram, Watford Rom board, Wordwise+, Exmon, Graphics extension, cost £700, £300 o.n.o. Tel: 0993 831083.

● BBC Model B, latest issue, Acorn DFS, latest Cumana 40/80T d/s drive, cassette, Phrom chip, £100'S games, Econet, Free Electron, Plus 1. Tel: 09323 53529 for details.

● BBC Teac disc drive, 40 track, 100k very good condition £40. Tel: 0636 813260 evenings.

● BBC B OS1.2 DFS 40T, ss/dd plus View, Disc Doctor and 'Replay' for tape/disc transfer, manuals included £225. Tel: 0228 711026.

● Master 128, Philips 80 green monitor, Cumana CD800S dual 40/80 disc drive, Prestel modem and

Rom Sanyo DR101 cassette player, 30 discs, new batteries all leads, 3 manuals for master and for View, Viewsheets, Viewstore, Prestel £600. Tel: 0491 571338.

● Wanted urgently, Viglen BBC B PC Console with or without computer, drives etc. Tel: 0723 370064.

● BBC 'B' OS1.2 Solidisk 1770 DDFS. Solidisk 256k SWR, fitted Dumpout3, Transferom, many tapes, games etc, mags, books, joysticks £425 the lot. Tel: 0225 22617.

● Micro User: Complete set from issue one: Most in binders: Best offer by end of the month. Tel: 01 363 7866.

● Master 128 £330, IBM upgrade £120, green screen monitor £30, mouse £20, Spellmaster £30, plus lots of Roms, immaculate condition. Tel: 0865 511500.

● Wanted: Viglen professional console unit for BBC B. Tel: 0784 251134.

● Wanted Master 128. Will pay £305. Tel: 0246 410732 evenings.

● Disc drive Teac 40T, no PSU £35 o.n.o. Will consider swap for Solidisk 2 meg. Tel: Ian 0702 714298 evenings.

● BBC B+, 40/80T disc drive, Amx mouse+ Super Art, View, cassette player, joystick, games, books. Tel: 0623 22296.

● Wanted Master 128 or 512 in excellent condition. Tel:

Terry Hopper 048 215322 (Beds/Cambs) after 5pm.

● BBC B Viglen case. ATPL Rom/Ram board with 16K SWR. Solidisk DFS/ADFS with 40/80 DSDD drive. Seikosha GP50 printer. Roms include Logo, BCPL, Halcien, 50+ discs, many books, dual joysticks, Trackball £400. Tel: 0623 649815 evenings.

● Immaculate BBC B Issue 7 Acorn-DFS dual DDFS 80T drives, printer, many roms, software, books, magazines, joysticks, 32K s/w Ram £450. Tel: 01 642 4703 (Sutton).

● Master 128 Solidisk ADFS Rom. Dual d/s Mitsubishi disc drives, Mitsubishi high resolution colour monitor, Amx mouse, Amx superart, 25 games, 35 blank discs, advanced reference manual £600. Tel: 0342 311423.

● B Solidisk 256K twin drives, Eprom programmer, mouse, ADFS, 1770 DFS, Roms £450. Tel: 0268 680334.

● Wanted compact computer without disc drive/monitor stand. Tel: Peter 0833 31303.

● Atari Trackball for sale, needs interface £10. Tel: Alex 01 361 2606 after 5pm.

● BBC B Issue 7, Watford DFS 1.44, View £260 o.n.o. Tel: 0246 410732 evenings.

● Printer and lead £120, 400K 80/40 disc drive £70, BCPL £35, colour art £5, joystick rom £10, Mini Office £3. Tel: 0227 61331.


**Ads will be accepted under the following conditions:**

- This service is EXCLUSIVELY for the use of private readers. No trade ads will be allowed.
- To avoid encouraging software piracy, all ads will be carefully vetted before they are accepted.
- Ads can only be accepted on this form (or a photocopy of it).
- There is no maximum to the number of words

you include in your ad. If there is insufficient room on the form, continue on a separate sheet of paper.

- The cost is 20p per word, with a minimum of 10 words.
- WE GUARANTEE your ad will appear in the next available issue of The Micro User.



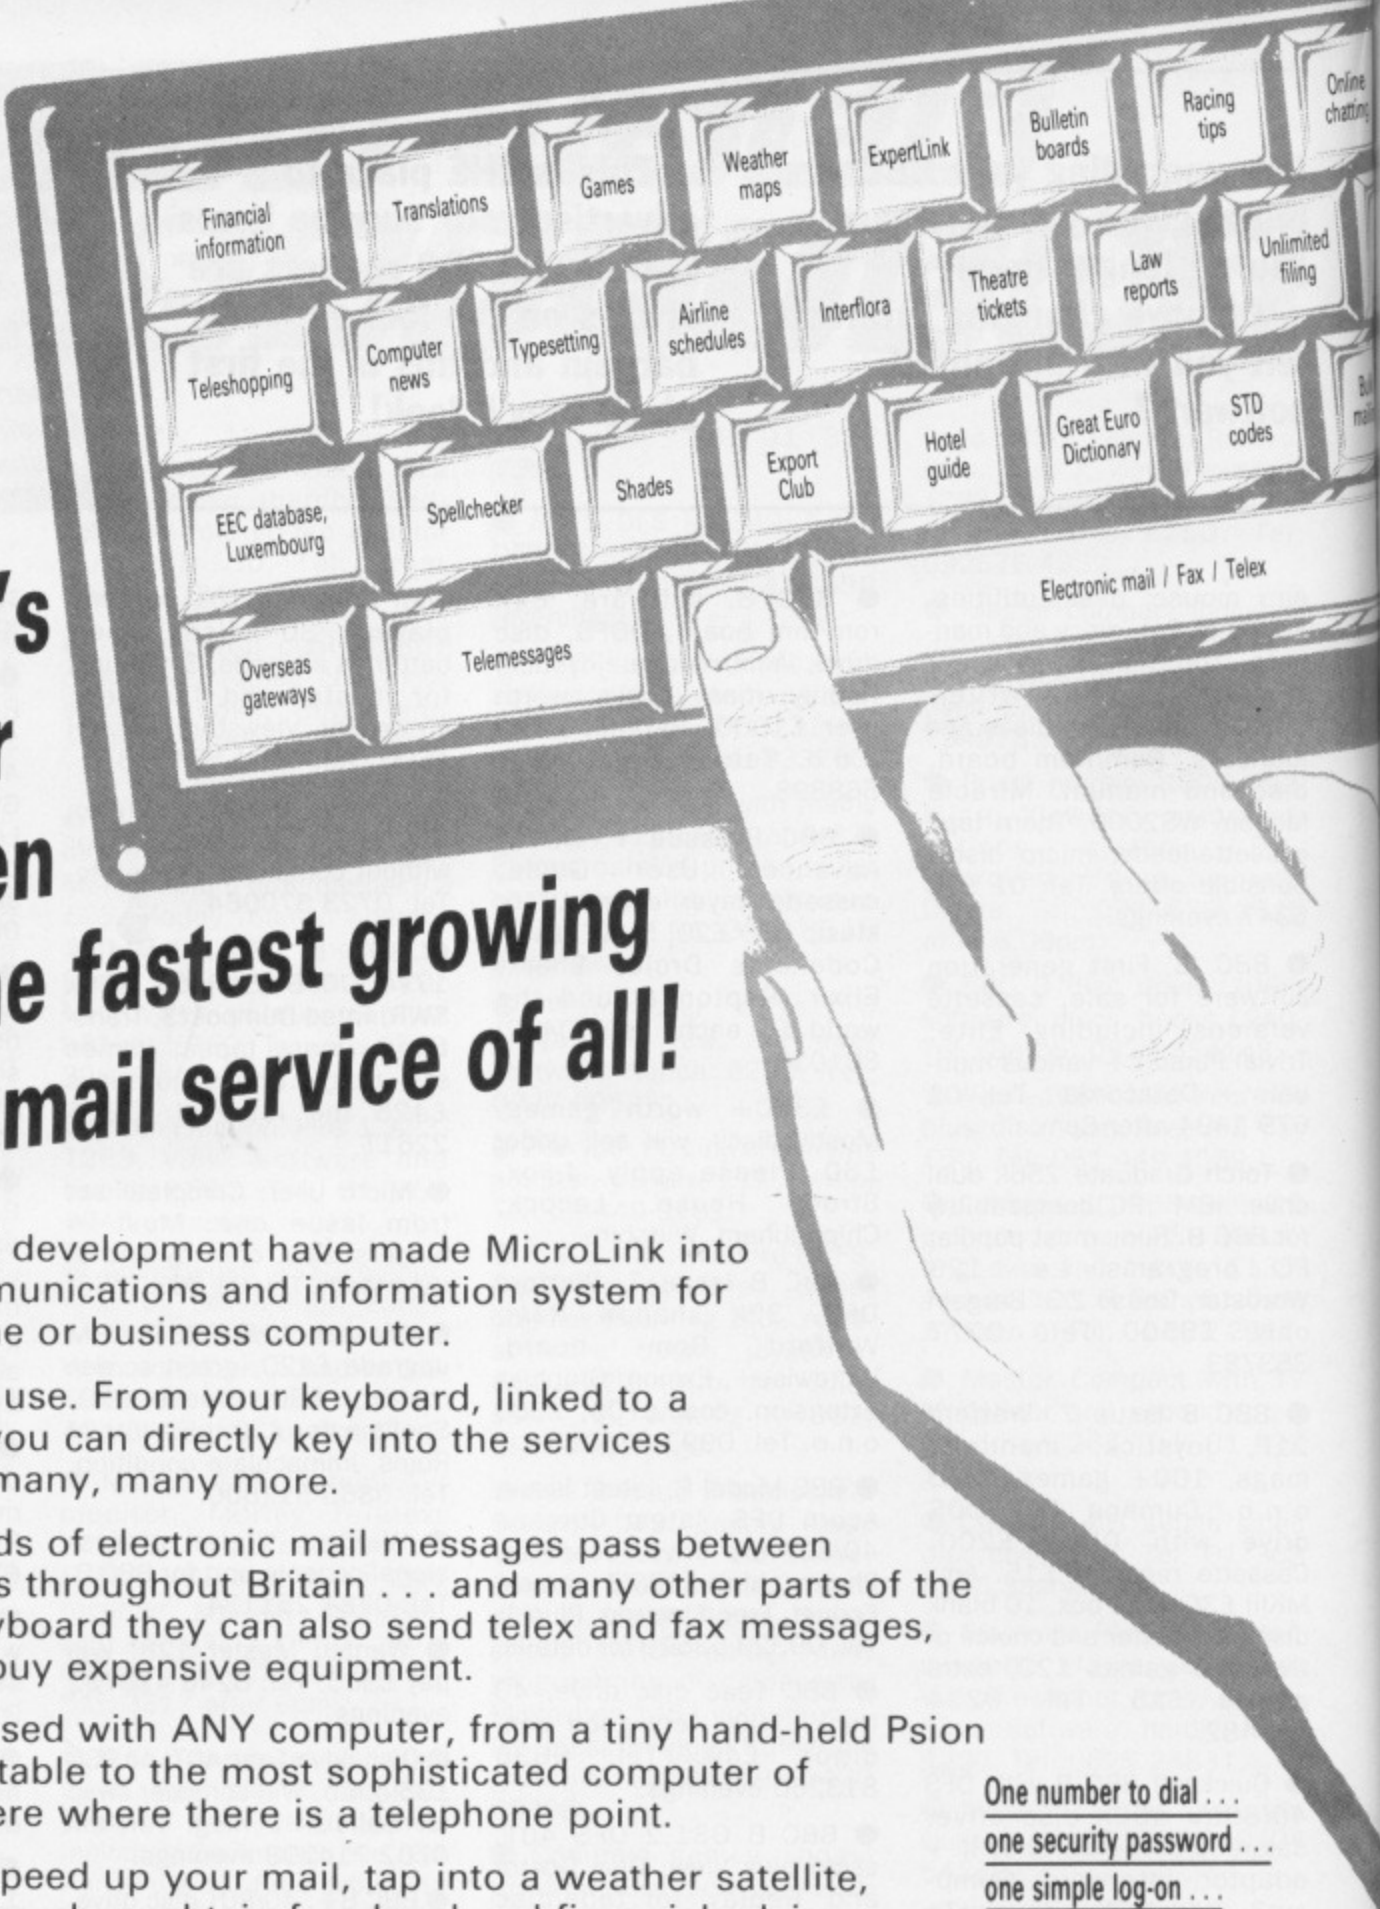

# Look what's waiting for you ... when you join the fastest growing electronic mail service of all!

Four years' continual development have made MicroLink into the COMPLETE communications and information system for everyone with a home or business computer.

And it's so easy to use. From your keyboard, linked to a modem and phone, you can directly key into the services shown above – and many, many more.

Every day thousands of electronic mail messages pass between MicroLink subscribers throughout Britain . . . and many other parts of the world. From their keyboard they can also send telex and fax messages, without the need to buy expensive equipment.

MicroLink can be used with ANY computer, from a tiny hand-held Psion Organiser or Z88 portable to the most sophisticated computer of all. And from anywhere where there is a telephone point.

So if you want to speed up your mail, tap into a weather satellite, carry out company searches, obtain free legal and financial advice, order flowers, book theatre tickets, negotiate a mortgage, help yourself to free telesoftware programs – or go adventuring in the land of Shades, the world's biggest multi-user game – then there's only one answer – MicroLink.

One number to dial . . .  
one security password . . .  
one simple log-on . . .  
and you're only a  
keystroke away from  
the best information  
and entertainment  
services now available!

## FIND OUT MORE ABOUT **MicroLink**

Please send me more facts about

**MicroLink**

Name \_\_\_\_\_

Address \_\_\_\_\_

Send to: MicroLink, Europa House, Adlington Park, Adlington, Macclesfield SK10 4NP. MU2

**Use TELECOM GOLD  
FREE\* for a month!**

When you send in the form alongside you will receive a unique invitation to join MicroLink, with FREE registration and telex validation (normally costing £15), and a month's FREE\* connect time to your MicroLink/Telecom Gold mailbox. So you can find out for yourself what MicroLink is all about without it costing you a penny.  
\* This exclusive offer relates to connect time only and does not include telephone, any possible PSS charges or surcharged services.



## £10 Prize letter

I HAVE recently acquired a Master 128 to replace my old BBC B. So far I have not transferred all my discs to ADFS format and so most of the time I am still using the DFS which is also provided on the Master.

There seem to be a number of bugs in Version 2.24 of the DFS, which forms a part of the megabit rom. I have not seen any reference to these anywhere but they can result in loss or corruption of data. But they are all easy to avoid if you know about them.

The first is with the CLOSE statement: CLOSE#0 — and its OS equivalent \*CLOSE — do not work correctly if the length of any file has been altered since it was opened. Try, for example, the following sequence:

```
XX=OPENOUT("NAME")
BPUT#XX,1
CLOSE#0
```

There should now be a file on the disc called NAME of length one byte. The file is there, but if you use \*INFO to examine it you will see that it is &4000 bytes long. However, if you replace the CLOSE#0 with CLOSE#X%, the file is given the correct

# Master's megabit rom is harbouring bugs

size. The problem seems to be that CLOSE#0 does not update the disc catalogue information.

When a file is first created using OPENOUT it is assigned a length of &4000 bytes, and it still has this length after using CLOSE#0.

The same thing happens if you extend an open file by adding a few bytes to the end. If there is no change to the number of sectors needed to store the data and CLOSE#0 is used the catalogue is not updated at all and the extra data is lost.

On the other hand, if the extended file does need more sectors, the DFS makes the file as big as possible up to a limit of &10000 bytes — see second bug described later — and using CLOSE#0 gives the same error, the file length is not changed.

The solution involves using individual variables for each file you can have open. Make sure it's set to zero during initialisation, use it for the file handle when the file is in

use and when you close the file set it back to zero. Your error routine can then close any file it knows is open by checking its associated variable:

```
10 outf=0
20 ON ERROR GOTO 300
90 outf=OPENOUT"File"
150 CLOSE#outf:outf=0
300 IF outf>0 CLOSE#outf:outf=0
```

The second bug involves the new feature where you can change the size of an open file by assigning a value to EXT#.

For example, if the file is &600 bytes long and you do:

```
EXT#X%=&200
```

the file is correctly shortened. But if you try to lengthen it using:

```
EXT#X%=&900
```

the DFS does not update the catalogue or assign more space to it — in fact it doesn't even check to see if there is enough room. This means that writing to this file could corrupt others and the end might be overwritten by others. The solution is to use PTR# and not EXT# when extending a file.

A third bug is the \*SHUT command which theoretically closes all files on all filing systems: It has no effect on the DFS and all open files stay open.

All these bugs are definitely in the DFS and do not appear in the ADFS.

There is also a bug in the new \*MOVE command but this time it's the tape system that's affected. When copying from tape to disc — DFS or ADFS — or vice versa the data is copied correctly.

But, from tape to disc, every file gets a load address of zero and an execution address of &FFFFFFF. Going the other way both values are &FFFFFFF. This means that

**Win a tenner**

● Want to write to The Micro User? The address is: Letters, The Micro User, Europa House, Adlington Park, Adlington, Macclesfield SK10 4NP.

Writers of the most interesting letters receive a £10 prize.

the method suggested in the Welcome Guide for copying BAS128 to disc won't work. And there are actually two files to copy despite what the Guide says. The following sequence will work correctly:

```
*-TAPE-OPT1,2
*DISC (or *ADFS)
*LOAD -TAPE-BAS128 1000
*SAVE BAS128 1000+7D 400
400
*LOAD -TAPE-BASOBJ 1000
*SAVE BASOBJ 1000+5000 3
100 3000
```

None of these bugs is particularly serious as long as you know they exist and how to avoid them. But it's a pity they exist even in the new machine — it looks as though Acorn put so much work into getting the ADFS right it forgot to fully check the DFS.

— D. Harper, Brinsley, Nottingham.

## Missing symbols

I AM having trouble getting the horizontal and vertical scales to display an ampersand symbol — & — and % sign on screen in the Dumpout Encoder program in the August 1988 issue of The Micro User.

I keyed it in exactly as printed, but I am not familiar with some of the characters used. For example, why is there an apostrophe at some lines as follows?

```
140 PRINT"What is the
code ..."
150 PRINT"Define which
key ..."
```

PROSize, from 600 on, is where I suspect my problem lies. I am presuming that the

symbol on line 610 — between the STR\$ and (scale) — is used for converting decimal to hex.

I have also tried changing it for other similar characters, but to no avail. — Glen Wilson, Langside, Glasgow.

● The apostrophe in a PRINT statement forces a new line — it's tidier and shorter than PRINT:PRINT, but has the same effect.

It seems that you haven't used Get it Right! to check your listing, as the program is definitely correct as printed. Page 48 in this issue gives details of the checksum program and how to use it.

You are quite correct about the character — pronounced tilda.

## Order of the boot

FOR a long time I have been wondering how to write a boot program. Please could you tell me how it is done, or point out a book that could show

Turn to Page 128 ►



◀ From Page 127

Me? I have a Master Compact but the User Guide does not cover booting your own programs. — **Simon Khoury B.F.P.O.**

● Creating a boot file for a Basic program is quite simple. Let's assume the program you want is called Fred, and the disc with this on is in the drive, just type:

```
*build !boot
```

A line number will appear on screen and you can enter your command there and when you press Return the next line number will be displayed:

```
00001 CHAIN"Fred"
00002
```

Press Escape and the disc drive will spin. If you do a \*CAT you'll find that !boot is now on the disc and you can check it by entering:

```
*LIST !boot
```

The final step is to set the boot option for the disc by entering:

```
*OPT 4 3
```

Now you can press Shift+Break to autoboot the disc.

## Pinball puzzle

SEVERAL of your readers have written to say that Pinball from the February 1988 issue works very well, but I cannot get it to work at all. I keep getting Bad mode at 210.

Can you help please? — **L.D. Jones, Pitsea, Basildon, Essex.**

● There are two possibilities here: The relocation and line deletion routine have not been typed in correctly or you

## Cunning catalogue capers

I AM having considerable problems with the ADFS catalogue program published in the October issue of The Micro User.

Firstly in the Create program line 330 doesn't match the checksum — but since this bit is for the Archimedes I ignored it and it seems to work okay.

Also when I try to boot the Catalogue program I get a Channel on channel error which I can't make head nor tail of since the line it happens on has no filing system commands in it at all. But I can CHAIN the program without this problem occurring.

Next, when I try to add the

first disc I get an error related to the fact that one of the files produced in the Create program is called Disc but in Catalogue it's named Discs.

This is fairly easy to change, but when I do I get Type mismatch errors cropping up.

I'm at my wits end — this looks to be an excellent program — if it would only work. — **Peter Lee, Davenport, Stockport.**

● The boot problem you're having indicates that you're using a Master. Adding \*FX119 at line 1 will sort this out.

The other problems — apart from the filename

change — are due to the data file always being present as the program was developed. The solution is to create a dummy entry before running the main program.

First delete line 120 from Create and save the program again. Then enter a new Create2 program:

```
10 REM $.Create2
20 ch%=OPENOUT$.Discs"
30 PRINT#ch%,"Dummy","1"
40 CLOSE#ch%
50 ch%=OPENUP$.Datafile"
60 PRINT#ch%,"":CLOSE#ch%
```

Now create the catalogue disc by following the instructions in the original article, but run Create2 immediately after Create.

might have typed in the space after every line number and possibly put spaces at the end of lines. This would add at least 325 bytes to the length of the program unnecessarily.

Using Get it Right!, you can ensure you've typed the program in correctly and when run the checksum listing puts an asterisk after the number to indicate any extra spaces at the ends of lines.

Spaces can only be removed by copying the offending line — but don't copy any additional spaces.

## Expert reply

IN the November 1988 issue of The Micro User Brian MacKenzie gives some modifications for and makes some

comments about my Expert program from the September issue.

The comments are paradoxical in that they are both right and wrong. Yes, it is true that the program forward chains rules — in fact, it forward chains twice if a selected item is investigated further.

However, the backward chain exists in the stage when the user investigates a conclusion, where that conclusion is subsequently related to all facts.

When I wrote the program I contemplated how it should work on numerous occasions: Should it merely backward chain, listing all relevant facts — or should it forward chain listing all conclusions?

Eventually, I decided to perform an initial forward chain, where a desired conclusion could be used to form the beginnings of a backward chain which finally resumes to a forward chain.

Though this may sound finicky, the method works reasonably well — and I do accept that I could have explained this in the text.

I would also like to point out that the program is a practical attempt to emulate an expert system and, to be quite frank, the mentioned computational

techniques which are given such grandiose titles are almost intuitive.

They don't really need explaining — as anyone who sits down to write an expert shell will find out.

To leave you with a little puzzle, however. Consider what I call chicken-and-egg rules, where it is not clear which is a fact and which is a conclusion, like so:

```
IF chicken THEN egg
IF egg THEN chicken
```

Which is which? How should the rules be entered? What chaining technique should be used? Does it matter which is which? Does it matter how they are chained? — **Francis Botto, Gorseinon, Swansea.**

## Superior delivery

I RECENTLY phoned an order to Superior Software who guarantee that all orders are despatched within 24 hours using first class post.

After four days I was getting concerned as to what had happened to my order so, after phoning the Post Office and the staff not being able to

ALL programs printed in this magazine are exact reproduction of listings taken from running programs which have been thoroughly tested.

However, on the rare occasions when mistakes occur corrections are published as a matter of urgency. Should you encounter error messages when you type in a program, they will almost certainly be the result of your own typing mistakes.

Unfortunately we can no longer answer personal programming queries concerning these mistakes. Of course letters about suggested errors will be investigated without delay, but any replies found necessary will only appear in the letters pages.



trace anything in the system, I phoned Superior.

Immediately and without quibble a replacement order was despatched and this arrived the next morning delivered by a security firm.

I would like to say thank you to Superior Software through The Micro User for not only ensuring its products are superior but its customer service also.

By the way, I received the original parcel after my replacement order. — **C.J. Teasdale, Dundee.**

## Getting into print

I AM a pupil at the Swayne School and the Needlework Department has just bought a BBC Micro. It requires a package which enables the screen to be dumped to a printer, on special paper, so this can then be ironed on to material. I believe this type of package is available but where from? — **K.A. Chapman, Rayleigh, Essex.**

● You can either use a special ribbon or special paper and you can get details from MGA Microsystems, 023 383 571. To print the screen you can use any screen dump such as Dumpout 3 from Watford Electronics or Printmaster from Beebug.

## Type-ins on the Electron

I HAVE an Electron 64k and was wondering if The Micro User listings can be run on my machine. — **F. Proffit, Wigan, Lancs.**

● Any of the programs that avoid direct OS and screen access should function correctly, although there's no Mode 7 of course.

## Back to the typewriter

IN the July 1988 Problem Solved, Andre John Mas asked about using a Brother typewriter as a printer. I would

agree that it is probably more cost effective to get a dot matrix printer, and the results using NLQ are quite good these days, but if you already have the Brother typewriter you may find the following information helpful.

To make the connection you need a buffered interface: This uses a ribbon lead from the printer port on the BBC Micro to a small box about 4in x 8in x 2in, with another lead from that to the back of the typewriter. The box costs £130 from Wildings.

The equipment has given me good service, typing exam papers and other items for which clarity and precision are essential, as well as longer items such as chapters for books.

By using the pause embedded command you can underline or combine characters, although this is slow. Changing the daisywheel lets you use characters specific to other languages, and you can work out which keyboard keys produce which effects simply by pressing each in turn — in lower case, Caps lock and Shift lock — then printing out and working back from the output. — **Alistair H. Thomas, Preston, Lancs.**

## Drive decisions

I OWN a Master 128 and the official Acorn Master disc drive unit. I hoped that, although this is 80 track only, I would be able to use the command:

```
*DRIVE 0 40
```

to make use of 40 track discs. Unfortunately, this method is read only, so I wondered whether there is some way to modify the DFS so I can write as well as read these discs.

Also when you \*CAT an ADFS disc, what do the numbers in brackets mean? — **John Sparrow, Bury, Lancs.**

● As Mike Cook often says, it's not impossible to modify the DFS but just not worth the effort. It's also possible to modify your 80 track drive to 40/80 but, again, this is not the best solution in terms of

time, effort and cost.

It is probably best to buy a 40 track drive or trade in your 80 track one for a 40/80 switchable. Alternatively, you could fit a DFS that double steps the drive and allows writing — like the Watford one.

The numbers in brackets give the value of the Master sequence number of the directory when the file was last saved.

## Going under in safety

I AM emigrating to Australia and would like to know if it is

worth taking my BBC Micro with me. Is there a full range of software available and do new programs reach Down Under?

Have they even heard of the BBC Micro or have they been swamped by some American gizmo that uses a language all of its own? — **Martyn Law, Arbroath, Angus.**

● We're glad to say the BBC Micro is very big in Australia and you'll not lose out by taking it with you. Several of our readers have told us that The Micro User has even featured on a coffee table in Neighbours though no one has yet reported sighting a BBC Micro itself.

## Those lost chords

I HAVE just invested in a Music 500 and I was impressed with the free demos. But when I wanted to alter the user defined words by:

```
"word" EDIT
```

I could edit the word but not return to the original start piece of the music, as this doesn't seem to have any way of getting to it.

Also, did Peartree ever release the Music 87 software for the Music 500? When I phoned them they disclaimed all knowledge of the matter. Please help. — **A. Emery, Sandy, Beds.**

**Ian Waugh replies:** By the original start piece of the music do you mean the state of the music before you edited it or the menu of demo tunes?

If you mean the original state of the music, the only way to get this back is to load it again from disc or tape. For example:

```
"POPCORN" LOAD RUN
```

Editing, by its very nature, alters a program and that's what these music pieces are — programs. If you edit an Ample program, a Basic one or one written in any language, you are, by definition altering the original version. You can load the demo

tune menu from disc by entering:

```
"index" LOAD RUN
```

Peartree's ill-fated Music 87 was advertised for more than a year and when it did appear it fell rather short of its claims. As a comprehensive music system it was all but unuseable.

Anyone unfortunate enough to have a Music 87 should contact Hybrid for a Rescue package — Peartree went into liquidation and was taken over and the Music 87 has been well and truly dropped.

Hybrid Technology spent years developing its Music System and it is optimistic, to say the least, to think that a third party developer could equal its fully-integrated software never mind improve upon it, especially in such a short space of time.

Music 500 is the most sophisticated and powerful music system available for the BBC Micro and if you are enjoying it it is certainly worthwhile upgrading to the Music 5000.

It is far easier to use and has several front-end editors which greatly simplify the music creation process. An upgrade pack is available from Hybrid for £99.



## Become a real dab hand at programming . . . with this complete guide to the Master Operating System

**NEVER BEFORE** has so much information about the Master's operating system been brought together in one handy volume!


This book details all you need to know about the internal organisation of the BBC Master. With many of the detailed explanations accompanied by comprehensive, fully documented listings, coming to grips with even the most complicated of operating system functions is made as easy as possible.

Written by Master expert David Atherton in conjunction with Paul Horrell and Bruce Smith, there's so much information crammed into this book that even expert programmers will find something new.

*The Dabhand Guide costs only £12.95, but for £15.99 you can get both the book AND a 5.25in disc containing all the programs from it. Or for £16.95 you can have the 3.5in version.*

### TOPICS COVERED

● MOS commands ● Non-volatile ram. ● The 65C02 processor ● Differences between machines. ● New MOS calls ● Complete OSBYTE, OSWORD and VDU lists. ● Shadow and SRAM ● Memory map. ● Sideways rom ● OS call and item list. ● The Tube ● PCB links. ● Filing systems ● And much, much more...

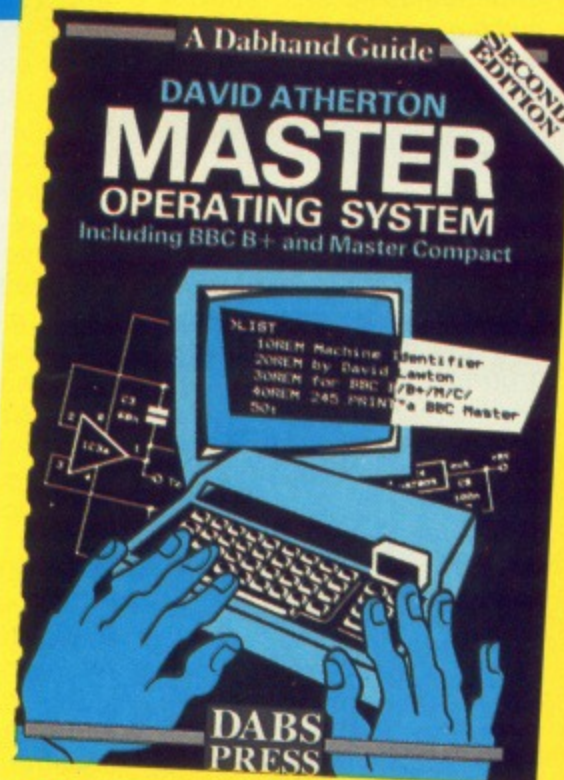

## Mini Office II

**Hot of the press  
— the book with  
ALL the answers!**

**THIS BOOK** is packed with the kind of hints and tips that can only be accumulated through years of computer use.

More than a manual the Dabhand guide to Mini Office II assumes nothing. Beginning with the first sentences typed into the editor, you are led through all aspects of using the system, up to advanced techniques. It is liberally sprinkled with examples, and contains handy tips on such things as function key definitions, planning databases, maximising memory usage, producing professional looking graphics, and getting to grips with communications.

All the examples are on the accompanying disc, which even includes a very useful routine to print out large spreadsheets sideways.

*For just £9.95 this book will help you to get the most out of Mini Office II. Send for your copy today!*



| Master Operating System book | With disc | Price  | (tick box)               |
|------------------------------|-----------|--------|--------------------------|
| Master                       | —         | £12.95 | <input type="checkbox"/> |
| Master                       | (5.25in)  | £15.95 | <input type="checkbox"/> |
| Master                       | (3.5in)   | £16.95 | <input type="checkbox"/> |
| Mini Office II book          | With disc | Price  | (tick box)               |
| Model B, B+, Master, Compact | —         | £9.95  | <input type="checkbox"/> |
| Model B, B+, Master          | (5.25in)  | £17.95 | <input type="checkbox"/> |
| Compact                      | (3.5in)   | £19.95 | <input type="checkbox"/> |

Total enclosed £ \_\_\_\_\_

Payment: Please indicate method ( )

☐ Access/Mastercard/Eurocard/Barclaycard/Visa

No. \_\_\_\_\_

☐ Cheque/Eurocheque made payable to Dabs Press

Name \_\_\_\_\_ Signed \_\_\_\_\_

Address \_\_\_\_\_

Post Code \_\_\_\_\_

Send to: Dabs Press, 5 Victoria Lane, Whitefield, Manchester M25 8AL.



**SAVE  
up to £84!**

THE MICRO USER  
December 1988  
Fruits 40T  
Code 2653  
(c)Database Publications

*How's this for an  
incredible deal?*



**Subscribe to *The Micro User* for a year – and we'll send you the monthly tape or disc absolutely FREE!\***

That's right, our tapes and discs have proved so popular we're making them available to EVERYONE who subscribes. And that adds up to a massive saving of £84 with the monthly 3.5in discs!

Just think, not only will you get your favourite magazine delivered to your door

before it's on sale in the newsagents, you'll also get a free tape or disc each month containing all the listings from that issue – plus the occasional extra.

*So, subscribe today and as well as ensuring you get *The Micro User* each month, with the free tapes or discs you'll save the wear and tear on your fingers, and get programs that work correctly – the first time!*

**UK ONLY**

\* 3.5" subscriptions are £4 extra

**THE  
MICRO  
USER** and  
monthly tape  
Usual price **£53**  
Offer price **£23**

**THE  
MICRO  
USER** and  
monthly 5.25in disc  
Usual price **£68**  
Offer price **£23**

**THE  
MICRO  
USER** and  
monthly 3.5in disc  
Usual price **£111**  
Offer price **£27**

All prices include  
post and packaging

**NEW**

**Annual  
subscriptions  
with tape or disc**

|  |     |      |
|--|-----|------|
| Magazine + monthly tape                  | £23 | 2225 |
| Magazine + monthly (40 track) 5.25" disc | £23 | 2227 |
| Magazine + monthly (80 track) 5.25" disc | £23 | 2251 |
| Magazine + monthly 3.5" disc             | £27 | 2234 |

|                        |     |      |
|------------------------|-----|------|
| Europe & Eire: surface | £28 | 2365 |
| Overseas: surface      | £34 | 2366 |
| Overseas: Air          | £45 | 2004 |

Please tick items in boxes below

|  | New *                    | Renewal                  | £    | p |
|--|--------------------------|--------------------------|------|---|
|  | <input type="checkbox"/> | <input type="checkbox"/> | 2226 |   |
|  | <input type="checkbox"/> | <input type="checkbox"/> | 2228 |   |
|  | <input type="checkbox"/> | <input type="checkbox"/> | 2252 |   |
|  | <input type="checkbox"/> | <input type="checkbox"/> | 2235 |   |
|  | <input type="checkbox"/> | <input type="checkbox"/> | 2114 |   |
|  | <input type="checkbox"/> | <input type="checkbox"/> | 2367 |   |
|  | <input type="checkbox"/> | <input type="checkbox"/> | 2113 |   |

\* New subscriptions commence with next issue

Send to: Database Publications, FREEPOST, Macclesfield, Cheshire SK10 4YB  
(No stamp needed if posted in UK) Please allow up to 28 days for delivery Prices valid to 28.2.89

Please note: The monthly tapes and discs are only available with UK subscriptions or renewals

Orders subject to availability

Payment: please indicate method (✓)

Expiry Date  /

☐ Access/Mastercard/Eurocard/Barclaycard/Visa  
No.

☐ Cheque/Eurocheque made payable to Database Publications Ltd.

Name  Signed

Address

Post Code

Daytime telephone number in case of queries

Order at any time of  
the day or night

Orders by Prestel:  
Key \*89, then 614568383

Fax Orders:  
0625 879966

MicroLink/Telecom Gold  
72:MAG001

Don't forget to give your name, address  
and credit card number

MU2

**THE  
MICRO  
USER**



BBC Micro  
5¼" disc:\*

**£4.99**

\* Tape version  
available soon

Master  
3½" disc:

**£6.95**

Following the likes of Repton and Ravenskull, Clogger is a mould-breaking arcade/strategy game offering 18 different levels, the smoothest animation you've seen, a catchy theme tune and dozens of mind-bending puzzles.

As you progress through the levels, some of the puzzles become really devious, and the skill required to solve each level will have you taxing your grey matter for weeks!

You've played a selection of the levels already. Now's your chance to try out the other 15, containing all the new puzzles, surprises and tricks.

**Order your copy today, and see if you can become a Master Clogger.**



**You have seen them on December's cover disc**

**Now's your chance to buy the full versions!**

# Cheat It Again Joe

**Volumes  
1 and 2**



Tape

**£2.99**

each volume

5¼" disc

**£4.99**

each volume

**The cheats**

Just about all the games in your collection can now be cracked – using Cheat it Again, Joe!

Each tape or disc contains a massive 20 cheats and they're so easy to use. Just load the cheat before you run the game and you're away – with infinite lives, extra speed, more credits, invulnerability and so on.

Now you can complete those games that have been frustrating you for months.

**And for only £2.99 on tape or £4.99 on disc, this is the ideal way to bring your games collection back to life.**

## Volume 1

### 5¼" disc

|                 |                  |
|-----------------|------------------|
| Elite           | Bonecruncher     |
| Citadel         | XOR              |
| Ravenskull      | Elixir           |
| Thrust          | Living Daylights |
| Strykers Run    | Deathstar        |
| Repton 1        | Starship Command |
| Repton 2        | Arcadians        |
| Star Wars       | Kourtyard        |
| Quest           | Despatch Rider   |
| Thunderstruck 2 | Phantom          |

### Tape

|                 |                  |
|-----------------|------------------|
| Elite           | Bonecruncher     |
| Citadel         | Killer Gorilla   |
| Ravenskull      | Elixir           |
| Thrust          | Living Daylights |
| Plan B          | Deathstar        |
| Repton 1        | Starship Command |
| Repton 2        | Arcadians        |
| Star Wars       | Kourtyard        |
| Quest           | Despatch Rider   |
| Thunderstruck 2 | Phantom          |

## Volume 2

### 5¼" disc

|                  |                    |
|------------------|--------------------|
| Repton 3         | Palace of Magic    |
| Around the World | Icarus             |
| Life of Repton   | Impact             |
| Galaforce        | Magic Mushrooms    |
| Codename: Droid  | Planetoid          |
| Craze Rider      | Ransack            |
| Paperboy         | Imogen             |
| Saigon           | Uridium            |
| Spycat           | Karate Combat      |
| Spellbinder      | Repton 3 passwords |

### Tape

|                  |                    |
|------------------|--------------------|
| Repton 3         | Palace of Magic    |
| Around the World | Icarus             |
| Life of Repton   | Impact             |
| Plan B2          | Magic Mushrooms    |
| Codename: Droid  | Planetoid          |
| Combat Lynx      | Ransack            |
| Paperboy         | Imogen             |
| Saigon           | Uridium            |
| Spycat           | Karate Combat      |
| Spellbinder      | Repton 3 passwords |

**Place your order today, using the form on Page 133**



ARCHIMEDES  
Version Out NOW  
**FIRST**

Desk Top Publisher for the Archimedes

**PIXEL  
PERFECT**

# The DTP package that does what you want!

"AVP's *Pixel Perfect* has probably the best overall facilities." *A & B Computing*

"The graphics capabilities of *Pixel Perfect* are excellent - the facilities are easy to use and a vast array of effects can be achieved."

"Here is a DTP package that does what you want." *Micro User*

"*Pixel Perfect* performs very well compared with other DTP packages."

"Its dot-matrix output stands comparison with anything else on the market."

"For value for money and professional output (depending on your design skills of course) *Pixel Perfect* is hard to beat." *Times Educational Supplement*

"*Pixel Perfect* is every bit as good as those DTP packages which run under the PC Emulator - and much, much faster!"

"The verdict? If you need to produce quality presentation material with no fuss - then buy this package. It represents good value for money." *Micronet*

All BBC versions £39.50 (5.25 disk) £41.70 (3.5 disk) Archimedes £79.50 plus VAT (no charge for p & p)



To order or for more information on the best BBC desk top publishing system available write to  
AVP School Hill Centre Chepstow Gwent NP6 5PH Telephone 02912 5439



## Reach For The Sky

with GLIDER PILOT 2, our comprehensive flight simulator. Features cable launch, thermals, cross country with map and practice option. Extensively machine coded for quick response. Instruction booklet.

With full instrumentation and "solid" colour perspective graphics, this is not a game but an accurate and challenging simulation. Keys or potentiometer joystick. Find the thermals and soar!

FREE to disc users - "NOTEBOOK" - an easy to use memopad utility. Use it as a flight log for Glider Pilot 2!

B, B+ and MASTER.

Cassette £7.95, 5.25" Disc £8.95, 3.5" Disc £9.95.

APEX Software, Station Road, Penshaw, Tyne & Wear  
DH4 7PE. Tel: Durham 091-385 3091.



**Field Electric Ltd**

Tel: 01-953 6009

3 Shenley Road, Borehamwood, Herts.

WD6 1AA. 0836 640328 Fax: 01-207 6375

**Special Offer.** PSU. 230VAC Input. Sinclair ZX power supply. 9 VDC AT 1.4A £7.95 c/p £2.00 New.  
Astec Switch Mode PSU. 240 VAC Input. Uncased New. +5V at 2.5A + 12V at 2A - 12V at 1.0A £17.50 c/p £2.00

**Special Offer.** NEC 12" green screen monitor. 75Ω composite video input. Black plastic case. High resolution. 20 Mhz Bandwidth. 240 VAC input. £21.95 c/p £5.50  
NEC 9" Green screen monitor 75Ω composite video input. Black plastic case with built in handle. High Resolution 20 Mhz Bandwidth 240v input £19.95 c/p £4.50. Video connection lead £3.95 All checked and tested.

Mitsubishi 5.25" Floppy Disk Drive .5 Height. 80/40 track Double Sided. High Density 1.6Mb Capacity. New uncased £69.00 c/p £2.75 Standard S400 interface.

PC/XT & AT compatible keyboard. Auto-sense keyboard. Keys arranged in 3 areas. Function array. Qwerty array. Special function/number pad. Shielded 5' cable terminated to 5 pin Din. New & Boxed IBM Compatible £45.00 c/p £4.95.

Motorola TTL Monitor chassis. 7" Green Phosphor 22 Mhz Bandwidth. 12 VDC input. New and boxed complete with circuit diagram and data. Compatible to BBC/IBM computers. Diagram supplied for connection to BBC. 75Ω composite video circuit diagram supplied. £25.00 c/p £4.00

We stock switch mode/linear PSU. Transformers test & measurement equipment. Audio equipment, telephone equipment. Please ring us. For overseas postal rates please enquire for quotation.

**THE  
MICRO  
USER**

**MAIL ORDER OFFERS**

**THE  
MICRO  
USER**

**MAIL ORDER OFFERS**

### Cover disc special offers

|                                      |            |                          |
|--------------------------------------|------------|--------------------------|
| Clogger 3.5" disc (Master)           | £6.95 2196 | <input type="checkbox"/> |
| Clogger 5.25" disc (BBC B)           | £4.99 2195 | <input type="checkbox"/> |
| Cheat It again, Joe Vol 1 cassette   | £2.99 2197 | <input type="checkbox"/> |
| Cheat It again, Joe Vol 1 5.25" disc | £4.99 2198 | <input type="checkbox"/> |
| Cheat It again, Joe Vol 2 cassette   | £2.99 2199 | <input type="checkbox"/> |
| Cheat It again, Joe Vol 2 5.25" disc | £4.99 2223 | <input type="checkbox"/> |

Payment: please indicate method (✓)

☐ Access/Mastercard/Eurocard/Barclaycard/Visa  
No.

☐ Cheque/Eurocheque made payable to Database Publications Ltd.

Name  Signed

Address

Post Code

Daytime telephone number in case of queries

Expiry Date

Send to: Database Publications,  
FREEPOST, Macclesfield,  
Cheshire SK10 4YB

(No stamp needed if posted in UK)  
Please allow up to 28 days for delivery

Order at any time of  
the day or night

Orders by Prestel:  
Key \*89, then 614568383

Fax Orders: MicroLink/Telecom Gold  
0625 879966 72:MAG001

Don't forget to give your name,  
address and credit card number

MU2



# Meet the Morley Family...

## Teletext Adapter

The adapter is housed in a plastic disc drive style case, similar in colour to the BBC micro. It connects to the User Port via a 4-way ribbon cable and can take its power either from the computer or from our optional power supply.

The unit comes with the ATS (advanced teletext software) written for us by the BBC. The HOLD PAGE and REVEAL features are implemented, and pages can be saved to disc under your own file names.

Telesoftware is catalogued and selected from the Menu page, and the programs are easily downloaded.

THIS IS THE BIGGEST SELLING TELETEXT ADAPTER CURRENTLY IN PRODUCTION WORLD-WIDE, AND COMES WITH A FULL MONEY BACK SATISFACTION GUARANTEE.

|                       |         |
|-----------------------|---------|
| Adapter BBC/Master    | £104.20 |
| Adapter Compact       | £120.00 |
| Adapter RML Nimbus    | £104.20 |
| Optional Power supply | £8.80   |
| Teletext Utility Disc | £5.20   |

## EPROM Programmer V2

This state-of-the-art unit, allows programming of 2764, 27128 and 27256 EPROMS both 12.5 and 21 volt. Totally under software control it is believed to be one of the fastest programmers available today.

The comprehensive user-friendly software included in the package has two main parts. The first allows EPROMS to be read, programmed, verified, and edited, also allowing a ROM image to be loaded or saved. The second is a full ROM management system in its own right, which has a host of useful features and routines, such as KILL and RESURRECT ROM to disable or enable a sideways ROM, dump ROM image to buffer or disc, move ROM image in buffer to sideways RAM, and VIEW-SEARCH any sideways ROM.

£30.00

Eprom programmer utility disc - Put all your favourite routines into Sideways Rom, both BASIC and M/Code allows multiple programmes up to 16k with separate \* commands for initialisation and help.

£5.20

## Master Board "AA"

At long last the add-on all MASTER users have been waiting for, an internal ROM board.

No more need to turn the computer off to insert the cartridge containing the ROM you need to debug the program in memory.

The all new MORLEY MASTER BOARD "AA" allows you to have up to 8 x 16k and 4 x 32k extra Roms installed inside your MASTER and still leaves the cartridge slots free. This in effect allows your MASTER to support as many as 24, 16k ROMs installed permanently, with the

addition of your standard 4 x sideways ram banks and four banks by using cartridges.

A staggering 32 ROM images installed and accessible at any time.

Included in the package is a utility ROM which has many useful features including a clever file transfer program that transfers files between DFS and ADFS formats or vice versa.

£40

## The Latest Arrival...

The Morley range of Winchester Drives are completely compatible with all BBC's, B+'s and Master computers fitted with ADFS.

Each unit comes complete with a utility disc containing format, verify, archive, initialise and an intelligent file copy including DFS files to hard disc.

Finished in high quality colour co-ordinated case with a whisper quiet internal fan and switch mode power supply.

Superb quality and competitive cost - in a word - "Morley"!

|             |        |
|-------------|--------|
| 20 Megabyte | £370   |
| 30 Megabyte | £420   |
| 40 Megabyte | £500   |
| 60 Megabyte | P.O.A. |

## RAMDISC

Due to the rise in prices of dynamic RAM chips we only have a limited stock of the 1 megabyte version of this device left. Special offer price while stocks last.

£150.00

## Master Cartridge

from Care

|                                  |        |
|----------------------------------|--------|
| Dual cartridge 2 sockets         | £9.00  |
| Quad cartridge 4 sockets         | £14.00 |
| Duet cartridge 2 x 32k sockets   | £12.00 |
| 32k non-volatile ram cartridge   |        |
| ideal for Spellmaster dictionary | £33.00 |

## Software

We now stock a full range of computer concepts software and will gladly populate your 'AA' board or cartridge before despatch.

## Master Smart Cartridge

THE MORLEY/CARE SMART CARTRIDGE

The Smart Cartridge will at the press of a button halt a program running in memory and execute any one of a host of useful built-in, or user defined procedures, and once completed will return to the program and continue where it left off. The only limiting factor with this device is the programmers imagination.

Some of the built-in features (at the press of a button):

- \*Autosaves computer's entire memory.
- \*Freeze program at any point.
- \*Screen dump (any mode) to printer or disc.
- \*Allows most protected software to be backed-up including tape to disc and disc to tape.
- \*User friendly menu driven software etc.

£30.00

**MORLEY**  
E · L · E · C · T · R · O · N · I · C · S



Unit 3  
Maurice Road  
Industrial Estate  
Wallsend, Tyne and Wear NE28 6BY  
Telephone: Tyneside (091) 262 7507

VAT: UK customers please add 15% VAT to cost incl. carriage.

CARRIAGE £1 on all orders. £3 on larger items (Adapters etc).

To order:

By Post:- Enclose cheque made payable to Morley Electronics Ltd. Or credit card:  
By Phone:- quoting your Access Visa number.

Goods usually despatched by return.  
Government and Education orders welcome.

**COMING SOON...**

**Master Speech Cartridge**



WITH  
PAYROLL

## A LOW COST DISC BASED PROFESSIONAL ACCOUNTING PROGRAM

For the BBC Computer

### "Micro-Trader"

#### INTEGRATED SALES PURCHASE AND NOMINAL LEDGERS

Designed for business use by a business man. "Micro-Trader" offers full Sales and Purchase Ledger facilities including SALES INVOICE and STATEMENT PRINTING with a capacity of up to 1,000 accounts and 5,000 transactions per month.

Nominal Ledger features quick and easy entry of everyday transactions. Up to 6 Bank Accounts, full V.A.T. facilities, Journal Posting. Full Reporting for individual accounts, Audit Trail, Trial Balance, Profit & Loss and Balance Sheet.

### "MICRO-STOCK"

Stock Control program, fully integrated with "Micro-Trader". 4,000 Stock Items with user defined Codes. Invoice and Credit Notes and Cash Sales routine. Full Stock Held Reports.

£75.00 + V.A.T.

### "EXTENDED PAYROLL"

Micro-Aid Full Feature Extended Payroll. For use stand alone or integrated with "Micro-Trader".


£49.95 + V.A.T.



### "MICRO-MAILER"

A Mailmerge program, fully integrated with "Micro-Trader". With a user Database.

£30.00 + V.A.T.



PHONE TODAY FOR A FREE FACT SHEET

## MEADOW COMPUTERS

11, LONDON STREET, WHITCHURCH, HAMPSHIRE, RG28 7LH

Telephone: Whitchurch (0256) 892008

## context

Archimedes is a trademark of Acorn Computers Ltd

### BANK MANAGER for disc systems only

The most advanced and versatile personal bank account management program available for all BBC computers. Consistently acclaimed!

"data entry is a delight... professional... excellent product" - Micro User April '86  
Enter cheques and receipts. Standing orders any frequency. Automatic date sequencing. Reconcile statements. Search, amend and delete. Unreconcile. Move forwards or backwards. Analyse expenditure. Forward cash flow forecast. Up to 36 simultaneous 'bank accounts' online, inter-account transfers, 9999 standing orders, 99 analysis categories. 12 actual and 12 budgets per category, over 4,000 postings on an 80k disc. Reports to screen or printer. Graphics. Foreign currency support. Password. File recovery. Auto exec file. Field editing. Itemised look ahead. Programmable report writer.

Standard Bank Manager for the BBC B, B+ £17.50

### BANK MANAGER MASTER for disc systems only

Includes all of the facilities of the Standard Bank Manager plus ADFS file system support, shadow screens, uses sideways RAM, 40 or 80 column screen reports. Improved graphics, m/c windows, function key support and onscreen labels, additional functions added to the already extensive report facilities.

Bank Manager Master for the MASTER and MASTER COMPACT £22.50

### ARCHIMEDES BANK MANAGER

All facilities of Master version plus high speed 'native' mode, wild card analysis enquiry, analysis code sort and other enhancements.

"Impressed, ideal, easy to use." - Micro User, March '88  
Archimedes Bank Manager £25.00

### BANK MANAGER BUSINESS UTILITIES for disc systems only

For the 'professional' who also uses the BANK MANAGER to control the business accounts the BUSINESS UTILITIES add double entry trial balance and programmable spreadsheet analysis reports. Generated from cheque and cash transactions keyed into BANK MANAGER. Just pass the reports to your accountant! Available for all BANK MANAGER versions state which.

Bank Manager Business Utility Pack 1 £12.00

### TYPING TUTOR

Quickly learn to touch type. Over 90 smoothly graded lessons graduate you from the basic home keys to complete keyboard mastery. Unique word scan line checking. Target WPM and percentage correct. Revise the targets or lessons as required. Audio key click for positive key depression. Establish a typing rhythm using the automatic metronome. Free format option. Disc version includes several enhancements e.g. on screen keyboard, exact mode, on screen parameters. Recommended.

Cassette £12.50, Disc for BBC B, B+, Master and Compact £12.50  
Disc for Archimedes (all models) £15.00

ALL PRICES FULLY INCLUSIVE FREE POSTAGE WITHIN UK  
Enquiries and Access Credit card orders telephone 023 03 347  
Please state: cassette, 3.5" disc, 5.25" 40k disc, or 5.25" 80k disc  
and computer type (B. Compact, Master or Archimedes).



## CONTEX COMPUTING

(REF. MU)

15 WOODLANDS CLOSE, COPL, BEDFORD MK44 3UE

# MICRO MEDIA Computer Supplies Ltd.

### 5.25 Unbranded Discs

|               | 25    | 50    | 100   | 250    |
|---------------|-------|-------|-------|--------|
| SS/DD         | 9.30  | 17.50 | 31.92 | 69.90  |
| DS/40T        | 10.40 | 18.64 | 34.48 | 72.50  |
| DS/80T        | 11.60 | 20.80 | 38.80 | 81.80  |
| DS HD PC AT's | 29.90 | 48.96 | 87.52 | 205.00 |

### 5.25 Coloured Discs

|        | 25    | 50    | 100   | 250    |
|--------|-------|-------|-------|--------|
| DS/40T | 12.45 | 23.56 | 39.96 | 91.50  |
| DS/80T | 13.45 | 25.40 | 47.40 | 100.00 |

### 5.25 Reversible

|                         | 25    | 50    | 100   | 250    |
|-------------------------|-------|-------|-------|--------|
| 2 Index Holes & Notches |       |       |       |        |
| DS40/80T                | 14.90 | 26.95 | 51.95 | 118.95 |

### 3.5 Discs

|       | 10    | 20    | 50    | 100   |
|-------|-------|-------|-------|-------|
| DS/DD | 11.30 | 21.76 | 47.90 | 91.50 |

### 5.25 BRAND NAME Brand Discs

|               | 25    | 50    | 100   | 250    |
|---------------|-------|-------|-------|--------|
| SS/DD         | 6.40  | 12.10 | 28.30 | 51.70  |
| DS/40T        | 7.50  | 14.15 | 33.15 | 61.30  |
| DS/80T        | 8.50  | 15.95 | 36.25 | 71.25  |
| DS HD PC AT's | 14.90 | 28.60 | 68.25 | 130.50 |
| REVERSIBLE    | 9.75  | 18.50 | 43.85 | 81.50  |

All discs supplied are with labels 5.25" write protects, envelopes & hub rings. 100% certified error free lifetime guarantee.

### 3.5 BRAND NAME Brand Discs

|           | 25    | 50    | 100    | 250    |
|-----------|-------|-------|--------|--------|
| SS/DD     | 13.70 | 26.90 | 64.40  | 122.60 |
| DS/DD     | 14.90 | 28.60 | 68.20  | 130.50 |
| DS/HD 2Mb | 37.95 | 72.40 | 172.40 | 319.60 |

### Printer Ribbons

| Price each Ribbon         | 2    | 6    | 12   |
|---------------------------|------|------|------|
| Acorn Ink Jet             | 3.75 | 3.45 | 3.15 |
| Centronics GLP            | 3.65 | 3.45 | 3.15 |
| R, BL, GR, BR, Y,         | 4.65 | 4.40 | 4.00 |
| Canon 1080/1156           | 2.99 | 2.85 | 2.60 |
| R, BL, GR, BR, Y          | 3.99 | 3.85 | 3.70 |
| Citizen 1200              | 4.30 | 3.95 | 3.70 |
| Epson MX, FX, RX80, FX800 | 3.35 | 3.20 | 3.05 |
| R, BL, GR, BR, Y          | 4.35 | 4.20 | 4.05 |
| IX80/86, GX80             | 2.80 | 2.65 | 2.40 |
| R, BL, GR, BR, Y          | 3.80 | 3.65 | 3.40 |
| MX100/FX1000/FX105        | 3.90 | 3.70 | 3.50 |
| R, BL, BR                 | 5.40 | 5.00 | 4.60 |
| EX800                     | 5.50 | 5.10 | 4.70 |
| Kaga KP810/910            | 2.99 | 2.85 | 2.60 |
| R, BL, GR, BR, Y          | 3.99 | 3.85 | 3.70 |
| NEC P2200                 | 5.95 | 5.65 | 5.30 |
| Panasonic KXP             | 4.65 | 4.40 | 4.20 |
| R, BL, GR, BR, Y          | 6.50 | 6.20 | 5.85 |
| Shimwa CP80MS             | 4.10 | 3.85 | 3.55 |
| Star LC10                 | 3.50 | 3.10 | 2.85 |
| NL10                      | 5.25 | 4.95 | 4.70 |

Please mix colours and types for best prices  
R = Red, BL = Blue, GR = Green, BR = Brown  
Y = Yellow

If the ribbon you require is not listed  
please let us quote

### Computer Paper

| Plain fanfold, micro perf edges | Weight | 1000's  | Price per box |
|---------------------------------|--------|---------|---------------|
| Size                            | gsm    | per box | 1 box         |
| 11 x 9.5                        | 60     | 2000    | 14.50         |
| 11 x 9.5                        | 70     | 2000    | 17.60         |
| 11 x 9.5                        | 80     | 2000    | 19.75         |
| EXACT A4                        |        |         |               |
| 11 1/2 x 9.25                   | 70     | 2000    | 20.50         |
|                                 | 80     | 2000    | 23.95         |
|                                 | 90     | 1000    | 13.90         |

### Computer Labels

| Continuous fanfold, sprocket fed | 1000 | 3000 | 5000 |
|----------------------------------|------|------|------|
| Price per 1000                   |      |      |      |
| 70x36 2 1/2 x 1 1/2              | 4.85 | 3.85 | 3.55 |
| 89x36 3 1/2 x 1 1/2              | 5.35 | 4.50 | 4.10 |
| 89x49 3 1/2 x 1 1/2              | 7.50 | 6.60 | 5.90 |

Please state no of labels across sheet (1, 2 or 3)

### Disc Storage Boxes

| Price each      | 1+    | 3+   | 6+   |
|-----------------|-------|------|------|
| MD 120 5.25x120 | 10.70 | 9.65 | 8.95 |
| MD 100 5.25x100 | 8.90  | 7.99 | 7.40 |
| MD 50 5.25x50   | 6.75  | 6.10 | 5.65 |

### Printer Stands

| Space Saver | 80 col | 132 col |
|-------------|--------|---------|
| Coated Wire | 28.50  | 27.25   |
| 132 col     | 35.50  | 32.90   |
| Coated Wire | 13.70  | 12.75   |
| 132 col     | 15.70  | 14.60   |

### Swivel Bases

| Price each       | 12"   | 14"   |
|------------------|-------|-------|
| 12" 55x280x260mm | 11.90 | 10.40 |
| 14" 55x355x320mm | 13.50 | 11.80 |

Freepost, Dept. MU, Rydal Mount,  
Baker St., Potters Bar, Herts EN6 3BR

(5 lines)  
Access & Visa

0707 52698

Out of Office Hours (Answer Machine)

Orders despatched 24 hrs  
Please allow 5 days for delivery

For guaranteed next day delivery please  
ring - from £2.50 extra

Postage cover UK only  
ALL PRICES INCLUSIVE OF DELIVERY  
AND VAT


Personal callers welcome  
Weekdays 8.30am - 5.30pm  
Saturdays 9.30am - 1.00pm

AUTUMN CATALOGUE  
OUT NOW 12 PAGES

Please ring or write for your free copy.

### Wire Printer Stand


adjusts by front  
dial turn 360°  
Tilt up &  
down 25°



MD120




Anti  
Static

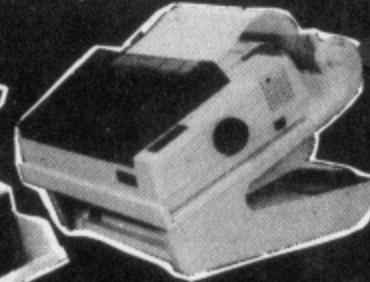

MD100 automatic refolding of paper



Space  
Saver

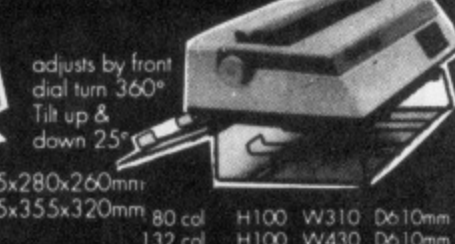

12" 55x280x260mm  
14" 55x355x320mm  
80 col H100 W310 D610mm  
132 col H100 W430 D610mm



## FAX\*FILE ORGANISER



Combine the power of your BBC with the flexibility and convenience of a personal organiser (Filofax, Lefax etc) to create a personalised data base. Using special sized computer paper or single sheets to print:

- ★ Diaries including your data (on disc)
- ★ Address book pages, up to 48 entries sorted by name.
- ★ Custom designed forms.

ADDRESS BOOK



The program is menu driven with plenty of on-screen help. The graphics are superb and the printed pages will match the high quality of your personal organiser. The Organiser will run on a BBC B or a Master 128. It requires an Epson FX80 compatible printer. Extra computer paper (tractor feed, pre-punched) is available.

"simple but effective product, very easy to use" Acorn User

"Extremely friendly. I cannot fault it" Beebug

"I have no reservations about recommending this product" Micro User

£12.95 inc p&p

DIARY

Disc, 40/80 track (state which), manual, sample pack of paper

### MEWsoft's - A4 FORMS DESIGNER

Ideal for schools, clubs, and for invoices, membership forms etc.

Master/Compact, Model B with Shadow Ram £9.95, Archimedes £12.95

MEWsoft

11 Cressy Road, London NW3 2NB. Tel: 01-267 2642

## EUROWORD

### for WORDWISE and WORDWISE PLUS

Converts Wordwise to a European Wordprocessor

- On-Screen Accents
- On-Screen Underlining
- Menu to Set Preferences
- Customise to Printer
- 40 Page Manual

Provides a minimum of 26 European Characters, all of which can be used in a single document.

Printer drivers for Epson, Citizen, Diablo/Qume, Juki, Ricoh and IBM mode printers.

Other useful features, such as additional embedded commands for Wordwise similar to those in Wordwise Plus.

Charm Micro Soft

31 Freshmeadow Lane, Helsby,

Cheshire WA6 0QU. Tel: 0772-616705

Price: £14.90 inclusive

Add £2 for a 3.5" disc

Specify 40/80T and printer type

## BeebDOS version 2.02 (New)

from MicroBoss

### Software for BBC and IBM file interchange

Runs on IBM-PC-XT-AT or compatibles and supports DOS 2.0 or later

Supplied on 360K IBM diskette with manual and plastic wallet the software includes:

- BCOPY Copy files BBC - IBM, IBM - BBC, BBC - BBC (wild cards allowed)
- BCONV Flexible IBM file translate facility enabling text to be passed between VIEW, WORDSTAR and Displaywrite 3 amongst other uses.
- BGRAPH Display BBC mode 0,1,2,4,5 screen format (AMX Art included) files on IBM standard colour (CGA), enhanced colour (EGA) or Hercules screens for use in IBM PC presentation, DTP, drawing and other graphic applications.

BeebDOS is almost a complete BBC DFS/ADFS for the IBM PC with utilities to catalogue, format, backup, delete, lock, unlock, compact rename, alter title & options, map free space, change and create directories of BBC diskette/files.


In fact BeebDOS is probably the fastest and most powerful BBC/IBM PC file transfer method available and no cables or serial connections are required.

BBC double density diskette formats supported are Acorn ADFS, Watford, Solidisk, OPUS DDOS and UDM. Acorn single density DFS is only supported when running BeebDOS on an IBM AT or XT286 with a 360k disk drive. Please send or phone for an information sheet

£46

Inclusive of VAT

CHEQUE OR POSTAL ORDER TRADE/EDUCATION ENQUIRIES WELCOME  
MICROBOSS LTD 3 HADLEIGH RD FRINTON ESSEX CO13 9HG TEL (0255) 671095



### Whatever your subject

French, First Aid, Football, Spelling, Science, Spanish, Sport, Scotland, England, English Words, German, General Knowledge, Geography, Italian, Arithmetic, Natural History and Welsh

Let your computer  
help you learn

Write or phone for a FREE 20 page illustrated catalogue of our  
Leisure and Educational Software

### KOSMOS SOFTWARE LIMITED

FREEPOST (no stamp needed)

DUNSTABLE, Beds. LU5 6BR

Tel 05255 3942 or 5406

## REAL TIME CONTROL APPLICATIONS

From Paul Fray Ltd

For School, Business, Home or Laboratory



### SPIDER The Software

Fifty additional keywords expanding BASIC's control over the User Port, Serial Port and keyboard by invoking BASIC procedures from external events.

- Foreground/Background processing
- ROM/RAM combination takes no memory
- Leaves BASIC programs unaffected
- Easy to install with no soldering

— FROM £65 —

### TERMITE The Hardware



- Eight configurable input/output lines
- Status indicators for each line
- Outputs rated at 2A, 5 to 30V DC
- Opto-isolated and fused for safety
- Fully compatible with SPIDER
- Comprehensive manual including driver utilities
- Ideal for driving motors, lamps, sensors etc.

— ONLY £79 —

Prices inclusive of VAT. Please add £3 for p&p


We also supply a full range of industrial digital, analogue and serial cards for use with SPIDER. For more information on any Paul Fray product please telephone (0223) 66529

(Trade Enquiries Welcome)

Paul Fray Ltd, Willowcroft, Histon Road, Cambridge CB4 3JD

## INTEGRA-β

### The Expansion for the BBC Model B



The INTEGRA-β provides four operation modes - as standard Beeb or with shadow Ram and emulation of 'B+' and Master 128 features. Ideal for educational, commercial and data collection applications, as well as the private user.

An included battery-backup system, (which covers all fitted Ram), can save any data in Ram during a power-line disturbance or when the computer is switched off. Also, Rom images can be loaded from disc, stored and cleared at will, minimising the need for physical Rom changes. Compatible with DFS, ADFS and second processors conforming to ACORN\* protocols.

Enjoy the facilities offered by the INTEGRA Operating System which allows you to run Model 'B+' versions of programmes with their added features also provides many of the features otherwise only available in the Master series. Control of sideways Ram even exceeds that available in the Master. Includes comprehensive machine configuration means, real-time clock with date, calendar and alarm features and commands for controlling the working environment. Will additionally allow use of the type 65C02 processor with its enhanced instruction set.

Compatible with many applications, some of which are, Inter-Word, Inter-Sheet, Inter-Base, Wordwise Plus from Computer Concepts. View-Sheet, View 3 from Acornsoft. AMX Super-Art, AMX Stop Press! from Advanced Memory Systems. The Publisher and Genie from Permanent Memory Systems. Music 5000 System and Ample from Hybrid Technology.

#### OFFER PRICES

| Item            | UK (Including P&P, Ins. VAT) | EEC (Incl. P&P, Ins.) | Others (Plus P&P, Ins.) |
|-----------------|------------------------------|-----------------------|-------------------------|
| INTEGRA-β       | £130.00                      | £122.00               | £118.00                 |
| 32K Ram Chip*   | £13.34*                      | £12.00*               | £12.00                  |
| Dual WP Switch† | £7.00†                       | £8.00†                | £7.00                   |
| Extra Switch*   | £1.50*                       | £1.50*                | £1.50                   |
| 65C02 CPU*      | £8.75*                       | £8.75*                | £8.75                   |

If ordering separately add as indicated for P&P  
£1.00  
£2.50

£2.00  
£4.00

The WP Switch has two switches fitted with room for four more. Each switch controls two 16K banks. Fits at rear of BBC casing and leads push-on to board pins.

#### COMPUTECH

The Garth, Hampsfell Road, Grange over Sands, Cumbria. LA11 6BG.  
Telephone: 053 953 4604



## MICROLEDGER

A high quality general ledger package designed by a Chartered Accountant for maximum versatility and ease of use. Ideal for small businesses, clubs, schools etc., as well as for home accounts. Runs on all BBC micros with 32k RAM or more. Features include:

- ★ "Double-entry" accounting.
- ★ Up to 99 general ledger accounts: all account names user-specified - can include VAT and sales/purchase ledger accounts.
- ★ Up to 500 transactions per accounting period.
- ★ Excellent budgeting facility.
- ★ Reports include Income & Expenditure Account, Balance Sheet, Funds Flow Statement. Current period and year-to-date reporting with actual/budget comparisons. Full audit trail.
- ★ Consolidation of two or more separate ledgers.
- ★ Menu-driven with full prompt messages.
- ★ Comprehensive, 30 page manual.

MicroLedger is supplied on 40 track 5.25" disk or on tape cassette for conversion to other disk media. Unrivalled value at £16.50 (incl. p&p) for disk or tape - specify which is required. Send cheque with order to Exchel Software, 16 Meredith Road, London SW13 0DY; or 'phone 01-876 9732 for a free fact sheet.

Whether you're a teacher, parent, both or neither - we're sure you'll find something of interest in our FREE

TOPOLOGIKA

## SOFTWARE CATALOGUE



£12.95



£18.40



£14.95

TOPOLOGIKA, P.O. Box 39, Stilton, PETERBOROUGH PE7 3RL Tel: 0733-244682


## Sciways for Scientists

- Over 350 defined characters accessible with simple 2-key codes
- All characters printable on both screen and printer
- User defined characters can be stored on disc
- All facilities can be used with word processors or with BASIC
- Tested with BASIC I & II, Wordwise, Wordwise Plus, View 2.1, View 3.0, on the Master 128, B+ & Model B, and with Epson/compatible printers

GREEK ALPHABET: Upper and Lower case, upright and italic

A B Γ Δ Ε Ζ Η Θ Ι Κ Λ Μ Ν Ξ Ο Π Ρ Σ Τ Τ ϒ Χ Ψ Ω

SCIENTIFIC CHARACTERS: Mainly mathematical but also chemical symbols



Orders accepted from schools, colleges, establishments, etc.  
Private orders - cheque with order, please

PRICE £39.95 inc VAT, p&p  
16k ROM, 40/80 disc & manual  
(not compatible with Inter-Word)

Mayhew Telonics,  
376a Ringwood Road,  
Poole, Dorset BH12 3LT  
Tel: (0202) 747695

## ROOM 7 SOFTWARE

INVESTMENT  
ANALYSER 2  
PERSONAL FINANCE  
£25.00

SUPER! BOOT  
DISC AUTOMENU/MANAGER  
£6.90  
ALL PRICES INCLUDE  
VAT AT 15%

FULLY BOUND  
SOFTWARE CATALOGUE  
50p P&P  
Refundable with order or  
Free with each purchase

### BUILDERS SOFTWARE

Electrical Cable Selector..... £17.25  
Central Heating Calculator..... £23.00  
Pocket Engineer..... £34.50

Most of our programs are available for the Electron/B+/Master and COMPACT, 3.5" & 5.25" disc and in DFS or ADFS

Also covered by our catalogue - Soccer Boss, Pools cheque, Investment Analyser 2, Matrix, Central Heating calculator, Electrical cable selector, Structural Beam Calculator, Introduction to Statistics, Easy Banker

Letters/cheques to: W.L. Computer Services, Dept. 4  
First floor, H.S.L. Building, 437 Warrington Road,  
Rainhill, Merseyside. L35 4LL Tel: 051-426 9660

VISA



## HEAD COACH v3

10%  
Off

As a very special offer to readers of Micro User, Coda Software are extending their 10% discount to the widely acclaimed American Football Simulation. "Head Coach v3" to all orders quoting this ad

### FEATURES

- Full 48-play offensive and defensive play books enclosed
- NFL player Data Base
- Full 45 man squad
- Complete NFL schedule
- League statistics and standings
- The College Draft
- The Superbowl

### THE REVIEWERS SAID

- "A must for NFL fans"
- "Heartily recommended"
- "A realistic and addictive simulation"
- "It seems unfair to call it just a game"
- "If you have any interest at all in American Football then this game is a must have"

### THE CUSTOMERS SAY

- "Thanks for a superb game"
- "My wife has threatened to hide the disks unless I cut down on the playing time"
- "Absolutely amazed by the realism"
- "Its a pleasure to do business with you"

### WE SAY

- We despatch all orders in 24hrs
- We offer a full after sales service
- The game is fully compatible with the BBC Master
- Supplied complete with disk, wallet, manual and playbook

## CODA SOFTWARE

Dept MU Tel: 01-789 9551  
4 St Simons Ave  
LONDON  
SW15 6DU



Please supply me with:

HEAD COACH v3 BBC - 51/4" 40T ☐ £14.35  
HEAD COACH v3 BBC - 51/4" 80T ☐ £14.35

Price quoted are fully inclusive.

Name: .....


Address: .....

Access No. (if appl.) .....




|  |  |
|--|--|
| <b>FAMILY HISTORY SYSTEM</b><br>(Health Warning: Genealogy is Addictive) | <b>PAYROLL (Wages)</b>                               |
| <b>ACCOUNT PLUS</b>  | New<br><b>TAXMAN</b><br>End of Year<br>Balance Sheet |

Micro Trader £230, Micro Stock £86.25 plus other programs  
Prices: £20.64, £58.13 £58.13 & £58.13 inc VAT



**Micro Aid**  
Kildonan Courtyard, Barrhill, S. Ayrshire, KA26 0PS  
Telephone: 0465-82288 and speak to for Colin



## LEARNING MUSIC? YOU NEED MY SOFTWARE

These programs give you the chance to practise your Theory and general musicianship as regularly as you practise on your instrument - and you'll enjoy it too. Great value for money. Write or 'phone for full details.

**THEORY OF MUSIC Questions and Exercises** - Grades 2 to 5 ... £12.80  
(This is a *practice* program)

**THEORY OF MUSIC GRADE 1** - from the beginning ... £12.80  
(This is a *tutorial* program with exercises)

**PLAY WHAT I PLAY** - an aural game (beginner to advanced) ... £8.90

**CAN YOU READ MUSIC?** (beginners' quiz on notes and rests) ... £6.90

**PLAY WHAT I PLAY and CAN YOU READ MUSIC?** on one disk ... £12.80

For 3.5 inch disk please add £1

Schools - add £5 for ECONET/site licence (covers all purchases)

PLEASE SPECIFY B/M/C, 80/40, DS/SS, DFS.ADFS, colour/mono

Orders and enquiries (leaflet free) To TED KIRK (MU)  
33 Humber Crescent, ST. HELENS, Merseyside WA9 4HD (0744 818761)

## MAKE YOUR MICRO EARN!

Yes making money becomes incidental when you know how. Your micro is, if only you knew it, a gold mine. The size and make is irrelevant. Make the initial effort. **NOW** by starting your own **HOME BASED BUSINESS.**

*This may be the most important move you will ever make!*

**REMEMBER:** You'll never get rich by digging someone else's "ditch". Anyone in the country, including YOU, can become very rich in a relatively short period of time just by doing a few basic things! It's more rewarding than playing games. The benefits are many and varied. Full or part time. For FREE details send S.A.E. to:



## HOME BASED BUSINESS

31 PILTON PLACE (MU1)  
KING AND QUEEN STREET  
WALWORTH, LONDON SE17 1DR

## ADVERTISERS' INDEX

|                            |              |
|----------------------------|--------------|
| 4mation.....               | 72           |
| 21st Software .....        | 55           |
| A.V.P.....                 | 133          |
| Advisory Unit .....        | 44           |
| Apex Software .....        | 133          |
| Apricote Studios .....     | 138          |
| B&S Computers .....        | 109          |
| Beebug .....               | 3,6,46       |
| Care Electronics .....     | 61           |
| Centec Disk Supplies ..... | 24,62        |
| Charm .....                | 136          |
| CJE Micros .....           | 8            |
| Clares .....               | 90,114       |
| Coda Software .....        | 137          |
| Computech .....            | 136          |
| Computer Concepts .....    | 14,70-71     |
| Computer Repairs .....     | 120          |
| Contex .....               | 135          |
| Database Software .....    | 64           |
| Datastore .....            | 123          |
| DGA Software .....         | 66           |
| Field Electric .....       | 133          |
| Home Based Business.....   | 138          |
| Impact Poster.....         | 115-117,139  |
| Integrex .....             | 89           |
| Ixchel Software .....      | 137          |
| Kosmos .....               | 136          |
| Manor Court.....           | 50           |
| Mayhew Telonics .....      | 137          |
| Meadow Computers.....      | 135          |
| Melton .....               | 12           |
| Mewsoft .....              | 136          |
| Micro-Aid .....            | 138          |
| Microboss .....            | 136          |
| Microhelp .....            | 123          |
| MicroLink .....            | 112          |
| Microman .....             | 10           |
| Micromedia .....           | 135          |
| Mijas Software .....       | 120          |
| Minerva .....              | 18           |
| Morley Electronics.....    | 134          |
| Panasonic .....            | 63           |
| Paul Fray .....            | 136          |
| PRES.....                  | 58           |
| Selec Software .....       | 72           |
| Silica Shop .....          | 15,17        |
| Silicon Vision .....       | 52           |
| Simtron .....              | 66           |
| Software Bargains .....    | 13           |
| Squirrel Software .....    | 55           |
| Star Micronics .....       | 85           |
| Superior Software .....    | 2,19,111,118 |
| Technomatic .....          | 69           |
| Ted Kirk .....             | 138          |
| Topologika .....           | 137          |
| Towerhill .....            | 16           |
| Twillstar.....             | 86           |
| Vine Micros .....          | 12           |
| Voltmace .....             | 30           |
| Watford Electronics .....  | 91-106       |
| Weserve .....              | 24           |
| W L Computers .....        | 137          |

# THE ACCOUNT BOOK

The Account Book does on a computer what most small businesses and clubs still do manually - your accounts, including VAT if you are VAT registered, but it does it far, far better and will probably make your book-keeping a pleasure and not a chore. In the 12 months since its launch we have received many letters of thanks and the following quote is typical, for which we thank Mr. G. Allcock of Southampton. "Without doubt the solution to my book-keeping problems. It is incredible value for money and its operation is simplicity itself". It costs just £27.95 inclusive and is suitable for the BBC B upwards. If you would like to order a copy or want a fact sheet please telephone us or use the coupon opposite. The Account Book is available on disc and requires a mono or colour monitor and dot matrix printer.

SEE REVIEW IN BEEBUG Vol. 7, No. 5

Please tick:

- ☐ 5.25" disc    ☐ 3.5" disc    ☐ ADFS    ☐ DFS
- ☐ 80 track (minimum 1 double sided drive)
- ☐ 40 track (minimum 2 single drives)

Name: .....

Address: .....

Post Code: ..... Telephone: .....


Access Card No. [ ] Signature .....

or send cheque for £27.95 to Apricote Studios, 2 Purls Bridge Farm, Manea, Cambs, PE15 0ND or telephone 035 478 432 with your Access card number/enquiry.

All orders sent by return of post.





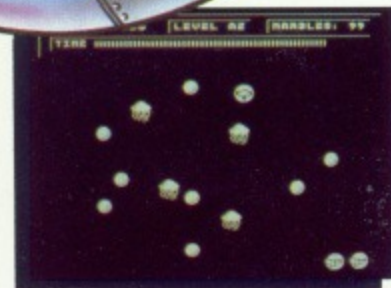

## ORBITAL - It's madness

Poor old Ozzy the Orbital. He always gets the tough jobs. His latest mission has landed him in the weird worlds of the Octopodes and they are far from pleased to see him.

Ozzy's mission is to collect the plutonium marbles that the Octopodes produce with their deadly tentacles.

**But why .... ?**

Because the Octopodes are hell-bent on annihilating the whole Orbital race by polluting their planet with the lethal marbles.

Ozzy is going to need your help. There are 12 Octopode worlds to visit and Ozzy will have to work fast on each of them before the Plutonium dissolves him.

The worlds have been designed to make capture of the marbles increasingly difficult and there are transporters with unknown destinations to both help and hinder him. Further problems are created by the patrolling Octopodes which are fatal on contact.

The worlds are split into groups of 4 and once a group has been completed you can jump straight to another by using security passwords.

Unfortunately for Ozzy he has not been told about the Octopodes contingency plan in the event of successful capture of all the marbles. They have a spare set of marbles and can make all the worlds invisible!

**The madness has just begun.**

### HOW TO ORDER

Simply fill in the coupon and send with a cheque or postal order to Impact Software.

- All "ORBITALS" despatched by 1st Class Post on same day as order. (Unparalleled Service).
- Free postage and Packing.



**IMPACT**  
Software

Impact Software  
Neepsend House  
1 Percy St.  
Sheffield S3 8AU  
Tel. (0742) 769950

To: Impact Software, Neepsend House, 1 Percy St., Sheffield, S3 8AU.

(BLOCK CAPITALS PLEASE)

Please send me the following:

**ORBITAL** Electron/BBC Cassette @ £4.95

**ORBITAL** BBC B/Master 5¼" disc @ £5.95

**ORBITAL** Master Compact 3½" disc @ £6.95

I enclose a cheque/PO (made payable to Impact Software) for

£

(N.B. If there are any other games you would also like to order at the same time please see the comprehensive Impact Games Club advert elsewhere in this magazine).

Name .....

Address .....

Postcode .....



# THE COMPUTER VERSION OF...



## A QUESTION OF SPORT



Teams Led by Ian Botham and Bill Beaumont



David Coleman Asks the Questions



Choose Your Team Members



The "Pictureboard" Round

### A QUESTION OF SPORT

The Home Computer Version of the Most Popular Sports Quiz of 1988

With David Coleman asking the questions and Ian Botham and Bill Beaumont heading the teams you can pit your wits against your family, your friends or your computer.

There are six exciting rounds including "Pictureboard", "Mystery Personality", "What Happened Next?" and "Quickfire". The game will enthral young and old alike: the only limit is your own knowledge.

The BBC and a Question of Sport are trade marks of the British Broadcasting Corporation.  
Format of the Programme Copyright ©1986 The British Broadcasting Corporation.  
Format of the program and source code copyright ©1988 Elite Systems Ltd.  
©1988 Superior Software Ltd.

BBC Micro Cassette .....£12.95 Acorn Electron Cassette .....£12.95  
BBC Micro 5¼" Disc .....£14.95 BBC Master Compact 3½" Disc .....£19.95

(Compatible with the BBC B, B+ and Master Series computers)

Please make cheques payable to "Superior Software Ltd".

#### OUR GUARANTEE

- All mail orders are despatched within 24 hours by first-class post.
- Postage and packing is free.
- Faulty cassettes and discs will be replaced immediately.

(This does not affect your statutory rights).

**SUPERIOR SOFTWARE**  
Limited

**ACORNSOFT**

**elite**

Available from

**WHSMITH**  
and all major dealers



24 HOUR TELEPHONE  
ANSWERING SERVICE FOR ORDERS

Dept QS2, Regent House, Skinner Lane, Leeds LS7 1AX. Telephone: (0532) 459453  
(Acornsoft is a registered trademark of Acorn Computers Ltd. Superior Software Ltd is a registered user)



PUTER VERSION OF...



# QUESTION SPORT



Asks the Questions



Choose Your Team Members



The "Pictureboard" Round

## A QUESTION OF SPORT

Computer Version of the Most Popular Sports Quiz of 1988

and Ian Botham and  
your wits against

There are six exciting rounds including "Pictureboard", "Mystery Personality", "What Happened Next?" and "Quickfire". The game will enthral young and old alike: the only limit is your own knowledge.

Cassette .....**\$12.95** Acorn Electron Cassette .....**\$12.95**  
Disc .....**\$14.95** BBC Master Compact 3½" Disc .....**\$19.95**

(Compatible with the BBC B, B+ and Master Series computers)  
Please make cheques payable to "Superior Software Ltd".

### OUR GUARANTEE

- All mail orders are despatched within 24 hours by first-class post.
- Postage and packing is free.
- Faulty cassettes and discs will be replaced immediately.

(This does not affect your statutory rights).

**elite**

Available from  
**WHSMITH**  
and all major dealers



24 HOUR TELEPHONE  
ANSWERING SERVICE FOR ORDERS

THE MICRO USER

February 1989

A Database Publication

# THE MICRO USER

## SECURITY

Advice on how to  
protect your files

## SPLIT

An easy utility to  
divide long files

## TAPE TIMER

Fast access to audio  
and video recordings

## TYPE-IN GAME

Archimedes arcade  
action in ArcRoids

## SCHEDULING

Make your Z88  
count the hours

## RISC OS

New series: How to  
get the best from it

## REVIEWS

- Double View
  - Scorpio
  - First Word Plus
  - First Fonts
- ... plus all the  
latest games

How  
bea  
lan  
bar

f8

Vol. 6 No. 12