

TW

**stichting
mathematisch
centrum**



AFDELING TOEGEPASTE WISKUNDE

TN 79/75

JUNE

H.A. LAUWERIER

A LIMIT CASE OF A VOLTERRA-LOTKA SYSTEM

Prepublication

TW

2e boerhaavestraat 49 amsterdam

Printed at the Mathematical Centre, 49, 2e Boerhaavestraat, Amsterdam.

The Mathematical Centre, founded the 11-th of February 1946, is a non-profit institution aiming at the promotion of pure mathematics and its applications. It is sponsored by the Netherlands Government through the Netherlands Organization for the Advancement of Pure Research (Z.W.O), by the Municipality of Amsterdam, by the University of Amsterdam, by the Free University at Amsterdam, and by industries.

A limit case of a Volterra-Lotka system

by

H.A. Lauwerier

The periodic solution of a Volterra-Lotka system is studied for large deviation from the stationary equilibrium. An asymptotic formula for the period is derived.

KEY WORDS & PHRASES: *Volterra-Lotka system, Asymptotic approximation for the period.*

1. INTRODUCTION

This paper is a companion to the paper of GRASMAN & VELING [1] on the same subject.

We consider again a Volterra-Lotka system in the following dimensionless form

$$(1) \quad \begin{cases} \dot{x} = \varepsilon_1 x(1-y), \\ \dot{y} = -\varepsilon_2 y(1-x), \end{cases}$$

where the variables x, y and the parameters $\varepsilon_1, \varepsilon_2$ are positive.

The solutions are periodic functions. In the x, y -plane they are represented by a one parameter family of nesting closed curves. By a proper choice of the unit of time we may take either $\varepsilon_1 = 1$ or $\varepsilon_2 = 1$. However, for reason of symmetry we keep both parameters. In the paper cited above the single independent parameter $\varepsilon = \varepsilon_1/\varepsilon_2$ is taken. The properties of the system are then studied for small values of ε . Here we study what happens when ε_1 and ε_2 are of the same order and the deviations of x and y from their equilibrium position $(1,1)$ are large.

In the x, y -plane the curves are given by

$$(2) \quad \varepsilon_2(x - \log x) + \varepsilon_1(y - \log y) = c.$$

The asymptotic analysis of (1) and (2) will be carried out with respect to c as a large parameter.

If in (2) the variables x and y are scaled down by $x \rightarrow cx'$ and $y \rightarrow cy'$ we obtain for $c \rightarrow \infty$ the limit form

$$(3) \quad \varepsilon_2 x' + \varepsilon_1 y' = 1.$$

This means that in the x', y' -plane the closed curves degenerate into a triangle formed by the coordinate axes and the line (3) (see fig. 1 and fig. 2).

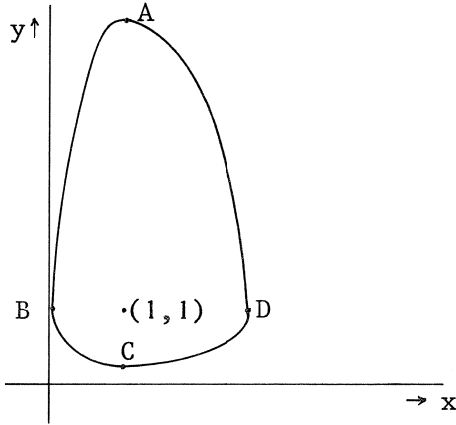


Figure 1

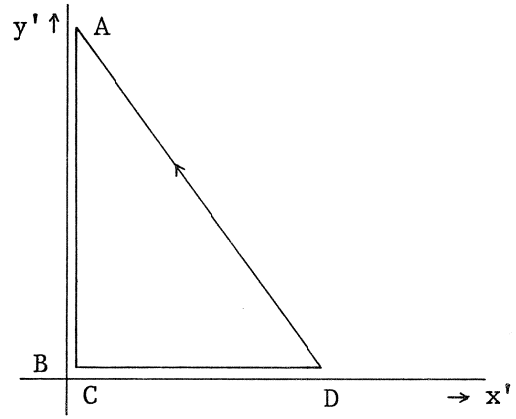


Figure 2

However, rather more detailed asymptotic analysis is needed to introduce the time variable and in particular to estimate the period for large values of c . It turns out that in fig. 1 the phase point (x, y) passes quickly from A (y maximum) to B (x minimum) but that it needs much time to make the quarter turn from B to C (y minimum). The transition from C to D (x maximum) is comparable to that from A to B. Finally the stretch from D to A is very fast. The total period T is found to be

$$(4) \quad T = \frac{c}{\epsilon_1 \epsilon_2} + \frac{1}{\epsilon_2} \log \frac{c}{\epsilon_1} + \frac{1}{\epsilon_1} \log \frac{c}{\epsilon_2} + o\left(\frac{\log c}{c}\right).$$

However, the following more accurate expression is also obtained

$$(5) \quad T \approx \frac{c}{\epsilon_1 \epsilon_2} + \frac{1}{\epsilon_2} \left(\frac{c}{c - \epsilon_2} + \frac{\epsilon_1}{c} \right) \log \frac{c}{\epsilon_1} + \frac{1}{\epsilon_1} \left(\frac{c}{c - \epsilon_1} + \frac{\epsilon_2}{c} \right) \log \frac{c}{\epsilon_2}.$$

This result may be compared with the well-known result obtained by Volterra for small disturbances of the equilibrium

$$(6) \quad T \approx \frac{2\pi}{\sqrt{\epsilon_1 \epsilon_2}}.$$

2. ASYMPTOTIC ANALYSIS

From (2) the positions y_A and y_C of A and C are determined as the solutions of the transcendental equation

$$(7) \quad y - \log y = \frac{c - \varepsilon_2}{\varepsilon_1}.$$

For $c \rightarrow \infty$ this equation can be solved in an iterative way as

$$y_A = \frac{c - \varepsilon_2}{\varepsilon_1} + \log \frac{c - \varepsilon_2}{\varepsilon_1} + \dots,$$

or

$$(8) \quad y_A = \frac{c}{\varepsilon_1} + \log \frac{c}{\varepsilon_1} - \frac{\varepsilon_2}{\varepsilon_1} + o\left(\frac{\log c}{c}\right).$$

In a similar way

$$\log y_C = -\frac{c - \varepsilon_2}{\varepsilon_1} + \exp -\frac{c - \varepsilon_2}{\varepsilon_1} + \dots,$$

or

$$(9) \quad \log y_C = -\frac{c}{\varepsilon_1} + \frac{\varepsilon_2}{\varepsilon_1} + o(c^{-\infty}).$$

The positions x_B and x_D of B and D can easily be derived from (8) and (9) by the interchanging of ε_1 and ε_2 .

We assume that the phase point (x, y) passes the points A, B, C, D at the times t_A, t_B, t_C, t_D . We write $t_B - t_A = \Delta_{AB}$ etcetera. The path ABC is determined in an iterative way as follows. As the first approximation we take (see fig. 1) $x = 0, \log y = -\varepsilon_2(t - t_B)$. The second approximation is next obtained from the first equation of (1)

$$\frac{d}{dt} \log x = \varepsilon_1 - \varepsilon_1 \exp -\varepsilon_2(t - t_B)$$

which gives

$$(10) \quad \log \frac{x}{x_B} = \varepsilon_1(t - t_B) - \frac{\varepsilon_1}{\varepsilon_2}(1 - \exp -\varepsilon_2(t - t_B)).$$

This approximation appears to be sufficiently accurate. Taking $t = t_A$ and $x = 1$ we have at A

$$(11) \quad \log \frac{1}{x_B} = -\varepsilon_1 \Delta_{AB} - \frac{\varepsilon_1}{\varepsilon_2} + \frac{\varepsilon_1}{\varepsilon_2} \exp \varepsilon_2 \Delta_{AB}.$$

If this is compared with the B-version of (9)

$$(12) \quad \log x_B = -\frac{c}{\varepsilon_2} + \frac{\varepsilon_1}{\varepsilon_2}$$

we find in good approximation

$$\exp \varepsilon_2 \Delta_{AB} = \frac{c}{\varepsilon_1} + \varepsilon_2 \Delta_{AB}.$$

For $c \rightarrow \infty$ this can be solved as

$$(13) \quad \Delta_{AB} = \frac{1}{\varepsilon_2} \log \frac{c}{\varepsilon_1} + \frac{\varepsilon_1}{\varepsilon_2} \frac{\log c/\varepsilon_1}{c} + \dots$$

The expression for Δ_{CD} is obtained by $\varepsilon_1 \leftrightarrow \varepsilon_2$

$$(14) \quad \Delta_{CD} = \frac{1}{\varepsilon_1} \log \frac{c}{\varepsilon_2} + \frac{\varepsilon_2}{\varepsilon_1} \frac{\log c/\varepsilon_2}{c} + \dots$$

For the stretch BC we find by substituting $t = t_C$ and $x = 1$ in (10)

$$(15) \quad \log \frac{1}{x_B} = \varepsilon_1 \Delta_{BC} - \frac{\varepsilon_1}{\varepsilon_2} + \frac{\varepsilon_1}{\varepsilon_2} \exp -\varepsilon_2 \Delta_{BC}.$$

If this is compared with (12) we find in good approximation

$$(16) \quad \Delta_{BC} = \frac{c}{\varepsilon_1 \varepsilon_2} + O(c^{-\infty}).$$

For the stretch DA which is approximately of the rectilinear form

$$(17) \quad \varepsilon_2 x + \varepsilon_1 y = c$$

we can obtain as approximate integration of the second equation of (1) by using the approximation

$$(18) \quad \dot{y} = y(c - \epsilon_2 - \epsilon_1 y).$$

The solution is

$$(19) \quad \log \frac{y}{c - \epsilon_2 - \epsilon_1 y} = (c - \epsilon_2)t + \text{constant}.$$

This approximation cannot be expected to be good at A where y is stationary. Therefore we impose the starting condition at D and determine the time needed to reach the mid-position $E(\frac{1}{2}c/\epsilon_2, \frac{1}{2}c/\epsilon_1)$. Then from (19) we obtain

$$(20) \quad (c - \epsilon_2)\Delta_{DE} = \log \frac{\frac{1}{2}c}{\epsilon_1(\frac{1}{2}c - \epsilon_2)} - \log \frac{1}{c - \epsilon_1 - \epsilon_2} \approx \log \frac{c}{\epsilon_1} + \frac{\epsilon_2 - \epsilon_1}{c},$$

and a similar expression for Δ_{EA} .

Together we may use the approximation

$$(21) \quad \Delta_{DA} \approx \frac{1}{c - \epsilon_2} \log \frac{c}{\epsilon_1} + \frac{1}{c - \epsilon_1} \log \frac{c}{\epsilon_2}.$$

The result (5) for the full period is merely the sum of the expressions at the right-hand sides of (13), (14), (16) and (21). The less accurate result (4) is obtained by keeping only the terms of order c , $\log c$ and a constant. We observe that the main contribution to T is due to the corner BC.

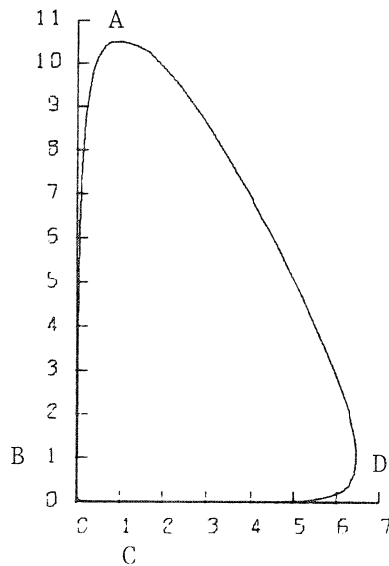


Figure 3

3. NUMERICAL ILLUSTRATION

We consider the following typical case

$$\varepsilon_1 = 0.5, \quad \varepsilon_2 = 1.0, \quad x_B = 0.01.$$

From (2) we obtain $c = 5.115$. The coordinates of the other corner points are determined by (see fig. 3)

$$\ln y_C = -8.230, \quad x_D = 6.48, \quad y_A = 10.59.$$

The time behaviour of x and y is sketched in figure 4.

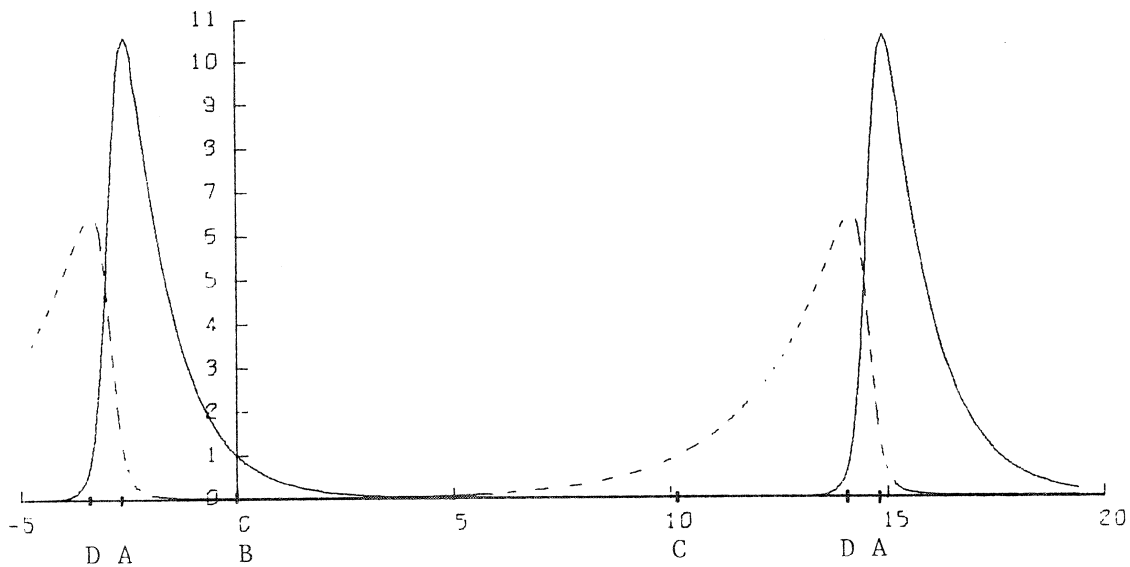


Figure 4

The correct solution of (11) is $\Delta_{AB} = 2.55$. Our approximate formula (13) gives 2.56. The correct solution of $\Delta_{CD} = 3.91$ and the approximation (14) gives 3.90.

Together we find

$$T = 2.56 \text{ (AB)} + 10.23 \text{ (BC)} + 3.90 \text{ (CA)} + 0.92 \text{ (DA)} = 17.61.$$

If this result is compared to the corresponding figures in the paper by GRASMAN & VELING it should be born in mind that the time variable contains the scaling factor ϵ_1 . Thus our value $\epsilon_1 T = 8.80$ corresponds with $\epsilon_1 T_G = 8.64$ according to formula (11) in the above cited paper. The true numerical value $\epsilon_1 T_N$ obtained from a computer program is 8.76. More numerical data are collected below. The author wishes to thank G.J.M. LAAN for his assistance in carrying out the computations.

	x_B	c	$\epsilon_1 T$	$\epsilon_1 T_G$	$\epsilon_1 T_N$
a. $\epsilon_1 = 0.1, \epsilon_2 = 1$	0.01	4.72	7.13	7.10	7.11
	0.05	3.15	5.21	5.17	5.17
	0.1	2.50	4.37	4.30	4.31
b. $\epsilon_1 = 0.5, \epsilon_2 = 1$	0.01	5.12	8.80	8.64	8.76
	0.05	3.55	6.88	6.70	6.87
	0.1	2.90	6.05	5.86	6.09
c. $\epsilon_1 = \epsilon_2 = 1$	0.01	5.62	10.43		10.41
	0.05	4.05	8.45		8.56
	0.1	3.40	7.59		7.82

REFERENCES

- [1] GRASMAN, J. & E. VELING, *An asymptotic formula for the period of a Volterra-Lotka system*, Math. Biosc. 18 (1973), 185-189.